

Proxess, LLC

TEST REPORT

SCOPE OF WORK

EMC TESTING – CYLINDRICAL PCB 2.0

REPORT NUMBER

103660035LAX-001

ISSUE DATE

September 26, 2018

PAGES

28

DOCUMENT CONTROL NUMBER

Non-Specific Radio Report Shell Rev. December 2017

© 2017 INTERTEK



EMC TEST REPORT (FULL COMPLIANCE)

Report Number: 103660035LAX-001

Project Number: G103660035

Report Issue Date: September 27, 2018

Model(s) Tested: Cylindrical PCB 2.0

Standards: **FCC CFR47 Part 15 Subpart C, September 2018**

Intentional Radiator

§15.225, *Operation within the bands 13.110-14.010 MHz*

ISED RSS-210 Issue 9, August 2016 (Amendment November 2017)

License-Exempt Radio Apparatus: Category I Equipment

ISED RSS-Gen Issue 5, April 2018

General Requirements for Compliance of Radio Apparatus

FCC Part 15 Subpart B, September 2018

Unintentional Radiators

ISED ICES-003 Issue 6, Published Jan. 19, 2016, Updated April 2017

Information Technology Equipment (Including Digital Apparatus – Limits and Methods of Measurement)

Tested by:

Intertek


25791 Commercentre Drive
Lake Forest, CA 92630
USA

Client:

Proxess, LLC

8100 Southpark Way, Unit A4
Littleton, CO 80120
USA

Report prepared by



Grace Lin
EMC Staff Engineer

Report reviewed by



Suresh Kondapalli
Sr. EMC Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Table of Contents

<i>Proxess, LLC</i>	1
1 Introduction and Conclusion	4
2 Test Summary	4
3 Client Information	5
4 Description of Equipment Under Test and Variant Models	5
5 System Setup and Method	7
6 Field Strength at Fundamental and Radiated Emissions Outside the band	8
7 Frequency Stability	14
8 Occupied Bandwidth	16
9 AC Mains Conducted Emissions	20
10 Radiated Emissions	23
11 Revision History	28

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	-
4	Description of Equipment Under Test and Variant Models	-
5	System Setup and Method	-
6	Field Strength at Fundamental and Radiated Emissions Outside of the band (FCC §15.225(a)(b)(c)(d); ISED RSS-210 §B.6a, b, c, d)	Compliant
7	Frequency Stability (FCC §15.225(e); ISED RSS-210 §B.6)	Compliant
8	Occupied Bandwidth (FCC §15.215(c); ISED RSS-Gen Issue 5 §6.7)	Compliant
9	AC Mains Conducted Emissions (FCC §15.207; FCC §15.107; ISED RSS-Gen Issue 5 §8.8; ISED ICES-003)	Compliant
10	Radiated Emissions (FCC §15.109; ISED ICES-003)	Compliant
11	Revision History	-

3 Client Information

This EUT was tested at the request of:

Client: Proxess, LLC
8100 Southpark Way, Unit A4
Littleton, CO 80120
USA

Contact: Jon Torre
Telephone: 203-506-4886
Email: jon.torre@proxess.com

4 Description of Equipment Under Test and Variant Models

Manufacturer: Proxess, LLC
8100 Southpark Way, Unit A4
Littleton, CO 80120
USA

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Cylindrical Wireless Lock	Proxess, LLC	Cylindrical PCB 2.0	-
Receive Date:	9/17/2018	Test Started	09/18/2018
Received Condition:	Good	Test Ended	09/26/2018
Type:	Production		

Description of Equipment Under Test (provided by client)

The Proxess Cylindrical Wireless Lock is an RFID enabled Grade 1 electronic lock that grants access upon correctly reading a 13.56 MHz credential. A pin and tumbler lock set are provided as a backup method for entry.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
6 Vdc (4 AA Batteries)	-	-	-

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	Test Mode – The EUT was constantly broadcasting a 13.65 MHz signal.
2	Normal Operation Mode – The EUT was configured as end users would normally use.

Software used by the EUT:

No.	Descriptions of EUT Exercising
1	Under test mode, the EUT was programmed to transmit continuously during testing.
2	Under Normal Operation Mode – The EUT was programmed as end users would normally use.

Radio/Receiver Characteristics	
Frequency Band(s)	13.56 MHz – 13.56 MHz
Modulation Type(s)	ASK
Maximum Field Strength at Fundamental	68.3 dBuV/m @ 3m
Test Channels	13.56 MHz
Occupied Bandwidth	434 kHz (99%)
Equipment Type	Standalone
Antenna Type and Gain	Internal PCB Antenna

Variant Models: None

5 System Setup and Method

Cables					
ID	Description	Length (m)	Shielding	Ferrites	Termination
1	Minigrabber test leads (pair)	1.0	No	No	Yes
2	Power Cord	1.8	No	No	Yes

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
DC Power Supply	B&K Precision	1671A	249D15133

5.1 Method:

Configuration as required by ANSI C63.10-2013 and ANSI C63.4-2014.

5.2 Test Setup Block Diagram:

Radiated spurious emissions test (30 MHz – 1 GHz) and radiated emissions test:



All the other tests:



6 Field Strength at Fundamental and Radiated Emissions Outside the band

6.1 Performance Requirement(s)

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in FCC §15.209.

6.2 Method

Tests are performed in accordance with ANSI C63.10-2013.

Radiated Measurements Below 30 MHz

The measurement antenna is positioned with its plane perpendicular to the ground. The lowest height of the antenna is 1 m above the ground and is positioned at the 3 meters from the EUT. Radiated emissions are taken at three meters unless specified otherwise.

During the test the EUT is rotated and the measuring antenna angles are varied during the search for maximum signal level.

Radiated Measurements Above 30 MHz

During the test the EUT is rotated and the measuring antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless specified otherwise. If necessary, a pre-amplifier is used. Radiated emission measurements were performed from 9kHz to 1 GHz, with the following resolution bandwidths:

200Hz or greater for 9kHz to 150kHz
9 kHz or greater for 150kHz to 30 MHz
120 kHz or greater for 30MHz to 1000 MHz

Data includes of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, test setup diagrams and data tables of the emissions are included.

TEST SITE:

The test is performed in the 3-meter semi-anechoic chamber located at 25791 Commercentre Drive, Lake Forest, California 92630 USA. This test facility meets the requirements of CISPR 16-1-4 and has been accredited by A2LA. IC test site registration number is 2042T.

Measurement Uncertainty

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucispr
Radiated Emissions, 3m	30-1000 MHz	4.3	6.3 dB

As shown in the table above our radiated emissions U_{lab} is less than the corresponding U_{CISPR} reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in $dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in $dB\mu V$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 $dB\mu V$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 $dB\mu V/m$. This value in $dB\mu V/m$ was converted to its corresponding level in $\mu V/m$.

$$RA = 52.0 \text{ } dB\mu V$$

$$AF = 7.4 \text{ } dB/m$$

$$CF = 1.6 \text{ } dB$$

$$AG = 29.0 \text{ } dB$$

$$FS = 32 \text{ } dB\mu V/m$$

To convert from $dB\mu V$ to μV or mV the following was used:

$$UF = 10^{(NF/20)} \text{ where } UF = \text{Net Reading in } \mu V$$

$$NF = \text{Net Reading in } dB\mu V$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ } dB\mu V / 20)} = 39.8 \text{ } \mu V/m$$

6.3 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
637	3m Semi-anechoic Chamber	Panashield	3 meter	25 331-D-Z	December 2015	December 2018
1140	EMI Test Receiver	R&S	ESCI7	100825	02/28/2018	02/28/2019
1147	Bilog Antenna	TESEQ GmbH	CBL 6112D	32852	11/16/2017	11/16/2018
590	Loop Antenna	EMCO	6502	9807-3213	08/10/2018	08/10/2019
1568	Pre-amp	Rhode & Schwarz	TS-PR1	102061	01/26/2018	01/26/2019
1517	Cable	R&S	TS-PR-B7	101528	08/06/2018	08/06/2019
1518	Cable	R&S	TS-PR-B7	101529	08/06/2018	08/06/2019
1014	Barometer Temp/Humidity	Omega	IBTHX-W	0480395	12/20/2017	12/20/2018

Software Utilized:


Name	Manufacturer	Version	Profile
TILE	Quantum Change	3.4.K.29	ESCI RE 150kHz-30MHz FCC 15225
TILE	Quantum Change	4.1.A.0	FCC 30 to 1000

6.4 Results:


The sample tested was found to Comply.

6.5 Setup Diagram:

Below 30 MHz:

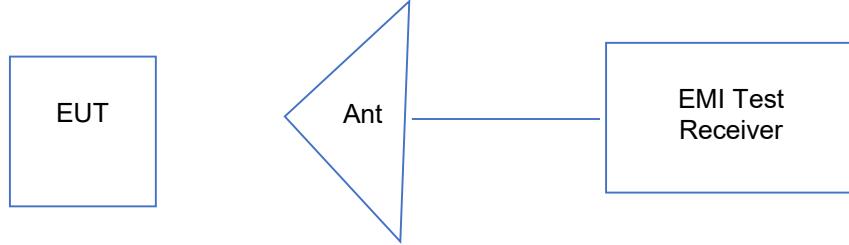


Above 30 MHz:

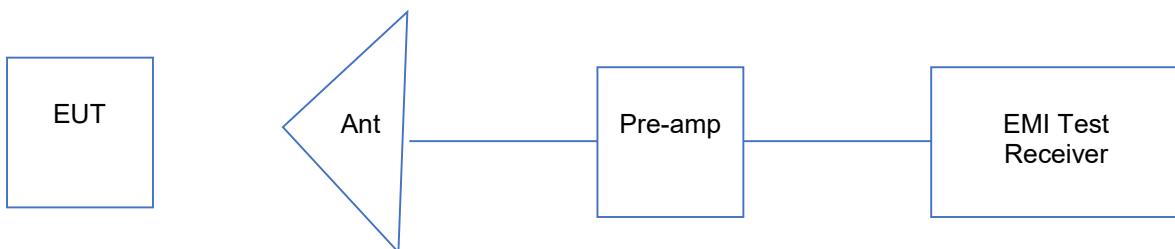


6.6 Plots/Data:

Field Strength at Fundamental:

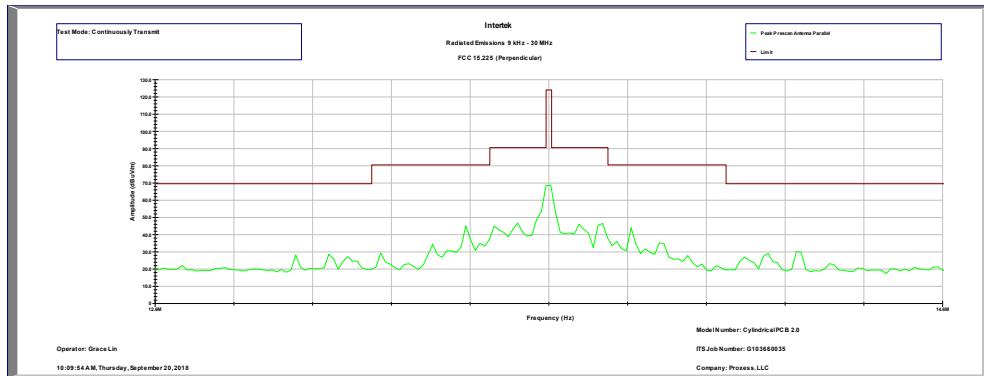


Frequency	PK FS	Limit@3m	Margin	RA	AF	CF	TT	Ant Ht	Antenna Orientation
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB(1/m)	dB	deg	cm	
13.56	68.3	124	-55.7	57.9	10.6	0.2	127	100	Perpendicular
13.56	62.3	124	-61.7	51.9	10.6	0.2	360	100	Ground Parallel
13.56	58.7	124	-65.3	48.3	10.6	0.2	23	100	Parallel


Radiated Emissions Outside the Band:

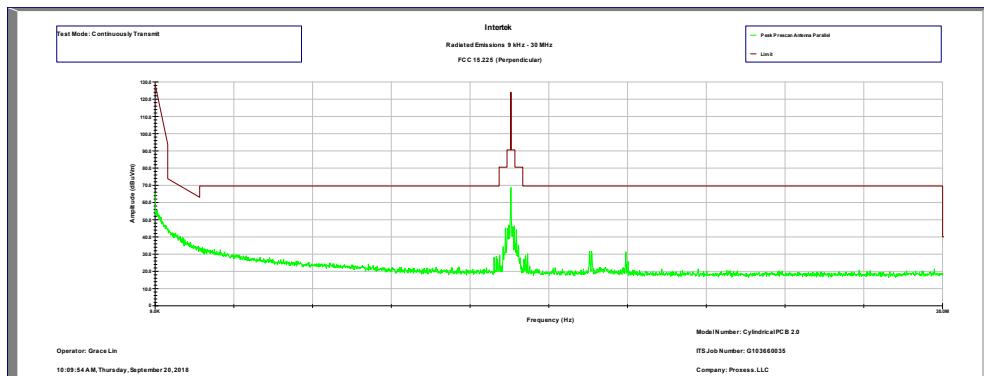

Radiated Emissions 9 kHz - 30 MHz, Antenna: Perpendicular (Worst case)

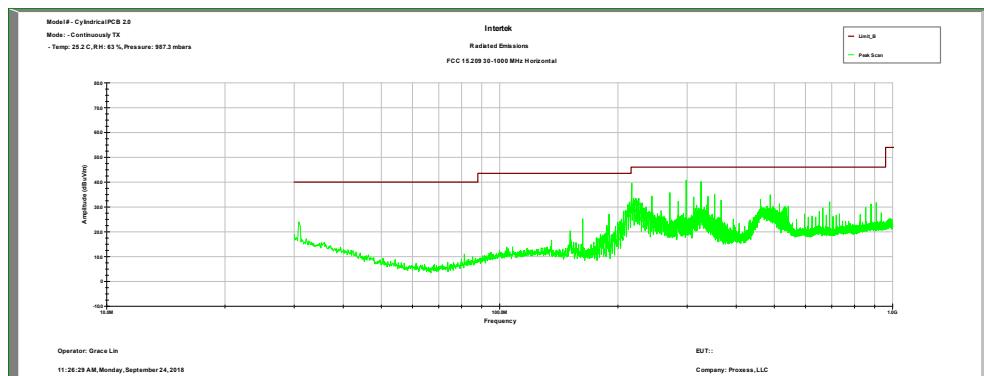

Radiated Emissions 30 MHz – 1GHz, Antenna: Horizontal

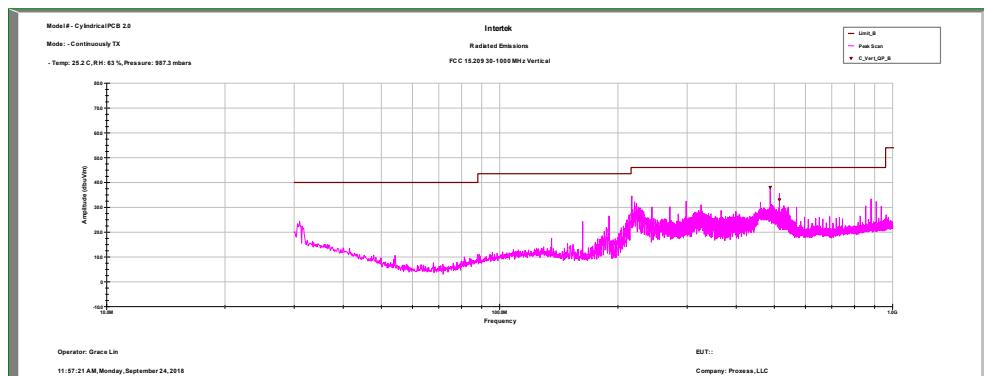

Radiated Emissions 30 MHz – 1GHz, Antenna: Vertical

Radiated Emissions – Out-of-band

Frequency	QP FS	Limit@3m	Margin	RA	AG	AF	CF	Ant Hgt	TT	Ant. Pol.
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm	deg	
216.96	39.7	46.0	-6.3	53.2	29.7	15.0	1.2	109	351	H
271.20	34.6	46.0	-11.4	44.2	29.7	18.8	1.3	108	126	H
288.32	23.1	46.0	-22.9	32.4	29.6	19.0	1.4	110	23	H
325.45	40.4	46.0	-5.6	48.9	29.6	19.7	1.4	110	74	H
488.16	38.1	46.0	-7.9	42.9	30.0	23.4	1.8	112	29	V
515.26	33.1	46.0	-12.9	37.9	30.0	23.4	1.8	114	37	V

Test Personnel:	Grace Lin	Test Date:	09/20/2018, 09/24/2018
Product Standard:	FCC 15.225, ISED RSS-210	Limit Applied:	FCC 15.225(a)(b)(c)(d), ISED RSS-210 §B.6a, b, c, d
Input Voltage:	6 Vdc (4 AA Batteries)	Ambient Temperature:	25.2 °C
Pretest Verification w/ BB Source:	Yes	Relative Humidity:	63 %
		Atmospheric Pressure:	987.3 mbars

Deviations, Additions, or Exclusions: None

7 Frequency Stability

7.1 Performance Requirement(s)

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

7.2 Method

Tests are performed in accordance with ANSI C63.10-2013, Sections 6.8.1 and 6.8.2.

The EUT was placed in an environmental test chamber. An EMI receiver was placed outside of the chamber and connected to a loop antenna inside of the chamber. For each temperature, the carrier frequency was recorded. In addition, the carrier frequency was recorded when the power was set to 85% and 115% of the rated voltage.

TEST SITE:

The test is performed in the PV laboratory located at 25791 Commercentre Drive, Lake Forest, California 92630 USA. This test facility meets the requirements of CISPR 16-1-4 and has been accredited by A2LA. ISED test site registration number is 2042T.

7.3 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
952	Environmental Test Chamber	ESPEC	EWSX376-22CW	1610559B	08/21/2018	08/21/2019
690	Spectrum Analyzer	R&S	FSP40	100027	02/28/2018	02/28/2019
590	Loop Antenna	EMCO	6502	9807-3213	08/10/2018	08/10/2019
1014	Barometer Temp/Humidity	Omega	IBTHX-W	0480395	12/20/2017	12/20/2018


Software Utilized:

Name	Manufacturer	Version	Profile
N/A	N/A	N/A	N/A

7.4 Results:

The sample tested was found to Comply.

7.5 Test Setup Diagram:

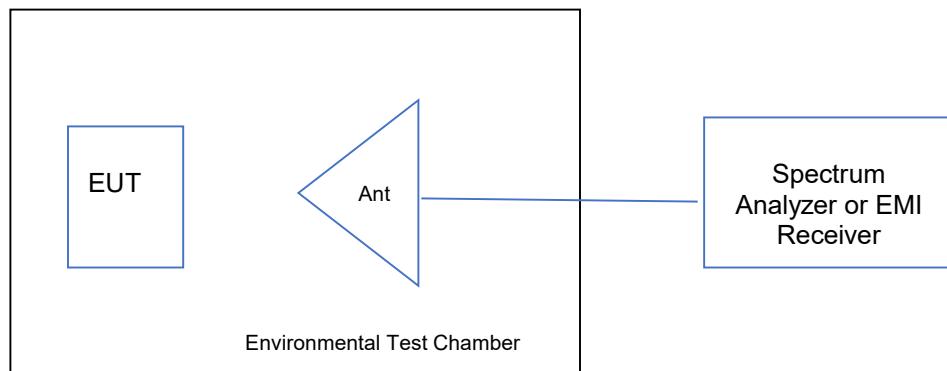

7.6 Plots/Data:

Temperature (°C)	Carrier (MHz)	Supply Voltage		Frequency Deviation	
		(Vdc)	(%)	(kHz)	(%)
-30	13.560024000	6	100	0.0240	0.00018
-20	13.560052000	6	100	0.0520	0.00038
-10	13.560044000	6	100	0.0440	0.00032
0	13.560028000	6	100	0.0280	0.00021
10	13.559992000	6	100	0.0080	0.00006
20	13.559994800	6	100	0.0052	0.00004
20	13.559990800	5.1	85	0.0092	0.00007
20	13.559990800	6.9	115	0.0092	0.00007
30	13.559970800	6	100	0.0292	0.00022
40	13.559942800	6	100	0.0572	0.00042
50	13.559918800	6	100	0.0812	0.00060

Test Personnel: Grace Lin
 Product Standard: FCC §15.225, RSS 210
 Input Voltage: 6 Vdc
 Pretest Verification w/
 BB Source: N/A

Test Date: 09/19/2018, 09/26/2018
 Limit Applied: FCC §15.225, RSS-210 §B6
 Ambient Temperature: 25 °C
 Relative Humidity: 51 %
 Atmospheric Pressure: 982 mbars

Deviations, Additions, or Exclusions: None

8 Occupied Bandwidth

8.1 Performance Requirement(s)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

8.2 Method

Tests are performed in accordance with ANSI C63.10-2013.

The EUT was setup to transmit in normal operating condition. Measurements were made with the loop antenna in close proximity of the EUT. Following the procedures of ANSI 63.10, the 20dB bandwidth measurements were taken. The following plots show Occupied Bandwidth.

TEST SITE:

The test is performed in the wireless laboratory located at 25791 Commercentre Drive, Lake Forest, California 92630 USA. This test facility meets the requirements of CISPR 16-1-4 and has been accredited by A2LA. ISED test site registration number is 2042T.

8.3 Test Equipment Used:


Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
1140	EMI Test Receiver	R&S	ESCI	100825	02/28/2018	02/28/2019
590	Loop Antenna	EMCO	6502	9807-3213	08/10/2018	08/10/2019
1014	Barometer Temp/Humidity	Omega	IBTHX-W	0480395	12/20/2017	12/20/2018

Software Utilized:


Name	Manufacturer	Version	Profile
N/A	N/A	N/A	N/A

8.4 Results:


The sample tested was found to Comply.

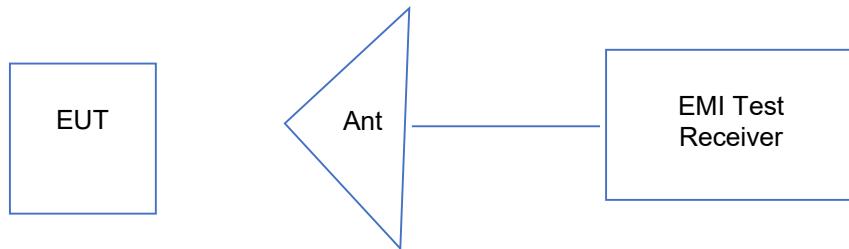8.5 Setup Diagram:

8.6 Plots/Data:

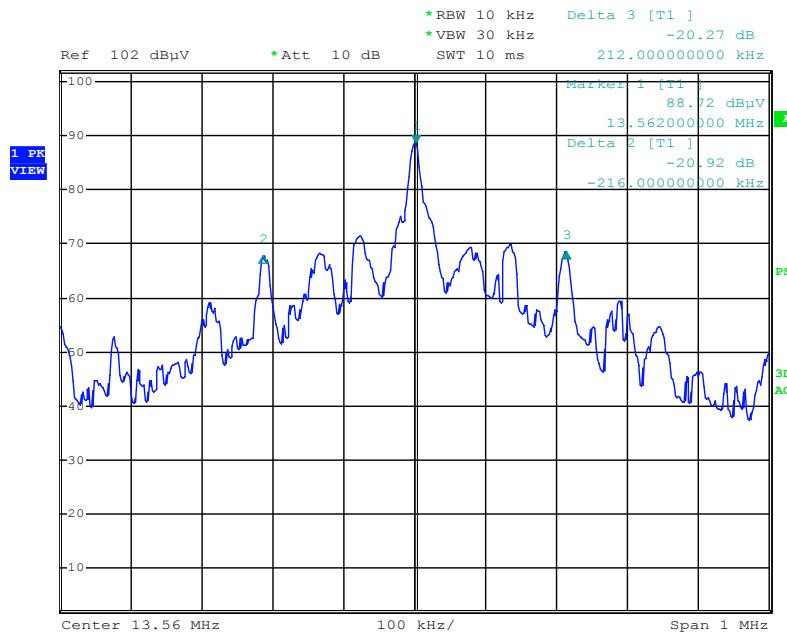

Date: 24.SEP.2018 16:46:20

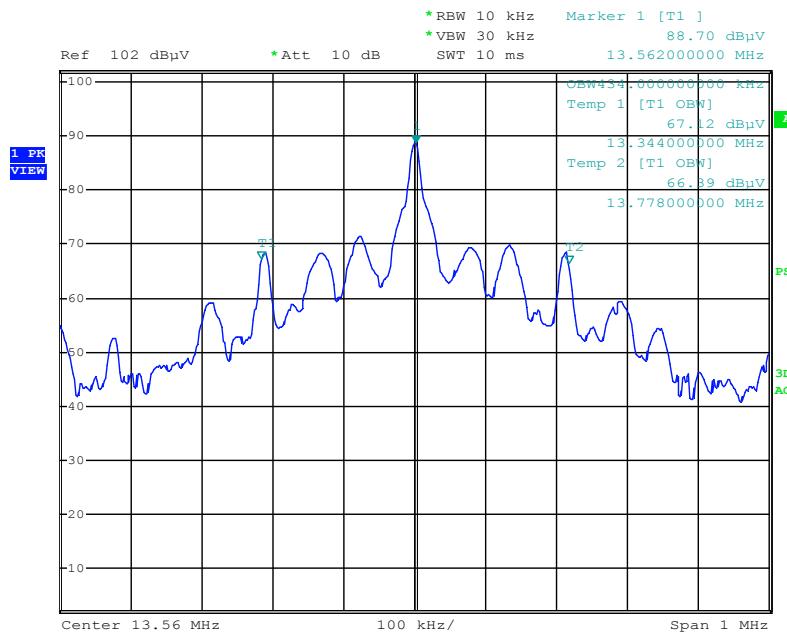

Date: 24.SEP.2018 16:49:18

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
13.56	428	434

Test Personnel: Grace Lin
Product Standard: FCC §15.225
ISED RSS-210
Input Voltage: 6 Vac
Pretest Verification w/
BB Source: N/A

Test Date: 09/24/2018
Limit Applied: FCC §15.215(c),
ISED RSS-Gen i5 §6.7
Ambient Temperature: 25.2 °C
Relative Humidity: 63 %
Atmospheric Pressure: 987.3 mbars

Deviations, Additions, or Exclusions: None

9 AC Mains Conducted Emissions

9.1 Performance Criterion

Frequency Band MHz	Class B Limit dB(µV)		Class A Limit dB(µV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: *Decreases linearly with the logarithm of the frequency
At the transition frequency the lower limit applies.*

9.2 Method

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4.

TEST SITE:

The test is performed in the 3 meter semi-anechoic chamber located at 25791 Commercentre Drive, Lake Forest, California 92630 USA. This test facility meets the requirements of CISPR 16-1-4 and has been accredited by A2LA. IC test site registration number is 2042T.

Measurement Uncertainty

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucispr
AC Line Conducted Emissions	150 kHz - 30 MHz	2.1 dB	3.4dB

As shown in the table above our conducted emissions U_{lab} is less than the corresponding U_{CISPR} reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculations

The following is how net line-conducted readings were determined:

$$NF = RF + LF + CF + AF$$

Where NF = Net Reading in dB μ V

RF = Reading from receiver in dB μ V

LF = LISN or ISN Correction Factor in dB

CF = Cable Correction Factor in dB

AF = Attenuator Loss Factor in dB

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$NF = RF + LF + CF + AF = 28.5 + 0.2 + 0.4 + 20.0 = 49.1 \text{ dB}\mu\text{V}$$

$$UF = 10^{(49.1 \text{ dB}\mu\text{V} / 20)} = 285.1 \mu\text{V/m}$$

9.3 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
-	-	-	-	-	-	-

Software Utilized:

Name	Manufacturer	Version	Profile
-	-	-	-

9.4 Results:

This test is not applicable as the equipment under test is battery powered.

10 Radiated Emissions

10.1 Performance Requirement(s)

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field strength dB(uV/m)
30 – 88	100	40
88 – 216	150	43.5
216 – 960	200	46
Above 960	500	54

10.2 Method

Tests are performed in accordance with ANSI C63.4-2014.

During the test the EUT is rotated and the measuring antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless specified otherwise. If necessary, a pre-amplifier is used. Radiated emission measurements were performed from 30 MHz to 12.5 GHz, with the following resolution bandwidths:

120 kHz or greater for 30MHz to 1000 MHz
1 MHz or greater for above 1 GHz

Data includes of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, test setup diagrams and data tables of the emissions are included.

TEST SITE:

The test is performed in the 3-meter semi-anechoic chamber located at 25791 Commercentre Drive, Lake Forest, California 92630 USA. This test facility meets the requirements of CISPR 16-1-4 and has been accredited by A2LA. IC test site registration number is 2042T.

Measurement Uncertainty

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucispr
Radiated Emissions, 3m	30-1000 MHz	4.3	6.3 dB
Radiated Emissions, 3m	1-18 GHz	4.7	5.2 dB

As shown in the table above our radiated emissions U_{lab} is less than the corresponding U_{CISPR} reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 52.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}/\text{m}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$FS = 32 \text{ dB}\mu\text{V}/\text{m}$$

To convert from $\text{dB}\mu\text{V}$ to μV or mV the following was used:

$$UF = 10^{(NF/20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in } \text{dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V}/\text{m} / 20)} = 39.8 \mu\text{V}/\text{m}$$

10.3 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
637	3m Semi-anechoic Chamber	Panashield	3 meter	25 331-D-Z	December 2015	December 2018
1140	EMI Test Receiver	R&S	ESCI7	100825	02/28/2018	02/28/2019
690	EMI Test Receiver	R&S	FSP40	100027	02/28/2018	02/28/2019
1147	Bilog Antenna	TESEQ GmbH	CBL 6112D	32852	11/16/2017	11/16/2018
1515	Horn Antenna	ETS-Lindgren	3115	00161631	03/28/2018	03/28/2019
1568	Pre-amp	Rhode & Schwarz	TS-PR1	102061	01/26/2018	01/26/2019
1556	Pre-amp	R&S	TS-PR18	102144	07/29/2017	07/29/2018
1517	Cable	R&S	TS-PR18	101528	08/06/2018	08/06/2019
1518	Cable	R&S	TS-PR18	101529	08/06/2018	08/06/2019
1014	Barometer Temp/Humidity	Omega	IBTHX-W	0480395	12/20/2017	12/20/2018


Software Utilized:

Name	Manufacturer	Version	Profile
TILE	Quantum Change	4.1.A.0	FCC 30 to 1000
TILE	Quantum Change	3.4.K.29	FCC Part 15 FSP 1-12GHz


10.4 Results:

The sample tested was found to Comply.

10.5 Setup Diagram:

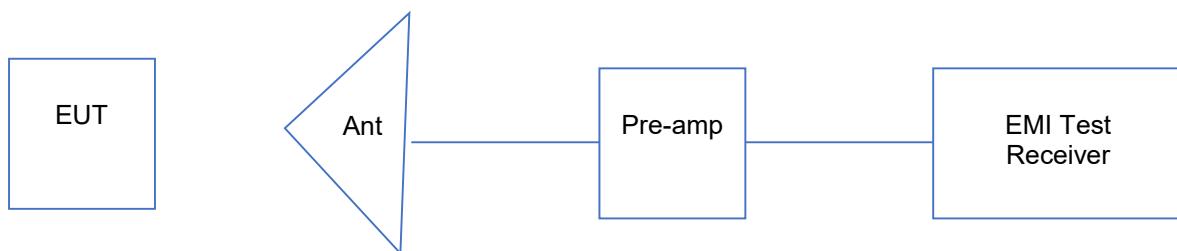

10.6 Plots/Data:

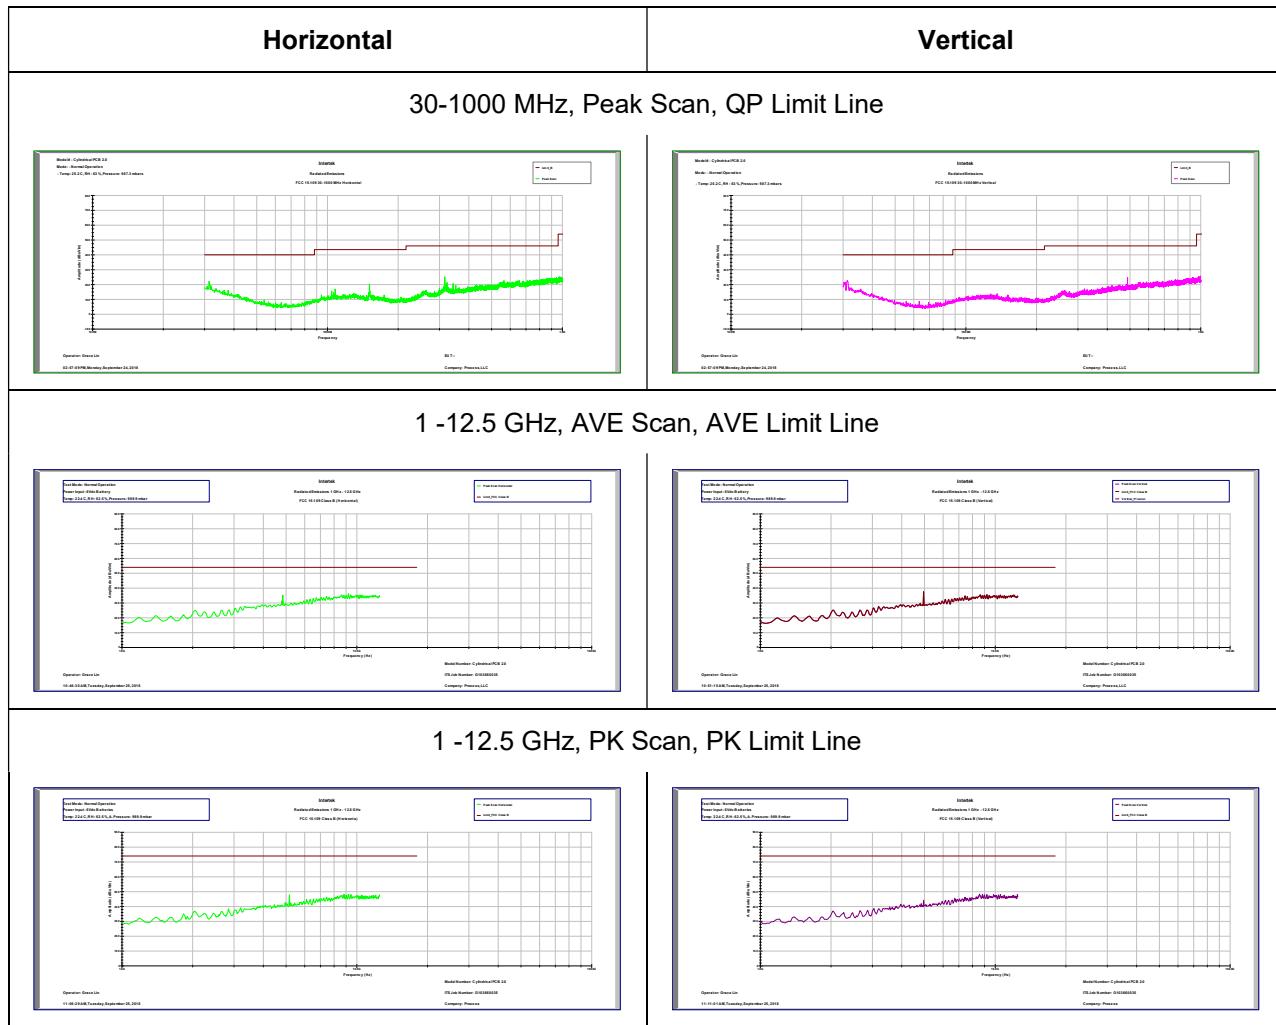

Frequency	FS Level	Limit@3m	Margin	RA	AG	AF	CF	Antenn Pol.	Detection
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB		
315.96	13.7	46.0	-32.3	22.2	29.6	19.7	1.4	H	QP
488.17	14.2	46.0	-31.8	19.0	30.0	23.4	1.8	V	QP
Frequency	FS Level	Limit@3m	Margin	RA	CF	Preamp	AF	Antenna Pol.	Detection
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(dB)	(dB)	(dB/1/m)		
4841	35.2	54.0	-18.8	49.7	3.0	50.0	32.5	H	AVE
4956	37.5	54.0	-16.5	52.0	3.0	50.1	32.7	V	AVE
5163	47.9	74.0	-26.1	61.7	3.1	49.6	32.7	H	PK

Test Personnel:	Grace Lin	Test Date:	09/24/2018, 09/25/2018
Product Standard:	FCC §15.109 ISED ICES-003	Limit Applied:	FCC §15.109, ICES-003
Input Voltage:	6 Vdc Battery	Ambient Temperature:	25.2 °C
Pretest Verification w/ BB Source:	Yes	Relative Humidity:	63 %
		Atmospheric Pressure:	987.3 mbars

Deviations, Additions, or Exclusions: None

11 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	09/27/2018	103660035LAX-001	GL	SK	Original Issue