

EMC TEST REPORT
No. 161201267SHA-001

Applicant : H.I.S. Juveniles Inc.

35 West 35th Street, Suite1004, New York 10001 USA

Product Name : Chicco Universal Light Up Backseat Baby View Mirror

Type/Model : 180020

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2016): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices


Date of issue: January 18, 2017

Prepared by:



Wade Zhang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing
Tel: +86 21 64956565 ext. 271
Fax: +86 21 54262335 ext. 271

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	4
1.1 Applicant Information.....	4
1.2 Identification of the EUT	4
1.3 Technical specification	4
1.4 Mode of operation during the test / Test peripherals used.....	5
2. TEST SPECIFICATION	6
2.1 Instrument list	6
2.2 Test Standard	6
2.3 Test Summary	7
3. FUNDAMENTAL & SPURIOUS EMISSION & RESTRICT BAND RADIATED EMISSION	8
3.1 Test limit	8
3.2 Test Configuration	9
3.3 Test procedure and test setup	9
3.4 Test protocol	10
4. DEACTIVATING TIME	13
4.1 Test limit	13
4.2 Test Configuration	13
4.3 Test procedure and test setup	14
4.4 Test protocol	14
5. POWER LINE CONDUCTED EMISSION	15
5.1 Limit.....	15
5.2 Test configuration	15
5.3 Test procedure and test set up	16
5.4 Test protocol	16
6. EMISSION BANDWIDTH	17
6.1 Test limit	17
6.2 Test Configuration	17
6.3 Test procedure and test setup	17
6.4 Test protocol	18
7. DUTY CYCLE	19

1. General Information

1.1 Applicant Information

Applicant : H.I.S. Juveniles Inc.
35 West 35th Street, Suite1004, New York 10001 USA
Name of contact : Gene Wu
Tel : 212-594-4215
Fax : 212-594-4215

1.2 Identification of the EUT

Equipment : Chicco Universal Light Up Backseat Baby View Mirror
Type/model : 180020
FCC ID : 2AKVHHIS-10001

1.3 Technical specification

Operation Frequency : 315MHz
Band
Rating : 3V DC Lithium button battery
Modulation : ASK
Antenna Designation : Integral PCB antenna, non-user removable
Gain of Antenna : 0dBi
Channel Description : There is one channel only, namely 315MHz.
Description of EUT : There is one model only.
The EUT is a transmitter to control the working condition of
the corresponding receiver.
Category of EUT : Class B
EUT type : Table top Floor standing
Sample received date : December 13, 2016
Sample Identification No : /
Date of test : December 13, 2016 ~ January 13, 2017

1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

2. Test Specification

2.1 Instrument list

Selected	Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
<input checked="" type="checkbox"/>	PXA Analyzer	N9030A	Agilent	EC5338	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	Vector SG	N5182B	Agilent	EC5175	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	Power sensor	U2021XA	Agilent	EC5338-1	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	MXG Analog SG	N5181A	Agilent	EC5338-2	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	Power meter	N1911A/N1921A	Agilent	EC4318	2016/4/10	2017/4/9
<input checked="" type="checkbox"/>	EMI chamber	3m	Albatross	EC 3048	2016/5/5	2017/5/4
<input checked="" type="checkbox"/>	Test Receiver	ESIB 26	R&S	EC 3045	2016/10/19	2017/10/18
<input checked="" type="checkbox"/>	Test Receiver	ESCI 7	R&S	EC4501	2016/2/24	2017/2/23
<input checked="" type="checkbox"/>	Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2016/5/30	2017/5/29
<input checked="" type="checkbox"/>	Horn antenna	HF 906	R&S	EC 3049	2016/9/11	2017/9/10
<input checked="" type="checkbox"/>	Horn antenna	HAP18-26W	TOYO	EC 4792-3	2014/6/12	2017/6/11
<input checked="" type="checkbox"/>	Pre-amplifier	Pre-amp 18	R&S	EC 5262	2016/5/24	2017/5/23
<input checked="" type="checkbox"/>	Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2016/4/11	2017/4/10

2.2 Test Standard

47CFR Part 15 (2016): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	RESULT
Fundamental & spurious emission	15.231(b)	Pass
Restrict band radiated emission	15.205	Pass
Power line conducted emission	15.207	NA
Emission bandwidth	15.231(c)	Pass
Deactivating time	15.231(a)(1)	Pass

Note: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

3. Fundamental & Spurious Emission & Restrict band radiated emission

Test result: **PASS**

3.1 Test limit

3.1.1 The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. It must comply with the limits below:

Fundamental Frequency (MHz)	Fundamental limit (uV/m)	Spurious limit (uV/m)
<input type="checkbox"/> 40.66 – 40.70	2250	225
<input type="checkbox"/> 70 – 130	1250	125
<input type="checkbox"/> 130 - 174	1250 to 3750	125 to 375
<input type="checkbox"/> 174 - 260	3750	375
<input checked="" type="checkbox"/> 260 – 470	3750 to 12500	375 to 1250
<input type="checkbox"/> Above 470	12500	1250

The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(Frequency) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(Frequency) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.


For that the EUT use fundamental frequency of 315MHz, after calculation, the limit is:

Fundamental limit = $41.6667 * 315 - 7083.3333 = 6041.68 \text{ uV/m} = 75.62 \text{ dBuV/m}$

$$\text{Spurious limit} = 75.62 - 20 = 55.62 \text{dBuV/m}$$

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

3.2 Test Configuration

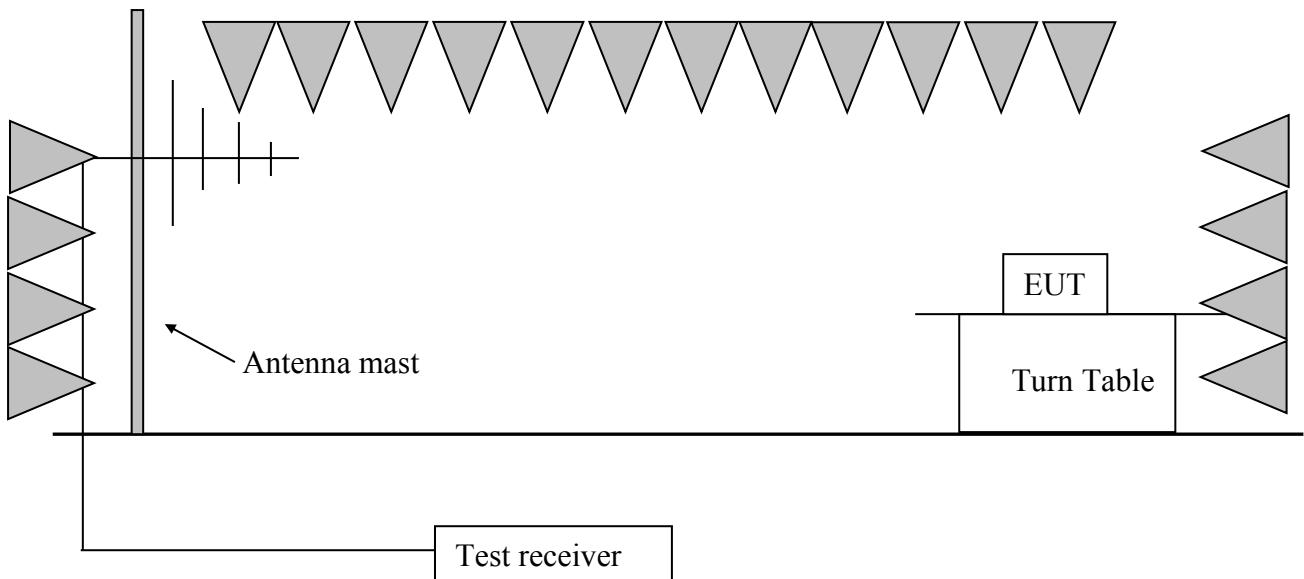

3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier and high pass filter is equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a non-conducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.


Both horizontal and vertical polarities of the receiving antenna were assessed and the higher reading was listed in this report.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW=300 Hz, VBW=1 kHz (9 kHz~150 kHz);
RBW=10kHz, VBW=30kHz (150kHz~30MHz);
RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

3.4 Test protocol

Temperature: 22°C
Relative humidity: 52%

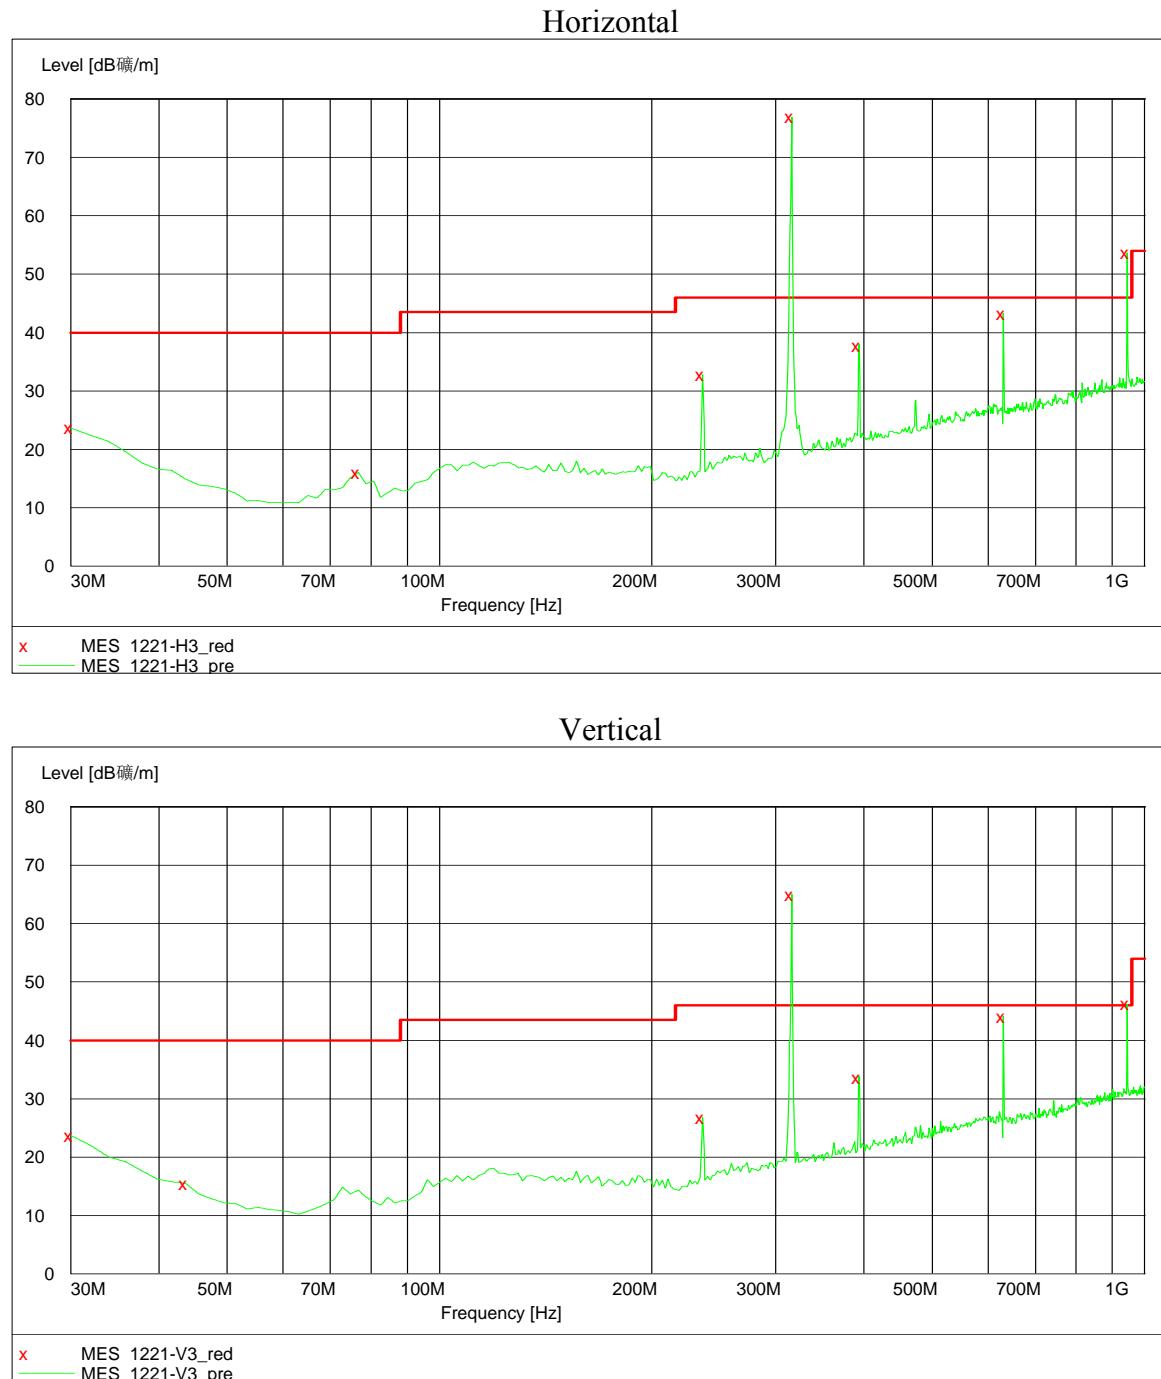

Test data:

Polarization	Frequency (MHz)	Measured level (dB μ V/m)	Correct Factor (dB/m)	Limits (dB μ V/m)	Margin (dB)	Detector
H	30.00	23.60	21.00	40.00	16.40	PK
	76.65	16.00	8.60	40.00	24.00	PK
	236.05	32.80	13.40	46.00	13.20	PK
	315.00	76.90	16.00	95.62	18.72	PK
	393.51	37.70	18.50	46.00	8.30	PK
	630.00	43.20	22.00	75.62	32.42	PK
	945.00	53.70	25.30	75.62	21.92	PK
	1260.00	54.10	-18.40	75.62	21.52	PK
	1575.00	47.80	-15.60	75.62	27.82	PK
V	30.00	23.70	21.00	40.00	16.30	PK
	43.61	15.50	12.20	40.00	24.50	PK
	236.05	26.80	13.40	46.00	19.20	PK
	315.00	65.00	16.00	95.62	30.62	PK
	393.51	33.60	18.50	46.00	12.40	PK
	630.00	44.10	22.00	75.62	31.52	PK
	945.00	46.20	25.30	75.62	29.42	PK
	1260.00	51.20	-18.40	75.62	24.42	PK
	1575.00	46.30	-15.60	75.62	29.32	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)

2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = limit - Corrected Reading
4. If PK reading is less than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dB μ V, limit = 40.00dB μ V/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20$ dB/m; Corrected Reading = $10\text{dB}\mu\text{V} + 0.20\text{dB/m} = 10.20\text{dB}\mu\text{V/m}$; Margin = $40.00\text{dB}\mu\text{V/m} - 10.20\text{dB}\mu\text{V/m} = 29.80\text{dB}$.

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	PK Reading (dBuV/m)	Correct Factor (dB)	AV (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	315.00	76.90	-11.81	65.09	75.62	10.53
H	630.00	43.20		31.39	55.62	24.23
H	945.00	53.70		41.89	55.62	13.73
H	1260.00	54.10		42.29	55.62	13.33
H	1575.00	47.80		35.99	55.62	19.63
V	315.00	65.00		53.19	75.62	22.43
V	630.00	44.10		32.29	55.62	23.33
V	945.00	46.20		34.39	55.62	21.23
V	1260.00	51.20		39.39	55.62	16.23
V	1575.00	46.30		34.49	55.62	21.13

Remark: 1. Correct Factor = $20\lg(\text{duty cycle}) = 20\lg(0.2568) = -11.81$

2. AV Reading = PK Reading + Correct Factor

3. Margin = limit - AV Reading


4. Deactivating time

Test result: **PASS**

4.1 Test limit

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

4.2 Test Configuration

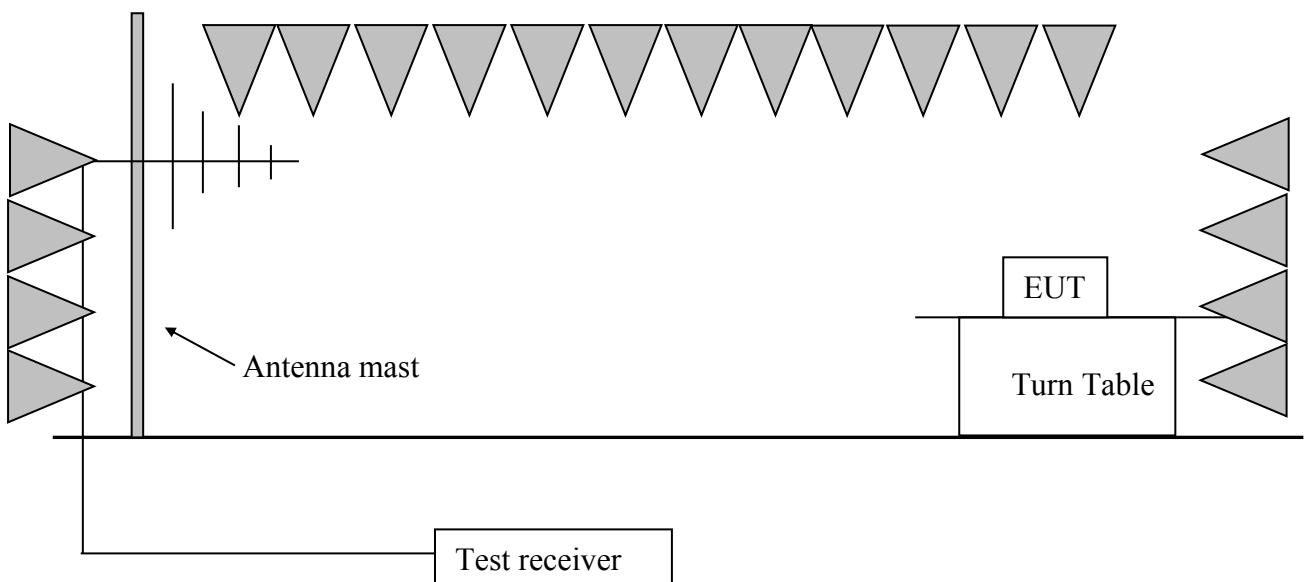

4.3 Test procedure and test setup


The measurement was applied in a semi-anechoic chamber.

The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded.

4.4 Test protocol

Whole time from the triggered moment to the time of stopping radiating: **0.380s**.
As a result, the EUT complies with the limit of 5s' deactivating time.

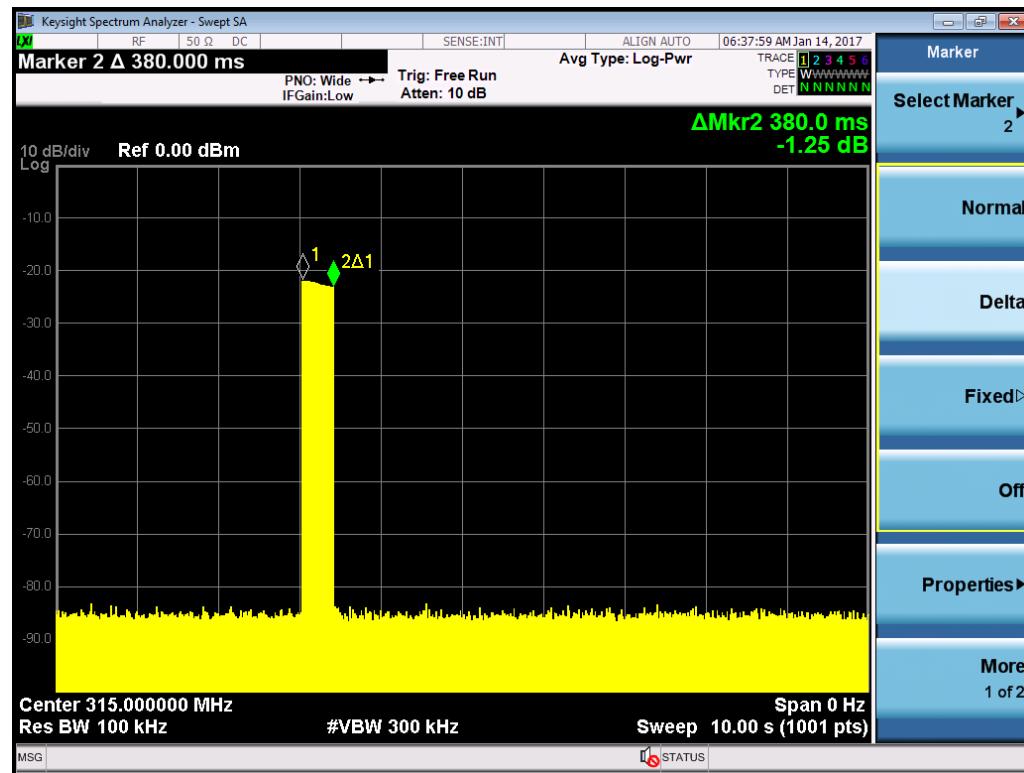

5. Power line conducted emission


Test result: **NA**

5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

5.2 Test configuration

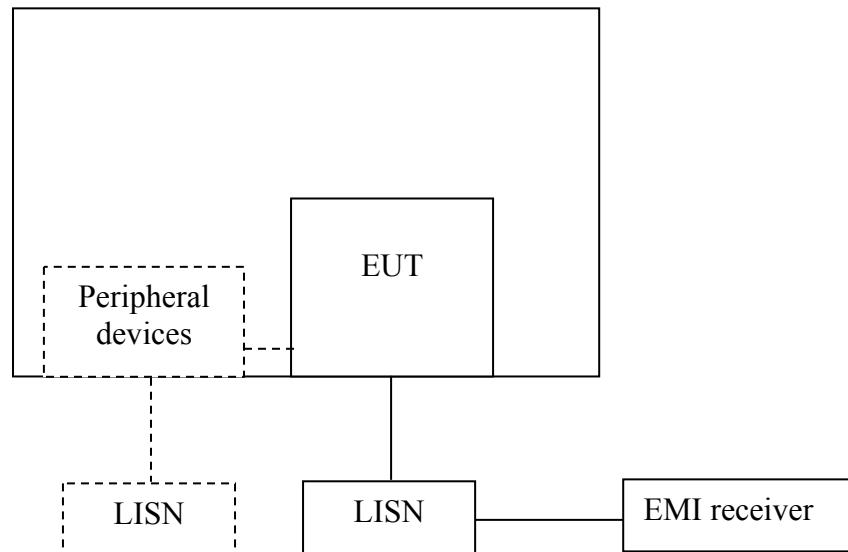

- For table top equipment, wooden support is 0.8m height table
- For floor standing equipment, wooden support is 0.1m height rack.

5.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

5.4 Test protocol

N/A

6. Emission Bandwidth


Test result: PASS

6.1 Test limit

The emission bandwidth of momentarily operated devices shall be less or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the emission bandwidth shall be less or equal to 0.5% of the centre frequency.

The limit for the EUT = $0.25\% * 315 \text{ MHz} = 787.5 \text{ kHz}$

6.2 Test Configuration

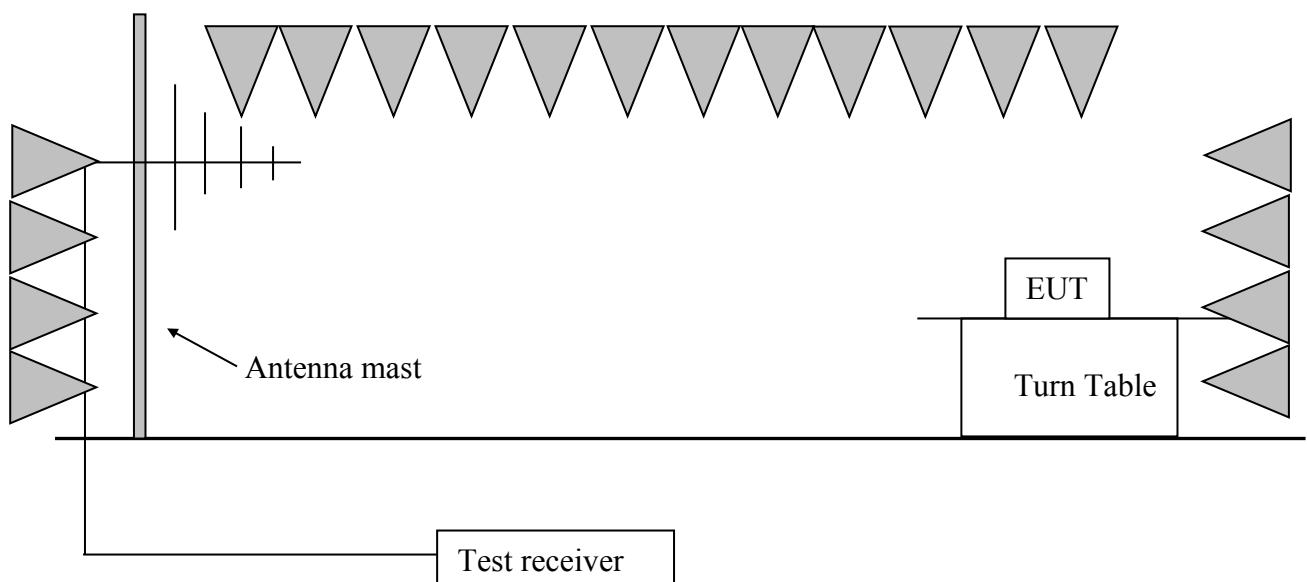

6.3 Test procedure and test setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.


The central frequency of test receiver was set near the operating frequency of EUT.

The test was conducted using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 30kHz.

6.4 Test protocol

Temperature : 25 °C
 Relative Humidity : 55 %

Channel	F _L (MHz)	F _H (MHz)	20dB bandwidth (kHz)	Limit (kHz)
1	314.979	315.028	49.0	787.5

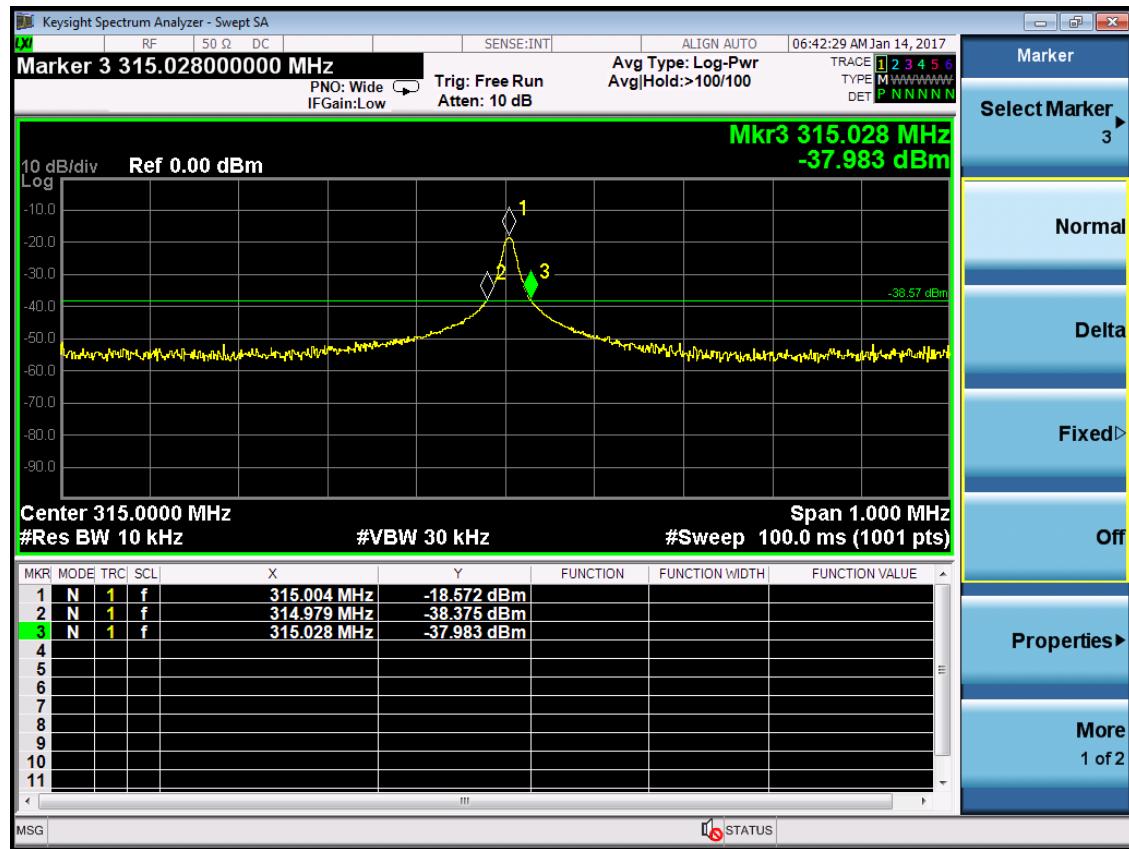

7. Duty Cycle

The test data with maximum duty cycle was listed below.

$$\text{The worst Duty cycle} = (1.1*6+0.35*19) / 51.6 = 13.25/51.6=0.2568$$

