

FCC SAR

Measurement and Test Report

For

Beijing iLeja Tech. Co. Ltd..

Room 3558, Building 3, Courtyard 29, DongBeiWang South Road, Haidian

District, Beijing

FCC ID: 2AKVNLJ-C2

FCC Rules:	FCC Part 2.1093 ANSI / IEEE C95.1 :2005 ANSI / IEEE C95.3 :2002 <u>IEEE 1528 :2013</u>
Product Description:	<u>Intelligent Car Terminal</u>
Tested Model:	<u>LJ-C2</u>
Report No.:	<u>STR16108134H</u>
Tested Date:	<u>2017-02-06 to 2017-02-07</u>
Issued Date:	<u>2017-02-08</u>
Tested By:	<u>Lucy Wei / Engineer</u> <i>Lucy Wei</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

TABLE OF CONTENTS

1. General Information	3
1.1 Product Description for Equipment Under Test (EUT).....	3
1.2 Test Standards	6
1.3 Test Methodology.....	6
1.4 Test Facility	6
2. Summary of Test Results	7
3. Specific Absorption Rate (SAR)	8
3.1 Introduction.....	8
3.2 SAR Definition	8
4. SAR Measurement System	9
4.1 The Measurement System	9
4.2 Probe.....	9
4.3 Probe Calibration Process.....	11
4.4 Phantom	12
4.5 Device Holder.....	12
4.6 Test Equipment List.....	13
5. Tissue Simulating Liquids	14
5.1 Composition of Tissue Simulating Liquid.....	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms.....	15
5.3 Tissue Calibration Result.....	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check.....	17
6.2 System Setup	17
6.3 Validation Results.....	18
7. EUT Testing Position	19
7.1 Body Position	19
7.2 EUT Antenna Position	19
7.3 EUT Testing Position.....	20
8. SAR Measurement Procedures	21
8.1 Measurement Procedures	21
8.2 Spatial Peak SAR Evaluation	21
8.3 Area & Zoom Scan Procedures.....	22
8.4 Volume Scan Procedures.....	22
8.5 SAR Averaged Methods	22
8.6 Power Drift Monitoring.....	22
9. SAR Test Result	23
9.1 Conducted RF Output Power	23
9.2 Test Results for Standalone SAR Test.....	47
9.3 Simultaneous Multi-band Transmission SAR Analysis	52
10. Measurement Uncertainty	58
10.1 Uncertainty for EUT SAR Test.....	58
10.2 Uncertainty for System Performance Check.....	59
Annex A. Plots of System Performance Check	61
Annex B. Plots of SAR Measurement	71
Annex C. EUT Photos	94
Annex D. Test Setup Photos	96
Annex E. Calibration Certificate	98

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Beijing iLeja Tech. Co. Ltd.
 Address of applicant: Room 3558, Building 3, Courtyard 29, DongBeiWang South Road, Haidian District, Beijing

Manufacturer: Beijing iLeja Tech. Co. Ltd.
 Address of manufacturer: Room 3558, Building 3, Courtyard 29, DongBeiWang South Road, Haidian District, Beijing

General Description of EUT	
Product Name:	Intelligent Car Terminal
Trade Name:	carrobot
Model No.:	LJ-C2
Adding Model(s):	/
Rated Voltage:	DC 12V
Power Adapter Model:	/
Software Version:	Carrobot_SIM_US_V01_161103
Hardware Version:	2CX006_V1.01
Device Category:	Portable Device
<p><i>The EUT supports GSM850/900/DCS1800/PCS1900, WCDMA Band 1/2/4/5, LTE Band 2/4/7/17 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850/900/DCS1800/PCS1900, GPS, FM transmitter, Bluetooth and Wi-Fi functions. For more information see the following datasheet</i></p> <p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. For more information see the following datasheet</i></p>	

Technical Characteristics of EUT	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 32.09dBm, GSM1900: 28.86dBm EDGE850: 26.91dBm, EDGE1900: 26.88dBm
Type of Modulation:	GMSK, 8PSK

Antenna Type:	Internal Antenna
Antenna Gain:	GSM850: 1.0dBi, GSM1900: 1.0dBi,
GPRS Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band II, WCDMA Band V
Uplink Frequency:	WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz
Downlink Frequency:	WCDMA Band II: 1930~1990MHz WCDMA Band V: 869~894MHz
RF Output Power:	WCDMA850: 22.57dBm, WCDMA1900: 22.73dBm
Type of Modulation:	BPSK, QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA850: 1.0dBi, WCDMA1900: 1.0dBi
4G	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 4,7,17
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 7: Tx: 2500-2570MHz FDD-LTE Band 17: Tx: 704-716MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 7: Rx: 2620-2690MHz, FDD-LTE Band 17: Tx: 734-746MHz
RF Output Power:	FDD-LTE Band 2: 25.03dBm, FDD-LTE Band 4: 24.03dBm, FDD-LTE Band 7: 23.37dBm, FDD-LTE Band 17: 24.07dBm
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	1.0dBi
WIFI	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11b/g/n(HT40)
AV Output Power:	11.24dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11/9
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.0dBi

Bluetooth	
Bluetooth Version:	V4.0
Frequency Range:	2402-2480MHz
AV Output Power:	-0.722dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.0dBi

1.2 Test Standards

The following report is prepared on behalf of the Beijing iLeja Tech. Co. Ltd.. in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-2005, IEEE 1528-2013, KDB 865664 D01 v01r04, KDB 865664 D02 v01r02, KDB 941225 D05 v02r05 ,KDB 941225 D06 Hotspot mode v02r01, KDB 447498 D01 v06, and KDB 941225 D01 v03.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM	0.666	1.220	1.6
WCDMA	0.710	0.710	1.6
FDD-LTE	0.564	0.564	1.6
WLAN 2.4G	0.209	0.209	1.6
Simultaneous Transmission	0.919	1.430	1.6

*The highest reported SAR values for body-worn accessory, wireless router(hotspot) , and simultaneous transmission conditions are **0.710 W/kg** , **1.220W/kg**, and **1.430W/kg** respectively*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm

- Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

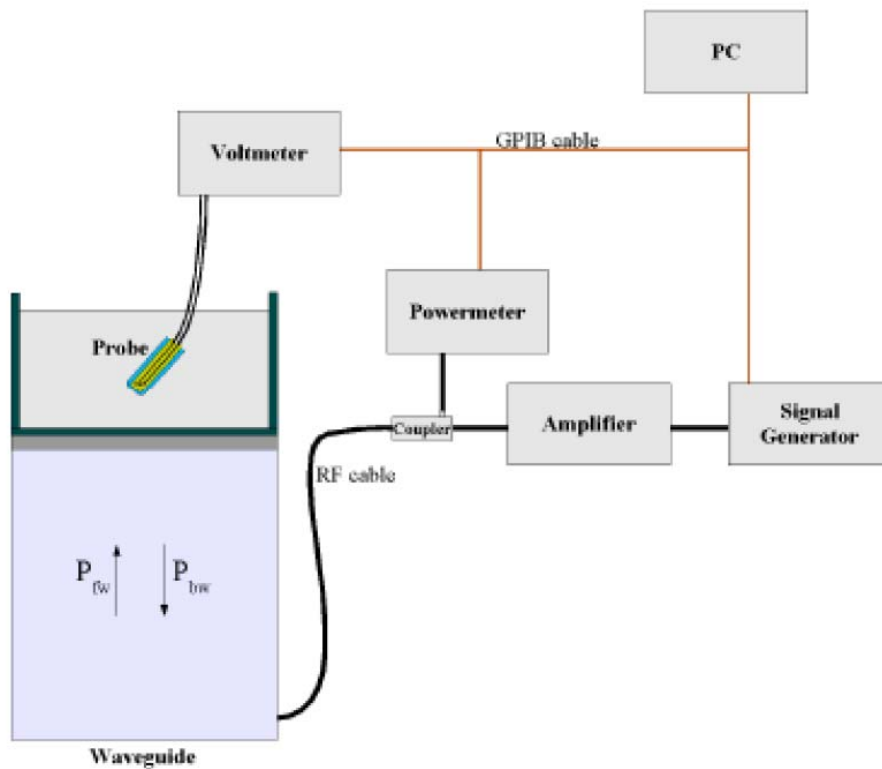

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

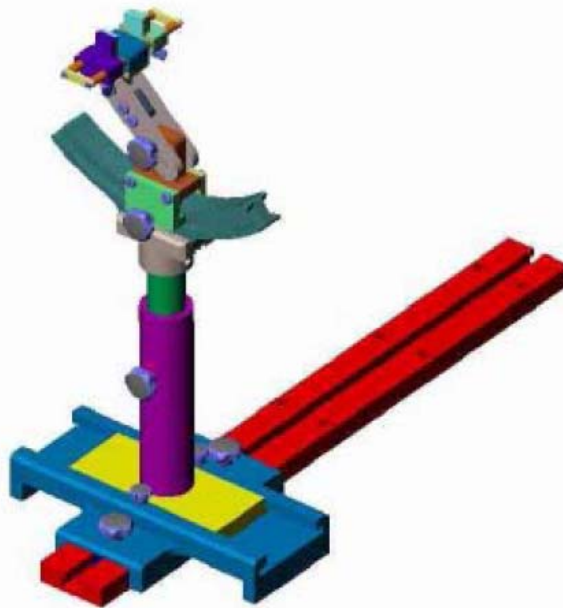

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	SATIMO	SSE5	SN 09/13 EP168	2016-06-01	2017-05-31
750MHz Dipole	SATIMO	SID750	SN 47/12 DIP 0G750-203	2016-03-20	2017-03-19
835MHz Dipole	SATIMO	SID835	SN 47/12 DIP 0G835-204	2016-03-20	2017-03-19
1800MHz Dipole	SATIMO	SID1800	SN 47/12 DIP 1G800-206	2016-03-20	2017-03-19
1900MHz Dipole	SATIMO	SID1900	SN 47/12 DIP 1G900-207	2016-03-20	2017-03-19
2450MHz Dipole	SATIMO	SID2450	SN 13/15 DIP 2G450-364	2016-03-20	2017-03-19
Dielectric Probe Kit	SATIMO	SCLMP	SN 47/12 OCPG49	2016-03-20	2017-03-19
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2016-06-04	2017-06-03
Signal Generator	Rohde & Schwarz	SMR20	100047	2016-06-04	2017-06-03
Universal Tester	Rohde & Schwarz	CMU200	112012	2016-06-04	2017-06-03
Network Analyzer	HP	8753C	2901A00831	2016-06-04	2017-06-03
Directional Couplers	Agilent	778D	20160	2016-06-04	2017-06-03

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

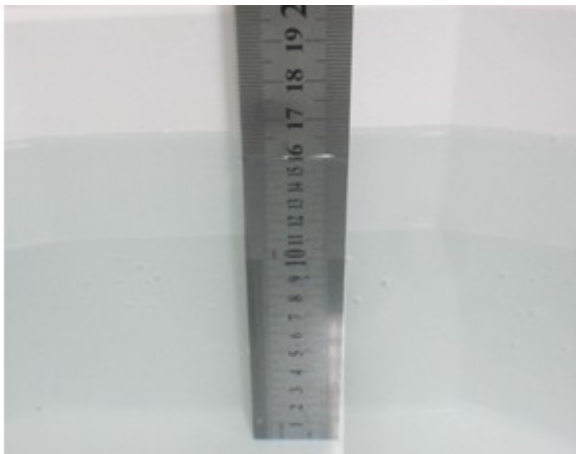

Liquid Height for Head SAR



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Triton (%)	HEC (%)	Preventol (%)	DGBE (%)
Body						
750	51.75	1.17	0.00	0.00	47.08	0.00
835	52.87	1.07	0.00	0.00	46.10	0.00
1800	70.81	0.52	20.01	0.00	0.00	8.65
1900	69.99	0.41	20.66	0.00	0.00	8.93
2450	55.44	0.32	30.50	0.00	0.00	13.74

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
750	21.2	0.93	0.96	-3.12	54.96	55.50	-0.97	±5	2017-02-06
835	21.2	0.95	0.97	-2.06	54.85	55.20	-0.63	±5	2017-02-06
1800	21.3	1.46	1.52	-3.95	51.22	53.30	-3.90	±5	2017-02-06
1900	21.3	1.50	1.52	-1.32	52.42	53.30	-1.65	±5	2017-02-06
2450	21.3	1.91	1.95	-2.05	52.01	52.70	-1.31	±5	2017-02-06


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

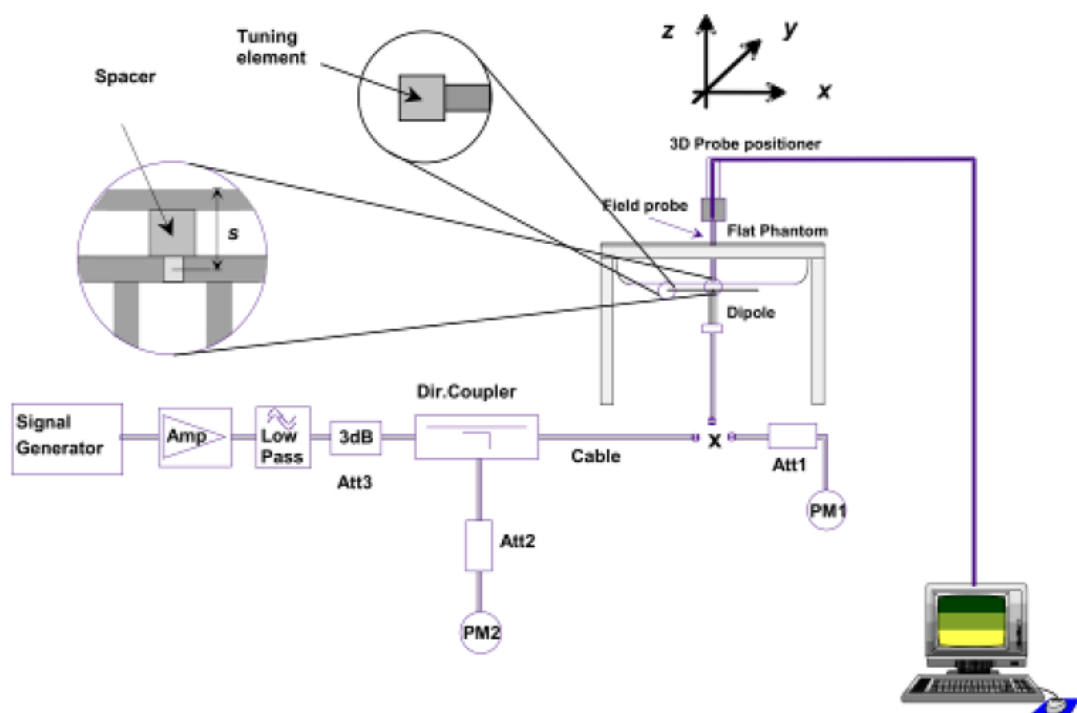

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance
MHz	(W/kg)	(W/kg)	(W/kg)	(%)
Body				
750	8.40	2.12	8.48	0.95
835	9.38	2.35	9.4	0.21
1800	38.31	9.58	38.32	0.03
1900	39.10	9.78	39.12	0.05
2450	50.41	12.59	50.36	-0.10

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Body Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


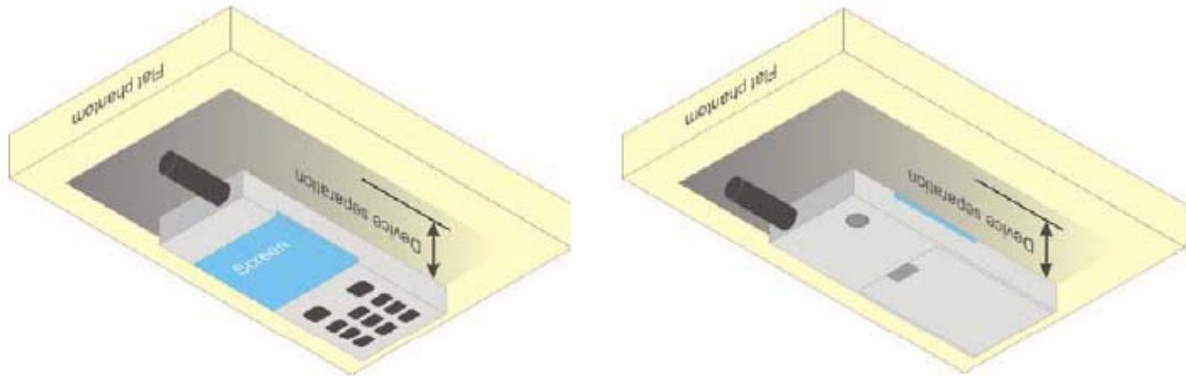


Illustration for Body Position

7.2 EUT Antenna Position

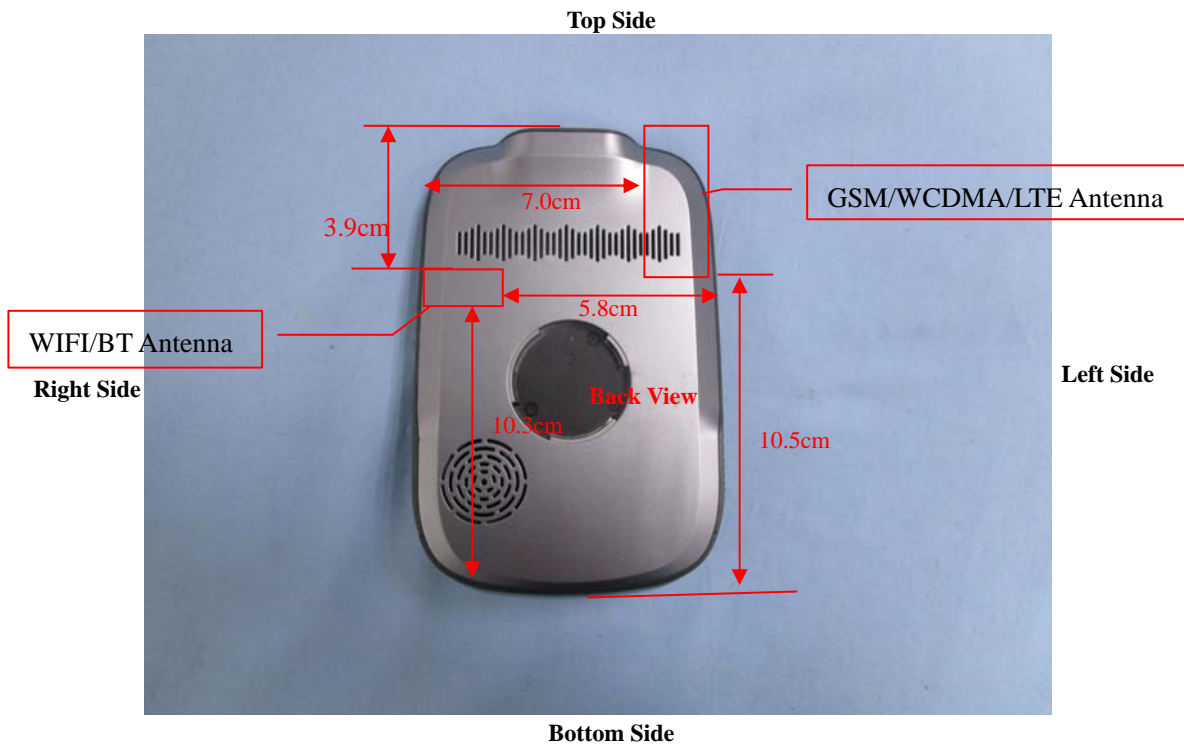

Block Diagram for EUT Antenna Position

7.3 EUT Testing Position

Body-worn/Hotspot mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
WWAN	Yes	Yes	No	Yes	No	No
WLAN	Yes	Yes	Yes	No	No	No

Body-worn SAR tests, Test distance: 10mm		
Antennas	Front	Back
WWAN	Yes	Yes
WLAN	Yes	Yes

Remark:

1. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM	31.88	32.09	32	28.55	28.69	28.86
GPRS (1 slot)	31.8	32.02	31.92	28.26	28.25	28.35
GPRS (2 slots)	31.16	31.36	31.24	27.96	27.99	28.08
GPRS (3 slots)	29.5	29.68	29.58	27.36	27.27	27.51
GPRS (4 slots)	28.42	28.62	28.49	25.06	25.28	25.52
EGPRS (1 slot)	26.91	26.8	26.39	26.34	26.61	26.88
EGPRS (2 slots)	26.14	25.96	25.58	25.27	25.47	25.83
EGPRS (3 slots)	24.21	24.07	23.73	23.1	23.4	23.73
EGPRS (4 slots)	23.04	22.92	22.57	21.97	22.19	22.6

GSM - Source-Based Time-Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM	22.88	23.09	23.00	19.55	19.69	19.86
GPRS (1 slot)	22.80	23.02	22.92	19.26	19.25	19.35
GPRS (2 slots)	25.16	25.36	25.24	21.96	21.99	22.08
GPRS (3 slots)	25.25	25.43	25.33	23.11	23.02	23.26
GPRS (4 slots)	25.42	25.62	25.49	22.06	22.28	22.52
EGPRS (1 slot)	17.91	17.80	17.39	17.34	17.61	17.88
EGPRS (2 slots)	20.14	19.96	19.58	19.27	19.47	19.83
EGPRS (3 slots)	19.96	19.82	19.48	18.85	19.15	19.48
EGPRS (4 slots)	20.04	19.92	19.57	18.97	19.19	19.60

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Remark:

1. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 due to its highest source-based time-average power.
2. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
3. The DUT do not support DTM function.

WCDMA - Average Power (dBm)						
Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.6	846.6
RMC 12.2k	22.37	22.55	22.73	22.57	22.56	22.53
HSDPA Subtest-1	21.52	21.66	21.54	21.57	21.57	21.54
HSDPA Subtest-2	21.49	21.53	21.48	21.54	21.49	21.42
HSDPA Subtest-3	21.42	21.56	21.45	21.46	21.38	21.39
HSDPA Subtest-4	21.43	21.51	21.34	21.35	21.31	21.38
HSUPA Subtest-1	21.4	21.59	21.46	21.58	21.66	21.51
HSUPA Subtest-2	21.42	21.48	21.45	21.51	21.51	21.43
HSUPA Subtest-3	21.34	21.45	21.38	21.42	21.49	21.36
HSUPA Subtest-4	21.33	21.46	21.36	21.39	21.38	21.34
HSUPA Subtest-5	21.35	21.49	21.24	21.28	21.32	21.21

Remark:

1. For Body SAR, per KDB 941225 D01 v03, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA SAR evaluation can be excluded.

WLAN - Maximum Average Power				
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)
802.11b	11Mbps	CH 01	2412	11.24
		CH 06	2437	8.74
		CH 11	2462	10.78
802.11g	54Mbps	CH 01	2412	5.31
		CH 06	2437	5.52
		CH 11	2462	5.97
802.11n (20MHz)	MCS7	CH 01	2412	4.42
		CH 06	2437	4.2
		CH 11	2462	5.37
802.11n (40MHz)	MCS7	CH 03	2422	3.09
		CH 06	2437	3.68
		CH 09	2452	3.22

Remark:

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.

FDD-LTE Band 2:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	24.54	
		1	3	24.52	
		1	5	24.49	
		3	0	23.82	
		3	2	23.96	
		3	3	23.97	
		6	0	23.95	
	MCH	1	0	24.17	
		1	3	24.15	
		1	5	24.09	
		3	0	23.79	
		3	2	23.62	
		3	3	23.41	
		6	0	23.64	
	HCH	1	0	24.04	
		1	3	23.76	
		1	5	23.76	
		3	0	22.93	
		3	2	23.01	
		3	3	23.06	
		6	0	23.03	
16QAM	LCH	1	0	24.14	
		1	3	24.28	
		1	5	24.18	
		3	0	23.09	
		3	2	23.20	
		3	3	23.36	
		6	0	23.22	
	MCH	1	0	24.47	
		1	3	24.52	
		1	5	24.45	
		3	0	23.21	
		3	2	23.07	
		3	3	22.91	
		6	0	23.08	
	HCH	1	0	23.43	
1		3	23.26		

		1	5	23.21	
		3	0	22.47	
		3	2	22.52	
		3	3	22.54	
		6	0	22.48	

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	24.77	
		1	7	24.92	
		1	14	24.85	
		8	0	23.93	
		8	4	23.96	
		8	7	23.99	
		15	0	23.95	
	MCH	1	0	24.09	
		1	7	24.99	
		1	14	24.02	
		8	0	24.18	
		8	4	24.17	
		8	7	24.15	
		15	0	24.17	
	HCH	1	0	24.29	
		1	7	23.90	
		1	14	23.62	
		8	0	23.30	
		8	4	23.10	
		8	7	22.97	
		15	0	23.10	
16QAM	LCH	1	0	24.05	
		1	7	24.21	
		1	14	24.13	
		8	0	22.96	
		8	4	23.01	
		8	7	22.99	
		15	0	22.88	
	MCH	1	0	24.37	
		1	7	24.36	
		1	14	24.29	
		8	0	23.19	
		8	4	23.17	
		8	7	23.15	

	HCH	15	0	23.08	
		1	0	23.76	
		1	7	23.41	
		1	14	23.20	
		8	0	22.66	
		8	4	22.58	
		8	7	22.51	
		15	0	22.59	

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	24.91	
		1	12	24.57	
		1	24	24.99	
		12	0	23.83	
		12	6	23.71	
		12	13	23.80	
		25	0	23.81	
	MCH	1	0	24.21	
		1	12	24.56	
		1	24	24.89	
		12	0	23.95	
		12	6	23.76	
		12	13	23.80	
		25	0	23.85	
	HCH	1	0	24.48	
		1	12	23.79	
		1	24	23.55	
		12	0	23.18	
		12	6	22.86	
		12	13	22.68	
		25	0	22.93	
16QAM	LCH	1	0	24.29	
		1	12	24.04	
		1	24	24.38	
		12	0	23.08	
		12	6	23.12	
		12	13	23.15	
		25	0	22.97	
	MCH	1	0	24.61	
		1	12	24.04	
		1	24	24.40	

		12	0	23.35	
		12	6	23.27	
		12	13	23.27	
		25	0	23.14	
	HCH	1	0	23.56	
		1	12	22.84	
		1	24	22.73	
		12	0	22.59	
		12	6	22.39	
		12	13	22.25	
		25	0	22.41	

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	24.31	
		1	24	24.70	
		1	49	24.75	
		25	0	23.72	
		25	12	23.86	
		25	25	23.97	
		50	0	23.88	
	MCH	1	0	24.57	
		1	24	24.54	
		1	49	24.22	
		25	0	23.82	
		25	12	23.73	
		25	25	23.62	
		50	0	23.76	
	HCH	1	0	23.83	
		1	24	23.94	
		1	49	23.12	
		25	0	23.19	
		25	12	23.11	
		25	25	22.85	
		50	0	23.08	
16QAM	LCH	1	0	23.67	
		1	24	24.06	
		1	49	24.14	
		25	0	22.97	
		25	12	23.03	
		25	25	23.12	
		50	0	23.05	

	MCH	1	0	23.95	
		1	24	23.93	
		1	49	23.62	
		25	0	23.23	
		25	12	23.14	
		25	25	23.09	
		50	0	23.17	
	HCH	1	0	23.33	
		1	24	23.43	
		1	49	22.71	
		25	0	22.51	
		25	12	22.52	
		25	25	22.37	
		50	0	22.50	

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	24.62	
		1	37	24.85	
		1	74	24.93	
		37	0	23.77	
		37	18	23.95	
		37	38	24.08	
		75	0	23.95	
	MCH	1	0	24.87	
		1	37	24.51	
		1	74	24.26	
		37	0	23.84	
		37	18	23.74	
		37	38	23.61	
		75	0	23.75	
	HCH	1	0	23.85	
		1	37	24.01	
		1	74	23.29	
		37	0	23.04	
		37	18	23.15	
		37	38	23.04	
		75	0	23.07	
16QAM	LCH	1	0	23.97	
		1	37	24.21	
		1	74	24.34	
		37	0	23.07	

		37	18	23.17	
		37	38	23.33	
		75	0	23.26	
	MCH	1	0	24.25	
		1	37	23.93	
		1	74	23.69	
		37	0	23.23	
		37	18	23.17	
		37	38	23.08	
		75	0	23.17	
	HCH	1	0	23.26	
		1	37	23.41	
		1	74	22.79	
		37	0	22.51	
		37	18	22.56	
		37	38	22.47	
75		0	22.48		

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	24.78	
		1	49	24.96	
		1	99	24.79	
		50	0	24.20	
		50	25	24.10	
		50	50	24.16	
		100	0	24.14	
	MCH	1	0	25.03	
		1	49	24.54	
		1	99	24.04	
		50	0	24.98	
		50	25	24.00	
		50	50	24.98	
		100	0	23.94	
	HCH	1	0	24.12	
		1	49	24.01	
		1	99	23.29	
		50	0	23.84	
		50	25	23.71	
		50	50	23.65	
		100	0	22.96	
16QAM	LCH	1	0	24.00	

		1	49	24.21	
		1	99	24.05	
		50	0	24.00	
		50	25	23.97	
		50	50	23.99	
		100	0	22.86	
	MCH	1	0	24.28	
		1	49	23.79	
		1	99	23.31	
		50	0	24.17	
		50	25	24.10	
		50	50	24.18	
	HCH	100	0	23.06	
		1	0	23.55	
		1	49	23.44	
		1	99	22.82	
		50	0	23.07	
		50	25	22.95	
		50	50	22.93	
	100	0	22.59		

FDD-LTE Band 4:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Verdict
		Size	Offset		
QPSK	LCH	1	0	23.59	
		1	3	23.40	
		1	5	23.94	
		3	0	22.31	
		3	2	22.39	
		3	3	22.72	
		6	0	22.53	
	MCH	1	0	23.74	
		1	3	23.59	
		1	5	23.76	
		3	0	22.78	
		3	2	22.65	
		3	3	22.66	
		6	0	22.76	
	HCH	1	0	23.80	
		1	3	23.37	

		1	5	23.03	
		3	0	22.62	
		3	2	22.36	
		3	3	22.19	
		6	0	22.41	
16QAM	LCH	1	0	22.79	
		1	3	22.63	
		1	5	23.27	
		3	0	21.35	
		3	2	21.43	
		3	3	21.78	
		6	0	21.59	
	MCH	1	0	22.97	
		1	3	22.81	
		1	5	23.02	
		3	0	21.79	
		3	2	21.71	
		3	3	21.75	
		6	0	21.78	
	HCH	1	0	23.19	
		1	3	22.78	
		1	5	22.50	
		3	0	21.76	
		3	2	21.53	
		3	3	21.35	
		6	0	21.50	

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	23.85	
		1	7	23.64	
		1	14	23.58	
		8	0	22.98	
		8	4	22.85	
		8	7	22.79	
		15	0	22.89	
	MCH	1	0	23.88	
		1	7	23.97	
		1	14	23.94	
		8	0	23.03	
		8	4	23.03	
		8	7	23.06	

	HCH	15	0	23.03	
		1	0	23.48	
		1	7	23.24	
		1	14	23.23	
		8	0	22.48	
		8	4	22.38	
		8	7	22.38	
		15	0	22.40	
16QAM	LCH	1	0	23.13	
		1	7	23.04	
		1	14	22.94	
		8	0	22.05	
		8	4	22.02	
		8	7	21.95	
		15	0	21.93	
	MCH	1	0	23.15	
		1	7	23.26	
		1	14	23.20	
		8	0	22.10	
		8	4	22.08	
		8	7	22.10	
		15	0	22.00	
	HCH	1	0	22.89	
		1	7	22.71	
		1	14	22.70	
		8	0	21.59	
		8	4	21.50	
		8	7	21.50	
		15	0	21.53	

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	23.88	
		1	12	23.17	
		1	24	23.49	
		12	0	22.56	
		12	6	22.30	
		12	13	22.28	
		25	0	22.39	
	MCH	1	0	24.02	
		1	12	23.61	
		1	24	23.97	

		12	0	22.97			
		12	6	22.76			
		12	13	22.80			
		25	0	22.84			
	HCH	1	0	23.48			
		1	12	22.79			
		1	24	23.07			
		12	0	22.11			
		12	6	21.91			
		12	13	21.91			
		25	0	22.02			
		16QAM	LCH	1	0	23.31	
				1	12	22.60	
1	24			22.96			
12	0			21.75			
12	6			21.51			
12	13			21.50			
25	0			21.49			
MCH	1		0	23.39			
	1		12	23.05			
	1		24	23.44			
	12		0	22.14			
	12		6	21.98			
	12		13	22.03			
	25	0	21.94				
HCH	1	0	22.57				
	1	12	21.87				
	1	24	22.20				
	12	0	21.29				
	12	6	21.07				
	12	13	21.06				
	25	0	21.14				

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	23.27	
		1	24	22.99	
		1	49	23.09	
		25	0	22.27	
		25	12	22.11	
		25	25	22.13	
		50	0	22.21	

	MCH	1	0	23.57	
		1	24	23.50	
		1	49	23.39	
		25	0	22.77	
		25	12	22.67	
		25	25	22.61	
		50	0	22.72	
	HCH	1	0	23.33	
		1	24	22.96	
		1	49	22.60	
		25	0	22.32	
		25	12	22.06	
		25	25	21.89	
		50	0	22.12	
16QAM	LCH	1	0	22.60	
		1	24	22.36	
		1	49	22.46	
		25	0	21.35	
		25	12	21.20	
		25	25	21.21	
		50	0	21.27	
	MCH	1	0	22.95	
		1	24	22.86	
		1	49	22.80	
		25	0	21.86	
		25	12	21.76	
		25	25	21.71	
		50	0	21.78	
	HCH	1	0	22.78	
		1	24	22.45	
		1	49	22.09	
		25	0	21.44	
		25	12	21.22	
		25	25	21.04	
		50	0	21.28	

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	23.50	
		1	37	23.08	
		1	74	23.72	
		37	0	22.30	

		37	18	22.22	
		37	38	22.49	
		75	0	22.37	
	MCH	1	0	23.81	
		1	37	23.56	
		1	74	23.71	
		37	0	22.84	
		37	18	22.74	
		37	38	22.73	
		75	0	22.79	
	HCH	1	0	23.70	
		1	37	23.15	
		1	74	22.97	
		37	0	22.59	
37		18	22.36		
37		38	22.12		
75		0	22.36		
16QAM	LCH	1	0	22.81	
		1	37	22.43	
		1	74	23.08	
		37	0	21.35	
		37	18	21.28	
		37	38	21.55	
		75	0	21.44	
	MCH	1	0	23.16	
		1	37	22.90	
		1	74	23.12	
		37	0	21.91	
		37	18	21.83	
		37	38	21.82	
		75	0	21.89	
	HCH	1	0	23.09	
		1	37	22.53	
		1	74	22.35	
		37	0	21.71	
		37	18	21.48	
		37	38	21.28	
		75	0	21.45	

Channel Bandwidth: 20 MHz				
Modulation	Channel	RB Configuration		Average Power [dBm]
		Size	Offset	
QPSK	LCH	1	0	23.98

		1	49	23.94		
		1	99	24.03		
		50	0	23.88		
		50	25	23.82		
		50	50	23.80		
		100	0	23.02		
	MCH	1	0	23.97		
		1	49	24.00		
		1	99	23.98		
		50	0	24.01		
		50	25	24.01		
		50	50	24.02		
	HCH	100	0	23.01		
		1	0	23.33		
		1	49	23.15		
		1	99	23.25		
		50	0	23.23		
		50	25	23.14		
	16QAM	LCH	50	50	23.19	
			100	0	22.34	
			1	0	23.12	
1			49	23.19		
1			99	23.16		
50			0	23.09		
MCH		50	25	23.03		
		50	50	23.03		
		100	0	21.99		
		1	0	23.20		
		1	49	23.30		
		1	99	23.20		
HCH		50	0	23.10		
		50	25	23.06		
		50	50	23.11		
		100	0	22.01		
		1	0	22.77		
		1	49	22.65		
			1	99	22.71	
			50	0	22.33	
			50	25	22.29	
	50		50	22.33		
	100		0	21.42		

FDD-LTE Band 7:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	22.07	
		1	12	22.78	
		1	24	22.93	
		12	0	21.32	
		12	6	21.85	
		12	13	22.33	
		25	0	21.94	
	MCH	1	0	22.35	
		1	12	22.37	
		1	24	23.24	
		12	0	21.10	
		12	6	21.36	
		12	13	21.86	
		25	0	21.46	
	HCH	1	0	23.13	
		1	12	22.71	
		1	24	22.57	
		12	0	21.94	
		12	6	21.74	
		12	13	21.57	
		25	0	21.74	
16QAM	LCH	1	0	21.29	
		1	12	22.01	
		1	24	22.63	
		12	0	20.44	
		12	6	21.06	
		12	13	21.55	
		25	0	21.10	
	MCH	1	0	21.55	
		1	12	21.64	
		1	24	22.50	
		12	0	20.36	
		12	6	20.63	
		12	13	21.01	
		25	0	20.73	
HCH	1	0	22.55		
	1	12	22.14		

		1	24	22.03	
		12	0	21.18	
		12	6	21.05	
		12	13	20.79	
		25	0	21.00	

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	22.11	
		1	24	22.49	
		1	49	22.90	
		25	0	21.38	
		25	12	21.65	
		25	25	21.99	
		50	0	21.68	
	MCH	1	0	22.32	
		1	24	22.71	
		1	49	22.86	
		25	0	21.57	
		25	12	21.78	
		25	25	22.00	
		50	0	21.75	
	HCH	1	0	22.91	
		1	24	22.55	
		1	49	22.39	
		25	0	21.79	
		25	12	21.69	
		25	25	21.68	
		50	0	21.72	
16QAM	LCH	1	0	21.47	
		1	24	21.82	
		1	49	22.28	
		25	0	20.52	
		25	12	20.78	
		25	25	21.12	
		50	0	20.81	
	MCH	1	0	21.71	
		1	24	22.12	
		1	49	22.29	
		25	0	20.84	
		25	12	21.06	
		25	25	21.27	

	HCH	50	0	21.03	
		1	0	22.33	
		1	24	22.10	
		1	49	21.91	
		25	0	21.06	
		25	12	20.97	
		25	25	20.88	
		50	0	20.99	

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	21.98	
		1	37	22.59	
		1	74	23.12	
		37	0	21.30	
		37	18	21.72	
		37	38	22.20	
		75	0	21.79	
	MCH	1	0	22.18	
		1	37	22.45	
		1	74	23.08	
		37	0	21.31	
		37	18	21.52	
		37	38	21.86	
		75	0	21.59	
	HCH	1	0	23.14	
		1	37	22.49	
		1	74	22.54	
		37	0	21.97	
		37	18	21.73	
		37	38	21.59	
		75	0	21.75	
16QAM	LCH	1	0	21.35	
		1	37	21.93	
		1	74	22.83	
		37	0	20.42	
		37	18	20.83	
		37	38	21.41	
		75	0	21.00	
	MCH	1	0	21.58	
		1	37	21.87	
		1	74	22.53	

		37	0	20.55	
		37	18	20.77	
		37	38	21.15	
		75	0	20.85	
	HCH	1	0	22.43	
		1	37	21.93	
		1	74	21.95	
		37	0	21.21	
		37	18	21.00	
		37	38	20.86	
		75	0	20.99	

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	22.94	
		1	49	22.44	
		1	99	23.37	
		50	0	22.31	
		50	25	22.26	
		50	50	22.45	
		100	0	22.17	
	MCH	1	0	22.60	
		1	49	22.37	
		1	99	23.00	
		50	0	22.32	
		50	25	22.36	
		50	50	22.80	
		100	0	22.35	
	HCH	1	0	23.30	
		1	49	22.84	
		1	99	23.30	
		50	0	22.06	
		50	25	21.98	
		50	50	22.11	
		100	0	21.98	
16QAM	LCH	1	0	23.04	
		1	49	22.67	
		1	99	23.23	
		50	0	21.51	
		50	25	21.47	
		50	50	21.68	
		100	0	21.31	

	MCH	1	0	22.61	
		1	49	22.45	
		1	99	23.07	
		50	0	21.58	
		50	25	21.63	
		50	50	21.88	
		100	0	21.62	
	HCH	1	0	22.48	
		1	49	22.06	
		1	99	22.66	
		50	0	21.22	
		50	25	21.17	
		50	50	21.34	
		100	0	21.20	

FDD-LTE Band 17:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	23.53	
		1	12	23.70	
		1	24	23.96	
		12	0	22.40	
		12	6	22.83	
		12	13	22.96	
		25	0	22.90	
	MCH	1	0	23.89	
		1	12	23.20	
		1	24	23.23	
		12	0	23.00	
		12	6	23.03	
		12	13	23.14	
		25	0	23.00	
	HCH	1	0	23.31	
		1	12	23.25	
		1	24	23.77	
		12	0	23.18	
		12	6	23.18	
		12	13	22.50	
		25	0	23.15	
16QAM	LCH	1	0	22.62	
		1	12	22.82	
		1	24	23.06	

		12	0	21.42	
		12	6	21.84	
		12	13	22.03	
		25	0	21.91	
	MCH	1	0	23.20	
		1	12	23.33	
		1	24	23.51	
		12	0	22.13	
		12	6	22.16	
		12	13	22.27	
		25	0	22.03	
	HCH	1	0	23.10	
		1	12	23.17	
		1	24	22.80	
		12	0	22.28	
		12	6	22.24	
		12	13	21.56	
		25	0	22.23	

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	
		Size	Offset		
QPSK	LCH	1	0	23.50	
		1	24	23.92	
		1	49	24.07	
		25	0	22.87	
		25	12	22.96	
		25	25	23.24	
		50	0	22.99	
	MCH	1	0	23.71	
		1	24	23.87	
		1	49	23.64	
		25	0	22.95	
		25	12	22.98	
		25	25	23.08	
		50	0	23.04	
	HCH	1	0	23.85	
		1	24	24.01	
		1	49	23.53	
		25	0	22.97	
		25	12	23.04	
		25	25	23.17	
		50	0	23.09	

16QAM	LCH	1	0	22.83	
		1	24	23.14	
		1	49	23.44	
		25	0	21.86	
		25	12	21.96	
		25	25	22.09	
		50	0	22.02	
	MCH	1	0	23.03	
		1	24	23.10	
		1	49	22.97	
		25	0	21.93	
		25	12	21.99	
		25	25	22.15	
		50	0	22.05	
	HCH	1	0	23.24	
		1	24	23.38	
		1	49	22.99	
		25	0	22.01	
		25	12	22.09	
		25	25	22.25	
		50	0	22.14	

Remark:

- Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
- Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

Bluetooth - Maximum Average Power		
Test Mode	Data Rate	Average Power(dBm)
GFSK	1Mbps	-0.722
Pi/4 QDPSK	2Mbps	-1.969
8DPSK	3Mbps	-1.956

Bluetooth - Maximum Average Power				
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)
BLE	1Mbps	CH 00	2402	-6.613
		CH 19	2440	-5.661
		CH 39	2480	-5.584

Remark:

Bluetooth maximum output power is -0.722dBm, and Tune-Up output power is 0dBm. Per KDB 447498 D01 v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, 16 where}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
0	1.00	10	2.441	0.16	3

The exclusion thresholds is $0.16 < 3$, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Body-worn SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Back	190	836.6	32.09	32.5	1.0990	0.3397	0.3733
2.	GSM	Front	190	836.6	32.09	32.5	1.0990	0.6057	0.6657

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
3.	GSM	Back	810	1909.8	28.86	29.0	1.0328	0.2375	0.2453
4.	GSM	Front	810	1909.8	28.86	29.0	1.0328	0.5526	0.5707

WCDMA Band V – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
15	RMC 12.2k	Back Side	4132	826.4	22.57	23.0	1.1041	0.2228	0.2460
16	RMC 12.2k	Front Side	4132	826.4	22.57	23.0	1.1041	0.4242	0.4684

WCDMA Band II – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
18	RMC 12.2k	Back Side	9538	1907.6	22.73	23.0	1.0641	0.3335	0.3549
19	RMC 12.2k	Front Side	9538	1907.6	22.73	23.0	1.0641	0.6672	0.7100

LTE Band 2–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
21	RMC QPSK 20MHz 1RB	Back Side	1880.0	25.03	25.5	1.1143	0.1518	0.1691	
22	RMC QPSK 20MHz 1RB	Front Side	1880.0	25.03	25.5	1.1143	0.3767	0.4198	
24	RMC QPSK 20MHz 50%RB	Back Side	1880.0	24.98	25.0	1.0046	0.1324	0.1330	
25	RMC QPSK 20MHz 50%RB	Front Side	1880.0	24.98	25.0	1.0046	0.3091	0.3105	

LTE Band 4–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
27	RMC QPSK 20MHz 1RB	Back Side	1720.0	24.03	24.5	1.1143	0.2914	0.3247
28	RMC QPSK 20MHz 1RB	Front Side	1720.0	24.03	24.5	1.1143	0.4747	0.5290
30	RMC QPSK 20MHz 50%RB	Back Side	1732.5	24.02	24.5	1.1169	0.2421	0.2704
31	RMC QPSK 20MHz 50%RB	Front Side	1732.5	24.02	24.5	1.1169	0.3855	0.4306

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
33	RMC QPSK 20MHz 1RB	Back Side	2510.0	23.37	23.5	1.0304	0.1410	0.1453
34	RMC QPSK 20MHz 1RB	Front Side	2510.0	23.37	23.5	1.0304	0.4818	0.4964
36	RMC QPSK 20MHz 50%RB	Back Side	2535.0	22.80	23.0	1.0471	0.1200	0.1257
37	RMC QPSK 20MHz 50%RB	Front Side	2535.0	22.80	23.0	1.0471	0.3833	0.4014

LTE Band 17–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
39	RMC,QPSK 10MHz 1RB	Back Side	709.0	24.07	24.5	1.1041	0.2765	0.3053
40	RMC,QPSK 10MHz 1RB	Front Side	709.0	24.07	24.5	1.1041	0.5109	0.5641
42	RMC,QPSK 10MHz 50%RB	Back Side	709.0	23.24	23.5	1.0617	0.2435	0.2585
43	RMC,QPSK 10MHz 50%RB	Front Side	709.0	23.24	23.5	1.0617	0.4329	0.4596

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
45	802.11b	Back Side	01	2412	11.24	11.5	1.0617	0.0220	0.0234
46	802.11b	Front Side	01	2412	11.24	11.5	1.0617	0.1972	0.2094

Hotspot SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
5.	GPRS_4TX	Back Side	190	836.6	28.62	29.0	1.0914	0.7784	0.8496
6.	GPRS_4TX	Front Side	128	824.2	28.42	29.0	1.1429	1.0676	1.2201
7.	GPRS_4TX	Front Side	190	836.6	28.62	29.0	1.0914	1.0804	1.1792
8.	GPRS_4TX	Front Side	251	848.8	28.49	29.0	1.1246	1.0415	1.1713
9.	GPRS_4TX	Left side	190	836.6	28.62	29.0	1.0914	0.2116	0.2309

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
10.	GPRS_3TX	Back Side	810	1909.8	27.51	28.0	1.1194	0.4255	0.4763
11.	GPRS_3TX	Front Side	512	1850.2	27.36	28.0	1.1588	1.0162	1.1775
12.	GPRS_3TX	Front Side	661	1880	27.27	28.0	1.1830	1.0078	1.1923
13.	GPRS_3TX	Front Side	810	1909.8	27.51	28.0	1.1194	0.9560	1.0702
14.	GPRS_3TX	Left side	810	1909.8	27.51	28.0	1.1194	0.5021	0.5621

WCDMA Band V – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
15.	RMC 12.2k	Back Side	4132	826.4	22.57	23.0	1.1041	0.2228	0.2460
16.	RMC 12.2k	Front Side	4132	826.4	22.57	23.0	1.1041	0.4242	0.4684
17.	RMC 12.2k	Left side	4132	826.4	22.57	23.0	1.1041	0.1098	0.1212

WCDMA Band II – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
18.	RMC 12.2k	Back Side	9538	1907.6	22.73	23.0	1.0641	0.3335	0.3549
19.	RMC 12.2k	Front Side	9538	1907.6	22.73	23.0	1.0641	0.6672	0.7100
20.	RMC 12.2k	Left side	9538	1907.6	22.73	23.0	1.0641	0.4501	0.4790

LTE Band 2–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
21.	RMC QPSK 20MHz 1RB	Back Side	1880.0	25.03	25.5	1.1143	0.1518	0.1691
22.	RMC QPSK 20MHz 1RB	Front Side	1880.0	25.03	25.5	1.1143	0.3767	0.4198
23.	RMC QPSK 20MHz 1RB	Left side	1880.0	25.03	25.5	1.1143	0.1427	0.1590
24.	RMC QPSK 20MHz 50%RB	Back Side	1880.0	24.98	25.0	1.0046	0.1324	0.1330
25.	RMC QPSK 20MHz 50%RB	Front Side	1880.0	24.98	25.0	1.0046	0.3091	0.3105
26.	RMC QPSK 20MHz 50%RB	Left side	1880.0	24.98	25.0	1.0046	0.1022	0.1027

LTE Band 4–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
27.	RMC QPSK 20MHz 1RB	Back Side	1720.0	24.03	24.5	1.1143	0.2914	0.3247
28.	RMC QPSK 20MHz 1RB	Front Side	1720.0	24.03	24.5	1.1143	0.4747	0.5290
29.	RMC QPSK 20MHz 1RB	Left side	1720.0	24.03	24.5	1.1143	0.2282	0.2543
30.	RMC QPSK 20MHz 50%RB	Back Side	1732.5	24.02	24.5	1.1169	0.2421	0.2704
31.	RMC QPSK 20MHz 50%RB	Front Side	1732.5	24.02	24.5	1.1169	0.3855	0.4306
32.	RMC QPSK 20MHz 50%RB	Left side	1732.5	24.02	24.5	1.1169	0.1928	0.2153

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
33.	RMC QPSK 20MHz 1RB	Back Side	2510.0	23.37	23.5	1.0304	0.1410	0.1453
34.	RMC QPSK 20MHz 1RB	Front Side	2510.0	23.37	23.5	1.0304	0.4818	0.4964
35.	RMC QPSK 20MHz 1RB	Left side	2510.0	23.37	23.5	1.0304	0.1281	0.1320
36.	RMC QPSK 20MHz 50%RB	Back Side	2535.0	22.80	23.0	1.0471	0.1200	0.1257
37.	RMC QPSK 20MHz 50%RB	Front Side	2535.0	22.80	23.0	1.0471	0.3833	0.4014
38.	RMC QPSK 20MHz 50%RB	Left side	2535.0	22.80	23.0	1.0471	0.0836	0.0875

LTE Band 17–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
39.	RMC,QPSK 10MHz 1RB	Back Side	709.0	24.07	24.5	1.1041	0.2765	0.3053
40.	RMC,QPSK 10MHz 1RB	Front Side	709.0	24.07	24.5	1.1041	0.5109	0.5641
41.	RMC,QPSK 10MHz 1RB	Left side	709.0	24.07	24.5	1.1041	0.1926	0.2126
42.	RMC,QPSK 10MHz 50%RB	Back Side	709.0	23.24	23.5	1.0617	0.2435	0.2585
43.	RMC,QPSK 10MHz 50%RB	Front Side	709.0	23.24	23.5	1.0617	0.4329	0.4596
44.	RMC,QPSK 10MHz 50%RB	Left side	709.0	23.24	23.5	1.0617	0.1082	0.1149

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
45.	802.11b	Back Side	01	2412	11.24	11.5	1.0617	0.0220	0.0234
46.	802.11b	Front Side	01	2412	11.24	11.5	1.0617	0.1972	0.2094
47.	802.11b	Right side	01	2412	11.24	11.5	1.0617	0.0685	0.0727

Remark: Per KDB447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Body-worn SAR	Hotspot SAR
1	GSM(Voice) + WLAN(Data)	Yes	-
2	GPRS/EDGE (Data) + WLAN(Data)	-	Yes
3	WCDMA (Voice)+ WLAN(Data)	Yes	-
4	HSDPA(Data) + WLAN(Data)	-	Yes
5	HSUPA(Data) + WLAN(Data)	-	Yes
6	GSM(Voice) + Bluetooth(Data)	Yes	-
7	GPRS/EDGE (Data) + Bluetooth(Data)	-	Yes
8	WCDMA(Voice) + Bluetooth(Data)	Yes	-
9	HSDPA(Data)+ Bluetooth(Data)	-	Yes
10	HSUPA(Data) + Bluetooth(Data)	-	Yes

Remark:

1. GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)⁻¹·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 10mm
0	1.00	10	2.441	7.5	0.0208

4. The maximum SAR summation is calculated based on the same configuration and test position.

Body-worn SAR
WWAN and WLAN

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.3733	0.0234	0.3967
Front	GSM850	0.6657	0.2094	0.8751
Back	GSM1900	0.2453	0.0234	0.2687
Front	GSM1900	0.5707	0.2094	0.7801
Back	WCDMA Band V	0.2460	0.0234	0.2694
Front	WCDMA Band V	0.4684	0.2094	0.6778
Back	WCDMA Band II	0.3549	0.0234	0.3783
Front	WCDMA Band II	0.7100	0.2094	0.9194
Back	LTE Band 2	0.1691	0.0234	0.1925
Front	LTE Band 2	0.4198	0.2094	0.6292
Back	LTE Band 4	0.3247	0.0234	0.3481
Front	LTE Band 4	0.5290	0.2094	0.7384
Back	LTE Band 7	0.1453	0.0234	0.1687
Front	LTE Band 7	0.4964	0.2094	0.7058
Back	LTE Band 17	0.3053	0.0234	0.3287
Front	LTE Band 17	0.5641	0.2094	0.7735

WWAN and Bluetooth

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.3733	0.0208	0.3941
Front	GSM850	0.6657	0.0208	0.6865
Back	GSM1900	0.2453	0.0208	0.2661
Front	GSM1900	0.5707	0.0208	0.5915
Back	WCDMA Band V	0.2460	0.0208	0.2668
Front	WCDMA Band V	0.4684	0.0208	0.4892
Back	WCDMA Band II	0.3549	0.0208	0.3757
Front	WCDMA Band II	0.7100	0.0208	0.7308
Back	LTE Band 2	0.1691	0.0208	0.1899
Front	LTE Band 2	0.4198	0.0208	0.4406
Back	LTE Band 4	0.3247	0.0208	0.3455
Front	LTE Band 4	0.5290	0.0208	0.5498
Back	LTE Band 7	0.1453	0.0208	0.1661
Front	LTE Band 7	0.4964	0.0208	0.5172
Back	LTE Band 17	0.3053	0.0208	0.3261
Front	LTE Band 17	0.5641	0.0208	0.5849

Hotspot SAR
WWAN and WLAN

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.8496	0.0234	0.873
Front	GSM850	1.2201	0.2094	1.4295
Top side	GSM850	--	--	--
Bottom side	GSM850	--	--	--
Right side	GSM850	--	0.0727	0.0727
Left side	GSM850	0.2309	--	0.2309
Back	GSM1900	0.4763	0.0234	0.4997
Front	GSM1900	1.1923	0.2094	1.4017
Top side	GSM1900	--	--	--
Bottom side	GSM1900	--	--	--
Right side	GSM1900	--	0.0727	0.0727
Left side	GSM1900	0.5621	--	0.5621
Back	WCDMA Band V	0.2460	0.0234	0.2694
Front	WCDMA Band V	0.4684	0.2094	0.6778
Top side	WCDMA Band V	--	--	--
Bottom side	WCDMA Band V	--	--	--
Right side	WCDMA Band V	--	0.0727	0.0727
Left side	WCDMA Band V	0.1212	--	0.1212
Back	WCDMA Band II	0.3549	0.0234	0.3783
Front	WCDMA Band II	0.7100	0.2094	0.9194
Top side	WCDMA Band II	--	--	--
Bottom side	WCDMA Band II	--	--	--
Right side	WCDMA Band II	--	0.0727	0.0727
Left side	WCDMA Band II	0.4790	--	0.4790
Back	LTE Band 2	0.1691	0.0234	0.1925
Front	LTE Band 2	0.4198	0.2094	0.6292
Top side	LTE Band 2	--	--	--
Bottom side	LTE Band 2	--	--	--
Right side	LTE Band 2	--	0.0727	0.0727
Left side	LTE Band 2	0.1590	--	0.1590
Back	LTE Band 4	0.3247	0.0234	0.3481
Front	LTE Band 4	0.5290	0.2094	0.7384
Top side	LTE Band 4	--	--	--
Bottom side	LTE Band 4	--	--	--
Right side	LTE Band 4	--	0.0727	0.0727
Left side	LTE Band 4	0.2543	--	0.2543
Back	LTE Band 7	0.1453	0.0234	0.1687

Front	LTE Band 7	0.4964	0.2094	0.7058
Top side	LTE Band 7	--	--	--
Bottom side	LTE Band 7	--	--	--
Right side	LTE Band 7	--	0.0727	0.0727
Left side	LTE Band 7	0.1320	--	0.1320
Back	LTE Band 17	0.3053	0.0234	0.3287
Front	LTE Band 17	0.5641	0.2094	0.7735
Top side	LTE Band 17	--	--	--
Bottom side	LTE Band 17	--	--	--
Right side	LTE Band 17	--	0.0727	0.0727
Left side	LTE Band 17	0.2126	--	0.2126

WWAN and Bluetooth

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.8496	0.0208	0.8704
Front	GSM850	1.2201	0.0208	1.2409
Top side	GSM850	--	--	--
Bottom side	GSM850	--	--	--
Right side	GSM850	--	0.0208	0.0208
Left side	GSM850	0.2309	--	0.2309
Back	GSM1900	0.4763	0.0208	0.4971
Front	GSM1900	1.1923	0.0208	1.2131
Top side	GSM1900	--	--	--
Bottom side	GSM1900	--	--	--
Right side	GSM1900	--	0.0208	0.0208
Left side	GSM1900	0.5621	--	0.5621
Back	WCDMA Band V	0.2460	0.0208	0.2668
Front	WCDMA Band V	0.4684	0.0208	0.4892
Top side	WCDMA Band V	--	--	--
Bottom side	WCDMA Band V	--	--	--
Right side	WCDMA Band V	--	0.0208	0.0208
Left side	WCDMA Band V	0.1212	--	0.1212
Back	WCDMA Band II	0.3549	0.0208	0.3757
Front	WCDMA Band II	0.7100	0.0208	0.7308
Top side	WCDMA Band II	--	--	--
Bottom side	WCDMA Band II	--	--	--
Right side	WCDMA Band II	--	0.0208	0.0208
Left side	WCDMA Band II	0.4790	--	0.4790
Back	LTE Band 2	0.1691	0.0208	0.1899
Front	LTE Band 2	0.4198	0.0208	0.4406
Top side	LTE Band 2	--	--	--
Bottom side	LTE Band 2	--	--	--
Right side	LTE Band 2	--	0.0208	0.0208
Left side	LTE Band 2	0.1590	--	0.1590
Back	LTE Band 4	0.3247	0.0208	0.3455
Front	LTE Band 4	0.5290	0.0208	0.5498
Top side	LTE Band 4	--	--	--
Bottom side	LTE Band 4	--	--	--
Right side	LTE Band 4	--	0.0208	0.0208
Left side	LTE Band 4	0.2543	--	0.2543
Back	LTE Band 7	0.1453	0.0208	0.1661
Front	LTE Band 7	0.4964	0.0208	0.5172

Top side	LTE Band 7	--	--	--
Bottom side	LTE Band 7	--	--	--
Right side	LTE Band 7	--	0.0208	0.0208
Left side	LTE Band 7	0.1320	--	0.1320
Back	LTE Band 17	0.3053	0.0208	0.3261
Front	LTE Band 17	0.5641	0.0208	0.5849
Top side	LTE Band 17	--	--	--
Bottom side	LTE Band 17	--	--	--
Right side	LTE Band 17	--	0.0208	0.0208
Left side	LTE Band 17	0.2126	--	0.2126

10. Measurement Uncertainty

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+- %)	10g Ui (+- %)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - deviation	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞

from target value										
Liquid conductivity measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞	
Liquid permittivity measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞	
Combined Standard Uncertainty			RSS				12.98	12.53		
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43		

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+- %)	10g Ui (+- %)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max.	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞

SAR Evaluation									
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

Annex A. Plots of System Performance Check

MEASUREMENT 1

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	0.034745
Ambient Temperature	21.1
Liquid Temperature	21.3

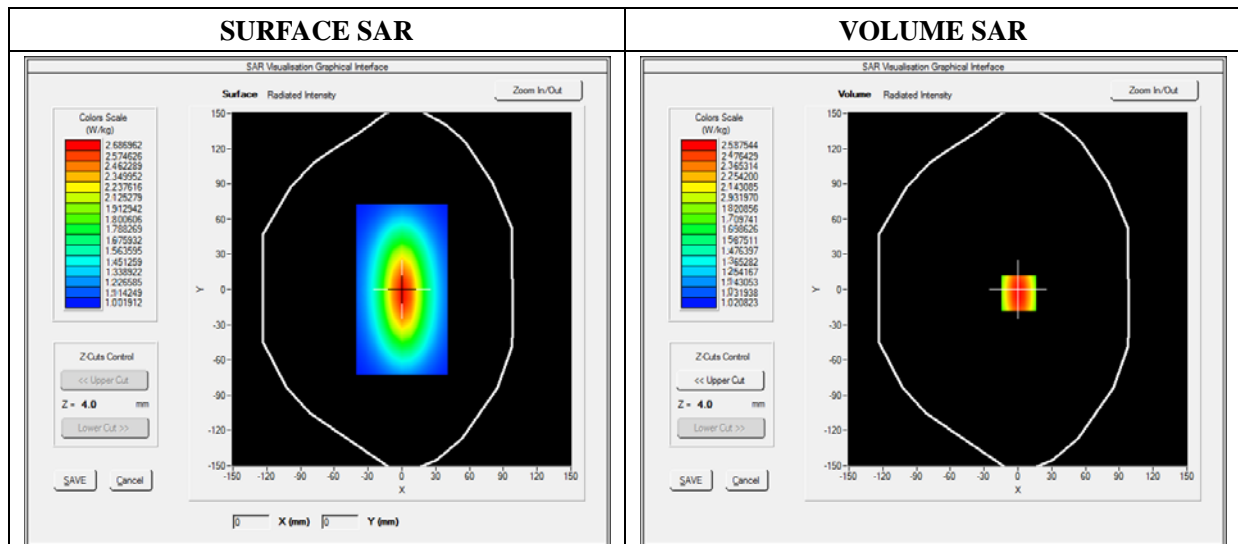




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.000865
SAR 1g (W/Kg)	2.124211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5132	1.1087	0.8214	0.5160	0.4875	0.4864

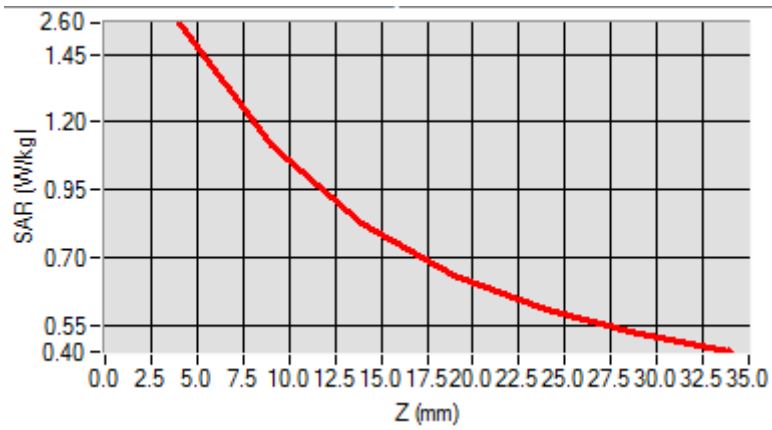

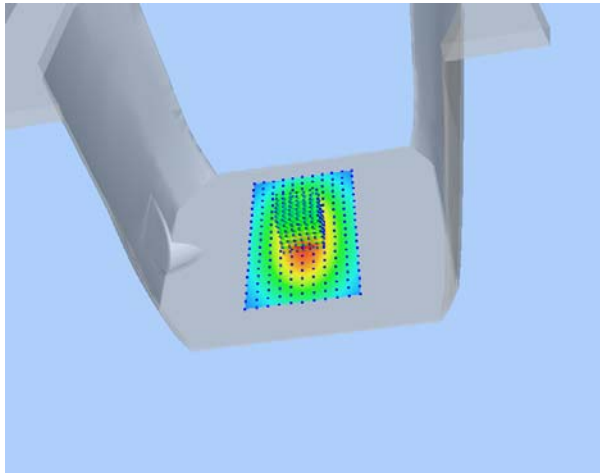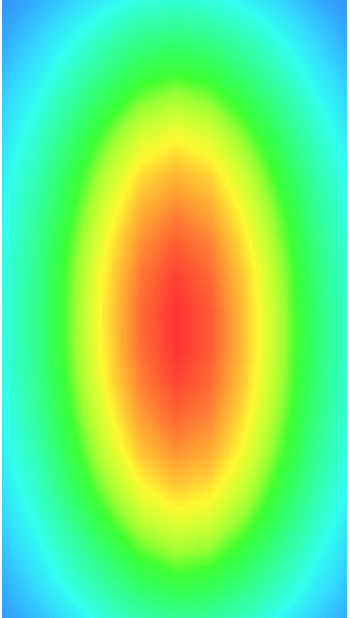3D screen shot	Hot spot position
	

MEASUREMENT 2

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

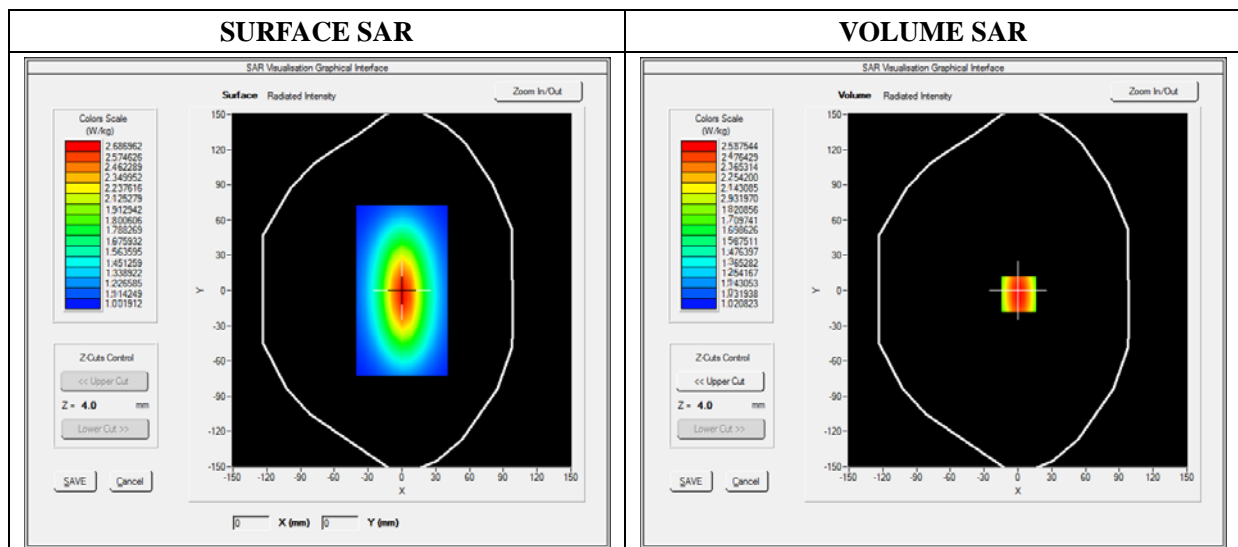




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.028956
SAR 1g (W/Kg)	2.354211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5789	1.1300	0.8795	0.5940	0.5011	0.5100

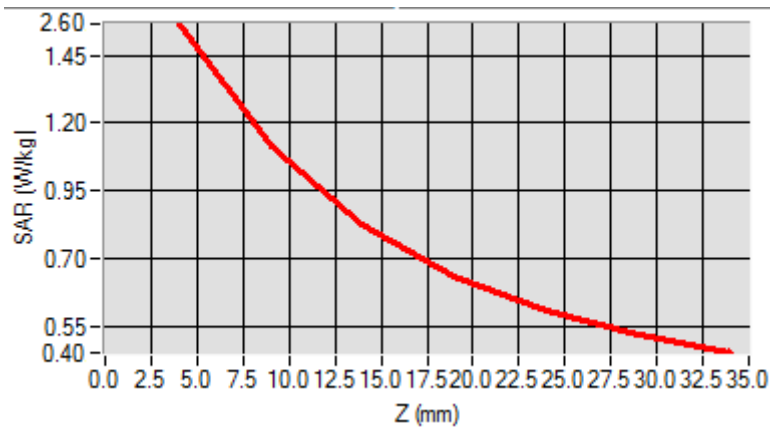

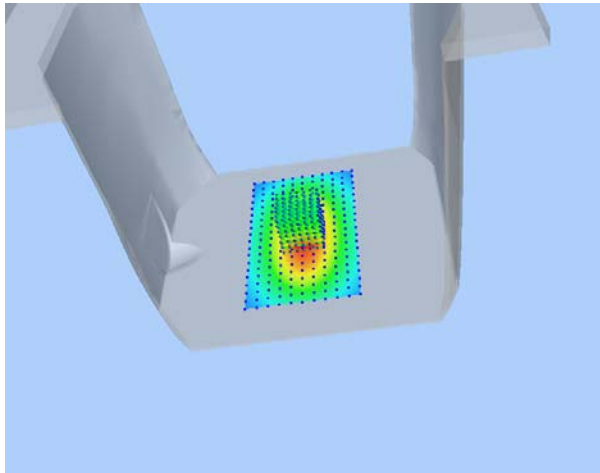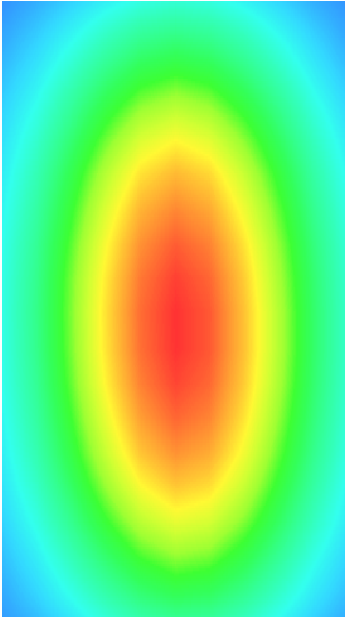3D screen shot	Hot spot position
	

MEASUREMENT 3

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.845690
Ambient Temperature	21.1
Liquid Temperature	21.2

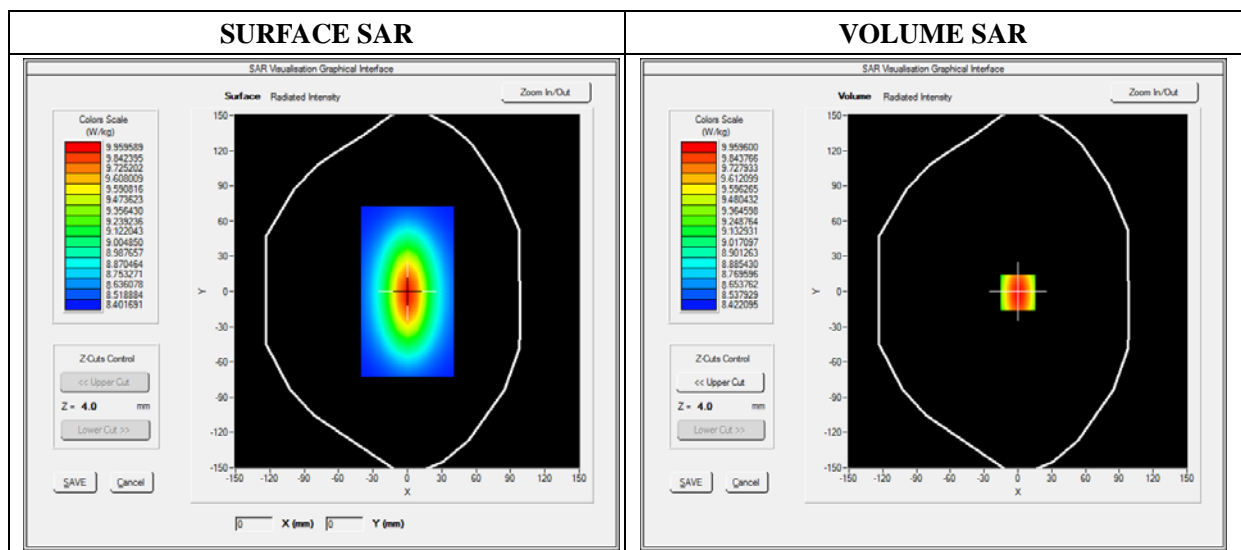


Maximum location: X=0.00, Y=0.00


SAR 10g (W/Kg)	5.221202
SAR 1g (W/Kg)	9.582560

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	11.2425	9.4123	8.0345	6.9125	6.3092	3.9460

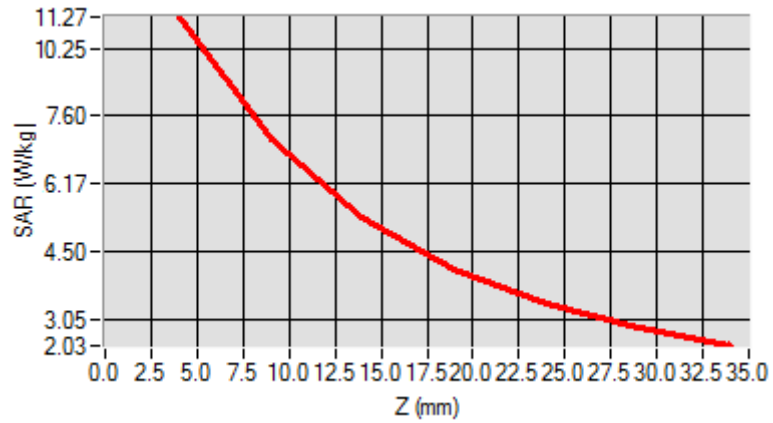

3D screen shot

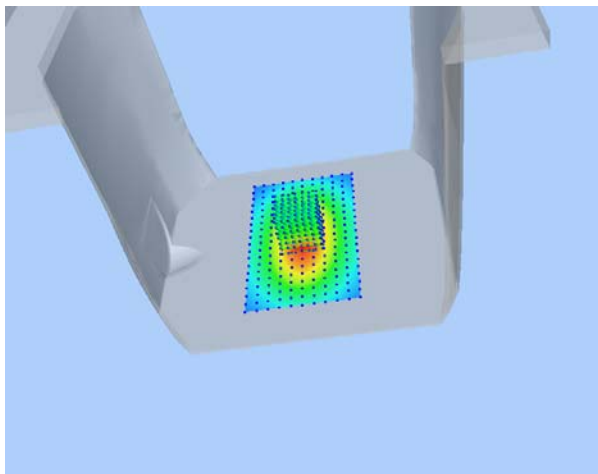

Hot spot position

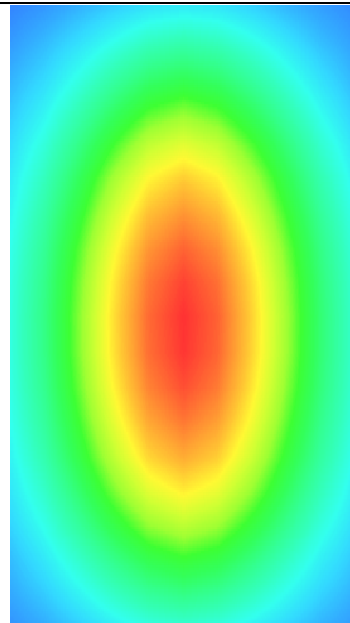

MEASUREMENT 4

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.541872
Ambient Temperature	21.1
Liquid Temperature	21.3

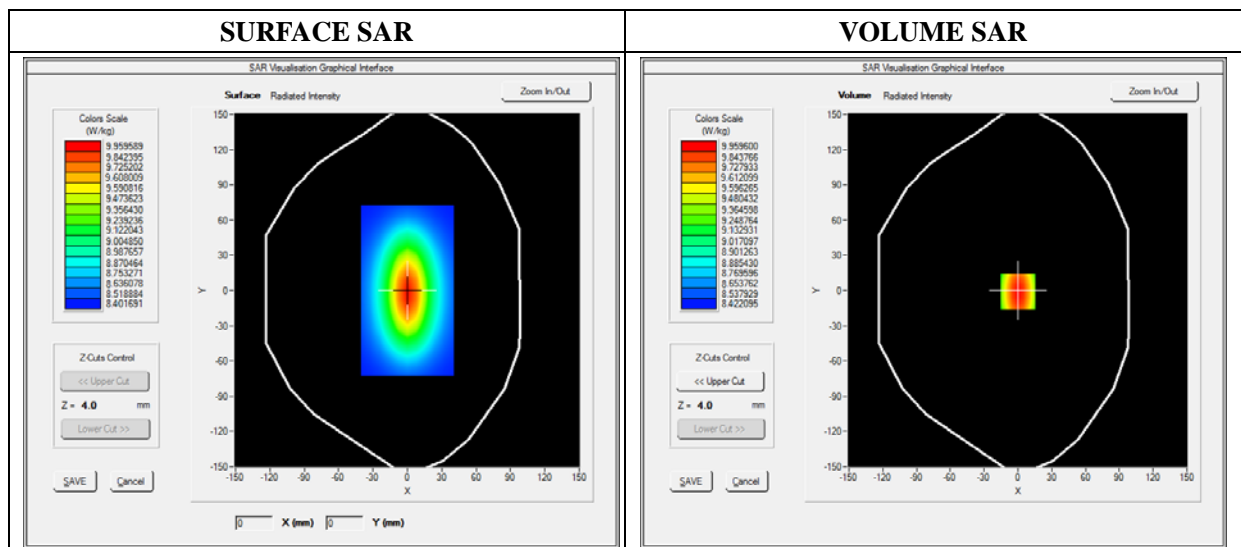


Maximum location: X=0.00, Y=0.00


SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.781550

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

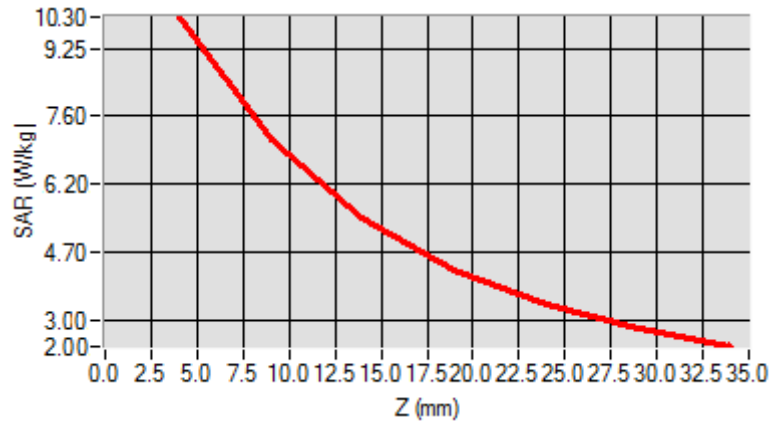

3D screen shot

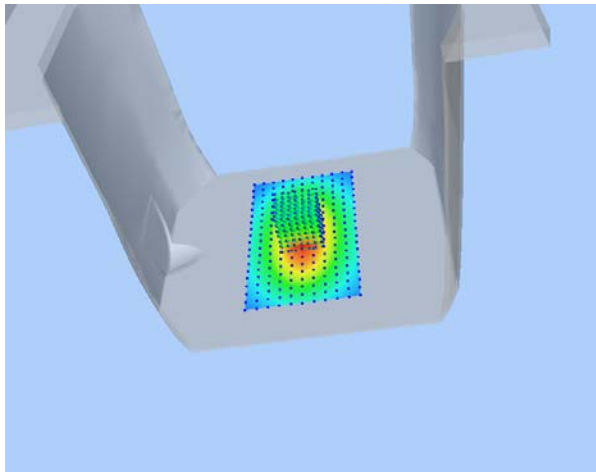

Hot spot position

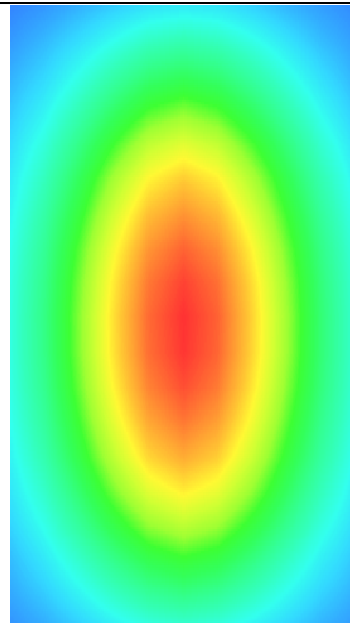

MEASUREMENT 5

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	52.015622
Conductivity (S/m)	1.911255
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2


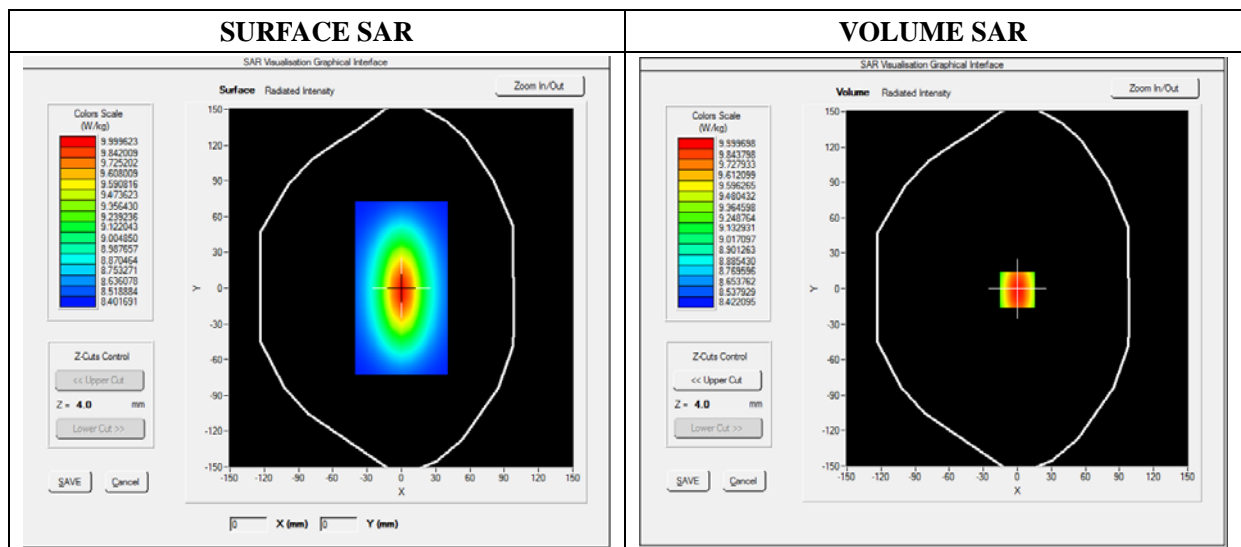


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.351512
SAR 1g (W/Kg)	12.590533

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.1631	10.01221	9.2566	8.5623	6.3469	4.5626

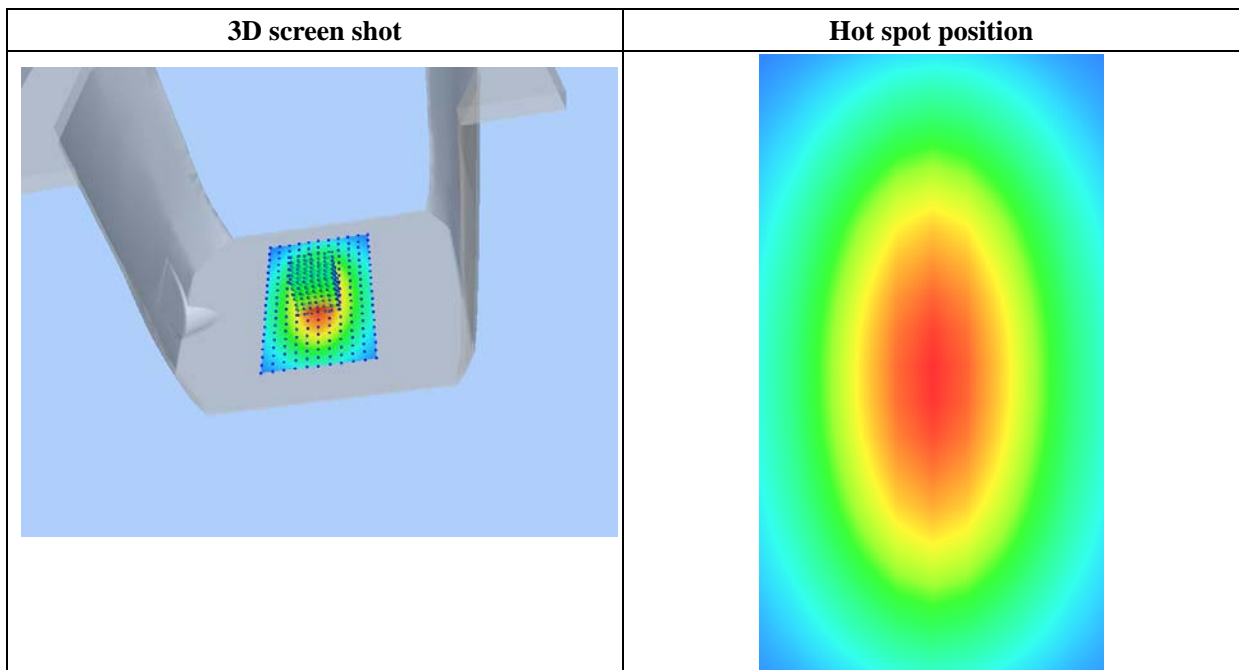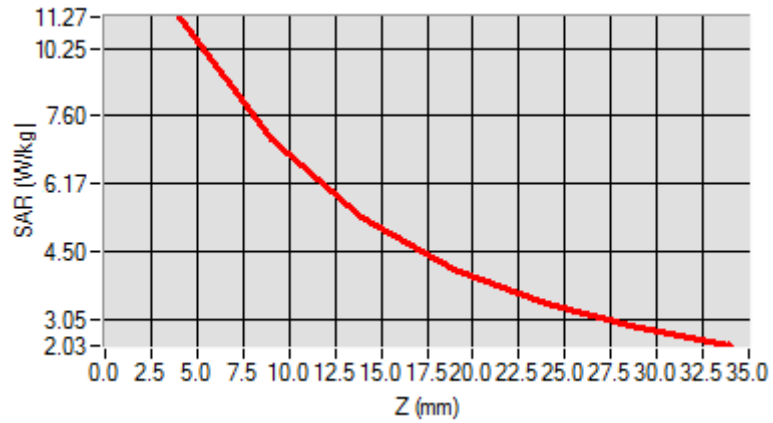

Annex B. Plots of SAR Measurement

<u>TYPE</u>	<u>BAND</u>	<u>PARAMETERS</u>
Phone	GSM850	<u>Measurement 2:</u> Flat Plane with Front(Body-worn) device position on Middle Channel in GSM mode
Phone	GSM1900	<u>Measurement 4:</u> Flat Plane with Front(Body-worn) device position on High Channel in GSM mode
Phone	GPRS850_4TX	<u>Measurement 7:</u> Flat Plane with Front device position on Middle Channel in GPRS mode
Phone	GPRS1900_3TX	<u>Measurement 11:</u> Flat Plane with Front device position on Low Channel in GPRS mode
Phone	WCDMA850_RMC	<u>Measurement 16:</u> Flat Plane with Front device position on Low Channel in WCDMA mode
Phone	WCDMA1900_RMC	<u>Measurement 19:</u> Flat Plane with Front device position on High Channel in WCDMA mode
Phone	LTE Band 2_RMC	<u>Measurement 22:</u> Flat Plane with Front device position on Middle Channel in LTE QPSK 20MHz 1RB mode
Phone	LTE Band 4_RMC	<u>Measurement 28:</u> Flat Plane with Front device position on Low Channel in LTE mode
Phone	LTE Band 7_RMC	<u>Measurement 34:</u> Flat Plane with Front device position on Low Channel in LTE mode
Phone	LTE Band 17_RMC	<u>Measurement 40:</u> Flat Plane with Front device position on Low Channel in LTE mode
Phone	WiFi_802.11b	<u>Measurement 46:</u> Flat Plane with Front side device position on Low Channel in 802.11b mode
<i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i>		

MEASUREMENT 2

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front(Body-worn)
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	836.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.785060
Ambient Temperature	21.1
Liquid Temperature	21.3

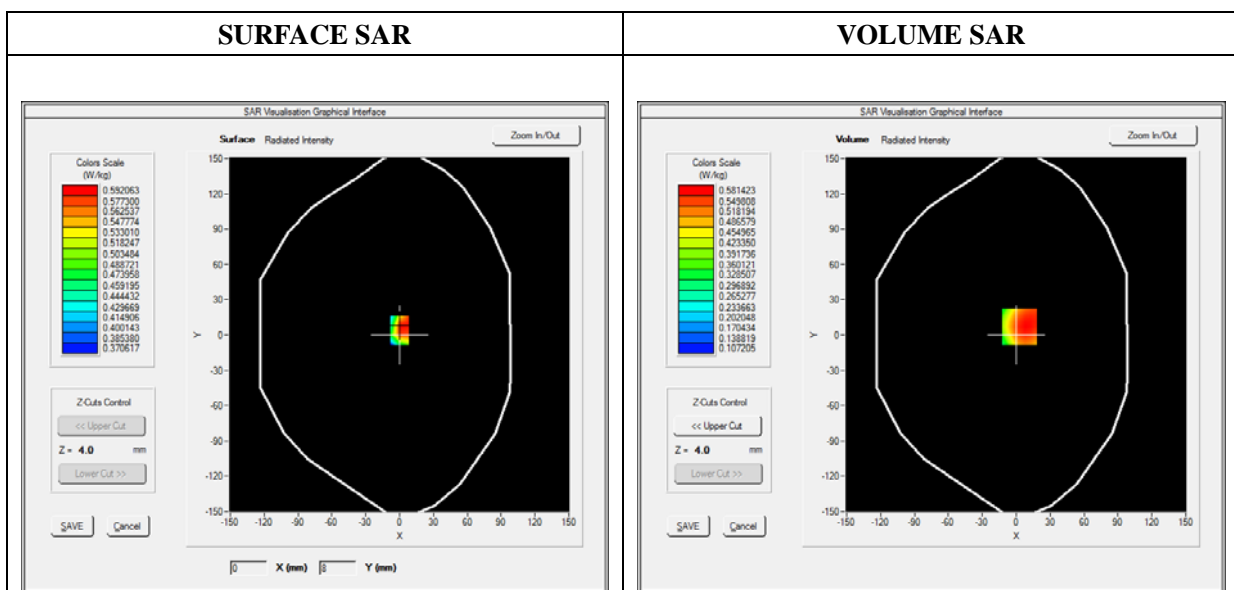



Maximum location: X=3.00, Y=7.00

SAR 10g (W/Kg)	0.464780
SAR 1g (W/Kg)	0.605745

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.5664	0.4518	0.3578	0.2804

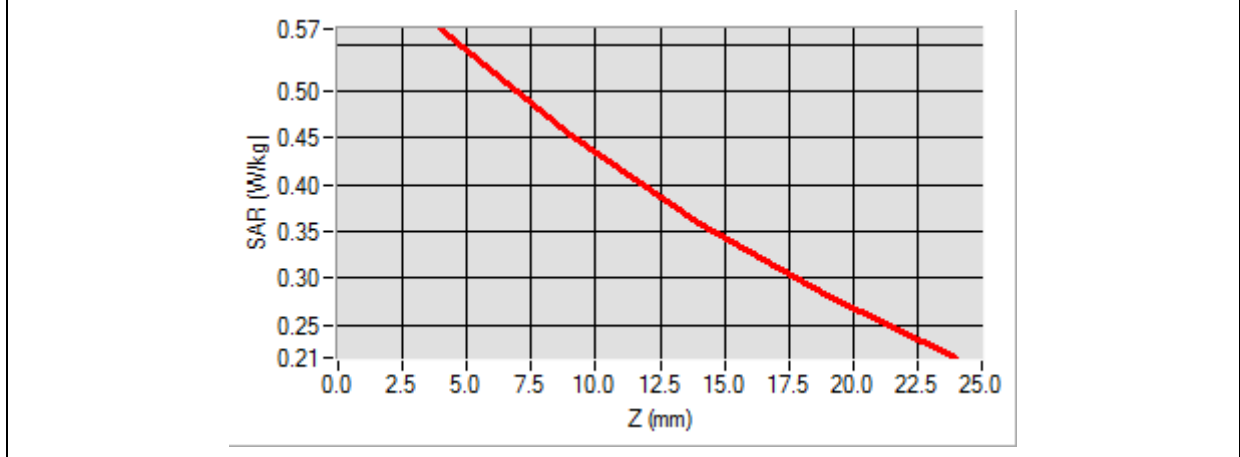
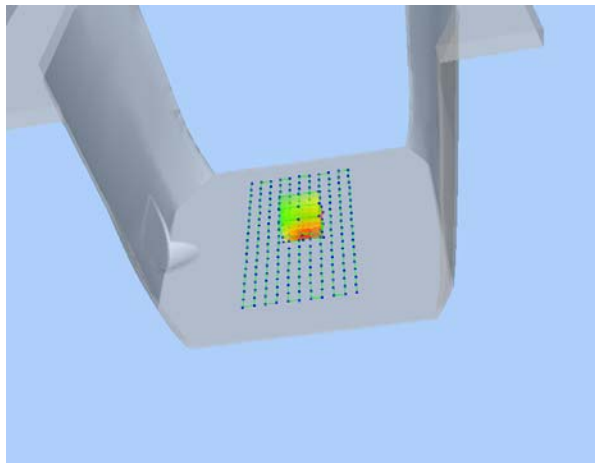
<p>3D screen shot</p>	<p>Hot spot position</p>
	

MEASUREMENT 4

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front(Body-worn)
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.568946
Ambient Temperature	21.1
Liquid Temperature	21.3


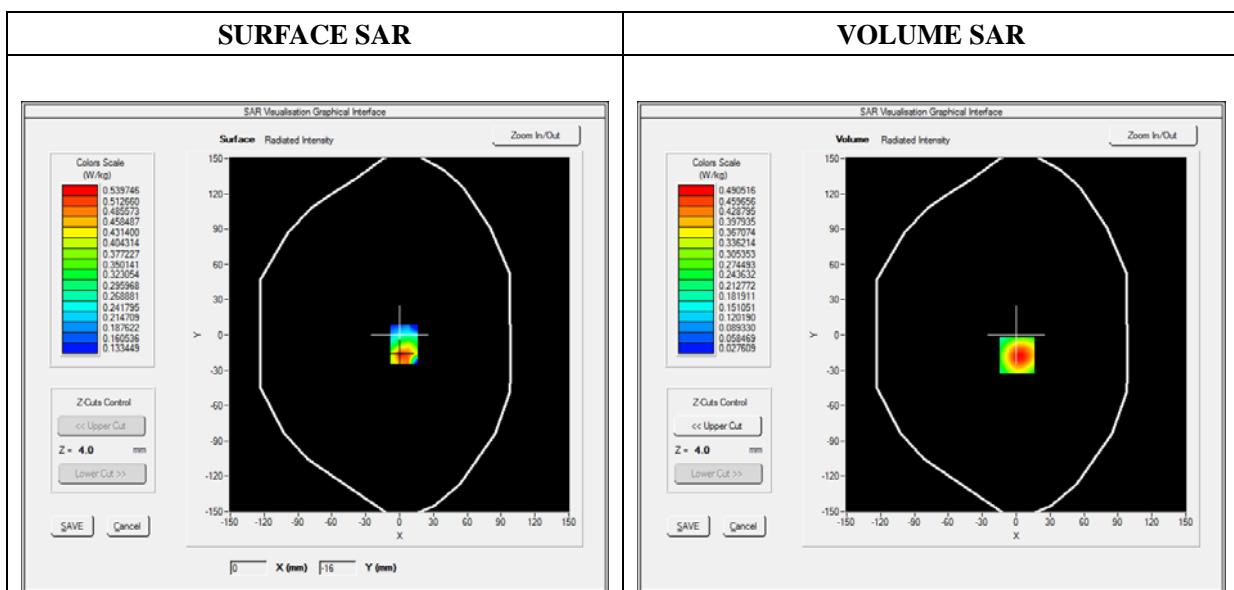


Maximum location: X=1.00, Y=-17.00

SAR 10g (W/Kg)	0.319019
SAR 1g (W/Kg)	0.552567

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4905	0.3030	0.1825	0.1069

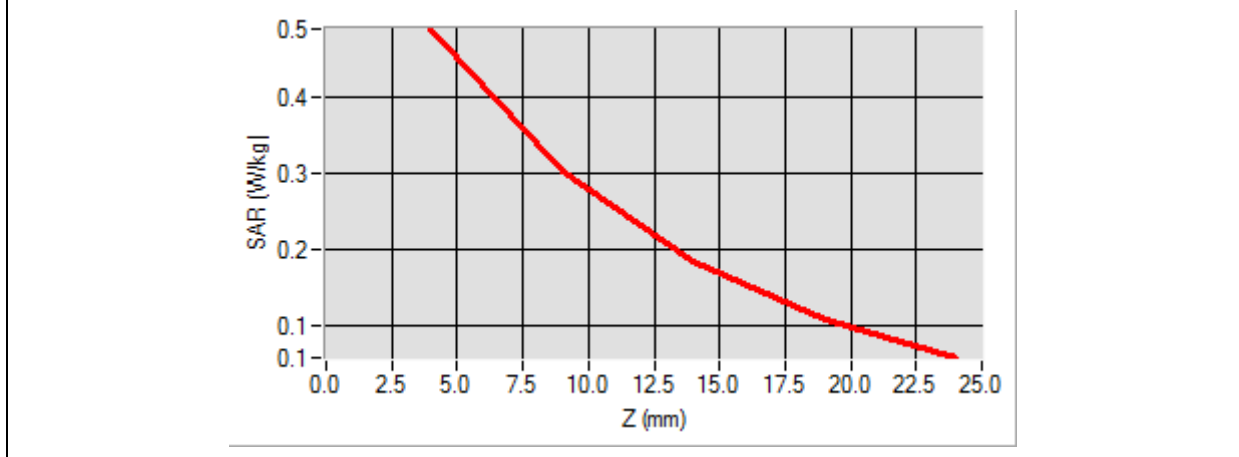
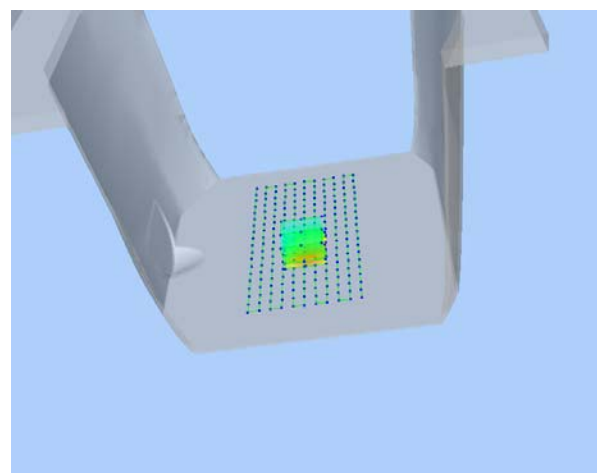
<p>3D screen shot</p>	<p>Hot spot position</p>
	

MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Front
Band	GPRS850_4TX
Channels	Middle
Signal	Duty Cycle: 1:2

B. SAR Measurement Results


Frequency (MHz)	836.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.562472
Ambient Temperature	21.1
Liquid Temperature	21.3

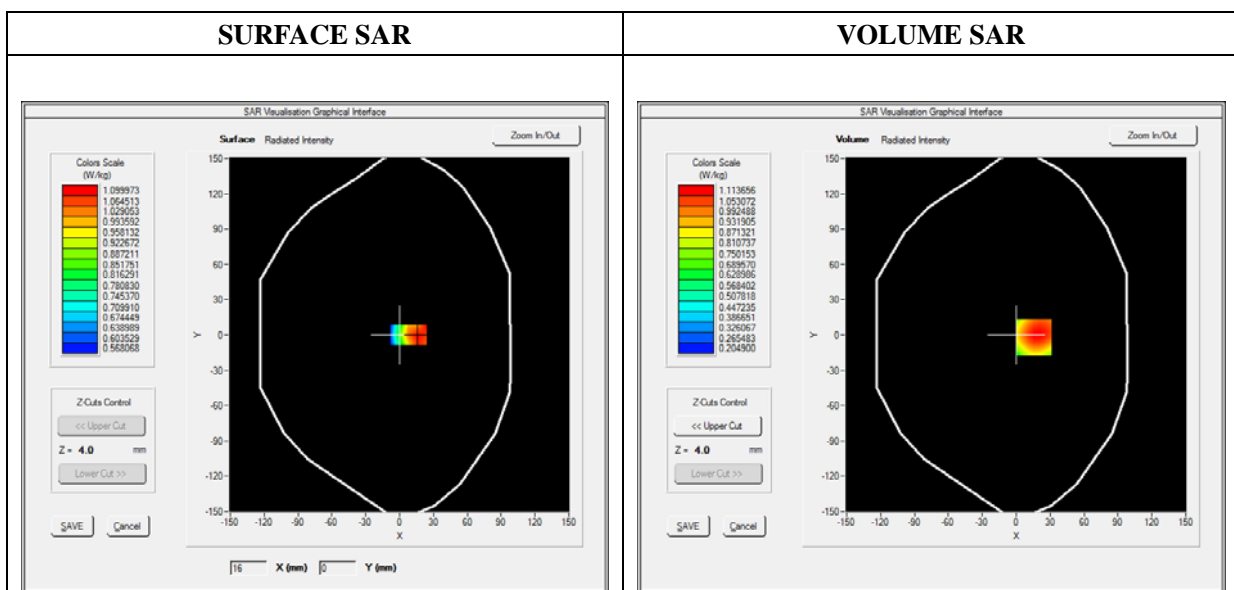



Maximum location: X=16.00, Y=-2.00

SAR 10g (W/Kg)	0.821177
SAR 1g (W/Kg)	1.080407

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	1.1100	0.8677	0.6848	0.5461

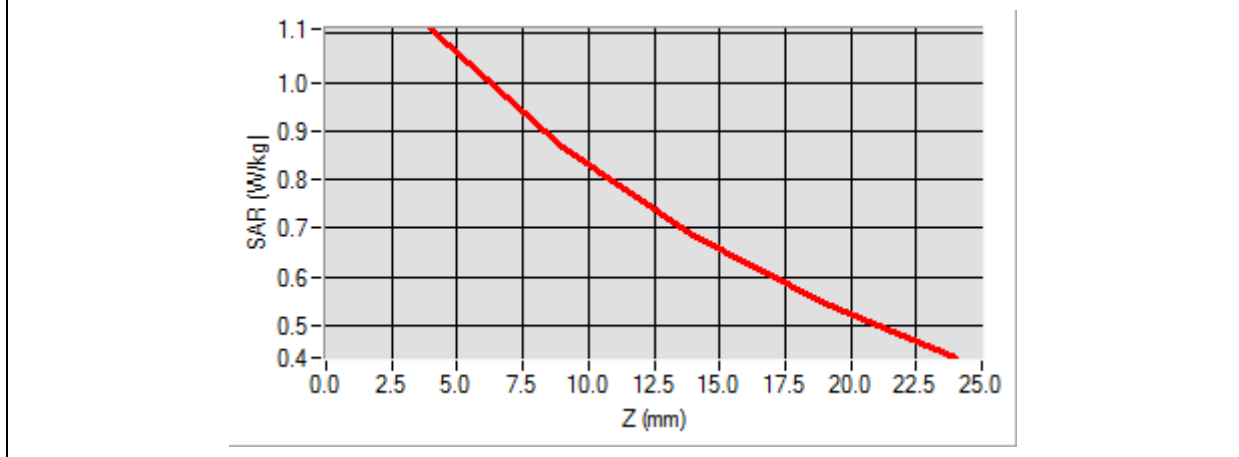
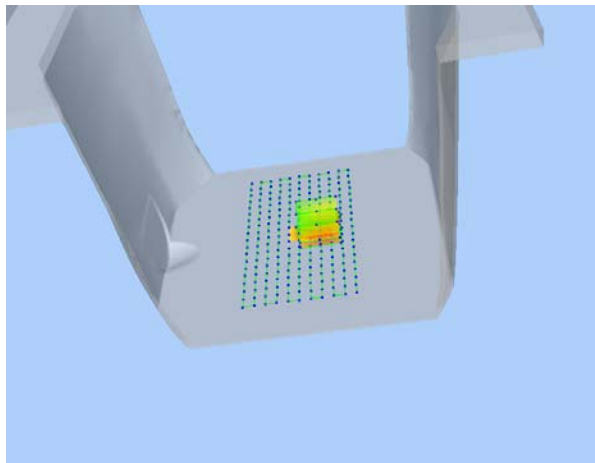
<p>3D screen shot</p>	<p>Hot spot position</p>
	

MEASUREMENT 11

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Front side
Band	GPRS1900_3TX
Channels	Low
Signal	Duty Cycle: 1:2.66

B. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.986340
Ambient Temperature	21.1
Liquid Temperature	21.3


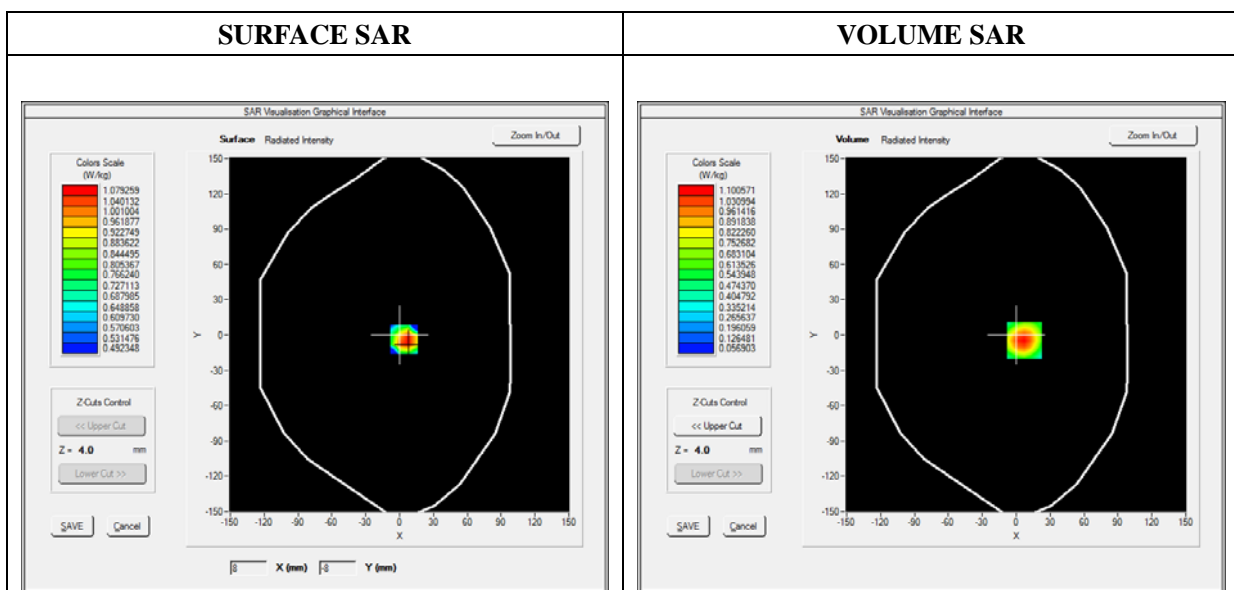


Maximum location: X=7.00, Y=-5.00

SAR 10g (W/Kg)	0.562670
SAR 1g (W/Kg)	1.016188

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	1.1006	0.6366	0.3692	0.2204

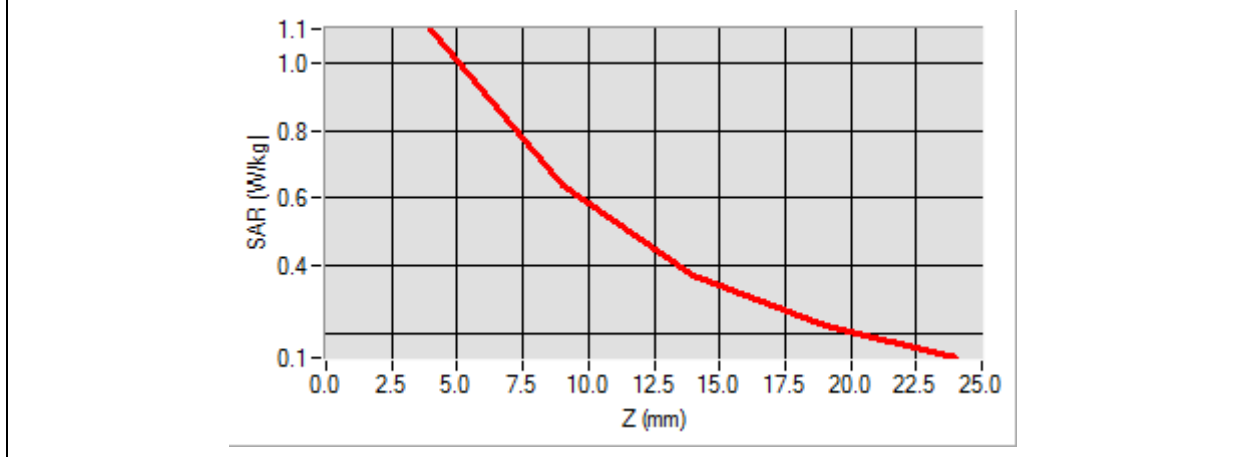
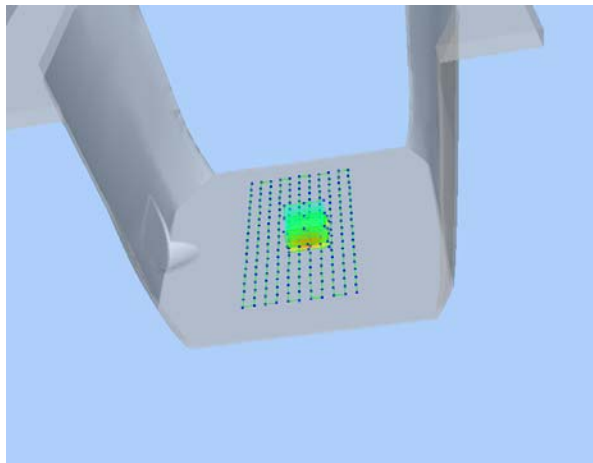
<p>3D screen shot</p>	<p>Hot spot position</p>
	

MEASUREMENT 16

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	826.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.986458
Ambient Temperature	21.1
Liquid Temperature	21.3

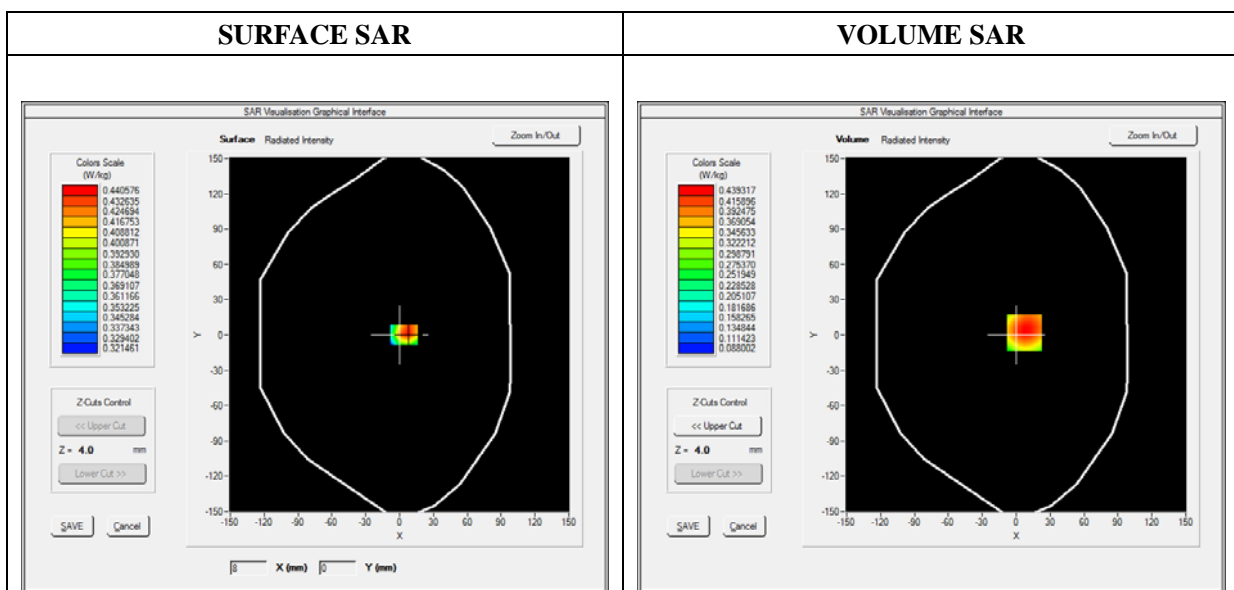



Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	0.319545
SAR 1g (W/Kg)	0.424206

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4393	0.3440	0.2711	0.2150

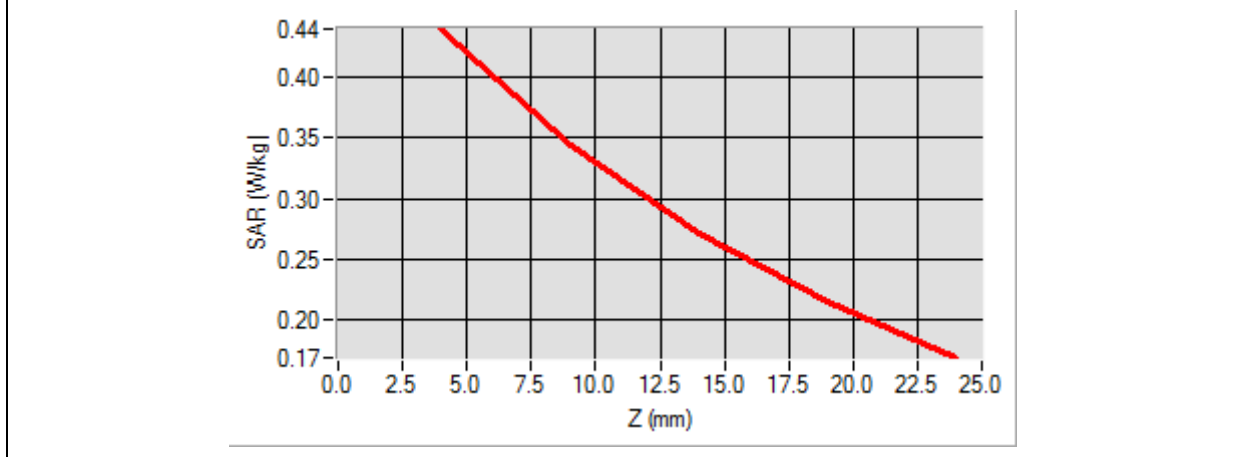
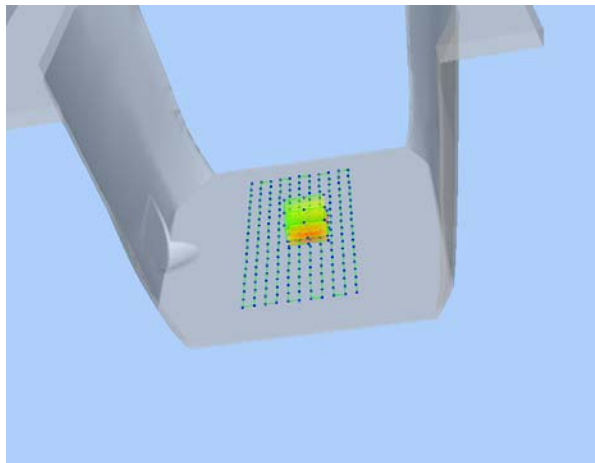
<p>3D screen shot</p>	<p>Hot spot position</p>
	

MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.687492
Ambient Temperature	21.1
Liquid Temperature	21.3


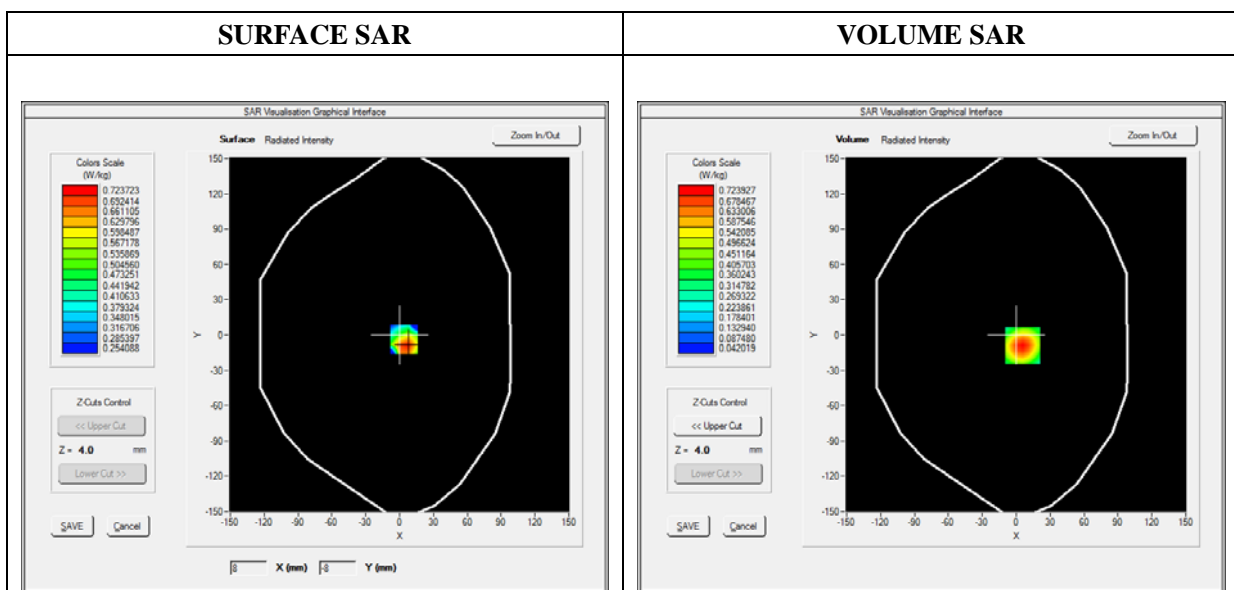


Maximum location: X=6.00, Y=-9.00

SAR 10g (W/Kg)	0.372605
SAR 1g (W/Kg)	0.667150

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.7239	0.4175	0.2413	0.1438

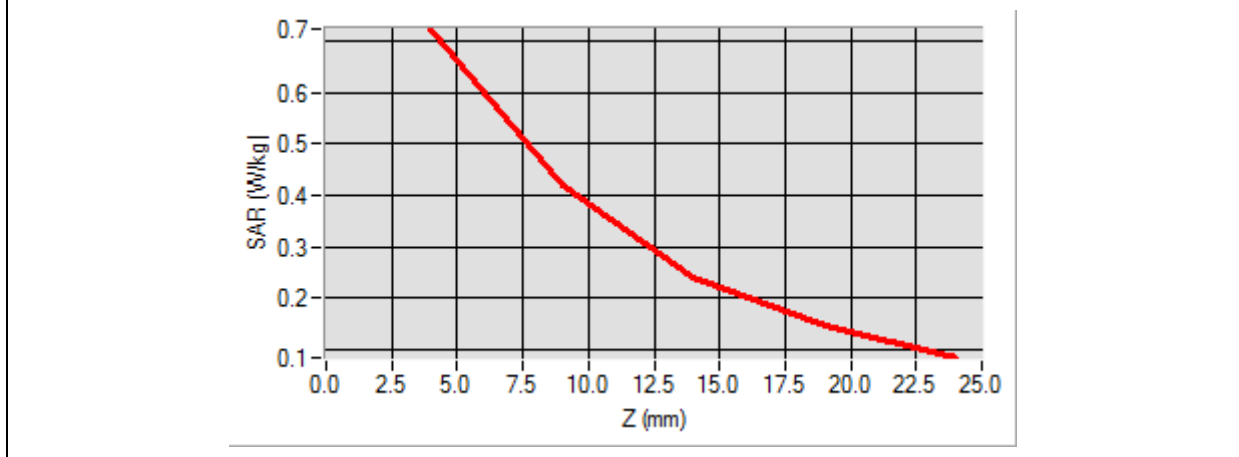
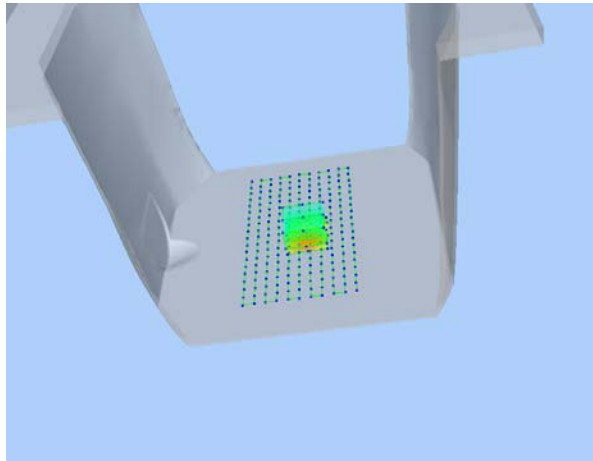
<p>3D screen shot</p>	<p>Hot spot position</p>
	

MEASUREMENT 22

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 2_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.523573
Ambient Temperature	21.1
Liquid Temperature	21.3

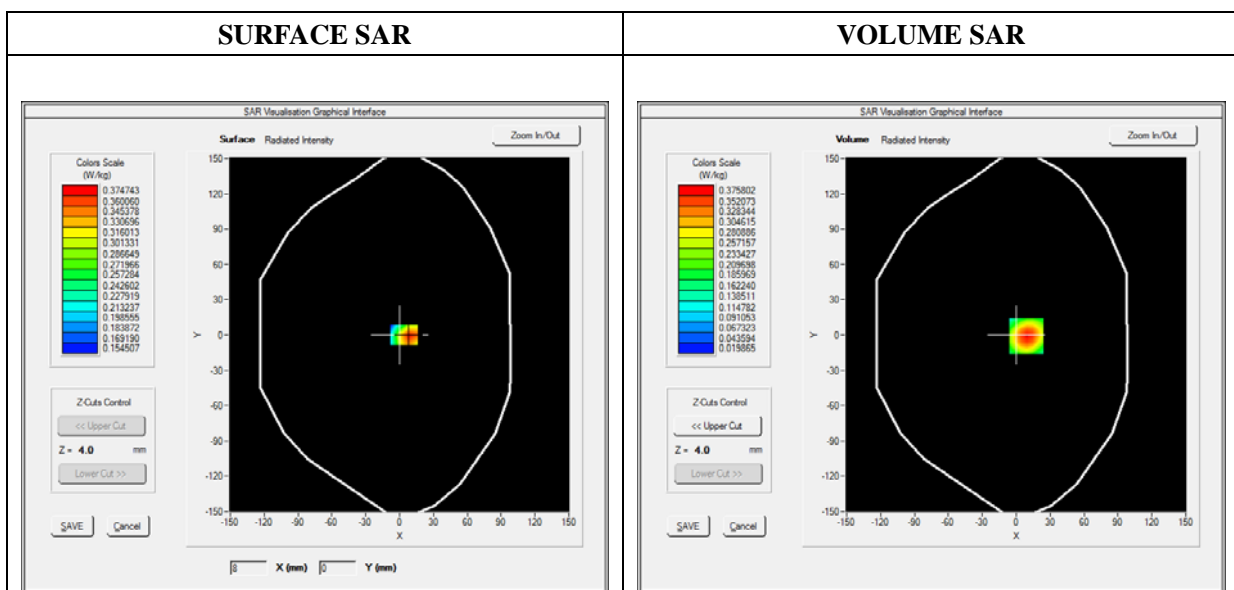



Maximum location: X=9.00, Y=-1.00

SAR 10g (W/Kg)	0.209476
SAR 1g (W/Kg)	0.376717

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.3758	0.2158	0.1243	0.0738

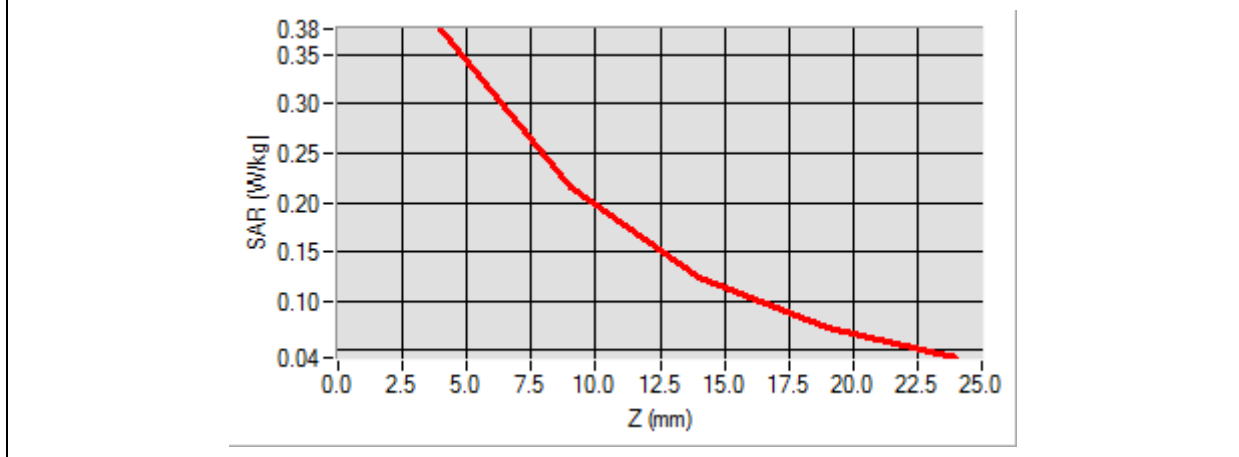

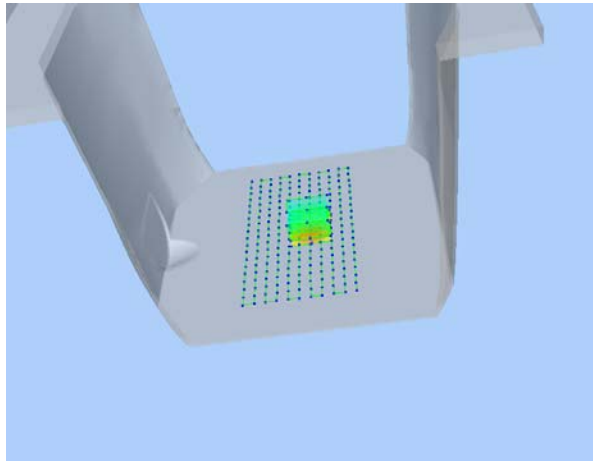3D screen shot	Hot spot position
	

MEASUREMENT 28

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 4_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1720.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

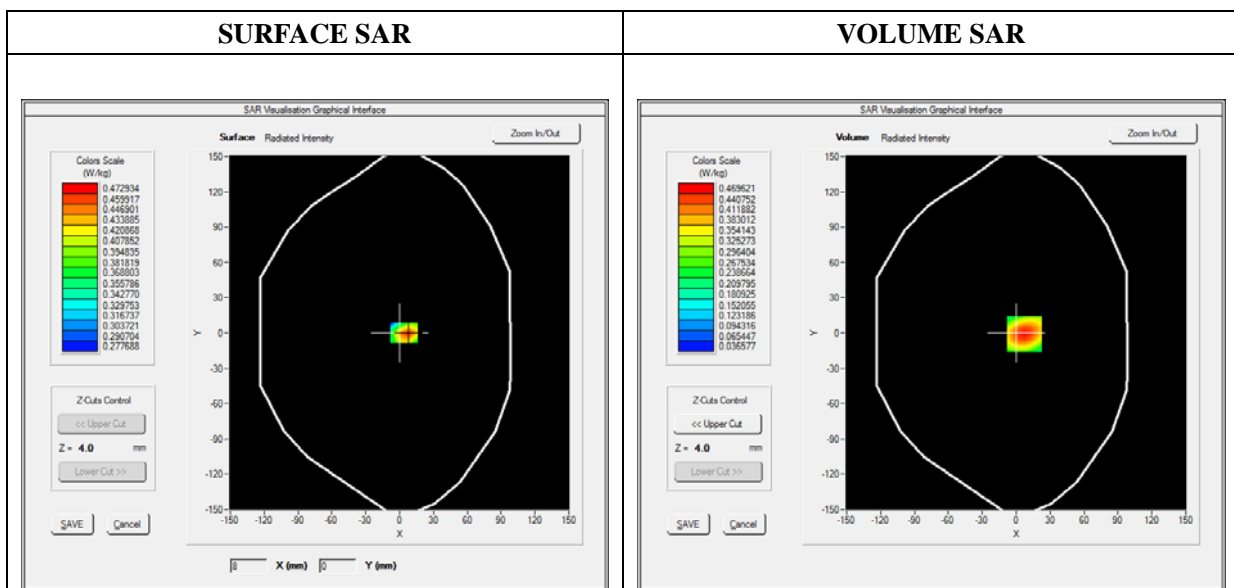



Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	0.280893
SAR 1g (W/Kg)	0.474657

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4696	0.2870	0.1758	0.1098

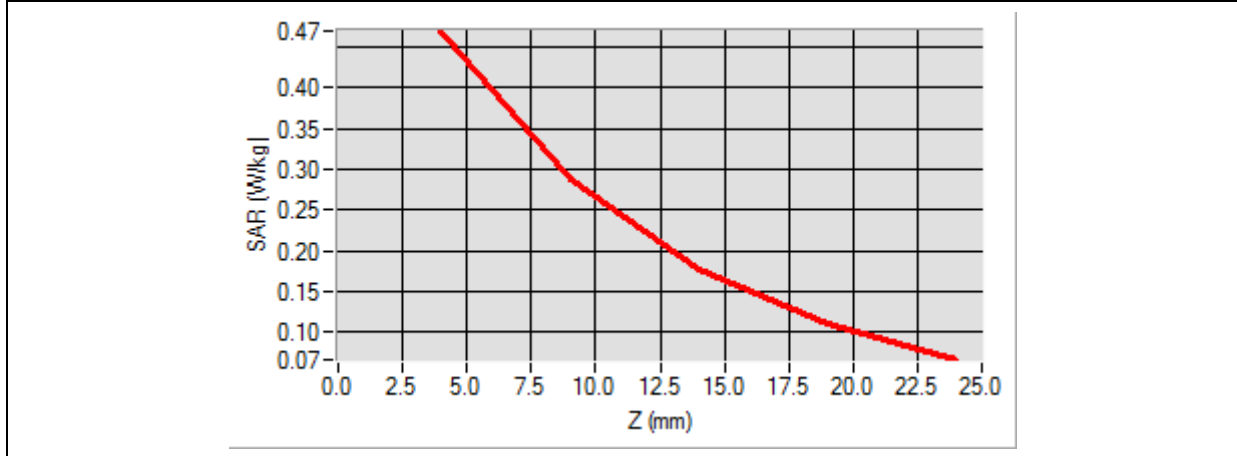

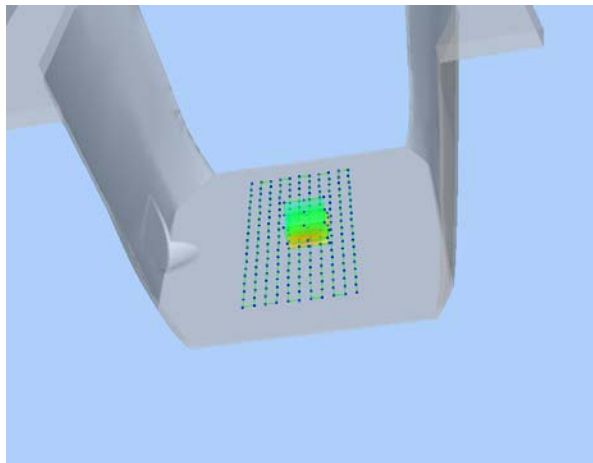3D screen shot	Hot spot position
	

MEASUREMENT 34

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 7_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	2510.000000
Relative Permittivity (real part)	52.015622
Conductivity (S/m)	1.911255
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

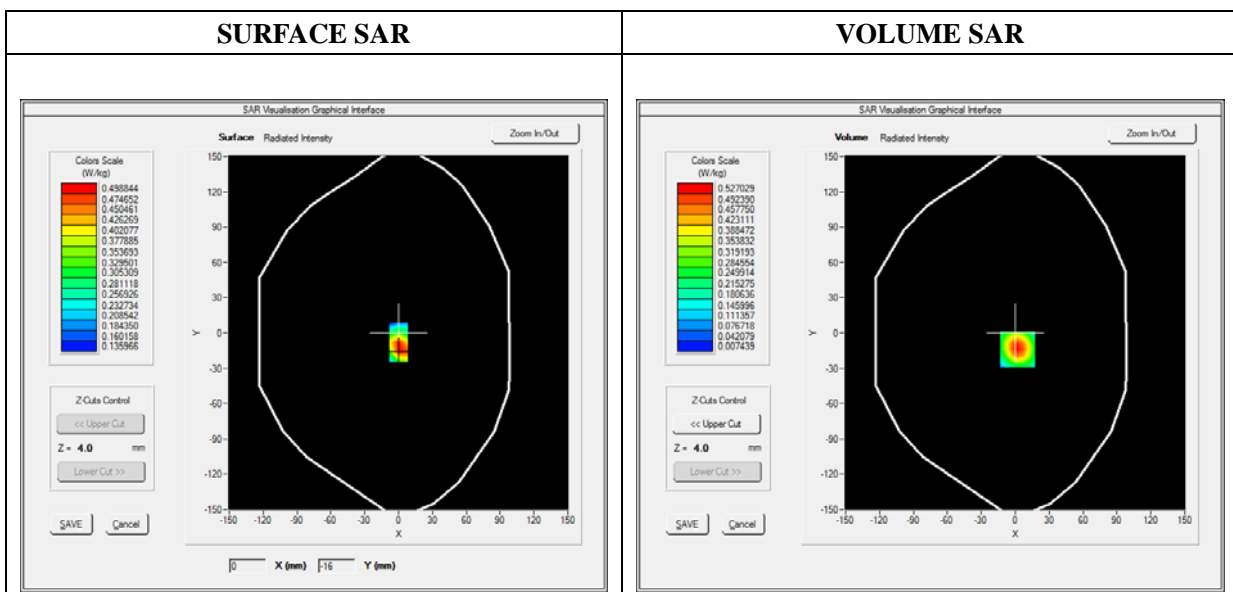



Maximum location: X=2.00, Y=-14.00

SAR 10g (W/Kg)	0.231279
SAR 1g (W/Kg)	0.481785

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.5270	0.2512	0.1168	0.0567

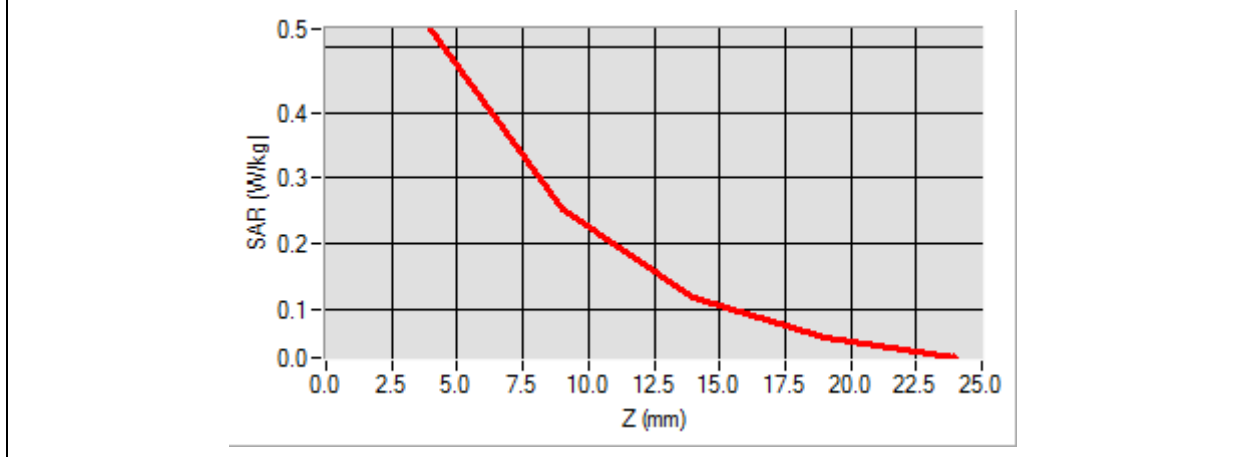

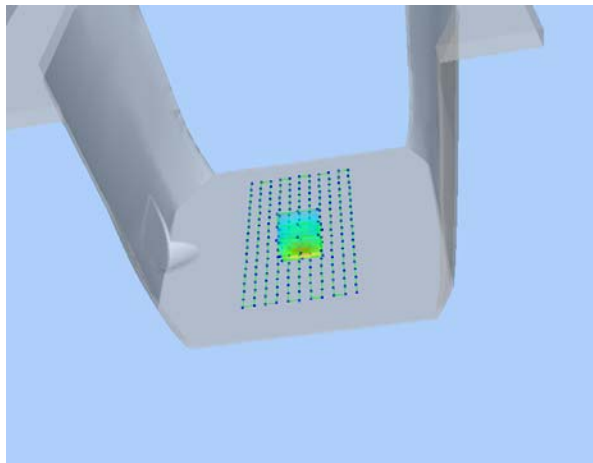3D screen shot	Hot spot position
	

MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 17_RMC
Channels	QPSK, 10MHz, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	709.000000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	0.954431
Ambient Temperature	21.1
Liquid Temperature	21.3

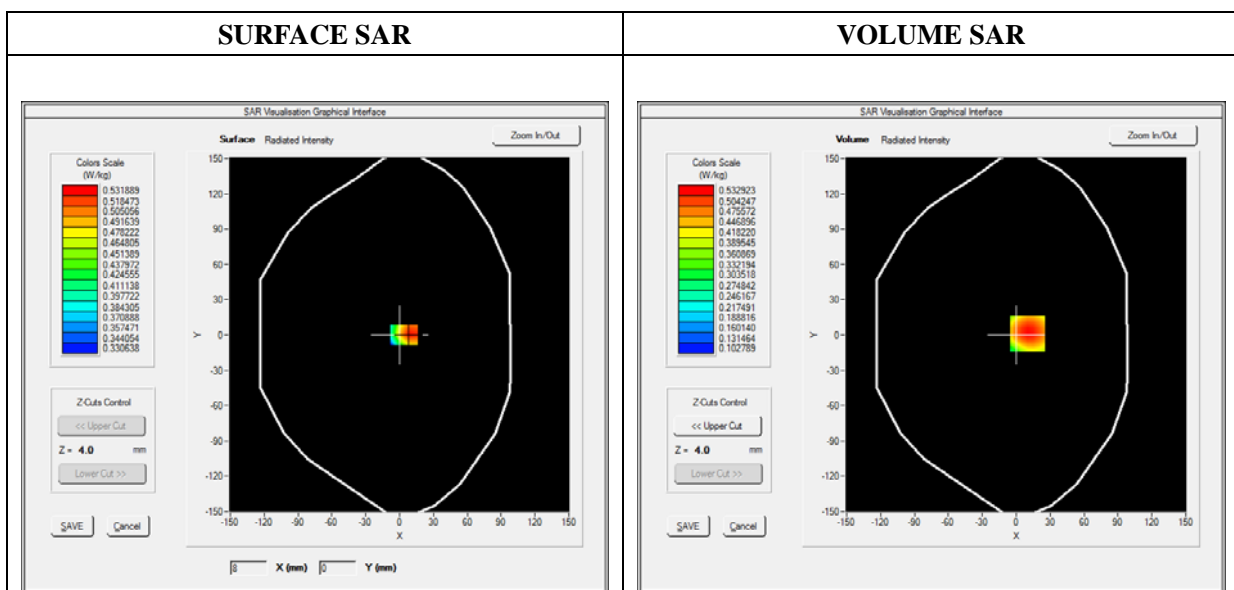



Maximum location: X=10.00, Y=1.00

SAR 10g (W/Kg)	0.380887
SAR 1g (W/Kg)	0.510883

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.5329	0.4285	0.3375	0.2591

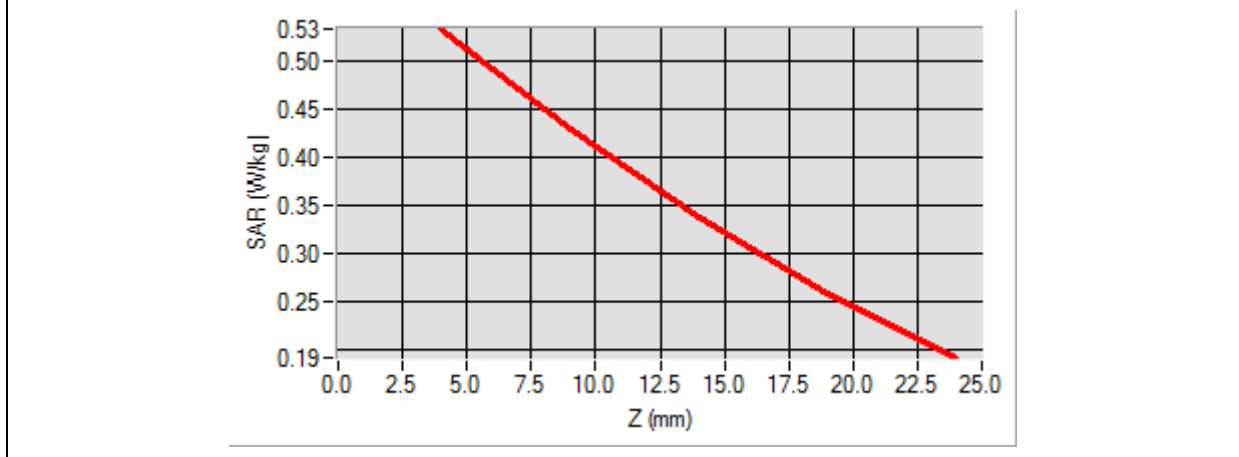

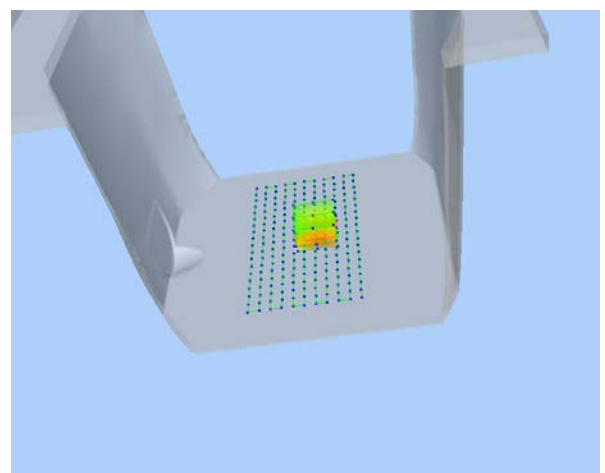3D screen shot	Hot spot position
	

MEASUREMENT 46

Type: Phone measurement (Complete)

Date of measurement: 02/06/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2016

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.015622
Conductivity (S/m)	1.911255
Power Variation (%)	0.968546
Ambient Temperature	21.1
Liquid Temperature	21.2

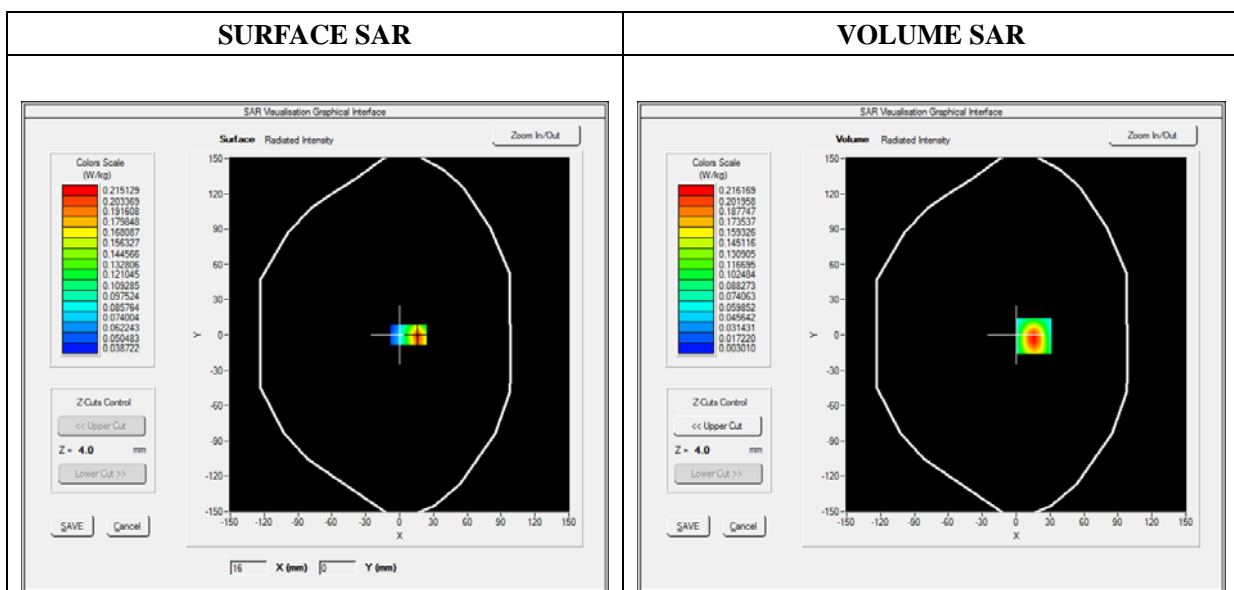



Maximum location: X=16.00, Y=-1.00

SAR 10g (W/Kg)	0.094334
SAR 1g (W/Kg)	0.197203


Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2162	0.1049	0.0494	0.0238

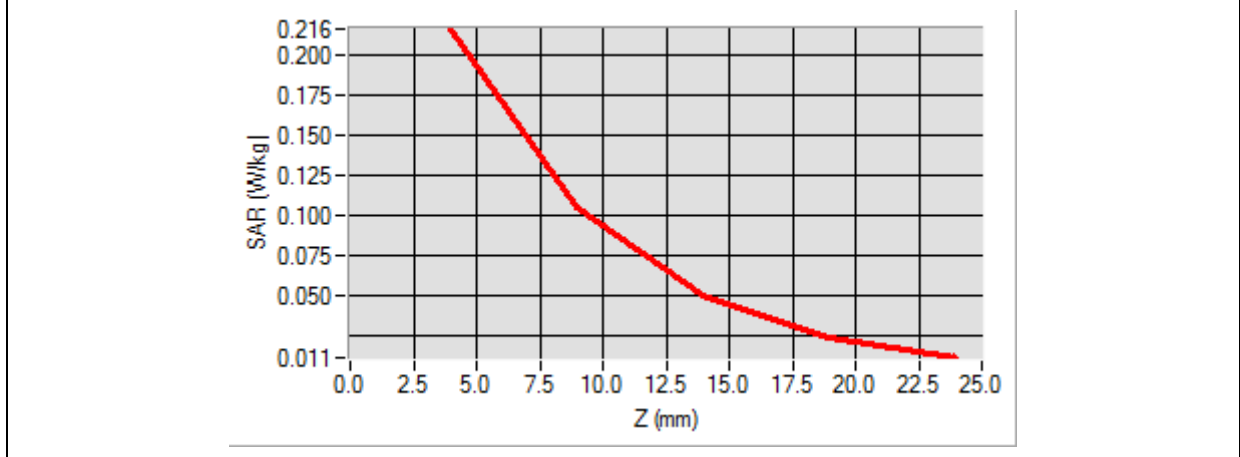
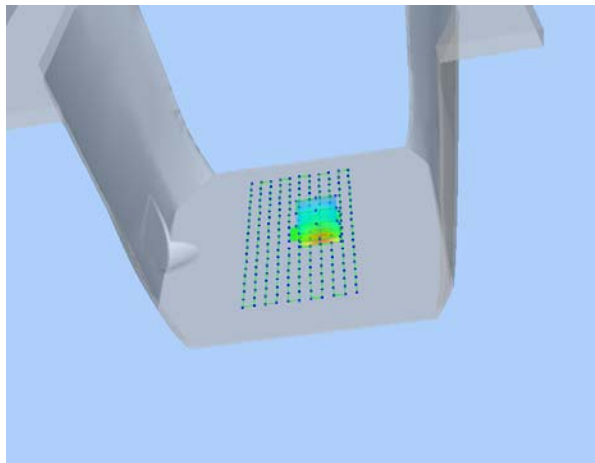
<p>3D screen shot</p>	<p>Hot spot position</p>
	

Annex C. EUT Photos


EUT View Front

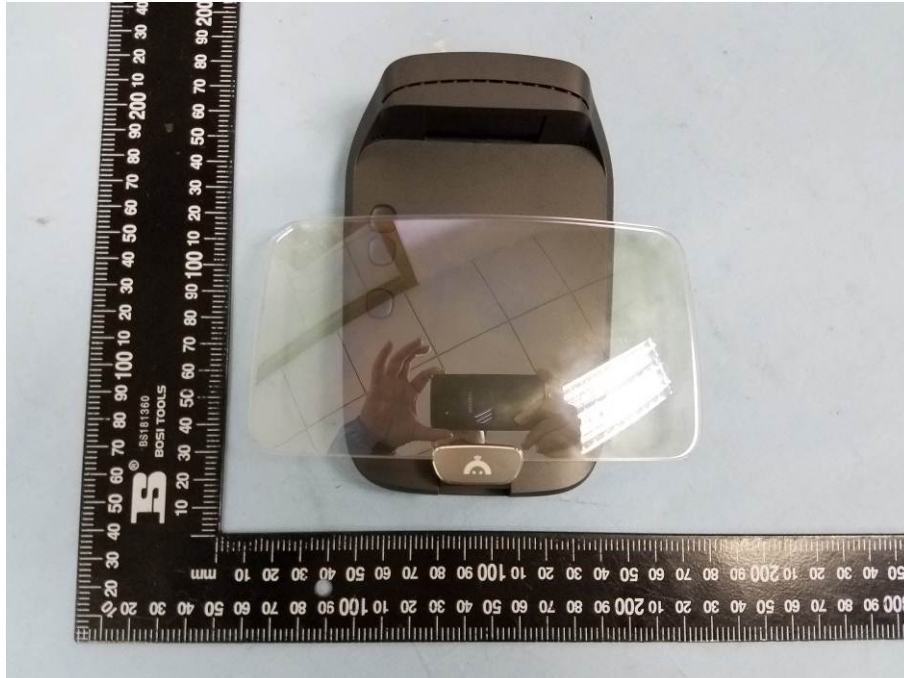

EUT View Back



Antenna View

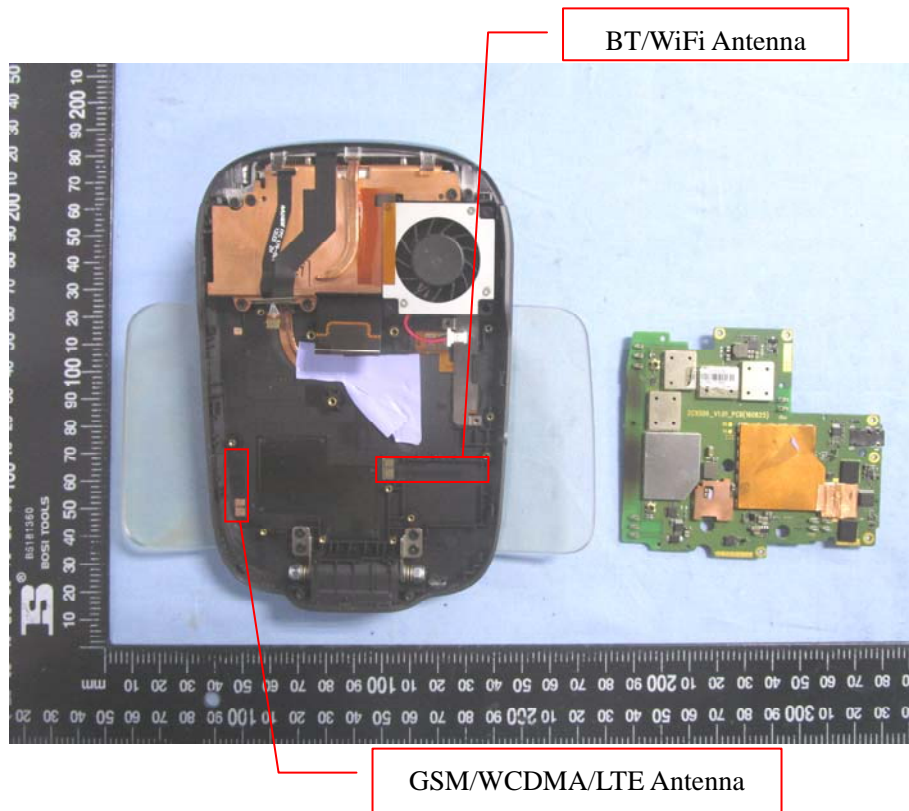

Annex D. Test Setup Photos

Body-worn & Hotspot mode Exposure Conditions

Body Front



Body Back



Hotspot Exposure Conditions

Body Right



Body Left



Annex E. Calibration Certificate

Please refer to the Exhibit for the Calibration Certificate

******* END OF REPORT *******