


WIRELESS TIRE PRESSURE MONITORING SYSTEM

Sensor Instruction Manual



TPMS 

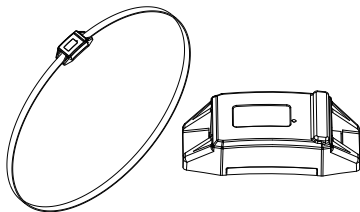


Sensor installation should be carried out by professional technician. After installation examine tire to make sure no air leakage.

SPECIFICATIONS

Operation temperature	-20°C~85°C
Storage temperature	-20°C~85°C
Frequency	433.92MHz
Transmission power	<8dBm
Pressure accuracy	±0.1 bar(±1.5 psi)
Temperature accuracy	±3°C
Dimension	68(L)x32(W)x20(H)mm
Weight	36g
Battery life	>/=3 Years or 60,000KM


INSTALLATION

Detach tire from vehicle and shovel off the tire from tire rim (operate at > 15cm distance away from tire valve).

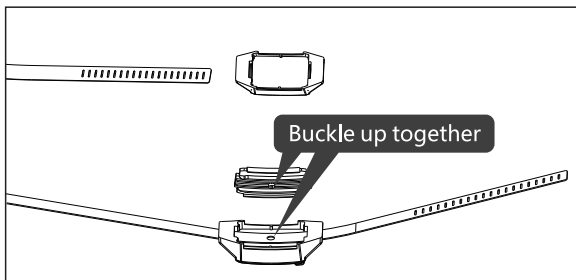

1


Thread the stainless steel band through sensor, buckle up together.

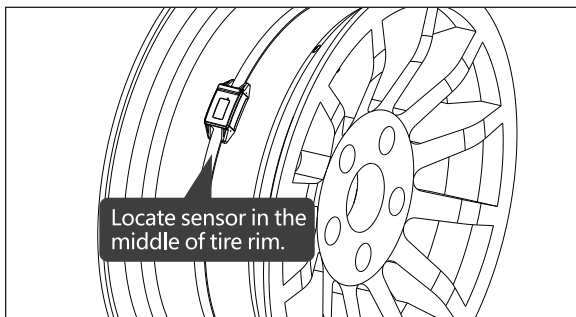

2


Wrap the sensor to tire rim.

INSTALLATION

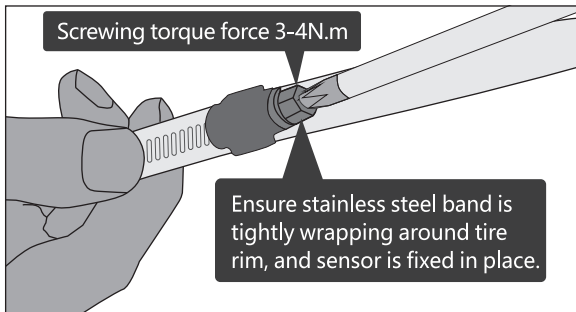

3

Fasten stainless steel band on tire rim with screw driver.

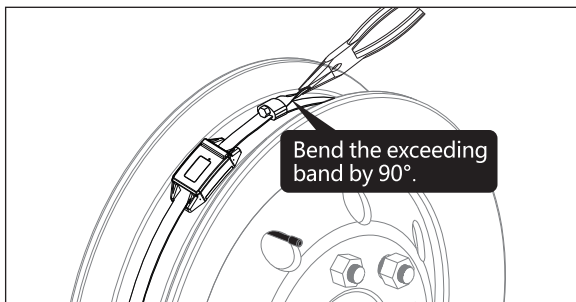

4

Use pliers to bend the exceeding band by 90° to reinforce.

Warning:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Compliance Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.