



FCC ID: 2AKZA-QCA9377
Report No.: T180627D11-RP3

Page: 1 / 137
Rev.: 02

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Brand name	TechNexion
Product name	WiFi+Bluetooth 4.1(HS) System on Module
Model No.	PIXI-9377
Test Result	Pass


The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Approved by:

Tested by:

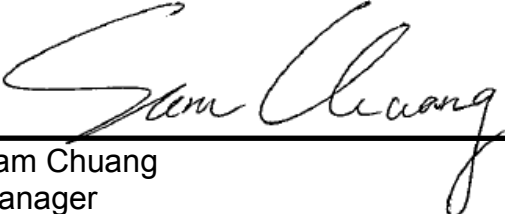

Sam Chuang
Manager



Jerry Chuang
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	August 28, 2018	Initial Issue	May Lin
01	September 20, 2018	1. Revised EUT channel and antenna information in P.5. 2. Update KDB 937606 to KDB 414788 in P.51.	May Lin
02	September 27, 2018	1. Revised the worst mode of measurement in P.12.	May Lin

Table of contents

1.	GENERAL INFORMATION.....	4
1.1	EUT INFORMATION.....	4
1.2	EUT CHANNEL INFORMATION.....	5
1.3	ANTENNA INFORMATION.....	5
1.4	MEASUREMENT UNCERTAINTY.....	6
1.5	FACILITIES AND TEST LOCATION.....	7
1.6	INSTRUMENT CALIBRATION.....	8
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT.....	9
1.8	TEST METHODOLOGY AND APPLIED STANDARDS.....	9
2.	TEST SUMMERY.....	10
3.	DESCRIPTION OF TEST MODES.....	11
3.1	THE WORST MODE OF OPERATING CONDITION.....	11
3.2	THE WORST MODE OF MEASUREMENT.....	12
4.	EUT DUTY CYCLE.....	14
5.	TEST RESULT.....	15
5.1	AC POWER LINE CONDUCTED EMISSION.....	15
5.2	6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%).....	18
5.3	OUTPUT POWER MEASUREMENT.....	28
5.4	POWER SPECTRAL DENSITY.....	31
5.5	CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	37
5.6	RADIATION BANDEDGE AND SPURIOUS EMISSION.....	50
	APPENDIX 1 - PHOTOGRAPHS OF EUT	

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	TechNexion Ltd. 16f-5, No.736, Zhongzheng Road, Zhonghe Dist., New Taipei City, 23511 Taiwan ROC
Manufacturer	TechNexion Ltd. 16f-5, No.736, Zhongzheng Road, Zhonghe Dist., New Taipei City, 23511 Taiwan ROC
Equipment	WiFi+Bluetooth 4.1(HS) System on Module
Model Name	PIXI-9377
Model Discrepancy	N/A
Received Date	June 27, 2018
Date of Test	July 13 ~ August 13, 2018
Output Power(W)	IEEE 802.11b mode: 0.0830 IEEE 802.11g mode: 0.2323 IEEE 802.11n HT 20 MHz mode: 0.2291 IEEE 802.11n HT 40 MHz mode: 0.2275
Power Supply	Power by host system
HW Version	A1
FW Version	A1

1.2 EUT CHANNEL INFORMATION

Frequency Range	802.11b/g/n HT 20: 2412MHz ~ 2462MHz 802.11n HT 40: 2422MHz ~ 2452MHz
Modulation Type	1. IEEE 802.11b mode: DSSS 2. IEEE 802.11g mode: OFDM 3. IEEE 802.11n HT 20 MHz mode : OFDM 4. IEEE 802.11n HT 40 MHz mode : OFDM
Number of channel	1. IEEE 802.11b mode: 11 Channels 2. IEEE 802.11g mode: 11 Channels 3. IEEE 802.11n HT 20 MHz mode : 11 Channels 4. IEEE 802.11n HT 40 MHz mode : 7 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	<input checked="" type="checkbox"/> PIFA <input type="checkbox"/> PCB <input checked="" type="checkbox"/> Dipole <input type="checkbox"/> Coils					
Antenna Gain		Brand	P/N	Type	Peak Gain	Worst Mode
	Antenna 1	TechNexion	VM2450-25523-OOX-180	PIFA	2.5dBi	X
	Antenna 2	TechNexion	VM2450-ASSY1005	Dipole	4dBi	O

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$*
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.*

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Chuang	-
RF Conducted	Jerry Chuang	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Report No.: T180627D11-RP3

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	06/29/2018	06/28/2019
Power Meter	Anritsu	ML2495A	1012009	09/18/2017	09/17/2018
Power Seneor	Anritsu	MA2411B	1126148	02/06/2018	02/05/2019
Signal Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	05/14/2018	05/13/2019
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	02/08/2018	02/07/2019
Double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	EMEC	EM330	060609	06/29/2018	06/28/2019
Pre-Amplifier	HP	8449B	3008A00965	06/29/2018	06/28/2019
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
LISN	R&S	ENV216	101054	02/06/2018	02/05/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
EMI Test Receiver	R&S	ESCI	101203	11/02/2017	11/01/2018
CABLE	EMCI	CFD300-NL	CERF	07/03/2018	07/02/2019

Remark: Each piece of equipment is scheduled for calibration once a year.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(K)	Toshiba	voyager	ZD 154034s	N/A
2	NB	Lenovo	TP00056A	R33B65	PD97260HU

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	5.1	AC Conducted Emission	Pass
15.247(a)(2)	5.2	6 dB Bandwidth	Pass
-	5.2	Occupied Bandwidth (99%)	Pass
15.247(b)	5.3	Output Power Measurement	Pass
15.247(e)	5.4	Power Spectral Density	Pass
15.247(d)	5.5	Conducted Band Edge	Pass
15.247(d)	5.5	Conducted Emission	Pass
15.247(d)	5.6	Radiation Band Edge	Pass
15.247(d)	5.6	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	IEEE 802.11b mode :1Mbps IEEE 802.11g mode :6Mbps IEEE 802.11n HT20 mode: MCS0 IEEE 802.11n HT40 mode: MCS0
Test Channel Frequencies	IEEE 802.11b mode: 1. Lowest Channel: 2412MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2462MHz IEEE 802.11g mode: 1. Lowest Channel: 2412MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2462MHz IEEE 802.11n HT20 mode: 1. Lowest Channel: 2412MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2462MHz IEEE 802.11n HT40 mode: 1. Lowest Channel: 2422MHz 2. Middle Channel: 2437MHz 3. Highest Channel: 2452MHz
Operation Transmitter	IEEE 802.11b mode: 1T1R IEEE 802.11g mode: 1T1R IEEE 802.11n HT20 mode: 1T1R IEEE 802.11n HT40 mode: 1T1R

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

For PIFA Antenna

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis , X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (X-Plane and Horizontal) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

For Dipole Antenna

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4


Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (Z-Plane and Vertical) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: T180627D11-RP3

4. EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
802.11b	8.6600	8.7200	99.31%	-0.03
802.11g	1.4500	1.5100	96.03%	0.18
802.11n HT20	1.3700	1.4500	94.48%	-0.25
802.11n HT40	0.6900	0.7600	90.79%	-0.42

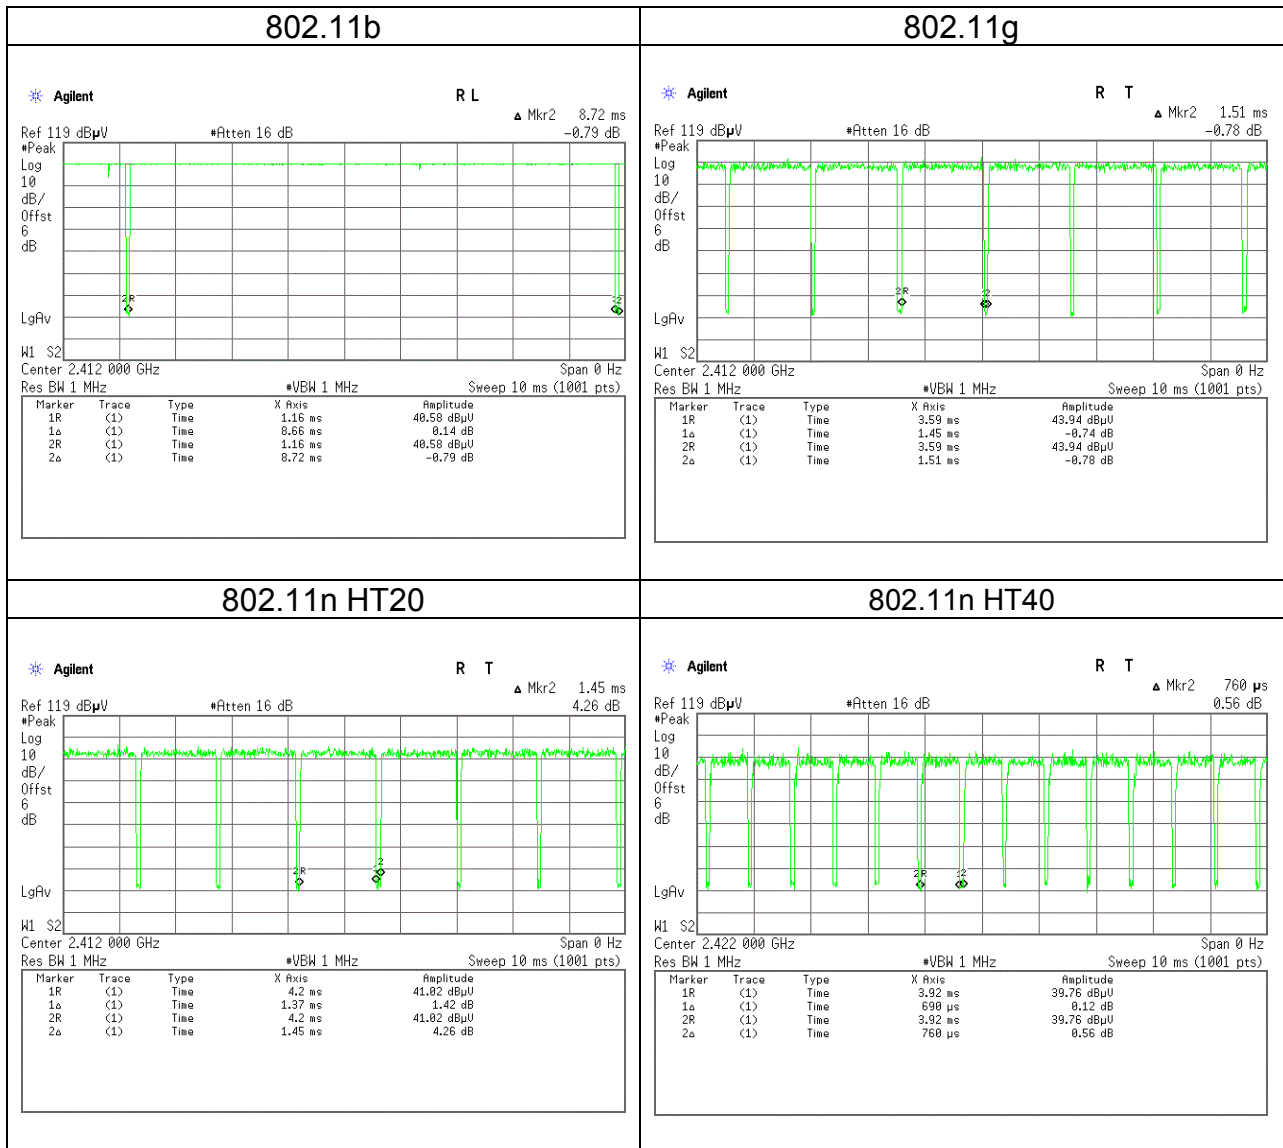

Report No.: T180627D11-RP3

5. TEST RESULT

5.1 AC POWER LINE CONDUCTED EMISSION

5.1.1 Test Limit

According to §15.207(a)(2)

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

5.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

5.1.3 Test Setup

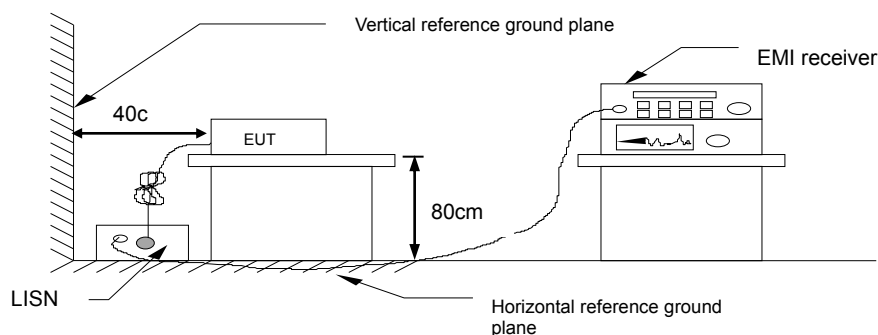


5.1.4 Test Result

Pass.

Report No.: T180627D11-RP3

Test Data


Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	July 19, 2018
Test Voltage:	120Vac	Test Engineer	Dally Hong

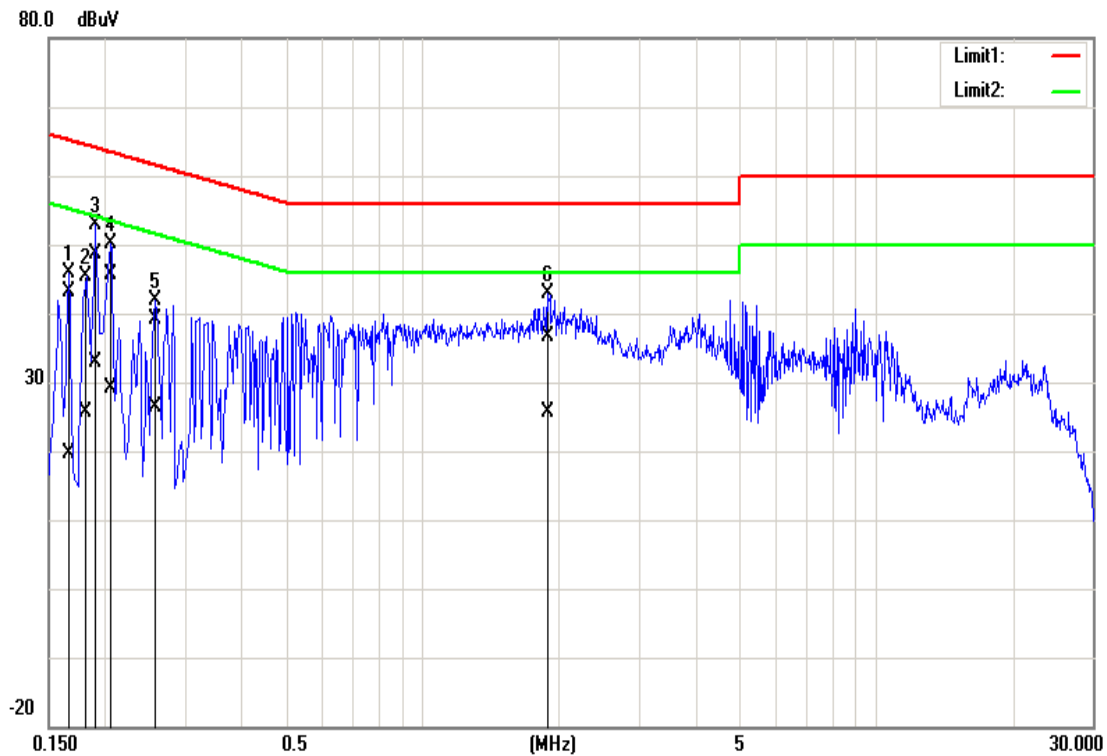

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1660	43.06	19.41	0.11	43.17	19.52	65.16	55.16	-21.99	-35.64	Pass
2	0.1820	45.33	25.48	0.11	45.44	25.59	64.39	54.39	-18.95	-28.80	Pass
3	0.1900	48.46	32.72	0.11	48.57	32.83	64.04	54.04	-15.47	-21.21	Pass
4	0.2060	45.57	28.98	0.11	45.68	29.09	63.37	53.37	-17.69	-24.28	Pass
5	0.2580	39.04	26.23	0.11	39.15	26.34	61.50	51.50	-22.35	-25.16	Pass
6	1.8940	36.51	25.54	0.15	36.66	25.69	56.00	46.00	-19.34	-20.31	Pass

Report No.: T180627D11-RP3

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	July 19, 2018
Test Voltage:	120Vac	Test Engineer	Dally Hong

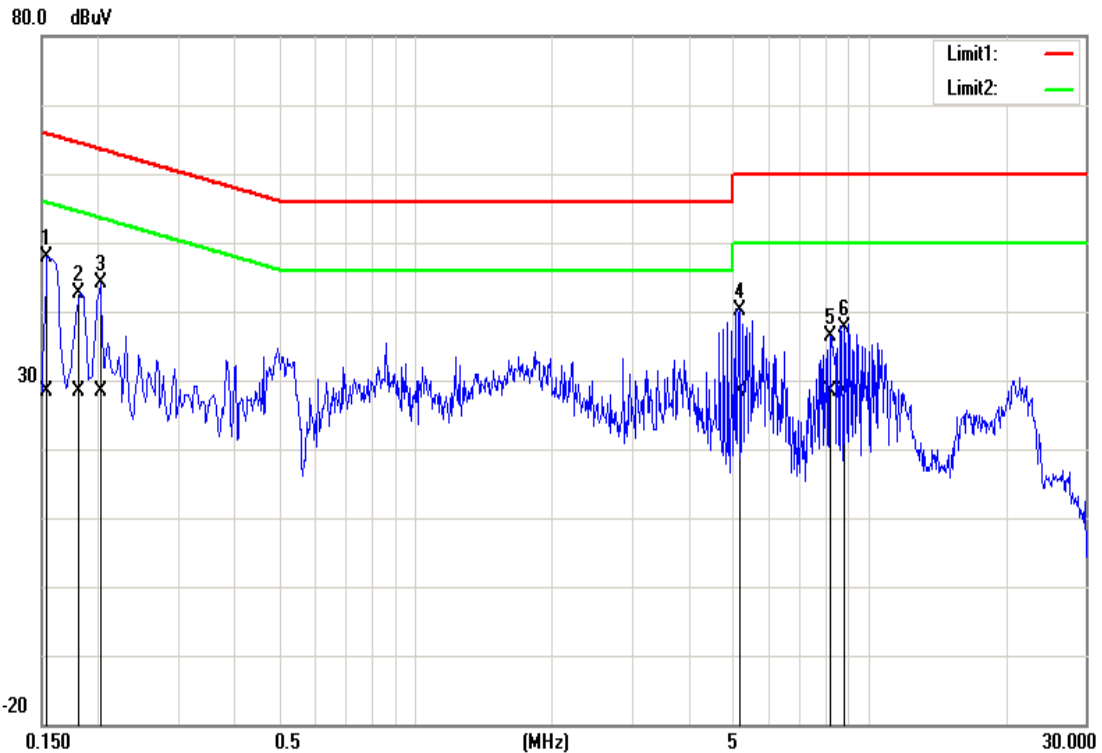

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	1.8940	31.03	22.97	0.16	31.19	23.13	56.00	46.00	-24.81	-22.87	Pass
2	0.1825	40.91	28.44	0.13	41.04	28.57	64.37	54.37	-23.33	-25.80	Pass
3	0.2007	40.02	26.02	0.13	40.15	26.15	63.58	53.58	-23.43	-27.43	Pass
4	5.1660	39.14	35.87	0.22	39.36	36.09	60.00	50.00	-20.64	-13.91	Pass
5	8.2300	34.97	30.49	0.27	35.24	30.76	60.00	50.00	-24.76	-19.24	Pass
6	8.7020	35.42	26.13	0.28	35.70	26.41	60.00	50.00	-24.30	-23.59	Pass

5.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

5.2.1 Test Limit

According to §15.247(a)(2)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

5.2.2 Test Procedure

Test method Refer as KDB 558074 D01, Section 8.1 and ANSI 63.10:2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

5.2.3 Test Setup



5.2.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2412	13.0246	8.0435	≥500
Mid	2437	13.0680	8.0435	
High	2462	13.1114	8.0435	


Test mode: IEEE 802.11g mode / 2412-2462 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2412	16.2807	15.1304	≥500
Mid	2437	16.5846	15.1304	
High	2462	16.2373	15.1304	

Test mode: IEEE 802.11n HT 20 MHz mode / 2412-2462 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2412	17.4095	15.1304	≥500
Mid	2437	17.5397	16.6087	
High	2462	17.3661	15.1304	

Test mode: IEEE 802.11n HT 40 MHz mode / 2422-2452 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2422	36.0057	35.13	>500
Mid	2437	36.0057	34.014	
High	2452	35.8900	35.13	

Report No.: T180627D11-RP3


Test Data (6dB BANDWIDTH)

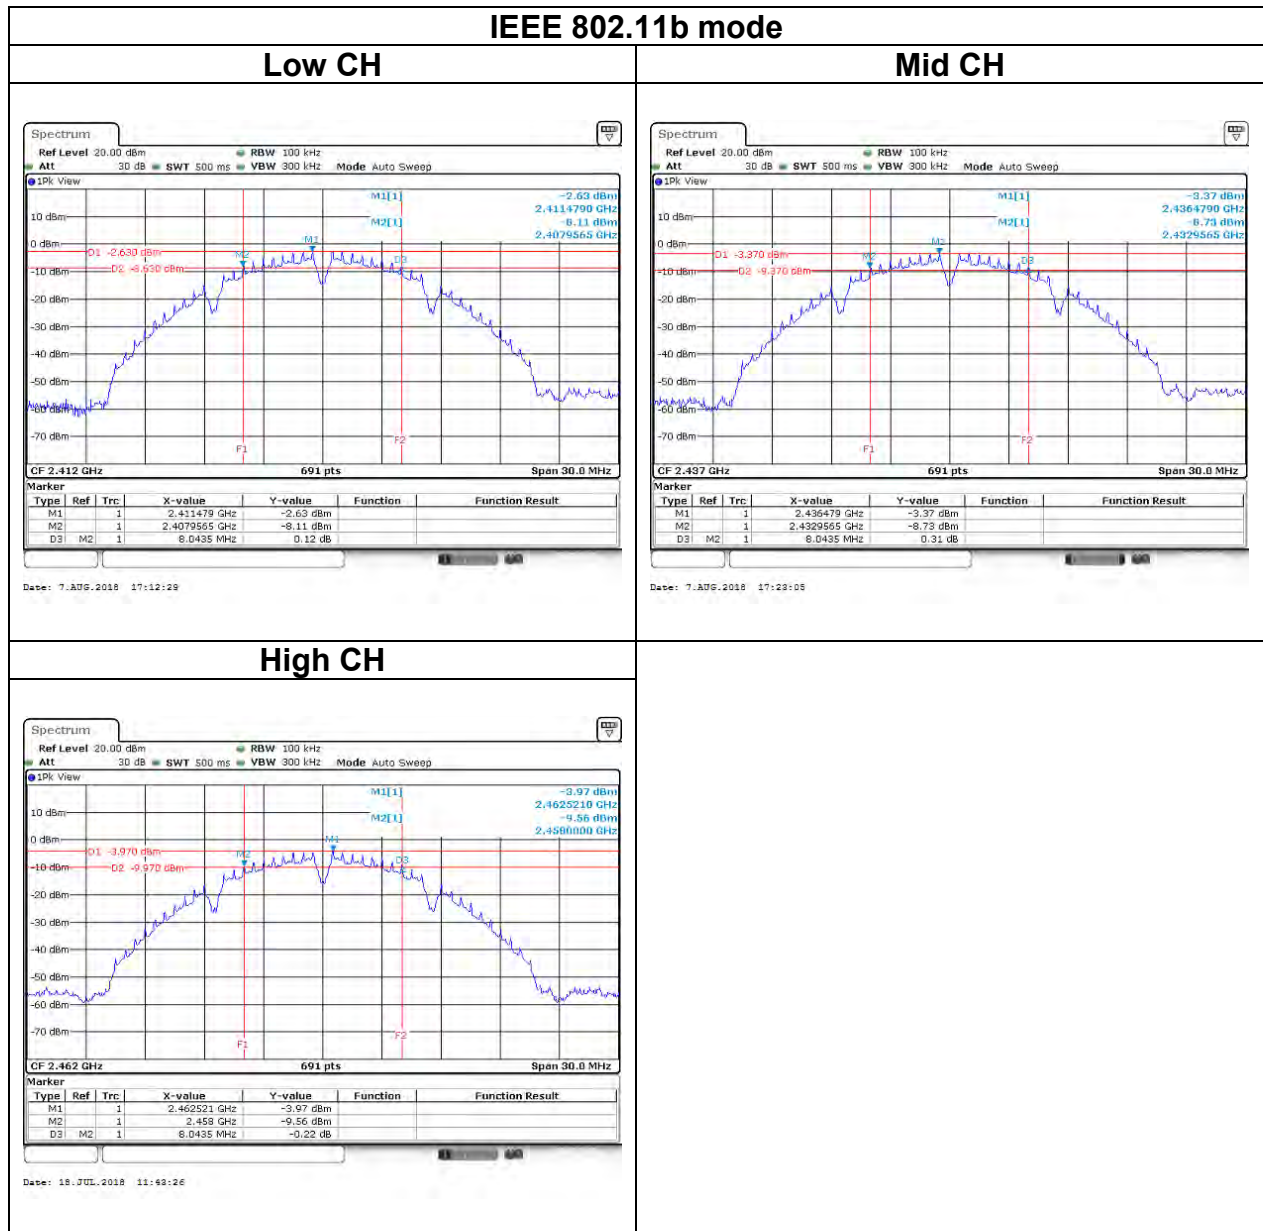


Report No.: T180627D11-RP3

IEEE 802.11g mode


Low CH

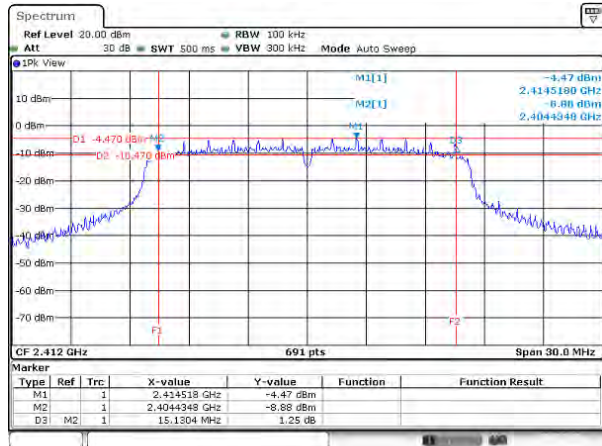


Mid CH

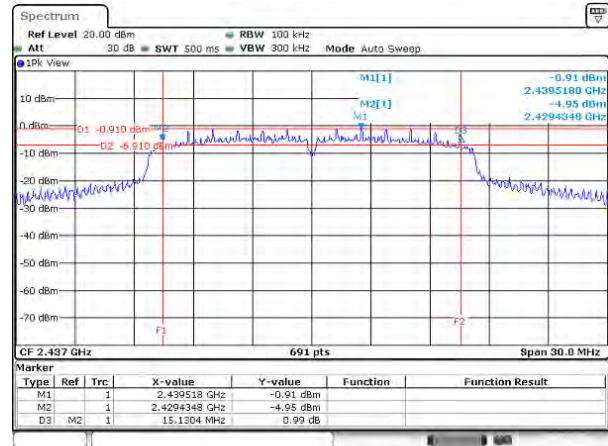


High CH

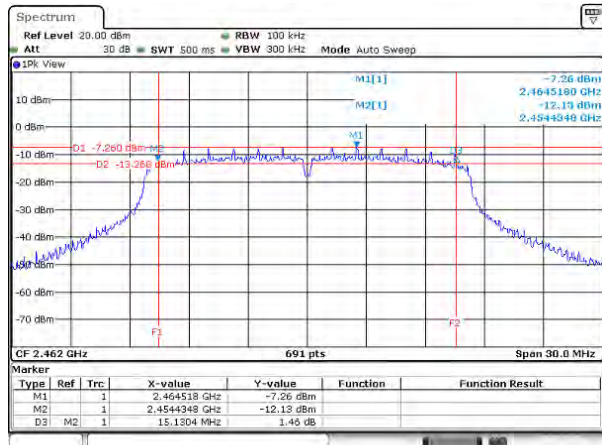

Report No.: T180627D11-RP3

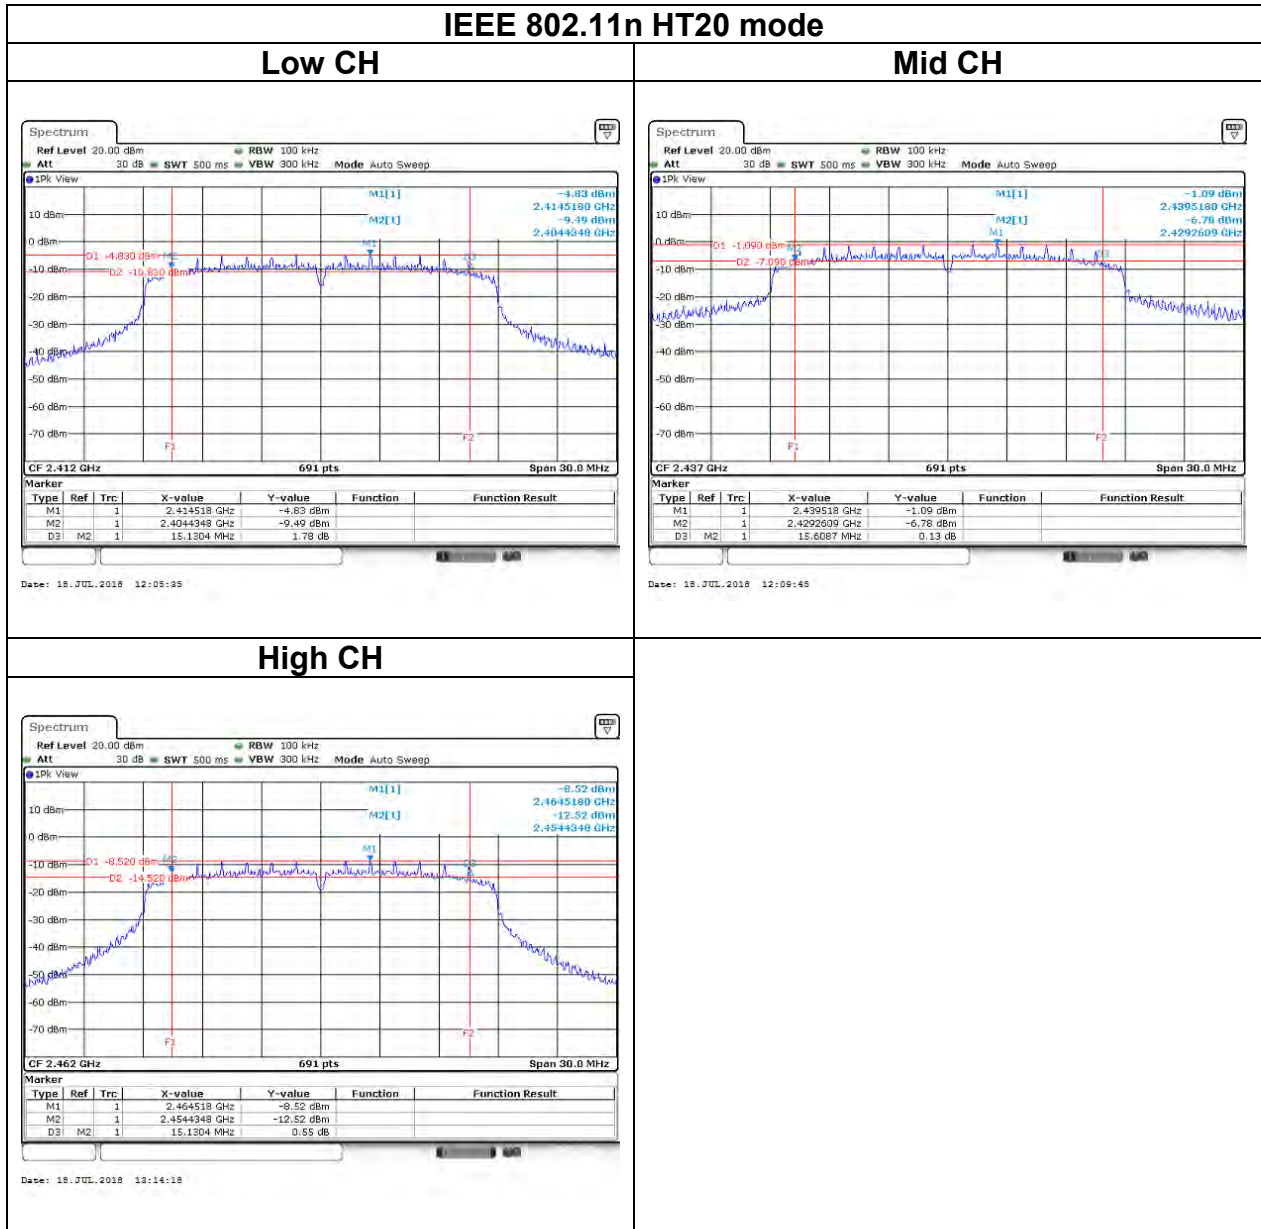


Report No.: T180627D11-RP3

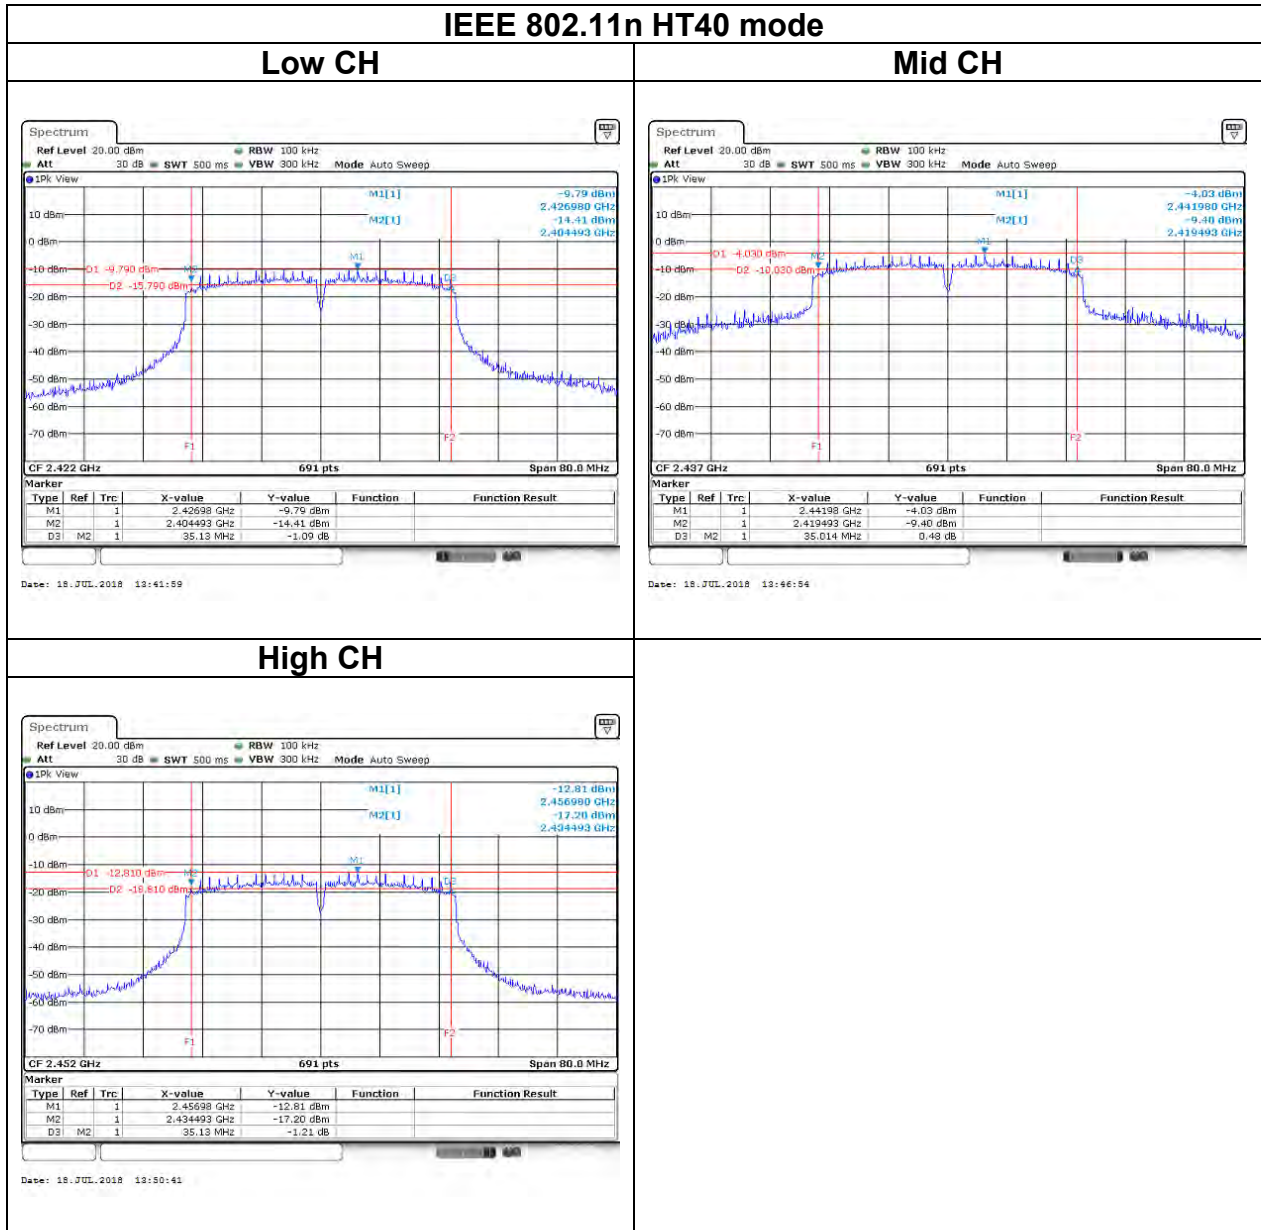


Report No.: T180627D11-RP3

Test Data (BANDWIDTH 99%)

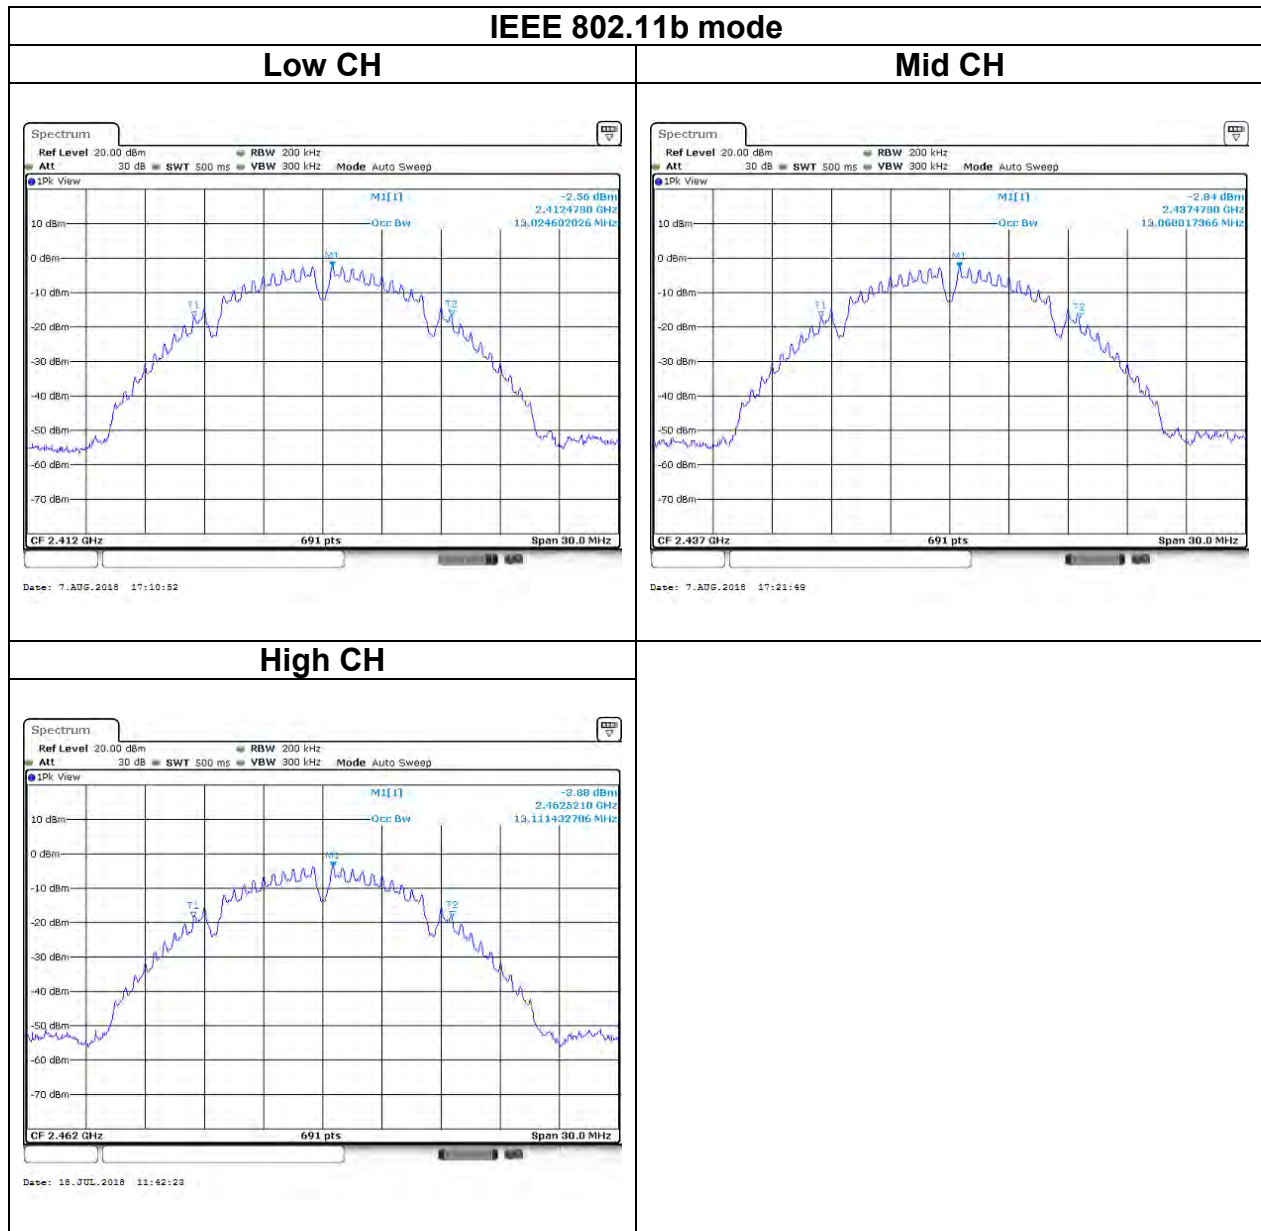


IEEE 802.11g mode

Low CH

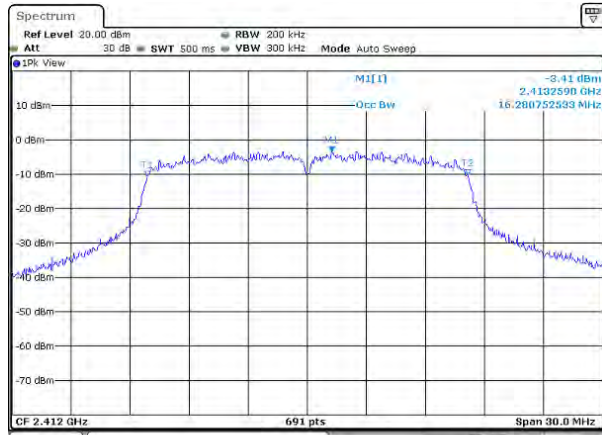


Date: 18 JUL 2018 11:49:49

Mid CH

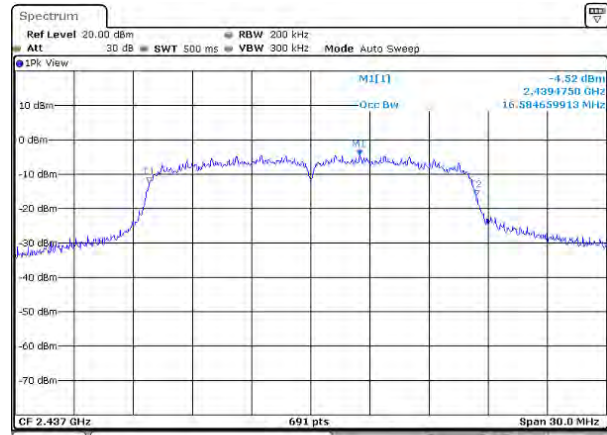



Date: 23.06.2018 19:42:46

High CH

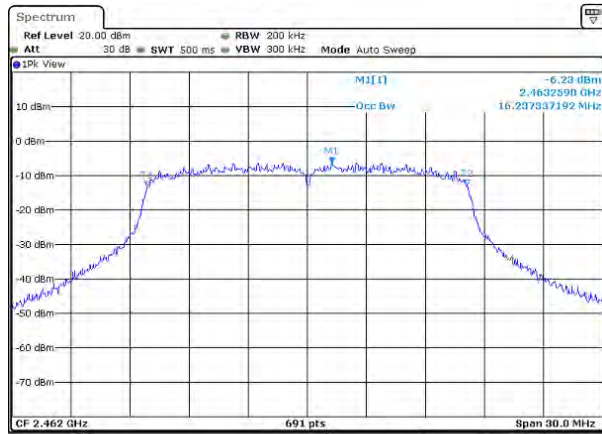

Date: 18 JUL 2018 11:57:24

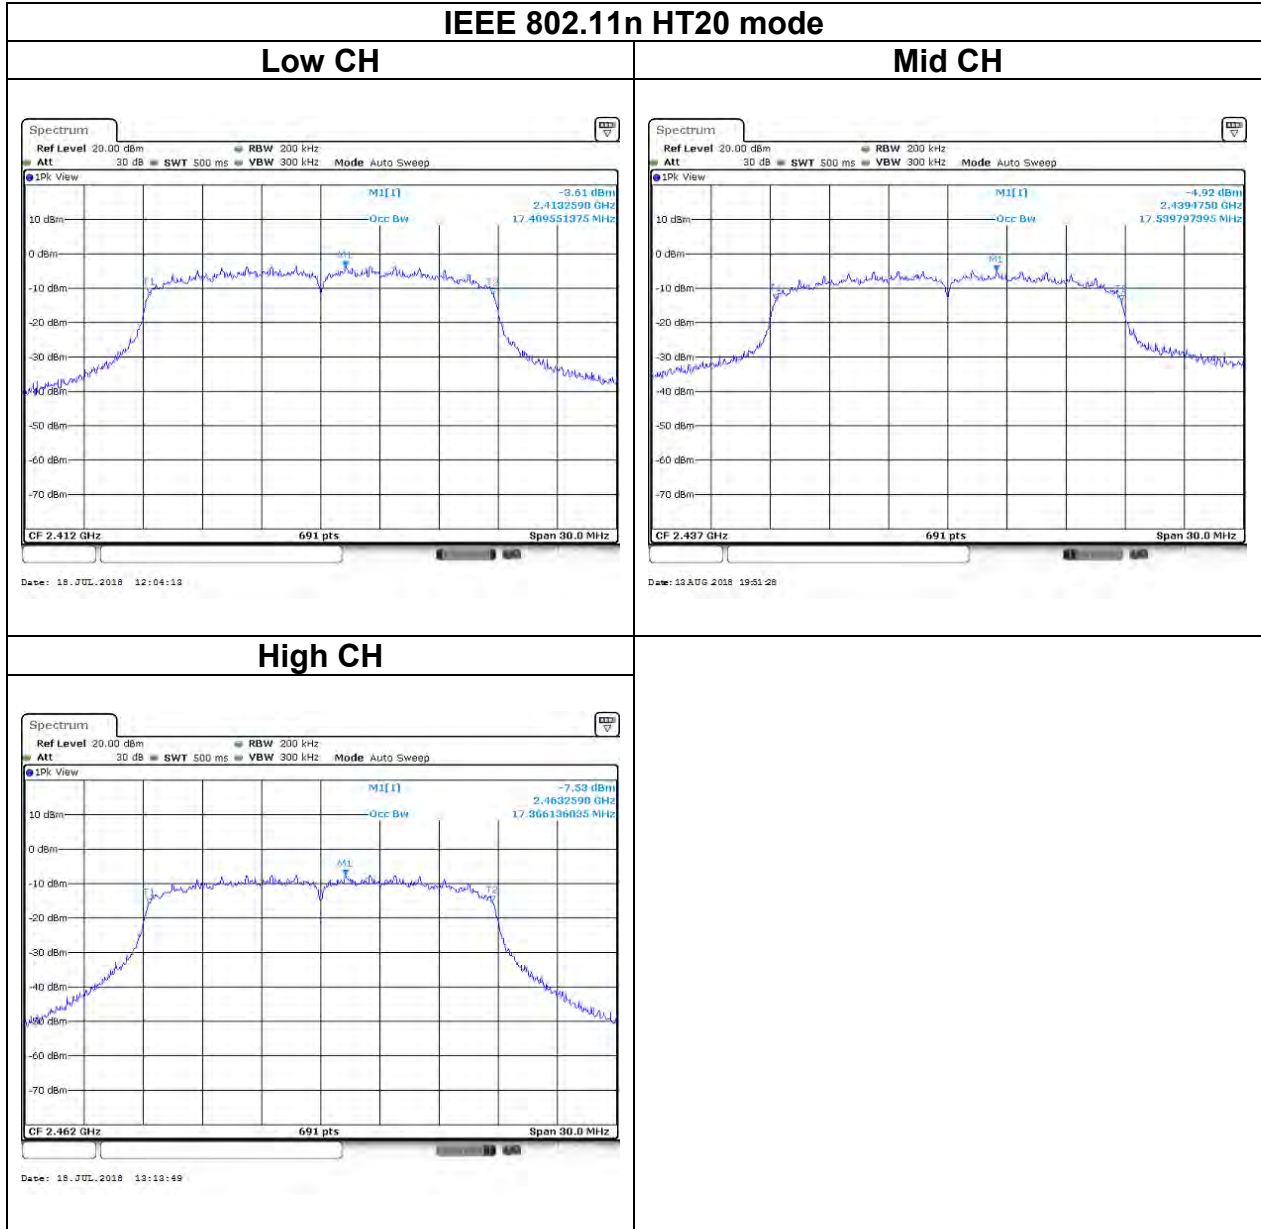

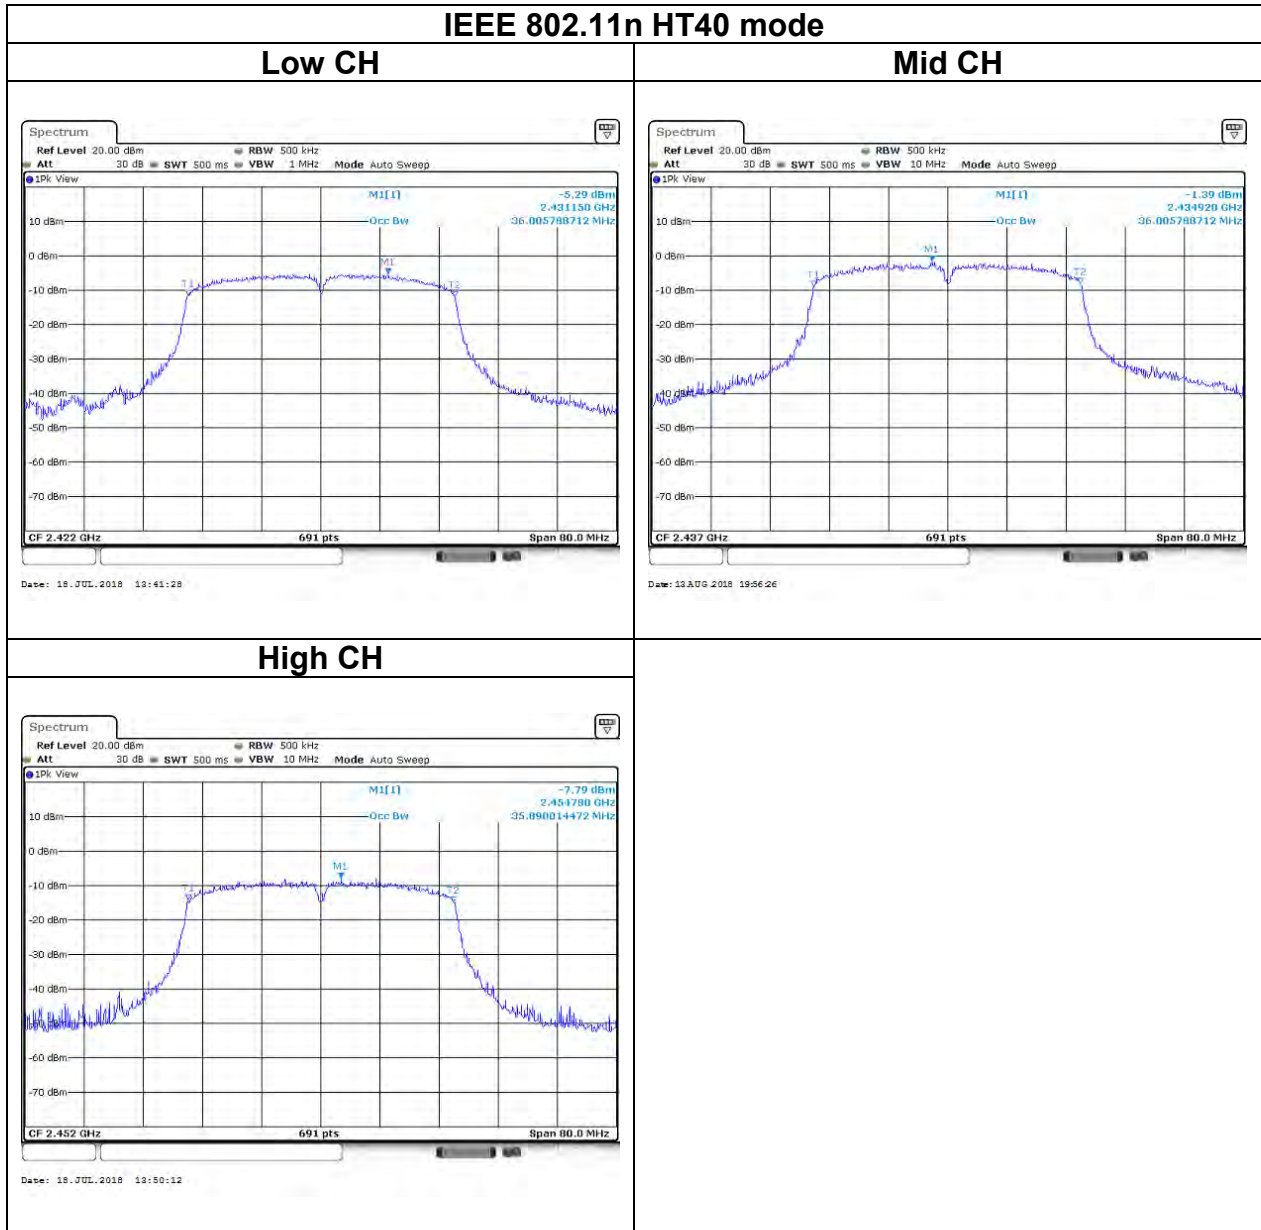

5.3 OUTPUT POWER MEASUREMENT

5.3.1 Test Limit

According to §15.247(b)

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---


Average output power : For reporting purposes only.

5.3.2 Test Procedure

Test method Refer as KDB 558074 D01, Section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

5.3.3 Test Setup



Report No.: T180627D11-RP3

5.3.4 Test Result

Peak output power :

Wifi 2.4G						
Config	CH	Freq. (MHz)	power set	PK Power (dBm)	PK Total Power (W)	Limit (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	16	18.98	0.0791	30
	Mid	2437	16	19.19	0.0830	
	High	2462	15	18.17	0.0656	
IEEE 802.11g Data rate: 6Mbps	Low	2412	18	23.25	0.2113	
	Mid	2437	22	23.66	0.2323	
	High	2462	15	21.13	0.1297	
IEEE 802.11n HT20 Data rate: MCS0	Low	2412	18	23.31	0.2143	
	Mid	2437	22	23.60	0.2291	
	High	2462	14	20.25	0.1059	
IEEE 802.11n HT40 Data rate: MCS0	Low	2422	16	22.08	0.1614	
	Mid	2437	22	23.57	0.2275	
	High	2452	13	19.56	0.0904	

Average output power :

Wifi 2.4G			
Config	CH	Freq. (MHz)	AV Power (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	16.50
	Mid	2437	16.68
	High	2462	15.68
IEEE 802.11g Data rate: 6Mbps	Low	2412	17.63
	Mid	2437	17.96
	High	2462	14.89
IEEE 802.11n HT20 Data rate: MCS0	Low	2412	17.45
	Mid	2437	17.76
	High	2462	13.66
IEEE 802.11n HT40 Data rate: MCS0	Low	2422	15.20
	Mid	2437	17.38
	High	2452	12.43

5.4 POWER SPECTRAL DENSITY

5.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---

5.4.2 Test Procedure

Test method Refer as KDB 558074 D01, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

5.4.3 Test Setup



5.4.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2412	-6.67	8
Mid	2437	-6.96	
High	2462	-7.56	


Test mode: IEEE 802.11g mode / 2412-2462 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2412	-7.88	8
Mid	2437	-5.02	
High	2462	-11.46	


Test mode: IEEE 802.11n HT 20 MHz mode / 2412-2462 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2412	-8.77	8
Mid	2437	-5.75	
High	2462	-13.00	

Test mode: IEEE 802.11n HT 40 MHz mode / 2422-2452 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2422	-12.07	8
Mid	2437	-7.27	
High	2452	-15.60	


Report No.: T180627D11-RP3


Test Data

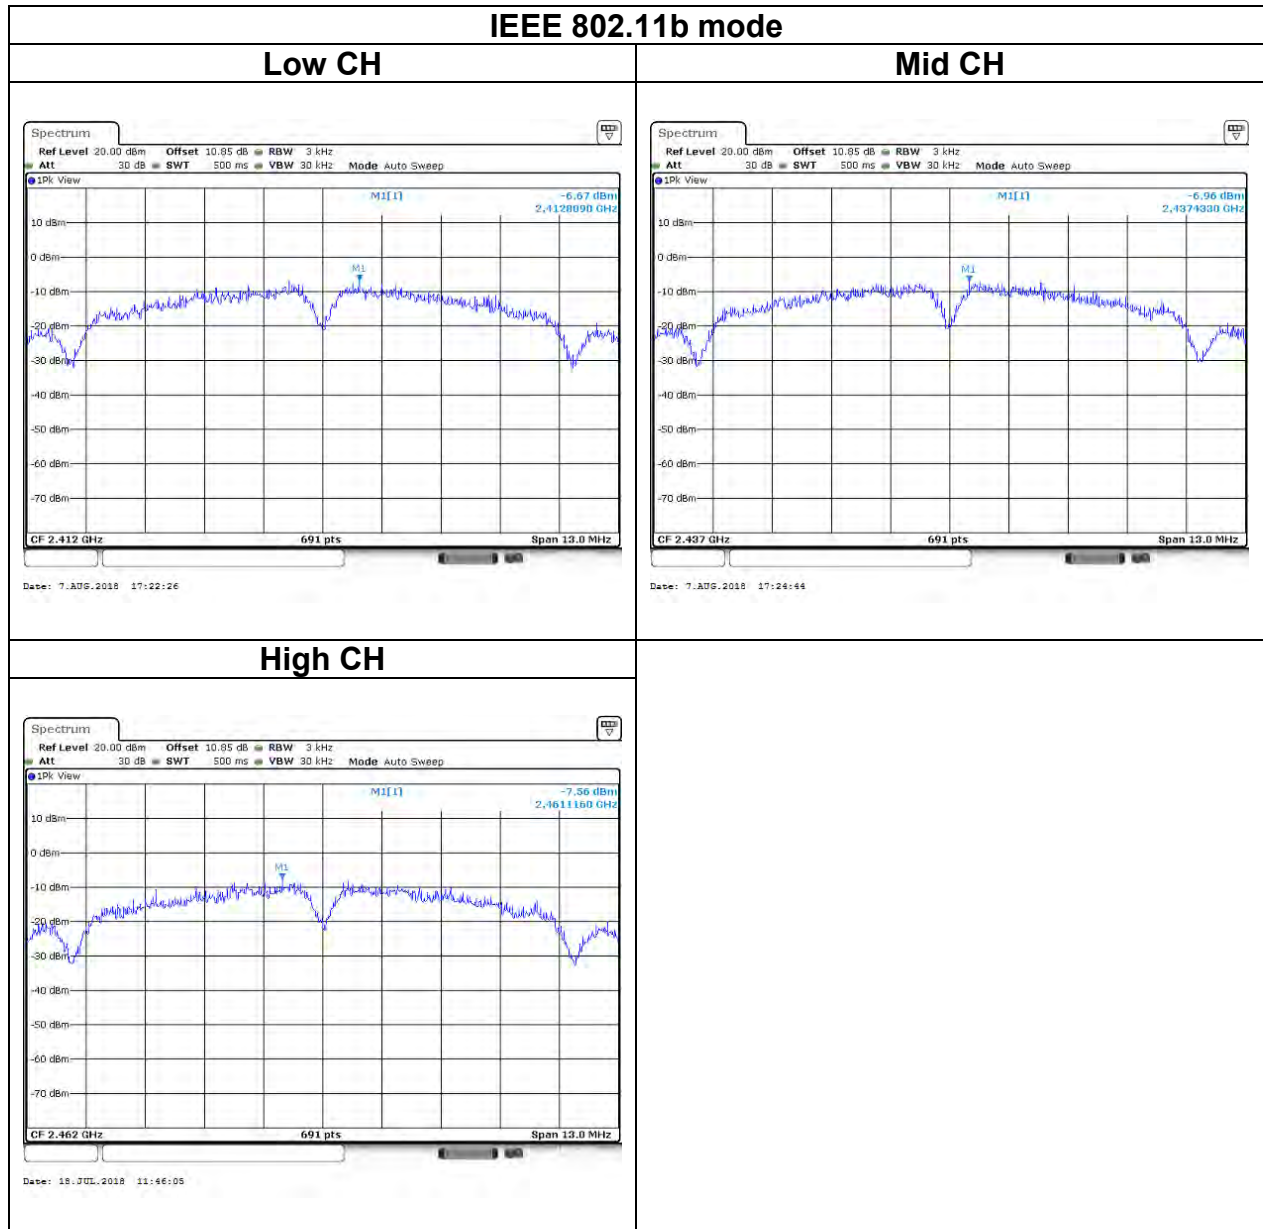

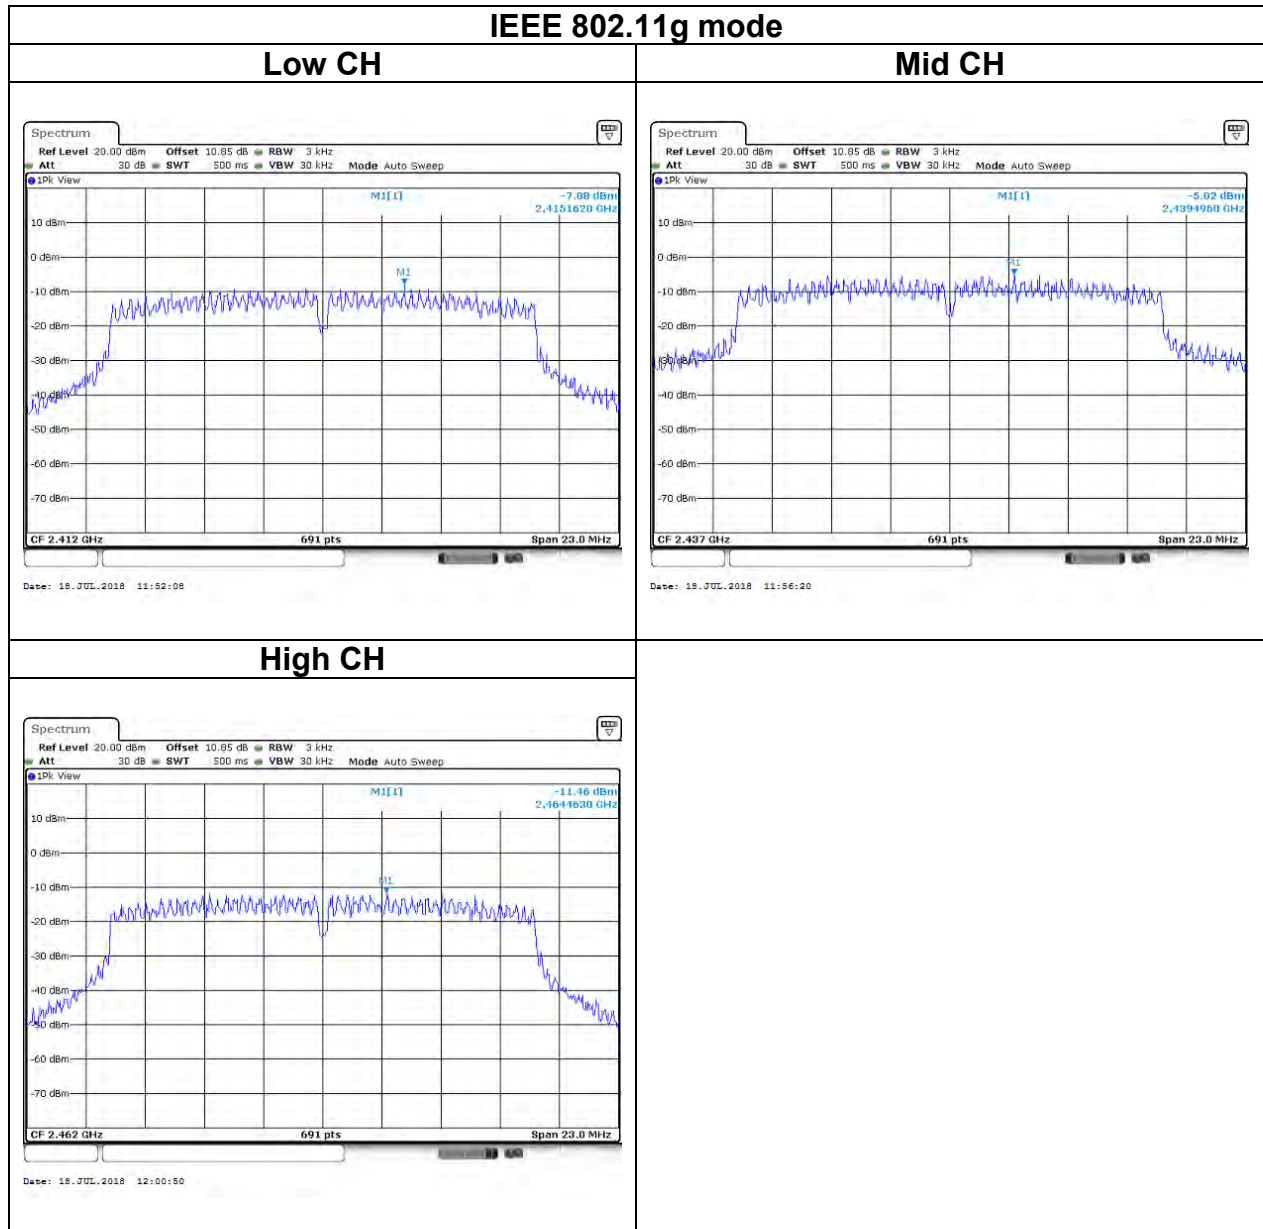

Report No.: T180627D11-RP3

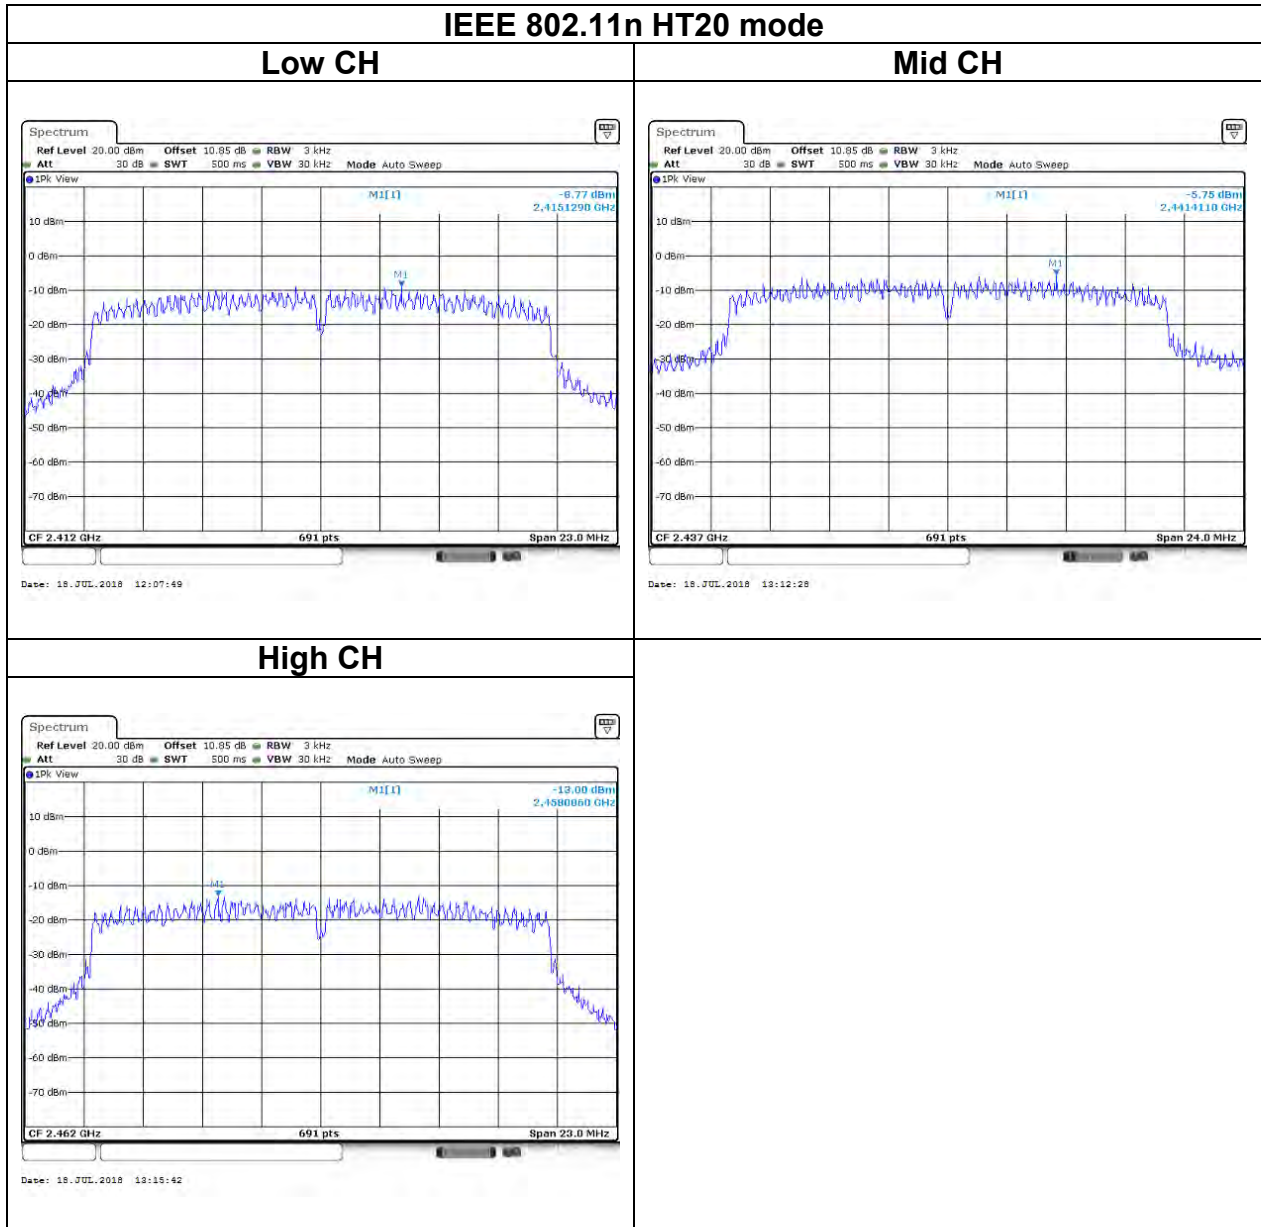

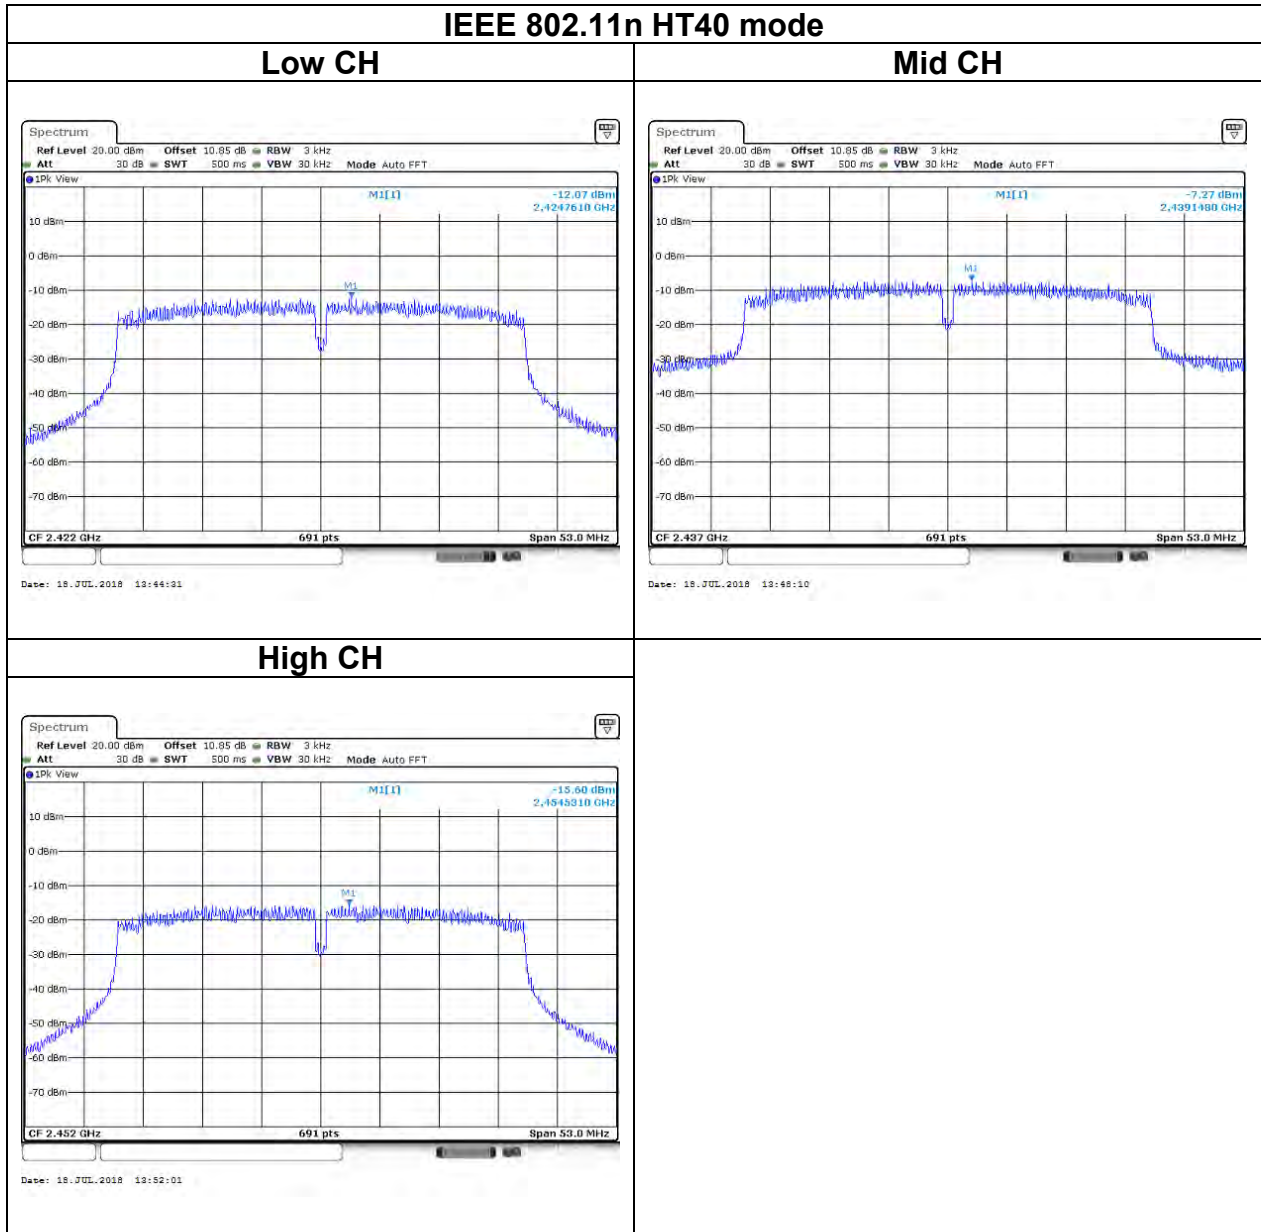

5.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

5.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

5.5.2 Test Procedure

Test method Refer as, KDB 558074 D01, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


5.5.3 Test Setup




Report No.: T180627D11-RP3

5.5.4 Test Result


Test Data

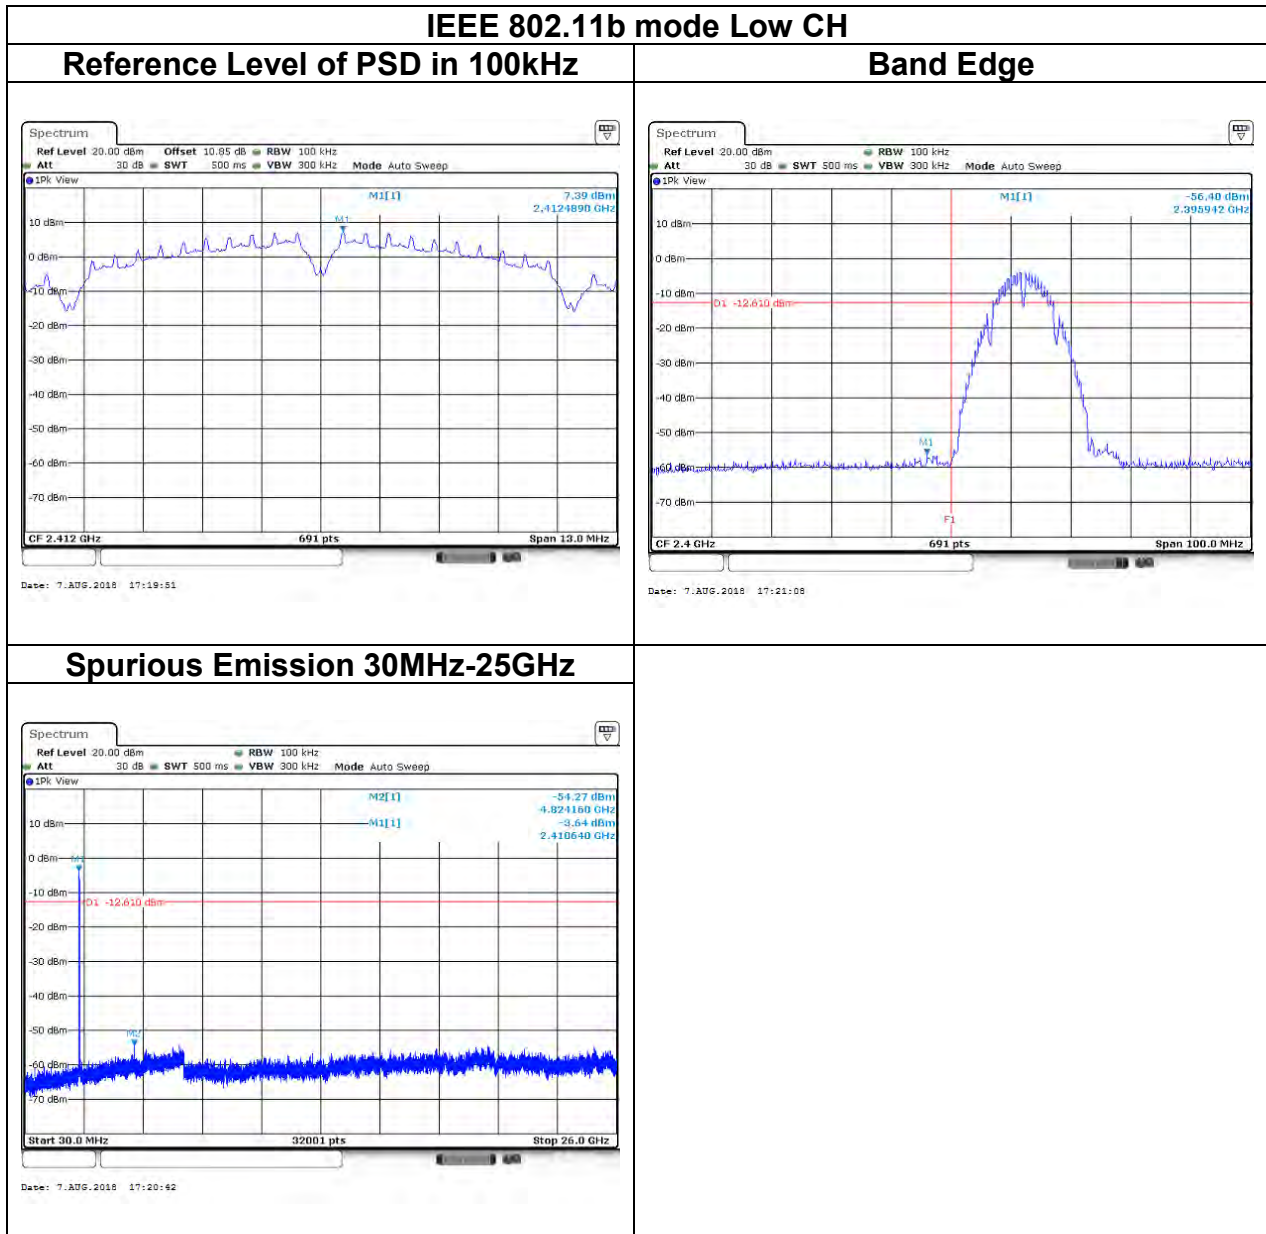

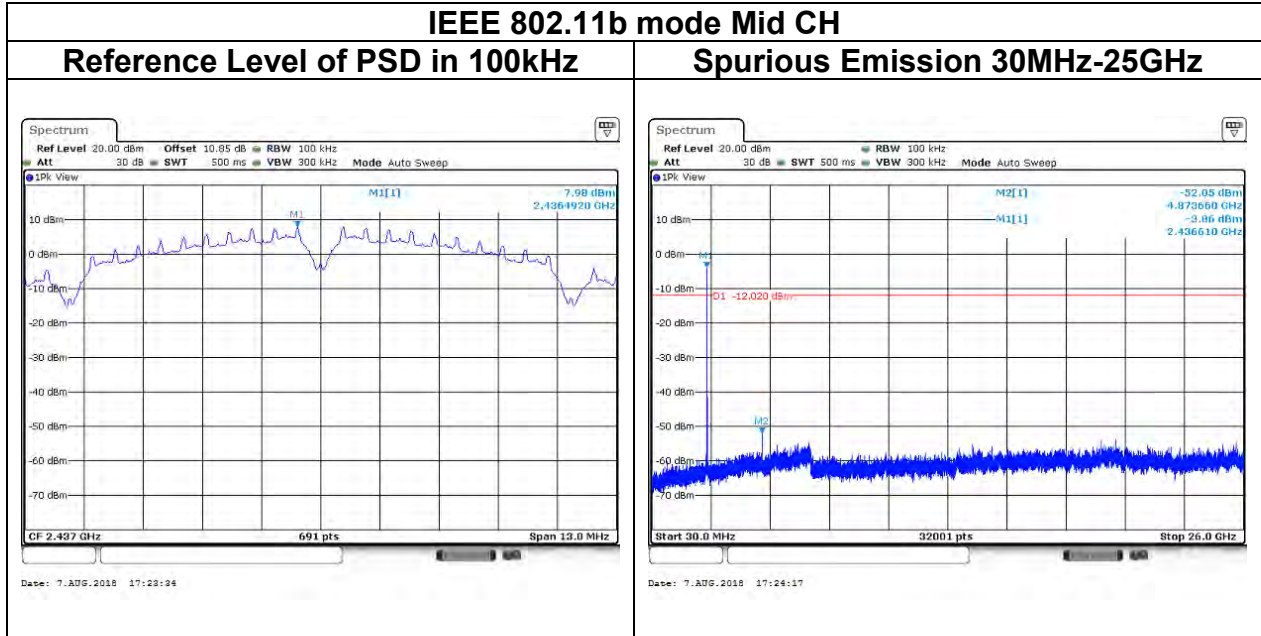


IEEE 802.11b mode High CH


Reference Level of PSD in 100kHz

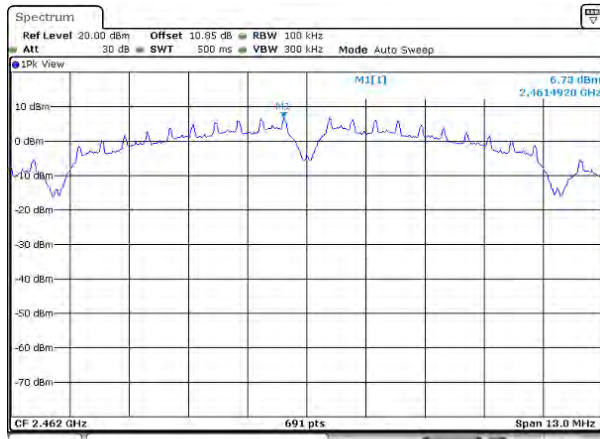

Band Edge

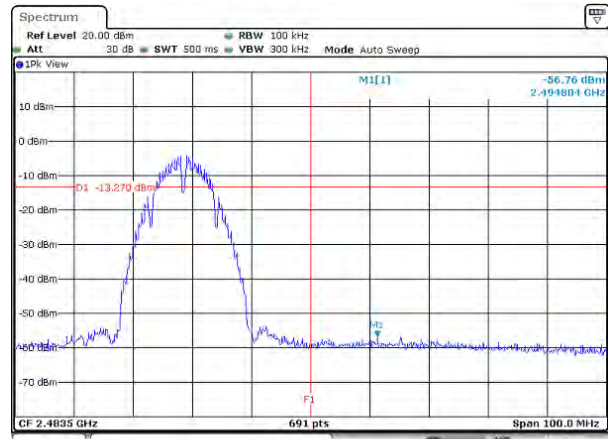


Spurious Emission 30MHz-25GHz

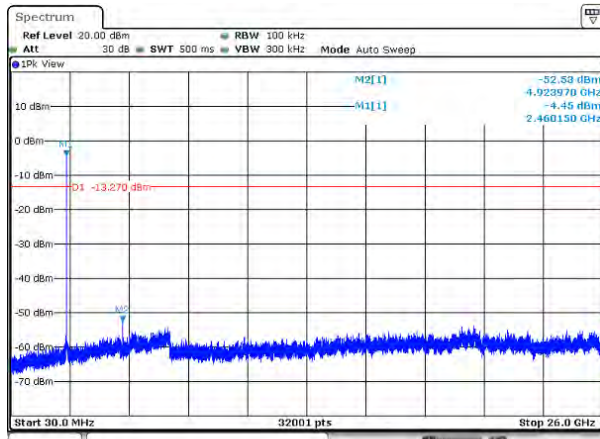


IEEE 802.11g mode Low CH

Reference Level of PSD in 100kHz

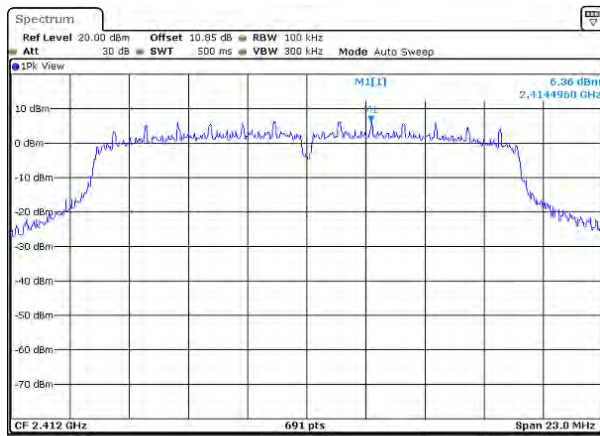


Date: 18 JUL 2018 11:50:50

Band Edge

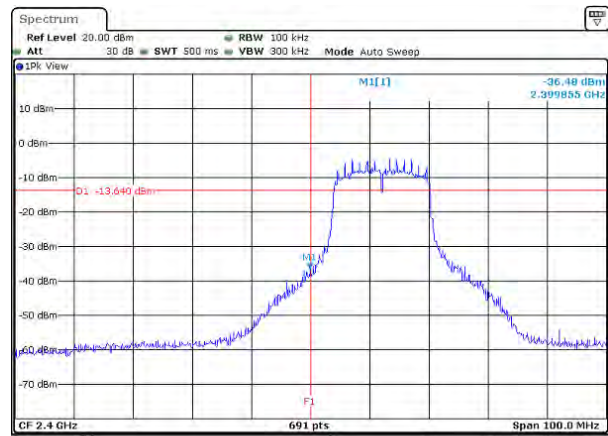


Date: 18 JUL 2018 11:52:40

Spurious Emission 30MHz-25GHz

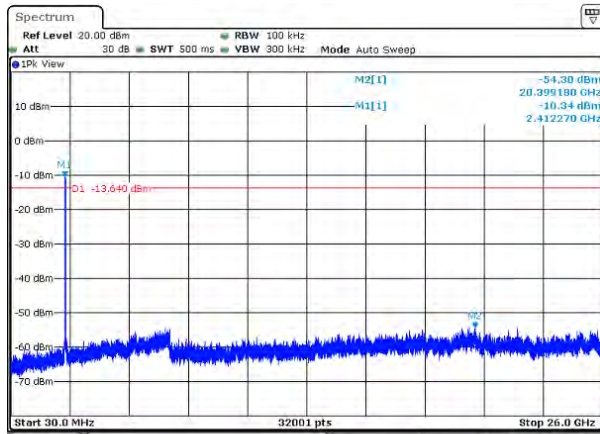


Date: 7 JUL 2018 17:28:45

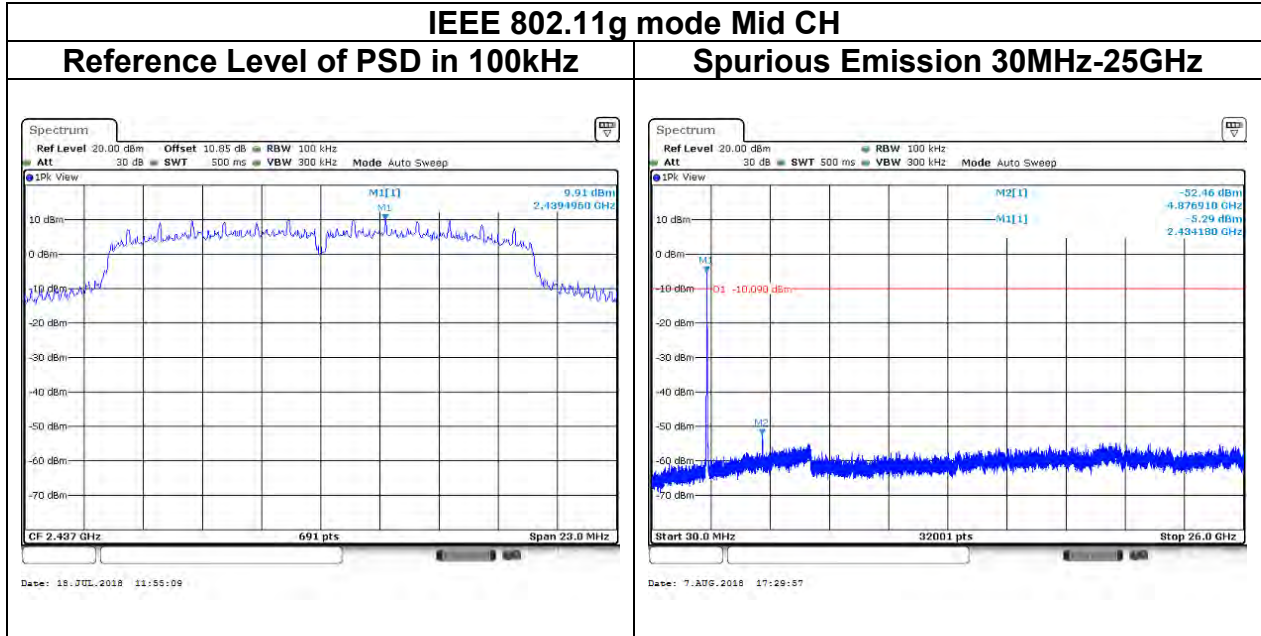


IEEE 802.11g mode High CH


Reference Level of PSD in 100kHz

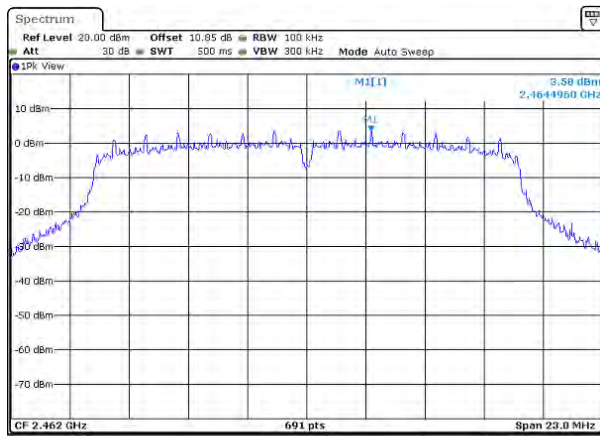



Band Edge

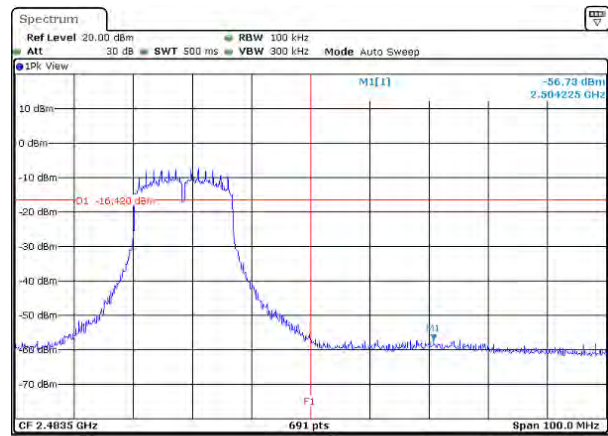

Spurious Emission 30MHz-25GHz

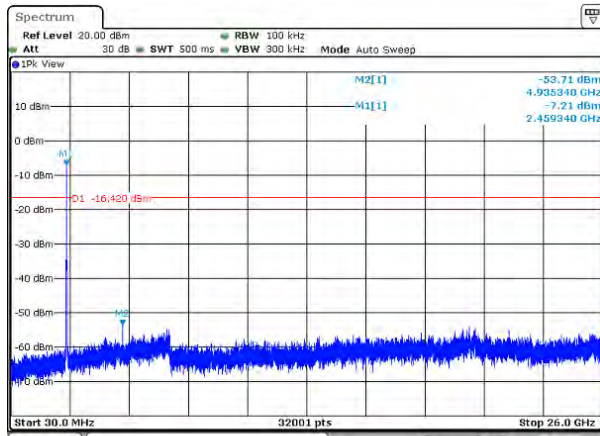


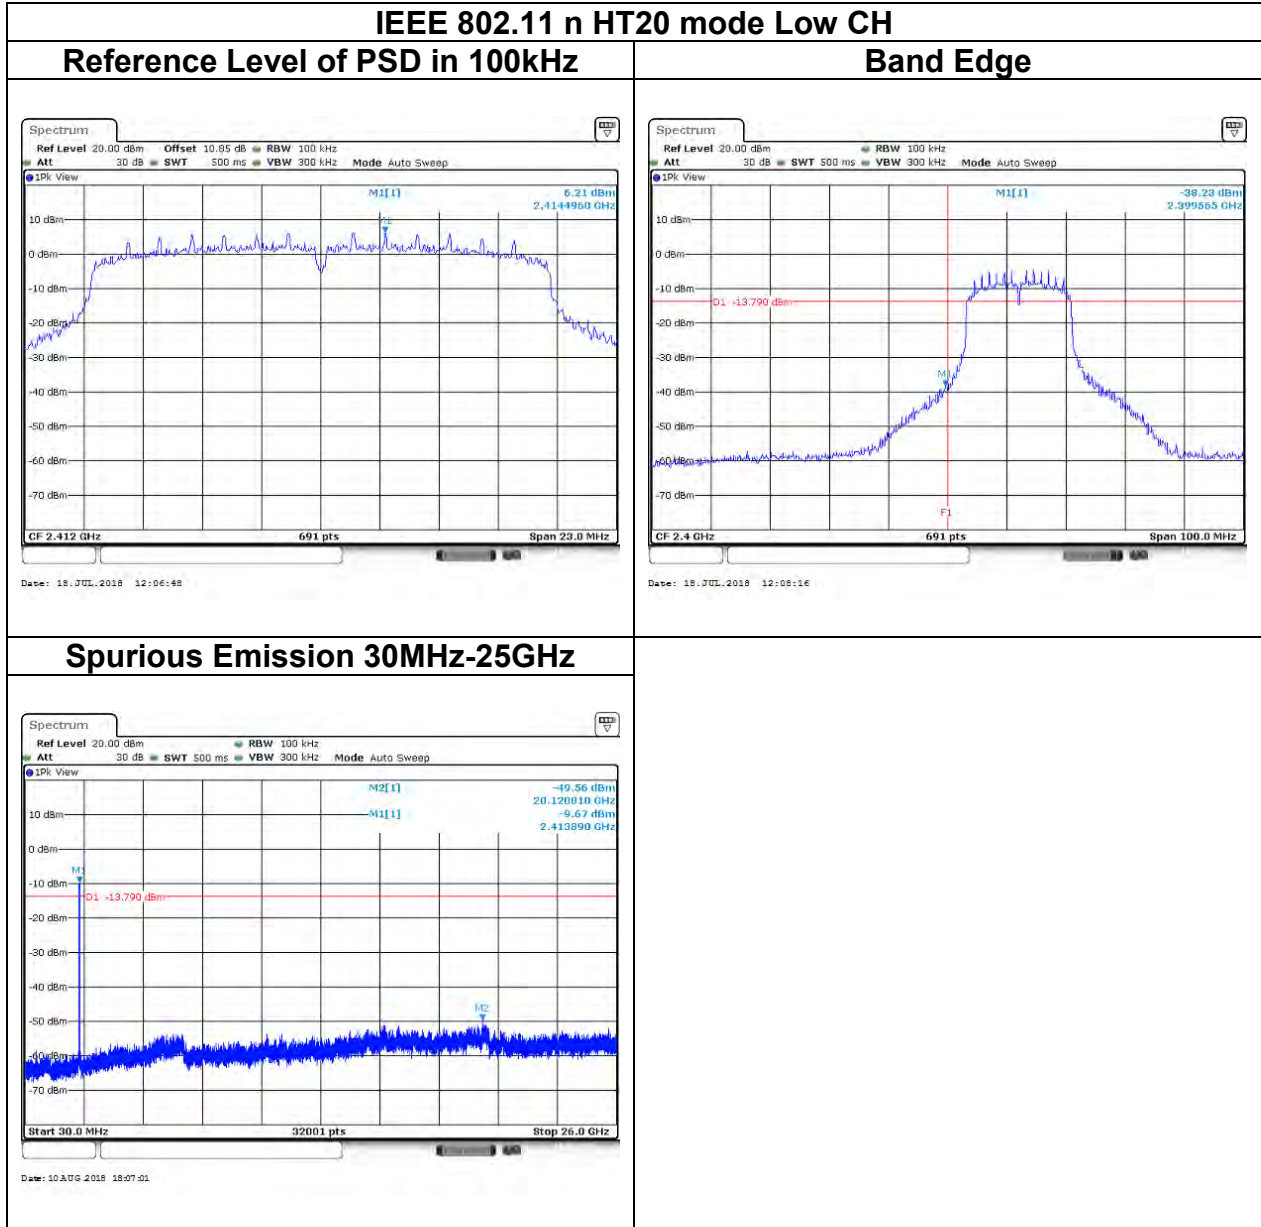

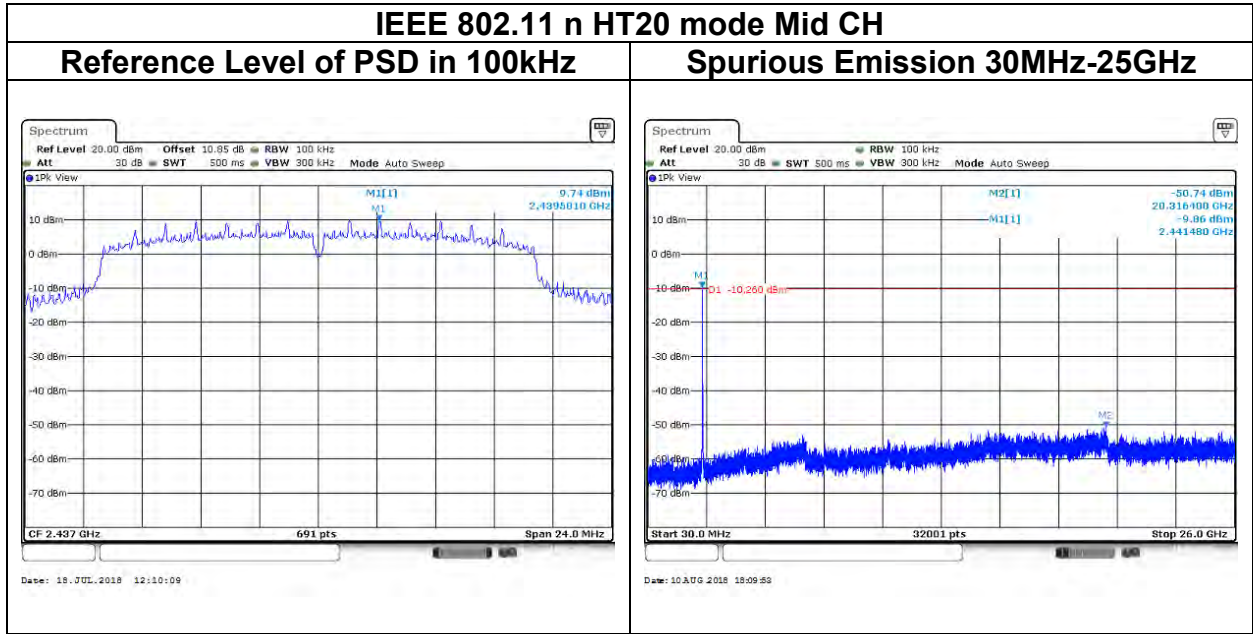


IEEE 802.11n HT20 mode High CH


Reference Level of PSD in 100kHz

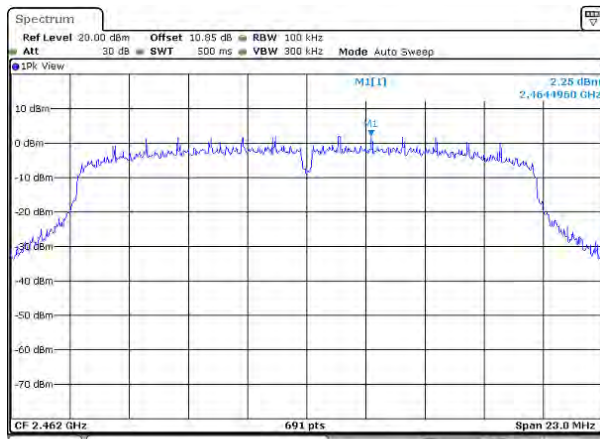


Band Edge

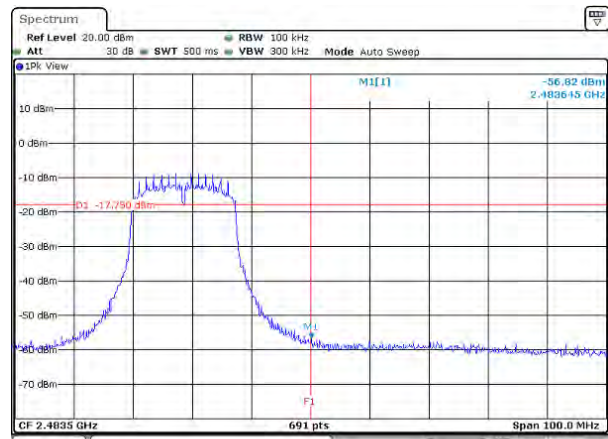


Spurious Emission 30MHz-25GHz

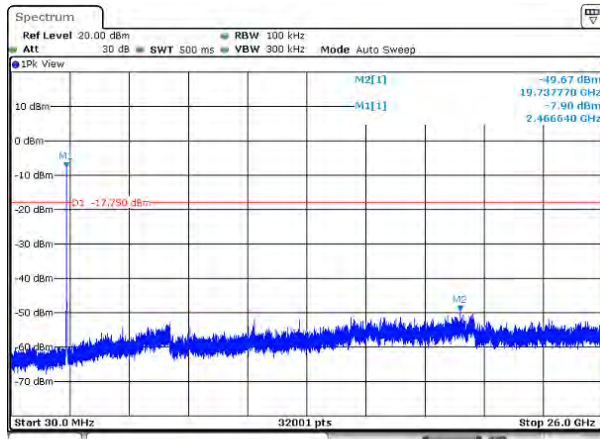


Report No.: T180627D11-RP3

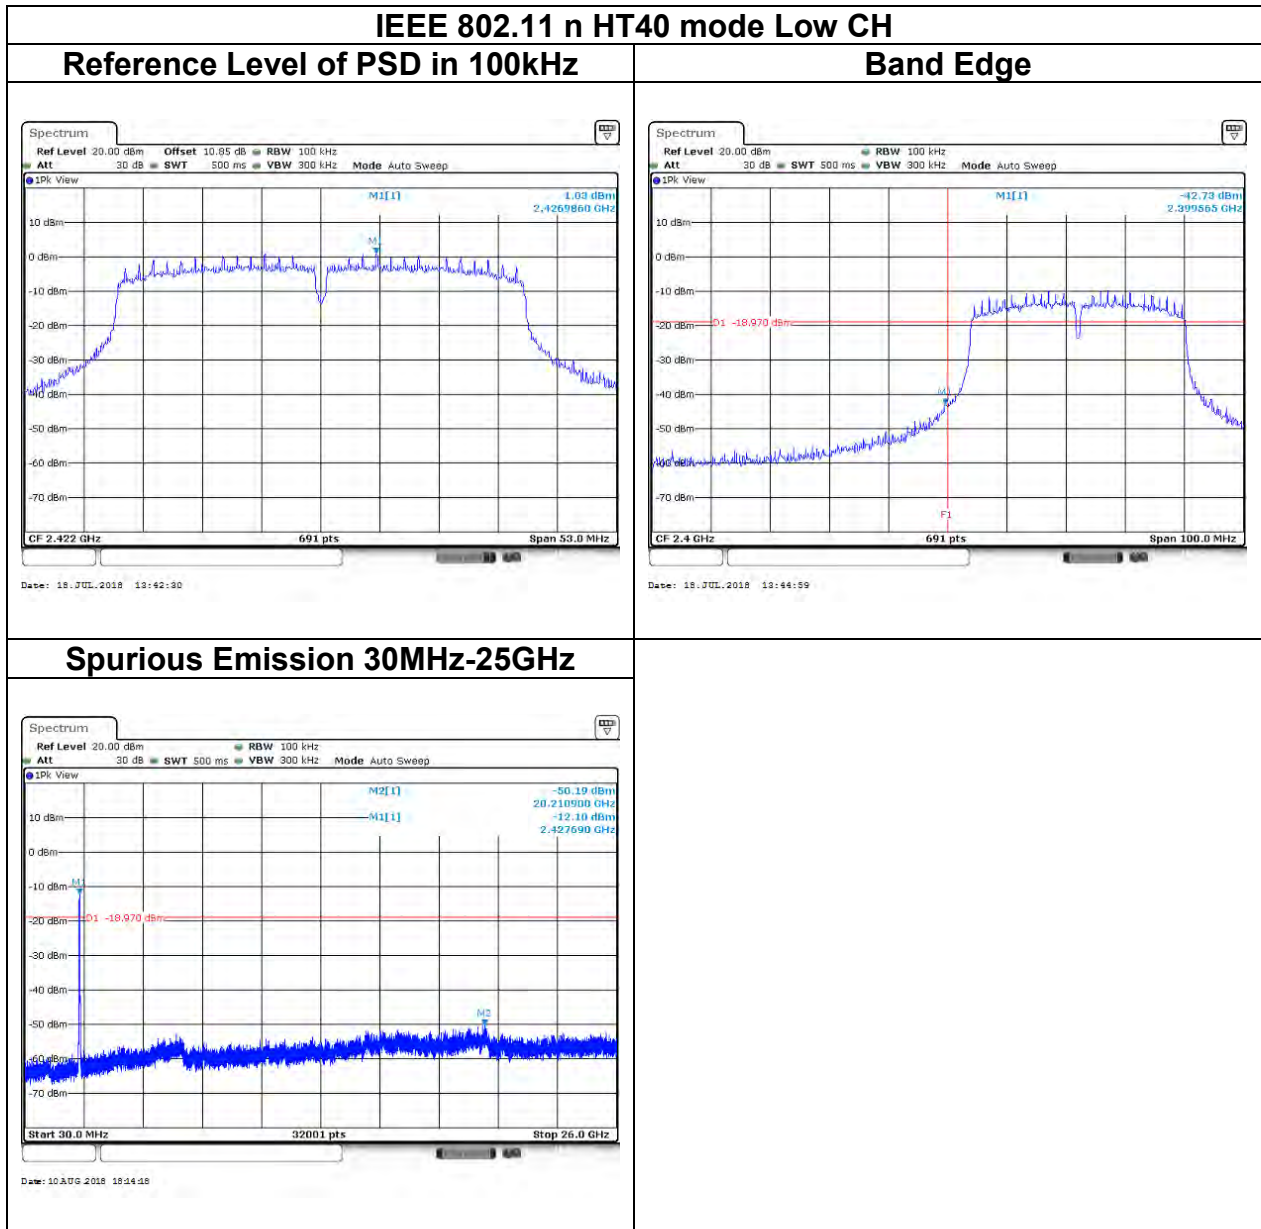

Report No.: T180627D11-RP3

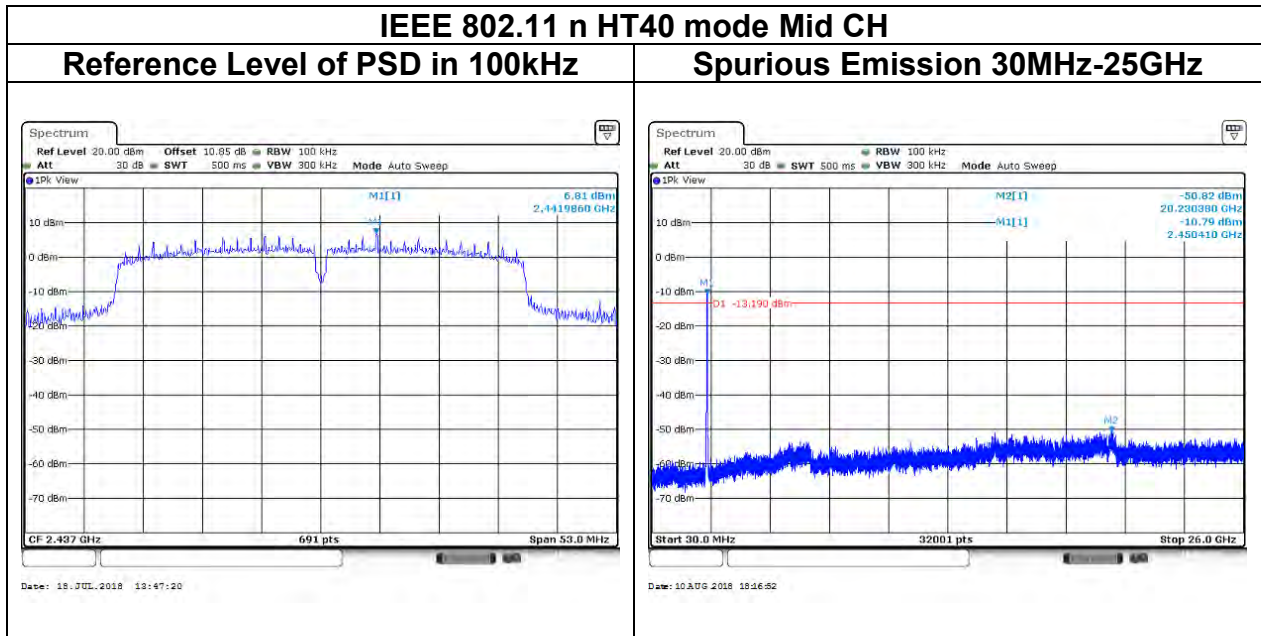

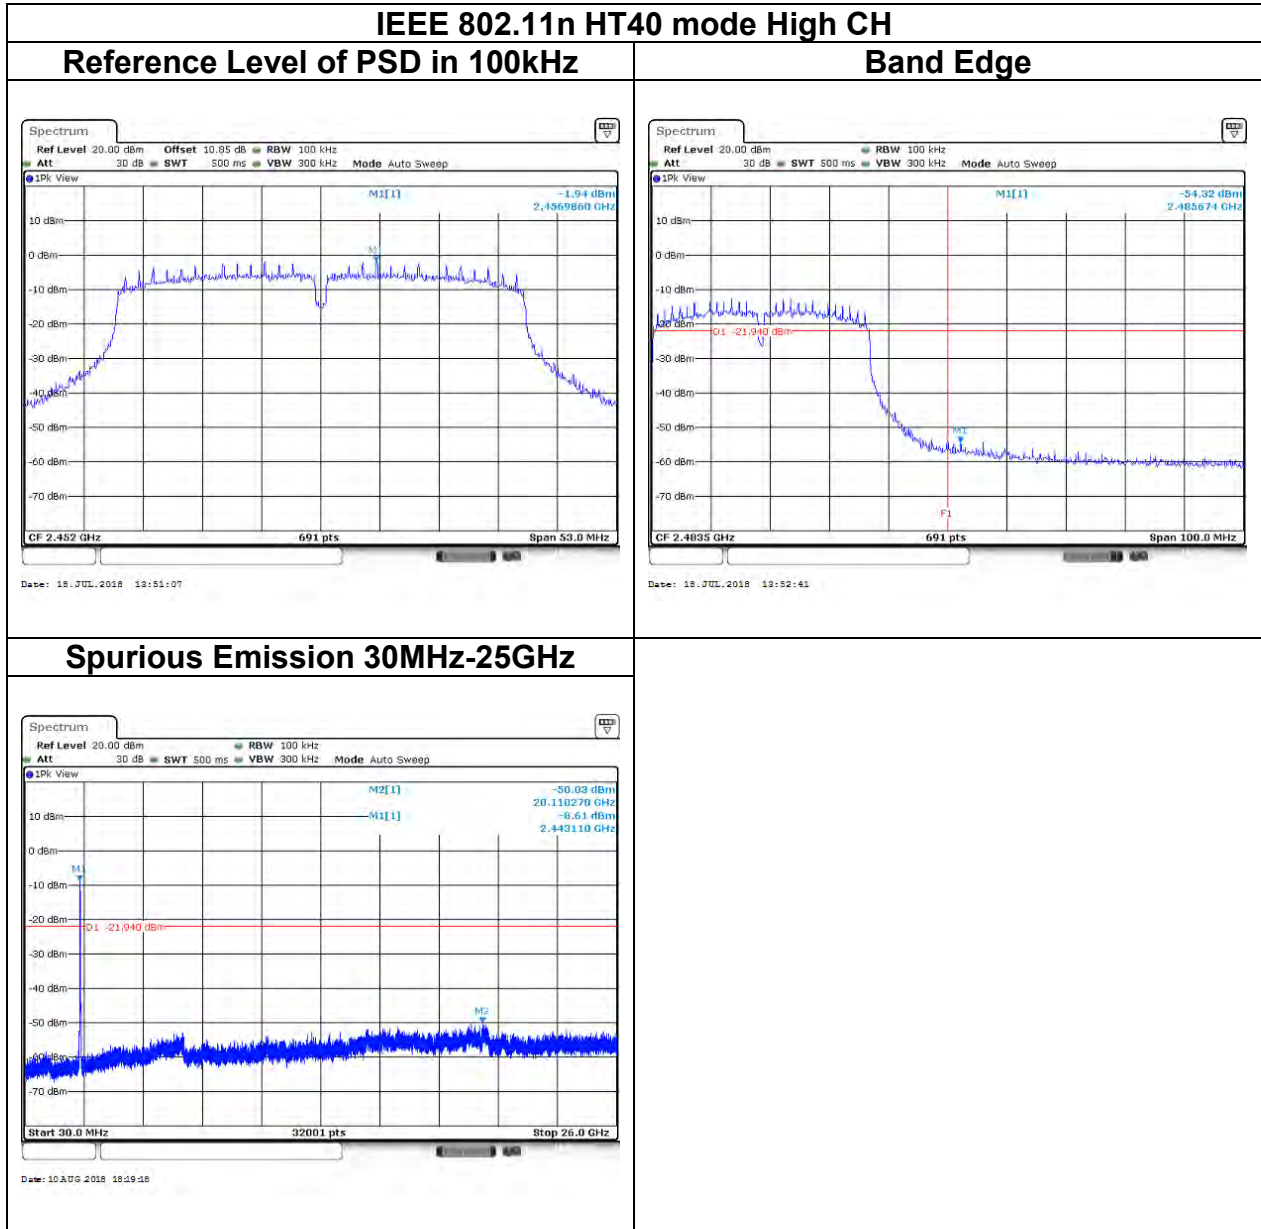

5.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

5.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Report No.: T180627D11-RP3

5.6.2 Test Procedure

Test method Refer as, KDB 558074, Section 12.1.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. Note: No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)


4. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - If Duty Cycle \geq 98%, VBW=10Hz.
 - If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
802.11b	99.31%	8.6600	-	10Hz
802.11g	96.03%	1.4500	0.690	750Hz
802.11n HT20	94.48%	1.3700	0.730	750Hz
802.11n HT40	90.79%	0.6900	1.449	1.5KHz

5.6.3 Test Setup


9kHz ~ 30MHz

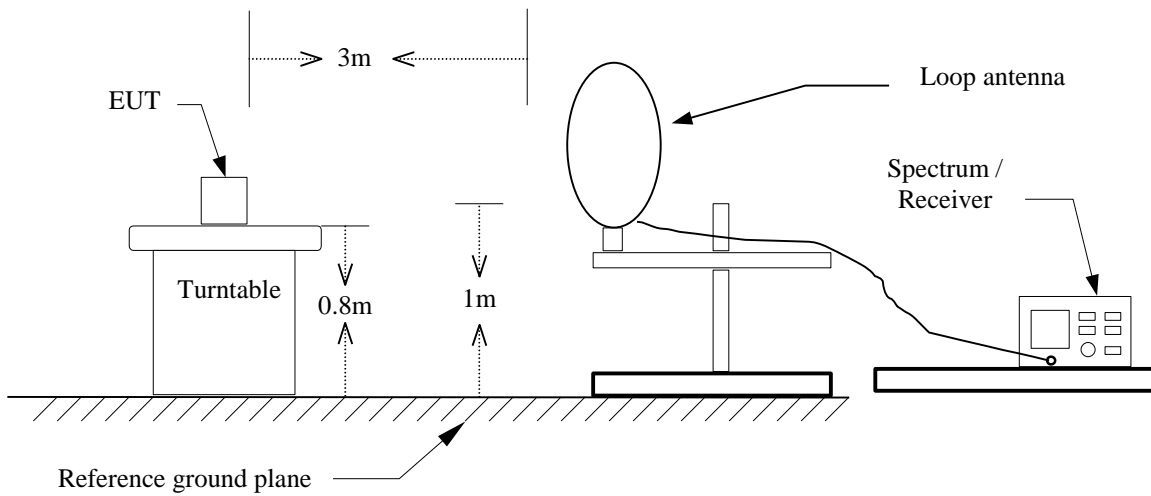

30MHz ~ 1GHz

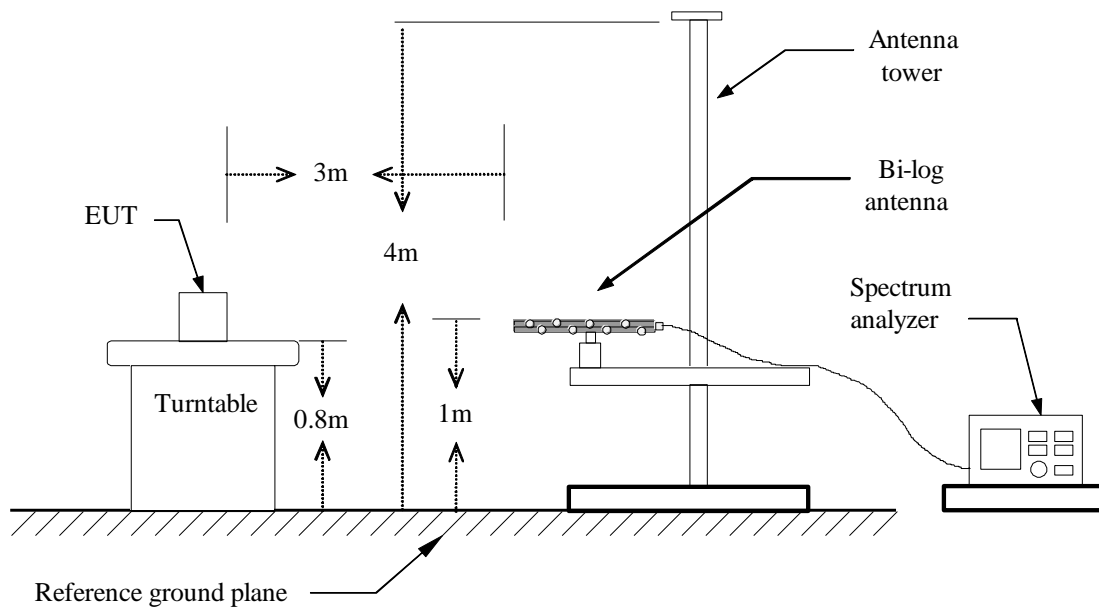

Above 1 GHz

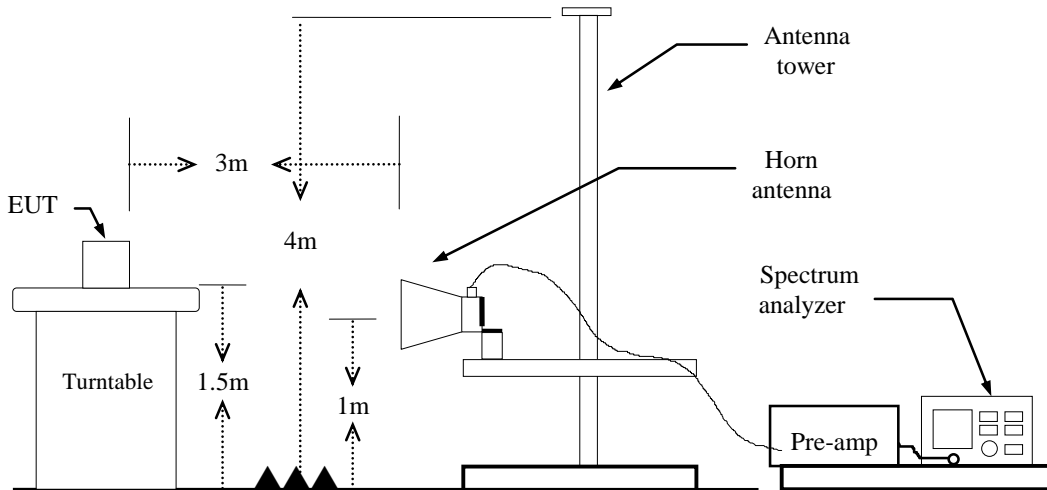


5.6.4 Test Result

Band Edge Test Data


For PIFA Antenna

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

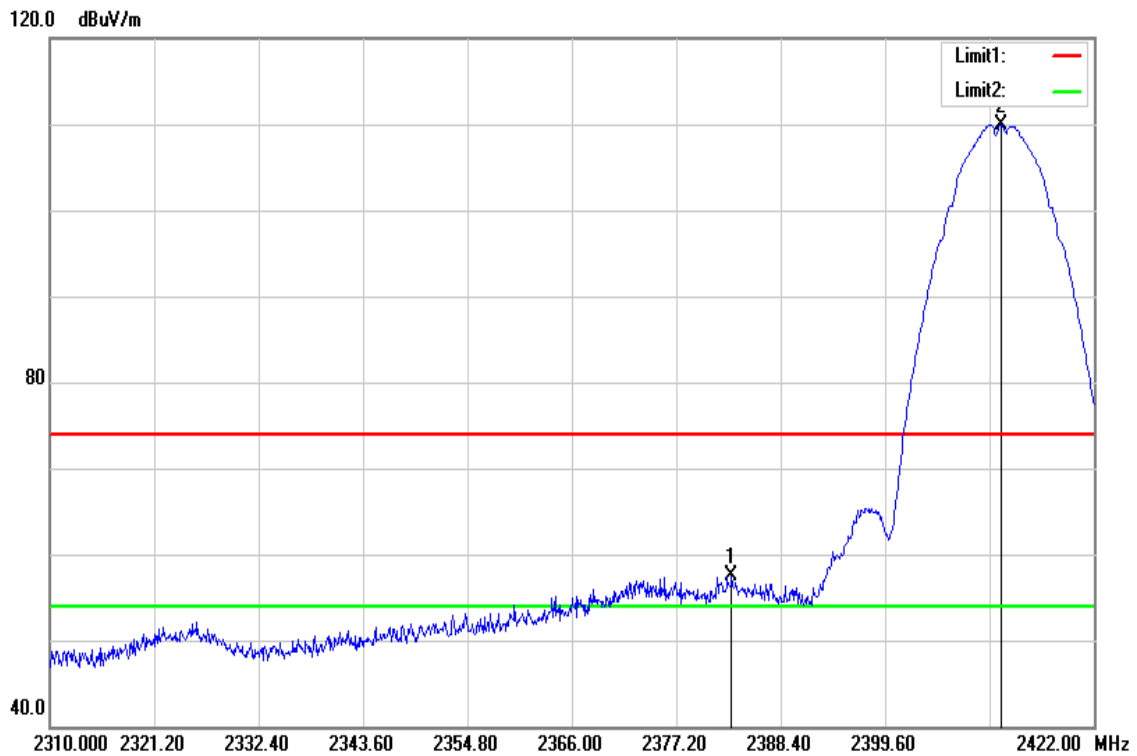


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2383.136	60.54	-3.00	57.54	74.00	-16.46	peak
2412.032	112.86	-2.92	109.94	-	-	peak

Test Mode	IEEE 802.11b Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

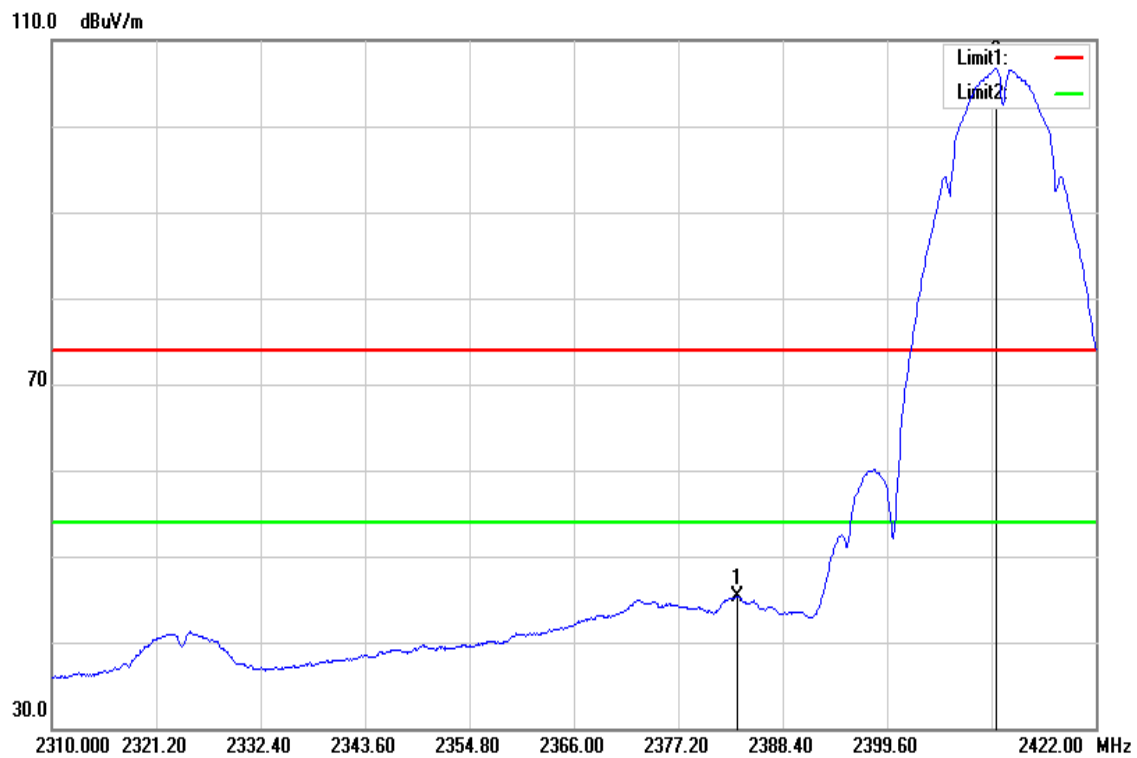


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2383.584	48.33	-3.00	45.33	54.00	-8.67	AVG
2411.248	109.72	-2.92	106.80	-	-	AVG

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

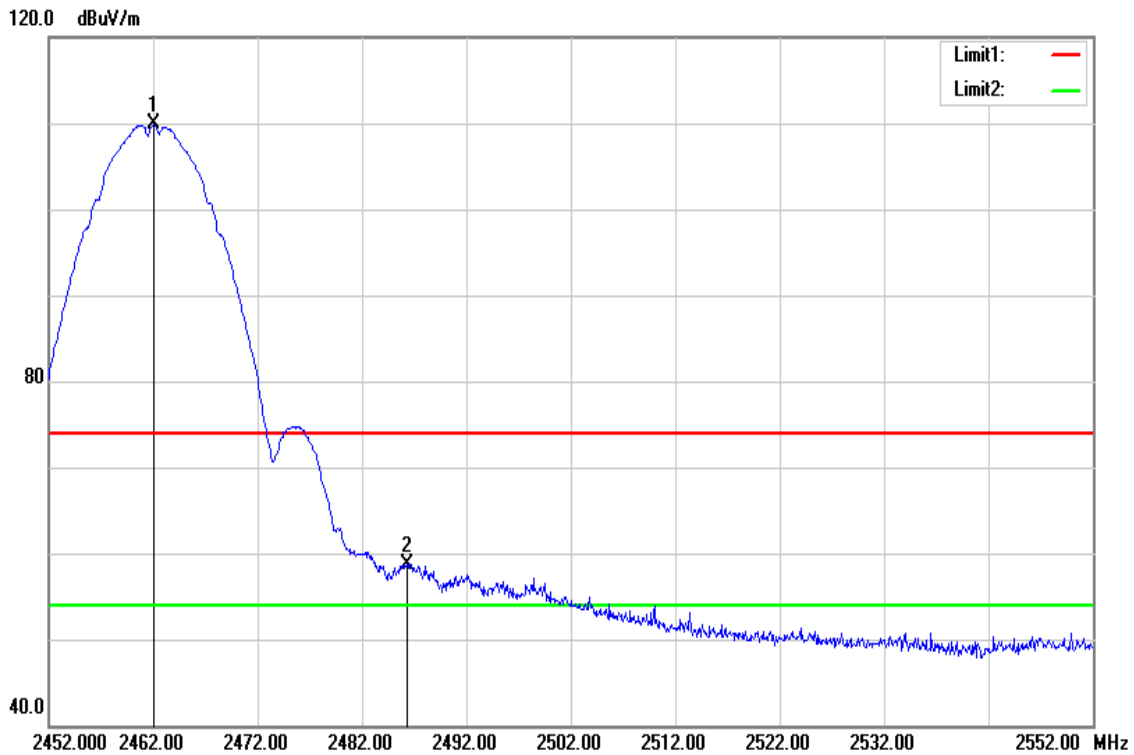


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2462.000	112.58	-2.76	109.82	-	-	peak
2486.300	61.46	-2.68	58.78	74.00	-15.22	peak

Test Mode	IEEE 802.11b High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

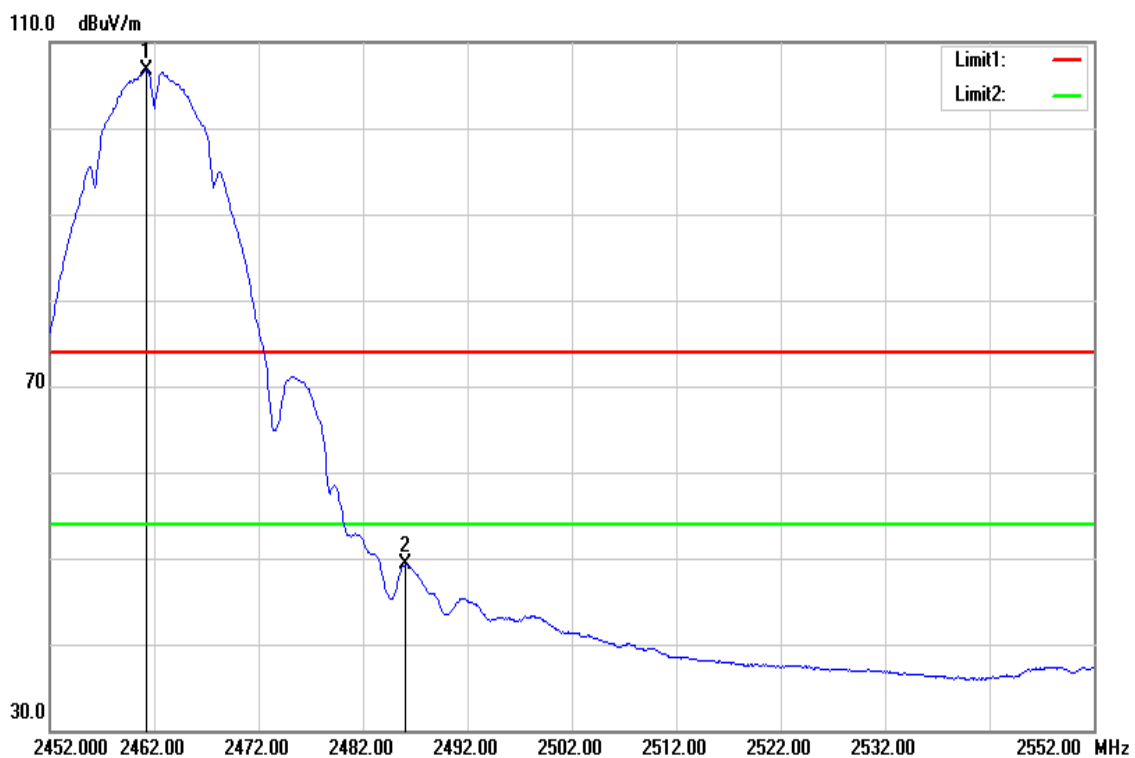


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.300	109.52	-2.76	106.76	-	-	AVG
2486.000	51.96	-2.69	49.27	54.00	-4.73	AVG

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

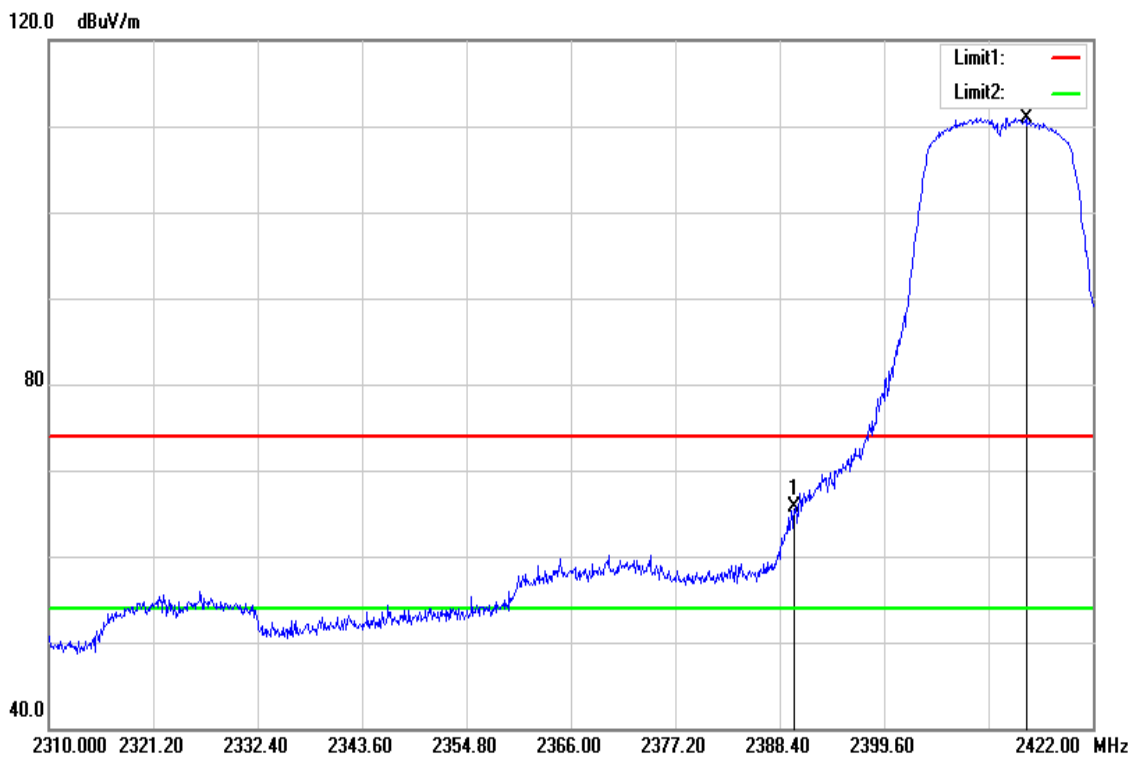


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	68.71	-2.98	65.73	74.00	-8.27	peak
2414.832	113.88	-2.90	110.98	-	-	peak

Test Mode	IEEE 802.11g Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

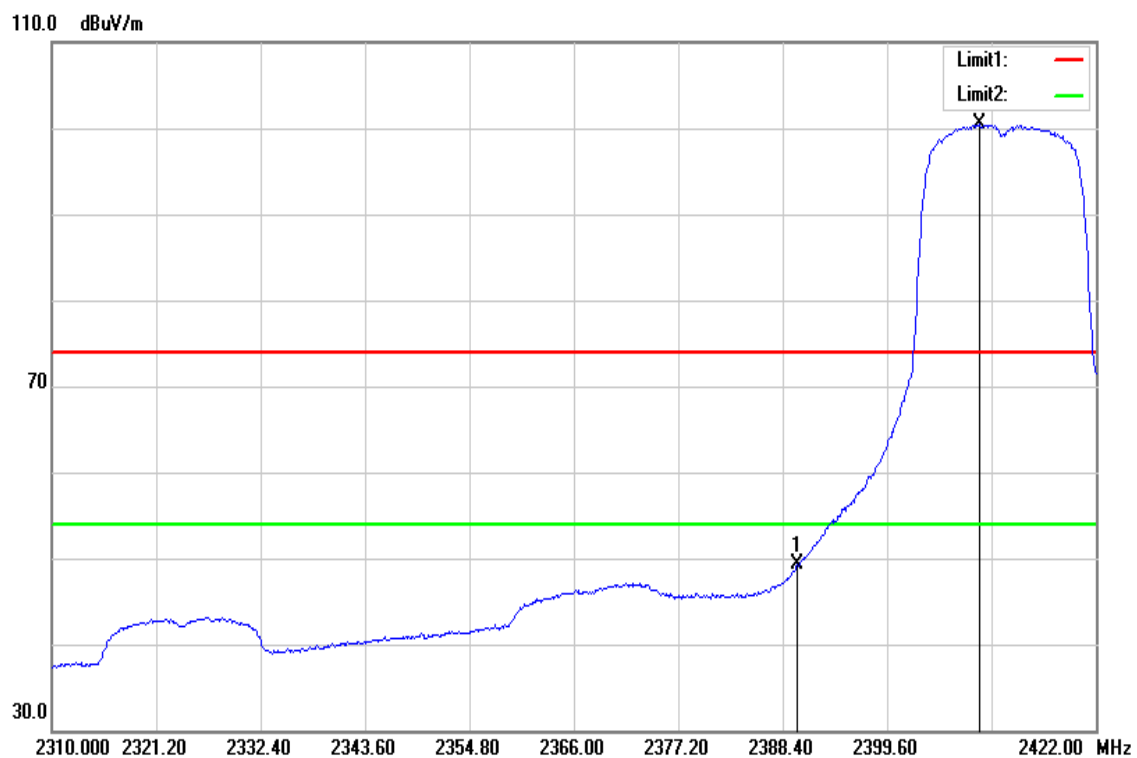


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	52.18	-2.98	49.20	54.00	-4.80	AVG
2409.456	103.38	-2.92	100.46	-	-	AVG

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

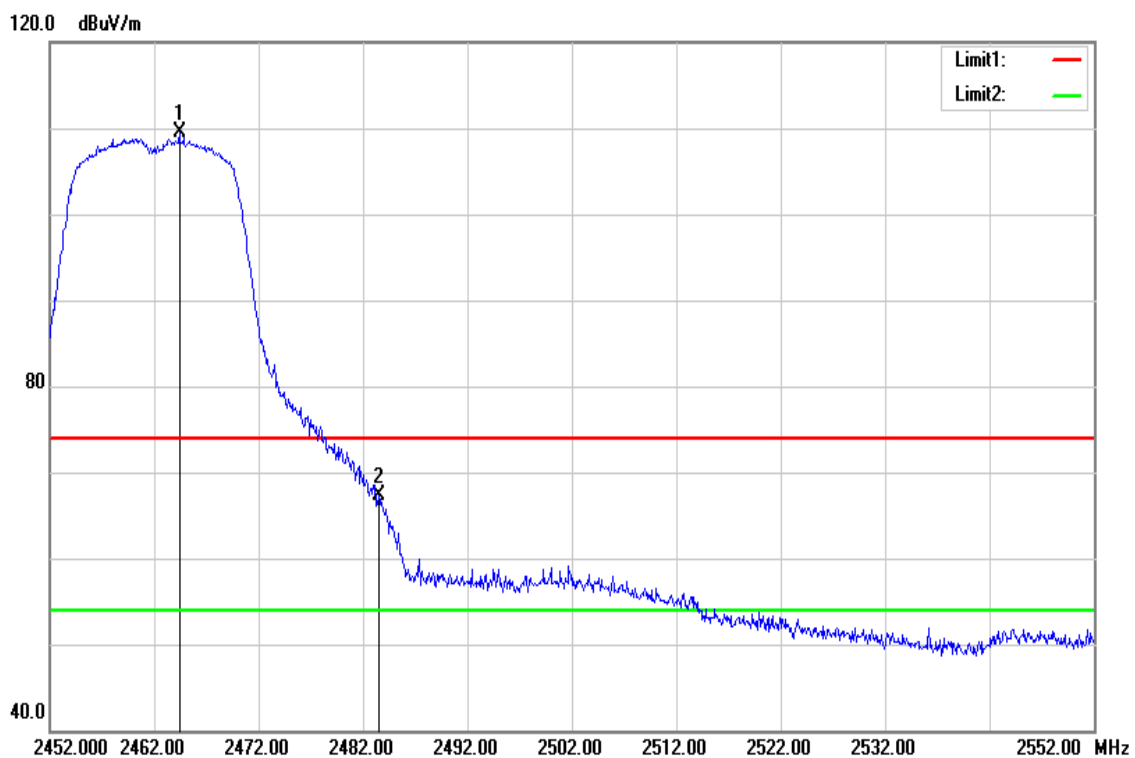


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2464.400	112.27	-2.75	109.52	-	-	peak
2483.500	69.96	-2.69	67.27	74.00	-6.73	peak

Test Mode	IEEE 802.11g High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

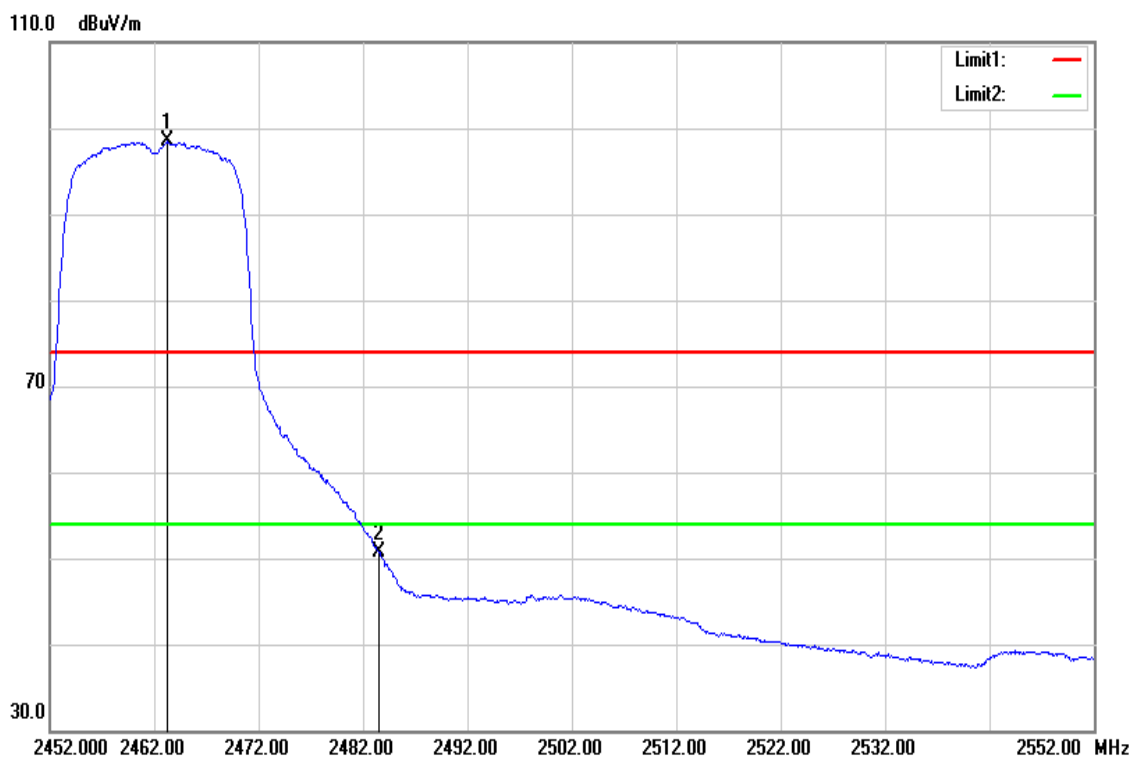


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2463.300	101.18	-2.75	98.43	-	-	AVG
2483.500	53.46	-2.69	50.77	54.00	-3.23	AVG

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

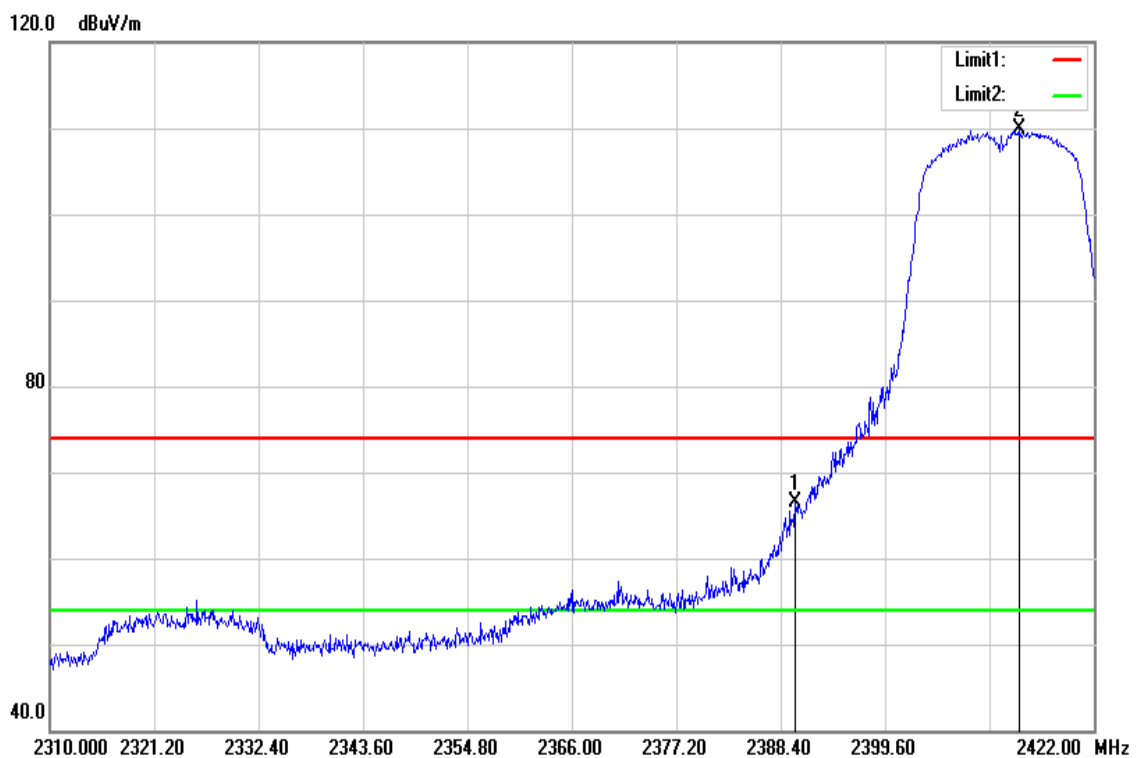


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2389.968	69.42	-2.98	66.44	74.00	-7.56	peak
2413.936	112.82	-2.90	109.92	-	-	peak

Test Mode	IEEE 802.11n HT20 Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

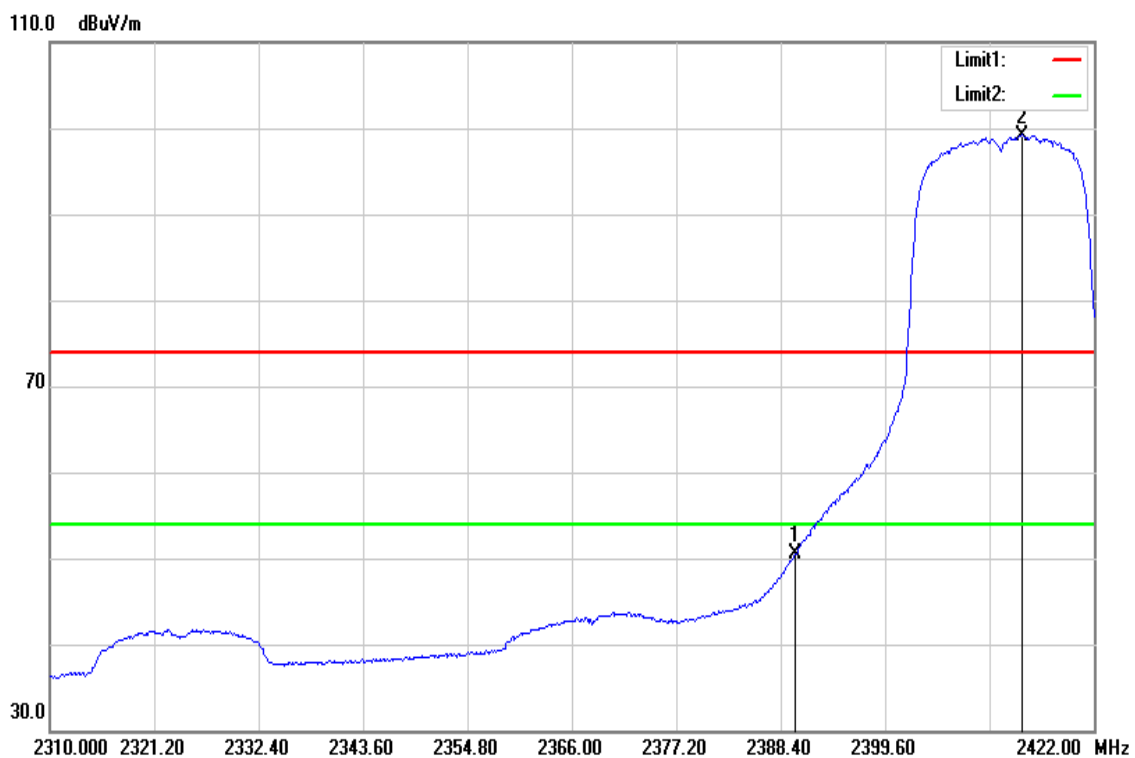


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	53.50	-2.98	50.52	54.00	-3.48	AVG
2414.272	102.10	-2.90	99.20	-	-	AVG

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

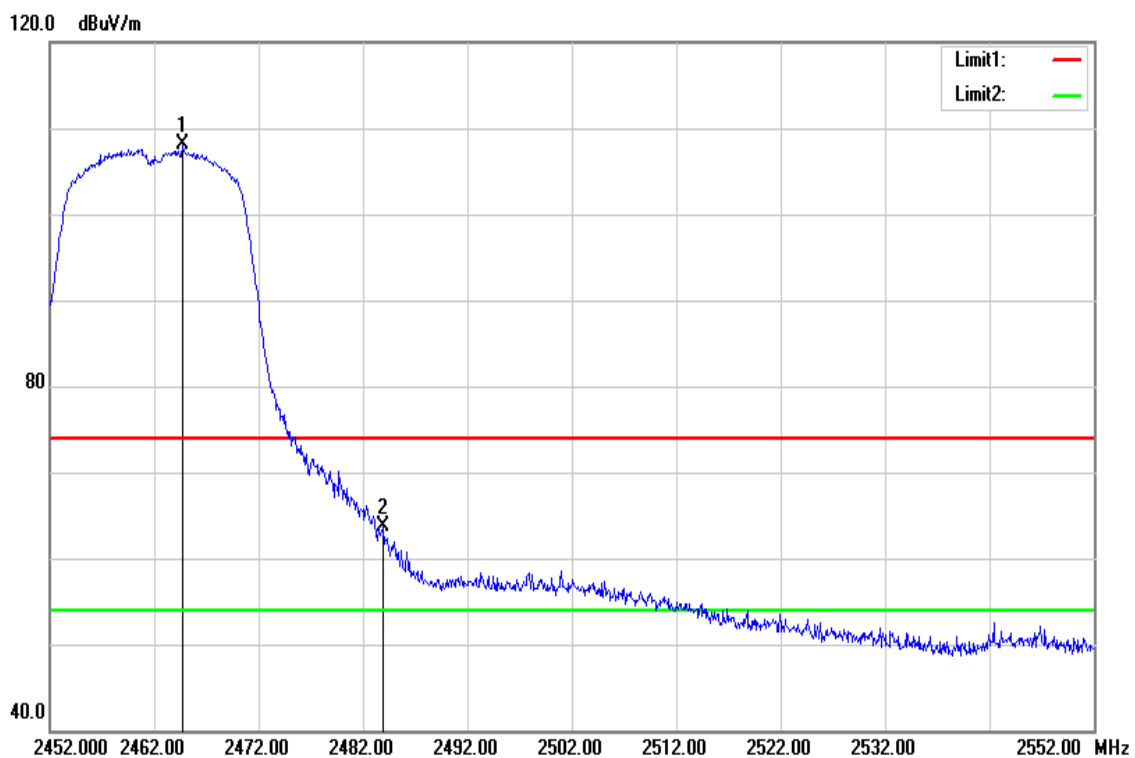


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2464.700	110.81	-2.75	108.06	-	-	peak
2483.900	66.43	-2.69	63.74	74.00	-10.26	peak

Test Mode	IEEE 802.11n HT20 High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

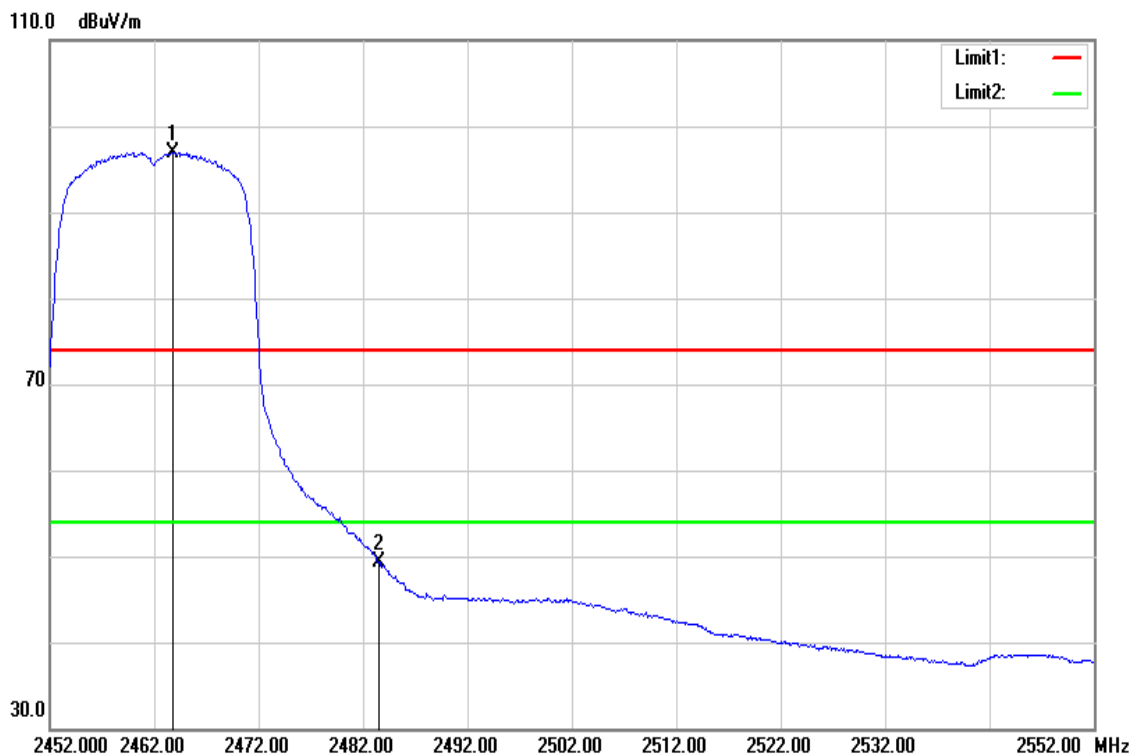


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2463.800	99.72	-2.75	96.97	-	-	AVG
2483.500	52.08	-2.69	49.39	54.00	-4.61	AVG

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

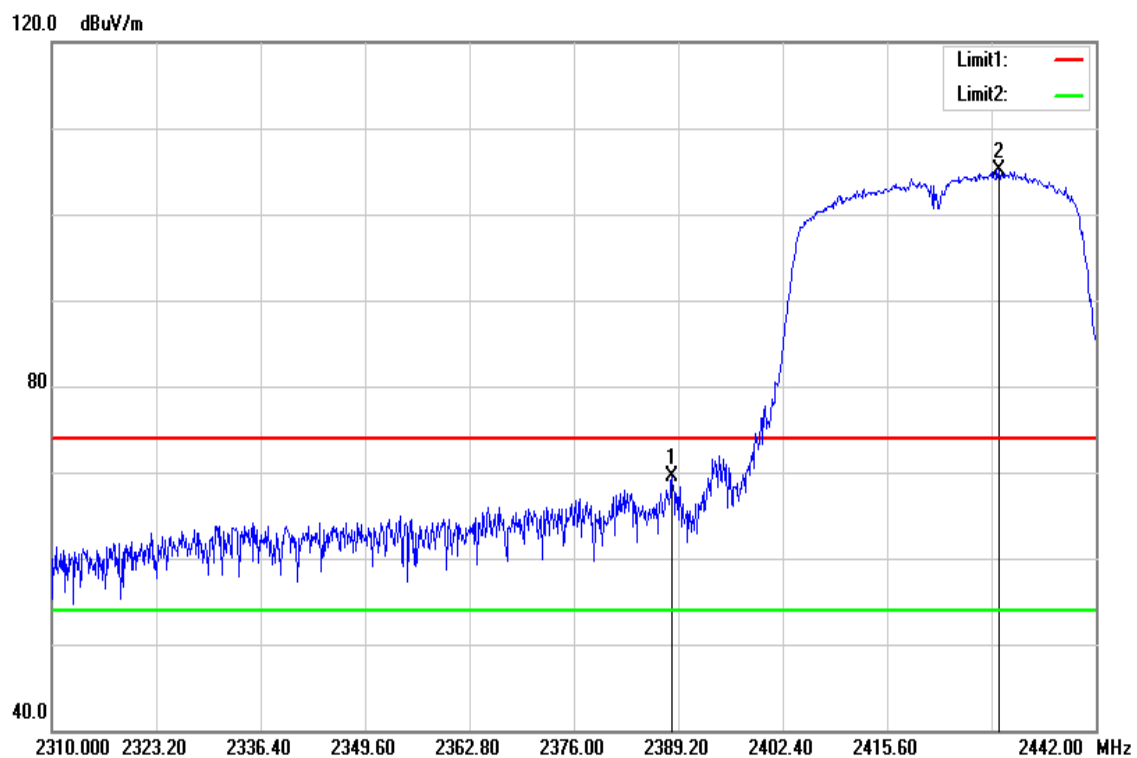


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2388.408	72.48	-2.98	69.50	74.00	-4.50	peak
2429.724	107.90	-2.86	105.04	-	-	peak

Test Mode	IEEE 802.11n HT40 Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

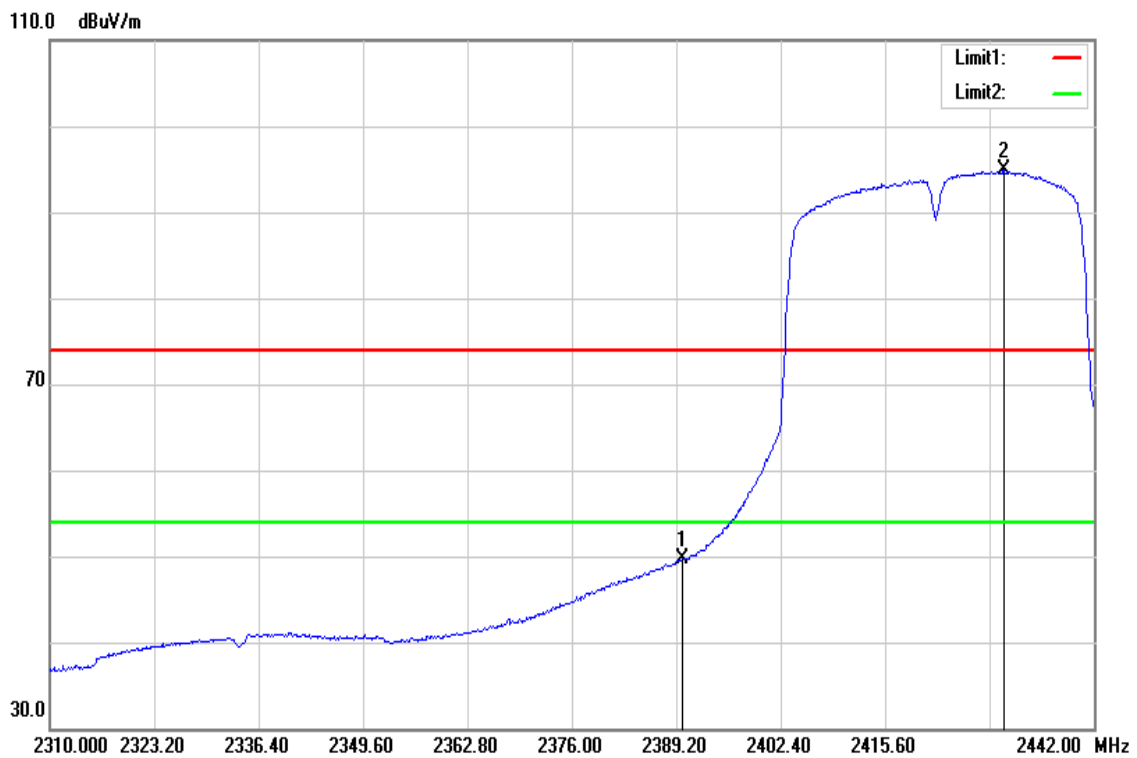


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	52.63	-2.98	49.65	54.00	-4.35	AVG
2430.648	97.73	-2.85	94.88	-	-	AVG

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

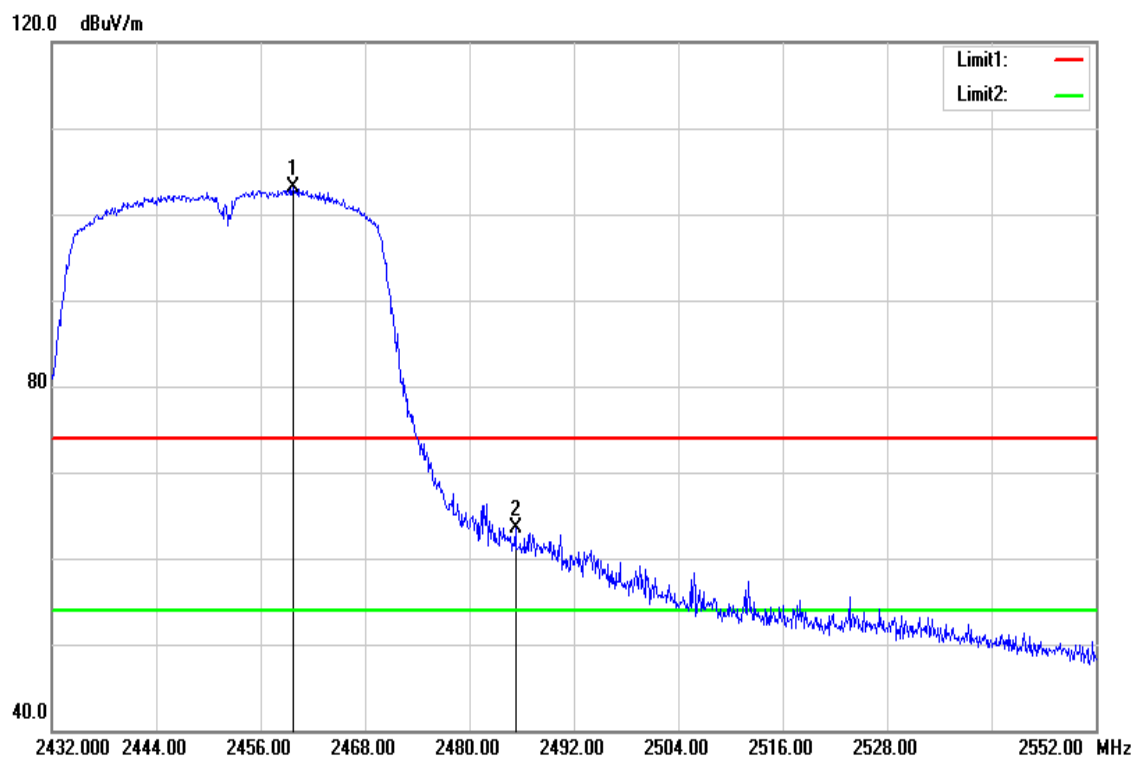

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2459.720	105.94	-2.76	103.18	-	-	peak
2485.280	66.12	-2.69	63.43	74.00	-10.57	peak


Test Mode	IEEE 802.11n HT40 High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 17, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

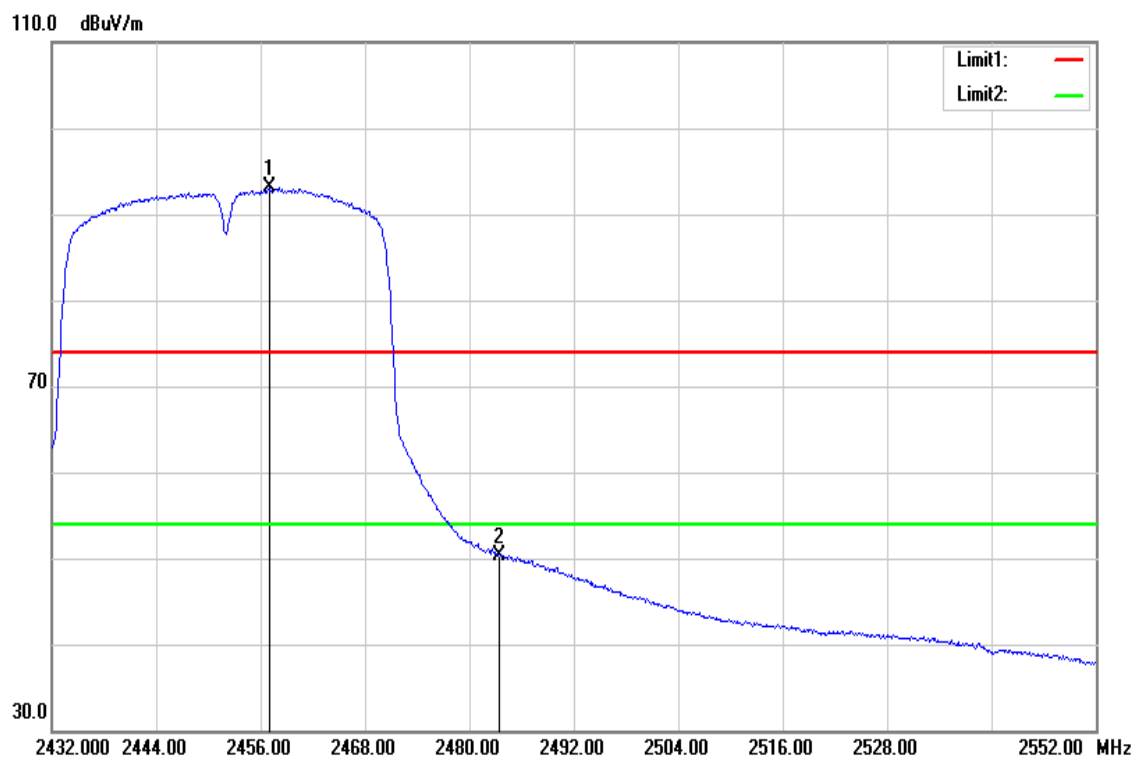

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2456.960	95.81	-2.78	93.03	-	-	AVG
2483.500	53.04	-2.69	50.35	54.00	-3.65	AVG


Band Edge Test Data
For Dipole Antenna

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

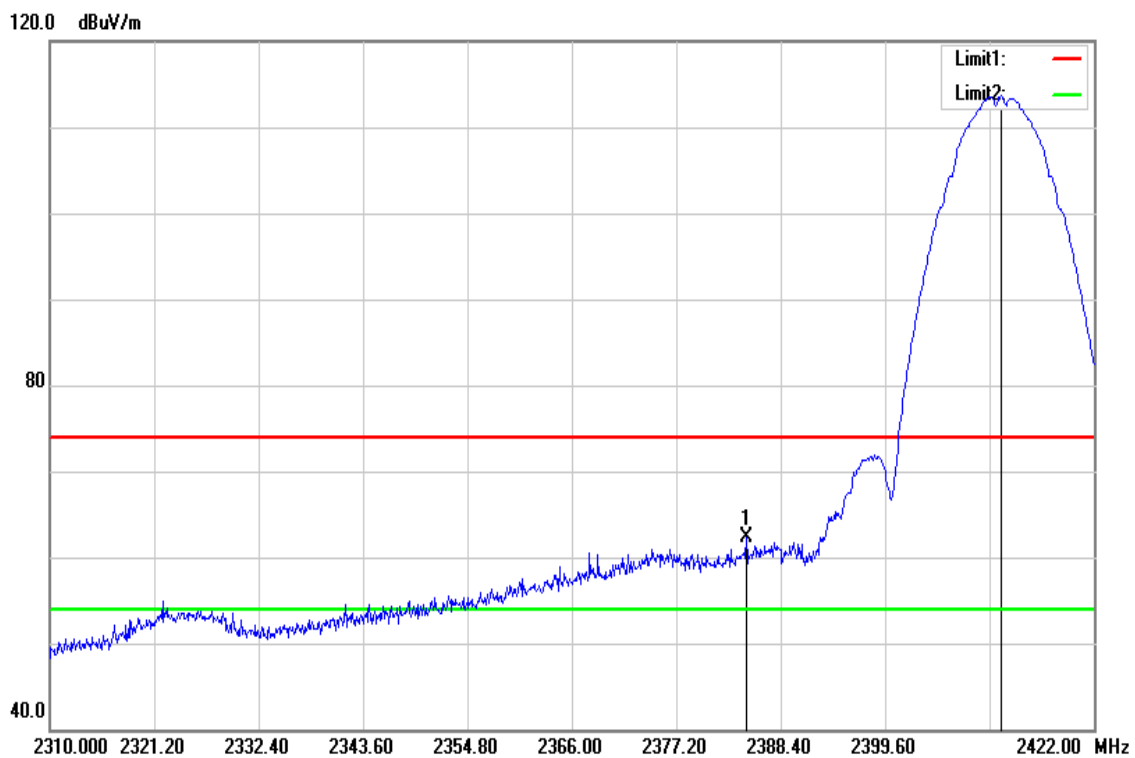


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2384.704	65.25	-2.99	62.26	74.00	-11.74	peak
2412.032	116.54	-2.92	113.62	-	-	peak

Test Mode	IEEE 802.11b Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

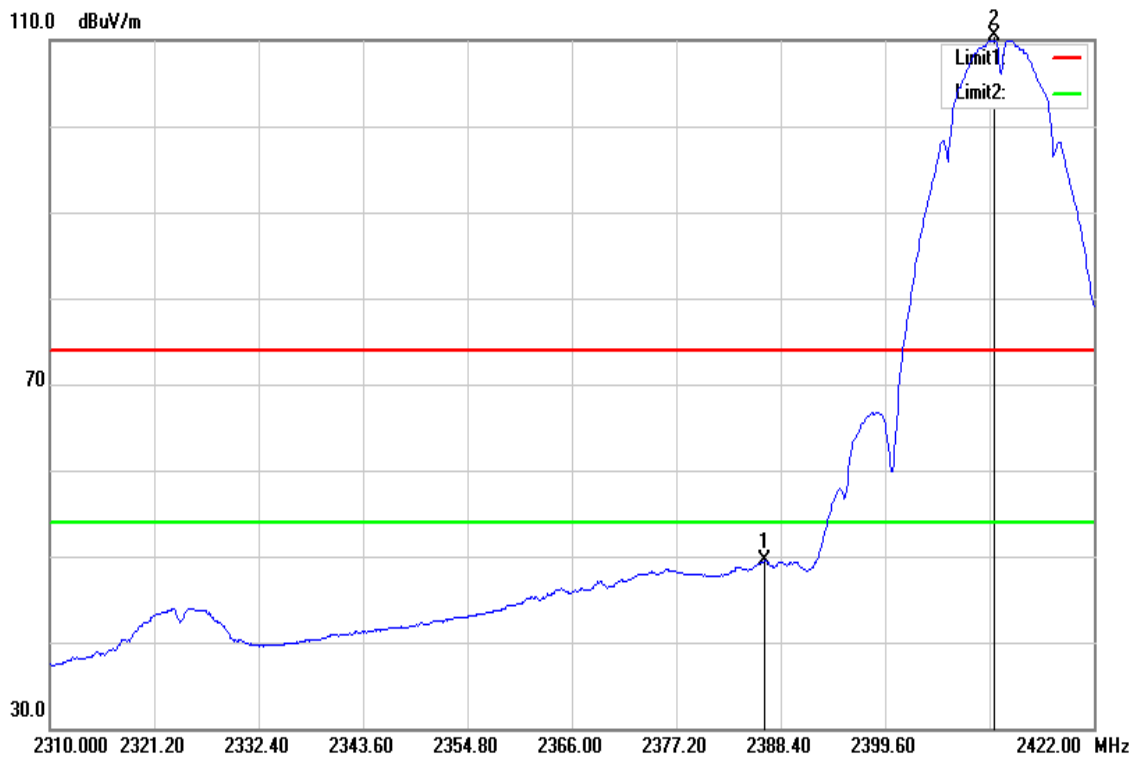


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2386.720	52.41	-2.99	49.42	54.00	-4.58	AVG
2411.248	113.38	-2.92	110.46	-	-	AVG

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

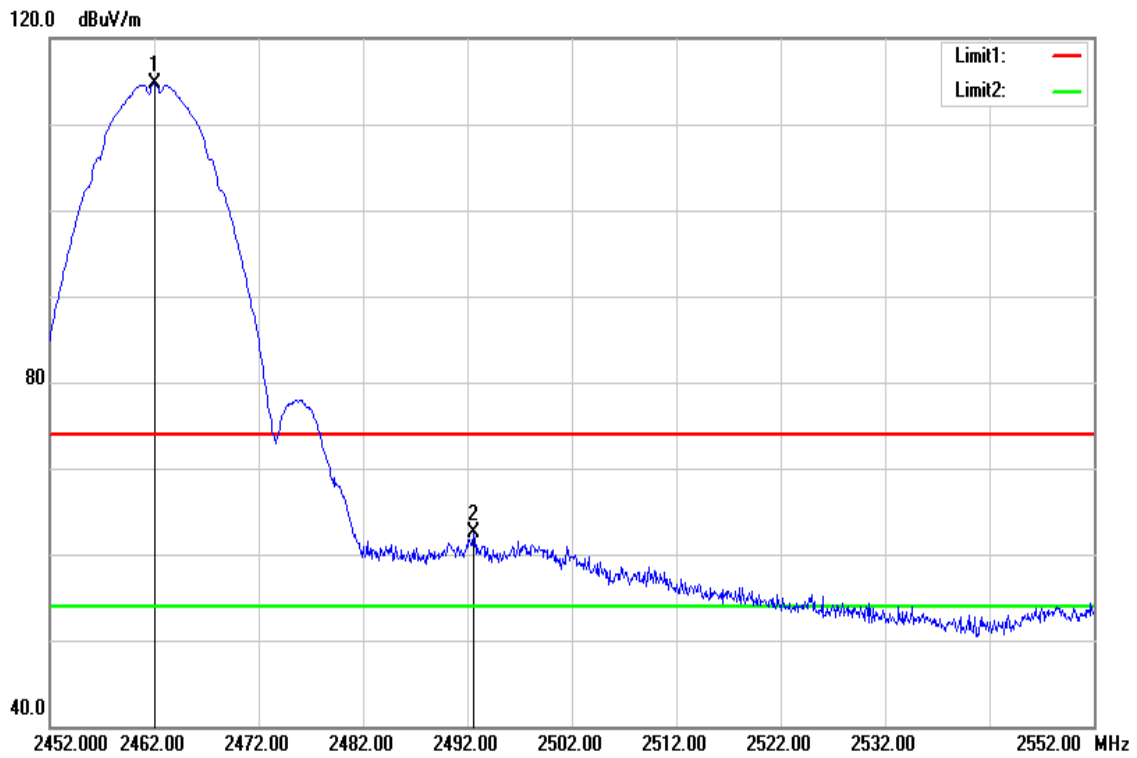


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2462.000	117.45	-2.76	114.69	-	-	peak
2492.600	65.13	-2.66	62.47	74.00	-11.53	peak

Test Mode	IEEE 802.11b High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

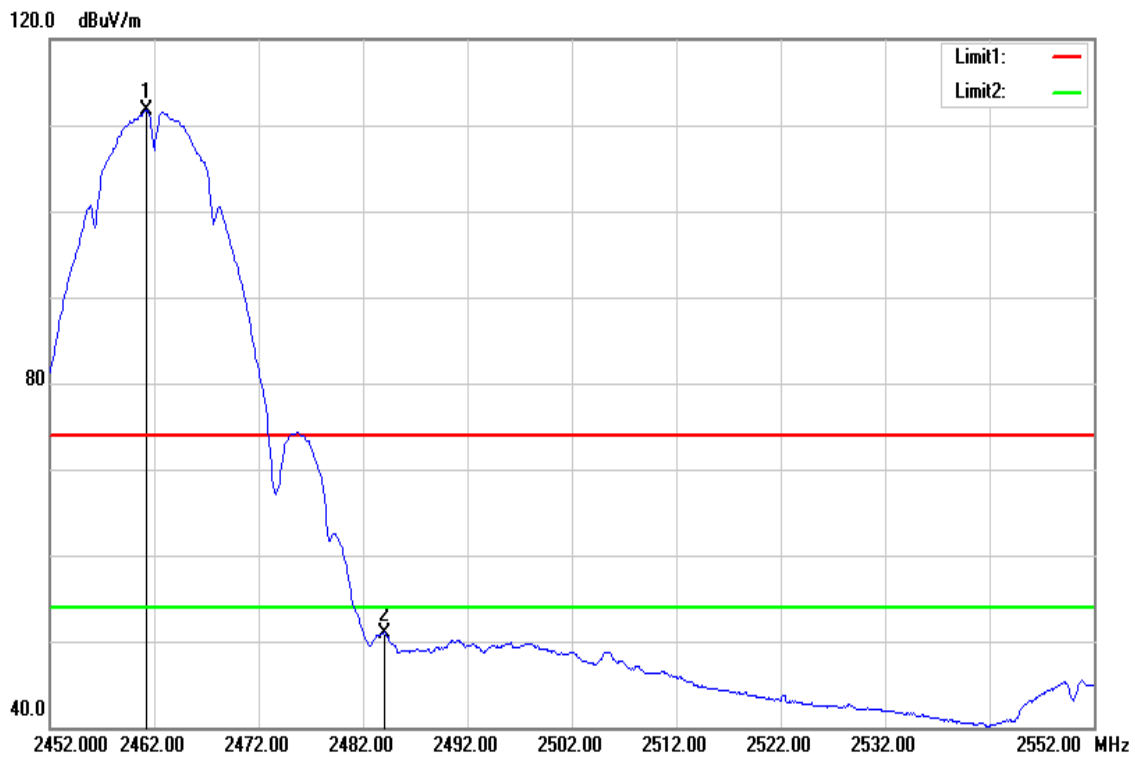


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.200	114.54	-2.76	111.78	-	-	AVG
2484.100	53.65	-2.69	50.96	54.00	-3.04	AVG

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

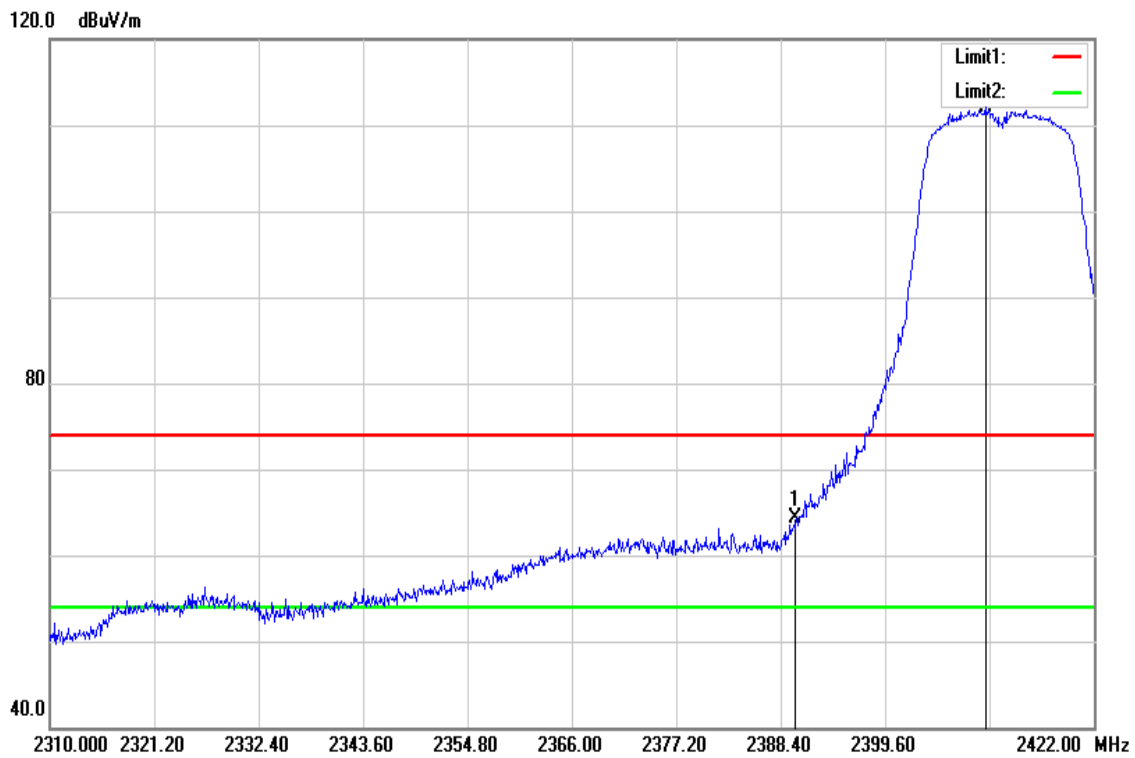


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	67.37	-2.98	64.39	74.00	-9.61	peak
2410.352	114.99	-2.92	112.07	-	-	peak

Test Mode	IEEE 802.11g Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

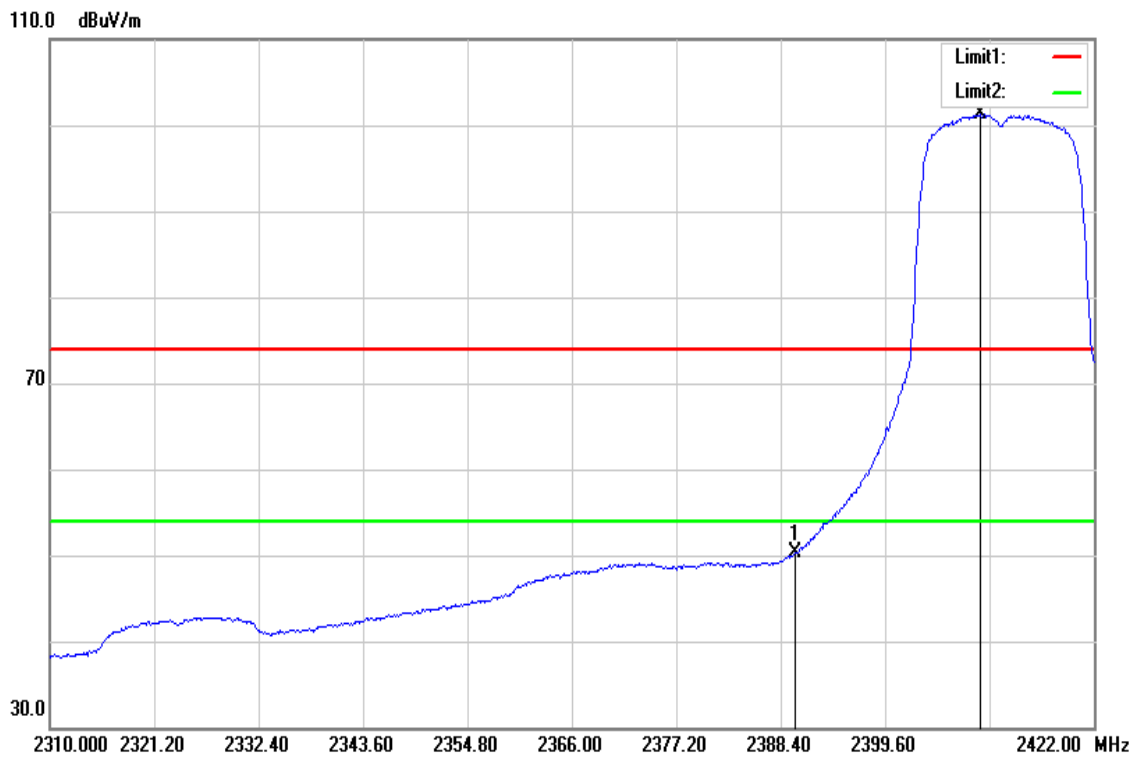


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	53.26	-2.98	50.28	54.00	-3.72	AVG
2409.792	104.22	-2.92	101.30	-	-	AVG

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

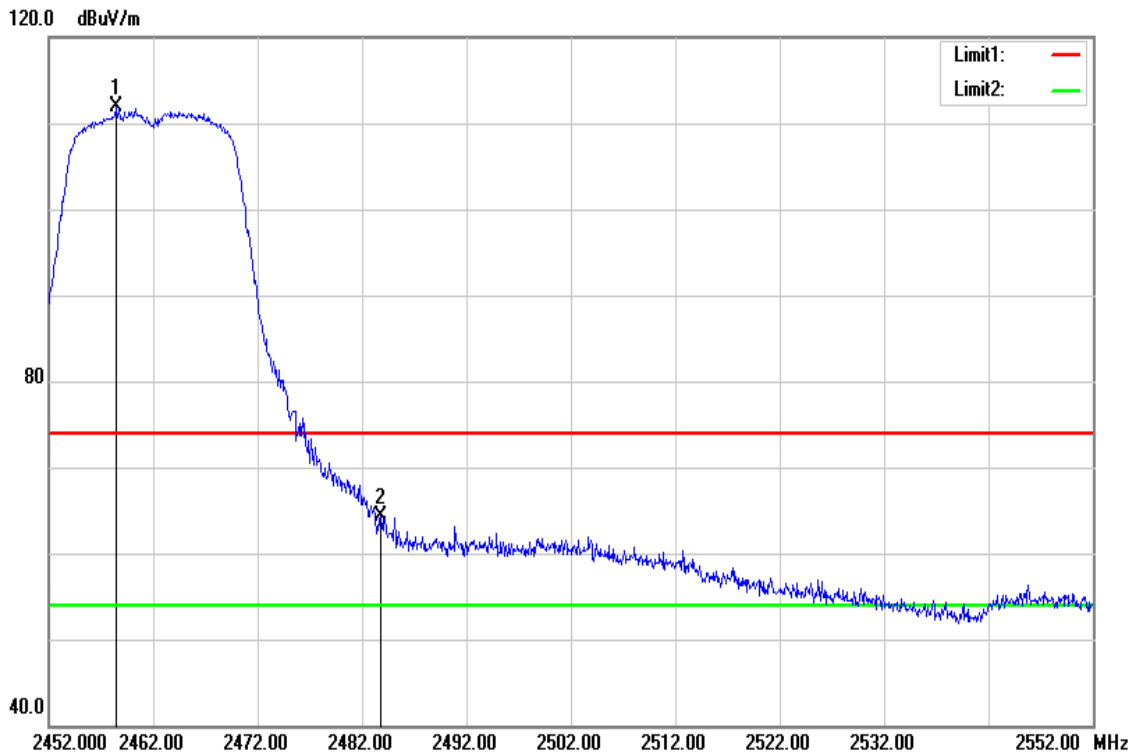


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2458.400	114.60	-2.76	111.84	-	-	peak
2483.800	67.01	-2.69	64.32	74.00	-9.68	peak

Test Mode	IEEE 802.11g High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

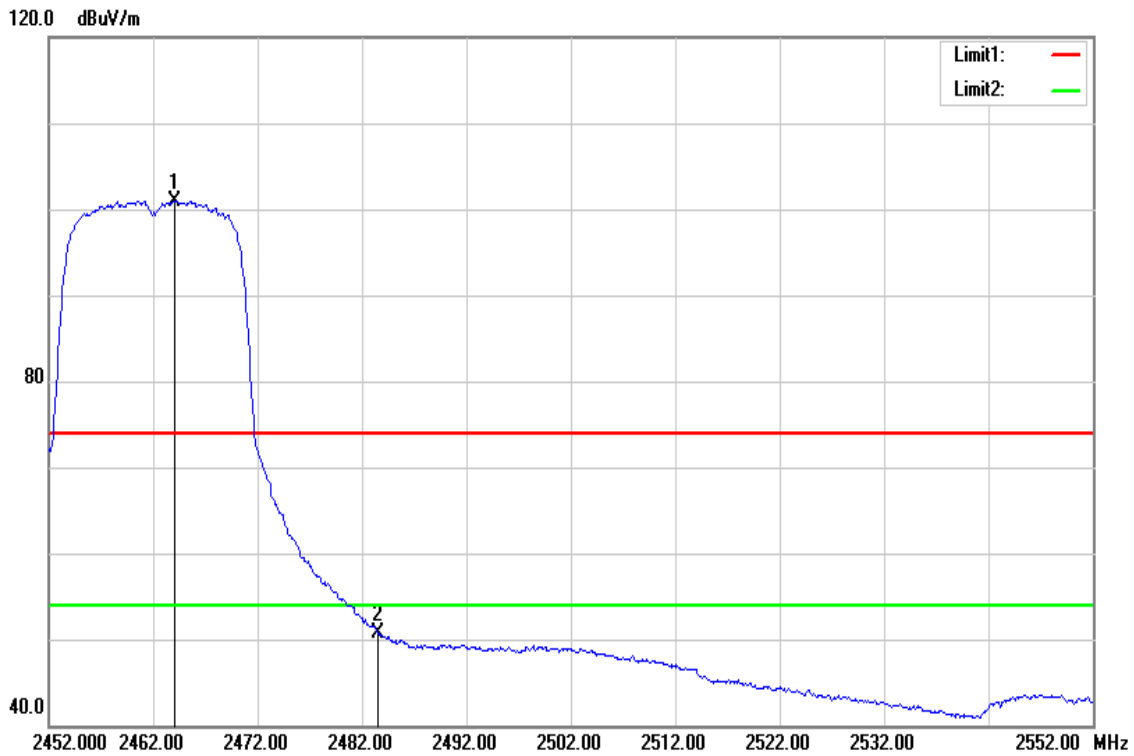


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2464.000	103.67	-2.75	100.92	-	-	AVG
2483.500	53.43	-2.69	50.74	54.00	-3.26	AVG

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

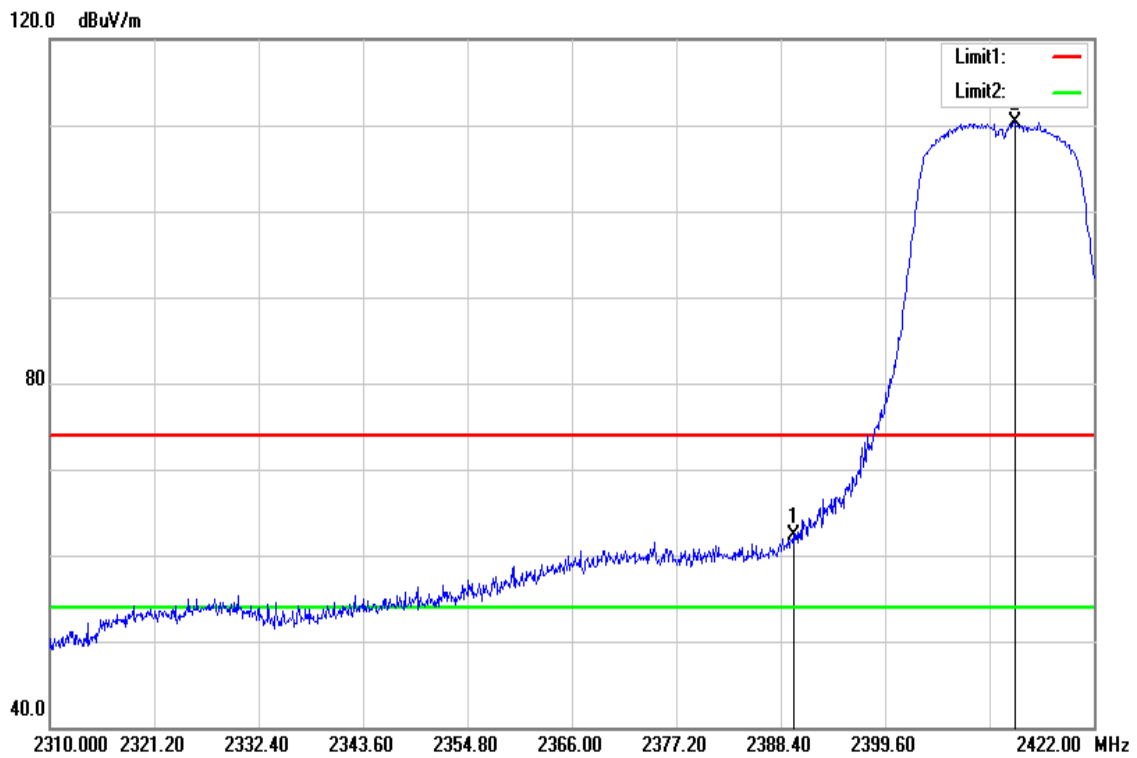


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2389.744	65.34	-2.98	62.36	74.00	-11.64	peak
2413.488	113.29	-2.90	110.39	-	-	peak

Test Mode	IEEE 802.11n HT20 Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

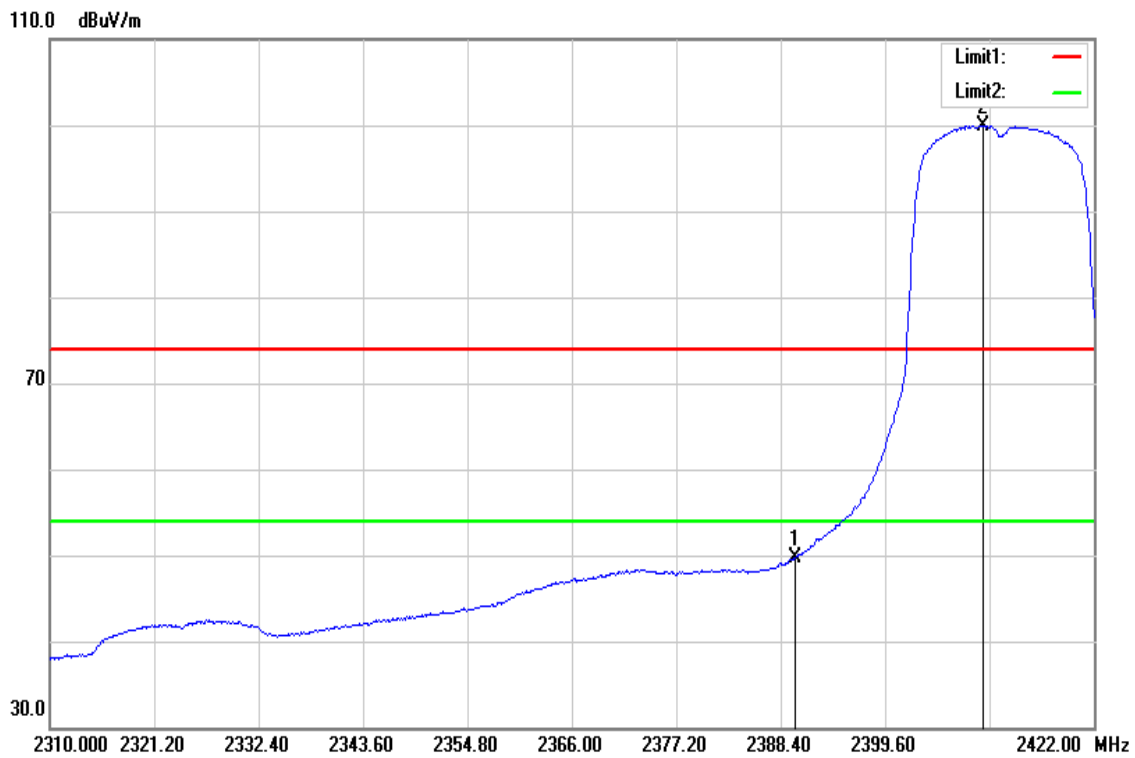


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	52.78	-2.98	49.80	54.00	-4.20	AVG
2410.128	102.86	-2.92	99.94	-	-	AVG

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

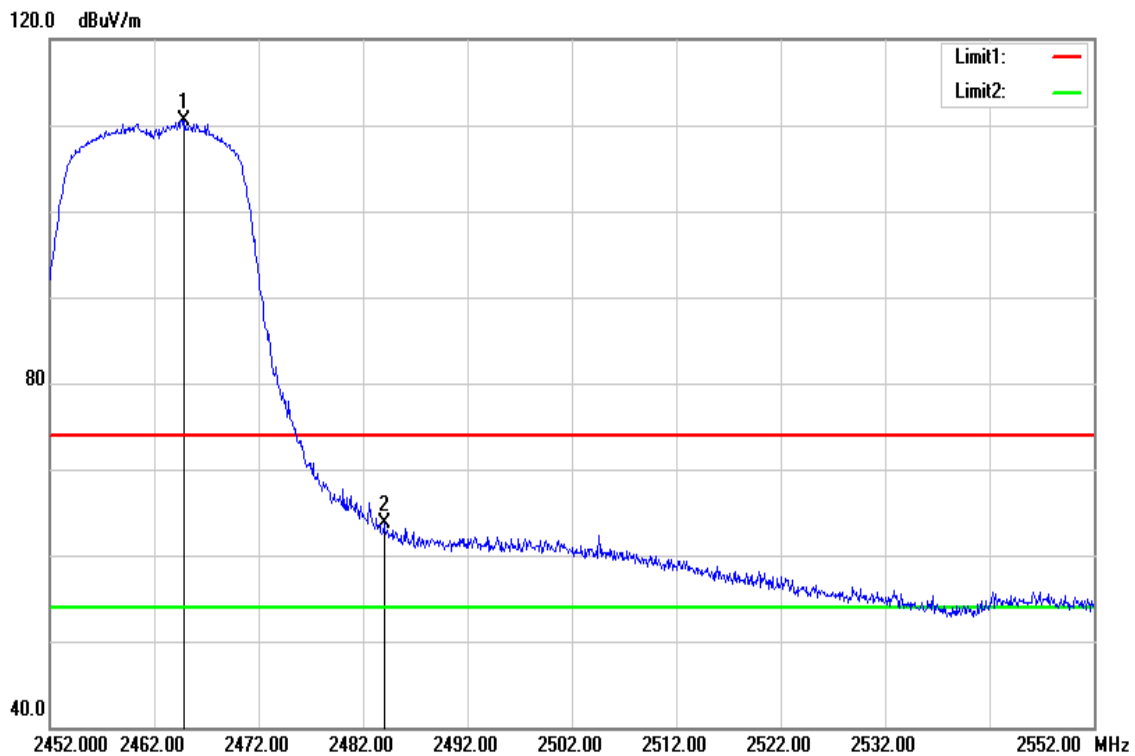


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2464.900	113.28	-2.75	110.53	-	-	peak
2484.000	66.40	-2.69	63.71	74.00	-10.29	peak

Test Mode	IEEE 802.11n HT20 High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

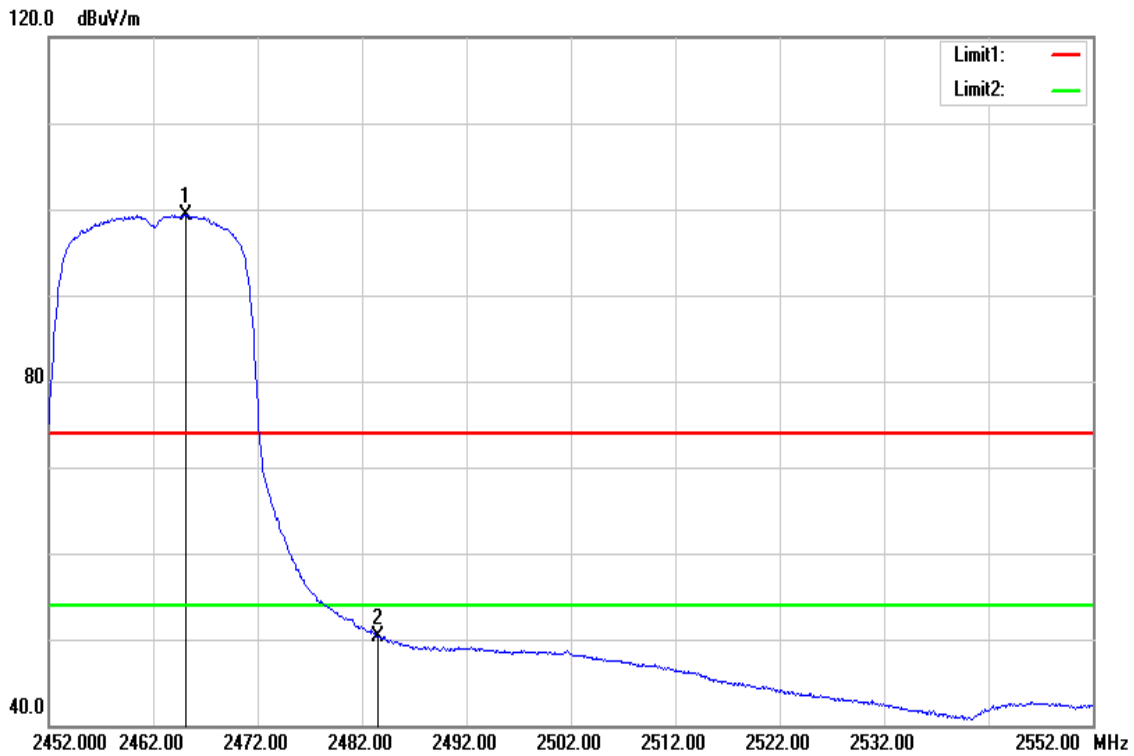


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2465.100	102.04	-2.75	99.29	-	-	AVG
2483.500	53.02	-2.69	50.33	54.00	-3.67	AVG

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

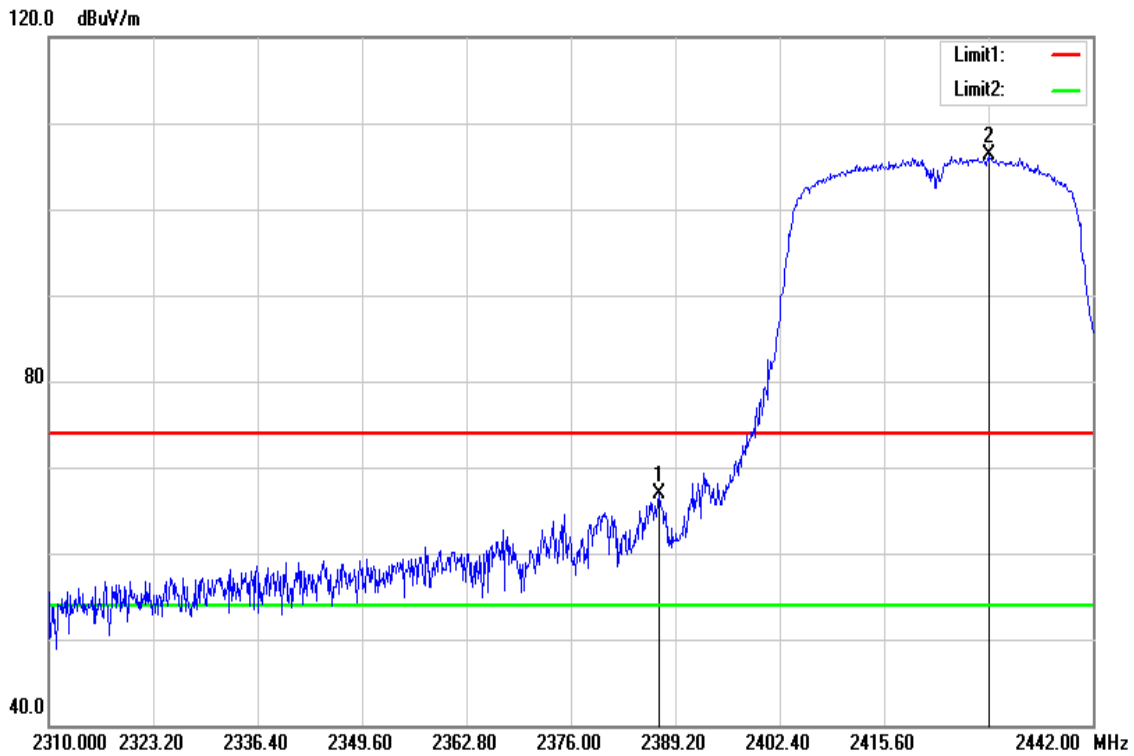


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2387.088	69.83	-2.99	66.84	74.00	-7.16	peak
2428.932	109.24	-2.86	106.38	-	-	peak

Test Mode	IEEE 802.11n HT40 Low CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

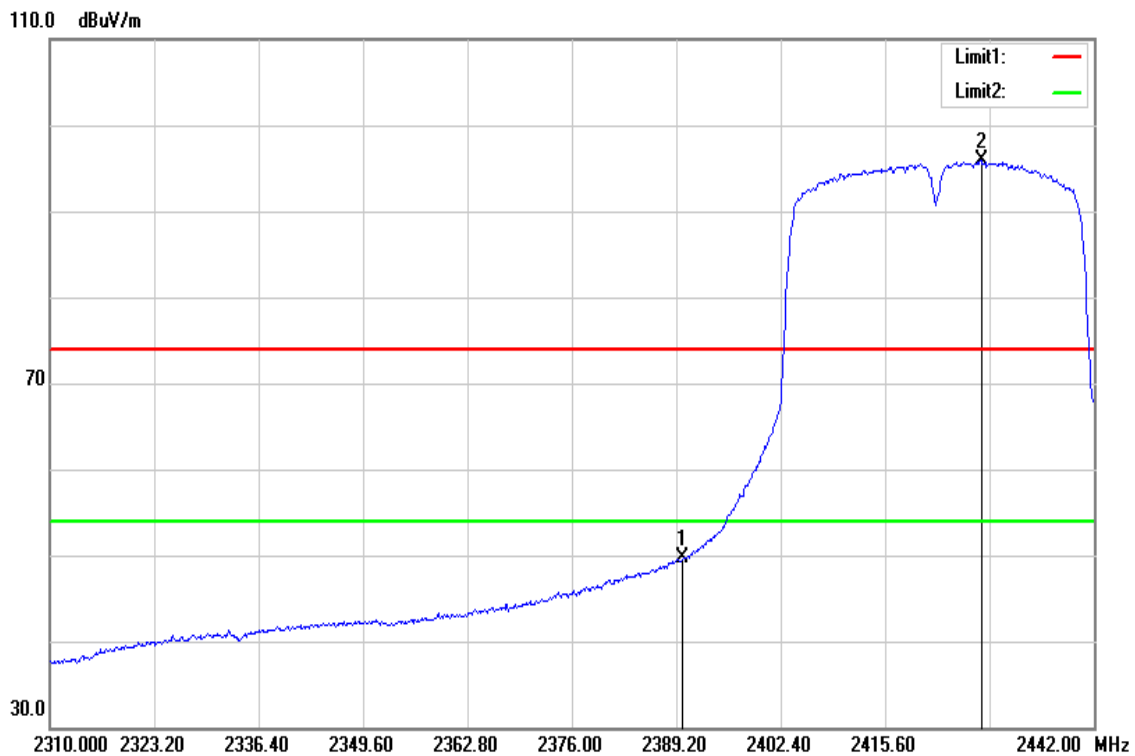


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	52.63	-2.98	49.65	54.00	-4.35	AVG
2427.744	98.77	-2.86	95.91	-	-	AVG

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

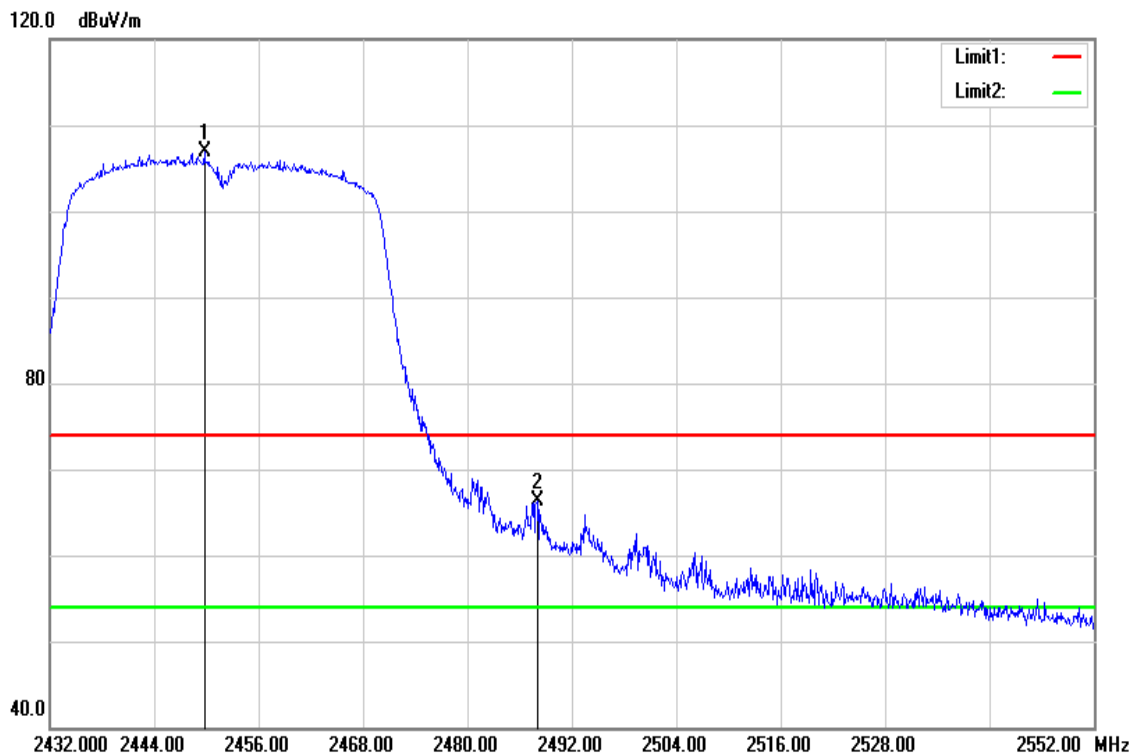

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2449.760	109.60	-2.79	106.81	-	-	peak
2488.040	69.01	-2.67	66.34	74.00	-7.66	peak

Test Mode	IEEE 802.11n HT40 High CH	Temperature:	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 13, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

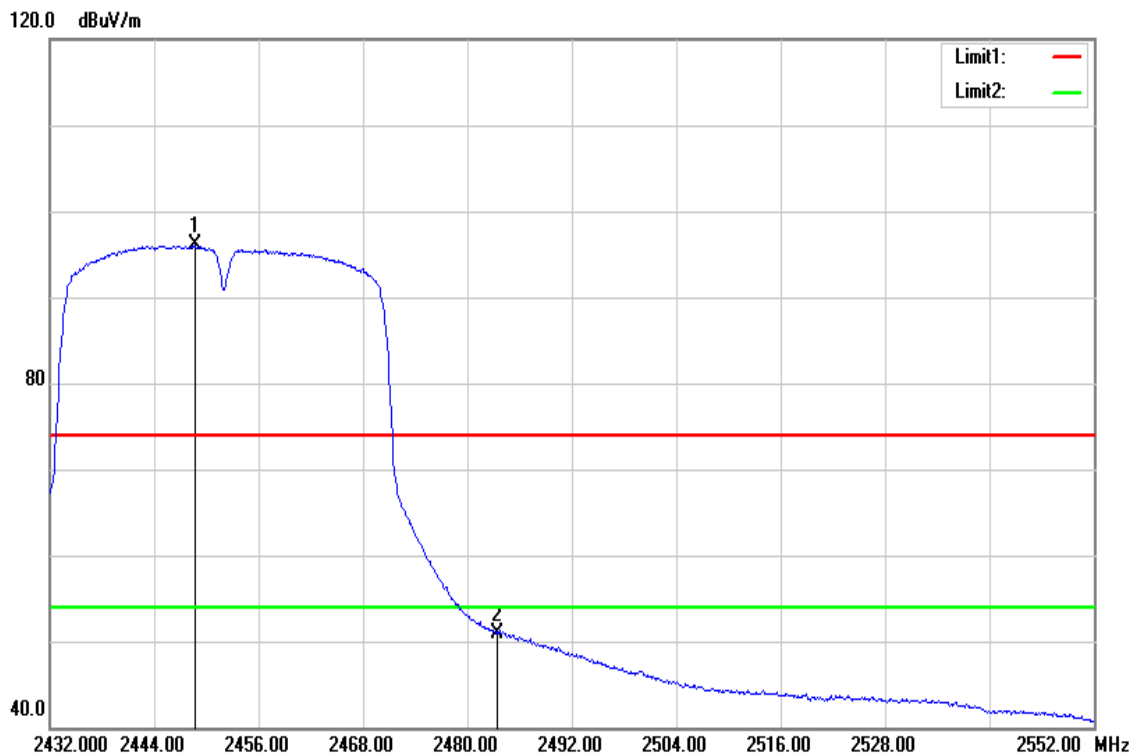


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2448.680	98.87	-2.80	96.07	-	-	AVG
2483.500	53.59	-2.69	50.90	54.00	-3.10	AVG

Report No.: T180627D11-RP3

Below 1G Test Data


For PIFA Antenna

Test Mode	Mode 1	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

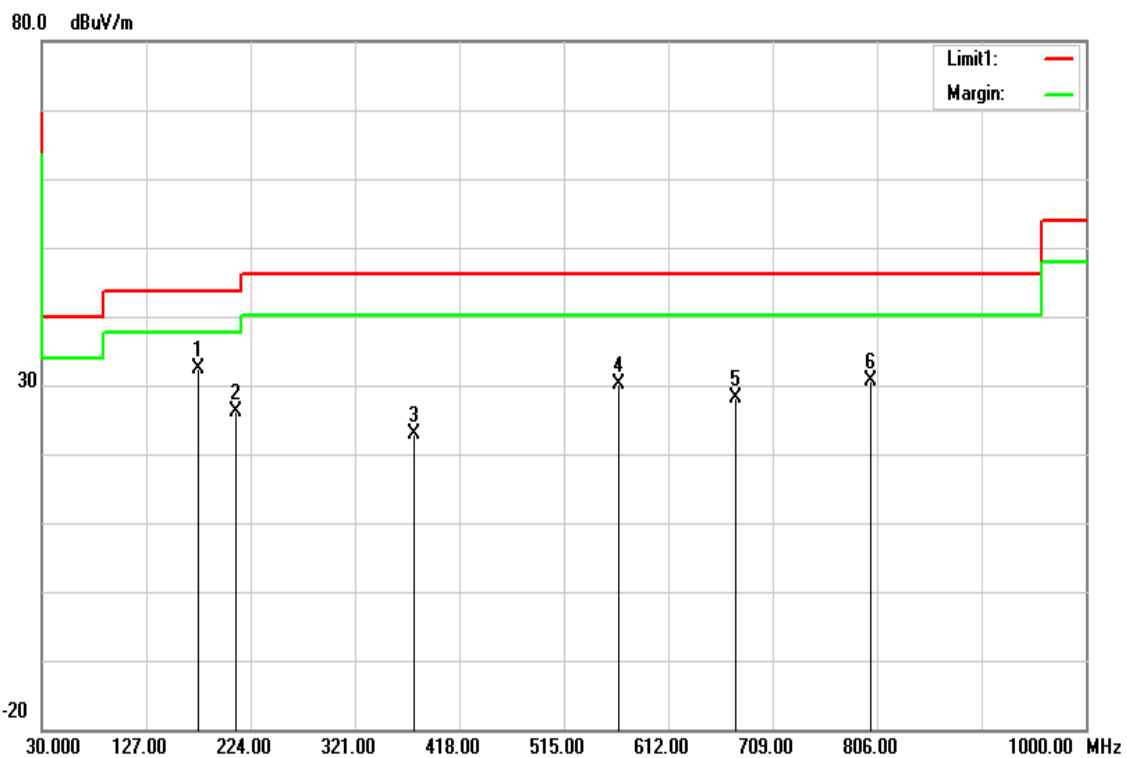

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
175.5000	43.32	-10.83	32.49	43.52	-11.03	peak
210.4200	36.48	-10.27	26.21	43.52	-17.31	peak
375.3200	28.99	-6.02	22.97	46.02	-23.05	peak
565.4400	31.73	-1.56	30.17	46.02	-15.85	peak
675.0500	27.41	0.68	28.09	46.02	-17.93	peak
800.1800	27.90	2.72	30.62	46.02	-15.40	peak


Test Mode	Mode 1	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

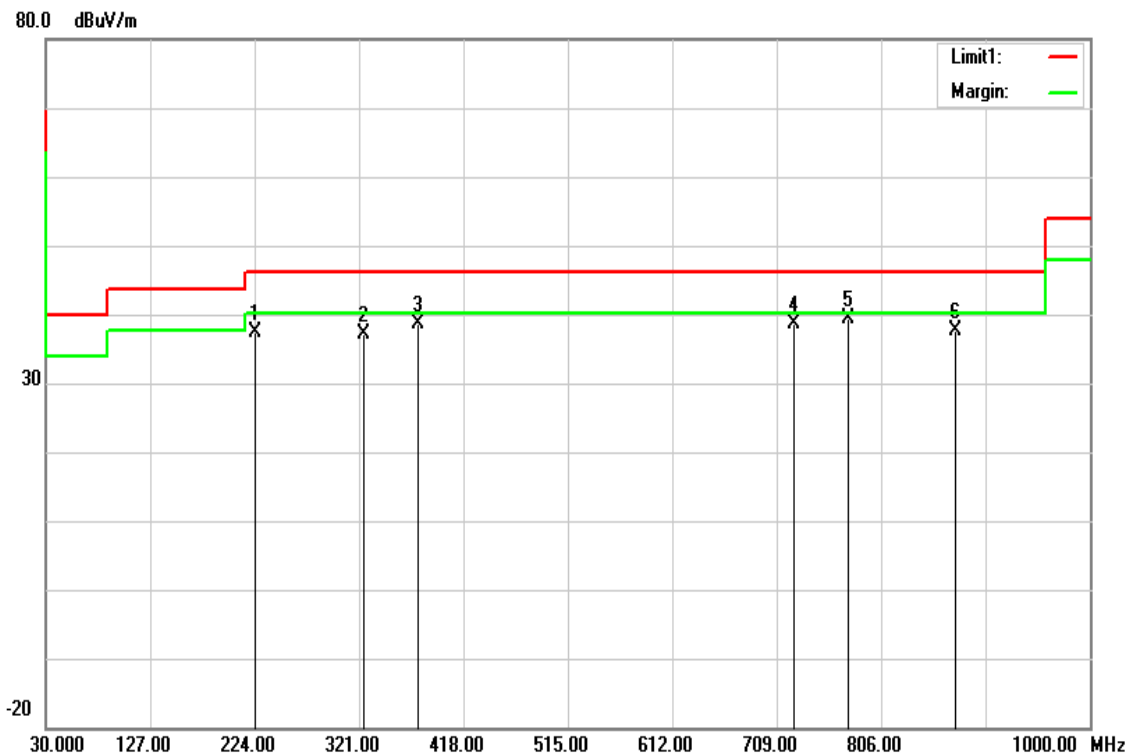

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
224.9700	48.39	-10.97	37.42	46.02	-8.60	peak
324.8800	44.48	-7.38	37.10	46.02	-8.92	peak
375.3200	44.58	-6.02	38.56	46.02	-7.46	peak
724.5200	37.38	1.35	38.73	46.02	-7.29	QP
774.9600	37.14	2.21	39.35	46.02	-6.67	QP
874.8700	33.61	3.91	37.52	46.02	-8.50	peak


For Dipole Antenna

Test Mode	Mode 1	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

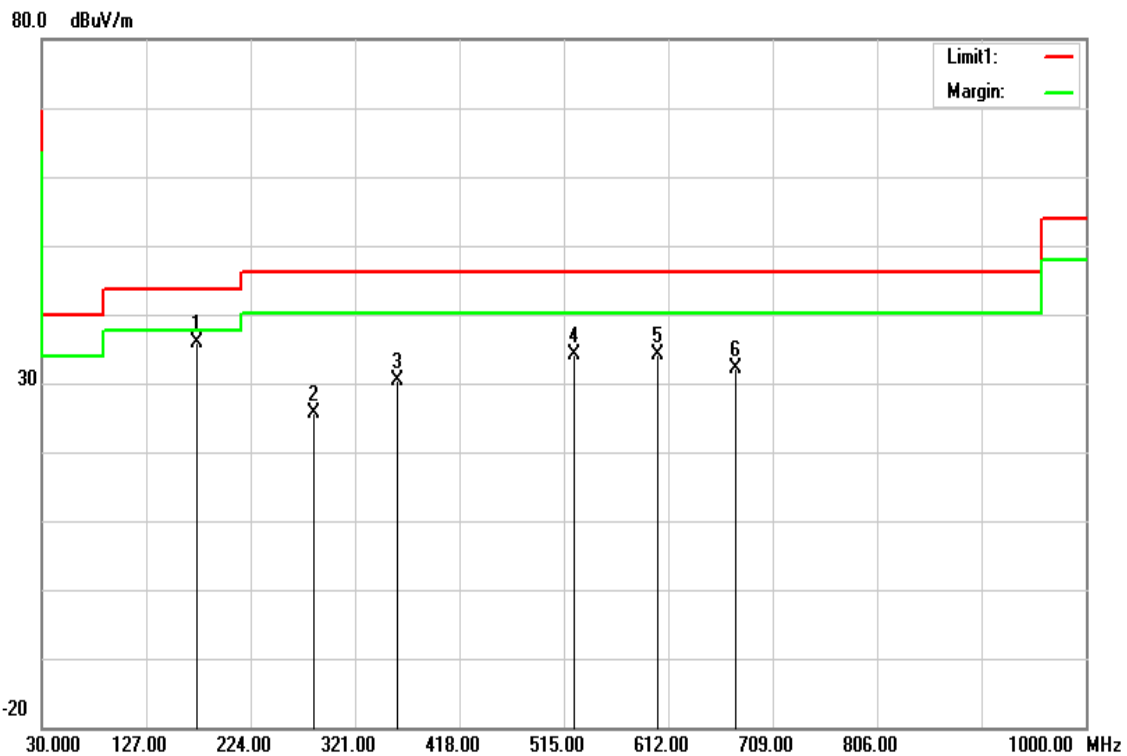

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
174.5300	46.66	-10.78	35.88	43.52	-7.64	peak
283.1700	33.71	-8.14	25.57	46.02	-20.45	peak
359.8000	36.75	-6.48	30.27	46.02	-15.75	peak
524.7000	36.24	-2.18	34.06	46.02	-11.96	peak
602.3000	35.13	-1.06	34.07	46.02	-11.95	peak
675.0500	31.37	0.68	32.05	46.02	-13.97	peak

Test Mode	Mode 1	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

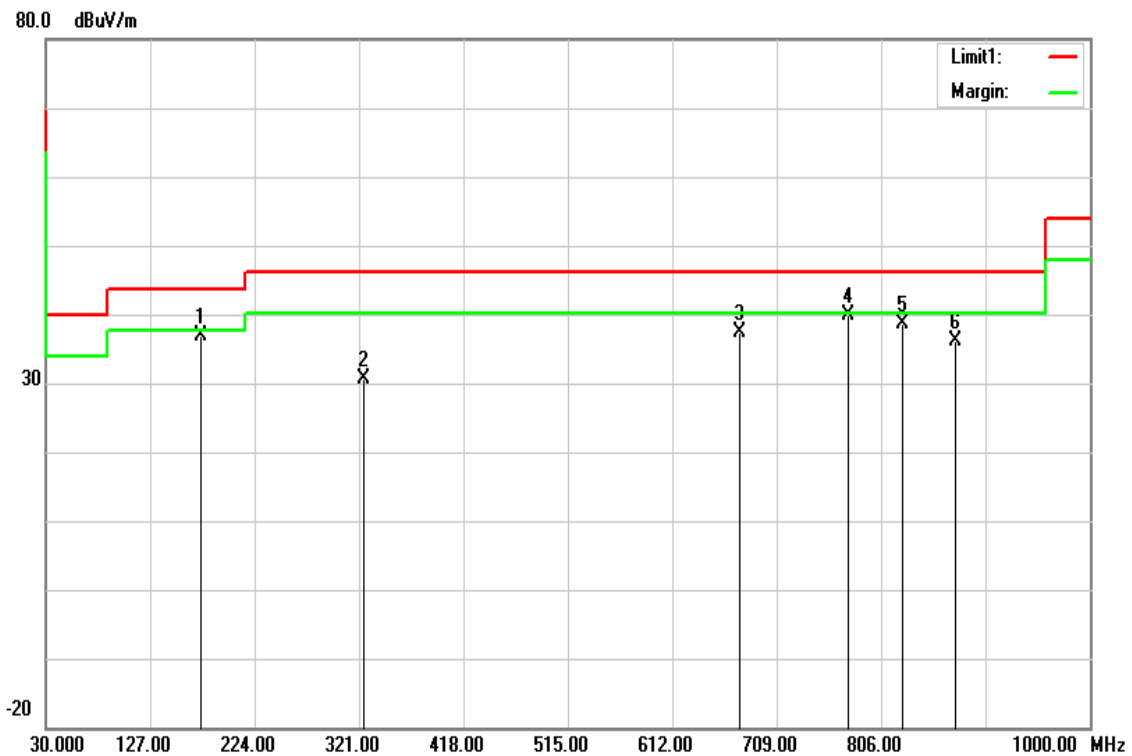


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
174.5300	47.76	-10.78	36.98	43.52	-6.54	peak
324.8800	37.91	-7.38	30.53	46.02	-15.49	peak
675.0500	36.76	0.68	37.44	46.02	-8.58	peak
774.9600	37.78	2.21	39.99	46.02	-6.03	peak
825.4000	35.48	3.04	38.52	46.02	-7.50	peak
874.8700	32.12	3.91	36.03	46.02	-9.99	peak

Report No.: T180627D11-RP3

**Above 1G Test Data
For PIFA Antenna**

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

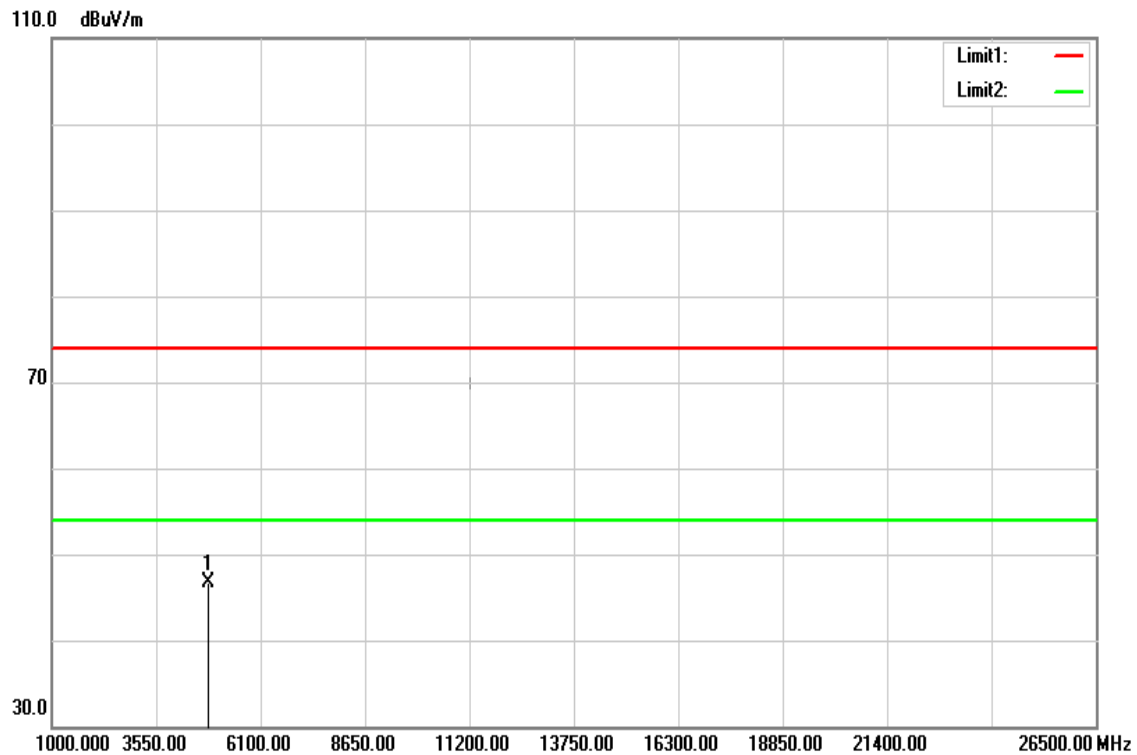


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	42.42	4.38	46.80	74.00	-27.20	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

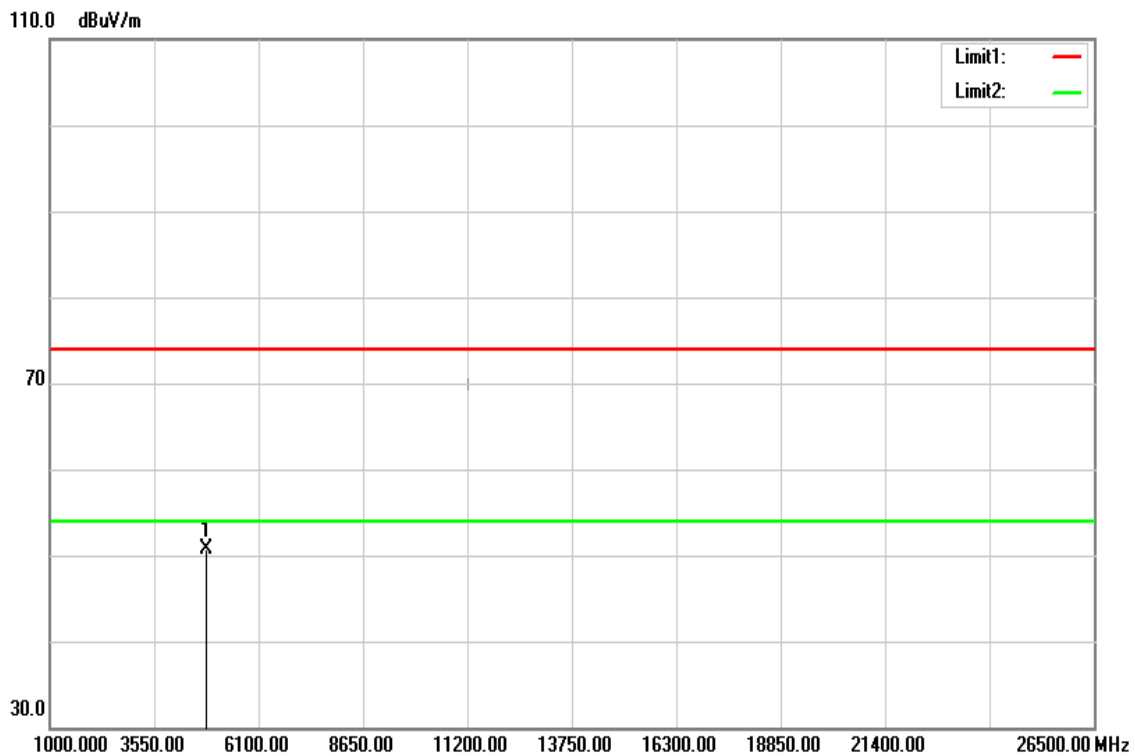


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	46.26	4.38	50.64	74.00	-23.36	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

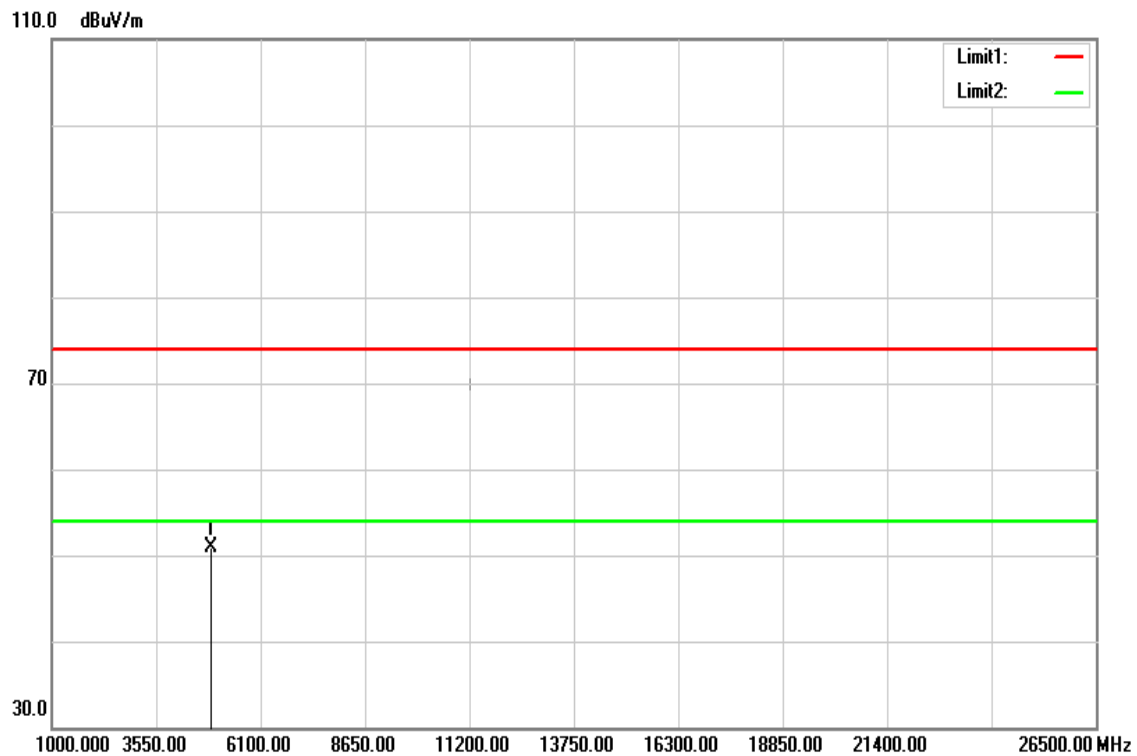


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	46.48	4.47	50.95	74.00	-23.05	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

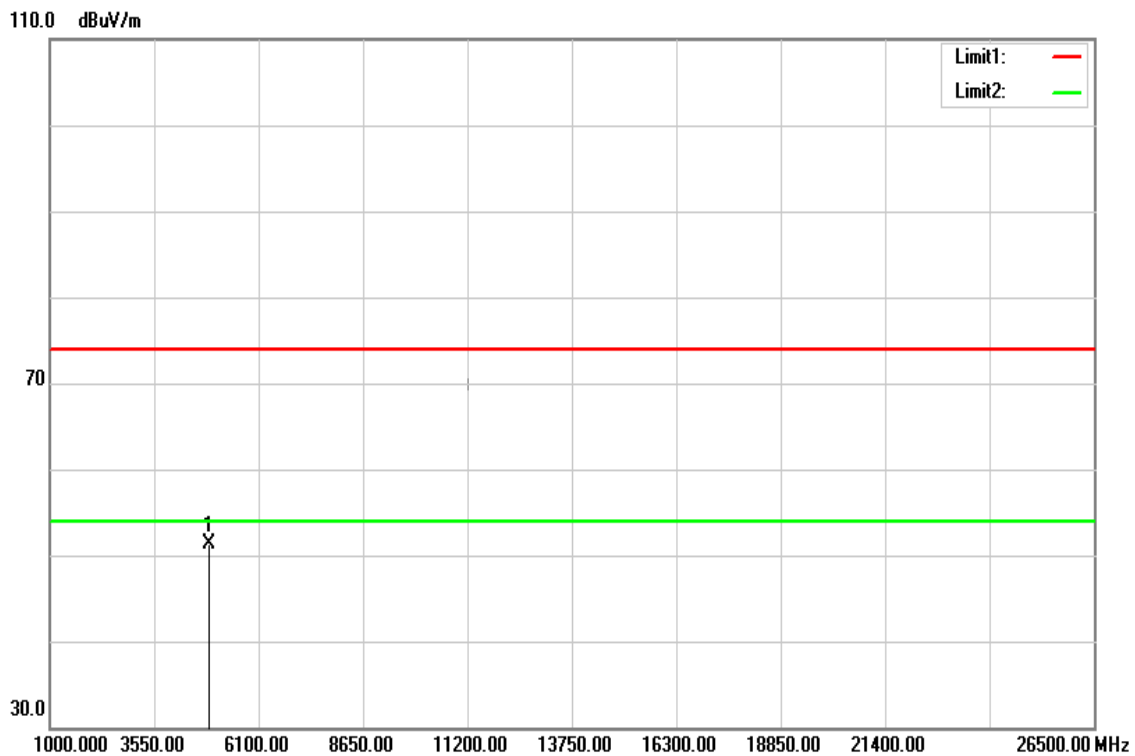


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	46.79	4.47	51.26	74.00	-22.74	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

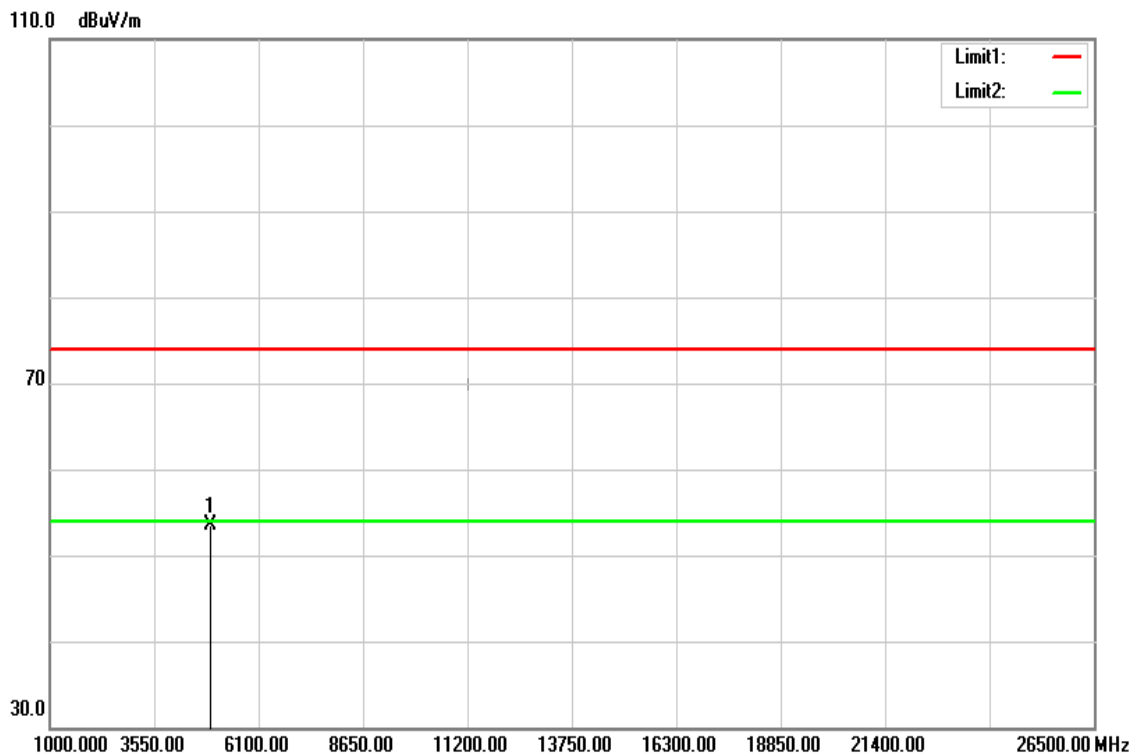


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	49.02	4.55	53.57	74.00	-20.43	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

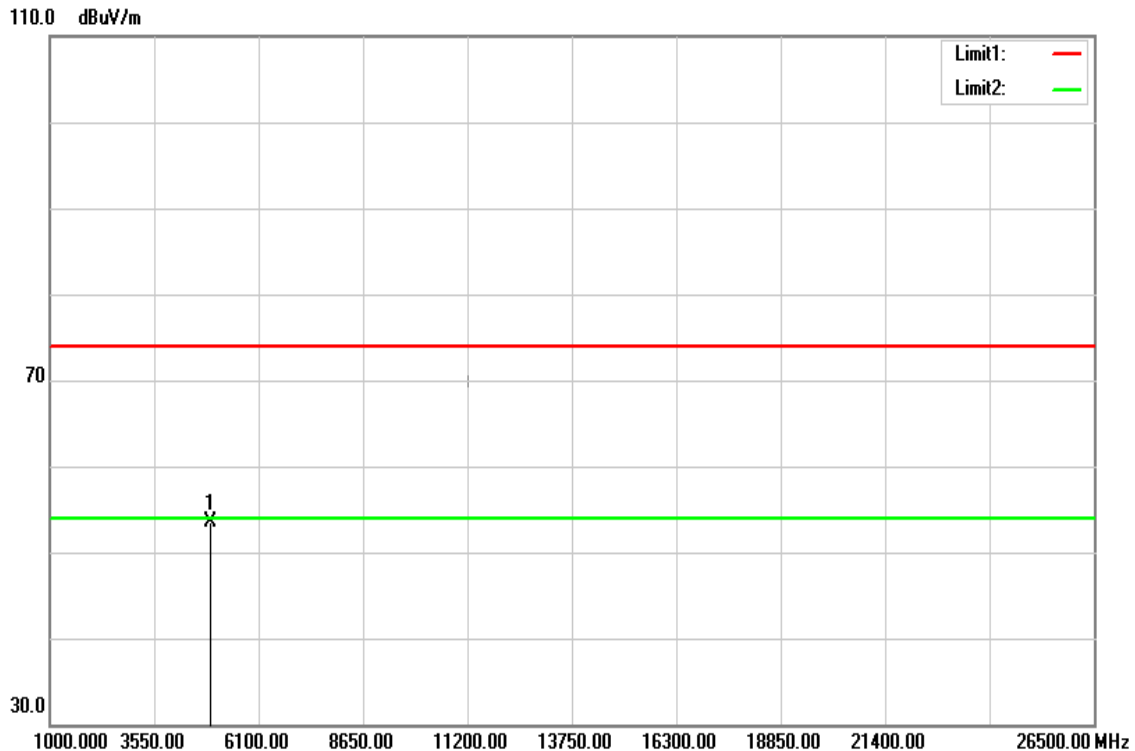


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	48.98	4.55	53.53	74.00	-20.47	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

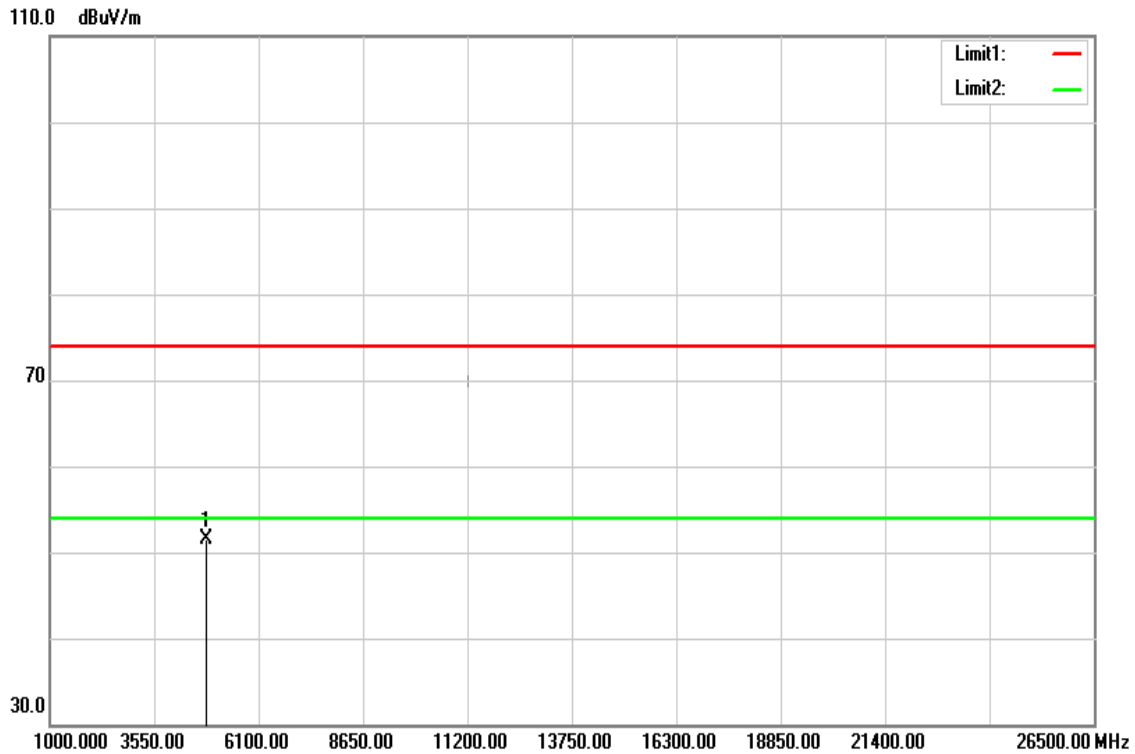


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4820.000	47.21	4.36	51.57	74.00	-22.43	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

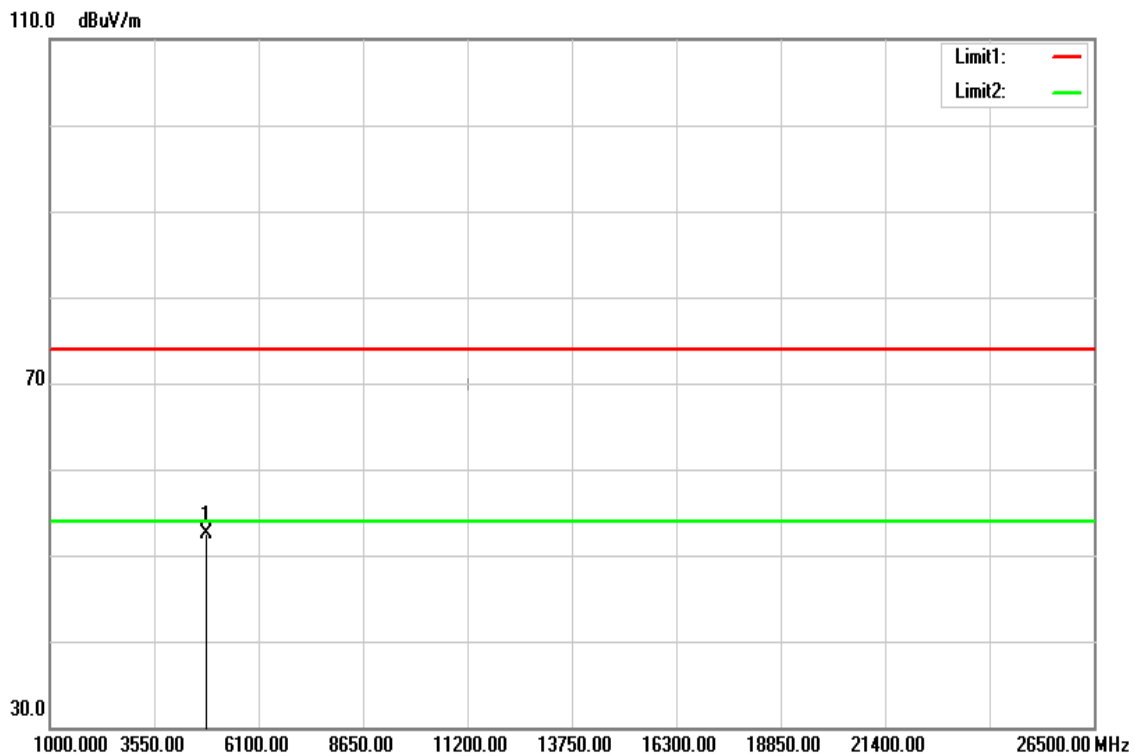


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	48.22	4.38	52.60	74.00	-21.40	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

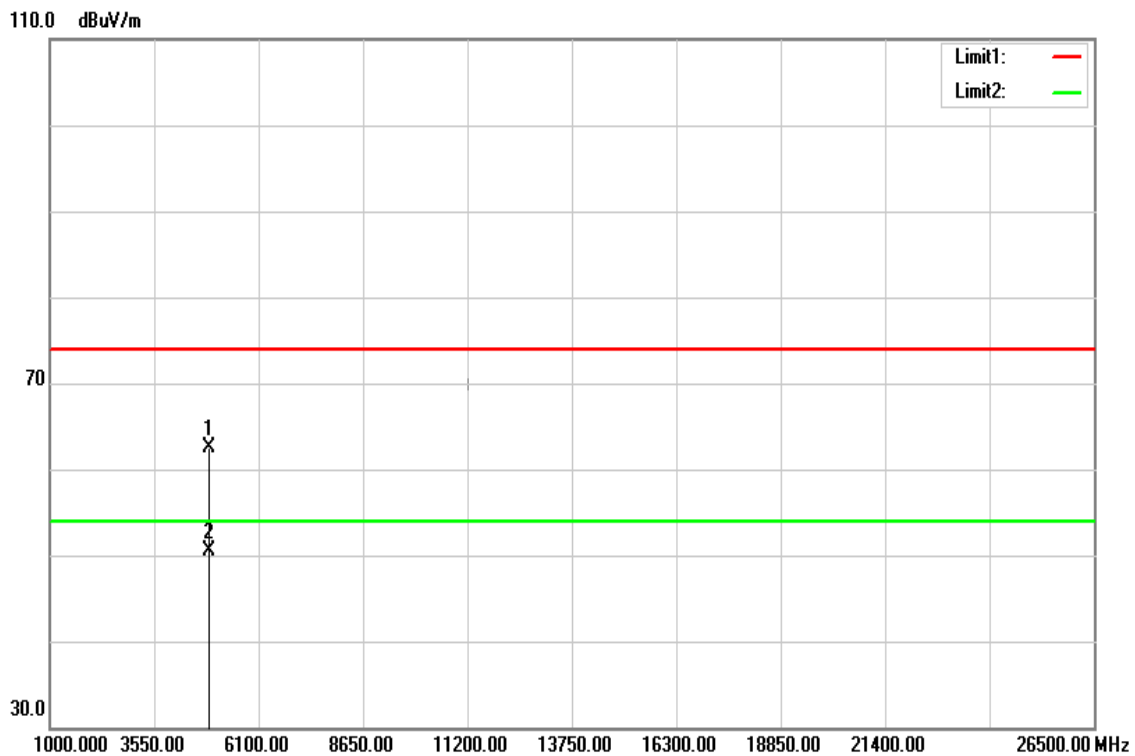


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	57.94	4.47	62.41	74.00	-11.59	peak
4876.000	46.11	4.47	50.58	54.00	-3.42	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

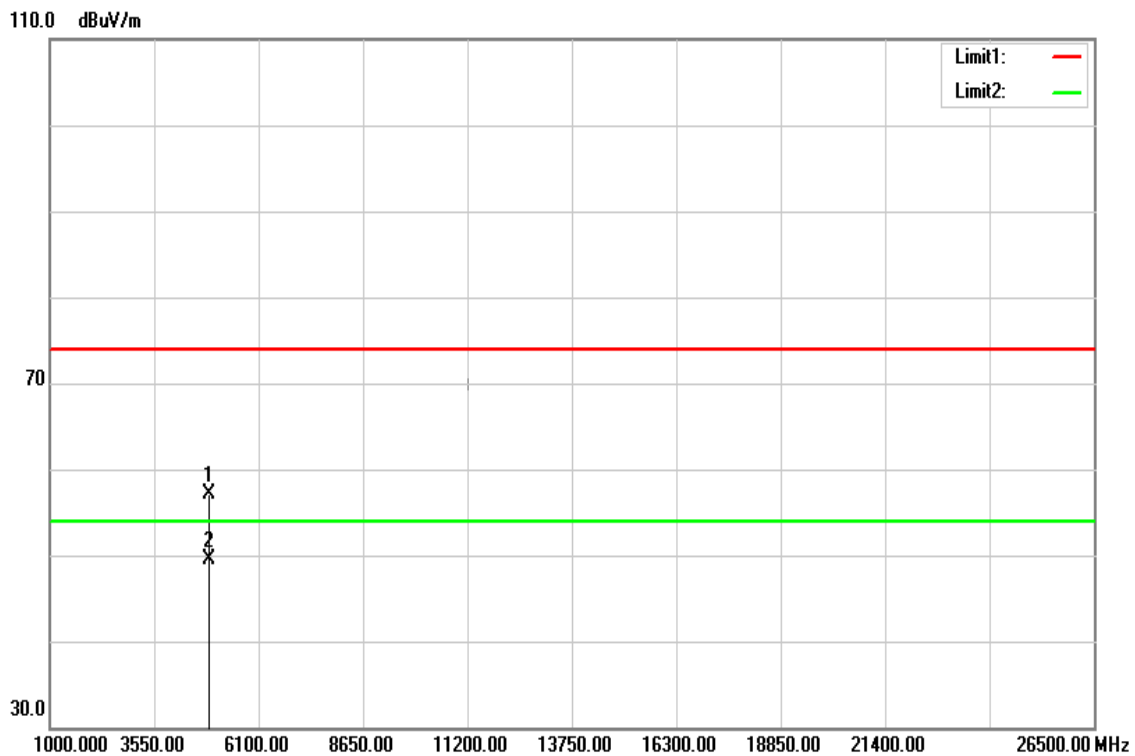


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	52.54	4.49	57.03	74.00	-16.97	peak
4883.000	45.06	4.49	49.55	54.00	-4.45	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

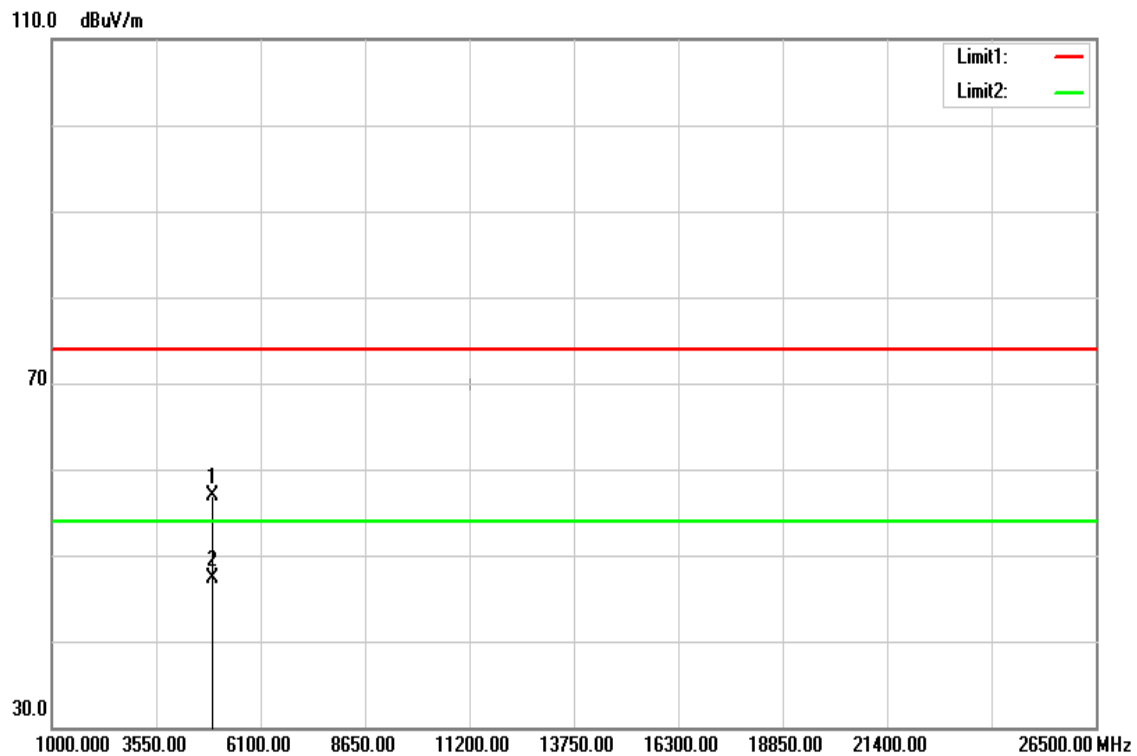


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	52.30	4.55	56.85	74.00	-17.15	peak
4925.000	42.68	4.55	47.23	54.00	-6.77	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

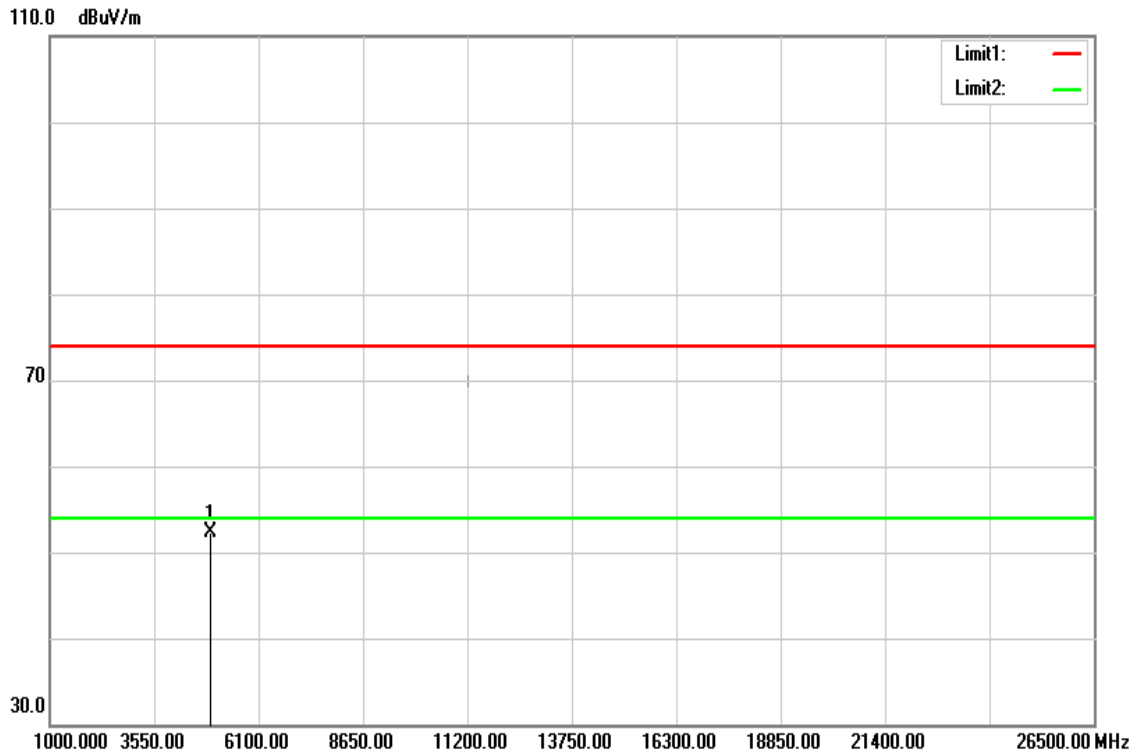


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	47.77	4.55	52.32	74.00	-21.68	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

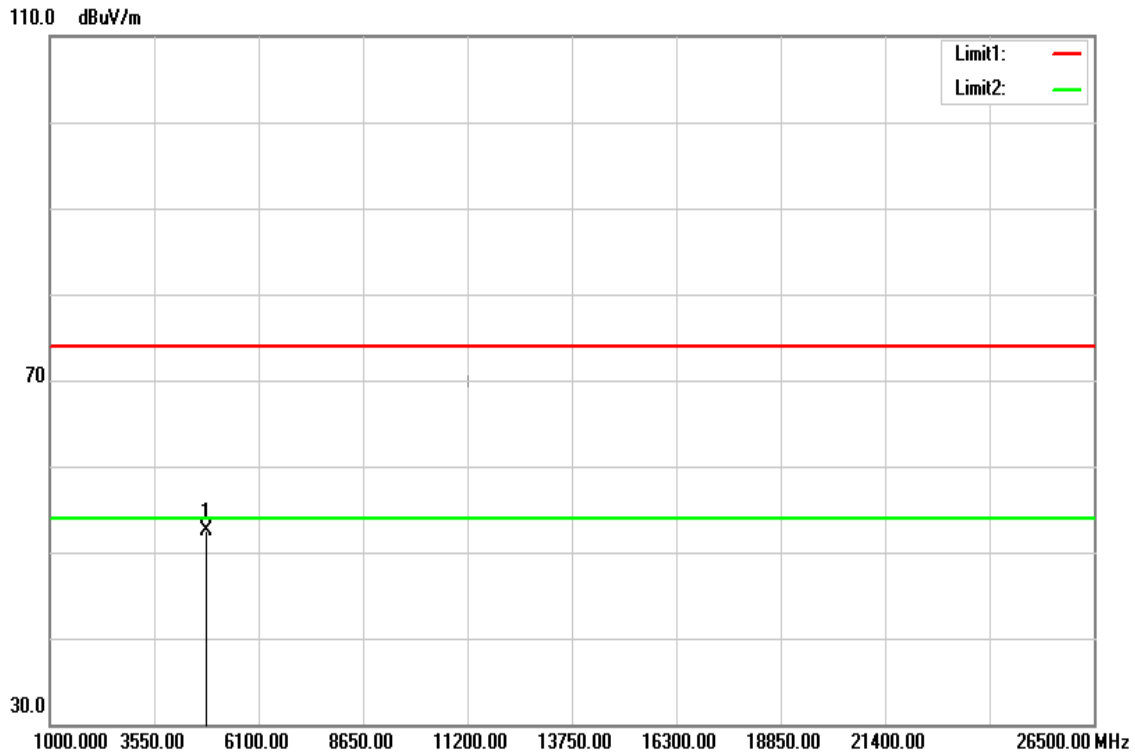


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	48.06	4.38	52.44	74.00	-21.56	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

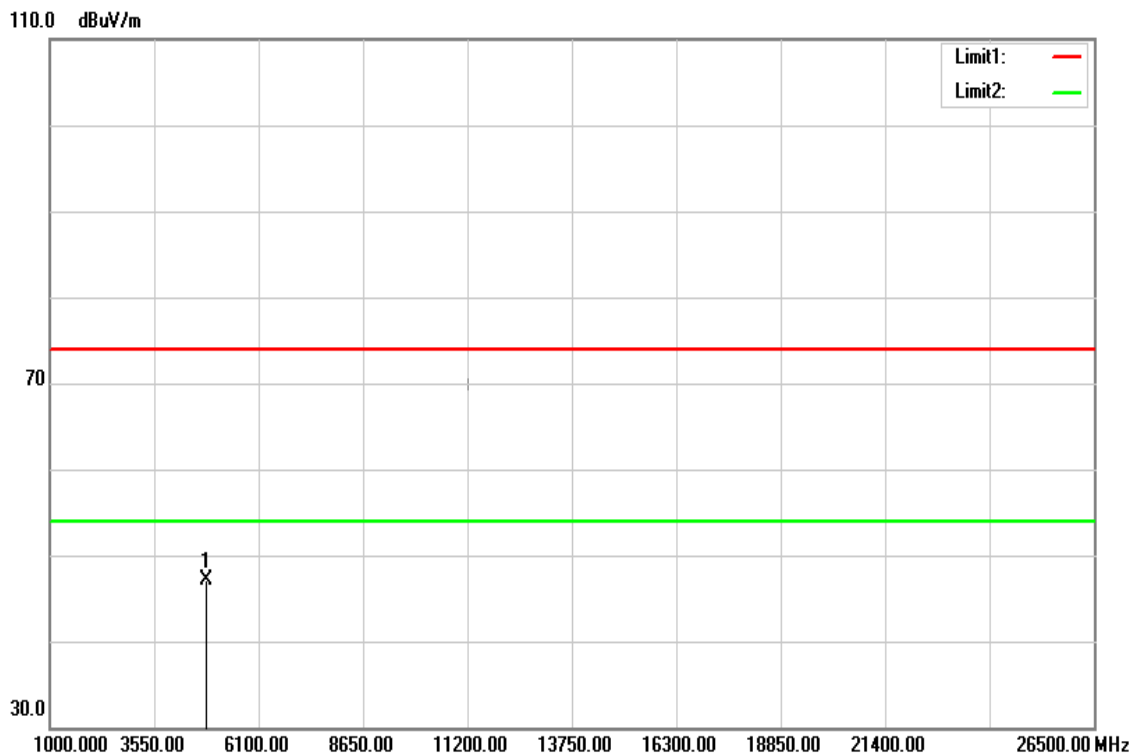


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	42.72	4.38	47.10	74.00	-26.90	
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

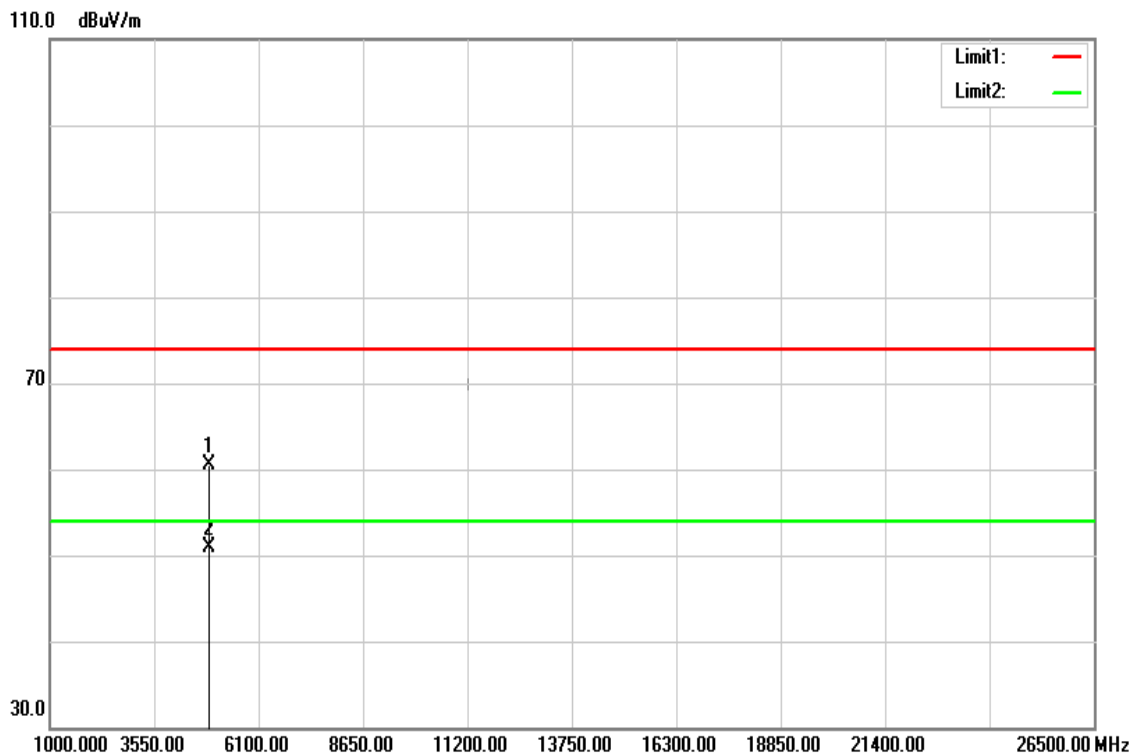


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	56.13	4.47	60.60	74.00	-13.40	peak
4876.000	46.45	4.47	50.92	54.00	-3.08	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

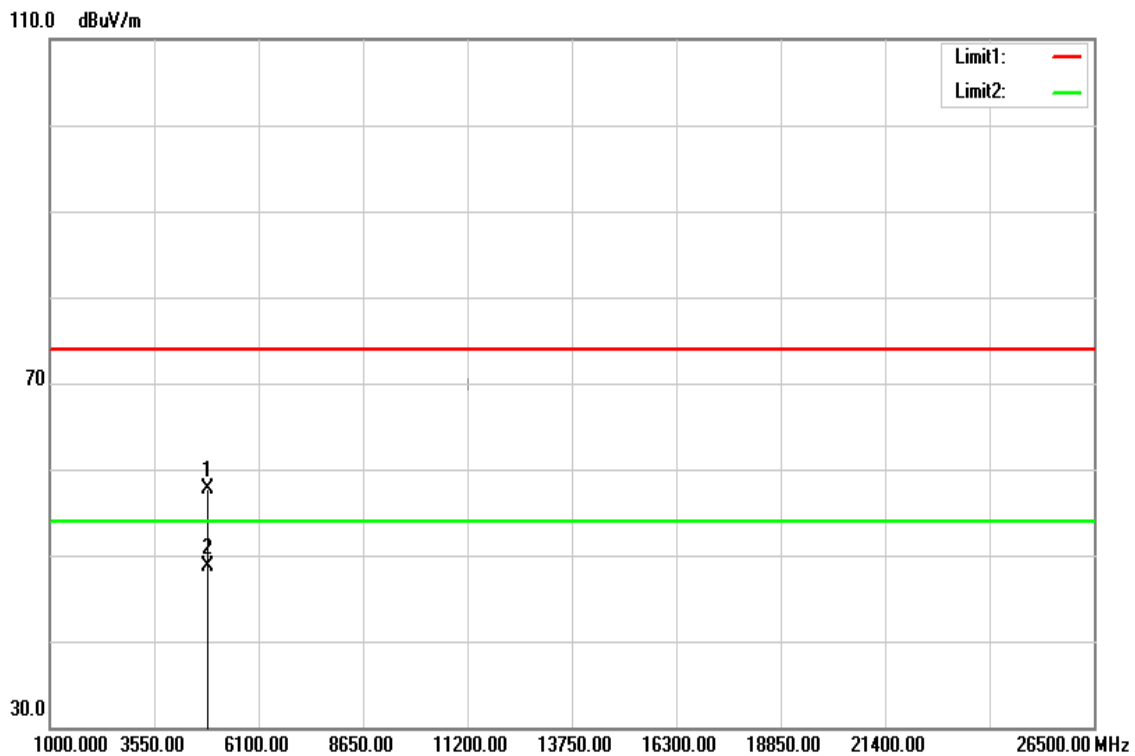


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4869.000	53.19	4.45	57.64	74.00	-16.36	peak
4869.000	44.29	4.45	48.74	54.00	-5.26	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

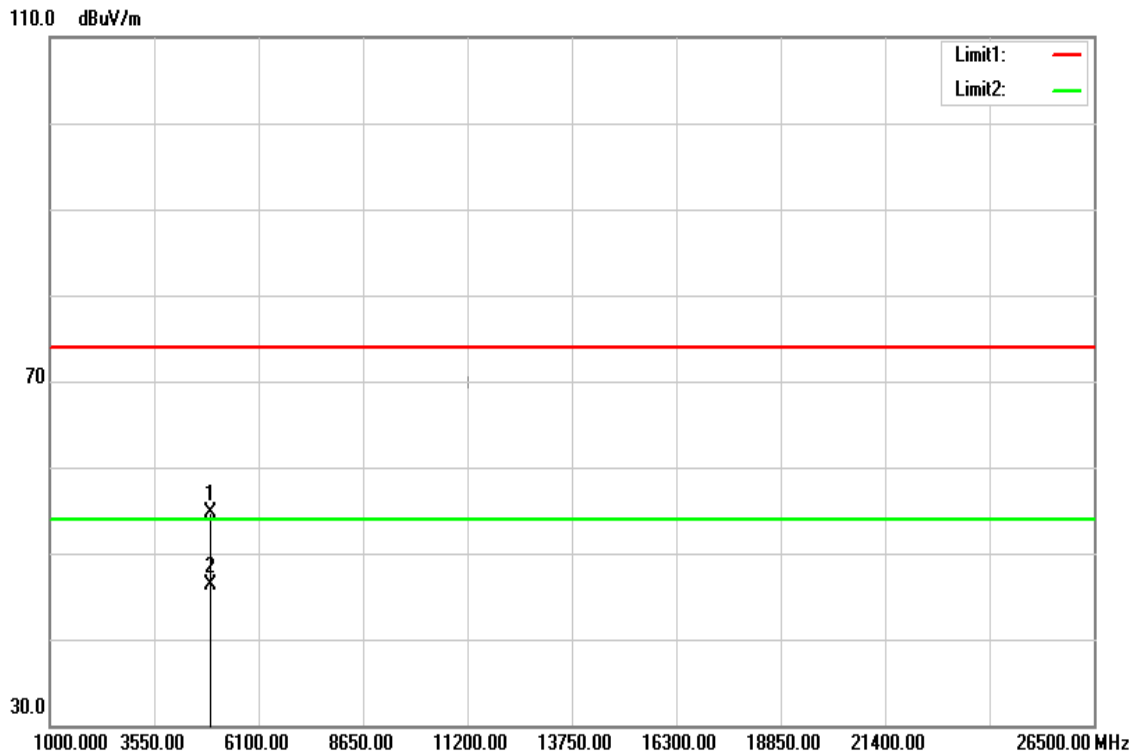


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	50.07	4.55	54.62	74.00	-19.38	peak
4925.000	41.74	4.55	46.29	54.00	-7.71	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

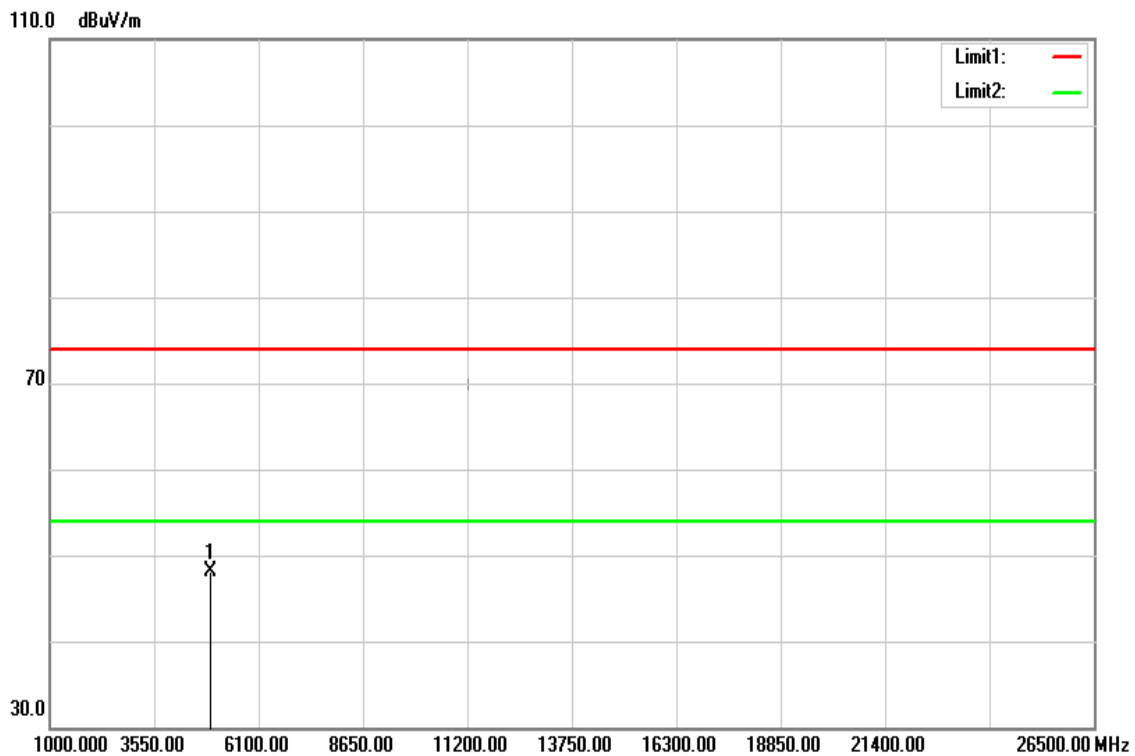


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4918.000	43.53	4.55	48.08	74.00	-25.92	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

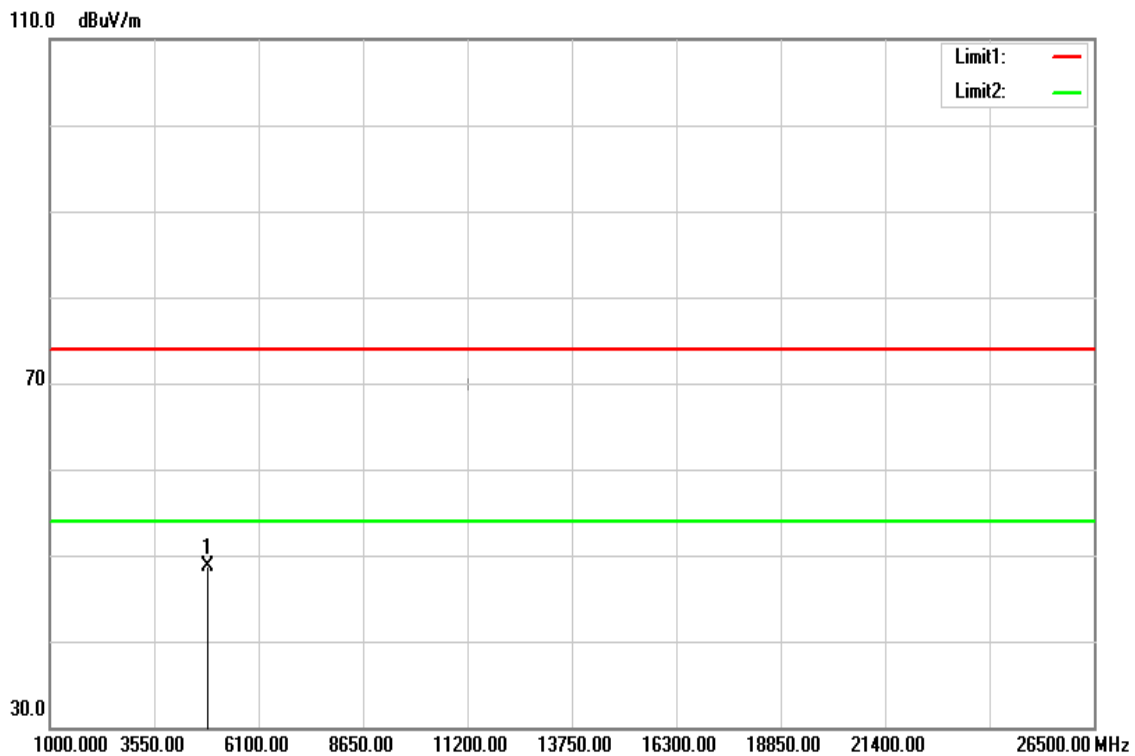


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4848.000	44.20	4.43	48.63	74.00	-25.37	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

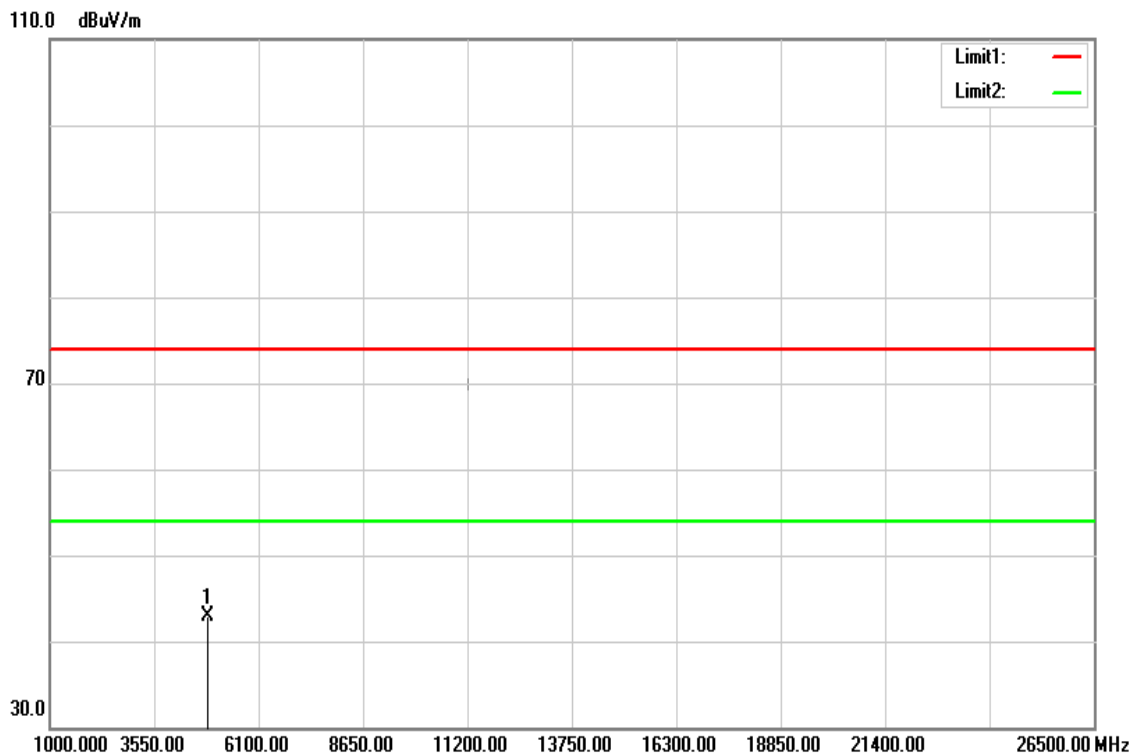


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844.000	38.49	4.41	42.90	74.00	-31.10	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

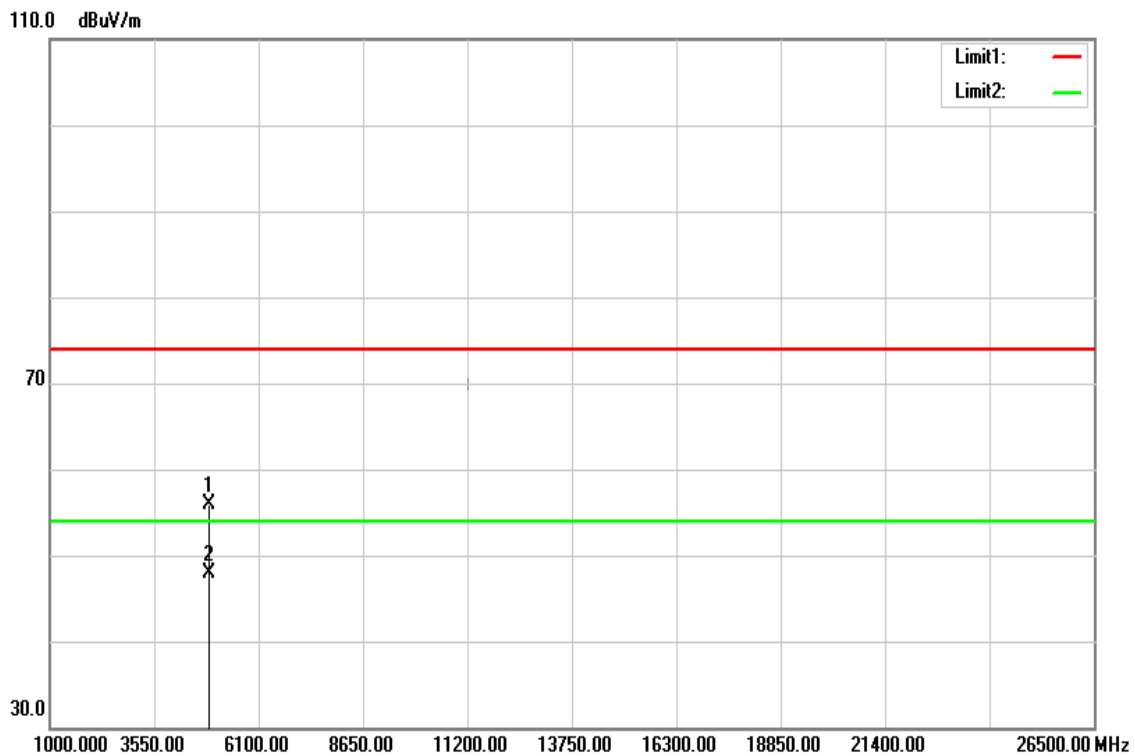


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	51.38	4.49	55.87	74.00	-18.13	peak
4883.000	43.36	4.49	47.85	54.00	-6.15	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

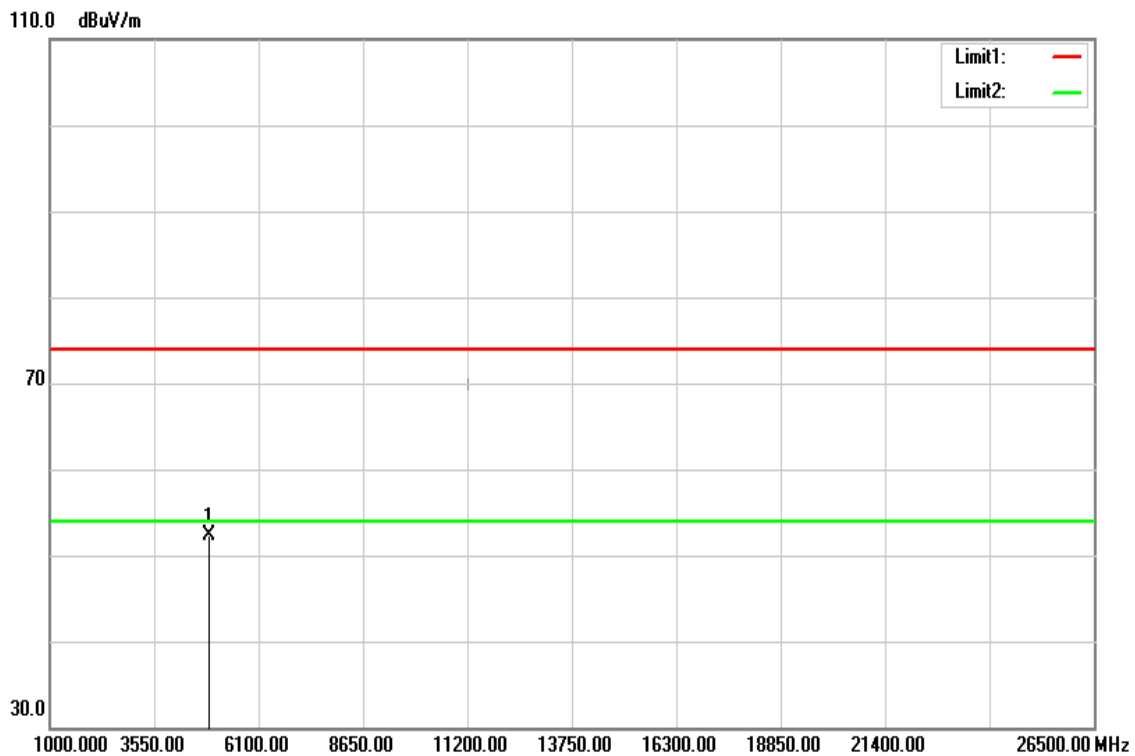


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4890.000	47.76	4.49	52.25	74.00	-21.75	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

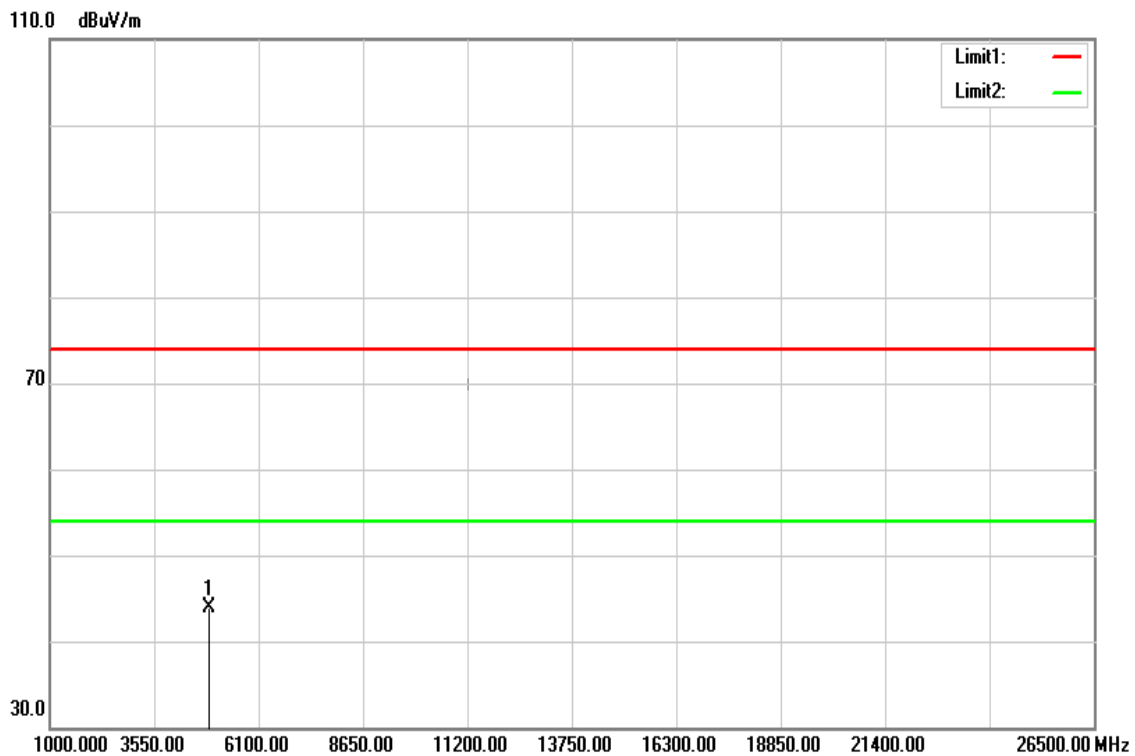


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4897.000	39.45	4.51	43.96	74.00	-30.04	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

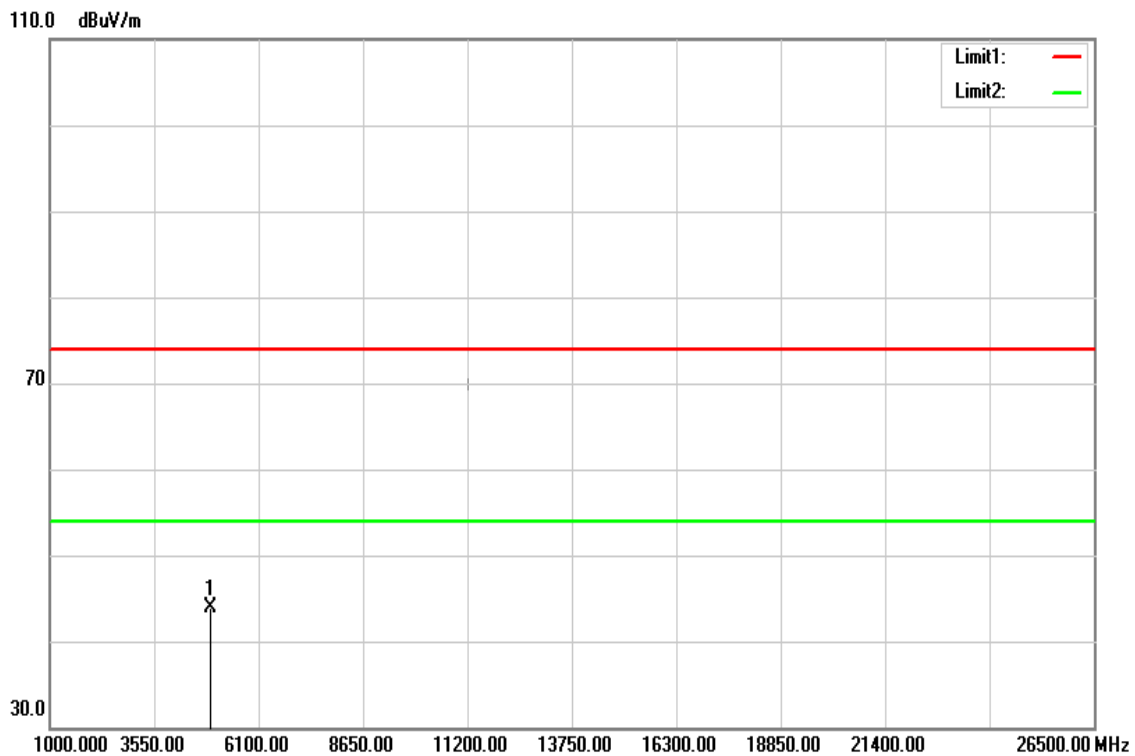


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4911.000	39.43	4.53	43.96	74.00	-30.04	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

For Dipole Antenna

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

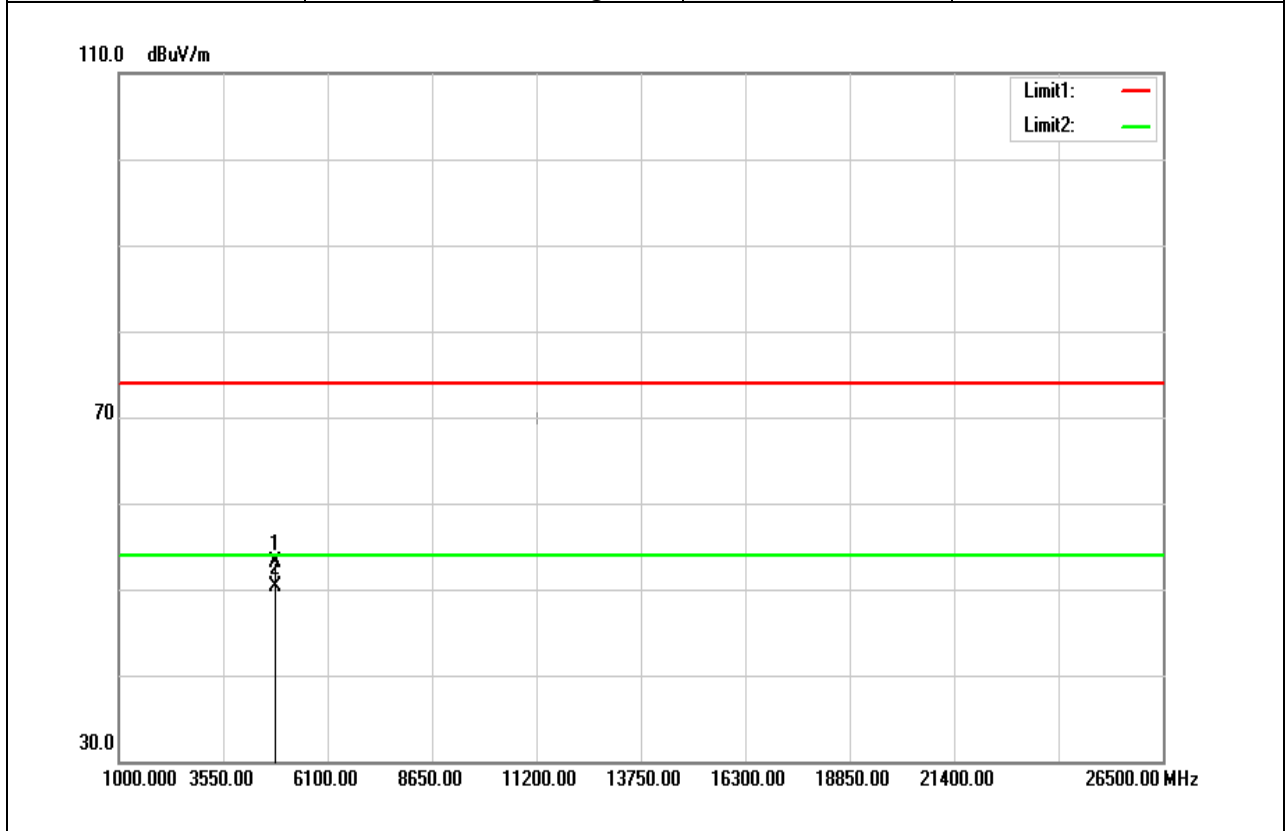


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	48.68	4.38	53.06	74.00	-20.94	peak
4827.000	45.97	4.38	50.35	54.00	-3.65	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

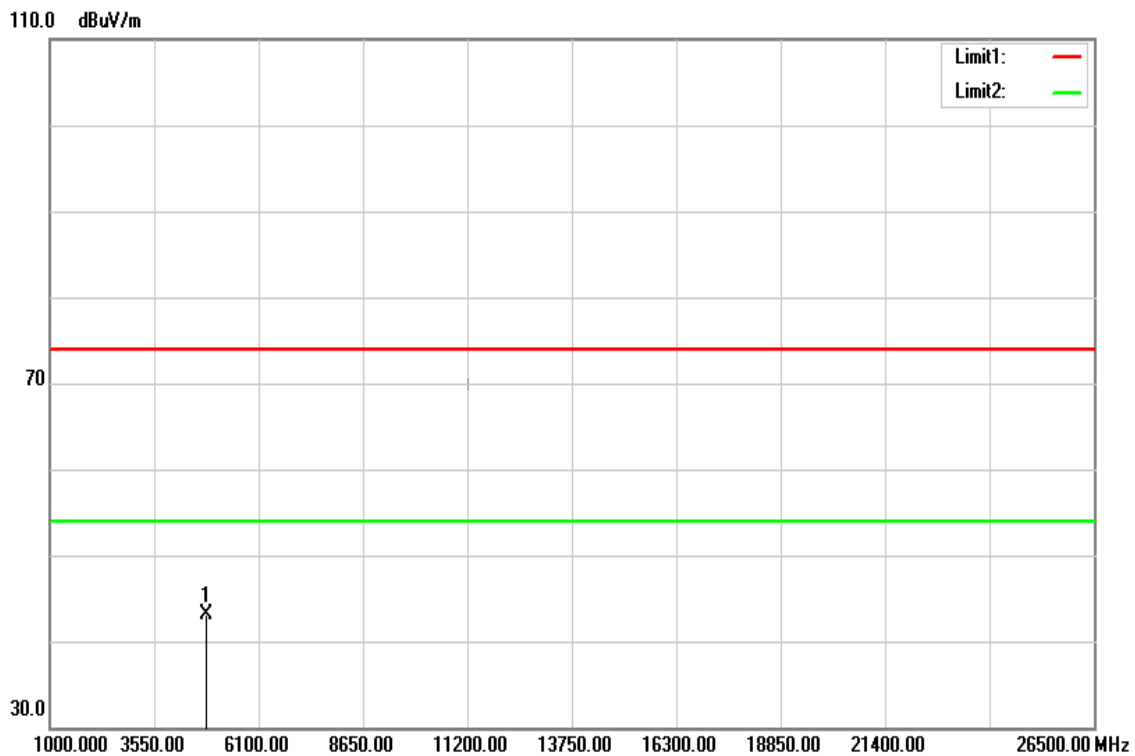


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	38.81	4.38	43.19	74.00	-30.81	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

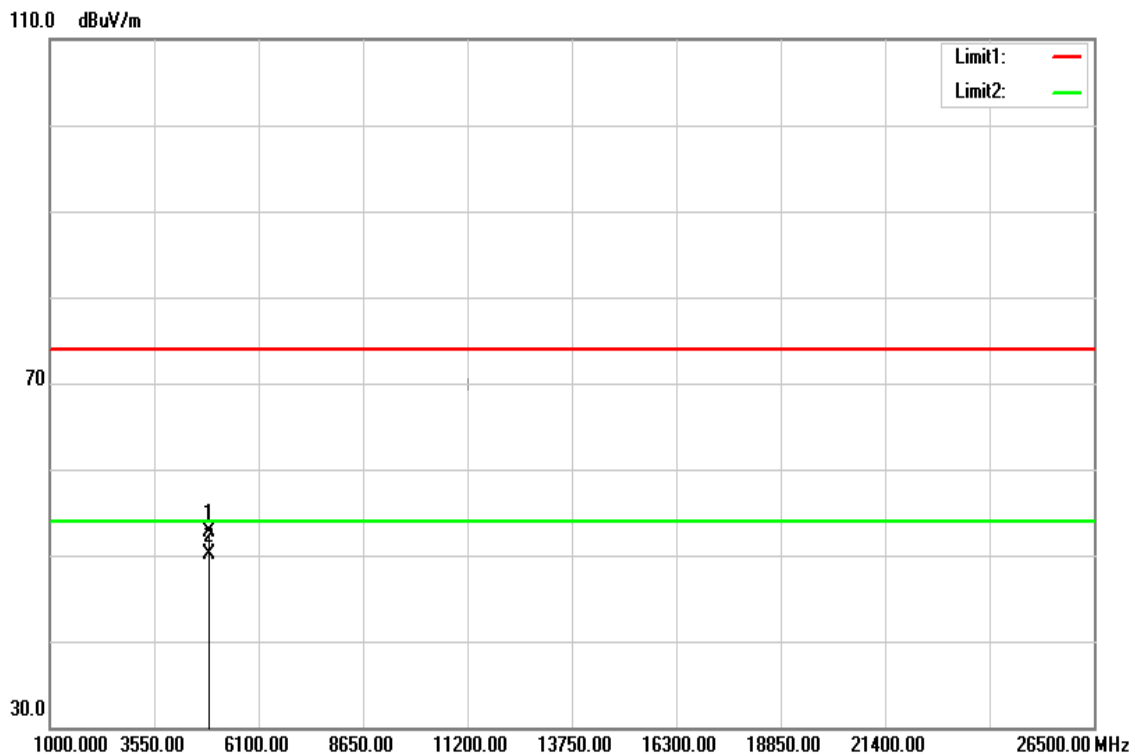


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	48.27	4.47	52.74	74.00	-21.26	peak
4876.000	45.56	4.47	50.03	54.00	-3.97	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

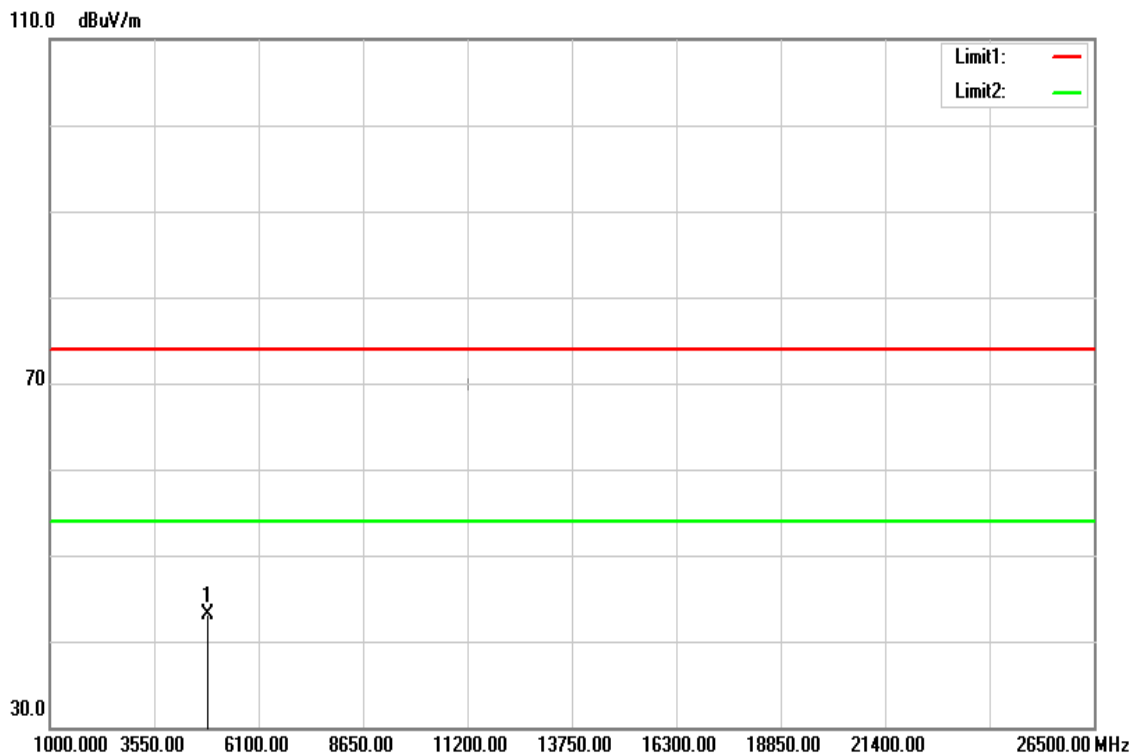


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	38.65	4.47	43.12	74.00	-30.88	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

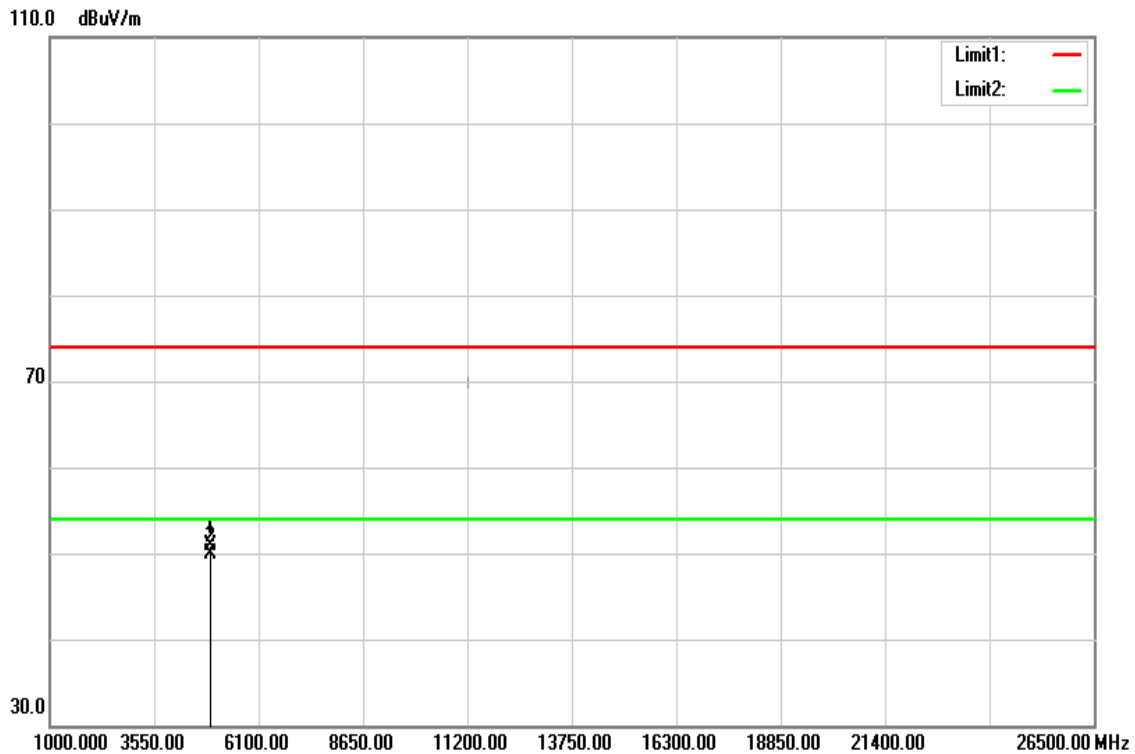


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	46.42	4.55	50.97	74.00	-23.03	peak
4925.000	45.30	4.55	49.85	54.00	-4.15	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

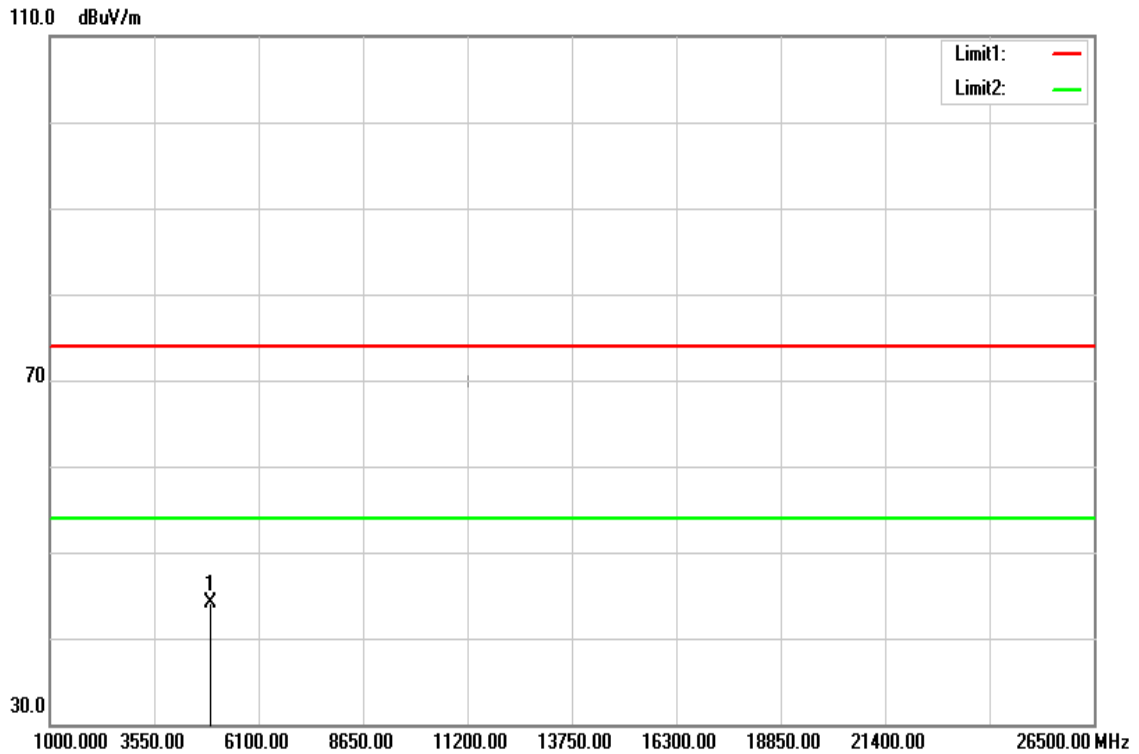


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	39.47	4.55	44.02	74.00	-29.98	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

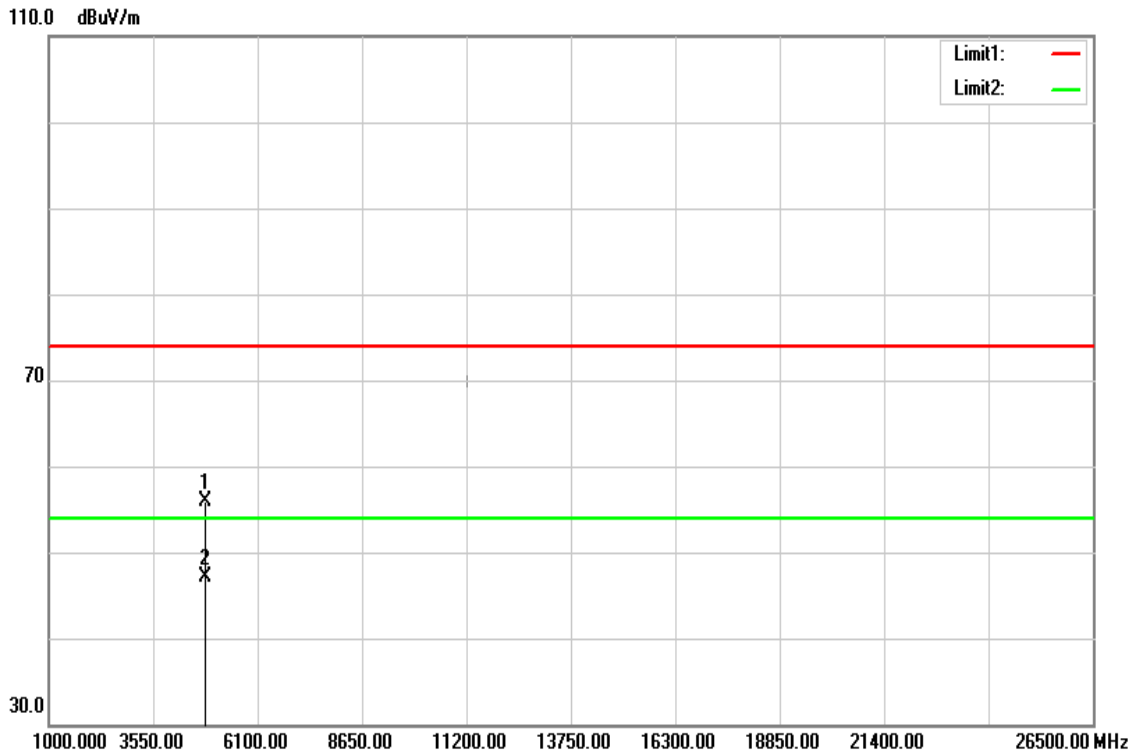


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	51.49	4.38	55.87	74.00	-18.13	peak
4827.000	42.69	4.38	47.07	54.00	-6.93	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

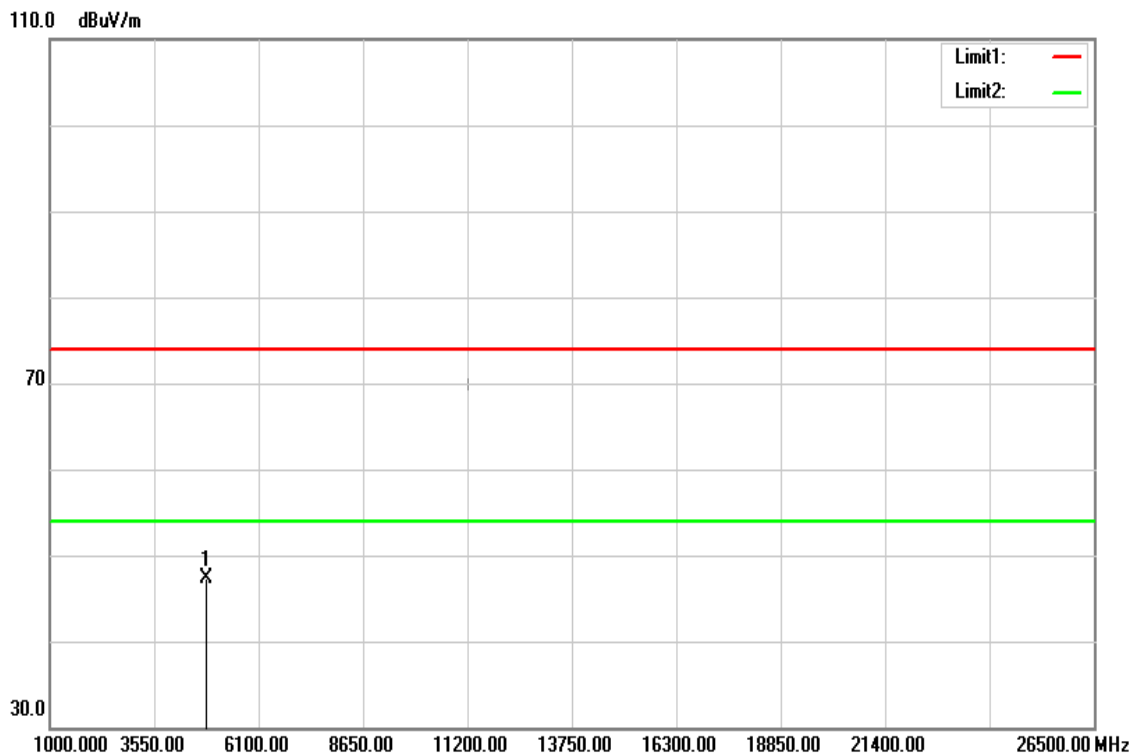


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4820.000	43.04	4.36	47.40	74.00	-26.60	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

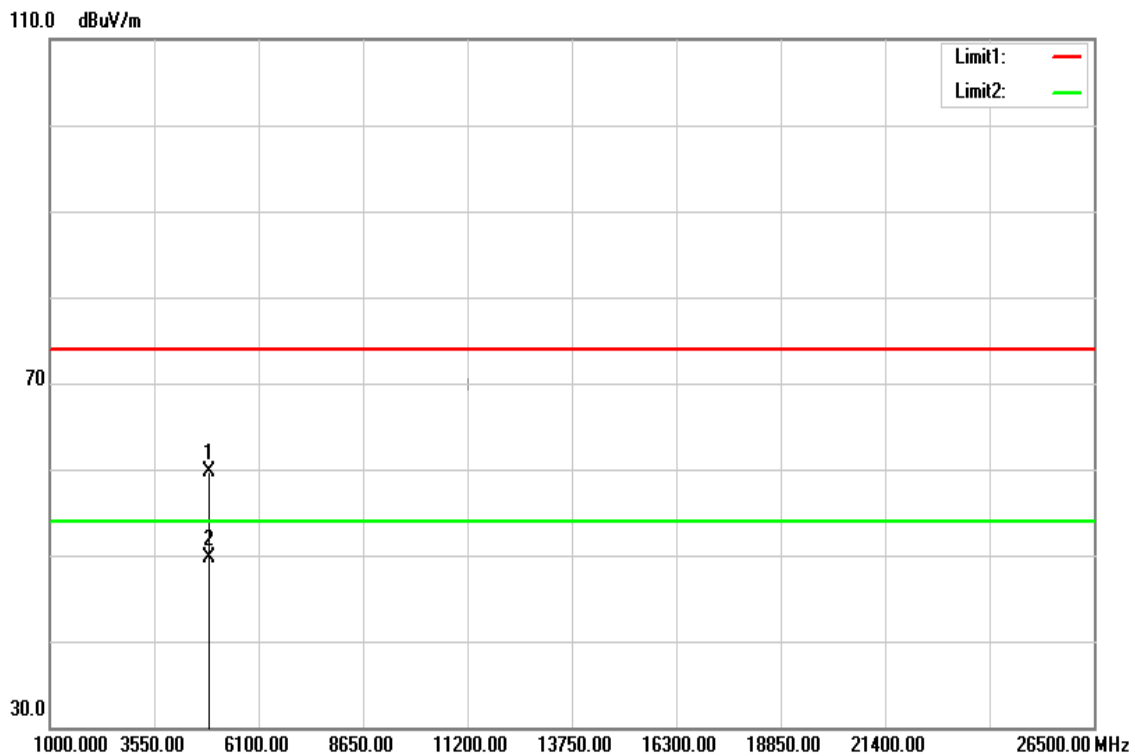


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	55.22	4.47	59.69	74.00	-14.31	peak
4876.000	45.24	4.47	49.71	54.00	-4.29	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

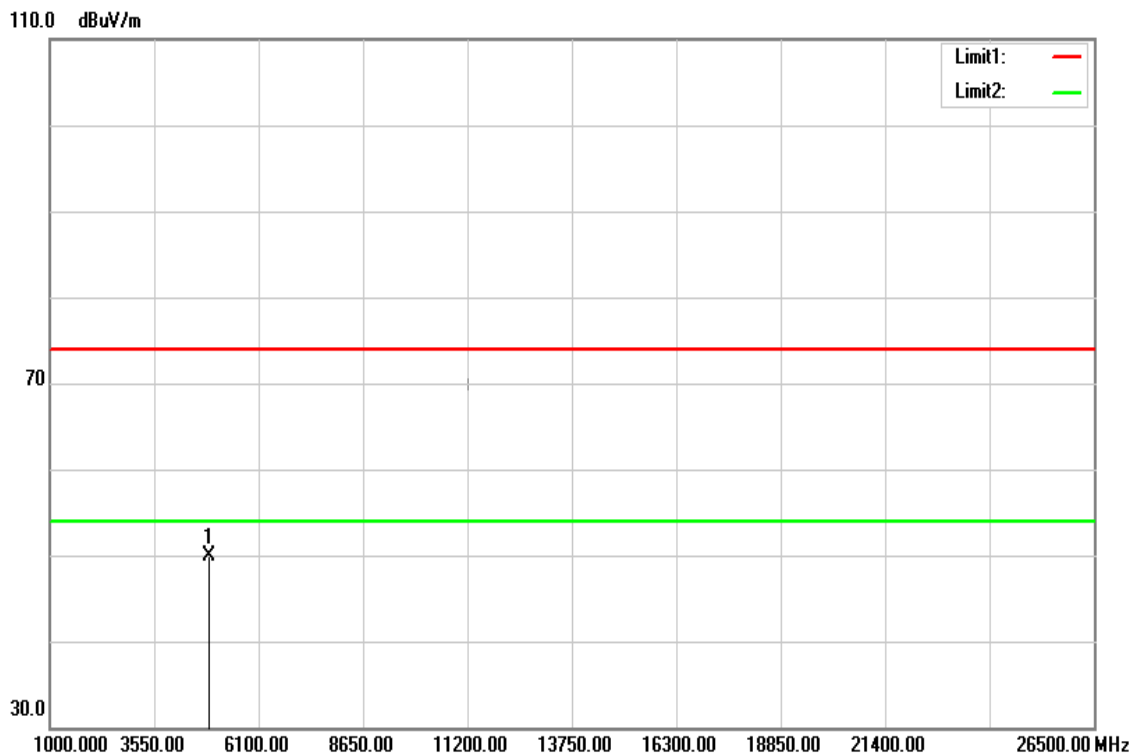


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	45.42	4.47	49.89	74.00	-24.11	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

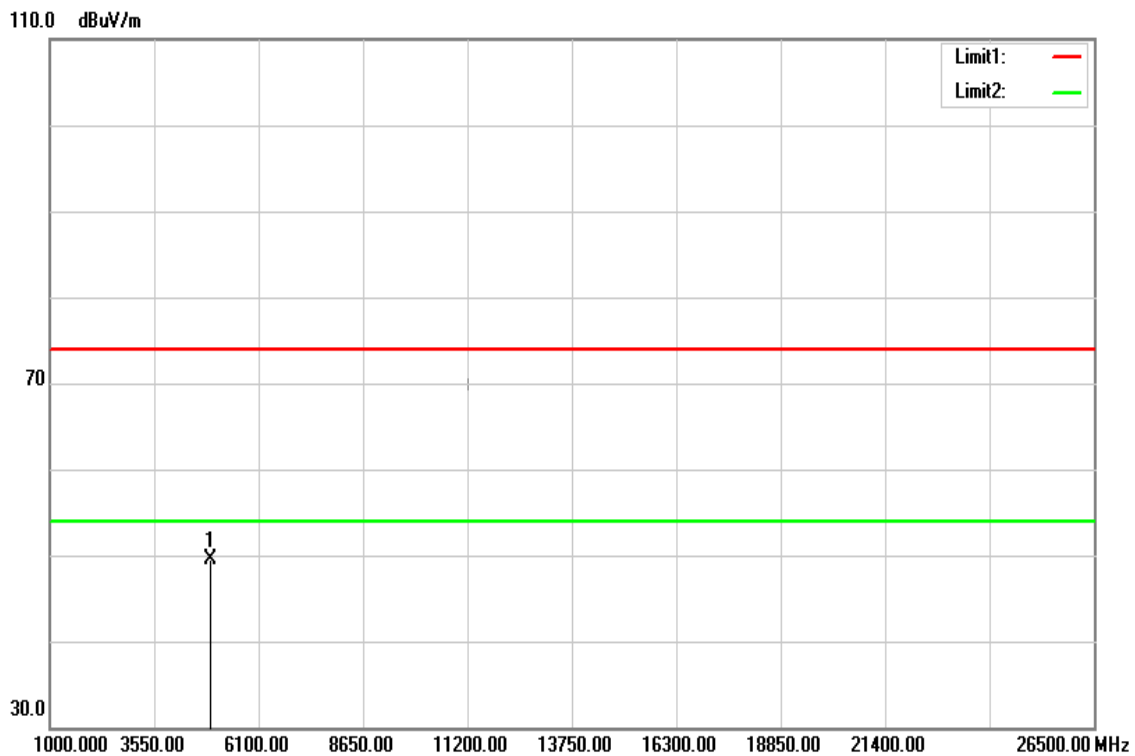


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	44.99	4.55	49.54	74.00	-24.46	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

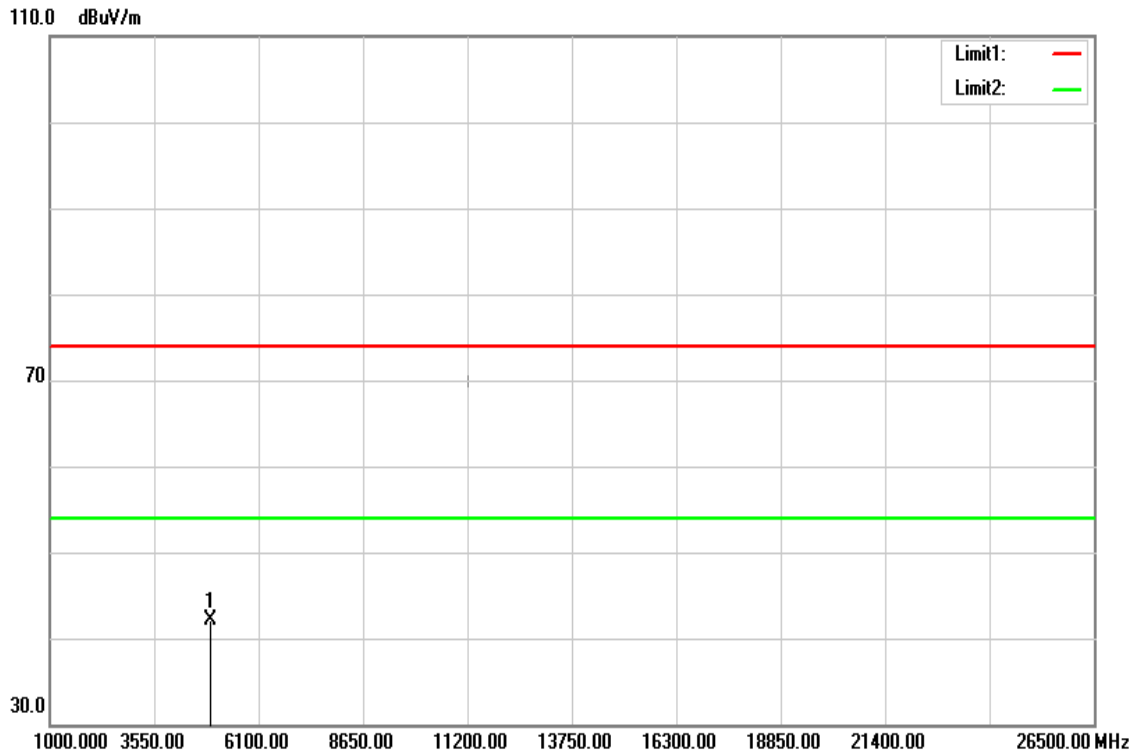


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	37.55	4.55	42.10	74.00	-31.90	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

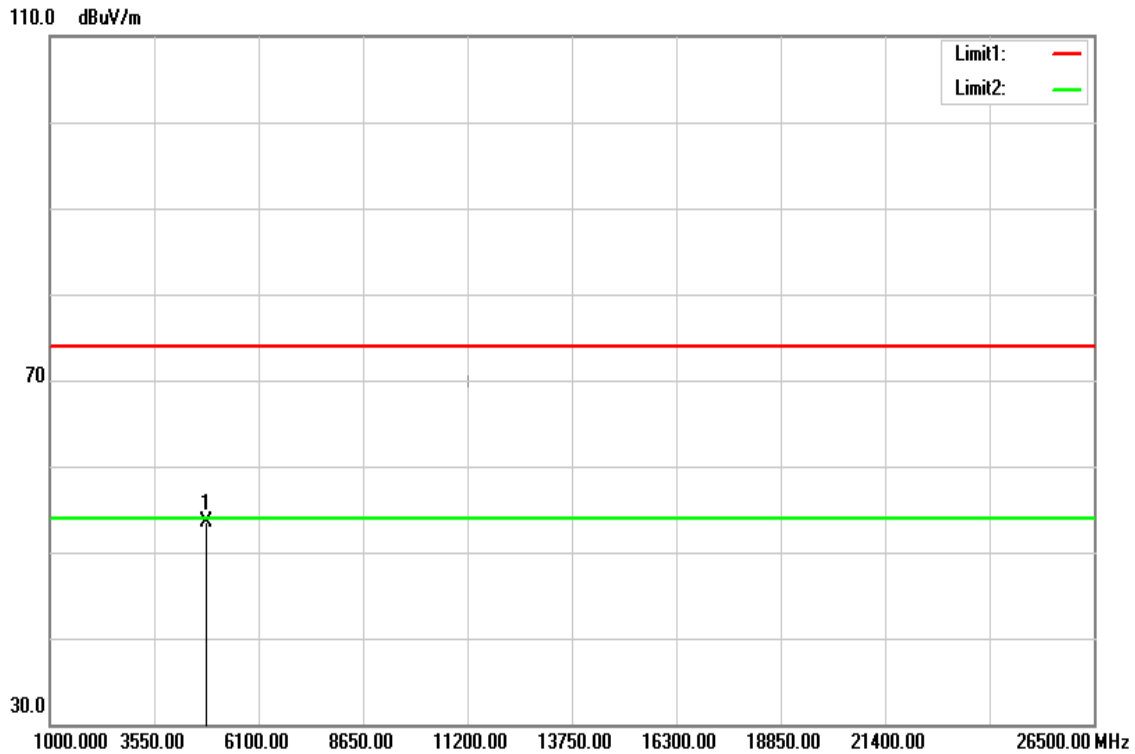


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	49.11	4.38	53.49	74.00	-20.51	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

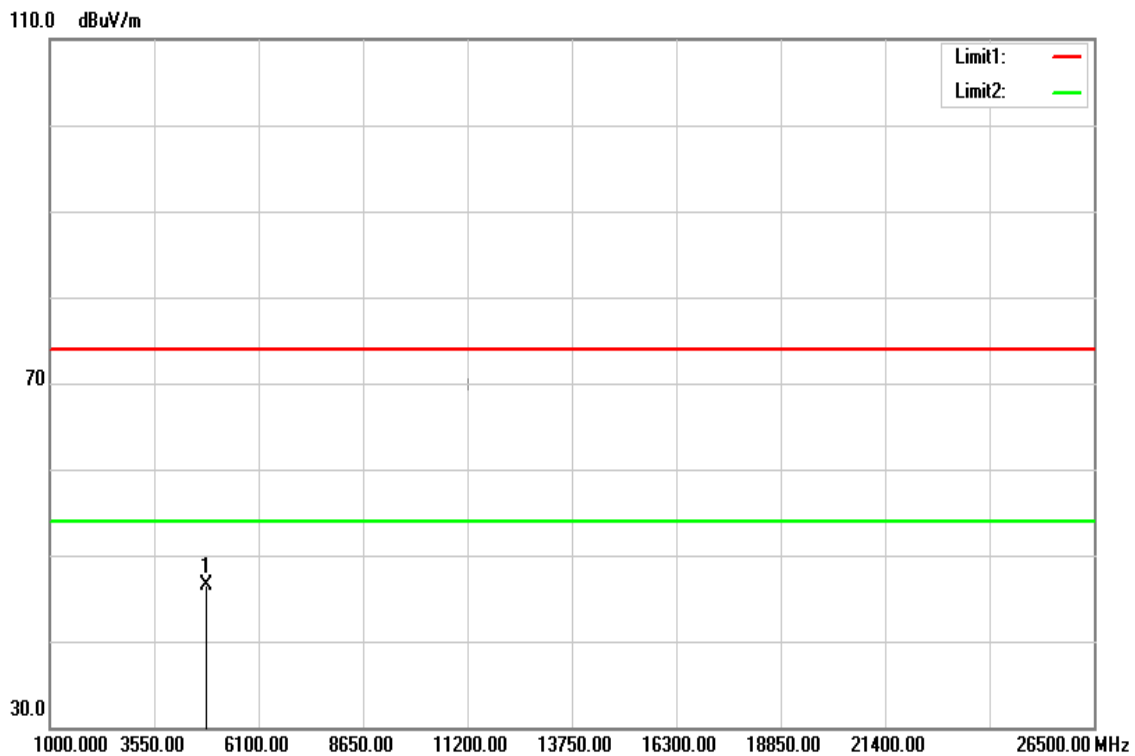


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4827.000	42.08	4.38	46.46	74.00	-27.54	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

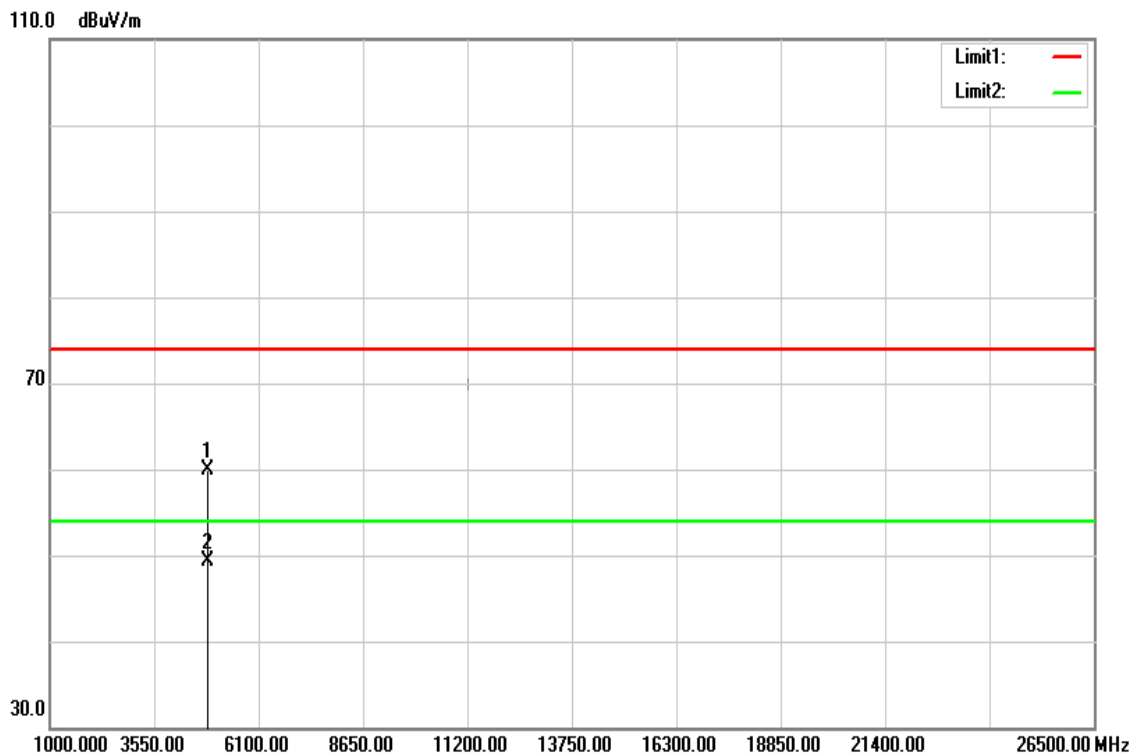


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4869.000	55.49	4.45	59.94	74.00	-14.06	peak
4869.000	44.80	4.45	49.25	54.00	-4.75	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

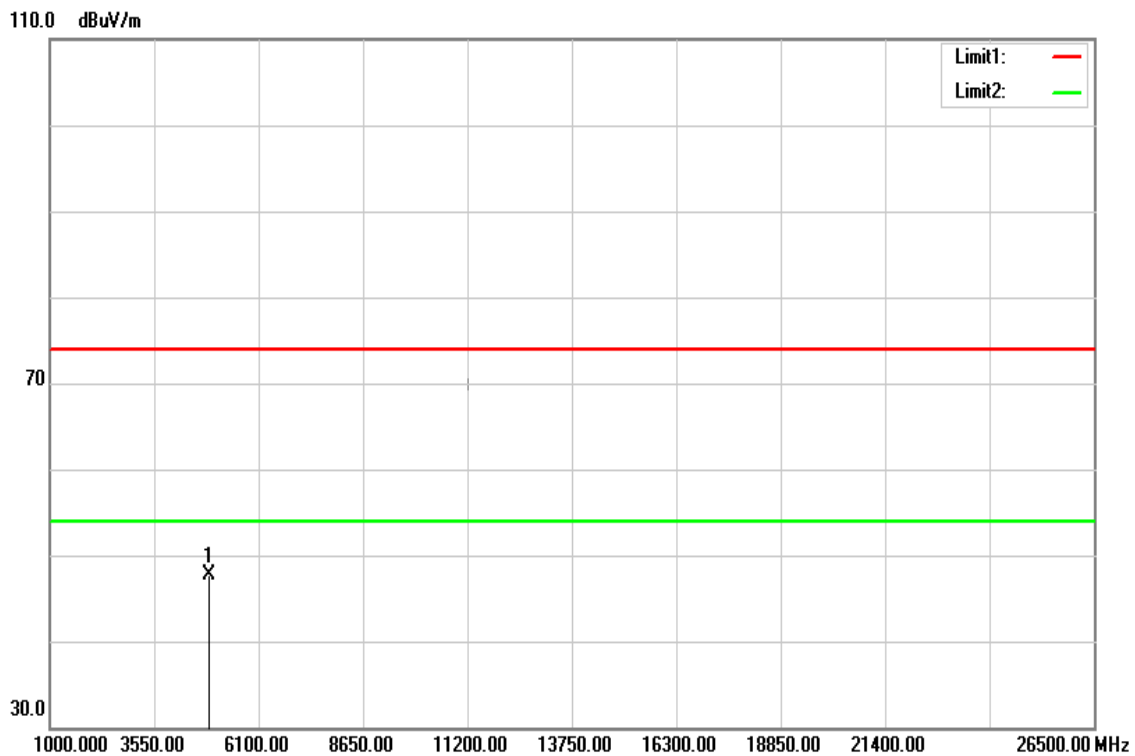


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	43.31	4.47	47.78	74.00	-26.22	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

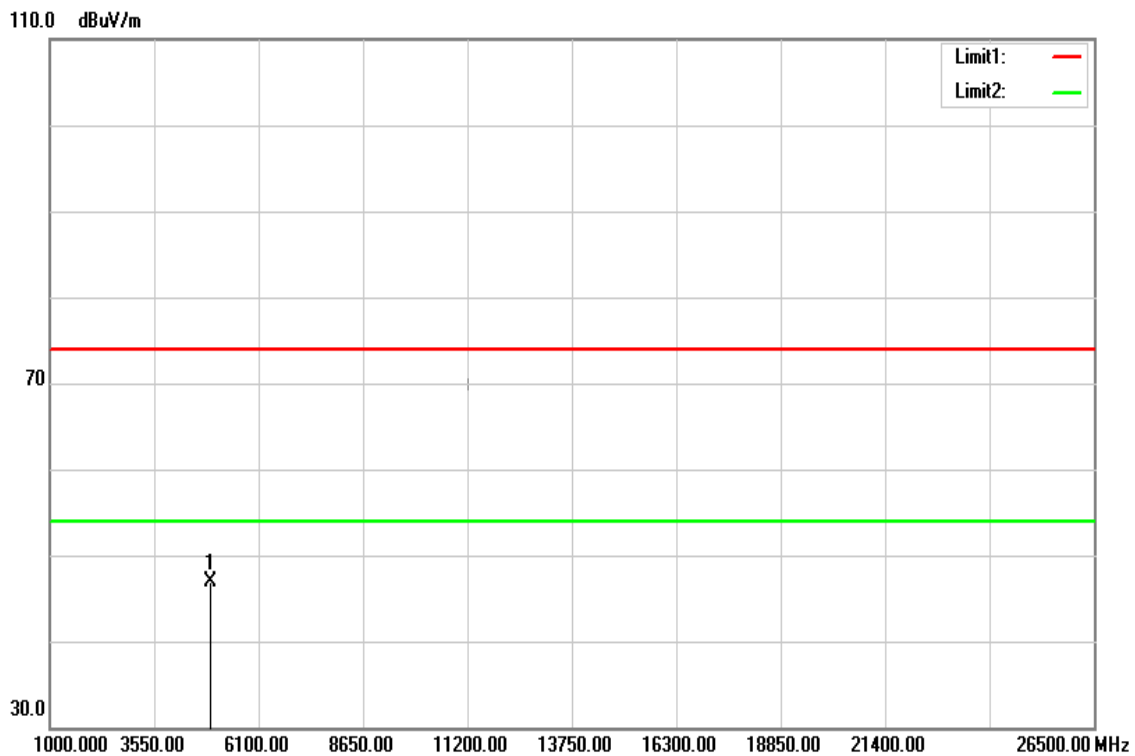


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4925.000	42.40	4.55	46.95	74.00	-27.05	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

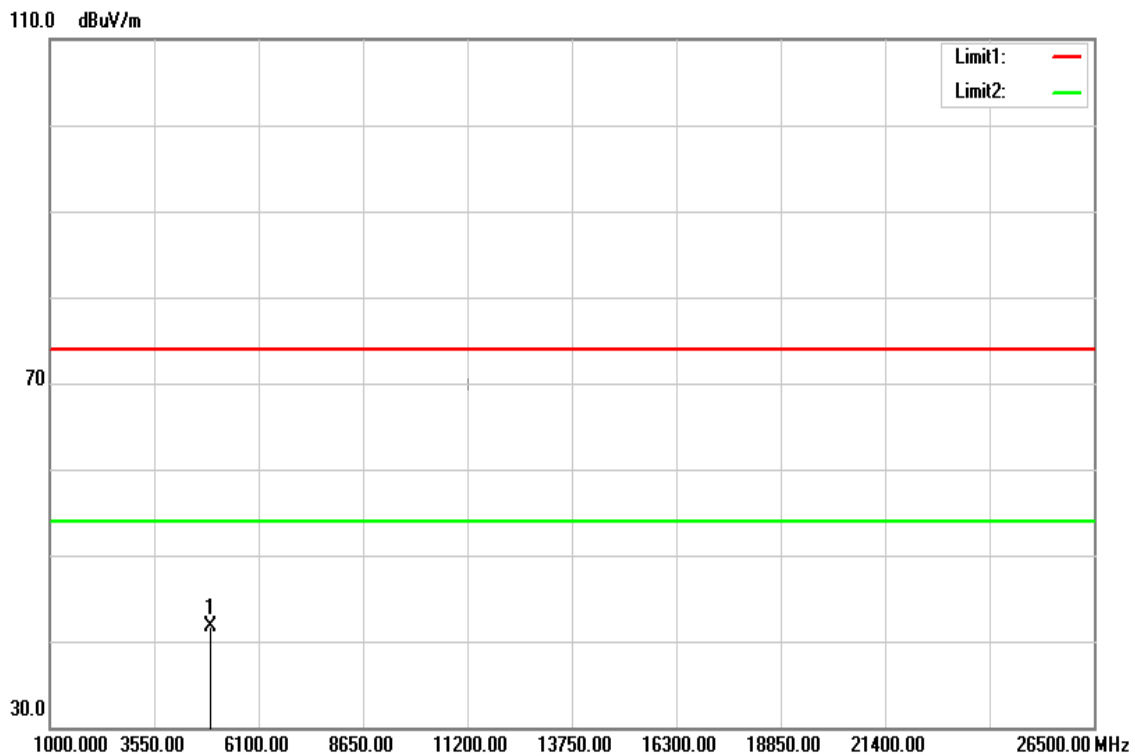


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	37.07	4.55	41.62	74.00	-32.38	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

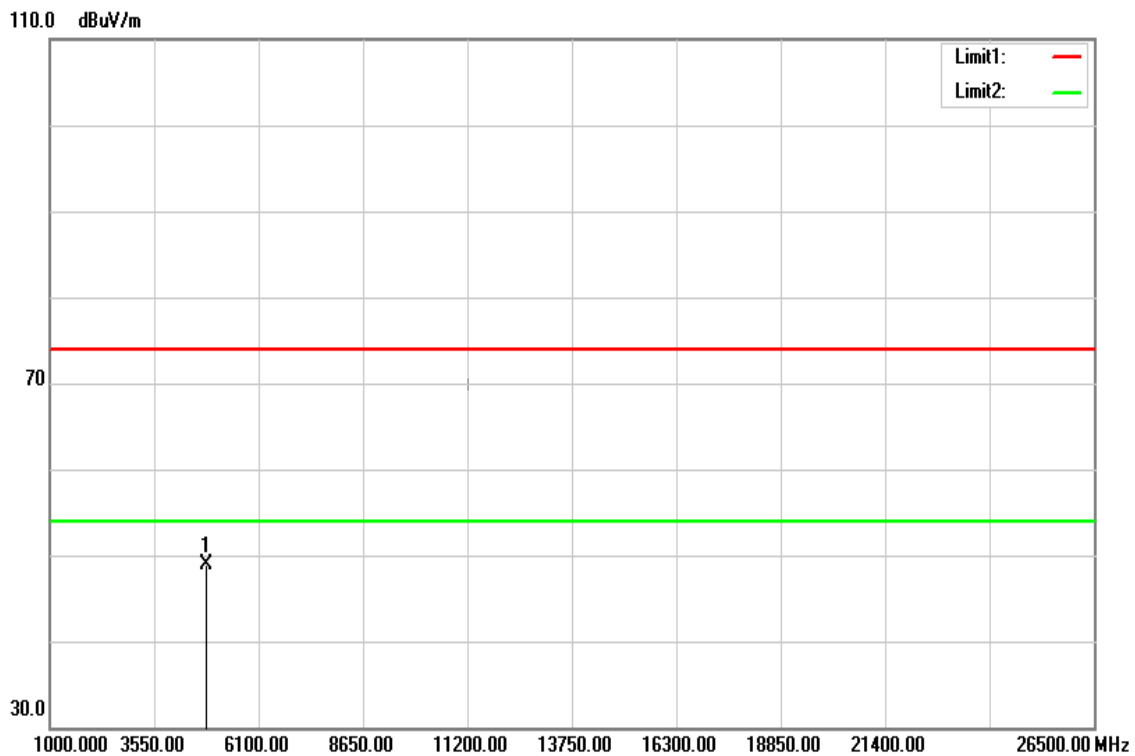


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4841.000	44.41	4.41	48.82	74.00	-25.18	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

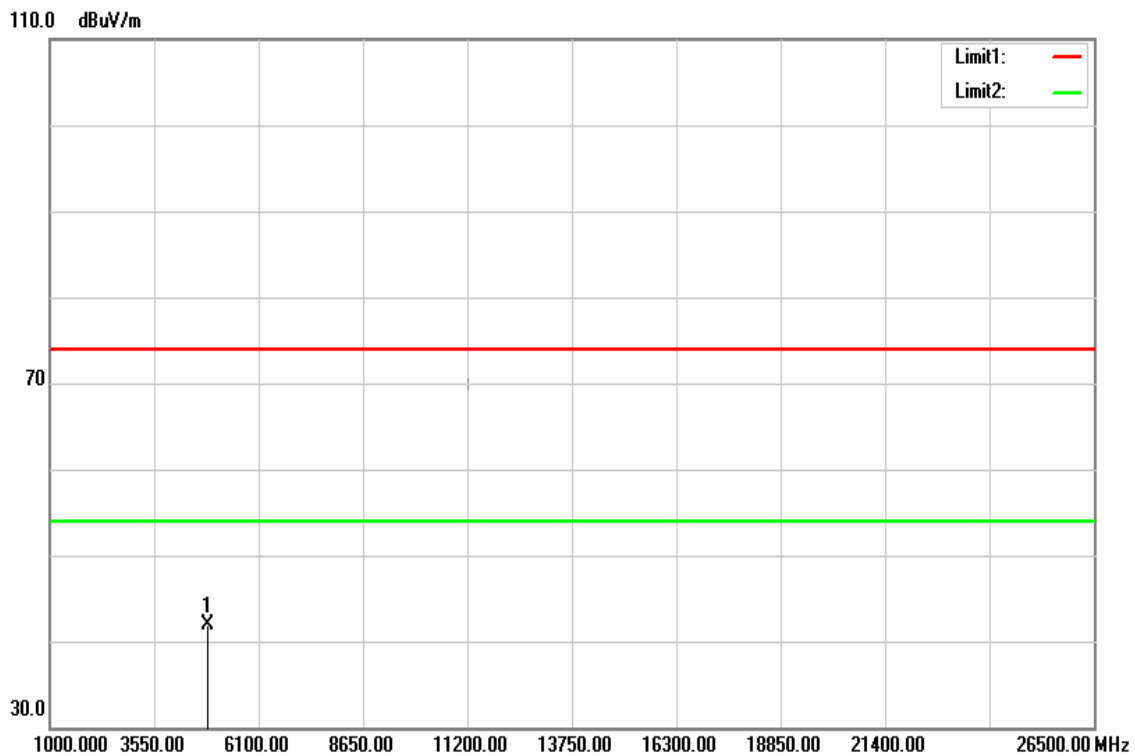


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844.000	37.47	4.41	41.88	74.00	-32.12	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

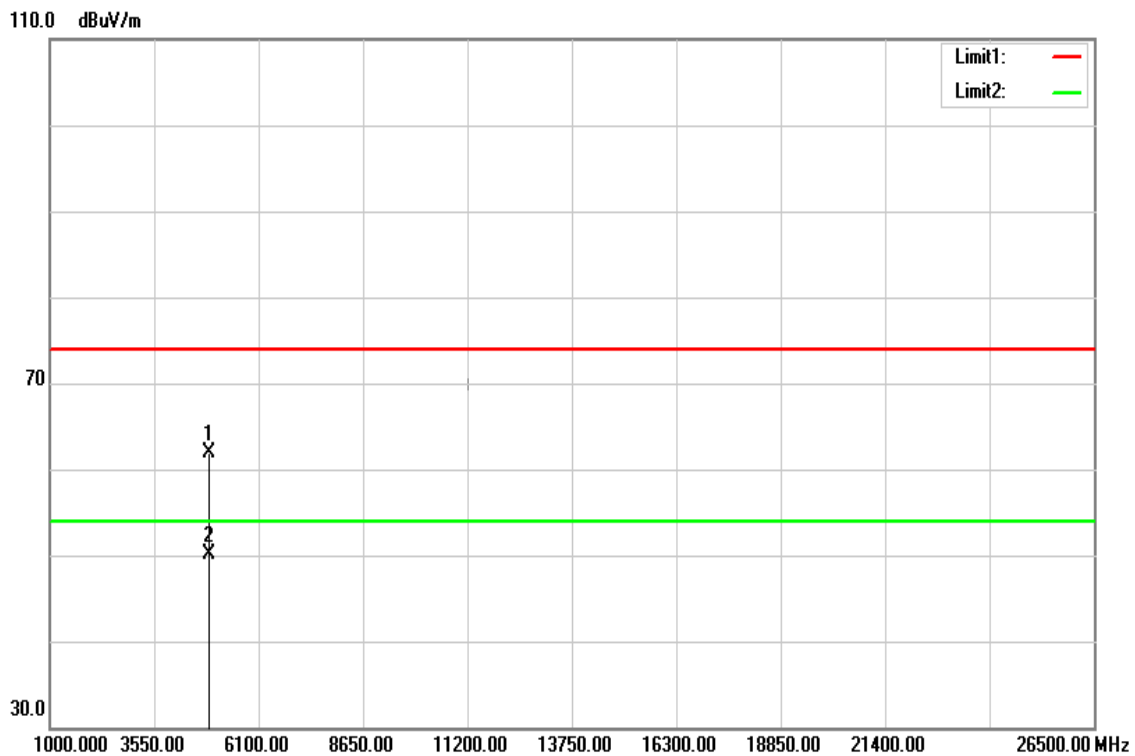


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	57.44	4.47	61.91	74.00	-12.09	peak
4876.000	45.71	4.47	50.18	54.00	-3.82	AVG
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

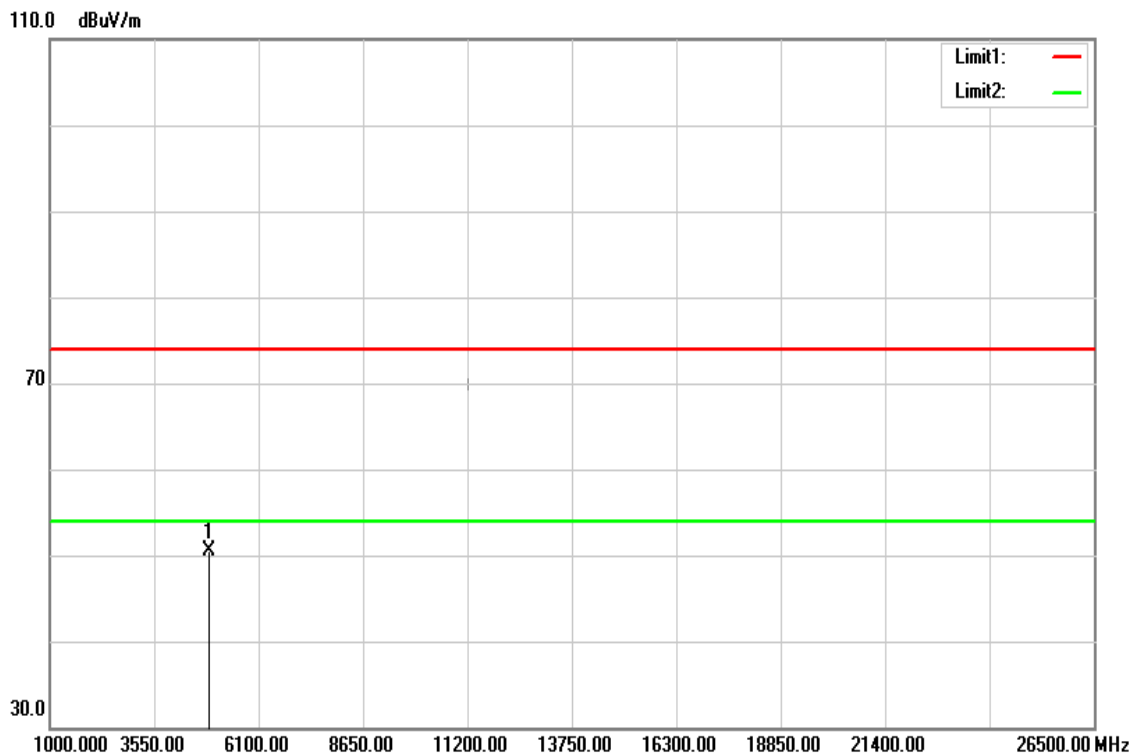


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4876.000	46.12	4.47	50.59	74.00	-23.41	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

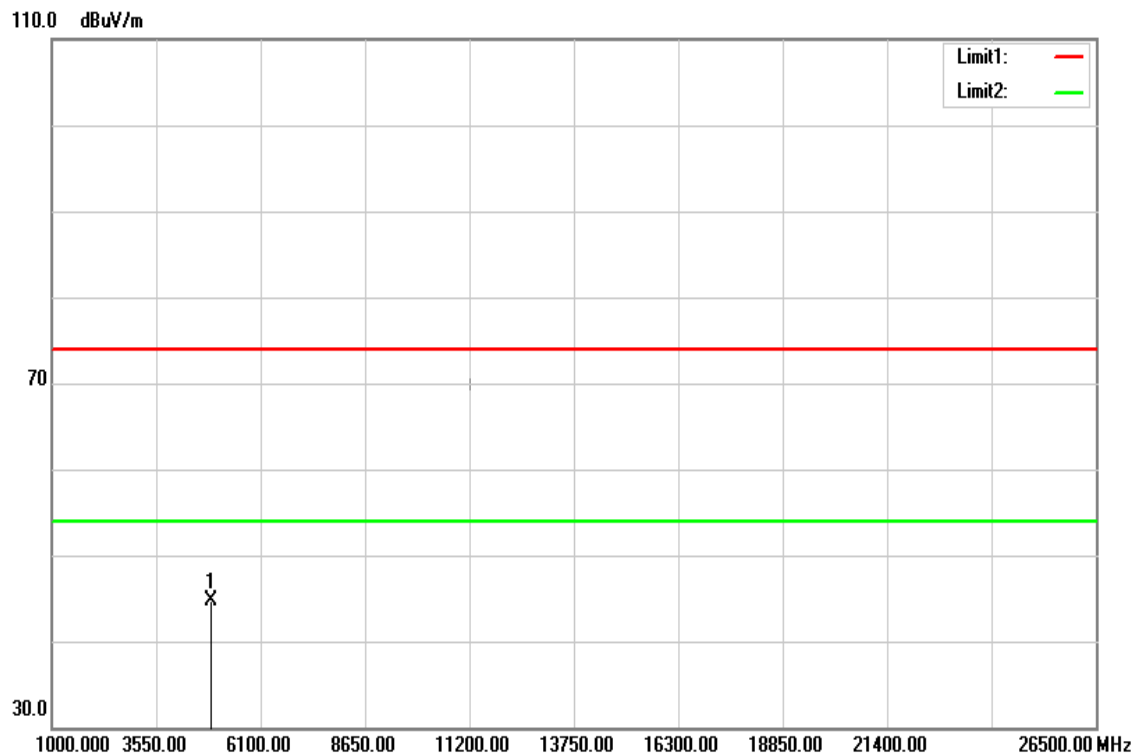


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4904.000	40.17	4.51	44.68	74.00	-29.32	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180627D11-RP3

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

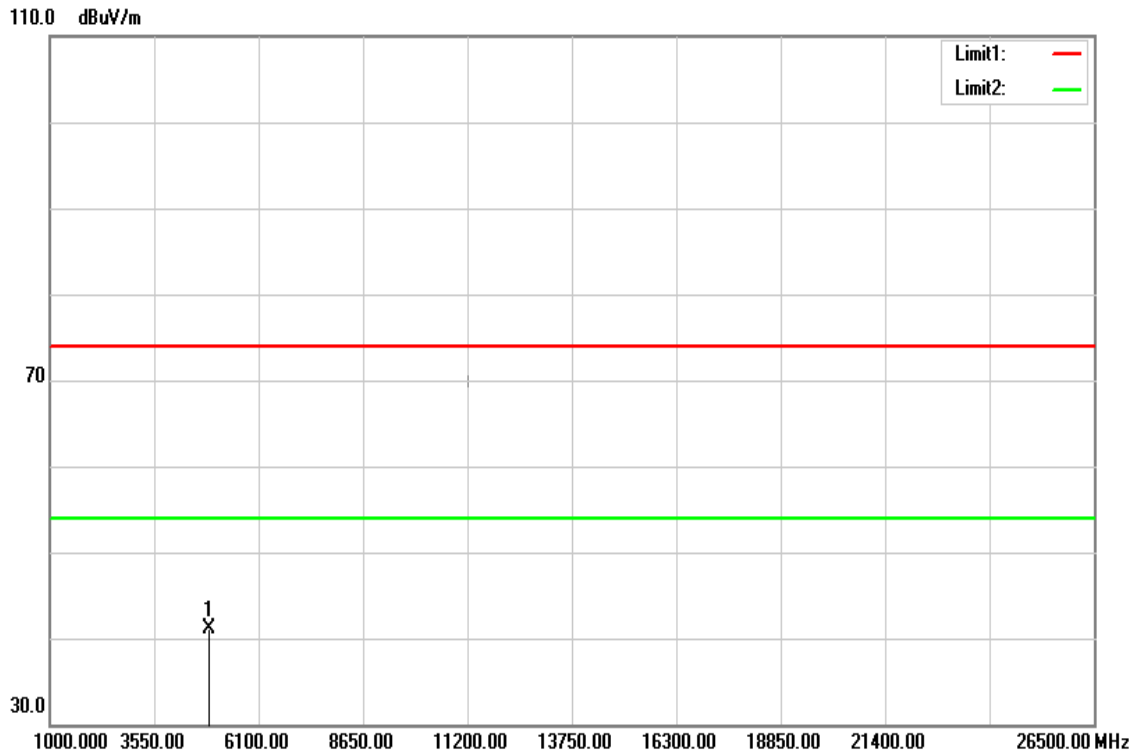

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4904.000	36.53	4.51	41.04	74.00	-32.96	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

--End of Report--