



KSIGN (Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park,
Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China
Tel.: + (86)755-29852678 Fax: + (86)755-29852397 E-mail: info@gdksign.cn Website: www.gdksign.com

TEST REPORT

Report No.	KS2101S0424E01
FCC ID	2AKZY-JZ708
Applicant	SHENZHEN JIZHAO INFORMATION TECHNOLOGY CO.,LTD.
Address	BUILDING NO.1ZHONGKENUO INDUSTRIAL PARK,HEZHOU ROAD XIXIANG STREET BAOAN DISTRICT,SHENZHEN CITY,CHINA
Manufacturer	SHENZHEN JIZHAO INFORMATION TECHNOLOGY CO.,LTD.
Address	BUILDING NO.1ZHONGKENUO INDUSTRIAL PARK,HEZHOU ROAD XIXIANG STREET BAOAN DISTRICT,SHENZHEN CITY,CHINA
Product Name	Tablet PC
Trade Mark	/
Model/Type reference	JZ708
Listed Model(s)	AMICUS-Prime, PowerPong-Omega , JZ100,JZ807
Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample	Jan. 21, 2021
Date of testing	Jan. 21, 2021~Jan. 29, 2021
Date of issue	Jan. 29, 2021
Result	PASS
Compiled by: (Printed name+signature)	Rory Huang
Supervised by: (Printed name+signature)	Eder Zhan
Approved by: (Printed name+signature)	Cary Luo
Testing Laboratory Name	KSIGN(Guangdong) Testing Co., Ltd.
Address	West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.

TABLE OF CONTENTS**Page**

TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION.....	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. OPERATION STATE	8
2.3. MEASUREMENT INSTRUMENTS LIST.....	9
2.5. TEST SOFTWARE	10
3. TEST ITEM AND RESULTS.....	11
3.1. ANTENNA REQUIREMENT.....	11
3.2. PEAK OUTPUT POWER.....	12
3.3. POWER SPECTRAL DENSITY	14
3.4. BANDWIDTH	23
3.5. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED).....	40
3.6. BAND EDGE EMISSIONS(RADIATED).....	47
3.7. SPURIOUS EMISSION (RADIATED)	52
3.8. CONDUCTED EMISSION	63
4. EUT TEST PHOTOS	66
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....	68

TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB 558074 D01 : The measurement guidance provided herein is applicable only to Digital Transmission System (DTS) devices operating in the 902-928 MHz, 2400-2483.5 MHz and/or 5725-5850 MHz bands under §15.247 of the FCC rules (Title 47 of the Code of Federal Regulations).

1.2. Report version

Revised No.	Date of issue	Description
01	Jan. 29, 2021	Original

1.3. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Rory Huang
Conducted Emission	15.207	Pass	Rory Huang
6dB&99% Bandwidth	15.247(a)(2)	Pass	Rory Huang
Peak Output Power	15.247(b)	Pass	Rory Huang
Power Spectral Density	15.247(e)	Pass	Rory Huang
Restricted Band	15.247(d)/15.205	Pass	Rory Huang
Band Edge and Spurious Emission(Conducted)	15.247(d)	Pass	Rory Huang
Spurious Emission(Radiated)	15.247(d)&15.209	Pass	Rory Huang

Note: The measurement uncertainty is not included in the test result.

1.4. Test Facility

Address of the report laboratory

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: CN0096

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

FCC-Registration No.: CN1272

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. General Description of EUT

Test Sample Number:	1-1-1(Normal Sample),1-1-2(Engineering Sample)
Product Name:	Tablet PC
Trade Mark:	/
Model/Type reference:	JZ708
Listed Model(s):	AMICUS-Prime,PowerPong-Omega , JZ807, JZ100
Model Different:	The difference of product model only depends on the screen size, model name and appearance color vary according to market demand. Other power supply methods, safety structure and key components are the same, which do not affect the safety and electromagnetic compatibility performance.
Power supply(Adapter):	INPUT:100-240V~50/60Hz 0.3A Max OUTPUT:5V---2A
Power supply(Battery):	DC 3.7V 3000mAh 11.1Wh
Hardware version:	BND-MT8168-P863 V1.1
Software version:	V1.0

2.4GHz WIFI

Modulation:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK,QPSK,16QAM,64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Max Peak Output Power:	802.11b: 9.43dBm 802.11g: 9.95dBm 802.11n (HT20): 9.96dBm 802.11n (HT40): 9.99dBm
Channel number:	802.11b/g/n(HT20):11 channels 802.11n(HT40):7 channels
Test frequency:	CH01/03: 2412MHz/2422MHz; CH06: 2437MHz; CH09/11: 2452MHz/2462MHz
Channel separation:	5MHz
Antenna type:	PIFA Antenna
Antenna gain:	0.8dBi

2.2. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: 1.CH 01~CH 11 for 802.11b/g/n(HT20/HT40), CH03~CH09 for 802.11n(HT40).

2.The display in grey were the channel selected for testing.

Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

2.3. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	04/07/2021
2	Vector Signal Generator	Agilent	N5182A	MY50142520	04/07/2021
3	Analog Signal Generator	HP	83752A	3344A00337	04/07/2021
4	Power Sensor	Agilent	E9304A	MY50390009	04/07/2021
5	Power Sensor	Agilent	E9300A	MY41498315	04/07/2021
6	Wideband Radio Communication Tester	R&S	CMW500	157282	04/07/2021
7	Climate Chamber	Angul	AGNH80L	1903042120	04/07/2021
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	04/07/2021
9	RF Control Unit	Tonscend	JS0806-2	/	04/07/2021

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	04/07/2021
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	03/27/2021
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	03/27/2021
4	Spectrum Analyzer	HP	8593E	3831U02087	04/07/2021
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	03/29/2023
6	Loop Antenna	Beijing ZHINAN	ZN30900C	18050	03/25/2021
7	Spectrum Analyzer	R&S	FSV40-N	101798	04/07/2021
8	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	03/29/2023
9	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	04/07/2021
10	Pre-Amplifier	EMCI	EMC051835SE	980662	04/07/2021
11	Pre-Amplifier	Schwarzbeck	BBV-9721	57	04/07/2021
12	Horn Antenna	Schwarzbeck	BBHA 9170	00939	03/29/2021

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV432	1326.6105.02	03/27/2021
2	EMI Test Receiver	R&S	ESR	102524	04/07/2021
3	Manual RF Switch	JS TOYO	/	MSW-01/002	04/07/2021

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

2.5. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

3. TEST ITEM AND RESULTS

3.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.


Note: The antenna is permanently fixed to the EUT

3.2. Peak Output Power

Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

Test Configuration

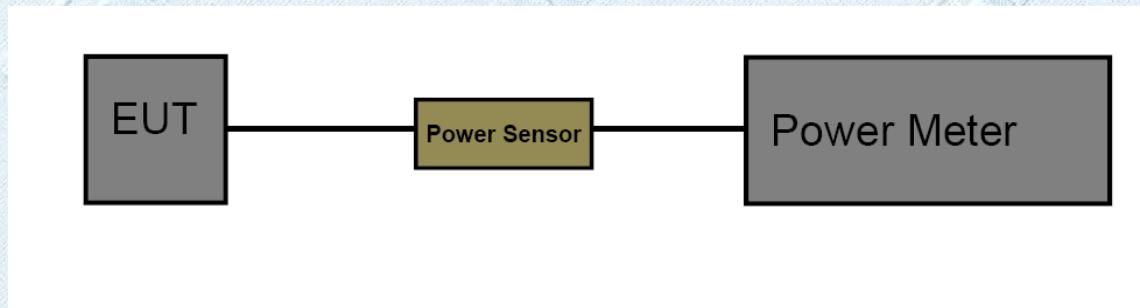

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. The measurement is according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.
3. Spectrum Setting:
Set analyser center frequency to DTS channel center frequency.
Set the RBW to: 1MHz
Set the VBW to: 3MHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.
4. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

Test Mode

Please refer to the clause 2.3

Test Result


Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
802.11b	2412	9.20	30
	2437	9.43	
	2462	8.97	
802.11g	2412	9.95	30
	2437	9.15	
	2462	9.54	
802.11n (HT20)	2412	9.69	30
	2437	9.96	
	2462	9.63	
802.11n (HT40)	2422	9.99	30
	2437	9.67	
	2452	9.93	
Result : PASS			

3.3. Power Spectral Density

Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration

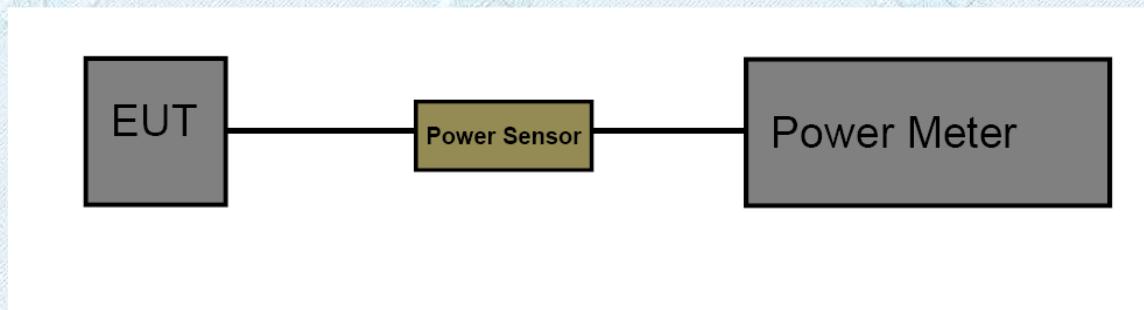

Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.
3. Spectrum Setting:
Set analyser center frequency to DTS channel center frequency.
Set the span to 1.5 times the DTS bandwidth.
Set the RBW to: 10 kHz
Set the VBW to: 30 kHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.


Test Mode



Please refer to the clause 2.3


Test Result



Note:

$$\text{Power Density(dBm/3kHz)} = \text{Power Density(dBm/10kHz)} - 10 * \log(10/3)$$

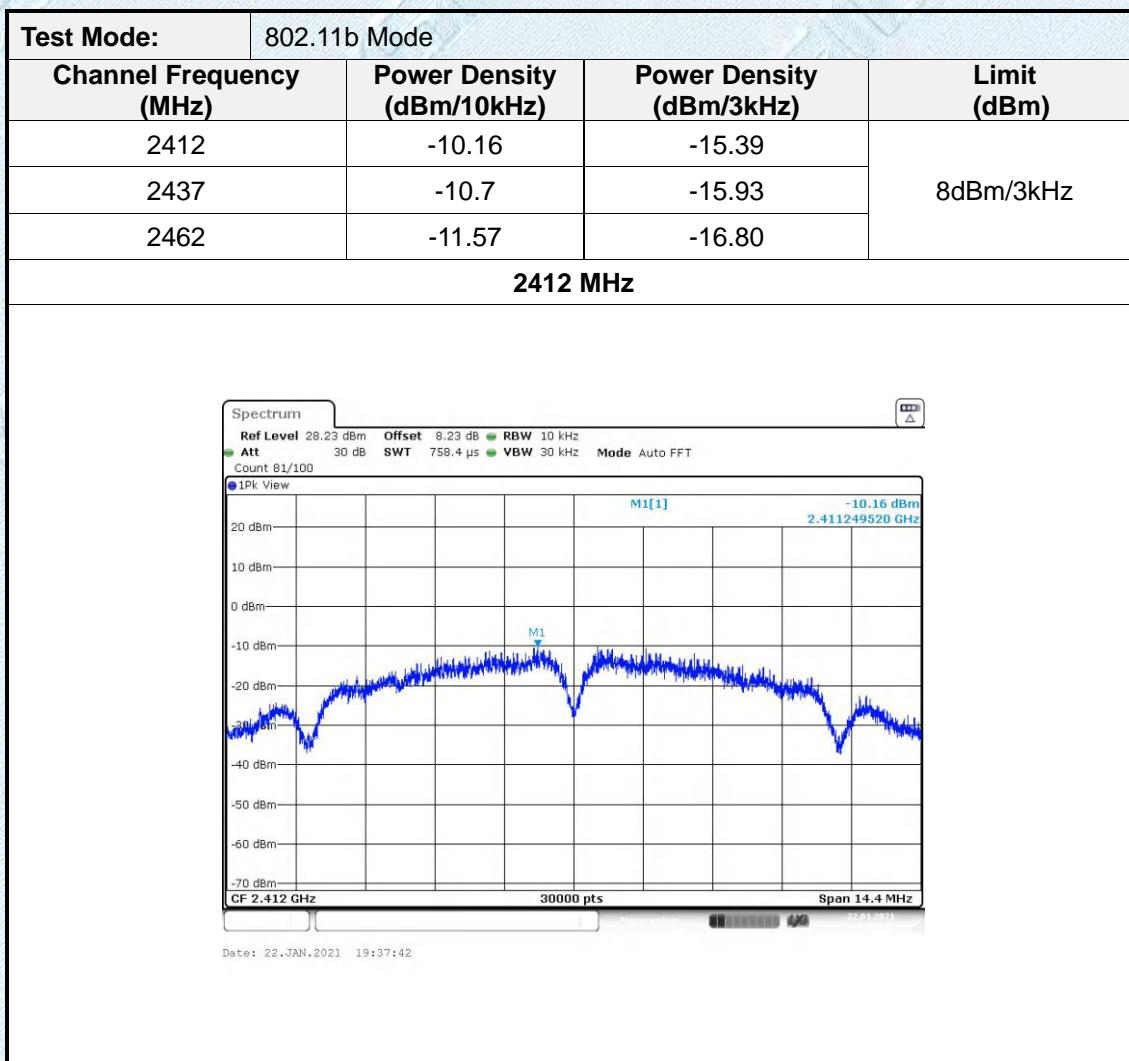

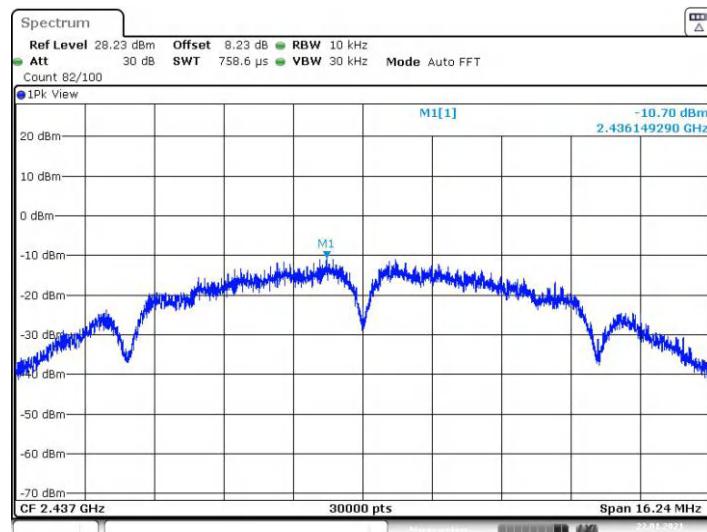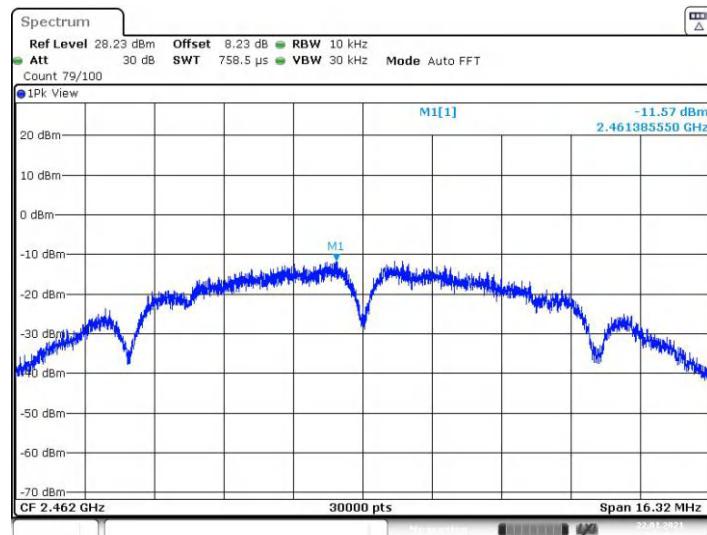2437 MHz**2462 MHz**

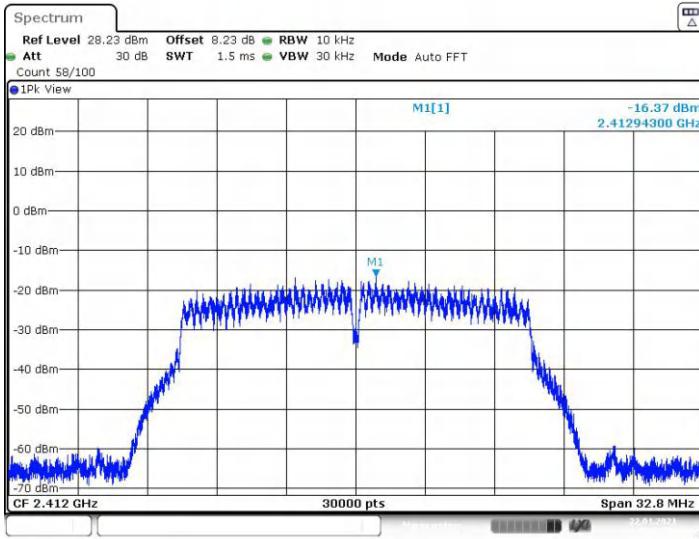Test Mode:	802.11g Mode			
Channel Frequency (MHz)	Power Density (dBm/10 kHz)	Power Density (dBm/3 kHz)	Limit (dBm)	
2412	-16.37	-21.60	8dBm/3kHz	
2437	-17.97	-23.20		
2462	-17.74	-22.97		
2412 MHz				
				
Date: 22.JAN.2021 19:52:54				

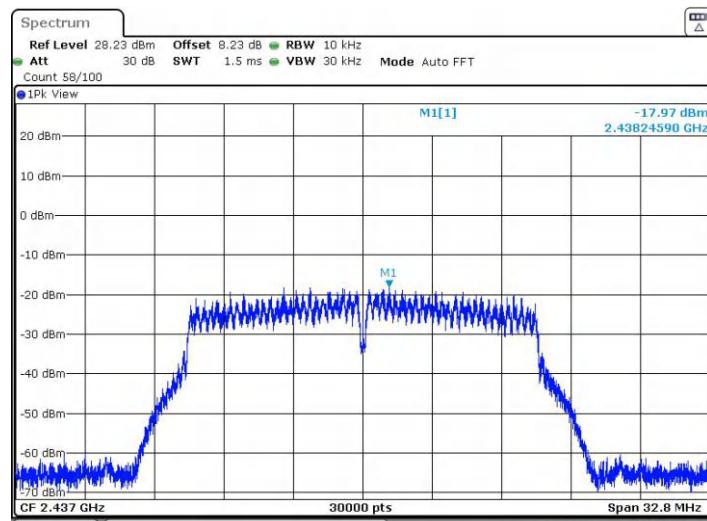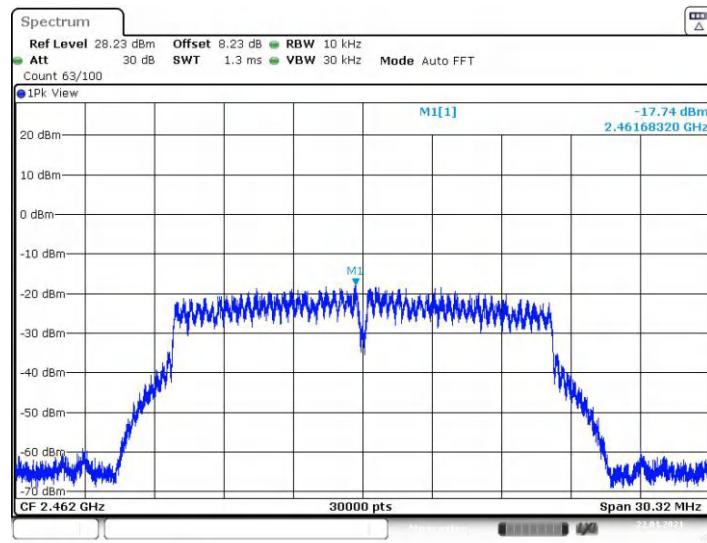2437 MHz**2462 MHz**

Test Mode:	802.11n(HT20) Mode		
Channel Frequency (MHz)	Power Density (dBm/10kHz)	Power Density (dBm/3 kHz)	Limit (dBm)
2412	-16.26	-21.60	8dBm/3kHz
2437	-16.92	-23.20	
2462	-17.33	-22.97	

2412 MHz

Spectrum

Ref Level 28.23 dBm Offset 8.23 dB RBW 10 kHz

Att 30 dB SWT 1.5 ms VBW 30 kHz Mode Auto FFT

Count 62/100



1Pk View

M1[1] -16.26 dBm
2.41137230 GHz

20 dBm
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

CF 2.412 GHz 30000 pts Span 32.0 MHz

Date: 22.JAN.2021 20:07:17

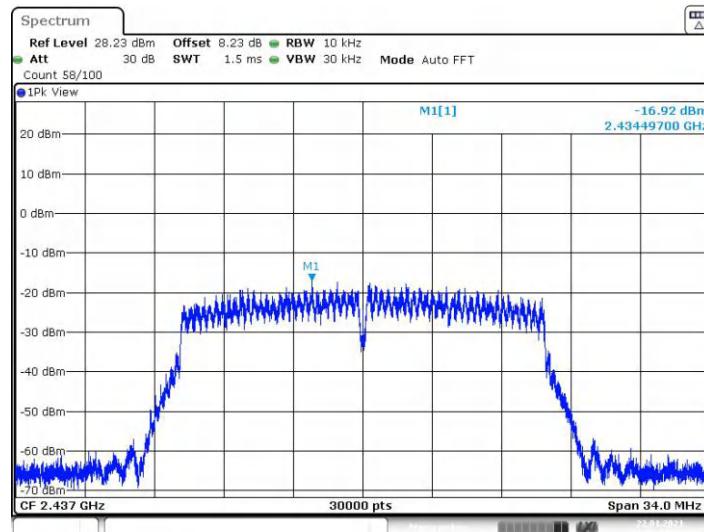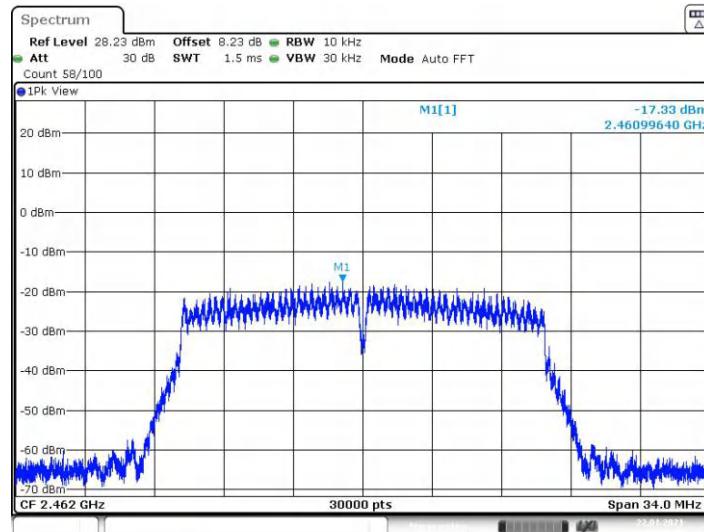2437 MHz**2462 MHz**

Test Mode:	802.11n(HT40) Mode		
Channel Frequency (MHz)	Power Density (dBm/10kHz)	Power Density (dBm/3 kHz)	Limit (dBm)
2422	-18.44	-21.60	8dBm/3kHz
2437	-19.75	-23.20	
2452	-18.4	-22.97	

2422 MHz

Spectrum



Ref Level 28.23 dBm Offset 8.23 dB RBW 10 kHz
Att 30 dB SWT 2.8 ms VBW 30 kHz Mode Auto FFT
Count 39/100

1Pk View

M1[1] -18.44 dBm
2.42449610 GHz

CF 2.422 GHz 30000 pts Span 65.6 MHz

Date: 22.JAN.2021 20:20:32

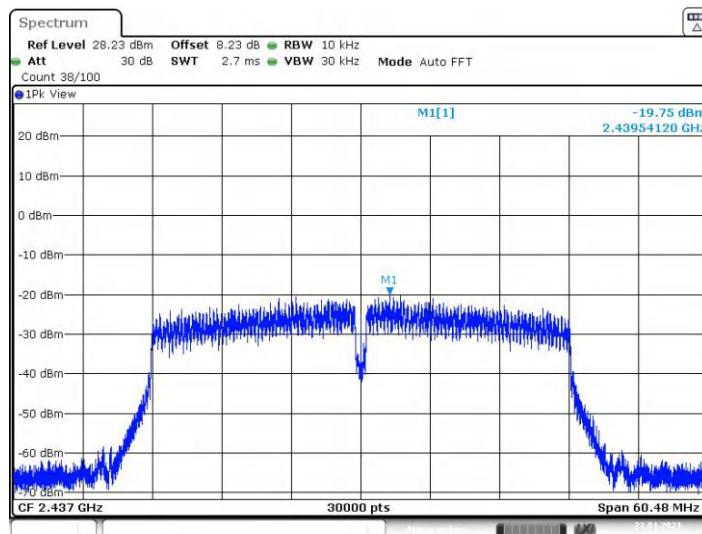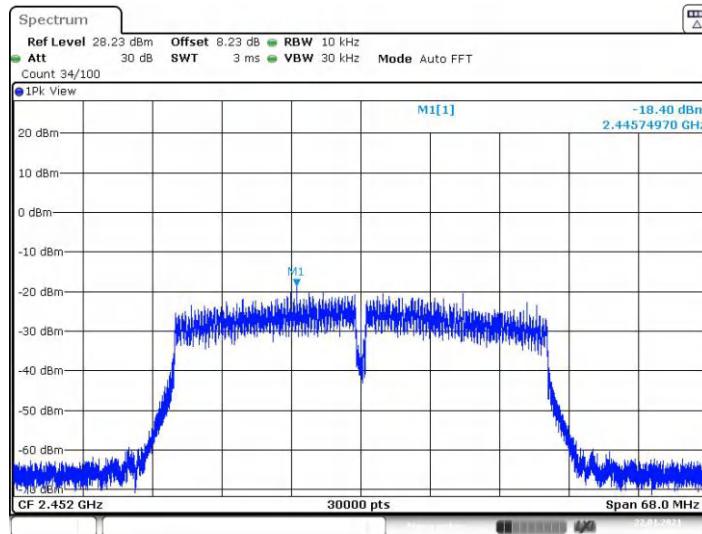
2437 MHz**2452 MHz**

3.4. Bandwidth

Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5

Test Configuration

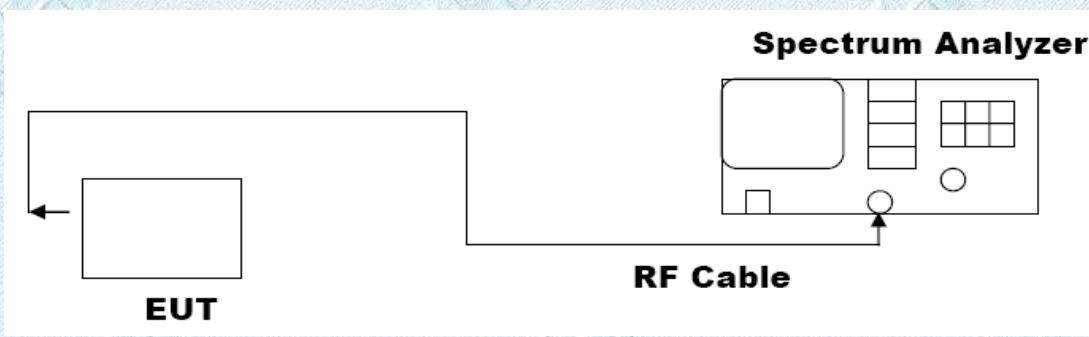

Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator:
6db Bandwidth
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.


Test Results

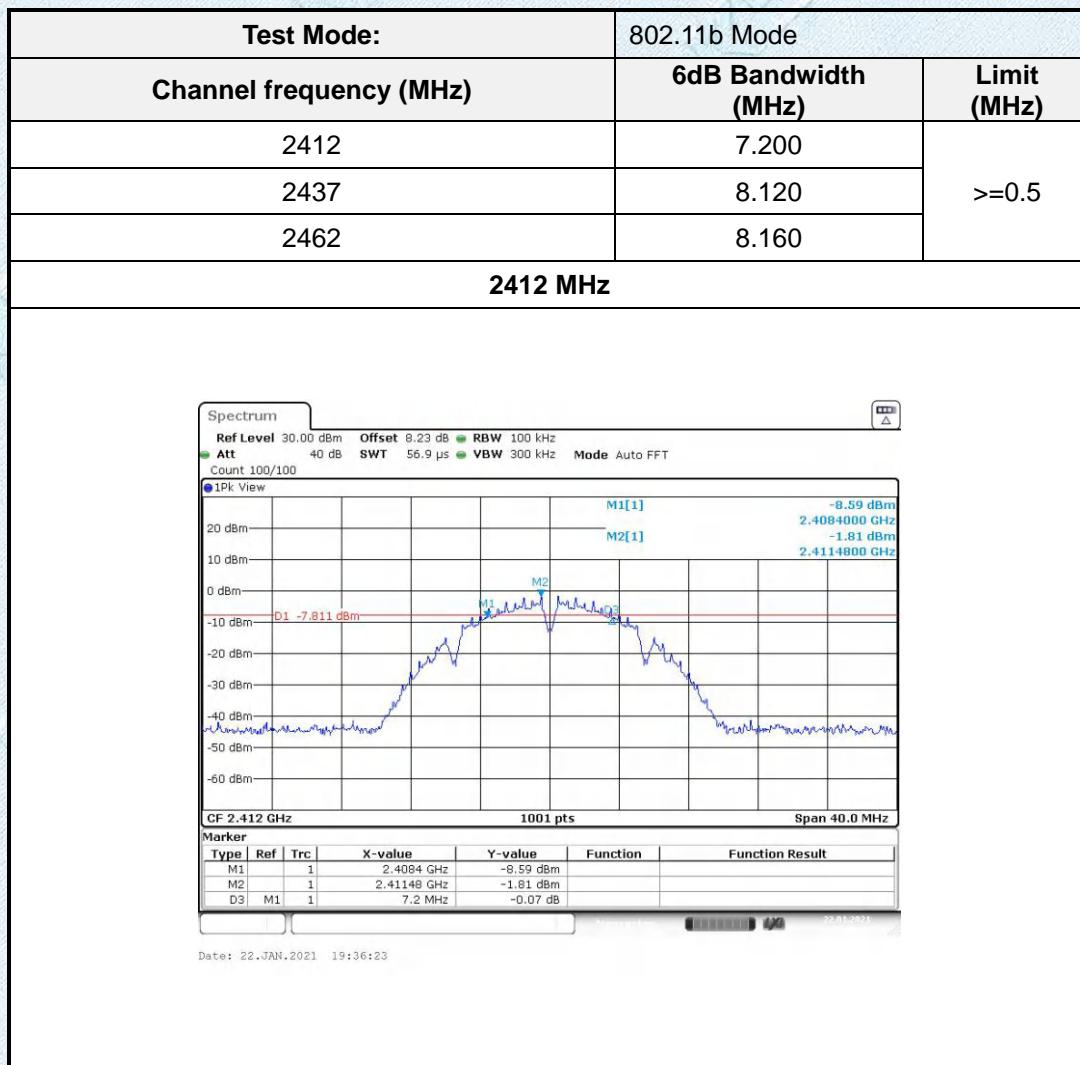


2437 MHz




2462 MHz

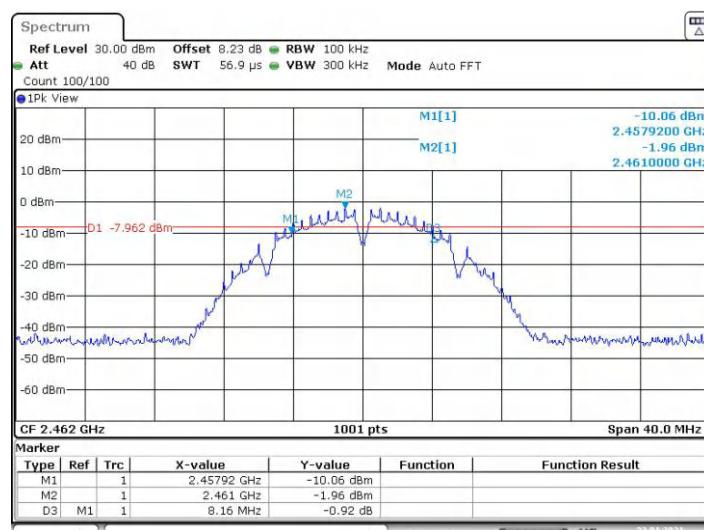


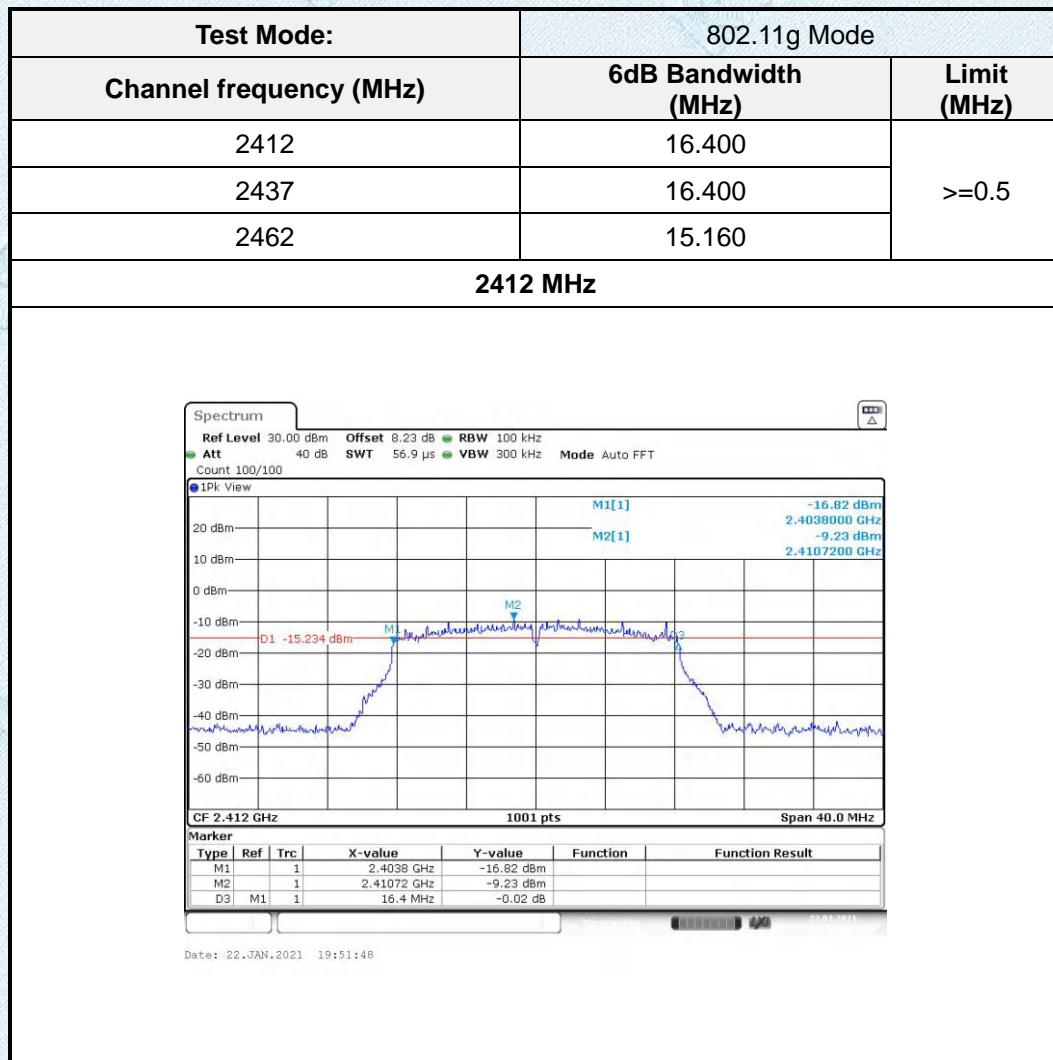


2437 MHz

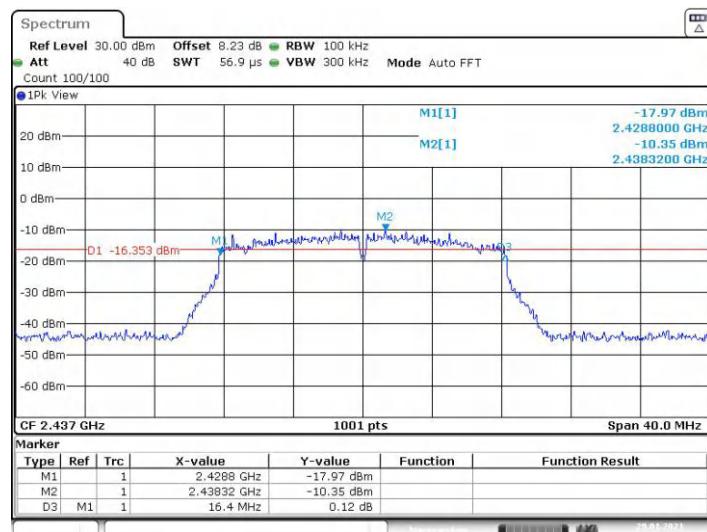


2462 MHz

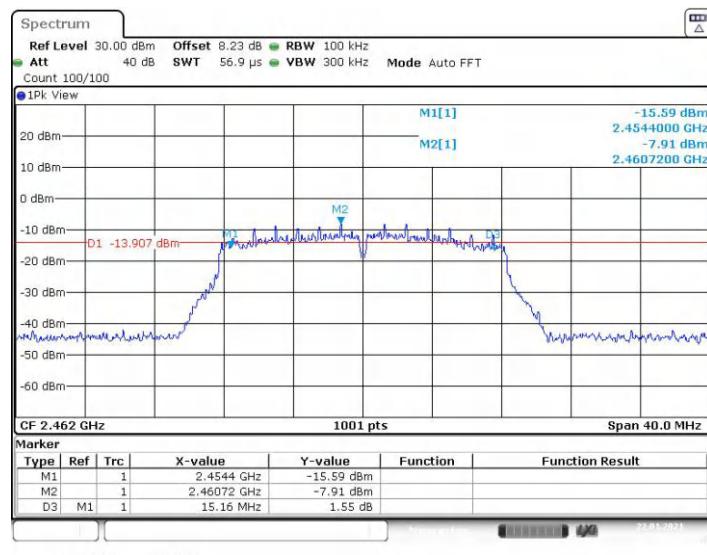


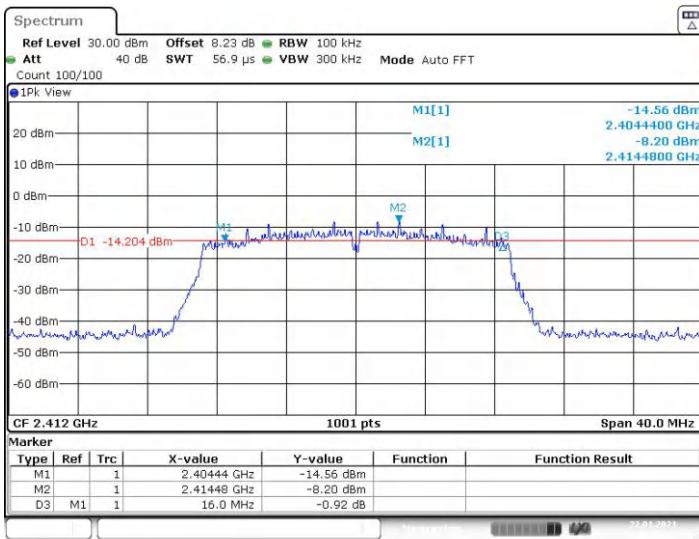
Test Mode:		802.11n(HT20) Mode				
Channel frequency (MHz)		6dB Bandwidth (MHz)	Limit (MHz)			
2412		16.000	>=0.5			
2437		17.000				
2462		17.000				
2412 MHz						
						
Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40444 GHz	-14.56 dBm		
M2		1	2.41448 GHz	-8.20 dBm		
D3	M1	1	16.0 MHz	-0.92 dB		



2437 MHz

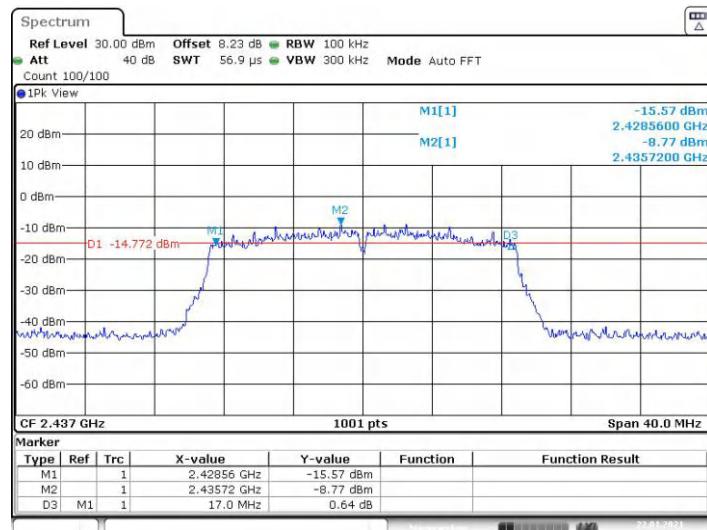


2462 MHz

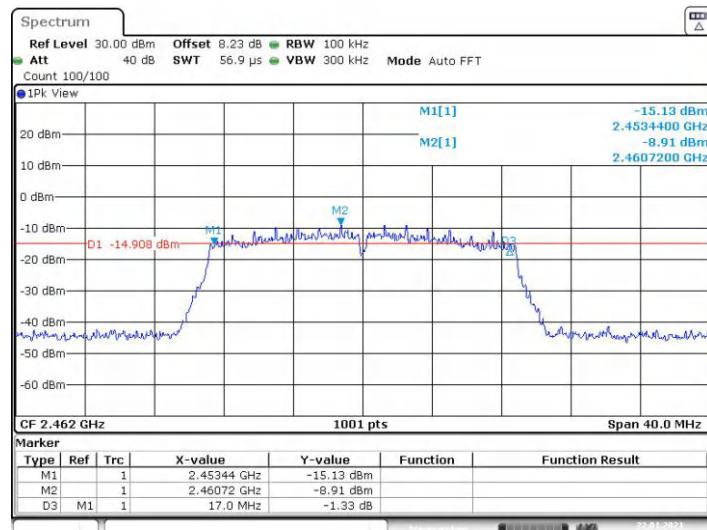


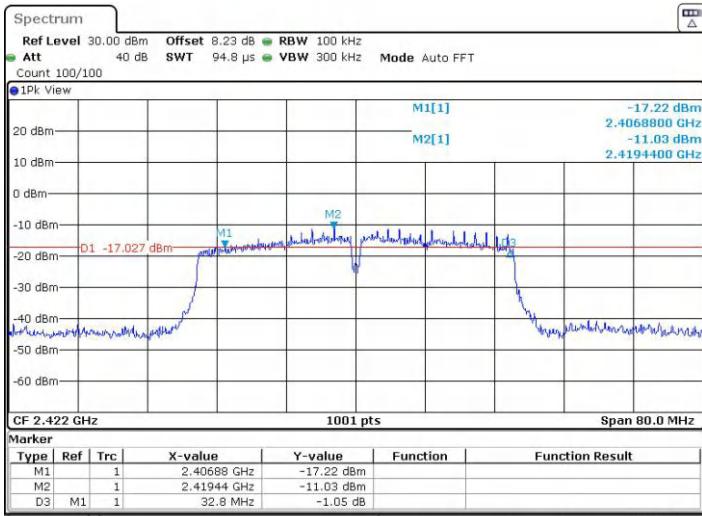Test Mode:		802.11n(HT40) Mode				
Channel frequency (MHz)		6dB Bandwidth (MHz)	Limit (MHz)			
2422		32.800	>=0.5			
2437		30.240				
2452		34.000				
2422 MHz						
						
Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40688 GHz	-17.22 dBm		
M2		1	2.41944 GHz	-11.03 dBm		
D3	M1	1	32.8 MHz	-1.05 dB		

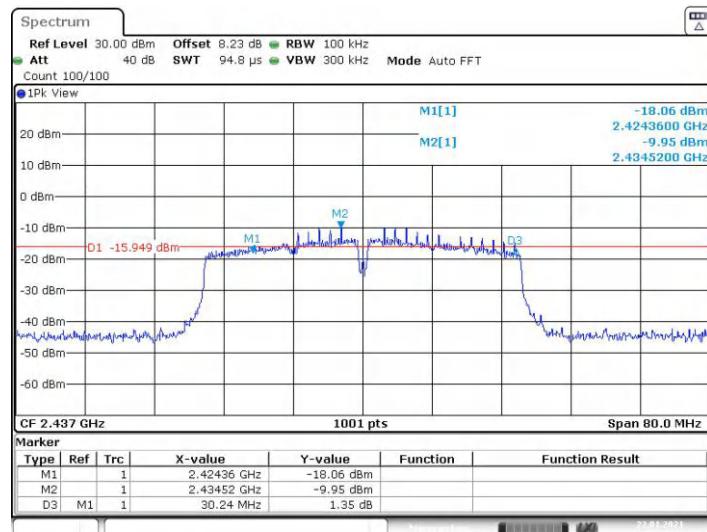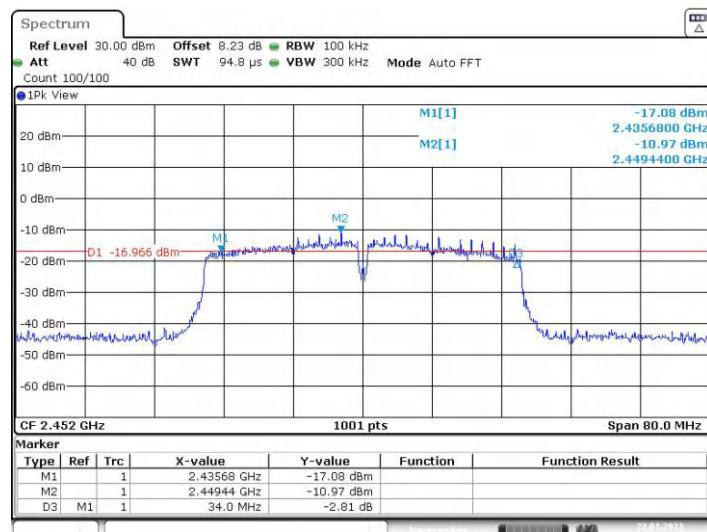
2437 MHz**2452 MHz**

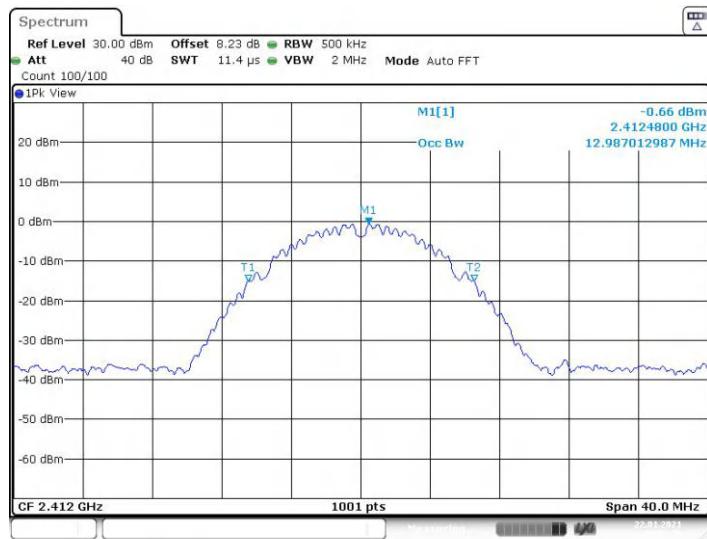
Test Mode:		802.11b Mode		
Channel frequency (MHz)		99% Bandwidth (MHz)	Limit (MHz)	
2412		12.987	>=0.5	
2437		12.907		
2462		12.947		
2412 MHz				
				

2437 MHz

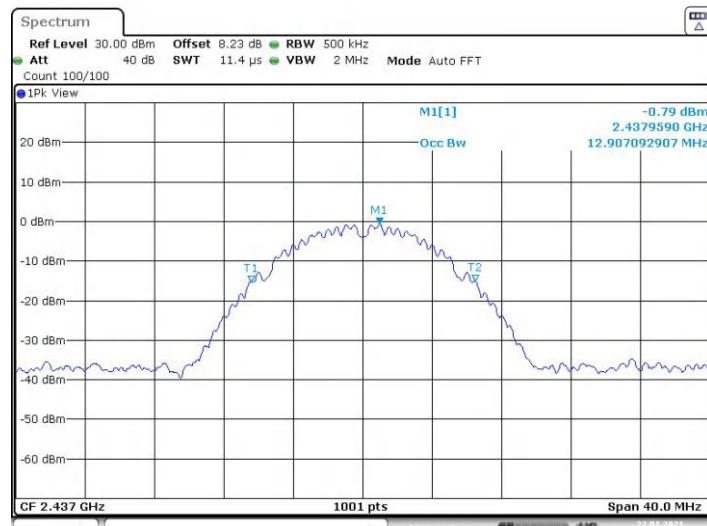


2462 MHz

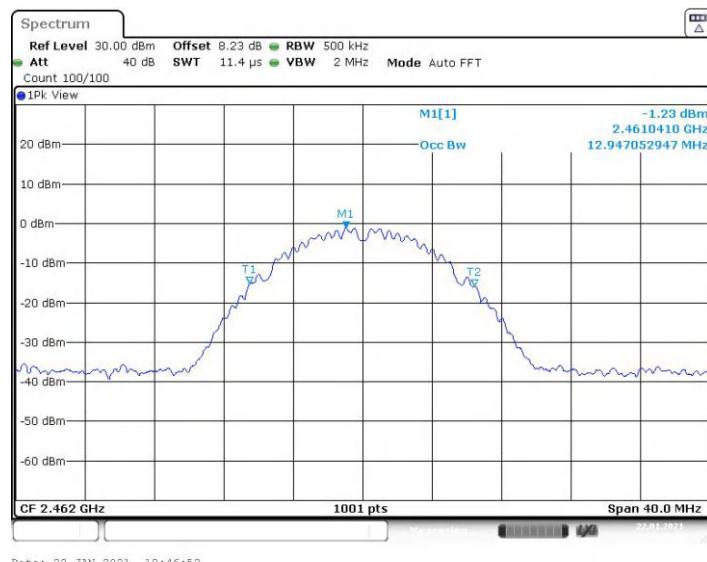

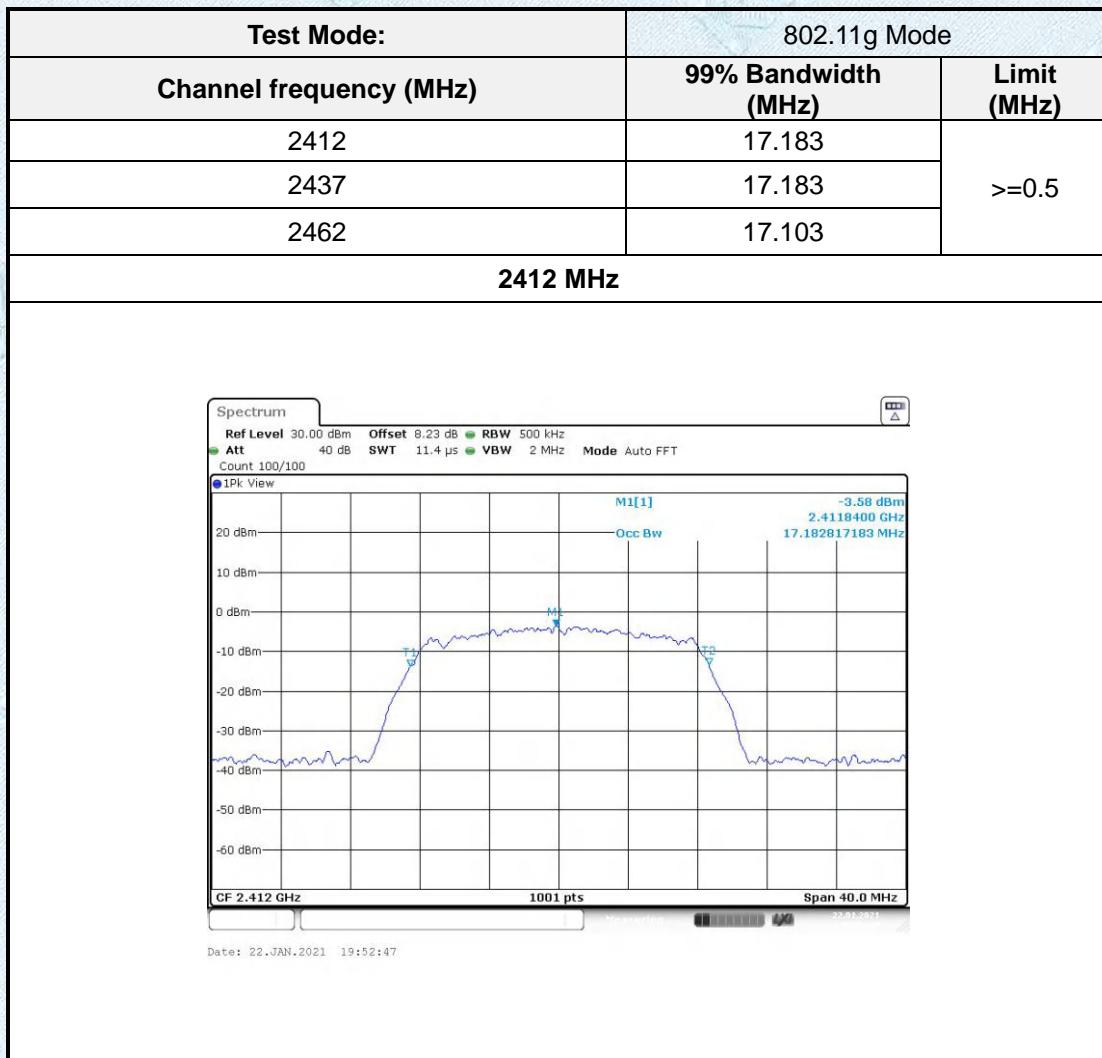

2437 MHz

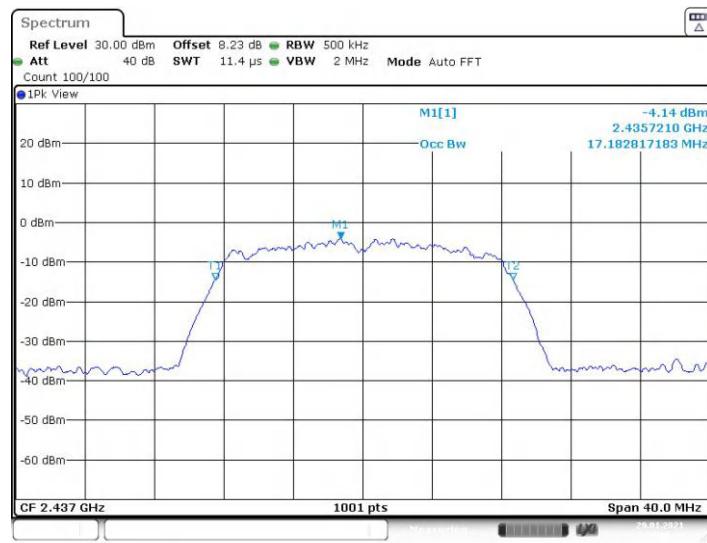

2462 MHz

