

## FCC CERTIFICATION TEST REPORT

### FOR

<b>Applicant</b>	:	SELVAS Healthcare, Inc.
<b>Address</b>	:	155, Sinseong-ro, Yuseong-gu, Daejeon, Republic of Korea
<b>Equipment under Test</b>	:	OCR Multi-Player
<b>Model No.</b>	:	T90ET, T90EZ
<b>Trade Mark</b>	:	N/A
<b>FCC ID</b>	:	2AL4D-T90
<b>Manufacturer</b>	:	Shenzhen Moss Technology Co., Ltd.
<b>Address</b>	:	Room 498, F1, TCL International E-City, 1001 Sun Yat-sen Garden Road, Xili Street, Nanshan District, Shenzhen

**Issued By: Dongguan Dongdian Testing Service Co., Ltd.**

**Add.:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,  
Dongguan City, Guangdong Province, China, 523808

**Tel.:** +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

# REPORT

## Table of Contents

Test report declares.....	4
1. Summary of Test Results.....	6
2. General Test Information .....	7
2.1. Description of EUT .....	7
2.2. Accessories of EUT .....	7
2.3. Assistant equipment used for test .....	8
2.4. Block diagram of EUT configuration for test .....	8
2.5. Deviations of test standard.....	8
2.6. Test environment conditions .....	8
2.7. Test laboratory.....	9
2.8. Measurement uncertainty.....	9
3. Equipment Used During Test.....	10
4. 6dB Bandwidth and 99% Bandwidth.....	11
4.1. Block diagram of test setup .....	11
4.2. Limits .....	11
4.3. Test procedure .....	11
4.4. Test result.....	12
4.5. original test data .....	13
5. Conducted peak Output Power.....	22
5.1. Block diagram of test setup.....	22
5.2. Limits .....	22
5.3. Test procedure .....	22
5.4. Test result.....	22
6. Power Spectral Density.....	23
6.1. Block diagram of test setup.....	23
6.2. Limits .....	23
6.3. Test procedure .....	23
6.4. Test result.....	23
6.5. original test data .....	24
7. Band Edge and Compliance (Conducted Method).....	29
7.1. Block diagram of test setup.....	29
7.2. Limits .....	29
7.3. Test procedure .....	29
7.4. Test result.....	30
7.5. original test data .....	30
8. Radiated Spurious Emissions.....	33
8.1. Block diagram of test setup.....	33

8.2.	Limit .....	34
8.3.	Test procedure .....	35
8.4.	Test result .....	37
9.	RF Conducted Spurious Emissions .....	52
9.1.	Block diagram of test setup .....	52
9.2.	Limits .....	52
9.3.	Test procedure .....	52
9.4.	Test result .....	53
9.5.	Original test data .....	53
10.	Radiated Band Edge Compliance .....	66
10.1.	Block diagram of test setup .....	66
10.2.	Limit .....	66
10.3.	Test procedure .....	66
10.4.	Test result .....	66
11.	Power Line Conducted Emission .....	83
11.1.	Block diagram of test setup .....	83
11.2.	Power Line Conducted Emission Limits (Class B) .....	83
11.3.	Test procedure .....	83
11.4.	Test result .....	84
12.	Antenna Requirements .....	87
12.1.	Limit .....	87
12.2.	Result .....	87
13.	Test Setup Photograph .....	88
14.	Photos of the EUT .....	90

## Test Report Declare

<b>Applicant</b>	:	SELVAS Healthcare, Inc.
<b>Address</b>	:	155, Sinseong-ro, Yuseong-gu, Daejeon, Republic of Korea
<b>Equipment under Test</b>	:	OCR Multi-Player
<b>Model No.</b>	:	T90ET, T90EZ
<b>Trade Mark</b>	:	N/A
<b>Manufacturer</b>	:	Shenzhen Moss Technology Co., Ltd.
<b>Address</b>	:	Room 498, F1, TCL International E-City, 1001 Sun Yat-sen Garden Road, Xili Street, Nanshan District, Shenzhen

### Test Standard Used:

FCC Rules and Regulations Part 15.247.

### Test procedure used:

ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02

### We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

<b>Report No:</b>	DDT-R22051321-2E03		
<b>Date of Receipt:</b>	Jul. 26, 2022	<b>Date of Test:</b>	Jul. 26, 2022 ~ Aug. 30, 2022

**Prepared By:**

*Sanvin Zheng*

**Sanvin Zheng /Engineer**

**Approved By:**



**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Oct. 19, 2022	

## 1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a)	Pass
Conducted Output Power	FCC 15.247 (b) (3)	Pass
Power Spectral Density	FCC 15.247 (e)	Pass
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d)	Pass
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
Power Line Conducted Emission	FCC 15.207	Pass
Antenna Requirement	FCC 15.203	Pass



## 2. General Test Information

### 2.1. Description of EUT

EUT* Name	: OCR Multi-Player
Model Number	: T90ET, T90EZ
Difference of models	: All model circuits share the same electrical, mechanical and physical structure, with the only difference is that T90ET has rear camera and OCR functions, while T90EZ does not. Therefore, the test model is T90ET.
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 3.8V powered by Li-Polymer Battery : DC 5V powered by external USB
Radio Technology	: IEEE 802.11b/g/n
FCC Operation Frequency	: IEEE 802.11b: 2412MHz-2462MHz : IEEE 802.11g: 2412MHz-2462MHz : IEEE 802.11n HT20: 2412MHz-2462MHz : IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) : IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) : IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) : IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter Rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps : IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps : IEEE 802.11n HT20: 7.2, 14.2, 21.7, 28.9, 43.3, 57.8, 65, 72.2 Mbps : IEEE 802.11n HT40: 15, 30, 45, 60, 90, 120, 135, 150 Mbps
Antenna Gain	: FPC antenna, maximum PK gain: 1.58 dBi
Sample Number	: S22051321-04 for conductive : S22051321-05 for radiation

Note: EUT is the ab. of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

### 2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Power Supply	N/A	ICP12-050-200B	Input: 100-240V~50/60Hz 0.3A Output: DC 5.0V/2.0A 10.0W
Type-C cable	N/A	N/A	N/A

### 2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	Other
N/A	N/A	N/A	N/A	N/A

### 2.4. Block diagram of EUT configuration for test

EUT

Test software: srcpy.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information				
Mode	Setting Tx Power Ant	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	16	1	LCH: CH1	2412
	16	1	MCH: CH6	2437
	16	1	HCH: CH11	2462
IEEE 802.11g	16	6	LCH: CH1	2412
	16	6	MCH: CH6	2437
	16	6	HCH: CH11	2462
IEEE 802.11n HT20	16	MCS 0	LCH: CH1	2412
	16	MCS 0	MCH: CH6	2437
	16	MCS 0	HCH: CH11	2462
IEEE 802.11n HT40	13	MCS 0	LCH: CH3	2422
	13	MCS 0	MCH: CH6	2437
	13	MCS 0	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

### 2.5. Deviations of test standard

No Deviation

### 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa



## 2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com)

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

## 2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 <sup>-8</sup> (Antenna couple method)
	5.5 × 10 <sup>-8</sup> (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW<20 kHz)	3×10 <sup>-8</sup>
Temperature	.4°C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz-18 GHz)
	3.54 dB (18 GHz-26 GHz)
	4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/> <b>RF Connected Test (Tonscend RF Measurement System 3#)</b>					
Spectrum analyzer	R&S	FSV40	101407	Jul. 21, 2022	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	May 18, 2022	1 Year
RF Control Unit	Tonscend	JS0806-2	DDT-ZC01449	May 18, 2022	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
<input checked="" type="checkbox"/> <b>Radiation 3#chamber</b>					
EMI Test Receiver	R&S	ESU	100472	May 18, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 18, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9161	4034	Sep. 19, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120D	02468	Nov. 29, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 11, 2022	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
<input checked="" type="checkbox"/> <b>Power Line Conducted Emissions Test 1#</b>					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBECK	NSLK 8163	00017	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

## 4. 6dB Bandwidth and 99% Bandwidth

### 4.1. Block diagram of test setup

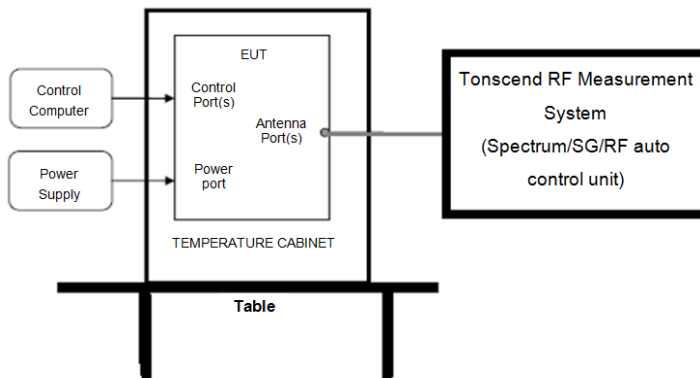

### 4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### 4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW: 500 kHz/ 1MHz

VBW: 2 MHz/ 3MHz

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW: 100 kHz

VBW: 300 kHz

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 4.4. Test result


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.04	2407.96	2416.00	0.5	PASS
		2437	8.04	2432.96	2441.00	0.5	PASS
		2462	8.04	2457.96	2466.00	0.5	PASS
11G	Ant1	2412	15.48	2404.40	2419.88	0.5	PASS
		2437	15.48	2429.40	2444.88	0.5	PASS
		2462	15.12	2454.44	2469.56	0.5	PASS
11N20SISO	Ant1	2412	15.48	2404.40	2419.88	0.5	PASS
		2437	15.92	2429.44	2445.36	0.5	PASS
		2462	15.16	2454.40	2469.56	0.5	PASS
11N40SISO	Ant1	2422	35.36	2404.48	2439.84	0.5	PASS
		2437	33.84	2420.76	2454.60	0.5	PASS
		2452	35.12	2434.48	2469.60	0.5	PASS

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	14.331	2404.9248	2419.2557	---	Pass
		2437	14.243	2429.9853	2444.2288	---	Pass
		2462	14.212	2454.9469	2469.1588	---	Pass
11G	Ant1	2412	17.536	2403.3669	2420.9026	---	Pass
		2437	17.989	2428.3171	2446.3065	---	Pass
		2462	17.730	2453.2145	2470.9441	---	Pass
11N20SISO	Ant1	2412	18.345	2402.9549	2421.2999	---	Pass
		2437	18.620	2427.9061	2446.5261	---	Pass
		2462	18.556	2452.7867	2471.3423	---	Pass
11N40SISO	Ant1	2422	37.598	2403.6349	2441.2328	---	Pass
		2437	37.623	2418.7243	2456.3472	---	Pass
		2452	37.194	2433.6463	2470.8402	---	Pass


### 4.5. original test data

6dB Bandwidth:




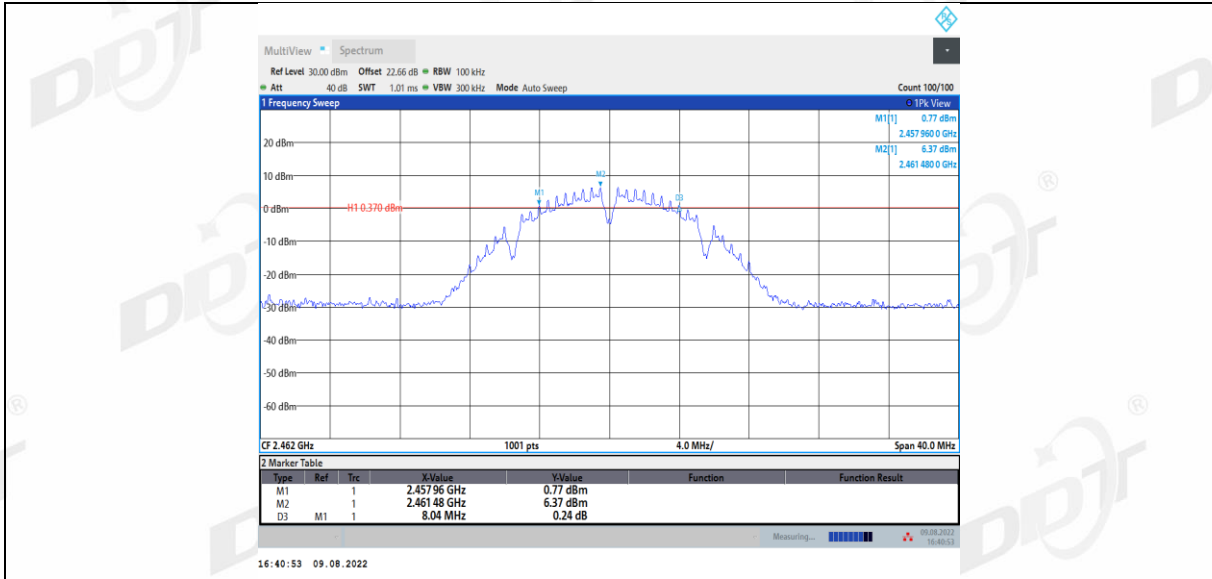

11G\_Ant1\_2412

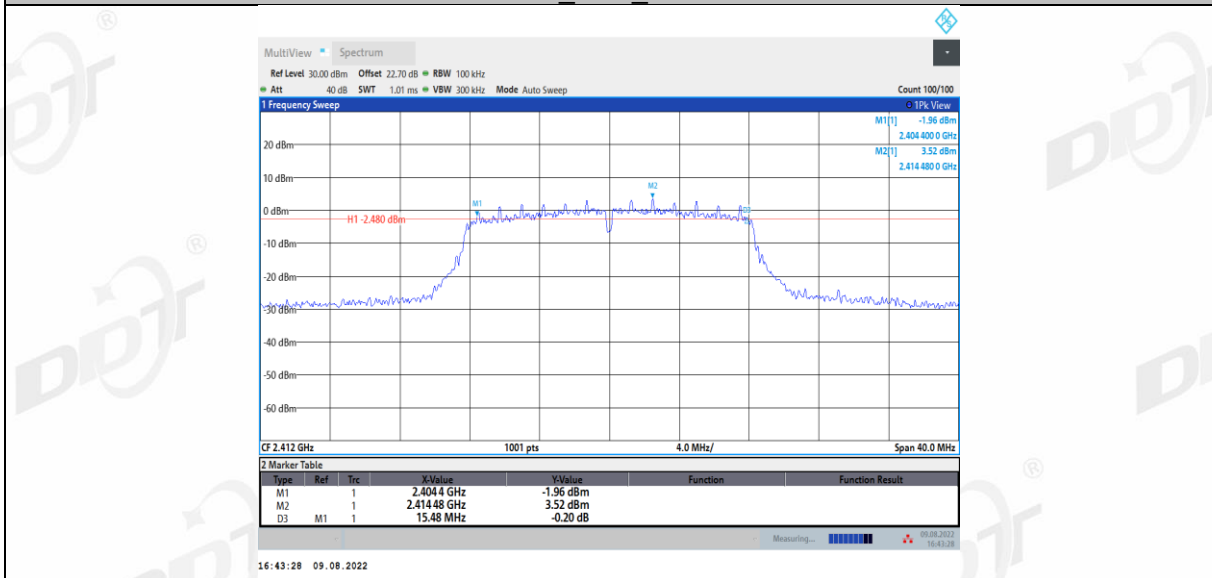


11G\_Ant1\_2437

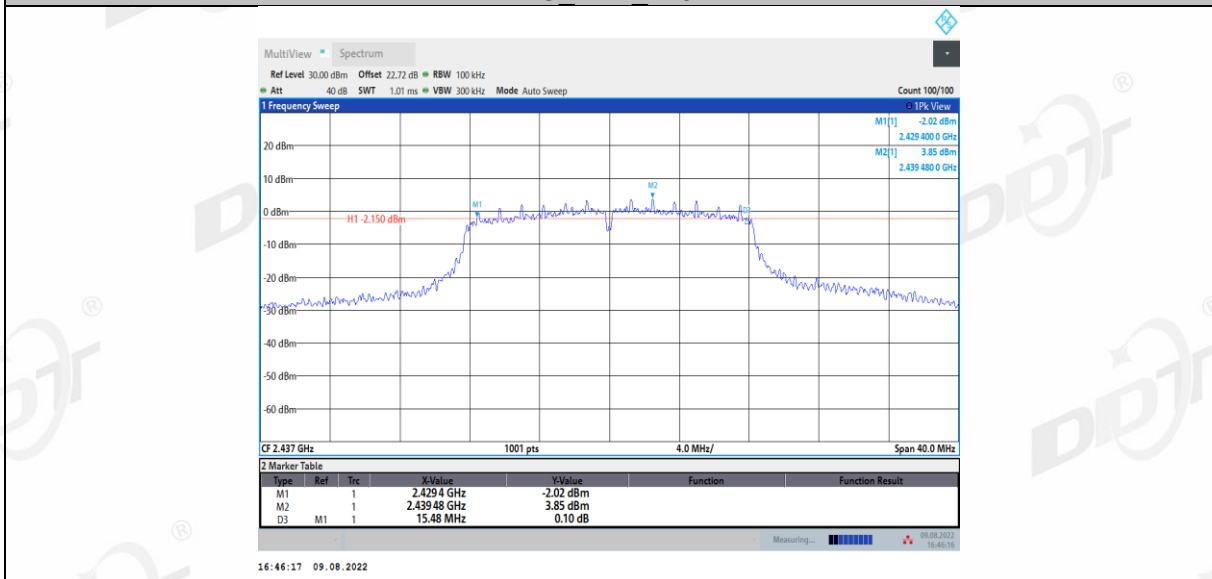


11G\_Ant1\_2462




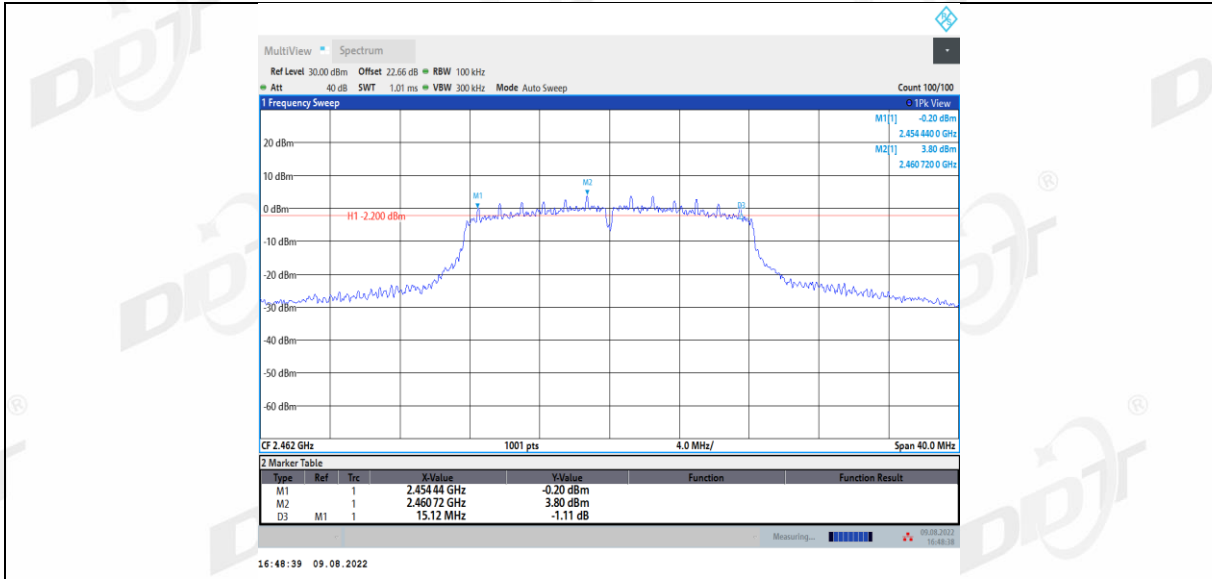


11N20SISO Ant1 2412

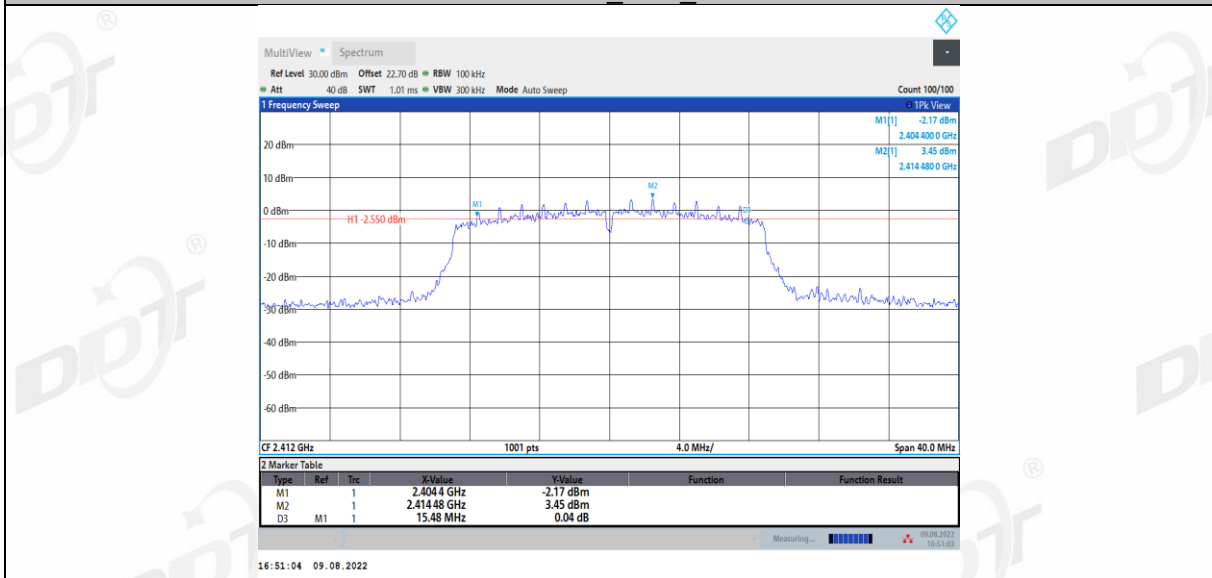


11N20SISO Ant1 2437

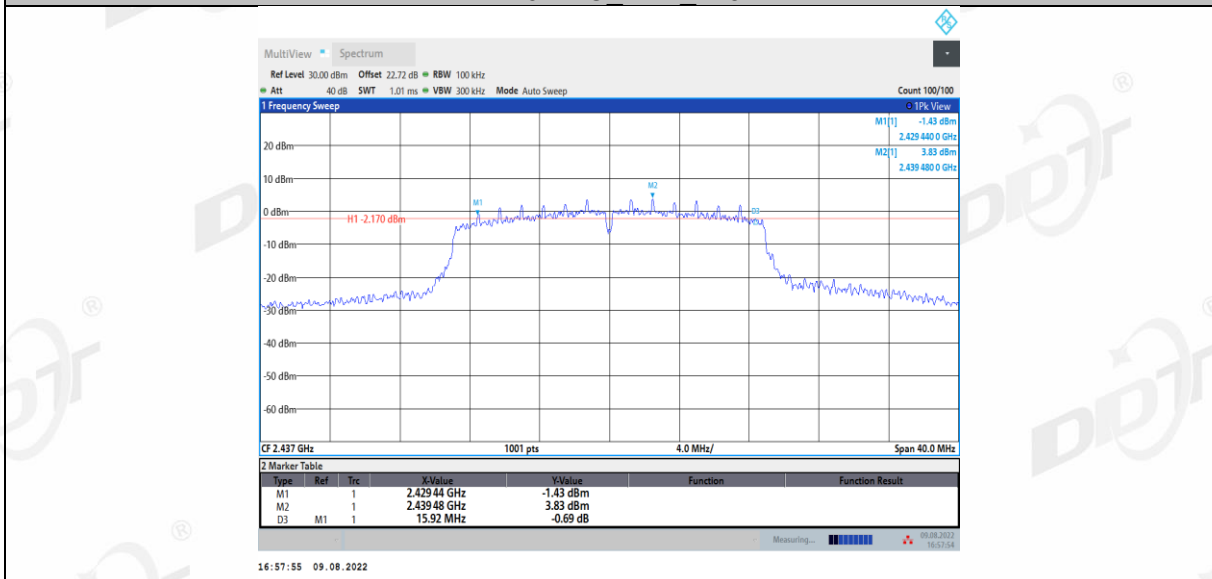


11N20SISO Ant1 2462

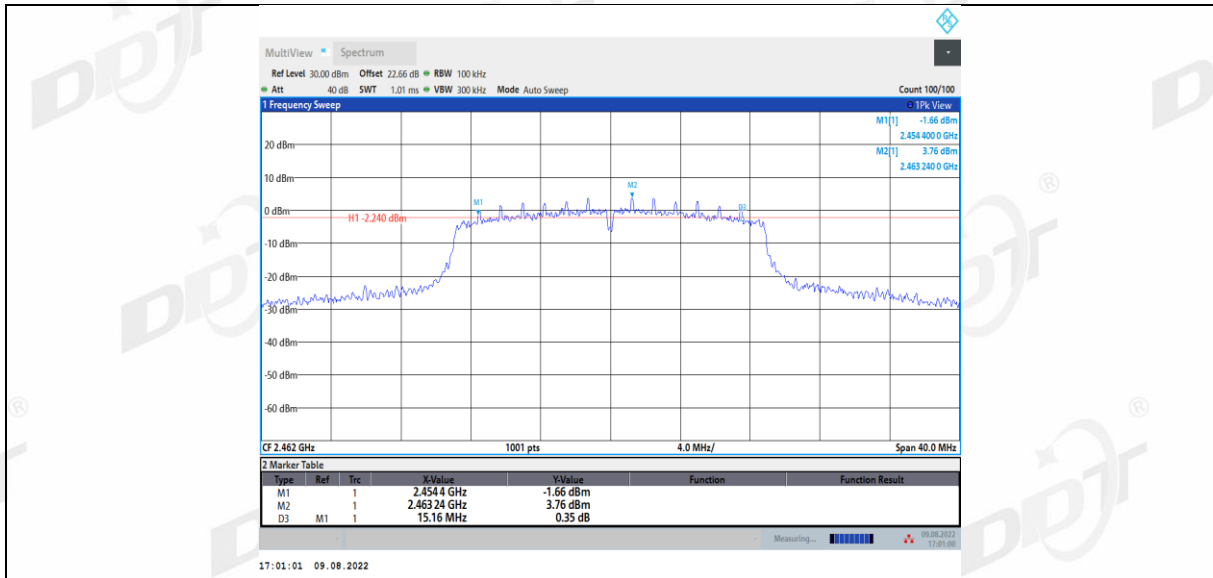


11N40SISO Ant1\_2422

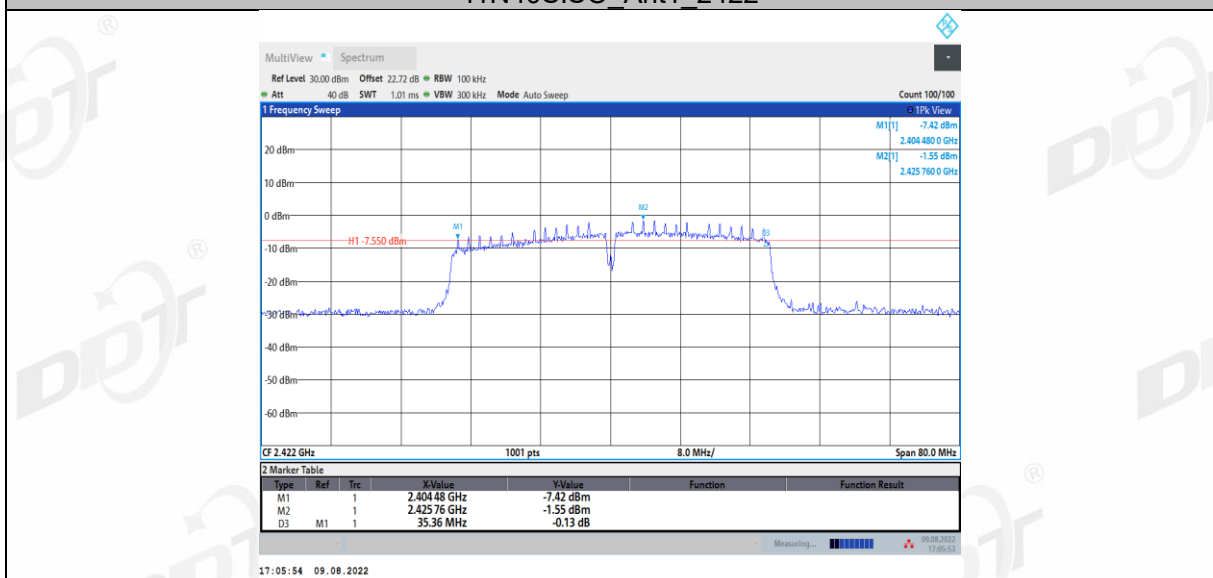


11N40SISO Ant1\_2437

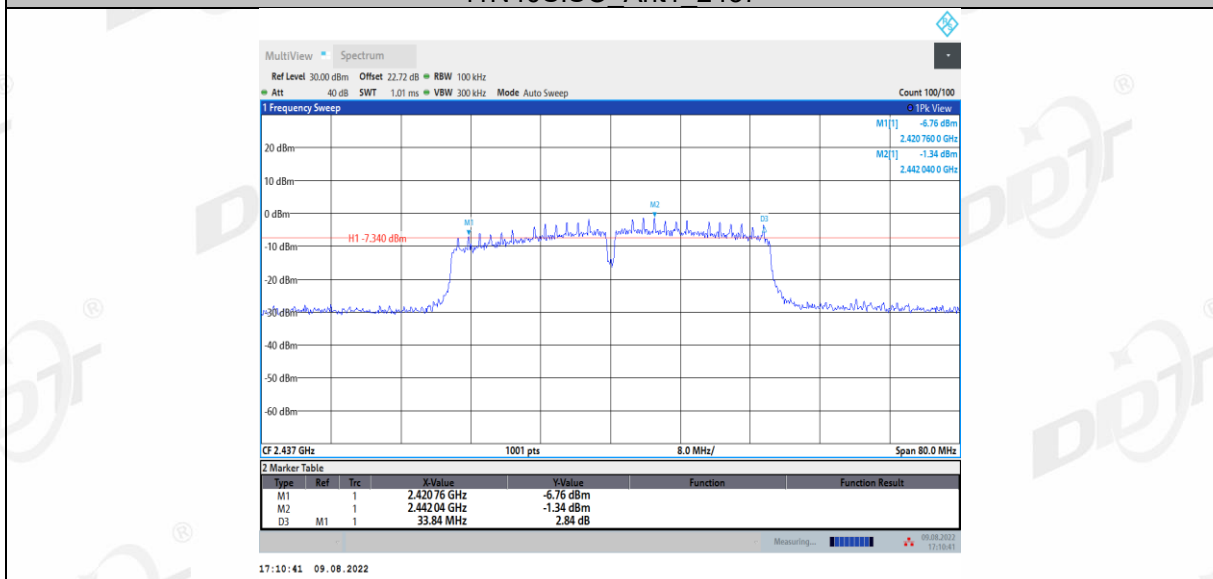


11N40SISO Ant1\_2452

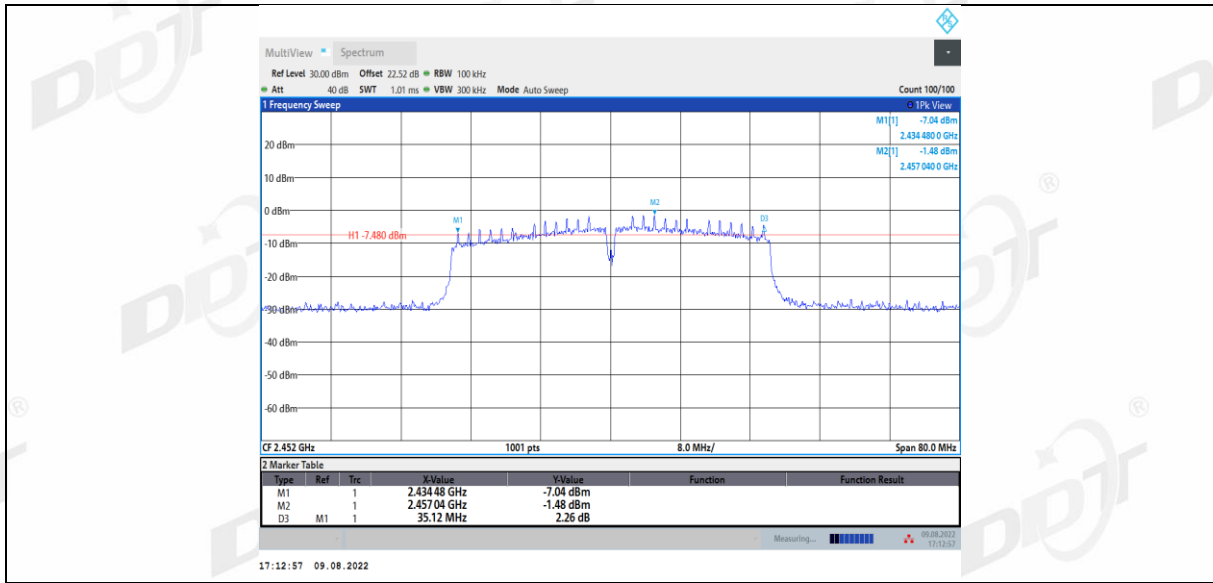


99% Bandwidth

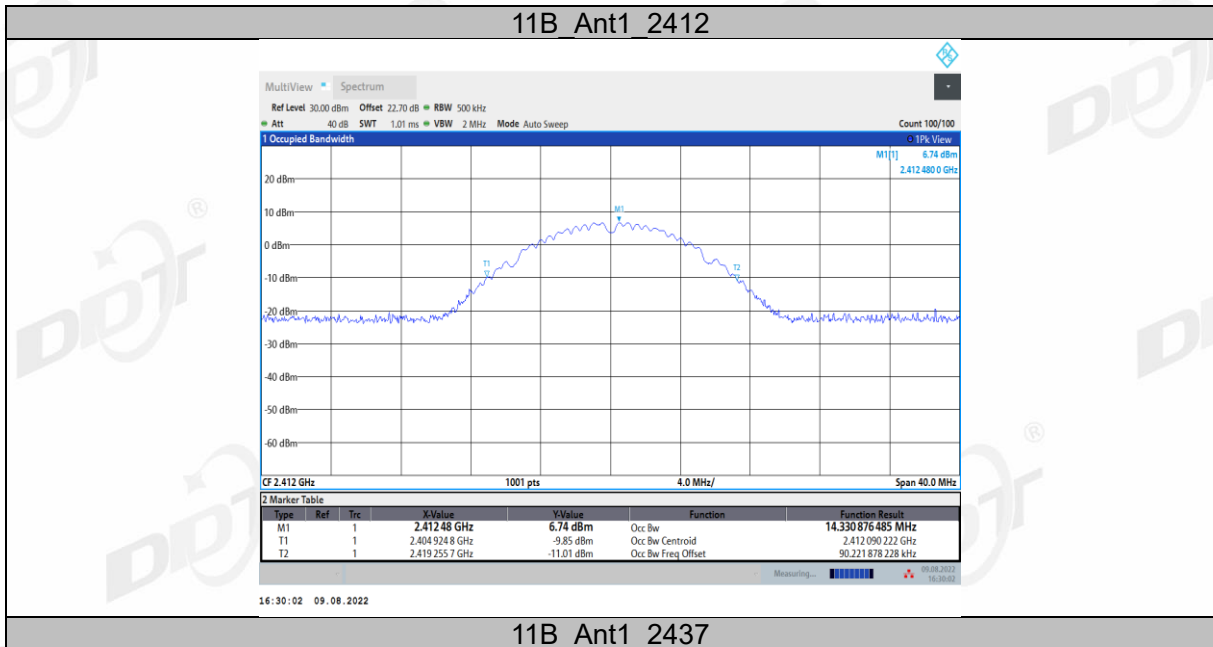


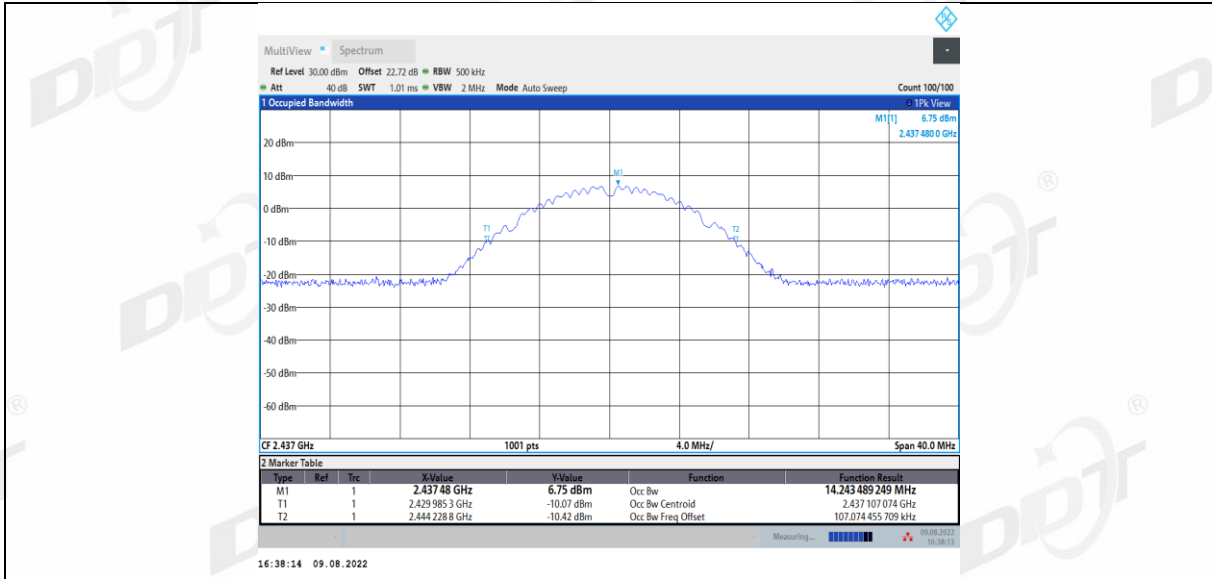


11B\_Ant1\_2462

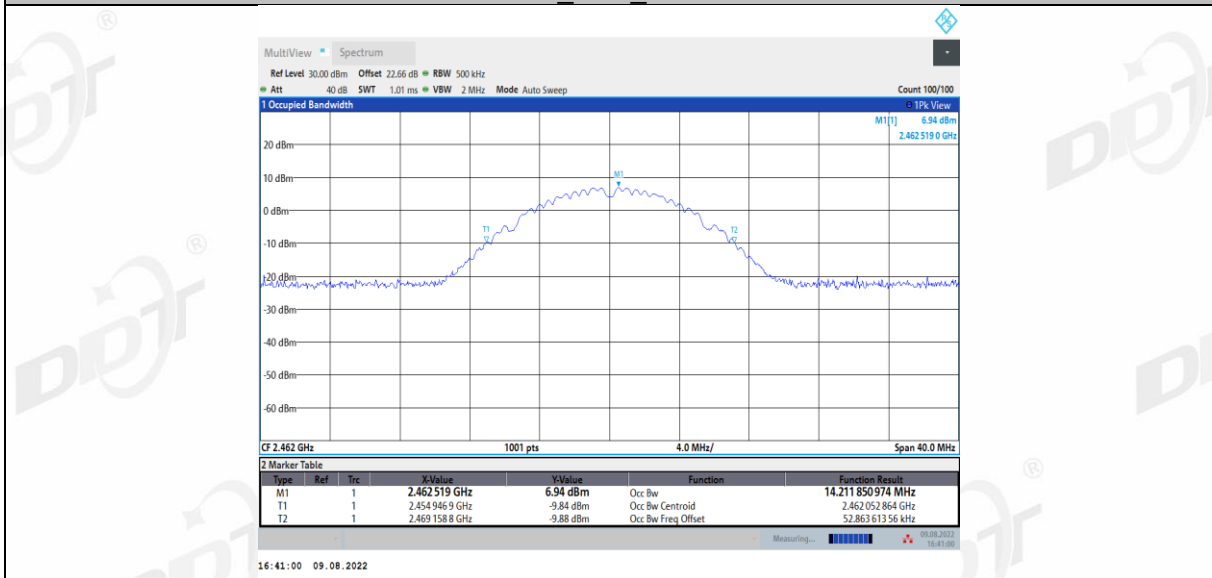


11G\_Ant1\_2412

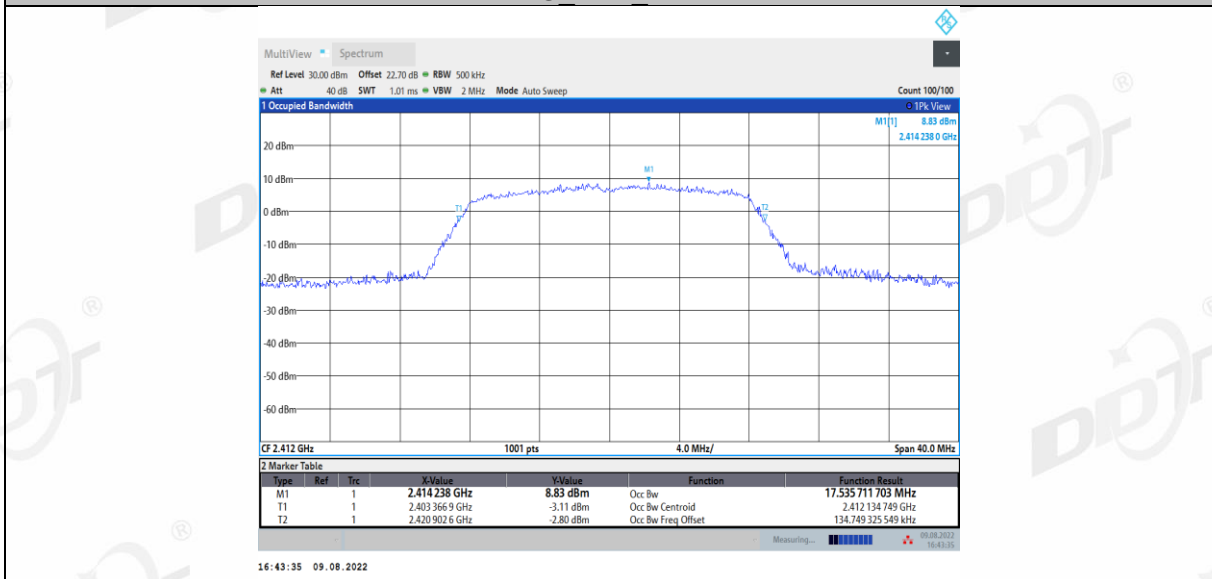


11G\_Ant1\_2437

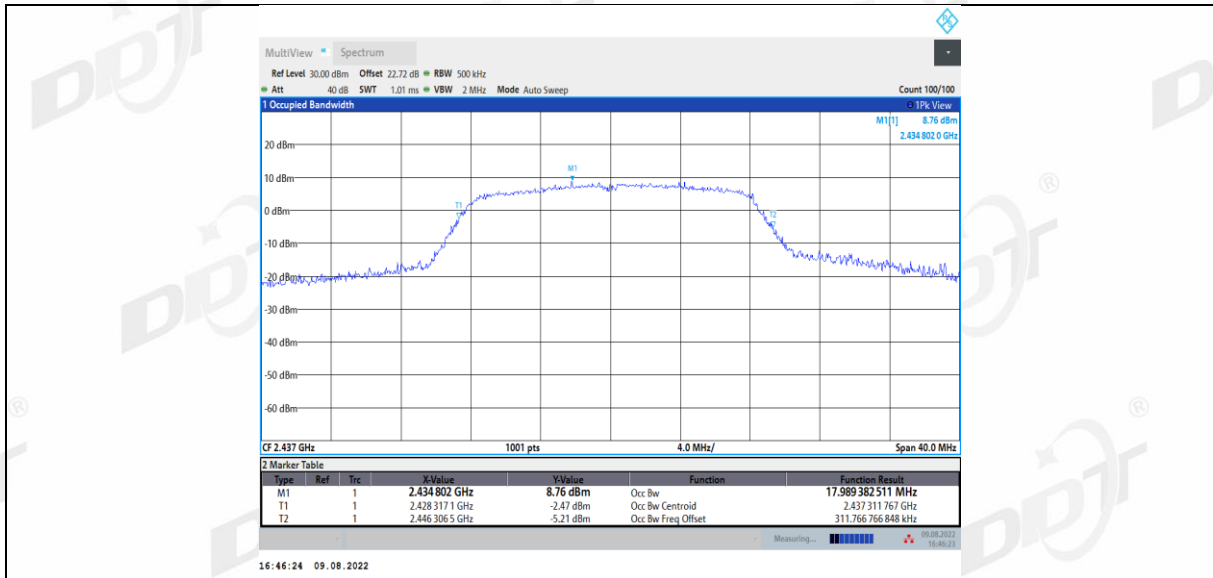


11G\_Ant1\_2462

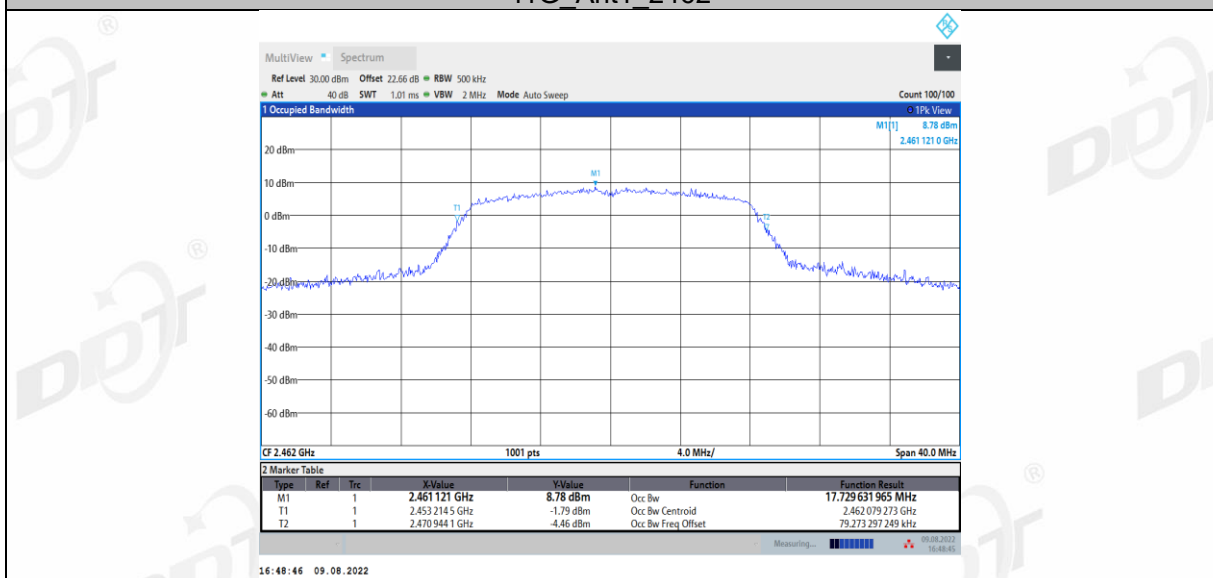


11N20SISO Ant1\_2412

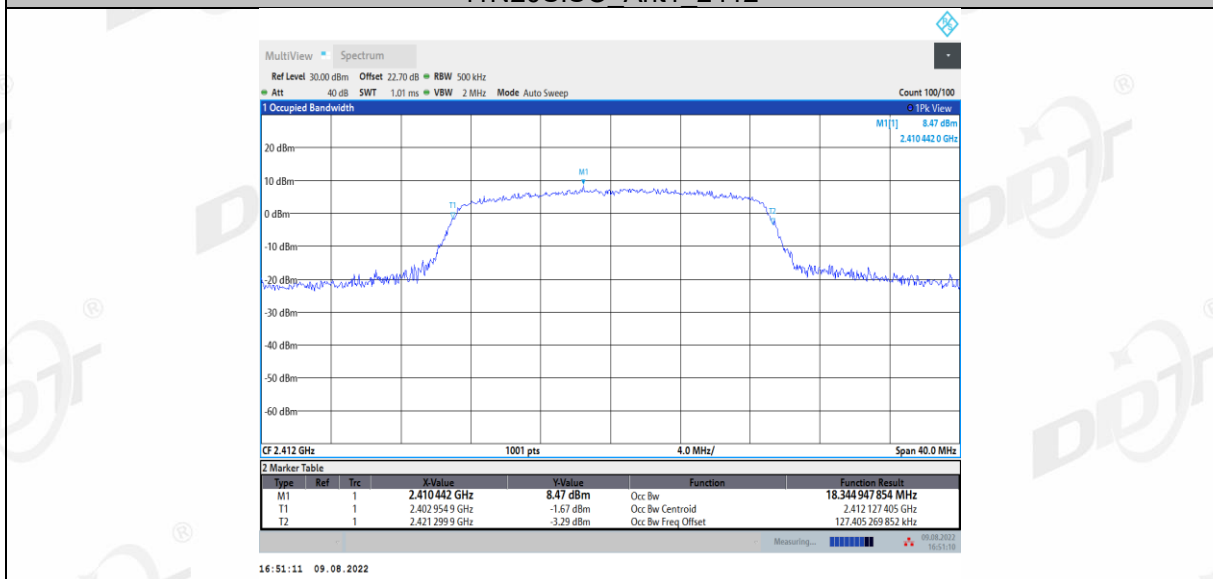


11N20SISO Ant1\_2437

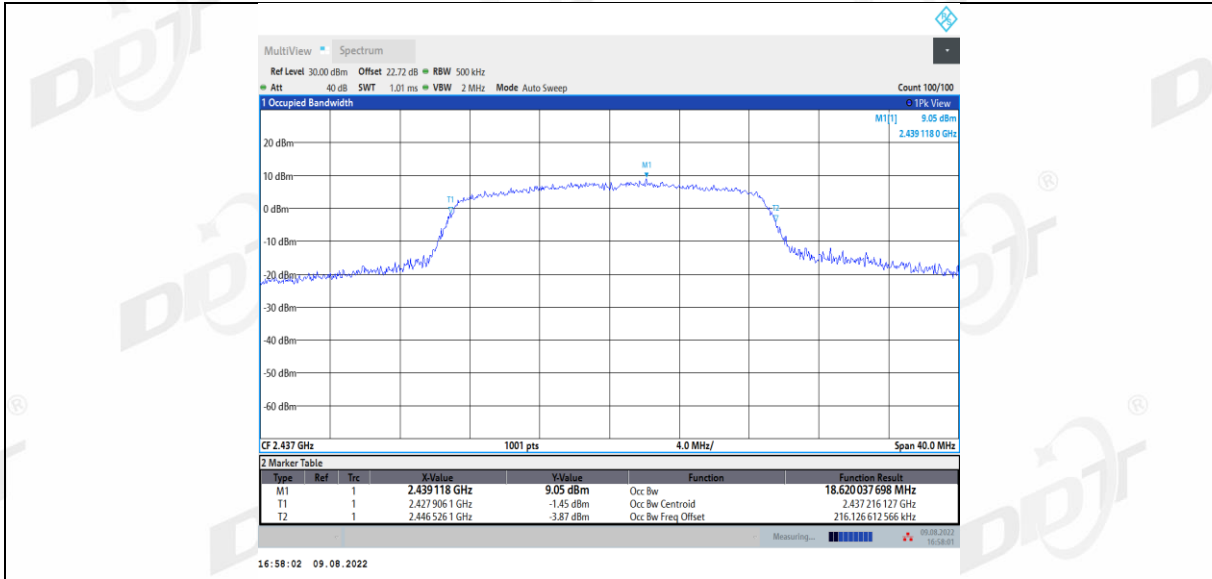

11N20SISO Ant1 2462

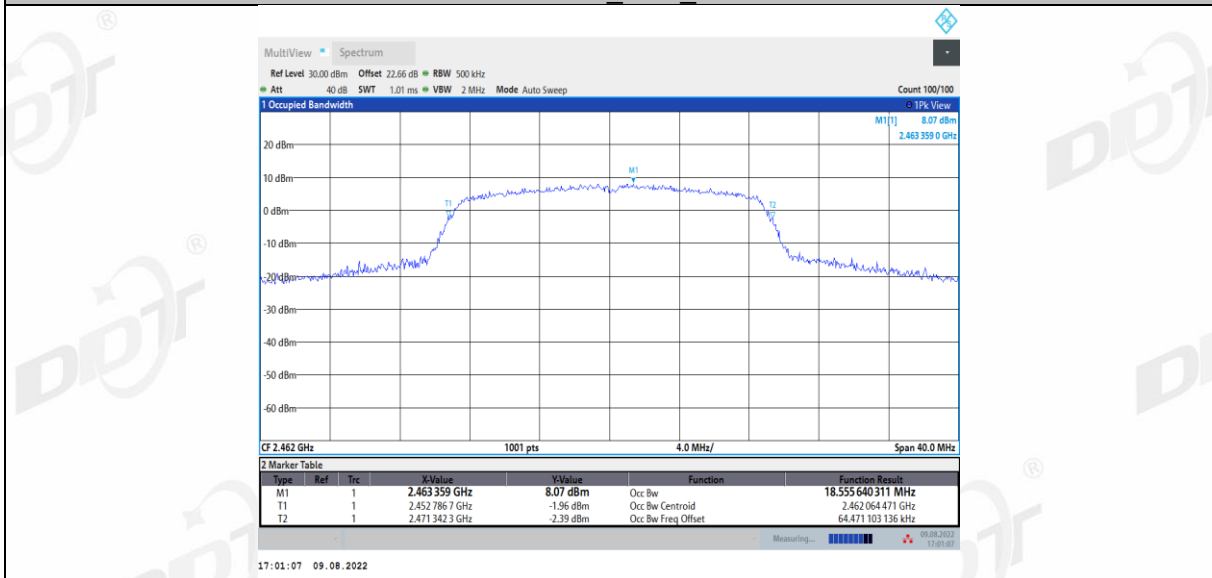


11N40SISO Ant1 2422

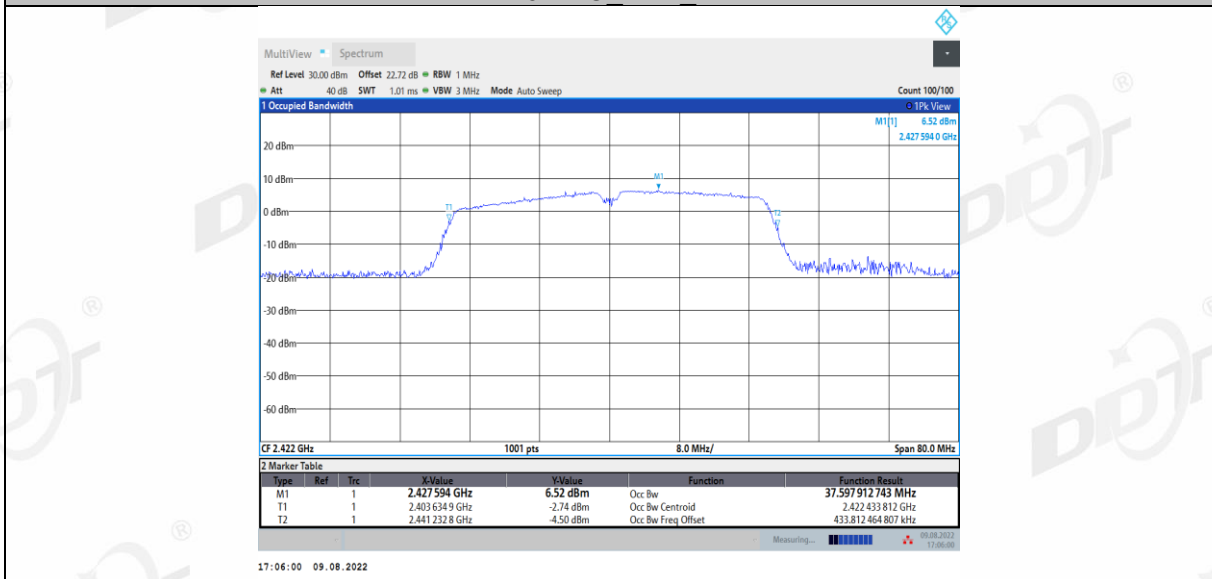


11N40SISO Ant1 2437



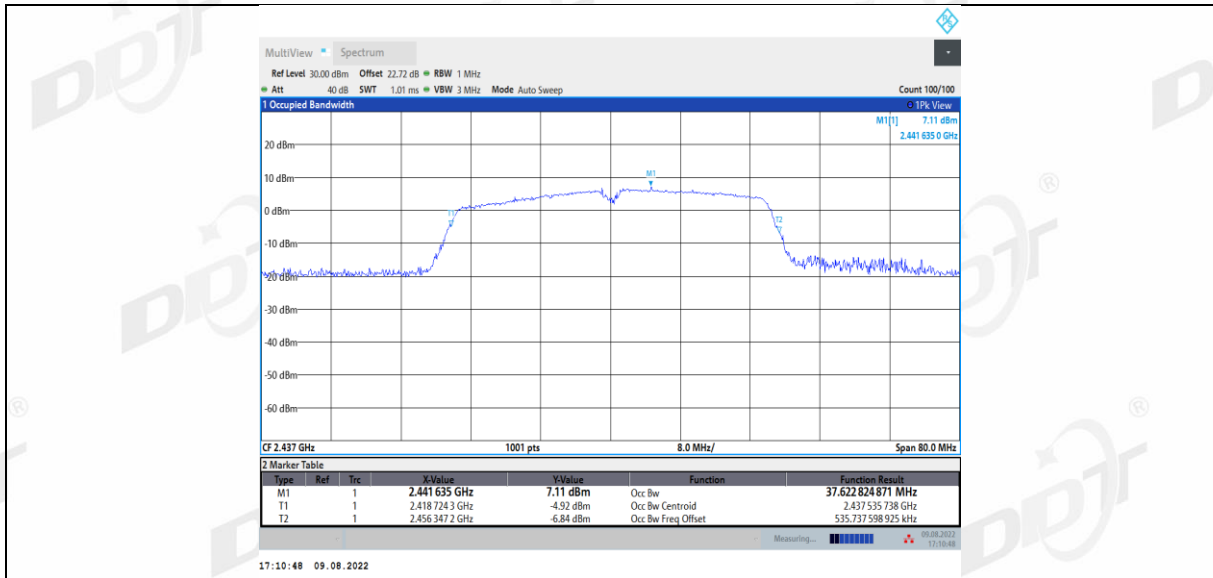

11N40SISO\_Ant1\_2452

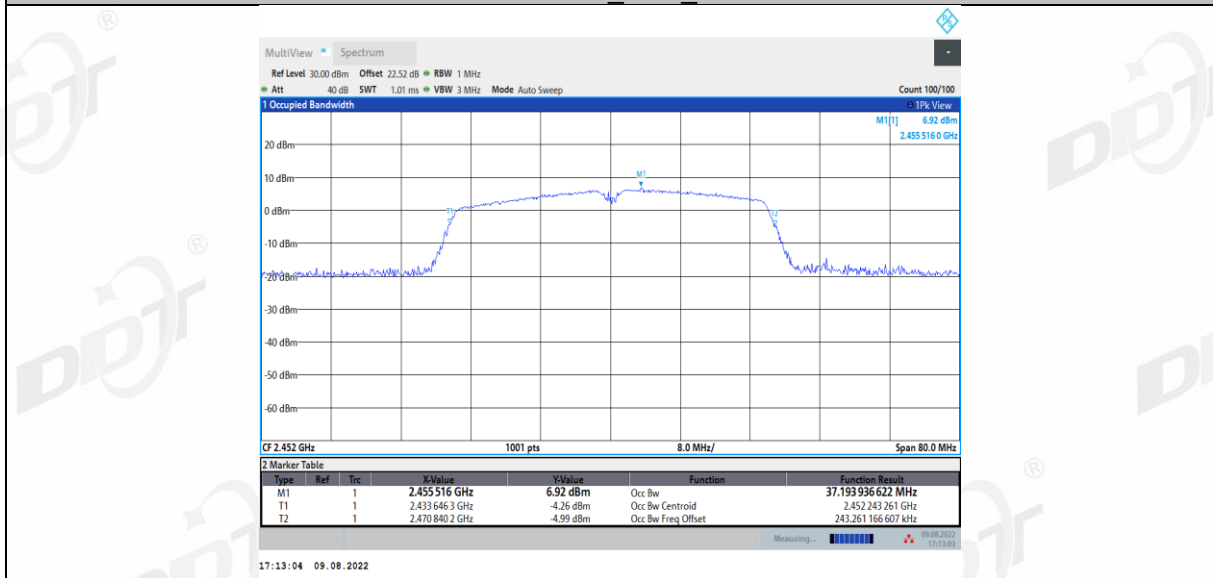

## 5. Conducted Average Output Power

### 5.1. Block diagram of test setup

Same as section 4.1

### 5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the AVG output power of each antenna port by power meter.

### 5.4. Test result

TestMode	Antenna	Frequency [MHz]	Average Power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	<b>14.43</b>	≤30.00	PASS
		2437	14.19	≤30.00	PASS
		2462	14.32	≤30.00	PASS
11G	Ant1	2412	14.30	≤30.00	PASS
		2437	14.37	≤30.00	PASS
		2462	14.11	≤30.00	PASS
11N20SISO	Ant1	2412	14.21	≤30.00	PASS
		2437	14.26	≤30.00	PASS
		2462	14.06	≤30.00	PASS
11N40SISO	Ant1	2422	12.07	≤30.00	PASS
		2437	11.91	≤30.00	PASS
		2452	11.82	≤30.00	PASS

## 6. Power Spectral Density

### 6.1. Block diagram of test setup

Same as section 4.1

### 6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold


- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.4. Test result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-15.58	$\leq 8.00$	PASS
		2437	-14.45	$\leq 8.00$	PASS
		2462	-15.17	$\leq 8.00$	PASS
11G	Ant1	2412	-16.92	$\leq 8.00$	PASS
		2437	-17.25	$\leq 8.00$	PASS
		2462	-16.69	$\leq 8.00$	PASS
11N20SISO	Ant1	2412	-18.18	$\leq 8.00$	PASS
		2437	-17.32	$\leq 8.00$	PASS
		2462	-16.70	$\leq 8.00$	PASS
11N40SISO	Ant1	2422	-22.48	$\leq 8.00$	PASS
		2437	-22.50	$\leq 8.00$	PASS
		2452	-21.89	$\leq 8.00$	PASS

### 6.5. original test data

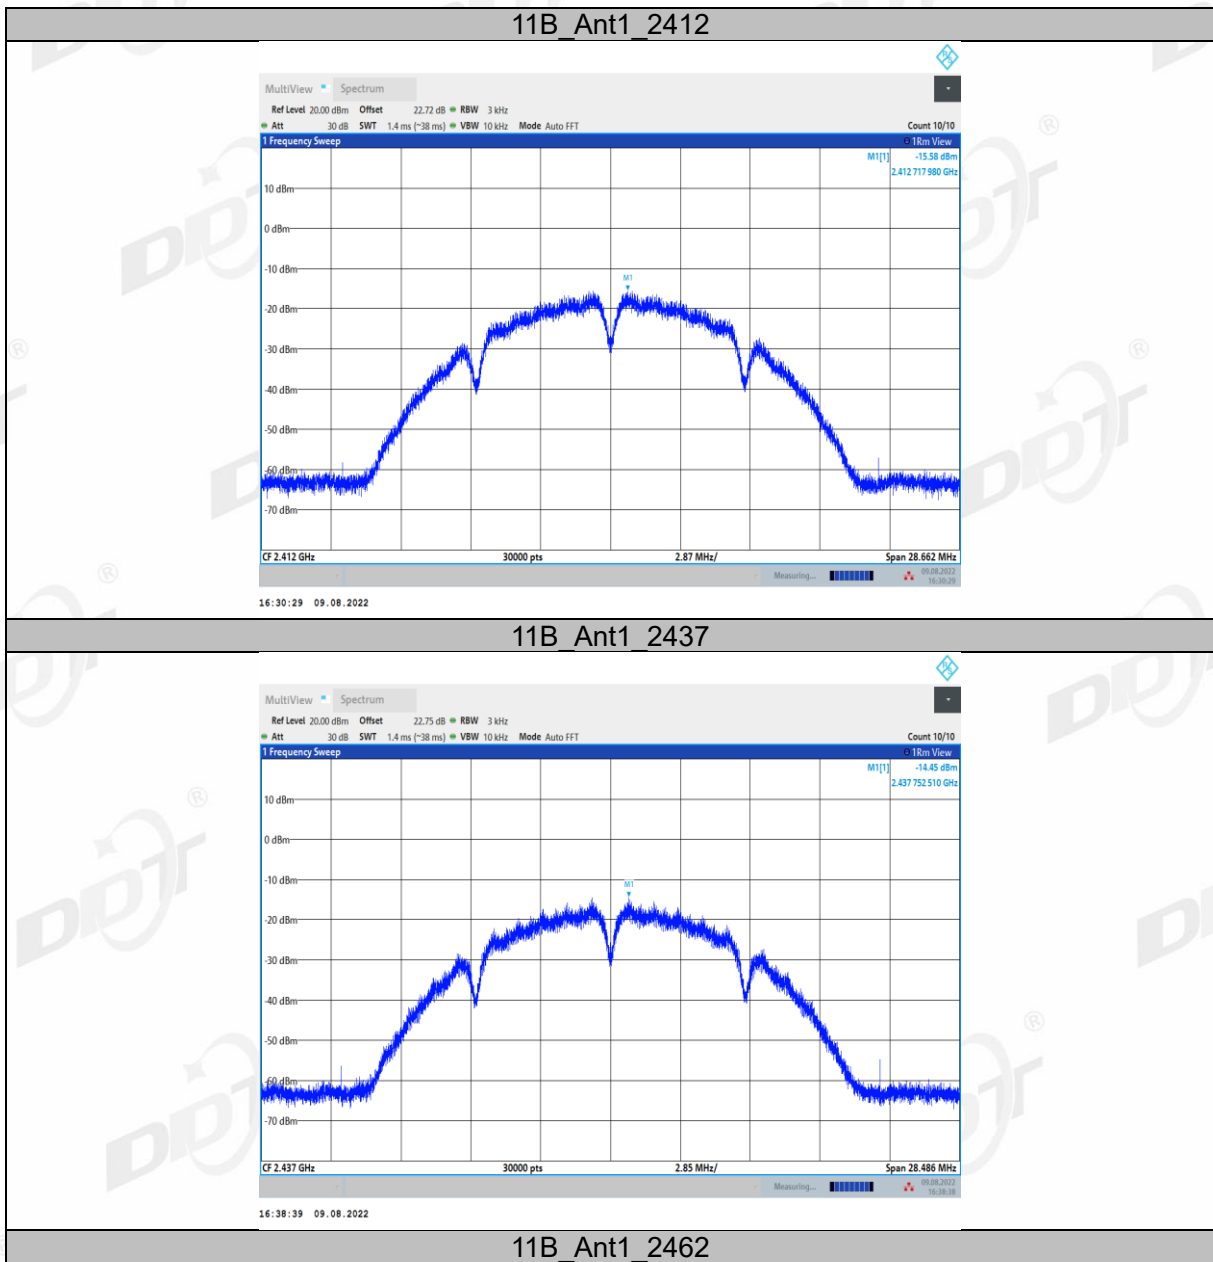


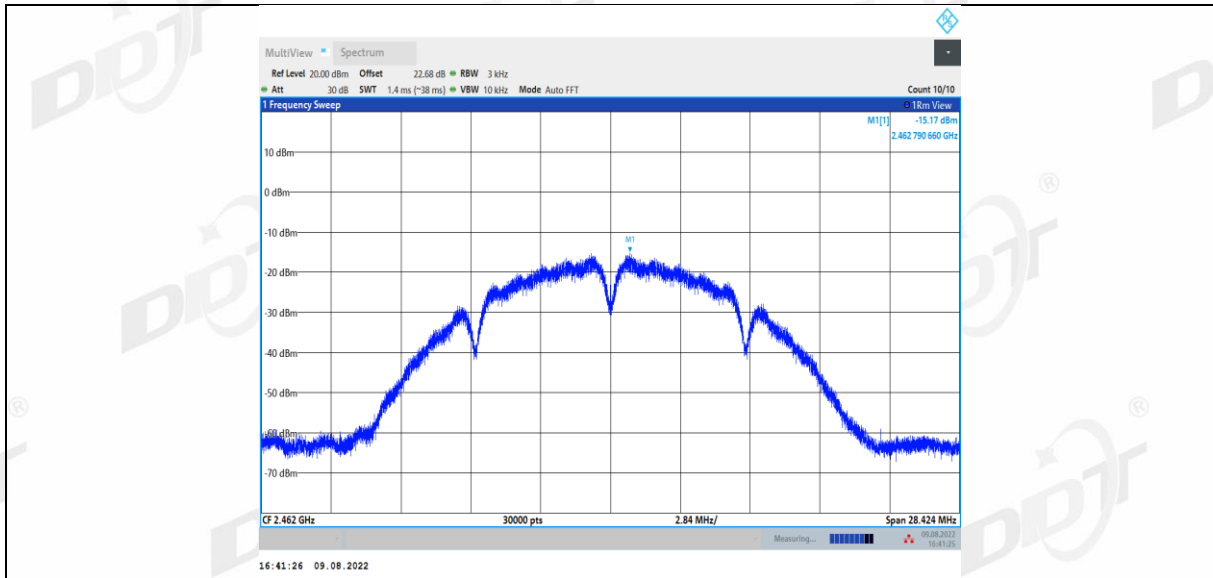


11G\_Ant1\_2412

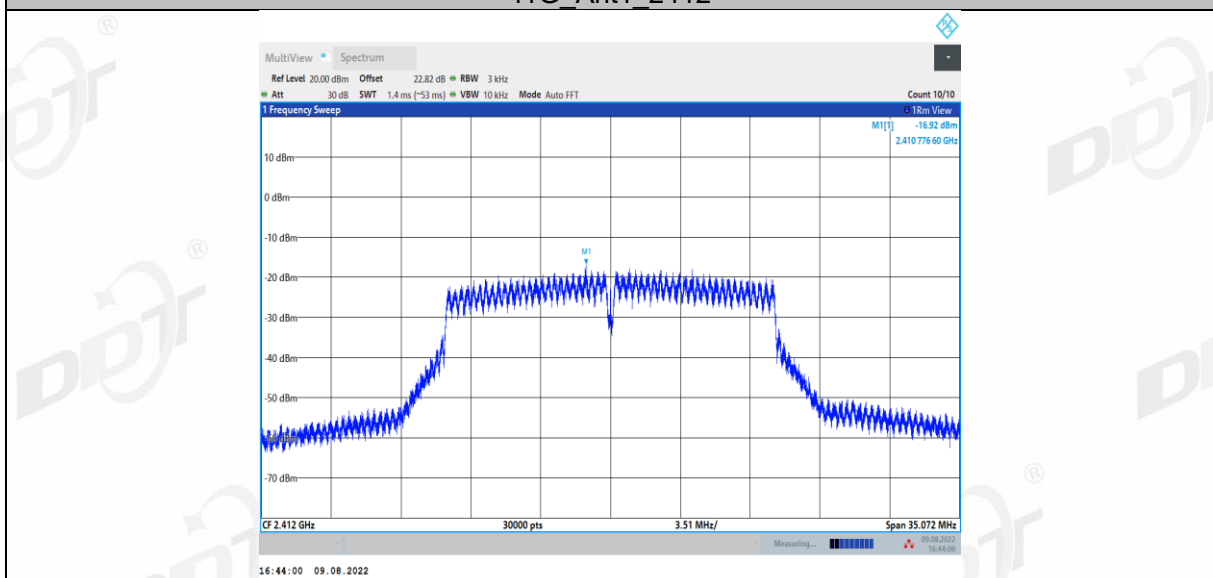


11G\_Ant1\_2437

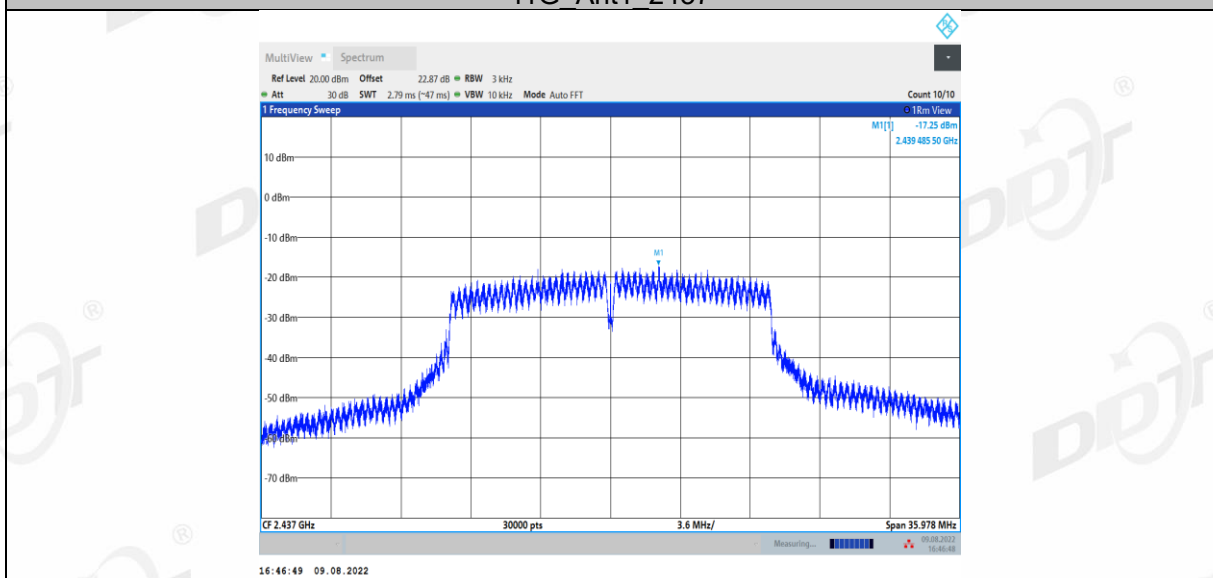


11G\_Ant1\_2462

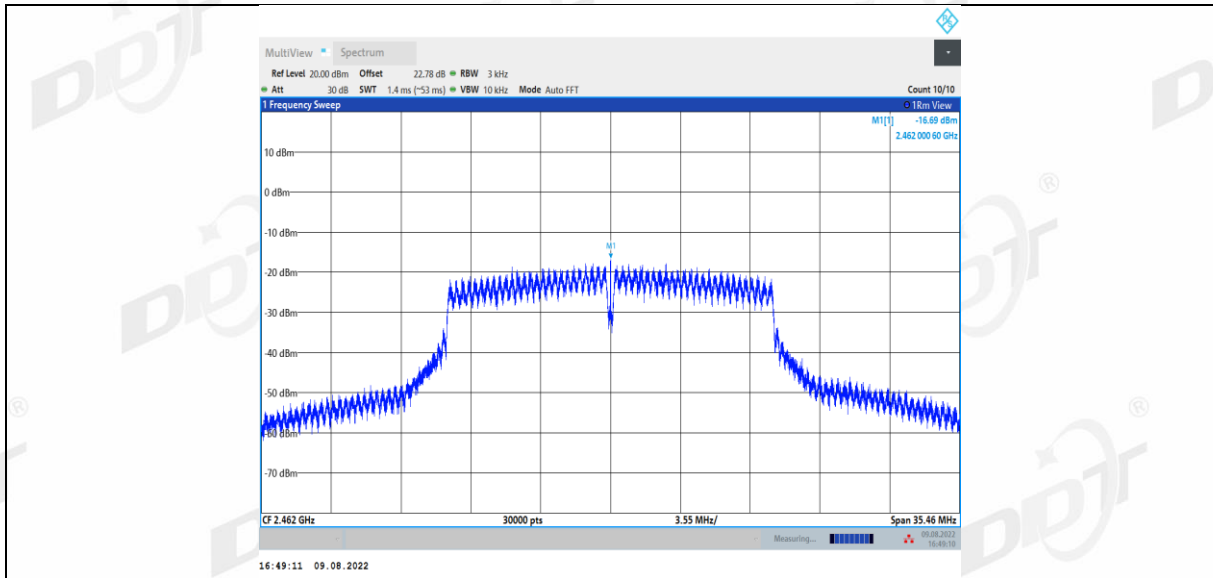

11N20SISO\_Ant1\_2412

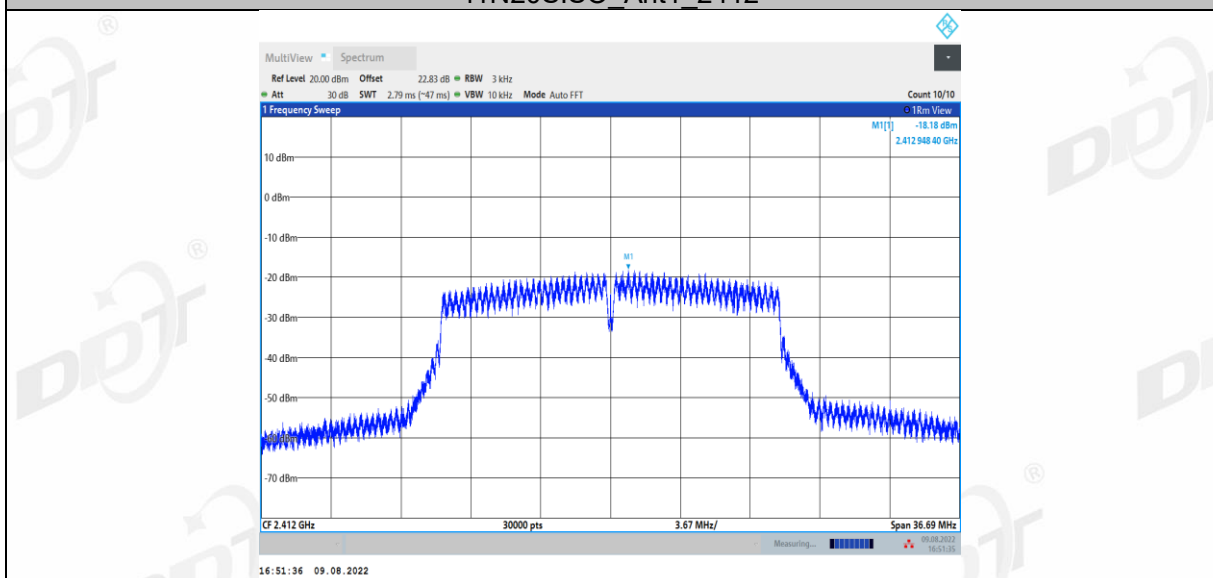


11N20SISO\_Ant1\_2437

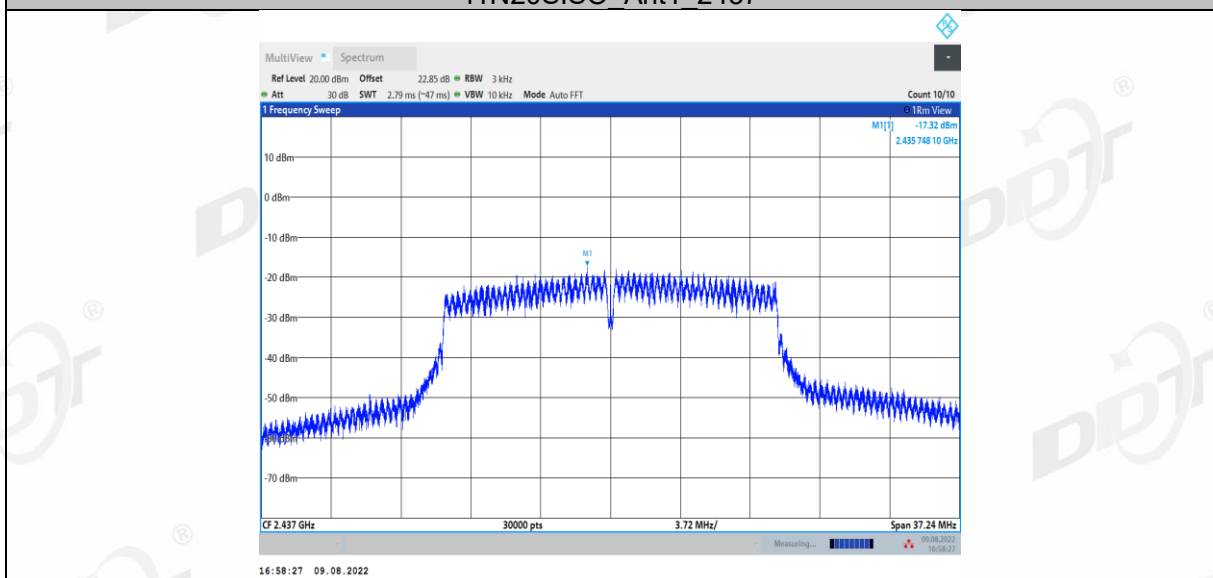


11N20SISO\_Ant1\_2462




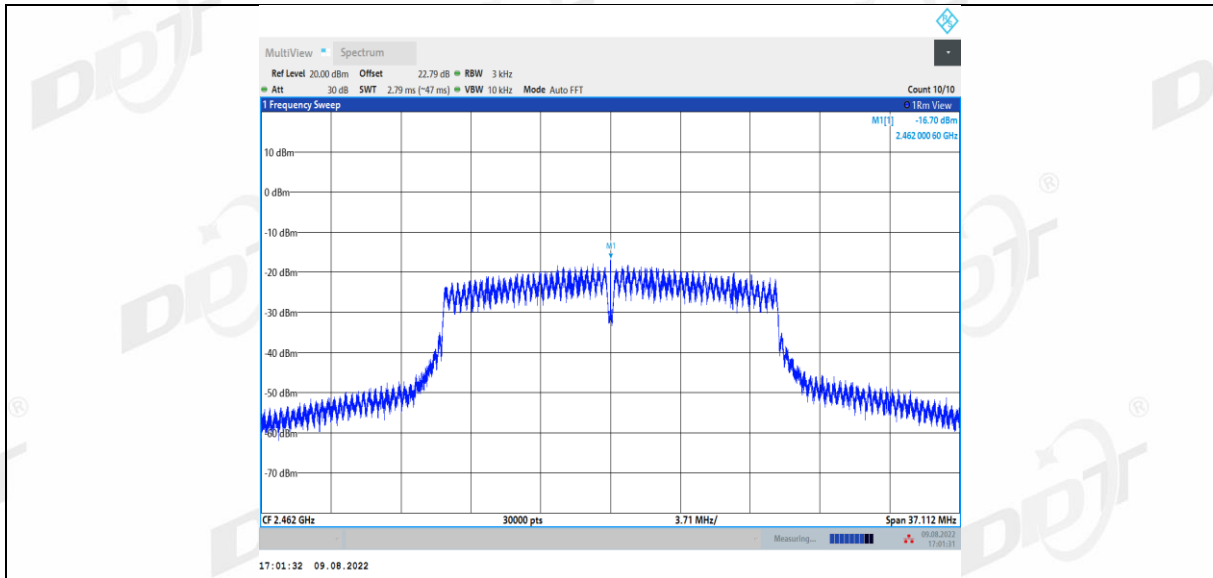


11N40SISO\_Ant1\_2422

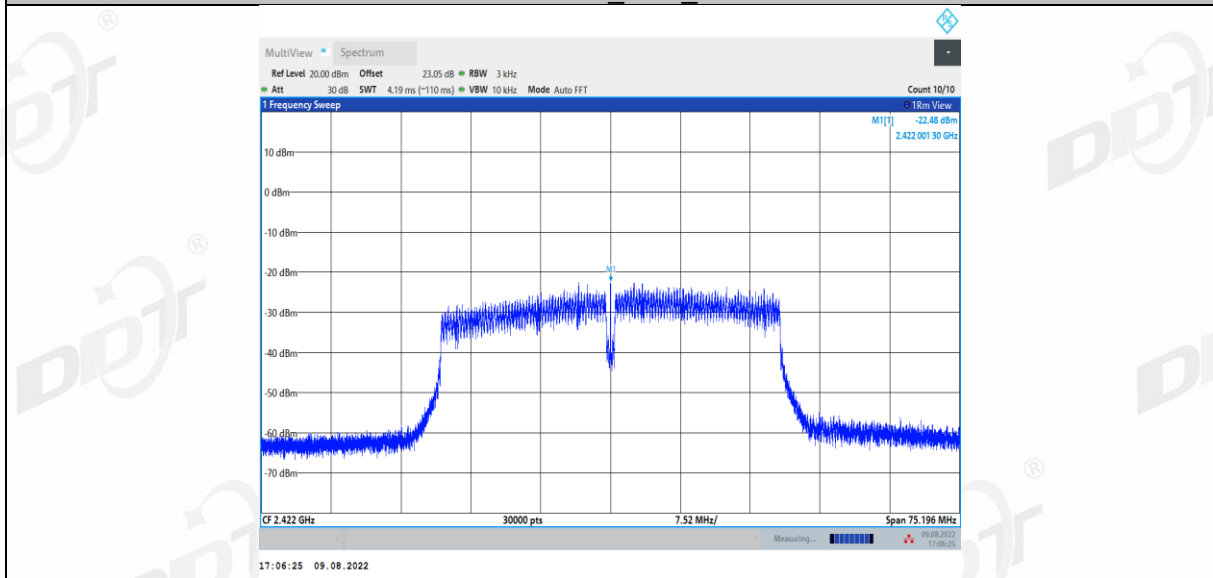

11N40SISO\_Ant1\_2437

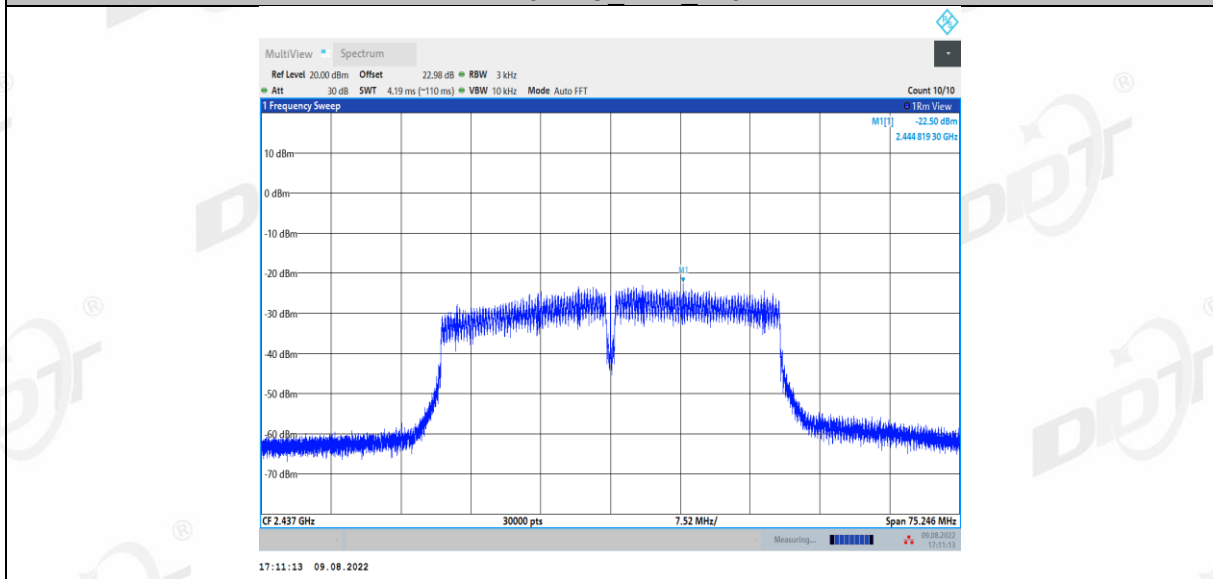

11N40SISO\_Ant1\_2452

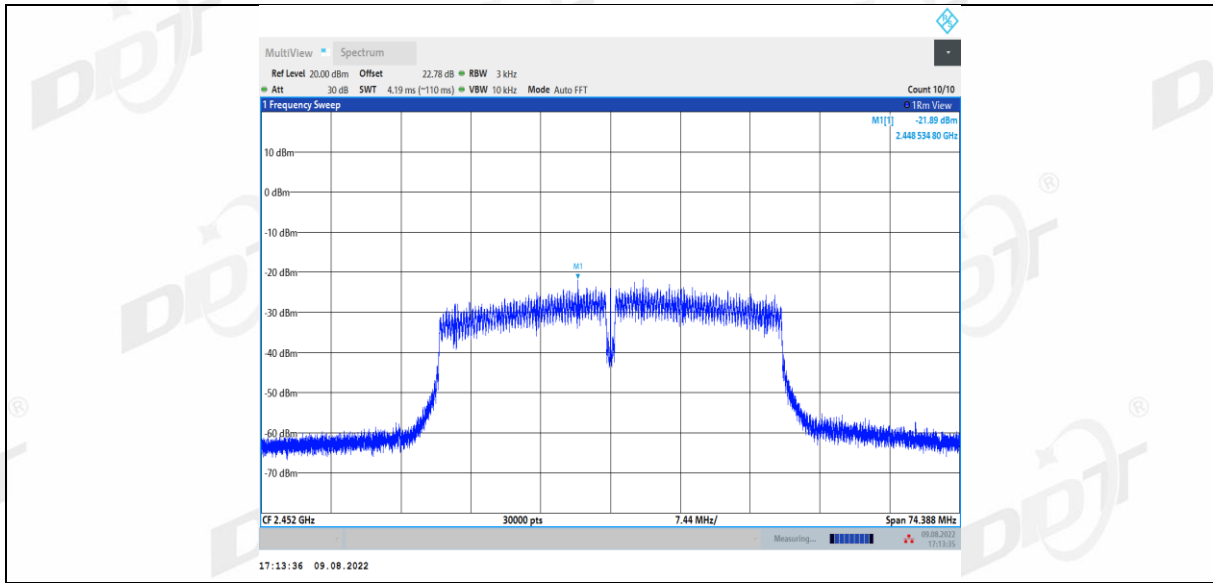

## 7. Band Edge and Compliance (Conducted Method)

### 7.1. Block diagram of test setup

Same as section 4.1

### 7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
RBW:	100 kHz


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

### 7.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

### 7.5. original test data

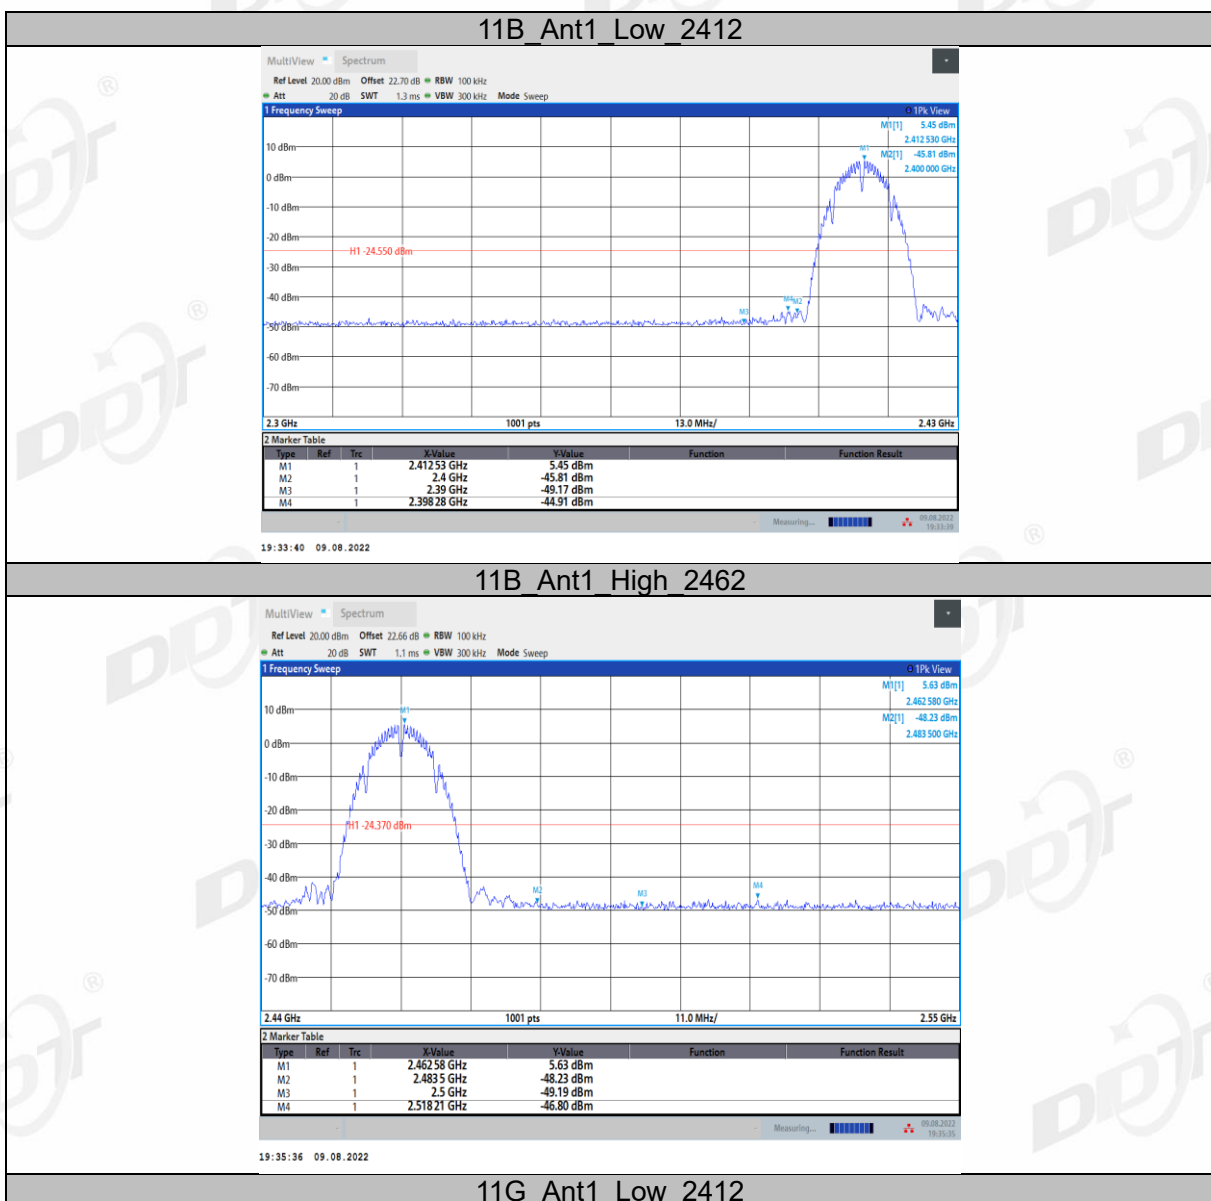


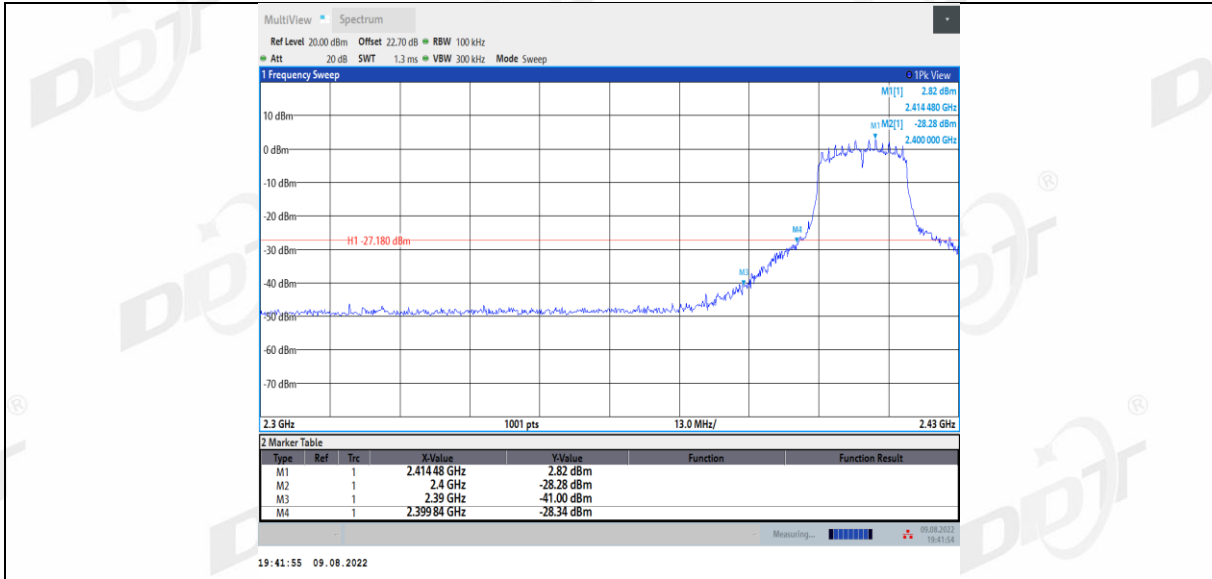


11G Ant1 High 2462

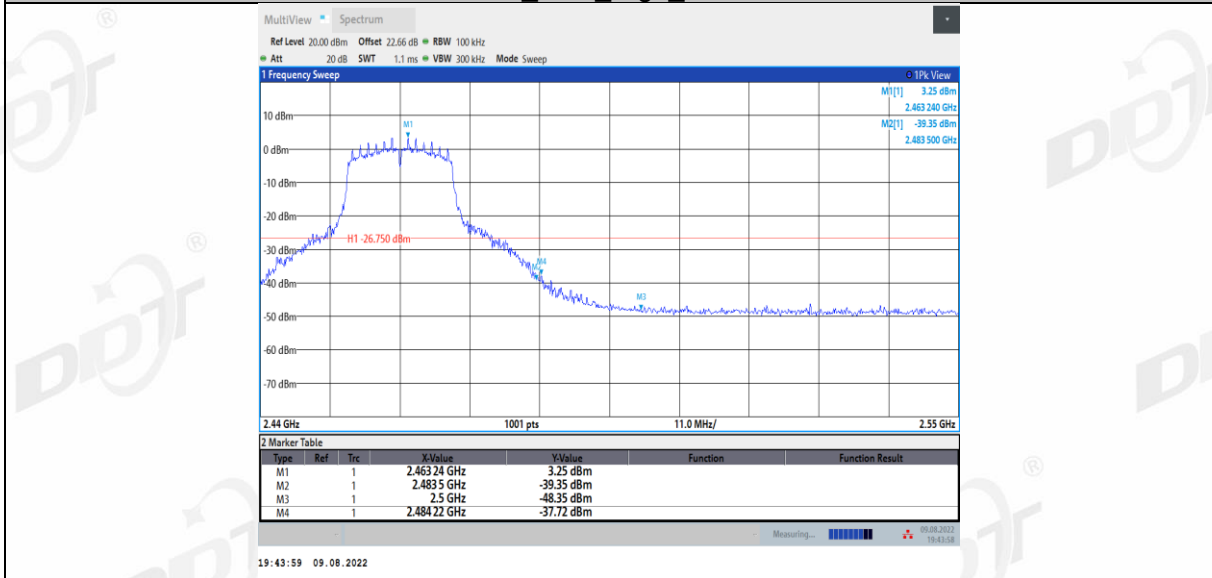


11N20SISO Ant1 Low 2412

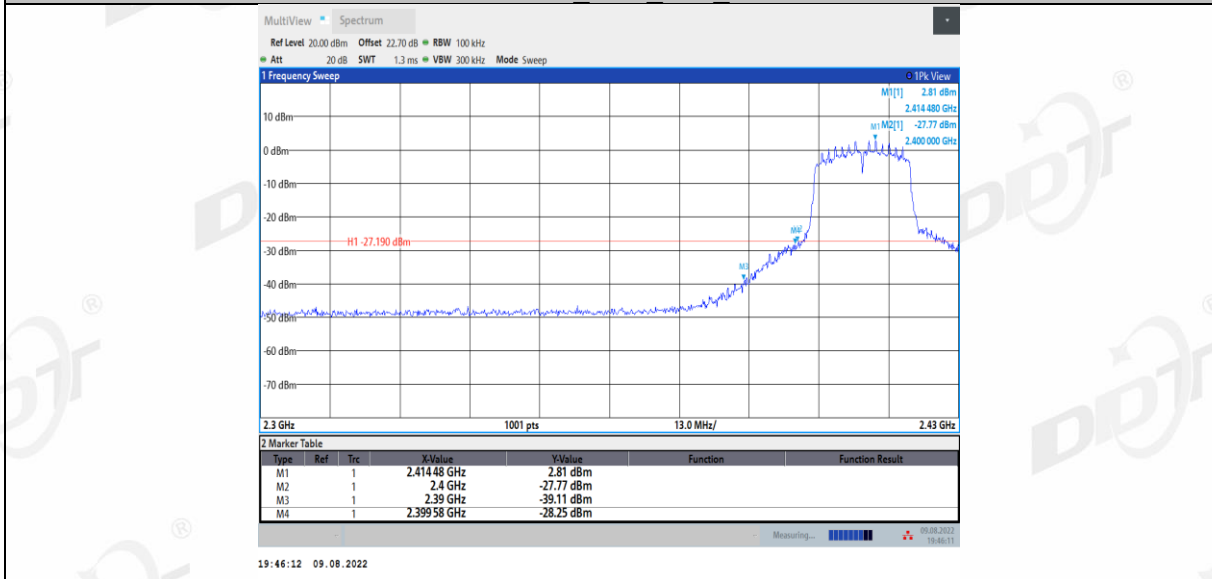


11N20SISO Ant1 High 2462

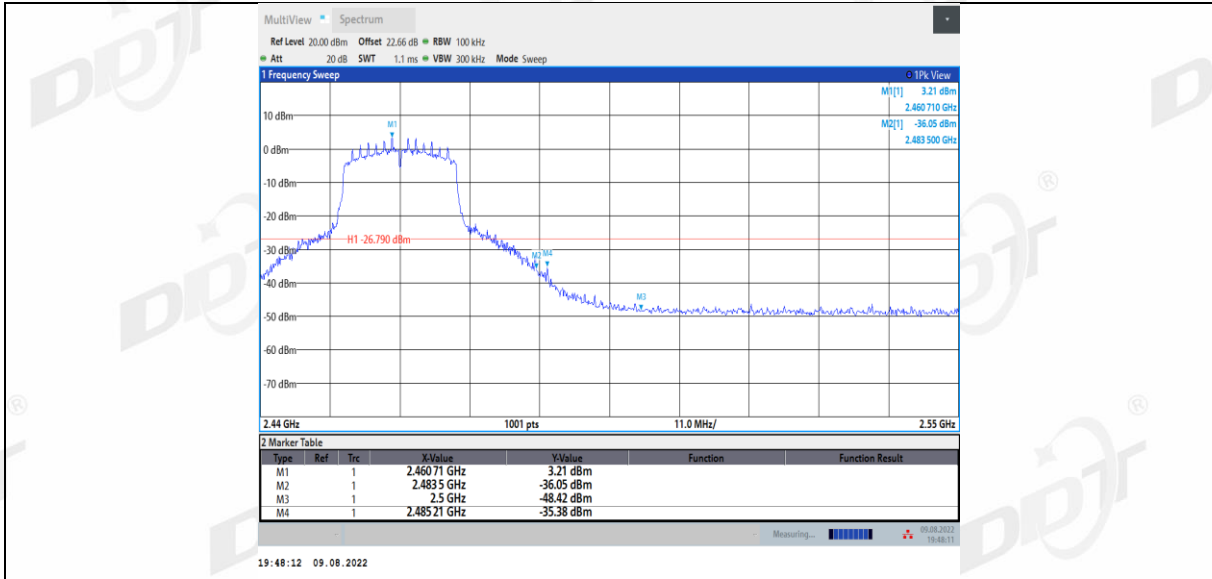

11N40SISO\_Ant1\_Low\_2422

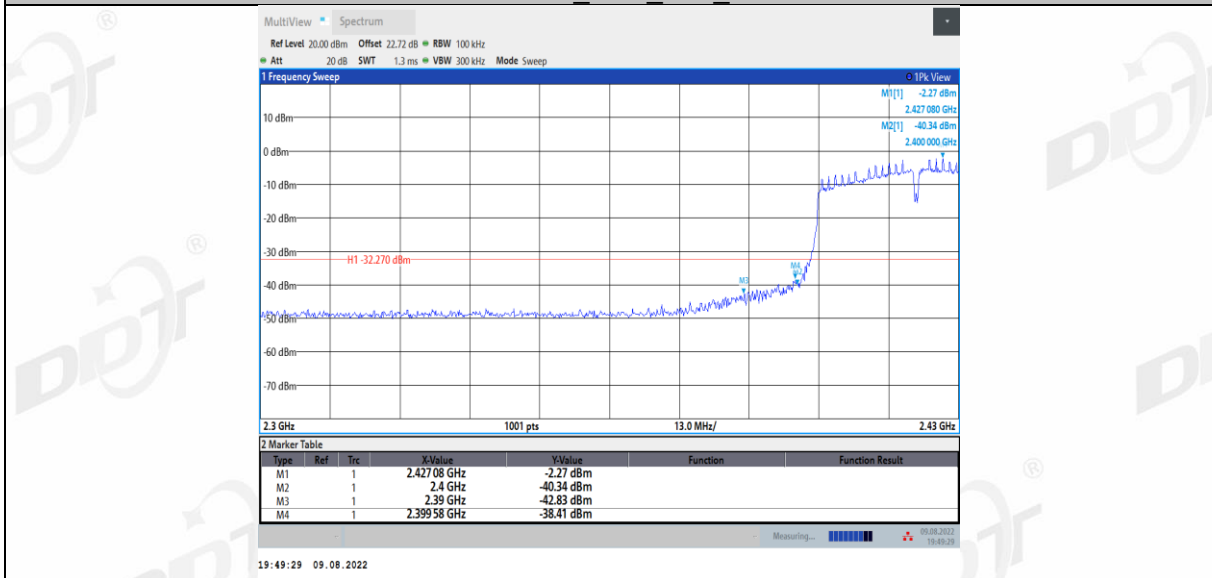

11N40SISO\_Ant1\_High\_2452

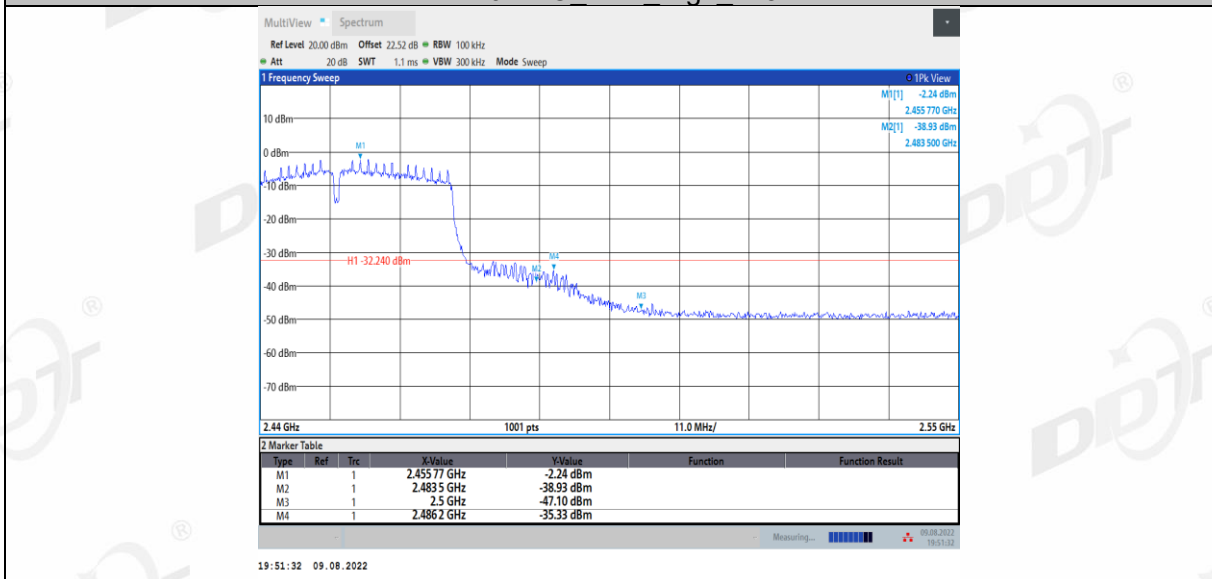





## 8. Radiated Spurious Emissions

### 8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

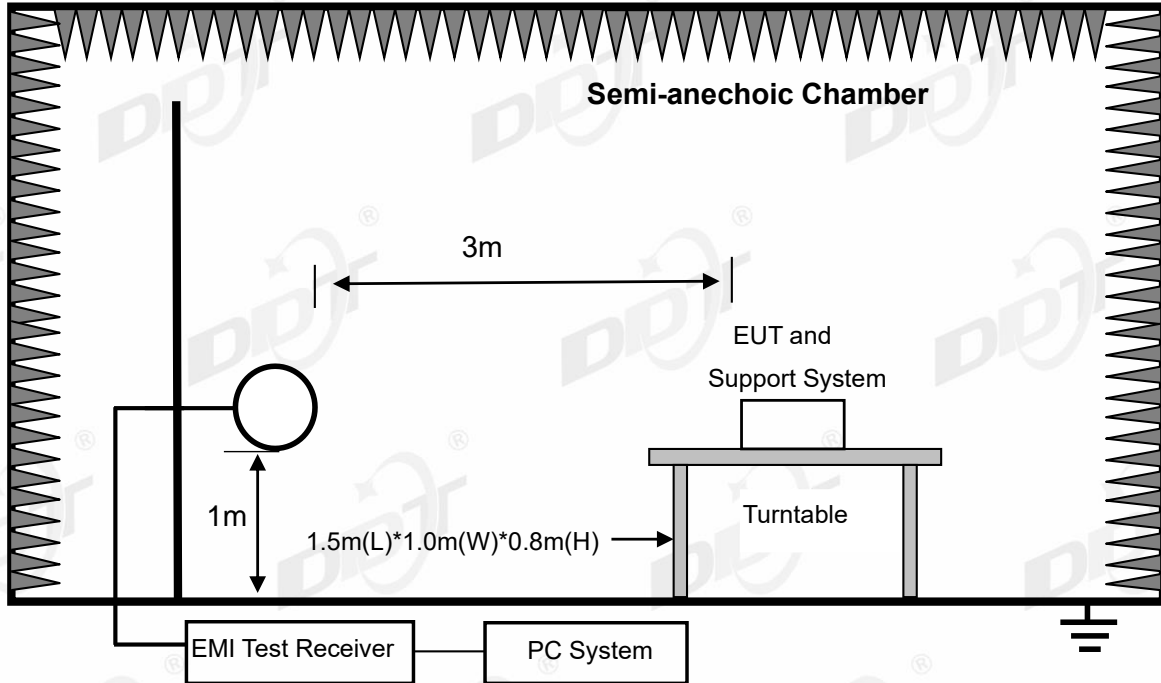

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

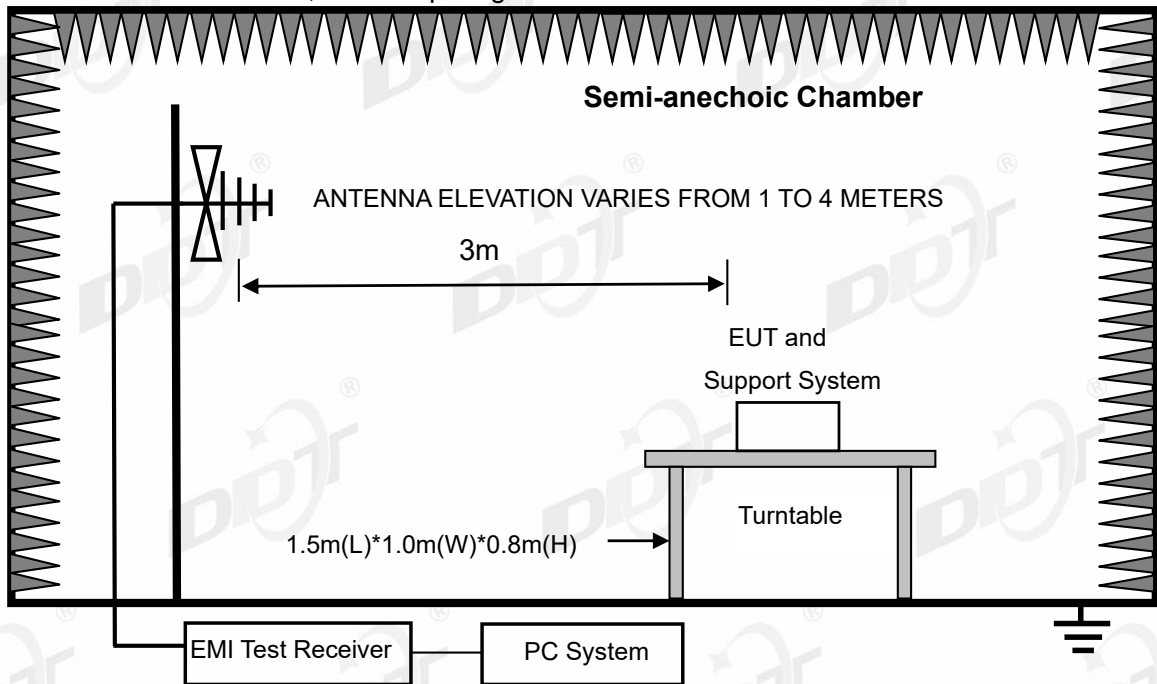

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

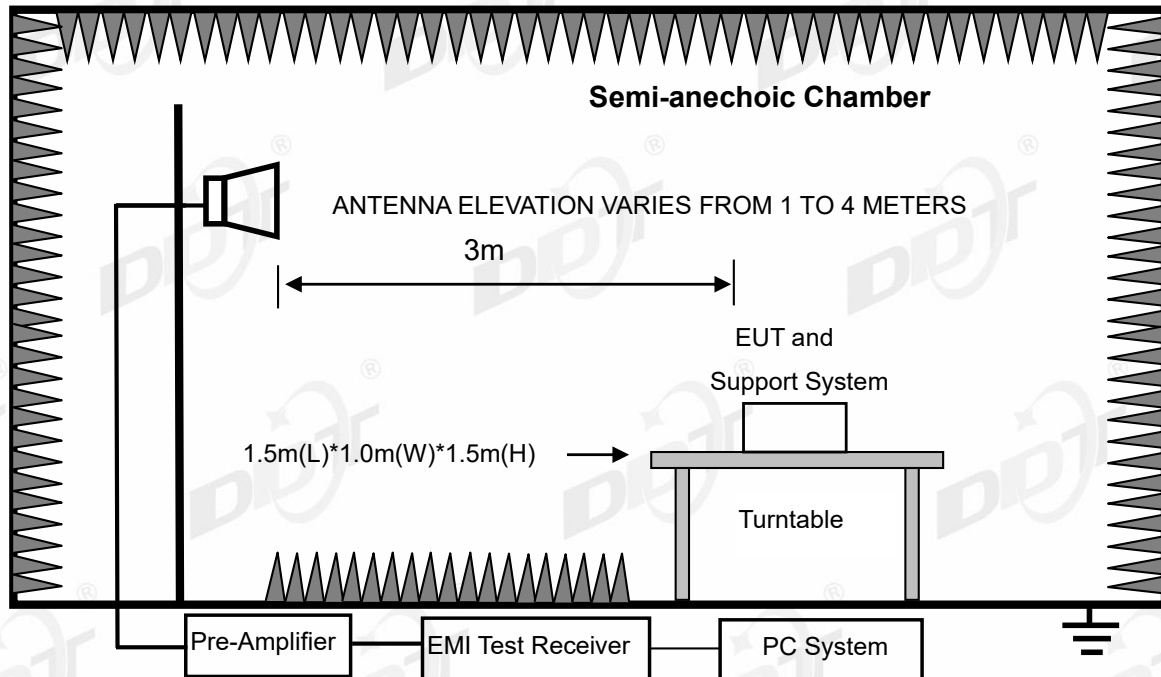

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

## 8.2. Limit

### 8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## 8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

## 8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

## 8.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1

m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

#### 8.4. Test result

##### **Pass. (See below detailed test result)**

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11b 2412MHz.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.



Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC BELOW 1G.EM6

Test Date : 2022-08-16

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : Battery

Test Mode : Tx Mode

Condition : Temp:23°C,Humi:52.4%,Press:100.3kPa

Antenna/Distance : 2022 9161 #3/3m/HORIZONTAL

Memo :

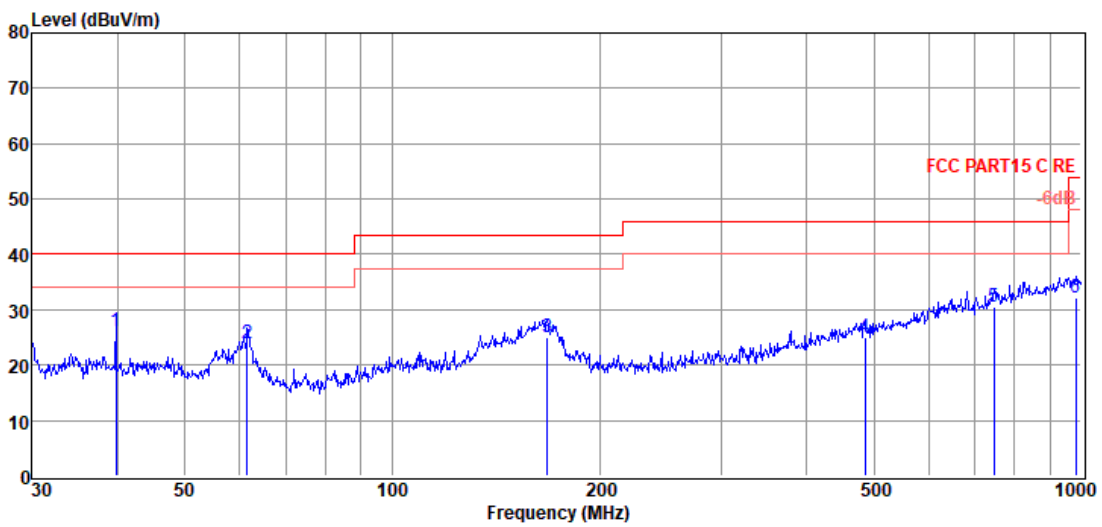

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	39.72	10.34	12.27	3.61	26.22	40.00	-13.78	QP	HORIZONTAL
2	61.56	8.30	11.73	3.76	23.79	40.00	-16.21	QP	HORIZONTAL
3	167.82	1.32	19.50	4.33	25.15	43.50	-18.35	QP	HORIZONTAL
4	485.61	2.44	17.20	5.44	25.08	46.00	-20.92	QP	HORIZONTAL
5	747.48	2.83	21.50	6.09	30.42	46.00	-15.58	QP	HORIZONTAL
6	982.62	1.56	23.80	6.75	32.11	54.00	-21.89	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC BELOW 1G.EM6

**Test Date** : 2022-08-16

**Tested By** : James Gan

**EUT** : OCR Multi-Player

**Model Number** : T90ET


**Power Supply** : Battery

**Test Mode** : Tx Mode

**Condition** : Temp:23°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2022 9161 #3/3m/VERTICAL

**Memo** :

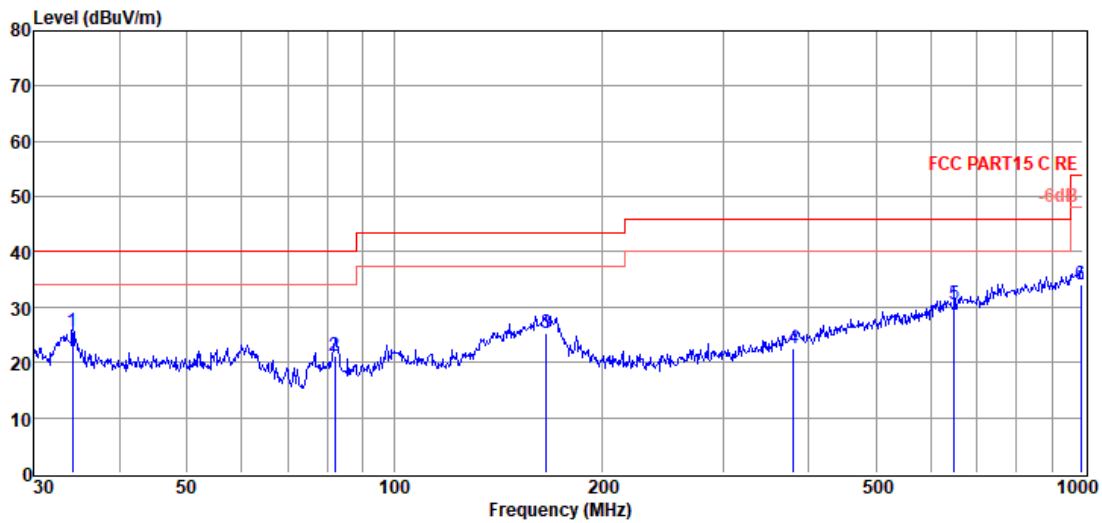

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBUV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	34.16	10.52	11.52	3.58	25.62	40.00	-14.38	QP	VERTICAL
2	82.07	7.47	9.71	3.89	21.07	40.00	-18.93	QP	VERTICAL
3	166.07	1.52	19.50	4.32	25.34	43.50	-18.16	QP	VERTICAL
4	379.91	1.98	15.60	5.09	22.67	46.00	-23.33	QP	VERTICAL
5	649.66	4.66	19.90	5.86	30.42	46.00	-15.58	QP	VERTICAL
6	993.01	3.53	23.80	6.80	34.13	54.00	-19.87	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (Above 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-16

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 11B 2412

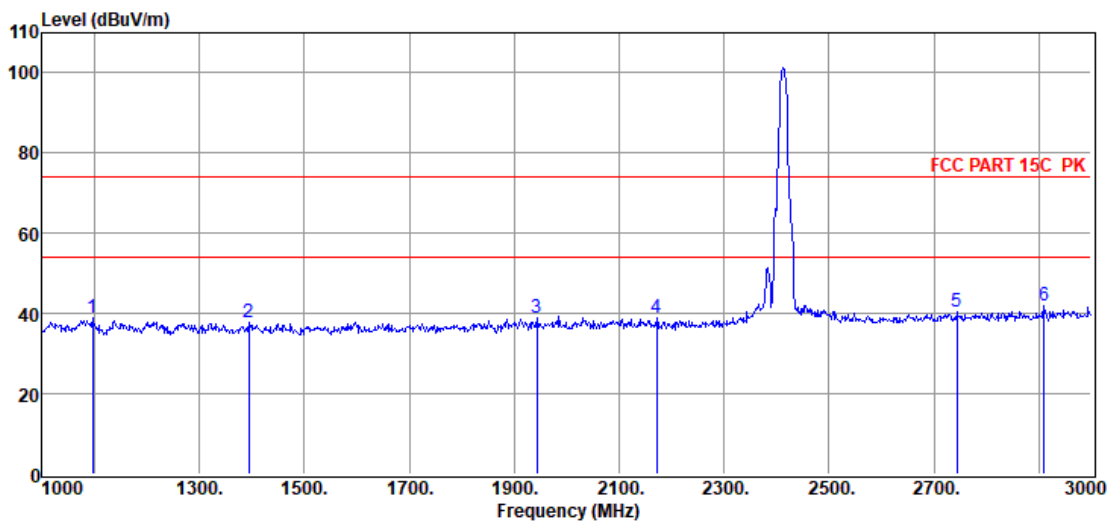

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1096.00	49.77	25.48	38.04	1.15	0.52	38.88	74.00	-35.12	Peak	HORIZONTAL
2	1394.00	49.00	25.42	38.49	1.32	0.57	37.82	74.00	-36.18	Peak	HORIZONTAL
3	1944.00	49.60	26.55	39.32	1.58	0.67	39.08	74.00	-34.92	Peak	HORIZONTAL
4	2172.00	49.13	27.01	39.49	1.65	0.70	39.00	74.00	-35.00	Peak	HORIZONTAL
5	2744.00	49.04	28.53	39.77	1.80	0.76	40.36	74.00	-33.64	Peak	HORIZONTAL
6	2910.00	50.10	29.16	39.86	1.85	0.78	42.03	74.00	-31.97	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11B 2412

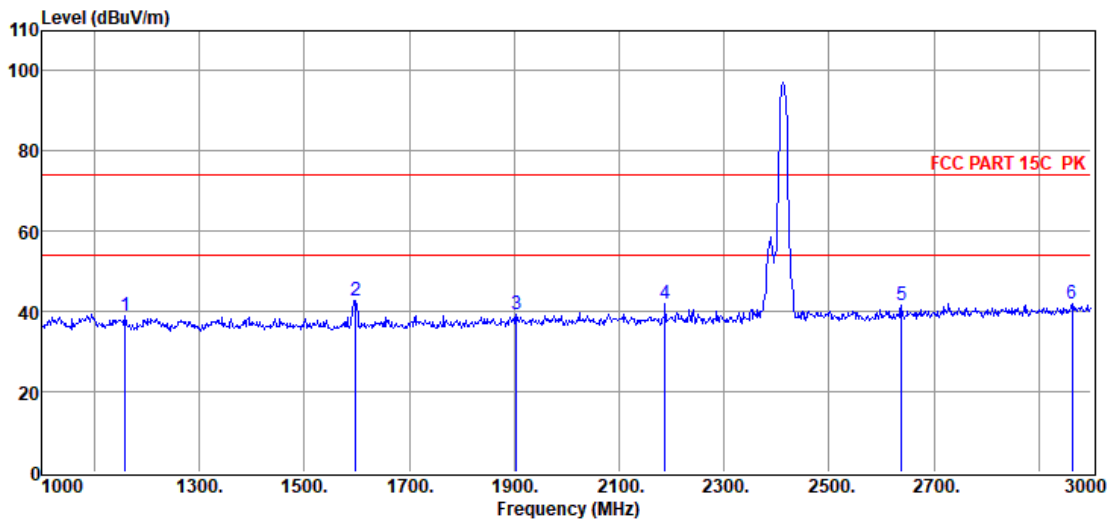


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1158.00	49.70	25.47	38.14	1.19	0.53	38.75	74.00	-35.25	Peak	VERTICAL
2	1598.00	54.01	25.65	38.80	1.42	0.61	42.89	74.00	-31.11	Peak	VERTICAL
3	1904.00	49.85	26.45	39.26	1.56	0.66	39.26	74.00	-34.74	Peak	VERTICAL
4	2188.00	51.97	27.04	39.49	1.65	0.70	41.87	74.00	-32.13	Peak	VERTICAL
5	2638.00	50.63	28.12	39.72	1.78	0.75	41.56	74.00	-32.44	Peak	VERTICAL
6	2964.00	49.70	29.36	39.88	1.86	0.79	41.83	74.00	-32.17	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL  
**Memo** : 11B 2437

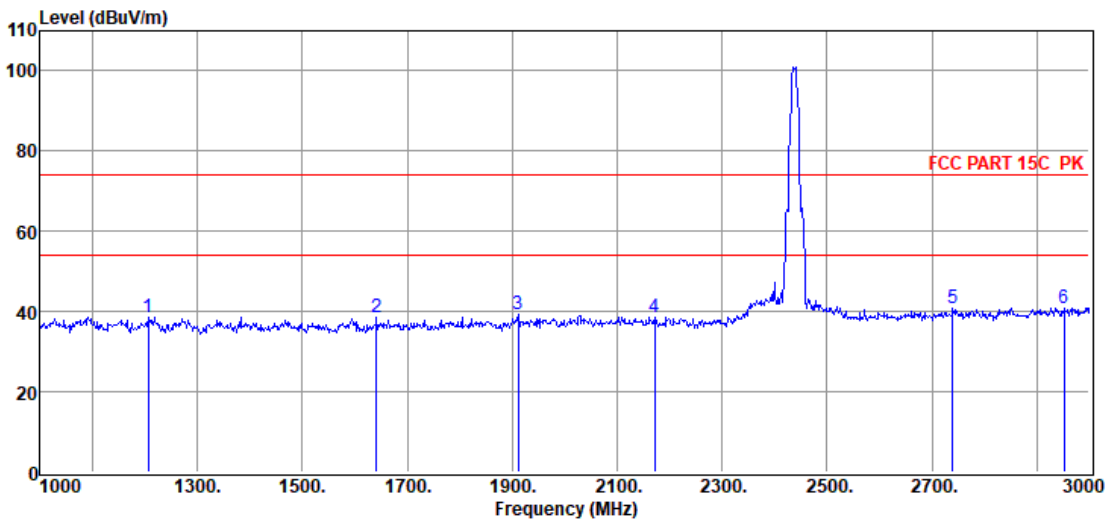


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1206.00	49.46	25.46	38.21	1.22	0.54	38.47	74.00	-35.53	Peak	HORIZONTAL
2	1642.00	49.72	25.77	38.86	1.44	0.62	38.69	74.00	-35.31	Peak	HORIZONTAL
3	1912.00	49.71	26.47	39.27	1.56	0.66	39.13	74.00	-34.87	Peak	HORIZONTAL
4	2172.00	48.74	27.01	39.49	1.65	0.70	38.61	74.00	-35.39	Peak	HORIZONTAL
5	2740.00	49.44	28.51	39.77	1.80	0.76	40.74	74.00	-33.26	Peak	HORIZONTAL
6	2952.00	48.87	29.32	39.88	1.86	0.78	40.95	74.00	-33.05	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11B 2437

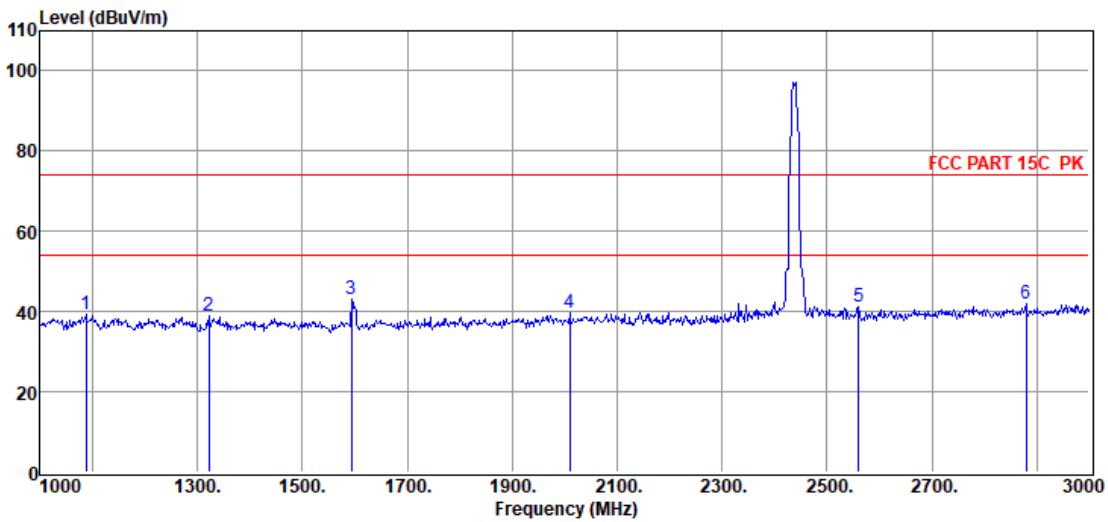

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1088.00	50.23	25.48	38.03	1.15	0.52	39.35	74.00	-34.65	Peak	VERTICAL
2	1322.00	49.86	25.44	38.38	1.28	0.56	38.76	74.00	-35.24	Peak	VERTICAL
3	1594.00	54.19	25.64	38.79	1.42	0.61	43.07	74.00	-30.93	Peak	VERTICAL
4	2010.00	49.94	26.72	39.41	1.60	0.68	39.53	74.00	-34.47	Peak	VERTICAL
5	2560.00	50.47	27.83	39.68	1.76	0.74	41.12	74.00	-32.88	Peak	VERTICAL
6	2880.00	49.98	29.04	39.84	1.84	0.78	41.80	74.00	-32.20	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#  
**Test Date** : 2022-08-16  
**EUT** : OCR Multi-Player  
**Power Supply** : BATTERY  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa  
**Memo** : 11B 2462

**Antenna/Distance** : 2021 BBHA 9120D  
 3#/3m/HORIZONTAL

**Tested By** : James Gan  
**Model Number** : T90ET  
**Test Mode** : Tx Mode

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

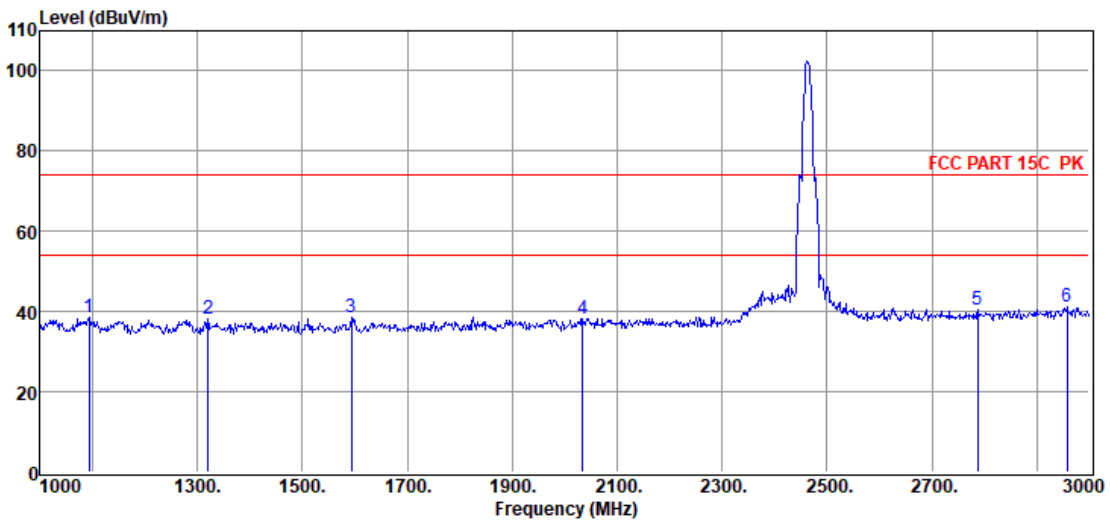


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1094.00	49.30	25.48	38.04	1.15	0.52	38.41	74.00	-35.59	Peak	HORIZONTAL
2	1320.00	49.40	25.44	38.38	1.28	0.56	38.30	74.00	-35.70	Peak	HORIZONTAL
3	1594.00	49.53	25.64	38.79	1.42	0.61	38.41	74.00	-35.59	Peak	HORIZONTAL
4	2034.00	48.48	26.76	39.42	1.61	0.68	38.11	74.00	-35.89	Peak	HORIZONTAL
5	2788.00	49.07	28.69	39.79	1.81	0.77	40.55	74.00	-33.45	Peak	HORIZONTAL
6	2958.00	48.94	29.34	39.88	1.86	0.79	41.05	74.00	-32.95	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11B 2462

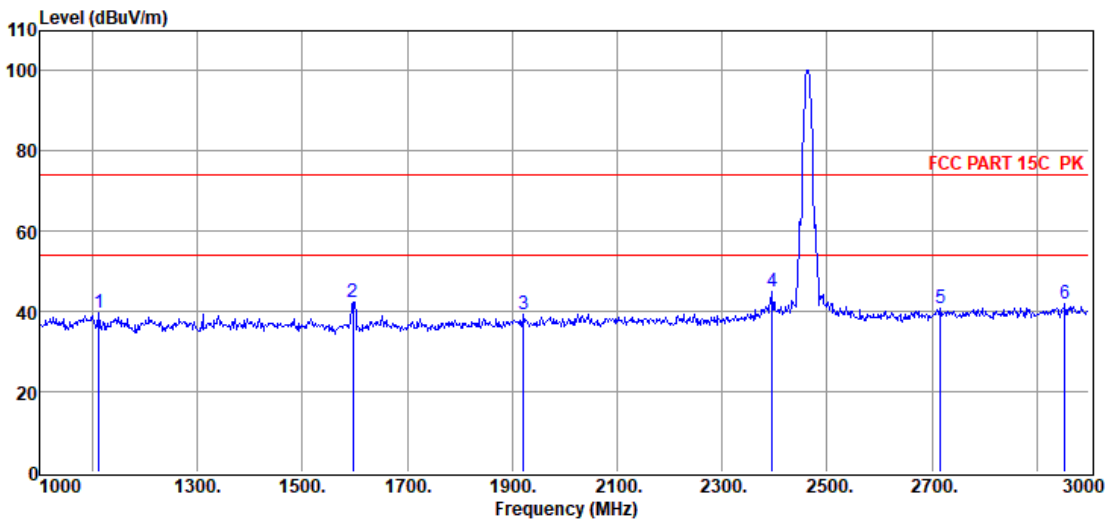


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1112.00	50.42	25.48	38.07	1.16	0.52	39.51	74.00	-34.49	Peak	VERTICAL
2	1596.00	53.33	25.65	38.79	1.42	0.61	42.22	74.00	-31.78	Peak	VERTICAL
3	1922.00	49.74	26.50	39.28	1.57	0.67	39.20	74.00	-34.80	Peak	VERTICAL
4	2396.00	54.74	27.41	39.60	1.71	0.72	44.98	74.00	-29.02	Peak	VERTICAL
5	2716.00	49.73	28.42	39.76	1.80	0.76	40.95	74.00	-33.05	Peak	VERTICAL
6	2954.00	49.96	29.33	39.88	1.86	0.78	42.05	74.00	-31.95	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL  
**Memo** : 11B 2412

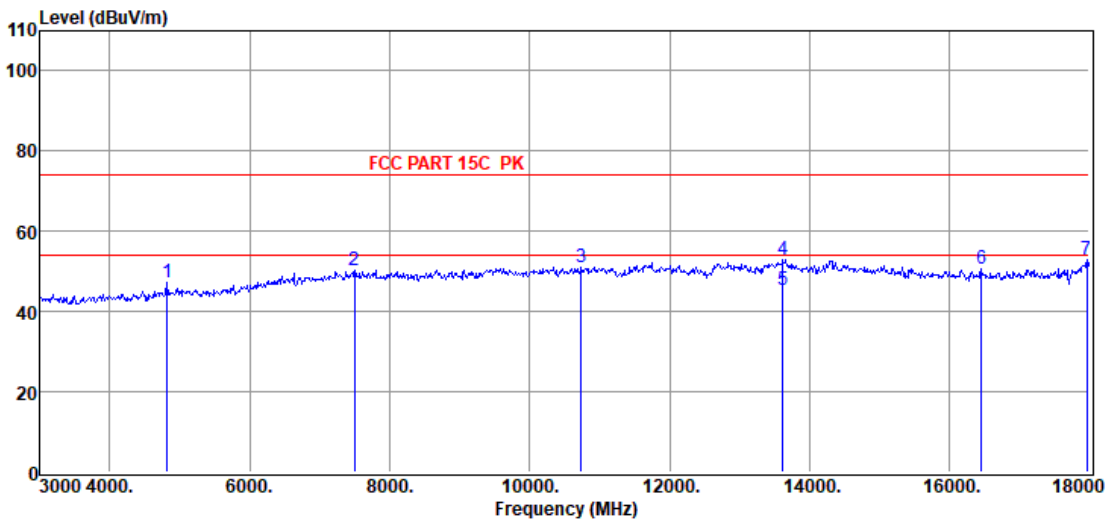

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4824.00	50.47	32.54	40.36	2.48	2.16	47.29	74.00	-26.71	Peak	HORIZONTAL
2	7500.00	48.09	36.40	39.75	3.14	2.27	50.15	74.00	-23.85	Peak	HORIZONTAL
3	10740.00	46.00	39.14	40.30	3.73	2.41	50.98	74.00	-23.02	Peak	HORIZONTAL
4	13620.00	46.04	39.98	39.97	4.12	2.92	53.09	74.00	-20.91	Peak	HORIZONTAL
5	13620.00	38.29	39.98	39.97	4.12	2.92	45.34	54.00	-8.66	Average	HORIZONTAL
6	16455.00	44.71	37.90	39.99	4.72	3.30	50.64	74.00	-23.36	Peak	HORIZONTAL
7	17970.00	42.48	42.31	40.68	4.95	3.78	52.84	74.00	-21.16	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

**Test Date** : 2022-08-16

**Tested By** : James Gan

**EUT** : OCR Multi-Player

**Model Number** : T90ET


**Power Supply** : BATTERY

**Test Mode** : Tx Mode

**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 11B 2412

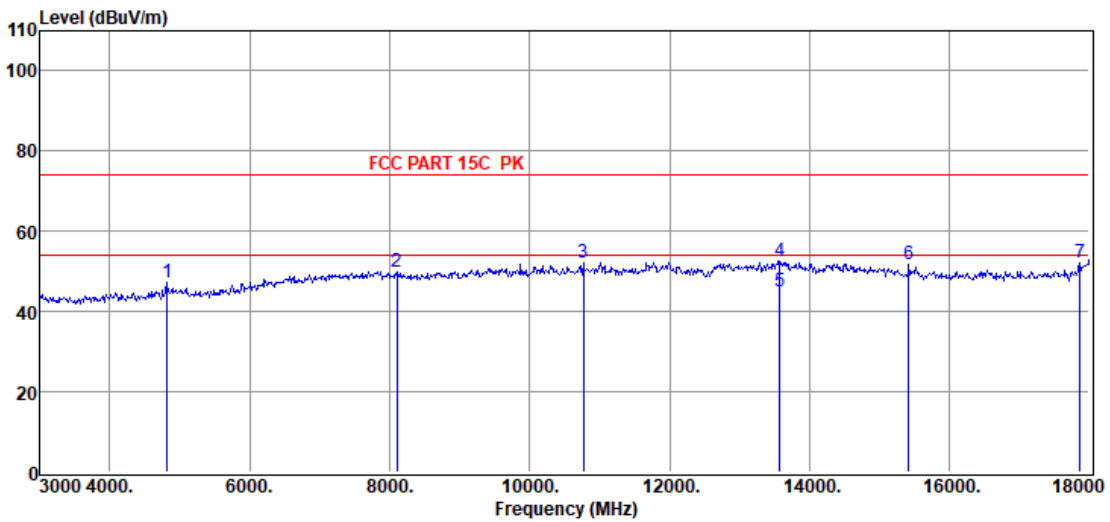

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4824.00	50.44	32.54	40.36	2.48	2.16	47.26	74.00	-26.74	Peak	VERTICAL
2	8100.00	47.20	37.16	39.81	3.20	2.27	50.02	74.00	-23.98	Peak	VERTICAL
3	10770.00	47.16	39.16	40.29	3.74	2.40	52.17	74.00	-21.83	Peak	VERTICAL
4	13575.00	45.63	39.99	40.00	4.07	2.93	52.62	74.00	-21.38	Peak	VERTICAL
5	13575.00	38.10	39.99	40.00	4.07	2.93	45.09	54.00	-8.91	Average	VERTICAL
6	15420.00	45.05	38.91	39.73	4.55	2.83	51.61	74.00	-22.39	Peak	VERTICAL
7	17865.00	42.40	41.66	40.62	4.92	3.75	52.11	74.00	-21.89	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL  
**Memo** : 11B 2437

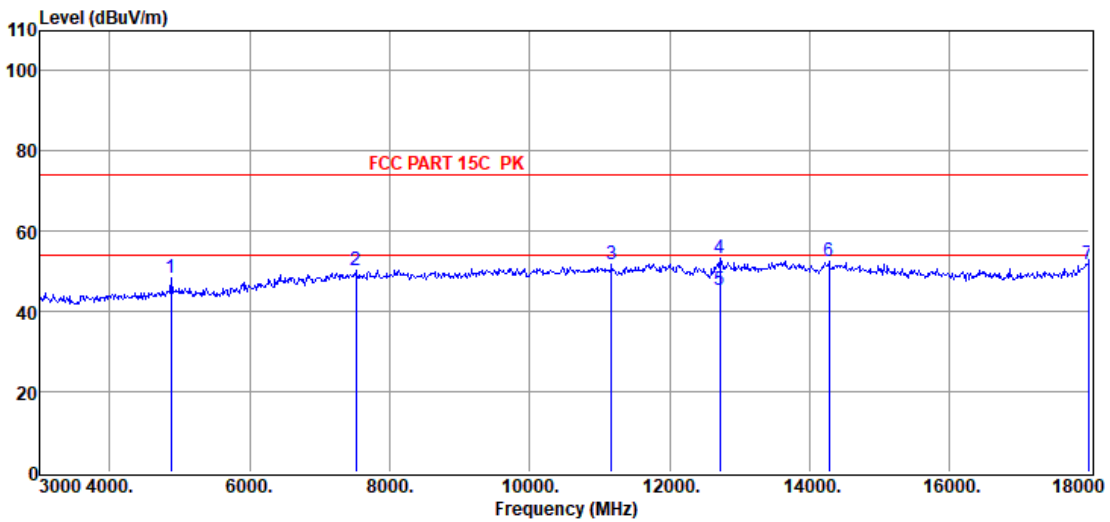


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4874.00	51.51	32.70	40.37	2.49	2.17	48.50	74.00	-25.50	Peak	HORIZONTAL
2	7515.00	48.27	36.42	39.75	3.14	2.27	50.35	74.00	-23.65	Peak	HORIZONTAL
3	11175.00	46.52	39.19	40.18	3.86	2.38	51.77	74.00	-22.23	Peak	HORIZONTAL
4	12720.00	47.42	39.26	40.32	4.01	2.80	53.17	74.00	-20.83	Peak	HORIZONTAL
5	12720.00	39.53	39.26	40.32	4.01	2.80	45.28	54.00	-8.72	Average	HORIZONTAL
6	14280.00	45.18	39.90	39.67	4.43	2.82	52.66	74.00	-21.34	Peak	HORIZONTAL
7	17985.00	41.37	42.41	40.69	4.96	3.79	51.84	74.00	-22.16	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-08-16 **Tested By** : James Gan  
**EUT** : OCR Multi-Player **Model Number** : T90ET  
**Power Supply** : BATTERY **Test Mode** : Tx Mode  
**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11B 2437

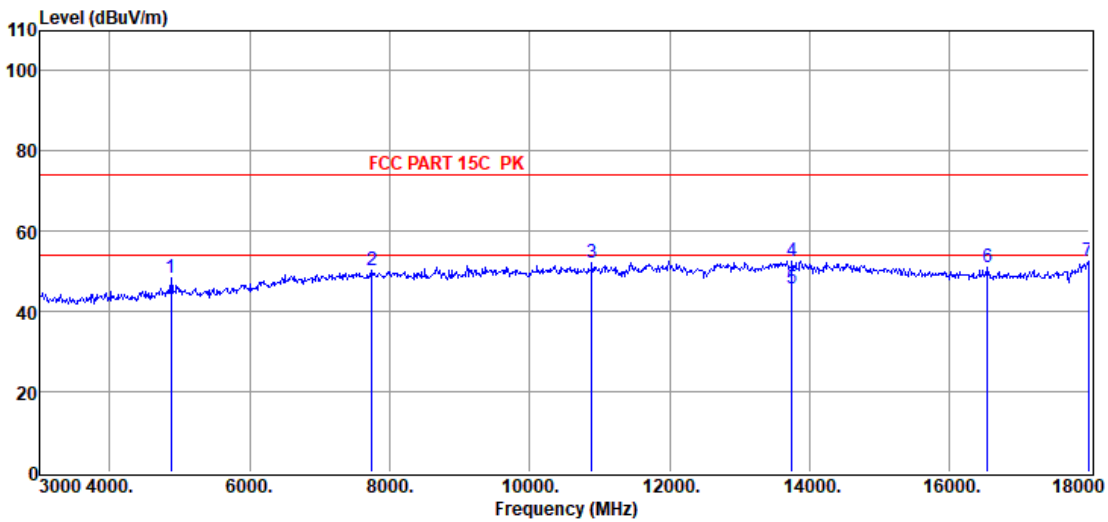

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4874.00	51.27	32.70	40.37	2.49	2.17	48.26	74.00	-25.74	Peak	VERTICAL
2	7740.00	47.96	36.69	39.77	3.16	2.27	50.31	74.00	-23.69	Peak	VERTICAL
3	10890.00	46.87	39.23	40.24	3.77	2.39	52.02	74.00	-21.98	Peak	VERTICAL
4	13755.00	45.41	39.95	39.87	4.27	2.91	52.67	74.00	-21.33	Peak	VERTICAL
5	13755.00	38.66	39.95	39.87	4.27	2.91	45.92	54.00	-8.08	Average	VERTICAL
6	16545.00	44.94	37.95	40.01	4.73	3.33	50.94	74.00	-23.06	Peak	VERTICAL
7	17985.00	41.96	42.41	40.69	4.96	3.79	52.43	74.00	-21.57	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

**Test Date** : 2022-08-16

**Tested By** : James Gan

**EUT** : OCR Multi-Player

**Model Number** : T90ET


**Power Supply** : BATTERY

**Test Mode** : Tx Mode

**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 11B 2462

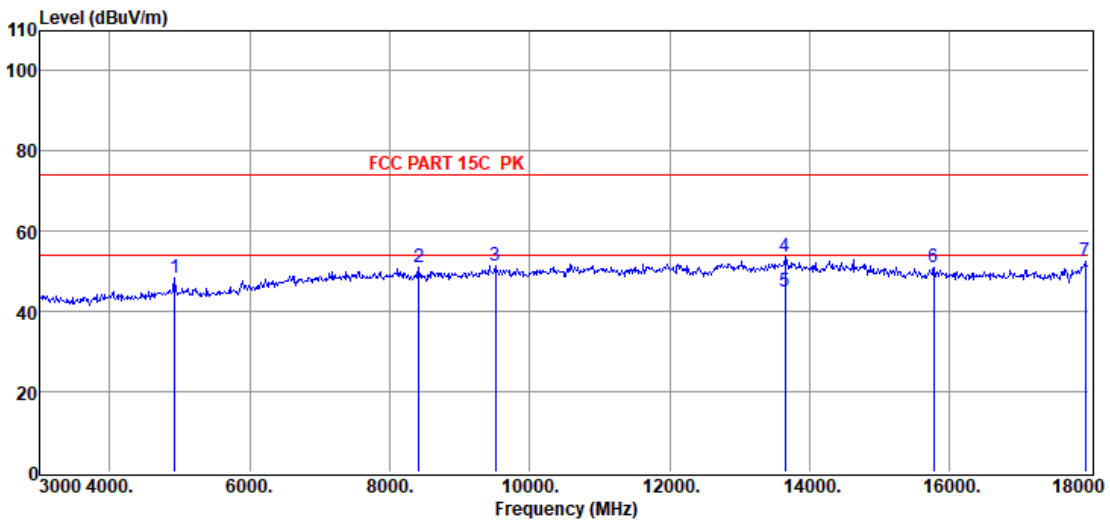

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4924.00	51.07	32.86	40.38	2.51	2.18	48.24	74.00	-25.76	Peak	HORIZONTAL
2	8415.00	47.58	37.66	39.84	3.21	2.24	50.85	74.00	-23.15	Peak	HORIZONTAL
3	9510.00	47.06	38.69	40.26	3.62	2.33	51.44	74.00	-22.56	Peak	HORIZONTAL
4	13650.00	46.45	39.97	39.94	4.15	2.92	53.55	74.00	-20.45	Peak	HORIZONTAL
5	13650.00	37.86	39.97	39.94	4.15	2.92	44.96	54.00	-9.04	Average	HORIZONTAL
6	15780.00	45.00	38.30	39.83	4.58	3.01	51.06	74.00	-22.94	Peak	HORIZONTAL
7	17940.00	42.24	42.13	40.66	4.94	3.77	52.42	74.00	-21.58	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

**Test Date** : 2022-08-16

**Tested By** : James Gan

**EUT** : OCR Multi-Player

**Model Number** : T90ET


**Power Supply** : BATTERY

**Test Mode** : Tx Mode

**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 11B 2462

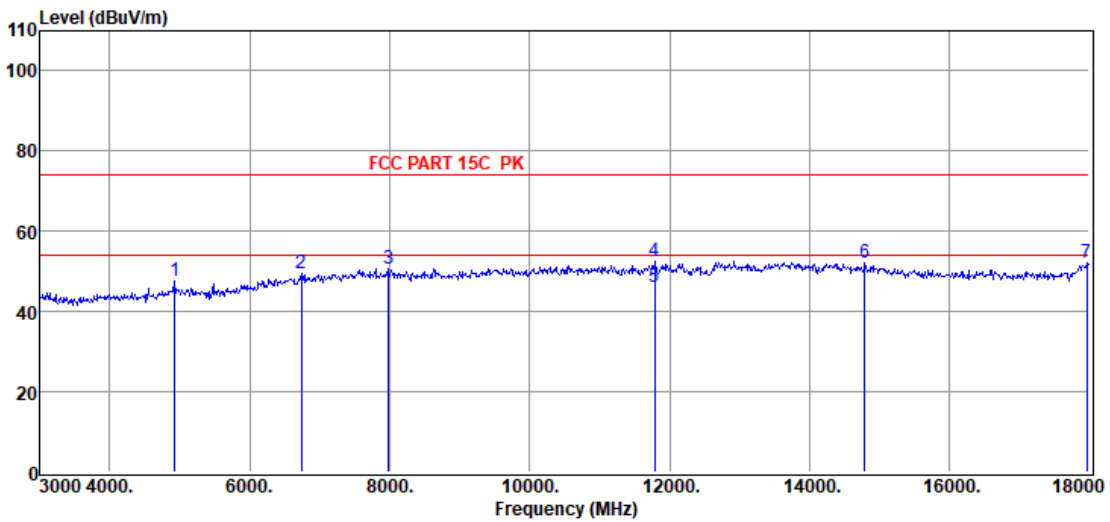

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4924.00	50.32	32.86	40.38	2.51	2.18	47.49	74.00	-26.51	Peak	VERTICAL
2	6735.00	48.19	35.58	39.91	3.15	2.40	49.41	74.00	-24.59	Peak	VERTICAL
3	7980.00	48.00	36.98	39.80	3.19	2.28	50.65	74.00	-23.35	Peak	VERTICAL
4	11790.00	46.98	39.12	40.12	4.02	2.40	52.40	74.00	-21.60	Peak	VERTICAL
5	11790.00	40.74	39.12	40.12	4.02	2.40	46.16	54.00	-7.84	Average	VERTICAL
6	14790.00	44.84	39.67	39.62	4.42	2.68	51.99	74.00	-22.01	Peak	VERTICAL
7	17970.00	41.81	42.31	40.68	4.95	3.78	52.17	74.00	-21.83	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 9. RF Conducted Spurious Emissions

### 9.1. Block diagram of test setup

Same as section 4.1

### 9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

9.5. Original test data

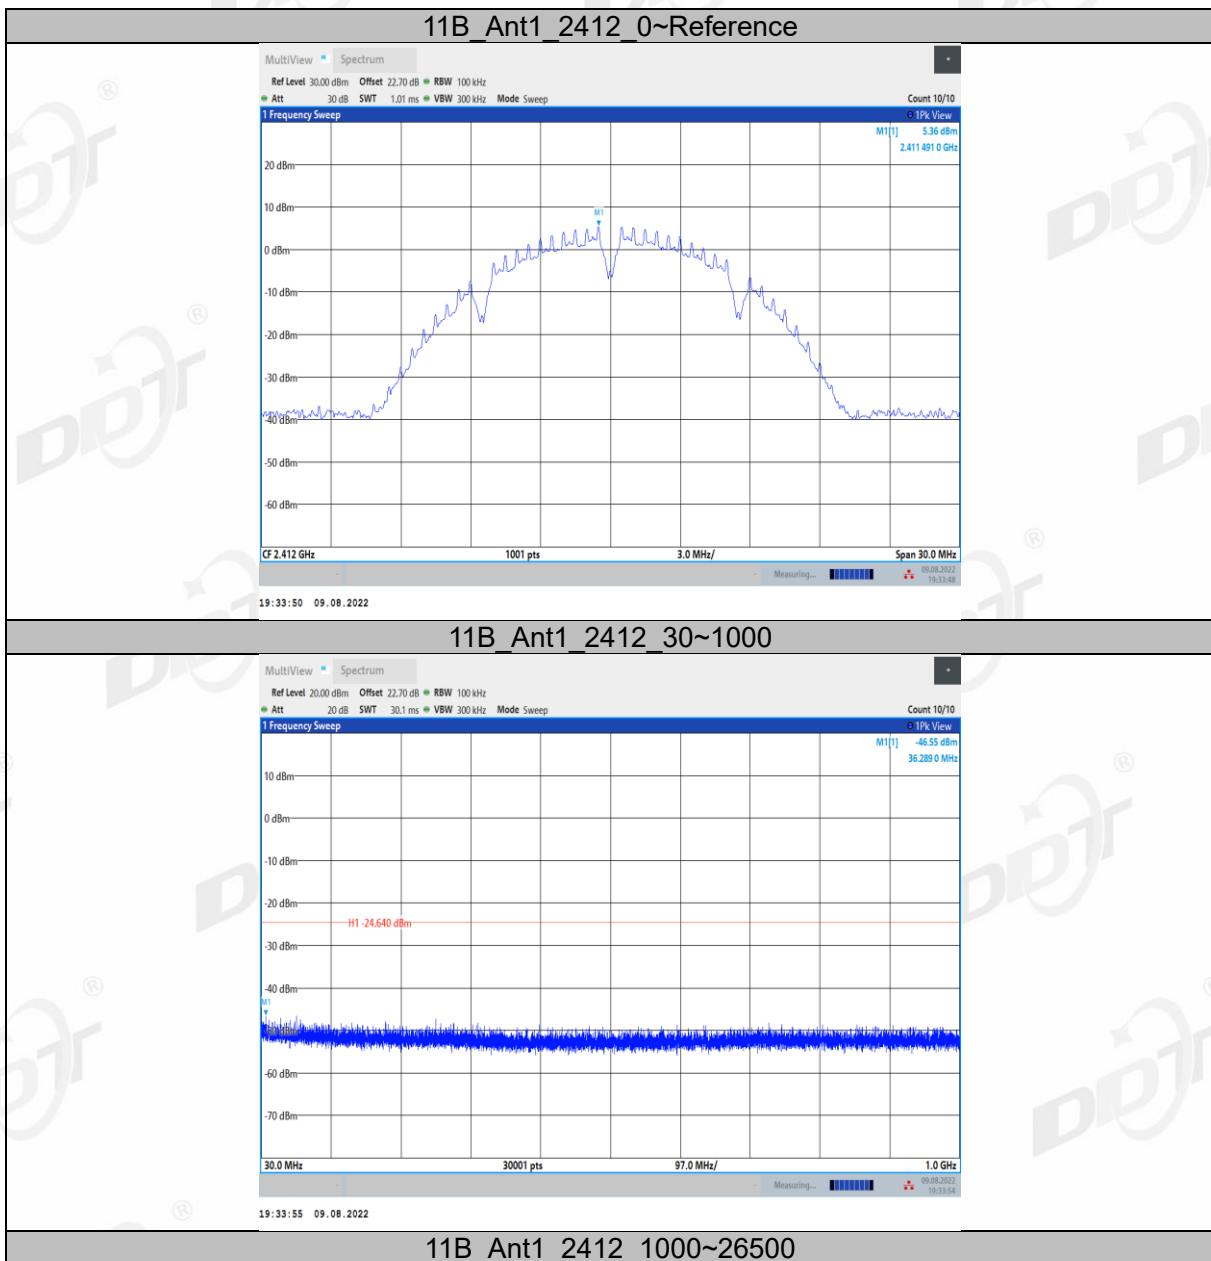


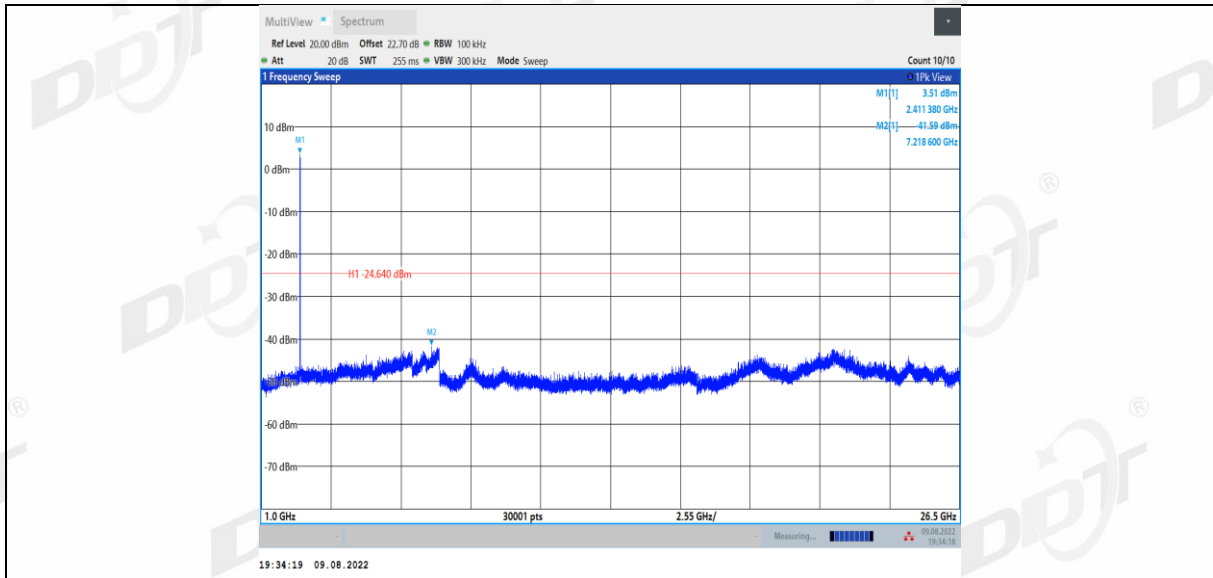

11B Ant1 2437 0~Reference

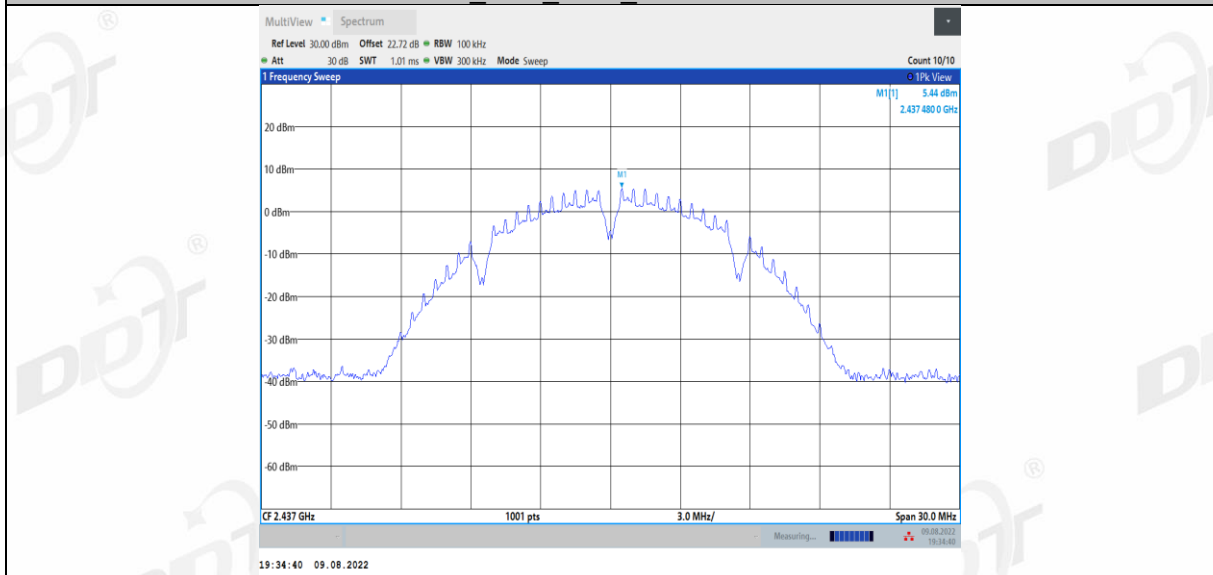

11B Ant1 2437 30~1000

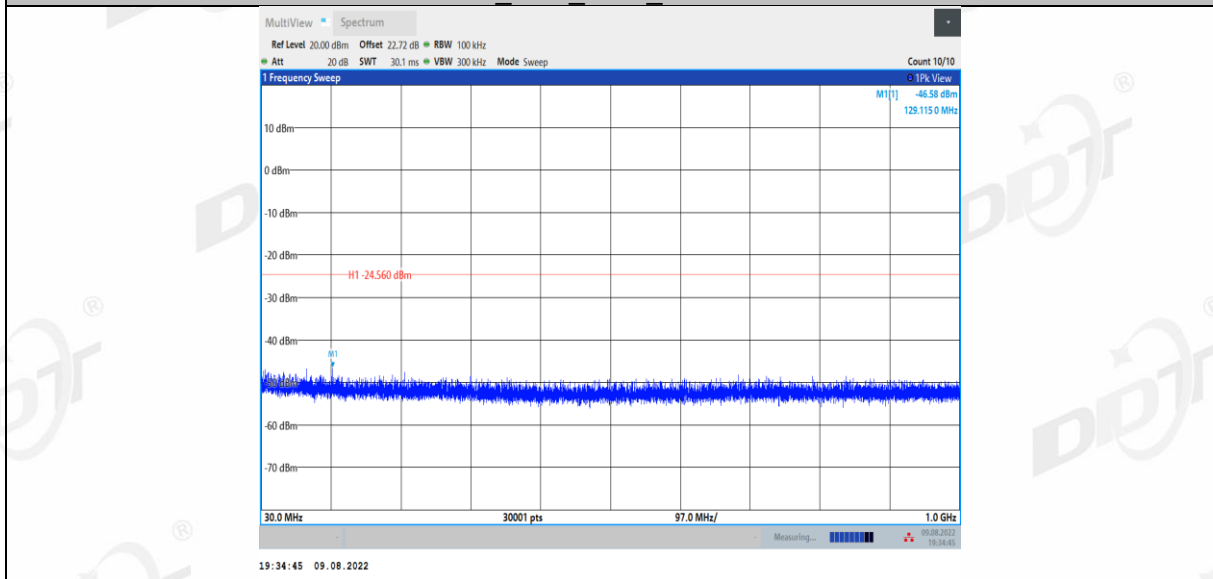

11B Ant1 2437 1000~26500