



RF MEASUREMENT REPORT

FCC ID: 2AL4G-003
Applicant: AXENT Intelligence Inc.
Product: Remote Controller
Model No.: AA029-0-WT
Brand Name: Axent-mint
FCC Classification: Part 15 Low Power Communication Device Transmitter (DXX)
FCC Rule Part(s): Part 15.249
Test Procedure(s): ANSI C63.10 - 2013
Result: Complies
Received Date: 2023-10-08
Test Date: 2023-10-13 ~ 2023-10-24

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2310RSU009-U1	V01	Initial Report	2023-12-29	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification	6
2. Test Configuration	7
2.1. Test Mode	7
2.2. Test Configuration	7
2.3. Test Environment Condition	7
3. Antenna Requirements	8
4. Measuring Instrument	9
5. Measurement Uncertainty	10
6. Test Result	11
6.1. Summary	11
6.2. AC Conducted Emissions Measurement	12
6.2.1. Test Limit	12
6.2.2. Test Setup	12
6.2.3. Test Result	12
6.3. Radiated Emission Measurement	13
6.3.1. Test Limit	13
6.3.2. Test Procedure	14
6.3.3. Test Setting	14
6.3.4. Test Setup	16
6.3.5. Test Result	17
6.4. Radiated Restricted Band Edge Measurement	18
6.4.1. Test Limit	18
6.4.2. Test Procedure	19
6.4.3. Test Setting	19
6.4.4. Test Setup	20
6.4.5. Test Result	20
6.5. 20dB Spectrum Bandwidth Measurement	21
6.5.1. Test Limit	21
6.5.2. Test Procedure	21
6.5.3. Test Setting	21
6.5.4. Test Setup	22
6.5.5. Test Result	22

Appendix A - Test Result.....	23
A.1 Radiated Emission Test Result	23
A.2 Radiated Restricted Band Edge Test Result.....	27
A.3 20dB Spectrum Bandwidth Test Result.....	31
Appendix B - Test Setup Photograph	32
Appendix C - EUT Photograph	33

1.4. Product Information

Product Name	Remote Controller
Model No.	AA029-0-WT
EUT Identification No.	20231008Sample#16
SRD Specification	2411MHz
Antenna Information	Refer to section 1.5
Operating Temperature	4~40 °C
Product Voltage	2 x AAA batteries normal 3.0V
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	2411 MHz
Type of modulation	FSK
Antenna Type	PCB Antenna
Antenna Gain	3.12 dBi

2. Test Configuration

2.1. Test Mode

Mode 1: Transmitter at channel 2411MHz.

2.2. Test Configuration

This device was tested per the guidance ANSI C63.10:2013 was used to reference the appropriate EUT setup for radiated emissions testing.

Connection Diagram – Radiated Emission testing



2.3. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

This unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2023-12-28	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2024-05-23	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2024-09-24	SIP-AC3
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2024-10-09	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2024-09-27	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2024-07-14	SIP-AC3
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2024-05-23	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2023-11-01	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2024-01-12	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2024-08-04	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2023-12-22	SIP-AC3
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2024-02-26	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2023-11-25	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE11255	1 year	2024-08-13	SIP-AC3

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & turntable

5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
9kHz~150kHz:	3.58dB
150kHz~30MHz:	3.20dB
Radiated Emission Measurement	
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
Coaxial:	9kHz~30MHz: 2.59dB
Coplanar:	9kHz~30MHz: 2.60dB
Horizontal:	30MHz~200MHz: 3.85dB
	200MHz~1GHz: 4.36dB
	1GHz~40GHz: 4.98dB
Vertical:	30MHz~200MHz: 4.06dB
	200MHz~1GHz: 5.28dB
	1GHz~40GHz: 4.91dB
Occupied Bandwidth Measurement	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
3.2%	

6. Test Result

6.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	N/A
15.209 15.249	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Radiated	Pass
15.215(c)	20dB Spectrum Bandwidth	Radiated	Pass

Notes:

1. The radiation measurements are performed in X, Y, Z axis positioning. The test results shown in the following sections represent the worst-case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. "N/A" means that this item is not applicable, and the detail information refer to relevant section.

6.2. AC Conducted Emissions Measurement


6.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.2.2. Test Setup

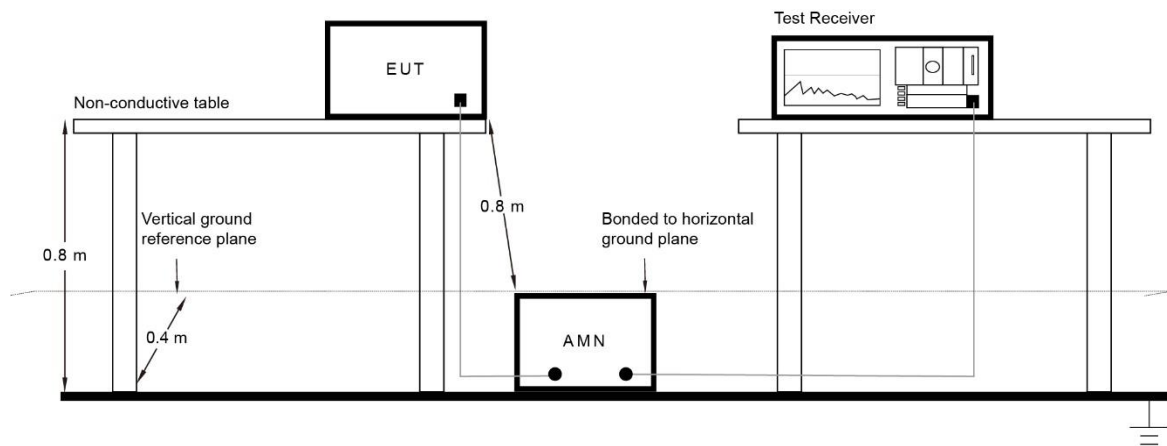

6.2.3. Test Result

The EUT is powered by Battery, so this item is not applicable.

6.3. Radiated Emission Measurement

6.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.249		
Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (μ V/m)
902 ~ 928	50	500
2400 ~ 2483.5	50	500
5725 ~ 5875	50	500
24000 ~ 24250	250	2500
Note: FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.		

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3
Note 1: The lower limit shall apply at the transition frequency. Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system. Note 3: E field strength (dBμV/m) = 20 log E field strength (μV/m).		

6.3.2.Test Procedure

ANSI C63.10-2013 Section 6.3

ANSI C63.10-2013 Section 6.4

ANSI C63.10-2013 Section 6.5

ANSI C63.10-2013 Section 6.6

6.3.3.Test Setting

Measurement of harmonic and spurious emissions below 40 GHz

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 x RBW
4. Detector = Peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 Hz
0.15 ~ 30 MHz	9 kHz
30 ~ 1000 MHz	120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. Set the VBW $\geq 3 \times$ RBW
4. Detector function = Average
5. Sweep time = auto couple
6. Trace mode = Max Hold
7. Allow max hold to run for suitable traces until the trace tend to stabilize.

6.3.4. Test Setup


Below 30MHz Test Setup:

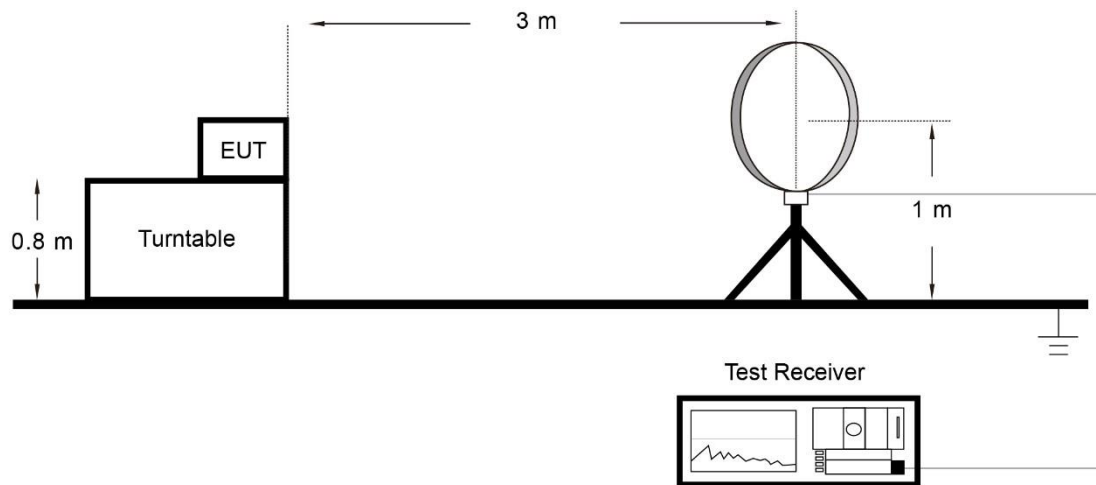

Below 1GHz Test Setup:

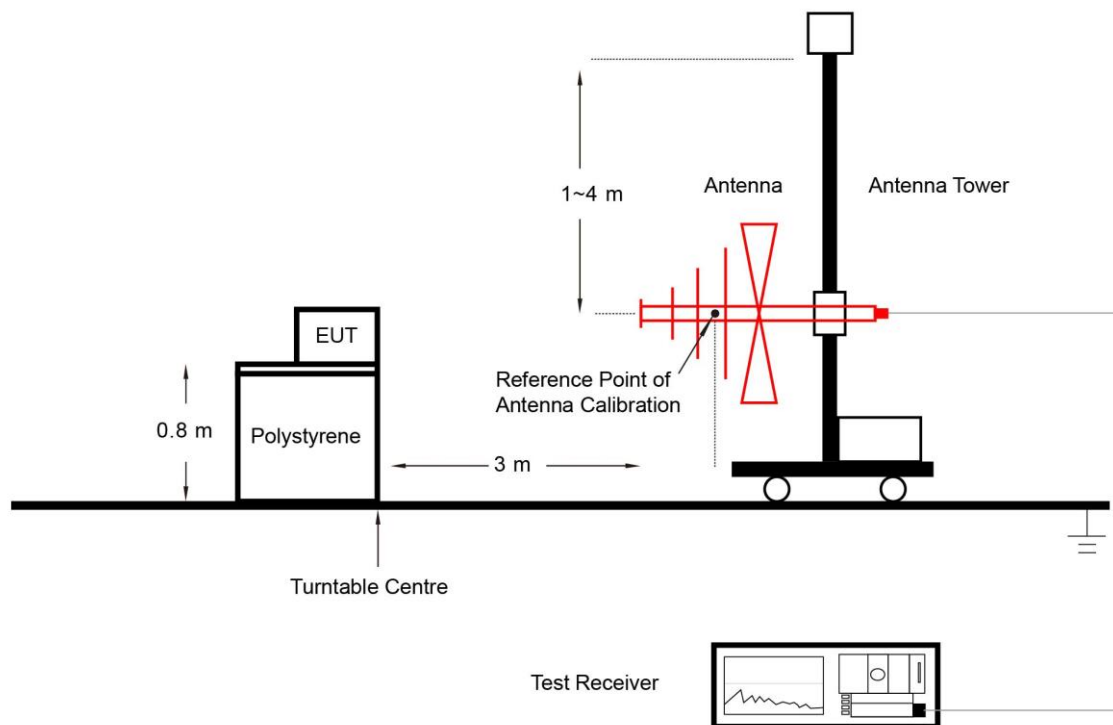

1GHz ~ 40GHz Test Setup:

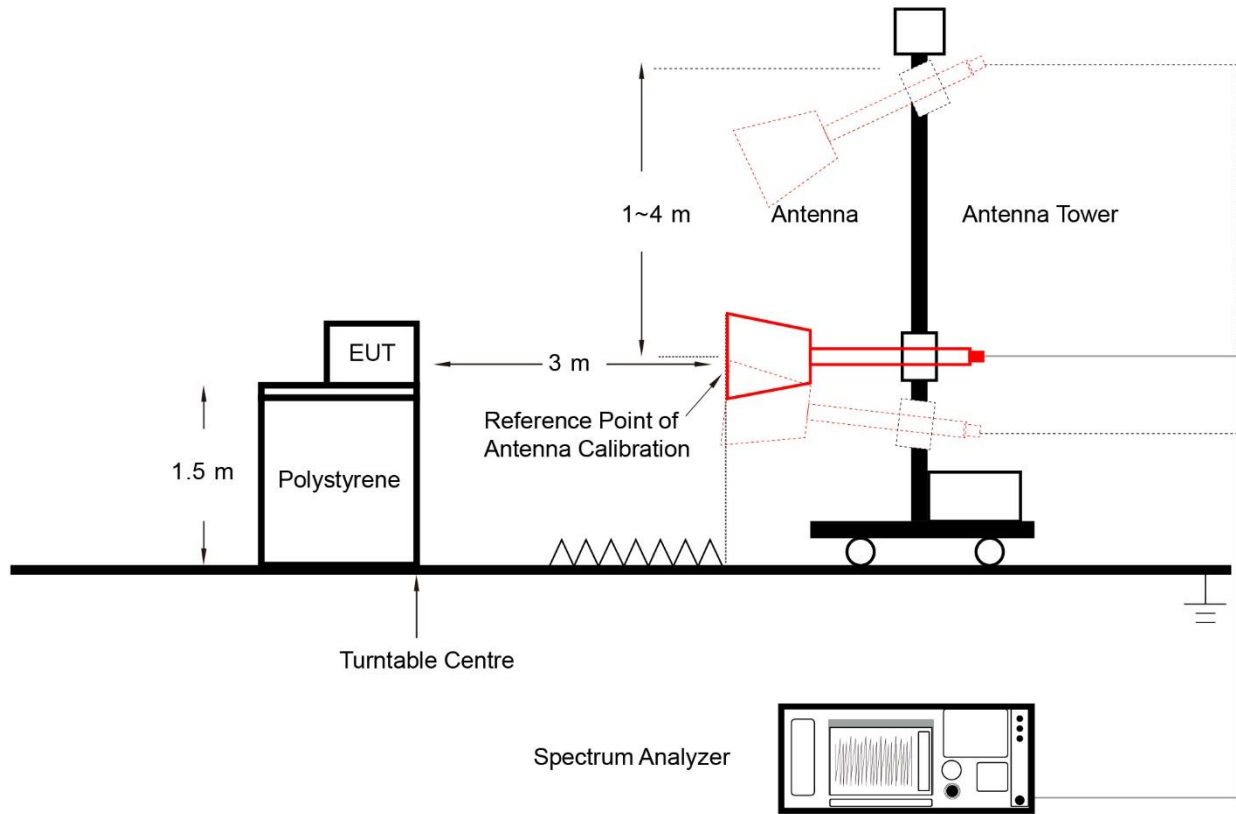

6.3.5. Test Result

Refer to Appendix A.1.

6.4. Radiated Restricted Band Edge Measurement

6.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meter]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

6.4.2. Test Procedure

ANSI C63.10-2013 Section 6.3

ANSI C63.10-2013 Section 6.6

ANSI C63.10-2013 Section 6.10

6.4.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. Set the VBW $\geq 3 \times$ RBW
4. Detector function = Average
5. Sweep time $\geq$ (number of points in sweep) $\times$ (transmission symbol period).
6. Trace mode = Average
7. Allow max hold to run for suitable traces until the trace tend to stabilize.

6.4.4. Test Setup

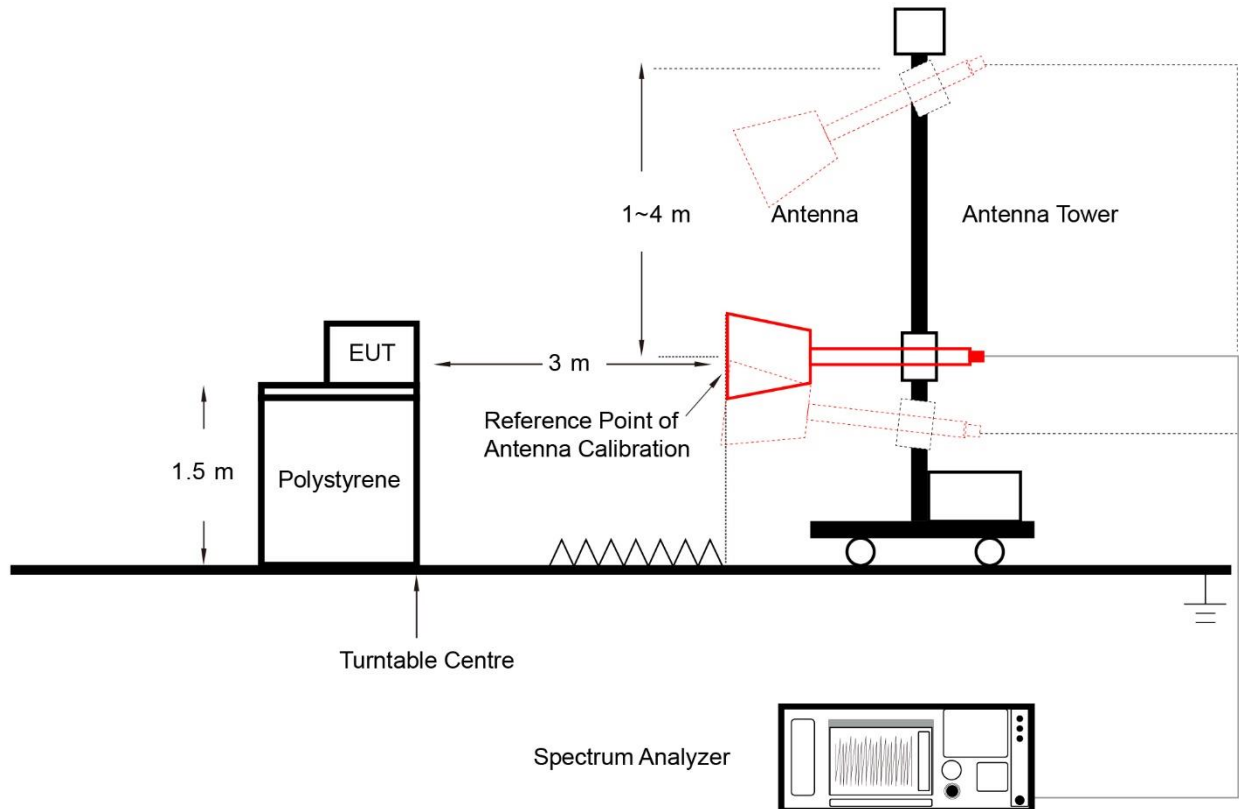

6.4.5. Test Result

Refer to Appendix A.2.

6.5. 20dB Spectrum Bandwidth Measurement

6.5.1. Test Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission in the specific band.


6.5.2. Test Procedure

ANSI C63.10-2013 Clause 6.9.2

6.5.3. Test Setting

1. Set the spectrum span range to overlap the nominal center frequency
2. Set RBW = 1% ~ 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize and marker the highest level
8. Use Occupied BW function to determine two frequencies, one at the lowest frequency and the other at the highest frequency

6.5.4. Test Setup

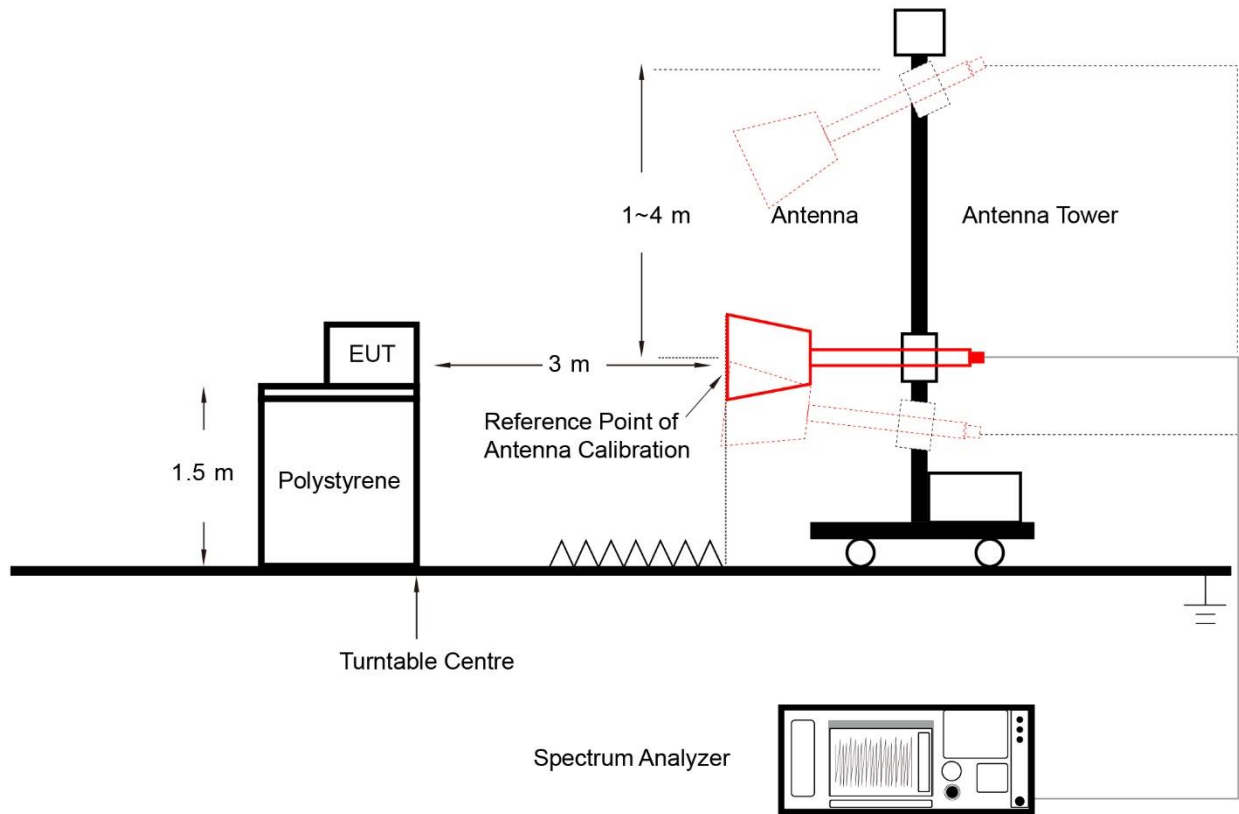

6.5.5. Test Result

Refer to Appendix A.3.

Appendix A - Test Result

A.1 Radiated Emission Test Result

Test Site	SIP-AC3	Test Date	2023-10-13
Test Engineer	Fusco Pan	Test Mode	Mode 1

Frequency Band (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level @3m (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Result
Fundamental Radiated Emission (Horizontal)							
2411	109.945	-13.616	96.329	113.98	-17.651	Peak	Pass
2411	94.880	-13.616	81.264	93.98	-12.716	Average	Pass
Fundamental Radiated Emission (Vertical)							
2411	105.370	-13.616	91.754	113.98	-22.226	Peak	Pass
2411	90.682	-13.616	77.066	93.98	-16.914	Average	Pass
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)							
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)							

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2023-10-13		
Remark:	Average measurement was not performed if peak level lower than average limit.		


Test Freq. (MHz)	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Between 1GHz ~ 40GHz								
2411	4825.0	58.6	-7.8	50.8	74.0	-23.2	Peak	Horizontal
	7230.5	58.4	-5.0	53.4	74.0	-20.6	Peak	Horizontal
	7230.5	57.9	-5.0	52.9	54.0	-1.1	Average	Horizontal
	9644.5	49.8	-2.1	47.7	74.0	-26.3	Peak	Horizontal
	4825.0	57.2	-7.8	49.4	74.0	-24.6	Peak	Vertical
	7230.5	52.5	-5.0	47.5	74.0	-26.5	Peak	Vertical
	8471.5	49.1	-3.1	46.0	74.0	-28.0	Peak	Vertical
	20950.5	55.4	-11.3	44.1	74.0	-29.9	Peak	Horizontal
	22760.0	54.4	-9.3	45.1	74.0	-28.9	Peak	Horizontal
	24625.5	54.5	-9.4	45.1	74.0	-28.9	Peak	Horizontal
	18598.5	56.7	-12.7	44.0	74.0	-30.0	Peak	Vertical
	22630.5	54.0	-9.4	44.6	74.0	-29.4	Peak	Vertical
	24951.0	54.7	-9.4	45.3	74.0	-28.7	Peak	Vertical

Notes:

- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-Amplifier Gain (dB)
- Average measurement was not performed when the peak level lower than average limit.

The Result of Radiated Emission below 1GHz:

Site: SIP-AC3	Test Date: 2023/10/16
Limit: FCC Part15.249_RSE(3m)	Engineer: Justin Guo
Probe: VULB 9168_00997_25-2000MHz	Polarity: Horizontal
EUT: Remote Controller	Power: By Battery
Test Mode 1	

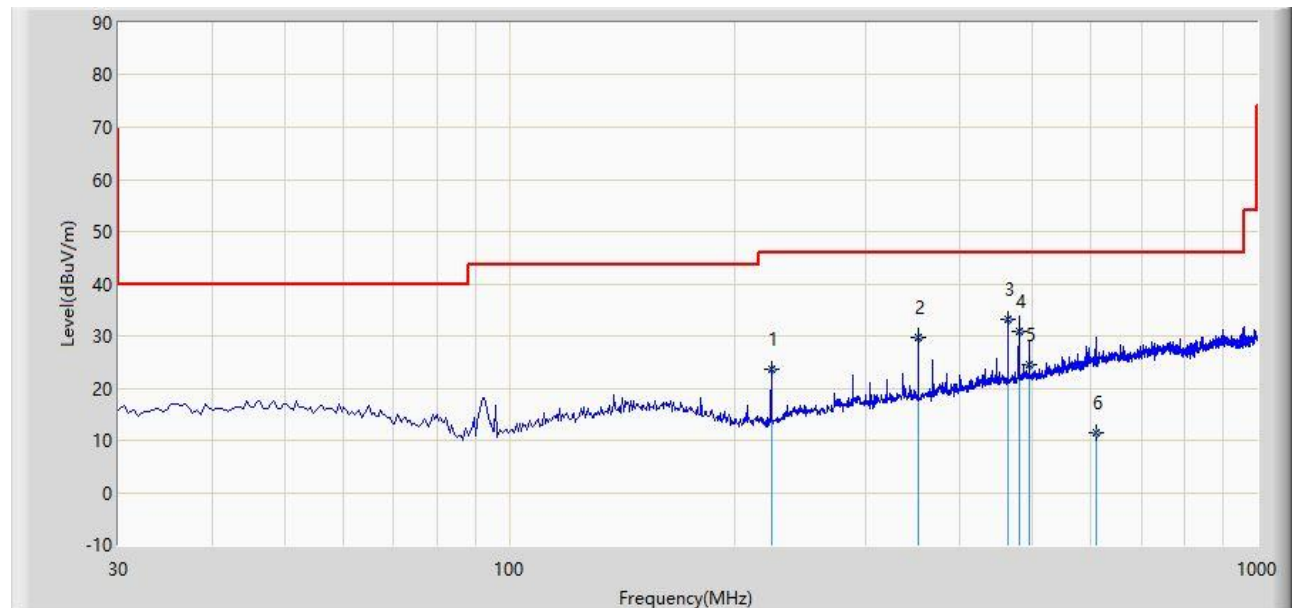

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		224.000	23.668	8.800	-22.332	46.000	14.868	QP
2		352.040	29.658	10.000	-16.342	46.000	19.658	QP
3	*	464.075	33.063	10.600	-12.937	46.000	22.463	QP
4		480.080	30.991	8.100	-15.009	46.000	22.891	QP
5		496.085	24.547	1.400	-21.453	46.000	23.147	QP
6		608.120	11.481	-14.300	-34.519	46.000	25.781	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: SIP-AC3	Test Date: 2023/10/16
Limit: FCC Part15.249_RSE(3m)	Engineer: Justin Guo
Probe: VULB 9168_00997_25-2000MHz	Polarity: Vertical
EUT: Remote Controller	Power: By Battery
Test Mode 1	

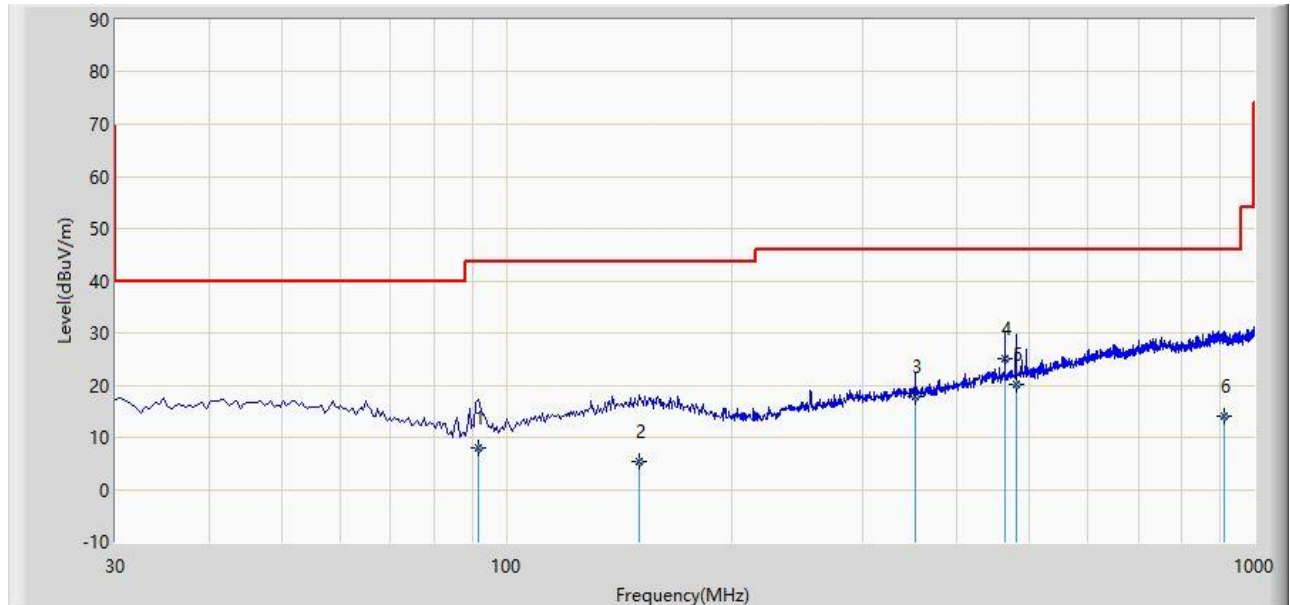

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		91.595	7.954	-4.300	-35.546	43.500	12.254	QP
2		150.765	5.232	-12.800	-38.268	43.500	18.032	QP
3		352.040	17.858	-1.800	-28.142	46.000	19.658	QP
4	*	464.075	25.163	2.700	-20.837	46.000	22.463	QP
5		480.080	20.191	-2.700	-25.809	46.000	22.891	QP
6		911.245	13.959	-15.700	-32.041	46.000	29.659	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.2 Radiated Restricted Band Edge Test Result

Site: SIP-AC3	Test Date: 2023/10/24
Limit: FCC_2.4G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Remote Controller	Power: By Battery
Test Mode 1	

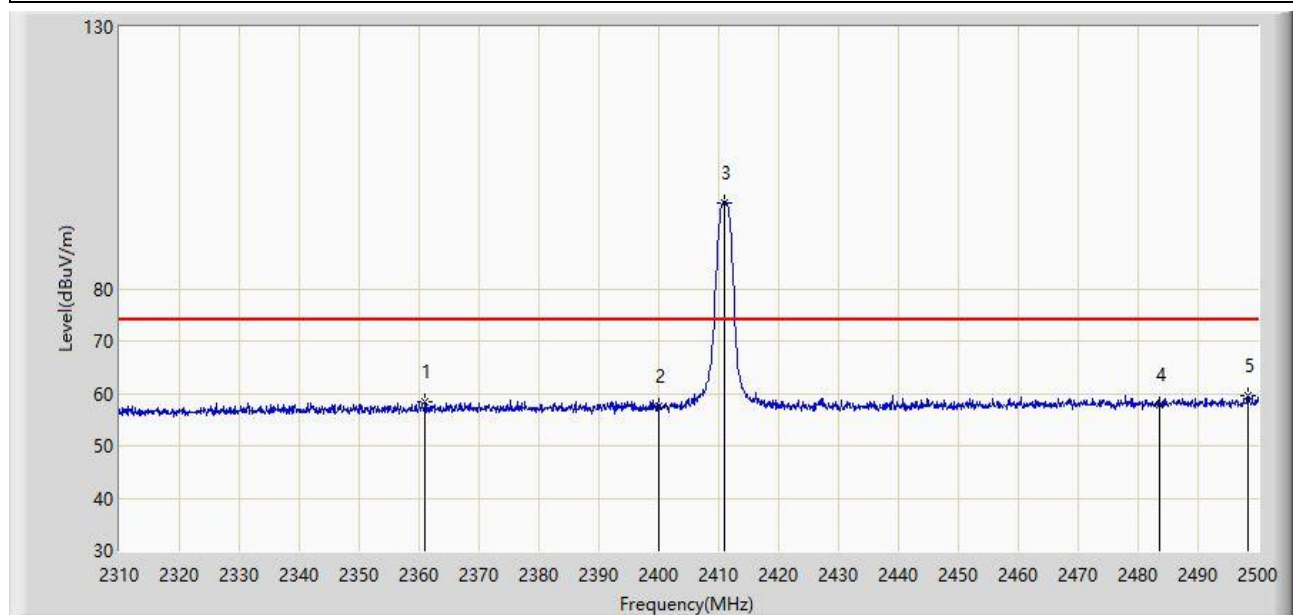


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2361.015	58.338	26.417	-15.662	74.000	31.921	PK
2		2400.000	57.494	25.458	-16.506	74.000	32.036	PK
3		2410.985	96.509	64.464	N/A	N/A	32.045	PK
4		2483.500	57.794	25.494	-16.206	74.000	32.300	PK
5	*	2498.290	59.482	27.100	-14.518	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023/10/24
Limit: FCC_2.4G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Remote Controller	Power: By Battery
Test Mode 1	

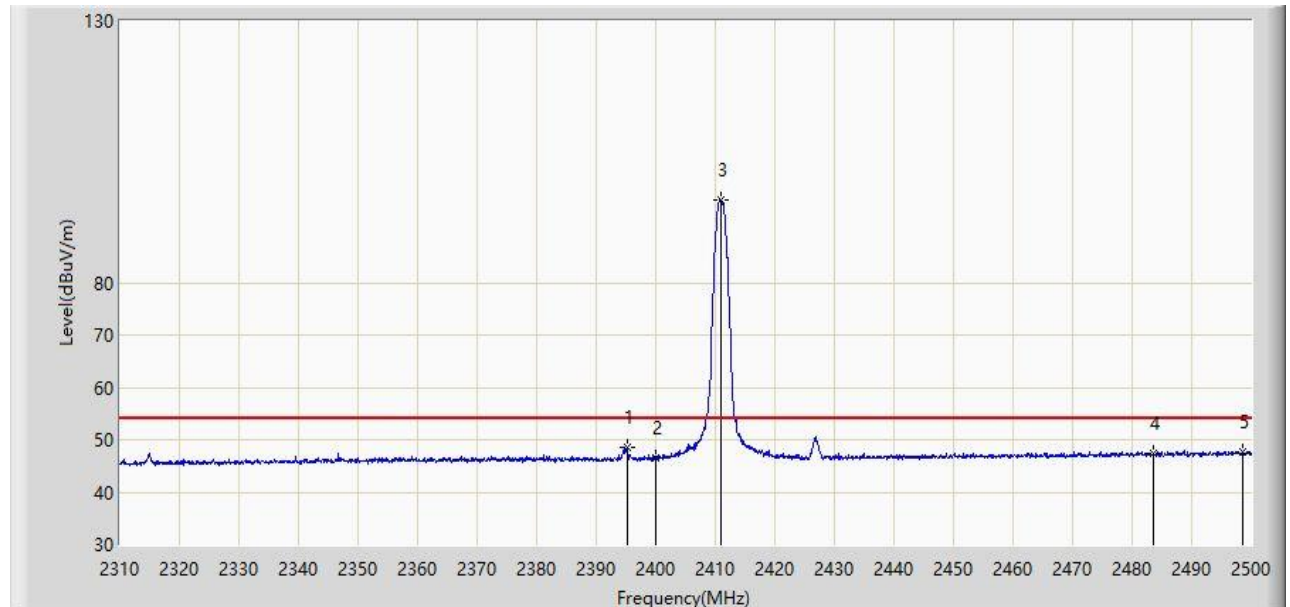


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2395.215	48.522	16.490	-5.478	54.000	32.032	AV
2		2400.000	46.440	14.404	-7.560	54.000	32.036	AV
3		2410.985	95.790	63.745	N/A	N/A	32.045	AV
4		2483.500	47.305	15.005	-6.695	54.000	32.300	AV
5		2498.575	47.595	15.211	-6.405	54.000	32.384	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023/10/24
Limit: FCC_2.4G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Remote Controller	Power: By Battery
Test Mode 1	

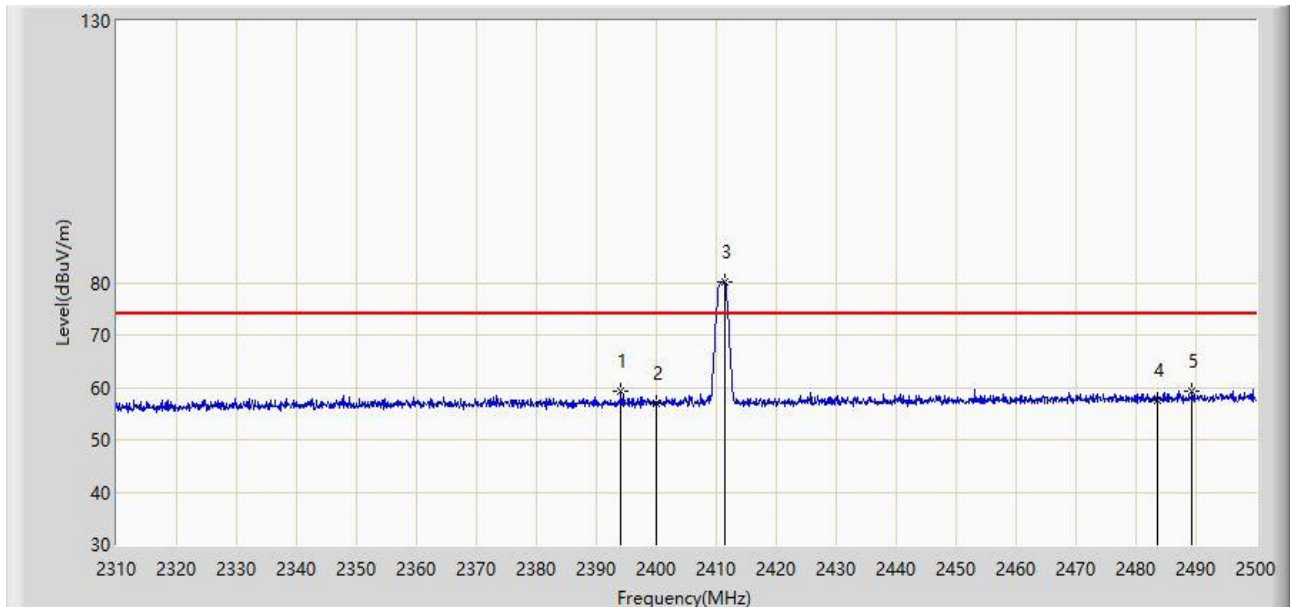


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2394.075	59.156	27.125	-14.844	74.000	32.031	PK
2		2400.000	56.846	24.810	-17.154	74.000	32.036	PK
3		2411.460	80.235	48.190	N/A	N/A	32.045	PK
4		2483.500	57.403	25.103	-16.597	74.000	32.300	PK
5	*	2489.265	59.227	26.897	-14.773	74.000	32.330	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023/10/24
Limit: FCC_2.4G_RE(3m)	Engineer: Fusco Pan
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Remote Controller	Power: By Battery
Test Mode 1	

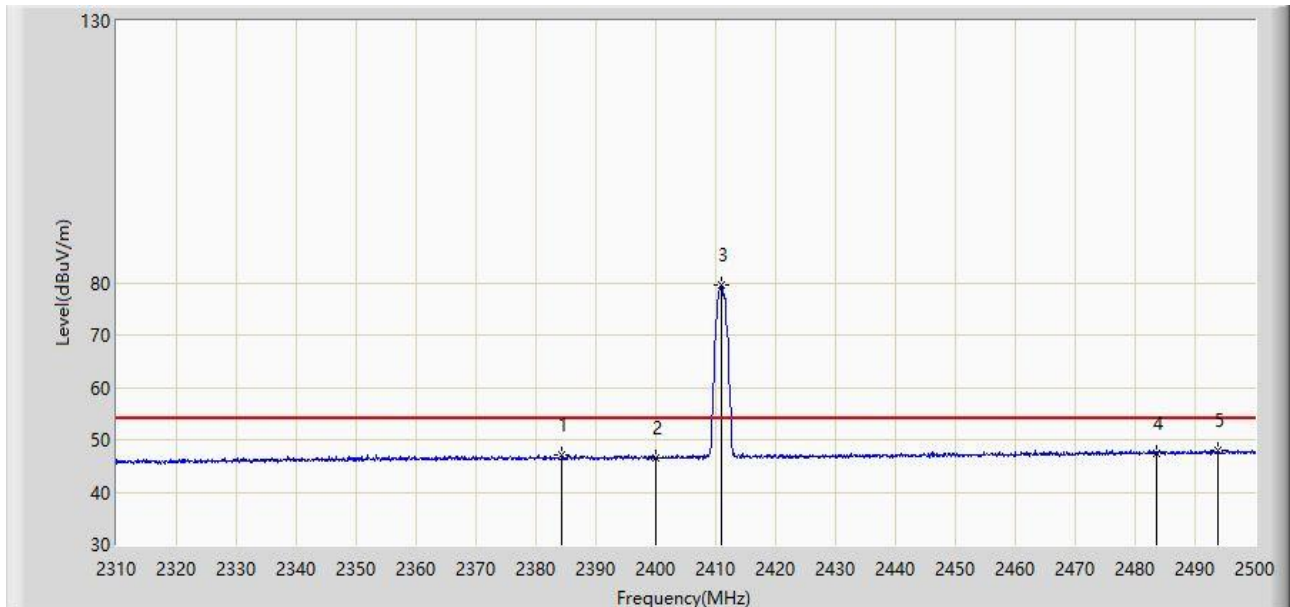

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2384.290	47.106	15.094	-6.894	54.000	32.012	AV
2		2400.000	46.422	14.386	-7.578	54.000	32.036	AV
3		2410.890	79.644	47.599	N/A	N/A	32.045	AV
4		2483.500	47.273	14.973	-6.727	54.000	32.300	AV
5	*	2493.920	48.026	15.672	-5.974	54.000	32.355	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


A.3 20dB Spectrum Bandwidth Test Result

Test Site	SIP-AC3	Test Date	2023-10-13
Test Engineer	Wayne Wang		

Test Freq. (MHz)	20dB Bandwidth (MHz)	F _L (MHz)	F _L Limit (MHz)	F _H (MHz)	F _H Limit (MHz)	Result
2411	0.52502	2410.73099	≥ 2400	2411.25601	≤ 2483.5	Pass

Note: Low Frequency (F_L) = Center Frequency + Lower Boundary;

High Frequency (F_H) = Center Frequency + Upper Boundary.

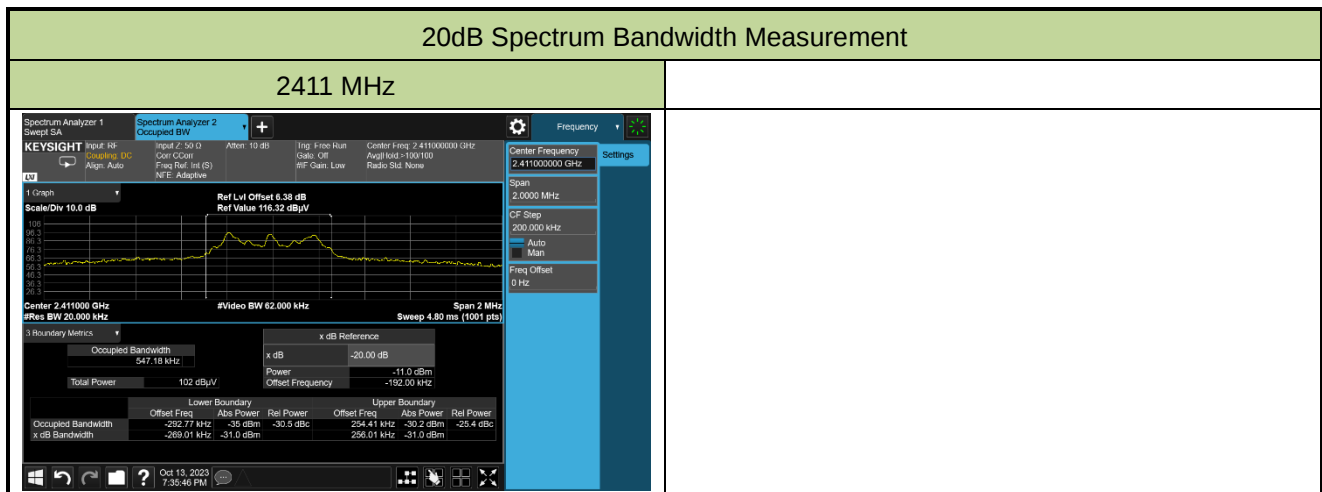

Appendix B - Test Setup Photograph

Refer to “2310RSU009-UT” file.

Appendix C - EUT Photograph

Refer to “2310RSU009-UE” file.