



Solutions

TEST REPORT

Report Number. : R14516988-E2

Applicant : Colgate-Palmolive Company
909 River Road
Piscataway, NJ 08855, U.S.A.

Model : A2000C

FCC ID : 2AL5Y-A2000C

EUT Description : Rechargeable Toothbrush

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C:2022

Date Of Issue:
2023-01-30

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2022-11-30	Initial Issue	Charles Moody
V2	2023-01-12	Updated Section 2 to Include Client Provided Data	Charles Moody
V3	2023-01-30	Added Attenuator Information	Charles Moody

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY.....	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	7
5.1. <i>METROLOGICAL TRACEABILITY</i>	7
5.2. <i>DECISION RULES.....</i>	7
5.3. <i>MEASUREMENT UNCERTAINTY.....</i>	7
5.4. <i>SAMPLE CALCULATION</i>	7
6. EQUIPMENT UNDER TEST.....	8
6.1. <i>EUT DESCRIPTION</i>	8
6.2. <i>MAXIMUM OUTPUT POWER.....</i>	8
6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
6.4. <i>SOFTWARE AND FIRMWARE.....</i>	8
6.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	8
6.6. <i>DESCRIPTION OF TEST SETUP.....</i>	9
7. MEASUREMENT METHOD	10
8. TEST AND MEASUREMENT EQUIPMENT	11
9. ANTENNA PORT TEST RESULTS.....	13
9.1. <i>ON TIME AND DUTY CYCLE</i>	13
9.2. <i>6 dB BANDWIDTH.....</i>	14
9.2.1. <i>BLE (1Mbps).....</i>	14
9.3. <i>OUTPUT POWER.....</i>	15
9.3.1. <i>BLE (1Mbps).....</i>	15
9.4. <i>AVERAGE POWER.....</i>	16
9.4.1. <i>BLE (1Mbps).....</i>	16
9.5. <i>POWER SPECTRAL DENSITY.....</i>	17
9.5.1. <i>BLE (1Mbps).....</i>	17
9.6. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	18
9.6.1. <i>BLE (1Mbps).....</i>	19

10. RADIATED TEST RESULTS	20
10.1. <i>LIMITS AND PROCEDURE</i>	20
10.2. <i>TRANSMITTER ABOVE 1 GHZ</i>	21
10.2.1. <i>BLE (1Mbps)</i>	21
10.3. <i>WORST CASE BELOW 30MHZ</i>	31
10.4. <i>WORST CASE BELOW 1 GHZ</i>	32
10.5. <i>WORST CASE 18-26 GHZ</i>	34
11. AC POWER LINE CONDUCTED EMISSIONS	36
11.1.1. <i>AC Power Line Norm</i>	36
12. SETUP PHOTOS	39

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Colgate-Palmolive Company
909 River Road
Piscataway, NJ 08855, U.S.A.

EUT DESCRIPTION: Rechargeable Toothbrush

MODEL: A2000C

SERIAL NUMBER: Non-Serialized

SAMPLE RECEIPT DATE: 2022-09-29, 2022-11-16

DATE TESTED: 2022-11-16 TO 2022-11-23

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C:2022	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.

Approved & Released For
UL LLC. By:



Mike Antola
Staff Engineer
Consumer Technology Division
UL LLC.

Prepared By:



Charles Moody
Electrical Engineer
Consumer Technology Division
UL LLC.

2. TEST RESULTS SUMMARY

FCC Clause	Requirement	Result	Comment
See Comment	Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
15.247 (a) (2)	6dB BW	Complies	None.
15.247 (b) (3)	Output Power	Complies	None.
See Comment	Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	PSD	Complies	None.
15.247 (d)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	Radiated Emissions	Complies	None.
15.207	AC Mains Conducted Emissions	Complies	None.

This Report contains data provided by the applicant which can impact the validity of the results. UL LLC is only responsible for the validity of results after the integrations of the data provided by the customer.

Below is a list of the data/info provided by the customer:

- 1.) Antenna type and gain (see section 6.3)
- 2.) Cable Loss (see section 9.3 and 9.4)

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number #0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U_{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dB_{uV/m}) = Measured Voltage (dB_{uV}) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dB}_{uV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dB}_{uV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dB_{uV}) = Measured Voltage (dB_{uV}) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$$36.5 \text{ dB}_{uV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dB}_{uV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a BLE battery operated toothbrush for consumer use. Accessories include DC contact charger and AC adapter.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	-0.52	0.89

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

Frequency Range (MHz)	Antenna Gain (dBi)	Antenna Type
2402-2480	6.62dBi	Chip

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was SDK version Gecko SDK 4.1.0.

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle, and high channels.

The EUT only supports 1 data rate of 1Mbps, therefore, all testing was done in that data rate.

The EUT was tested while connected to a DC contact charger on AC Mains to represent Worst Case.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Inspiron 15 3000	5KPQJP3	N/A
Laptop	Lenovo	ThinkPad T450	11989F32-3DE1-4C7D-B46D-7243CCCA9AE62	N/A
AC Adaptor	BOSE	S008AHU0500160	072381Z60770084AE	N/A
DC Contact Charger	Colgate	N/A	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	1	1	USB to UART	Shielded	>3m	Programming cable
2	2	1	USB-A	Shielded	<3m	Connected EUT charger to AC Adaptor

TEST SETUP

The EUT is connected to a test laptop and configured before the tests. Test software exercised the radio card. Programming cable (1) and Laptop removed for testing.

SETUP DIAGRAMS

Please refer to R14516988-EP2 for setup diagrams

7. MEASUREMENT METHOD

Duty Cycle: ANSI C63.10 Section 11.6

6 dB BW: ANSI C63.10 Subclause -11.8.1

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11 and 6.10.4

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 and 6.10.5

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions: ANSI C63.10-2013 Section 6.3 to 6.6

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted 1					
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
PWM005	RF Power Meter	Keysight Technologies	N1912A	2022-09-02	2024-09-02
PWS002	Wideband Power Sensor, 50MHz – 18GHz	Keysight Technologies	N1921A	2022-09-27	2023-09-27
Conducted 2					
SA0026	Spectrum Analyzer	Keysight Technologies	N9030A	2022-08-02	2023-08-02
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
SOFTEMI	Antenna Port Software	UL	Version 2022.8.16		
Fittings Used					
226559	10dB SMA Attenuator	CentricRF	C1852-10	2022-05-03	2023-05-03

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2022-04-05	2023-04-05
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
LISN003	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2022-08-01	2023-08-01
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2022-08-03	2023-08-03
ATA222	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2022-04-05	2023-04-05
PS215	AC Power Source	Elgar	CW2501M (s/n 1523A02397)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Miscellaneous (if needed)					
CDECABLE001	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2022-09-12	2023-09-12

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	0.009-30MHz				
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2022-09-12	2023-09-12
	30-1000 MHz				
AT0081	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2021-12-08	2022-12-08
	1-18 GHz				
AT0067	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-05-24	2023-05-24
	18-40 GHz				
204704	Horn Antenna, 18-26.5GHz	Com-Power	AH-626	2022-07-11	2023-07-11
	Gain-Loss Chains				
C4-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2022-05-20	2023-05-20
C4-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2022-05-20	2023-05-20
C4-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-20	2023-05-20
C4-SAC04	Gain-loss string: 18-40GHz	Various	Various	2022-10-12	2023-10-12
	Receiver & Software				
206496	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-02-15	2023-02-15
SA0026	Spectrum Analyzer	Agilent	N9030A	2022-08-02	2023-08-02
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
21642	Environmental Meter	Fisher Scientific	15-077-963 (s/n 210701692)	2021-08-16	2023-08-16

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method, ANSI C63.10 Section 11.6

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE	0.394	0.624	0.631	63.14	3.99	2.538

DUTY CYCLE PLOTS

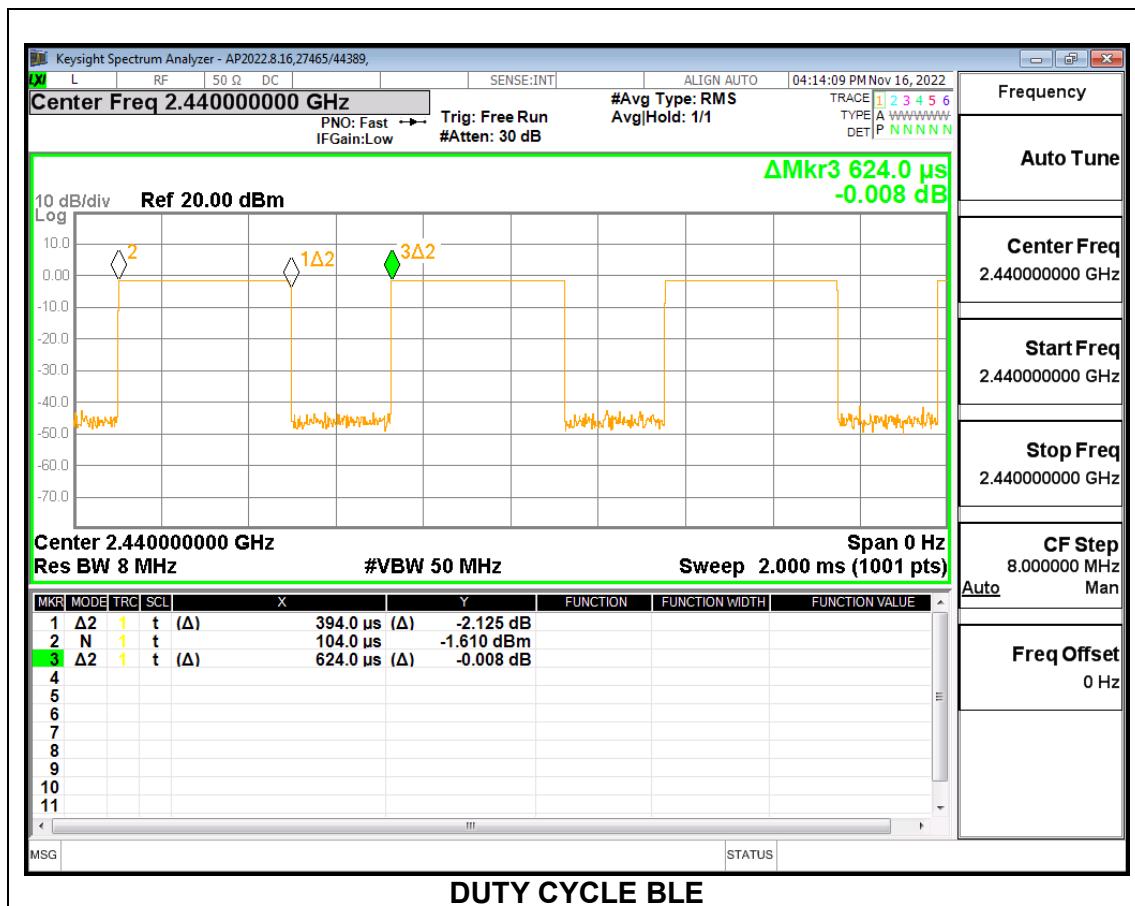

9.2. 6 dB BANDWIDTH

LIMITS


FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

9.2.1. BLE (1Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.651	0.5
Middle	2440	0.615	0.5
High	2480	0.666	0.5

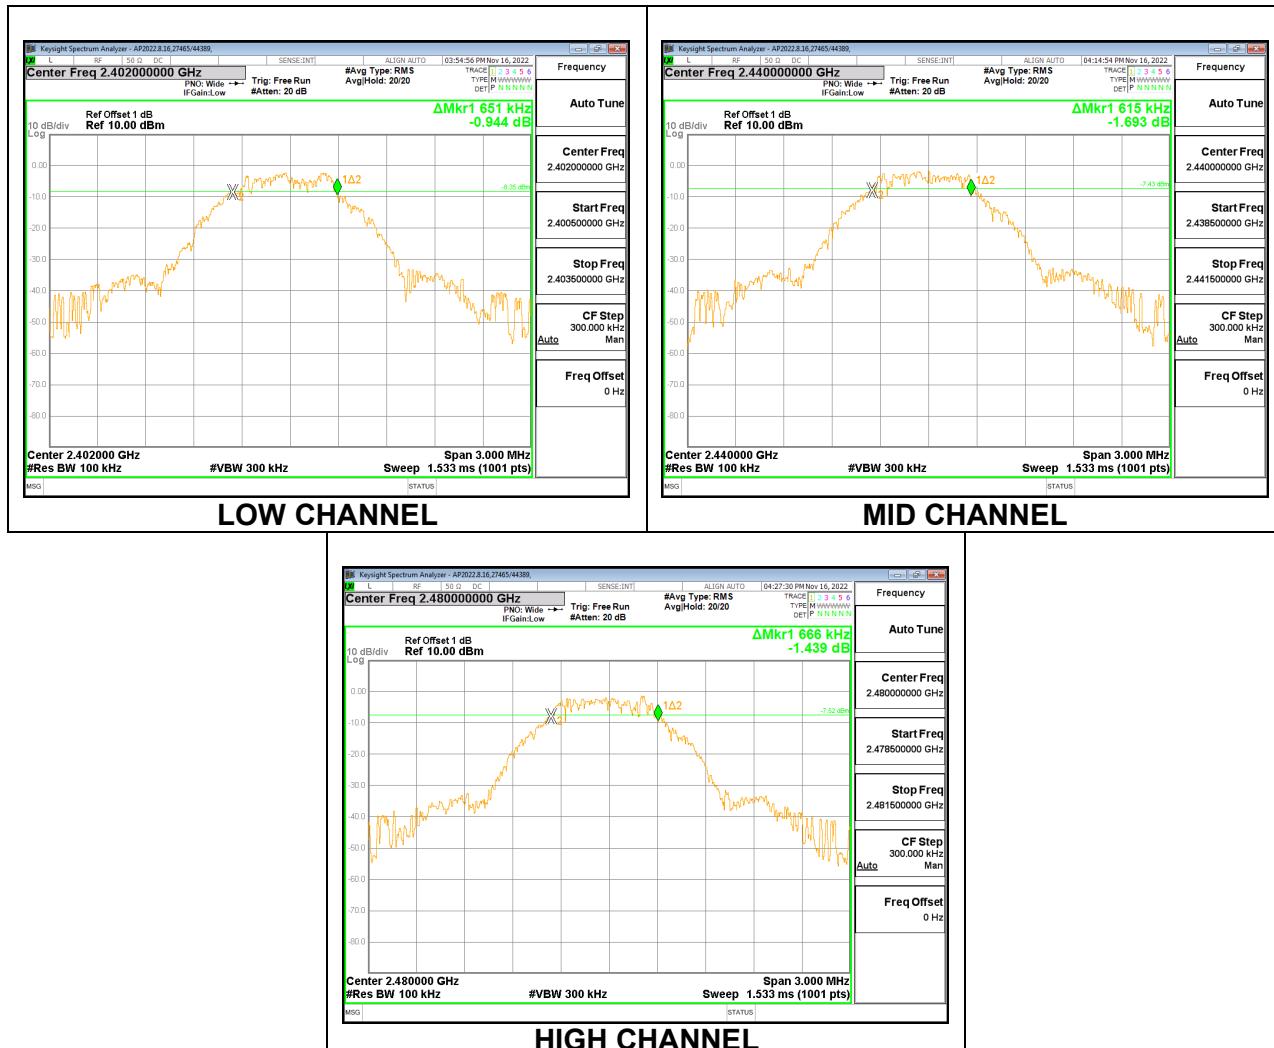

9.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.68 dB (including 9.68 dB pad and 1.0 dB cable) was entered as an offset in the power meter. Peak output power was read directly from power meter.

RESULTS

9.3.1. BLE (1Mbps)

Tested By:	27465/44389
Date:	11/16/2022

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-0.88	30	-30.880
Middle	2440	-0.73	30	-30.730
High	2480	-0.52	30	-30.520

9.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a gated average power meter.

The cable assembly insertion loss of 10.68 dB (including 9.68 dB pad and 1.0 dB cable) was entered as an offset in the power meter. Gated average output power was read directly from power meter.

RESULTS

9.4.1. BLE (1Mbps)

Tested By:	27465/44389
Date:	11/16/2022

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	-0.99
Middle	2440	-0.83
High	2480	-0.63

9.5. POWER SPECTRAL DENSITY

LIMITS



FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.5.1. BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-15.969	8	-23.97
Middle	2440	-15.528	8	-23.53
High	2480	-15.470	8	-23.47

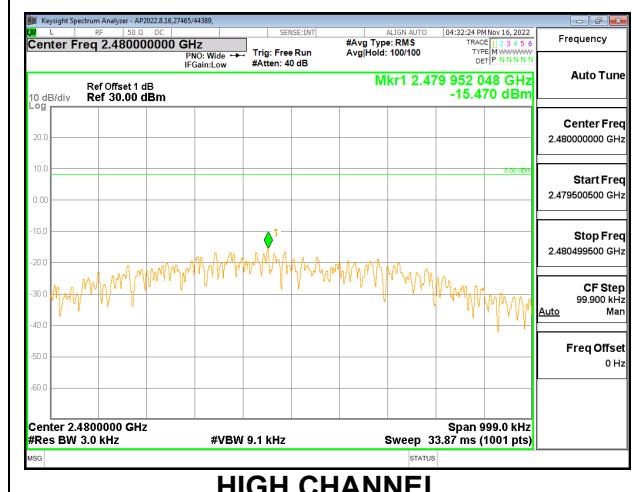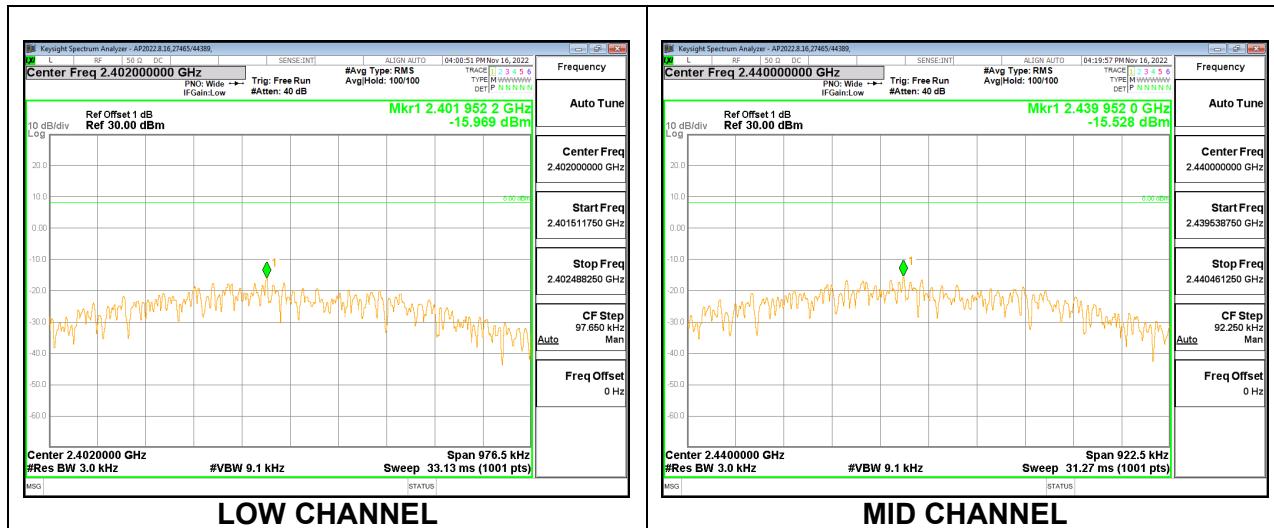

9.6. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is -20dBc.

RESULTS

9.6.1. BLE (1Mbps)

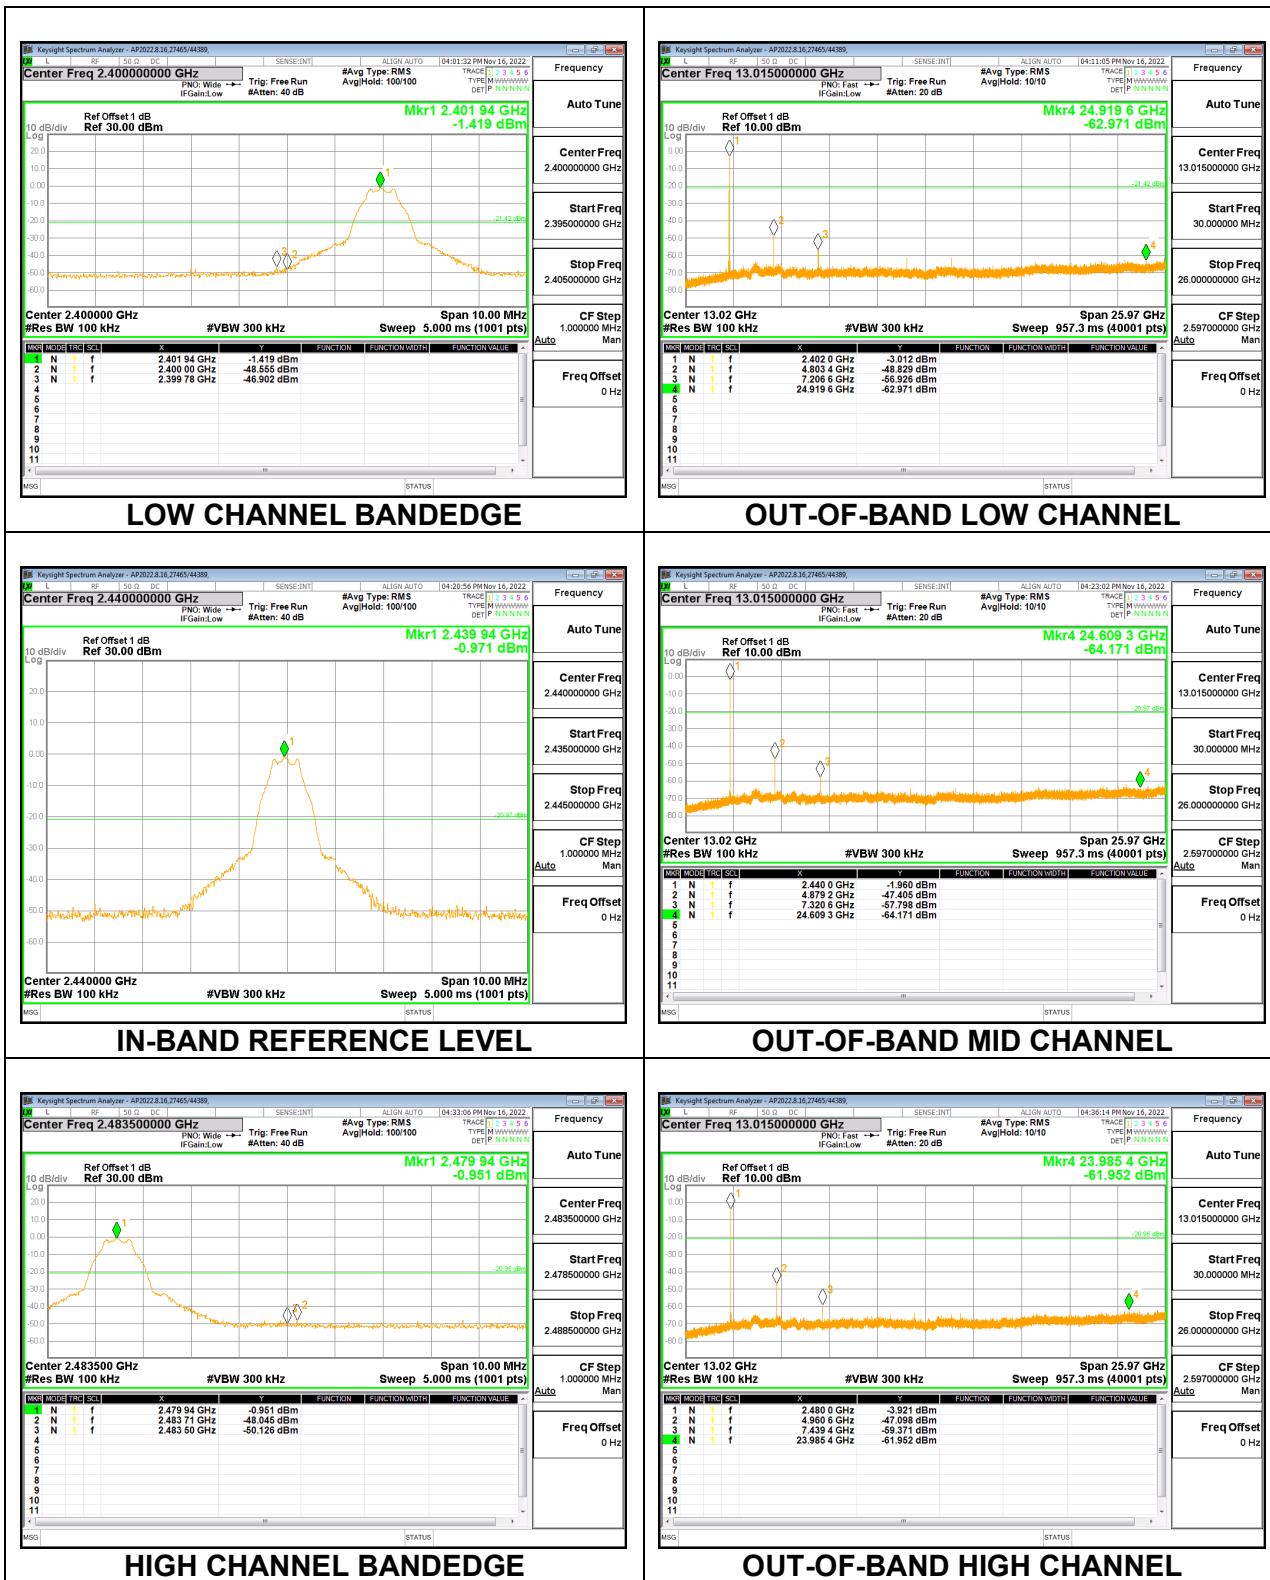

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements. For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements. Linear voltage averaging was used.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

3D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel). Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. BLE (1Mbps)

Antenna 1

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

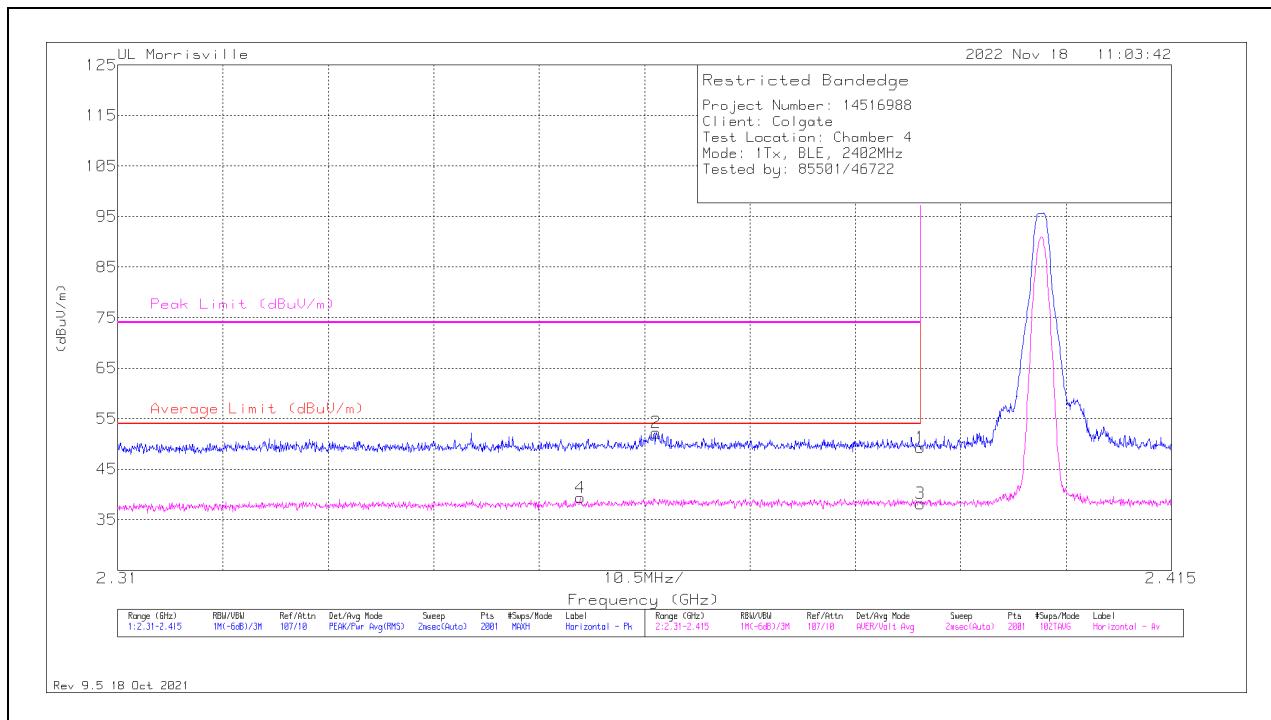

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* *** 2.38996	30.69	Pk	32.2	-13.6	0	49.29	-	-	74	-24.71	174	188	H
2	* *** 2.36366	33.62	Pk	32.2	-13.6	0	52.22	-	-	74	-21.78	174	188	H
3	* *** 2.38996	19.59	ADV	32.2	-13.6	3.99	42.18	54	-11.82	-	-	174	188	H
4	* *** 2.3561	21.07	ADV	32.1	-13.8	3.99	43.36	54	-10.64	-	-	174	188	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

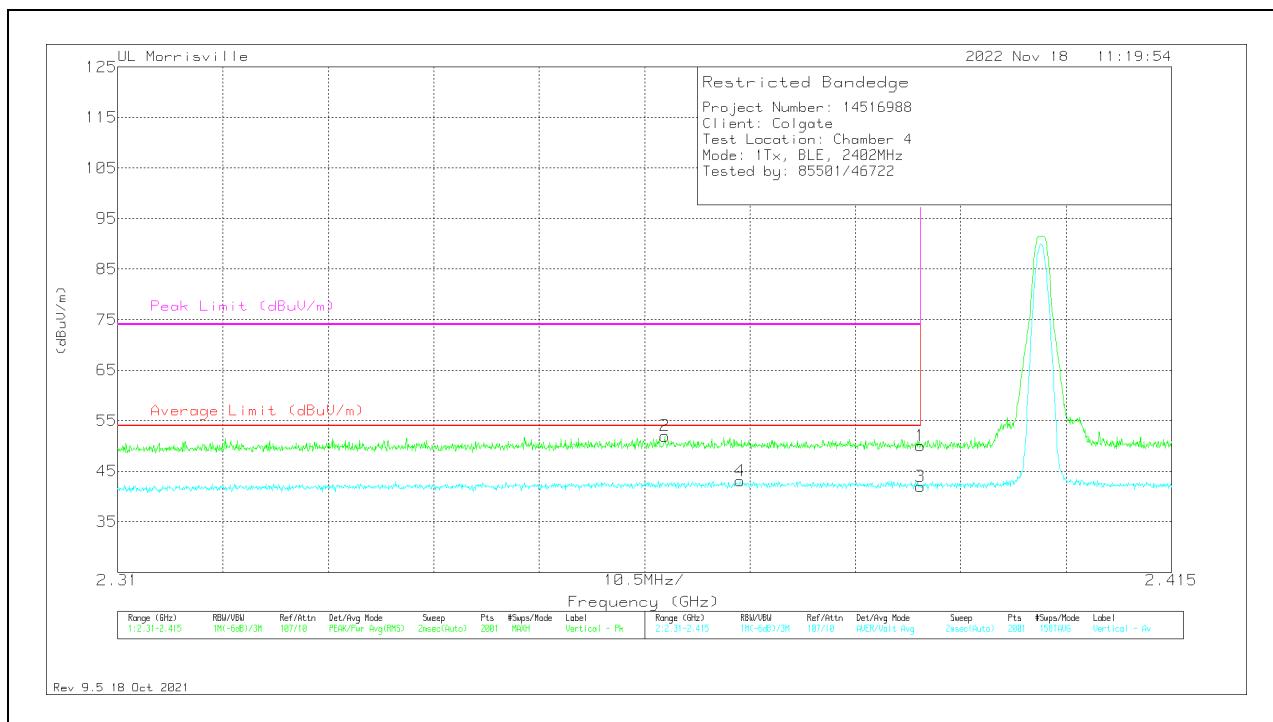

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38996	31.42	Pk	32.2	-13.6	0	50.02	-	-	74	-23.98	85	394	V
2	* ** 2.3645	33.37	Pk	32.2	-13.6	0	51.97	-	-	74	-22.03	85	394	V
3	* ** 2.38996	19.37	ADV	32.2	-13.6	3.99	41.96	54	-12.04	-	-	85	394	V
4	* ** 2.372	20.44	ADV	32.2	-13.6	3.99	43.03	54	-10.97	-	-	85	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

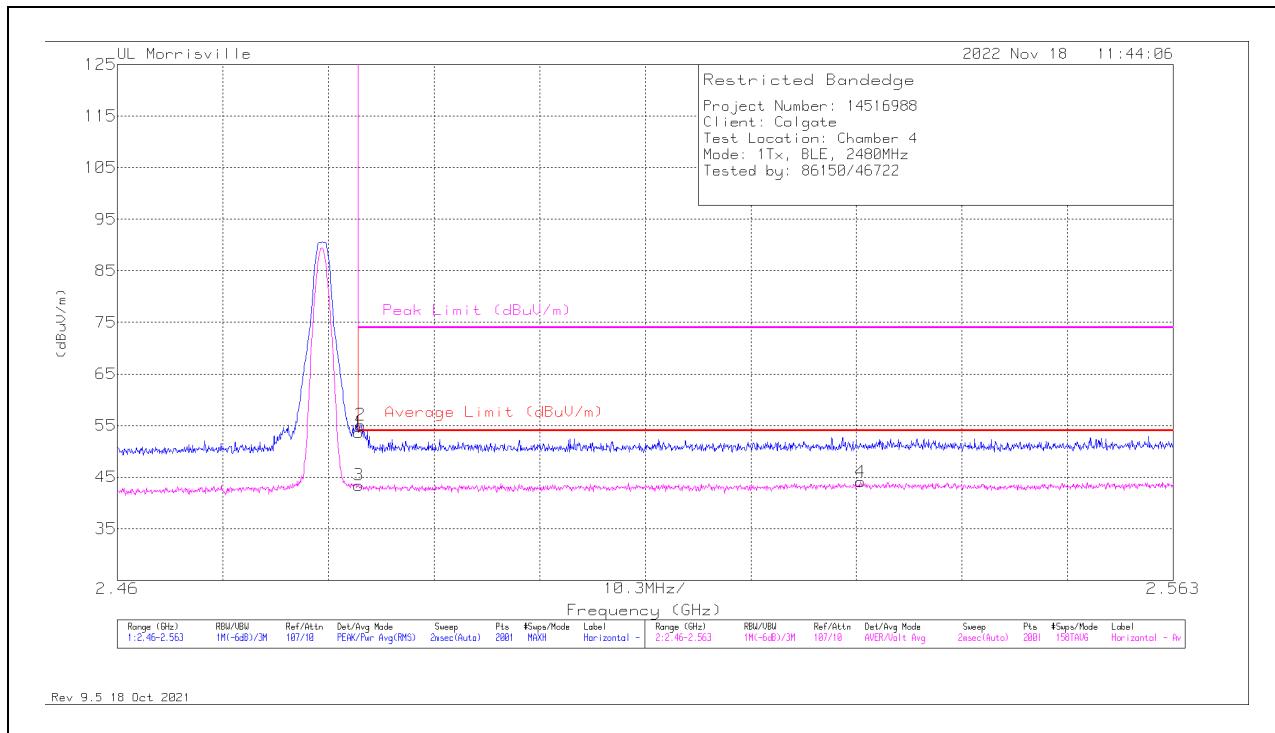

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* *** 2.48354	34.76	Pk	32.6	-13.7	0	53.66	-	-	74	-20.34	72	397	H
2	* *** 2.48374	36.2	Pk	32.6	-13.7	0	55.1	-	-	74	-18.9	72	397	H
3	* *** 2.48354	20.52	ADV	32.6	-13.7	3.99	43.41	54	-10.59	-	-	72	397	H
4	** 2.53251	20.76	ADV	32.7	-13.4	3.99	44.05	54	-9.95	-	-	72	397	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

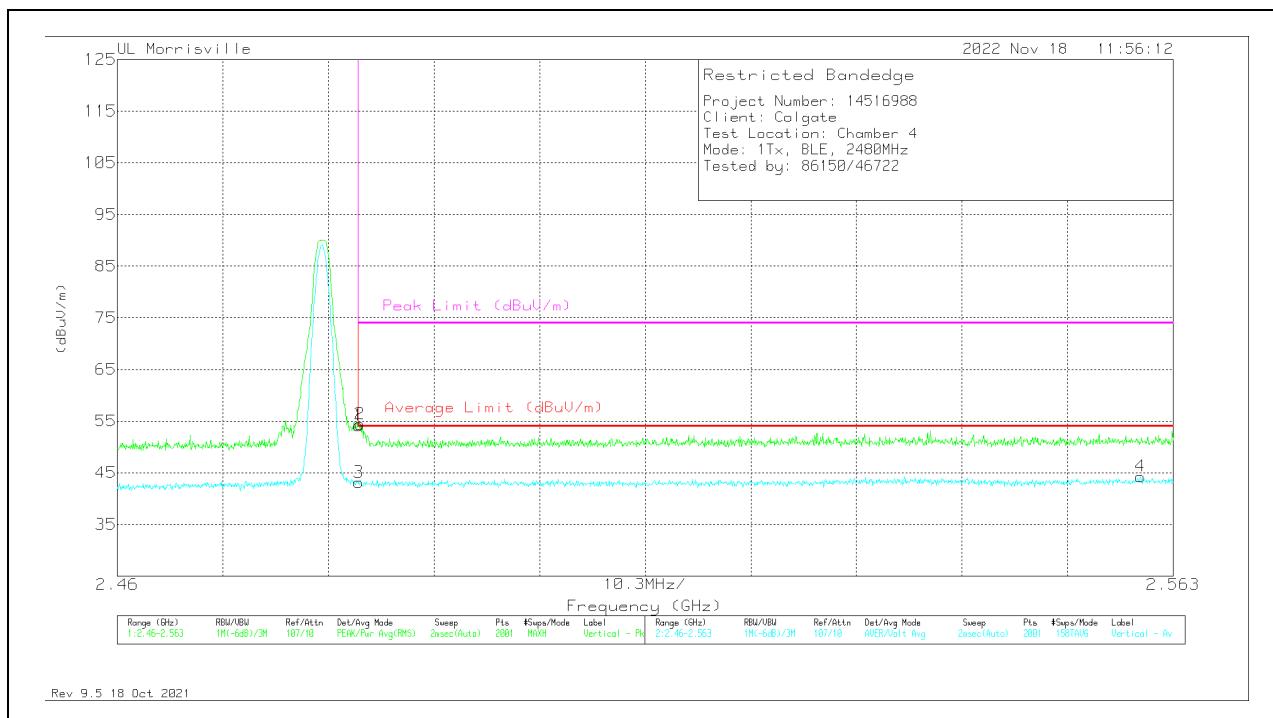

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* *** 2.48354	35.28	Pk	32.6	-13.7	0	54.18	-	-	74	-19.82	106	370	V
2	* *** 2.48369	35.52	Pk	32.6	-13.7	0	54.42	-	-	74	-19.58	106	370	V
3	* *** 2.48354	20.24	ADV	32.6	-13.7	3.99	43.13	54	-10.87	-	-	106	370	V
4	** 2.55981	20.86	ADV	32.7	-13.3	3.99	44.25	54	-9.75	-	-	106	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

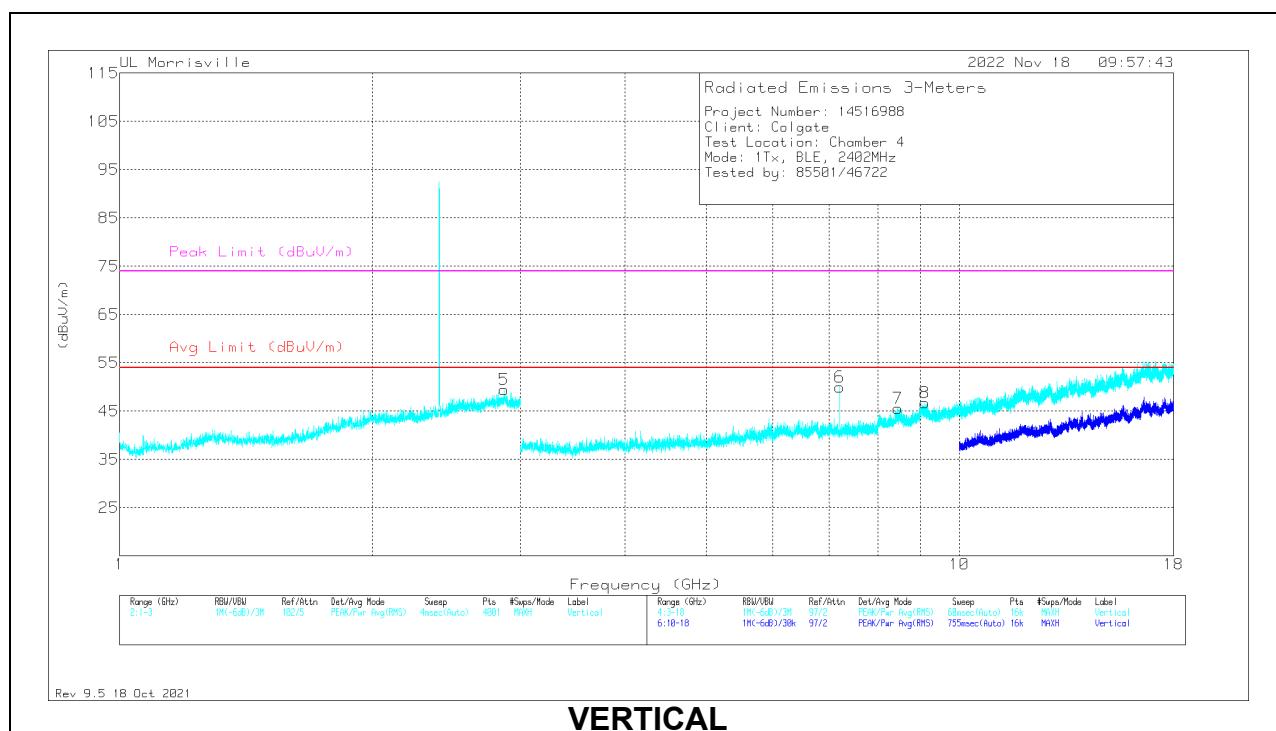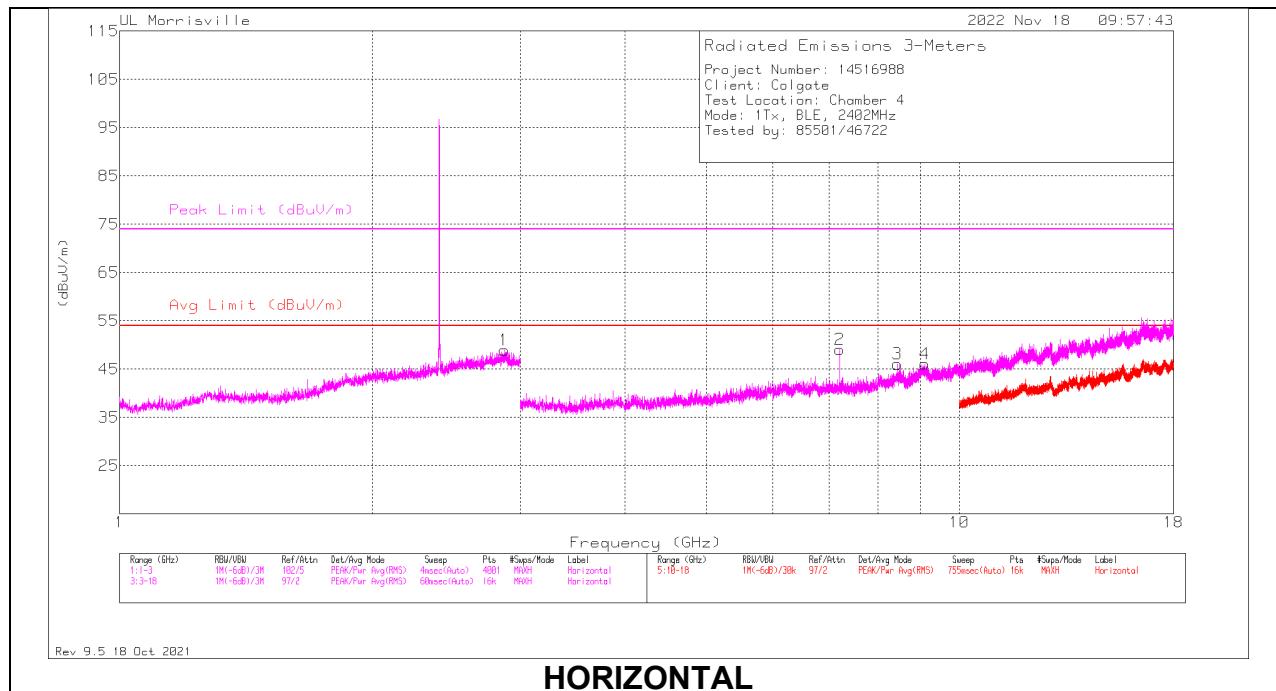

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* *** 2.87414	29.55	PK2	32.7	-12.7	0	49.55	-	-	74	-24.45	355	205	H
	* *** 2.87085	17.36	ADV	32.7	-12.8	3.99	41.25	54	-12.75	-	-	355	205	H
5	* *** 2.87058	30.11	PK2	32.7	-12.8	0	50.01	-	-	74	-23.99	252	264	V
	* *** 2.86837	16.74	ADV	32.7	-12.9	3.99	40.53	54	-13.47	-	-	252	264	V
3	* *** 8.44219	36.93	Pk	35.7	-26.6	0	46.03	54	-7.97	74	-27.97	0-360	100	H
4	* *** 9.09656	35.36	Pk	36.2	-25.5	0	46.06	54	-7.94	74	-27.94	0-360	100	H
7	* *** 8.44875	36.39	Pk	35.7	-26.5	0	45.59	54	-8.41	74	-28.41	0-360	200	V
8	* *** 9.10406	36.11	Pk	36.2	-25.6	0	46.71	54	-7.29	74	-27.29	0-360	200	V
2	7.20516	41.91	Pk	35.7	-28.5	0	49.11	-	-	74	-24.89	0-360	100	H
6	7.20563	42.82	Pk	35.7	-28.5	0	50.02	-	-	74	-23.98	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

PK2 -Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

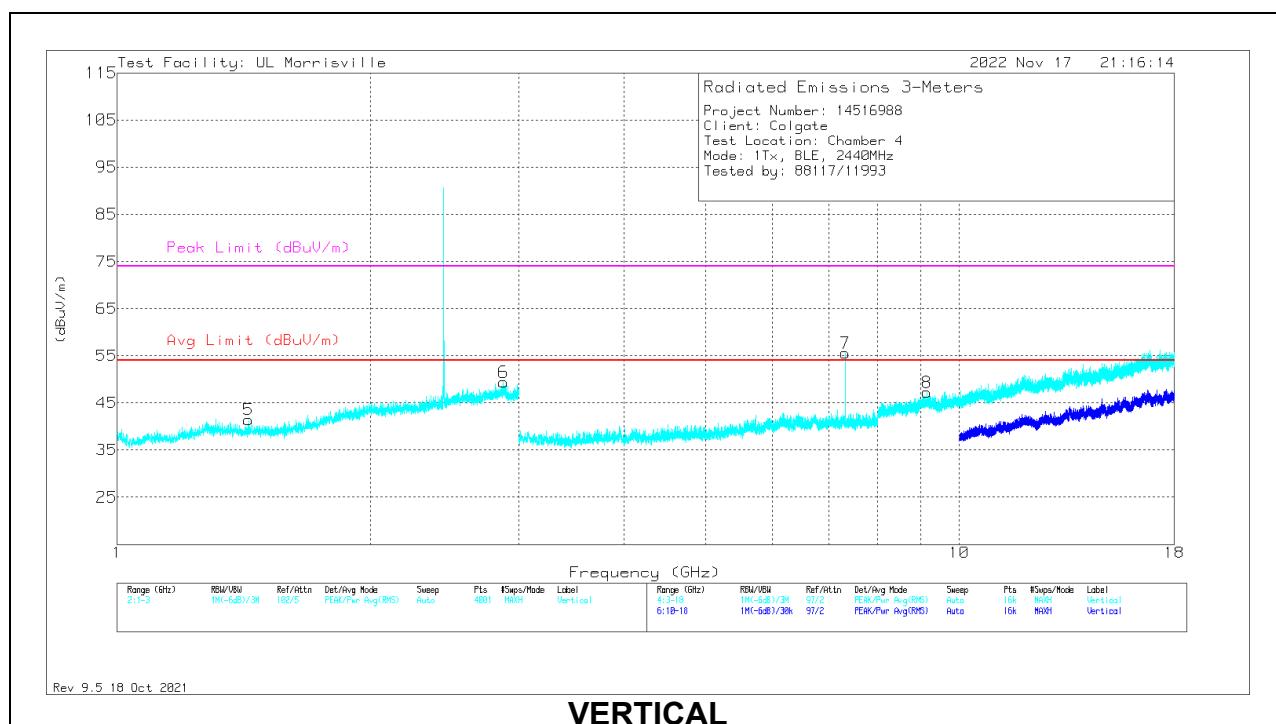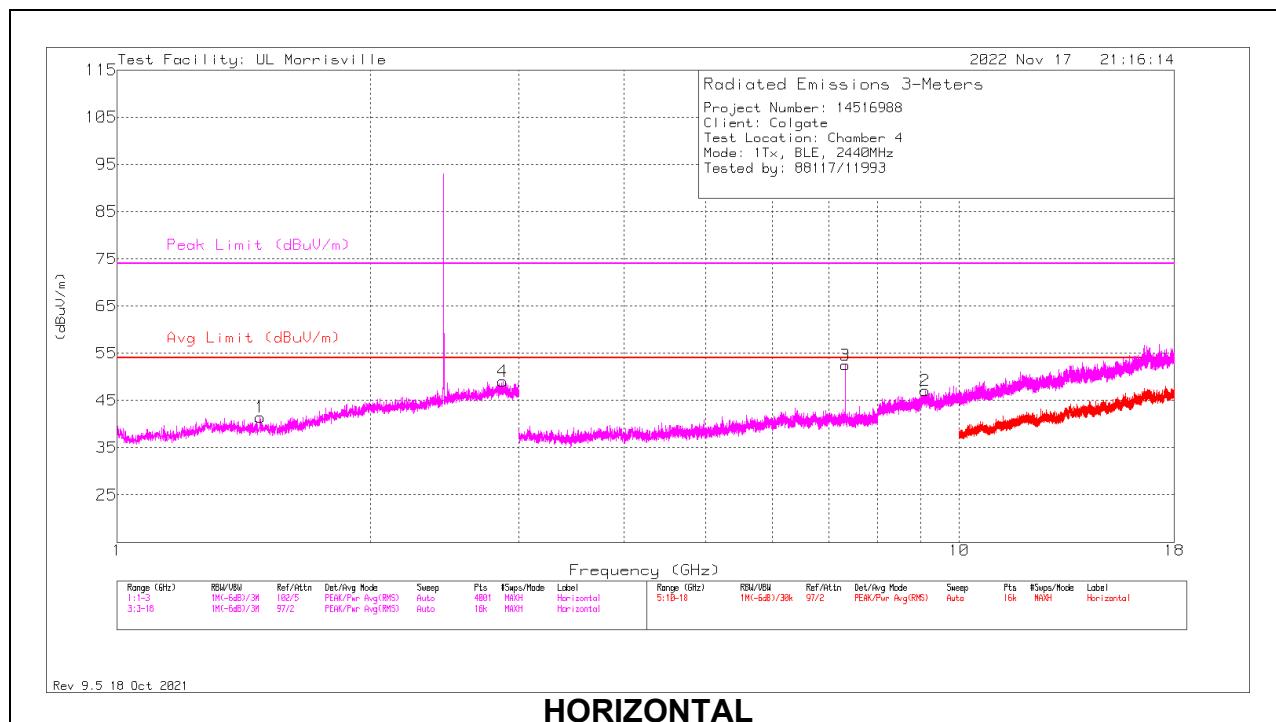

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* *** 1.478	28.03	PK	28.5	-15.1	0	41.43	54	-12.57	74	-32.57	0-360	100	H
4	* *** 2.87197	29.37	PK2	32.7	-12.7	0	49.37	-	-	74	-24.63	175	216	H
	* *** 2.8718	16.77	ADV	32.7	-12.8	3.99	40.66	54	-13.34	-	-	175	216	H
6	* *** 2.87454	29.67	PK2	32.7	-12.7	0	49.67	-	-	74	-24.33	194	293	V
	* *** 2.87424	16.54	ADV	32.7	-12.7	3.99	40.53	54	-13.47	-	-	194	293	V
2	* *** 9.10594	36.5	Pk	36.2	-25.6	0	47.1	54	-6.9	74	-26.9	0-360	100	H
3	* *** 7.32074	49.02	PK2	35.6	-28.4	0	56.22	-	-	74	-17.78	348	102	H
	* *** 7.31929	39.36	ADV	35.6	-28.3	3.99	50.65	54	-3.35	-	-	348	102	H
7	* *** 7.32065	49.97	PK2	35.6	-28.4	0	57.17	-	-	74	-16.83	34	193	V
	* *** 7.31945	40.69	ADV	35.6	-28.3	3.99	51.98	54	-2.02	-	-	34	193	V
8	* *** 9.14859	36.72	Pk	36.2	-25.7	0	47.22	54	-6.78	74	-26.78	0-360	200	V
5	1.4315	28.02	Pk	28.7	-15.3	0	41.42	54	-12.58	74	-32.58	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

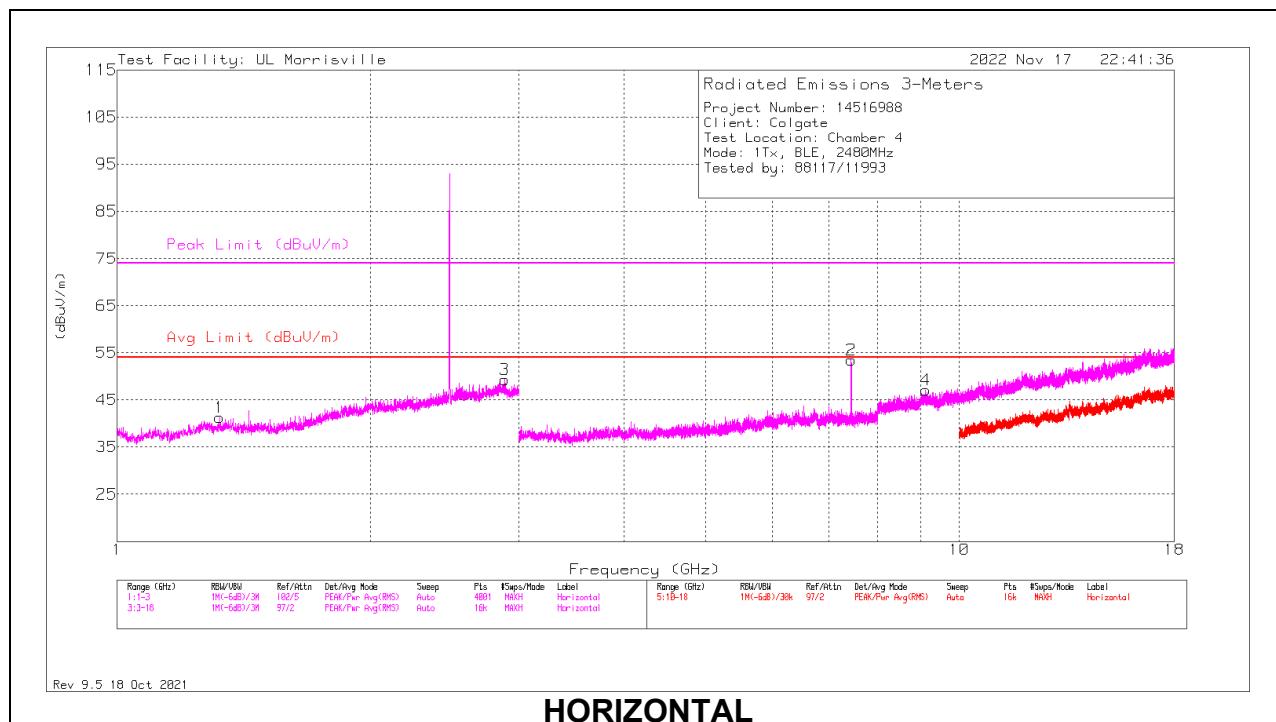

HORIZONTAL

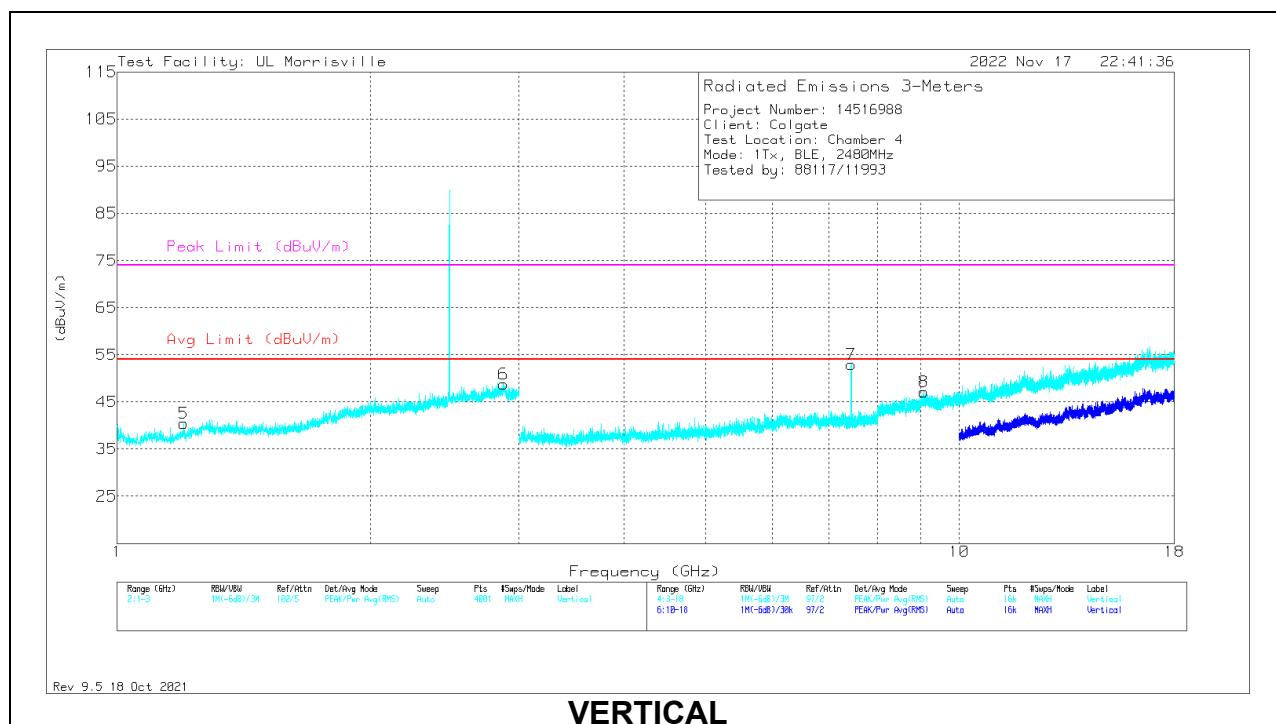

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* *** 1.323	27.38	PK	29.2	-15.3	0	41.28	54	-12.72	74	-32.72	0-360	100	H
3	* ** 2.8869	29.48	PK2	32.6	-12.8	0	49.28	-	-	74	-24.72	99	265	H
	* *** 2.88705	16.55	ADV	32.6	-12.8	3.99	40.34	54	-13.66	-	-	99	265	H
5	* *** 1.1995	27.45	PK	28.5	-15.5	0	40.45	54	-13.55	74	-33.55	0-360	200	V
6	* *** 2.87787	29.58	PK2	32.7	-12.6	0	49.68	-	-	74	-24.32	136	255	V
	* *** 2.87678	16.72	ADV	32.7	-12.6	3.99	40.81	54	-13.19	-	-	136	255	V
2	* *** 7.43926	49.55	PK2	35.6	-28.5	0	56.65	-	-	74	-17.35	190	196	H
	* *** 7.43938	40.52	ADV	35.6	-28.5	3.99	51.61	54	-2.39	-	-	190	196	H
4	* *** 9.11906	36.6	PK	36.2	-25.7	0	47.1	54	-6.9	74	-26.9	0-360	100	H
7	* *** 7.43929	49.88	PK2	35.6	-28.5	0	56.98	-	-	74	-17.02	319	197	V
	* *** 7.43921	39.9	ADV	35.6	-28.5	3.99	50.99	54	-3.01	-	-	319	197	V
8	* *** 9.07219	36.29	Pk	36.1	-25.2	0	47.19	54	-6.81	74	-26.81	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK2 - Maximum Peak

ADV - Linear Voltage Average

10.3. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHZ (WORST-CASE CONFIGURATION)

Note: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were 40*Log (test distance / specification distance).

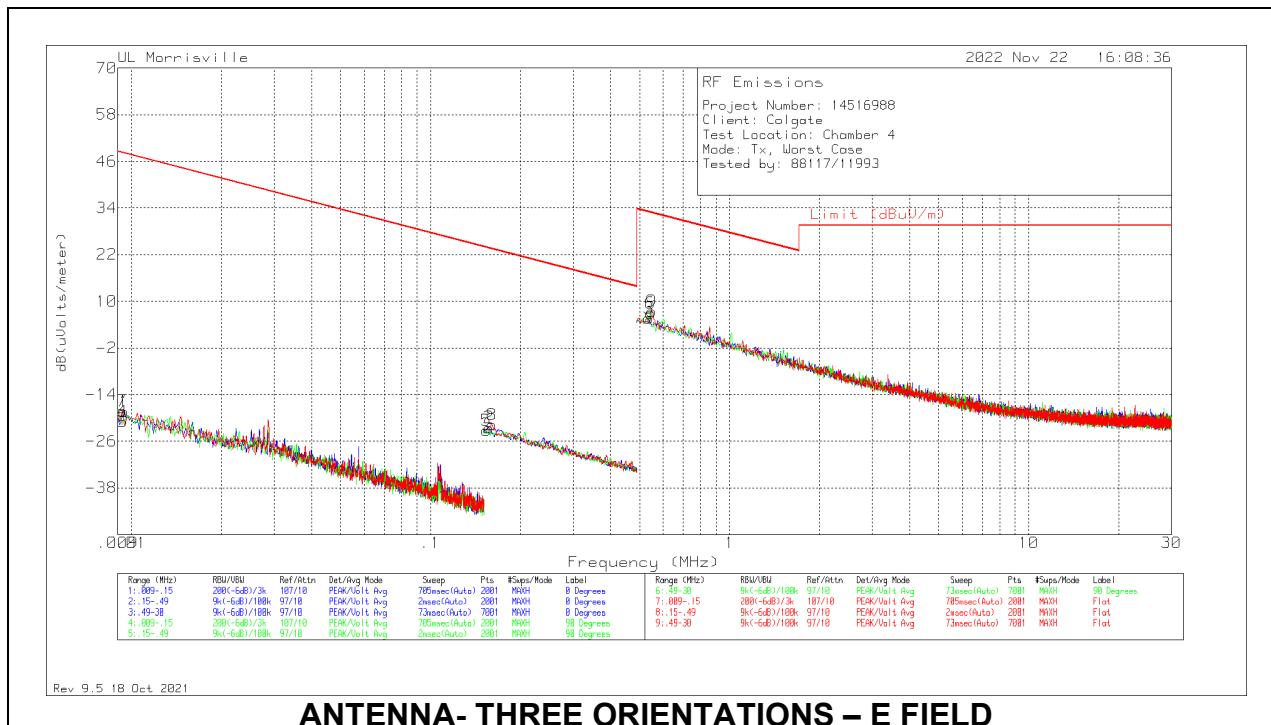



Below 30MHz Data – E FIELD

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Loop Angle
7	.00928	43.04	Pk	18.7	0	-80	-18.26	48.25	68.25	-66.51	0-360	400	Flat
4	.00936	40.35	Pk	18.7	0	-80	-20.95	48.18	68.18	-69.13	0-360	400	90 degs
1	.00943	42.89	Pk	18.7	0	-80	-18.41	48.12	68.12	-66.53	0-360	400	0 degs
5	.15391	45.59	Pk	11.1	.1	-80	-23.21	23.86	43.86	-47.07	0-360	400	90 degs
2	.15663	46.31	Pk	11.1	.1	-80	-22.49	23.71	43.71	-46.2	0-360	400	0 degs
8	.16037	47.05	Pk	11.1	.1	-80	-21.75	23.5	43.5	-45.25	0-360	400	Flat
3	.53638	34.43	Pk	11.1	.1	-40	5.63	33.01	-	-27.38	0-360	400	0 degs
6	.54481	35.71	Pk	11.1	.1	-40	6.91	32.88	-	-25.97	0-360	400	90 degs
9	.54902	36.19	Pk	11.1	.1	-40	7.39	32.81	-	-25.42	0-360	400	Flat

Pk - Peak detector

10.4. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

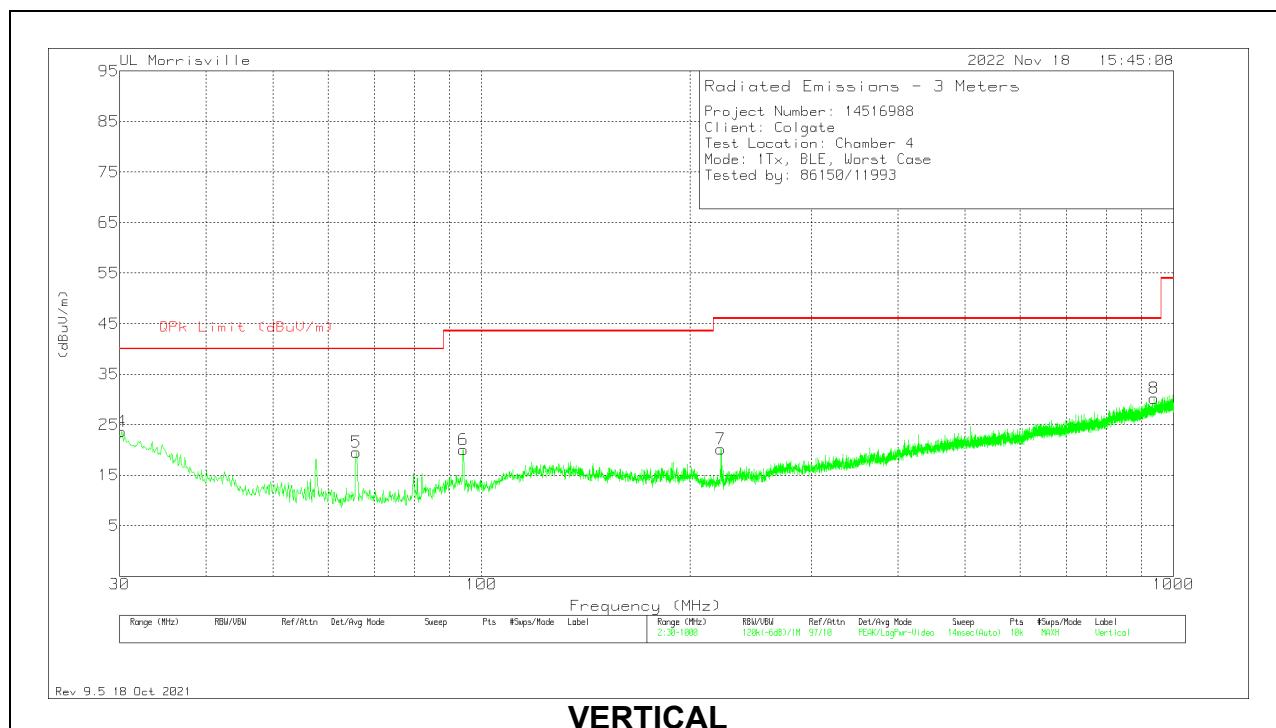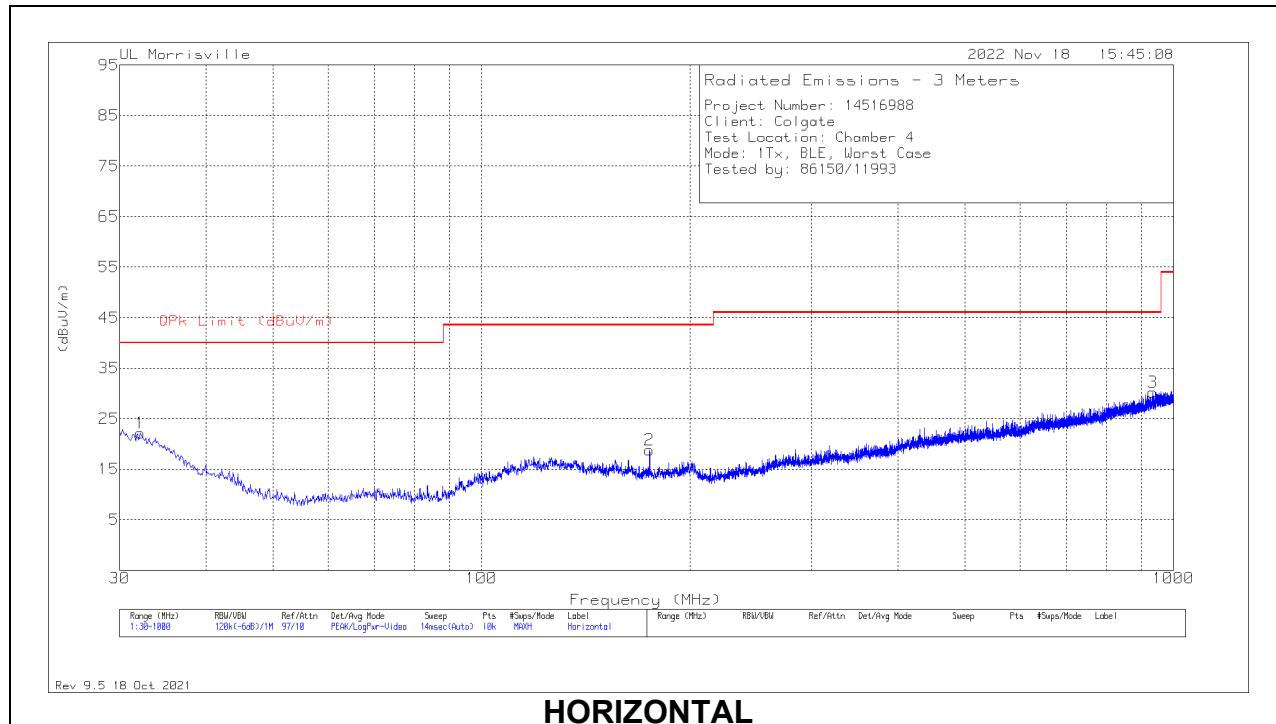



Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0081 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	30.194	28.21	Pk	27.1	-31.7	23.61	40	-16.39	0-360	100	V
1	32.134	28.02	Pk	25.8	-31.7	22.12	40	-17.88	0-360	300	H
5	65.987	36.62	Pk	14.1	-31.2	19.52	40	-20.48	0-360	100	V
6	94.117	35.95	Pk	14.9	-30.8	20.05	43.52	-23.47	0-360	200	V
2	174.918	30.95	Pk	17.8	-30	18.75	43.52	-24.77	0-360	100	H
7	221.866	32.37	Pk	17.2	-29.4	20.17	46.02	-25.85	0-360	200	V
3	933.264	25.92	Pk	29.2	-24.9	30.22	46.02	-15.8	0-360	100	H
8	937.823	25.88	Pk	29.2	-24.9	30.18	46.02	-15.84	0-360	100	V

Pk - Peak detector

10.5. WORST CASE 18-26 GHZ

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

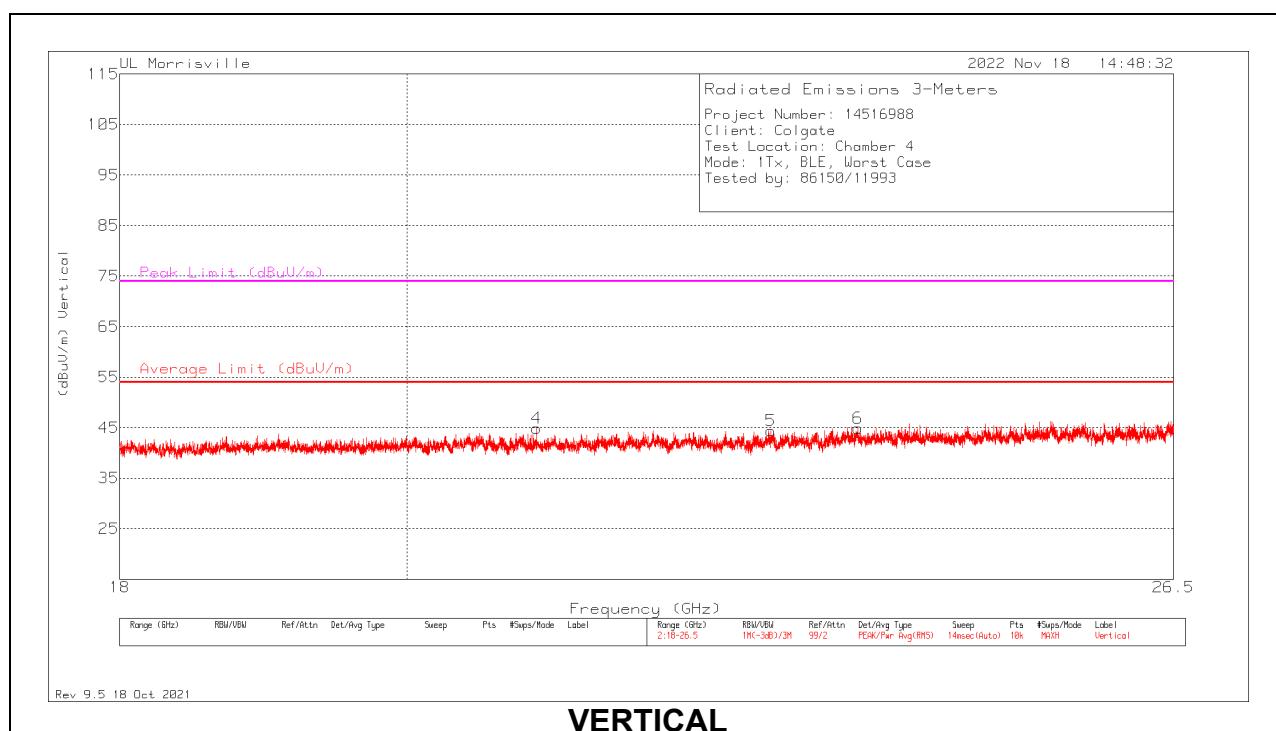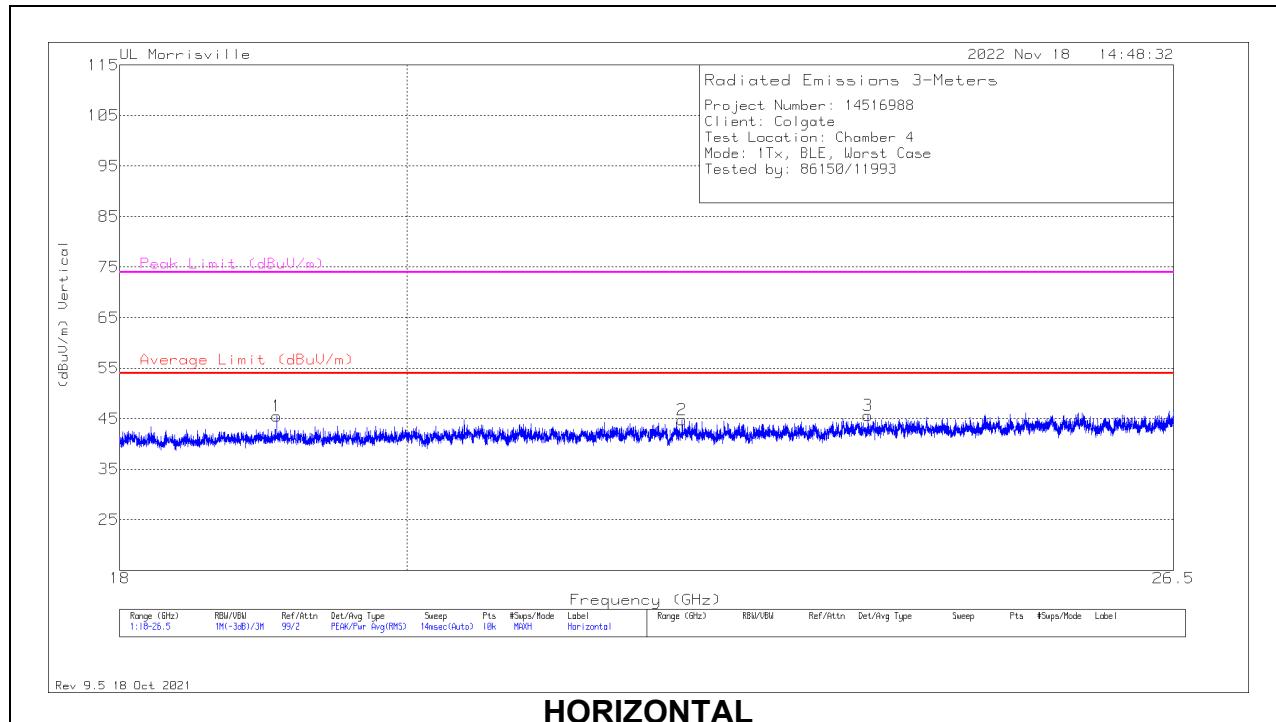

18 – 26GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	204704 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 19.06771	51.11	Pk	33.8	-39.4	0	45.51	54	-8.49	74	-28.49	0-360	100	H
2	* ** 22.12716	49.15	Pk	34.5	-38.9	0	44.75	54	-9.25	74	-29.25	0-360	150	H
3	* ** 23.69047	48.23	Pk	35.2	-37.8	0	45.63	54	-8.37	74	-28.37	0-360	150	H
4	* ** 20.97615	49.52	Pk	34	-38.6	0	44.92	54	-9.08	74	-29.08	0-360	250	V
5	* ** 22.85909	47.57	Pk	34.4	-37.6	0	44.37	54	-9.63	74	-29.63	0-360	300	V
6	* ** 23.60121	46.67	Pk	35.3	-37.1	0	44.87	54	-9.13	74	-29.13	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
	66 to 56	56 to 46*
0.15-0.5	56	46
0.5-5	60	50
5-30		

* Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak Detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS

11.1.1. AC Power Line Norm

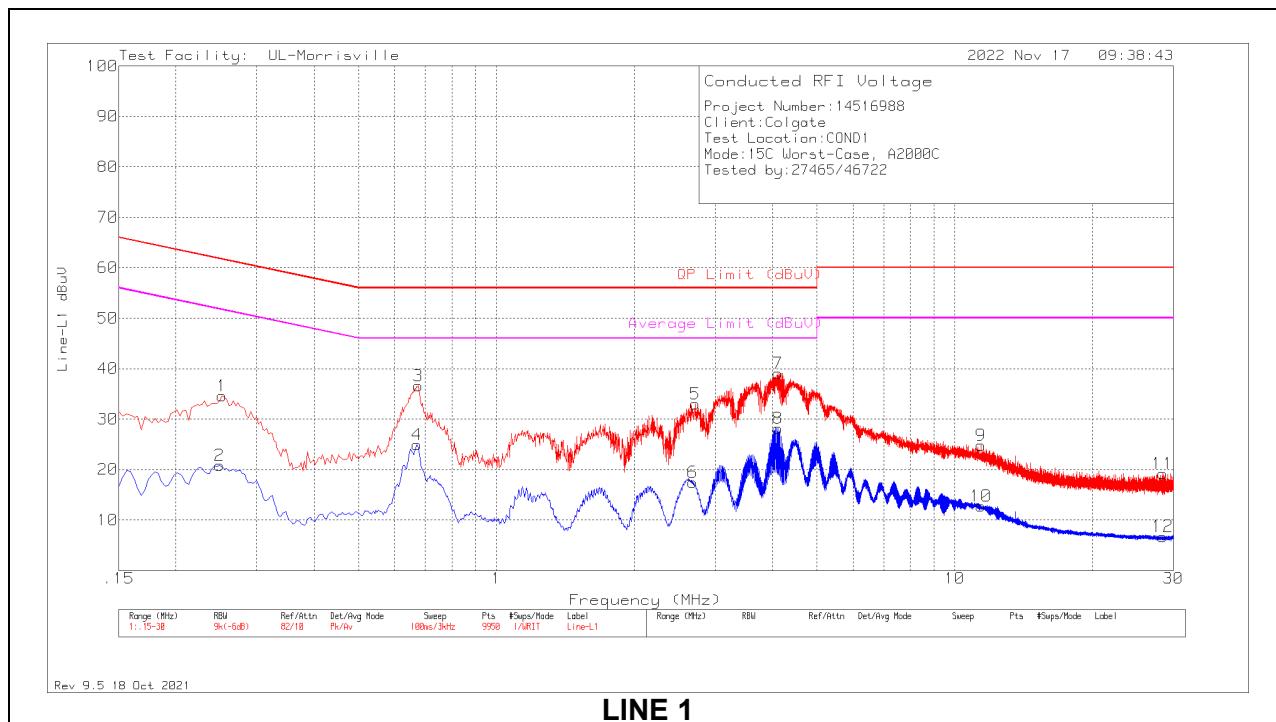


LINE 1 RESULTS

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.252	24.67	Pk	.1	9.8	34.57	61.69	-27.12	-	-
2	.249	10.91	Av	.1	9.8	20.81	-	-	51.79	-30.98
3	.675	26.8	Pk	0	9.8	36.6	56	-19.4	-	-
4	.672	15.11	Av	0	9.8	24.91	-	-	46	-21.09
5	2.712	23.17	Pk	0	9.8	32.97	56	-23.03	-	-
6	2.685	7.65	Av	0	9.8	17.45	-	-	46	-28.55
7	4.11	29.22	Pk	0	9.9	39.12	56	-16.88	-	-
8	4.11	18.29	Av	0	9.9	28.19	-	-	46	-17.81
9	11.418	14.71	Pk	.1	10	24.81	60	-35.19	-	-
10	11.4045	2.65	Av	.1	10	12.75	-	-	50	-37.25
11	28.413	8.66	Pk	.3	10.2	19.16	60	-40.84	-	-
12	28.422	-3.77	Av	.3	10.2	6.73	-	-	50	-43.27

Pk - Peak detector

Av - Average detection

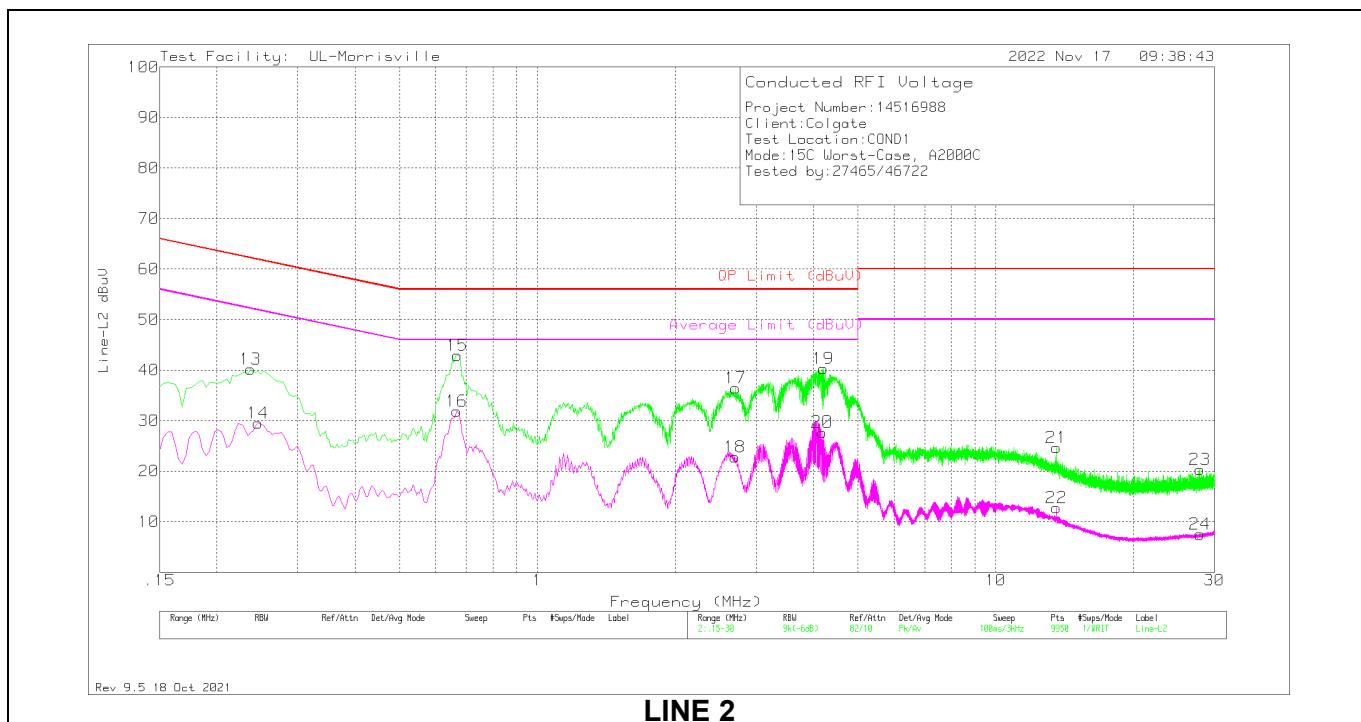

LINE 2 RESULTS

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.237	30.29	Pk	.1	9.8	40.19	62.2	-22.01	-	-
14	.246	19.57	Av	.1	9.8	29.47	-	-	51.89	-22.42
15	.669	33.12	Pk	0	9.8	42.92	56	-13.08	-	-
16	.666	22.09	Av	0	9.8	31.89	-	-	46	-14.11
17	2.706	26.67	Pk	0	9.8	36.47	56	-19.53	-	-
18	2.697	12.98	Av	0	9.8	22.78	-	-	46	-23.22
19	4.2	30.38	Pk	0	9.9	40.28	56	-15.72	-	-
20	4.176	17.81	Av	0	9.9	27.71	-	-	46	-18.29
21	13.56	14.54	Pk	.1	10	24.64	60	-35.36	-	-
22	13.56	2.7	Av	.1	10	12.8	-	-	50	-37.2
23	27.891	9.77	Pk	.3	10.2	20.27	60	-39.73	-	-
24	27.921	-3.02	Av	.3	10.2	7.48	-	-	50	-42.52

Pk - Peak detector

Av - Average detection

12. SETUP PHOTOS

Please refer to R14516988-EP2 for setup photos

END OF TEST REPORT