

FCC RADIO TEST REPORT

FCC ID: 2AL6KBL-M8733BS2

Product: 802.11a/b/g/n 150Mbps WLAN + BT
v5.2 Combo SDIO Module

Trade Mark: N/A

Model No.: BL-M8733BS2

Family Model: N/A

Report No.: S24070807404004

Issue Date: Sept. 12, 2024

Prepared for

ShenZhen BiLian Electronic Co.,Ltd.
Room 501, Building 3, No.32, Dafu Road, Zhangge
Community, Fucheng Street, Longhua District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : ShenZhen BiLian Electronic Co.,Ltd.
Address : Room 501,Building 3,No.32,Dafu Road,Zhangge Community,FuchengStreet,Longhua District,Shenzhen,China
Manufacturer's Name : ShenZhen BiLian Electronic Co.,Ltd.
Address : Room 501,Building 3,No.32,Dafu Road,Zhangge Community,FuchengStreet,Longhua District,Shenzhen,China

Product description

Product name : 802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module
Trade Mark : N/A
Model and/or type reference : BL-M8733BS2
Family Model : N/A
Test Sample Number : S240708074004

Standards : FCC Part15.407

Test procedure : ANSI C63.10-2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D03 Client Without DFS New Rules v01r02
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : Jul. 17, 2024 ~ Sept. 12, 2024

Date of Issue : Sept. 12, 2024

Test Result : Pass

Prepared By : Mary Hu (Project Engineer)

Reviewed By : Aaron Cheng (Supervisor)

Approved By : Alex Li (Manager)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	7
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
1 . GENERAL INFORMATION	9
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 DESCRIPTION OF TEST MODES	11
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
2 . EMC EMISSION TEST	16
2.1 CONDUCTED EMISSION MEASUREMENT	16
2.1.1 APPLICABLE STANDARD	16
2.1.2 CONFORMANCE LIMIT	16
2.1.3 TEST CONFIGURATION	16
2.1.4 TEST PROCEDURE	16
2.2 RADIATED EMISSION MEASUREMENT	25
2.2.1 APPLICABLE STANDARD	25
2.2.2 CONFORMANCE LIMIT	25
2.2.3 MEASURING INSTRUMENTS	25
2.2.4 TEST CONFIGURATION	26
2.2.5 TEST PROCEDURE	27
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	28
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	29
2.2.8 TEST RESULTS (1GHZ-18GHZ)	37
2.2.10 TEST RESULTS (18GHZ-40GHZ)	45
3 . POWER SPECTRAL DENSITY TEST	67
3.1 APPLIED PROCEDURES / LIMIT	67
3.2 TEST PROCEDURE	68
3.3 DEVIATION FROM STANDARD	68
3.4 TEST SETUP	68
3.5 EUT OPERATION CONDITIONS	68
3.6 TEST RESULTS	69
4 . 26DB & 99% EMISSION BANDWIDTH	70
4.1 APPLIED PROCEDURES / LIMIT	70
4.2 TEST PROCEDURE	70
4.3 EUT OPERATION CONDITIONS	71
4.4 TEST RESULTS	71

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	72
5.1 APPLIED PROCEDURES / LIMIT	72
5.2 TEST PROCEDURE	72
5.3 DEVIATION FROM STANDARD	72
5.4 TEST SETUP	72
5.5 EUT OPERATION CONDITIONS	72
5.6 TEST RESULTS	73
6 . MAXIMUM CONDUCTED OUTPUT POWER	74
6.1 PPLIED PROCEDURES / LIMIT	74
6.2 TEST RESULTS	76
7 . OUT OF BAND EMISSIONS	77
7.1 APPLICABLE STANDARD	77
7.2 TEST PROCEDURE	77
7.3 DEVIATION FROM STANDARD	78
7.4 TEST SETUP	78
7.5 EUT OPERATION CONDITIONS	78
7.6 TEST RESULTS	79
8. FREQUENCY STABILITY MEASUREMENT	80
8.1 LIMIT	80
8.2 TEST PROCEDURES	80
8.3 TEST SETUP LAYOUT	80
8.4 EUT OPERATION DURING TEST	80
8.5 TEST RESULTS	81
9. DYNAMIC FREQUENCY SELECTION(DFS)	105
9.1 APPLICABILITY OF DFS REQUIREMENTS	105
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	105
9.3 DFS RESPONSE REQUIREMENT VALUES	106
9.4 SHORT PULSE RADAR TEST WAVEFORMS	106
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	107
9.6 CONDUCTED CALIBRATION SETUP	107
9.7 RADAR WAVEFORM CALIBRATION RESULT	107
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	108
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	

Table of Contents

	Page
AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	109
10. ANTENNA REQUIREMENT	110
10.1 STANDARD REQUIREMENT	110
10.2 EUT ANTENNA	110

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407(b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	(Note 3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%
- (3) The product is a client device, and the data transmission is limited by the AP. When the information to be sent is missing or the operation fails, the device will automatically stop sending and directly connect to the AP correctly again.

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted, PSD	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	Occupied bandwidth	$\pm 4.7\%$
5	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$
6	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
7	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
8	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
9	Temperature	$\pm 0.5^\circ\text{C}$
10	Humidity	$\pm 2\%$
11	Radio Frequency	$\pm 0.2\text{ppm}$
12	Occupied bandwidth	$\pm 4.7\%$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	
Trade Mark	N/A	
Model Name	BL-M8733BS2	
Family Model	N/A	
Model Difference	N/A	
FCC ID	2AL6KBL-M8733BS2	
Product Description	Mode Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS7;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM
	Operating Frequency Range	<input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz
	Function:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input checked="" type="checkbox"/> Client
	DFS type:	<input type="checkbox"/> master devices <input type="checkbox"/> Slave devices with radar detection <input checked="" type="checkbox"/> Slave devices without radar detection
	Support TPC	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
	Antenna Type	ANT1: FPC Antenna ANT2: FPC Antenna
	Antenna Gain	ANT 1 Gain: WIFI 5.2G:-0.3dBi, WIFI 5.3G:1.6dBi, WIFI5.6G: 1.9dBi, WIFI 5.8G: 1.9dBi ; ANT 2Gain: WIFI 5.2G:0.9dBi, WIFI 5.3G:1.5dBi, WIFI5.6G 2.8dBi: WIFI 5.8G: 2.3dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Adapter	N/A	
Battery	N/A	
Power supply	DC 3.3V	
Connecting I/O Port(s)	Please refer to the User's Manual	
Hardware version	V1.0	
Software version	V1.0	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz	
	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz
	40	5200 MHz	46	5230 MHz
	44	5220 MHz		
	48	5240 MHz		
U-NII-2A	52	5260 MHz	54	5270 MHz
	56	5280 MHz	62	5310 MHz
	60	5300 MHz		
	64	5320 MHz		
U-NII-2C	100	5500 MHz	102	5510 MHz
	104	5520 MHz	110	5550 MHz
	108	5540 MHz	118	5590 MHz
	112	5560 MHz	126	5630 MHz
	116	5580 MHz	134	5670 MHz
	120	5600 MHz		
	124	5620 MHz		
	128	5640 MHz		
	132	5660 MHz		
	136	5680 MHz		
U-NII-3	140	5700 MHz		
	149	5745 MHz	151	5755 MHz
	153	5765 MHz	159	5795 MHz
	157	5785 MHz		
	161	5805 MHz		
	165	5825 MHz		

3. Antenna information

Antenna Type	Antenna model	Antenna Supplier
Ant1: FPC	450L	Shen Zhen Cicent Communication Technology Co.,Ltd
Ant2: FPC	Irobot	Shen Zhen Cicent Communication Technology Co.,Ltd

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

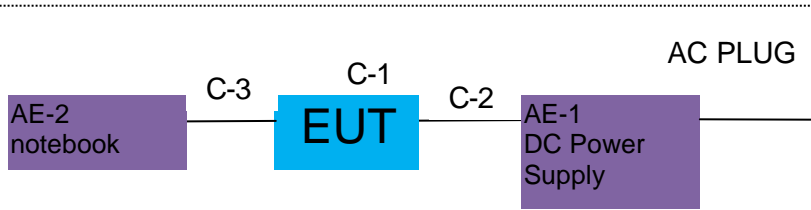

For Radiated Test Cases



For Conducted Test Cases



Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	DC Power Supply	N/A	N/A	Peripherals
AE-2	Notebook	Vostro 3420	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	1.0m
C-2	Power Cable	NO	NO	0.8m
C-3	RF Cable	YES	NO	0.1m
C-4				

Notes:

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.04.26	2025.04.25	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024.04.25	2025.04.24	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2024.04.25	2025.04.24	1 year
4	Test Receiver	R&S	ESPI7	101318	2024.04.26	2025.04.25	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12	2025.03.11	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2024.04.25	2025.04.24	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15100041SN084	2024.04.25	2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2023.05.06	2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2023.05.06	2026.05.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
 And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
2	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.04.25	2025.04.24	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30M Hz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30M Hz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30M Hz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest
4	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

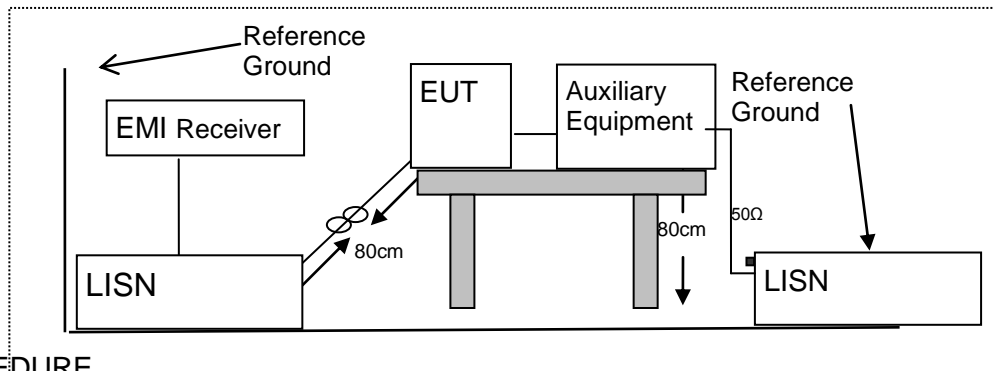

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.2G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3356	6.56	10.27	16.83	59.31	-42.48	QP
0.3356	-2.63	10.27	7.64	49.31	-41.67	AVG
0.8380	6.22	11.32	17.54	56.00	-38.46	QP
0.8380	-3.29	11.32	8.03	46.00	-37.97	AVG
1.8340	4.63	13.33	17.96	56.00	-38.04	QP
1.8340	-5.97	13.33	7.36	46.00	-38.64	AVG
12.6580	24.77	9.81	34.58	60.00	-25.42	QP
12.6580	18.51	9.81	28.32	50.00	-21.68	AVG
19.2020	19.53	9.90	29.43	60.00	-30.57	QP
19.2020	15.00	9.90	24.90	50.00	-25.10	AVG
25.9140	16.48	10.00	26.48	60.00	-33.52	QP
25.9140	10.51	10.00	20.51	50.00	-29.49	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

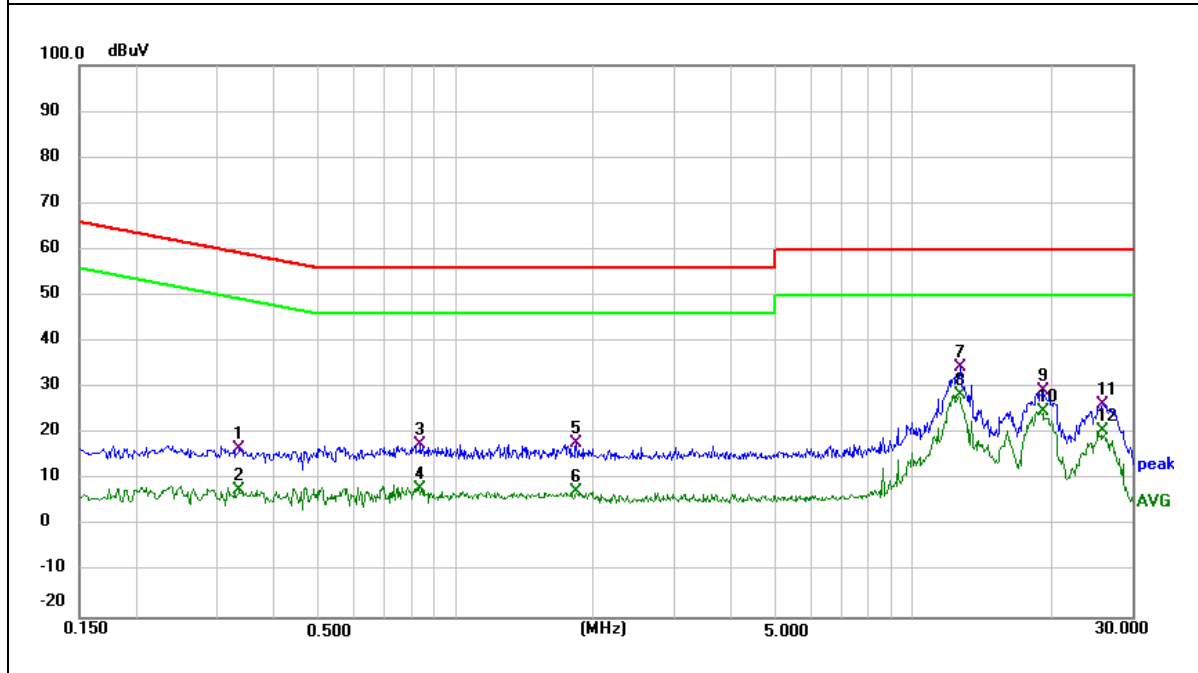


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.2G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4340	6.59	10.56	17.15	57.18	-40.03	QP
0.4340	-3.11	10.56	7.45	47.18	-39.73	AVG
1.5980	5.12	12.94	18.06	56.00	-37.94	QP
1.5980	-5.74	12.94	7.20	46.00	-38.80	AVG
3.0380	6.45	9.76	16.21	56.00	-39.79	QP
3.0380	-3.35	9.76	6.41	46.00	-39.59	AVG
14.0580	22.75	9.87	32.62	60.00	-27.38	QP
14.0580	17.92	9.87	27.79	50.00	-22.21	AVG
17.7260	18.80	9.92	28.72	60.00	-31.28	QP
17.7260	15.30	9.92	25.22	50.00	-24.78	AVG
26.0100	16.75	10.04	26.79	60.00	-33.21	QP
26.0100	8.12	10.04	18.16	50.00	-31.84	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

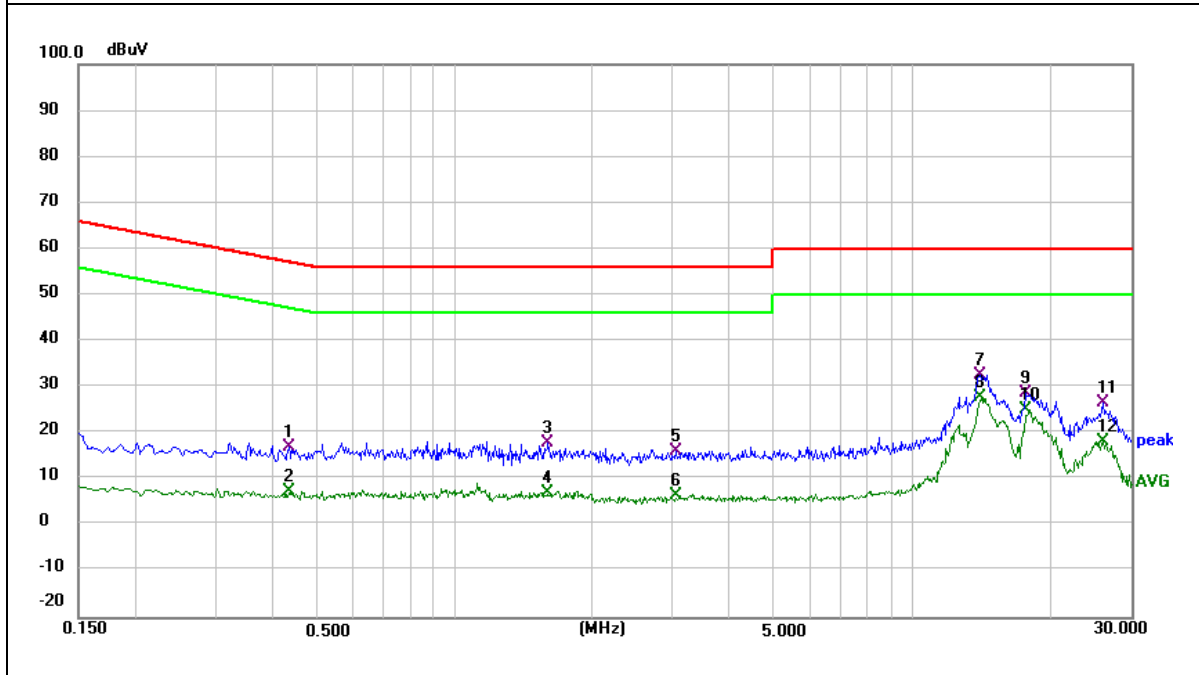


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.3G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5060	6.31	10.64	16.95	56.00	-39.05	QP
0.5060	-1.37	10.64	9.27	46.00	-36.73	AVG
0.9420	6.44	11.53	17.97	56.00	-38.03	QP
0.9420	-3.34	11.53	8.19	46.00	-37.81	AVG
12.4860	22.34	9.80	32.14	60.00	-27.86	QP
12.4860	18.09	9.80	27.89	50.00	-22.11	AVG
13.8980	25.51	9.81	35.32	60.00	-24.68	QP
13.8980	18.87	9.81	28.68	50.00	-21.32	AVG
18.0100	19.10	9.87	28.97	60.00	-31.03	QP
18.0100	14.85	9.87	24.72	50.00	-25.28	AVG
26.4100	17.44	10.01	27.45	60.00	-32.55	QP
26.4100	9.77	10.01	19.78	50.00	-30.22	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

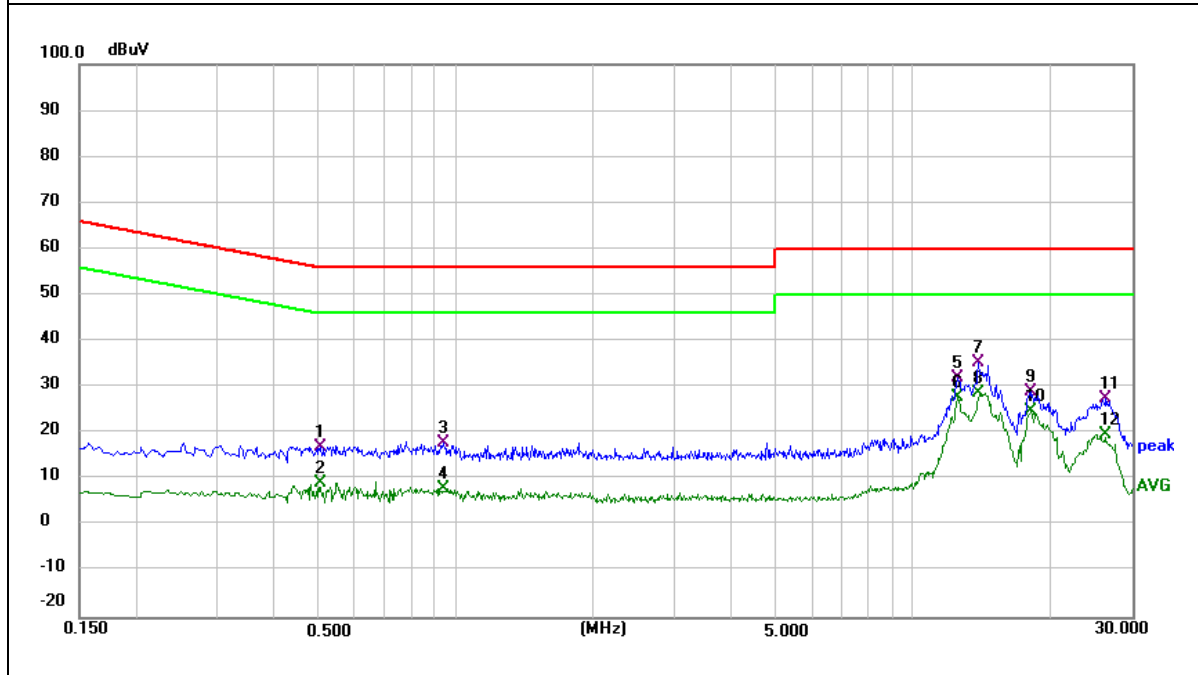


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.3G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3740	7.33	10.43	17.76	58.41	-40.65	QP
0.3740	-3.34	10.43	7.09	48.41	-41.32	AVG
0.6820	7.46	11.08	18.54	56.00	-37.46	QP
0.6820	-3.20	11.08	7.88	46.00	-38.12	AVG
1.7860	3.87	13.32	17.19	56.00	-38.81	QP
1.7860	-5.60	13.32	7.72	46.00	-38.28	AVG
13.5620	27.52	9.87	37.39	60.00	-22.61	QP
13.5620	17.45	9.87	27.32	50.00	-22.68	AVG
17.7260	20.03	9.92	29.95	60.00	-30.05	QP
17.7260	16.35	9.92	26.27	50.00	-23.73	AVG
26.1540	16.87	10.04	26.91	60.00	-33.09	QP
26.1540	9.35	10.04	19.39	50.00	-30.61	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

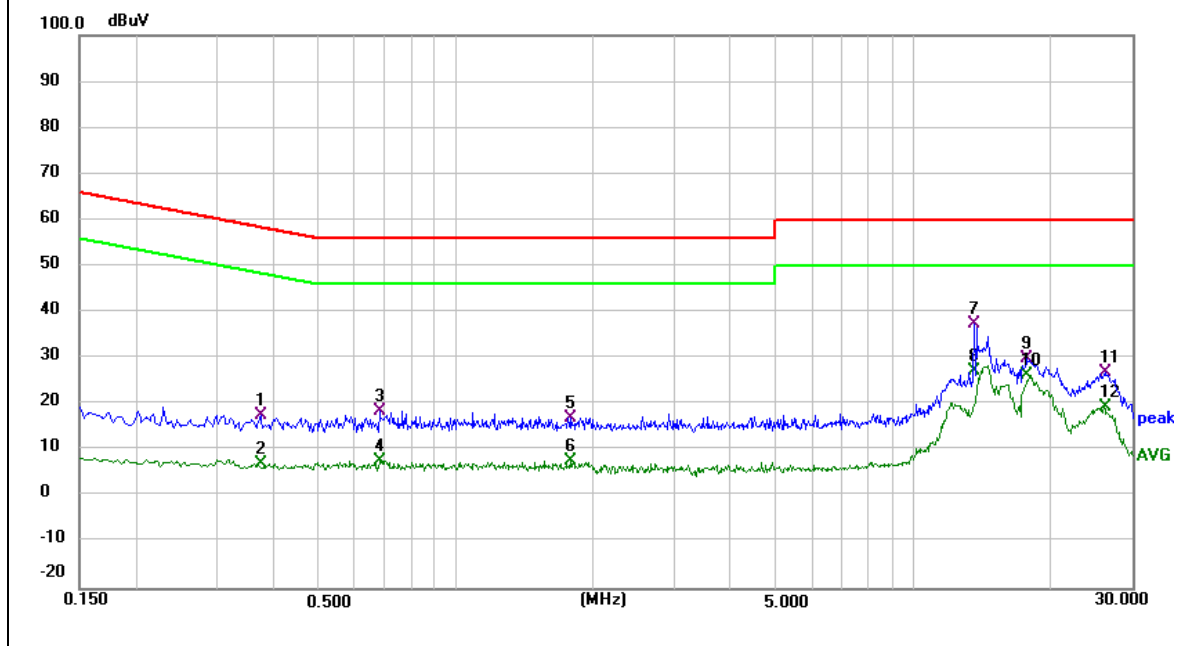


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.6G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5180	9.61	10.66	20.27	56.00	-35.73	QP
0.5180	-2.60	10.66	8.06	46.00	-37.94	AVG
1.7300	5.40	13.13	18.53	56.00	-37.47	QP
1.7300	-4.92	13.13	8.21	46.00	-37.79	AVG
12.6580	25.77	9.81	35.58	60.00	-24.42	QP
12.6580	19.23	9.81	29.04	50.00	-20.96	AVG
16.2500	17.39	9.85	27.24	60.00	-32.76	QP
16.2500	12.76	9.85	22.61	50.00	-27.39	AVG
18.5340	14.14	9.89	24.03	60.00	-35.97	QP
18.5340	17.71	9.89	27.60	50.00	-22.40	AVG
25.9140	17.48	10.00	27.48	60.00	-32.52	QP
25.9140	11.01	10.00	21.01	50.00	-28.99	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

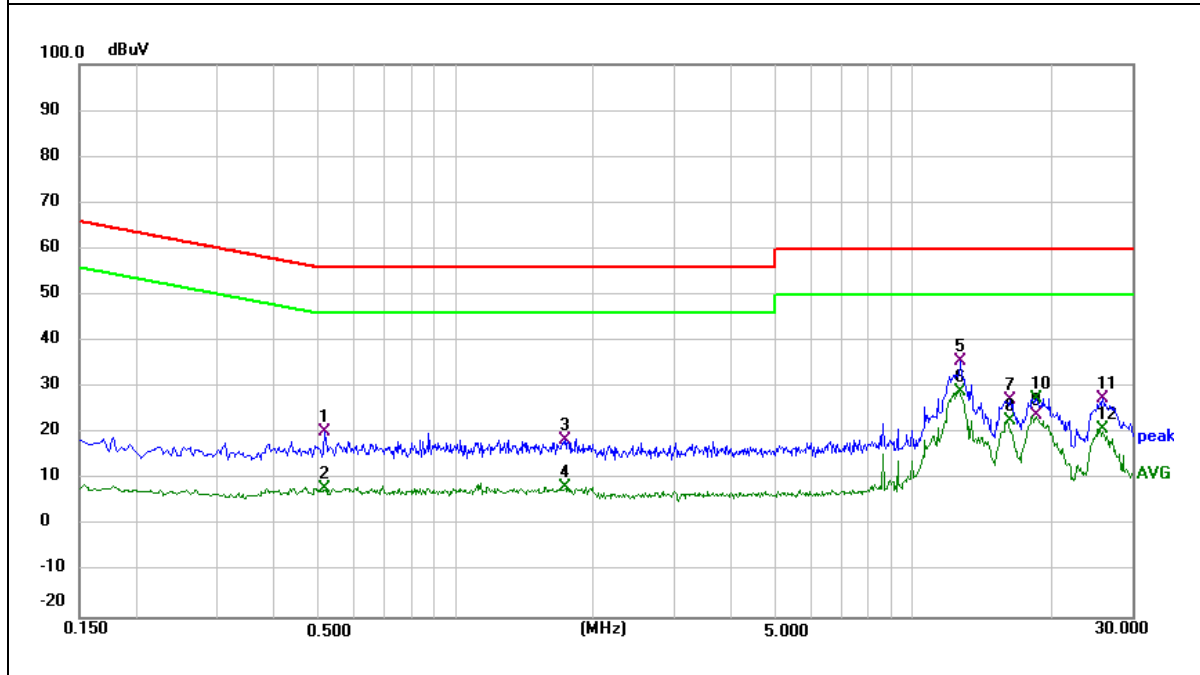


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.6G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4340	5.59	10.56	16.15	57.18	-41.03	QP
0.4340	-4.57	10.56	5.99	47.18	-41.19	AVG
1.1780	5.20	12.10	17.30	56.00	-38.70	QP
1.1780	-6.04	12.10	6.06	46.00	-39.94	AVG
4.4460	6.14	9.77	15.91	56.00	-40.09	QP
4.4460	-4.29	9.77	5.48	46.00	-40.52	AVG
14.5340	22.16	9.88	32.04	60.00	-27.96	QP
14.5340	17.41	9.88	27.29	50.00	-22.71	AVG
18.0580	18.11	9.93	28.04	60.00	-31.96	QP
18.0580	14.79	9.93	24.72	50.00	-25.28	AVG
26.0100	17.25	10.04	27.29	60.00	-32.71	QP
26.0100	10.11	10.04	20.15	50.00	-29.85	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

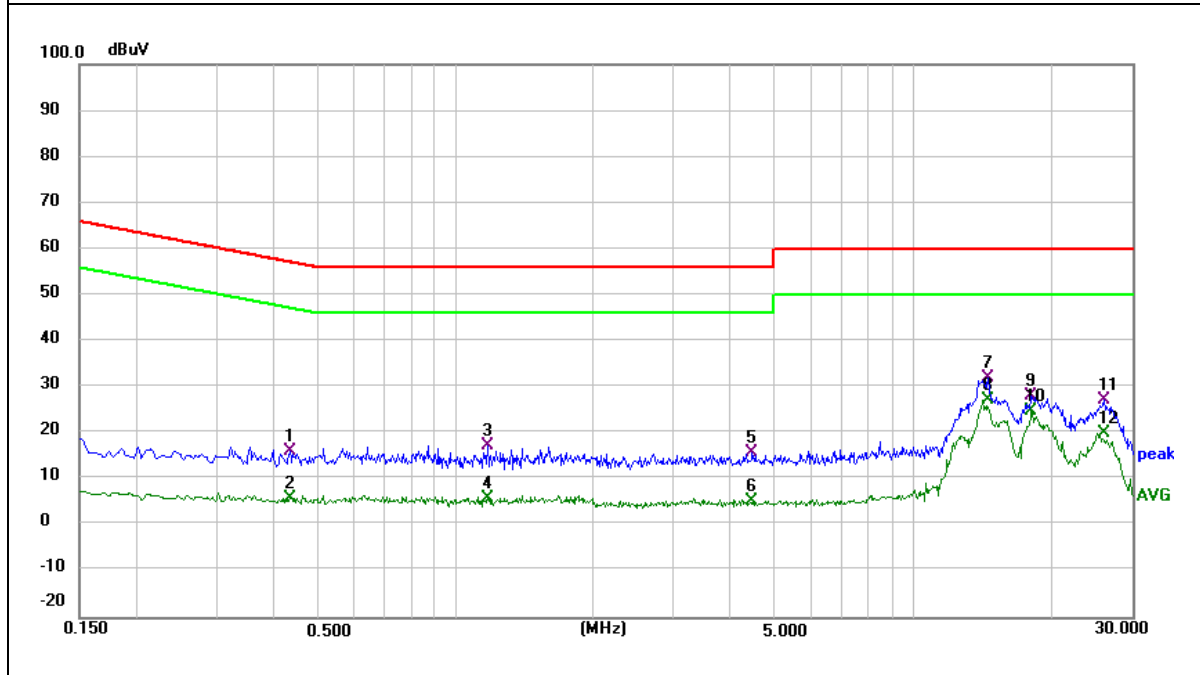


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.8G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.7780	7.09	11.20	18.29	56.00	-37.71	QP
0.7780	-3.06	11.20	8.14	46.00	-37.86	AVG
1.8580	5.53	13.40	18.93	56.00	-37.07	QP
1.8580	-5.19	13.40	8.21	46.00	-37.79	AVG
12.4860	21.34	9.80	31.14	60.00	-28.86	QP
12.4860	17.09	9.80	26.89	50.00	-23.11	AVG
13.8980	23.51	9.81	33.32	60.00	-26.68	QP
13.8980	17.35	9.81	27.16	50.00	-22.84	AVG
18.0100	20.60	9.87	30.47	60.00	-29.53	QP
18.0100	16.35	9.87	26.22	50.00	-23.78	AVG
26.4100	16.44	10.01	26.45	60.00	-33.55	QP
26.4100	8.77	10.01	18.78	50.00	-31.22	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

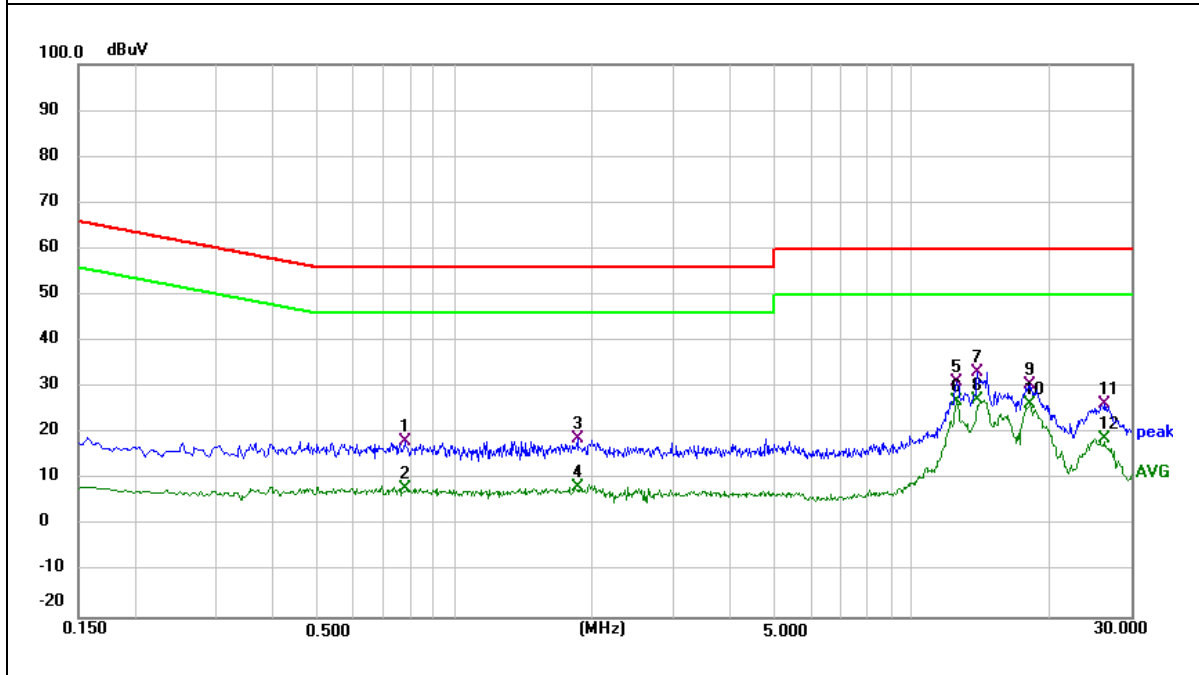


EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 3.3V from DC Power Supply AC 120V/60Hz	Test Mode:	Mode 1(5.8G WIFI)-ANT1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.7660	7.22	11.27	18.49	56.00	-37.51	QP
0.7660	-4.05	11.27	7.22	46.00	-38.78	AVG
2.1540	8.20	9.74	17.94	56.00	-38.06	QP
2.1540	-1.68	9.74	8.06	46.00	-37.94	AVG
13.5620	24.02	9.87	33.89	60.00	-26.11	QP
13.5620	18.57	9.87	28.44	50.00	-21.56	AVG
18.1060	18.13	9.93	28.06	60.00	-31.94	QP
18.1060	14.96	9.93	24.89	50.00	-25.11	AVG
20.6780	18.01	9.97	27.98	60.00	-32.02	QP
20.6780	8.90	9.97	18.87	50.00	-31.13	AVG
26.1540	15.37	10.04	25.41	60.00	-34.59	QP
26.1540	7.85	10.04	17.89	50.00	-32.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

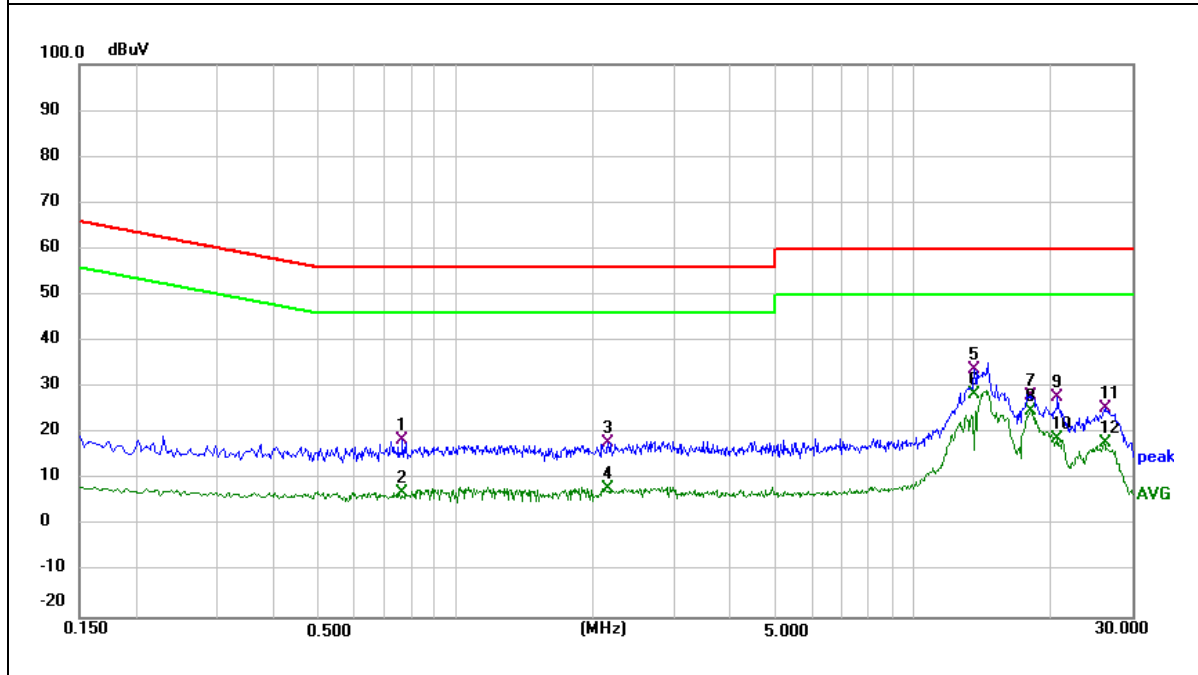

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407 (b) (9) (10) : radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark :1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. For Frequency 9kHz~30MHz:
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.
 For Frequency above 30MHz:
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

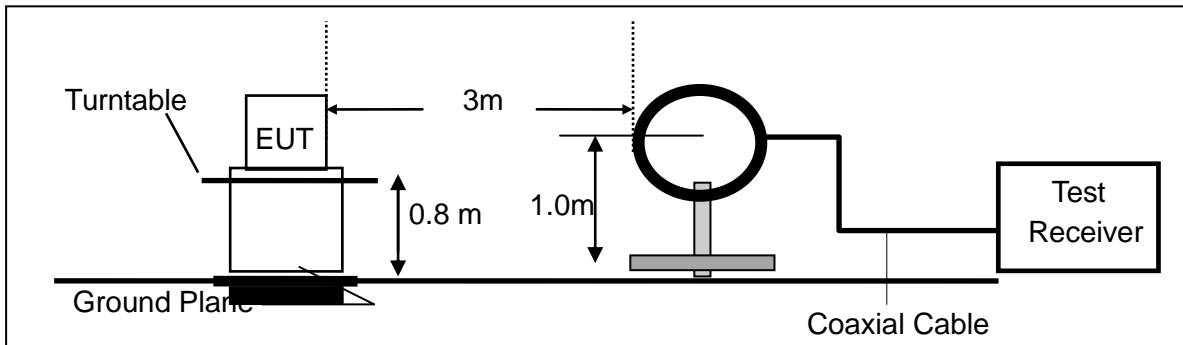

(b) For radiated emissions from 30MHz to 1000MHz

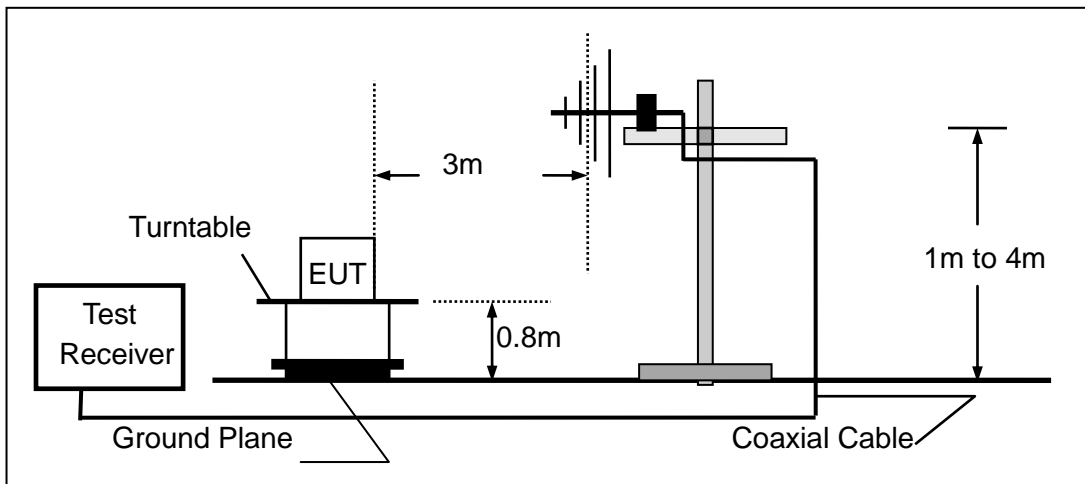

(c) For radiated emissions above 1000MHz

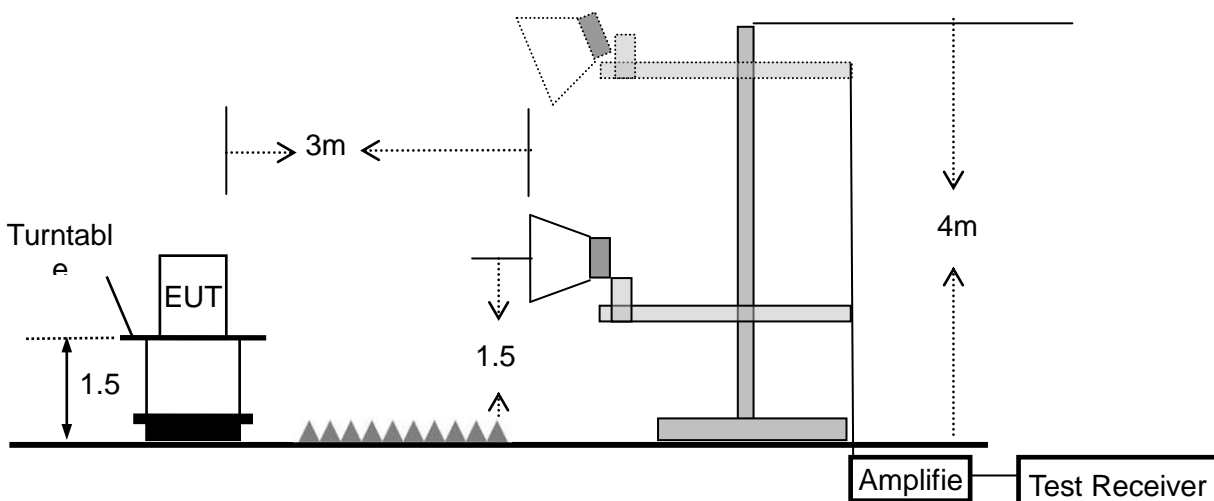

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 * \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.2G WIFI)- 802.11a-ANT1		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	53.8817	6.93	19.50	26.43	40.00	-13.57	QP
V	87.4175	10.80	15.09	25.89	40.00	-14.11	QP
V	250.3010	11.99	19.43	31.42	46.00	-14.58	QP
V	480.5276	9.38	24.26	33.64	46.00	-12.36	QP
V	625.0780	9.41	26.59	36.00	46.00	-10.00	QP
V	952.0937	6.51	31.37	37.88	46.00	-8.12	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

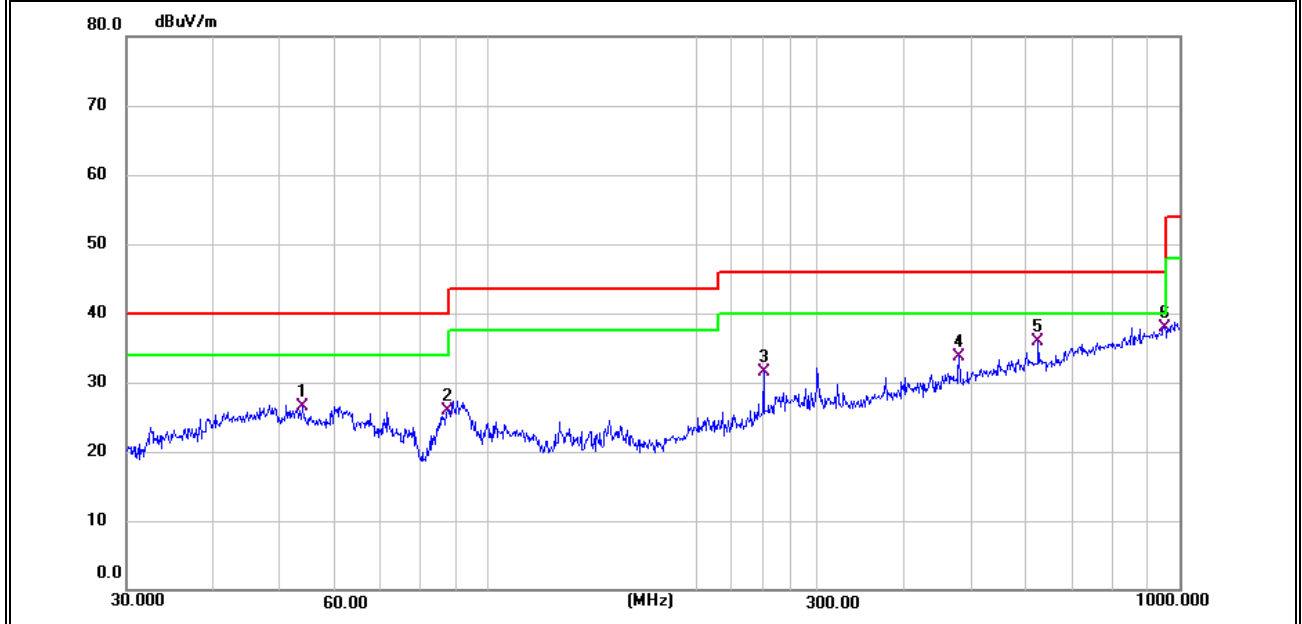

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	52.9453	6.21	19.50	25.71	40.00	-14.29	QP
H	143.8291	15.67	14.47	30.14	43.50	-13.36	QP
H	285.9777	14.07	20.13	34.20	46.00	-11.80	QP
H	776.8777	6.87	29.36	36.23	46.00	-9.77	QP
H	948.7610	7.71	31.34	39.05	46.00	-6.95	QP
H	52.9453	6.21	19.50	25.71	40.00	-14.29	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

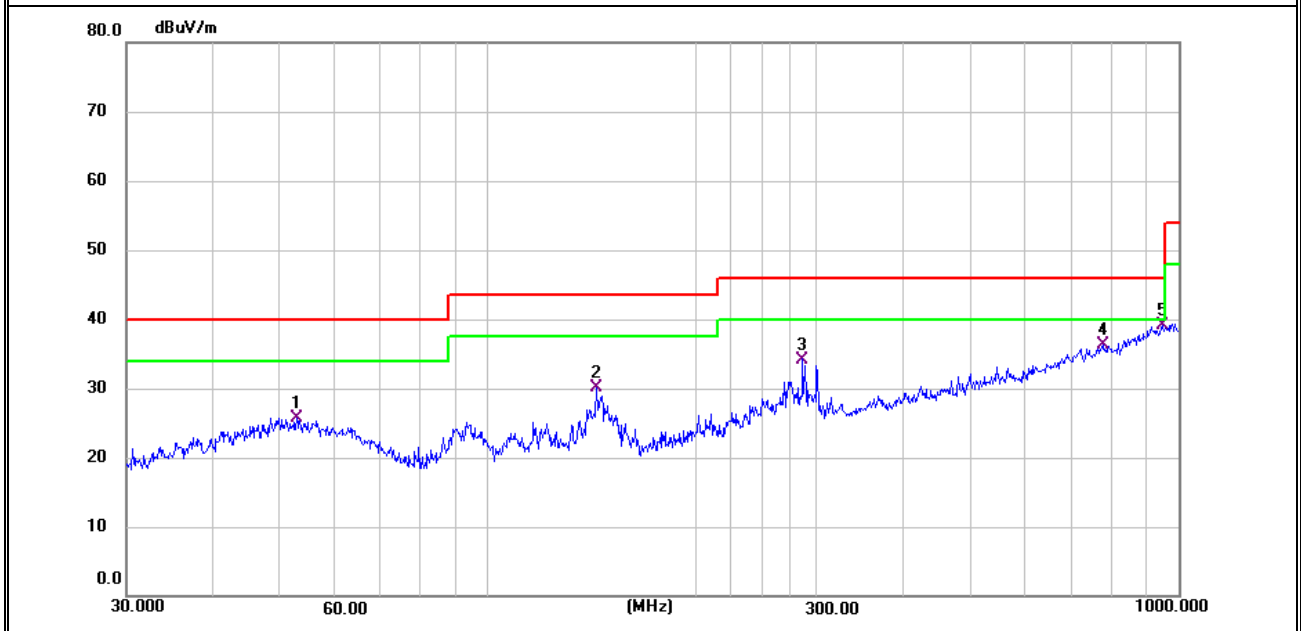


Note: All modes have been tested, just the worst mode has been recorded in the report.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX(5.3G WIFI)- 802.11a-ANT1		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	72.5913	12.72	15.14	27.86	40.00	-12.14	QP
V	87.4175	11.64	15.09	26.73	40.00	-13.27	QP
V	250.3010	9.99	19.43	29.42	46.00	-16.58	QP
V	480.5276	12.22	24.26	36.48	46.00	-9.52	QP
V	625.0780	11.33	26.59	37.92	46.00	-8.08	QP
V	875.2470	7.21	30.67	37.88	46.00	-8.12	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

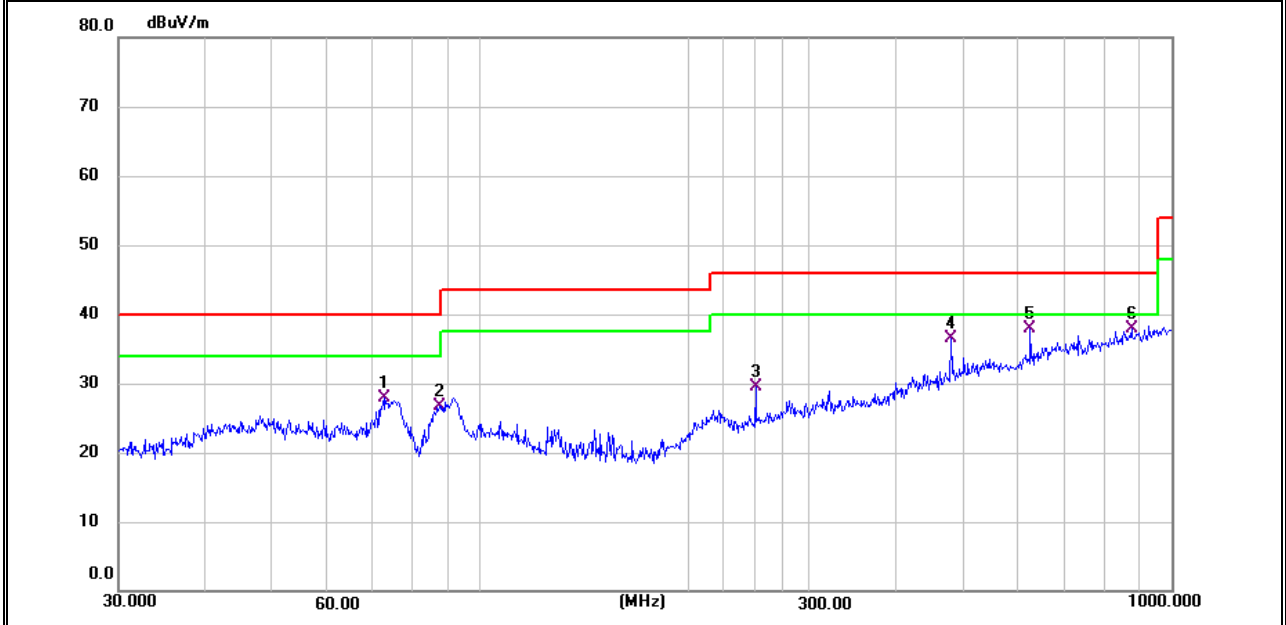

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	49.0144	6.15	19.77	25.92	40.00	-14.08	QP
H	87.1115	8.10	15.03	23.13	40.00	-16.87	QP
H	149.4857	16.78	14.60	31.38	43.50	-12.12	QP
H	255.6230	15.15	19.55	34.70	46.00	-11.30	QP
H	682.3482	7.30	28.04	35.34	46.00	-10.66	QP
H	912.8620	6.74	31.02	37.76	46.00	-8.24	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

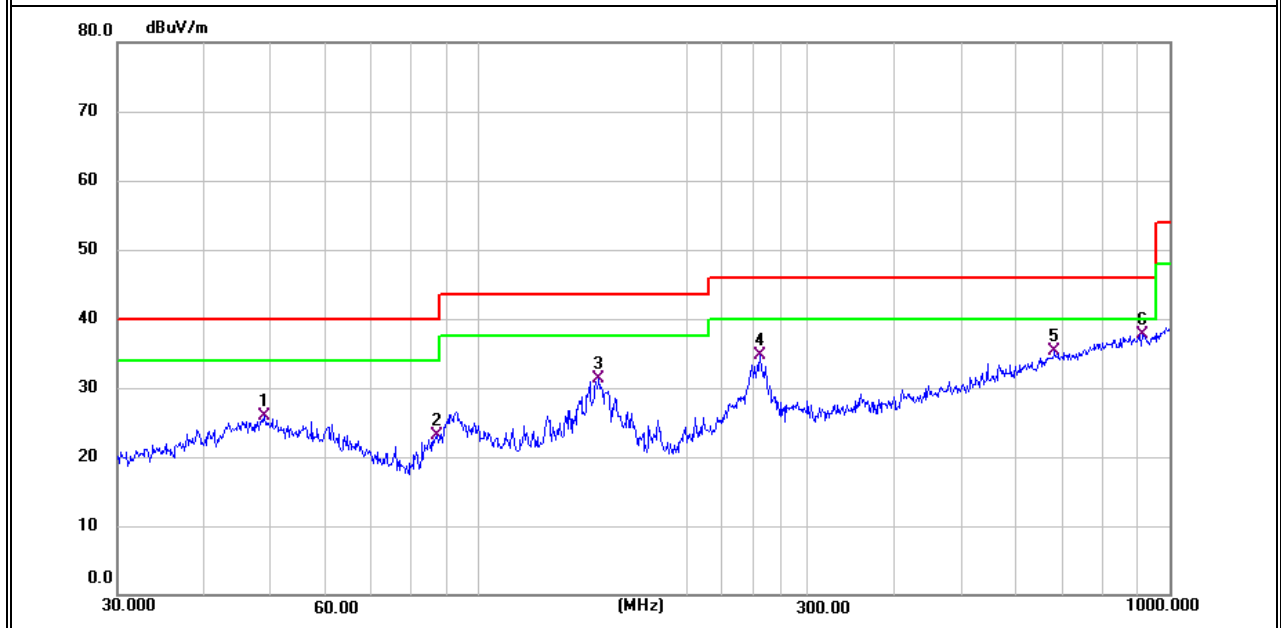


Note: All modes have been tested, just the worst mode has been recorded in the report.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.6G WIFI)- 802.11a-ANT1		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	48.3316	7.92	19.70	27.62	40.00	-12.38	QP
V	87.4175	11.80	15.09	26.89	40.00	-13.11	QP
V	250.3010	10.99	19.43	30.42	46.00	-15.58	QP
V	299.3158	12.68	20.43	33.11	46.00	-12.89	QP
V	625.0780	10.41	26.59	37.00	46.00	-9.00	QP
V	785.0932	6.12	29.54	35.66	46.00	-10.34	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

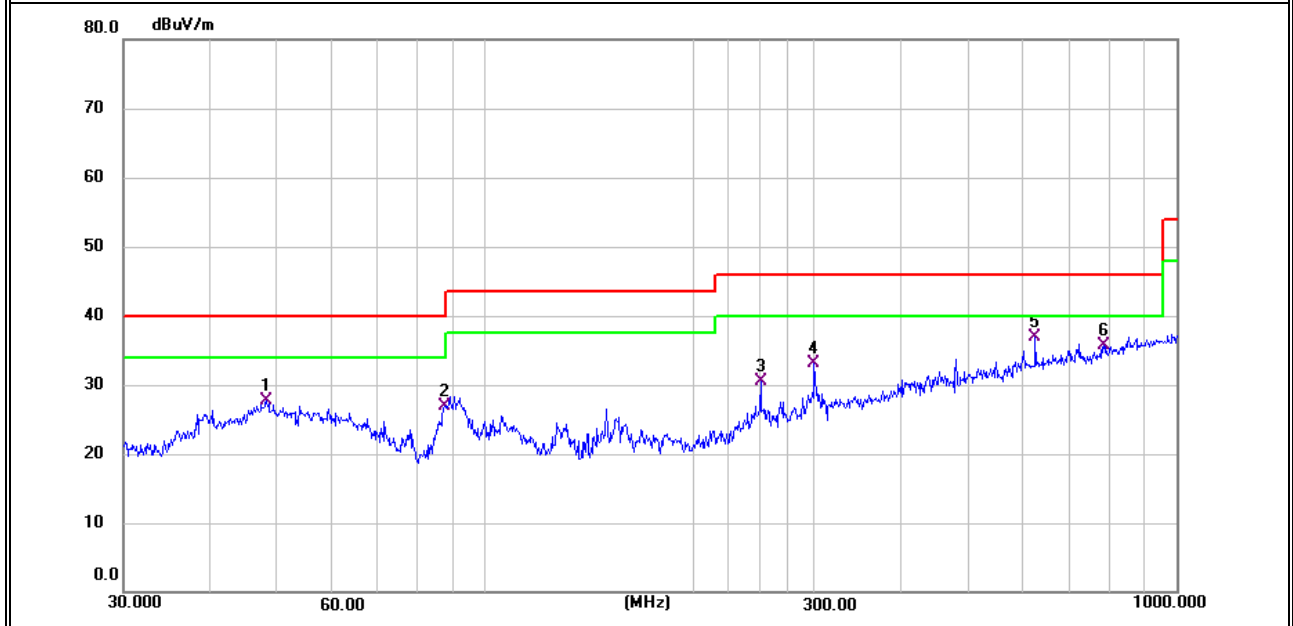

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	52.5752	6.54	19.50	26.04	40.00	-13.96	QP
H	93.1131	10.12	16.47	26.59	43.50	-16.91	QP
H	143.8291	17.17	14.47	31.64	43.50	-11.86	QP
H	285.9777	14.07	20.13	34.20	46.00	-11.80	QP
H	595.1326	6.83	26.15	32.98	46.00	-13.02	QP
H	912.8620	7.37	31.02	38.39	46.00	-7.61	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

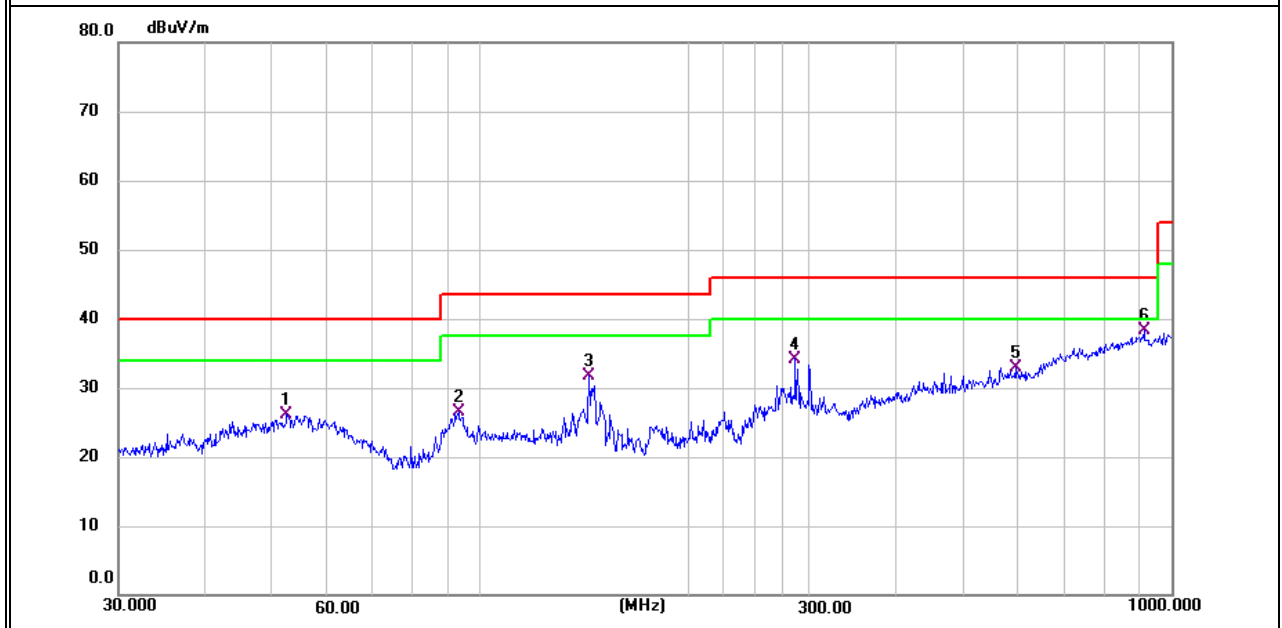


Note: All modes have been tested, just the worst mode has been recorded in the report.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.8G WIFI)- 802.11a -ANT1		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	48.3316	7.42	19.70	27.12	40.00	-12.88	QP
V	87.4175	10.80	15.09	25.89	40.00	-14.11	QP
V	250.3010	10.99	19.43	30.42	46.00	-15.58	QP
V	480.5276	9.38	24.26	33.64	46.00	-12.36	QP
V	625.0780	10.41	26.59	37.00	46.00	-9.00	QP
V	854.0247	6.93	30.42	37.35	46.00	-8.65	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

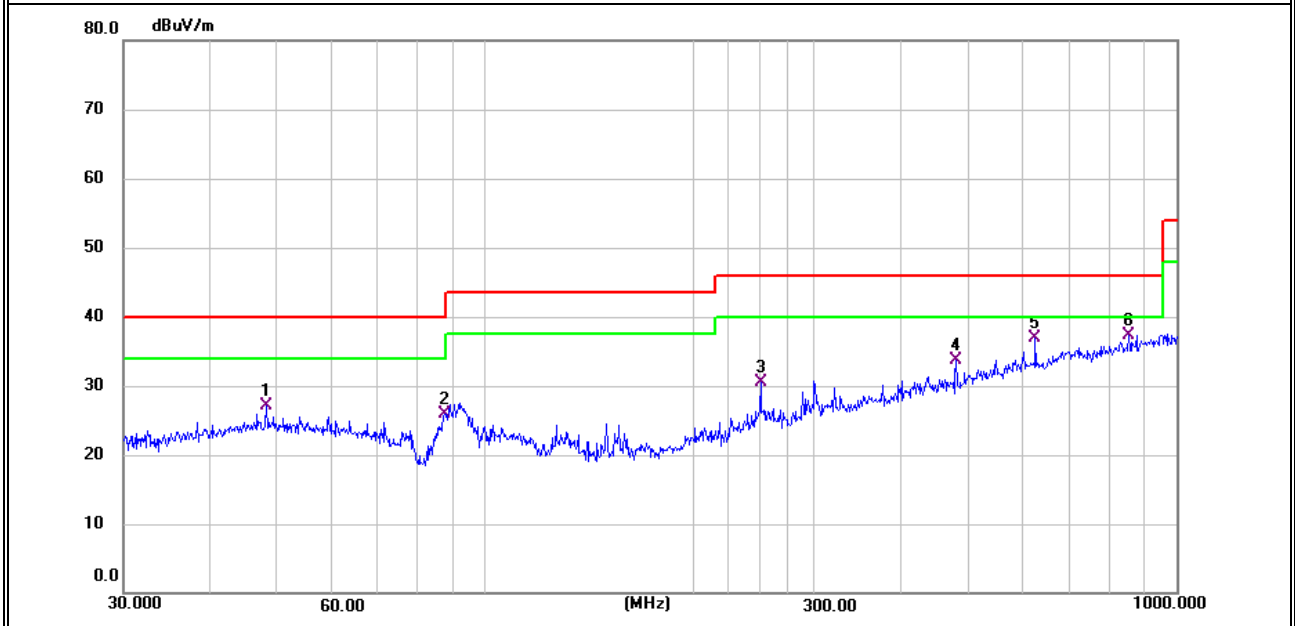

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	48.5015	6.90	19.72	26.62	40.00	-13.38	QP
H	93.1131	9.62	16.47	26.09	43.50	-17.41	QP
H	143.8291	16.67	14.47	31.14	43.50	-12.36	QP
H	285.9777	14.57	20.13	34.70	46.00	-11.30	QP
H	818.8340	6.68	29.88	36.56	46.00	-9.44	QP
H	912.8620	7.37	31.02	38.39	46.00	-7.61	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

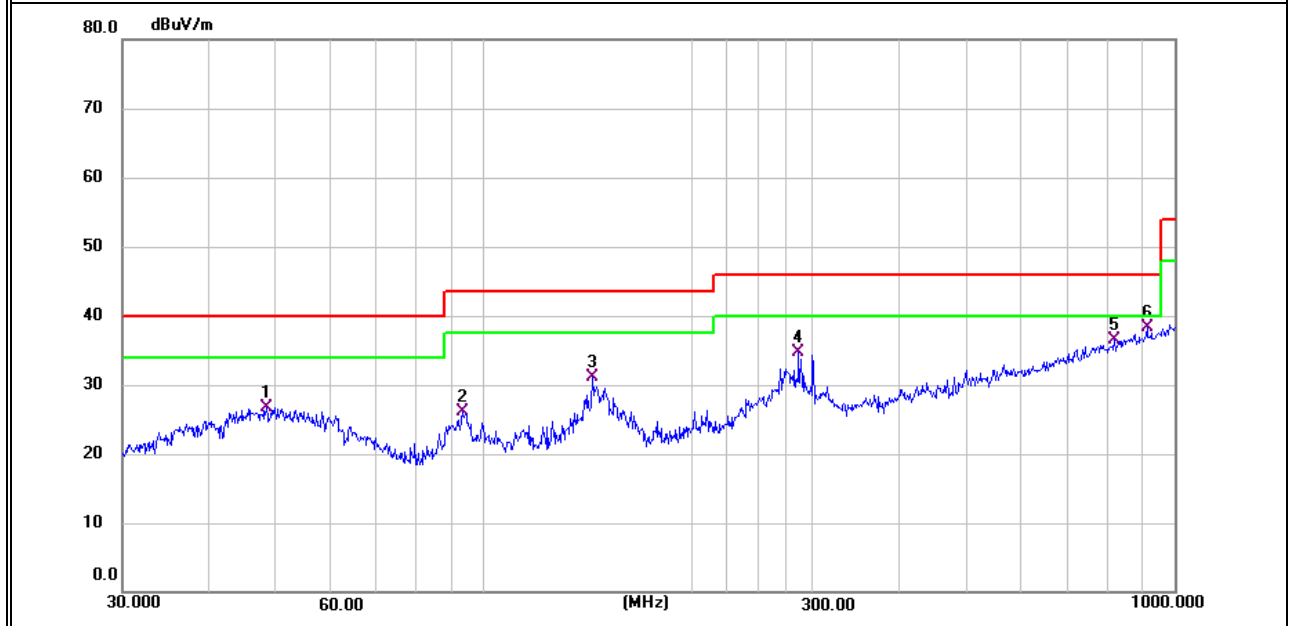

Note: All modes have been tested, just the worst mode has been recorded in the report.

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.2G-ANT1) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015	50.89	5.94	35.40	44.00	48.23	68.2	-19.97	Pk
Vertical	10360	58.72	8.46	39.75	44.50	62.43	68.2	-5.77	Pk
Vertical	15540	61.42	10.12	38.80	44.10	66.24	74	-7.76	Pk
Vertical	15540	43.89	10.12	38.80	42.70	50.11	54	-3.89	AV
Horizontal	2981	62.34	5.94	35.18	44.00	59.46	68.2	-8.74	Pk
Horizontal	10360	60.20	8.46	38.71	44.50	62.87	68.2	-5.33	Pk
Horizontal	15540	61.78	10.12	38.38	44.10	66.18	74	-7.82	Pk
Horizontal	15540	40.23	10.12	38.38	44.10	44.63	54	-9.37	AV
High Channel (5200 MHz)-Above 1G									
Vertical	3561	52.13	6.48	36.35	44.05	50.91	68.2	-17.29	Pk
Vertical	10400	60.77	8.47	37.88	44.51	62.61	68.2	-5.59	Pk
Vertical	15600	59.36	10.12	38.8	44.1	64.18	74	-9.82	Pk
Vertical	15600	42.65	10.12	38.8	42.7	48.87	54	-5.13	AV
Horizontal	3363	54.27	6.48	36.37	44.05	53.07	68.2	-15.13	Pk
Horizontal	10400	59.51	8.47	38.64	44.5	62.12	68.2	-6.08	Pk
Horizontal	15600	59.23	10.12	38.38	44.1	63.63	74	-10.37	Pk
Horizontal	15600	43.38	10.12	38.38	44.1	47.78	54	-6.22	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3926	52.66	7.1	37.24	43.5	53.50	74	-20.50	Pk
Vertical	3926	39.23	7.1	37.24	43.5	40.07	54	-13.93	AV
Vertical	10480	61.06	8.46	37.68	44.5	62.70	68.2	-5.50	Pk
Vertical	15720	57.10	10.12	38.8	44.1	61.92	74	-12.08	Pk
Vertical	15720	43.79	10.12	38.8	42.7	50.01	54	-3.99	AV
Horizontal	3885	54.84	7.1	37.24	43.5	55.68	74	-18.32	Pk
Horizontal	3885	41.78	7.1	37.24	43.5	42.62	54	-11.38	AV
Horizontal	10480	58.87	8.46	38.57	44.5	61.40	68.2	-6.80	Pk
Horizontal	15720	54.77	10.12	38.38	44.1	59.17	74	-14.83	Pk
Horizontal	15720	43.75	10.12	38.38	44.1	48.15	54	-5.85	AV

Note: "802.11a(5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record. The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.3G-ANT1) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.53	54.89	5.44	35.40	44.00	51.73	74.00	-22.27	Pk
Vertical	4633.53	39.85	5.74	35.40	44.00	36.99	54.00	-17.01	AV
Vertical	10520.40	60.89	8.26	39.75	44.50	64.40	68.20	-3.80	Pk
Vertical	15780.62	58.34	10.12	38.80	44.10	63.16	74.00	-10.84	Pk
Vertical	15780.62	38.39	9.62	38.80	42.70	44.11	54.00	-9.89	AV
Horizontal	4366.43	63.02	5.57	35.18	44.00	59.76	74.00	-14.24	Pk
Horizontal	4366.43	43.01	5.74	35.18	44.00	39.92	54.00	-14.08	AV
Horizontal	10520.54	58.79	8.38	38.71	44.50	61.38	68.20	-6.82	Pk
Horizontal	15780.62	56.63	9.88	38.38	44.10	60.79	74.00	-13.21	Pk
Horizontal	15780.62	39.15	9.94	38.38	44.10	43.37	54.00	-10.63	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4122.62	52.56	6.08	36.35	44.05	50.94	74.00	-23.06	Pk
Vertical	4122.62	40.46	6.39	36.35	44.05	39.15	54.00	-14.85	AV
Vertical	10560.47	59.59	8.28	37.88	44.51	61.24	68.20	-6.96	Pk
Vertical	15840.64	61.04	9.79	38.8	44.10	65.53	74.00	-8.47	Pk
Vertical	15840.64	38.79	9.70	38.8	42.70	44.59	54.00	-9.41	AV
Horizontal	3869.76	52.59	6.11	36.37	44.05	51.02	74.00	-22.98	Pk
Horizontal	3869.76	39.89	6.27	36.37	44.05	38.48	54.00	-15.52	AV
Horizontal	10561.02	60.48	8.33	38.64	44.50	62.95	68.20	-5.25	Pk
Horizontal	15840.65	59.22	9.99	38.38	44.10	63.49	74.00	-10.51	Pk
Horizontal	15840.65	39.14	9.81	38.38	44.10	43.23	54.00	-10.77	AV
Low Channel (5320 MHz)-Above 1G									
Vertical	5366.80	53.87	6.96	37.24	43.50	54.57	74.00	-19.43	Pk
Vertical	5366.80	32.86	7.07	37.24	43.50	33.67	54.00	-20.33	AV
Vertical	10640.86	60.74	8.14	37.68	44.50	62.06	74.00	-11.94	Pk
Vertical	10640.86	47.98	8.35	37.68	44.50	49.51	54.00	-4.49	AV
Vertical	15960.69	59.49	10.11	38.8	44.10	64.30	74.00	-9.70	Pk
Vertical	15960.69	44.26	9.64	38.8	42.70	50.00	54.00	-4.00	AV
Horizontal	5436.87	52.87	7.05	37.24	43.50	53.66	74.00	-20.34	Pk
Horizontal	5436.87	39.98	7.05	37.24	43.50	40.77	54.00	-13.23	AV
Horizontal	10640.52	59.81	8.20	38.57	44.50	62.08	74.00	-11.92	Pk
Horizontal	10640.52	43.25	8.03	38.57	44.50	45.35	54.00	-8.65	AV
Horizontal	15961.16	59.23	9.81	38.38	44.10	63.32	74.00	-10.68	Pk
Horizontal	15961.16	42.08	9.96	38.38	44.10	46.32	54.00	-7.68	AV

Note: ANT 1 802.11a(5.3G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.6G-ANT1) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5433.30	52.47	5.61	35.40	44.00	49.48	74.00	-24.52	Pk
Vertical	5433.30	39.98	5.61	35.40	44.00	36.99	54.00	-17.01	AV
Vertical	11020.32	56.98	8.24	39.75	44.50	60.48	74.00	-13.52	Pk
Vertical	11020.32	46.36	8.35	39.75	44.50	49.96	54.00	-4.04	AV
Vertical	16530.12	48.16	10.05	38.80	44.10	52.91	68.20	-15.29	Pk
Horizontal	5126.75	56.54	5.78	35.18	44.00	53.50	74.00	-20.50	Pk
Horizontal	5126.75	38.69	5.66	35.18	44.00	35.54	54.00	-18.46	AV
Horizontal	11020.32	55.41	8.22	38.71	44.50	57.85	74.00	-16.15	Pk
Horizontal	11020.32	37.92	8.14	38.71	44.50	40.27	54.00	-13.73	AV
Horizontal	16530.12	59.16	10.04	38.38	44.10	63.47	68.20	-4.73	Pk
Middle Channel (5600 MHz)-Above 1G									
Vertical	5647.61	53.78	6.79	37.24	43.50	54.31	68.20	-13.89	Pk
Vertical	11200.71	57.14	8.10	37.68	44.50	58.42	74.00	-15.58	Pk
Vertical	11200.71	39.28	8.23	37.68	44.50	40.69	54.00	-13.31	AV
Vertical	16770.00	59.71	9.70	38.80	44.10	64.11	68.20	-4.09	Pk
Horizontal	5433.54	58.50	6.74	37.24	43.50	58.99	74.00	-15.01	Pk
Horizontal	5433.54	40.12	6.74	37.24	43.50	40.60	54.00	-13.40	AV
Horizontal	11200.71	58.00	8.25	38.57	44.50	60.32	74.00	-13.68	Pk
Horizontal	11200.71	40.28	8.25	38.57	44.50	42.60	54.00	-11.40	AV
Horizontal	16770.00	58.82	10.09	38.38	44.10	63.18	68.20	-5.02	Pk
High Channel (5700 MHz)-Above 1G									
Vertical	5647.61	53.46	6.79	37.24	43.50	53.99	68.20	-14.21	Pk
Vertical	11340.54	57.85	8.10	37.68	44.50	59.13	74.00	-14.87	Pk
Vertical	11340.54	37.90	8.23	37.68	44.50	39.31	54.00	-14.69	AV
Vertical	17010.36	58.56	9.70	38.80	44.10	62.96	68.20	-5.24	Pk
Horizontal	5433.54	56.55	6.74	37.24	43.50	57.03	74.00	-16.97	Pk
Horizontal	5433.54	40.27	6.74	37.24	43.50	40.75	54.00	-13.25	AV
Horizontal	11340.54	58.27	8.25	38.57	44.50	60.59	74.00	-13.41	Pk
Horizontal	11340.54	39.68	8.25	38.57	44.50	42.00	54.00	-12.00	AV
Horizontal	17010.36	59.52	10.09	38.38	44.10	63.88	68.20	-4.32	Pk

Note: "802.11a(5.6G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record. The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.8G-ANT1) -- 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806.9	52.38	5.94	35.40	44.00	49.72	74.00	-24.28	Pk
Vertical	2806.9	40.89	5.94	35.40	44.00	38.23	54.00	-15.77	AV
Vertical	11490.56	60.16	8.46	39.75	44.50	63.87	74.00	-10.13	Pk
Vertical	11490.56	40.74	8.46	39.75	44.50	44.45	54.00	-9.55	AV
Vertical	17235.32	55.85	10.12	38.80	44.10	60.67	68.20	-7.53	Pk
Horizontal	2911.524	60.73	5.94	35.18	44.00	57.85	68.20	-10.35	Pk
Horizontal	11490.56	59.76	8.46	38.71	44.50	62.43	74.00	-11.57	Pk
Horizontal	11490.56	38.60	8.46	38.71	44.50	41.27	54.00	-12.73	AV
Horizontal	17235.56	56.69	10.12	38.38	44.10	61.09	68.20	-7.11	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763.083	52.90	6.48	36.35	44.05	51.68	74.00	-22.32	Pk
Vertical	3763.083	38.99	6.48	36.35	44.05	37.77	54.00	-16.23	AV
Vertical	11570.56	60.20	8.47	37.88	44.51	62.04	74.00	-11.96	Pk
Vertical	11570.56	41.00	8.47	37.88	44.51	42.84	54.00	-11.16	AV
Vertical	17355.56	55.33	10.12	38.8	44.10	60.15	68.20	-8.05	Pk
Horizontal	3561.585	58.50	6.48	36.37	44.05	57.30	68.20	-10.90	Pk
Horizontal	11570.56	56.33	8.47	38.64	44.50	58.94	74.00	-15.06	Pk
Horizontal	11570.56	40.59	8.47	38.64	44.50	43.20	54.00	-10.80	AV
Horizontal	17355.56	60.39	10.12	38.38	44.10	64.79	74.00	-9.21	Pk
Horizontal	17355.35	40.04	10.12	38.38	44.10	44.44	54.00	-9.56	AV
High Channel (5825 MHz)-Above 1G									
Vertical	3907.168	53.22	7.10	37.24	43.50	54.06	74.00	-19.94	Pk
Vertical	3907.168	40.13	7.10	37.24	43.50	40.97	54.00	-13.03	AV
Vertical	11650.54	57.77	8.46	37.68	44.50	59.41	74.00	-14.59	Pk
Vertical	11650.54	39.97	8.46	37.68	44.50	41.61	54.00	-12.39	AV
Vertical	17475.54	56.25	10.12	38.8	44.10	61.07	68.20	-7.13	Pk
Horizontal	3912.779	52.22	7.10	37.24	43.50	53.06	74.00	-20.94	Pk
Horizontal	3912.779	41.13	7.10	37.24	43.50	41.97	54.00	-12.03	AV
Horizontal	11650.54	58.51	8.46	38.57	44.50	61.04	74.00	-12.96	Pk
Horizontal	11650.54	39.83	8.46	38.57	44.50	42.36	54.00	-11.64	AV
Horizontal	17475.54	55.87	10.12	38.38	44.10	60.27	68.20	-7.93	Pk

Note: "802.11a (5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record. The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.2G-ANT2) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015	52.78	5.94	35.40	44.00	50.12	68.2	-18.08	Pk
Vertical	10360	58.62	8.46	39.75	44.50	62.33	68.2	-5.87	Pk
Vertical	15540	61.21	10.12	38.80	44.10	66.03	74	-7.97	Pk
Vertical	15540	44.73	10.12	38.80	42.70	50.95	54	-3.05	AV
Horizontal	2981	62.98	5.94	35.18	44.00	60.10	68.2	-8.10	Pk
Horizontal	10360	60.38	8.46	38.71	44.50	63.05	68.2	-5.15	Pk
Horizontal	15540	59.57	10.12	38.38	44.10	63.97	74	-10.03	Pk
Horizontal	15540	38.77	10.12	38.38	44.10	43.17	54	-10.83	AV
High Channel (5200 MHz)-Above 1G									
Vertical	3561	53.02	6.48	36.35	44.05	51.80	68.2	-16.40	Pk
Vertical	10400	61.11	8.47	37.88	44.51	62.95	68.2	-5.25	Pk
Vertical	15600	59.44	10.12	38.8	44.1	64.26	74	-9.74	Pk
Vertical	15600	43.76	10.12	38.8	42.7	49.98	54	-4.02	AV
Horizontal	3363	63.10	6.48	36.37	44.05	61.90	68.2	-6.30	Pk
Horizontal	10400	59.33	8.47	38.64	44.5	61.94	68.2	-6.26	Pk
Horizontal	15600	59.49	10.12	38.38	44.1	63.89	74	-10.11	Pk
Horizontal	15600	43.24	10.12	38.38	44.1	47.64	54	-6.36	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3926	53.26	7.1	37.24	43.5	54.10	74	-19.90	Pk
Vertical	3926	39.67	7.1	37.24	43.5	40.51	54	-13.49	AV
Vertical	10480	61.30	8.46	37.68	44.5	62.94	68.2	-5.26	Pk
Vertical	15720	57.86	10.12	38.8	44.1	62.68	74	-11.32	Pk
Vertical	15720	34.18	10.12	38.8	42.7	40.40	54	-13.60	AV
Horizontal	3885	65.55	7.1	37.24	43.5	66.39	74	-7.61	Pk
Horizontal	3885	40.28	7.1	37.24	43.5	41.12	54	-12.88	AV
Horizontal	10480	58.84	8.46	38.57	44.5	61.37	68.2	-6.83	Pk
Horizontal	15720	59.70	10.12	38.38	44.1	64.10	74	-9.90	Pk
Horizontal	15720	40.34	10.12	38.38	44.1	44.74	54	-9.26	AV

Note: "802.11a(5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record. The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.3G-ANT2) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.53	52.36	5.44	35.40	44.00	49.21	74.00	-24.79	Pk
Vertical	4633.53	40.23	5.74	35.40	44.00	37.37	54.00	-16.63	AV
Vertical	10520.40	59.67	8.26	39.75	44.50	63.19	68.20	-5.01	Pk
Vertical	15780.62	54.39	10.12	38.80	44.10	59.20	74.00	-14.80	Pk
Vertical	15780.62	42.00	9.62	38.80	42.70	47.72	54.00	-6.28	AV
Horizontal	4366.43	63.26	5.57	35.18	44.00	60.00	74.00	-14.00	Pk
Horizontal	4366.43	43.32	5.74	35.18	44.00	40.24	54.00	-13.76	AV
Horizontal	10520.54	58.76	8.38	38.71	44.50	61.36	68.20	-6.84	Pk
Horizontal	15780.62	56.24	9.88	38.38	44.10	60.40	74.00	-13.60	Pk
Horizontal	15780.62	39.93	9.94	38.38	44.10	44.15	54.00	-9.85	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4122.62	52.00	6.08	36.35	44.05	50.38	74.00	-23.62	Pk
Vertical	4122.62	40.84	6.39	36.35	44.05	39.53	54.00	-14.47	AV
Vertical	10560.47	57.22	8.28	37.88	44.51	58.87	68.20	-9.33	Pk
Vertical	15840.64	60.20	9.79	38.8	44.10	64.69	74.00	-9.31	Pk
Vertical	15840.64	38.65	9.70	38.8	42.70	44.45	54.00	-9.55	AV
Horizontal	3869.76	57.49	6.11	36.37	44.05	55.92	74.00	-18.08	Pk
Horizontal	3869.76	44.39	6.27	36.37	44.05	42.98	54.00	-11.02	AV
Horizontal	10561.02	60.61	8.33	38.64	44.50	63.08	68.20	-5.12	Pk
Horizontal	15840.65	59.08	9.99	38.38	44.10	63.35	74.00	-10.65	Pk
Horizontal	15840.65	39.32	9.81	38.38	44.10	43.41	54.00	-10.59	AV
Low Channel (5320 MHz)-Above 1G									
Vertical	5366.80	52.57	6.96	37.24	43.50	53.27	74.00	-20.73	Pk
Vertical	5366.80	39.24	7.07	37.24	43.50	40.05	54.00	-13.95	AV
Vertical	10640.86	59.98	8.14	37.68	44.50	61.30	74.00	-12.70	Pk
Vertical	10640.86	39.24	8.35	37.68	44.50	40.78	54.00	-13.22	AV
Vertical	15960.69	59.98	10.11	38.8	44.10	64.79	74.00	-9.21	Pk
Vertical	15960.69	36.74	9.64	38.8	42.70	42.49	54.00	-11.51	AV
Horizontal	5436.87	60.62	7.05	37.24	43.50	61.41	74.00	-12.59	Pk
Horizontal	5436.87	40.27	7.05	37.24	43.50	41.06	54.00	-12.94	AV
Horizontal	10640.52	59.28	8.20	38.57	44.50	61.54	74.00	-12.46	Pk
Horizontal	10640.52	48.23	8.03	38.57	44.50	50.33	54.00	-3.67	AV
Horizontal	15961.16	59.17	9.81	38.38	44.10	63.26	74.00	-10.74	Pk
Horizontal	15961.16	42.70	9.96	38.38	44.10	46.94	54.00	-7.06	AV

Note: ANT 1 802.11a(5.3G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX(5.6G-ANT2) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5433.30	54.18	5.61	35.40	44.00	51.19	74.00	-22.81	Pk
Vertical	5433.30	41.67	5.61	35.40	44.00	38.68	54.00	-15.32	AV
Vertical	11020.32	57.28	8.24	39.75	44.50	60.77	74.00	-13.23	Pk
Vertical	11020.32	47.96	8.35	39.75	44.50	51.56	54.00	-2.44	AV
Vertical	16530.12	48.08	10.05	38.80	44.10	52.83	68.20	-15.37	Pk
Horizontal	5126.75	56.83	5.78	35.18	44.00	53.79	74.00	-20.21	Pk
Horizontal	5126.75	39.24	5.66	35.18	44.00	36.08	54.00	-17.92	AV
Horizontal	11020.32	55.36	8.22	38.71	44.50	57.79	74.00	-16.21	Pk
Horizontal	11020.32	45.77	8.14	38.71	44.50	48.12	54.00	-5.88	AV
Horizontal	16530.12	59.81	10.04	38.38	44.10	64.13	68.20	-4.07	Pk
Middle Channel (5600 MHz)-Above 1G									
Vertical	5647.61	54.26	6.79	37.24	43.50	54.79	68.20	-13.41	Pk
Vertical	11200.71	57.56	8.10	37.68	44.50	58.84	74.00	-15.16	Pk
Vertical	11200.71	43.57	8.23	37.68	44.50	44.98	54.00	-9.02	AV
Vertical	16770.00	58.80	9.70	38.80	44.10	63.20	68.20	-5.00	Pk
Horizontal	5433.54	53.22	6.74	37.24	43.50	53.70	74.00	-20.30	Pk
Horizontal	5433.54	40.13	6.74	37.24	43.50	40.61	54.00	-13.39	AV
Horizontal	11200.71	58.39	8.25	38.57	44.50	60.71	74.00	-13.29	Pk
Horizontal	11200.71	45.53	8.25	38.57	44.50	47.85	54.00	-6.15	AV
Horizontal	16770.00	58.94	10.09	38.38	44.10	63.31	68.20	-4.89	Pk
High Channel (5700 MHz)-Above 1G									
Vertical	5647.61	54.28	6.79	37.24	43.50	54.81	68.20	-13.39	Pk
Vertical	11340.54	58.23	8.10	37.68	44.50	59.51	74.00	-14.49	Pk
Vertical	11340.54	38.62	8.23	37.68	44.50	40.03	54.00	-13.97	AV
Vertical	17010.36	58.78	9.70	38.80	44.10	63.18	68.20	-5.02	Pk
Horizontal	5433.54	53.96	6.74	37.24	43.50	54.44	74.00	-19.56	Pk
Horizontal	5433.54	42.67	6.74	37.24	43.50	43.15	54.00	-10.85	AV
Horizontal	11340.54	57.76	8.25	38.57	44.50	60.08	74.00	-13.92	Pk
Horizontal	11340.54	39.24	8.25	38.57	44.50	41.56	54.00	-12.44	AV
Horizontal	17010.36	59.39	10.09	38.38	44.10	63.76	68.20	-4.44	Pk

Note: "802.11a(5.6G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record. The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.8G-ANT2) - 802.11a		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806.9	54.57	5.94	35.40	44.00	51.91	74.00	-22.09	Pk
Vertical	2806.9	42.68	5.94	35.40	44.00	40.02	54.00	-13.98	AV
Vertical	11490.56	60.01	8.46	39.75	44.50	63.72	74.00	-10.28	Pk
Vertical	11490.56	45.42	8.46	39.75	44.50	49.13	54.00	-4.87	AV
Vertical	17235.32	55.90	10.12	38.80	44.10	60.72	68.20	-7.48	Pk
Horizontal	2911.524	60.87	5.94	35.18	44.00	57.99	68.20	-10.21	Pk
Horizontal	11490.56	59.69	8.46	38.71	44.50	62.36	74.00	-11.64	Pk
Horizontal	11490.56	43.67	8.46	38.71	44.50	46.34	54.00	-7.66	AV
Horizontal	17235.56	56.78	10.12	38.38	44.10	61.18	68.20	-7.02	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763.083	53.57	6.48	36.35	44.05	52.35	74.00	-21.65	Pk
Vertical	3763.083	42.46	6.48	36.35	44.05	41.24	54.00	-12.76	AV
Vertical	11570.56	61.36	8.47	37.88	44.51	63.20	74.00	-10.80	Pk
Vertical	11570.56	45.87	8.47	37.88	44.51	47.71	54.00	-6.29	AV
Vertical	17355.56	55.56	10.12	38.8	44.10	60.38	68.20	-7.82	Pk
Horizontal	3561.585	53.22	6.48	36.37	44.05	52.02	68.20	-16.18	Pk
Horizontal	11570.56	56.15	8.47	38.64	44.50	58.76	74.00	-15.24	Pk
Horizontal	11570.56	40.82	8.47	38.64	44.50	43.43	54.00	-10.57	AV
Horizontal	17355.56	60.22	10.12	38.38	44.10	64.62	74.00	-9.38	Pk
Horizontal	17355.35	43.38	10.12	38.38	44.10	47.78	54.00	-6.22	AV
High Channel (5825 MHz)-Above 1G									
Vertical	3907.168	52.58	7.10	37.24	43.50	53.42	74.00	-20.58	Pk
Vertical	3907.168	42.77	7.10	37.24	43.50	43.61	54.00	-10.39	AV
Vertical	11650.54	57.83	8.46	37.68	44.50	59.47	74.00	-14.53	Pk
Vertical	11650.54	43.75	8.46	37.68	44.50	45.39	54.00	-8.61	AV
Vertical	17475.54	56.14	10.12	38.8	44.10	60.96	68.20	-7.24	Pk
Horizontal	3912.779	53.78	7.10	37.24	43.50	54.62	74.00	-19.38	Pk
Horizontal	3912.779	41.73	7.10	37.24	43.50	42.57	54.00	-11.43	AV
Horizontal	11650.54	58.57	8.46	38.57	44.50	61.10	74.00	-12.90	Pk
Horizontal	11650.54	42.89	8.46	38.57	44.50	45.42	54.00	-8.58	AV
Horizontal	17475.54	56.06	10.12	38.38	44.10	60.46	68.20	-7.74	Pk


Note: "802.11a (5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.
 The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

2.2.10 TEST RESULTS (18GHz-40GHz)

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.2G -ANT1)-802.11a ; TX (5.3G -ANT1)-802.11a; TX (5.6G -ANT1)-802.11a;TX (5.8G -ANT1)-802.11a		


All the modulation modes have been tested, and the worst result was report as below:
Low Channel (5180 MHz)-Above 1G

Horizontal

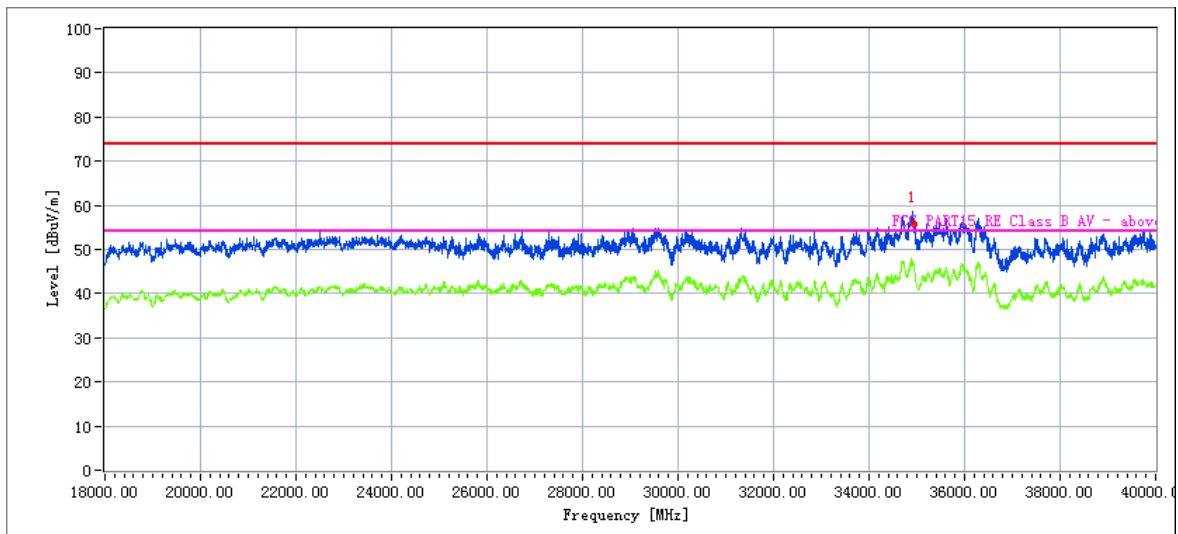

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39769.27	33.82	20.09	44.07	43.48	54.5	68.2	-13.7	Peak


Vertical

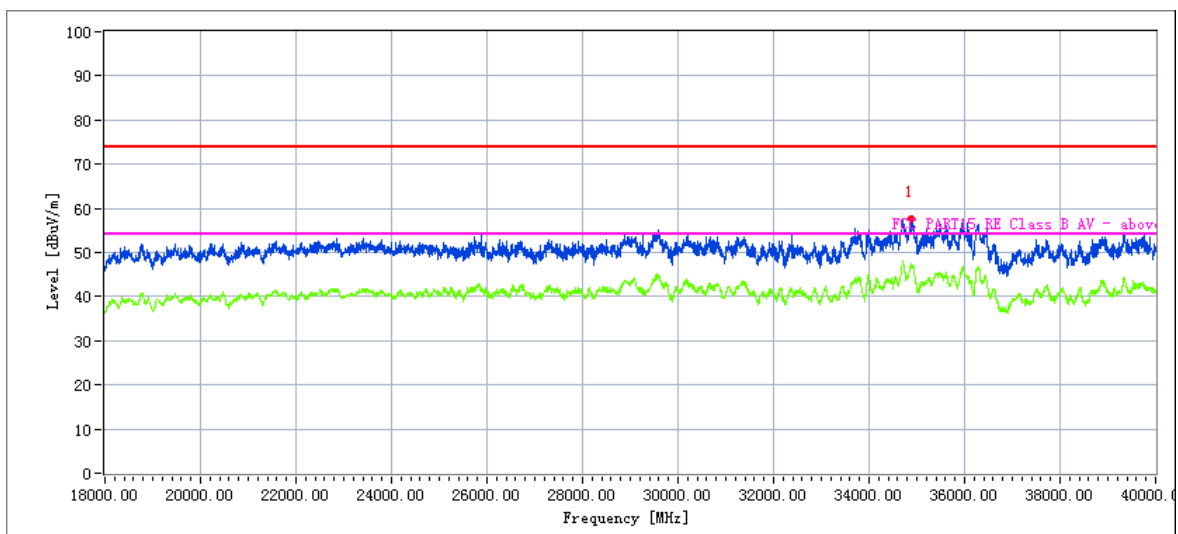

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39769.546	35.92	20.09	44.07	43.48	56.6	68.2	-11.6	Peak


High Channel (5240 MHz)-Above 1G

Horizontal

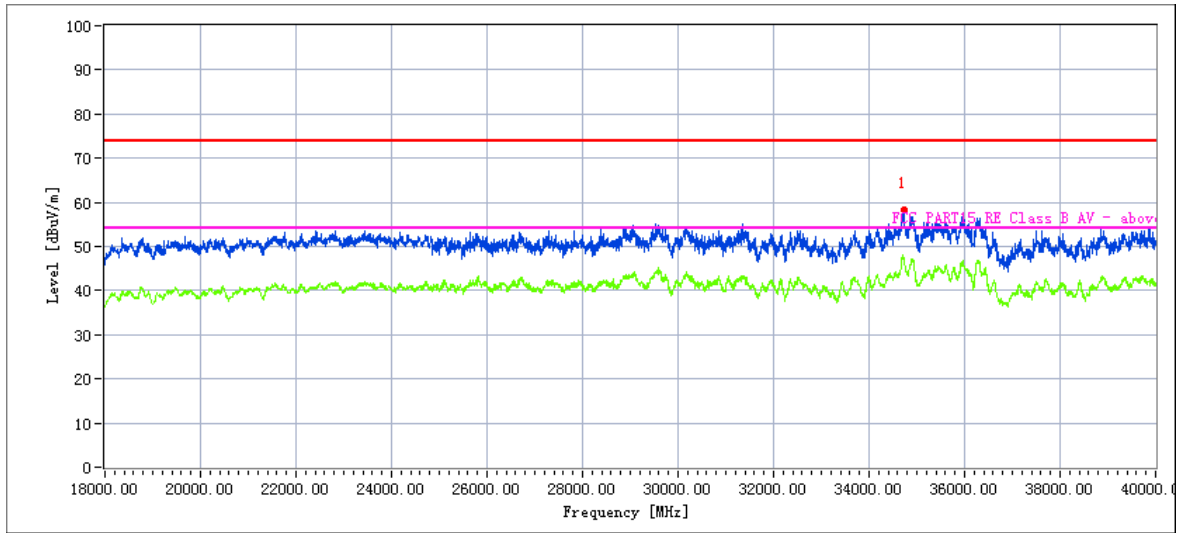

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
35628.37	38.37	19.11	42.73	44.61	55.6	68.2	-12.6	Peak

Vertical

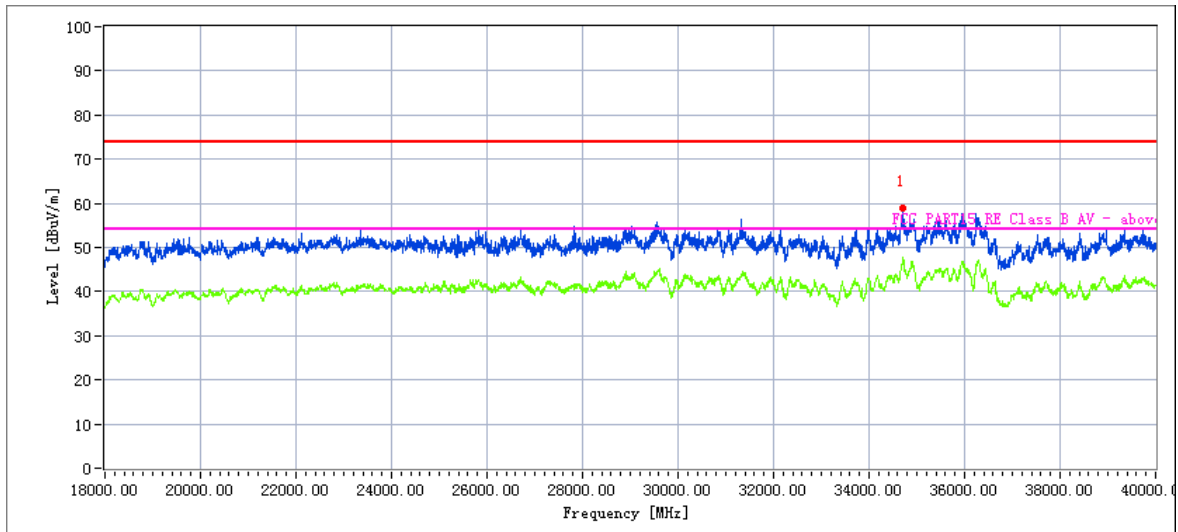


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39769.476	35.42	20.09	44.07	43.48	56.1	68.2	-12.1	Peak

Note:802.11a mode is the worst mode.


Low Channel (5260 MHz)-Above 1G

Horizontal

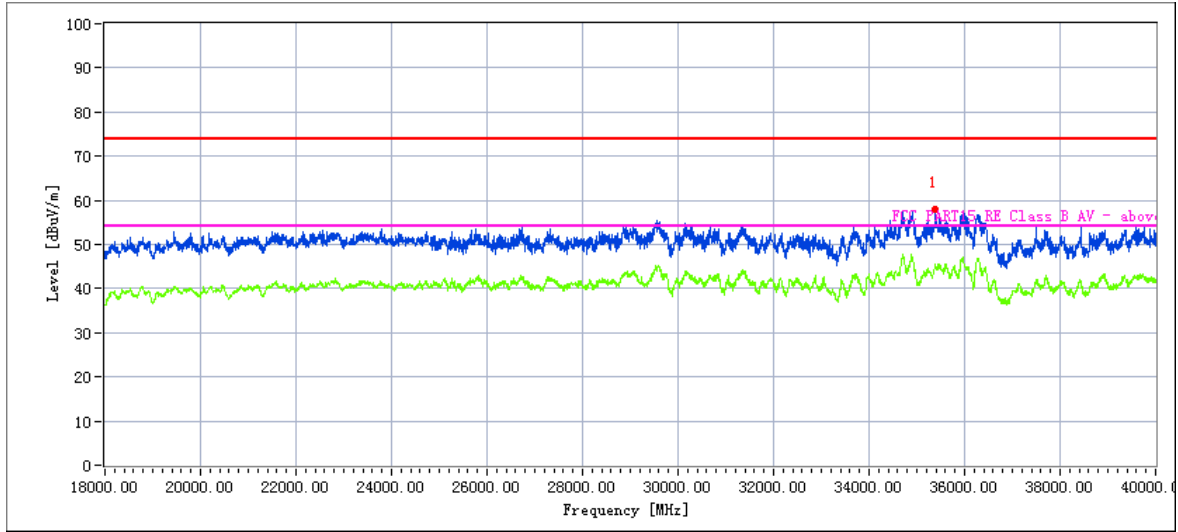

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39176.23	38.35	19.98	43.84	44.62	56.6	68.2	-11.6	Peak


Vertical

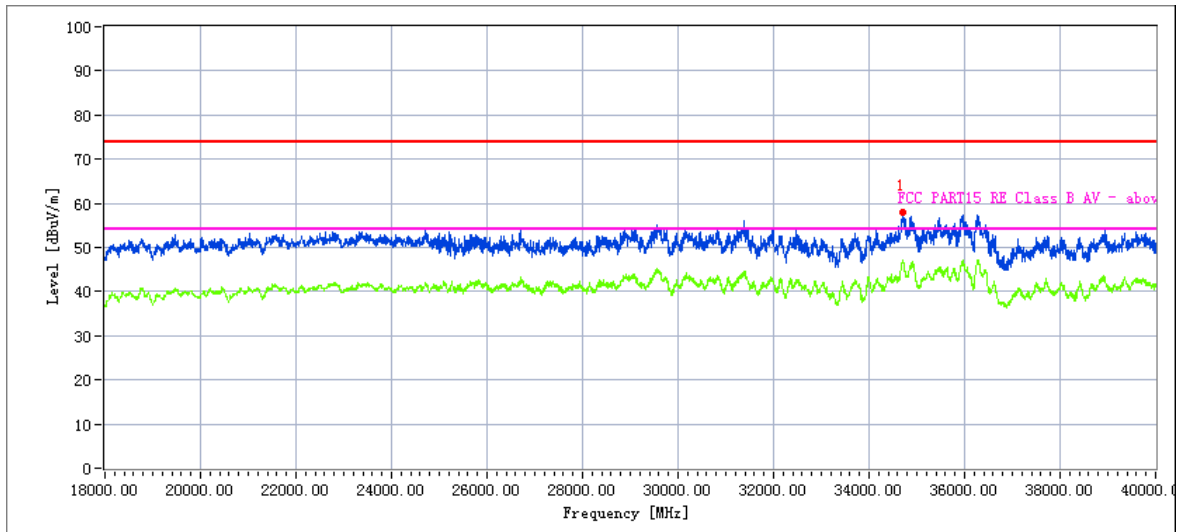

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39385.84	26.02	20.01	44.06	42.69	47.4	68.2	-20.8	Peak


High Channel (5320 MHz)-Above 1G

Horizontal

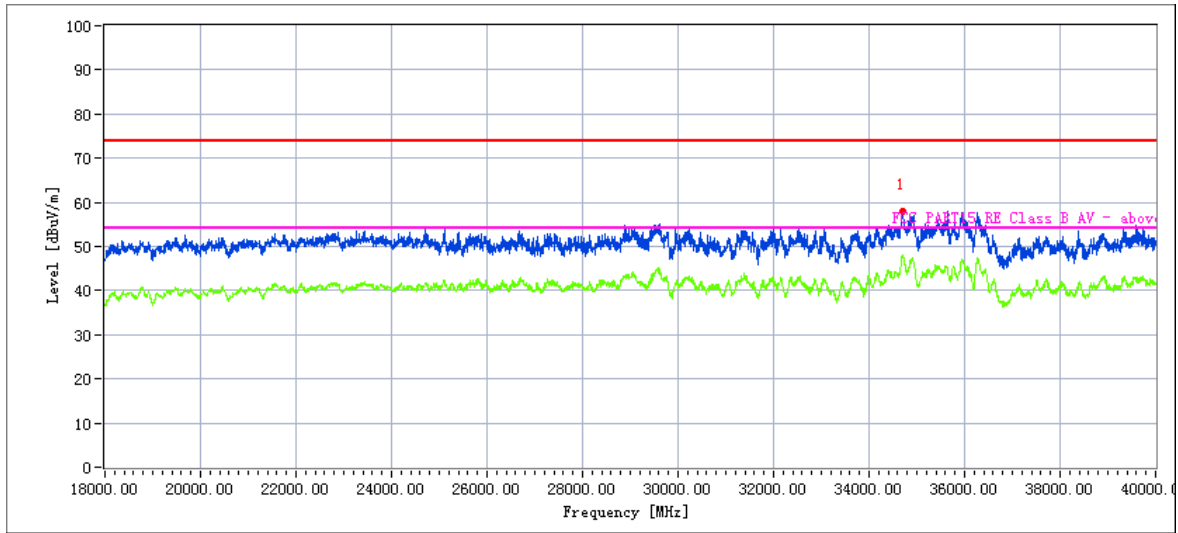

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39176.94	26.6	19.98	43.84	44.62	45.8	68.2	-22.4	Peak

Vertical

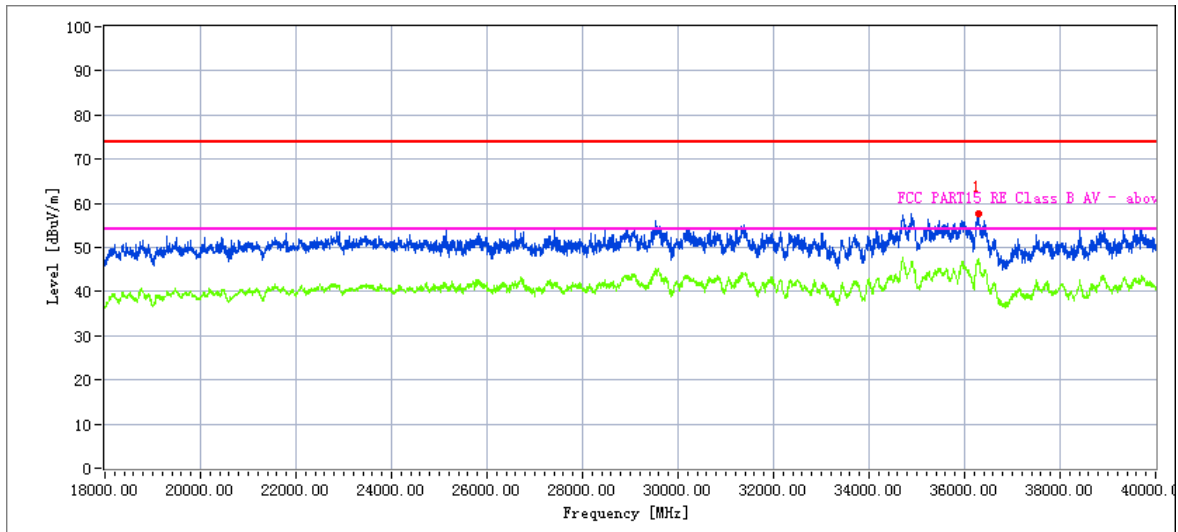


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39369.174	27.12	20.01	44.06	42.69	48.5	68.2	-19.7	Peak

Note:802.11a mode is the worst mode.


Low Channel (5500 MHz)-Above 1G

Horizontal

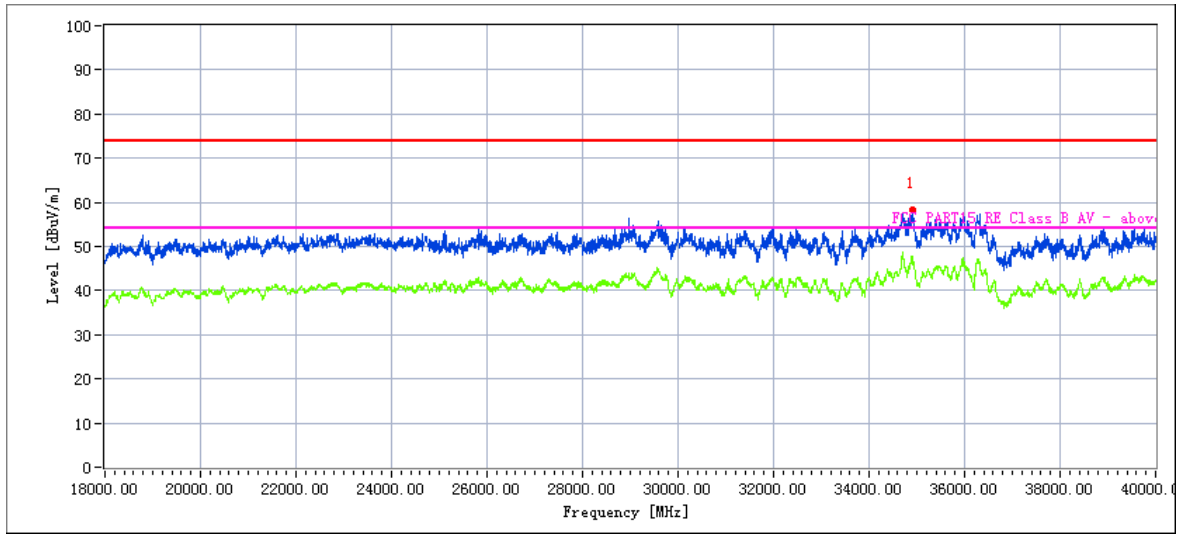

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39696.437	26.82	20.09	44.07	43.48	47.5	68.2	-20.7	Peak


Vertical

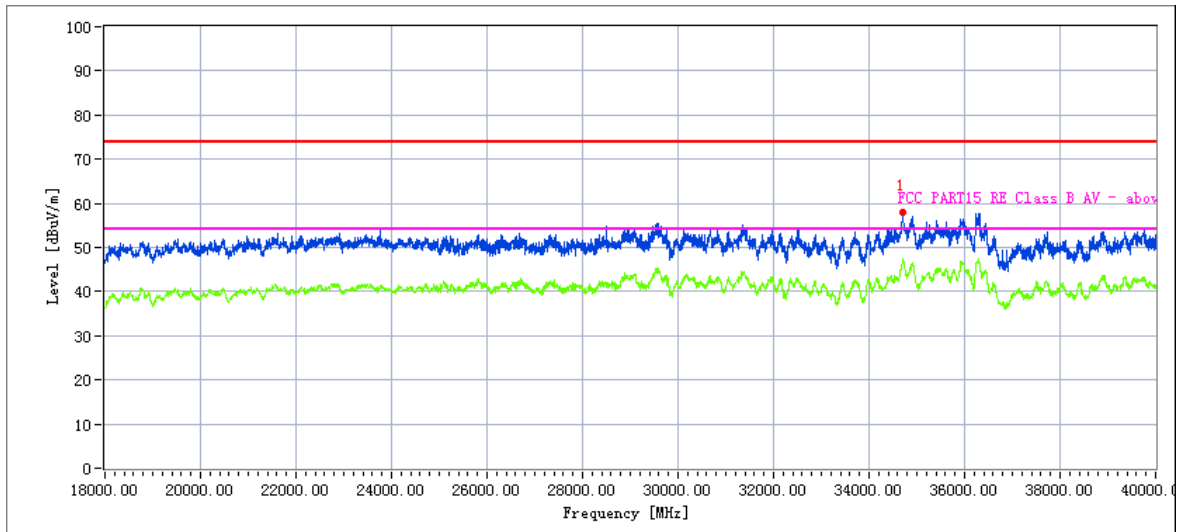

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
36575.641	37.29	19.16	42.61	41.56	57.5	68.2	-10.7	Peak


High Channel (5700 MHz)-Above 1G

Horizontal

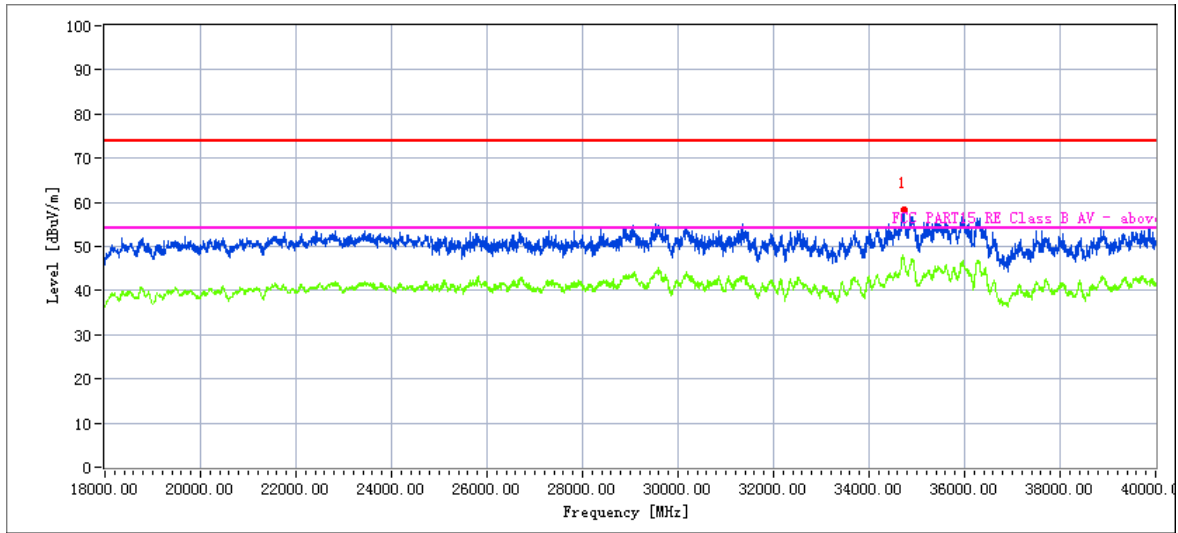

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
35794.5	28.84	19.17	42.63	42.74	47.9	68.2	-20.3	Peak

Vertical

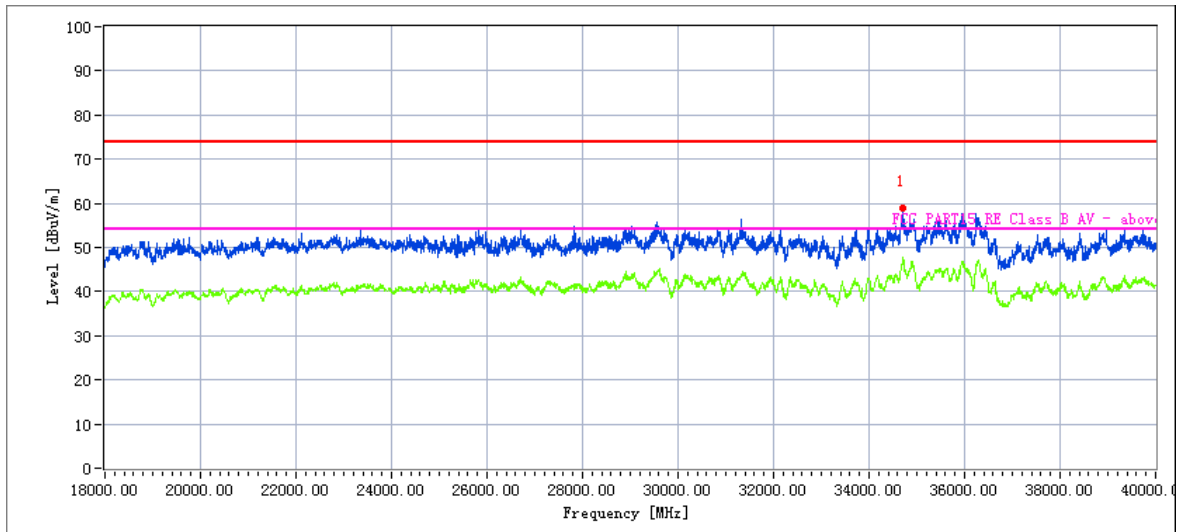


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39816.733	36.86	20.09	42.63	43.48	56.1	68.2	-12.1	Peak

Note:802.11a mode is the worst mode.


Low Channel (5745 MHz)-Above 1G

Horizontal

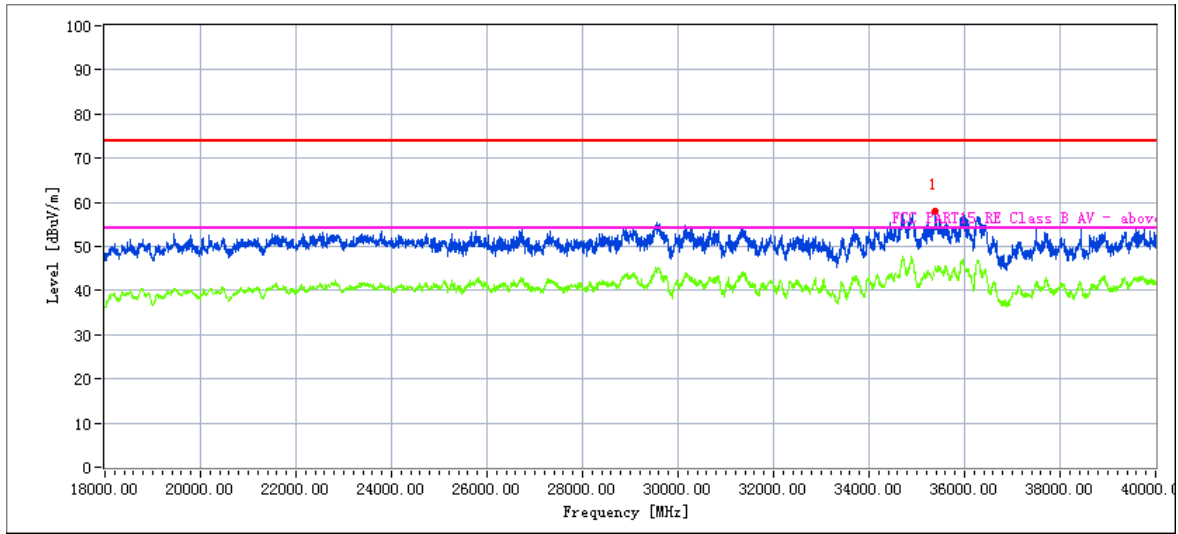

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39670.224	33.43	20.09	44.16	43.48	54.2	68.2	-14.00	Peak


Vertical

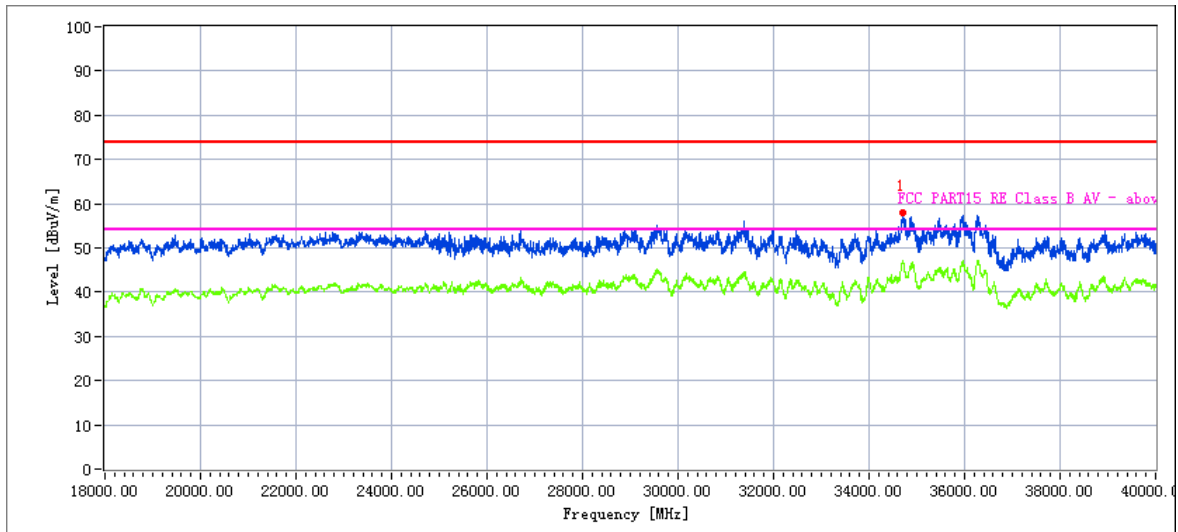

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39731.342	26.58	20.06	44.07	43.21	47.5	68.2	-20.7	Peak


High Channel (5825 MHz)-Above 1G

Horizontal

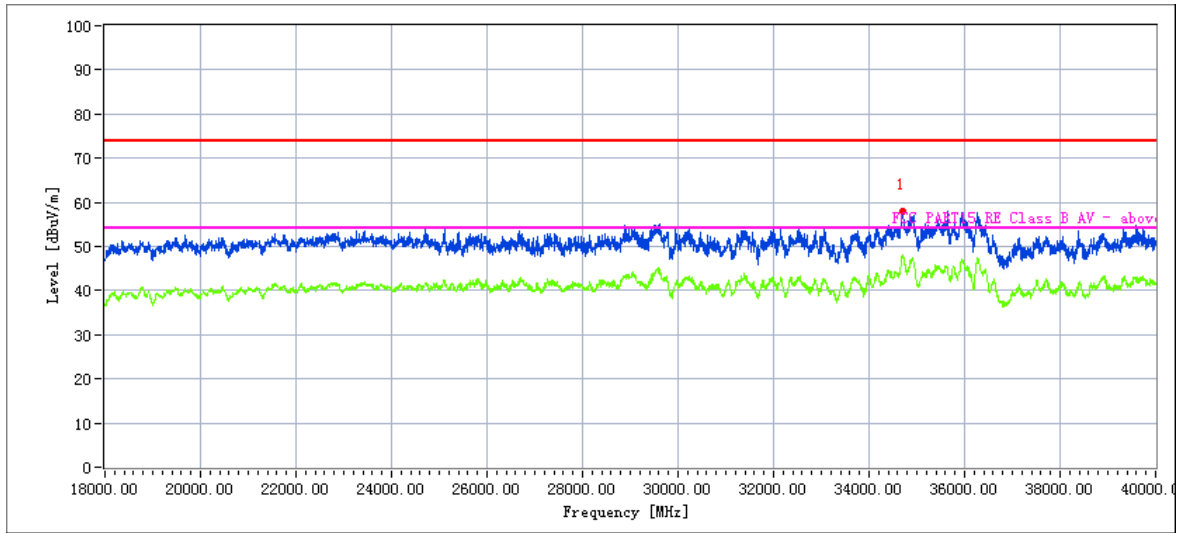

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
35628.534	38.84	19.11	42.63	43.48	57.1	68.2	-11.1	Peak

Vertical

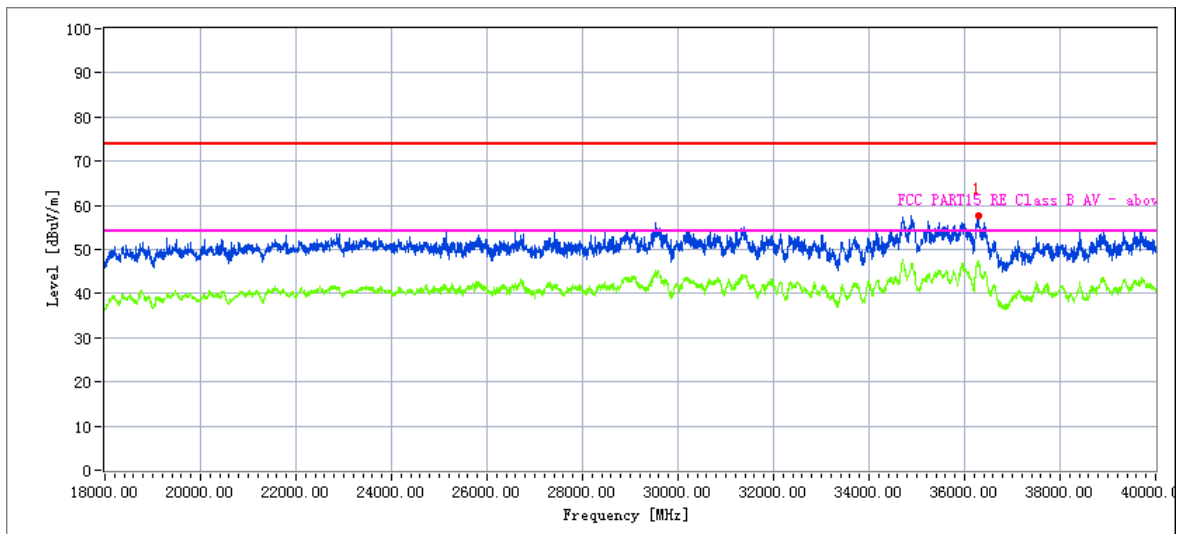


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39821.763	24.32	20.1	44.1	43.22	45.3	68.2	-22.9	Peak

Note:802.11a mode is the worst mode.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.2G -ANT2)-802.11a ; TX (5.3G -ANT2)-802.11a; TX (5.6G -ANT2)-802.11a; TX (5.8G -ANT2)-802.11a		


All the modulation modes have been tested, and the worst result was report as below:
Low Channel (5180 MHz)-Above 1G

Horizontal

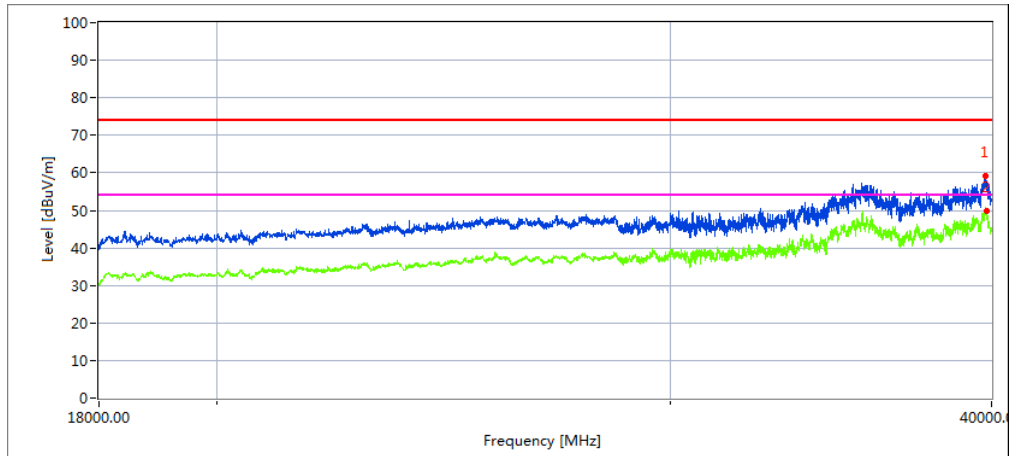

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39782.778	32.90	20.09	44.07	43.48	53.58	68.20	-14.62	Peak


Vertical

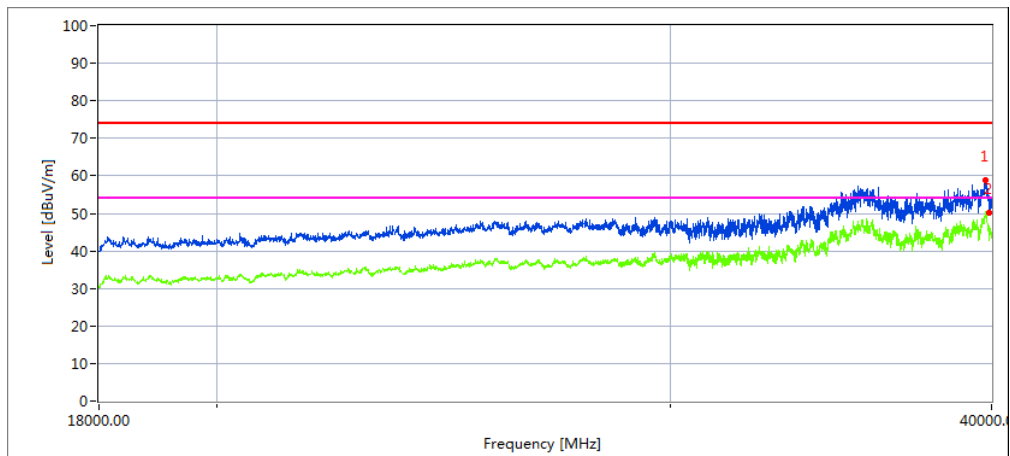

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39798.591	32.67	20.09	44.07	43.48	53.35	68.2	-14.85	Peak


High Channel (5240 MHz)-Above 1G

Horizontal

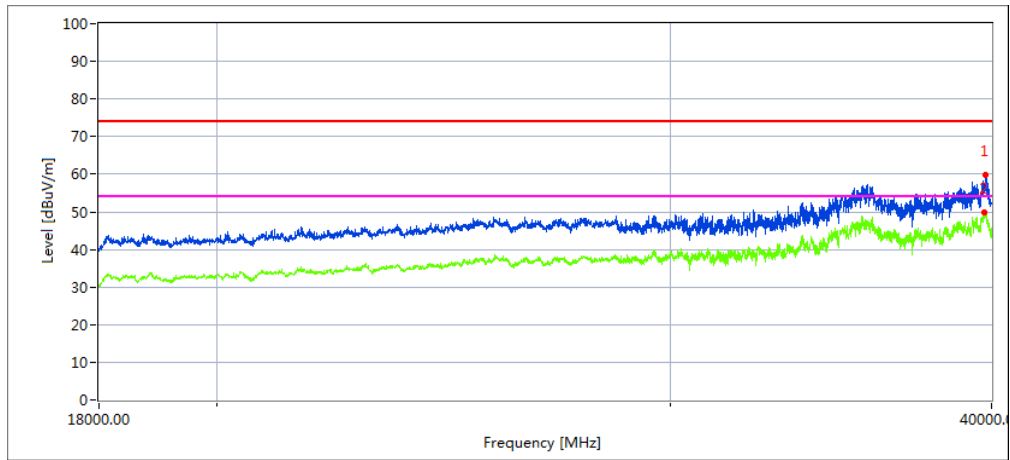

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39799.442	36.89	19.11	42.73	44.61	54.12	68.2	-14.08	Peak

Vertical

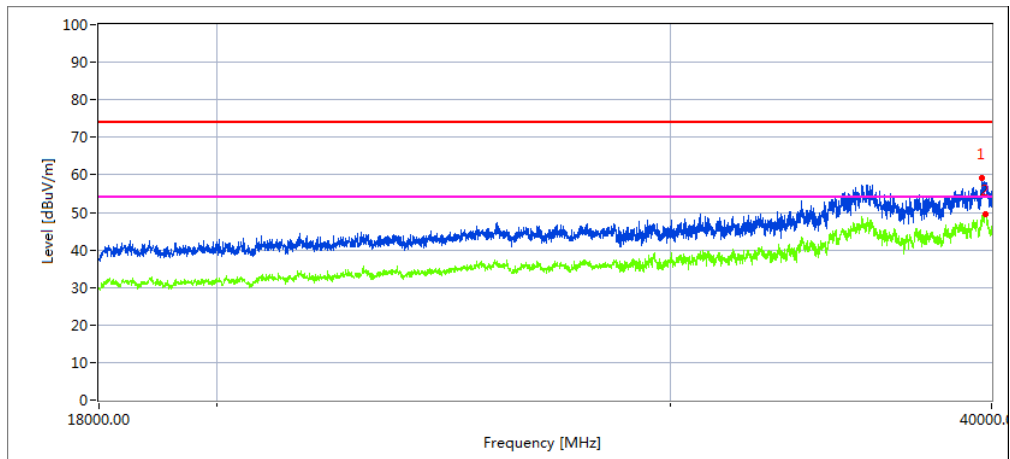


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39672.258	32	20.09	44.07	43.48	52.68	68.2	-15.52	Peak

Note:802.11n20 mode is the worst mode.


Low Channel (5260 MHz)-Above 1G

Horizontal

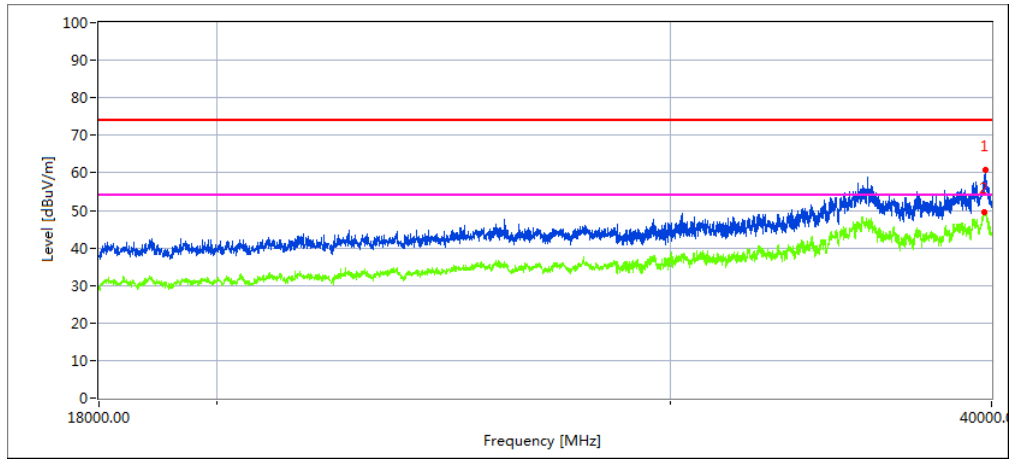

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39670.224	35.13	20.09	44.16	43.48	55.9	68.2	-12.3	Peak


Vertical

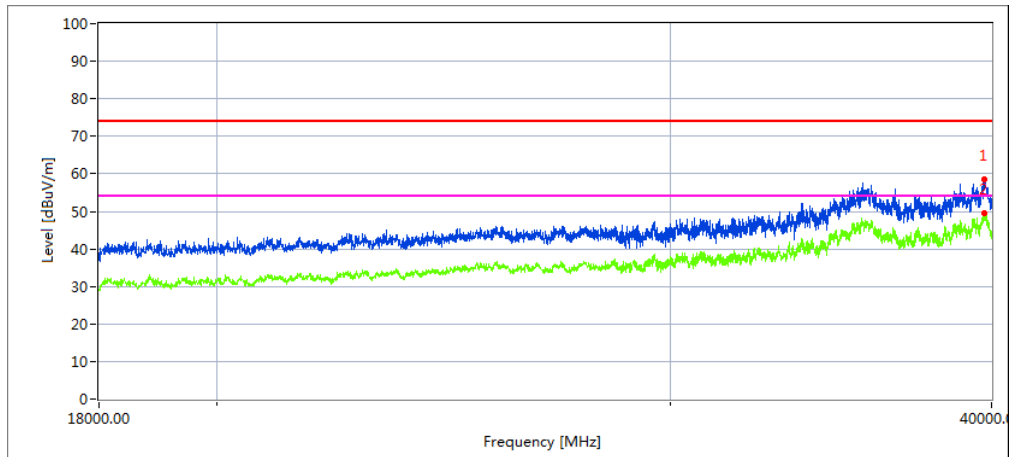

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39736.872	36.38	20.06	44.07	43.21	57.3	68.2	-10.9	Peak


High Channel (5320 MHz)-Above 1G

Horizontal

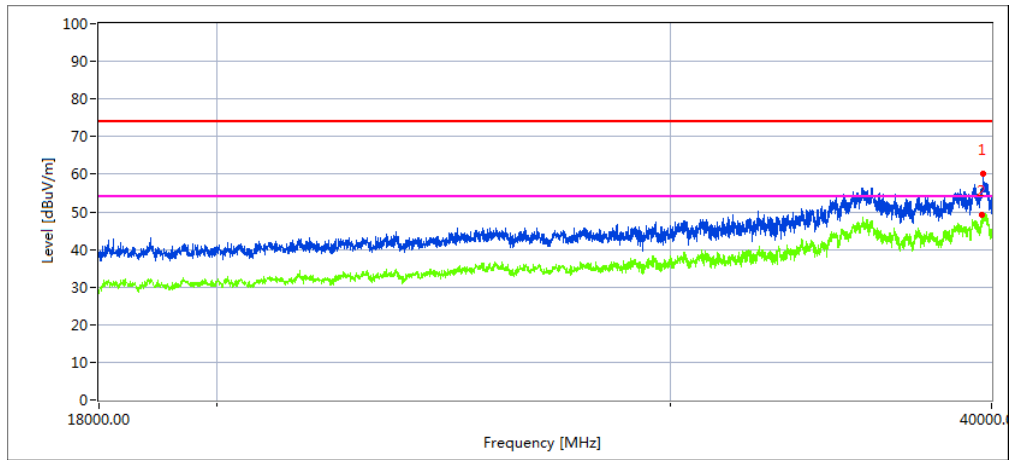

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39701.268	39	19.98	43.84	44.62	58.2	68.2	-10	Peak

Vertical

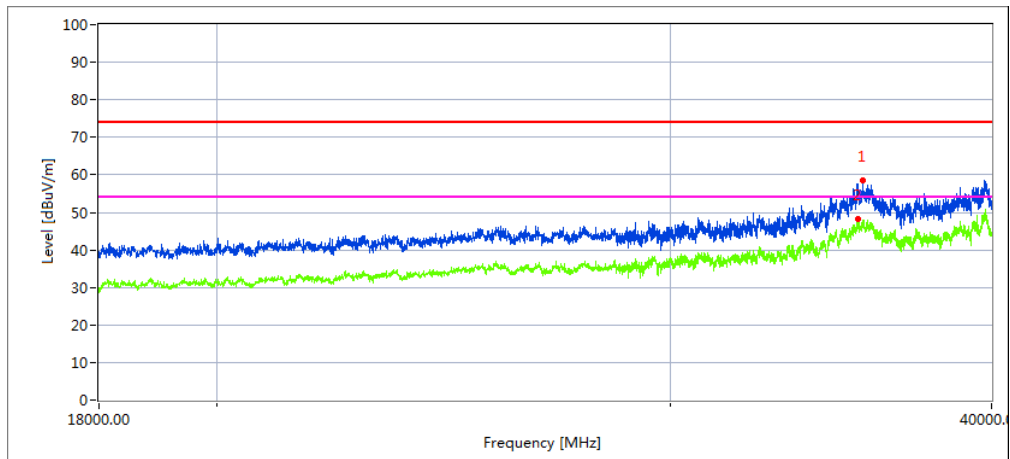


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
35651.004	32.72	20.01	44.06	42.69	54.1	68.2	-14.1	Peak

Note:802.11a mode is the worst mode.


Low Channel (5500 MHz)-Above 1G

Horizontal

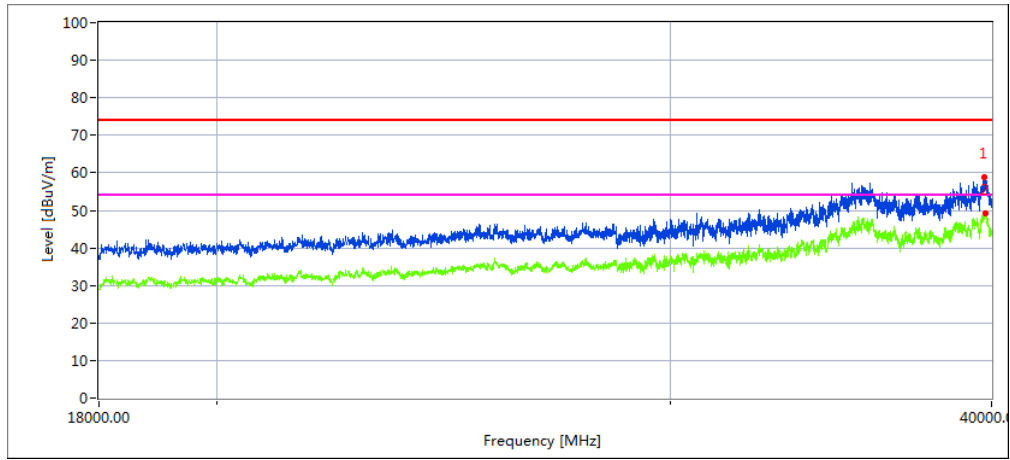

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39759.474	36.12	20.09	44.07	43.48	56.8	68.2	-11.4	Peak


Vertical

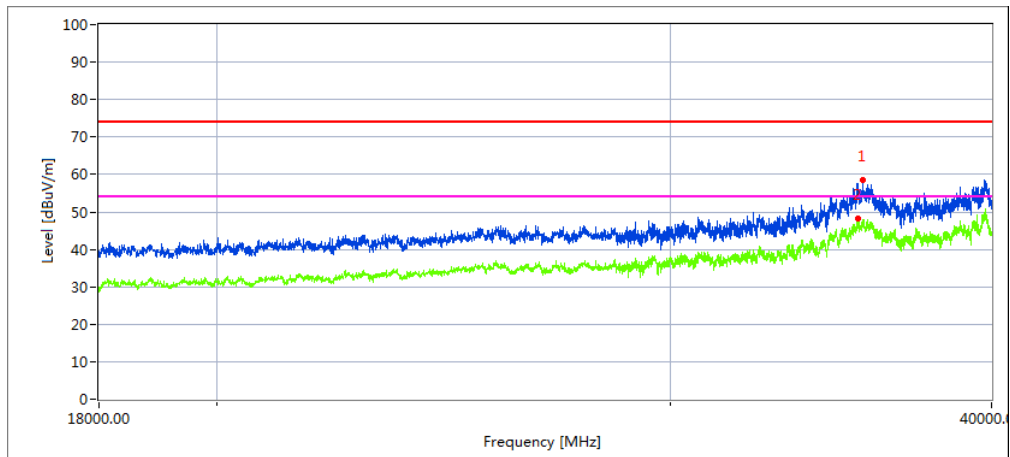

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
35651.004	34.39	19.16	42.61	41.56	54.6	68.2	-13.6	Peak


High Channel (5700 MHz)-Above 1G

Horizontal

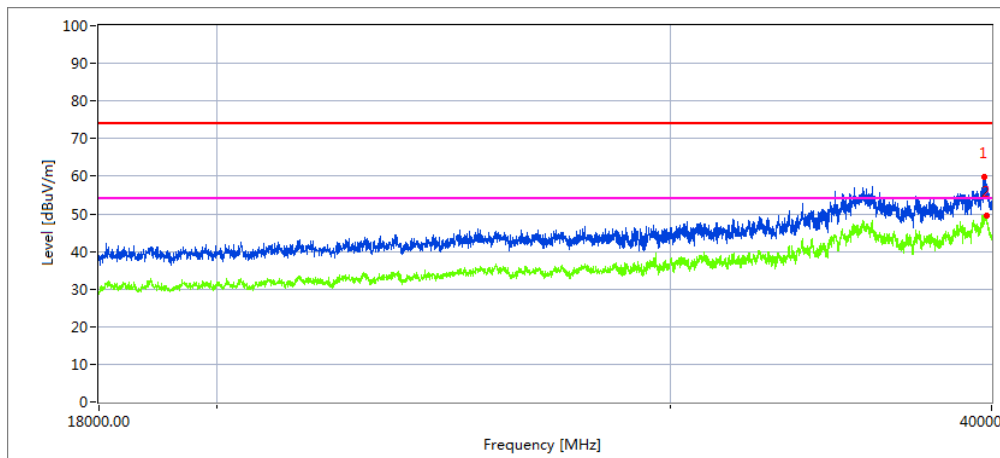

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39817.454	38.64	19.17	42.63	42.74	57.7	68.2	-10.5	Peak

Vertical

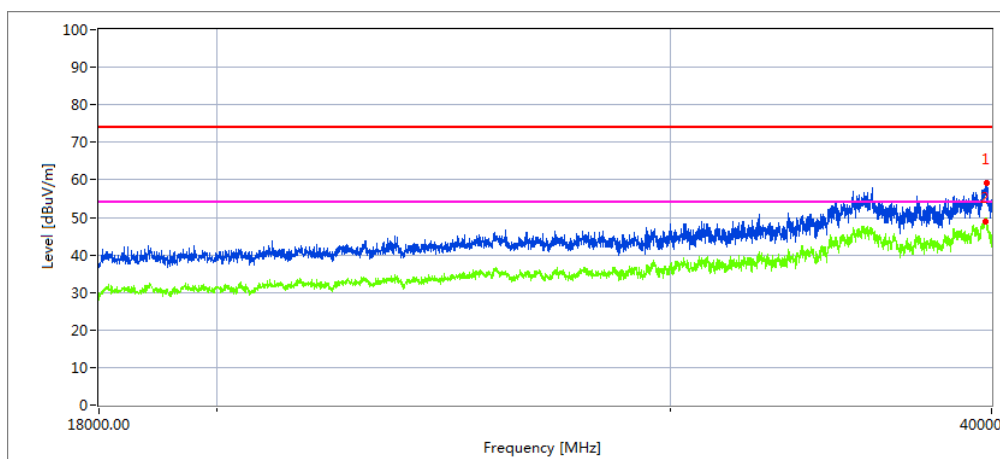


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39815.224	39.86	20.09	42.63	43.48	59.1	68.2	-9.1	Peak

Note:802.11a mode is the worst mode.


Low Channel (5745 MHz)-Above 1G

Horizontal

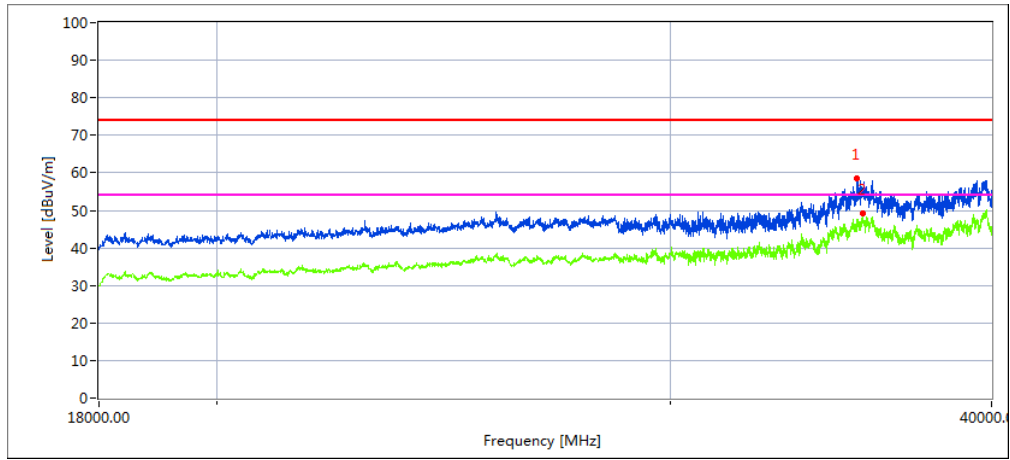

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
35459.427	30.49	20.09	44.16	43.48	51.26	68.2	-16.94	Peak


Vertical

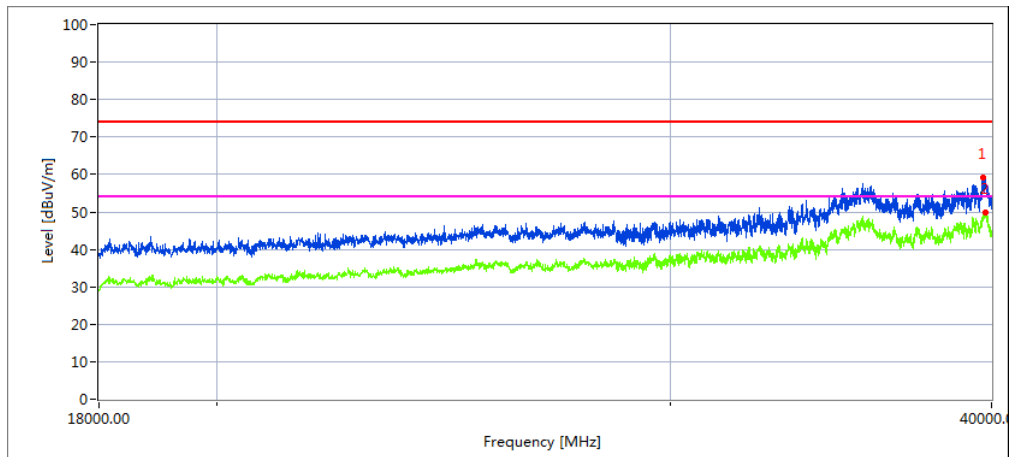

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39716.170	33.24	20.06	44.07	43.21	54.16	68.2	-14.04	Peak


High Channel (5825 MHz)-Above 1G

Horizontal

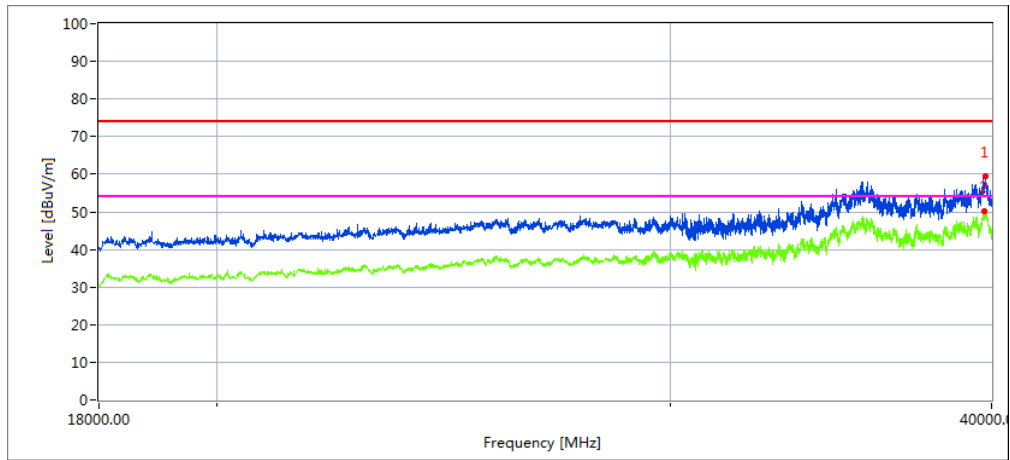

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39765.106	35.71	19.11	42.63	43.48	53.97	68.2	-14.23	Peak

Vertical

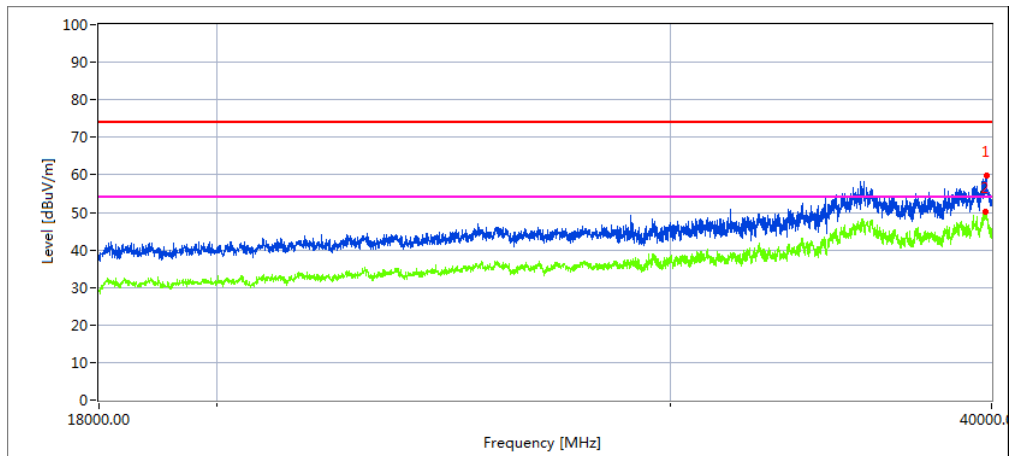

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
39821.763	33.44	20.1	44.1	43.22	54.42	68.2	-13.78	Peak

Note:802.11a mode is the worst mode.

2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.2G-ANT1)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11a Mode									
4500	63.56	5.2	35.6	44.2	60.16	74	-13.84	Pk	Horizontal
4500	46.57	5.2	35.6	44.2	43.17	54	-10.83	AV	Horizontal
4500	54.89	5.2	35.6	44.2	51.49	74	-22.51	Pk	Horizontal
4500	39.78	5.2	35.6	44.2	36.38	54	-17.62	AV	Horizontal
5150	69.72	5.36	35.66	44.22	66.52	74	-7.48	Pk	Vertical
5150	52.32	5.36	35.66	44.22	49.12	54	-4.88	AV	Vertical
5150	69.74	5.36	35.66	44.22	66.54	74	-7.46	Pk	Horizontal
5150	50.76	5.36	35.66	44.22	47.56	54	-6.44	AV	Horizontal
5350	62.37	5.68	35.68	44.22	59.51	74	-14.49	Pk	Vertical
5350	40.82	5.68	35.68	44.22	37.96	54	-16.04	AV	Vertical
5350	56.48	5.68	35.68	44.22	53.62	74	-20.38	Pk	Horizontal
5350	38.50	5.68	35.68	44.22	35.64	54	-18.36	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.3G-ANT1)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
High Channel (5320 MHz)-Above 1G									
5350.00	55.89	6.96	37.24	43.50	56.59	74.00	-17.41	Pk	Vertical
5350.00	47.68	7.07	37.24	43.50	48.49	54.00	-5.51	AV	Vertical
5350.00	58.26	7.05	37.24	43.50	59.05	74.00	-14.95	Pk	Horizontal
5350.00	45.66	7.05	37.24	43.50	46.45	54.00	-7.55	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
 (2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.6G-ANT1)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (5500 MHz)-Above 1G									
5460.00	55.89	6.96	37.24	43.50	56.59	74.00	-17.41	Pk	Vertical
5460.00	47.68	7.07	37.24	43.50	48.49	54.00	-5.51	AV	Vertical
5460.00	58.26	7.05	37.24	43.50	59.05	74.00	-14.95	Pk	Horizontal
5460.00	45.66	7.05	37.24	43.50	46.45	54.00	-7.55	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.2G-ANT2)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11a Mode									
4500	63.40	5.2	35.6	44.2	60.00	74	-14.00	Pk	Horizontal
4500	46.25	5.2	35.6	44.2	42.85	54	-11.15	AV	Horizontal
4500	55.69	5.2	35.6	44.2	52.29	74	-21.71	Pk	Horizontal
4500	39.91	5.2	35.6	44.2	36.51	54	-17.49	AV	Horizontal
5150	69.10	5.36	35.66	44.22	65.90	74	-8.10	Pk	Vertical
5150	51.87	5.36	35.66	44.22	48.67	54	-5.33	AV	Vertical
5150	69.15	5.36	35.66	44.22	65.95	74	-8.05	Pk	Horizontal
5150	53.67	5.36	35.66	44.22	50.47	54	-3.53	AV	Horizontal
5350	61.93	5.68	35.68	44.22	59.07	74	-14.93	Pk	Vertical
5350	40.47	5.68	35.68	44.22	37.61	54	-16.39	AV	Vertical
5350	56.26	5.68	35.68	44.22	53.40	74	-20.60	Pk	Horizontal
5350	38.30	5.68	35.68	44.22	35.44	54	-18.56	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.3G-ANT2)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	dB/m	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type	
High Channel (5320 MHz)-Above 1G									
5350.00	63.26	6.96	37.24	43.50	63.96	74.00	-10.04	Pk	Vertical
5350.00	50.15	7.07	37.24	43.50	50.96	54.00	-3.04	AV	Vertical
5350.00	60.26	7.05	37.24	43.50	61.05	74.00	-12.95	Pk	Horizontal
5350.00	48.15	7.05	37.24	43.50	48.94	54.00	-5.06	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
 (2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5.6G-ANT2)-802.11a		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (5500 MHz)-Above 1G									
5460.00	61.24	5.61	35.40	44.00	58.25	74.00	-15.75	Pk	Vertical
5460.00	51.78	5.76	35.40	44.00	48.94	54.00	-5.06	AV	Vertical
5460.00	59.67	5.78	35.18	44.00	56.63	74.00	-17.37	Pk	Horizontal
5460.00	49.56	5.66	35.18	44.00	46.40	54.00	-7.60	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP



3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1015 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW ≥ 3 · RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

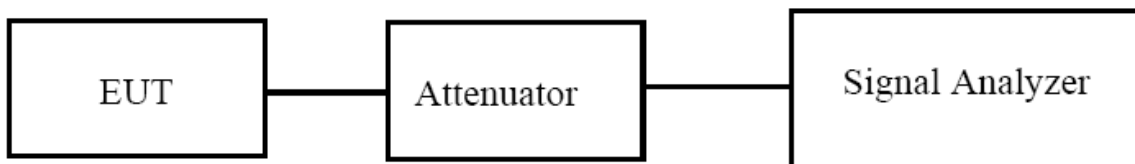

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

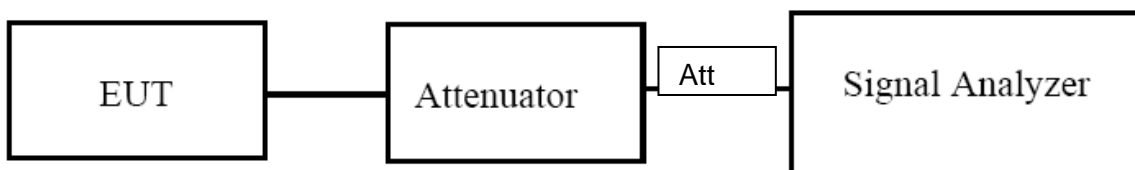

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

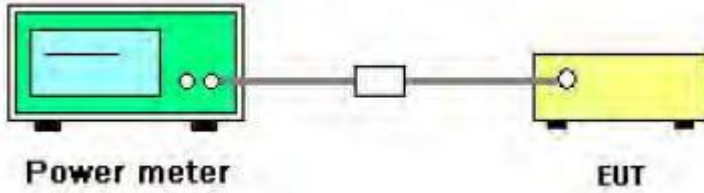

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Test data reference attachment.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

7.2 TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

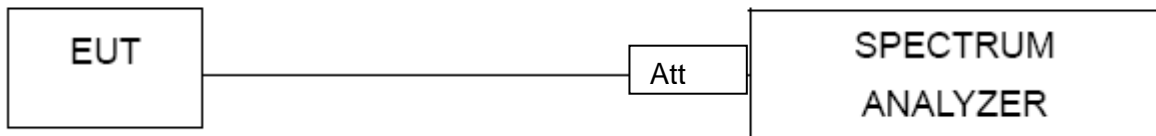

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name :	BL-M8733BS2
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V

Test data reference attachment.

8. Frequency Stability Measurement


8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

8.3 TEST SETUP LAYOUT

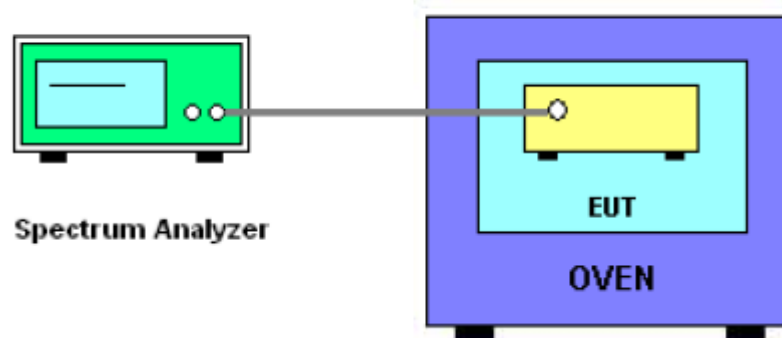

8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

8.5 TEST RESULTS

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band I (5150-5250MHz)-ANT1		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5180.0000	5180	0.0000	0.0004
		V max (V)	3.63	5180.0000	5180	0.0000	0.0029
		V min (V)	2.97	5180.0018	5180	0.0018	0.3537
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5180.0017	5180	0.0017	0.3342
		T (°C)	-10	5180.0002	5180	0.0002	0.0432
		T (°C)	0	5180.0004	5180	0.0004	0.0794
		T (°C)	10	5180.0010	5180	0.0010	0.1933
		T (°C)	20	5180.0003	5180	0.0003	0.0508
		T (°C)	30	5180.0013	5180	0.0013	0.2532
		T (°C)	40	5180.0005	5180	0.0005	0.1034
		T (°C)	50	5180.0013	5180	0.0013	0.2470
		T (°C)	60	5180.0008	5180	0.0008	0.1539
		T (°C)	70	5180.0006	5180	0.0006	0.1063
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5200.0010	5200	0.0010	0.1947
		V max (V)	3.63	5200.0015	5200	0.0015	0.2845
		V min (V)	2.97	5200.0007	5200	0.0007	0.1404
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5200.0009	5200	0.0009	0.1749
		T (°C)	-10	5200.0018	5200	0.0018	0.3385
		T (°C)	0	5200.0005	5200	0.0005	0.0875
		T (°C)	10	5200.0012	5200	0.0012	0.2286
		T (°C)	20	5200.0004	5200	0.0004	0.0709
		T (°C)	30	5200.0016	5200	0.0016	0.3061
		T (°C)	40	5200.0009	5200	0.0009	0.1683
		T (°C)	50	5200.0011	5200	0.0011	0.2111
		T (°C)	60	5200.0015	5200	0.0015	0.2958
		T (°C)	70	5200.0000	5200	0.0000	0.0007
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5240.0003	5240	0.0003	0.0662
		V max (V)	3.63	5240.0019	5240	0.0019	0.3534
		V min (V)	2.97	5240.0010	5240	0.0010	0.1989
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5240.0005	5240	0.0005	0.0900
		T (°C)	-10	5240.0005	5240	0.0005	0.0928
		T (°C)	0	5240.0011	5240	0.0011	0.2167
		T (°C)	10	5240.0002	5240	0.0002	0.0324
		T (°C)	20	5240.0013	5240	0.0013	0.2560
		T (°C)	30	5240.0004	5240	0.0004	0.0734
		T (°C)	40	5240.0010	5240	0.0010	0.1965
		T (°C)	50	5240.0005	5240	0.0005	0.0980
		T (°C)	60	5240.0003	5240	0.0003	0.0666
		T (°C)	70	5240.0019	5240	0.0019	0.3553
Limits				Within 5150-5250MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)-ANT1		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5260.0011	5260	0.0011	0.2042
		V max (V)	3.63	5260.0011	5260	0.0011	0.2164
		V min (V)	2.97	5260.0015	5260	0.0015	0.2816
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5260.0002	5260	0.0002	0.0373
		T (°C)	-10	5260.0001	5260	0.0001	0.0229
		T (°C)	0	5260.0001	5260	0.0001	0.0147
		T (°C)	10	5260.0004	5260	0.0004	0.0695
		T (°C)	20	5260.0001	5260	0.0001	0.0177
		T (°C)	30	5260.0006	5260	0.0006	0.1078
		T (°C)	40	5260.0012	5260	0.0012	0.2363
		T (°C)	50	5260.0008	5260	0.0008	0.1522
		T (°C)	60	5260.0001	5260	0.0001	0.0179
		T (°C)	70	5260.0014	5260	0.0014	0.2615
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5280.0006	5280	0.00060	0.1142
		V max (V)	3.63	5280.0018	5280	0.00184	0.3490
		V min (V)	2.97	5280.0002	5280	0.00020	0.0377
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5280.0019	5280	0.0019	0.3613
		T (°C)	-10	5280.0009	5280	0.0009	0.1671
		T (°C)	0	5280.0014	5280	0.0014	0.2621
		T (°C)	10	5280.0017	5280	0.0017	0.3190
		T (°C)	20	5280.0011	5280	0.0011	0.2003
		T (°C)	30	5280.0020	5280	0.0020	0.3758
		T (°C)	40	5280.0015	5280	0.0015	0.2808
		T (°C)	50	5280.0014	5280	0.0014	0.2705
		T (°C)	60	5280.0005	5280	0.0005	0.1011
		T (°C)	70	5280.0000	5280	0.0000	0.0052
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5320.0020	5320	0.0020	0.3759
		V max (V)	3.63	5320.0019	5320	0.0019	0.3482
		V min (V)	2.97	5320.0000	5320	0.0000	0.0046
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5320.0011	5320	0.0011	0.2154
		T (°C)	-10	5320.0007	5320	0.0007	0.1229
		T (°C)	0	5320.0012	5320	0.0012	0.2243
		T (°C)	10	5320.0015	5320	0.0015	0.2805
		T (°C)	20	5320.0016	5320	0.0016	0.2987
		T (°C)	30	5320.0007	5320	0.0007	0.1230
		T (°C)	40	5320.0017	5320	0.0017	0.3284
		T (°C)	50	5320.0012	5320	0.0012	0.2325
		T (°C)	60	5320.0011	5320	0.0011	0.2145
		T (°C)	70	5320.0015	5320	0.0015	0.2822
Limits				Within 5250-5350MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)-ANT1		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5500.0002	5500	0.0002	0.0451
		V max (V)	3.63	5500.0001	5500	0.0001	0.0267
		V min (V)	2.97	5500.0011	5500	0.0011	0.2052
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5500.0019	5500	0.0019	0.3383
		T (°C)	-10	5500.0011	5500	0.0011	0.1962
		T (°C)	0	5500.0015	5500	0.0015	0.2684
		T (°C)	10	5500.0018	5500	0.0018	0.3330
		T (°C)	20	5500.0004	5500	0.0004	0.0678
		T (°C)	30	5500.0001	5500	0.0001	0.0271
		T (°C)	40	5500.0003	5500	0.0003	0.0615
		T (°C)	50	5500.0006	5500	0.0006	0.1168
		T (°C)	60	5500.0016	5500	0.0016	0.2916
		T (°C)	70	5500.0009	5500	0.0009	0.1589
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5600.0008	5600	0.0008	0.1382
		V max (V)	3.63	5600.0013	5600	0.0013	0.2242
		V min (V)	2.97	5600.0012	5600	0.0012	0.2231
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5600.0007	5600	0.0007	0.1337
		T (°C)	-10	5600.0002	5600	0.0002	0.0295
		T (°C)	0	5600.0015	5600	0.0015	0.2741
		T (°C)	10	5600.0013	5600	0.0013	0.2280
		T (°C)	20	5600.0004	5600	0.0004	0.0636
		T (°C)	30	5600.0011	5600	0.0011	0.1879
		T (°C)	40	5600.0016	5600	0.0016	0.2850
		T (°C)	50	5600.0005	5600	0.0005	0.0903
		T (°C)	60	5600.0018	5600	0.0018	0.3283
		T (°C)	70	5600.0013	5600	0.0013	0.2386
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5700.0006	5700	0.0006	0.0998
		V max (V)	3.63	5700.0011	5700	0.0011	0.2001
		V min (V)	2.97	5700.0005	5700	0.0005	0.0794
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5700.0000	5700	0.0000	0.0010
		T (°C)	-10	5700.0015	5700	0.0015	0.2604
		T (°C)	0	5700.0017	5700	0.0017	0.2950
		T (°C)	10	5700.0000	5700	0.0000	0.0034
		T (°C)	20	5700.0007	5700	0.0007	0.1194
		T (°C)	30	5700.0012	5700	0.0012	0.2064
		T (°C)	40	5700.0012	5700	0.0012	0.2048
		T (°C)	50	5700.0011	5700	0.0011	0.1955
		T (°C)	60	5700.0015	5700	0.0015	0.2569
		T (°C)	70	5700.0004	5700	0.0004	0.0641
Limits				Within 5470-5725MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency(5745-5850MHz)-ANT1		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5745.0014	5745	0.0014	0.2491
		V max (V)	3.63	5745.0006	5745	0.0006	0.1025
		V min (V)	2.97	5745.0009	5745	0.0009	0.1589
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5745.0013	5745	0.0013	0.2233
		T (°C)	-10	5745.0013	5745	0.0013	0.2279
		T (°C)	0	5745.0009	5745	0.0009	0.1567
		T (°C)	10	5745.0003	5745	0.0003	0.0514
		T (°C)	20	5745.0016	5745	0.0016	0.2776
		T (°C)	30	5745.0011	5745	0.0011	0.1888
		T (°C)	40	5745.0005	5745	0.0005	0.0820
		T (°C)	50	5745.0000	5745	0.0000	0.0085
		T (°C)	60	5745.0011	5745	0.0011	0.1952
		T (°C)	70	5745.0016	5745	0.0016	0.2715
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5785.0007	5785	0.00074	-0.1279
		V max (V)	3.63	5785.0003	5785	0.00029	-0.0508
		V min (V)	2.97	5785.0018	5785	0.00182	-0.3142
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5785.0007	5785	0.0007	0.1142
		T (°C)	-10	5785.0005	5785	0.0005	0.0944
		T (°C)	0	5785.0004	5785	0.0004	0.0635
		T (°C)	10	5785.0001	5785	0.0001	0.0209
		T (°C)	20	5785.0006	5785	0.0006	0.1033
		T (°C)	30	5785.0016	5785	0.0016	0.2742
		T (°C)	40	5785.0000	5785	0.0000	0.0022
		T (°C)	50	5785.0009	5785	0.0009	0.1584
		T (°C)	60	5785.0010	5785	0.0010	0.1793
		T (°C)	70	5785.0008	5785	0.0008	0.1314
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5825.0005	5825	0.0005	0.0775
		V max (V)	3.63	5825.0005	5825	0.0005	0.0840
		V min (V)	2.97	5825.0013	5825	0.0013	0.2310
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5825.0013	5825	0.0013	0.2232
		T (°C)	-10	5825.0003	5825	0.0003	0.0555
		T (°C)	0	5825.0007	5825	0.0007	0.1212
		T (°C)	10	5825.0005	5825	0.0005	0.0904
		T (°C)	20	5825.0008	5825	0.0008	0.1359
		T (°C)	30	5825.0006	5825	0.0006	0.1106
		T (°C)	40	5825.0001	5825	0.0001	0.0207
		T (°C)	50	5825.0016	5825	0.0016	0.2816
		T (°C)	60	5825.0003	5825	0.0003	0.0596
		T (°C)	70	5825.0017	5825	0.0017	0.2954
Limits				Within 5745-5850MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band I (5150-5250MHz)-ANT2		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5180.0004	5180	0.0004	0.0679
		V max (V)	3.63	5180.0005	5180	0.0005	0.0900
		V min (V)	2.97	5180.0016	5180	0.0016	0.3023
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5180.0007	5180	0.0007	0.1264
		T (°C)	-10	5180.0011	5180	0.0011	0.2179
		T (°C)	0	5180.0002	5180	0.0002	0.0394
		T (°C)	10	5180.0016	5180	0.0016	0.3006
		T (°C)	20	5180.0008	5180	0.0008	0.1463
		T (°C)	30	5180.0013	5180	0.0013	0.2468
		T (°C)	40	5180.0002	5180	0.0002	0.0344
		T (°C)	50	5180.0009	5180	0.0009	0.1770
		T (°C)	60	5180.0011	5180	0.0011	0.2068
		T (°C)	70	5180.0019	5180	0.0019	0.3762
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5200.0004	5200	0.0004	0.0822
		V max (V)	3.63	5200.0012	5200	0.0012	0.2316
		V min (V)	2.97	5200.0008	5200	0.0008	0.1553
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5200.0012	5200	0.0012	0.2346
		T (°C)	-10	5200.0019	5200	0.0019	0.3694
		T (°C)	0	5200.0011	5200	0.0011	0.2172
		T (°C)	10	5200.0011	5200	0.0011	0.2038
		T (°C)	20	5200.0004	5200	0.0004	0.0847
		T (°C)	30	5200.0010	5200	0.0010	0.1830
		T (°C)	40	5200.0014	5200	0.0014	0.2765
		T (°C)	50	5200.0018	5200	0.0018	0.3402
		T (°C)	60	5200.0006	5200	0.0006	0.1078
		T (°C)	70	5200.0003	5200	0.0003	0.0595
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5240.0012	5240	0.0012	0.2334
		V max (V)	3.63	5240.0001	5240	0.0001	0.0263
		V min (V)	2.97	5240.0014	5240	0.0014	0.2722
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5240.0016	5240	0.0016	0.3120
		T (°C)	-10	5240.0012	5240	0.0012	0.2352
		T (°C)	0	5240.0000	5240	0.0000	0.0062
		T (°C)	10	5240.0003	5240	0.0003	0.0493
		T (°C)	20	5240.0016	5240	0.0016	0.3008
		T (°C)	30	5240.0010	5240	0.0010	0.2004
		T (°C)	40	5240.0007	5240	0.0007	0.1329
		T (°C)	50	5240.0015	5240	0.0015	0.2812
		T (°C)	60	5240.0001	5240	0.0001	0.0201
		T (°C)	70	5240.0000	5240	0.0000	0.0064
Limits				Within 5150-5250MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)-ANT2		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5260.0017	5260	0.0017	0.3296
		V max (V)	3.63	5260.0012	5260	0.0012	0.2326
		V min (V)	2.97	5260.0010	5260	0.0010	0.1982
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5260.0015	5260	0.0015	0.2850
		T (°C)	-10	5260.0001	5260	0.0001	0.0262
		T (°C)	0	5260.0004	5260	0.0004	0.0752
		T (°C)	10	5260.0006	5260	0.0006	0.1206
		T (°C)	20	5260.0011	5260	0.0011	0.2001
		T (°C)	30	5260.0012	5260	0.0012	0.2331
		T (°C)	40	5260.0018	5260	0.0018	0.3336
		T (°C)	50	5260.0018	5260	0.0018	0.3415
		T (°C)	60	5260.0012	5260	0.0012	0.2258
		T (°C)	70	5260.0017	5260	0.0017	0.3201
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5280.0000	5280	0.00003	0.0051
		V max (V)	3.63	5280.0008	5280	0.00080	0.1515
		V min (V)	2.97	5280.0016	5280	0.00161	0.3053
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5280.0012	5280	0.0012	0.2326
		T (°C)	-10	5280.0010	5280	0.0010	0.1909
		T (°C)	0	5280.0019	5280	0.0019	0.3657
		T (°C)	10	5280.0007	5280	0.0007	0.1245
		T (°C)	20	5280.0009	5280	0.0009	0.1767
		T (°C)	30	5280.0010	5280	0.0010	0.1800
		T (°C)	40	5280.0013	5280	0.0013	0.2557
		T (°C)	50	5280.0001	5280	0.0001	0.0101
		T (°C)	60	5280.0008	5280	0.0008	0.1461
		T (°C)	70	5280.0017	5280	0.0017	0.3217
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5320.0002	5320	0.0002	0.0347
		V max (V)	3.63	5320.0000	5320	0.0000	0.0045
		V min (V)	2.97	5320.0003	5320	0.0003	0.0583
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5320.0004	5320	0.0004	0.0662
		T (°C)	-10	5320.0018	5320	0.0018	0.3441
		T (°C)	0	5320.0001	5320	0.0001	0.0123
		T (°C)	10	5320.0020	5320	0.0020	0.3670
		T (°C)	20	5320.0016	5320	0.0016	0.3084
		T (°C)	30	5320.0008	5320	0.0008	0.1430
		T (°C)	40	5320.0002	5320	0.0002	0.0311
		T (°C)	50	5320.0006	5320	0.0006	0.1131
		T (°C)	60	5320.0019	5320	0.0019	0.3519
		T (°C)	70	5320.0006	5320	0.0006	0.1040
Limits				Within 5250-5350MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)-ANT2		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5500.0016	5500	0.0016	0.2853
		V max (V)	3.63	5500.0007	5500	0.0007	0.1185
		V min (V)	2.97	5500.0008	5500	0.0008	0.1538
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5500.0010	5500	0.0010	0.1893
		T (°C)	-10	5500.0019	5500	0.0019	0.3375
		T (°C)	0	5500.0011	5500	0.0011	0.1924
		T (°C)	10	5500.0019	5500	0.0019	0.3398
		T (°C)	20	5500.0015	5500	0.0015	0.2718
		T (°C)	30	5500.0008	5500	0.0008	0.1427
		T (°C)	40	5500.0016	5500	0.0016	0.2860
		T (°C)	50	5500.0019	5500	0.0019	0.3509
		T (°C)	60	5500.0005	5500	0.0005	0.0915
		T (°C)	70	5500.0003	5500	0.0003	0.0542
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5600.0009	5600	0.0009	0.1680
		V max (V)	3.63	5600.0015	5600	0.0015	0.2640
		V min (V)	2.97	5600.0000	5600	0.0000	0.0012
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5600.0016	5600	0.0016	0.2924
		T (°C)	-10	5600.0011	5600	0.0011	0.1947
		T (°C)	0	5600.0014	5600	0.0014	0.2463
		T (°C)	10	5600.0008	5600	0.0008	0.1494
		T (°C)	20	5600.0009	5600	0.0009	0.1619
		T (°C)	30	5600.0014	5600	0.0014	0.2525
		T (°C)	40	5600.0015	5600	0.0015	0.2632
		T (°C)	50	5600.0016	5600	0.0016	0.2886
		T (°C)	60	5600.0003	5600	0.0003	0.0471
		T (°C)	70	5600.0006	5600	0.0006	0.1094
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5700.0003	5700	0.0003	0.0441
		V max (V)	3.63	5700.0019	5700	0.0019	0.3370
		V min (V)	2.97	5700.0019	5700	0.0019	0.3366
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5700.0009	5700	0.0009	0.1586
		T (°C)	-10	5700.0005	5700	0.0005	0.0931
		T (°C)	0	5700.0012	5700	0.0012	0.2056
		T (°C)	10	5700.0004	5700	0.0004	0.0674
		T (°C)	20	5700.0005	5700	0.0005	0.0867
		T (°C)	30	5700.0013	5700	0.0013	0.2253
		T (°C)	40	5700.0007	5700	0.0007	0.1305
		T (°C)	50	5700.0008	5700	0.0008	0.1390
		T (°C)	60	5700.0005	5700	0.0005	0.0817
		T (°C)	70	5700.0007	5700	0.0007	0.1250
Limits				Within 5470-5725MHz			
Result				Complies			

EUT:	802.11a/b/g/n 150Mbps WLAN + BT v5.2 Combo SDIO Module	Model Name. :	BL-M8733BS2
Temperature:	25 °C	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency(5745-5850MHz)-ANT2		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5745.0009	5745	0.0009	0.1607
		V max (V)	3.63	5745.0002	5745	0.0002	0.0392
		V min (V)	2.97	5745.0015	5745	0.0015	0.2588
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5745.0010	5745	0.0010	0.1801
		T (°C)	-10	5745.0001	5745	0.0001	0.0215
		T (°C)	0	5745.0017	5745	0.0017	0.3024
		T (°C)	10	5745.0007	5745	0.0007	0.1231
		T (°C)	20	5745.0017	5745	0.0017	0.2968
		T (°C)	30	5745.0004	5745	0.0004	0.0681
		T (°C)	40	5745.0017	5745	0.0017	0.2971
		T (°C)	50	5745.0006	5745	0.0006	0.1054
		T (°C)	60	5745.0008	5745	0.0008	0.1350
		T (°C)	70	5745.0007	5745	0.0007	0.1298
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5785.0020	5785	0.00200	-0.3453
		V max (V)	3.63	5785.0018	5785	0.00177	-0.3054
		V min (V)	2.97	5785.0004	5785	0.00039	-0.0682
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5785.0009	5785	0.0009	0.1502
		T (°C)	-10	5785.0016	5785	0.0016	0.2712
		T (°C)	0	5785.0004	5785	0.0004	0.0640
		T (°C)	10	5785.0010	5785	0.0010	0.1732
		T (°C)	20	5785.0015	5785	0.0015	0.2637
		T (°C)	30	5785.0008	5785	0.0008	0.1414
		T (°C)	40	5785.0011	5785	0.0011	0.1864
		T (°C)	50	5785.0016	5785	0.0016	0.2800
		T (°C)	60	5785.0001	5785	0.0001	0.0163
		T (°C)	70	5785.0006	5785	0.0006	0.0969
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.3	5825.0016	5825	0.0016	0.2675
		V max (V)	3.63	5825.0016	5825	0.0016	0.2713
		V min (V)	2.97	5825.0015	5825	0.0015	0.2661
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5825.0001	5825	0.0001	0.0160
		T (°C)	-10	5825.0001	5825	0.0001	0.0254
		T (°C)	0	5825.0013	5825	0.0013	0.2216
		T (°C)	10	5825.0007	5825	0.0007	0.1192
		T (°C)	20	5825.0018	5825	0.0018	0.3052
		T (°C)	30	5825.0014	5825	0.0014	0.2386
		T (°C)	40	5825.0000	5825	0.0000	0.0037
		T (°C)	50	5825.0008	5825	0.0008	0.1401
		T (°C)	60	5825.0005	5825	0.0005	0.0891
		T (°C)	70	5825.0016	5825	0.0016	0.2787
Limits				Within 5745-5850MHz			
Result				Complies			

9. DYNAMIC FREQUENCY SELECTION(DFS)

9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

9.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	Roundup $\left(\frac{1}{360} \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

9.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB .
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

9.6 CONDUCTED CALIBRATION SETUP

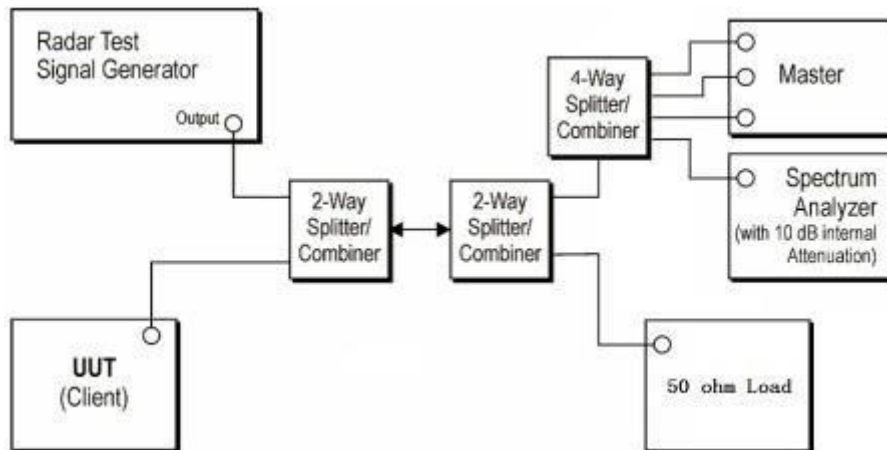

Wireless AP	Manufacturer	ASUSTek Computer Inc
	Model NO.	AX5400
	FCC ID	MSQ-RTAXJ300

- Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.
2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.
 3. The time required for the master and slave devices to fully start up is 120s.
 4. EUT does not support TPC.


9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

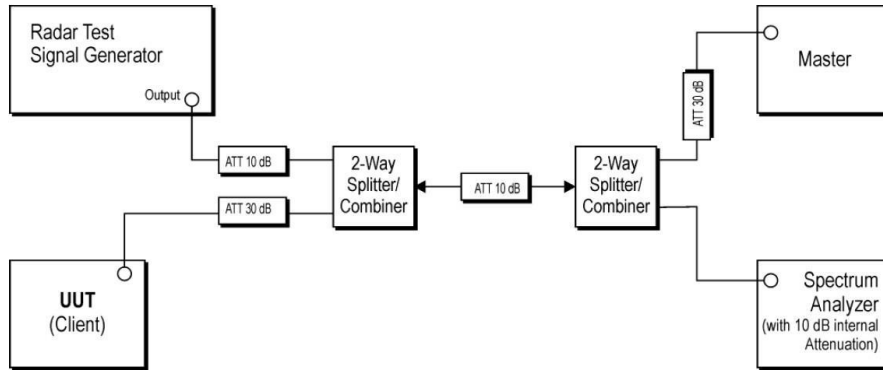

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Mode	Frequency (MHz)
ac80	5290
ac80	5530
n40	5310
n40	5510
a	5320
a	5500

9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

Test data reference attachment.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is permanent attached FPC Antenna (ANT 1 Gain: WIFI 5.2G:-0.3dBi, WIFI 5.3G:1.6dBi, WiFi5.6G: 1.9dBi, WIFI 5.8G: 1.9dBi ; ANT 2Gain: WIFI 5.2G:0.9dBi, WIFI 5.3G:1.5dBi, WiFi5.6G 2.8dBi: WIFI 5.8G: 2.3dBi). It comply with the standard requirement.

END OF REPORT