

FCC and Industry Canada Testing of the  
BCF Technology Ltd  
Duo-Scan: Go Plus, Model: DSGC02  
In accordance with FCC 47 CFR Part 18,  
Industry Canada RSS-216 and  
Industry Canada RSS-GEN



Product Service

Choose certainty.  
Add value.

Prepared for: BCF Technology Ltd  
Imaging House  
Phoenix Crescent  
Strathclyde Business Park  
Bellshill  
ML4 3NJ  
UNITED KINGDOM

FCC ID: 2AL6R-DSGC02  
IC: 22758-DSGC01

COMMERCIAL-IN-CONFIDENCE

Date: October 2017  
Document Number: 75940307-03 | Issue: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Natalie Bennett	31 October 2017	
Authorised Signatory	Matthew Russell	31 October 2017	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 18, Industry Canada RSS-216 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Graeme Lawler	31 October 2017	

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation  
IC2932B-1 Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 18: 2016, Industry Canada RSS-216: Issue 2 (2016) and Industry Canada RSS-GEN: Issue 4 (2014).

	<p><b>DISCLAIMER AND COPYRIGHT</b> This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2017 TÜV SÜD Product Service.</p>
	<p><b>ACCREDITATION</b> Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).</p>

TÜV SÜD Product Service  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

TÜV SÜD Product Service  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Application Form .....	4
1.5	Product Information .....	8
1.6	Deviations from the Standard.....	8
1.7	EUT Modification Record .....	8
1.8	Test Location.....	9
<b>2</b>	<b>Test Details .....</b>	<b>10</b>
2.1	Field Strength of Emissions .....	10
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>17</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	31 October 2017

**Table 1**

## 1.2 Introduction

Applicant	BCF Technology Ltd
Manufacturer	BCF Technology Ltd
Model Number(s)	DSGC02
Serial Number(s)	DSGC0200003
Hardware Version(s)	PBA-PP520_REV_B
Software Version(s)	b04616d47050f71e21b3b62eb02eb13f26e4ff20 (CE/FCC test SW)
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 18: 2016 Industry Canada RSS-216: Issue 2 (2016) Industry Canada RSS-GEN: Issue 4 (2014)
Order Number	PO34233
Date	12-September-2017
Date of Receipt of EUT	10-October-2017
Start of Test	16-October-2017
Finish of Test	16-October-2017
Name of Engineer(s)	Graeme Lawler
Related Document(s)	ANSI C63.10 (2013) ICES-001 Issue 4 (2006) CISPR 11 Fourth Edition (inc Amend.1 IEC:2004)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 18, Industry Canada RSS-216 and Industry Canada RSS-GEN. is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 18	RSS-216	RSS-GEN			
Configuration: Wireless Charging						
2.1	18.305(b)	6.2.2.2	6.4, 6.5 and 6.13	Field Strength of Emissions	Pass	

**Table 2**



### 1.4 Application Form

EQUIPMENT DESCRIPTION	
Model Name/Number	Duo-Scan:Go Plus - DSGC02
Part Number	DSG-SCANNER-C PLUS
Hardware Version	PBA-PP520_REV_B
Software Version	b04616d47050f71e21b3b62eb02eb13f26e4ff20 (CE/FCC test SW)
FCC ID (if applicable)	2AL6R-DSGC02
Industry Canada ID (if applicable)	22758-DSGC01
Technical Description (Please provide a brief description of the intended use of the equipment)	<p>The product is a Swine Ultrasound Scanner used in the veterinary industry for scanning pigs, sheep or goats The product contains a Texas Instruments pre-approved 2.4 GHz and 5 GHz WLAN module which is FCC and Industry Canada certified and this is used to communicate to a commercial smart phone or tablet.</p> <p>The scanner is a compact handheld unit with a built in ultrasound probe and uses certified Li-ion batteries.</p>

EQUIPMENT SUPPLIED	
WPT Source	<input type="checkbox"/>
WPT Client	<input checked="" type="checkbox"/>
WPT System (Client and source designed to work exclusively together)	<input type="checkbox"/>

WPT SOURCE			
<input type="checkbox"/>	Type 1	No intelligent communication transmitted wirelessly	
<input checked="" type="checkbox"/>	Type 2	Transmission is modulated including load modulation techniques where: <ol style="list-style-type: none"> <li>1. Fundamental is &lt; 490 kHz and ;</li> <li>2. All emissions are &gt; 40 dB below RSS-GEN field strength limits.</li> </ol>	
<input type="checkbox"/>	Type 3	Neither type 1 or type 2, but uses some form of modulation to transmit intelligent communication.	
Is the device intended for us in any of the following?:			
<input type="checkbox"/>	High power WPT device (e.g charging electric vehicles)		
<input type="checkbox"/>	WPT over a distance of > 10 cm		
<input type="checkbox"/>	Medical Device		
<input type="checkbox"/>	WPT source operating at a frequency > 400 MHz		
Does the device support power management transfer?			Yes
Can the source and client operate at different separation distances?			No
Minimum Distance:	mm	Maximum Distance	mm
Does the EUT contain any other wireless modules (excluding WPT device)?			Yes
Can the device transmit secondary frequencies?			No Bluetooth
State Frequencies:	to MHz		

WPT SOURCE DESIGN	
<input checked="" type="checkbox"/>	Single fixed power transfer zone – single client



WPT SOURCE DESIGN	
<input type="checkbox"/>	Multiple fixed power transfer zone – single client
<input type="checkbox"/>	Multiple non-fixed power transfer zone – single client
<input type="checkbox"/>	Multiple power transfer zone – multiples clients

POWER SOURCE			
<input type="checkbox"/>	AC mains	State voltage	
	AC supply frequency	(Hz)	
	VAC		
	Max Current		
	Hz		
<input type="checkbox"/>	Single phase	<input type="checkbox"/>	Three phase
And / Or			
<input type="checkbox"/>	External DC supply		
	Nominal voltage	V	Max Current A
	Extreme upper voltage	V	
	Extreme lower voltage	V	
Battery			
<input type="checkbox"/>	Nickel Cadmium	<input type="checkbox"/>	Lead acid (Vehicle regulated)
<input type="checkbox"/>	Alkaline	<input type="checkbox"/>	Leclanche
<input checked="" type="checkbox"/>	Lithium	<input type="checkbox"/>	Other Details:
3.7	Volts nominal.		
End point voltage as quoted by equipment manufacturer		2.3	V

FREQUENCY INFORMATION				
Frequency Range	0.11 to 0.205	MHz		
Channel Spacing (where applicable)				
Receiver Frequency Range (if different)	to	MHz		
Channel Spacing (if different)				
Test Frequencies*	Bottom	0.110	MHz	Channel Number (if applicable)
	Middle		MHz	Channel Number (if applicable)
	Top	0.205	MHz	Channel Number (if applicable)
Intermediate Frequencies			MHz	
Highest Internally Generated Frequency:		0.205MHz		



POWER CHARACTERISTICS			
Maximum TX power	W		
Minimum TX power	W (if variable)		
Is transmitter intended for:			
Continuous duty		<input type="checkbox"/> Yes	<input type="checkbox"/> No
Intermittent duty		<input type="checkbox"/> Yes	<input type="checkbox"/> No
If intermittent state DUTY CYCLE			
Transmitter ON	seconds		
Transmitter OFF	seconds		

ANTENNA CHARACTERISTICS			
<input type="checkbox"/>	Antenna connector	State impedance	Ohm
<input type="checkbox"/>	Temporary antenna connector	State impedance	Ohm
<input type="checkbox"/>	Integral antenna	Type	State impedance dBi
<input type="checkbox"/>	External antenna	Type	State impedance dBi

MODULATION CHARACTERISTICS			
<input checked="" type="checkbox"/>	Amplitude	<input type="checkbox"/>	Frequency
<input type="checkbox"/>	Phase	<input type="checkbox"/>	Other (please provide details):
Can the transmitter operate un-modulated?			<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

CLASS OF EMISSION USED	
<b>ITU designation or Class of Emission:</b>	
1	
(if applicable) 2	
(if applicable) 3	
If more than three classes of emission, list separately:	

BATTERY POWER SUPPLY			
Model name/number	103450AR2-1S-3M	Identification/Part number	
Manufacturer	Shenzhen BAK Technology Co Ltd	Country of Origin	China

ANCILLARIES (If applicable)	
Model name/number	Identification/Part number
Manufacturer	Country of Origin



Product Service

EXTREME CONDITIONS			
Extreme test voltages (Max)	V	Extreme test voltages (Mix)	V
Nominal DC Voltage	V	DC Maximum Current	A
Maximum temperature	°C	Minimum temperature	°C

I hereby declare that the information supplied is correct and complete.

Name: Fabrizio Gaudenzi  
Date: 21/9/17

Position held: Lead Design Engineer





## 1.5 Product Information

### 1.5.1 Technical Description

The product is a Swine Ultrasound Scanner used in the veterinary industry for scanning pigs, sheep or goats. The product contains a Texas Instruments pre-approved 2.4 GHz and 5 GHz WLAN module which is FCC and Industry Canada certified and this is used to communicate to a commercial smart phone or tablet. The scanner is a compact handheld unit with a built in ultrasound probe and uses certified Li-ion batteries.

### 1.6 Deviations from the Standard

#### Industry Canada RSS-216, Clause 6.1.3.1 - Setup for Verifying the Power Transfer Function

The Battery voltage is nominally 3.3 volts

When the battery is charging normally the current is in the region of 800 mA

When the battery is replaced with a load resistor of 2R7 the charge current drops to only 19.6mA

We believe the reason for this is that the voltage across the battery terminals with the load resistor connected is only 52mV and the charging circuit on the EUT is not powered and so the intelligent charging circuit will not provide the required 800mA current.

Therefore, it is not possible to test the charging circuit of this unit without the battery connected.

This test was performed with the battery connected.

No other deviations from the applicable test standard were made during testing.

### 1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number: DSGC0200003			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 3**



Product Service

### 1.8 Test Location

TÜV SÜD Product Service conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration: Wireless Charging		
Field Strength of Emissions	Graeme Lawler	UKAS

**Table 4**

Office Address:

Octagon House  
Concorde Way  
Segensworth North  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom



## 2 Test Details

### 2.1 Field Strength of Emissions

#### 2.1.1 Specification Reference

FCC 47 CFR Part 18, Clause 18.305(b)  
Industry Canada RSS-216, Clause 6.2.2.2  
Industry Canada RSS-GEN, Clause 6.4, 6.5 and 6.13

#### 2.1.2 Equipment Under Test and Modification State

DSGC02, S/N: DSGC0200003 - Modification State 0

#### 2.1.3 Date of Test

16-October-2017

#### 2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5 and Industry Canada RSS-216, clause 6.2.2.2.

For FCC the following expressions were used to convert the limit from  $\mu\text{V}/\text{m}$  @ 300 m to  $\text{dBuV}/\text{m}$  @ 3 m:

- a. To convert  $\mu\text{V}/\text{m}$  to  $\text{dBuV}/\text{m} = 20 \cdot \text{LOG}_{10}(\text{Field Strength in } \mu\text{V}/\text{m})$ .
- b. To convert from 300 m to 3 m, the method described in ANSI C63.10 clause 6.4.4.2 was used.

Using the above when measuring at 148.5 kHz, a limit of  $15 \mu\text{V}/\text{m}$  @ 300 m equates to  $103.52 \text{ dBuV}/\text{m}$  at 3m.

For IC the following expression is used to convert to  $\text{dBuV}/\text{m}$ :  $\text{dBuA}/\text{m} + 51.5$ .

The WPT source device used during testing was a Samsung Wireless Charging Pad, Model: EP-PN920. The FCC and Industry Canada identification numbers for this product are as follows:

FCC ID: A3LEPPN920  
IC: 649E-EPPN920


#### 2.1.5 Environmental Conditions

Ambient Temperature	19.5 - 19.8 °C
Relative Humidity	53.0 %



**2.1.6 Test Results**

Wireless Charging

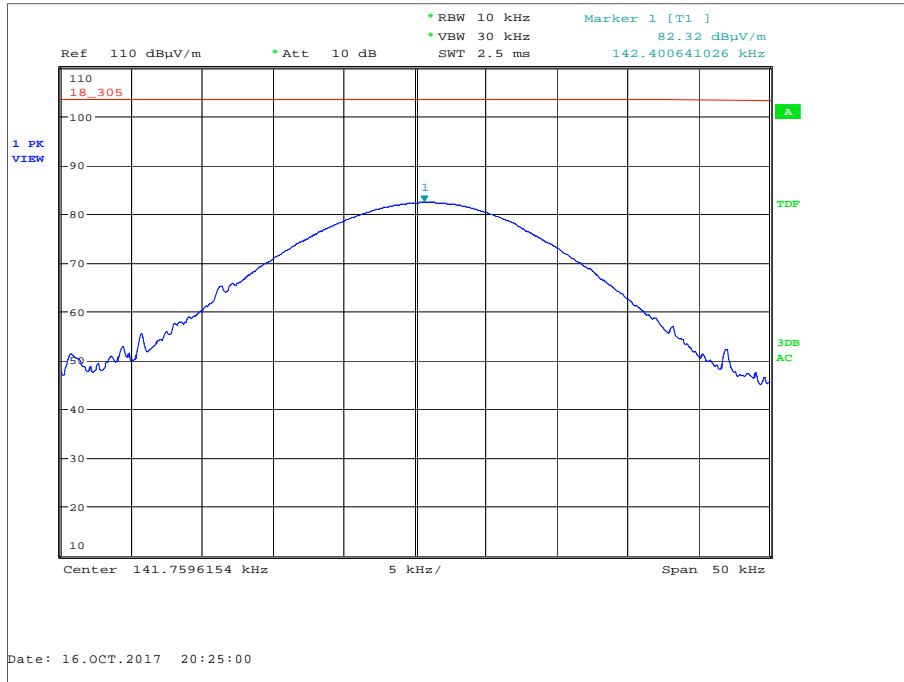

**Figure 1 - 142.401 kHz**

Frequency (MHz)	QP Level at 3m (dBµV/m)	QP Level at 3m (µV/m)	QP Limit at 3m (dBµV/m)	QP Limit at 3m (µV/m)	Angle	Height (m)	Polarity
0.142401	81.96	12531.41	103.52	150000.00	180	1.50	Face On

**Table 5 - Field Strength of Emissions, 9 kHz to 30 MHz**

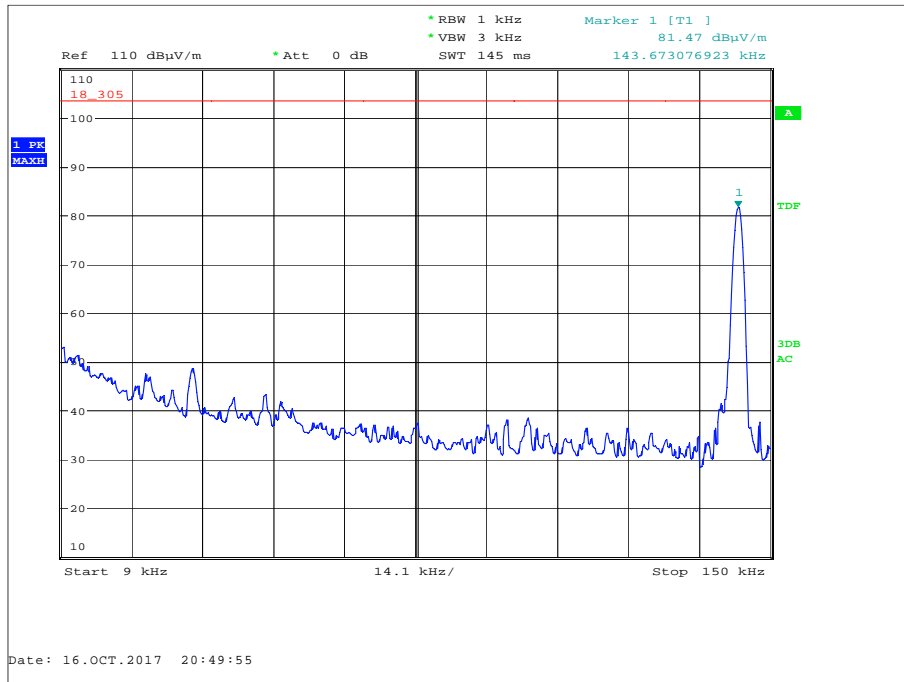


Figure 2 - 9 kHz to 150 kHz

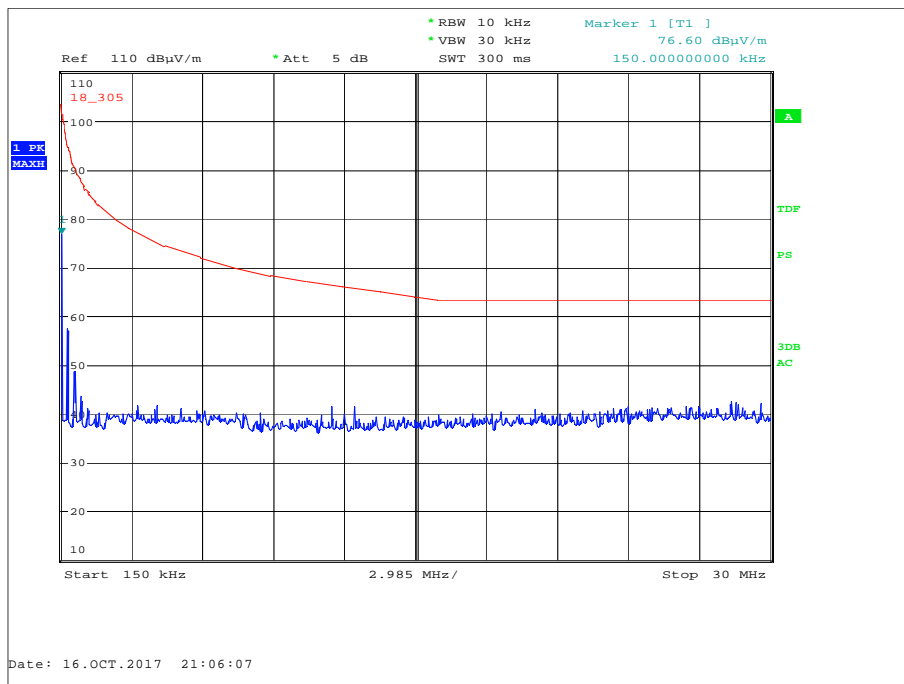



Figure 3 - 150 kHz to 30 MHz

The above plots detail the FCC limit line but an assessment was made for IC and the product is compliant.



Frequency (MHz)	QP Level at 10m (dBµV/m)	QP Limit at 10m (dBµV/m)	Angle	Height (m)	Polarity
30.511	21.4	30.0	170	1.00	Vertical
220.569	21.5	30.0	122	1.00	Vertical

**Table 6 - Field Strength of Emissions, 9 kHz to 30 MHz**

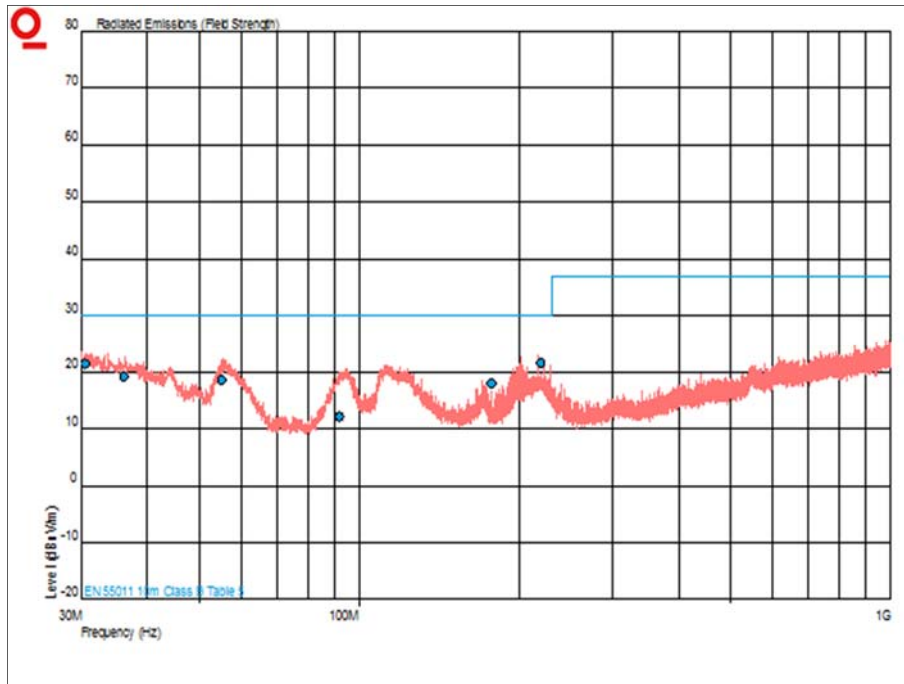

**Figure 4 - 30 MHz to 1 GHz**



FCC 47 CFR Part 18, Limit Clause 18.305 (b)

Equipment	Operating Frequency	RF Power generated by equipment (Watts)	Field Strength Limit ( $\mu\text{V/m}$ )	Distance (Meters)
Any type unless otherwise specified (miscellaneous).	Any ISM frequency	Below 500	25	300
		500 or more	$25 \times \sqrt{P/500}$	300
	Any non-ISM frequency	Below 500	15	300
		500 or more	$15 \times \sqrt{P/500}$	300

**Table 7 - Limit Table**

Industry Canada RSS-216, Limit Clause 6.2.2.2, ICES-001, Limit Clause 7.1.1 and CAN/CSA-CEI/IEC CISPR 11, Clause 5.2 - Table 3b

Frequency Band (MHz)	Limits in dB $\mu\text{A/m}$ at 3 m distance
0.009 to 0.070	69
0.070 to 0.1485	69 Decreasing linearly with logarithm of frequency to 39
0.1485 to 4.0	39 Decreasing linearly with logarithm of frequency to 3
4.0 to 30	3

NOTE The limits of Table 3b apply to induction cooking appliances for commercial use and those for domestic use with a diagonal diameter of more than 1.6 m.  
 Measurements are performed at 3 m distance with a 0.6 m loop antenna as described in 5.5.2.1 of CISPR 16-1.  
 The antenna shall be vertically installed, with the lower edge of the loop at 1 m height above the floor.

**Table 8 - Limits of Magnetic Field Strength**



Industry Canada RSS-216, Limit Clause 6.2.2.2, ICES-001, Limit Clause 7.1.1 and CAN/CSA-CEI/IEC CISPR 11, Clause 5.2 - Table 4

Frequency Band (MHz)	Electric Field Measurement Distance 10m		Magnetic Field Measurement Distance 10 m Quasi-peak limits (dBµA/m)
	Quasi-Peak Limits (dBµV/m)	Average Limits (dBµV/m) <sup>1</sup>	
0.15 to 30	-	-	39 Decreasing linearly with logarithm of frequency to 3
30 to 80.872	30	25	-
80.872 to 81.848	50	45	-
81.848 to 134.786	30	25	-
134.786 to 136.414	50	45	-
136.141 to 230	30	25	-
230 to 1000	37	32	-

<sup>1</sup> The average limits apply to magnetron driven equipment only. If magnetron driven equipment exceeds the quasi-peak limit at certain frequencies, then the measurement shall be repeated at these frequencies with the average detector and the average limits specified in this table apply.

**Table 9 - Electromagnetic Radiation Disturbance Limits for Group 2, Class B Equipment Measured on a Test Site**





### 2.1.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Apr-2018
Antenna (Active Loop, 9kHz-30MHz)	Rohde & Schwarz	HFH2-Z2	333	24	09-Dec-2018
Antenna (Dish/Tripod/Adaptor, 1GHz-18GHz)	Rohde & Schwarz	AC-008	334	-	TU
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Comb Generator	Schaffner	RSG1000	3034	-	TU
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	12	02-May-2018
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Multimeter	Fluke	177	3813	12	14-Sep-2018
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	30-Aug-2018
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	6	04-Nov-2017

**Table 10**

TU - Traceability Unscheduled



### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Field Strength of Emissions	9 kHz to 30 MHz: $\pm 3.4$ dB 30 MHz to 1 GHz: $\pm 5.2$ dB

**Table 11**