

## RF Test Report

Applicant : Emplus Technologies, Inc  
Product Type : 4x4 AX Dual-band AP  
Trade Name : emplus  
Model Number : WAP380  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013  
Received Date : Dec. 03, 2020  
Test Period : Dec. 07 ~ Dec. 16, 2020  
Issued Date : Dec. 31, 2020

### Issued by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range : 9 kHz to 40 GHz  
Test Firm MRA designation number: TW0010

#### Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



### **Revision History**

Rev.	Issued Date	Revisions	Revised By
00	Dec. 18, 2020	Initial Issue	Snow Wang
01	Dec. 31, 2020	Update chapter 2 (P.5)	Snow Wang

## Verification of Compliance

Applicant : Emplus Technologies, Inc

Product Type : 4x4 AX Dual-band AP

Trade Name : emplus

Model Number : WAP380

FCC ID : 2AL6XWAP380

EUT Rated Voltage : DC 12 V, 2.5 A (DC Power Adapter)  
DC 54 V, 0.6 A (PoE injector (802.3af/at))

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190




Taiwan Accreditation Foundation accreditation number: 1330

<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: 

(Manager)

(Fly Lu)



## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
1.1.	Summary of Test Result .....	5
1.2.	Measurement Uncertainty .....	6
<b>2</b>	<b>EUT Description.....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>9</b>
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step.....	10
3.3.	Configuration of Test System Details.....	11
3.4.	Test Instruments .....	13
3.5.	Test Site Environment.....	14
<b>4</b>	<b>Measurement Procedure.....</b>	<b>15</b>
4.1.	AC Power Line Conducted Emission Measurement.....	15
4.2.	Radiated Emission Measurement.....	17
4.3.	Maximum Conducted Output Power Measurement.....	21
4.4.	6 dB RF Bandwidth Measurement.....	22
4.5.	Maximum Power Spectral Density Measurement .....	23
4.6.	Out of Band Conducted Emissions Measurement.....	24
4.7.	Antenna Measurement .....	25
<b>5</b>	<b>Test Results .....</b>	<b>26</b>
	Annex A. Conducted Emission .....	26
	Annex B. Conducted Test Results .....	30
	Annex C. Radiated Emission Measurement .....	54



# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	Note
15.247(d)	Transmitter Radiated Emissions	PASS	Note
15.247(b)(3)	Max. Output Power	PASS	Note
15.247(a)(2)	6 dB RF Bandwidth	PASS	Note
15.247(e)	Maximum Power Spectral Density	PASS	Note
15.247(d)	Out of Band Conducted Spurious Emission	PASS	Note
15.203	Antenna Requirement	PASS	Note

Note: C2PC, only verify the WLAN 2.4 GHz b mode.

### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)



## 1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.1 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	



## 2 EUT Description

Applicant	Emplus Technologies, Inc Bld B, 10F, No.209, Sec.1, Nangang Rd., Taipei City, Taiwan			
Manufacturer	Emplus Technologies., Inc. 10F., Building B, No.209, Sec. 1, Nangang Rd., Nangang Dist., Taipei City 115, Taiwan (R.O.C.)			
Product Type	4x4 AX Dual-band AP			
Trade Name	emplus			
Model Number	WAP380			
FCC ID	2AL6XWAP380			
Class II Permissive Change	Change WLAN 2.4G b mode transition be CDD mode, this modification is through by adjust power setting to meet standard requirement.			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
IEEE 802.11n 2.4 GHz 20 MHz	2412 ~ 2462	OFDM (256QAM)	20 MHz	Up to 364.8 Mbps
IEEE 802.11n 2.4 GHz 40 MHz	2422 ~ 2452	OFDM (256QAM)	40 MHz	Up to 800 Mbps
IEEE 802.11ax 2.4 GHz 20 MHz	2412 ~ 2462	OFDMA	20 MHz	MCS11
IEEE 802.11ax 2.4 GHz 40 MHz	2422 ~ 2452	OFDMA	40 MHz	MCS11
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)
	ANT-0	5718A0514300	PIFA Antenna	3.70
	ANT-1	5718A0515300	PIFA Antenna	4.08
	ANT-2	5718A0516300	PIFA Antenna	4.12
	ANT-3	5718A0517300	PIFA Antenna	5.01
Antenna Delivery	See section 3.1			
Operate Temp. Range	0 ~ +40 °C			



Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.080
IEEE 802.11g	0.334
IEEE 802.11n 2.4 GHz 20 MHz	0.329
IEEE 802.11n 2.4 GHz 40 MHz	0.226
IEEE 802.11ax 2.4 GHz 20 MHz	0.332
IEEE 802.11ax 2.4 GHz 40 MHz	0.186

Beamforming on

Frequency Band	Max. RF Output Power (W)
IEEE 802.11n 2.4 GHz 20 MHz	0.078
IEEE 802.11n 2.4 GHz 40 MHz	0.051
IEEE 802.11ax 2.4 GHz 20 MHz	0.079
IEEE 802.11ax 2.4 GHz 40 MHz	0.042





### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.


Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
Mode 2	V	V	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	4TX(CDD)	1	1, 6, 11

### Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412.0	1.352	2.136	0.633	1.986	0.740

### Duty Cycle Graphs

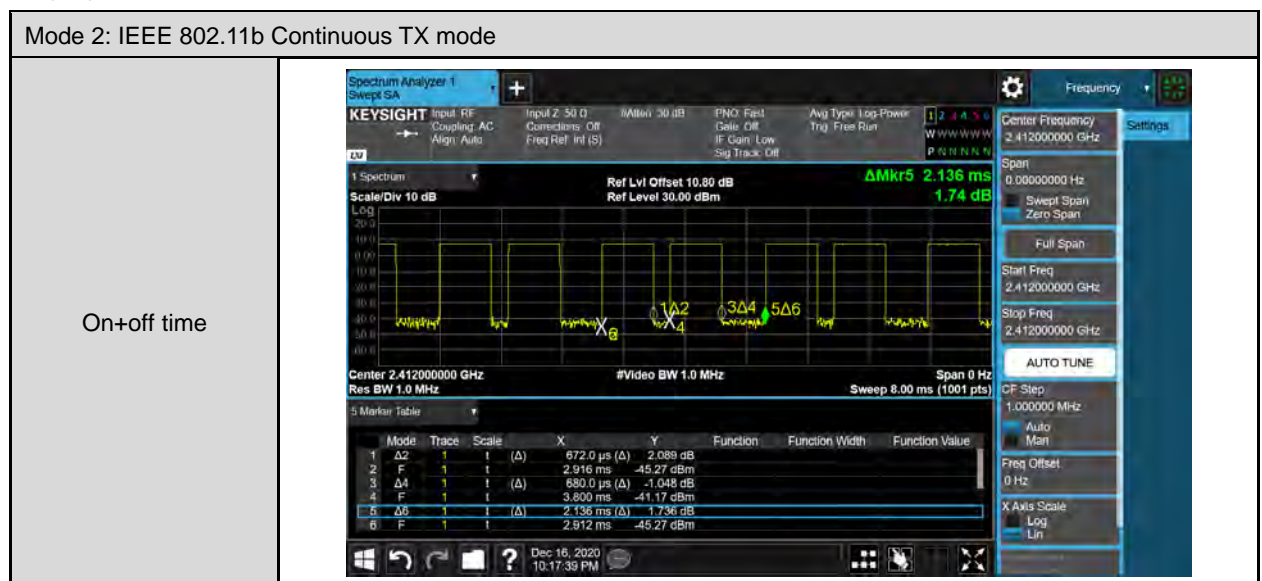


### 3.2. EUT Test Step

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

### 3.3. Configuration of Test System Details

Conducted Emission

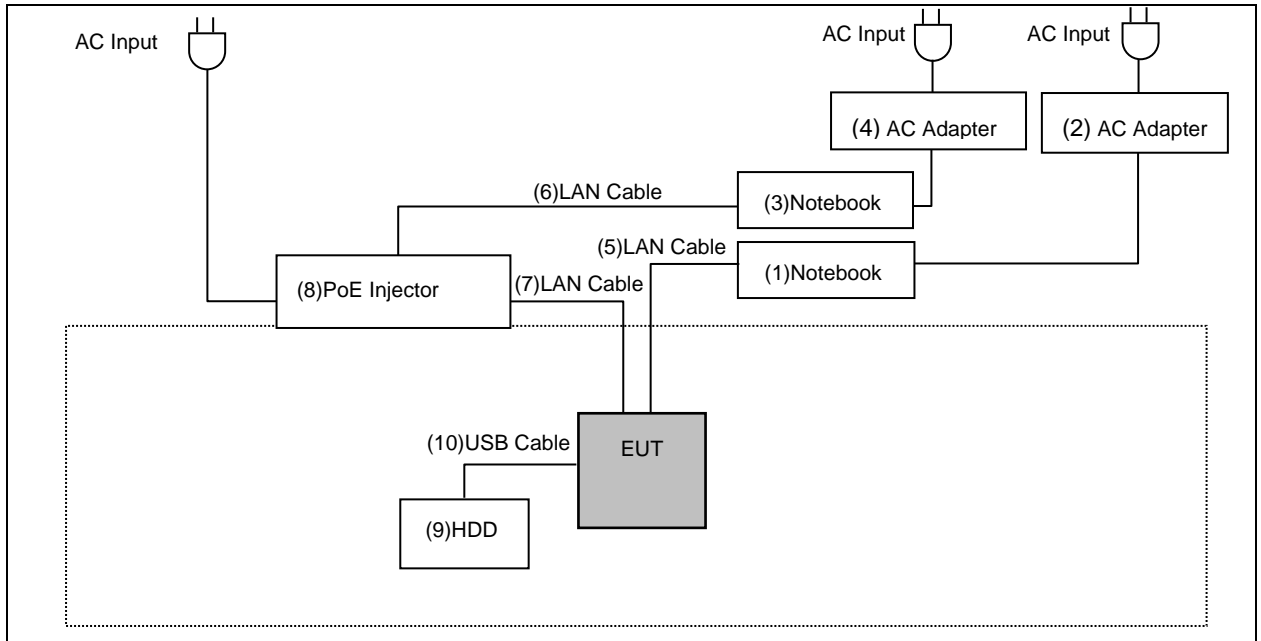

Radiated Emissions

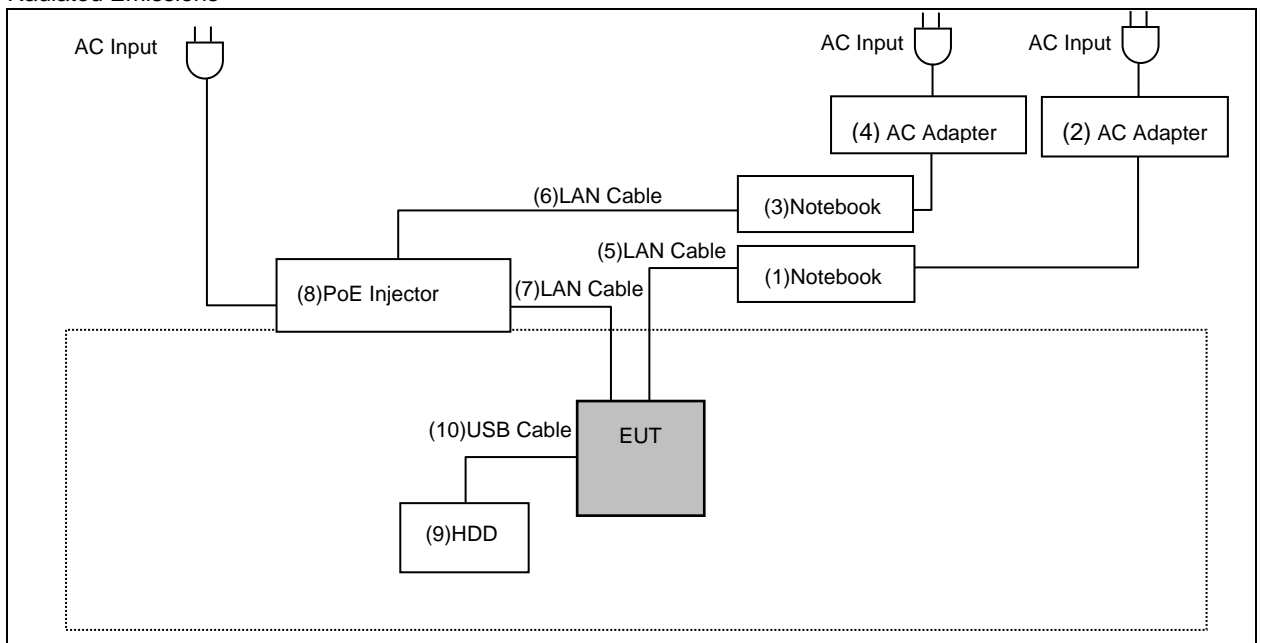

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Remark
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	INPUT : 100-240 VAC, 50/60 Hz, 1.7 A OUTPUT : 19.5 VDC, 3.34 A Non-Shielded, 1.7 m
(3)	Notebook	DELL	LATITUDE E6440	48GBD72	---
(4)	AC Adapter	DELL	HA65NM130	---	INPUT : 100-240 VAC, 50/60 Hz, 1.7 A OUTPUT : 19.5 VDC, 3.34 A Non-Shielded, 1.7 m
(5)	LAN Cable	WINKEY ENTERPRISE CO., LTD.	CY-SZ-141224	---	---
(6)	LAN Cable	WINKEY ENTERPRISE CO., LTD.	CY-SZ-141224	---	---
(7)	LAN Cable	HUAWEI	UL2464	---	---
(8)	PoE Injector	emplus	EPA5006GAT	---	INPUT : 100-240 VAC, 50-60 Hz, 0.8 A OUTPUT : 54 VDC, 0.6 A
(9)	HDD	Transend	TS1TSJ25A3K-RU	D72654-0611	---
(10)	USB Cable	Transend	TS1TSJ25A3K-RU	D72654-0611	---
(11)	AC Adapter	SPC	ZZU1588-250120-2A	---	INPUT : 100-240 VAC, 50-60 Hz, 1.5 A OUTPUT : 12.0 VDC, 2.5 A

Note: The device used (11)AC Adapter and (8)PoE Injector to evaluation AC Power line Conducted Emission, (8)POE Injector is worst case to perform testing.



### 3.4. Test Instruments

For Conducted Emission

Test Period: Dec. 07, 2020

Testing Engineer: Andy Lu

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/25/2020	1 year
LISN	R&S	ENV216	101040	03/23/2020	1 year
LISN	R&S	ENV216	101041	04/06/2020	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/25/2020	1 year

For Radiated Emissions

Test Period: Dec. 09, 2020

Testing Engineer: Marc Yeh

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/13/2020	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/17/2020	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/15/2020	1 year
Broadband Antenna	Schwarzbeck	VULB9168	01146	07/03/2020	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/21/2020	1 year
Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/14/2020	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/27/2020	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2020	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/29/2020	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2020	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Dec. 07 ~ Dec. 16, 2020

Testing Engineer: Peter Liu

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Agilent	N1911A	MY45101619	09/01/2020	1 year
Power Meter	Agilent	N1921A	MY45241957	09/01/2020	1 year
Spectrum Analyzer (10 Hz~26.5 GHz)	KEYSIGHT	N9010B	MY59071418	03/17/2020	1 year

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


## 4 Measurement Procedure

### 4.1. AC Power Line Conducted Emission Measurement

#### ■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

#### ■ Test Setup

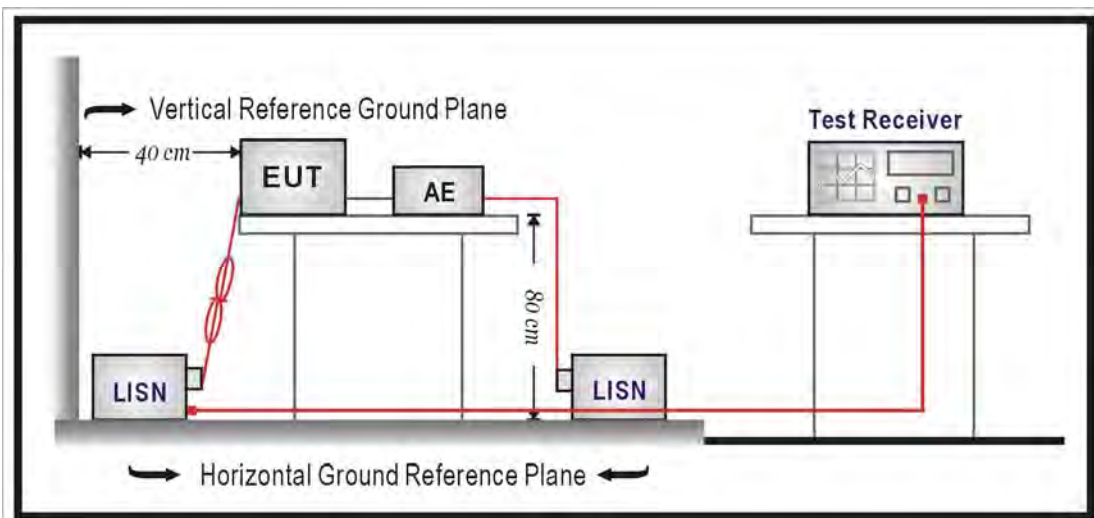

#### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All  $50 \Omega$  ports of the LISN shall be resistively terminated into  $50 \Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.



## 4.2. Radiated Emission Measurement

### ■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### ■ Setup


9 kHz ~ 30 MHz

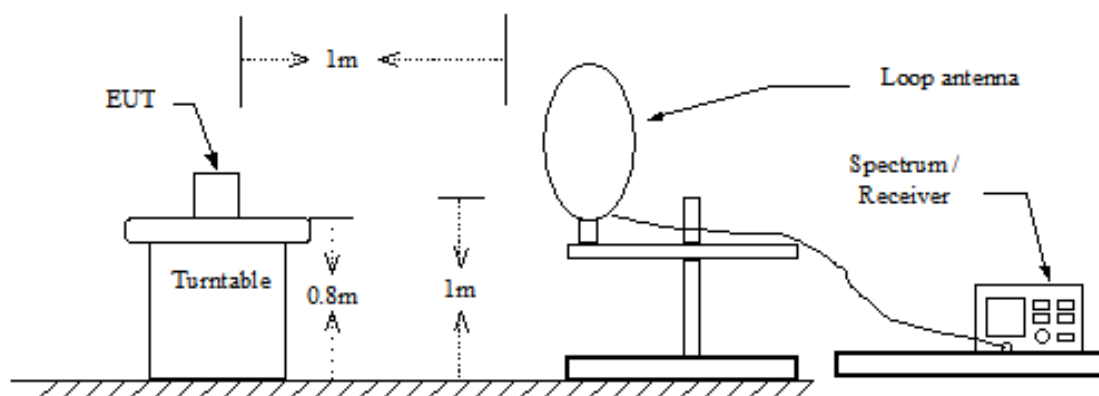

Below 1 GHz

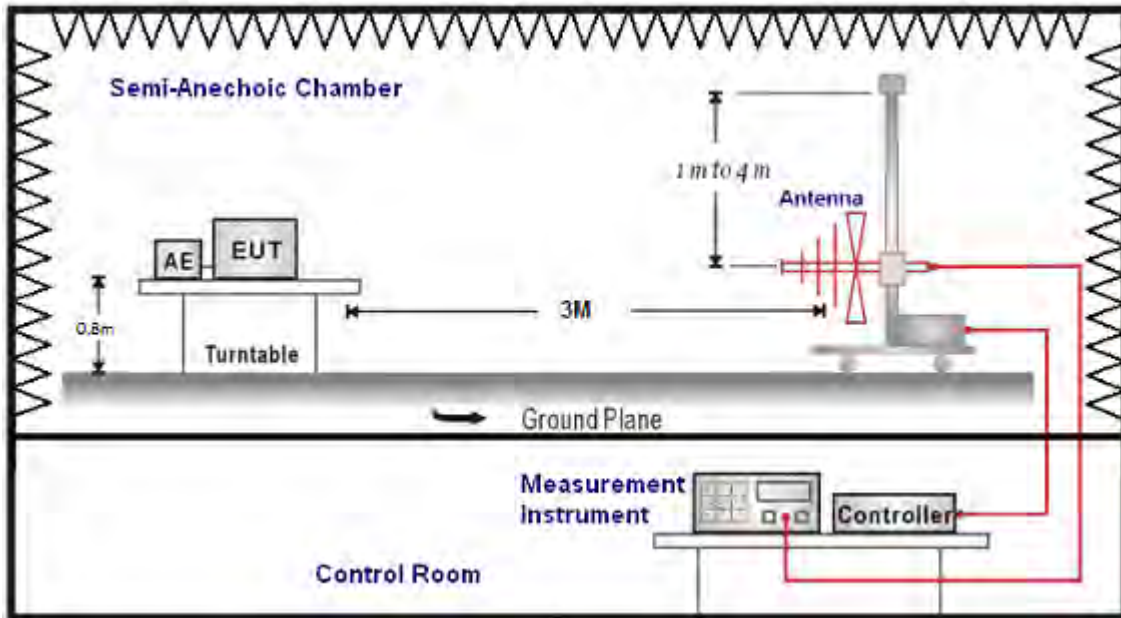

Above 1 GHz

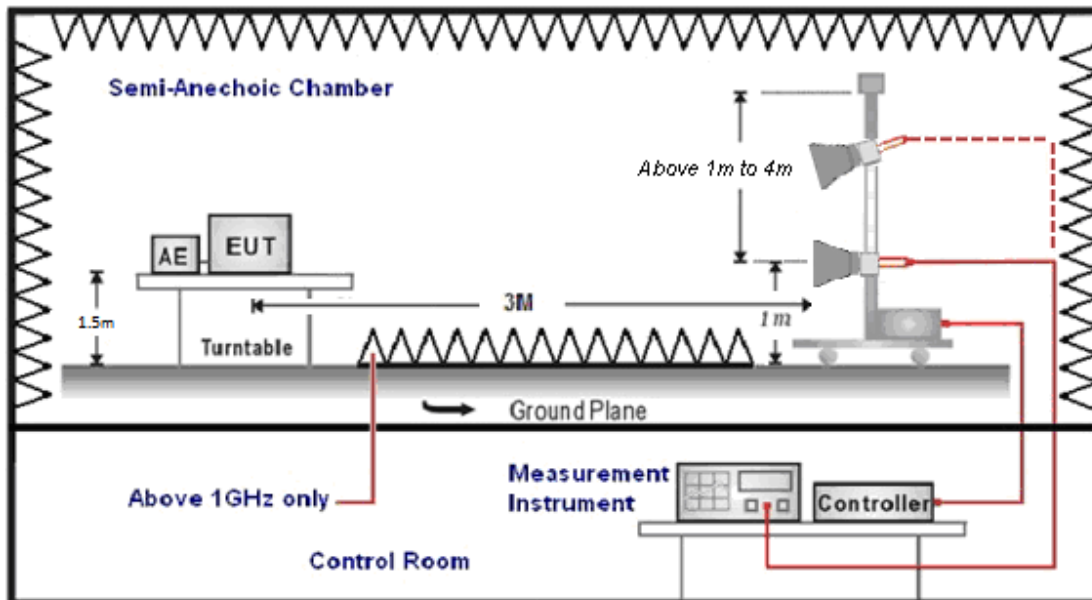

### ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle  $>0.98 / 1/T$  for average measurements when Duty cycle  $<0.98$ . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

### 4.3. Maximum Conducted Output Power Measurement

#### ■ Limit


For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### CDD mode:

Directional =  $G_{ANT} = 10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\} = 4.25 \text{ dBi} < 6 \text{ dBi}$

#### ■ Test Setup

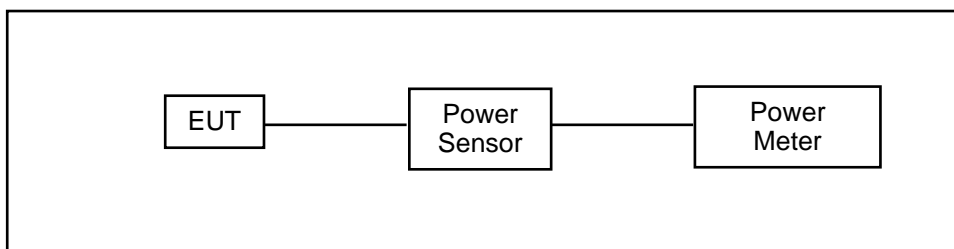

#### ■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

#### 4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ **Test Setup**

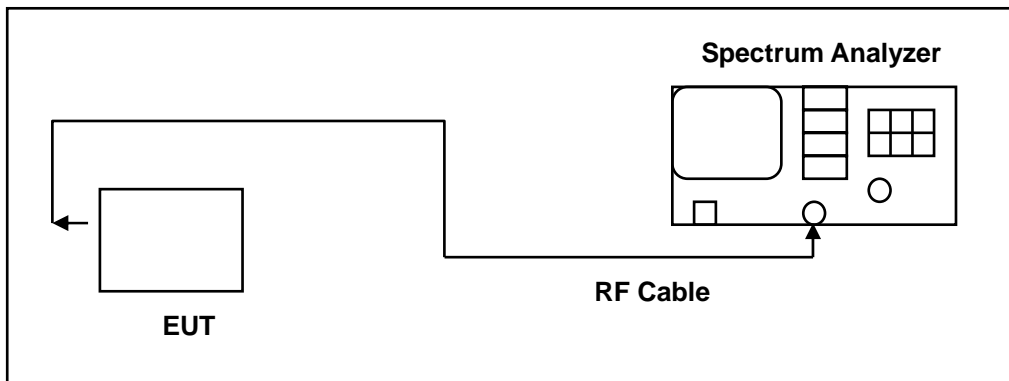

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

## 4.5. Maximum Power Spectral Density Measurement

### ■ Limit


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### CDD mode:

Directional Gain =  $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$  = 10.26 dBi > 6dBi

\* power spectral density limit shall be reduced =  $8 - 4.26 = 3.74$  dBm/3 kHz

### ■ Test Setup

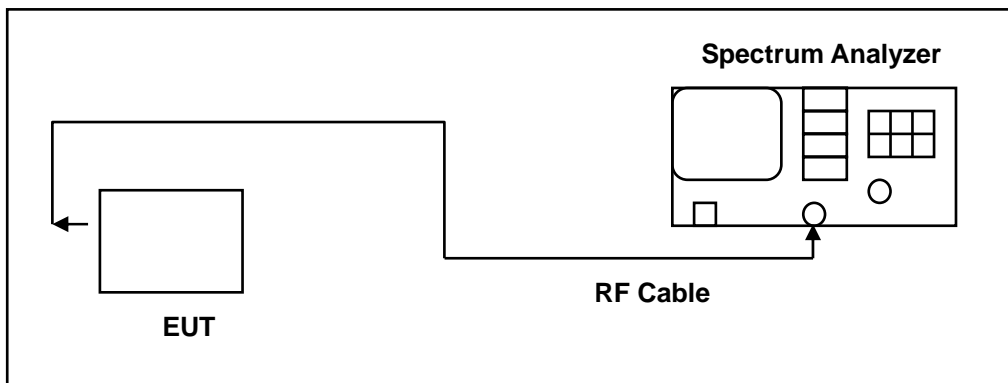

### ■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 4.6. Out of Band Conducted Emissions Measurement

##### ■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

##### ■ Test Setup

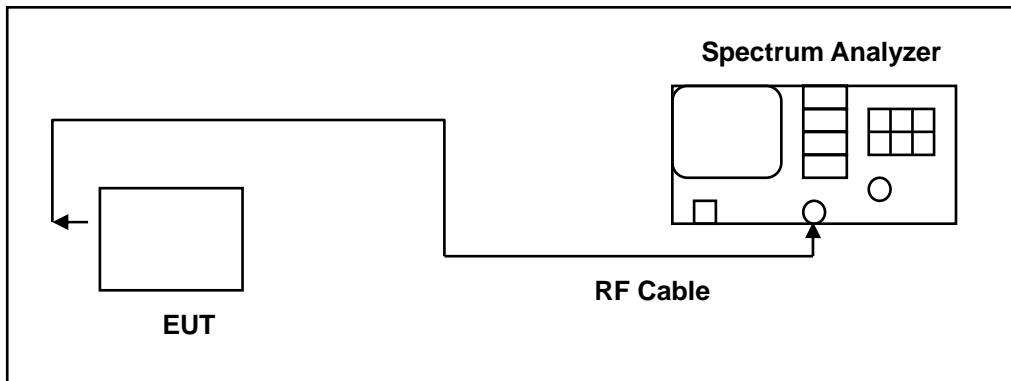

##### ■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.





## 4.7. Antenna Measurement

### ■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ■ Antenna Description

See section 2 – antenna information.

### ■ Directional Gain Calculated

#### For Maximum Conducted Output Power

$$\text{Directional Gain} = 10 \cdot \log\left\{\frac{10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}}{NANT}\right\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	4.25

#### For Maximum Power Density

$$\text{Directional Gain} = 10 \cdot \log\left\{\frac{10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}}{NANT}\right\}^2$$


Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	10.26

## 5 Test Results

### Annex A. Conducted Emission

POE Injector

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

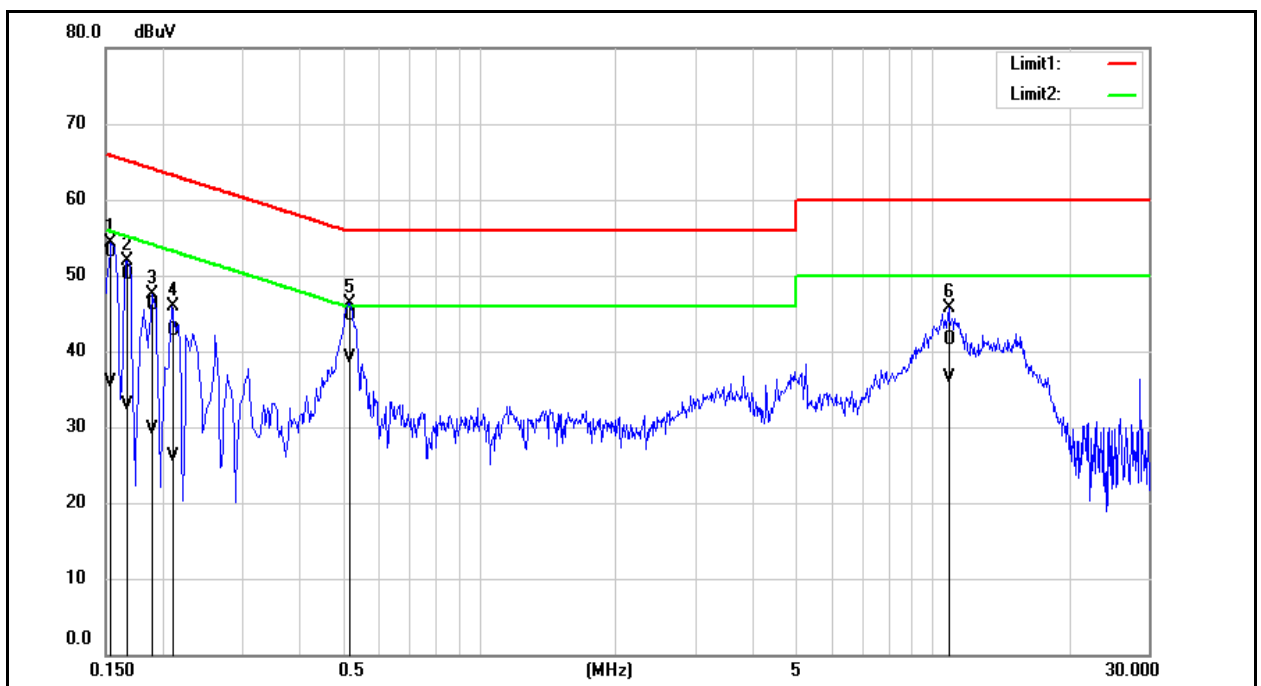


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	43.37	26.17	9.70	53.07	35.87	65.78	55.78	-12.71	-19.91	Pass
2	0.1660	40.40	23.25	9.70	50.10	32.95	65.16	55.16	-15.06	-22.21	Pass
3	0.1900	36.46	19.96	9.70	46.16	29.66	64.04	54.04	-17.88	-24.38	Pass
4	0.2100	32.98	16.48	9.70	42.68	26.18	63.21	53.21	-20.53	-27.03	Pass
5	0.5180	34.95	29.44	9.71	44.66	39.15	56.00	46.00	-11.34	-6.85	Pass
6	10.8820	31.59	26.53	9.89	41.48	36.42	60.00	50.00	-18.52	-13.58	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

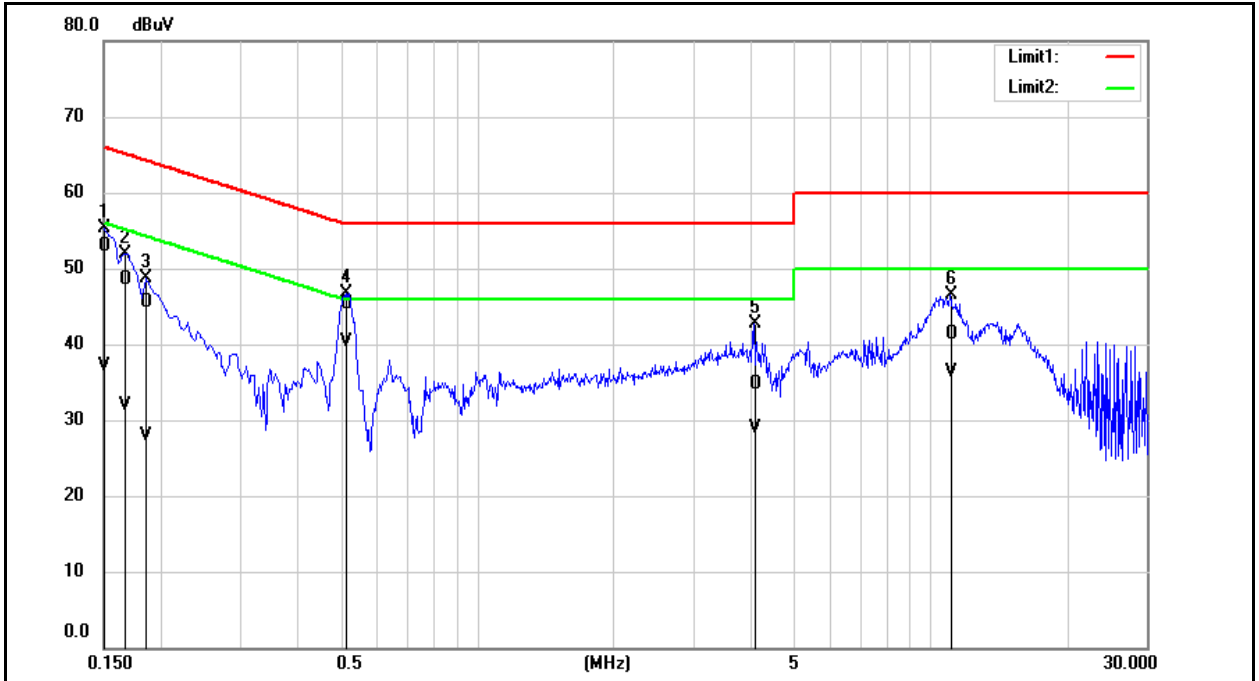


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	43.31	27.34	9.69	53.00	37.03	66.00	56.00	-13.00	-18.97	Pass
2	0.1660	38.83	22.19	9.69	48.52	31.88	65.16	55.16	-16.64	-23.28	Pass
3	0.1860	35.88	18.16	9.69	45.57	27.85	64.21	54.21	-18.64	-26.36	Pass
4	0.5140	35.54	30.58	9.70	45.24	40.28	56.00	46.00	-10.76	-5.72	Pass
5	4.0740	24.89	19.17	9.79	34.68	28.96	56.00	46.00	-21.32	-17.04	Pass
6	11.0380	31.49	26.47	9.90	41.39	36.37	60.00	50.00	-18.61	-13.63	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

AC Adapter


Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

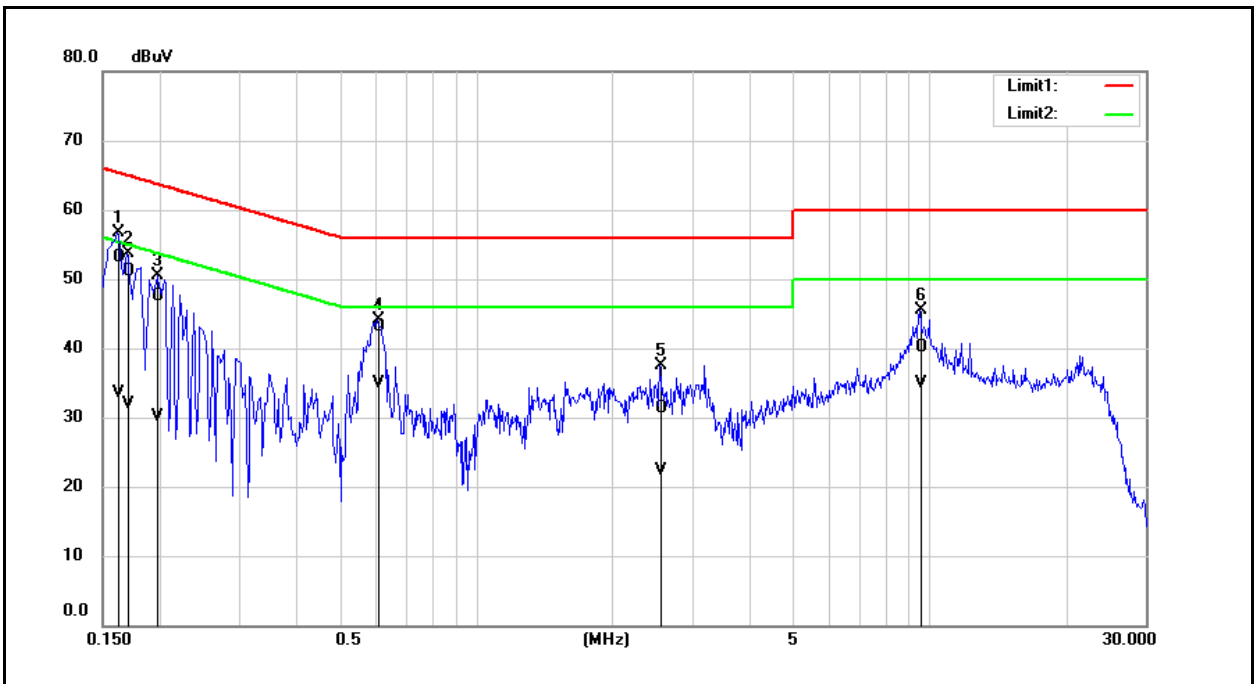

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	43.47	23.86	9.70	53.17	33.56	65.36	55.36	-12.19	-21.80	Pass
2	0.1700	41.42	22.22	9.70	51.12	31.92	64.96	54.96	-13.84	-23.04	Pass
3	0.1980	37.83	20.47	9.70	47.53	30.17	63.69	53.69	-16.16	-23.52	Pass
4	0.6060	33.43	25.18	9.71	43.14	34.89	56.00	46.00	-12.86	-11.11	Pass
5	2.5500	21.59	12.57	9.77	31.36	22.34	56.00	46.00	-24.64	-23.66	Pass
6	9.5140	30.20	25.12	9.88	40.08	35.00	60.00	50.00	-19.92	-15.00	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

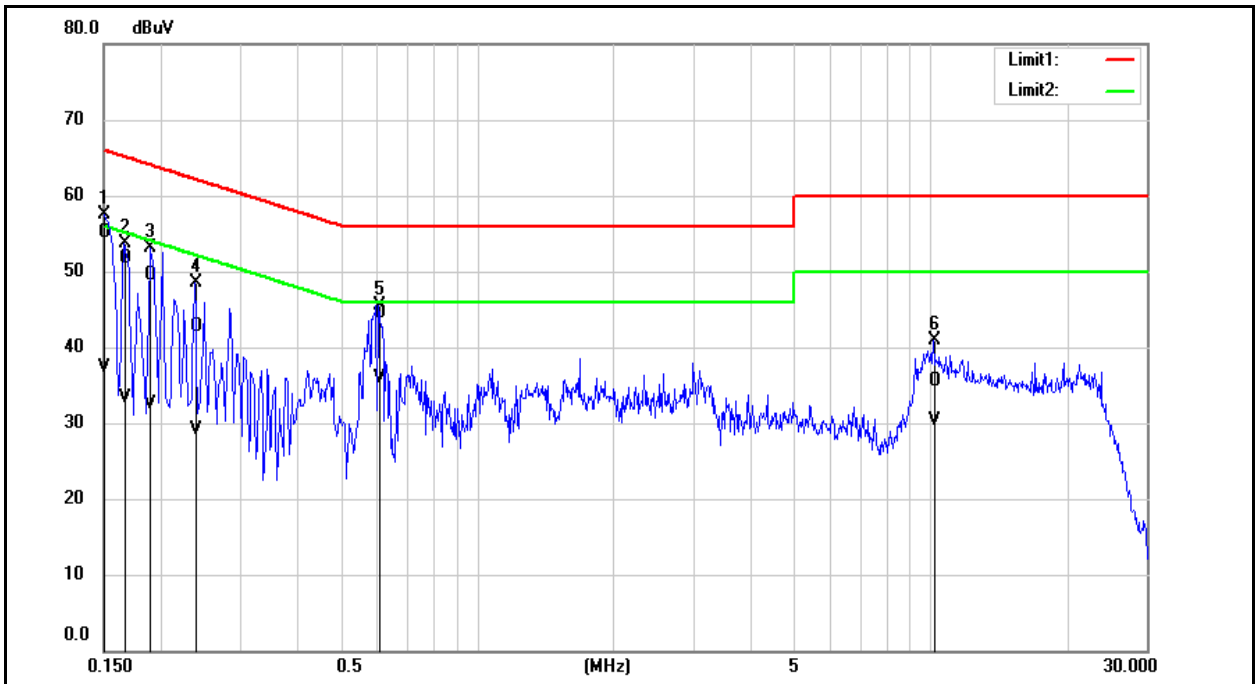

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	45.42	27.69	9.69	55.11	37.38	66.00	56.00	-10.89	-18.62	Pass
2	0.1660	42.09	23.65	9.69	51.78	33.34	65.16	55.16	-13.38	-21.82	Pass
3	0.1900	39.77	22.88	9.69	49.46	32.57	64.04	54.04	-14.58	-21.47	Pass
4	0.2380	33.06	19.35	9.69	42.75	29.04	62.17	52.17	-19.42	-23.13	Pass
5	0.6060	34.84	26.24	9.70	44.54	35.94	56.00	46.00	-11.46	-10.06	Pass
6	10.1780	25.68	20.47	9.88	35.56	30.35	60.00	50.00	-24.44	-19.65	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## Annex B. Conducted Test Results

### Maximum Conducted Output Power Measurement

ANT-0					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	12.68	0.019	≤ 30
	2437		12.55	0.018	≤ 30
	2462		12.76	0.019	≤ 30

ANT-1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	13.11	0.020	≤ 30
	2437		13.13	0.021	≤ 30
	2462		13.33	0.022	≤ 30

ANT-2					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	12.83	0.019	≤ 30
	2437		12.61	0.018	≤ 30
	2462		12.71	0.019	≤ 30

Note: The relevant measured result has the offset with cable loss already.



ANT-3					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	13.00	0.020	≤ 30
	2437		13.07	0.020	≤ 30
	2462		13.20	0.021	≤ 30

ANT-0+1+2+3					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	18.93	0.078	≤ 30
	2437		18.87	0.077	≤ 30
	2462		<b>19.03</b>	<b>0.080</b>	≤ 30

Note: The relevant measured result has the offset with cable loss already.



**6 dB RF Bandwidth Measurement**

Test Mode	Frequency (MHz)	Measurement (kHz)				Limit (kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 2	2412	8071	8079	8076	8066	≥ 500
	2437	8069	8084	8075	8078	≥ 500
	2462	8061	8076	8076	8072	≥ 500





■ Test Graphs

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412 MHz	<p>Spectrum Analyzer 1 Occupied BW</p> <p>KEYSIGHT Input RF Input Z: 50 Ω Attenu: 30 dB Trig: Error Run Center Freq: 2.41200000 GHz Coupling: AC Corrections: Off Freq Ref: Int (S) Sale: Off Avg: Mod: 111 Align: Auto Radio St: None</p> <p>1 Graph Scale/Div 10.0 dB Log Ref Lvl Offset 10.80 dB Ref Value 30.00 dBm</p> <p>Center 2.41200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts)</p> <p>2 Metrics Occupied Bandwidth 12.855 MHz Total Power 20.2 dBm Transmit Freq Error 41.584 kHz % of OBW Power 99.00 % x dB Bandwidth 8.071 MHz x dB -6.00 dB</p> <p>Dec 16, 2020 7:20:02 PM</p>
2437 MHz	<p>Spectrum Analyzer 1 Occupied BW</p> <p>KEYSIGHT Input RF Input Z: 50 Ω Attenu: 30 dB Trig: Error Run Center Freq: 2.43700000 GHz Coupling: AC Corrections: Off Freq Ref: Int (S) Sale: Off Avg: Mod: 111 Align: Auto Radio St: None</p> <p>1 Graph Scale/Div 10.0 dB Log Ref Lvl Offset 10.80 dB Ref Value 30.00 dBm</p> <p>Center 2.43700 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts)</p> <p>2 Metrics Occupied Bandwidth 12.823 MHz Total Power 19.6 dBm Transmit Freq Error 49.543 kHz % of OBW Power 99.00 % x dB Bandwidth 8.069 MHz x dB -6.00 dB</p> <p>Dec 16, 2020 7:16:37 PM</p>
2462 MHz	<p>Spectrum Analyzer 1 Occupied BW</p> <p>KEYSIGHT Input RF Input Z: 50 Ω Attenu: 30 dB Trig: Error Run Center Freq: 2.46200000 GHz Coupling: AC Corrections: Off Freq Ref: Int (S) Sale: Off Avg: Mod: 111 Align: Auto Radio St: None</p> <p>1 Graph Scale/Div 10.0 dB Log Ref Lvl Offset 10.80 dB Ref Value 30.00 dBm</p> <p>Center 2.46200 GHz #Res BW 100.00 kHz #Video BW 300.00 kHz Span 40 MHz Sweep 3.87 ms (1001 pts)</p> <p>2 Metrics Occupied Bandwidth 12.865 MHz Total Power 20.1 dBm Transmit Freq Error 2.698 kHz % of OBW Power 99.00 % x dB Bandwidth 8.061 MHz x dB -6.00 dB</p> <p>Dec 16, 2020 7:15:22 PM</p>

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412 MHz






2437 MHz



2462 MHz



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2

<p>2412 MHz</p>	 <p>Center Frequency: 2.41200000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Freq Offset: 0 Hz</p> <p>Center: 2.41200 GHz #Res BW: 100.00 kHz #Video BW: 300.00 kHz Span: 40 MHz Sweep: 3.87 ms (1001 pts)</p> <p>Occupied Bandwidth: 12.803 MHz Total Power: 20.1 dBm Transmit Freq Error: 47.830 kHz % of OBW Power: 99.00 % x dB Bandwidth: 8.076 MHz x dB: -6.00 dB</p>
<p>2437 MHz</p>	 <p>Center Frequency: 2.43700000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Freq Offset: 0 Hz</p> <p>Center: 2.43700 GHz #Res BW: 100.00 kHz #Video BW: 300.00 kHz Span: 40 MHz Sweep: 3.87 ms (1001 pts)</p> <p>Occupied Bandwidth: 12.831 MHz Total Power: 20.0 dBm Transmit Freq Error: 19.330 kHz % of OBW Power: 99.00 % x dB Bandwidth: 8.075 MHz x dB: -6.00 dB</p>
<p>2462 MHz</p>	 <p>Center Frequency: 2.46200000 GHz Span: 40.000 MHz CF Step: 4.000000 MHz Freq Offset: 0 Hz</p> <p>Center: 2.46200 GHz #Res BW: 100.00 kHz #Video BW: 300.00 kHz Span: 40 MHz Sweep: 3.87 ms (1001 pts)</p> <p>Occupied Bandwidth: 12.891 MHz Total Power: 20.3 dBm Transmit Freq Error: 23.378 kHz % of OBW Power: 99.00 % x dB Bandwidth: 8.076 MHz x dB: -6.00 dB</p>

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz



2437 MHz



2462 MHz





**Maximum Power Spectral Density Measurement**

Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)					Limit (dBm/ 3 kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3	
Mode 2	2412	-9.740	-9.080	-9.540	-9.380	-3.408	≤ 3.74
	2437	-9.930	-8.770	-9.800	-8.330	-3.134	≤ 3.74
	2462	-9.510	-8.660	-9.680	-7.990	-2.885	≤ 3.74

■ Test Graphs

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412 MHz



2437 MHz



2462 MHz



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412 MHz



2437 MHz



2462 MHz



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2

2412 MHz



2437 MHz



2462 MHz





Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz



2437 MHz



2462 MHz



### Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412 MHz



2437 MHz



2462 MHz



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2

2412 MHz



2437 MHz



2462 MHz



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz



2437 MHz



2462 MHz



Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412 MHz



2437 MHz



2462 MHz



Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412 MHz



2437 MHz



2462 MHz





Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2

2412 MHz



2437 MHz



2462 MHz





Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz



2437 MHz




2462 MHz




### Conducted Band Edge

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412 MHz

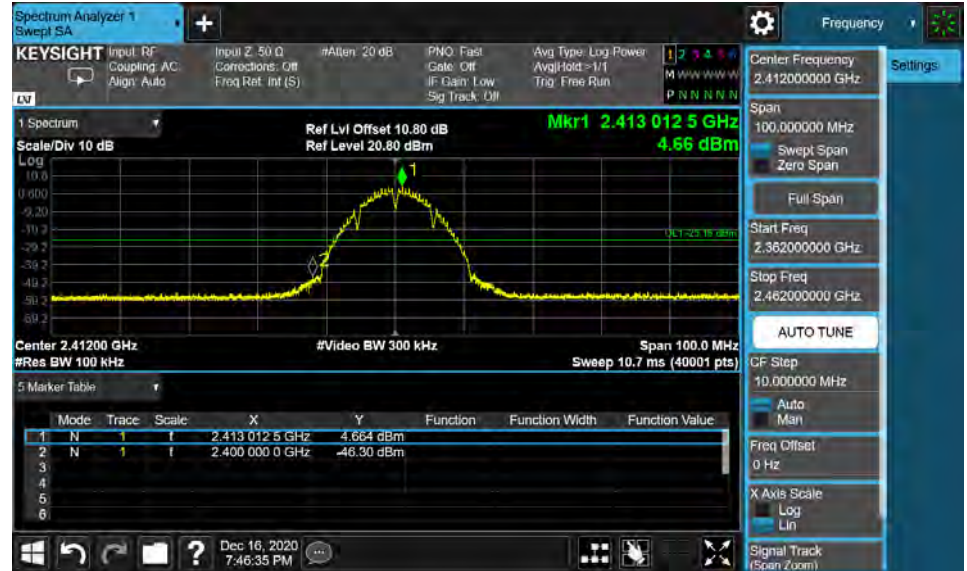


2462 MHz

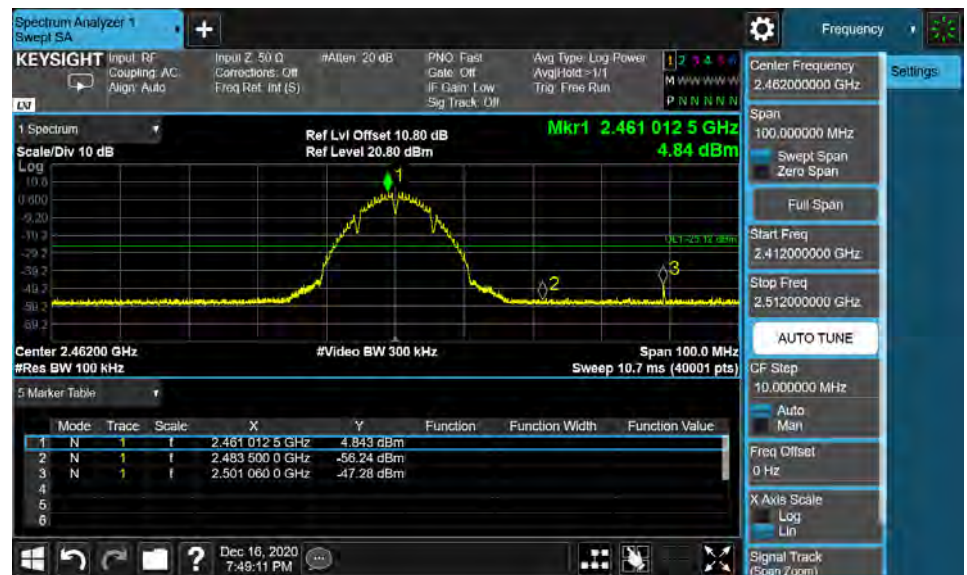


Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412 MHz

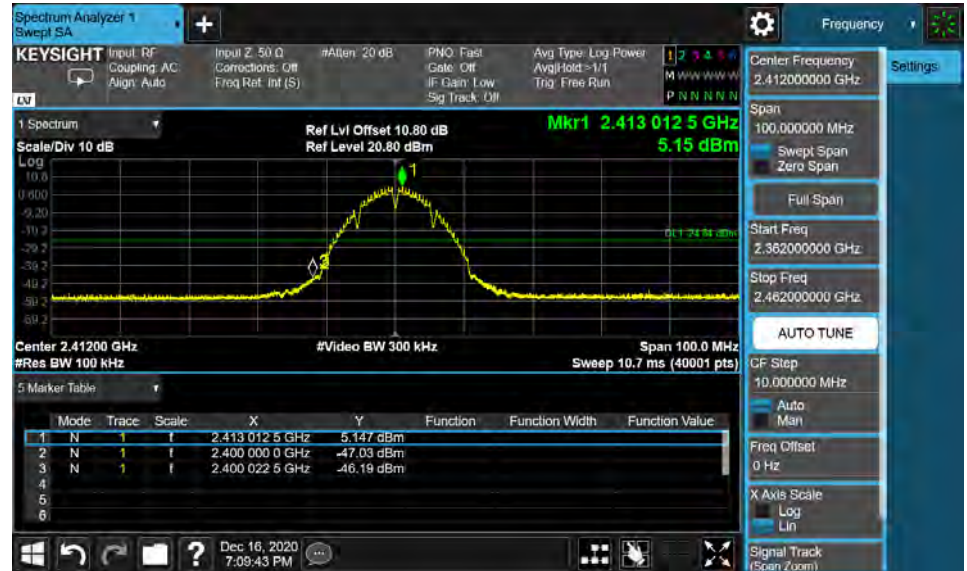


2462 MHz

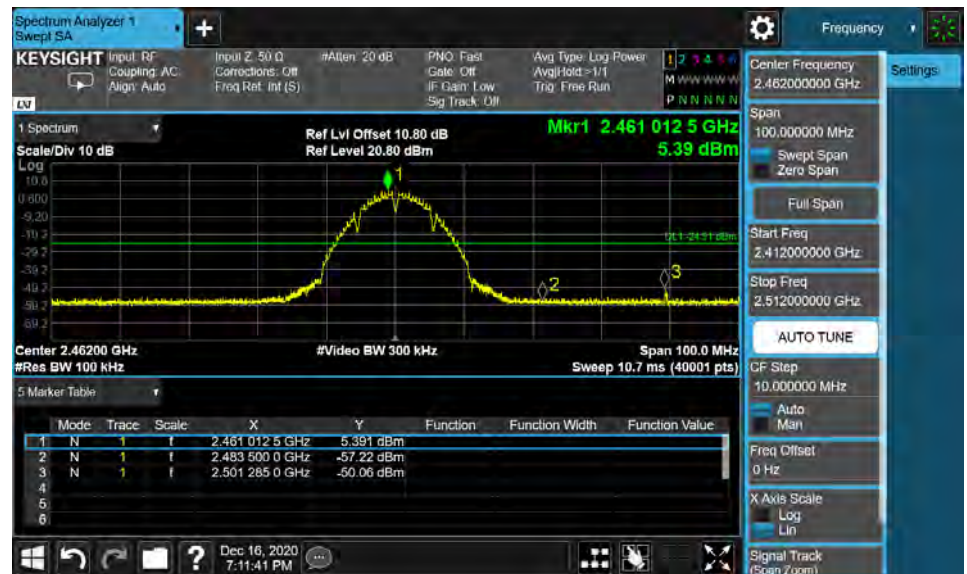


Mode 2: IEEE 802.11b Continuous TX mode\_ANT-2

2412 MHz

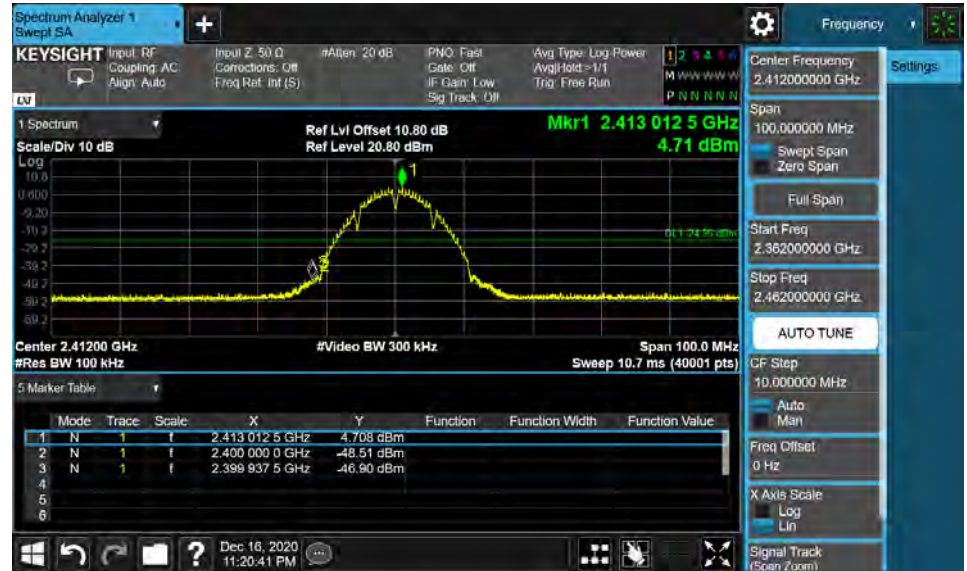


2462 MHz

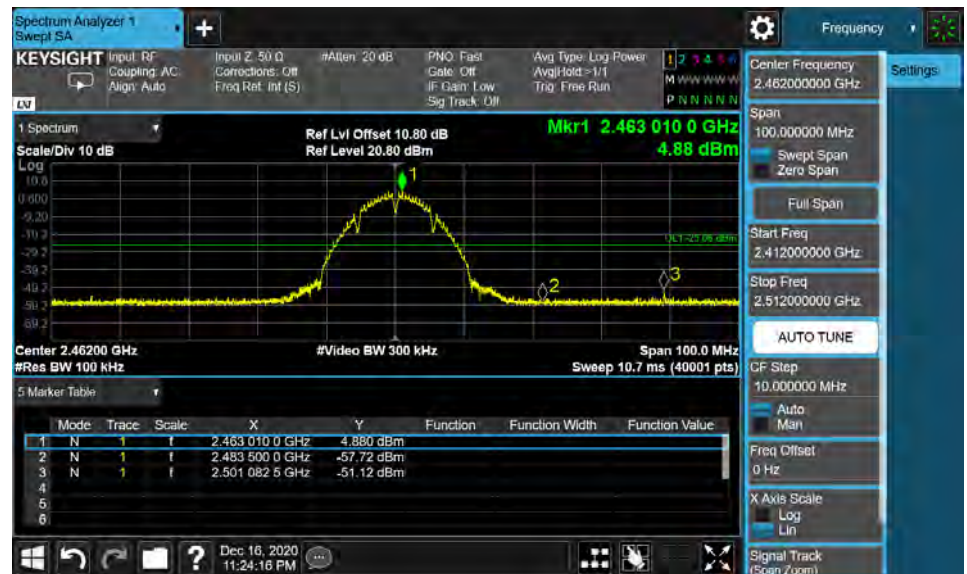


Mode 2: IEEE 802.11b Continuous TX mode\_ANT-3

2412 MHz

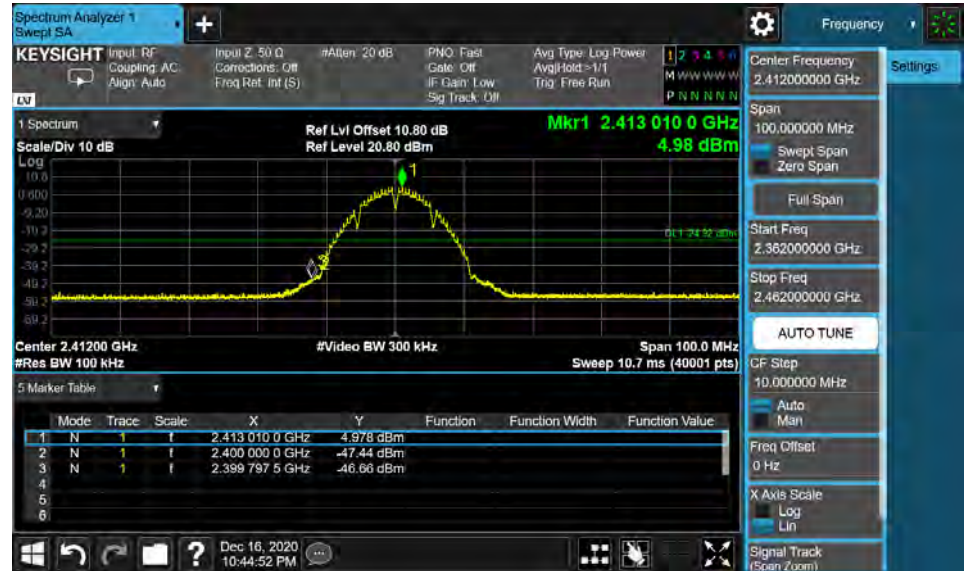


2462 MHz

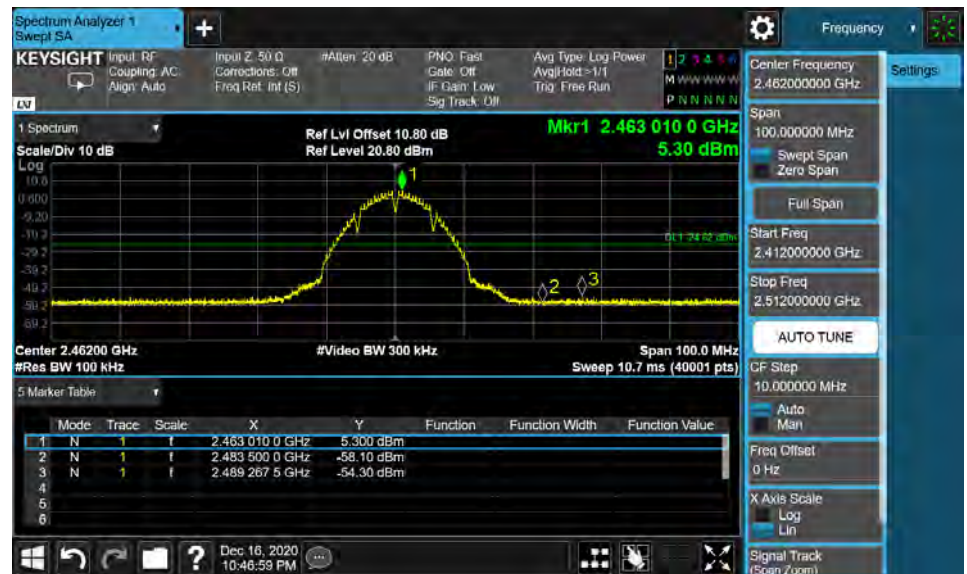

## Annex C. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3m
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

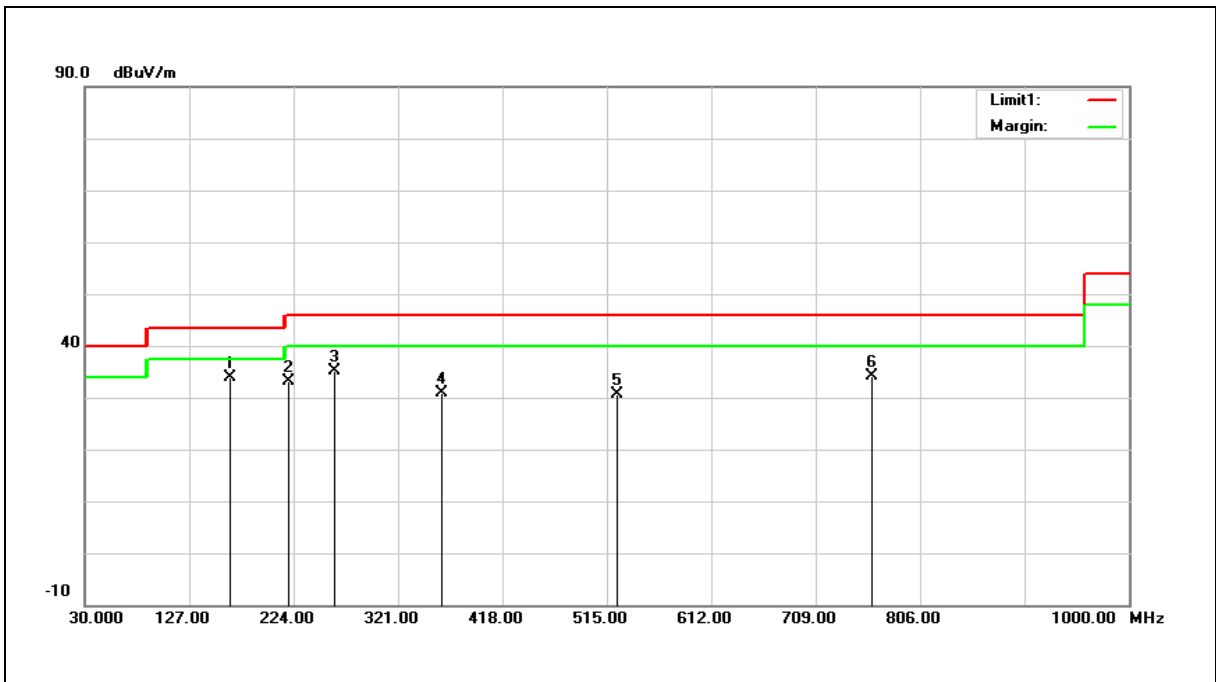

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	163.9940	40.09	-6.18	33.91	43.50	-9.59	QP
2	218.3684	41.42	-8.27	33.15	46.00	-12.85	QP
3	261.0910	41.83	-6.70	35.13	46.00	-10.87	QP
4	361.1010	34.87	-4.04	30.83	46.00	-15.17	QP
5	524.2241	31.57	-0.87	30.70	46.00	-15.30	QP
6	761.1411	30.00	4.15	34.15	46.00	-11.85	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example:  $33.91 = -6.18 + 40.09$ .

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

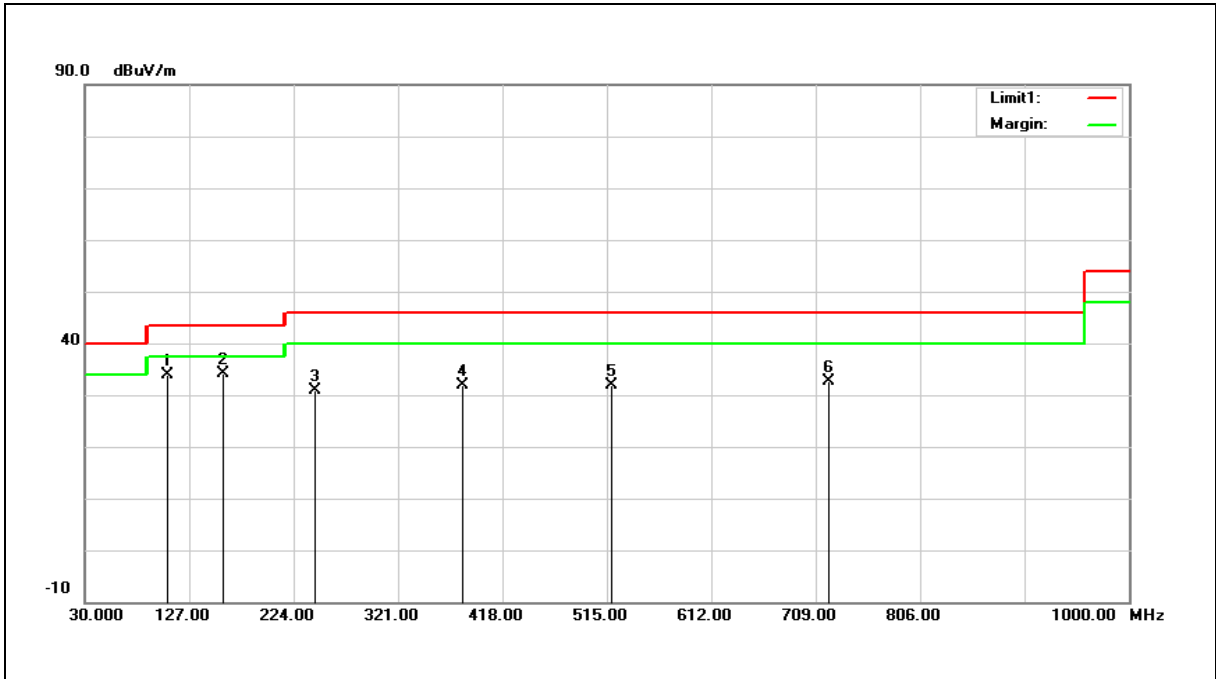

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	105.7356	44.36	-10.50	33.86	43.50	-9.64	QP
2	157.1972	40.28	-6.10	34.18	43.50	-9.32	QP
3	242.6425	37.94	-7.09	30.85	46.00	-15.15	QP
4	380.5205	35.48	-3.57	31.91	46.00	-14.09	QP
5	519.3694	32.95	-1.00	31.95	46.00	-14.05	QP
6	721.3313	29.34	3.34	32.68	46.00	-13.32	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 33.86 = -10.50 + 44.36.


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

### Harmonic

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

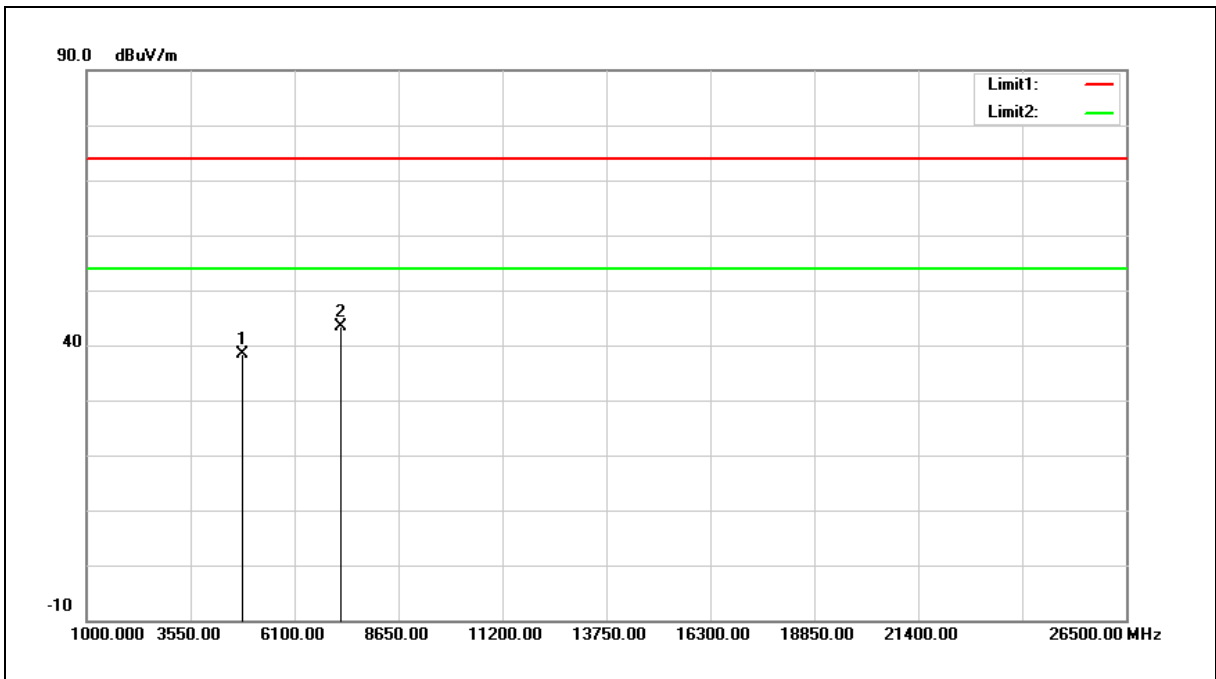

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.62	5.86	38.48	74.00	-35.52	peak
2	7236.000	30.97	12.32	43.29	74.00	-30.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 38.48=5.86+32.62.


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

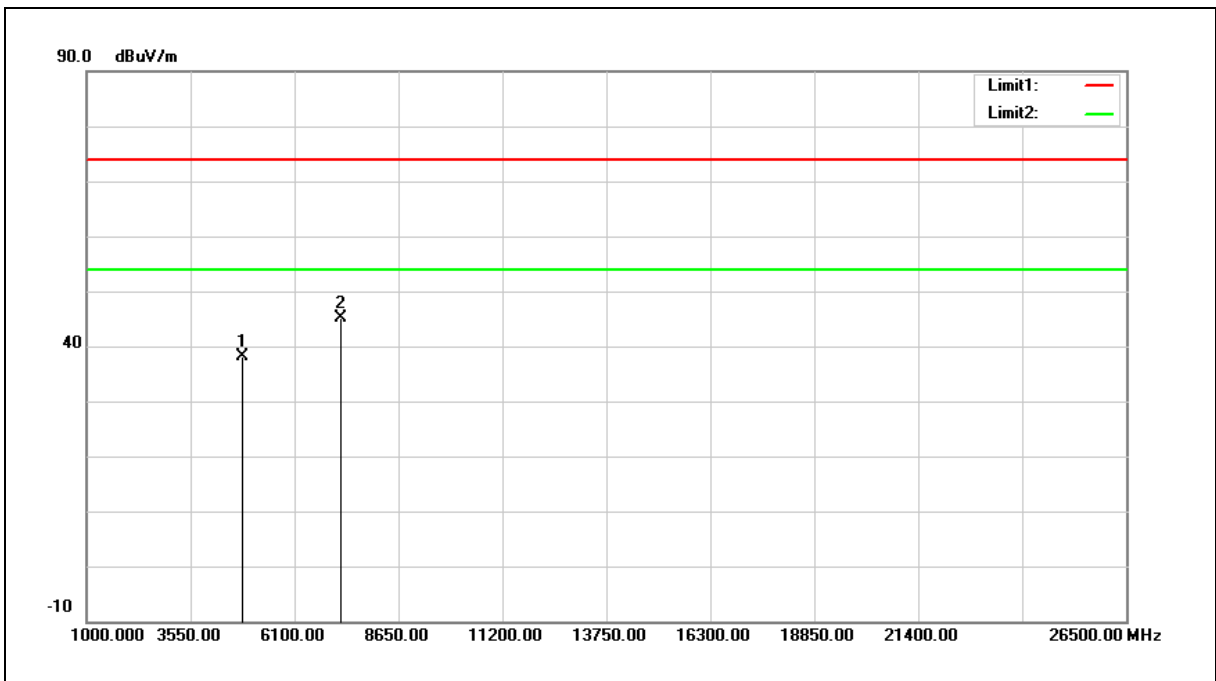

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.23	5.86	38.09	74.00	-35.91	peak
2	7236.000	32.72	12.32	45.04	74.00	-28.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 38.09=5.86+32.23.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

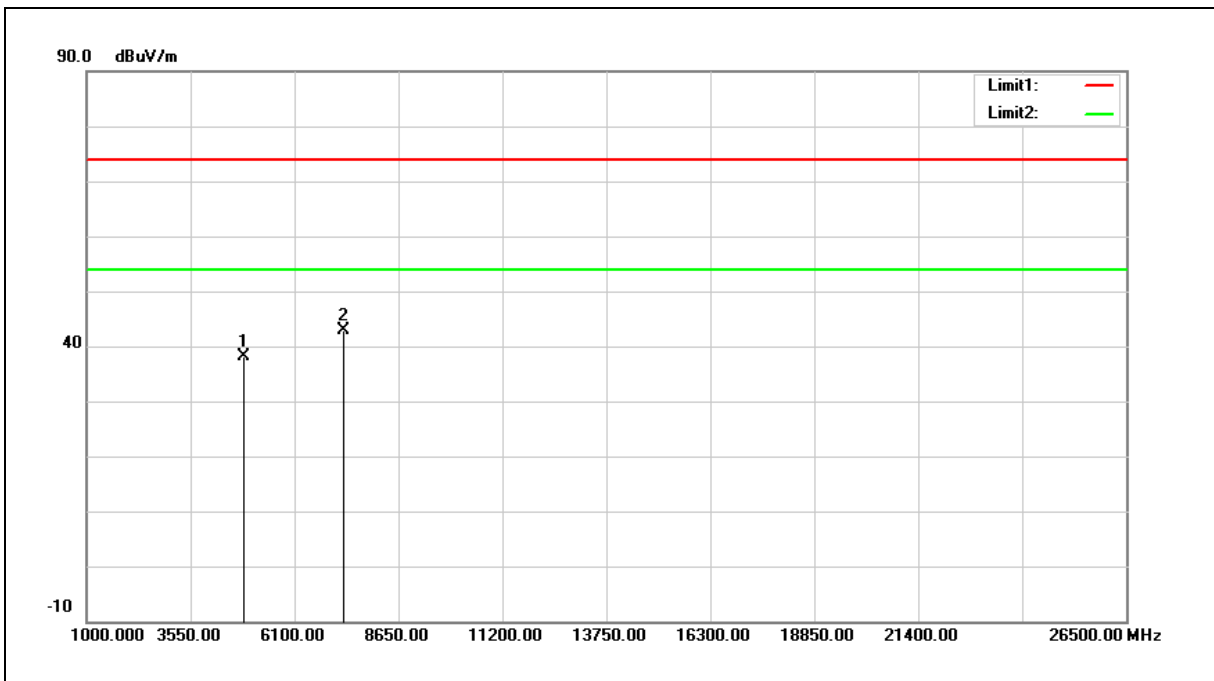

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.15	5.98	38.13	74.00	-35.87	peak
2	7311.000	30.27	12.56	42.83	74.00	-31.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	33.51	5.98	39.49	74.00	-34.51	peak
2	7311.000	29.35	12.56	41.91	74.00	-32.09	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

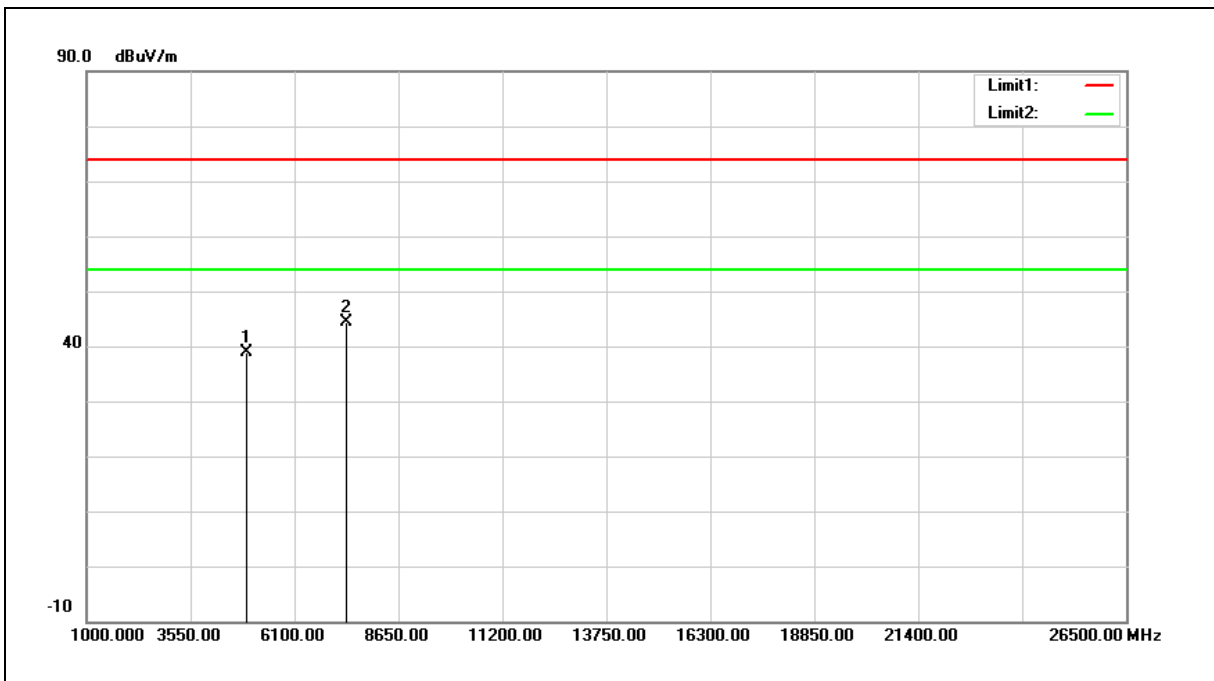

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	32.73	6.11	38.84	74.00	-35.16	peak
2	7386.000	31.48	12.80	44.28	74.00	-29.72	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

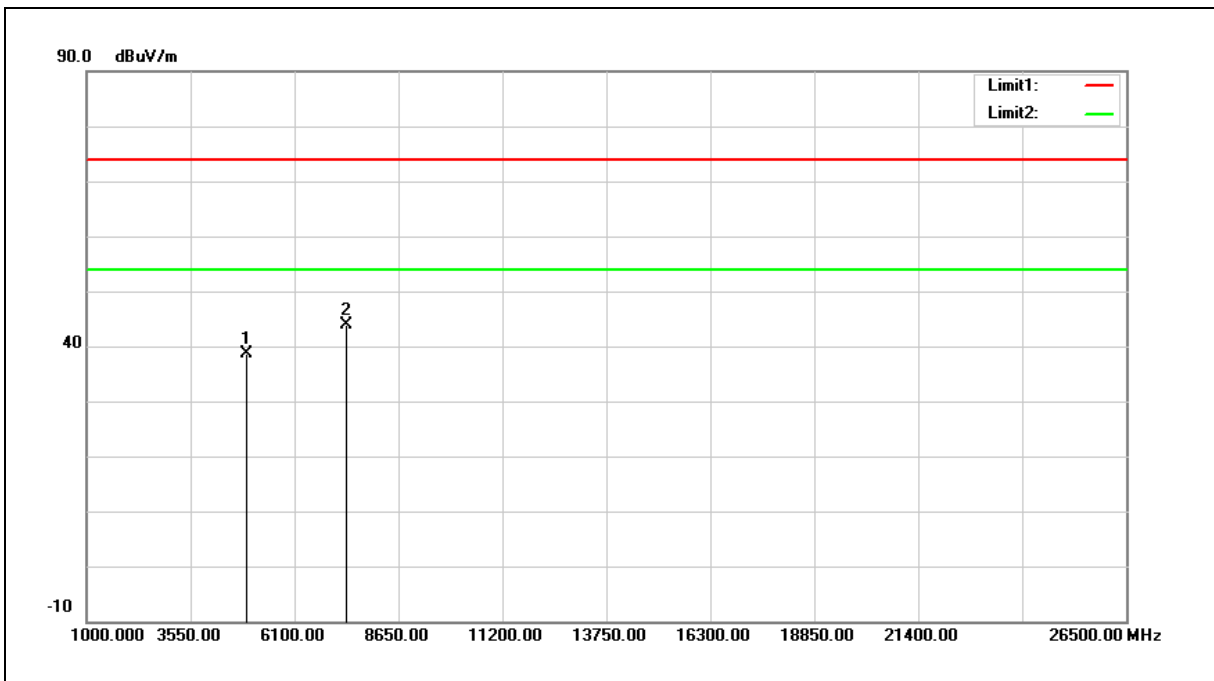

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	32.61	6.11	38.72	74.00	-35.28	peak
2	7386.000	31.08	12.80	43.88	74.00	-30.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



### Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

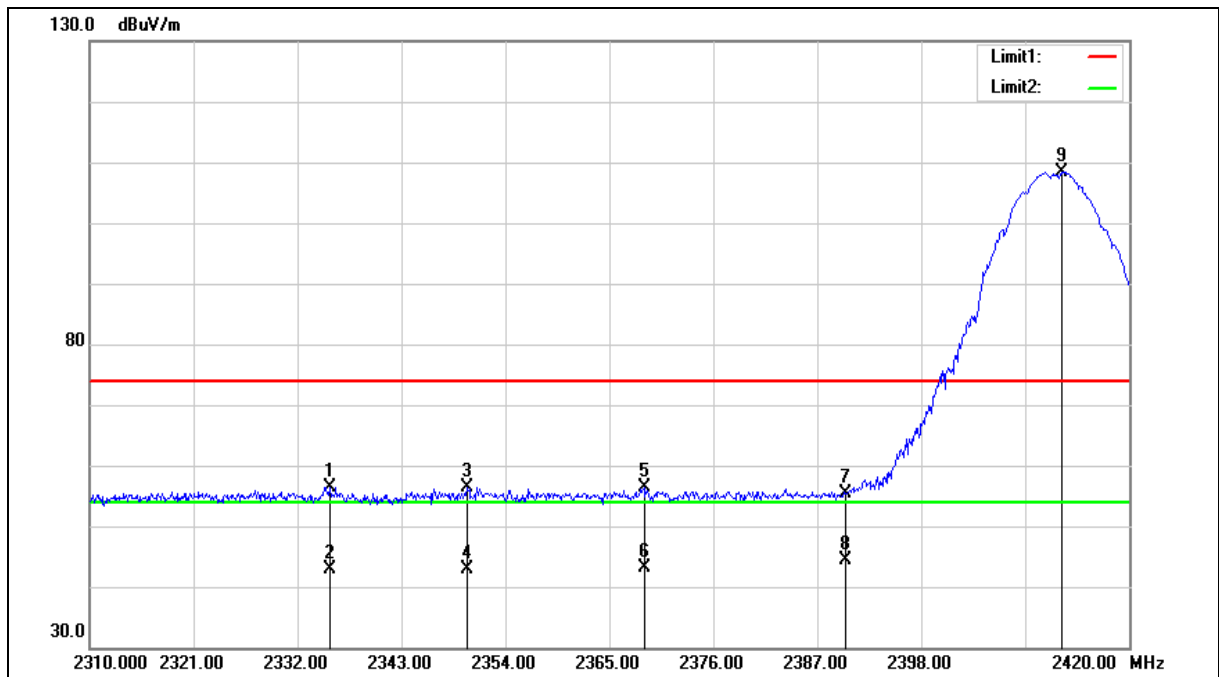



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2335.435	57.32	-0.97	56.35	74.00	-17.65	peak
2	2335.435	43.78	-0.97	42.81	54.00	-11.19	AVG
3	2349.970	57.29	-0.90	56.39	74.00	-17.61	peak
4	2349.970	43.89	-0.90	42.99	54.00	-11.01	AVG
5	2368.689	57.23	-0.82	56.41	74.00	-17.59	peak
6	2368.689	44.04	-0.82	43.22	54.00	-10.78	AVG
7	2390.000	56.14	-0.70	55.44	74.00	-18.56	peak
8	2390.000	45.08	-0.70	44.38	54.00	-9.62	AVG
9	2412.843	109.09	-0.59	108.50	--	--	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

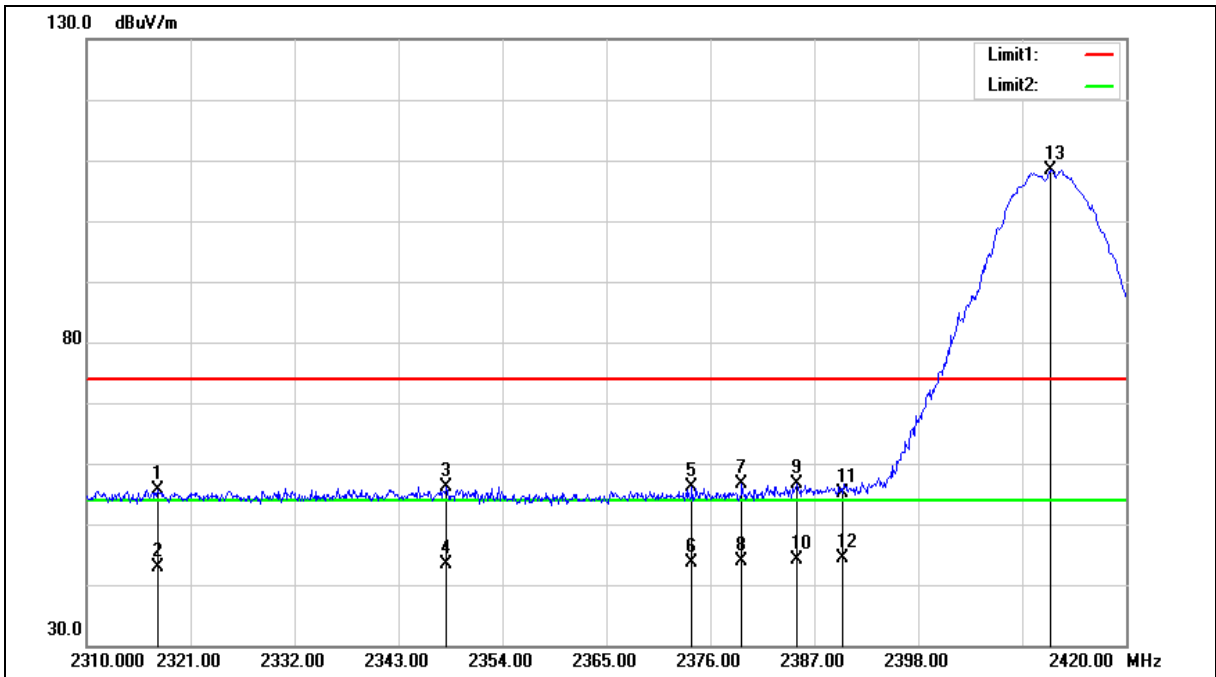





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2317.488	56.72	-1.06	55.66	74.00	-18.34	peak
2	2317.488	43.93	-1.06	42.87	54.00	-11.13	AVG
3	2348.098	57.06	-0.91	56.15	74.00	-17.85	peak
4	2348.098	44.40	-0.91	43.49	54.00	-10.51	AVG
5	2374.084	57.01	-0.79	56.22	74.00	-17.78	peak
6	2374.084	44.39	-0.79	43.60	54.00	-10.40	AVG
7	2379.369	57.46	-0.76	56.70	74.00	-17.30	peak
8	2379.369	44.57	-0.76	43.81	54.00	-10.19	AVG
9	2385.095	57.47	-0.73	56.74	74.00	-17.26	peak
10	2385.095	44.75	-0.73	44.02	54.00	-9.98	AVG
11	2390.000	55.76	-0.70	55.06	74.00	-18.94	peak
12	2390.000	45.15	-0.70	44.45	54.00	-9.55	AVG
13	2412.072	108.88	-0.59	108.29	--	--	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

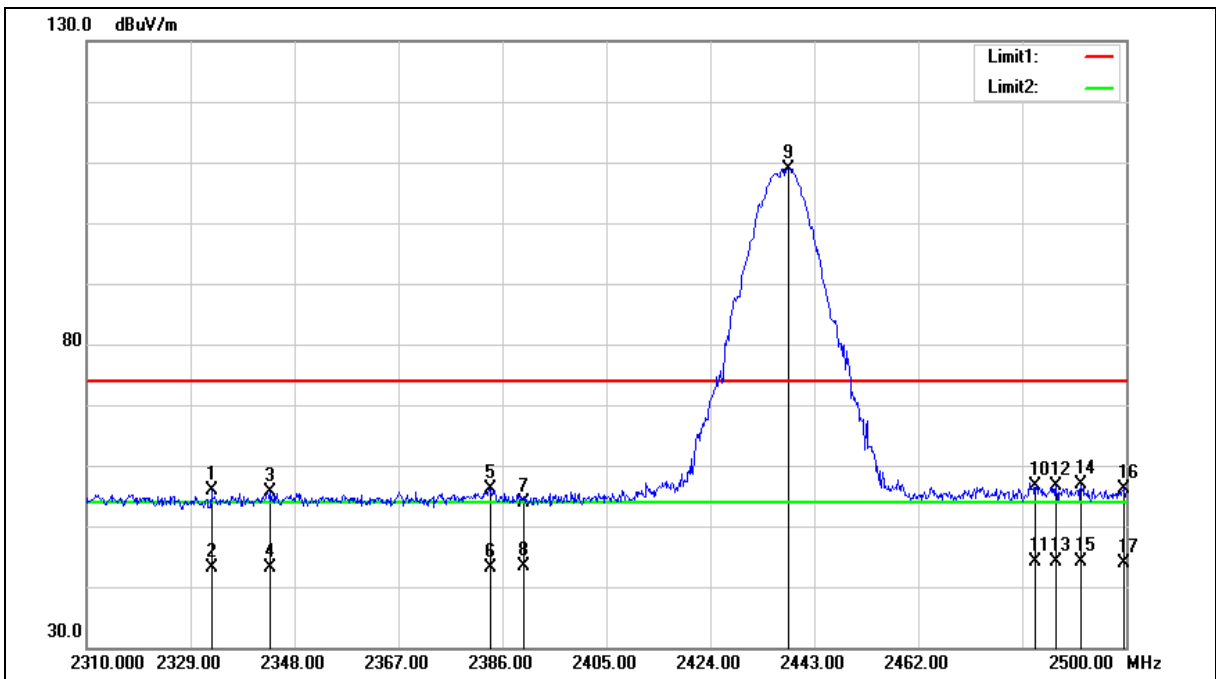



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.823	56.93	-0.99	55.94	74.00	-18.06	peak
2	2332.823	44.00	-0.99	43.01	54.00	-10.99	AVG
3	2343.664	56.61	-0.93	55.68	74.00	-18.32	peak
4	2343.664	44.03	-0.93	43.10	54.00	-10.90	AVG
5	2383.794	56.99	-0.74	56.25	74.00	-17.75	peak
6	2383.794	43.97	-0.74	43.23	54.00	-10.77	AVG
7	2390.000	54.69	-0.70	53.99	74.00	-20.01	peak
8	2390.000	44.18	-0.70	43.48	54.00	-10.52	AVG
9	2438.188	109.42	-0.46	108.96	--	--	peak
10	2483.500	56.78	-0.23	56.55	74.00	-17.45	peak
11	2483.500	44.25	-0.23	44.02	54.00	-9.98	AVG
12	2487.257	56.82	-0.20	56.62	74.00	-17.38	peak
13	2487.257	44.30	-0.20	44.10	54.00	-9.90	AVG
14	2491.822	57.09	-0.18	56.91	74.00	-17.09	peak
15	2491.822	44.23	-0.18	44.05	54.00	-9.95	AVG
16	2499.619	56.15	-0.14	56.01	74.00	-17.99	peak
17	2499.619	44.12	-0.14	43.98	54.00	-10.02	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

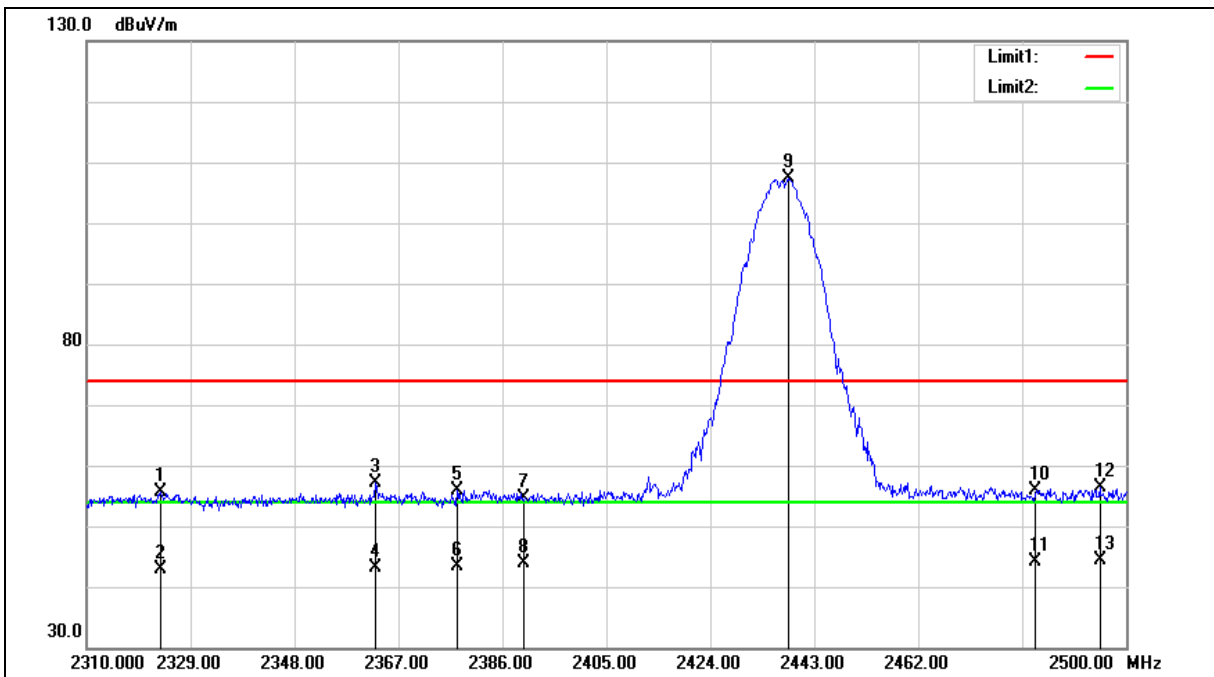



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2323.503	56.59	-1.03	55.56	74.00	-18.44	peak
2	2323.503	43.92	-1.03	42.89	54.00	-11.11	AVG
3	2362.873	57.89	-0.85	57.04	74.00	-16.96	peak
4	2362.873	44.02	-0.85	43.17	54.00	-10.83	AVG
5	2377.708	56.73	-0.77	55.96	74.00	-18.04	peak
6	2377.708	44.09	-0.77	43.32	54.00	-10.68	AVG
7	2390.000	55.37	-0.70	54.67	74.00	-19.33	peak
8	2390.000	44.54	-0.70	43.84	54.00	-10.16	AVG
9	2438.188	107.78	-0.46	107.32	--	--	peak
10	2483.500	56.01	-0.23	55.78	74.00	-18.22	peak
11	2483.500	44.32	-0.23	44.09	54.00	-9.91	AVG
12	2495.245	56.47	-0.17	56.30	74.00	-17.70	peak
13	2495.245	44.45	-0.17	44.28	54.00	-9.72	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

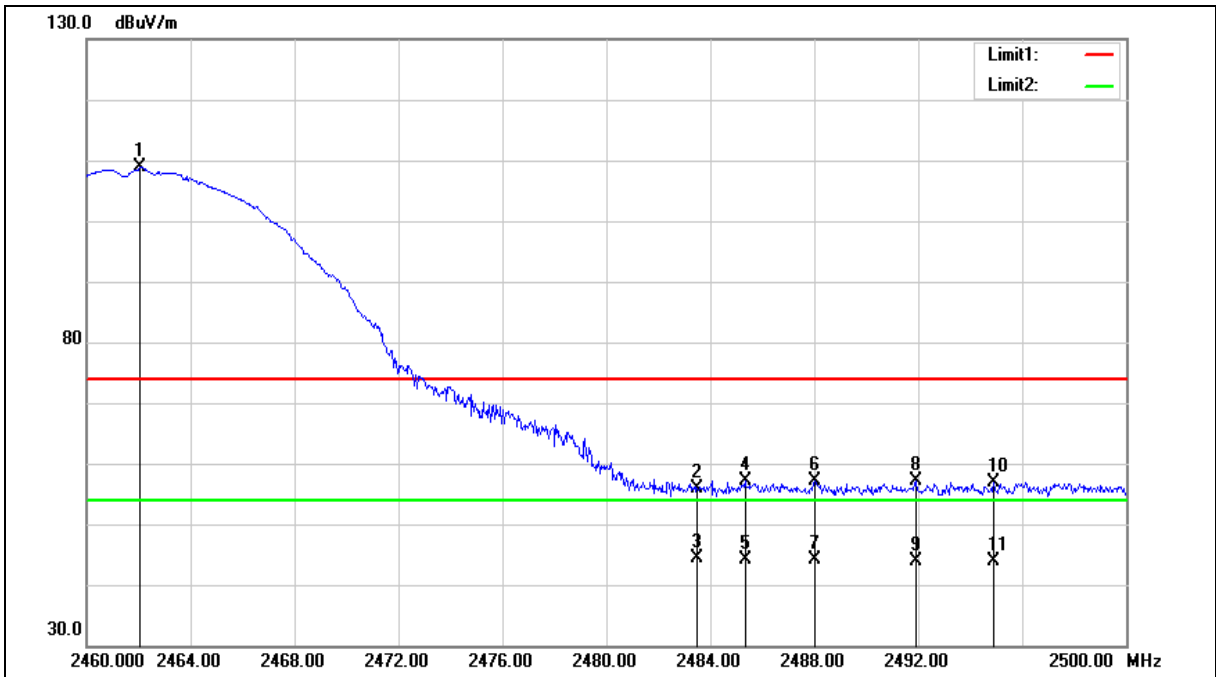



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.042	109.28	-0.34	108.94	--	--	peak
2	2483.500	56.00	-0.23	55.77	74.00	-18.23	peak
3	2483.500	44.66	-0.23	44.43	54.00	-9.57	AVG
4	2485.345	57.46	-0.22	57.24	74.00	-16.76	peak
5	2485.345	44.42	-0.22	44.20	54.00	-9.80	AVG
6	2488.028	57.39	-0.20	57.19	74.00	-16.81	peak
7	2488.028	44.22	-0.20	44.02	54.00	-9.98	AVG
8	2491.912	57.27	-0.18	57.09	74.00	-16.91	peak
9	2491.912	44.16	-0.18	43.98	54.00	-10.02	AVG
10	2494.915	57.04	-0.17	56.87	74.00	-17.13	peak
11	2494.915	44.02	-0.17	43.85	54.00	-10.15	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

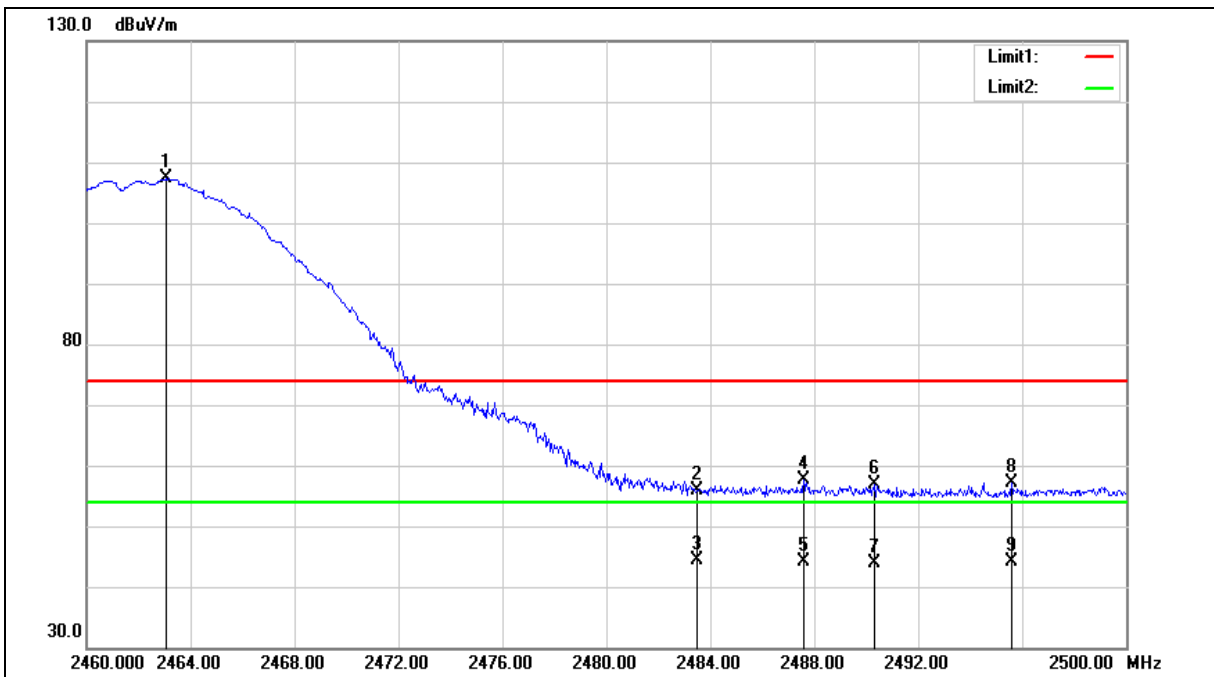





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.043	107.59	-0.33	107.26	--	--	peak
2	2483.500	56.05	-0.23	55.82	74.00	-18.18	peak
3	2483.500	44.65	-0.23	44.42	54.00	-9.58	AVG
4	2487.588	57.82	-0.20	57.62	74.00	-16.38	peak
5	2487.588	44.30	-0.20	44.10	54.00	-9.90	AVG
6	2490.310	57.10	-0.19	56.91	74.00	-17.09	peak
7	2490.310	44.12	-0.19	43.93	54.00	-10.07	AVG
8	2495.596	57.21	-0.16	57.05	74.00	-16.95	peak
9	2495.596	44.17	-0.16	44.01	54.00	-9.99	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

---END---