



TESTING LABORATORY  
CERTIFICATE #4820.01



## FCC PART 15.247


### TEST REPORT

For

**Flyability SA**

EPFL INNOVATION PARK BLDG C, Lausanne Switzerland

**FCC ID: 2AL7M-MAGICKAYAKD**

<b>Report Type:</b> Original Report	<b>Product Name:</b> ELIOS 2
<b>Report Number:</b> <u>DG1210701-26645E-00A</u>	
<b>Report Date:</b> <u>2021-08-31</u>	
Reviewed By: _____  Allen Qiao RF Supervisor 	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
DECLARATIONS.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EQUIPMENT MODIFICATIONS .....	5
EUT EXERCISE SOFTWARE .....	6
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	11
<b>FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
EUT SETUP .....	12
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	13
TEST PROCEDURE .....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA .....	14
<b>FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH.....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA .....	23
<b>FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA .....	28
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA .....	30
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA .....	35

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

EUT Name:	ELIOS 2
EUT Model:	107324
Operation Frequency:	SDR 4M: 2405-2479MHz SDR 8M: 2407-2477MHz
Maximum Peak Output Power (Conducted):	27.02 dBm
Modulation Type:	OFDM
Antenna Gain▲:	3 dBi
Adapter Information	Model: FY2105000
	Input: 100-240V~50/60Hz 1.5A 150V/A
	Output: 21V 5A
Serial Number:	DG1210701-26645E-RF-S1
EUT Received Date:	2021.07.05
EUT Received Status:	Good

### Objective

This report is prepared on behalf of **Flyability SA** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.209, 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in RF Transmiutting mode.

The EUT has 2 antennas for SDR, and supports 2T2R mode.  
SDR 4M mode : 75 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	39	2443
2	2406	...	...
...	...	...	...
...	...	74	2478
37	2441	75	2479
38	2442	/	/

EUT was tested with 2405MHz, 2442MHz and 2479MHz.

SDR 8M mode : 71 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2407	37	2443
2	2408	...	...
...	...	...	...
...	...	70	2476
35	2441	71	2477
36	2442	/	/

EUT was tested with 2407MHz, 2442MHz and 2477MHz.

### Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

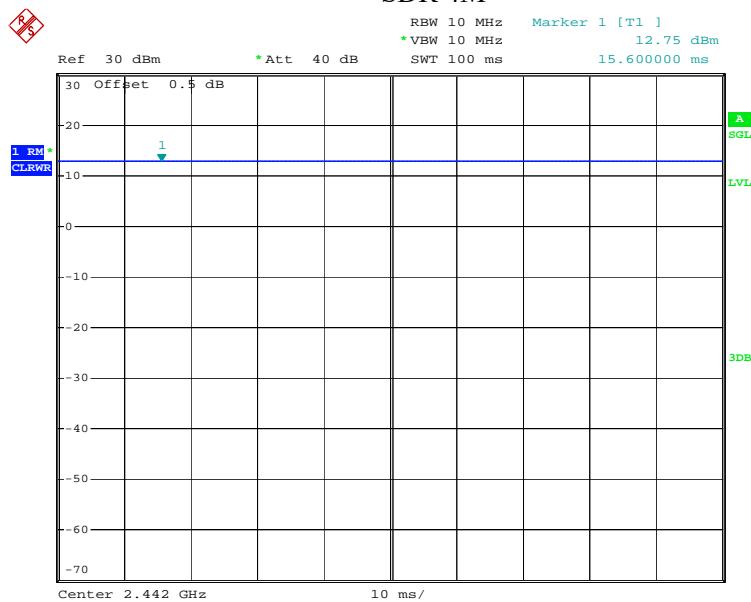
For SDR, Software "IP Control" was used during test, the maximum power was configured as below, which was provided by manufacturer▲:

Test Modes	Channel	Frequency (MHz)	Power level	
			Chain 0	Chain 1
SDR 4M	Low	2405	20	20
	Middle	2442	20	20
	High	2475	20	20
		2476	16	16
		2477	11	11
		2478	7	7
		2479	7	7
SDR 8M	Low	2407	20	20
	Middle	2442	20	20
	High	2472	20	20
		2473	18	18
		2474	16	16
		2475	7	7
		2476	7	7
		2477	7	7

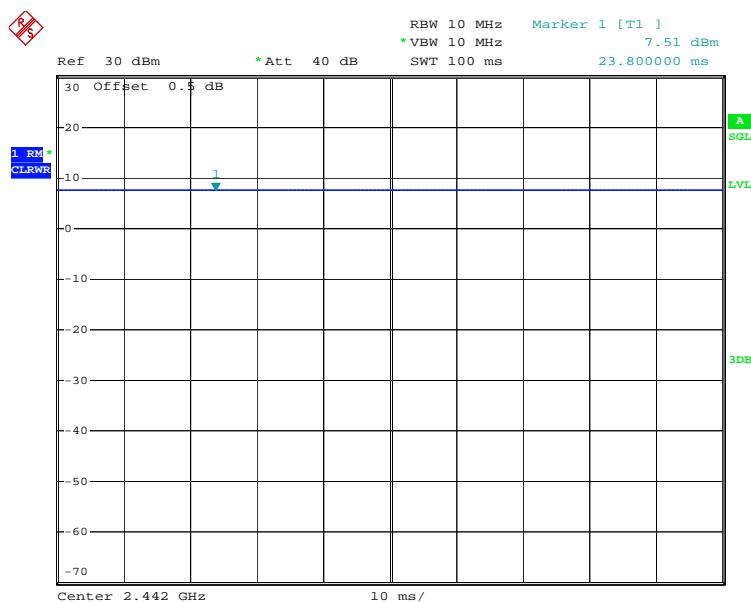
For SDR modes, the power was configured as default setting. Per pretest the conducted output power, the power in difference power level, all test items performed at Low, Middle and High Channel, except Conducted Output Power and Spurious Emissions pretest all channel and reported the channels power, radiation bandedge test with all channels have difference power level with maximum power.

The duty cycle as below:

Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle (%)
SDR 4M	100	100	100
SDR 8M	100	100	100

**SDR 4M**

Date: 23.JUL.2021 14:50:13

**SDR 8M**

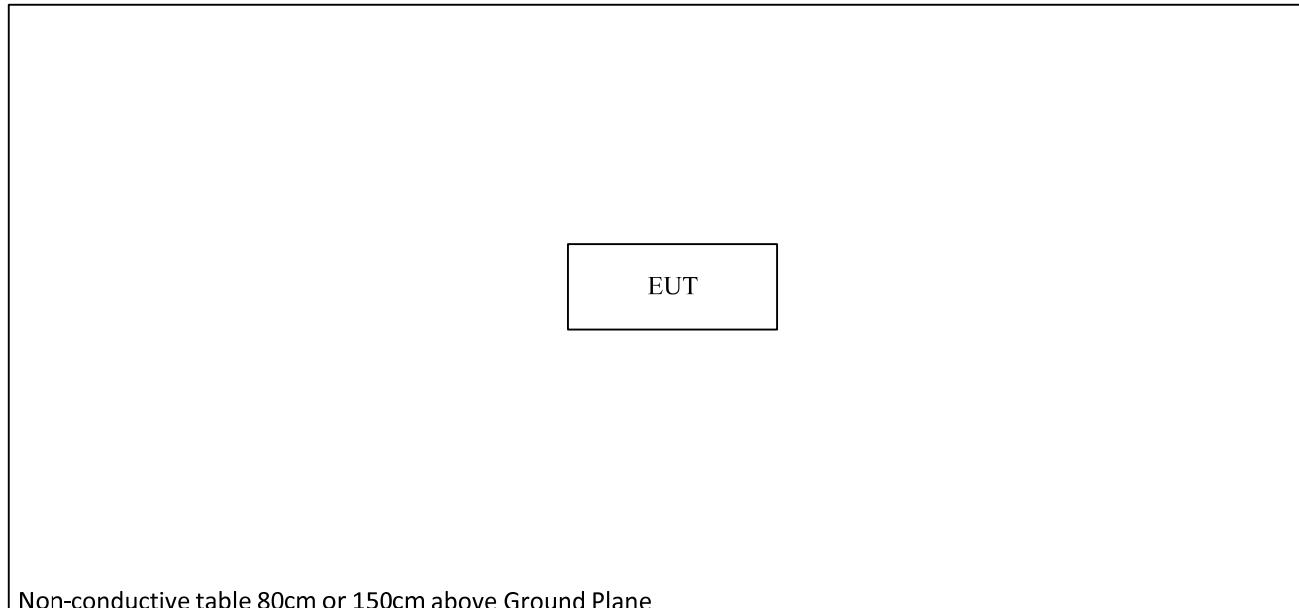
Date: 23.JUL.2021 14:53:36

**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
/	/	/	/

**Support Cable List and Details**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
/	/	/	/	/	/

**Block Diagram of Test Setup**

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Not applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

*Not Applicable: the device was powered by battery when operating.*

## FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Data:

Operation Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
SDR 4M	2405-2479	3	2.00	27.0	501.19	20.00	0.1990	1.0
SDR 8M	2407-2477	3	2.00	27.5	562.34	20.00	0.2233	1.0

**Result:** The device meet FCC MPE at 20 cm distance

## FCC §15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Antenna Information And Connector Construction

The EUT has two antennas permanently attached to the unit, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	3dBi/2.4~2.5GHz

**Result:** Compliance.

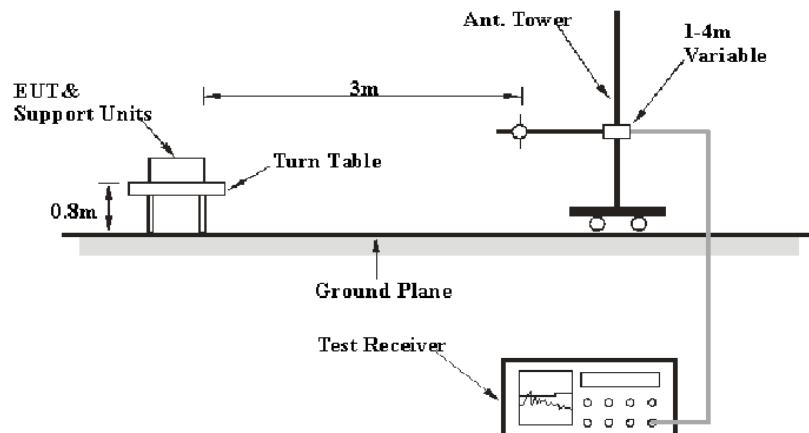
## FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

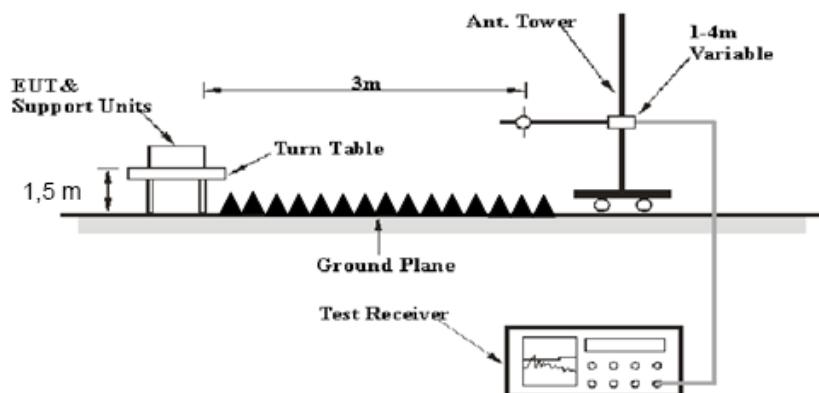
FCC §15.247 (d); §15.209; §15.205

### EUT Setup

Below 1GHz:



Above 1GHz:



The radiated emission below 1GHz tests were performed in the the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98% <98%	1MHz	10 Hz 1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-06	2022-07-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2021-06-27	2022-06-26
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2021-06-27	2022-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2021-06-16	2022-06-15
Mini Circuits	High Pass Filter	VHF-6010+	31118	2021-06-16	2022-06-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
<b>Temperature:</b>	26.2 °C	27.1°C
<b>Relative Humidity:</b>	52 %	31%
<b>ATM Pressure:</b>	100.3 kPa	100.3kPa
<b>Tester:</b>	Johnson Huang	Jeremy Liang
<b>Test Date:</b>	2021-07-21	2021-07-20

*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table and plots.*

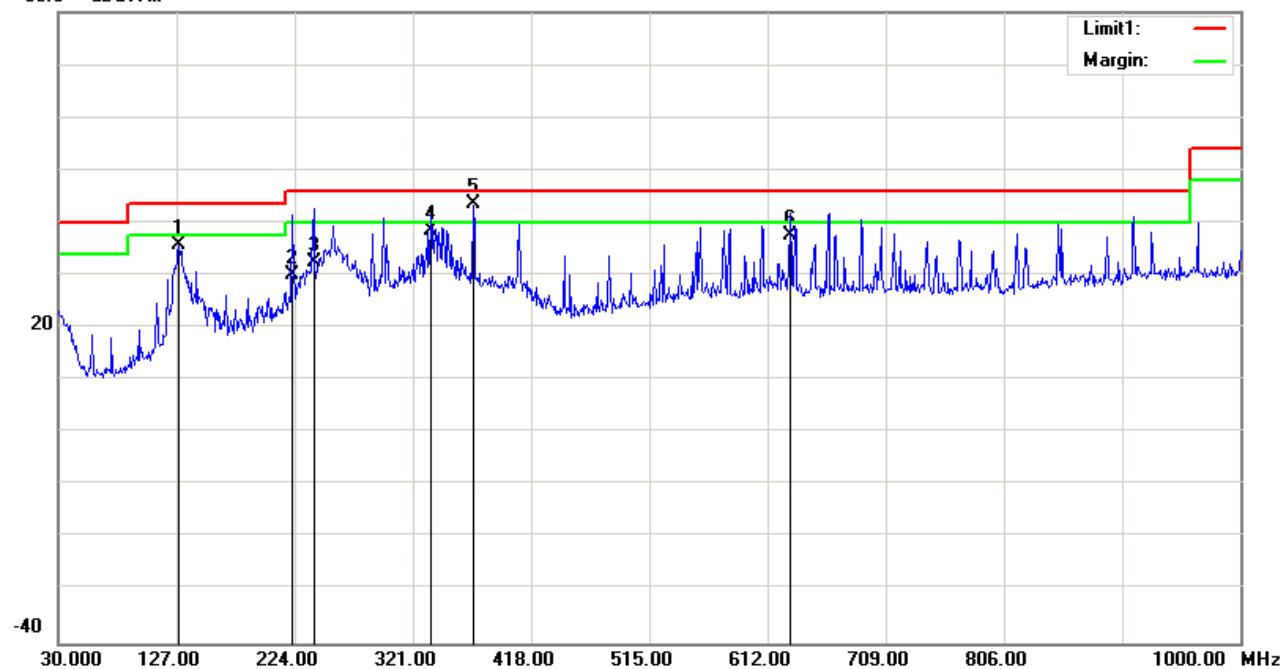
*Note 1: for high channel, the worst bandedge test channel in conducted bandedge test item was verified in radiation test.*

*Note 2: the two antennas can transmitting simultaneously.*

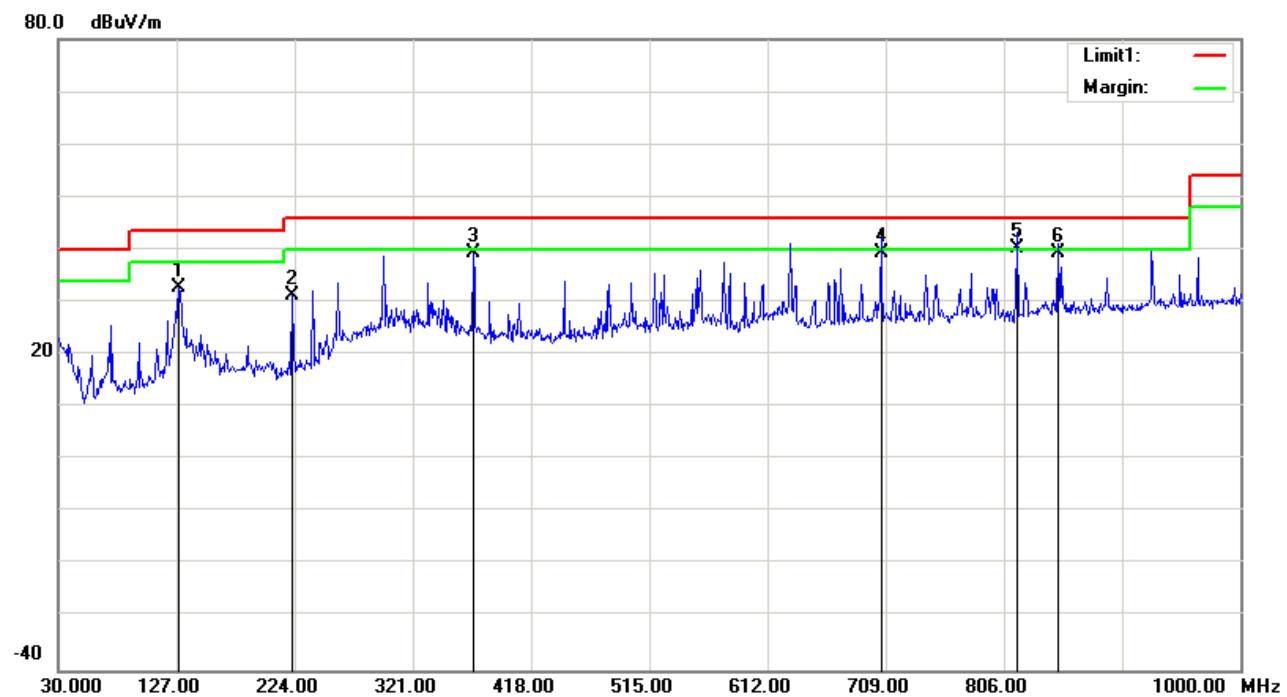
**1) 30MHz-1GHz (SDR 8M Low Channel was the worst):**

**Horizontal:**

80.0 dB<sub>UV</sub>/m



Frequency (MHz)	Receiver Reading (dB <sub>UV</sub> )	Detector	Correction Factor (dB/m)	Cord. Amp. (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)
128.9400	45.87	peak	-10.02	35.85	43.50	7.65
222.0600	40.89	QP	-10.89	30.00	46.00	16.00
239.5200	42.55	QP	-10.05	32.50	46.00	13.50
335.5500	45.38	QP	-6.86	38.52	46.00	7.48
370.4700	49.54	QP	-5.94	43.60	46.00	2.40
630.4300	38.52	QP	-0.90	37.62	46.00	8.38

**Vertical:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
128.9400	42.62	peak	-10.02	32.60	43.50	10.90
222.0600	42.04	peak	-10.89	31.15	46.00	14.85
370.4700	45.20	peak	-5.94	39.26	46.00	6.74
705.1200	39.42	QP	0.03	39.45	46.00	6.55
816.6700	38.99	QP	1.14	40.13	46.00	5.87
850.6200	37.37	QP	1.84	39.21	46.00	6.79

**2)1GHz-25GHz:****SDR 4M:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Remark	Polar (H/V)	Factor (dB/m)					
Channel: 2405 MHz									
2405.00	82.46	PK	H	28.11	1.80	0.00	112.37	N/A	N/A
2405.00	71.35	AV	H	28.11	1.80	0.00	101.26	N/A	N/A
2405.00	87.95	PK	V	28.11	1.80	0.00	117.86	N/A	N/A
2405.00	77.36	AV	V	28.11	1.80	0.00	107.27	N/A	N/A
2390.00	28.36	PK	V	28.08	1.80	0.00	58.24	74.00	15.76
2390.00	17.06	AV	V	28.08	1.80	0.00	46.94	54.00	7.06
4810.00	35.43	PK	V	32.92	3.17	25.61	45.91	74.00	28.09
4810.00	23.15	AV	V	32.92	3.17	25.61	33.63	54.00	20.37
7215.00	35.42	PK	V	35.76	4.81	25.61	50.38	74.00	23.62
7215.00	23.18	AV	V	35.76	4.81	25.61	38.14	54.00	<b>15.86</b>
Channel: 2442 MHz									
2442.00	82.14	PK	H	28.18	1.82	0.00	112.14	N/A	N/A
2442.00	70.56	AV	H	28.18	1.82	0.00	100.56	N/A	N/A
2442.00	87.68	PK	V	28.18	1.82	0.00	117.68	N/A	N/A
2442.00	76.39	AV	V	28.18	1.82	0.00	106.39	N/A	N/A
4884.00	35.64	PK	V	33.07	3.28	25.66	46.33	74.00	27.67
4884.00	23.17	AV	V	33.07	3.28	25.66	33.86	54.00	20.14
7326.00	34.89	PK	V	36.05	4.61	25.73	49.82	74.00	24.18
7326.00	22.56	AV	V	36.05	4.61	25.73	37.49	54.00	16.51
Channel: 2475 MHz									
2475.00	81.21	PK	H	28.25	1.84	0.00	111.30	N/A	N/A
2475.00	70.36	AV	H	28.25	1.84	0.00	100.45	N/A	N/A
2475.00	88.02	PK	V	28.25	1.84	0.00	118.11	N/A	N/A
2475.00	77.92	AV	V	28.25	1.84	0.00	108.01	N/A	N/A
2483.50	40.25	PK	V	28.27	1.84	0.00	70.36	74.00	3.64
2483.50	22.33	AV	V	28.27	1.84	0.00	52.44	54.00	1.56
Channel: 2476 MHz									
2476.00	72.41	PK	H	28.25	1.84	0.00	102.50	N/A	N/A
2476.00	61.46	AV	H	28.25	1.84	0.00	91.55	N/A	N/A
2476.00	85.54	PK	V	28.25	1.84	0.00	115.63	N/A	N/A
2476.00	74.18	AV	V	28.25	1.84	0.00	104.27	N/A	N/A
2483.50	41.53	PK	V	28.27	1.84	0.00	71.64	74.00	2.36
2483.50	22.39	AV	V	28.27	1.84	0.00	52.50	54.00	1.50
Channel: 2477 MHz									
2477.00	72.51	PK	H	28.25	1.84	0.00	102.60	N/A	N/A
2477.00	51.84	AV	H	28.25	1.84	0.00	81.93	N/A	N/A
2477.00	81.15	PK	V	28.25	1.84	0.00	111.24	N/A	N/A
2477.00	70.54	AV	V	28.25	1.84	0.00	100.63	N/A	N/A
2483.50	35.65	PK	V	28.27	1.84	0.00	65.76	74.00	8.24
2483.50	22.09	AV	V	28.27	1.84	0.00	52.20	54.00	1.80
Channel: 2478 MHz									
2478.00	67.73	PK	H	28.26	1.84	0.00	97.83	N/A	N/A
2478.00	57.26	AV	H	28.26	1.84	0.00	87.36	N/A	N/A
2478.00	78.26	PK	V	28.26	1.84	0.00	108.36	N/A	N/A
2478.00	66.77	AV	V	28.26	1.84	0.00	96.87	N/A	N/A
2483.50	39.16	PK	V	28.27	1.84	0.00	69.27	74.00	4.73
2483.50	21.43	AV	V	28.27	1.84	0.00	51.54	54.00	2.46

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Remark	Polar (H/V)	Factor (dB/m)					
Channel: 2479 MHz									
2479.00	67.31	PK	H	28.26	1.84	0.00	97.41	N/A	N/A
2479.00	57.44	AV	H	28.26	1.84	0.00	87.54	N/A	N/A
2479.00	76.78	PK	V	28.26	1.84	0.00	106.88	N/A	N/A
2479.00	65.11	AV	V	28.26	1.84	0.00	95.21	N/A	N/A
2483.50	41.81	PK	V	28.27	1.84	0.00	71.92	74.00	2.08
2483.50	23.19	AV	V	28.27	1.84	0.00	53.30	54.00	0.70
4958.00	34.56	PK	V	33.22	3.23	25.63	45.38	74.00	28.62
4958.00	22.15	AV	V	33.22	3.23	25.63	32.97	54.00	21.03
7437.00	34.62	PK	V	36.34	4.42	25.84	49.54	74.00	24.46
7437.00	22.54	AV	V	36.34	4.42	25.84	37.46	54.00	16.54

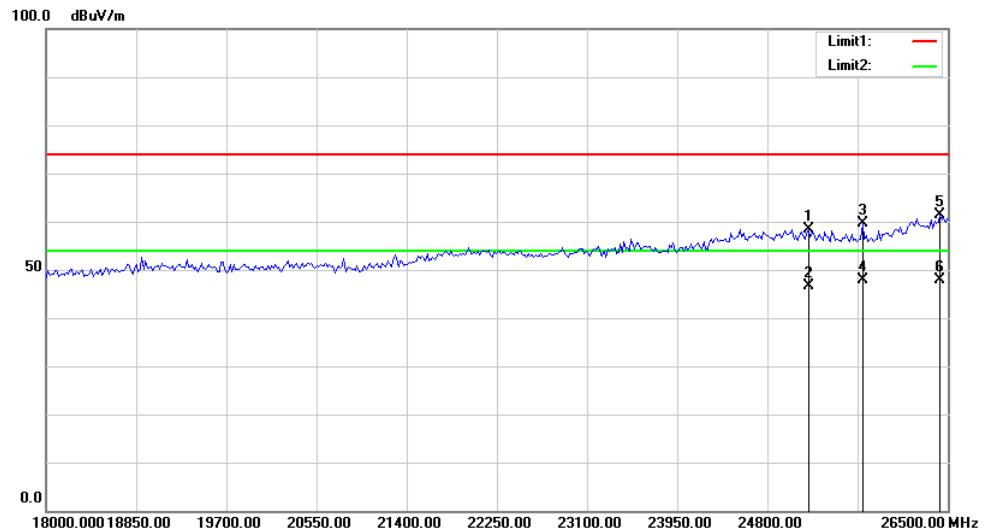
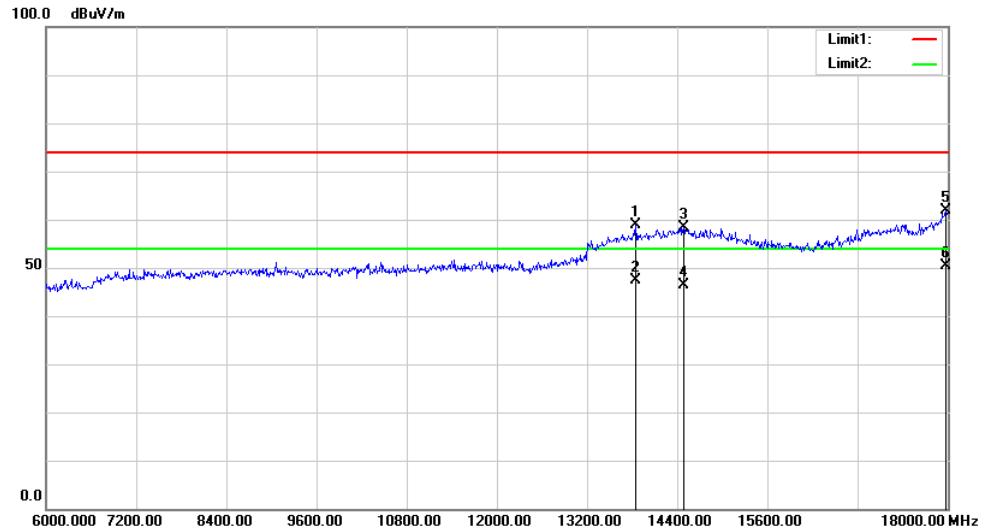
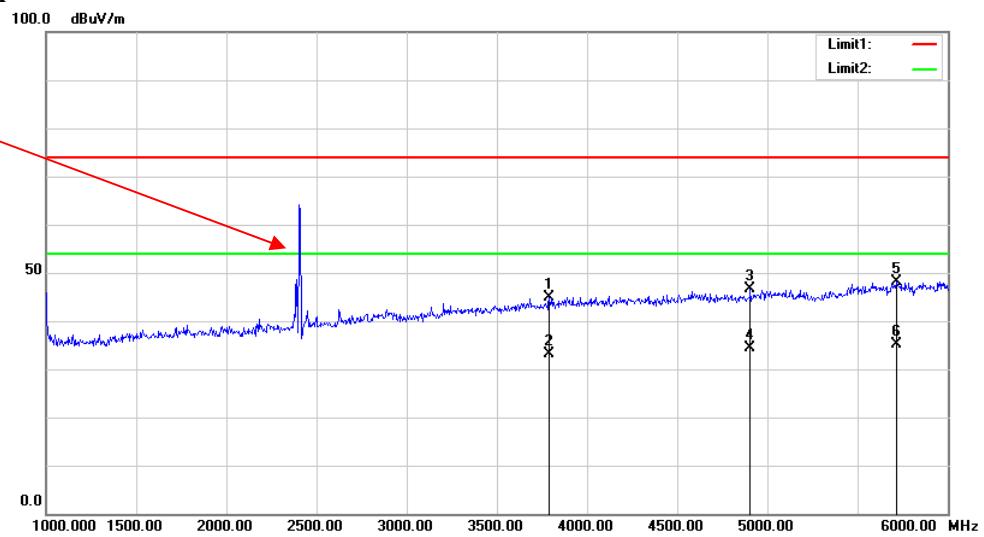
**SDR 8M:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Remark	Polar (H/V)	Factor (dB/m)					
Channel: 2407 MHz									
2407.00	79.18	PK	H	28.11	1.80	0.00	109.09	N/A	N/A
2407.00	68.03	AV	H	28.11	1.80	0.00	97.94	N/A	N/A
2407.00	86.35	PK	V	28.11	1.80	0.00	116.26	N/A	N/A
2407.00	75.59	AV	V	28.11	1.80	0.00	105.50	N/A	N/A
2390.00	28.59	PK	V	28.08	1.80	0.00	58.47	74.00	15.53
2390.00	16.61	AV	V	28.08	1.80	0.00	46.49	54.00	7.51
4814.00	35.63	PK	V	32.93	3.18	25.61	46.13	74.00	27.87
4814.00	23.89	AV	V	32.93	3.18	25.61	34.39	54.00	19.61
7221.00	35.14	PK	V	35.77	4.80	25.62	50.09	74.00	23.91
7221.00	24.35	AV	V	35.77	4.80	25.62	39.30	54.00	<b>14.70</b>
Channel: 2442 MHz									
2442.00	80.06	PK	H	28.18	1.82	0.00	110.06	N/A	N/A
2442.00	70.21	AV	H	28.18	1.82	0.00	100.21	N/A	N/A
2442.00	85.51	PK	V	28.18	1.82	0.00	115.51	N/A	N/A
2442.00	74.87	AV	V	28.18	1.82	0.00	104.87	N/A	N/A
4884.00	35.26	PK	V	33.07	3.28	25.66	45.95	74.00	28.05
4884.00	23.15	AV	V	33.07	3.28	25.66	33.84	54.00	20.16
7326.00	35.17	PK	V	36.05	4.61	25.73	50.10	74.00	23.90
7326.00	23.18	AV	V	36.05	4.61	25.73	38.11	54.00	15.89
Channel: 2472 MHz									
2472.00	78.24	PK	H	28.24	1.84	0.00	108.32	N/A	N/A
2472.00	67.12	AV	H	28.24	1.84	0.00	97.20	N/A	N/A
2472.00	84.64	PK	V	28.24	1.84	0.00	114.72	N/A	N/A
2472.00	74.15	AV	V	28.24	1.84	0.00	104.23	N/A	N/A
2483.50	30.14	PK	V	28.27	1.84	0.00	60.25	74.00	13.75
2483.50	20.74	AV	V	28.27	1.84	0.00	50.85	54.00	3.15
Channel: 2473 MHz									
2473.00	74.54	PK	H	28.25	1.84	0.00	104.63	N/A	N/A
2473.00	63.95	AV	H	28.25	1.84	0.00	94.04	N/A	N/A
2473.00	81.74	PK	V	28.25	1.84	0.00	111.83	N/A	N/A
2473.00	70.36	AV	V	28.25	1.84	0.00	100.45	N/A	N/A
2483.50	33.01	PK	V	28.27	1.84	0.00	63.12	74.00	10.88
2483.50	21.94	AV	V	28.27	1.84	0.00	52.05	54.00	1.95
Channel: 2474 MHz									
2474.00	70.61	PK	H	28.25	1.84	0.00	100.70	N/A	N/A
2474.00	60.25	AV	H	28.25	1.84	0.00	90.34	N/A	N/A
2474.00	78.73	PK	V	28.25	1.84	0.00	108.82	N/A	N/A
2474.00	68.59	AV	V	28.25	1.84	0.00	98.68	N/A	N/A
2483.50	34.27	PK	V	28.27	1.84	0.00	64.38	74.00	9.62
2483.50	22.08	AV	V	28.27	1.84	0.00	52.19	54.00	1.81
Channel: 2475 MHz									
2475.00	63.87	PK	H	28.25	1.84	0.00	93.96	N/A	N/A
2475.00	53.46	AV	H	28.25	1.84	0.00	83.55	N/A	N/A
2475.00	73.26	PK	V	28.25	1.84	0.00	103.35	N/A	N/A
2475.00	63.24	AV	V	28.25	1.84	0.00	93.33	N/A	N/A
2483.50	39.63	PK	V	28.27	1.84	0.00	69.74	74.00	4.26
2483.50	22.55	AV	V	28.27	1.84	0.00	52.66	54.00	1.34

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Remark	Polar (H/V)	Factor (dB/m)					
Channel: 2476 MHz									
2476.00	64.25	PK	H	28.25	1.84	0.00	94.34	N/A	N/A
2476.00	53.42	AV	H	28.25	1.84	0.00	83.51	N/A	N/A
2476.00	73.56	PK	V	28.25	1.84	0.00	103.65	N/A	N/A
2476.00	63.89	AV	V	28.25	1.84	0.00	93.98	N/A	N/A
2483.50	40.06	PK	V	28.27	1.84	0.00	70.17	74.00	3.83
2483.50	22.47	AV	V	28.27	1.84	0.00	52.58	54.00	1.42
Channel: 2477 MHz									
2477.00	66.35	PK	H	28.25	1.84	0.00	96.44	N/A	N/A
2477.00	56.53	AV	H	28.25	1.84	0.00	86.62	N/A	N/A
2477.00	74.08	PK	V	28.25	1.84	0.00	104.17	N/A	N/A
2477.00	64.21	AV	V	28.25	1.84	0.00	94.30	N/A	N/A
2483.50	42.74	PK	V	28.27	1.84	0.00	72.85	74.00	1.15
2483.50	23.44	AV	V	28.27	1.84	0.00	53.55	54.00	0.45
4954.00	34.26	PK	V	33.21	3.24	25.63	45.08	74.00	28.92
4954.00	22.15	AV	V	33.21	3.24	25.63	32.97	54.00	21.03
7431.00	34.75	PK	V	36.32	4.43	25.84	49.66	74.00	24.34
7431.00	22.63	AV	V	36.32	4.43	25.84	37.54	54.00	16.46

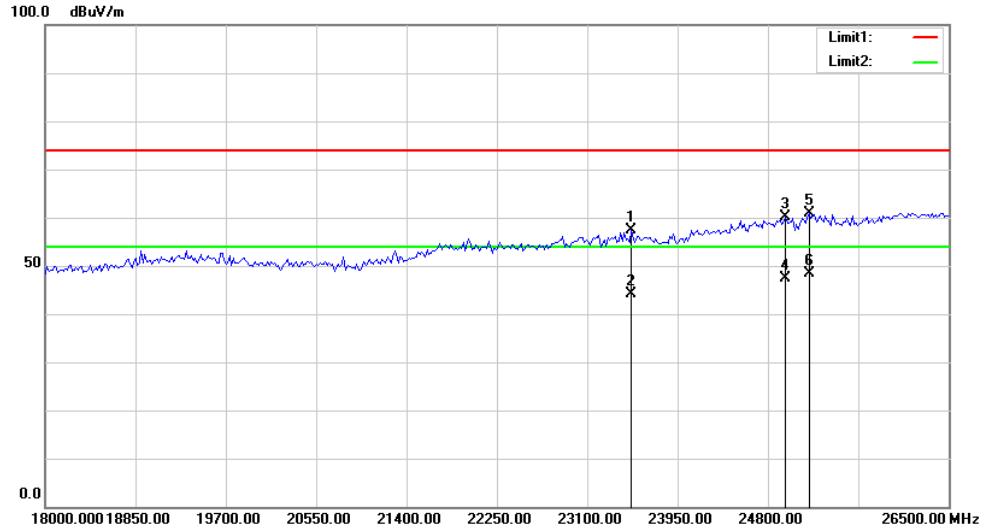
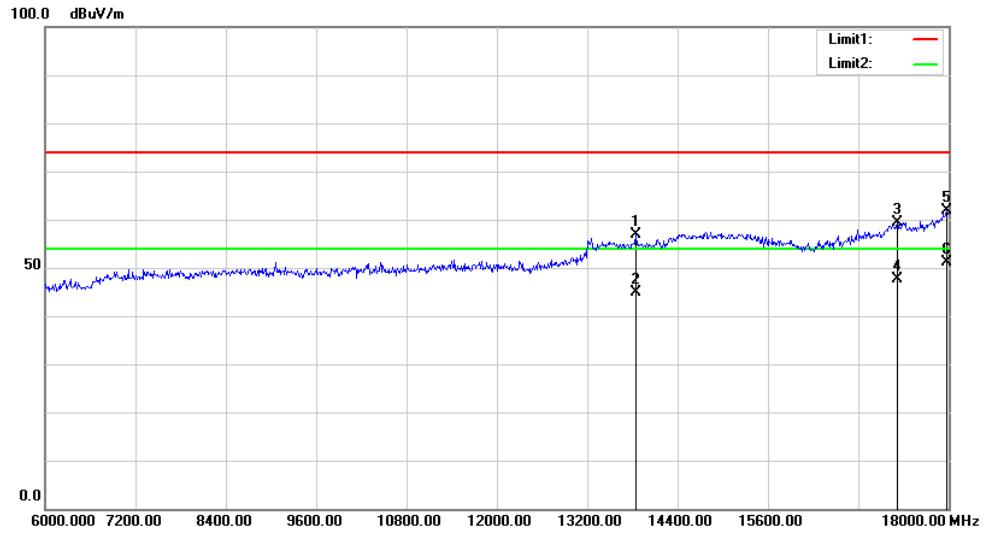
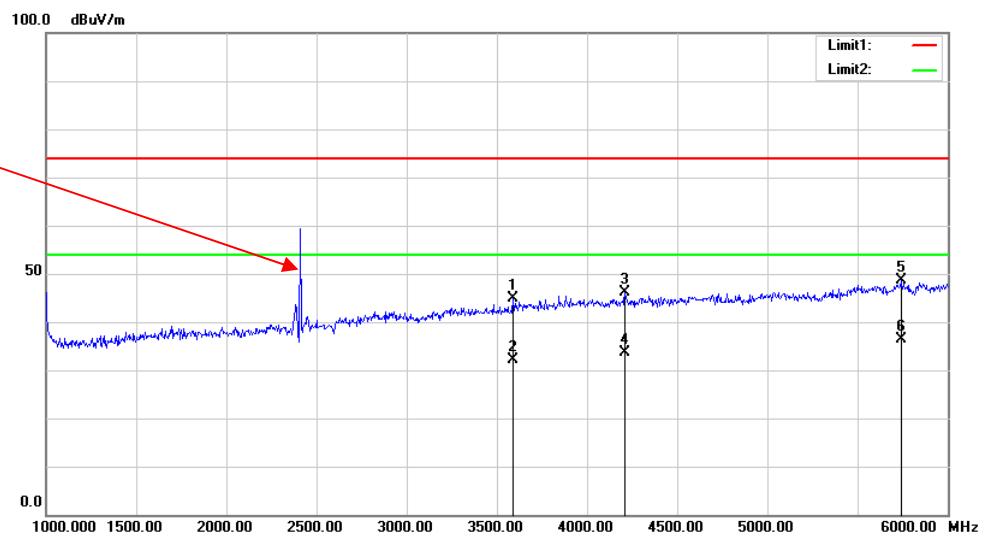
**Worst plots (SDR 8M Low channel was the worst)****Horizontal**

Fundamental  
Test with Band  
Rejection Filter



**Vertical**

Fundamental Test with Band Rejection Filter



## FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH

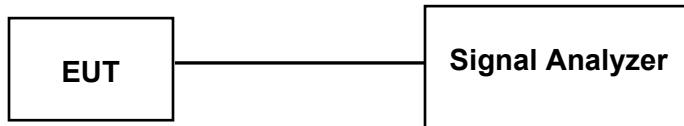
### Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2021-07-07	2022-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25.4~29.6°C
<b>Relative Humidity:</b>	43~49%
<b>ATM Pressure:</b>	100~100.5kPa
<b>Tester:</b>	Rennes Guo
<b>Test Date:</b>	2021-07-13~2021-07-21

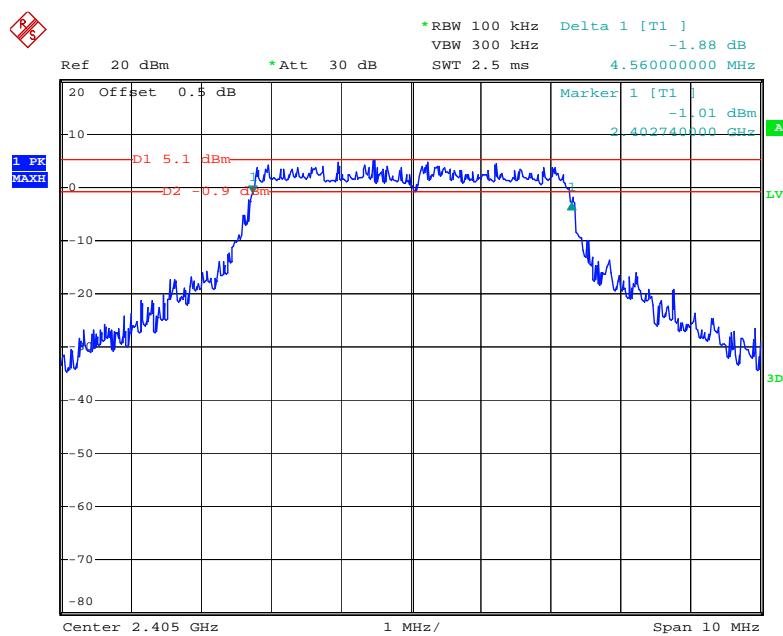
*Test Mode: Transmitting*

*Test Result: Compliance. Test only was performed at chain 0, please refer to the following table and plots.*

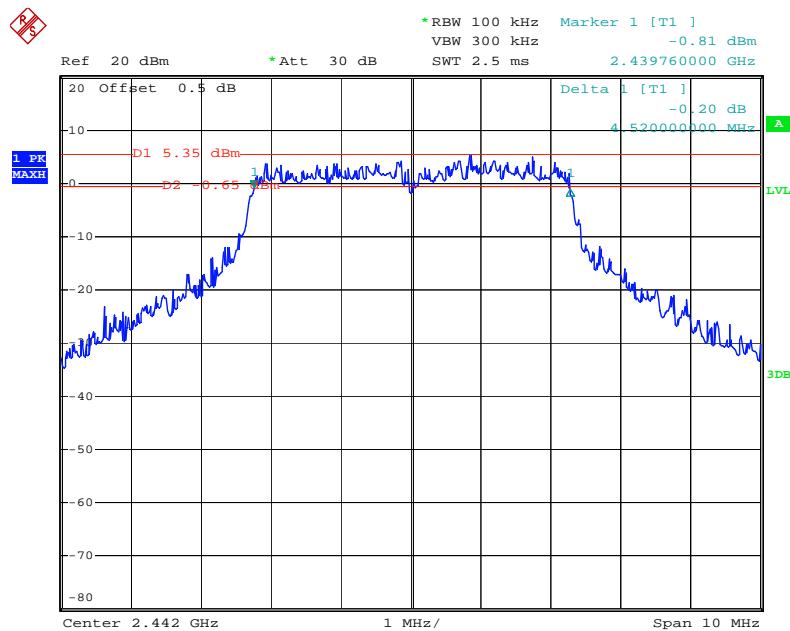
Mode	Channel	Frequency (MHz)	Result (MHz)	Limit (MHz)
SDR 4M	Low	2405	4.560	0.5
	Middle	2442	4.520	
	High	2479	4.580	
SDR 8M	Low	2407	9.900	0.5
	Middle	2442	9.780	
	High	2477	9.720	

### SDR 4M

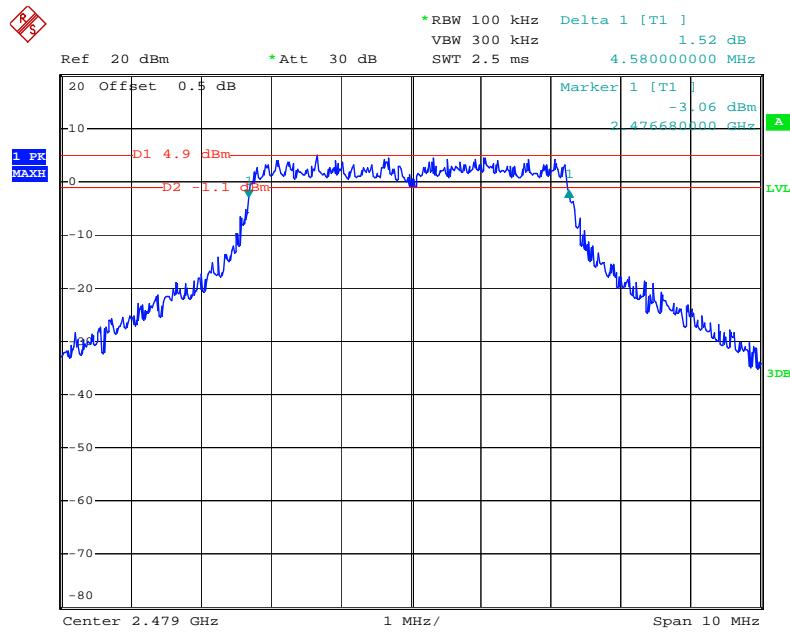
#### Low Channel



Date: 21.JUL.2021 09:07:42

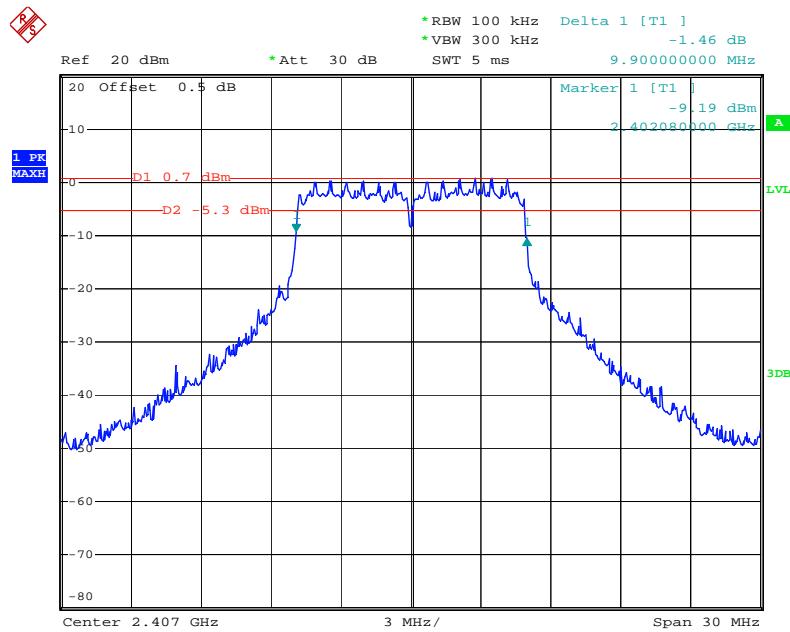
**Middle Channel**

Date: 21.JUL.2021 09:05:47

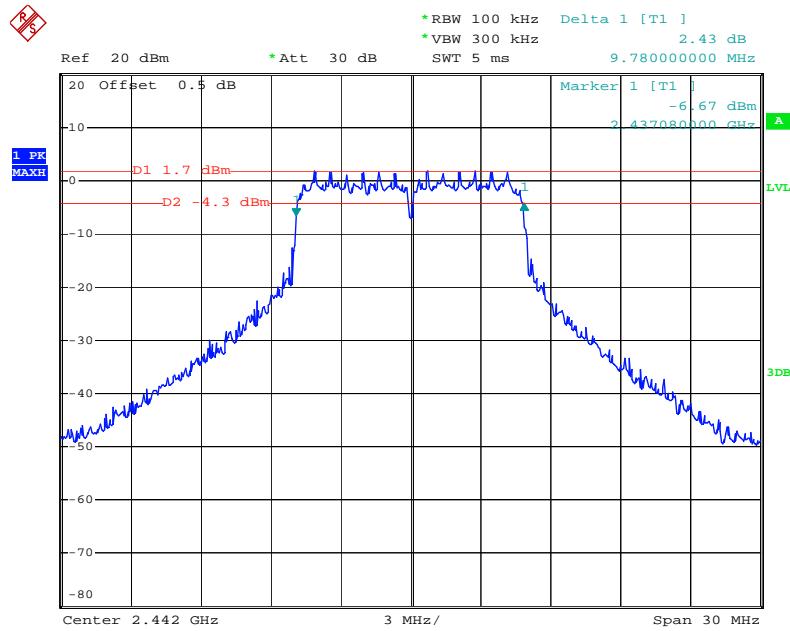
**High Channel**

Date: 21.JUL.2021 09:10:13

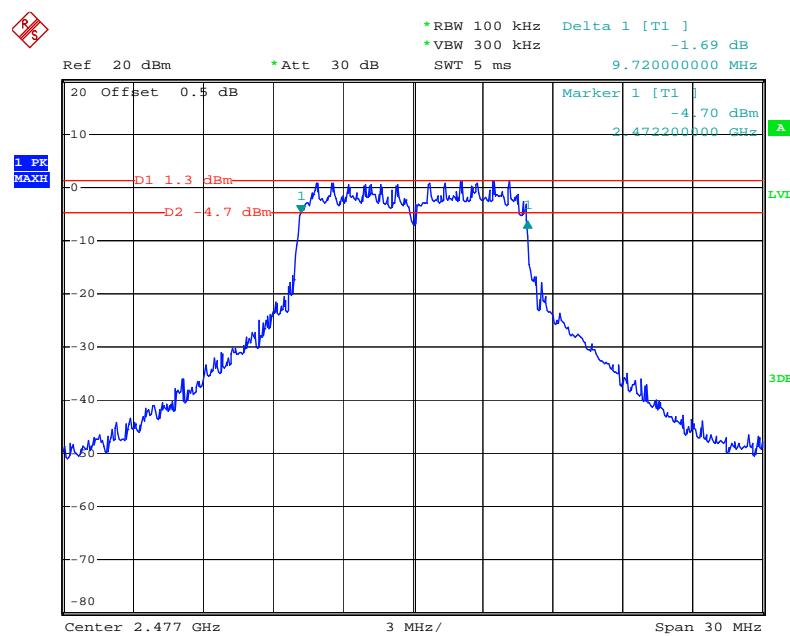
8M

**Low Channel**

Date: 13.JUL.2021 13:45:47

**Middle Channel**

Date: 13.JUL.2021 13:44:00

**High Channel**

Date: 13.JUL.2021 13:39:29

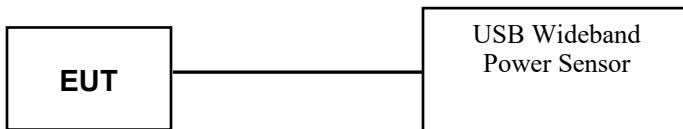
## FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.4~29.6°C
Relative Humidity:	43~49%
ATM Pressure:	100~100.5kPa
Tester:	Rennes Guo
Test Date:	2021-07-13~2021-07-21

*Test Result: Compliance. Please refer to the following table.*

*Test Mode: Transmitting*

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)		Total (dBm)	Limit (dBm)
			Chain 0	Chain 1		
SDR 4M	Low	2405	23.15	23.58	26.38	30
	Middle	2442	23.43	23.72	26.59	
	High	2475	22.86	22.79	25.84	
		2476	16.78	16.85	19.83	
		2477	13.21	13.16	16.2	
		2478	9.53	9.62	12.59	
		2479	9.23	9.31	12.28	
SDR 8M	Low	2407	22.41	23.65	26.08	30
	Middle	2442	23.56	24.41	27.02	
	High	2472	23.43	23.28	26.37	
		2473	21.38	21.37	24.39	
		2474	18.17	18.26	21.23	
		2475	9.14	9.25	12.21	
		2476	9.03	9.07	12.06	
		2477	8.96	8.88	11.93	

## Note:

The maximum antenna gain is 3.0 dBi in 2.4GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Directional gain = 3 dBi

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2021-07-07	2022-07-07
R&S	Spectrum Analyzer	FSV40	101474	2021-07-22	2022-07-21
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2021-05-06	2022-05-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data Environmental Conditions

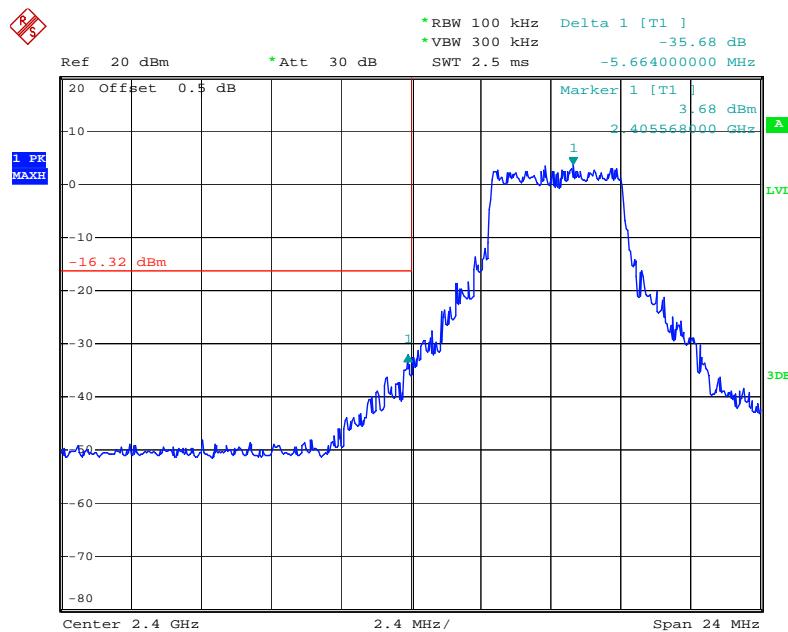
Temperature:	25.4~29.6°C
Relative Humidity:	43~49%
ATM Pressure:	100~100.5kPa
Tester:	Rennes Guo
Test Date:	2021-07-13~2021-08-31

*Test mode: Transmitting*

*Test Result: Compliance. Please refer to following plots.*

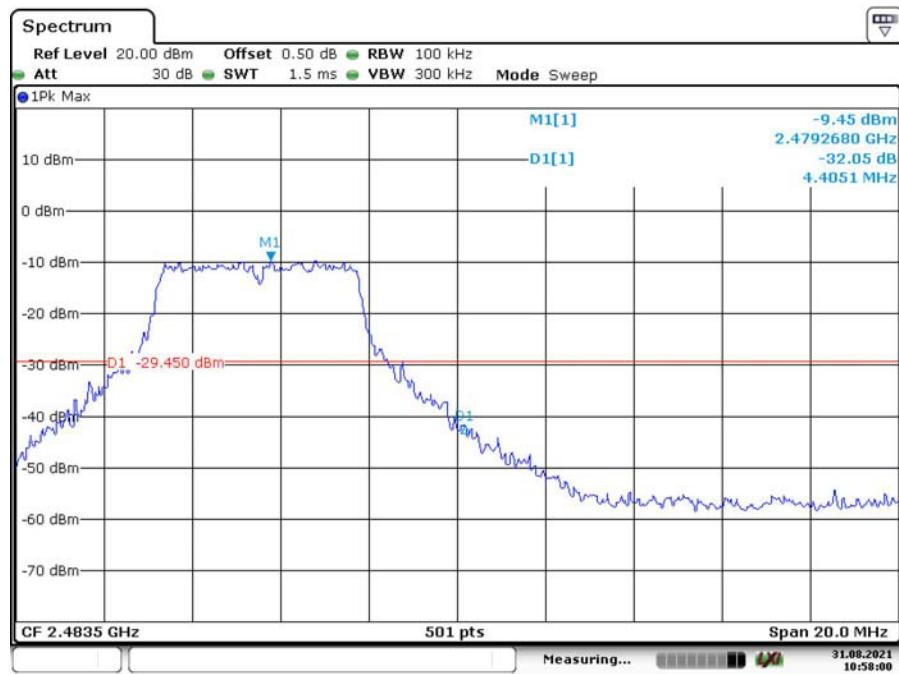
*SDR 4M Chain 0*

### Band Edge, Left Side

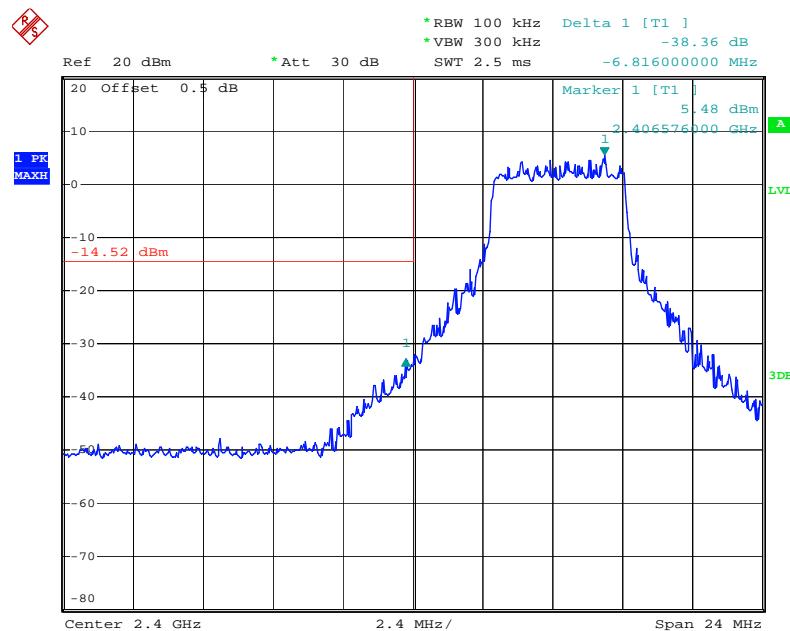


Date: 21.JUL.2021 09:28:30

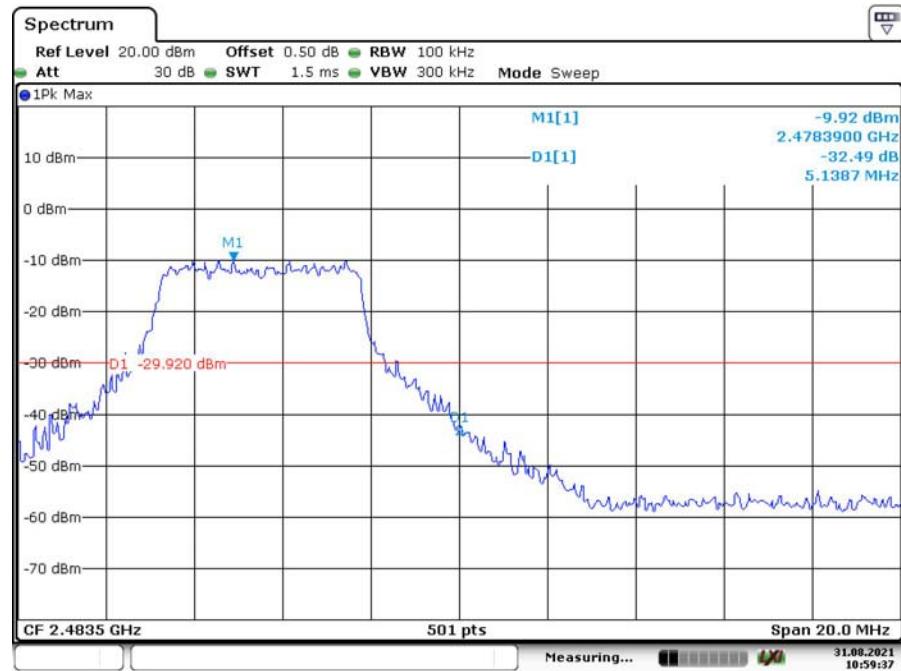
### Band Edge, Right Side



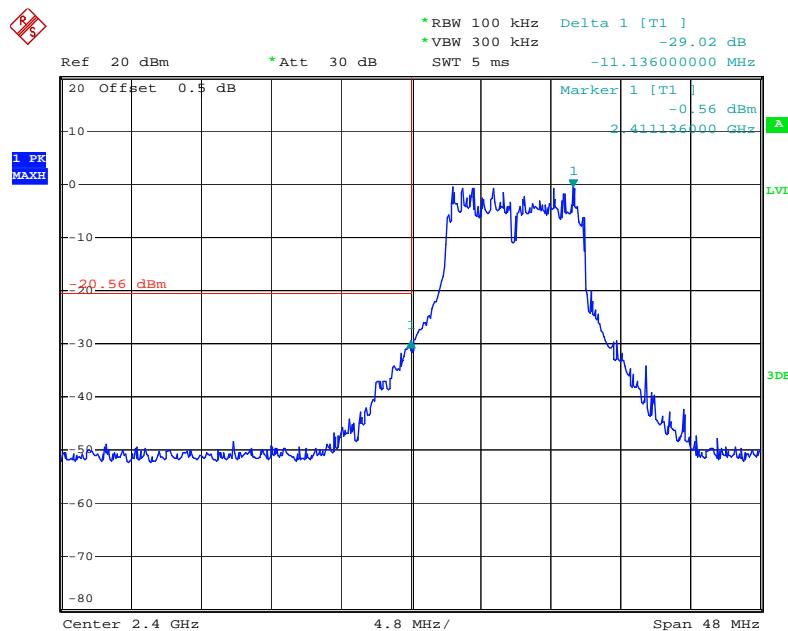
Date: 31.AUG.2021 10:58:00

*SDR 4M Chain 1***Band Edge, Left Side**

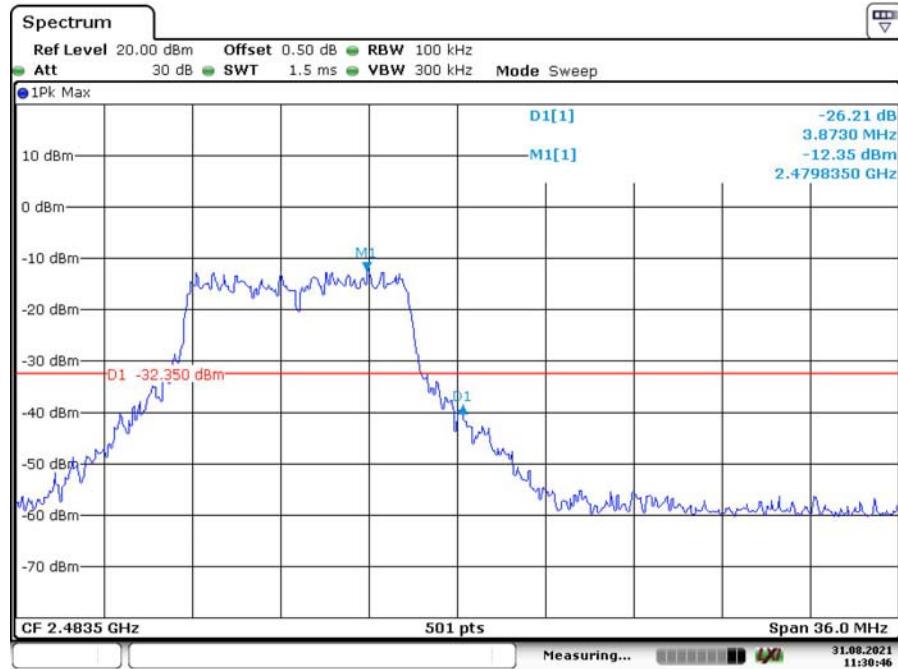
Date: 21.JUL.2021 10:05:47

**Band Edge, Right Side**

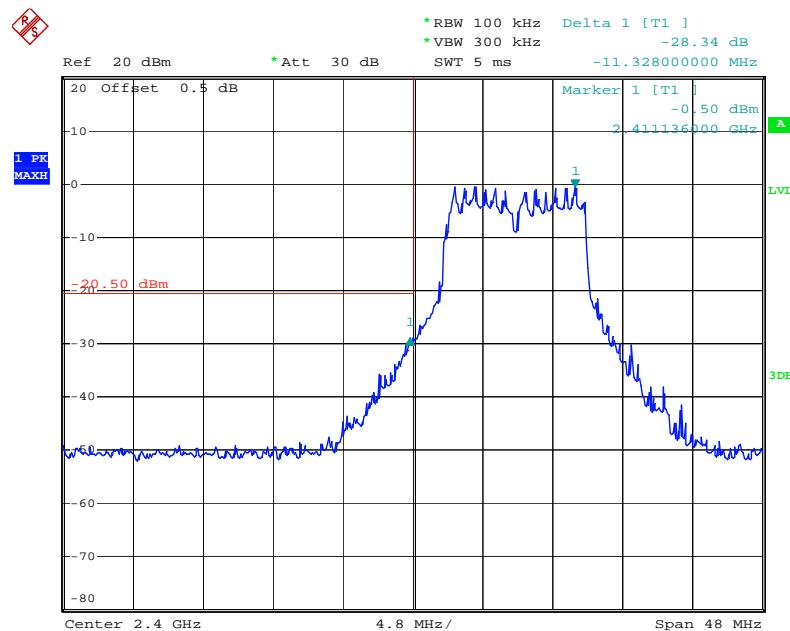
Date: 31.AUG.2021 10:59:37

*SDR 8M Chain 0***Band Edge, Left Side**

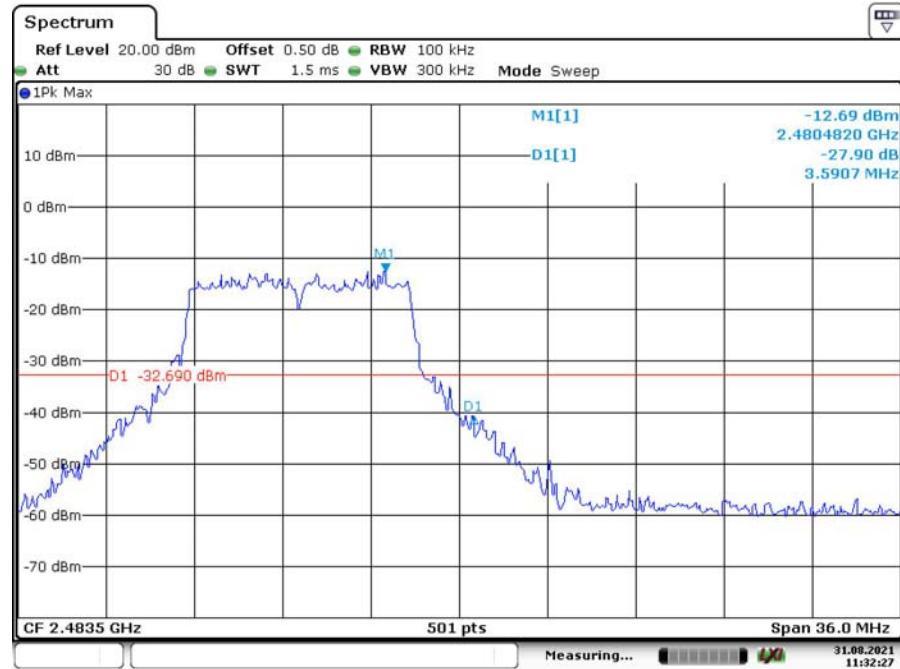
Date: 13.JUL.2021 13:50:30

**Band Edge, Right Side**

Date: 31.AUG.2021 11:30:46

*SDR 8M Chain 1***Band Edge, Left Side**

Date: 13.JUL.2021 13:51:51

**Band Edge, Right Side**

Date: 31.AUG.2021 11:32:27

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

According to FCC§15.247(e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2021-07-07	2022-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.4~29.6°C
Relative Humidity:	43~49%
ATM Pressure:	100~100.5kPa
Tester:	Rennes Guo
Test Date:	2021-07-13~2021-07-21

Test Mode: Transmitting

*Test Result: Compliance. Please refer to the following table and plots*

Mode	Channel	Frequency (MHz)	Result (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 1	Total	
SDR 4M	Low	2405	-9.64	-7.56	-5.47	8
	Middle	2442	-9.31	-6.90	-4.93	
	High	2479	-20.93	-21.42	-18.16	
SDR 8M	Low	2407	-15.36	-15.27	-12.3	8
	Middle	2442	-14.79	-14.57	-11.67	
	High	2477	-25.39	-24.54	-21.93	

Note 1: The maximum antenna gain is 3 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

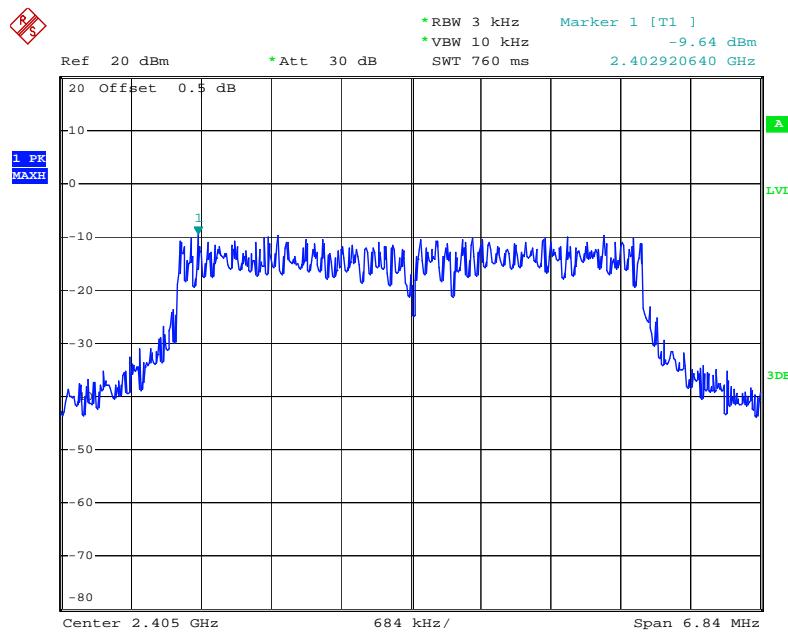
$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

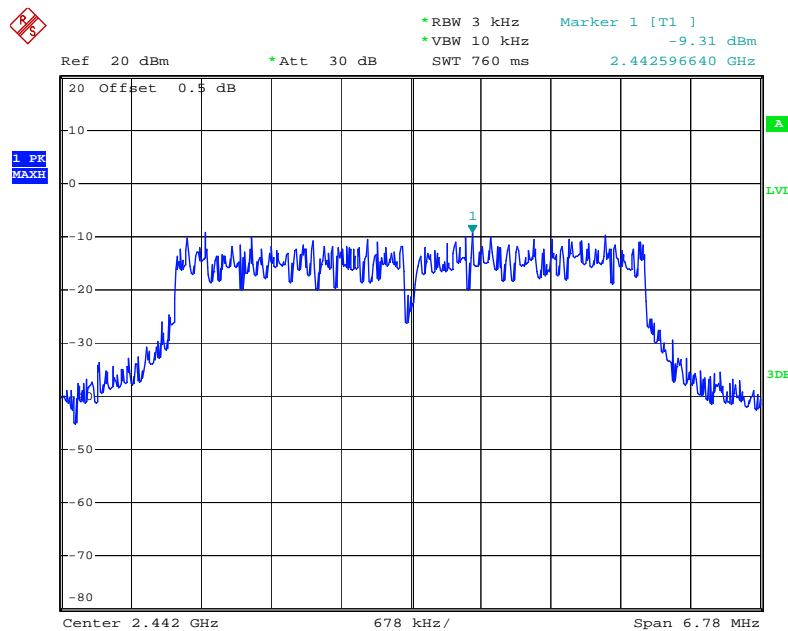
$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 3 + 10 * \log(2/1) = 6 \text{ dBi}$$

SDR 4M Chain 0

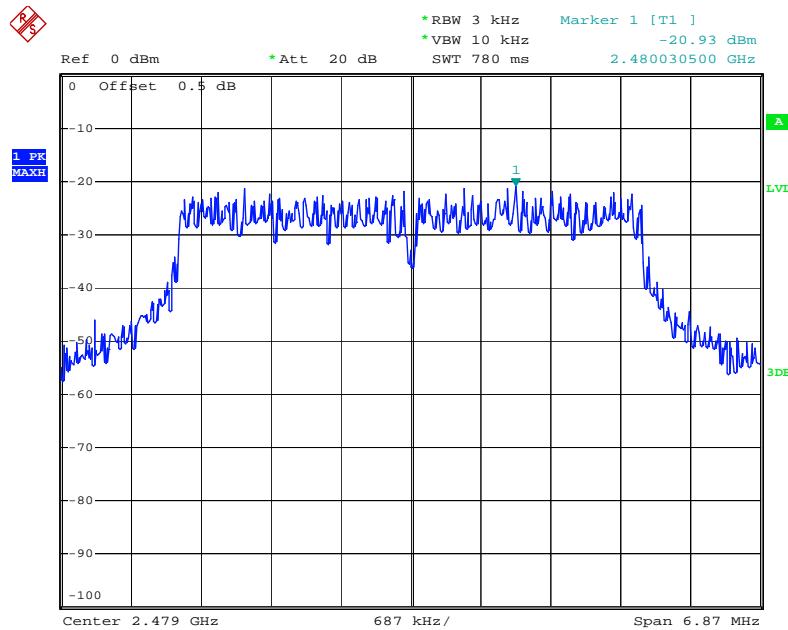
#### Power Spectral Density, Low Channel



Date: 21.JUL.2021 09:25:03

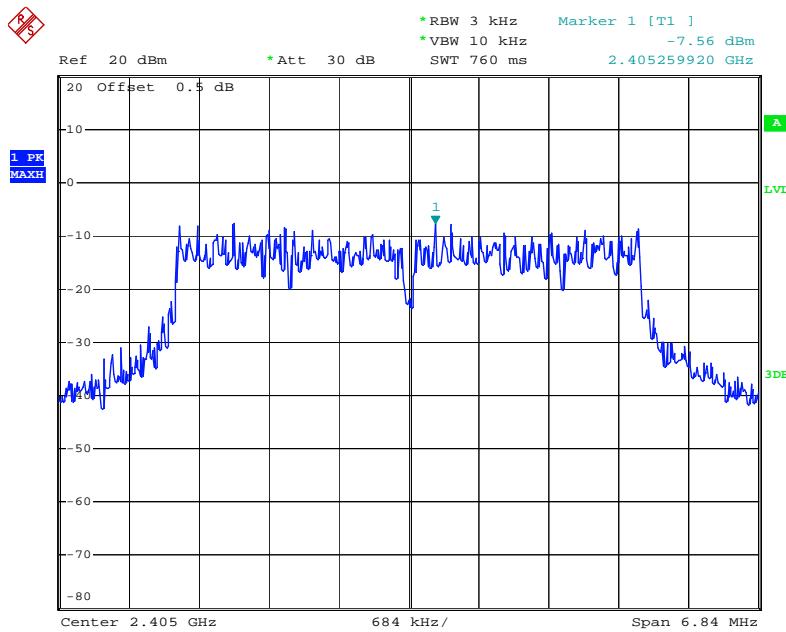
**Power Spectral Density, Middle Channel**

Date: 21.JUL.2021 09:31:57

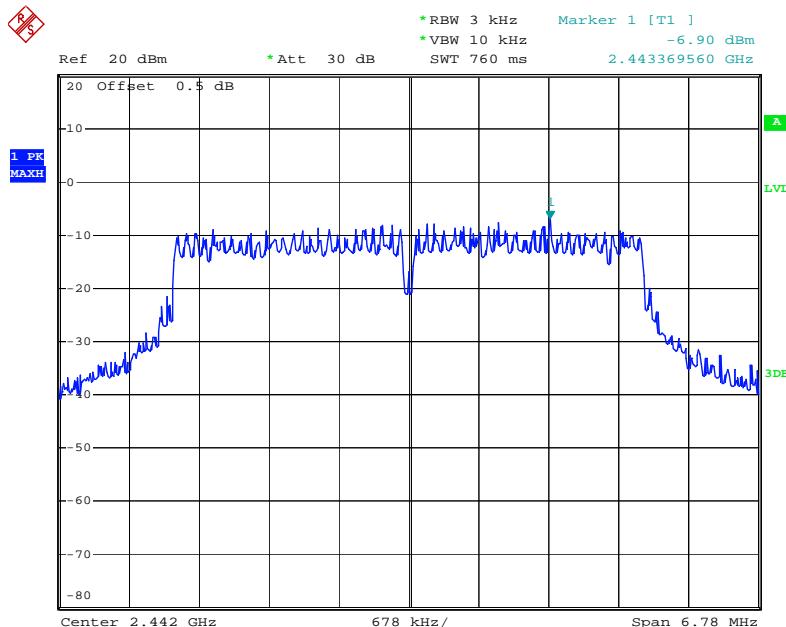
**Power Spectral Density, High Channel**

Date: 29.JUL.2021 10:28:21

4M Chain 1

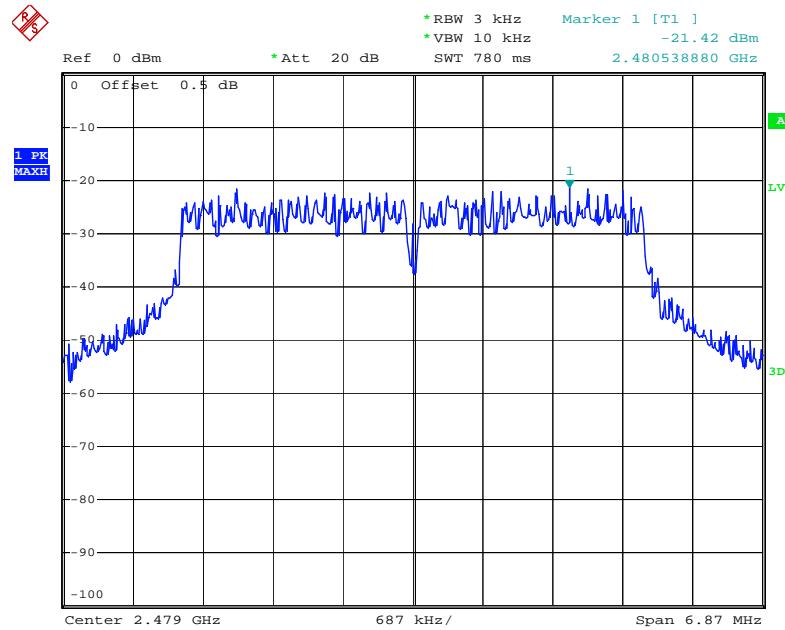
**Power Spectral Density, Low Channel**

Date: 21.JUL.2021 10:04:46

**Power Spectral Density, Middle Channel**

Date: 21.JUL.2021 10:01:23

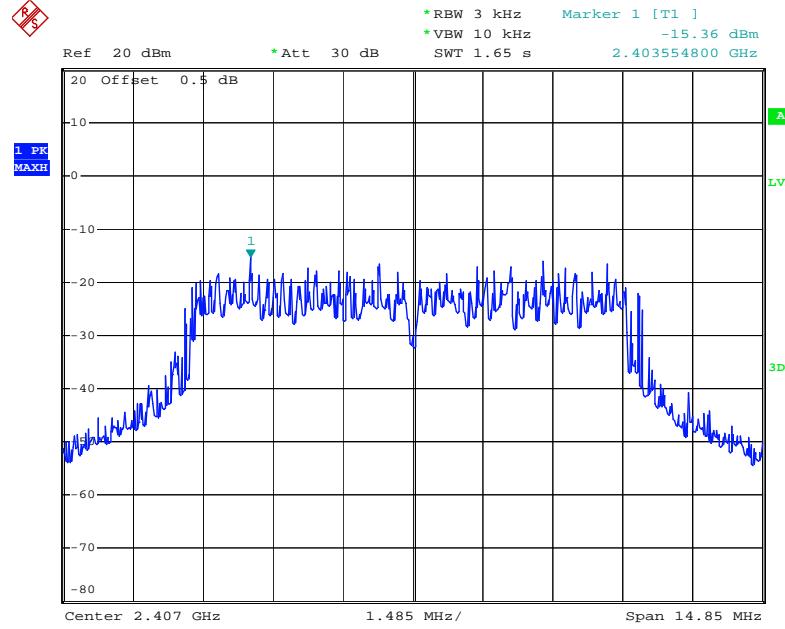
### Power Spectral Density, High Channel



Date: 29.JUL.2021 10:31:36

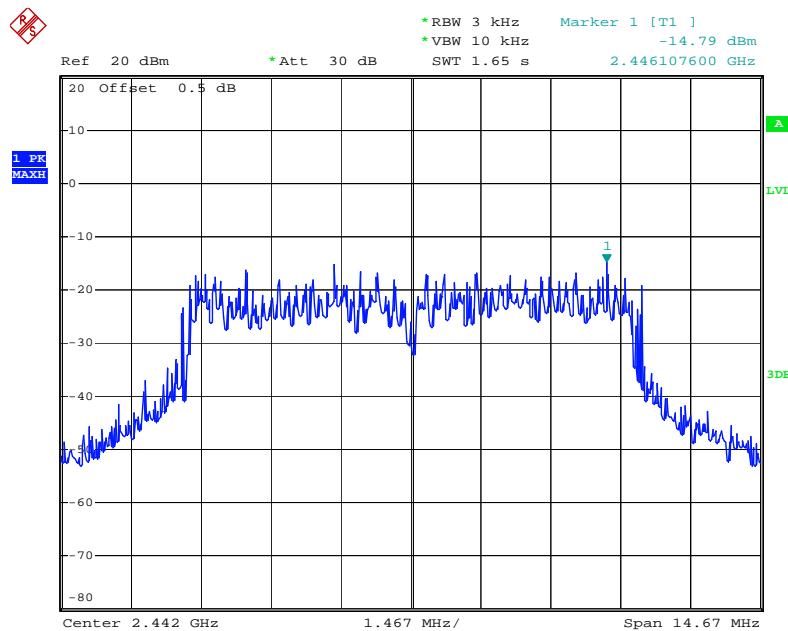
8M Chain 0

### Power Spectral Density, Low Channel



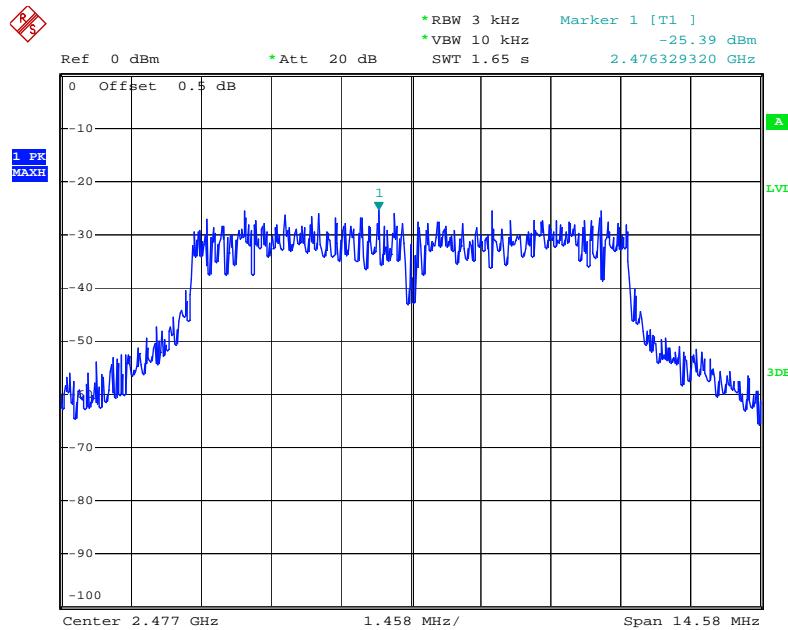
Date: 13.JUL.2021 13:50:14

### Power Spectral Density, Middle Channel



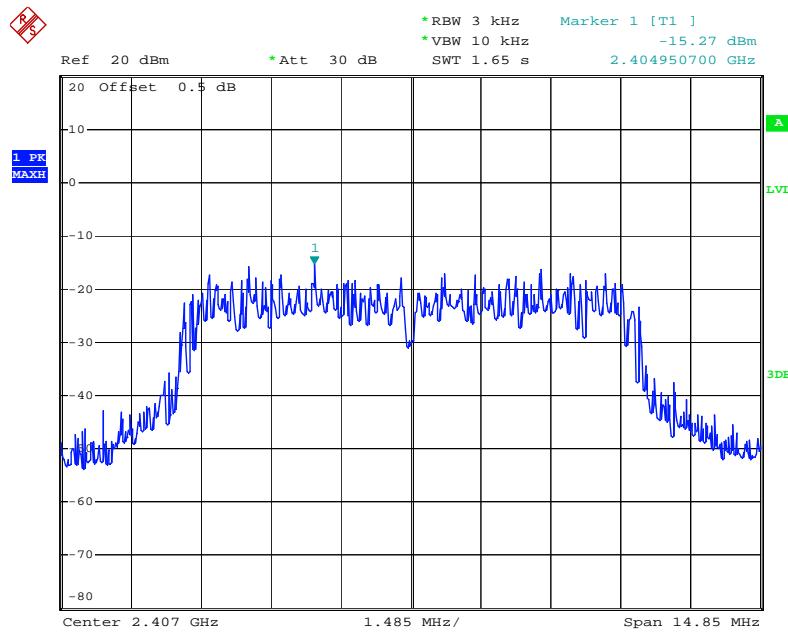
Date: 13.JUL.2021 13:57:15

### Power Spectral Density, High Channel

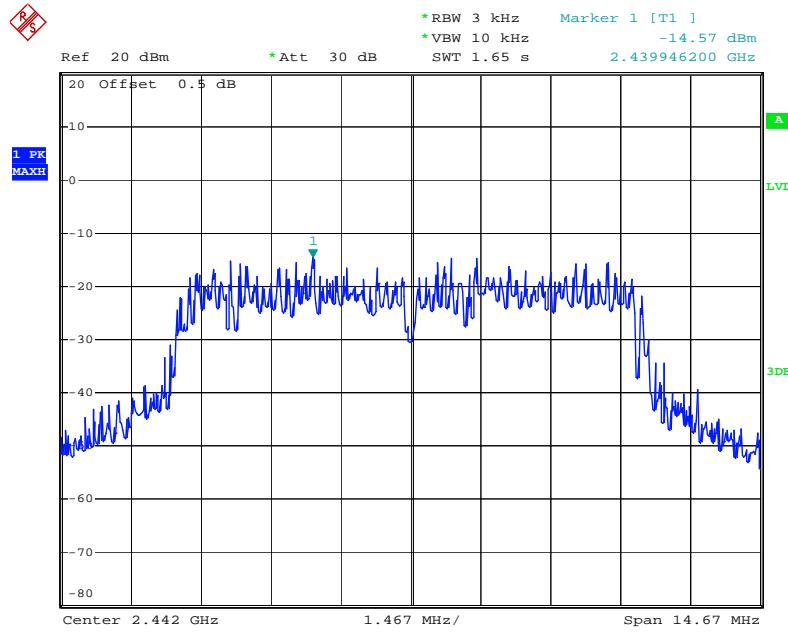


Date: 29.JUL.2021 10:40:45

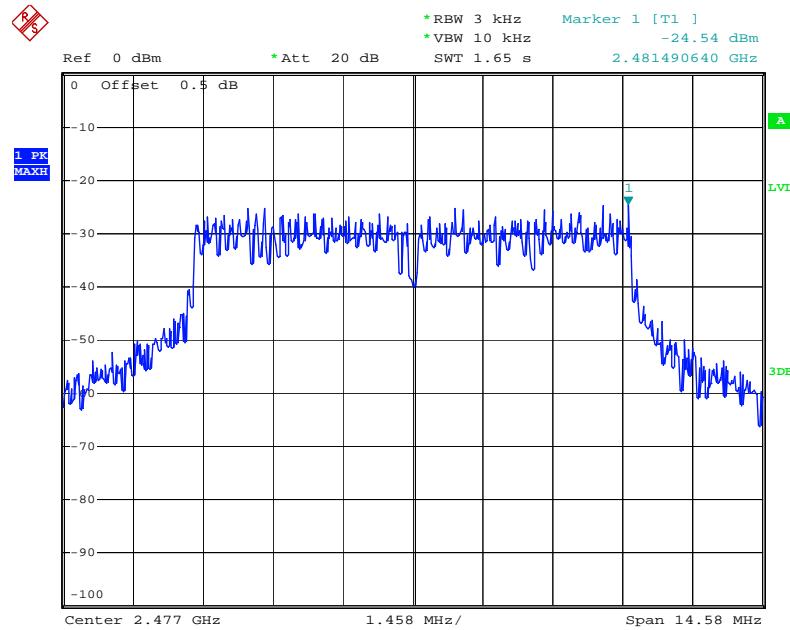
8M Chain 1

**Power Spectral Density, Low Channel**

Date: 13.JUL.2021 14:23:35

**Power Spectral Density, Middle Channel**

Date: 13.JUL.2021 13:58:41

**Power Spectral Density, High Channel**

Date: 29.JUL.2021 10:48:17

**\*\*\*\*\* END OF REPORT \*\*\*\*\***