



FCC Part 15C Test Report

FCC ID: 2AL7VRLC-422W

Product Name:	WiFi IP Camera
Trademark:	
Model Name :	RLC-422W
Prepared For :	Shenzhen Reo-link Digital Technology Co., Ltd
Address :	B509, University Town Business Park LiShan Road, NanShan, Shenzhen Guangdong China 518055
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jan. 15 – Jan. 22, 2018
Date of Report :	Jan. 22, 2017
Report No.:	BCTC-LH171204480E



TEST RESULT CERTIFICATION

Applicant's name..... : Shenzhen Reo-link Digital Technology Co., Ltd
 Address..... : B509, University Town Business Park LiShan Road, NanShan,
 Shenzhen Guangdong China 518055
Manufacture's Name..... : SHENZHEN BAICHUAN SECURITY TECHNOLOGY
 CO.,LTD
 Address..... : 5th Floor, Building 7, Tangtou 3rd Industrial Area, Shiyan
 Town, Bao'an District, Shenzhen City, China

Product description


Product name.....: WiFi IP Camera
 Model and/or type reference : RLC-422W

Standards..... : FCC Part15.247
 KDB 558074 D01 DTS Meas Guidance v04
 KDB 662911 D01 Multiple Transmitter Output v02r01
 ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang
 Reviewer(Supervisor): Jade Yang
 Approved(Manager): Carson Zhang



**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	17
3.2.5 EUT OPERATING CONDITIONS	18
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	19
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	20
3.2.8 TEST RESULTS (1GHZ~25GHZ)	22
3.3 RADIATED BAND EMISSION MEASUREMENT	27
3.3.1 TEST REQUIREMENT:	27
3.3.2 TEST PROCEDURE	27
3.3.3 DEVIATION FROM TEST STANDARD	28
3.3.4 TEST SETUP	28



Table of Contents		Page
3.3.5 EUT OPERATING CONDITIONS		28
4 . POWER SPECTRAL DENSITY TEST		30
4.1 APPLIED PROCEDURES / LIMIT		30
4.1.1 TEST PROCEDURE		30
4.1.2 DEVIATION FROM STANDARD		30
4.1.3 TEST SETUP		31
4.1.4 EUT OPERATION CONDITIONS		31
4.1.5 TEST RESULTS		32
5 . BANDWIDTH TEST		48
5.1 APPLIED PROCEDURES / LIMIT		48
5.1.1 TEST PROCEDURE		48
5.1.2 DEVIATION FROM STANDARD		48
5.1.3 TEST SETUP		48
5.1.4 EUT OPERATION CONDITIONS		48
5.1.5 TEST RESULTS		49
6 . PEAK OUTPUT POWER TEST		65
6.1 APPLIED PROCEDURES / LIMIT		65
6.1.1 TEST PROCEDURE		65
6.1.2 DEVIATION FROM STANDARD		65
6.1.3 TEST SETUP		65
6.1.4 EUT OPERATION CONDITIONS		65
6.1.5 TEST RESULTS		66
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE		67
7.1 APPLICABLE STANDARD		67
7.2 TEST PROCEDURE		67
7.3 DEVIATION FROM STANDARD		67
7.4 TEST SETUP		67
7.5 EUT OPERATION CONDITIONS		68
7.1 TEST RESULTS		68
8 . DUTY CYCLE OF TEST SIGNAL		74
8.1 STANDARD REQUIREMENT		74
8.2 FORMULA:		74
9 . ANTENNA REQUIREMENT		77
9.1 STANDARD REQUIREMENT		77



Table of Contents	Page
9.2 EUT ANTENNA	77
10 . EUT TEST PHOTO	78
11 . EUT PHOTO	80
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

A2LA Certificate No.: 4474.01

IC Registered No.: 12655A

1.2 MEASUREMENT UNCERTAINTY


The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	WiFi IP Camera
Trade Name	
Model Name	RLC-422W
Model Difference	N/A
Product Description	Operation Frequency: 802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
	Modulation Type: WIFI: OFDM/DSSS
	Bit Rate of Transmitter 802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 300Mbps
	Number Of Channel 802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
	Antenna Designation: Please see Note 3.
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.
Power Source	DC 12V
hardware version	--
Software version	--
Serial number	--
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	SMA Antenna	2.0dBi	
2	N/A	N/A	SMA Antenna	2.0dBi	

Note1: Directional Gain=2.0dBi+10log(2)=5.01 dBi

Note2: The EUT 802.11n (20) and 802.11n(40) is support MIMO mode.

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission/Radiated Spurious Emission Test




RF Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Mini Pc		RLC-422W	N/A	EUT
E-2	Adapter	N/A	BCTC003	N/A	Lab Provide

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	DC cable unshielded
C-2	NO	NO	0.3M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2017.08.27	2018.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2017.08.27	2018.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2017.08.27	2018.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2017.09.03	2018.09.02
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2017.09.03	2018.09.02
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2017.08.27	2018.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2017.08.27	2018.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2017.08.27	2018.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2017.09.03	2018.09.02
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2017.08.27	2018.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2017.08.27	2018.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2017.08.27	2018.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2017.08.27	2018.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2017.08.27	2018.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2017.08.27	2018.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2017.08.27	2018.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2017.08.27	2018.08.26

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1011 65-ha	2017.08.27	2018.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2017.08.27	2018.08.26
3	LISN	R&S	NSLK8126	8126487	2017.08.27	2018.08.26
4	RF cables	R&S	R204	R20X	2017.08.27	2018.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2017.08.27	2018.08.26



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

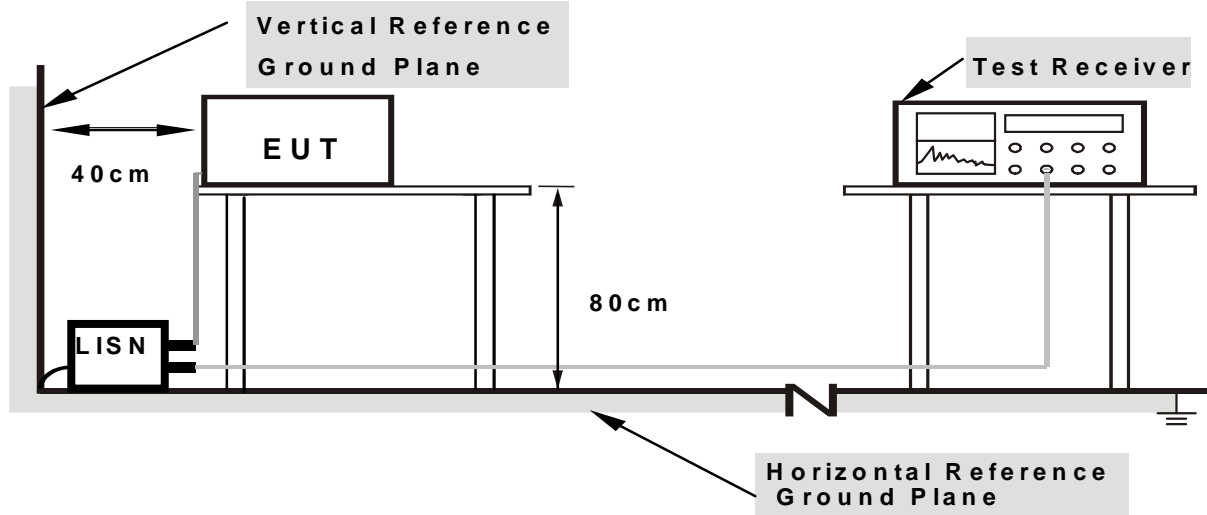

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature :	25°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

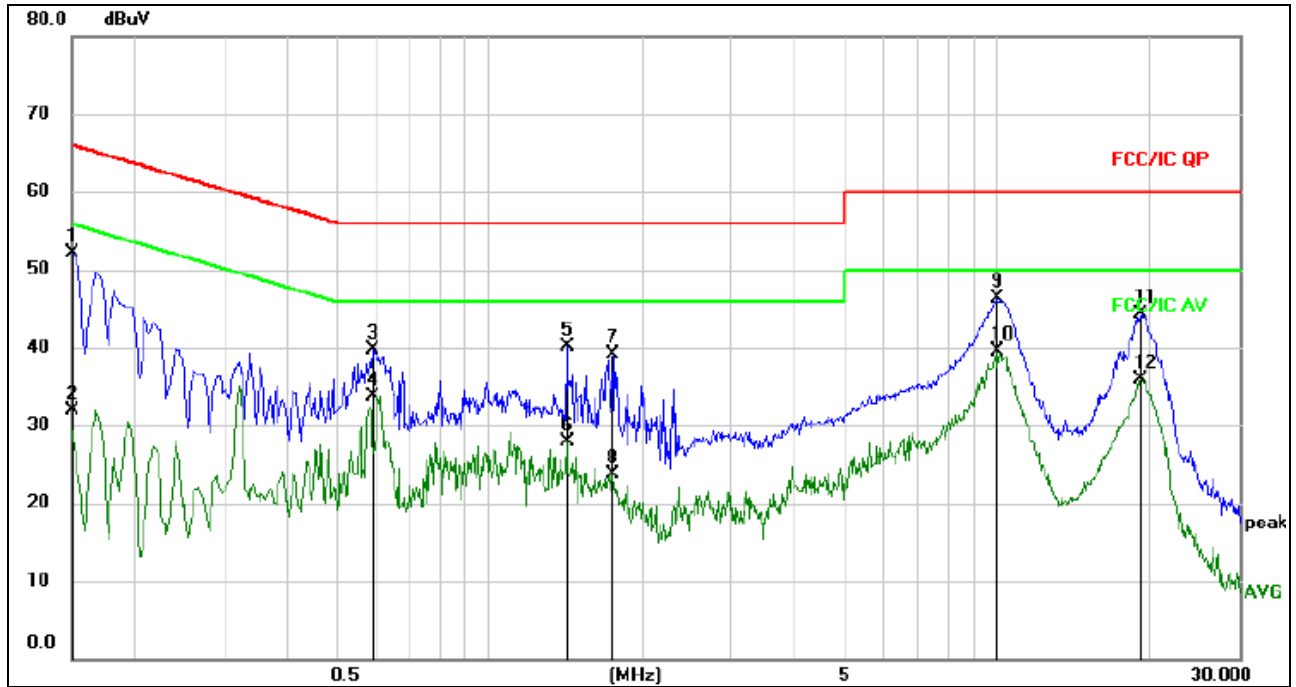


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	42.39	9.74	52.13	66.00	-13.87	QP	
2		0.1500	22.12	9.74	31.86	56.00	-24.14	AVG	
3		0.5909	30.11	9.68	39.79	56.00	-16.21	QP	
4		0.5909	24.02	9.68	33.70	46.00	-12.30	AVG	
5		1.4189	30.31	9.71	40.02	56.00	-15.98	QP	
6		1.4189	18.11	9.71	27.82	46.00	-18.18	AVG	
7		1.7519	29.39	9.71	39.10	56.00	-16.90	QP	
8		1.7519	14.08	9.71	23.79	46.00	-22.21	AVG	
9		10.0095	36.40	9.84	46.24	60.00	-13.76	QP	
10	*	10.0095	29.62	9.84	39.46	50.00	-10.54	AVG	
11		19.2030	34.27	9.96	44.23	60.00	-15.77	QP	
12		19.2030	26.01	9.96	35.97	50.00	-14.03	AVG	



Temperature :	25°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

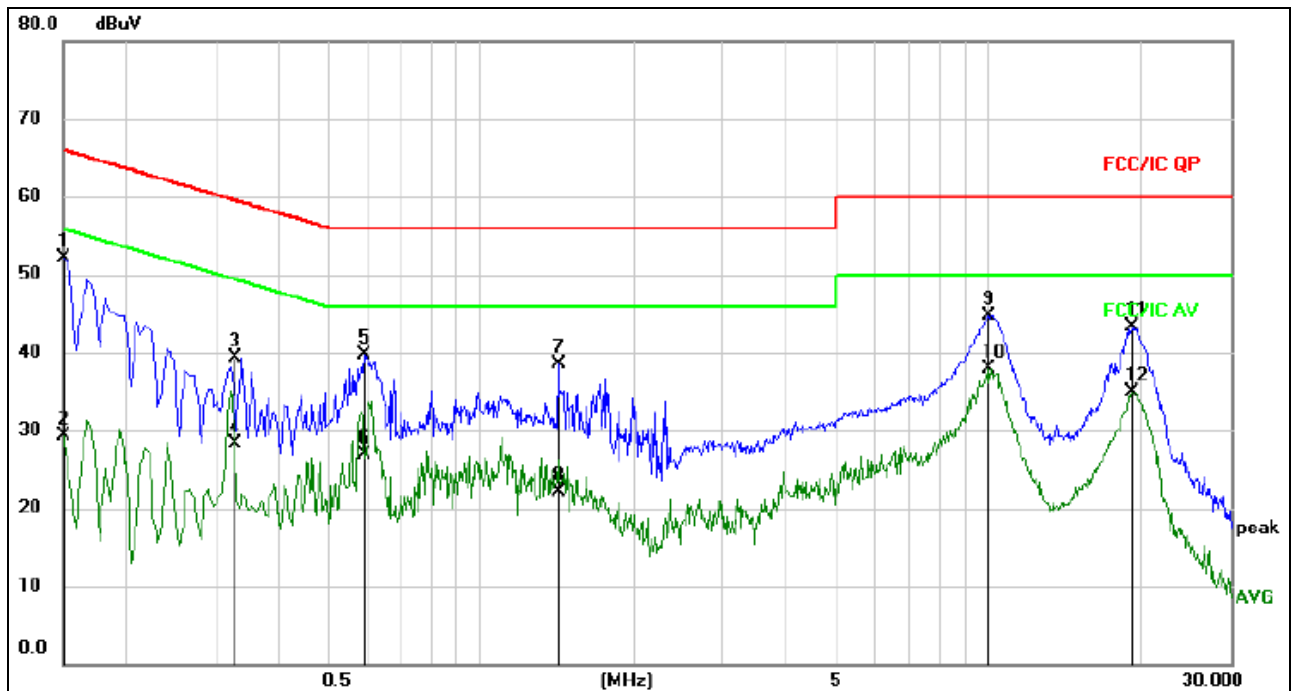

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	42.39	9.74	52.13	66.00	-13.87	QP	
2		0.1500	19.52	9.74	29.26	56.00	-26.74	AVG	
3		0.3267	29.58	9.65	39.23	59.53	-20.30	QP	
4		0.3267	18.70	9.65	28.35	49.53	-21.18	AVG	
5		0.5909	30.11	9.68	39.79	56.00	-16.21	QP	
6		0.5909	17.15	9.68	26.83	46.00	-19.17	AVG	
7		1.4189	28.81	9.71	38.52	56.00	-17.48	QP	
8		1.4189	12.47	9.71	22.18	46.00	-23.82	AVG	
9		10.0095	34.90	9.84	44.74	60.00	-15.26	QP	
10	*	10.0095	28.12	9.84	37.96	50.00	-12.04	AVG	
11		19.2030	33.27	9.96	43.23	60.00	-16.77	QP	
12		19.2030	25.01	9.96	34.97	50.00	-15.03	AVG	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

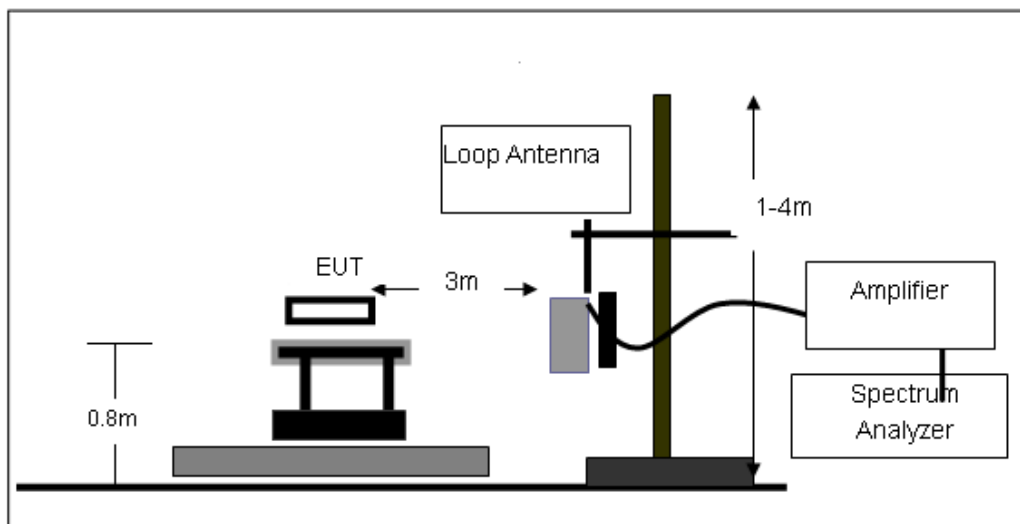

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

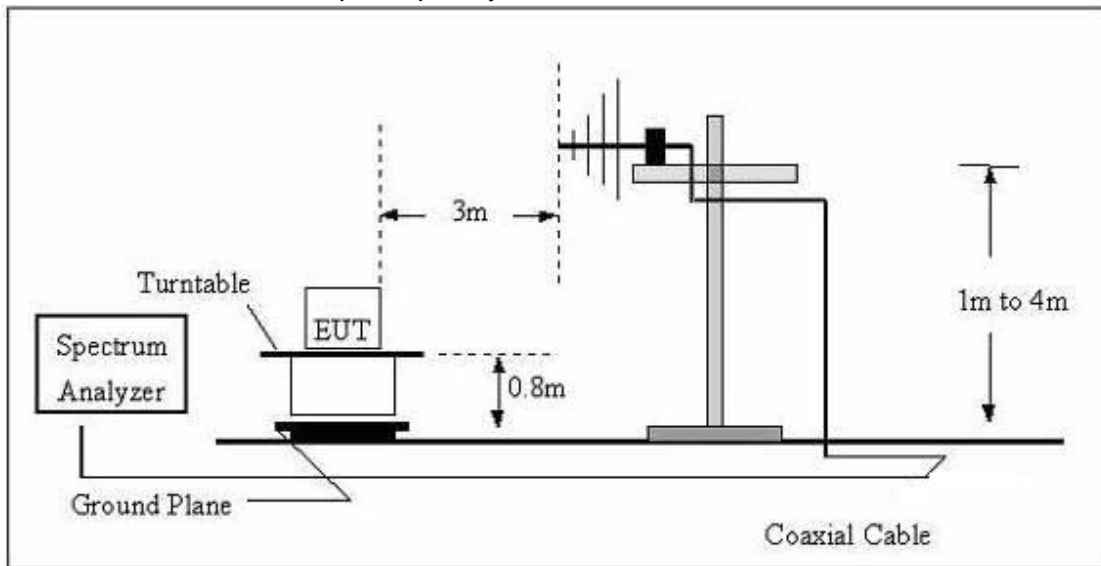

(C) Radiated Emission Test-Up Frequency Above 1GHz

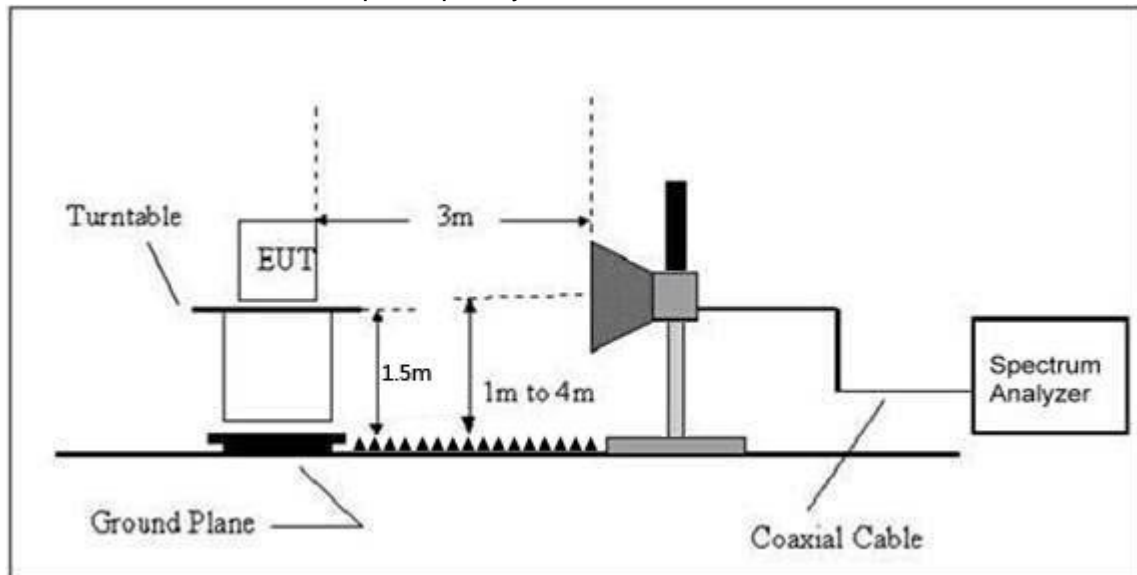

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 12V
Test Mode :	Mode 5	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 5		

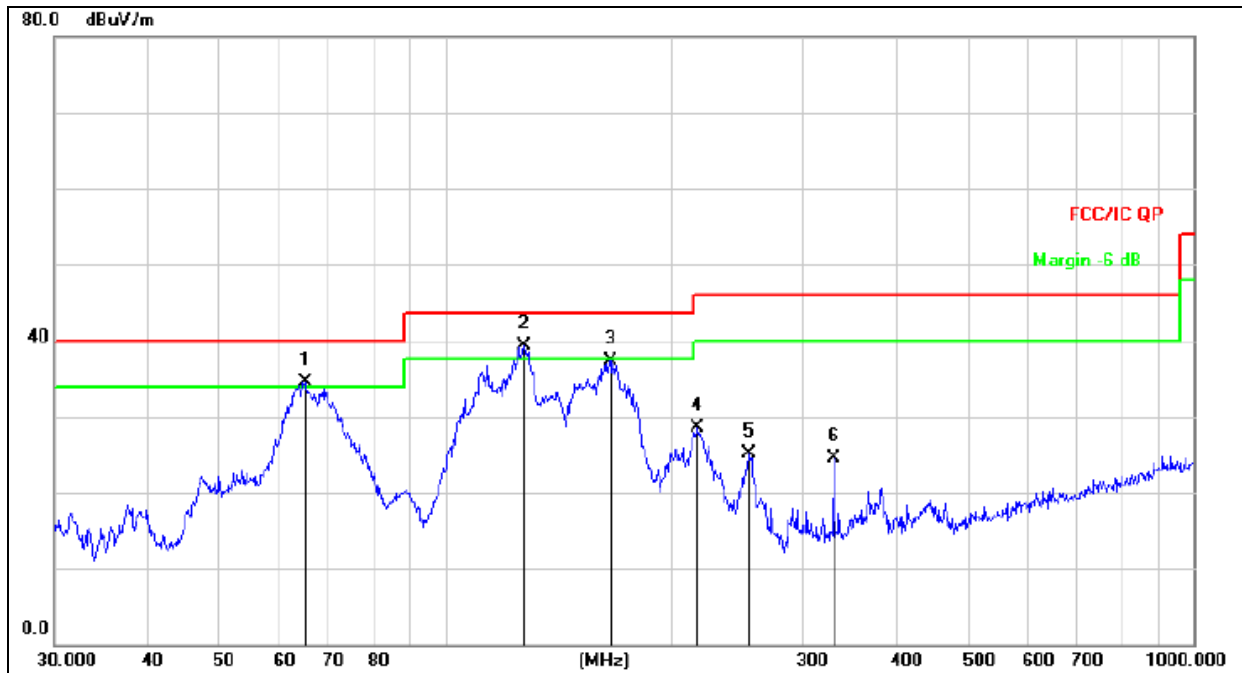


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	64.8865	51.42	-16.85	34.57	40.00	-5.43	QP
2	*	127.6645	58.70	-19.35	39.35	43.50	-4.15	QP
3		166.0680	55.97	-18.65	37.32	43.50	-6.18	QP
4		217.5443	44.12	-15.52	28.60	46.00	-17.40	QP
5		254.7284	38.79	-13.59	25.20	46.00	-20.80	QP
6		330.1949	35.68	-11.23	24.45	46.00	-21.55	QP



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 5		

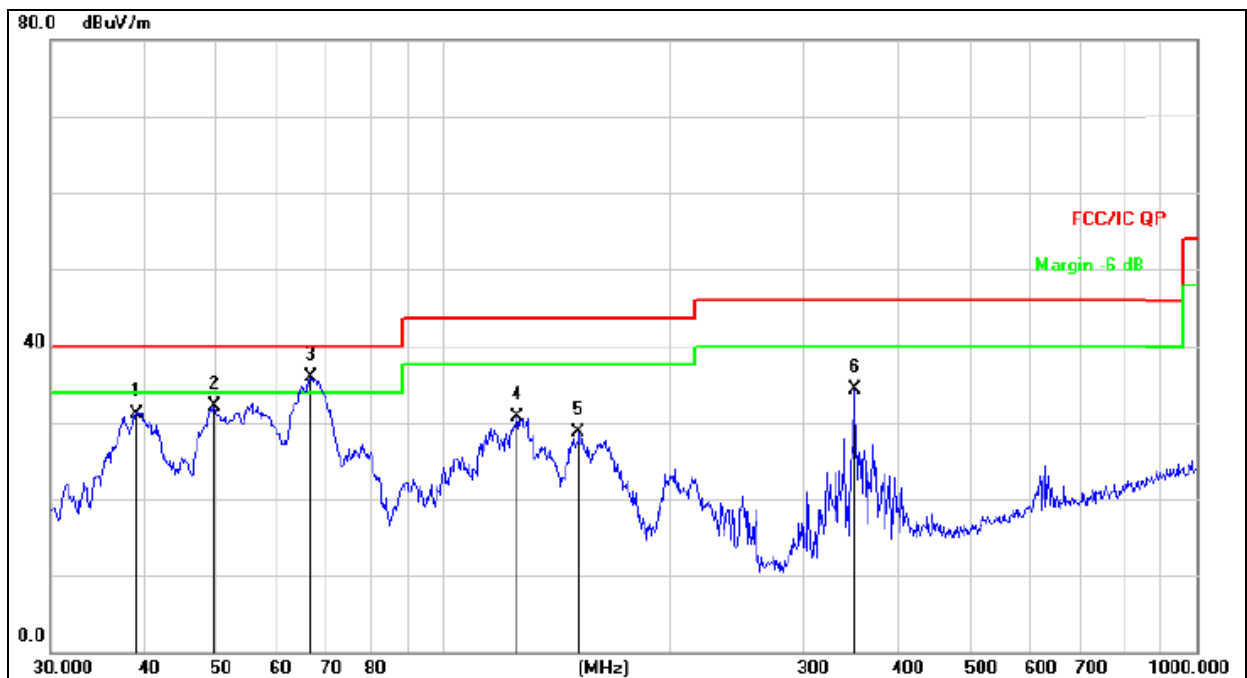

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.0245	47.22	-16.02	31.20	40.00	-8.80	QP
2		49.5328	46.87	-14.71	32.16	40.00	-7.84	QP
3	*	66.4989	53.32	-17.35	35.97	40.00	-4.03	QP
4		125.0066	49.81	-19.15	30.66	43.50	-12.84	QP
5		151.0666	48.36	-19.58	28.78	43.50	-14.72	QP
6		351.7079	44.55	-10.34	34.21	46.00	-11.79	QP



3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b									
Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824.00	66.02	39.55	7.85	25.66	59.98	74.00	-14.02	PK
V	4824.00	49.28	39.55	7.85	25.66	43.24	54.00	-10.76	AV
V	7236.00	66.33	38.33	7.52	24.55	60.07	74.00	-13.93	PK
V	7236.00	47.62	38.33	7.52	24.55	41.36	54.00	-12.64	AV
V	15450.00	51.08	35.23	6.75	26.59	49.19	74.00	-24.81	PK
H	4824.00	63.25	39.55	7.85	25.66	57.21	74.00	-16.79	PK
H	4824.00	49.14	39.55	7.85	25.66	43.10	54.00	-10.90	AV
H	7236.00	70.54	38.33	7.52	23.55	63.28	74.00	-10.72	PK
H	7236.00	48.76	38.33	7.52	23.22	41.17	54.00	-12.83	AV
H	15450.00	45.61	35.45	6.75	27.88	44.79	74.00	-29.21	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437									
V	4874.00	66.34	38.89	7.57	25.45	60.47	74.00	-13.53	PK
V	4874.00	48.80	38.89	7.57	25.45	42.93	54.00	-11.07	AV
V	7311.00	66.10	38.78	7.35	24.78	59.45	74.00	-14.55	PK
V	7311.00	48.31	38.78	7.35	24.78	41.66	54.00	-12.34	AV
V	15450.00	51.40	35.89	6.42	26.47	48.40	74.00	-25.60	PK
H	4874.00	64.77	38.89	7.57	25.45	58.90	74.00	-15.10	PK
H	4874.00	48.23	38.89	7.57	25.45	42.36	54.00	-11.64	AV
H	7311.00	69.66	38.78	7.35	24.78	63.01	74.00	-10.99	PK
H	7311.00	47.79	38.78	7.35	24.78	41.14	54.00	-12.86	AV
H	15450.00	48.71	36.68	6.42	26.65	45.10	74.00	-28.90	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	4924.00	67.43	38.75	7.46	25.45	61.59	74.00	-12.41	PK
V	4924.00	48.82	38.75	7.46	25.45	42.98	54.00	-11.02	AV
V	7386.00	68.96	38.65	7.22	24.78	62.31	74.00	-11.69	PK
V	7386.00	50.29	38.65	7.22	24.78	43.64	54.00	-10.36	AV
V	15450.00	49.88	35.58	6.35	26.47	47.12	74.00	-26.88	PK
H	4924.00	66.40	38.75	7.46	25.45	60.56	74.00	-13.44	PK
H	4924.00	49.77	38.75	7.46	25.45	43.93	54.00	-10.07	AV
H	7386.00	70.79	38.65	7.22	24.78	64.14	74.00	-9.86	PK
H	7386.00	47.65	38.65	7.22	24.78	41.00	54.00	-13.00	AV
H	15450.00	45.43	36.42	6.32	26.65	41.98	74.00	-32.02	PK



Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g									
Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824.00	65.13	38.75	7.46	25.45	59.29	74.00	-14.71	PK
V	4824.00	50.36	38.75	7.46	25.45	44.52	54.00	-9.48	AV
V	7236.00	66.74	38.65	7.22	24.78	60.09	74.00	-13.91	PK
V	7236.00	47.63	38.65	7.22	24.78	40.98	54.00	-13.02	AV
V	15450.00	51.63	35.58	6.35	26.47	48.87	74.00	-25.13	PK
H	4824.00	67.12	38.75	7.46	25.45	61.28	74.00	-12.72	PK
H	4824.00	50.77	38.75	7.46	25.45	44.93	54.00	-9.07	AV
H	7236.00	68.4	38.65	7.22	24.78	61.75	74.00	-12.25	PK
H	7236.00	51.13	38.65	7.22	24.78	44.48	54.00	-9.52	AV
H	15450.00	46.08	36.42	6.32	26.65	42.63	74.00	-31.37	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437									
V	4874.00	66.32	38.89	7.57	25.45	60.45	74.00	-13.55	PK
V	4874.00	49.59	38.89	7.57	25.45	43.72	54.00	-10.28	AV
V	7311.00	66.83	38.78	7.35	24.78	60.18	74.00	-13.82	PK
V	7311.00	49.4	38.78	7.35	24.78	42.75	54.00	-11.25	AV
V	15450.00	53.76	35.89	6.42	26.47	50.76	74.00	-23.24	PK
H	4874.00	64.74	38.89	7.57	25.45	58.87	74.00	-15.13	PK
H	4874.00	50.66	38.89	7.57	25.45	44.79	54.00	-9.21	AV
H	7311.00	68.5	38.78	7.35	24.78	61.85	74.00	-12.15	PK
H	7311.00	49.76	38.78	7.35	24.78	43.11	54.00	-10.89	AV
H	15450.00	49.02	36.68	6.42	26.65	45.41	74.00	-28.59	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	4924.00	66.71	38.75	7.38	25.45	60.79	74.00	-13.21	PK
V	4924.00	47.82	38.75	7.38	25.45	41.90	54.00	-12.10	AV
V	7386.00	69.2	38.65	7.15	24.78	62.48	74.00	-11.52	PK
V	7386.00	50.19	38.65	7.15	24.78	43.47	54.00	-10.53	AV
V	15450.00	48.31	35.58	6.25	26.47	45.45	74.00	-28.55	PK
H	4924.00	67.33	38.75	7.38	25.45	61.41	74.00	-12.59	PK
H	4924.00	48.88	38.75	7.38	25.45	42.96	54.00	-11.04	AV
H	7386.00	68.04	38.65	7.15	24.78	61.32	74.00	-12.68	PK
H	7386.00	47.79	38.65	7.15	24.78	41.07	54.00	-12.93	AV
H	15450.00	46.81	36.42	6.25	26.65	43.29	74.00	-30.71	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824.00	68.45	38.75	7.46	25.45	62.61	74.00	-11.39	PK
V	4824.00	48.05	38.75	7.46	25.45	42.21	54.00	-11.79	AV
V	7236.00	67.33	38.65	7.22	24.78	60.68	74.00	-13.32	PK
V	7236.00	49.48	38.65	7.22	24.78	42.83	54.00	-11.17	AV
V	15450.00	49.85	35.58	6.35	26.47	47.09	74.00	-26.91	PK
H	4824.00	67.88	38.75	7.46	25.45	62.04	74.00	-11.96	PK
H	4824.00	48.85	38.75	7.46	25.45	43.01	54.00	-10.99	AV
H	7236.00	68.48	38.65	7.22	24.78	61.83	74.00	-12.17	PK
H	7236.00	49.74	38.65	7.22	24.78	43.09	54.00	-10.91	AV
H	15450.00	47.89	36.42	6.32	26.65	44.44	74.00	-29.56	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437									
V	4874.00	67.66	38.89	7.57	25.45	61.79	74.00	-12.21	PK
V	4874.00	50.14	38.89	7.57	25.45	44.27	54.00	-9.73	AV
V	7311.00	66.43	38.78	7.35	24.78	59.78	74.00	-14.22	PK
V	7311.00	46.56	38.78	7.35	24.78	39.91	54.00	-14.09	AV
V	15450.00	45.96	35.89	6.42	26.47	42.96	74.00	-31.04	PK
H	4874.00	65.06	38.89	7.57	25.45	59.19	74.00	-14.81	PK
H	4874.00	48.81	38.89	7.57	25.45	42.94	54.00	-11.06	AV
H	7311.00	69.86	38.78	7.35	24.78	63.21	74.00	-10.79	PK
H	7311.00	48.62	38.78	7.35	24.78	41.97	54.00	-12.03	AV
H	15450.00	49.48	36.68	6.42	26.65	45.87	74.00	-28.13	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	4924.00	67.25	38.75	7.38	25.45	61.33	74.00	-12.67	PK
V	4924.00	47.15	38.75	7.38	25.45	41.23	54.00	-12.77	AV
V	7386.00	66.45	38.65	7.15	24.78	59.73	74.00	-14.27	PK
V	7386.00	49.91	38.65	7.15	24.78	43.19	54.00	-10.81	AV
V	15450.00	46.73	35.58	6.25	26.47	43.87	74.00	-30.13	PK
H	4924.00	64.77	38.75	7.38	25.45	58.85	74.00	-15.15	PK
H	4924.00	50.13	38.75	7.38	25.45	44.21	54.00	-9.79	AV
H	7386.00	67.98	38.65	7.15	24.78	61.26	74.00	-12.74	PK
H	7386.00	49.02	38.65	7.15	24.78	42.30	54.00	-11.70	AV
H	15450.00	47.78	36.42	6.25	26.65	44.26	74.00	-29.74	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422									
V	4844.000	67.93	39.55	7.77	25.66	61.81	74.00	-12.19	PK
V	4844.000	48.57	39.55	7.77	25.66	42.45	54.00	-11.55	AV
V	7266.000	65.93	38.33	7.30	24.55	59.45	74.00	-14.55	PK
V	7266.000	48.9	38.33	7.30	24.55	42.42	54.00	-11.58	AV
V	15450.00	47.14	35.23	6.60	26.59	45.10	74.00	-28.90	PK
H	4844.000	67.71	39.55	7.77	25.66	61.59	74.00	-12.41	PK
H	4844.000	49.09	39.55	7.77	25.66	42.97	54.00	-11.03	AV
H	7266.000	67.64	38.33	7.30	23.55	60.16	74.00	-13.84	PK
H	7266.000	48.56	38.33	7.30	23.22	40.75	54.00	-13.25	AV
H	15450.00	48.06	35.45	6.60	27.88	47.09	74.00	-26.91	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437									
V	4874.00	66.53	38.89	7.57	25.45	60.66	74.00	-13.34	PK
V	4874.00	49.44	38.89	7.57	25.45	43.57	54.00	-10.43	AV
V	7311.00	67.04	38.78	7.35	24.78	60.39	74.00	-13.61	PK
V	7311.00	47.33	38.78	7.35	24.78	40.68	54.00	-13.32	AV
V	15450.00	47.28	35.89	6.42	26.47	44.28	74.00	-29.72	PK
H	4874.00	64.67	38.89	7.57	25.45	58.80	74.00	-15.20	PK
H	4874.00	49.05	38.89	7.57	25.45	43.18	54.00	-10.82	AV
H	7311.00	68.86	38.78	7.35	24.78	62.21	74.00	-11.79	PK
H	7311.00	47.67	38.78	7.35	24.78	41.02	54.00	-12.98	AV
H	15450.00	46.89	36.68	6.42	26.65	43.28	74.00	-30.72	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2452									
V	4904.00	68.27	38.75	7.38	25.45	62.35	74.00	-11.65	PK
V	4904.00	49.42	38.75	7.38	25.45	43.50	54.00	-10.50	AV
V	7356.00	66.53	38.65	7.15	24.78	59.81	74.00	-14.19	PK
V	7356.00	48.69	38.65	7.15	24.78	41.97	54.00	-12.03	AV
V	15450.00	52.92	35.58	6.25	26.47	50.06	74.00	-23.94	PK
H	4904.00	66.70	38.75	7.38	25.45	60.78	74.00	-13.22	PK
H	4904.00	47.37	38.75	7.38	25.45	41.45	54.00	-12.55	AV
H	7356.00	70.17	38.65	7.15	24.78	63.45	74.00	-10.55	PK
H	7356.00	49.48	38.65	7.15	24.78	42.76	54.00	-11.24	AV
H	15450.00	46.65	36.42	6.25	26.65	43.13	74.00	-30.87	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

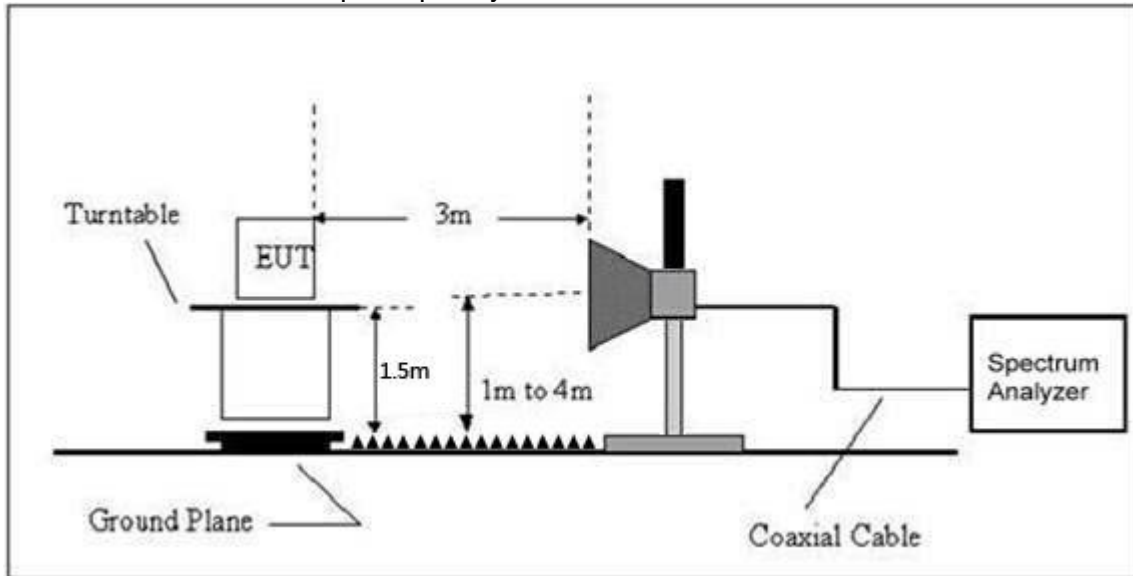

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	56.15	38.06	7.42	20.15	45.66	74.00	54.00	PASS
	H	2400.00	62.09	38.06	7.42	20.15	51.60	74.00	54.00	PASS
	V	2390.00	56.40	38.06	7.42	20.15	45.91	74.00	54.00	PASS
	V	2400.00	63.06	38.06	7.42	20.15	52.57	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.00	38.17	7.45	20.54	49.82	74.00	54.00	PASS
	H	2485.50	58.24	38.17	7.45	20.54	48.06	74.00	54.00	PASS
	V	2483.50	60.80	38.20	7.45	20.54	50.59	74.00	54.00	PASS
	V	2485.50	58.63	38.20	7.45	20.54	48.42	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	57.59	38.06	7.42	20.15	47.10	74.00	54.00	PASS
	H	2400.00	59.83	38.06	7.42	20.15	49.34	74.00	54.00	PASS
	V	2390.00	57.61	38.06	7.42	20.15	47.12	74.00	54.00	PASS
	V	2400.00	60.94	38.06	7.42	20.15	50.45	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.38	38.17	7.45	20.54	51.20	74.00	54.00	PASS
	H	2485.50	59.09	38.17	7.45	20.54	48.91	74.00	54.00	PASS
	V	2483.50	60.56	38.20	7.45	20.54	50.35	74.00	54.00	PASS
	V	2485.50	59.85	38.20	7.45	20.54	49.64	74.00	54.00	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	57.40	38.06	7.42	20.15	46.91	74.00	54.00	PASS
	H	2400.00	61.73	38.06	7.42	20.15	51.24	74.00	54.00	PASS
	V	2390.00	57.47	38.06	7.42	20.15	46.98	74.00	54.00	PASS
	V	2400.00	61.11	38.06	7.42	20.15	50.62	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.18	38.17	7.45	20.54	51.00	74.00	54.00	PASS
	H	2485.50	58.55	38.17	7.45	20.54	48.37	74.00	54.00	PASS
	V	2483.50	60.61	38.20	7.45	20.54	50.40	74.00	54.00	PASS
	V	2485.50	59.30	38.20	7.45	20.54	49.09	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz									
	H	2390.00	57.44	38.06	7.42	20.15	46.95	74.00	54.00	PASS
	H	2400.00	60.54	38.06	7.42	20.15	50.05	74.00	54.00	PASS
	V	2390.00	57.77	38.06	7.42	20.15	47.28	74.00	54.00	PASS
	V	2400.00	61.33	38.06	7.42	20.15	50.84	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	60.34	38.17	7.45	20.54	50.16	74.00	54.00	PASS
	H	2485.50	57.80	38.17	7.45	20.54	47.62	74.00	54.00	PASS
	V	2483.50	60.26	38.20	7.45	20.54	50.05	74.00	54.00	PASS
	V	2485.50	57.40	38.20	7.45	20.54	47.19	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

For Average Power (Duty cycle $\geq 98\%$)

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle $< 98\%$)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log(1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.1.2 DEVIATION FROM STANDARD

No deviation.



4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS



Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	TX b Mode		

Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
	Ant.1	Ant.2			
2412 MHz	-6.659	-6.644	-3.64	8	PASS
2437 MHz	-7.003	-6.974	-3.98	8	PASS
2462 MHz	-7.428	-6.898	-4.14	8	PASS

Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



Ant. 1

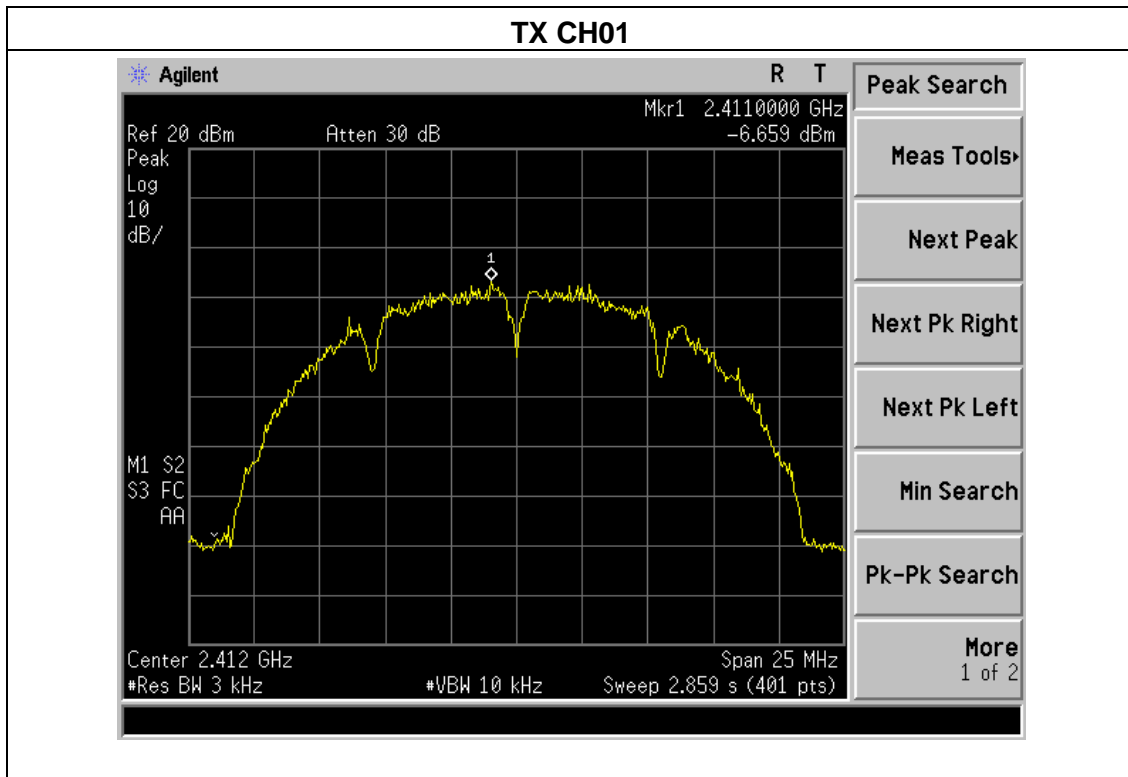


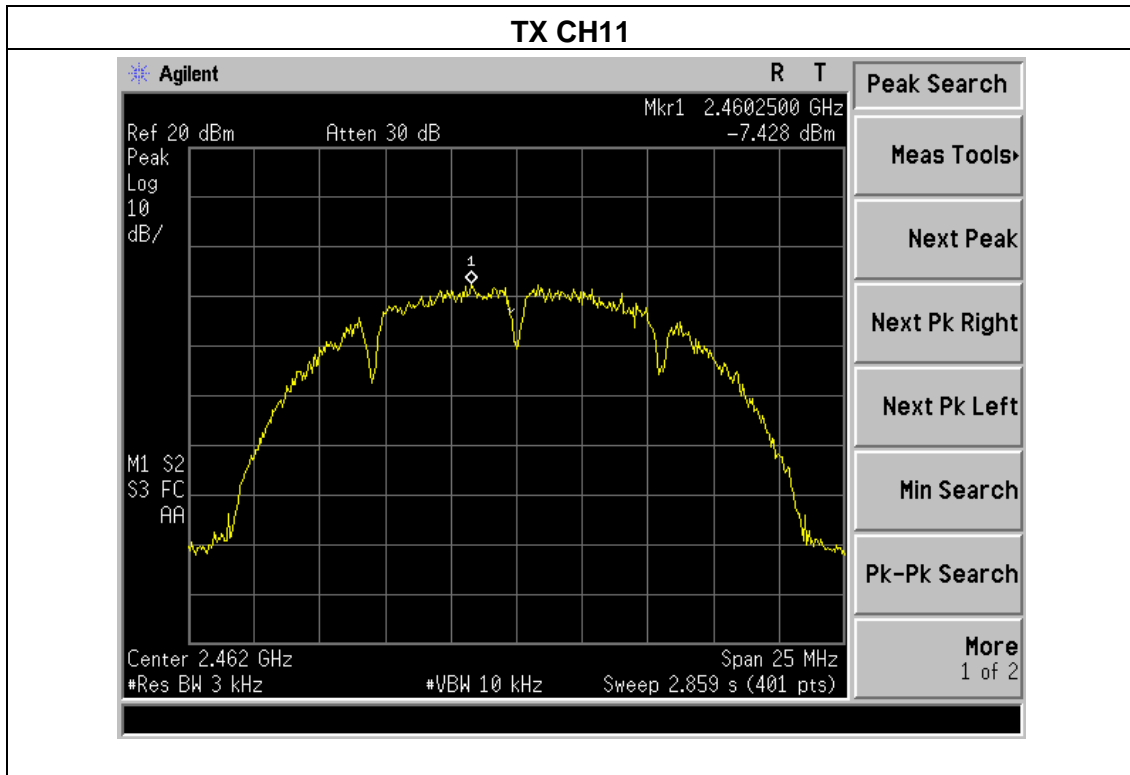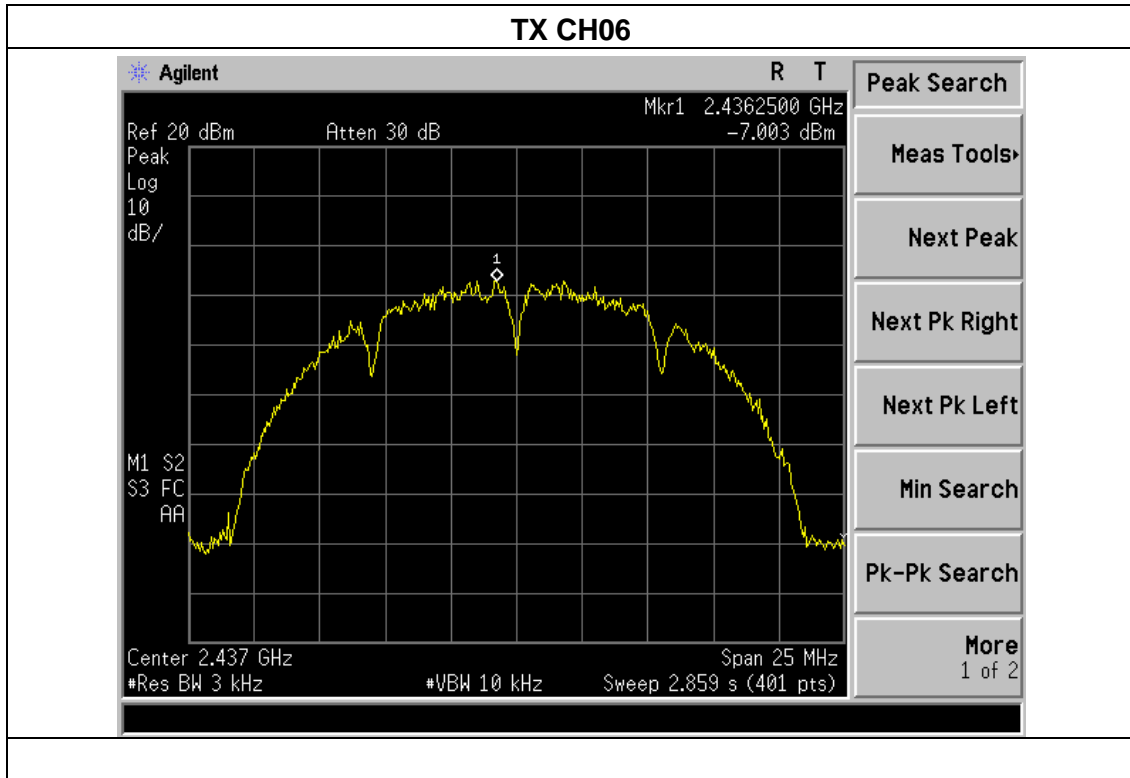



Ant. 2

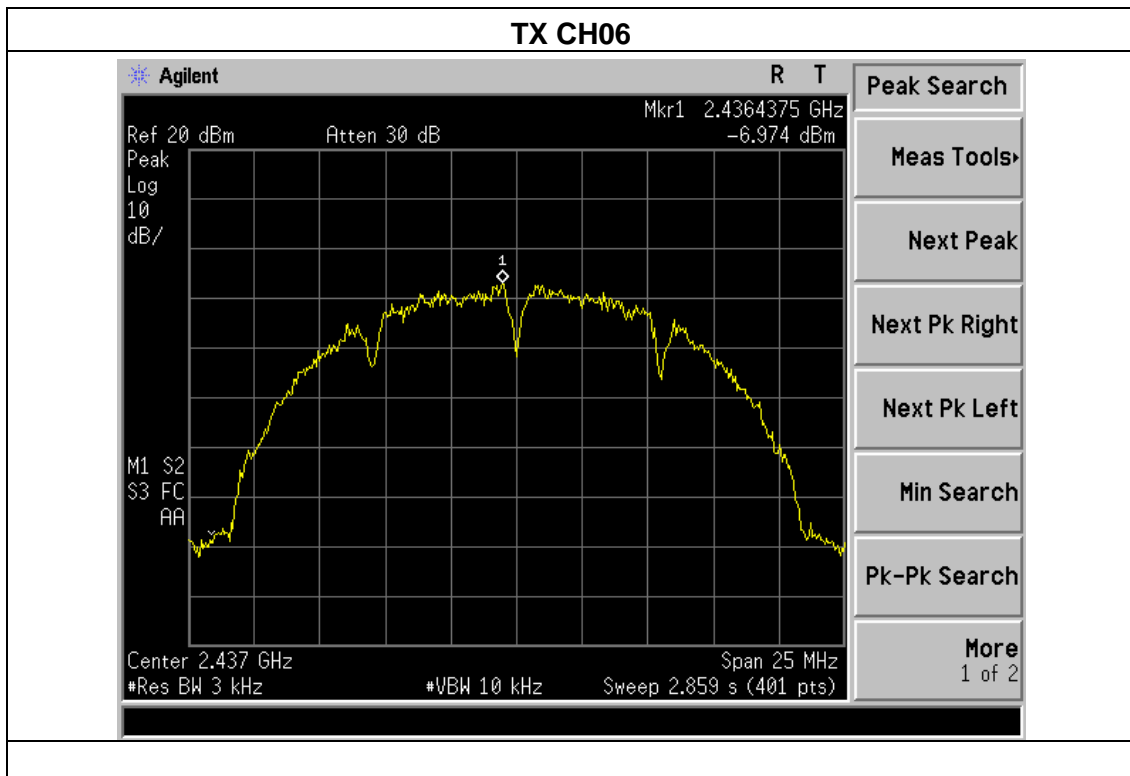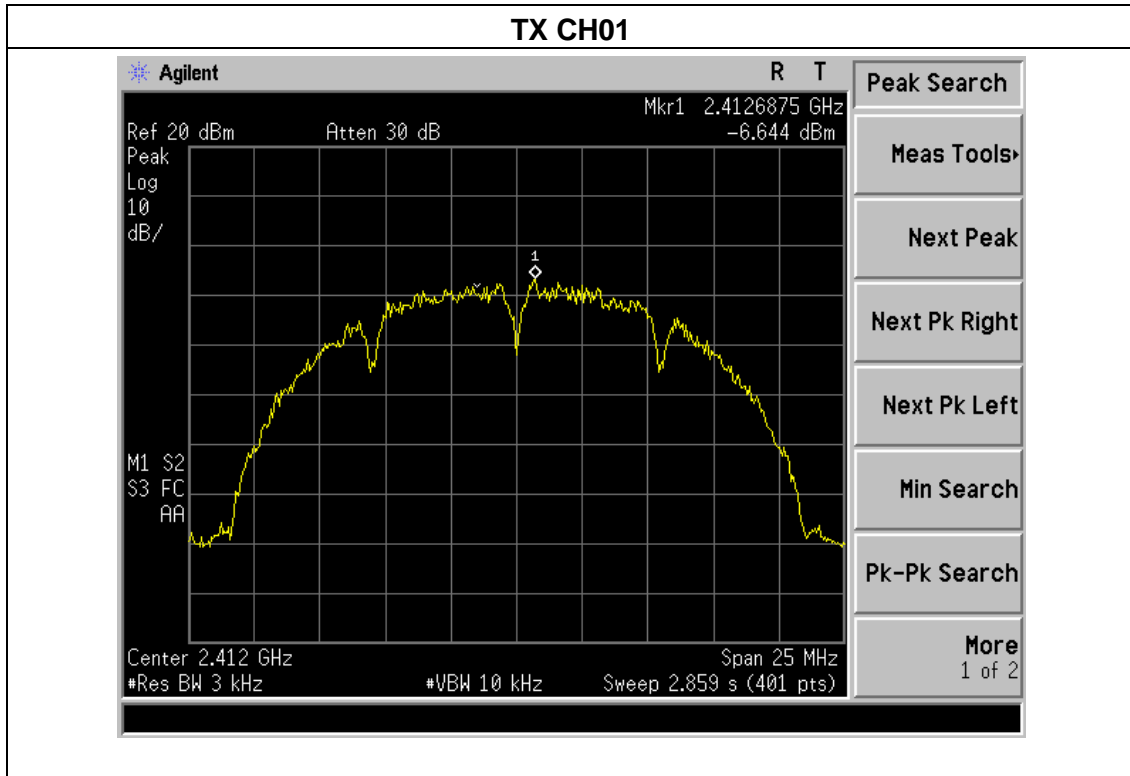

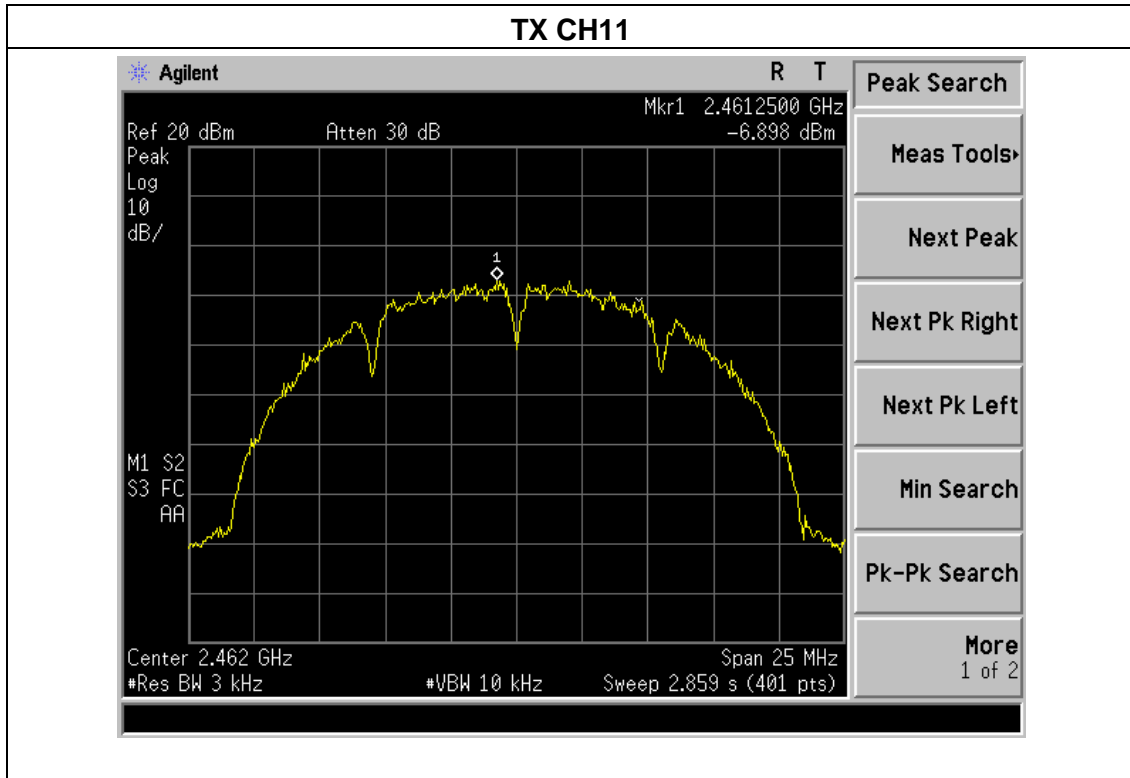






Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	TX g Mode		

Frequency	Read Level (dBm)		Total Power Spectral Density (dBm)	Limit (dBm)	Result
	Ant.1	Ant.2			
2412 MHz	-8.577	-9.595	-6.05	8	PASS
2437 MHz	-9.354	-9.913	-6.61	8	PASS
2462 MHz	-10.210	-10.150	-7.17	8	PASS

Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



Ant.1

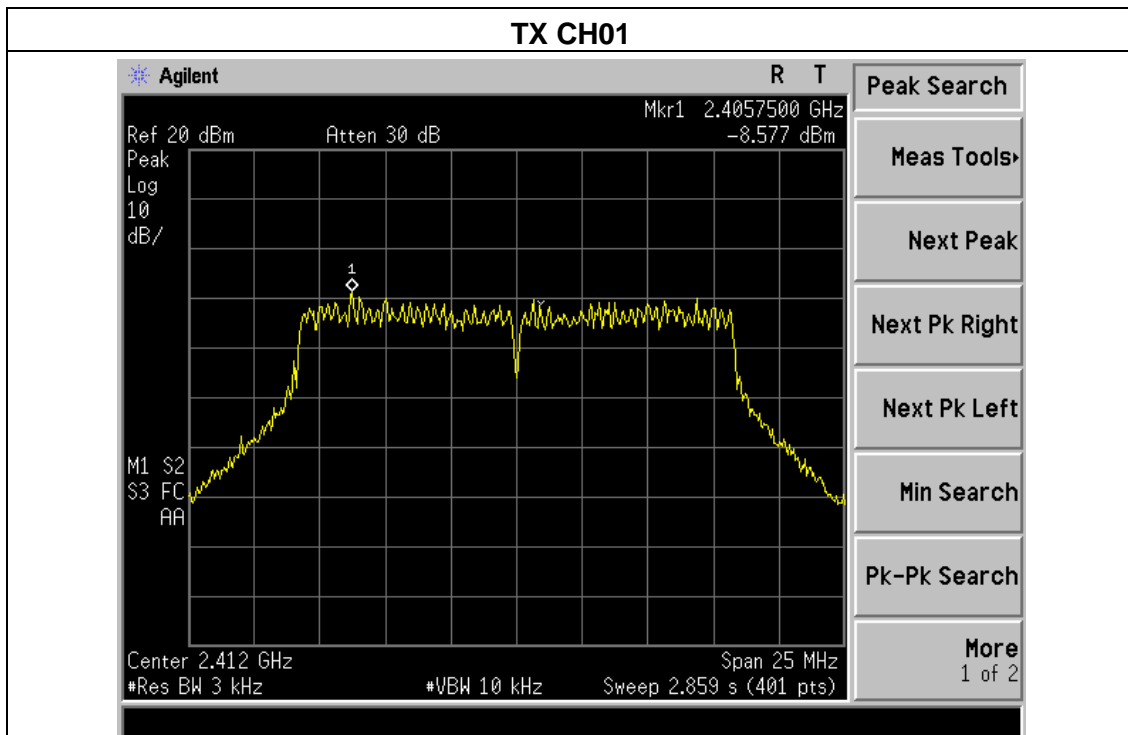


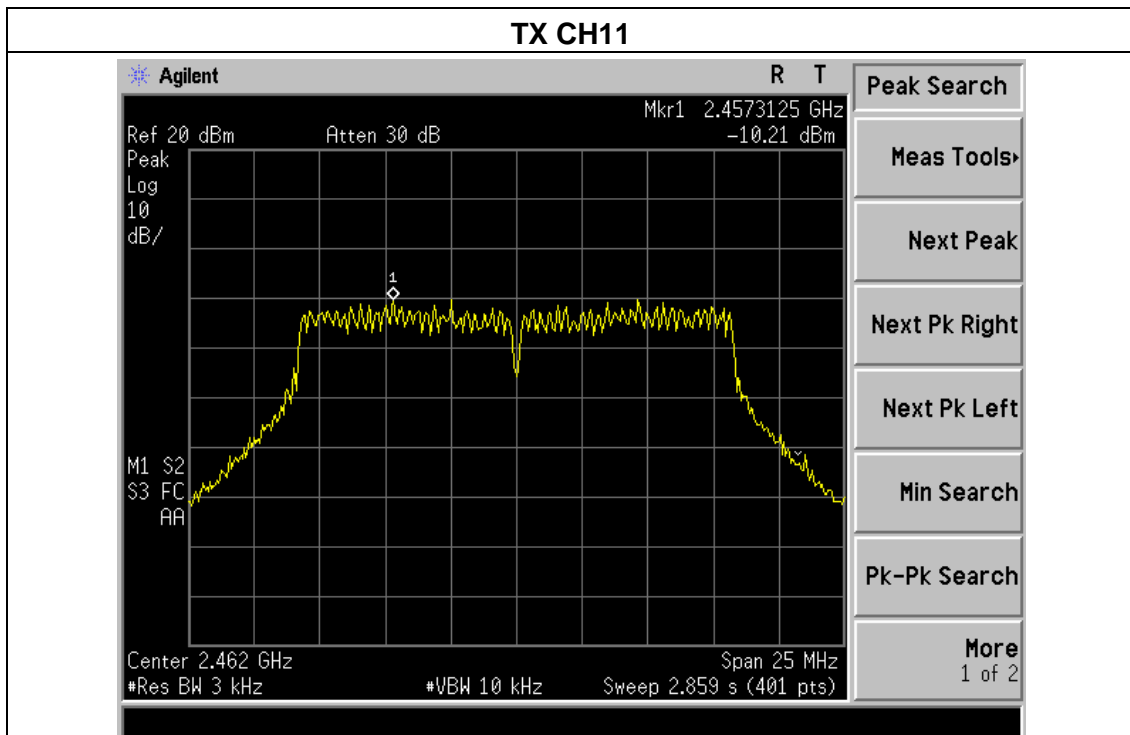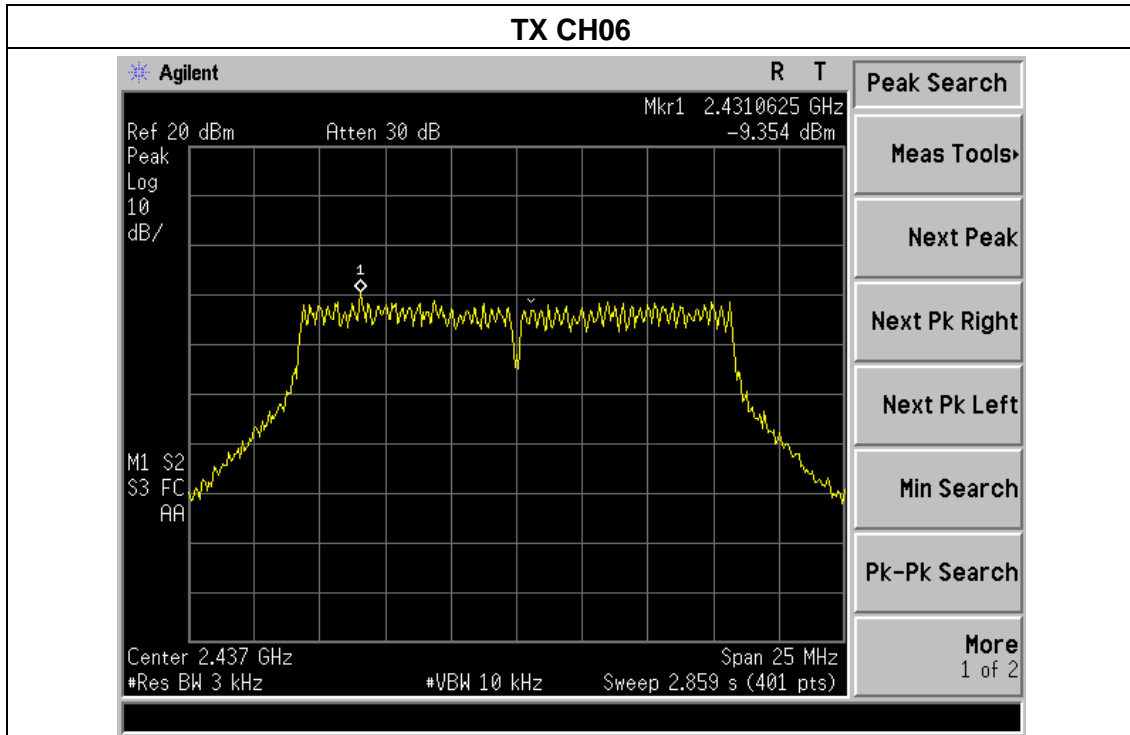



Ant.2

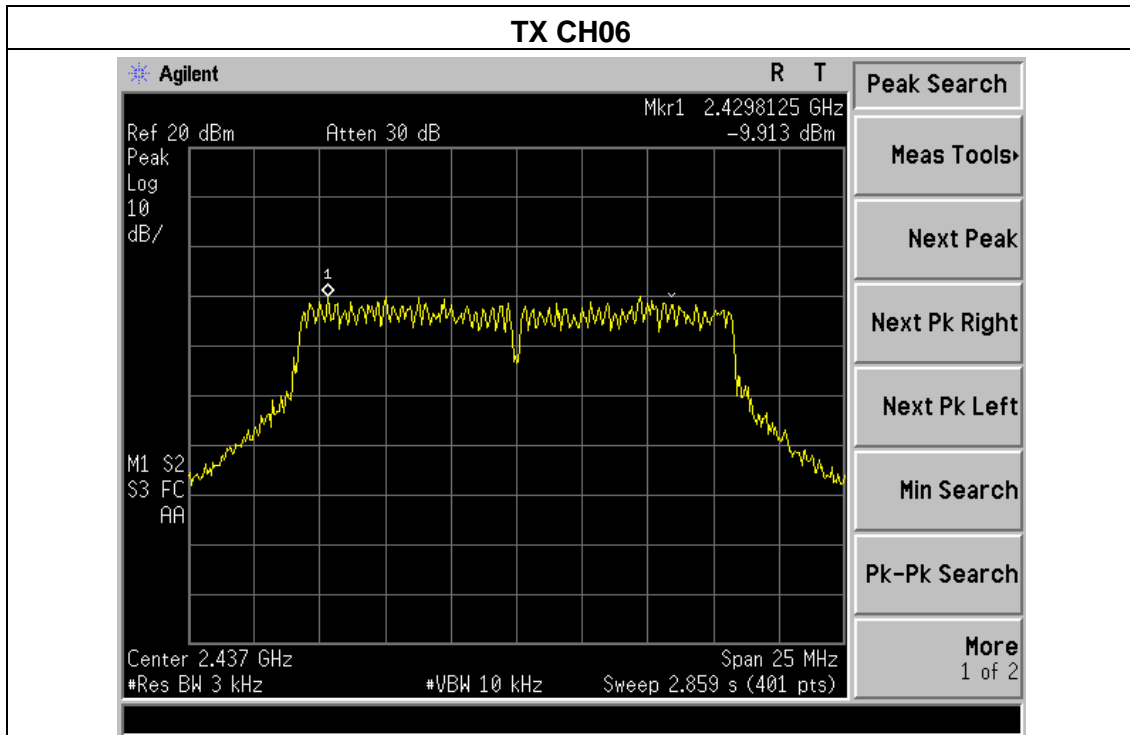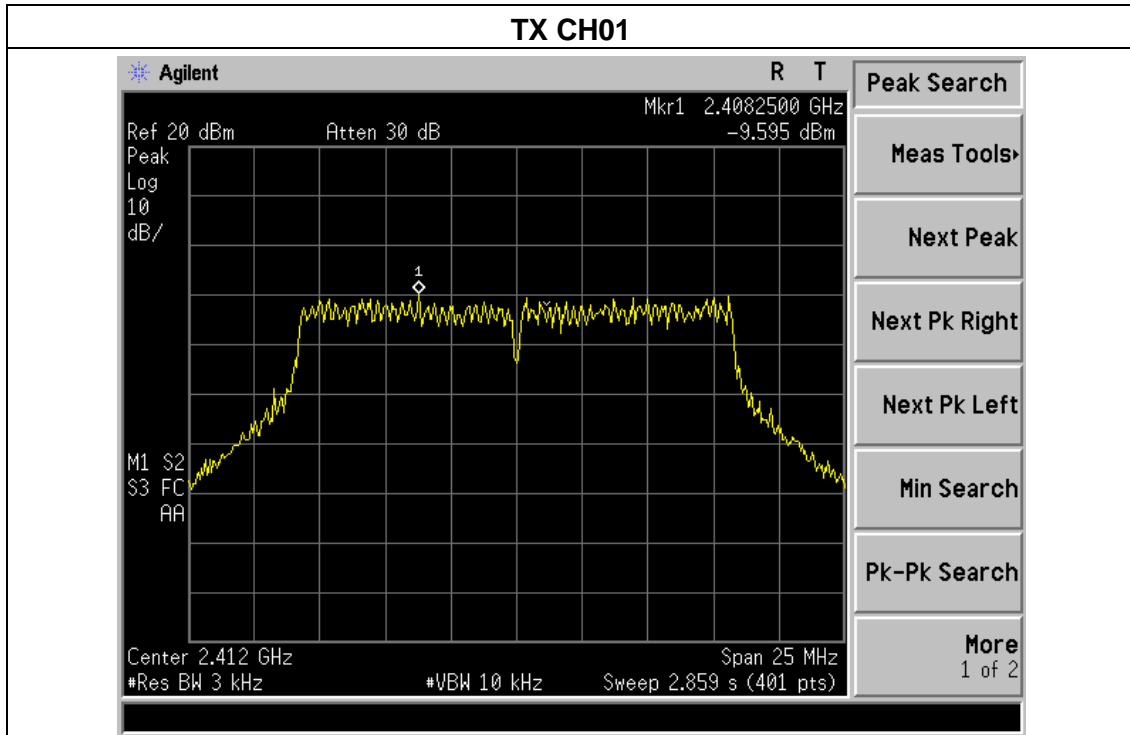

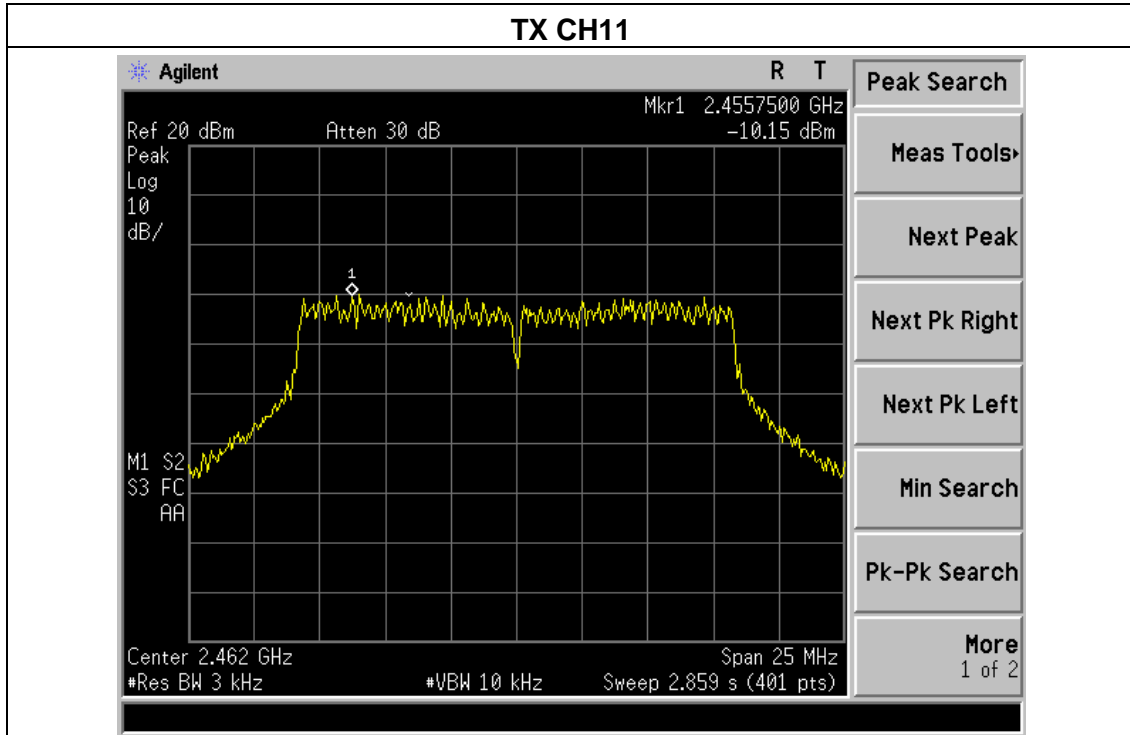






Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(20M)		

Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
	Ant.1	Ant.2			
2412 MHz	-9.401	-9.039	-6.21	8	PASS
2437 MHz	-10.640	-9.421	-6.98	8	PASS
2462 MHz	-9.438	-9.174	-6.29	8	PASS

Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



Ant.1

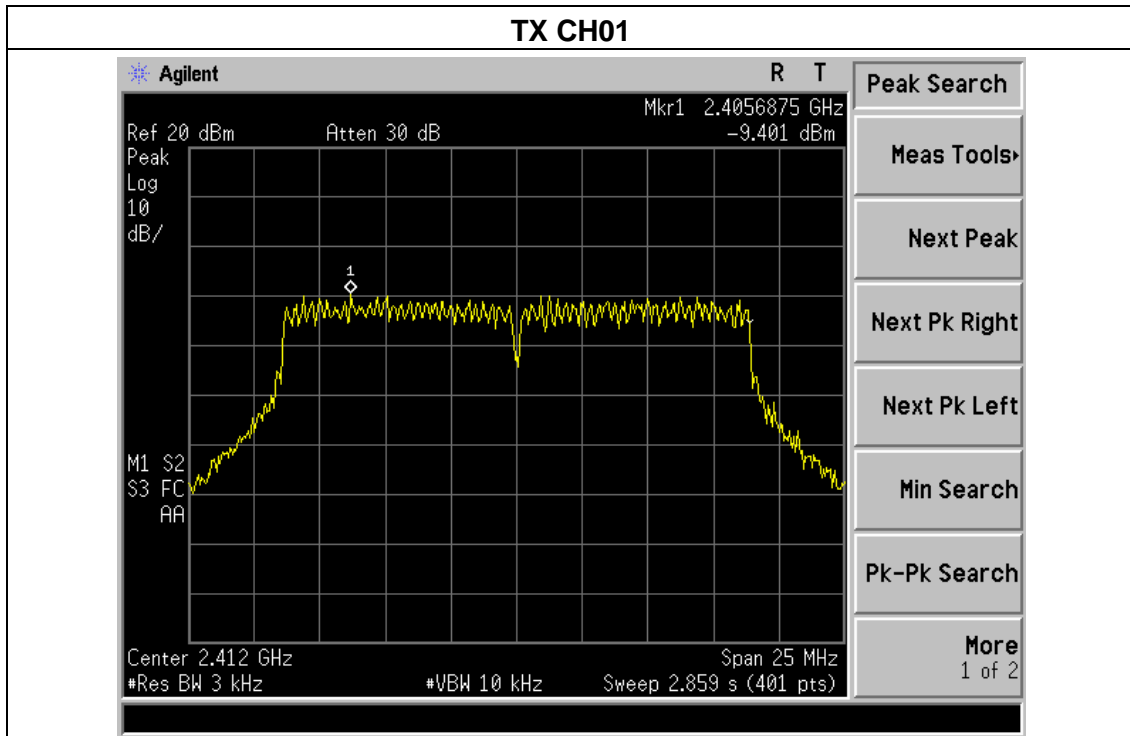


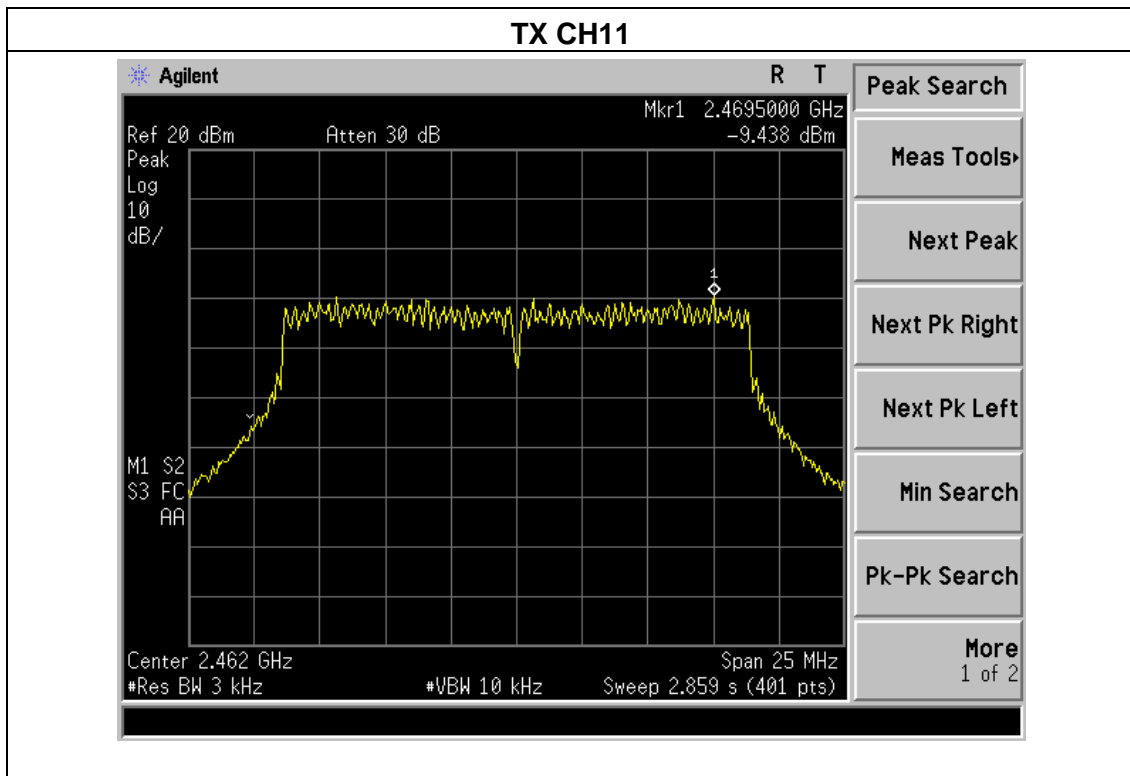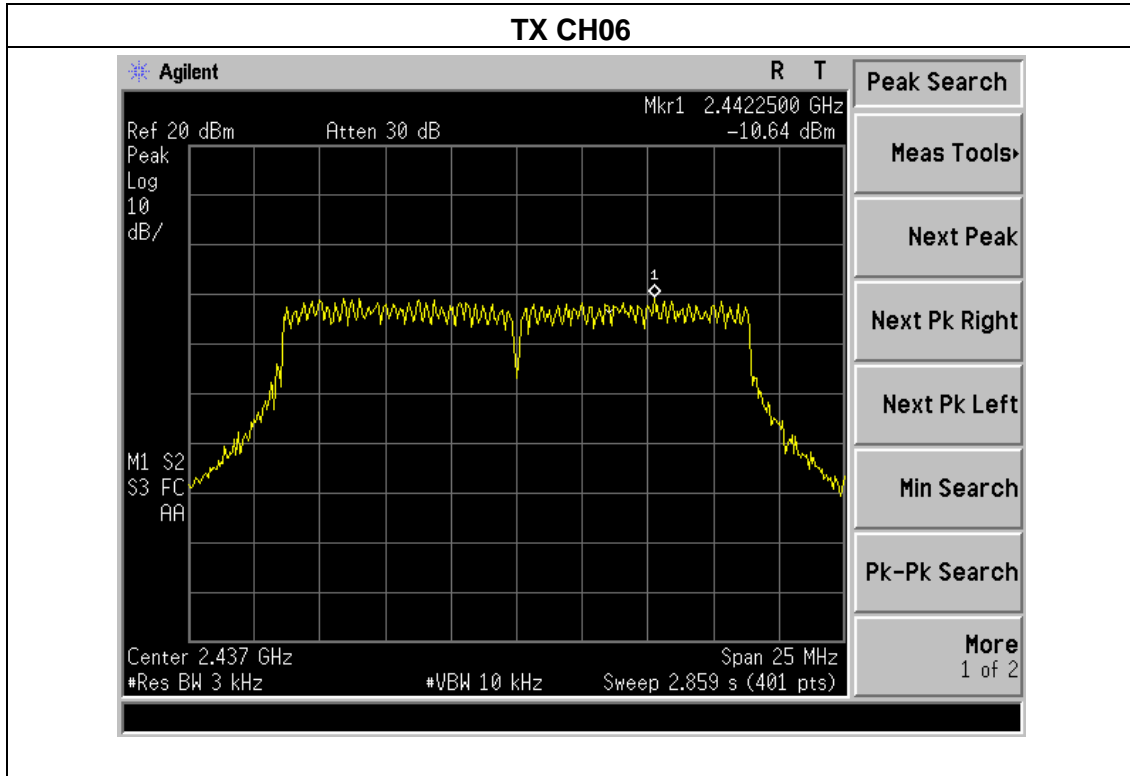



Ant.2

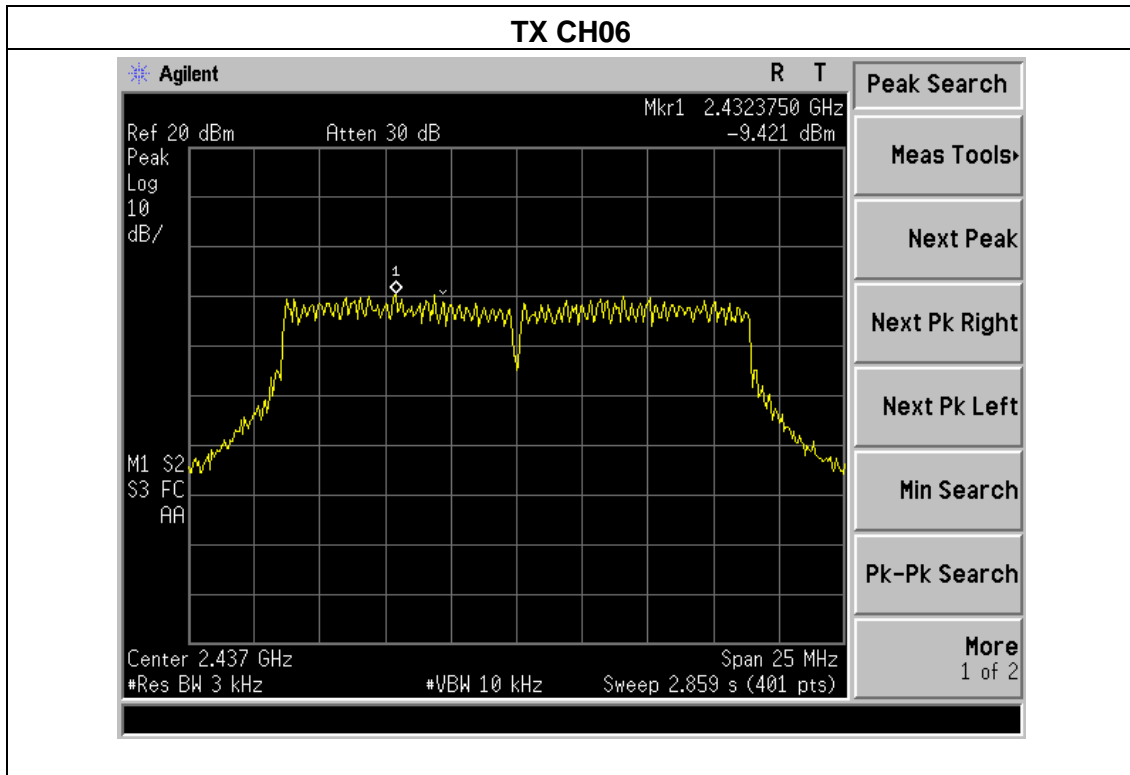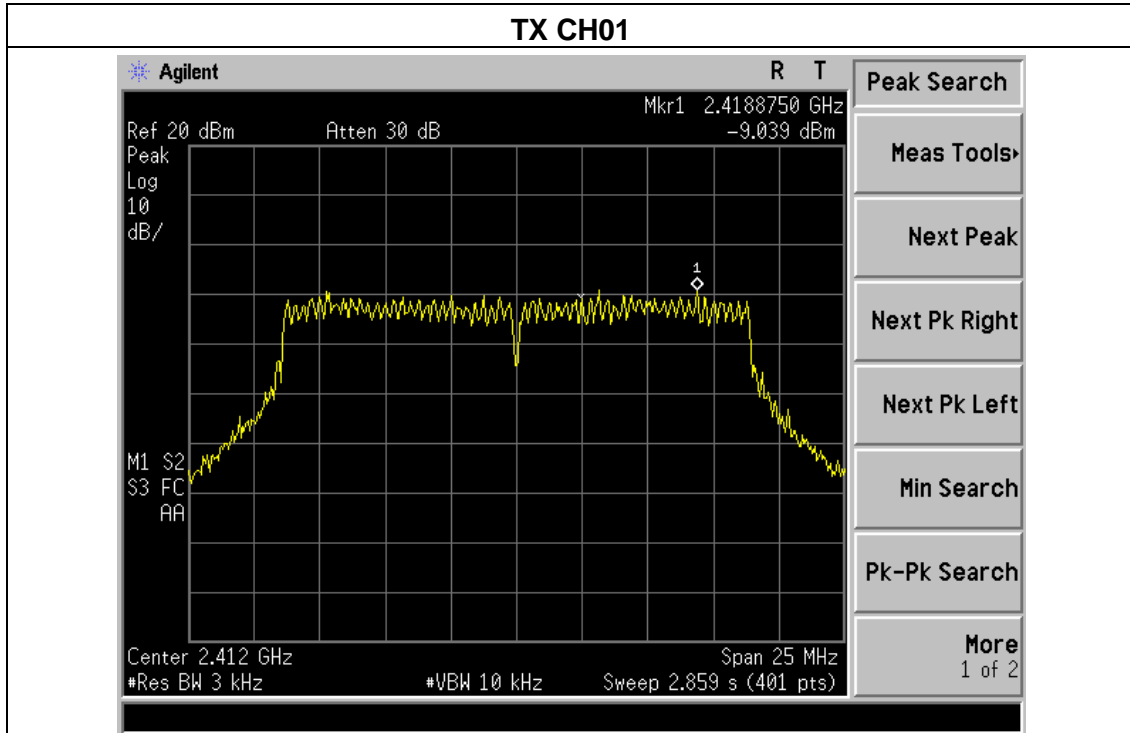

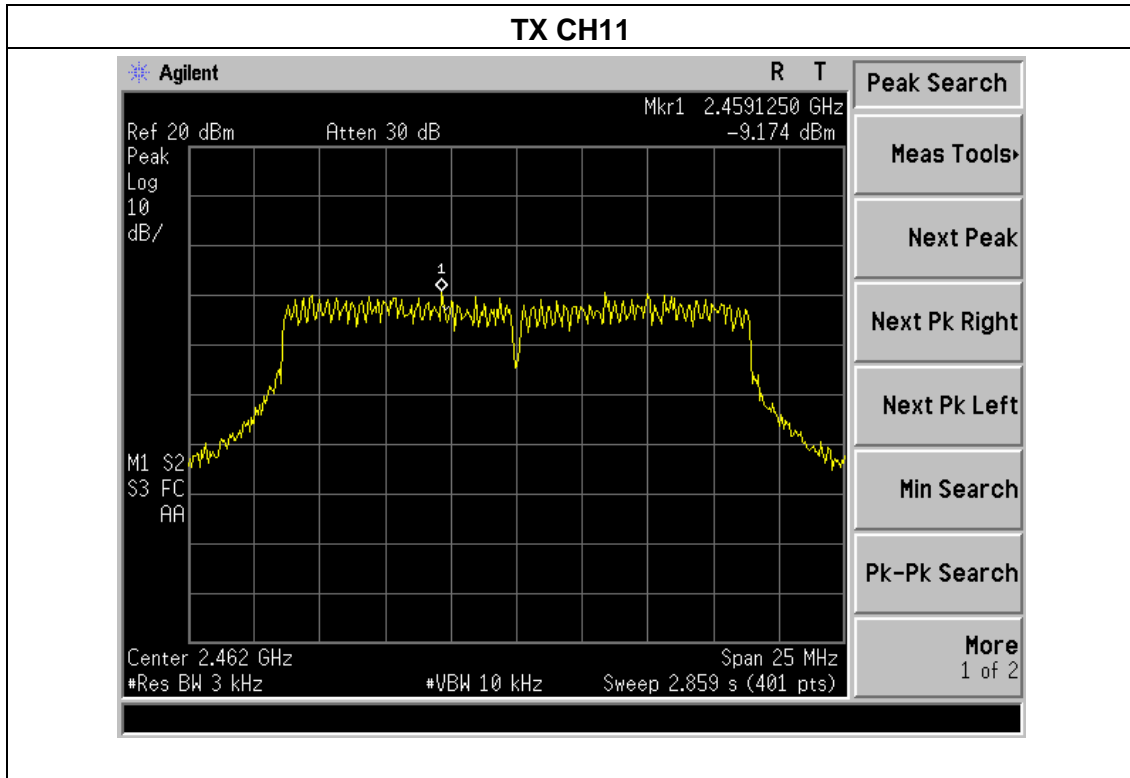






Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(40M)		

Frequency	Read Level (dBm)		Total Power Spectral Density(dBm)	Limit (dBm)	Result
	Ant.1	Ant.2			
2422 MHz	-13.780	-13.200	-10.47	8	PASS
2437 MHz	-14.420	-13.260	-10.79	8	PASS
2452 MHz	-13.510	-14.020	-10.75	8	PASS

Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



Ant.1

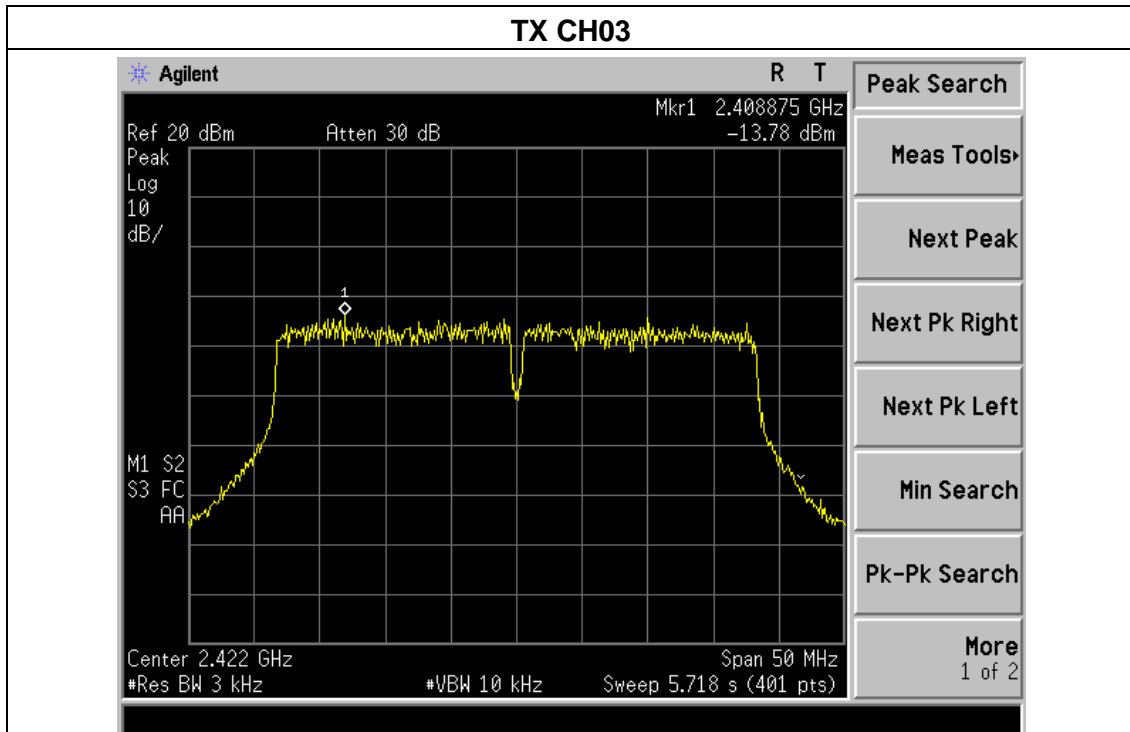


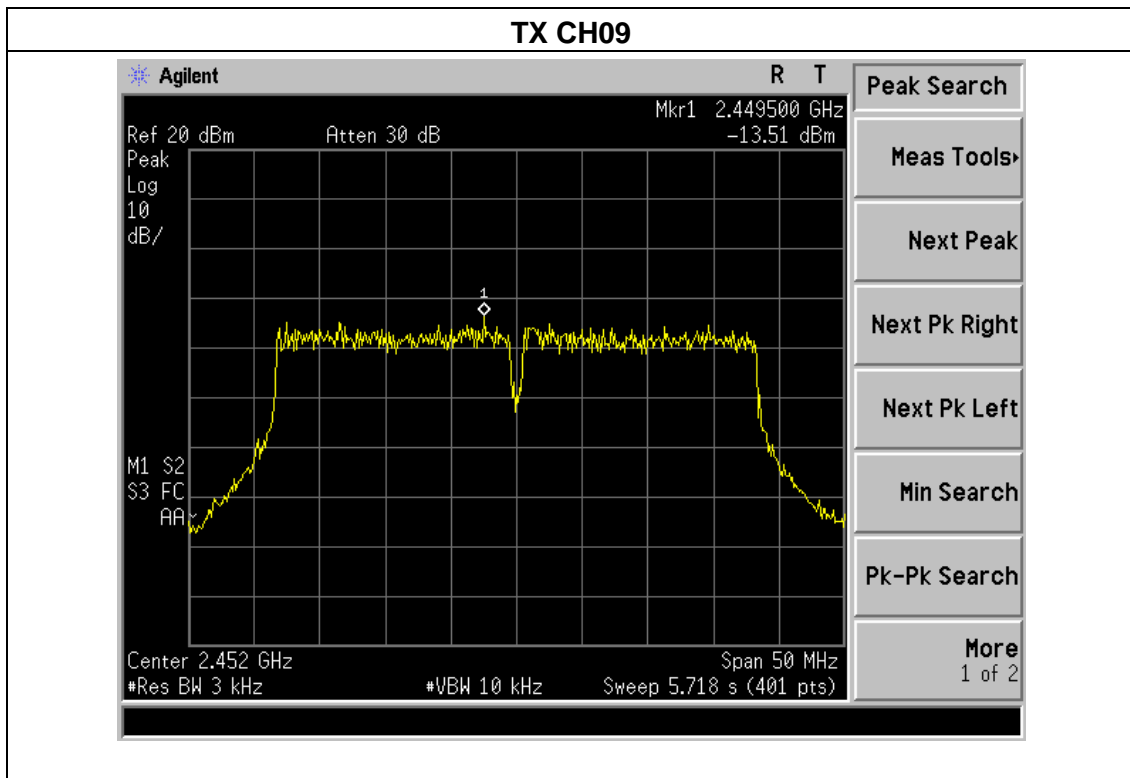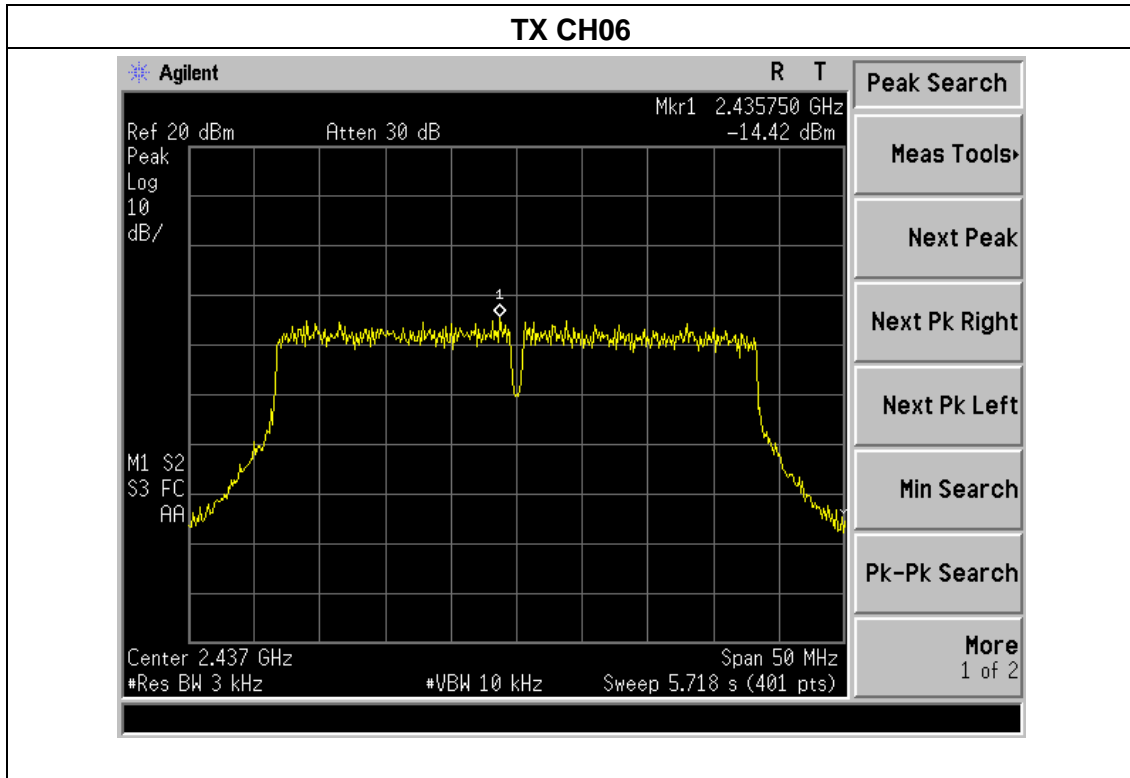



Ant.2

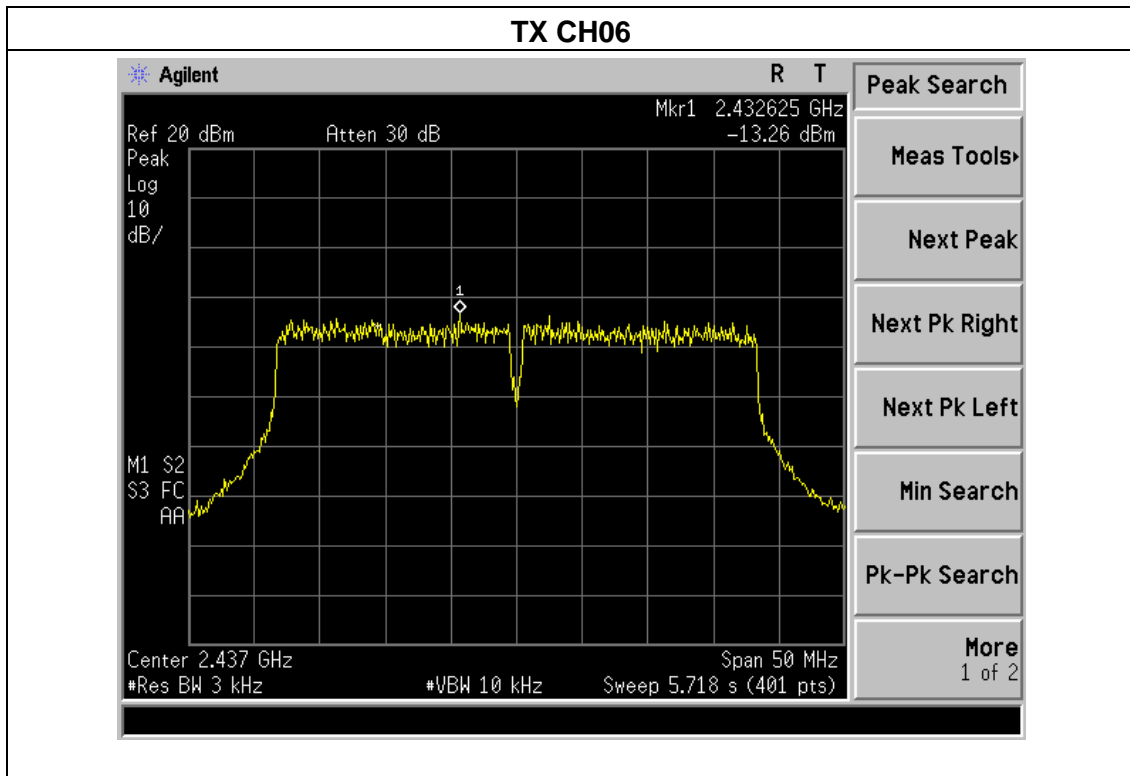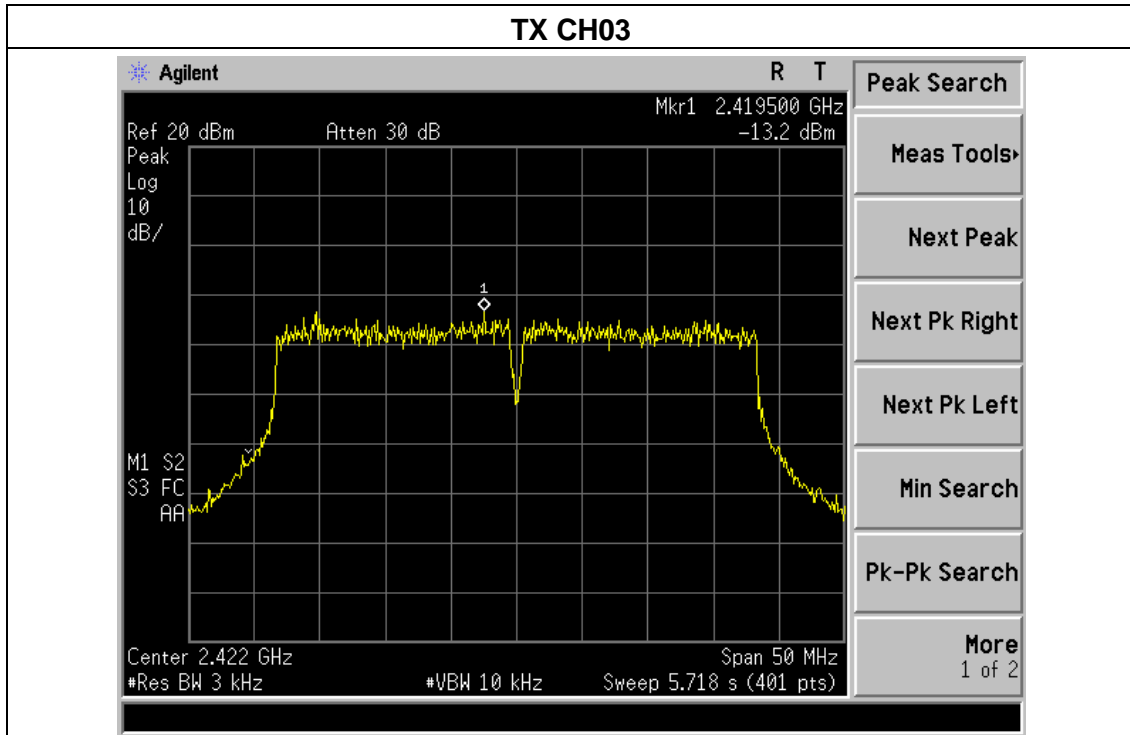

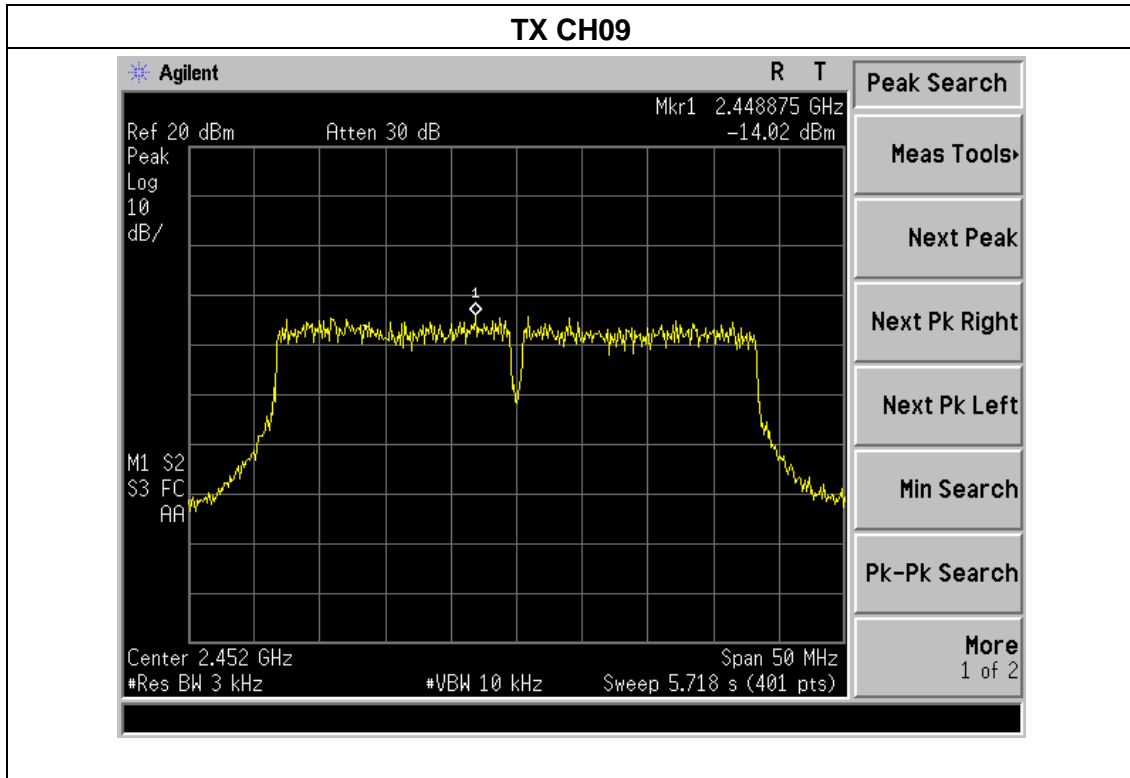

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





5.1.5 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX b Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		Ant.1	Ant.2		
Low	2412	9.637	10.122	500	Pass
Middle	2437	10.084	10.087	500	Pass
High	2462	10.094	10.058	500	Pass



Ant.1

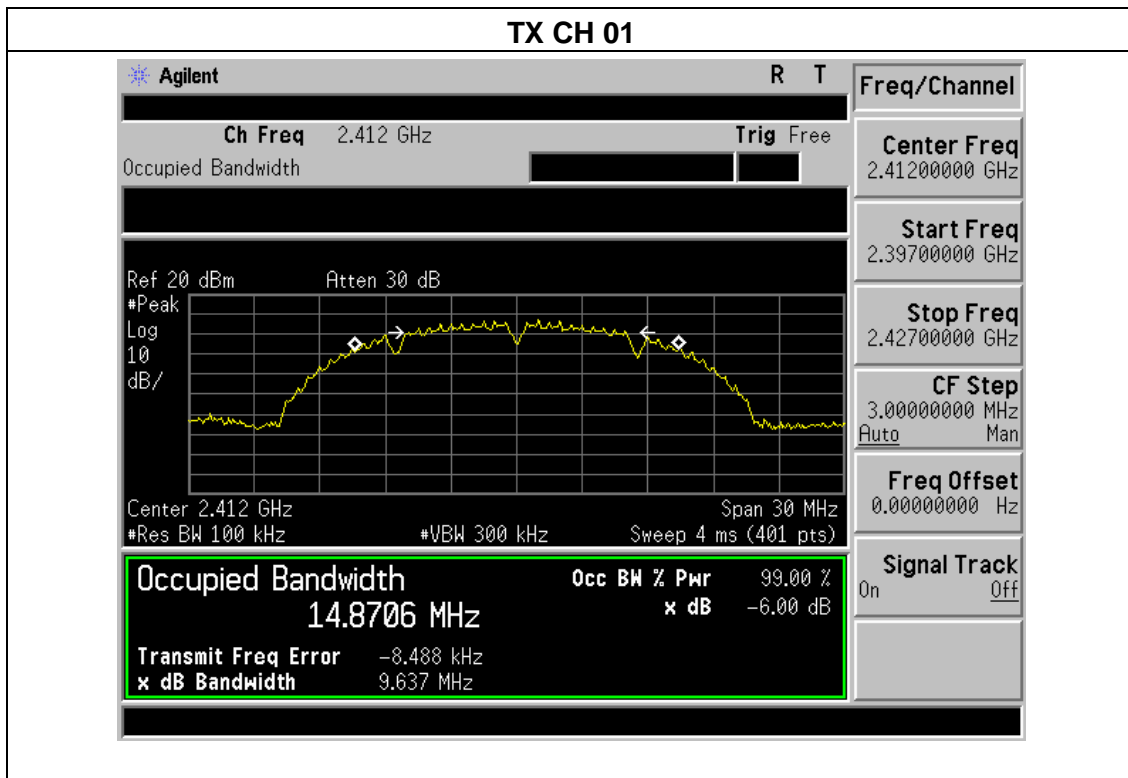


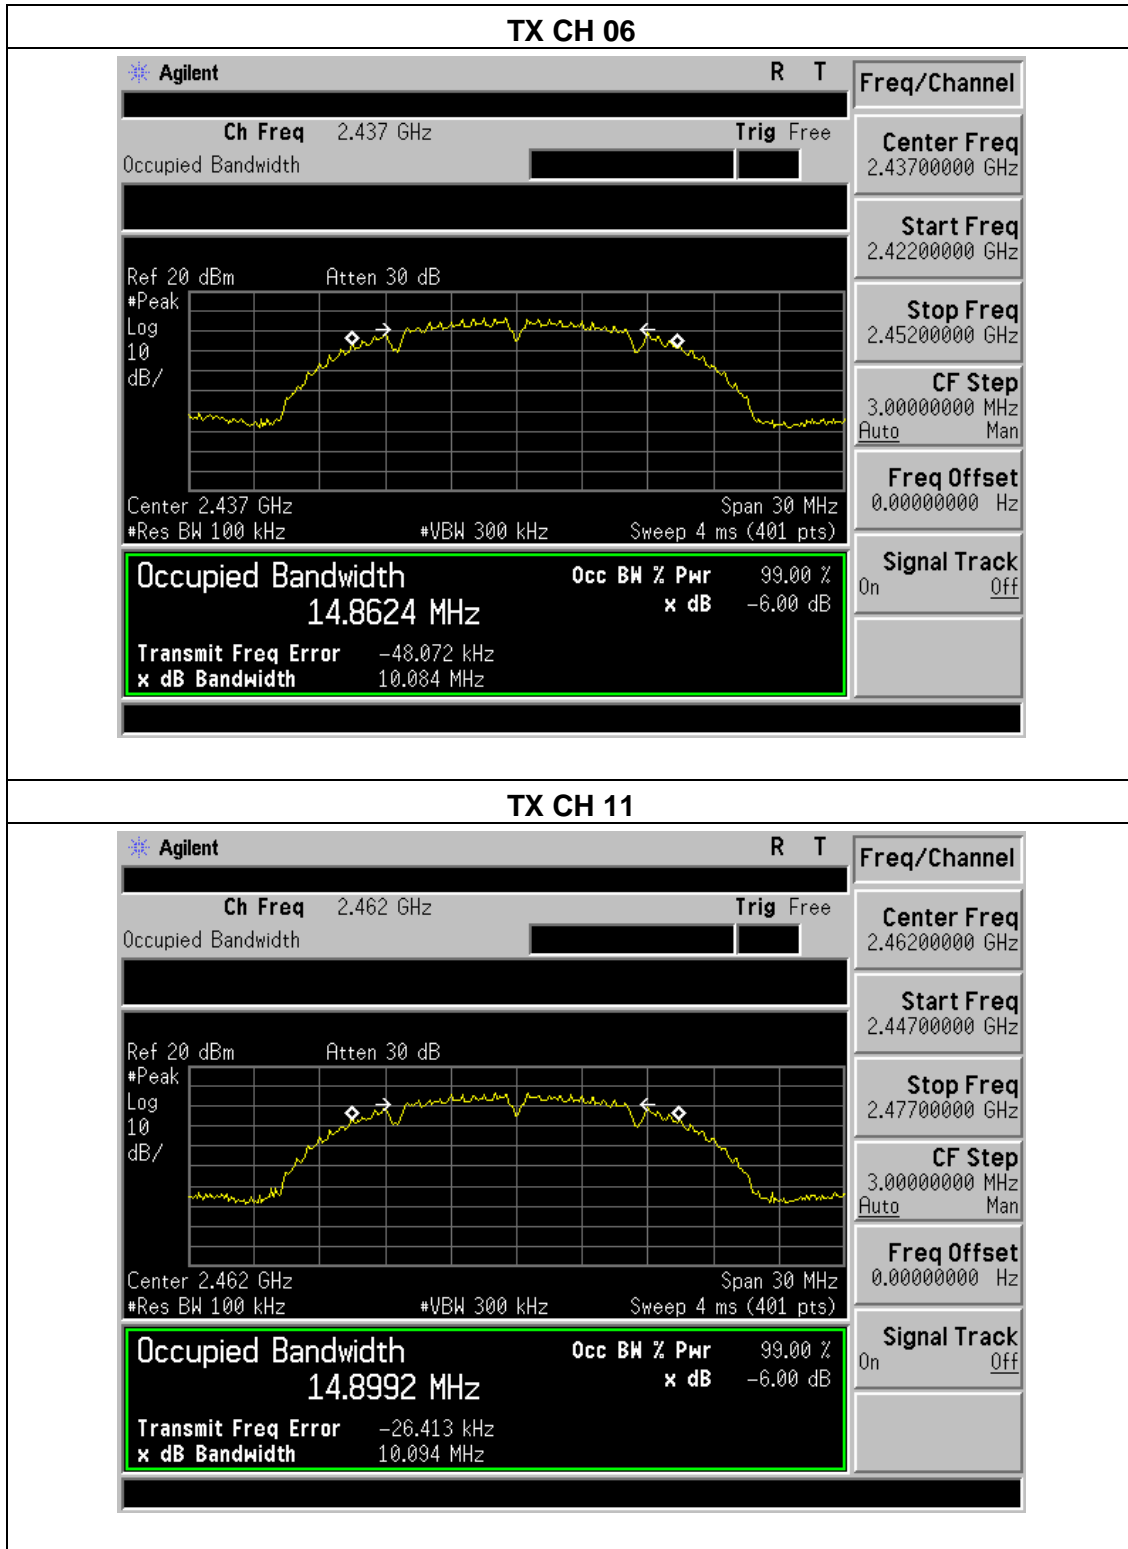



Ant.2

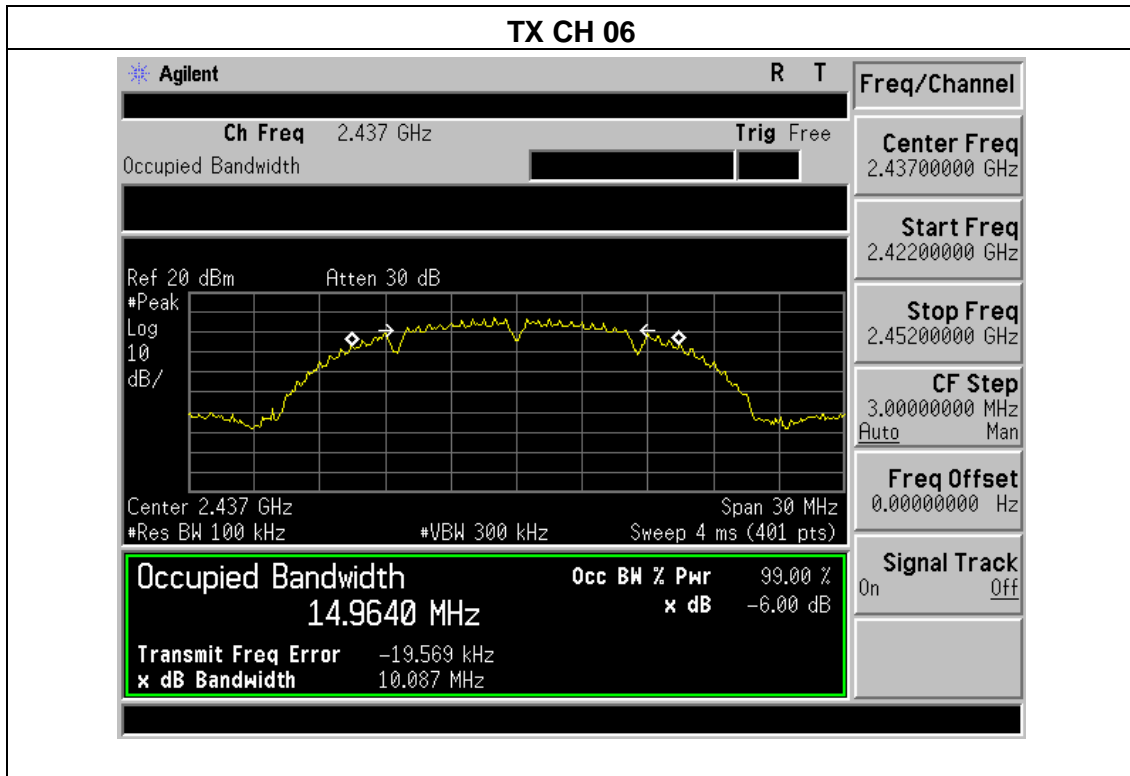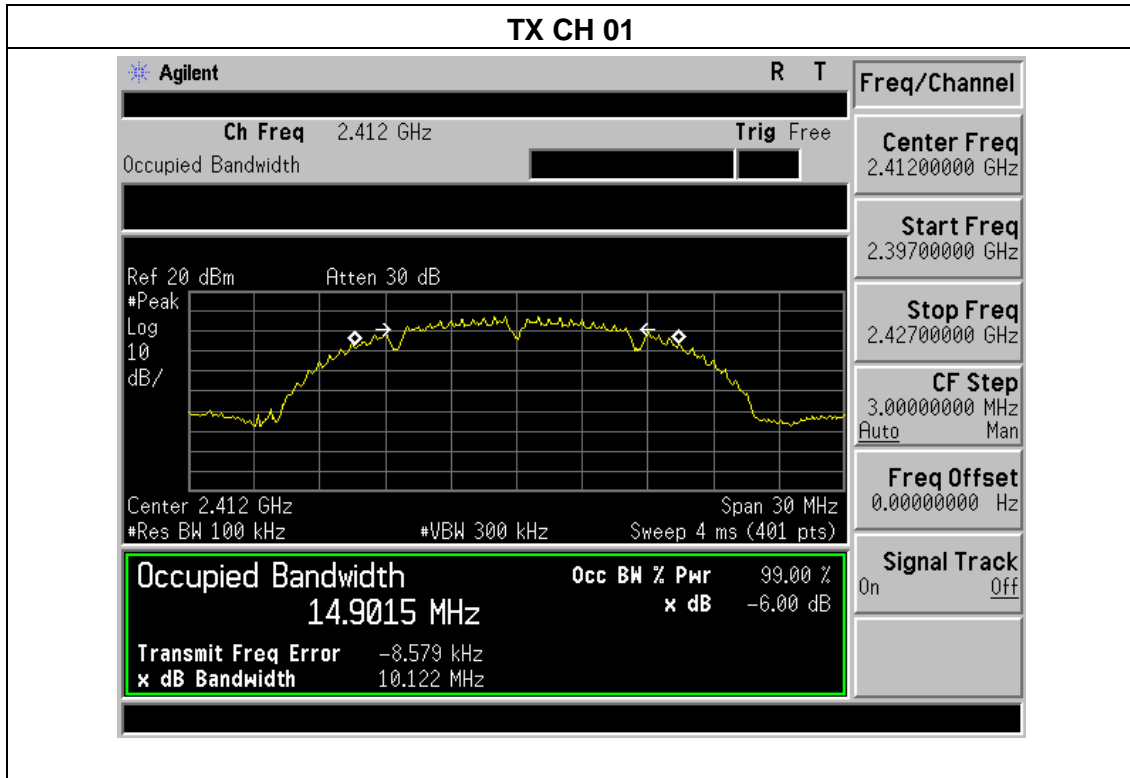

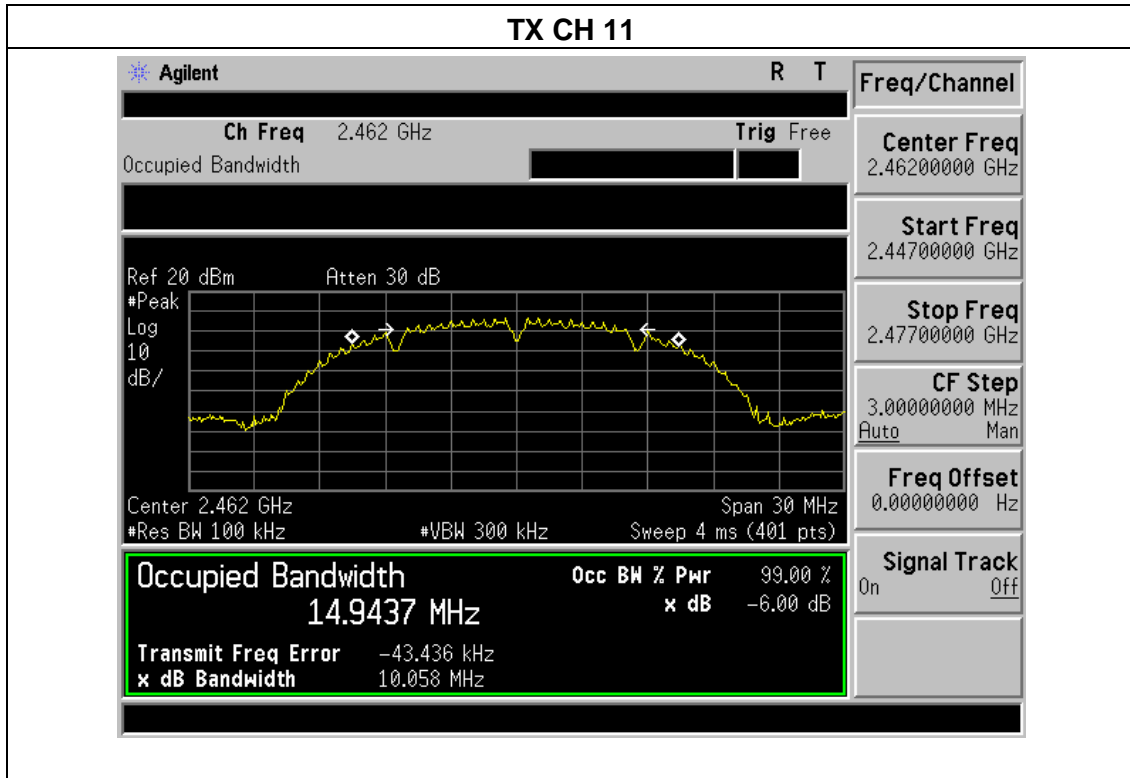






Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX g Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		Ant.1	Ant.2		
Low	2412	16.416	16.423	500	Pass
Middle	2437	16.382	16.445	500	Pass
High	2462	16.348	16.447	500	Pass



Ant.1

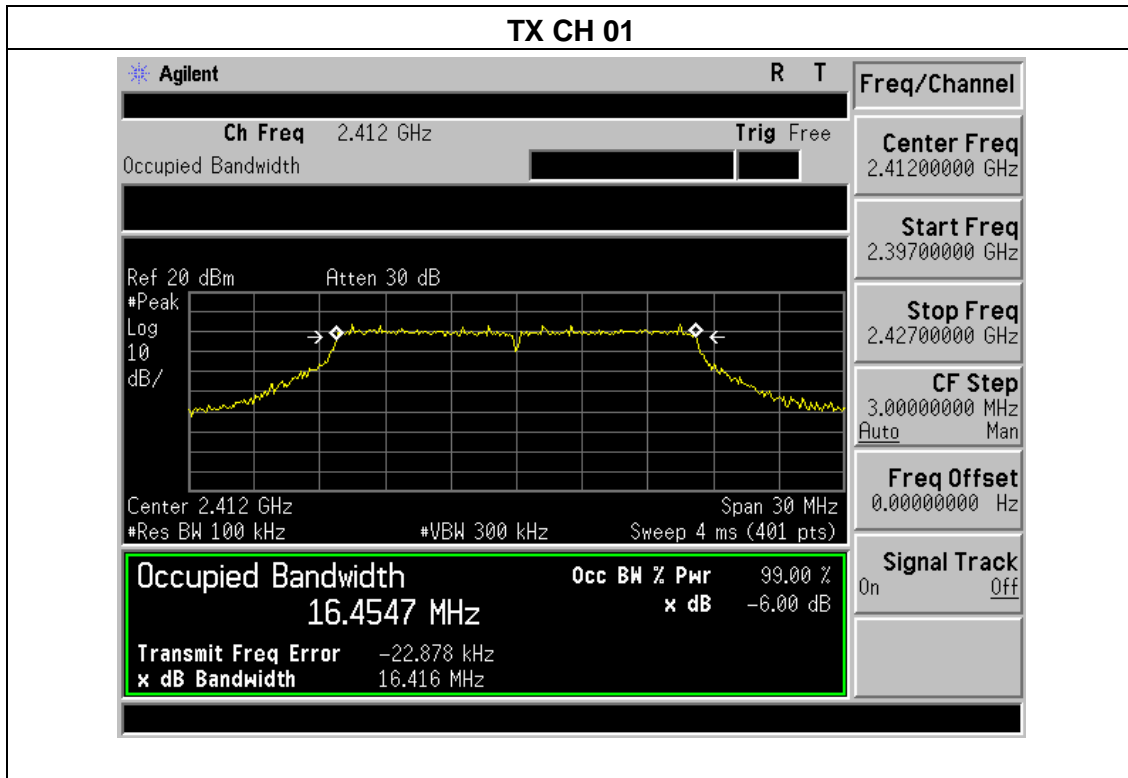


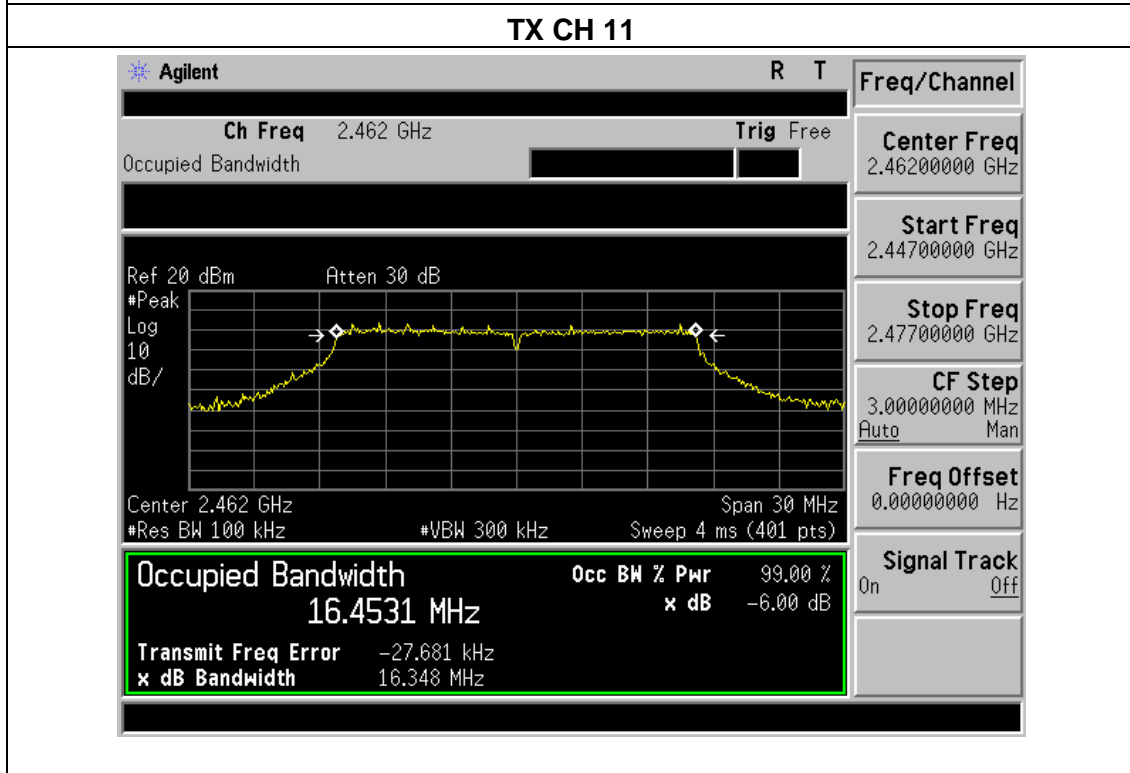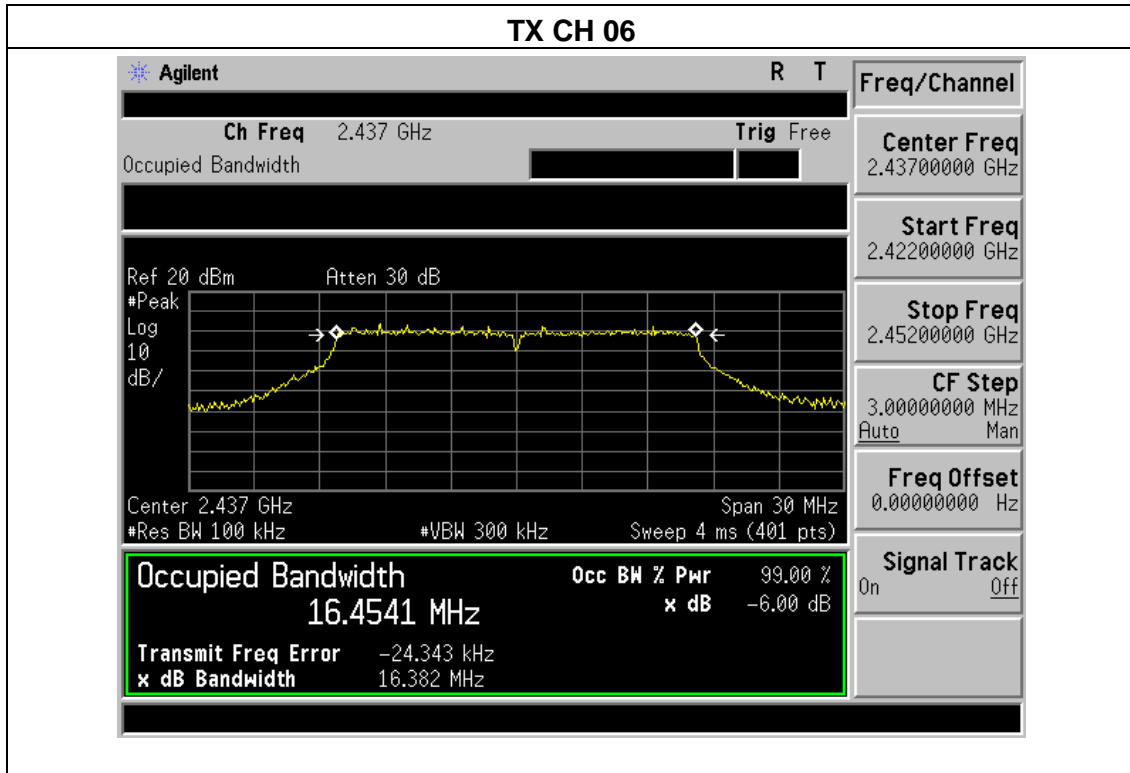



Ant.2

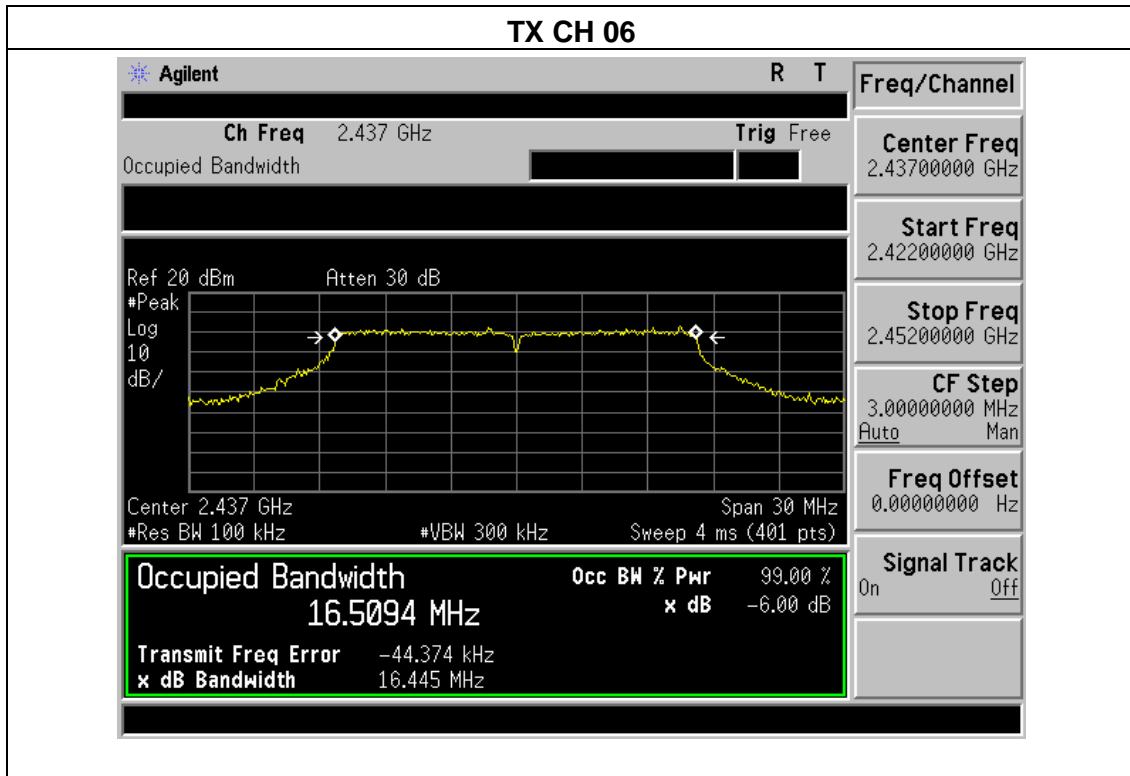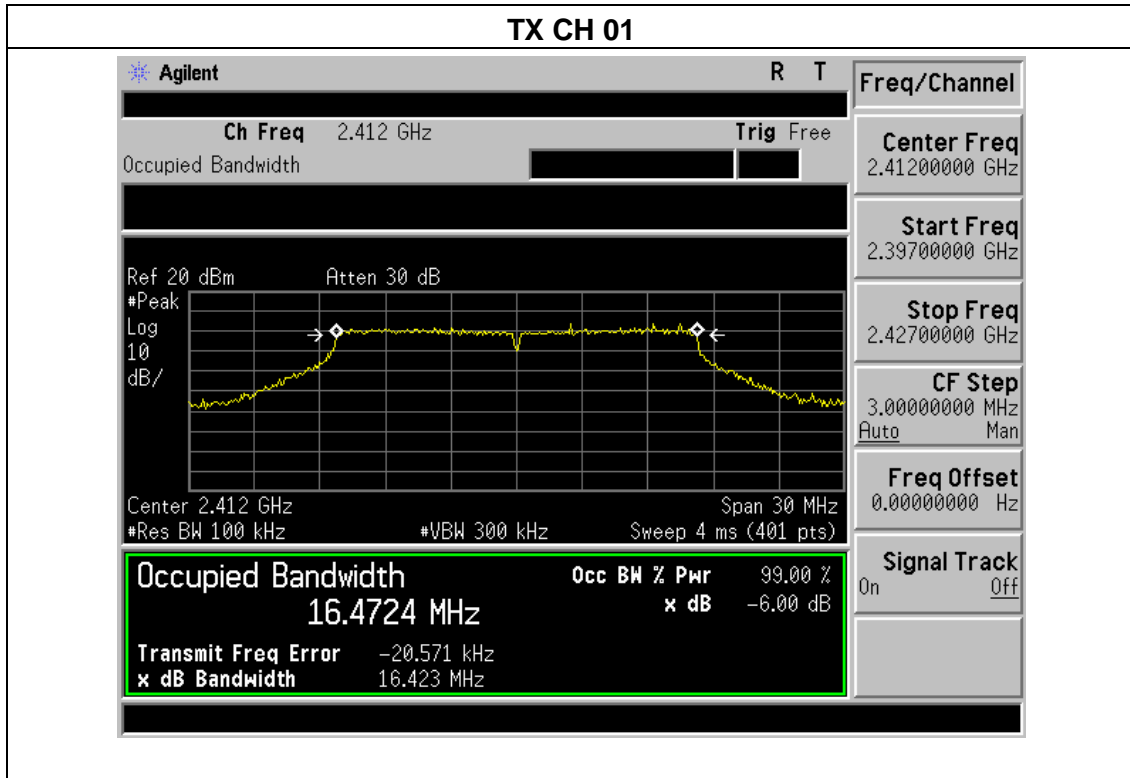

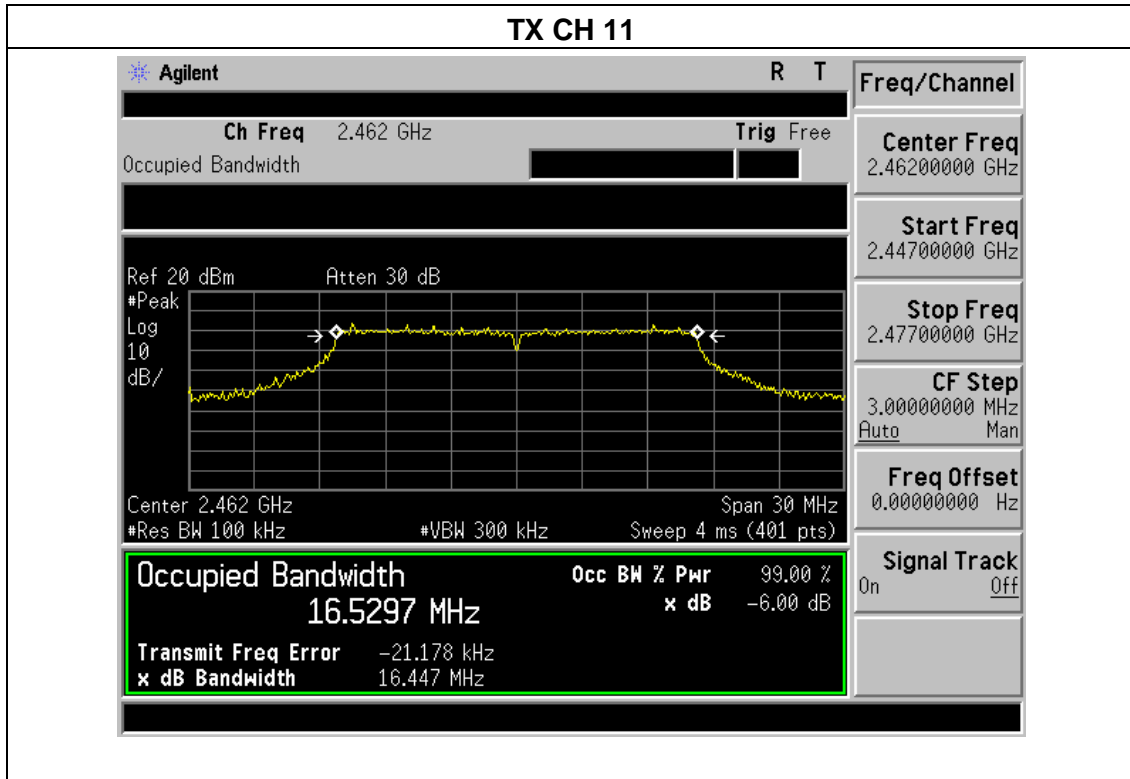





Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(20M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		Ant.1	Ant.2		
Low	2412	17.575	17.605	500	Pass
Middle	2437	17.539	17.635	500	Pass
High	2462	17.182	17.643	500	Pass



Ant.1

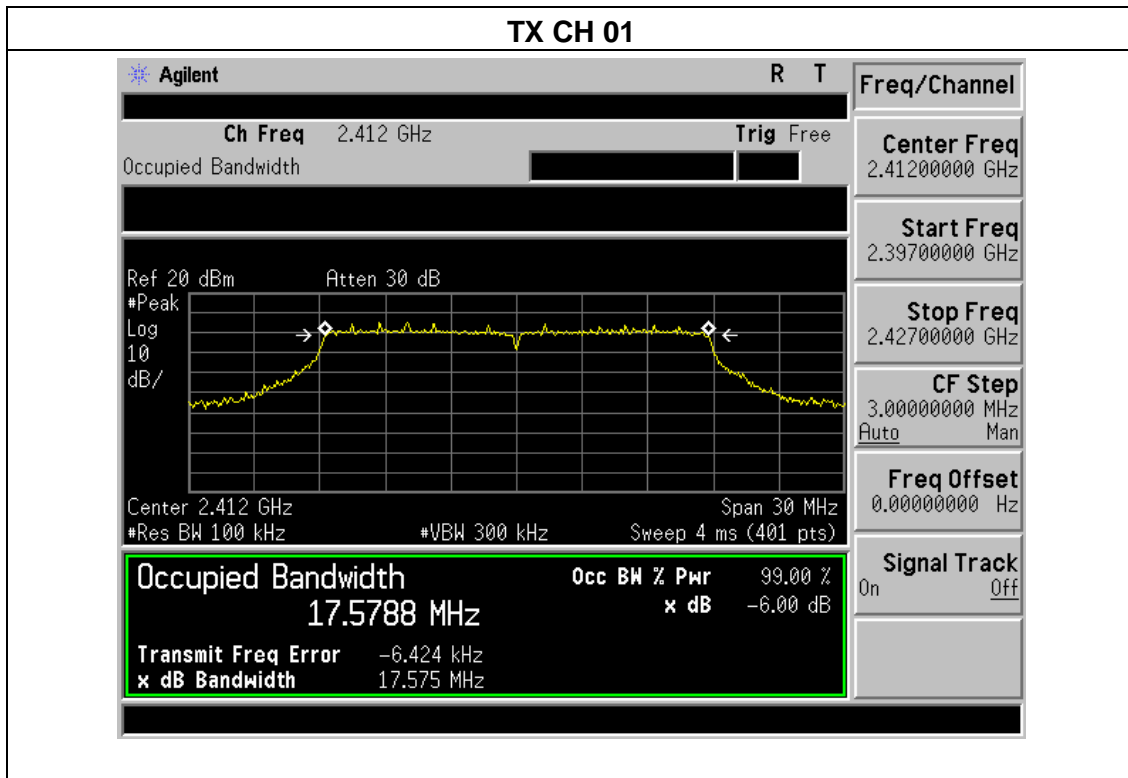


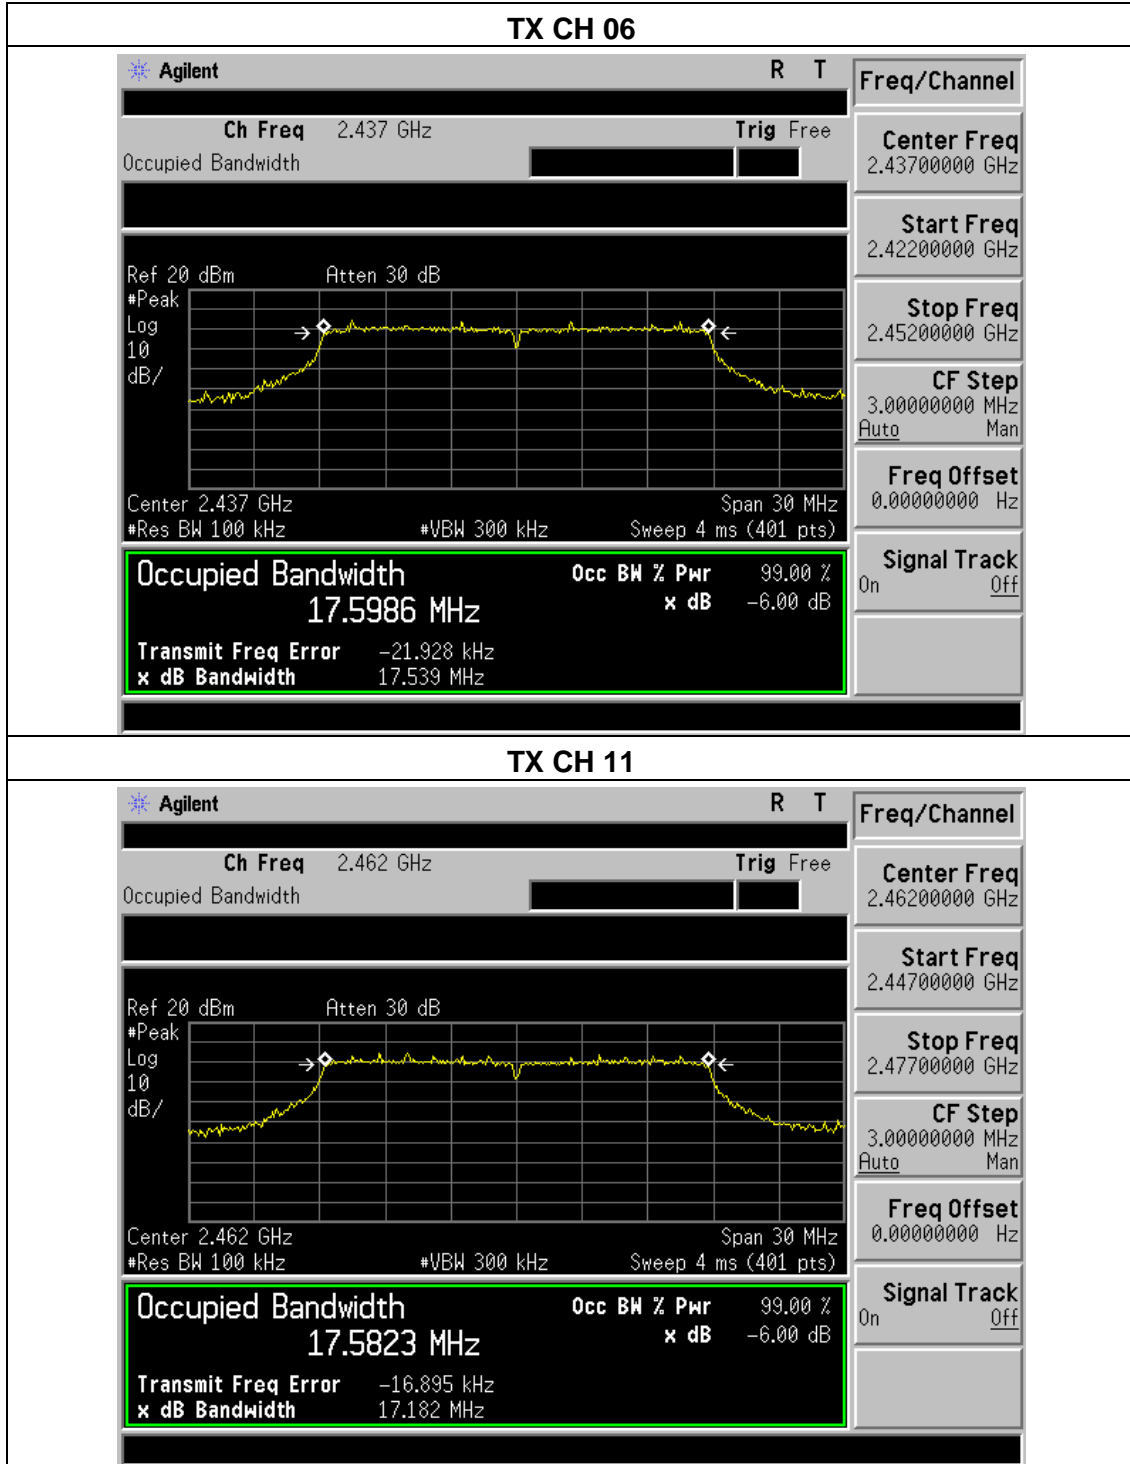



Ant.2

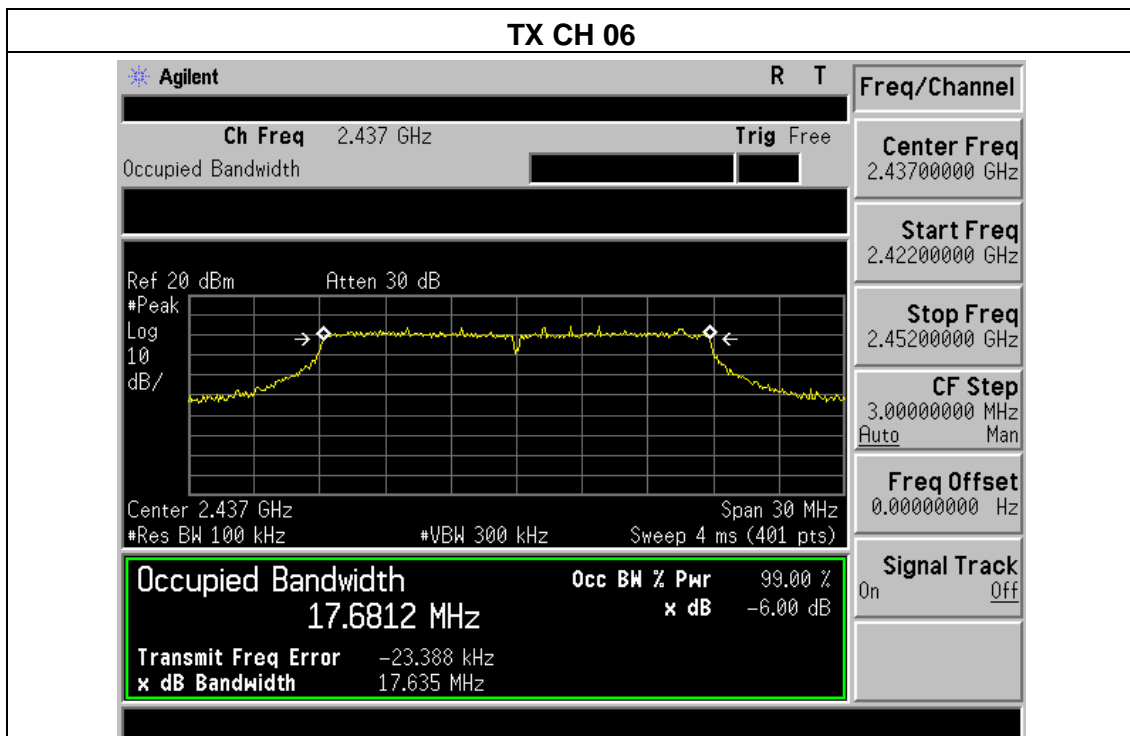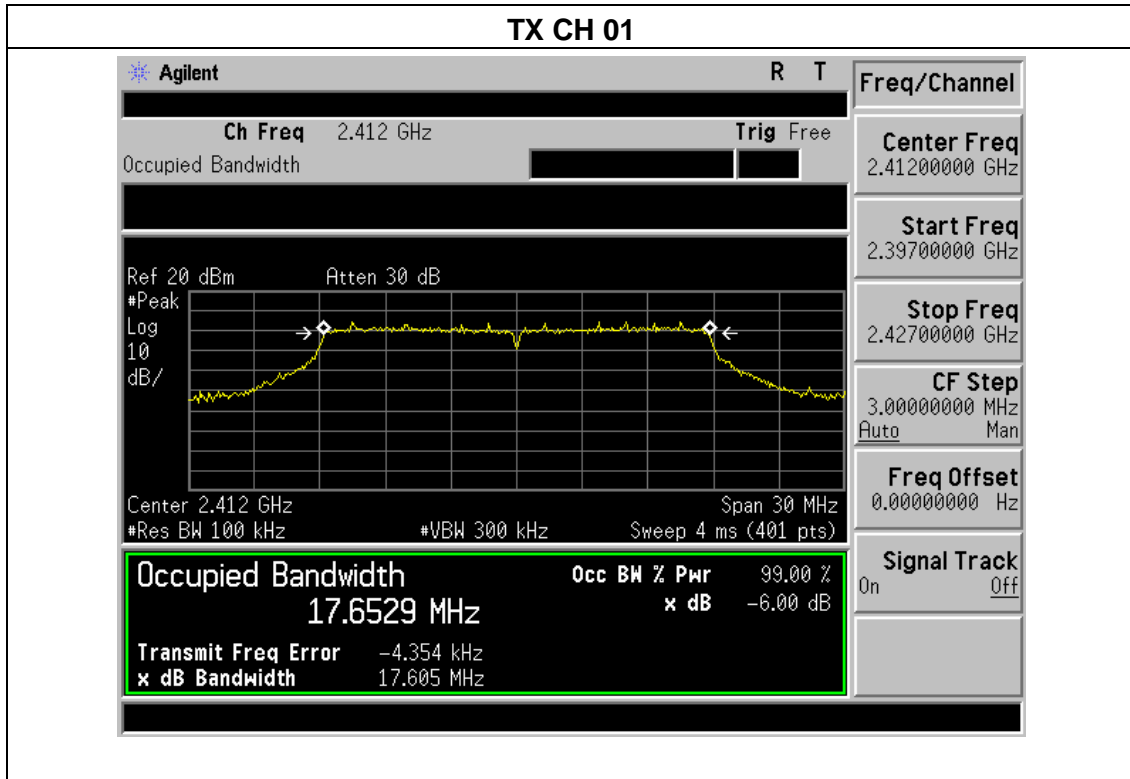

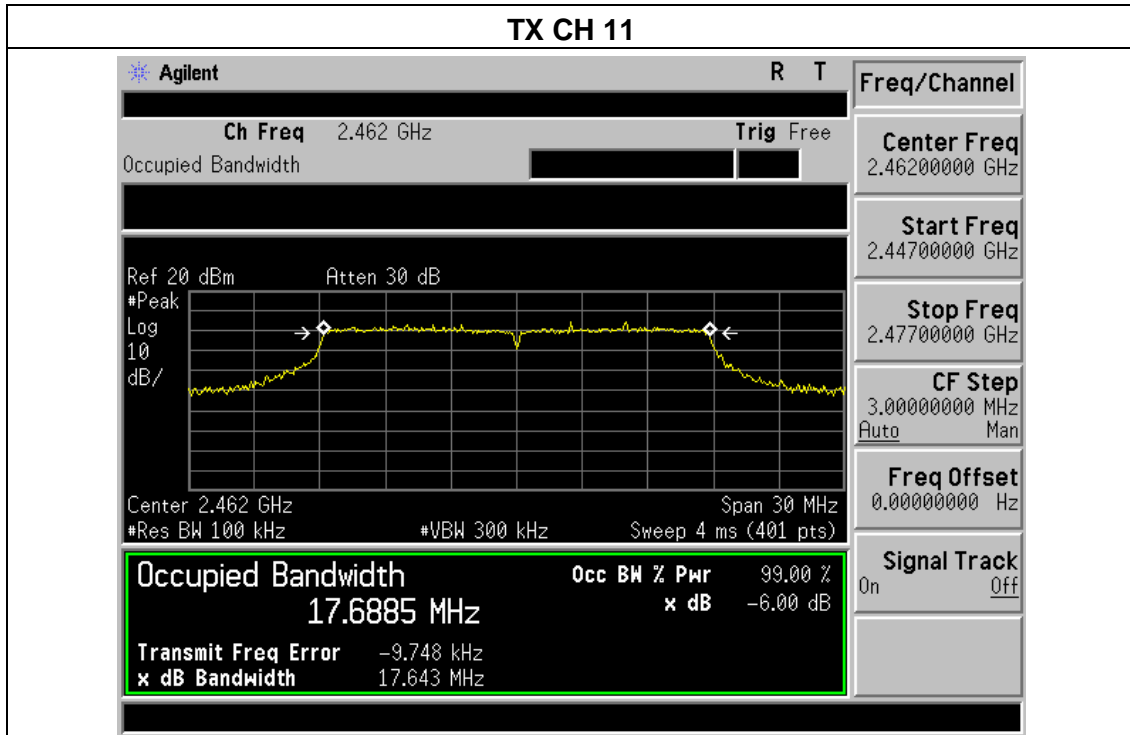




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(40M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		Ant.1	Ant.2		
Low	2422	35.957	35.696	500	Pass
Middle	2437	35.823	36.097	500	Pass
High	2452	36.090	36.060	500	Pass



Ant.1

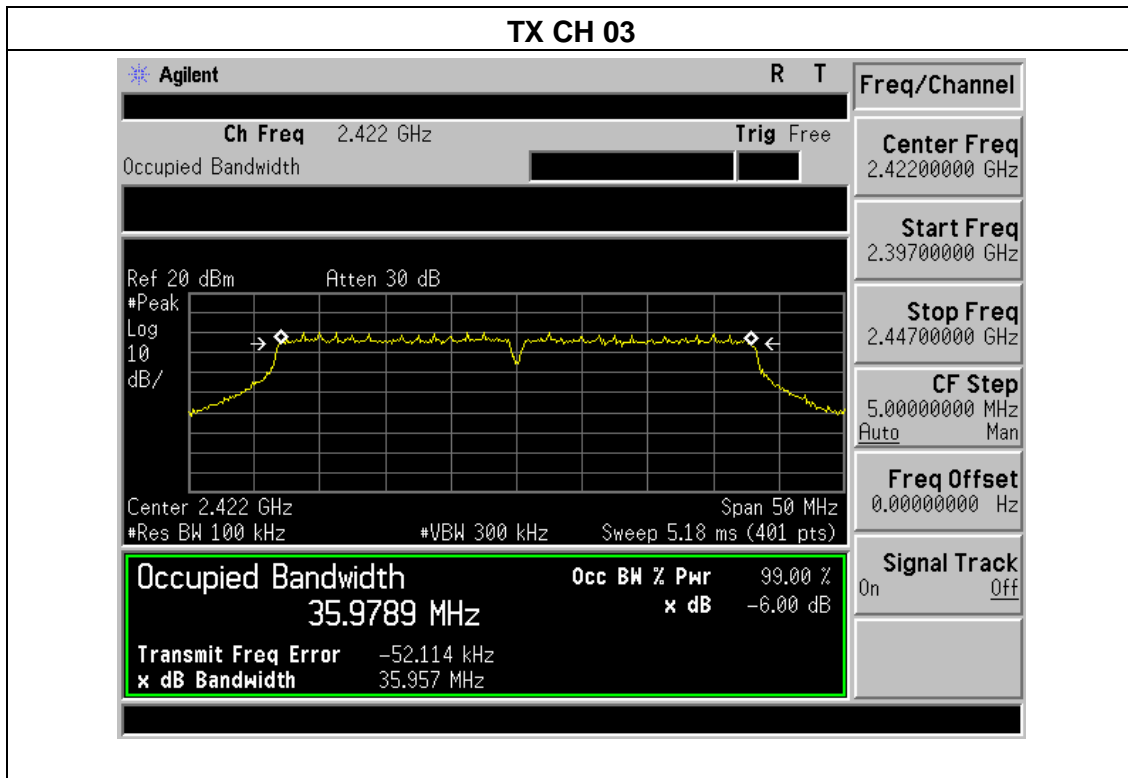






Ant.2

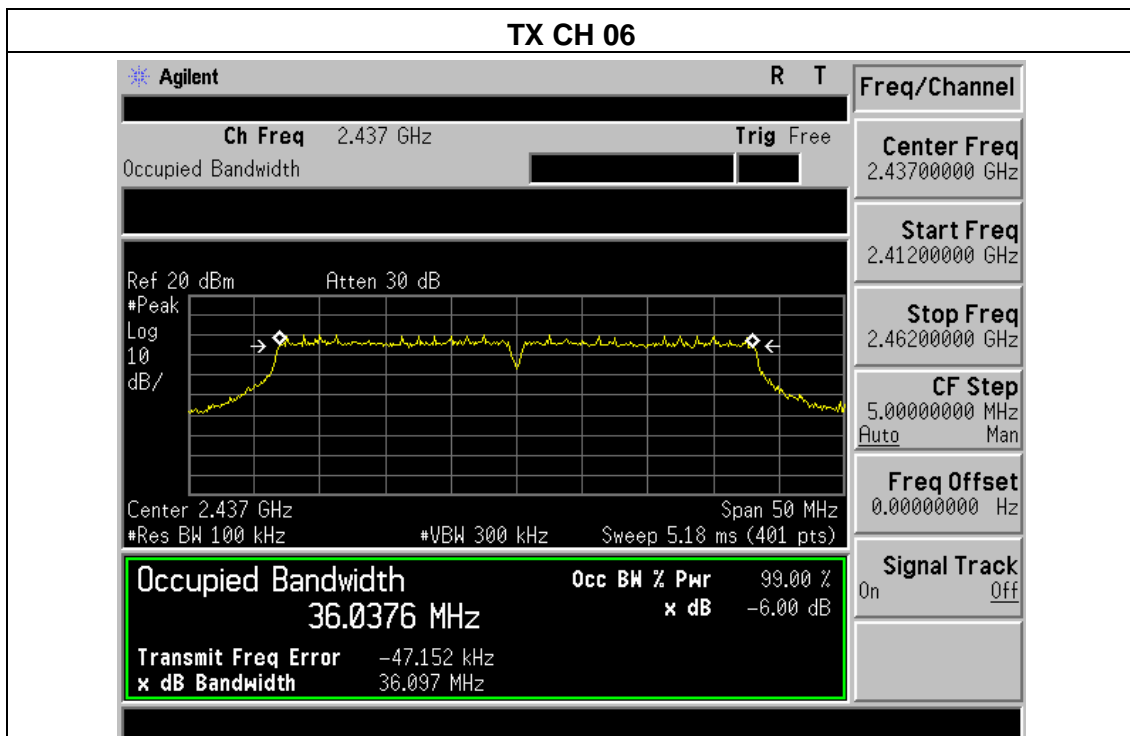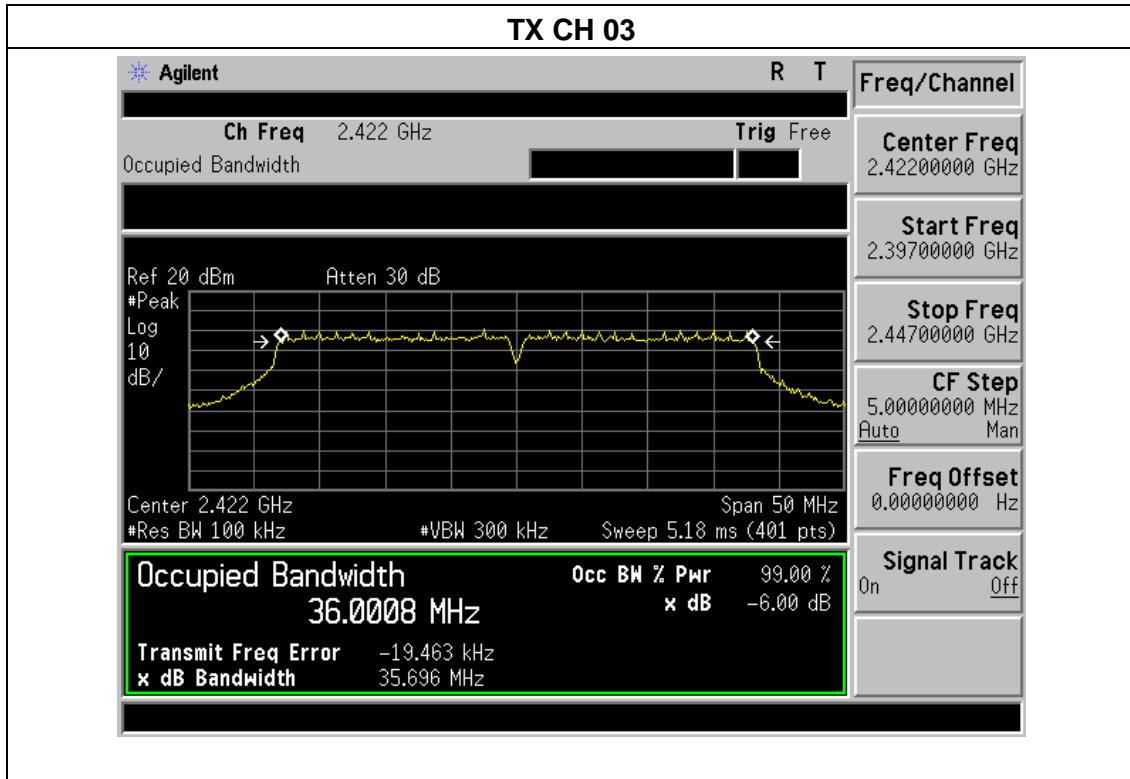

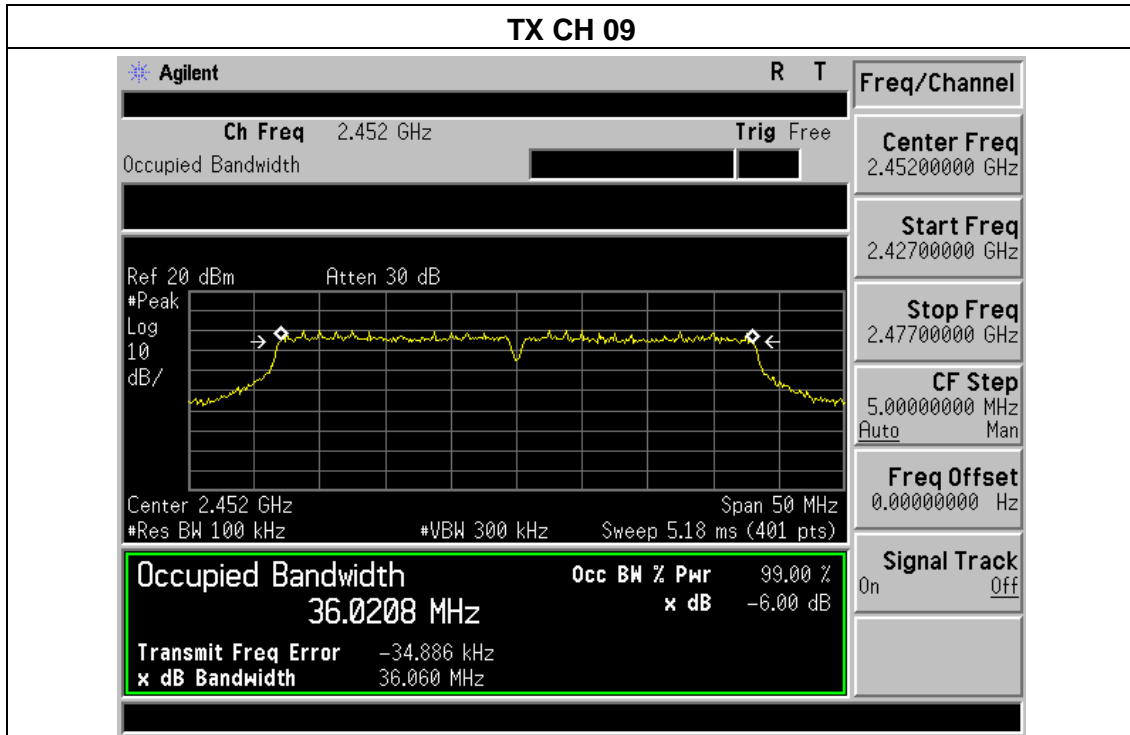

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS
<p>Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices, Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4; Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT; Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5. For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.</p>				

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.5 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V

	Frequency	Antenna port	Maximum Conducted Output Power	Maximum Conducted Output Power	Total Conducted Output Power	Total Conducted Output Power	LIMIT
	(MHz)		(dBm)	(mW)	(mW)	(dBm)	dBm
802.11b	2412	Ant.1	15.87	38.64	N/A	N/A	30
		Ant.2	15.95	39.36			
	2437	Ant.1	15.64	36.64	N/A	N/A	30
		Ant.2	15.59	36.22			
	2462	Ant.1	15.73	37.41	N/A	N/A	30
		Ant.2	15.82	38.19			
802.11g	2412	Ant.1	14.56	28.58	N/A	N/A	30
		Ant.2	14.62	28.97			
	2437	Ant.1	14.45	27.86	N/A	N/A	30
		Ant.2	14.25	26.61			
	2462	Ant.1	14.47	27.99	N/A	N/A	30
		Ant.2	14.49	28.12			
802.11n20	2412	Ant.1	12.51	17.82	36.36	15.61	30
		Ant.2	12.68	18.54			
	2437	Ant.1	12.55	17.99	35.69	15.53	30
		Ant.2	12.48	17.70			
	2462	Ant.1	12.62	18.28	36.56	15.63	30
		Ant.2	12.62	18.28			
802.11n40	2422	Ant.1	11.68	14.72	29.65	14.72	30
		Ant.2	11.74	14.93			
	2437	Ant.1	11.54	14.26	27.94	14.46	30
		Ant.2	11.36	13.68			
	2452	Ant.1	11.57	14.35	28.28	14.51	30
		Ant.2	11.44	13.93			

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP






7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.1 TEST RESULTS



802.11b: Band Edge, Left Side

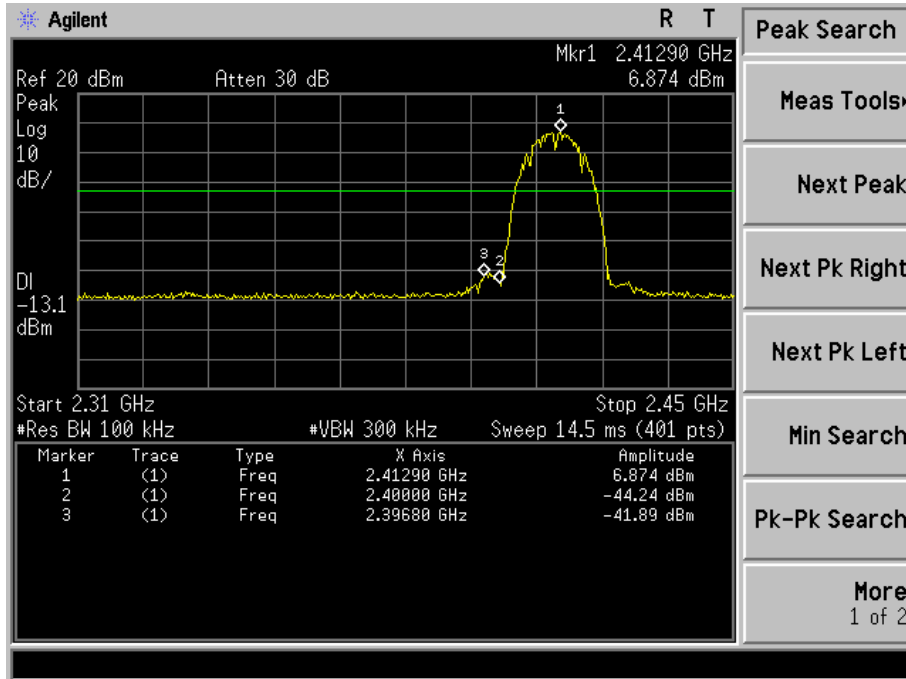


802.11b: Band Edge, Right Side

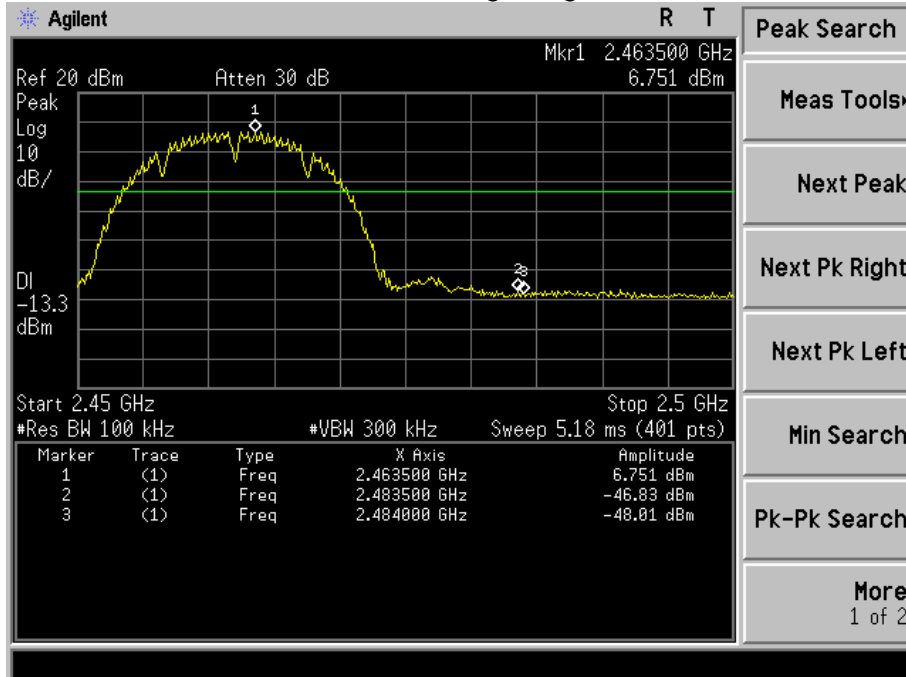




802.11g: Band Edge, Left Side

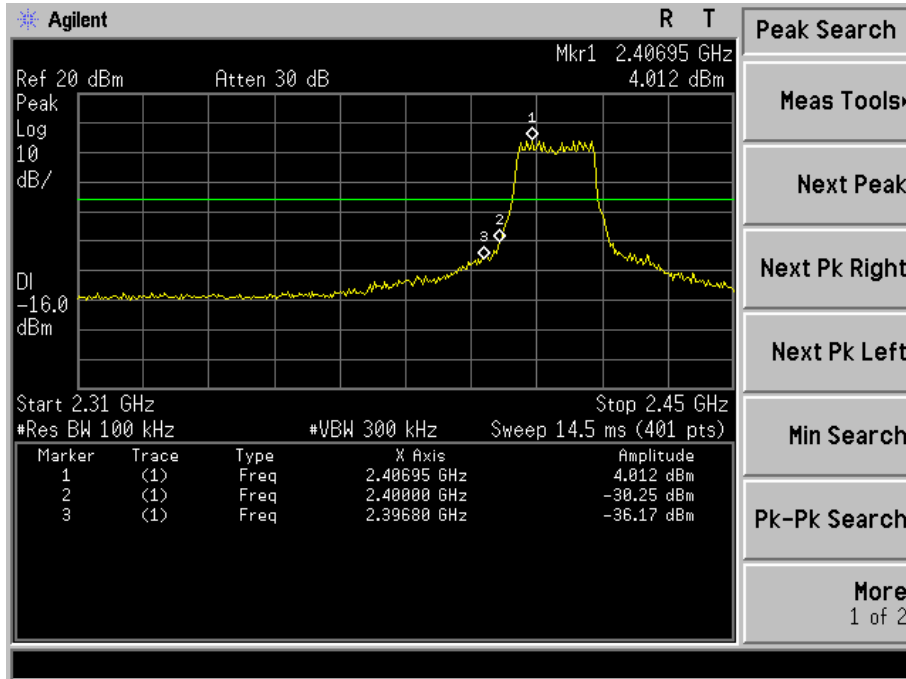


802.11g: Band Edge, Right Side

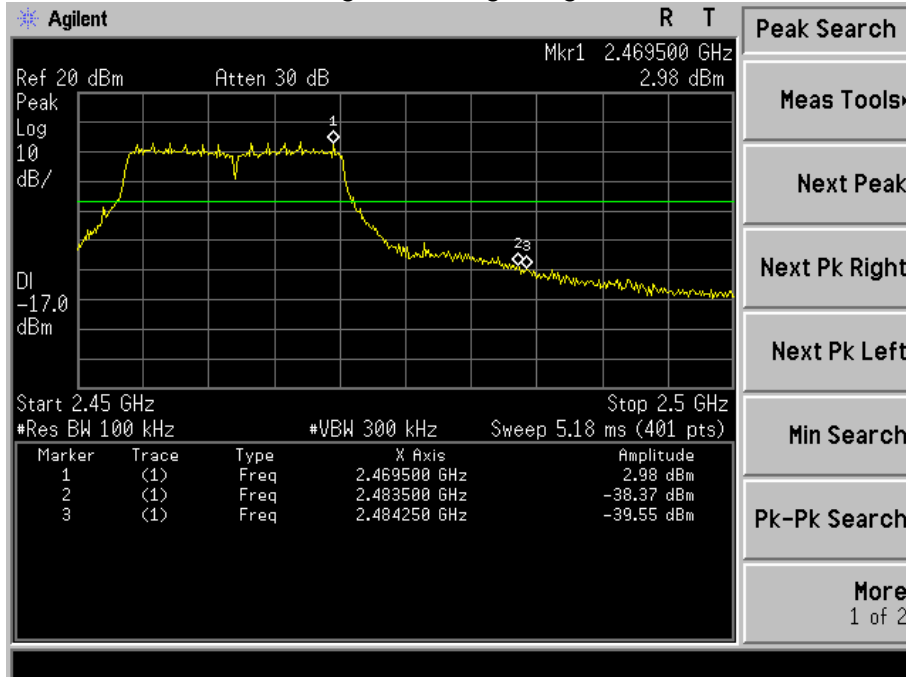




802.11n-HT20: Band Edge, Left Side

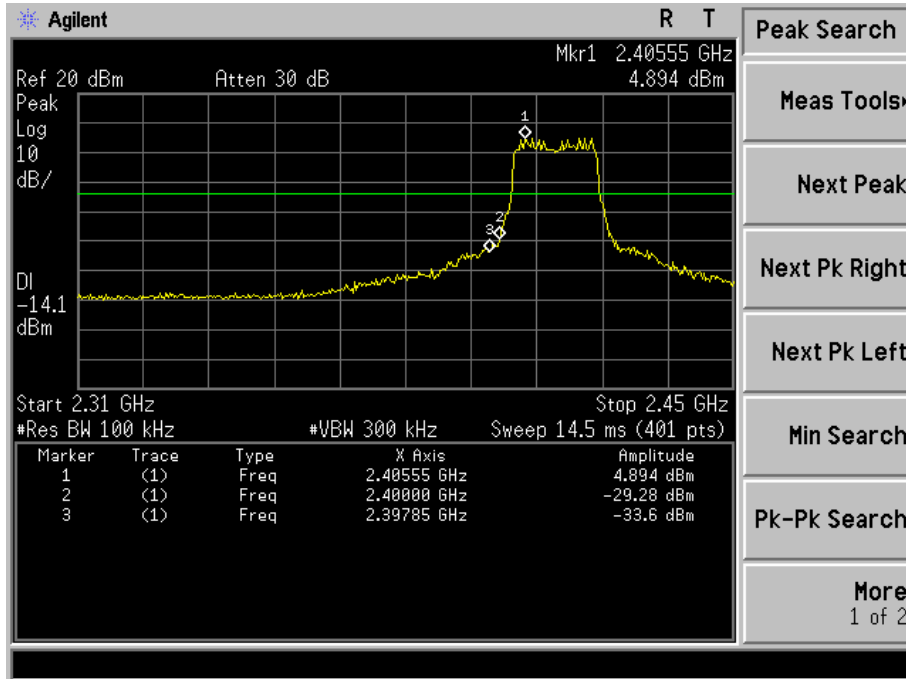


802.11n-HT20: Band Edge, Right Side

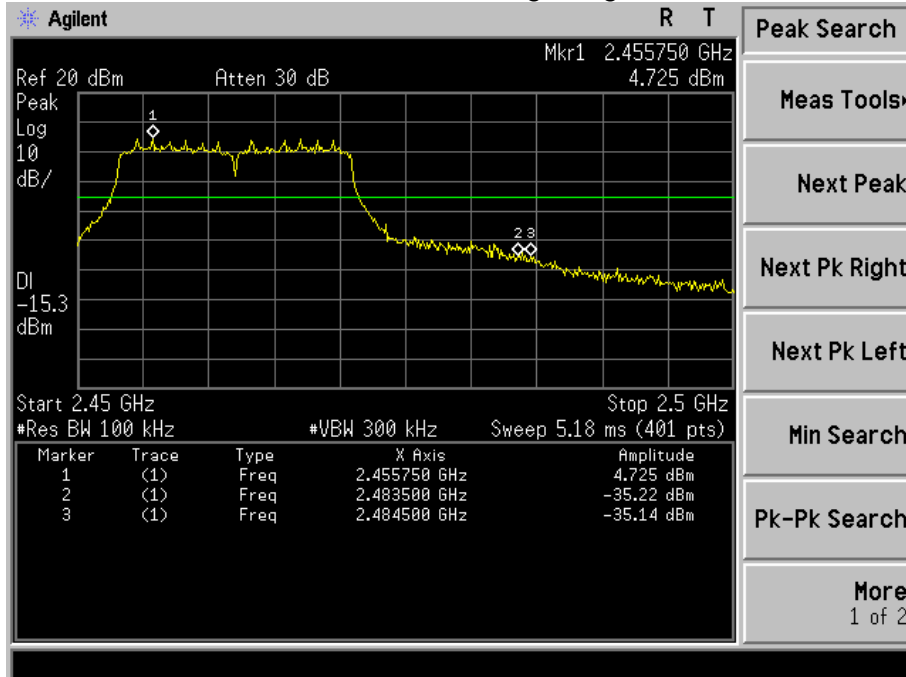




802.11n-HT40: Band Edge, Left Side

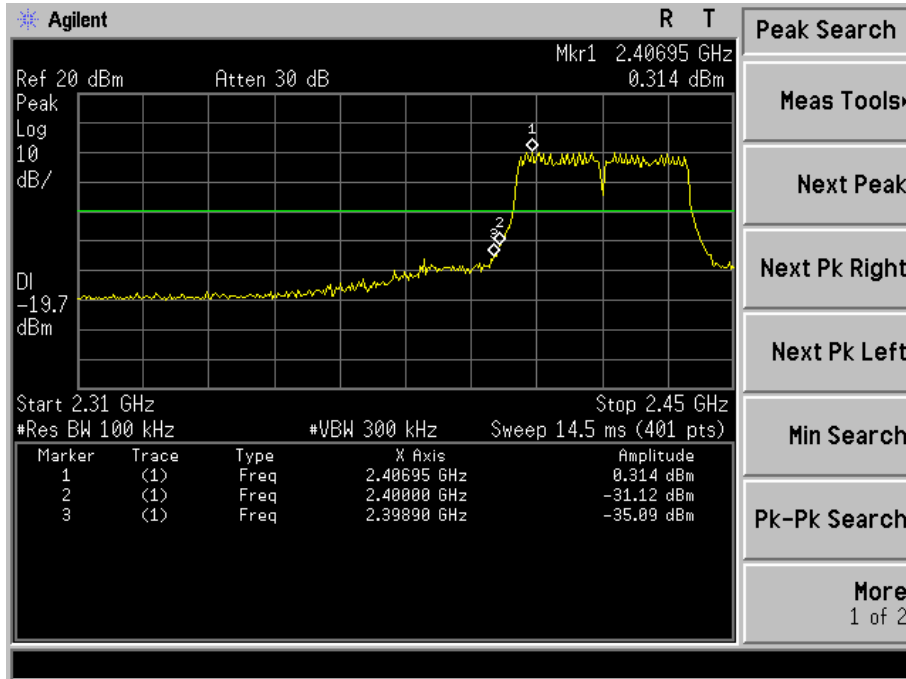

802.11n-HT40: Band Edge, Right Side


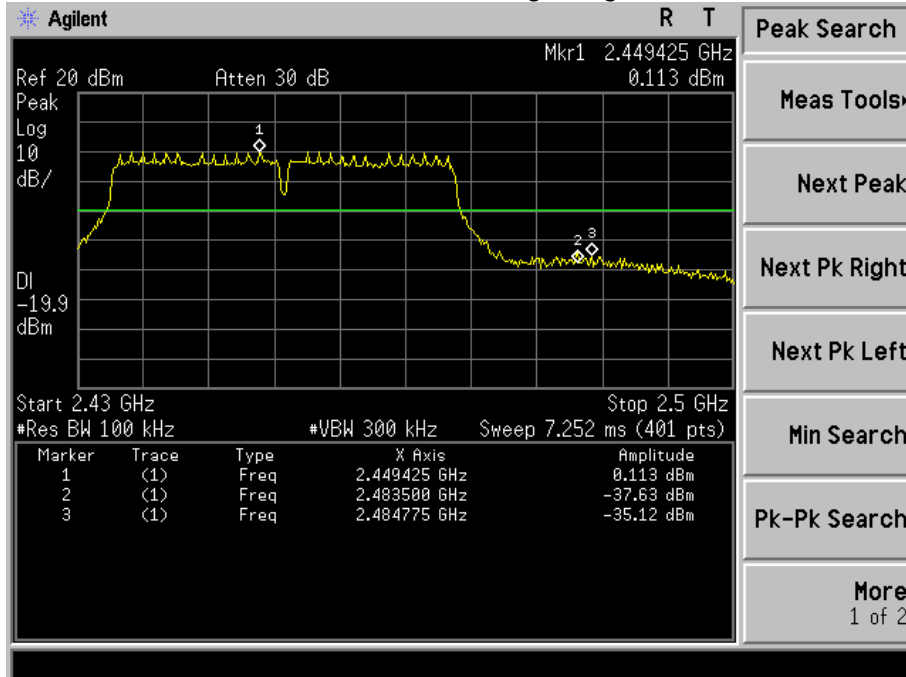






CONDUCTED EMISSION MEASUREMENT

we pretest all mode, the worst mode was 802.11b, and the data only show the worst mode data. 802.11b



Low Channel 2412MHz

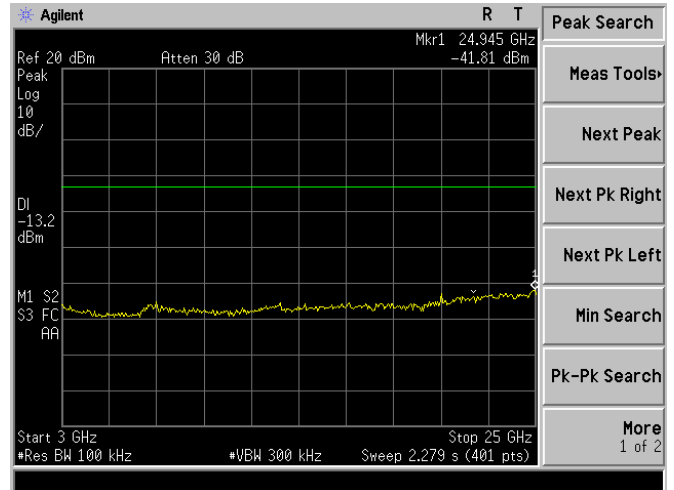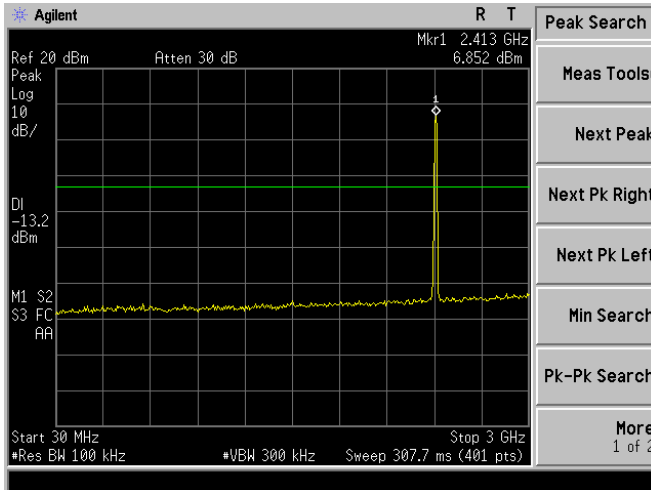

Middle Channel 2437MHz

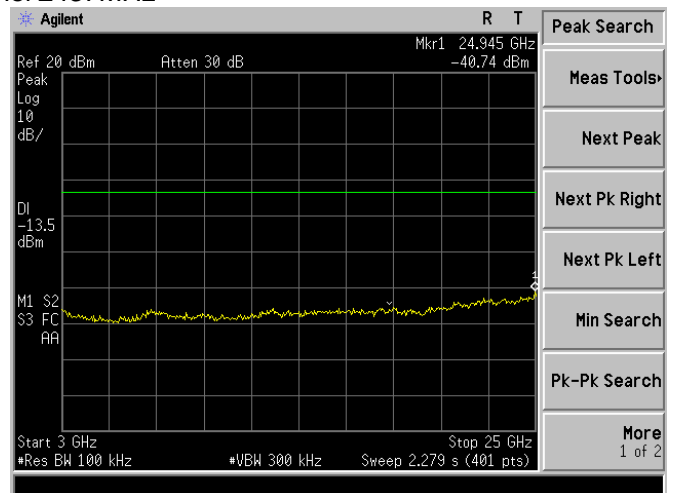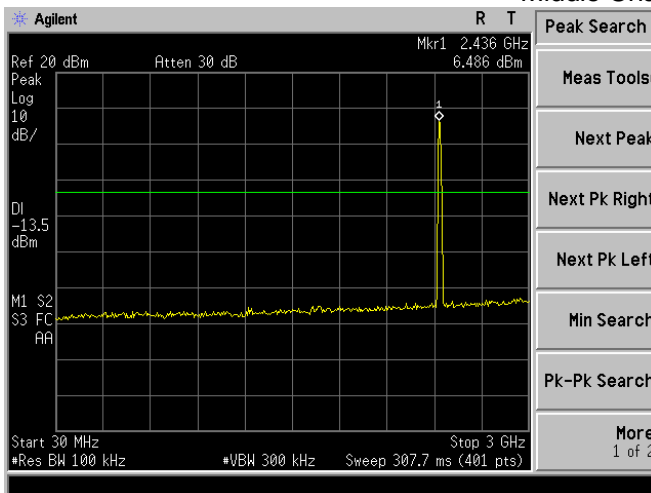

High Channel 2462MHz

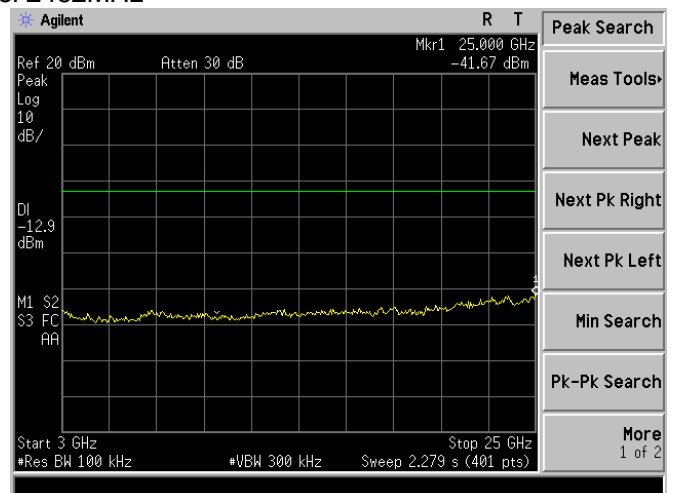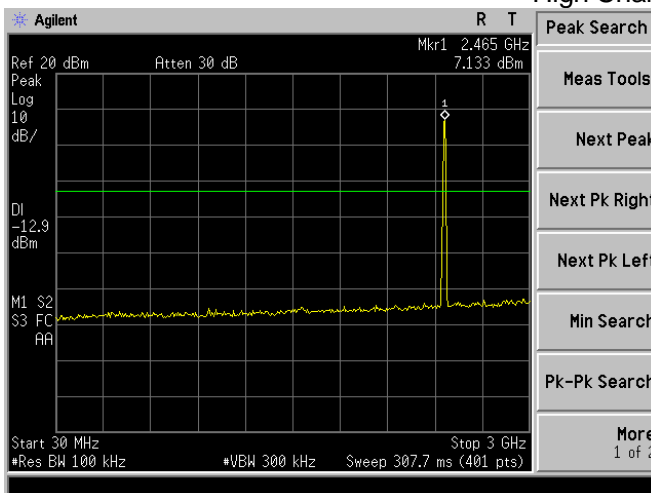



8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$


Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:


	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

802.11b

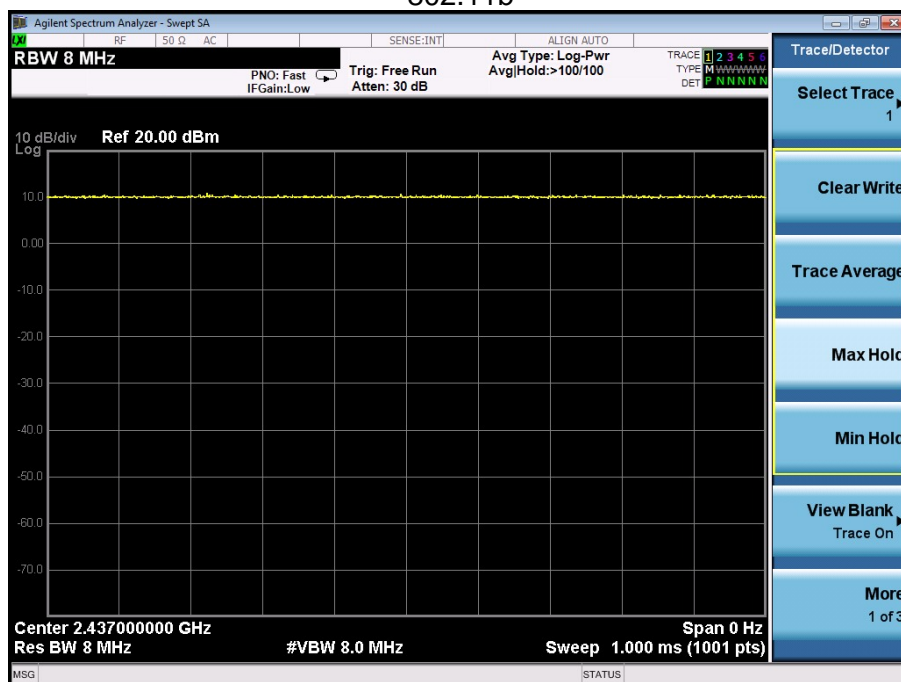




802.11g

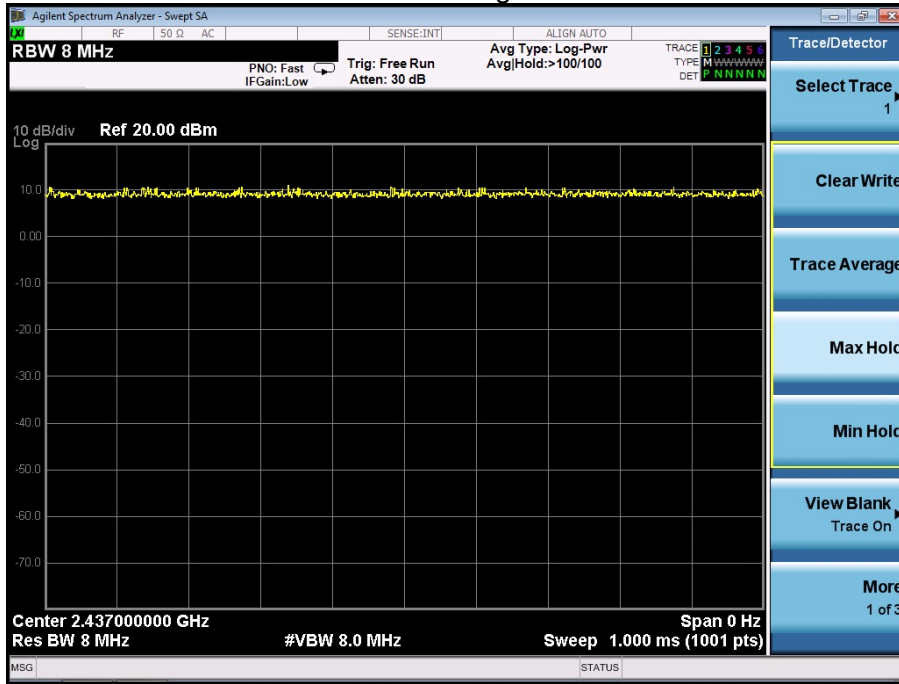


802.11n(HT20)

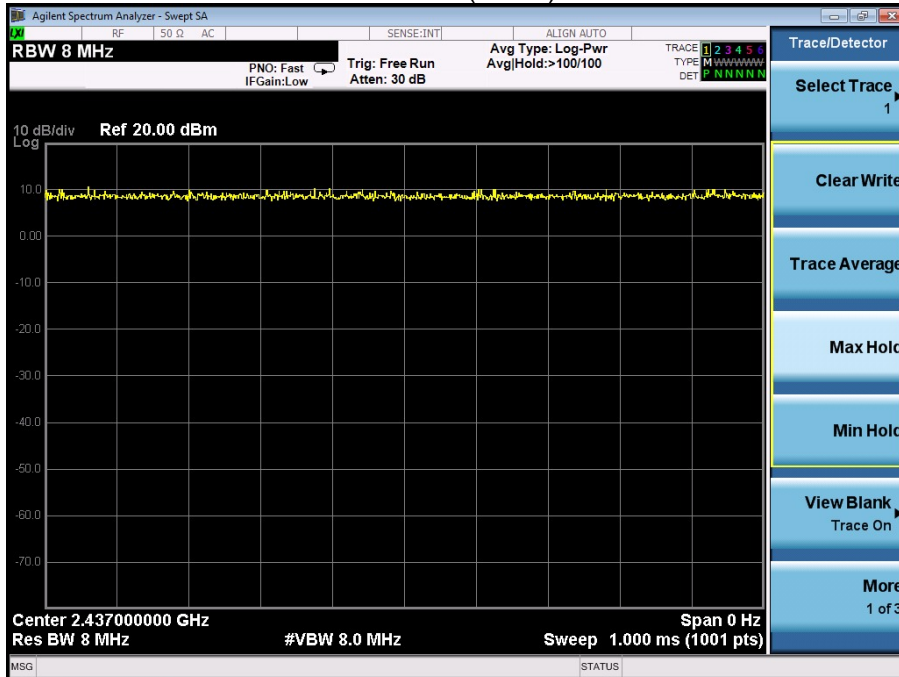



802.11n(HT40)

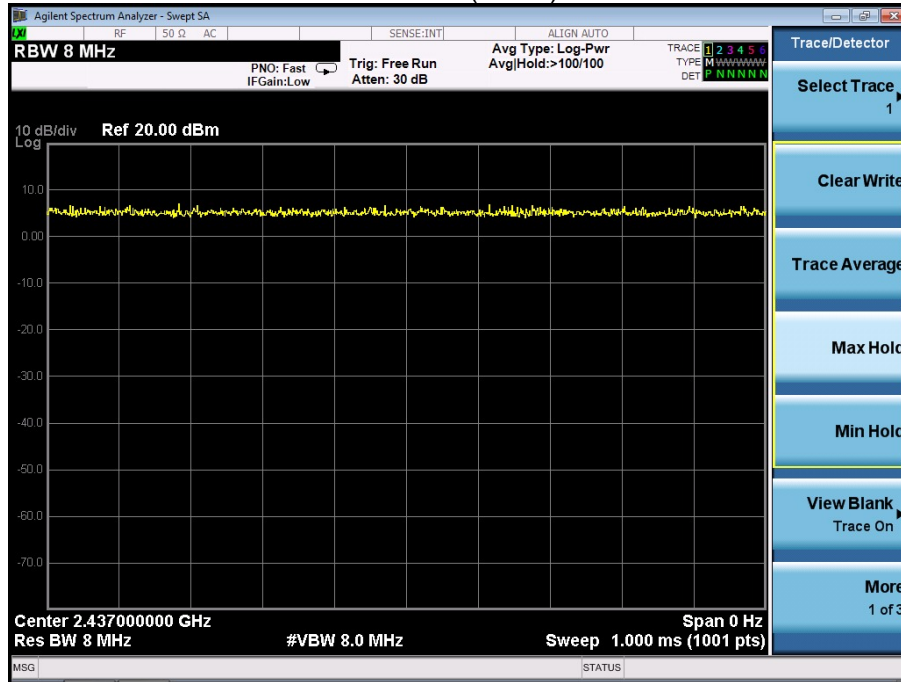



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is external antenna, The anti spiral antenna is used, and the standard antenna will not be connected. It comply with the standard requirement.

10. EUT TEST PHOTO

Radiated Measurement Photos



Radiated Measurement Photos

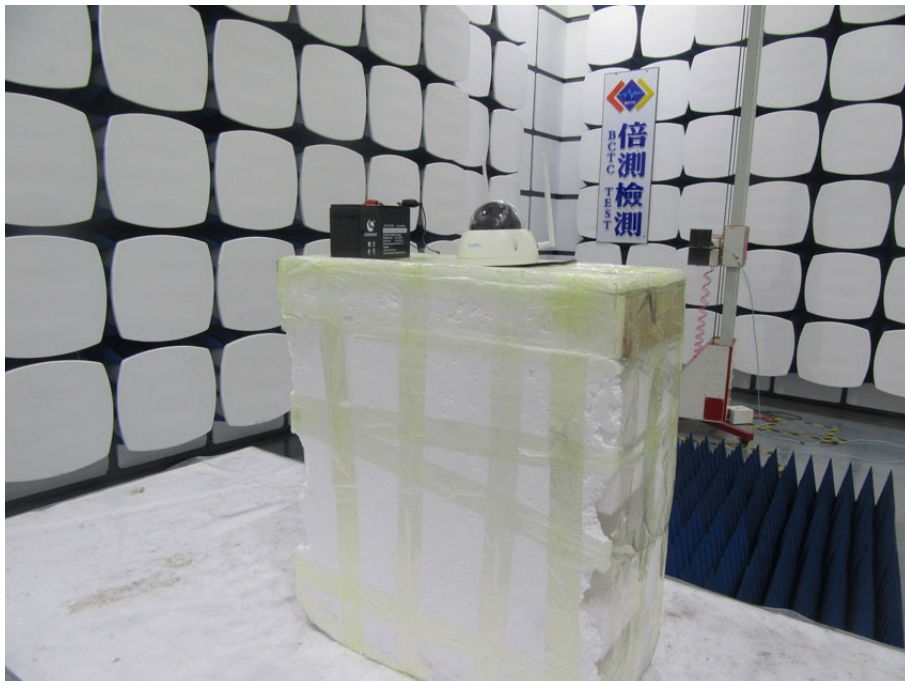

Conducted Measurement Photos



11. EUT PHOTO



***** END OF REPORT *****