

S

T

S

L

A

B



RADIO TEST REPORT

Report No: STS1806237W01

Issued for


ZHEJIANG UNIVIEW TECHNOLOGIES CO LTD

88 JIANGLING RD, BINJIANG DISTRICT HANGZHOU,
ZHEJIANG 310051, P.R. CHINA

Product Name:	Network Video Recorder
Brand Name:	N/A
Model Name:	NVR301-04LB-W
Series Model:	NVR301-04LB-W-NB
FCC ID:	2AL8S-0211C2WX
Test Standard:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test Sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's name: **ZHEJIANG UNIVIEW TECHNOLOGIES CO LTD**
Address: 88 JIANGLING RD, BINJIANG DISTRICT HANGZHOU, ZHEJIANG
310051, P.R. CHINA
Manufacture's Name: **1. Zhejiang Uniview Technologies Co., Ltd.**
2. Suzhou Qiaoxin Electronic Technology Co., Ltd.
3. TDG TECHNOLOGY CO LTD
4. ZHE JIANG RAYSOAR ELECTRONICS CO LTD
Address: 1. A Zone, Building 2, Wanlun Science Park, 88 Jiangling Road,
Hangzhou, P.R. China
2. No. 77, Yitang Road, Economic Development Zone, Wujiang
District, Suzhou City, Jiangsu Province, China 215200
3. YATAI ROAD NO.1, SOUTH LAKE DISTRICT, JIAXING,
ZHEJIANG, PROVINCE, 314050, P.R. CHINA.
4. No. 367 Weizhong Road, Weitang Street, Jiashan County, Jiaxing,
Zhejiang

Product description

Product Name: Network Video Recorder
Brand Name: N/A
Model Name: NVR301-04LB-W
Series Model: NVR301-04LB-W-NB
Test Standards: CFR47 FCC Part 15: Subpart C Section 15.247
CFR47 FCC Part 15: Subpart C Section 15.207
CFR47 FCC Part 15: Subpart C Section 15.209
CFR47 FCC Part 15: Subpart B Section 15.107
CFR47 FCC Part 15: Subpart B Section 15.109

Test procedure: ANSI C63.10: 2013, ANSI C63.4: 2014

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test:

Date (s) of performance of tests: 01 Jul. 2018 ~ 29 Jul. 2018

Date of Issue: 30 Jul. 2018

Test Result: **Pass**



Testing Engineer : Chris Chen
(Chris Chen)

Technical Manager : Sean She
(Sean She)

Authorized Signatory : Vita Li
(Vita Li)






Table of Contents

Page

1	SUMMARY OF TEST RESULTS	7
1.1	TEST FACTORY	8
1.2	MEASUREMENT UNCERTAINTY	8
2	GENERAL INFORMATION	9
2.1	GENERAL DESCRIPTION OF EUT.....	9
2.2	DESCRIPTION OF TEST MODES	11
2.3	BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4	DESCRIPTION OF SUPPORT UNITS	12
2.5	EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3	EMC EMISSION TEST	16
3.1	CONDUCTED EMISSION MEASUREMENT	16
3.2	RADIATED EMISSION MEASUREMENT	30
3.3	RADIATED SPURIOUS EMISSION MEASUREMENT.....	46
4	CONDUCTED SPURIOUS & BAND EDGE EMISSION	58
4.1	APPLIED PROCEDURES / LIMIT	58
4.2	TEST PROCEDURE	58
4.3	DEVIATION FROM STANDARD	58
4.4	TEST SETUP	58
4.5	EUT OPERATION CONDITIONS.....	58
4.6	TEST RESULTS	59
5	POWER SPECTRAL DENSITY TEST	68
5.1	APPLIED PROCEDURES / LIMIT	68
5.2	TEST PROCEDURE	68
5.3	DEVIATION FROM STANDARD	68
5.4	TEST SETUP	68
5.5	EUT OPERATION CONDITIONS.....	68
5.6	TEST RESULTS	69
6	BANDWIDTH TEST	75
6.1	APPLIED PROCEDURES / LIMIT	75
6.2	TEST PROCEDURE	75
6.3	DEVIATION FROM STANDARD	75
6.4	TEST SETUP	75
6.5	EUT OPERATION CONDITIONS.....	75
6.6	TEST RESULTS	76



- 7 PEAK OUTPUT POWER TEST 82**
 - 7.1 APPLIED PROCEDURES / LIMIT 82
 - 7.2 TEST PROCEDURE 82
 - 7.3 DEVIATION FROM STANDARD 82
 - 7.4 TEST SETUP 82
 - 7.5 EUT OPERATION CONDITIONS 82
 - 7.6 TEST RESULTS 83
- 8 ANTENNA REQUIREMENT 84**
 - 8.1 STANDARD REQUIREMENT 84
 - 8.2 EUT ANTENNA 84
- 9 APPENDIX - PHOTOS OF TEST SETUP 85**





Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	30 Jul. 2018	STS1806237W01	ALL	Initial Issue





1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 558074 D01 DTS Meas Guidance v04

FCC Part 15, Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC Part 15.207(a)	Conducted Emission	PASS	
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS	
FCC Part 15.247(b)(3)	Output Power	PASS	
FCC Part 15.247(d)	Radiated Spurious Emission	PASS	
FCC Part 15.247(d)	Conducted Spurious & Band Edge Emission	PASS	
FCC Part 15.247(e)	Power Spectral Density	PASS	
FCC Part 15.205	Restricted Band Edge Emission	PASS	
FCC Part 15.247(d) & 15.209(a)	Band Edge Emission	PASS	
FCC Part 15.247(b)(4) & 15.203	Antenna Requirement	PASS	

FCC Part 15, Subpart B			
Standard Section	Test Item	Judgment	Remark
FCC Part 15.107(a)	Conducted Emission	PASS	Class B limit
FCC Part 15.109(a)	Radiated Emission	PASS	Class B limit

NOTE:

- 1) 'N/A' denotes test is not applicable in this test report
- 2) All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.71\text{dB}$
4	Spurious emissions,conducted	$\pm 0.63\text{dB}$
5	All emissions,radiated (9KHz-30MHz)	$\pm 3.02\text{dB}$
6	All emissions,radiated (30MHz-200MHz)	$\pm 3.80\text{dB}$
7	All emissions,radiated (200MHz-1000MHz)	$\pm 3.97\text{dB}$
8	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	Network Video Recorder	
Trade Name	N/A	
Model Name	NVR301-04LB-W	
Series Model	NVR301-04LB-W-NB	
Model Difference	All models are identical except the model number.	
Product Description	The EUT is Network Video Recorder which supports Wi-Fi 802.11 b/g/n wireless technology.	
	Operation Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20)
	Modulation Type:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
	Bit Rate of Transmitter:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
	Number Of Channel:	11 channels for 802.11b/g/n(HT20)
	Antenna Designation:	Please see Note 4
	Antenna Gain (dBi):	4dBi
	Duty Cycle:	>98%
Channel List	Please refer to the Note 2.	
Adapter	Adapter 1 Model: 2ABL024F (CWT) Input: AC 100-240V~50/60Hz, 0.8A Output: DC 12.0V@2000mA Adapter 2 Model: KPC-024FA-VI-US (CWT) Input: AC 100-240V~50/60Hz, 0.8A Output: DC 12.0V@2000mA	
Battery	N/A	
Hardware version	N/A	
Software version	N/A	
Radio Hardware version	N/A	
Radio Software version	N/A	
Test Software	SecureCRT	
RF Power Setting TEST Software (power class)	default	
Connecting I/O Port(s)	Please refer to the User's Manual	



Note:

- 1 For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2

RF Channel and Frequency of Wi-Fi 802.11 b/g/n			
802.11b/g/n (HT20)			
RF Channel	Freq.(MHz)		
01	2412		
02	2417		
03	2422		
04	2427		
05	2432		
06	2437		
07	2442		
08	2447		
09	2452		
10	2457		
11	2462		

3 Note:

- 1) In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test;
- 2) Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

4

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	NVR301-04LB-W	Integral Antenna	N/A	4	WLAN Antenna



2.2 DESCRIPTION OF TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode10	Wi-Fi transmitting mode	/
Mode 11	HDMI+VGA+Recording+Repaly	/
Mode 12	HDMI+VGA+Recording+USB back up	/
Mode 13	HDMI+VGA+PC	/

Note:


- 1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- 2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report
- 3) Controlled using a bespoke application on the laptop PC supplied by the customer. The application was used to enable a continuous transmission mode and to select the test channels, data rates and modulation schemes as required.
- 4) According to the model differences description, we choose model: NVR301-04LB-W to perform all tests.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

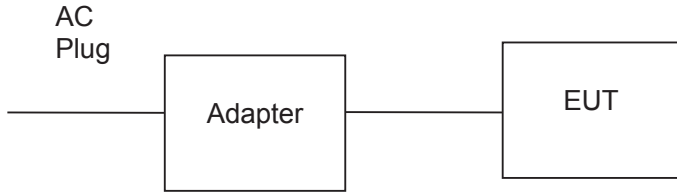

Conduction Test Set

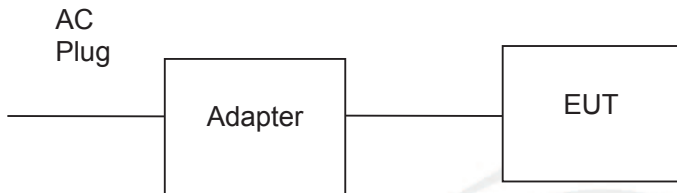

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	CWT	2ABL024F	ADS12024-VI-CWT	Accessory equipment
2	Adapter	CWT	KPC-024FA-VI-US	N/A	
3	3D Optical Mouse	N/A	N/A	N/A	
4	Personal computer	HP	500-320cx	4CV428DQYN	Provided by lab
5	HDMI Monitor	AOC	LE24A3150/80	D32ECBA003548QH	
6	VGA Monitor	AOC	E2060Swn195LM00001	GBZE91A000815EK	
7	IP Camera*4	UNIVIEW	IPC2122SR3-F40W-D	N/A	
8	Adapter	CWT	KPL-060F-VI	N/A	
9	U-disk	Kingston	32G	N/A	
10	Speaker	N/A	N/A	N/A	
11	Ethernet switch	HUAWEI	S5700S-52X-LI-AC	N/A	
12	Mouse	HP	MODGUO	N/A	



Item	Shielded Type	Ferrite Core	Length	Note
1	VGA cable	NO	200cm	unshielded
2	HDMI cable	NO	200cm	unshielded
3	RJ45 cable*5	NO	200cm	unshielded

Note:

- 1) The support equipment was authorized by Declaration of Confirmation.
- 2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- 3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.





2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	102086	2017.10.15	2018.10.14
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2018.11.01
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2017.10.27	2018.10.26
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	N/A	2018.03.11	2019.03.10
Temperature & Humidity	HH660	Mieo	N/A	2017.10.15	2018.10.14
Temperature & Humidity	HH660	Mieo	N/A	2017.10.15	2018.10.14
Pre-mpifier (0.1M-3GHz)	EM	EM330	60538	2018.03.11	2019.03.10
PreAmplifier (1G-26.5GHz)	Agilent	8449B	60538	2017.10.15	2018.10.14
Passive Loop (9K--30MHz)	ZHNAN	ZN3090C	16035	2018.03.11	2019.03.10
Low frequency cable	EM	R01	N/A	2018.03.11	2019.03.10
Low frequency cable	EM	R06	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R04	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R02	N/A	2018.03.11	2019.03.10
Semi-anechoic chamber	Changling	966	N/A	2017.10.15	2018.10.14
trun table	EM	SC100_1	60531	N/A	N/A
Antnna mast	EM	SC100	N/A	N/A	N/A
Max-full Antenna Corp	MF	MFA-440H	N/A	N/A	N/A

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
conduction Cable	EM	C01	N/A	2018.03.11	2019.03.10
Temperature & Humidity	Mieo	HH660	N/A	2017.10.15	2018.10.14



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2017.10.15	2018.10.14
Power Meter	R&S	NRP	100510	2017.10.15	2018.10.14
Spectrum Analyzer	Agilent	N9020A	MY51110105	2018.03.08	2019.03.07
Signal Analyzer	Agilent	N9020A	MY49100060	2017.10.15	2018.10.14

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.





3 EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

operating frequency band. In case the emission fall within the restricted band specified on Part 15. 207(a), 107(a) limit in the table below has to be followed.

This item was performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- 1) The tighter limit applies at the band edges.
- 2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

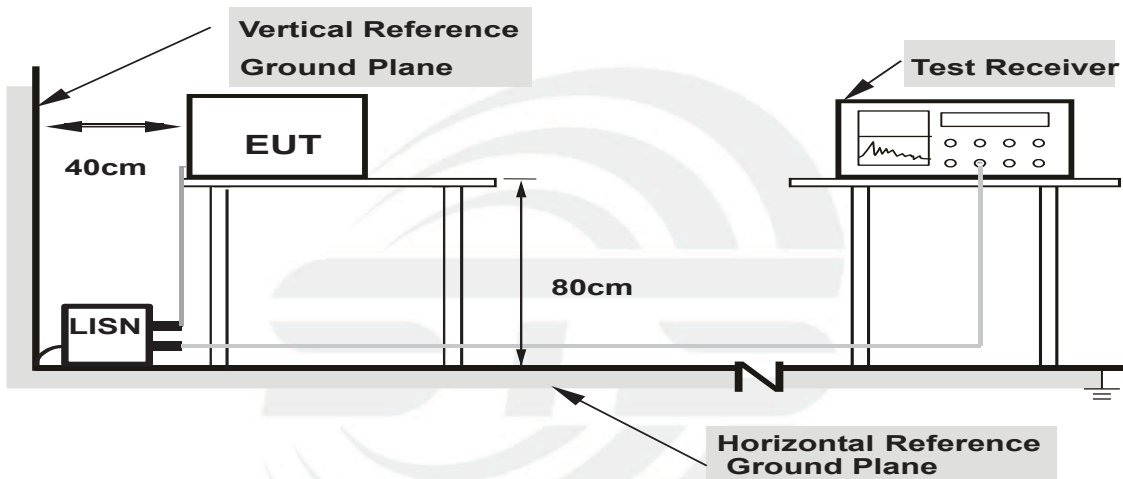

- Note:**
- 1. Support units were connected to second LISN.
 - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10 Adapter 1		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1540	44.69	9.79	54.48	65.78	-11.30	QP
0.1580	30.40	9.79	40.19	55.57	-15.38	AVG
0.2580	23.64	10.04	33.68	51.50	-17.82	QP
0.2660	33.09	10.08	43.17	61.24	-18.07	AVG
0.3820	31.60	10.07	41.67	58.24	-16.57	QP
0.3820	26.12	10.07	36.19	48.24	-12.05	AVG
1.8140	26.59	9.78	36.37	56.00	-19.63	QP
1.8460	18.53	9.78	28.31	46.00	-17.69	AVG
6.2780	15.98	9.87	25.85	50.00	-24.15	QP
6.3180	27.79	9.87	37.66	60.00	-22.34	AVG
16.9260	14.25	10.32	24.57	50.00	-25.43	QP
17.1220	23.63	10.33	33.96	60.00	-26.04	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

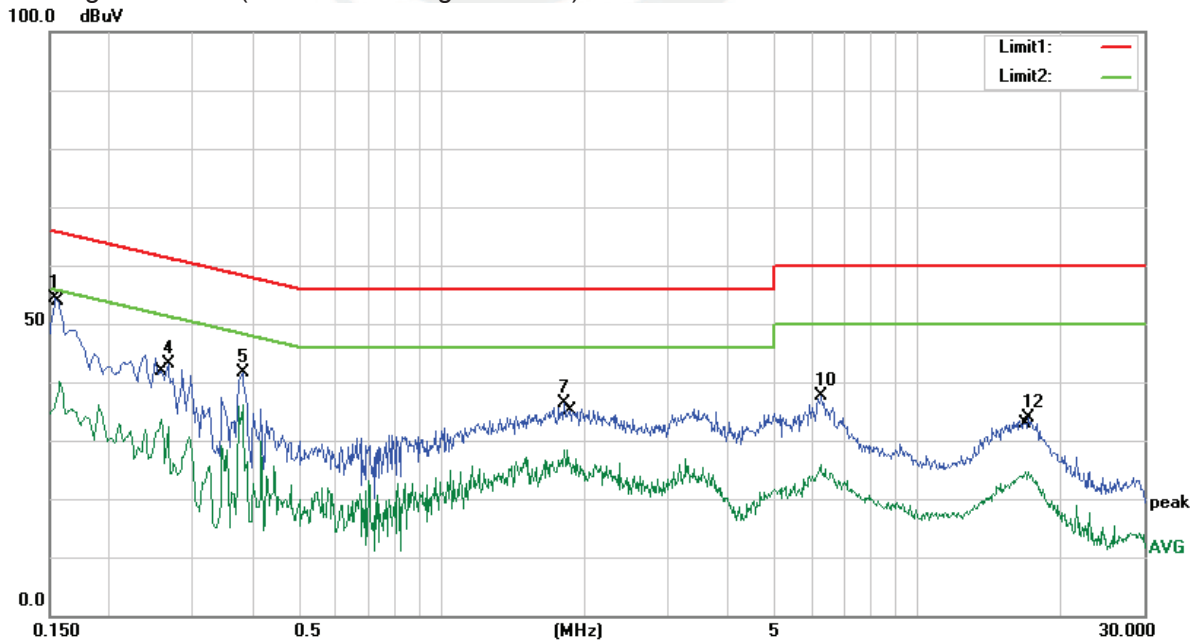




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10 Adapter 1		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1500	43.42	9.75	53.17	66.00	-12.83	QP
0.1620	29.93	9.78	39.71	55.36	-15.65	AVG
0.1900	26.17	9.85	36.02	54.04	-18.02	QP
0.1985	34.59	9.87	44.46	63.67	-19.21	AVG
0.3540	24.64	10.15	34.79	48.87	-14.08	QP
0.3860	30.77	10.09	40.86	58.15	-17.29	AVG
0.9060	17.32	9.82	27.14	46.00	-18.86	QP
0.9260	24.86	9.82	34.68	56.00	-21.32	AVG
6.2980	25.32	9.90	35.22	60.00	-24.78	QP
6.7300	12.74	9.89	22.63	50.00	-27.37	AVG
16.7860	25.48	10.22	35.70	60.00	-24.30	QP
16.8860	17.25	10.23	27.48	50.00	-22.52	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

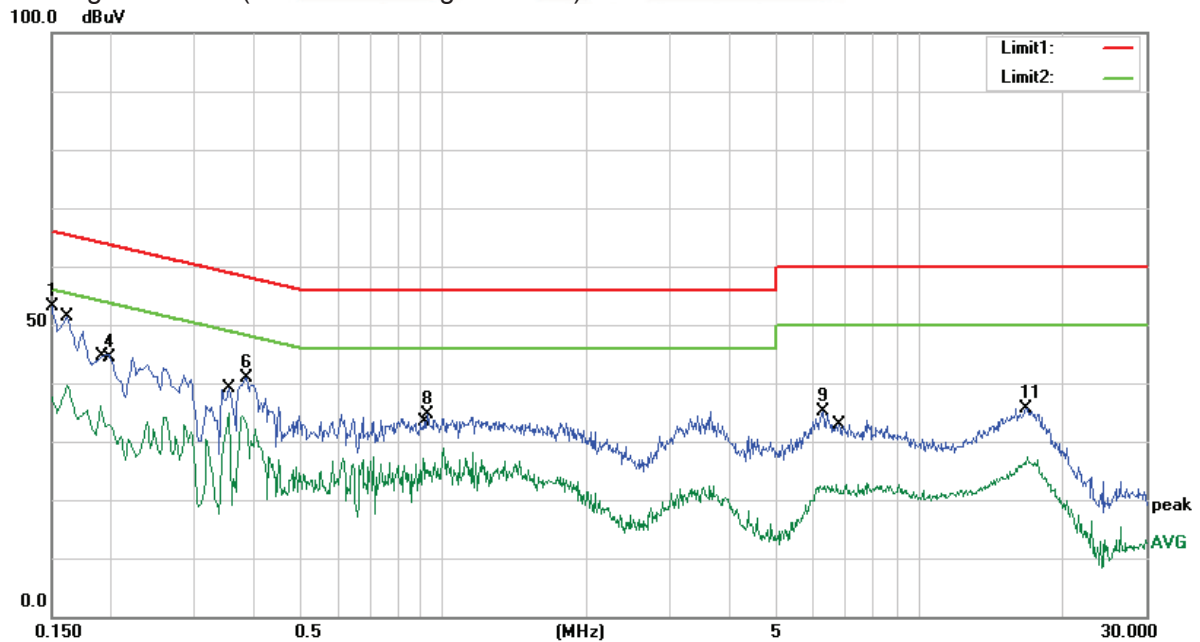




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10 Adapter 2		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1500	34.60	9.75	44.35	66.00	-21.65	QP
0.1500	15.00	9.75	24.75	56.00	-31.25	AVG
0.1660	33.53	9.79	43.32	65.16	-21.84	QP
0.1700	16.71	9.80	26.51	54.96	-28.45	AVG
0.3580	28.24	10.14	38.38	58.77	-20.39	QP
0.3580	21.26	10.14	31.40	48.77	-17.37	AVG
0.7580	12.94	9.85	22.79	46.00	-23.21	QP
0.9140	20.84	9.82	30.66	56.00	-25.34	AVG
6.3060	26.34	9.90	36.24	60.00	-23.76	QP
6.4660	17.67	9.89	27.56	50.00	-22.44	AVG
23.1260	14.37	10.35	24.72	50.00	-25.28	QP
24.5340	19.75	10.29	30.04	60.00	-29.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

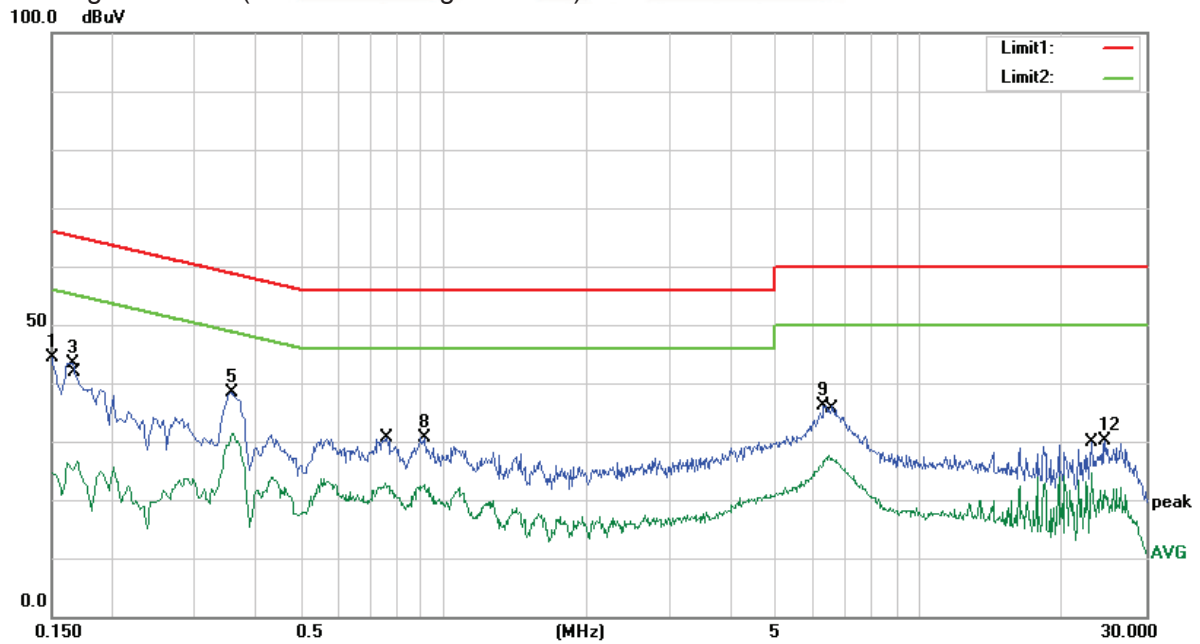




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10 Adapter 2		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1500	34.61	9.75	44.36	66.00	-21.64	QP
0.1660	21.79	9.79	31.58	55.16	-23.58	AVG
0.2740	31.81	10.17	41.98	61.00	-19.02	QP
0.2740	23.42	10.17	33.59	51.00	-17.41	AVG
0.3500	34.60	10.16	44.76	58.96	-14.20	QP
0.3540	28.76	10.15	38.91	48.87	-9.96	AVG
0.9100	22.98	9.82	32.80	56.00	-23.20	QP
0.9700	12.37	9.81	22.18	46.00	-23.82	AVG
6.4900	24.34	9.89	34.23	60.00	-25.77	QP
6.4900	15.62	9.89	25.51	50.00	-24.49	AVG
23.1300	22.05	10.35	32.40	60.00	-27.60	QP
23.1300	16.44	10.35	26.79	50.00	-23.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor) –Limit

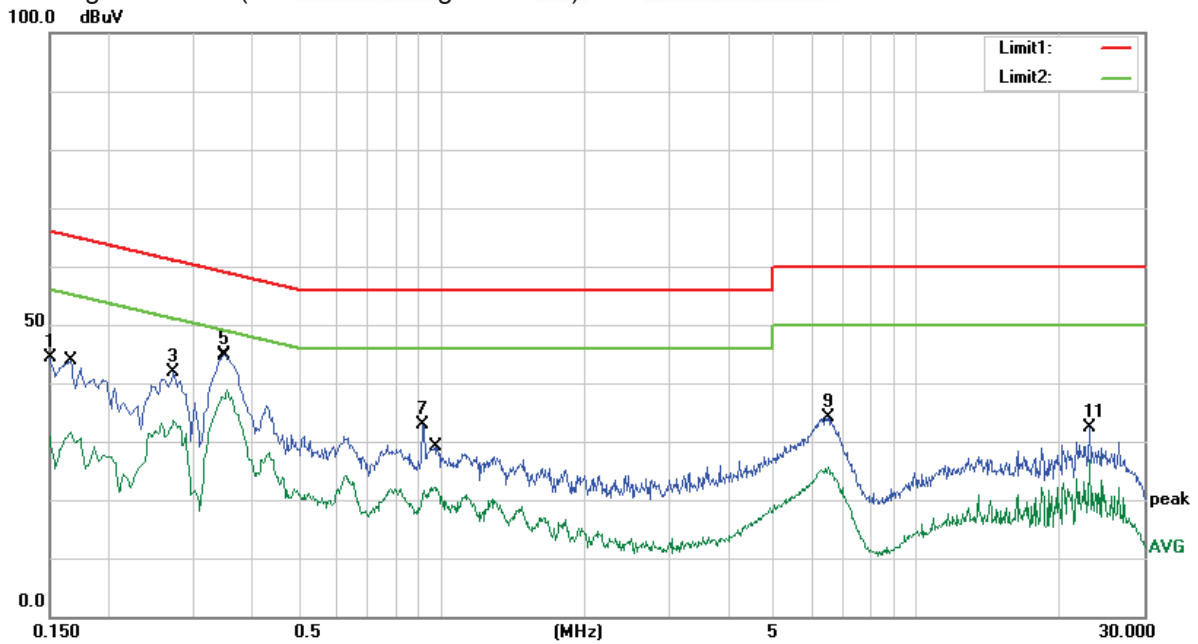




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 11 (Part 15B) Adapter 1		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1500	43.25	9.75	53.00	66.00	-13.00	QP
0.1500	30.45	9.75	40.20	56.00	-15.80	AVG
0.3860	31.57	10.09	41.66	58.15	-16.49	QP
0.3860	26.63	10.09	36.72	48.15	-11.43	AVG
1.0820	25.75	9.81	35.56	56.00	-20.44	QP
1.0820	19.16	9.81	28.97	46.00	-17.03	AVG
3.5980	24.41	9.93	34.34	56.00	-21.66	QP
3.6220	13.22	9.93	23.15	46.00	-22.85	AVG
6.2180	23.73	9.90	33.63	60.00	-26.37	QP
6.3420	11.90	9.90	21.80	50.00	-28.20	AVG
16.9700	16.33	10.23	26.56	50.00	-23.44	QP
17.2500	25.17	10.25	35.42	60.00	-24.58	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

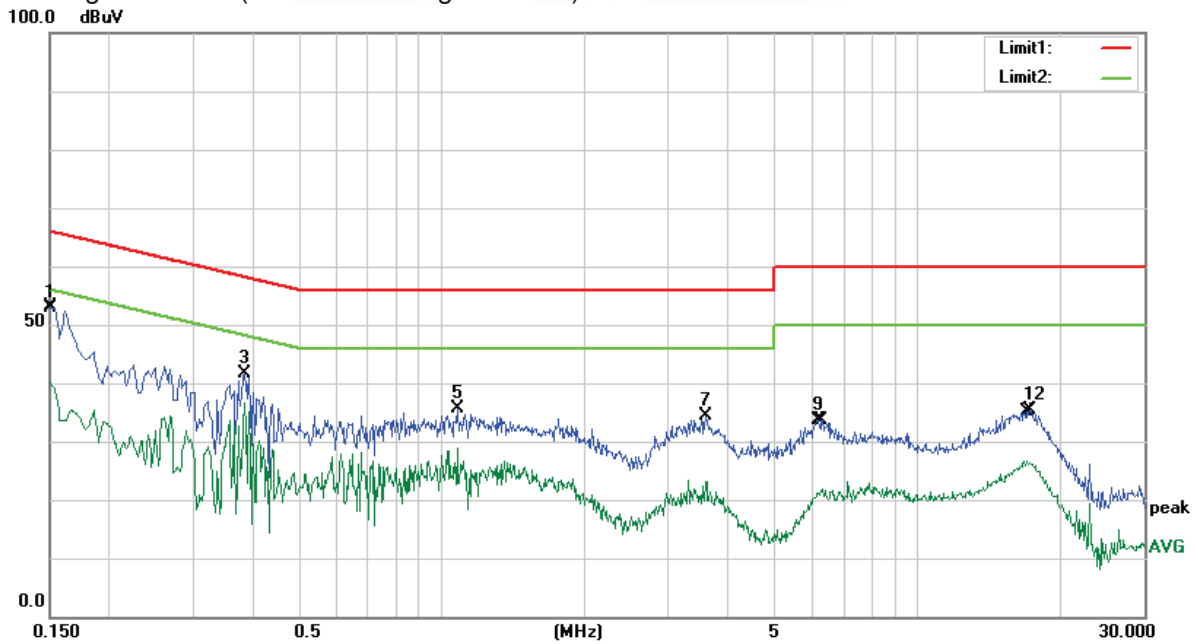




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 11 (Part 15B) Adapter 1		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1500	31.13	9.79	40.92	56.00	-15.08	QP
0.1540	43.44	9.79	53.23	65.78	-12.55	AVG
0.1740	40.96	9.79	50.75	64.77	-14.02	QP
0.1740	30.43	9.79	40.22	54.77	-14.55	AVG
0.3820	31.56	10.07	41.63	58.24	-16.61	QP
0.3860	26.91	10.06	36.97	48.15	-11.18	AVG
1.7660	17.66	9.78	27.44	46.00	-18.56	QP
1.8420	26.56	9.78	36.34	56.00	-19.66	AVG
6.1900	14.47	9.87	24.34	50.00	-25.66	QP
6.2500	26.33	9.87	36.20	60.00	-23.80	AVG
16.2300	24.06	10.29	34.35	60.00	-25.65	QP
16.8980	13.82	10.32	24.14	50.00	-25.86	AVG

Remark:

- All readings are Quasi-Peak and Average values.
- Margin = Result (Result = Reading + Factor) – Limit

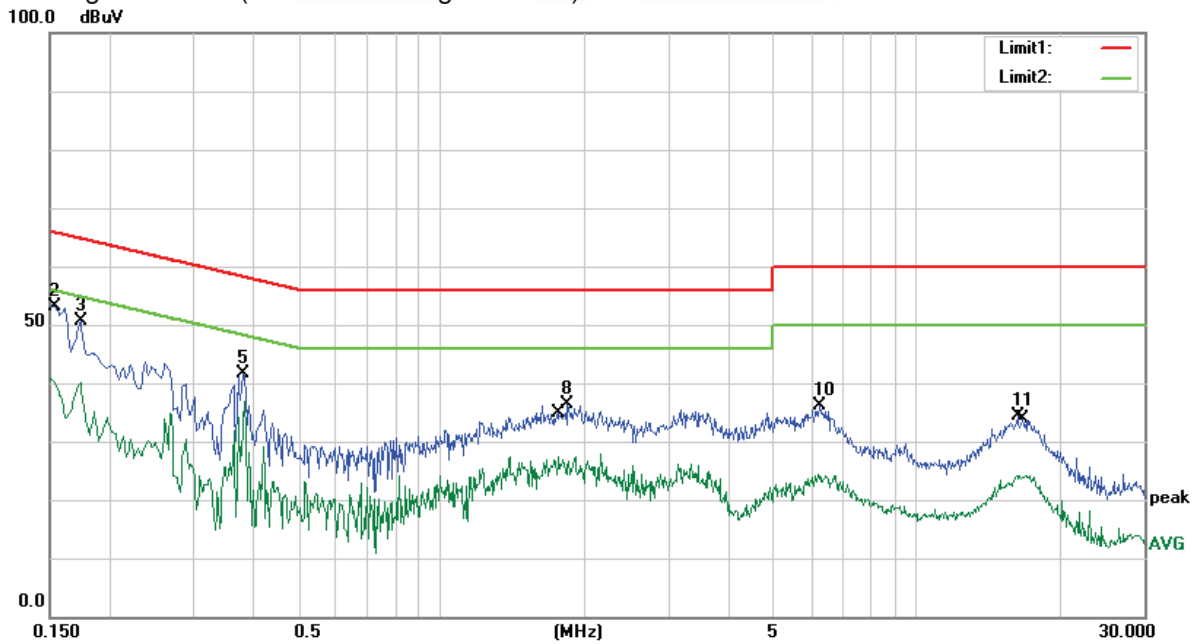




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 12 (Part 15B) Adapter 1		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1620	42.73	9.79	52.52	65.36	-12.84	QP
0.1620	29.31	9.79	39.10	55.36	-16.26	AVG
0.2260	34.75	9.90	44.65	62.60	-17.95	QP
0.2300	21.12	9.91	31.03	52.45	-21.42	AVG
0.3820	31.95	10.07	42.02	58.24	-16.22	QP
0.3820	25.07	10.07	35.14	48.24	-13.10	AVG
1.8100	26.19	9.78	35.97	56.00	-20.03	QP
1.8340	17.52	9.78	27.30	46.00	-18.70	AVG
6.3460	25.81	9.87	35.68	60.00	-24.32	QP
6.4980	14.34	9.87	24.21	50.00	-25.79	AVG
17.0060	24.62	10.33	34.95	60.00	-25.05	QP
17.0060	14.84	10.33	25.17	50.00	-24.83	AVG

Remark:

- All readings are Quasi-Peak and Average values.
- Margin = Result (Result =Reading + Factor) –Limit

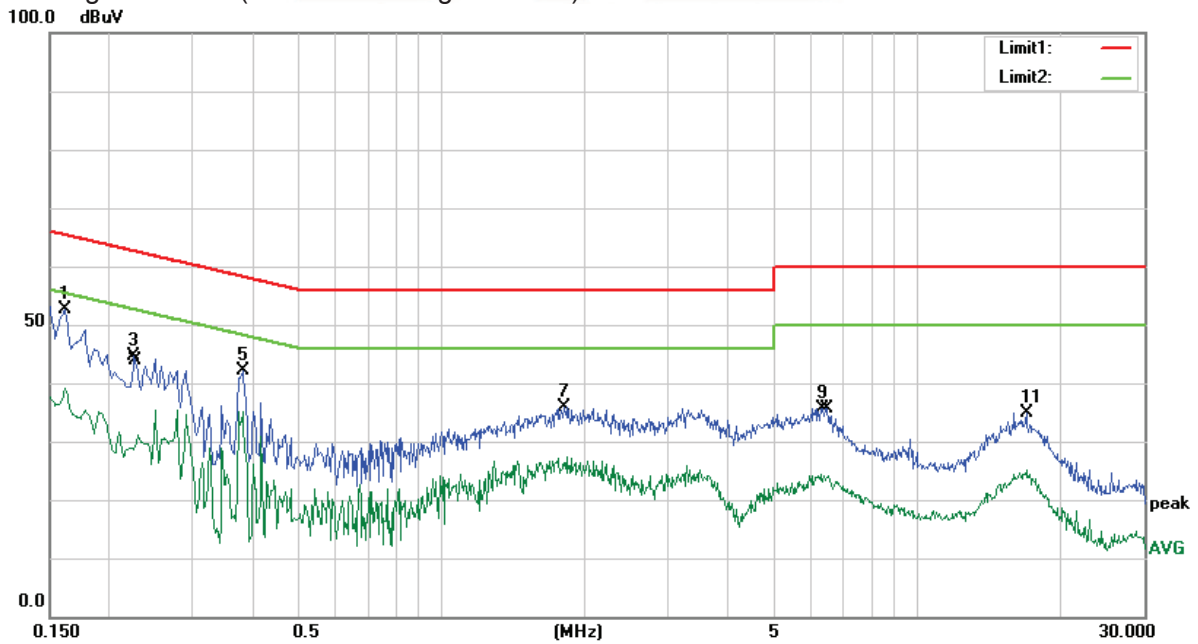




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 12 (Part 15B) Adapter 1		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1540	42.42	9.76	52.18	65.78	-13.60	QP
0.1540	28.44	9.76	38.20	55.78	-17.58	AVG
0.3780	31.10	10.11	41.21	58.32	-17.11	QP
0.3820	23.70	10.10	33.80	48.24	-14.44	AVG
0.9700	24.17	9.81	33.98	56.00	-22.02	QP
0.9700	17.24	9.81	27.05	46.00	-18.95	AVG
3.1380	11.74	9.91	21.65	46.00	-24.35	QP
3.2660	24.11	9.92	34.03	56.00	-21.97	AVG
6.2460	24.50	9.90	34.40	60.00	-25.60	QP
6.3780	12.61	9.90	22.51	50.00	-27.49	AVG
16.7660	25.68	10.22	35.90	60.00	-24.10	QP
17.2260	16.38	10.25	26.63	50.00	-23.37	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor) –Limit

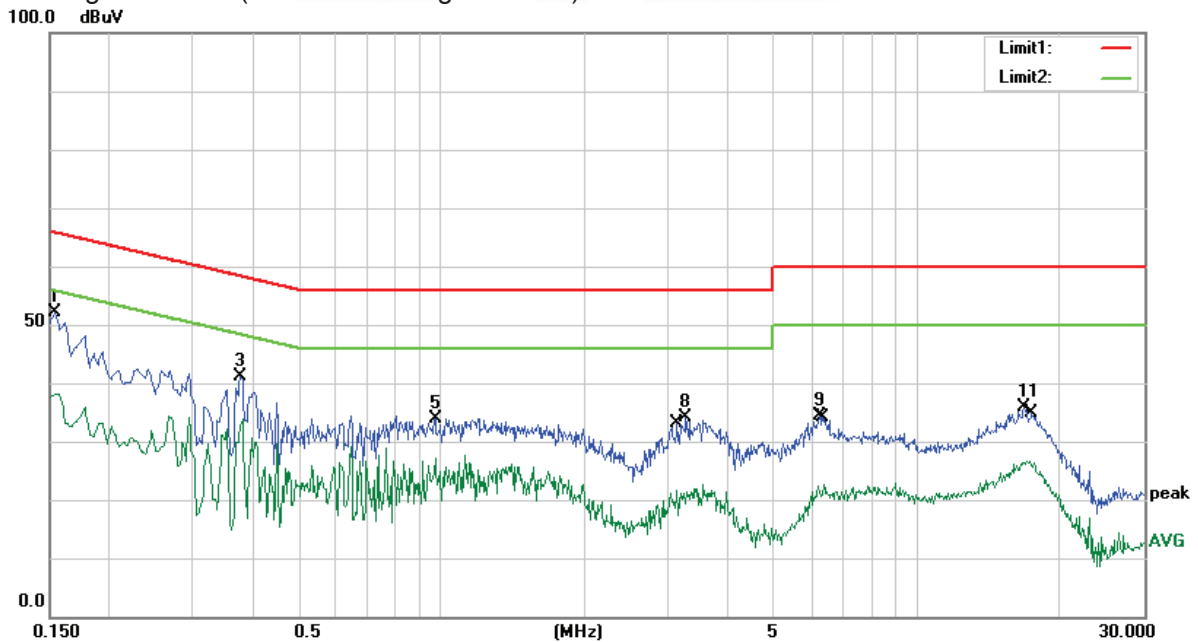




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 13 (Part 15B) Adapter 1		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1540	47.08	9.79	56.87	65.78	-8.91	QP
0.1540	34.67	9.79	44.46	55.78	-11.32	AVG
0.3180	41.10	10.19	51.29	59.76	-8.47	QP
0.3180	32.36	10.19	42.55	49.76	-7.21	AVG
0.4820	26.91	10.03	36.94	56.30	-19.36	QP
0.4820	17.31	10.03	27.34	46.30	-18.96	AVG
5.2980	21.51	9.85	31.36	60.00	-28.64	QP
5.2980	9.74	9.85	19.59	50.00	-30.41	AVG
9.9140	25.38	10.20	35.58	60.00	-24.42	QP
9.9140	15.47	10.20	25.67	50.00	-24.33	AVG
21.6620	20.82	10.36	31.18	60.00	-28.82	QP
21.6620	16.16	10.36	26.52	50.00	-23.48	AVG

Remark:

- All readings are Quasi-Peak and Average values.
- Margin = Result (Result = Reading + Factor) - Limit

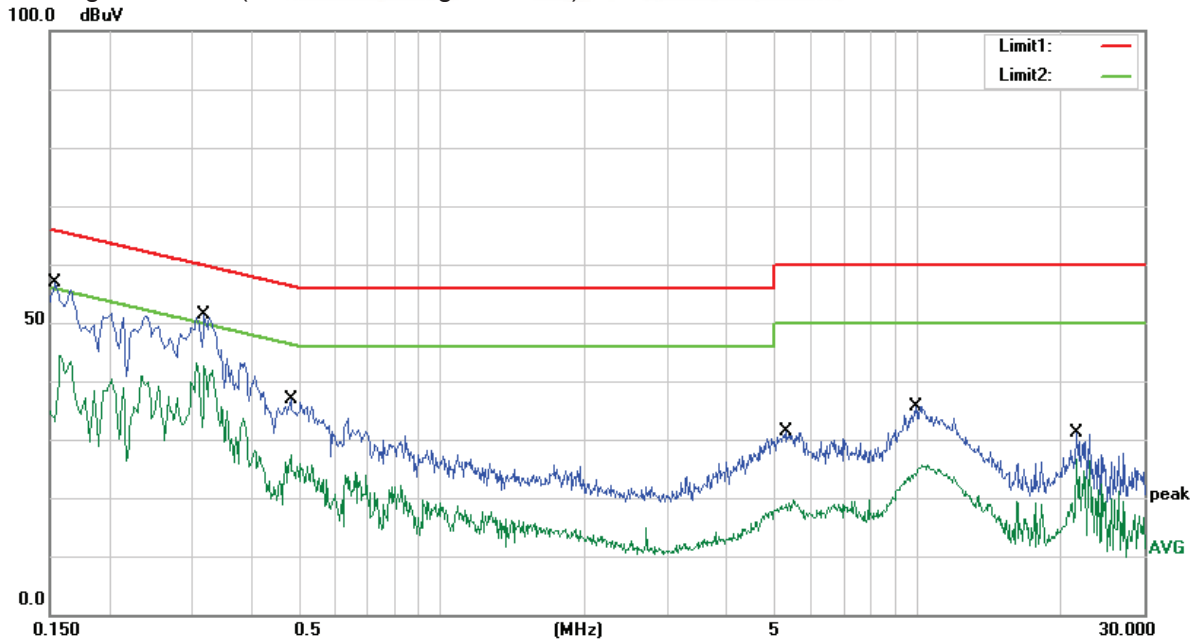




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 13 (Part 15B) Adapter 1		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1582	44.76	9.77	54.53	65.56	-11.03	QP
0.1582	34.05	9.77	43.82	55.56	-11.74	AVG
0.3140	39.92	10.24	50.16	59.86	-9.70	QP
0.3140	31.57	10.24	41.81	49.86	-8.05	AVG
0.3820	32.14	10.10	42.24	58.24	-16.00	QP
0.3820	24.68	10.10	34.78	48.24	-13.46	AVG
5.4980	22.51	9.91	32.42	60.00	-27.58	QP
5.4980	9.99	9.91	19.90	50.00	-30.10	AVG
10.6060	26.03	9.94	35.97	60.00	-24.03	QP
10.6060	16.16	9.94	26.10	50.00	-23.90	AVG
23.1300	20.75	10.35	31.10	60.00	-28.90	QP
23.1300	15.36	10.35	25.71	50.00	-24.29	

Remark:

- All readings are Quasi-Peak and Average values.
- Margin = Result (Result =Reading + Factor)–Limit

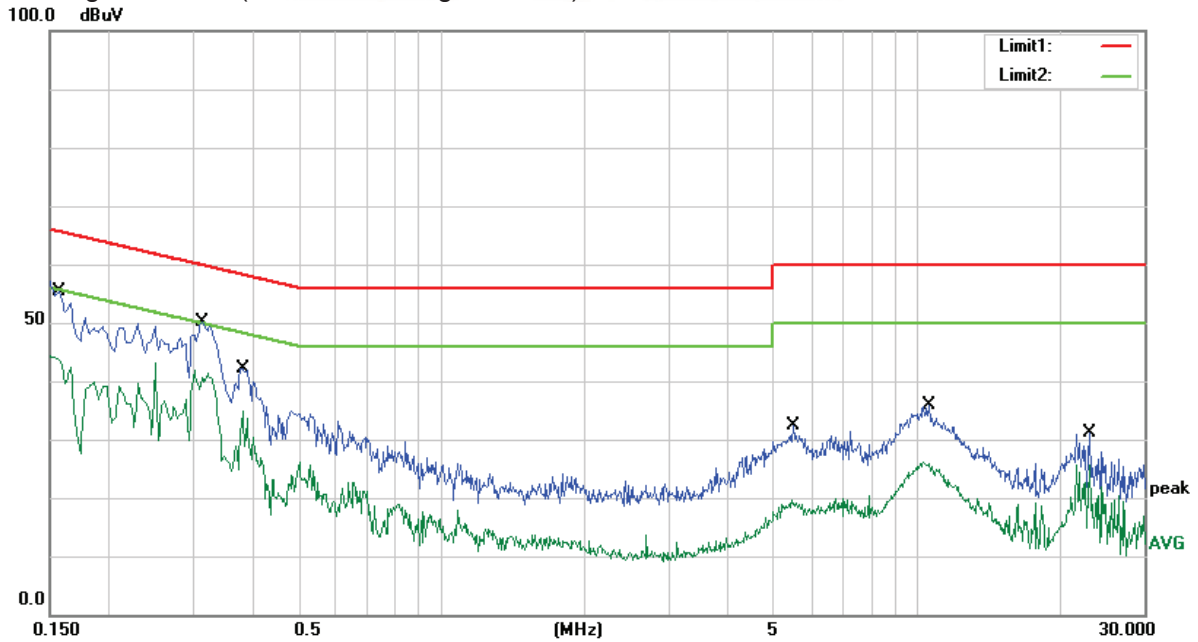




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 13 (Part 15B) Adapter 2 worst case		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1660	36.05	9.79	45.84	65.16	-19.32	QP
0.1660	19.57	9.79	29.36	55.16	-25.80	AVG
0.3580	35.63	10.11	45.74	58.77	-13.03	QP
0.3580	28.99	10.11	39.10	48.77	-9.67	AVG
0.9020	26.98	9.82	36.80	56.00	-19.20	QP
0.9020	19.60	9.82	29.42	46.00	-16.58	AVG
5.9700	32.87	9.87	42.74	60.00	-17.26	QP
5.9700	22.24	9.87	32.11	50.00	-17.89	AVG
10.3740	24.78	10.21	34.99	60.00	-25.01	QP
10.3740	14.38	10.21	24.59	50.00	-25.41	AVG
23.1260	21.61	10.27	31.88	60.00	-28.12	QP
23.1260	15.63	10.27	25.90	50.00	-24.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

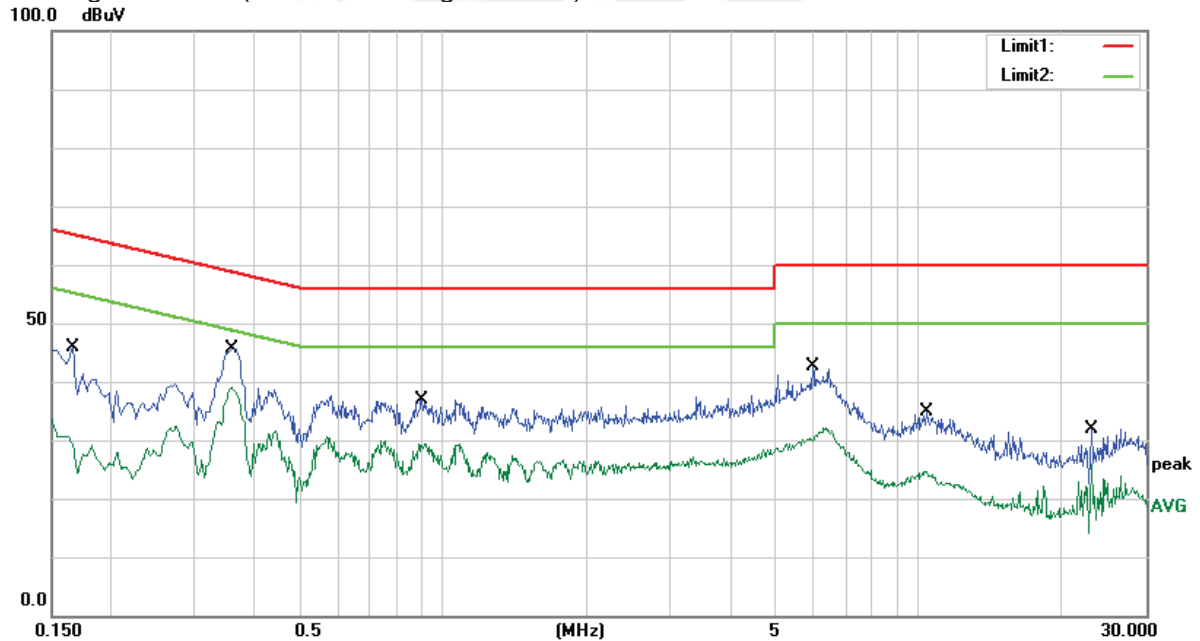




Temperature:	25 °C	Relative Humidity:	61%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 13 (Part 15B) Adapter 2 worst case		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
0.1548	37.47	9.79	47.26	65.74	-18.48	QP
0.1548	21.77	9.79	31.56	55.74	-24.18	AVG
0.3500	36.95	10.13	47.08	58.96	-11.88	QP
0.3500	29.85	10.13	39.98	48.96	-8.98	AVG
0.6500	27.09	9.89	36.98	56.00	-19.02	QP
0.6500	17.87	9.89	27.76	46.00	-18.24	AVG
1.4860	27.85	9.79	37.64	56.00	-18.36	QP
1.4860	16.25	9.79	26.04	46.00	-19.96	AVG
6.1500	32.97	9.87	42.84	60.00	-17.16	QP
6.1500	22.97	9.87	32.84	50.00	-17.16	AVG
15.7180	21.89	10.27	32.16	60.00	-27.84	QP
15.7180	17.27	10.27	27.54	50.00	-22.46	AVG

Remark:

- All readings are Quasi-Peak and Average values.
- Margin = Result (Result =Reading + Factor) –Limit

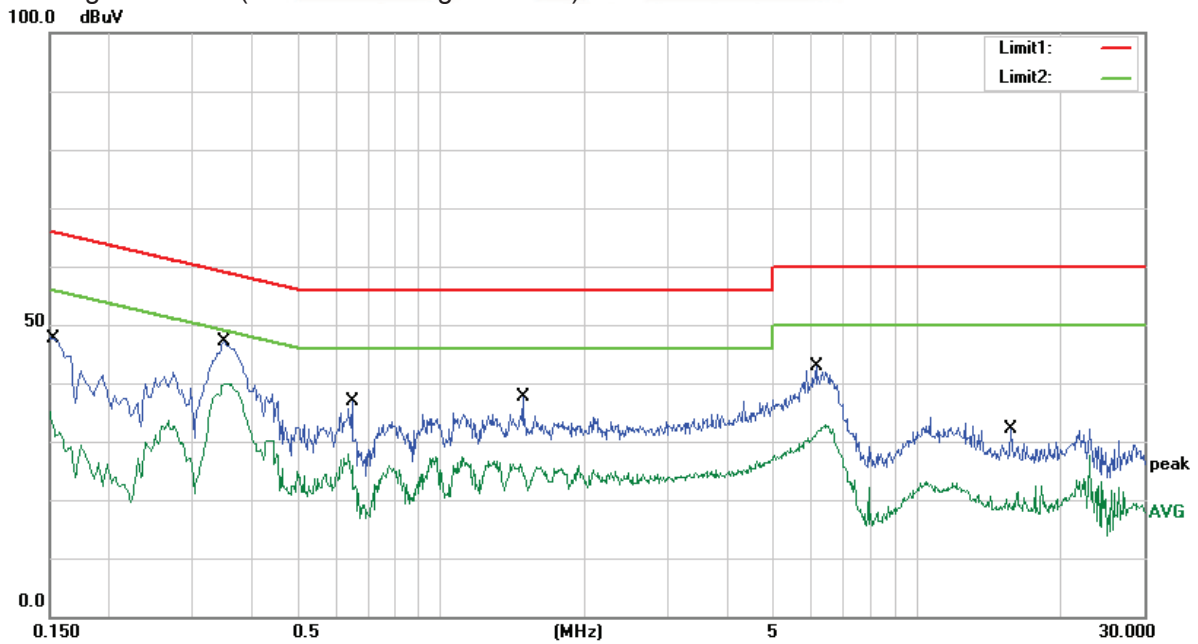



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Class A (at 10m) dBuV/m	Class B (at 3m) dBuV/m
30~88	39.0	40.0
88~216	43.5	43.5
216~960	46.5	46.0
Above 960	49.5	54.0

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Note:

- 1) The tighter limit applies at the band edges.
- 2) Emission level (dBuV/m)=20log Emission level (uV/m).


3.2.2 TEST PROCEDURE

- a) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 0.8 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f) For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 TEST SETUP

a) Radiated Emission Test-Up Frequency 30MHz~1GHz

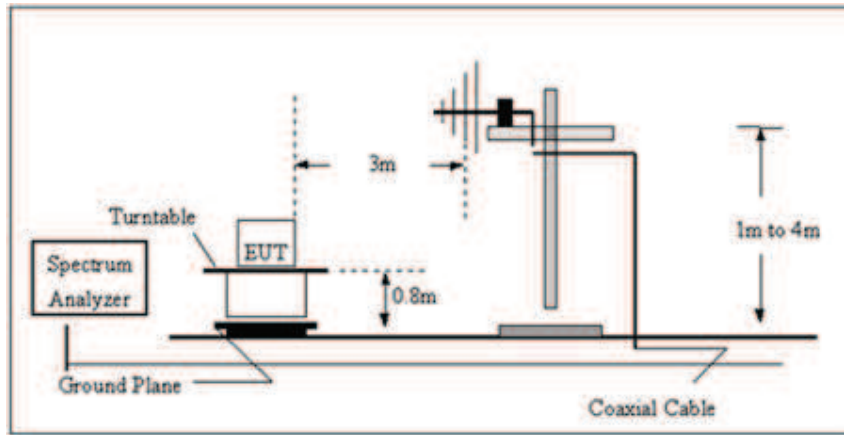

b) Radiated Emission Test-Up Frequency Above 1GHz

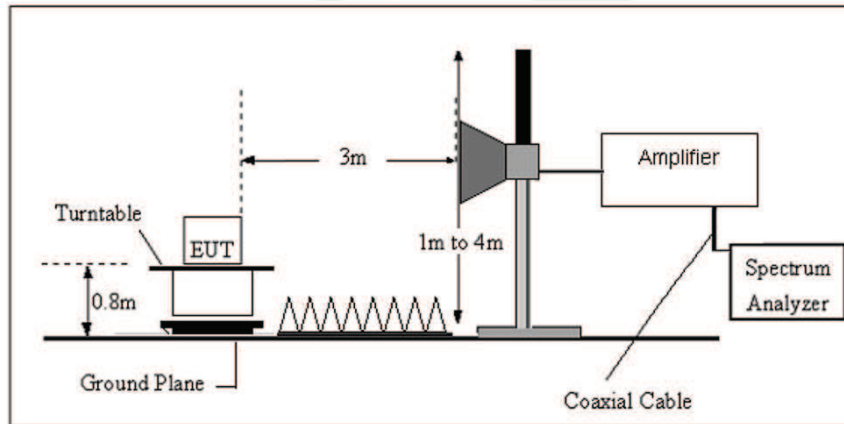

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS


Between 30-1000MHz:

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 11 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.8953	51.11	-14.73	36.38	40.00	-3.62	QP
2	107.8877	52.44	-18.52	33.92	43.50	-9.58	QP
3	162.6106	52.92	-18.71	34.21	43.50	-9.29	QP
4	337.2155	55.37	-14.04	41.33	46.00	-4.67	QP
5	541.3725	48.78	-6.97	41.81	46.00	-4.19	QP
6	758.0408	45.39	-3.60	41.79	46.00	-4.21	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit

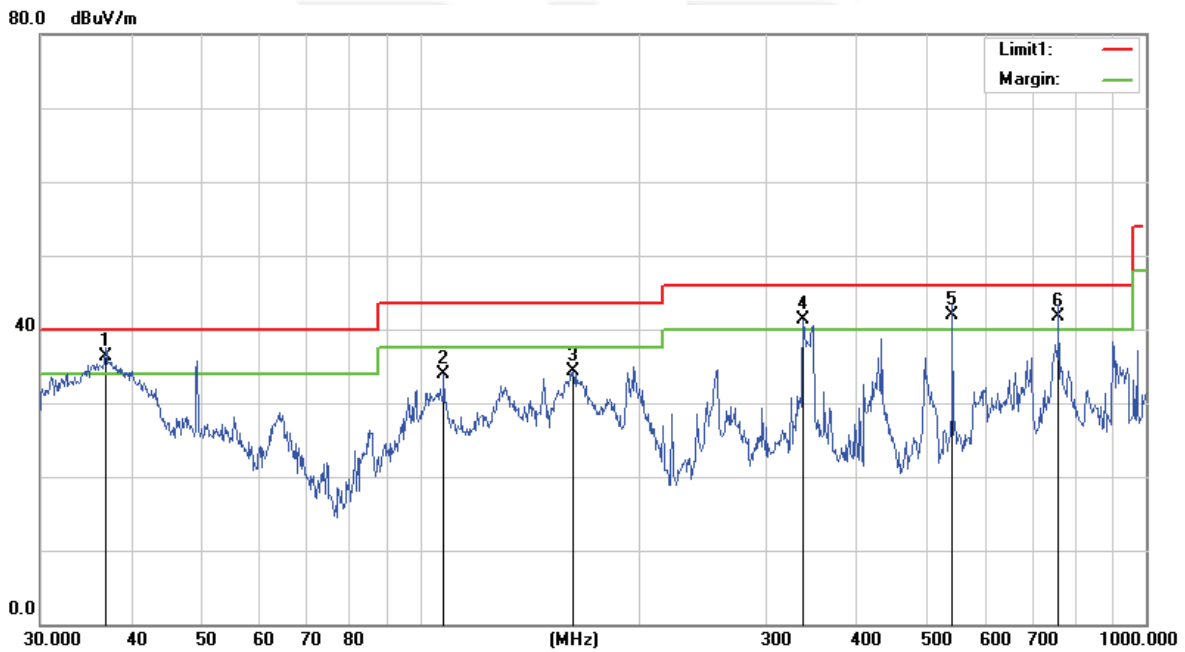




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 11 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.3594	45.80	-21.15	24.65	40.00	-15.35	QP
2	107.8877	47.43	-18.52	28.91	43.50	-14.59	QP
3	197.8926	53.47	-20.19	33.28	43.50	-10.22	QP
4	256.5211	57.79	-15.50	42.29	46.00	-3.71	QP
5	324.4561	55.06	-14.14	40.92	46.00	-5.08	QP
6	758.0408	45.53	-3.60	41.93	46.00	-4.07	QP

Remark:
 1. All readings are Quasi-Peak .
 2. Margin = Result (Result =Reading + Factor)–Limit

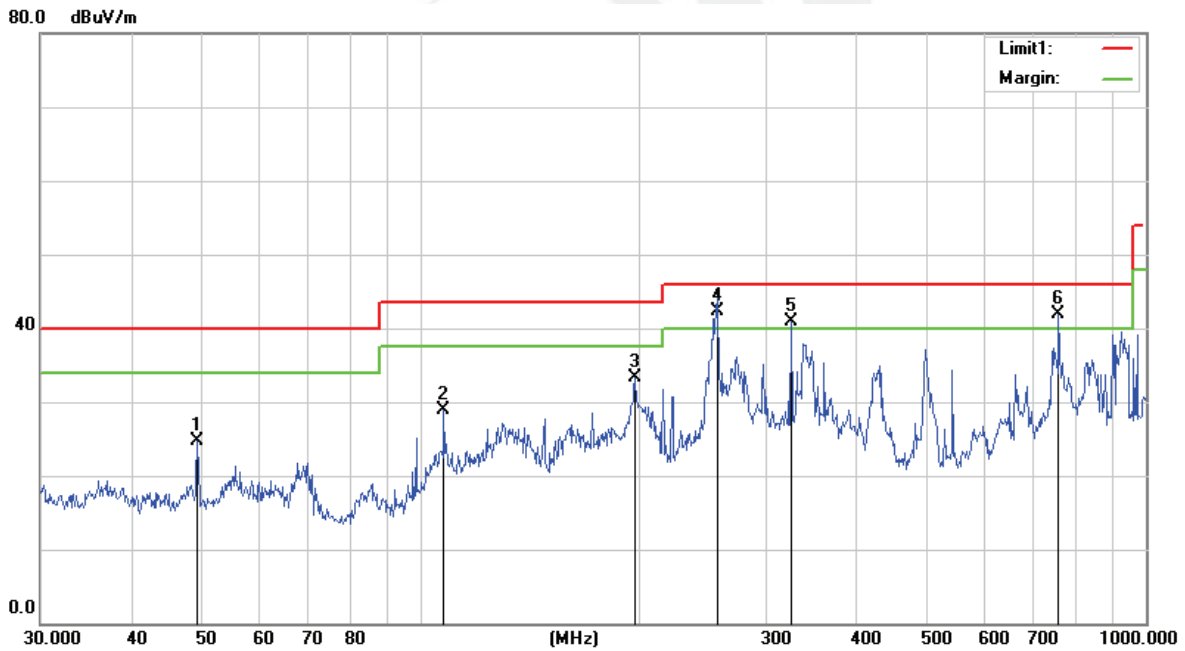




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 12 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	49.3594	46.68	-21.15	25.53	40.00	-14.47	QP
2	197.8928	54.35	-20.19	34.16	43.50	-9.34	QP
3	255.6231	57.32	-15.62	41.70	46.00	-4.30	QP
4	324.4561	54.95	-14.14	40.81	46.00	-5.19	QP
5	758.0408	46.49	-3.60	42.89	46.00	-3.11	QP
6	938.8326	42.70	-0.75	41.95	46.00	-4.05	QP

- Remark:
1. All readings are Quasi-Peak .
 2. Margin = Result (Result =Reading + Factor)–Limit

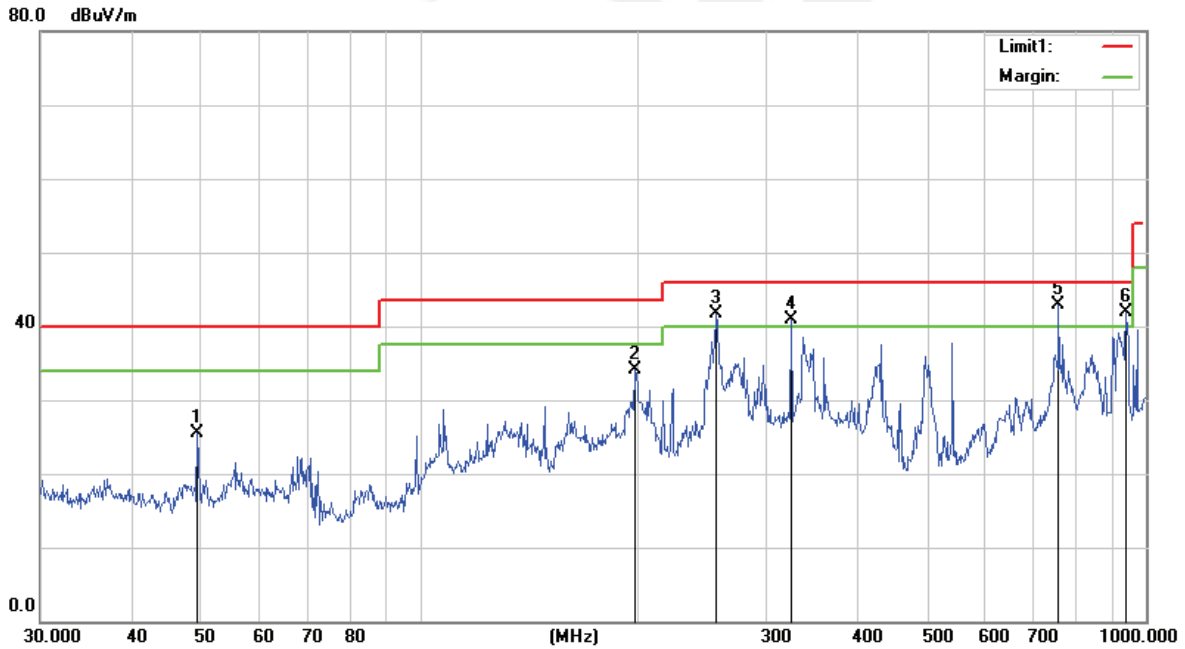



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 12 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.0248	51.46	-14.79	36.67	40.00	-3.33	QP
2	99.8777	54.62	-19.20	35.42	43.50	-8.08	QP
3	160.9090	53.39	-18.57	34.82	43.50	-8.68	QP
4	337.2155	55.34	-14.04	41.30	46.00	-4.70	QP
5	758.0408	45.59	-3.60	41.99	46.00	-4.01	QP
6	972.3374	39.03	-0.14	38.89	54.00	-15.11	QP

Remark:
 1. All readings are Quasi-Peak .
 2. Margin = Result (Result =Reading + Factor)–Limit





Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 13 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	94.0980	51.93	-19.78	32.15	43.50	-11.35	QP
2	138.3873	53.03	-17.51	35.52	43.50	-7.98	QP
3	167.8243	58.44	-19.15	39.29	43.50	-4.21	QP
4	199.2855	58.40	-20.17	38.23	43.50	-5.27	QP
5	504.7062	50.84	-8.89	41.95	46.00	-4.05	QP
6	597.2234	49.72	-7.10	42.62	46.00	-3.38	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit






Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 13 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.1278	50.55	-13.82	36.73	40.00	-3.27	QP
2	85.8984	56.11	-21.22	34.89	40.00	-5.11	QP
3	133.6188	57.28	-17.54	39.74	43.50	-3.76	QP
4	239.9873	56.60	-17.76	38.84	46.00	-7.16	QP
5	432.5457	51.04	-10.89	40.15	46.00	-5.85	QP
6	625.0780	48.85	-6.43	42.42	46.00	-3.58	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit

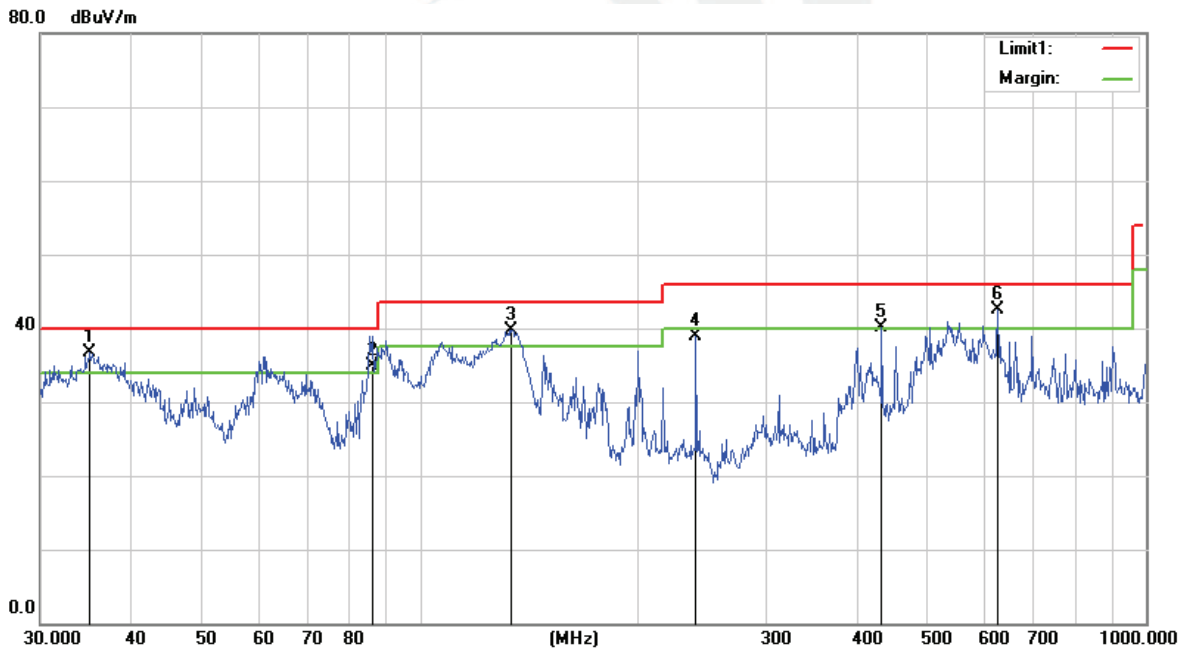




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 12 (part 15B) Adapter 2 worst case

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.1865	58.04	-21.06	36.98	40.00	-3.02	QP
2	98.4866	51.07	-19.35	31.72	43.50	-11.78	QP
3	198.5880	54.88	-20.19	34.69	43.50	-8.81	QP
4	338.4001	53.50	-14.03	39.47	46.00	-6.53	QP
5	428.0193	50.66	-10.90	39.76	46.00	-6.24	QP
6	758.0408	46.32	-3.60	42.72	46.00	-3.28	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit

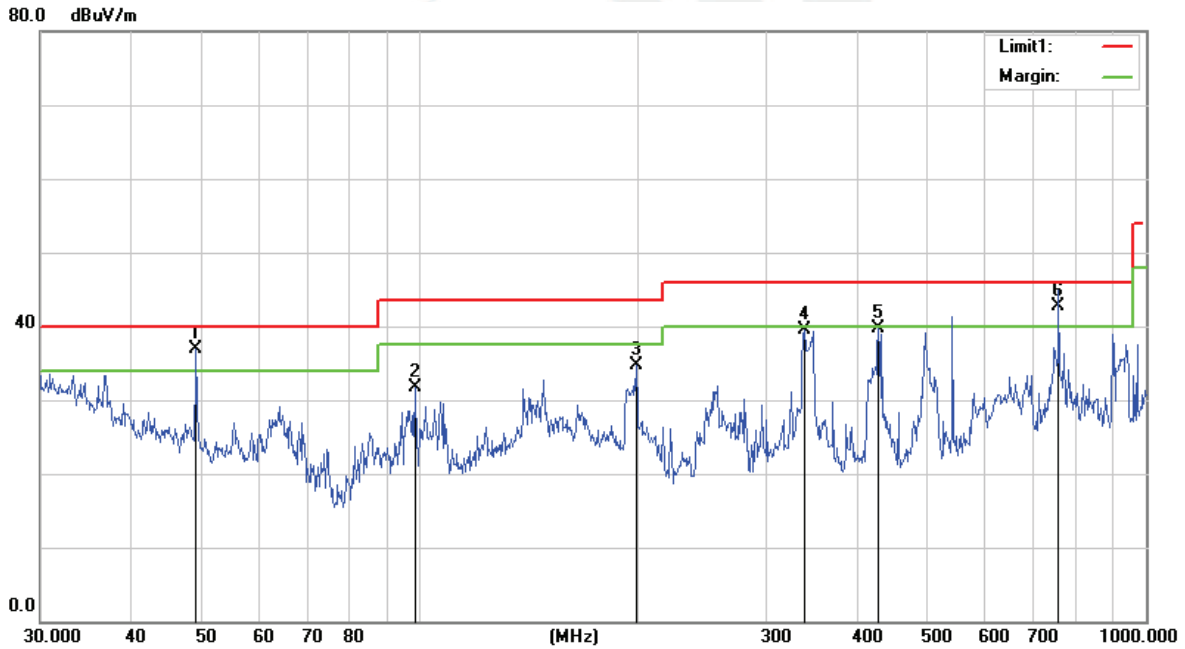




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 12 (part 15B) Adapter 2 worst case

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	49.1865	44.09	-21.06	23.03	40.00	-16.97	QP
2	68.8721	47.04	-24.13	22.91	40.00	-17.09	QP
3	107.8877	45.20	-18.52	26.68	43.50	-16.82	QP
4	256.5211	58.36	-15.50	42.86	46.00	-3.14	QP
5	495.9344	49.91	-9.00	40.91	46.00	-5.09	QP
6	758.0408	45.86	-3.60	42.26	46.00	-3.74	QP

- Remark:
1. All readings are Quasi-Peak .
 2. Margin = Result (Result =Reading + Factor)–Limit

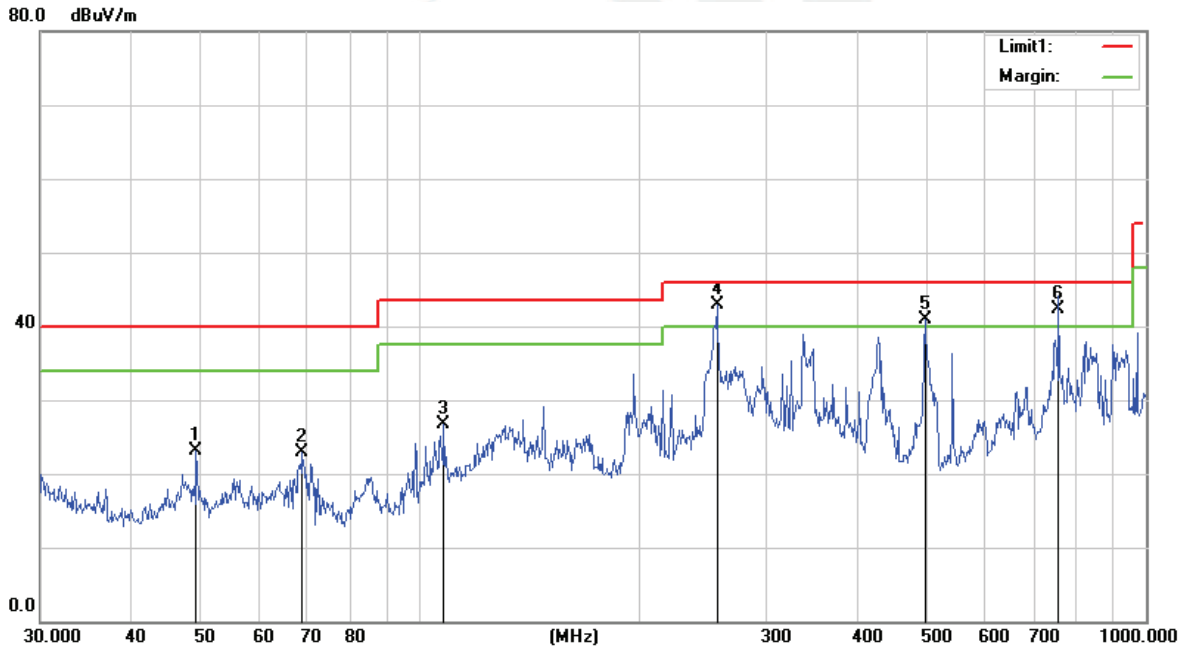




Between 1GHz-18GHz:

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 11 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7987.000	41.83	-0.42	41.41	54.00	-12.59	AVG
2	7987.000	52.12	-0.42	51.70	74.00	-22.30	peak
3	13291.000	41.60	4.29	45.89	54.00	-8.11	AVG
4	13291.000	51.80	4.29	56.09	74.00	-17.91	peak
5	18000.000	40.18	8.13	48.31	54.00	-5.69	AVG
6	18000.000	50.45	8.13	58.58	74.00	-15.42	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

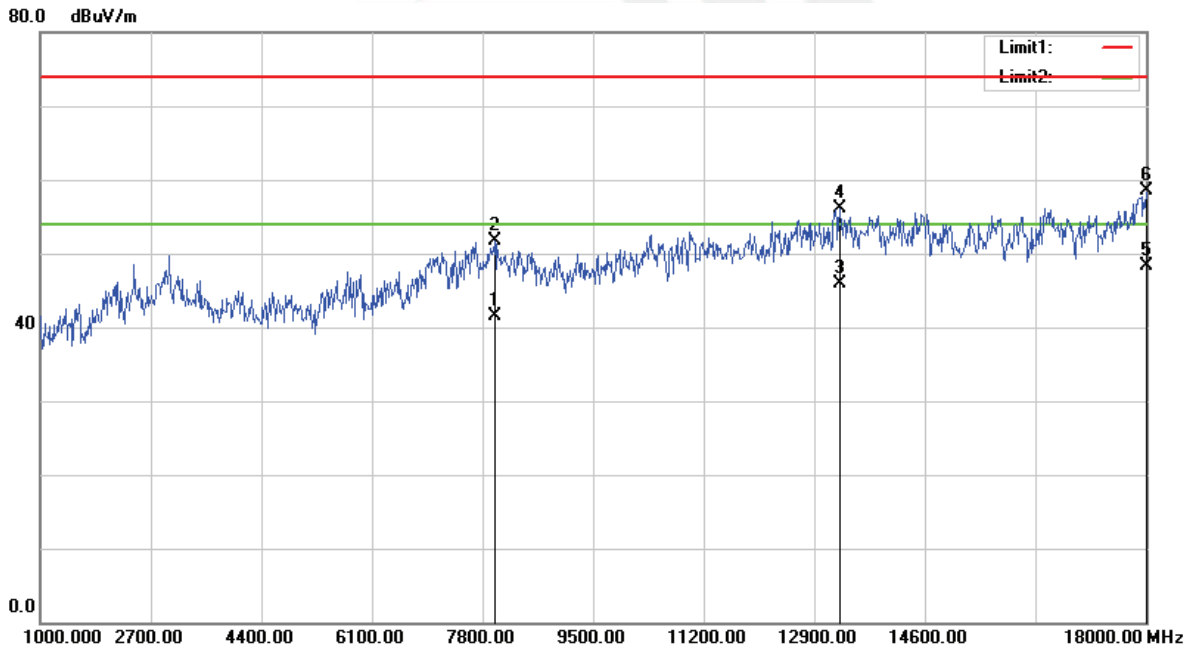




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 11 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7443.000	42.95	-1.74	41.21	54.00	-12.79	AVG
2	7443.000	53.27	-1.74	51.53	74.00	-22.47	peak
3	12968.000	41.69	3.62	45.31	54.00	-8.69	AVG
4	12968.000	51.94	3.62	55.56	74.00	-18.44	peak
5	17949.000	38.77	7.98	46.75	54.00	-7.25	AVG
6	17949.000	48.97	7.98	56.95	74.00	-17.05	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

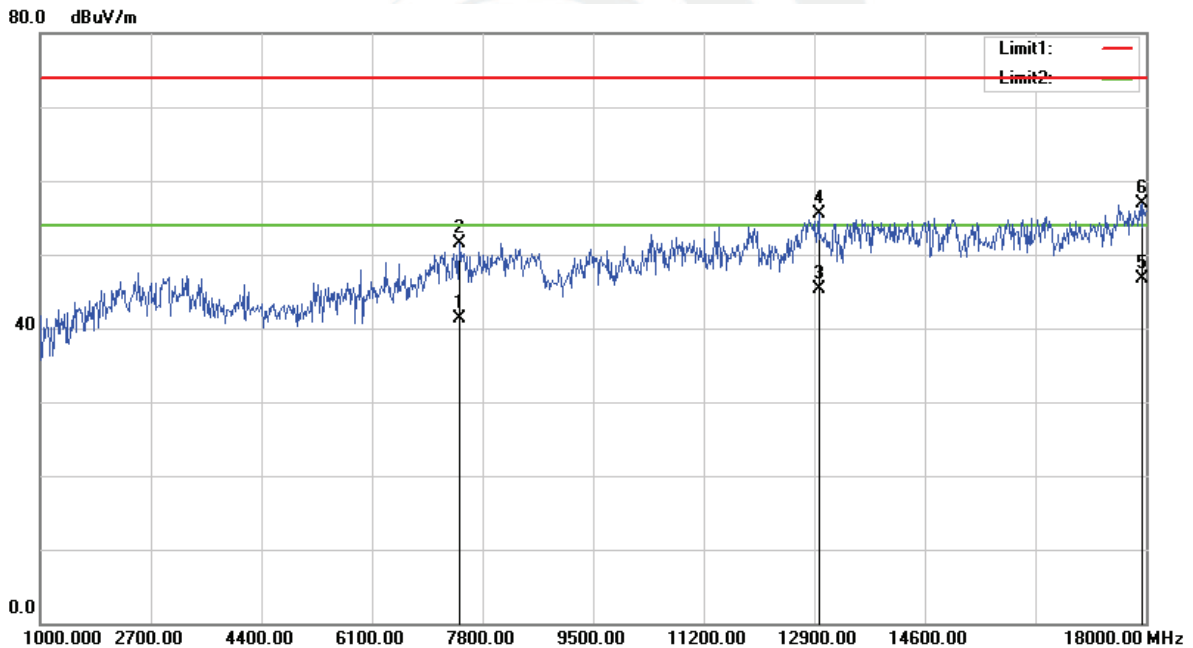




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 12 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11115.000	41.21	2.16	43.37	54.00	-10.63	AVG
2	11115.000	51.54	2.16	53.70	74.00	-20.30	peak
3	13223.000	43.25	3.82	47.07	54.00	-6.93	AVG
4	13223.000	53.45	3.82	57.27	74.00	-16.73	peak
5	17864.000	40.49	7.72	48.21	54.00	-5.79	AVG
6	17864.000	50.76	7.72	58.48	74.00	-15.52	peak

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

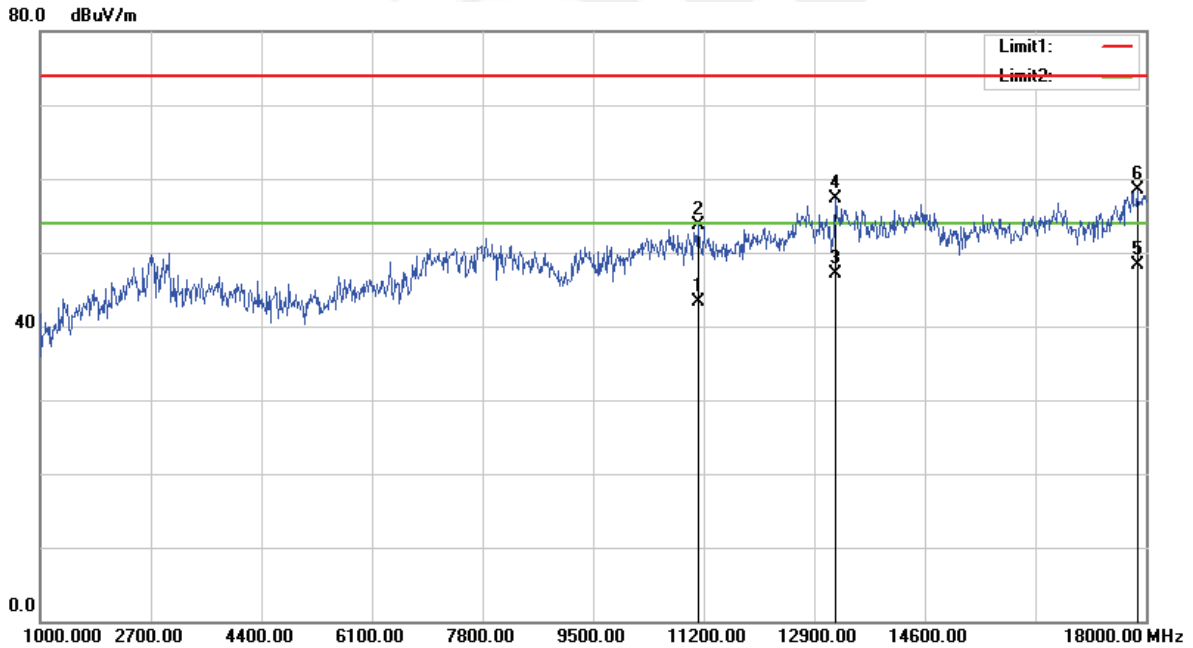




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 12 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	12781.000	40.62	3.87	44.49	54.00	-9.51	AVG
2	12781.000	50.97	3.87	54.84	74.00	-19.16	peak
3	16521.000	41.76	5.35	47.11	54.00	-6.89	AVG
4	16521.000	51.95	5.35	57.30	74.00	-16.70	peak
5	17881.000	40.11	7.77	47.88	54.00	-6.12	AVG
6	17881.000	50.29	7.77	58.06	74.00	-15.94	peak

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit

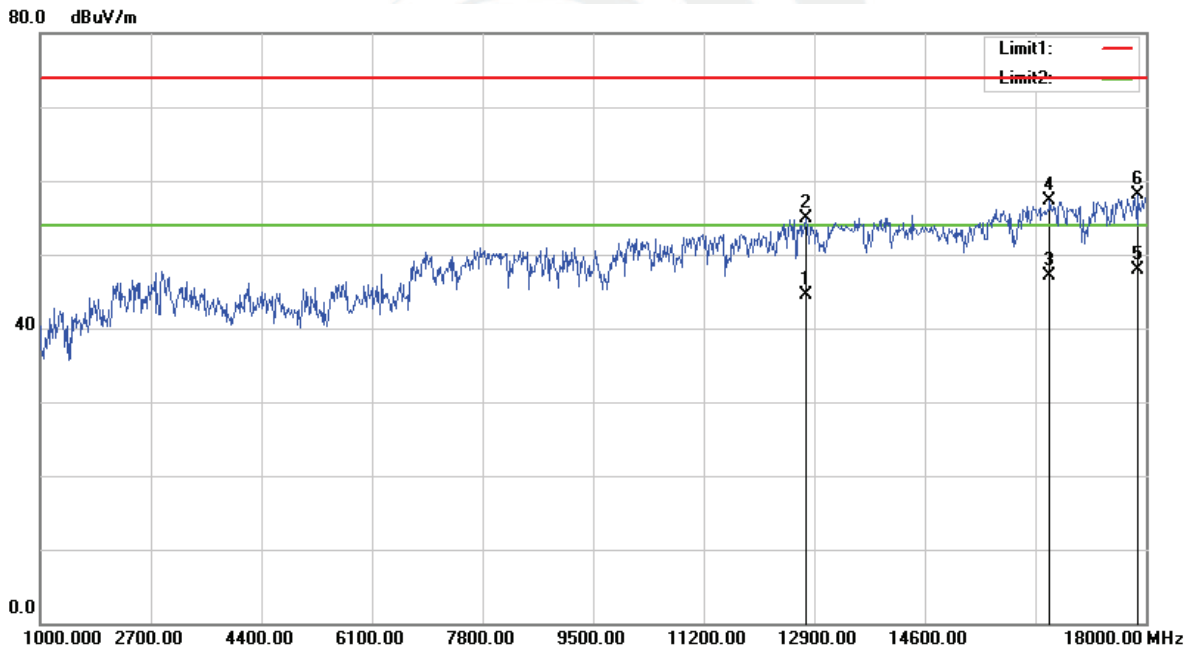




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 13 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	13223.000	41.82	3.82	45.64	54.00	-8.36	AVG
2	13223.000	52.95	3.82	56.77	74.00	-17.23	peak
3	14549.000	40.61	4.39	45.00	54.00	-9.00	AVG
4	14549.000	51.16	4.39	55.55	74.00	-18.45	peak
5	17711.000	38.66	7.27	45.93	54.00	-8.07	AVG
6	17711.000	49.71	7.27	56.98	74.00	-17.02	peak

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit

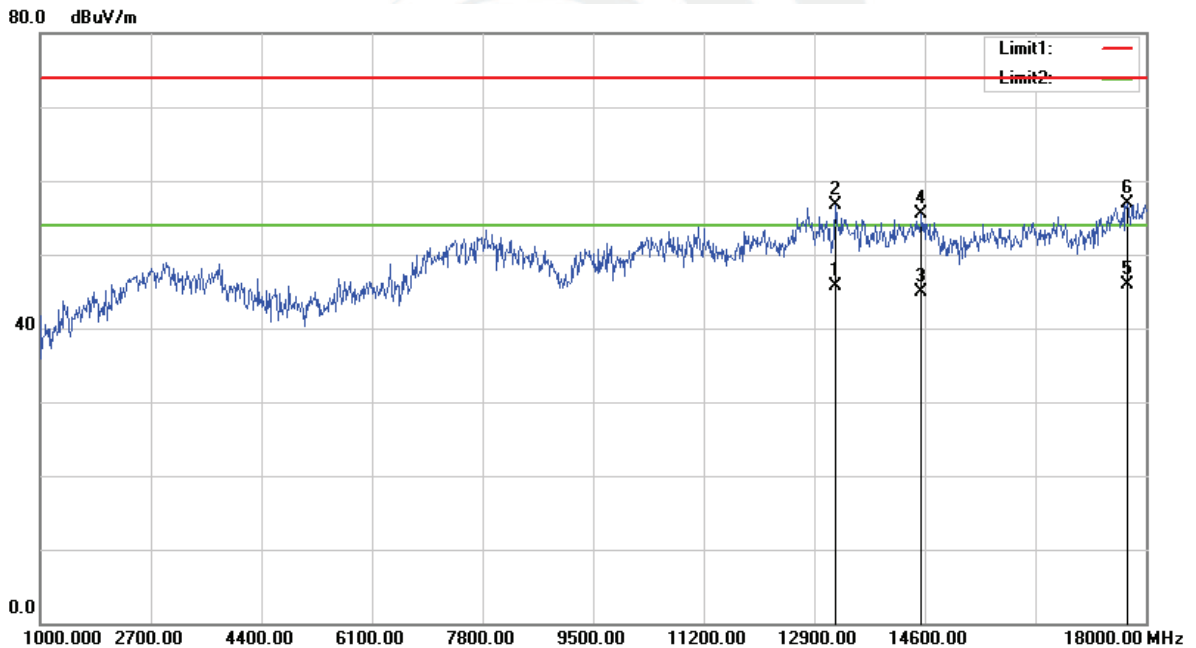




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 13 (part 15B) Adapter 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	14413.000	39.49	4.73	44.22	54.00	-9.78	AVG
2	14413.000	50.04	4.73	54.77	74.00	-19.23	peak
3	16521.000	40.82	5.35	46.17	54.00	-7.83	AVG
4	16521.000	51.45	5.35	56.80	74.00	-17.20	peak
5	17881.000	38.74	7.77	46.51	54.00	-7.49	AVG
6	17881.000	49.79	7.77	57.56	74.00	-16.44	peak

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit

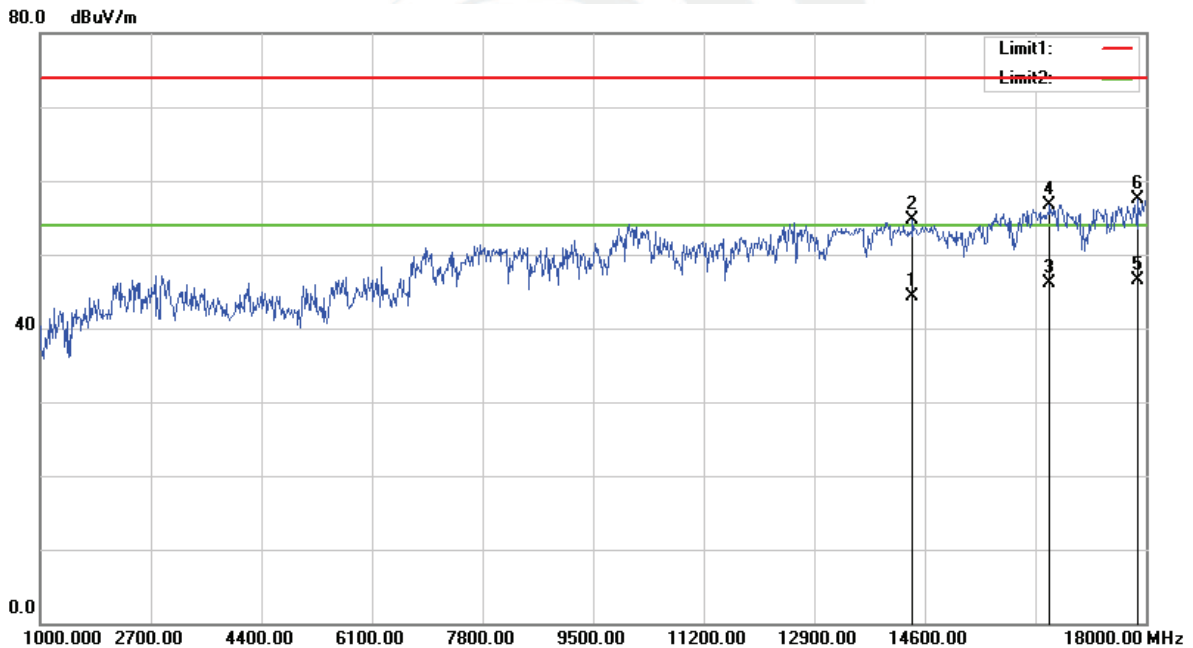



3.3 RADIATED SPURIOUS EMISSION MEASUREMENT

3.3.1 RADIATED EMISSION LIMITS

in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz /3MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2422 MHz Upper Band Edge: 2452 to 2500 MHz
RB / VB (emission in restricted band)	1 MHz /3MHz



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.3.2 TEST PROCEDURE


- a) The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b) The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- d) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f) For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.3.3 TEST SETUP


a) Radiated Emission Test-Up Frequency Below 30MHz

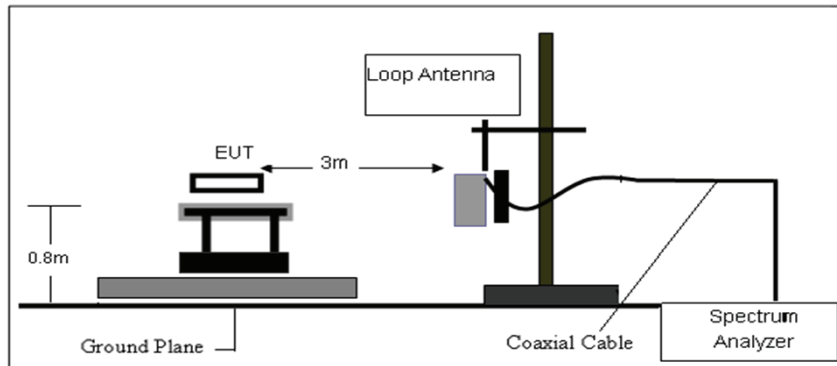

b) Radiated Emission Test-Up Frequency 30MHz~1GHz

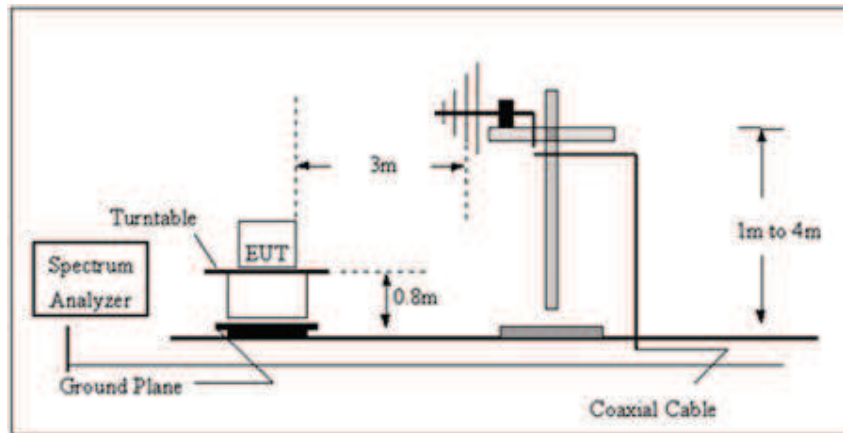

c) Radiated Emission Test-Up Frequency Above 1GHz

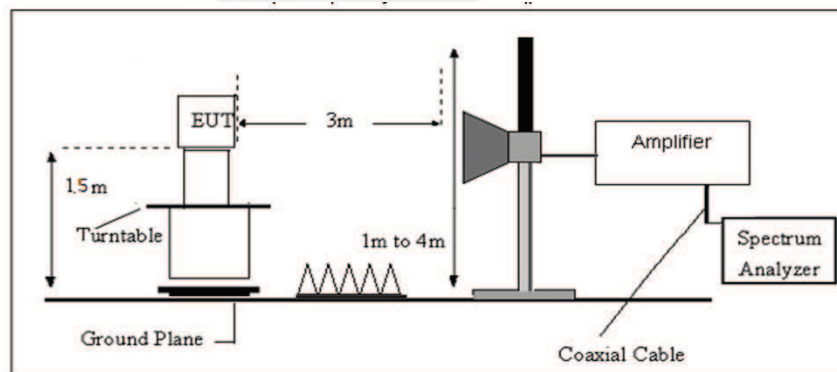

3.3.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.3.6 TEST RESULT

9KHz-30MHz

Temperature:	25 °C	Relative Humidity:	61%
Test Voltage :	AC 120V/60Hz	Polarization :	--
Test Mode :	TX Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



(30MHz - 1000MHz)


Temperature:	25.7 °C	Relative Humidity:	63%
Test Voltage :	AC 120V/60Hz	Polarization :	Horizontal
Test Mode :	Mode 1/2/3/4/5/6/7/8/9(Mode 2-1Mbps worst mode) Adapter 1		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
69.8450	46.92	-24.10	22.82	40.00	-17.18	QP
142.3243	49.33	-17.62	31.71	43.50	-11.79	QP
256.5211	56.39	-15.50	40.89	46.00	-5.11	QP
337.2155	49.88	-14.04	35.84	46.00	-10.16	QP
513.6331	41.75	-8.86	32.89	46.00	-13.11	QP
900.1474	43.97	-2.26	41.71	46.00	-4.29	QP

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit

80.0 dBuV/m

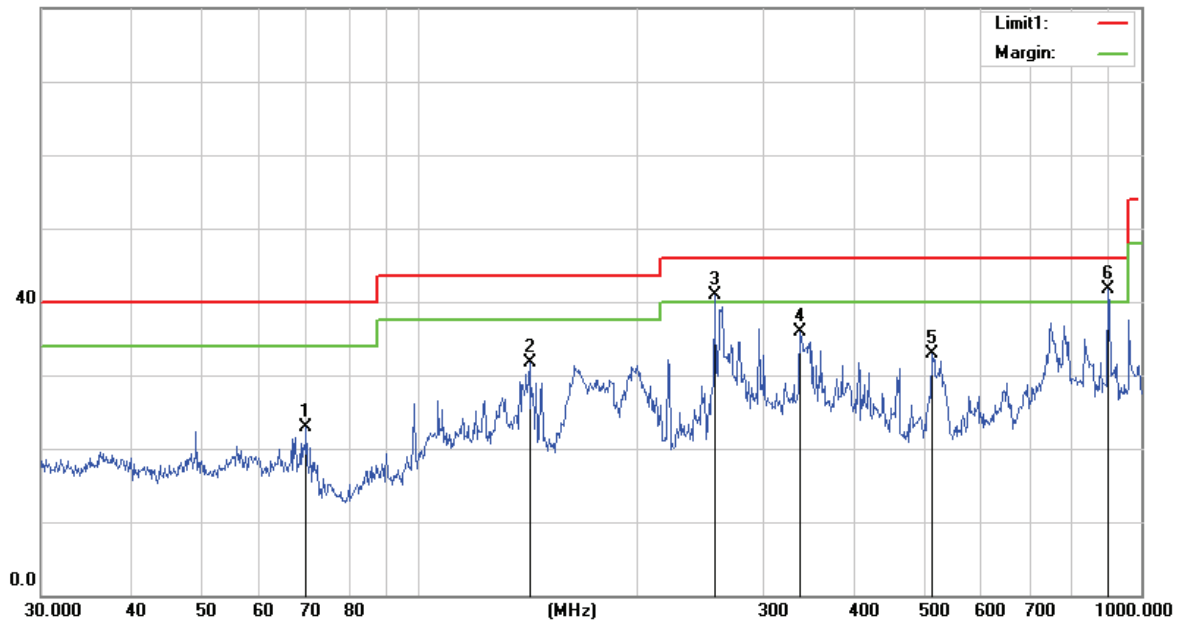



Temperature:	25.7 °C	Relative Humidity:	63%
Test Voltage :	AC 120V/60Hz	Polarization :	Vertical
Test Mode :	Mode 1/2/3/4/5/6/7/8/9(Mode 2-1Mbps worst mode) Adapter 1		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
36.8953	51.45	-14.73	36.72	40.00	-3.28	QP
131.7577	52.49	-17.54	34.95	43.50	-8.55	QP
346.8092	52.58	-13.72	38.86	46.00	-7.14	QP
526.3967	41.81	-8.26	33.55	46.00	-12.45	QP
750.1083	42.85	-3.56	39.29	46.00	-6.71	QP
900.1474	43.31	-2.26	41.05	46.00	-4.95	

Remark:.

1. Margin = Result (Result =Reading + Factor)-Limit

80.0 dBuV/m






Temperature:	25.7 °C	Relative Humidity:	63%
Test Voltage :	AC 120V/60Hz	Polarization :	Horizontal
Test Mode :	Mode 1/2/3/4/5/6/7/8/9(Mode 2-1Mbps worst mode) Adapter 2		

Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
49.3594	42.33	-21.15	21.18	40.00	-18.82	QP
68.3908	46.47	-24.14	22.33	40.00	-17.67	QP
147.9214	46.80	-17.88	28.92	43.50	-14.58	QP
256.5211	57.79	-15.50	42.29	46.00	-3.71	QP
495.9344	51.21	-9.00	42.21	46.00	-3.79	QP
758.0408	45.39	-3.60	41.79	46.00	-4.21	QP

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit

80.0 dBUV/m

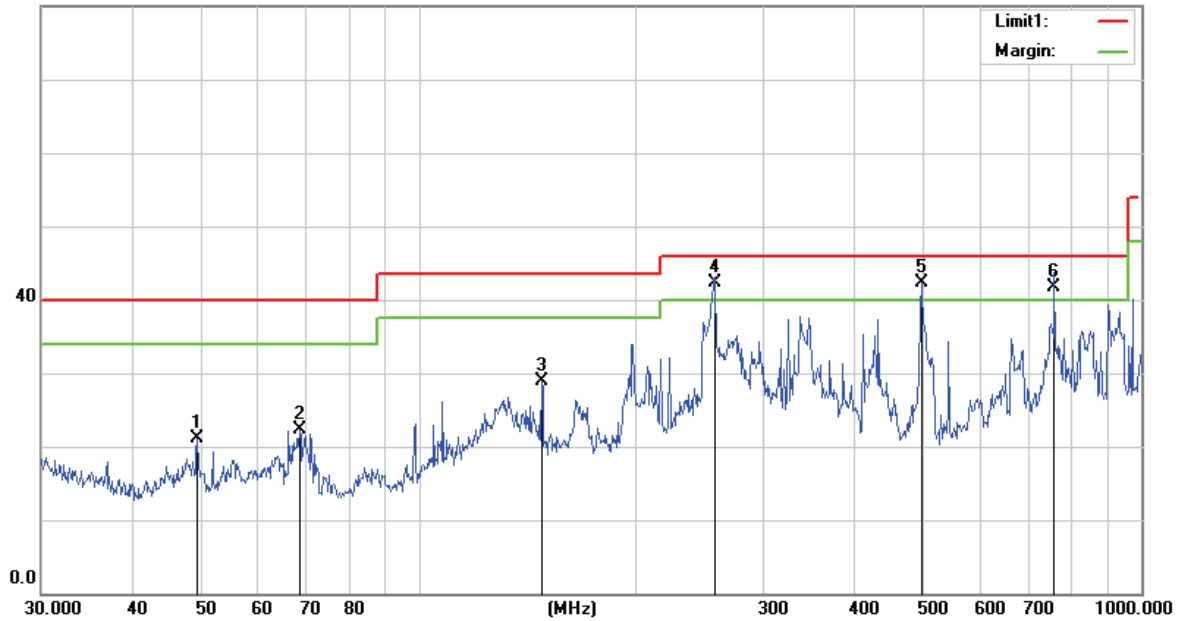




Temperature:	25.7 °C	Relative Humidity:	63%
Test Voltage :	AC 120V/60Hz	Polarization :	Vertical
Test Mode :	Mode 1/2/3/4/5/6/7/8/9(Mode 2-1Mbps worst mode) Adapter 2		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.7455	46.21	-11.57	34.64	40.00	-5.36	QP
49.3594	55.39	-21.15	34.24	40.00	-5.76	QP
197.8928	51.24	-20.19	31.05	43.50	-12.45	QP
432.5457	49.72	-10.89	38.83	46.00	-7.17	QP
541.3725	48.20	-6.97	41.23	46.00	-4.77	QP
758.0407	45.81	-3.60	42.21	46.00	-3.79	QP

Remark:.

1. Margin = Result (Result =Reading + Factor)-Limit

80.0 dBuV/m

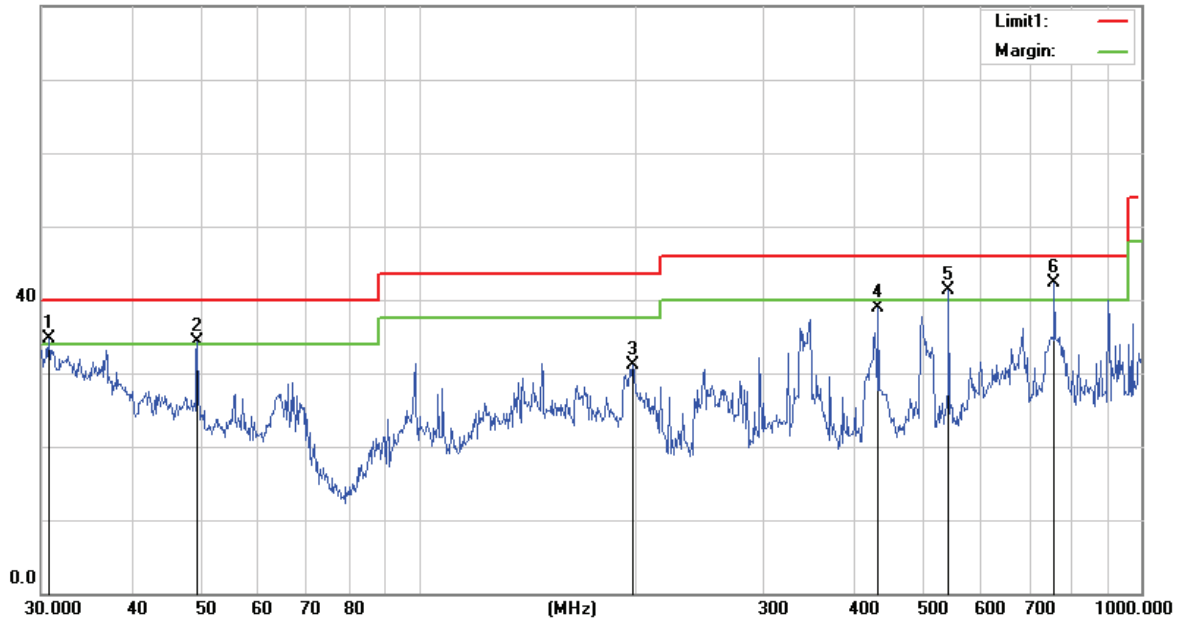



(1000MHz-25GHz) Restricted band and Spurious emission Requirements

802.11b Low Channel

Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	ANT	Verdict
3264.72	-9.80	38.40	74.00	-35.60	Peak	Vertical	Pass
3264.72	-9.80	29.47	54.00	-24.53	Average	Vertical	Pass
3264.70	-9.80	39.08	74.00	-34.92	Peak	Horizontal	Pass
3264.70	-9.80	28.25	54.00	-25.75	Average	Horizontal	Pass
4824.46	-3.56	55.05	74.00	-18.95	Peak	Vertical	Pass
4824.46	-3.56	35.74	54.00	-18.26	Average	Vertical	Pass
4824.52	-3.56	55.56	74.00	-18.44	Peak	Horizontal	Pass
4824.52	-3.56	35.26	54.00	-18.74	Average	Horizontal	Pass
5359.63	-2.34	43.36	74.00	-30.64	Peak	Vertical	Pass
5359.63	-2.34	35.35	54.00	-18.65	Average	Vertical	Pass
5359.79	-2.34	43.32	74.00	-30.68	Peak	Horizontal	Pass
5359.79	-2.34	35.81	54.00	-18.19	Average	Horizontal	Pass
7235.74	3.40	54.88	74.00	-19.12	Peak	Vertical	Pass
7235.74	3.40	36.77	54.00	-17.23	Average	Vertical	Pass
7235.80	3.40	54.72	74.00	-19.28	Peak	Horizontal	Pass
7235.95	3.40	34.72	54.00	-19.28	Average	Horizontal	Pass

**802.11b Mid Channel**

Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	ANT	Verdict
3264.74	-9.80	39.27	74.00	-34.73	Peak	Vertical	Pass
3264.74	-9.80	29.98	54.00	-24.02	Average	Vertical	Pass
3264.71	-9.80	38.02	74.00	-35.98	Peak	Horizontal	Pass
3264.71	-9.80	28.28	54.00	-25.72	Average	Horizontal	Pass
4874.53	-3.56	56.03	74.00	-17.97	Peak	Vertical	Pass
4874.53	-3.56	34.66	54.00	-19.34	Average	Vertical	Pass
4874.43	-3.56	55.97	74.00	-18.03	Peak	Horizontal	Pass
4874.43	-3.56	34.81	54.00	-19.19	Average	Horizontal	Pass
5359.79	-2.34	42.78	74.00	-31.22	Peak	Vertical	Pass
5359.79	-2.34	35.33	54.00	-18.67	Average	Vertical	Pass
5359.71	-2.34	43.34	74.00	-30.66	Peak	Horizontal	Pass
5359.71	-2.34	35.79	54.00	-18.21	Average	Horizontal	Pass
7310.90	3.40	55.05	74.00	-18.95	Peak	Vertical	Pass
7310.90	3.40	35.92	54.00	-18.08	Average	Vertical	Pass
7310.70	3.40	54.40	74.00	-19.60	Peak	Horizontal	Pass
7310.70	3.40	36.17	54.00	-17.83	Average	Horizontal	Pass

**802.11b High Channel**

Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	ANT	Verdict
3264.77	-9.80	39.07	74.00	-34.93	Peak	Vertical	Pass
3264.77	-9.80	29.61	54.00	-24.39	Average	Vertical	Pass
3264.67	-9.80	39.03	74.00	-34.97	Peak	Horizontal	Pass
3264.67	-9.80	28.10	54.00	-25.90	Average	Horizontal	Pass
4924.55	-3.56	54.78	74.00	-19.22	Peak	Vertical	Pass
4924.55	-3.56	34.69	54.00	-19.31	Average	Vertical	Pass
4924.38	-3.56	55.10	74.00	-18.90	Peak	Horizontal	Pass
4924.38	-3.56	34.66	54.00	-19.34	Average	Horizontal	Pass
5359.78	-2.34	44.10	74.00	-29.90	Peak	Vertical	Pass
5359.78	-2.34	35.26	54.00	-18.74	Average	Vertical	Pass
5359.66	-2.34	42.95	74.00	-31.05	Peak	Horizontal	Pass
5359.66	-2.34	35.22	54.00	-18.78	Average	Horizontal	Pass
7385.80	3.40	54.26	74.00	-19.74	Peak	Vertical	Pass
7385.80	3.40	36.68	54.00	-17.32	Average	Vertical	Pass
7385.68	3.40	55.05	74.00	-18.95	Peak	Horizontal	Pass
7385.68	3.40	37.35	54.00	-16.65	Average	Horizontal	Pass

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20) the worst case is 802.11b.
Emission Level = Reading + Factor
Margin = Limit - Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.3.7 TEST RESULTS (BAND EDGE REQUIREMENTS)

Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b										
2390.00	68.20	43.80	4.91	25.90	-12.99	55.21	74.00	-18.79	Peak	Vertical
2390.00	53.62	43.80	4.91	25.90	-12.99	40.63	54.00	-13.37	Average	Vertical
2390.00	68.27	43.80	4.91	25.90	-12.99	55.28	74.00	-18.72	Peak	Horizontal
2390.00	53.19	43.80	4.91	25.90	-12.99	40.20	54.00	-13.80	Average	Horizontal
2483.50	69.41	43.80	5.12	25.90	-12.78	56.63	74.00	-17.37	Peak	Vertical
2483.50	53.29	43.80	5.12	25.90	-12.78	40.51	54.00	-13.49	Average	Vertical
2483.50	69.77	43.80	5.12	25.90	-12.78	56.99	74.00	-17.01	Peak	Horizontal
2483.50	53.00	43.80	5.12	25.90	-12.78	40.22	54.00	-13.78	Average	Horizontal
802.11g										
2390.00	67.25	43.80	4.91	25.90	-12.99	54.26	74.00	-19.74	Peak	Vertical
2390.00	52.82	43.80	4.91	25.90	-12.99	39.83	54.00	-14.17	Average	Vertical
2390.00	65.85	43.80	4.91	25.90	-12.99	52.86	74.00	-21.14	Peak	Horizontal
2390.00	54.13	43.80	4.91	25.90	-12.99	41.14	54.00	-12.86	Average	Horizontal
2483.50	65.77	43.80	5.12	25.90	-12.78	52.99	74.00	-21.01	Peak	Vertical
2483.50	52.36	43.80	5.12	25.90	-12.78	39.58	54.00	-14.42	Average	Vertical
2483.50	65.54	43.80	5.12	25.90	-12.78	52.76	74.00	-21.24	Peak	Horizontal
2483.50	52.25	43.80	5.12	25.90	-12.78	39.47	54.00	-14.53	Average	Horizontal
802.11n20										
2390.00	66.37	43.80	4.91	25.90	-12.99	53.38	74.00	-20.62	Peak	Vertical
2390.00	52.24	43.80	4.91	25.90	-12.99	39.25	54.00	-14.75	Average	Vertical
2390.00	66.05	43.80	4.91	25.90	-12.99	53.06	74.00	-20.94	Peak	Horizontal
2390.00	54.15	43.80	4.91	25.90	-12.99	41.16	54.00	-12.84	Average	Horizontal
2483.50	65.83	43.80	5.12	25.90	-12.78	53.05	74.00	-20.95	Peak	Vertical
2483.50	52.73	43.80	5.12	25.90	-12.78	39.95	54.00	-14.05	Average	Vertical
2483.50	66.05	43.80	5.12	25.90	-12.78	53.27	74.00	-20.73	Peak	Horizontal
2483.50	53.26	43.80	5.12	25.90	-12.78	40.48	54.00	-13.52	Average	Horizontal
<p>Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Low measurement frequencies is range from 2300 to 2422 MHz, high measurement frequencies is range from 2452 to 2500 MHz. Only show the worst point data of the emissions in the frequency 2300-2422 MHz and 2452-2500 MHz.</p>										

4 CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 APPLIED PROCEDURES / LIMIT

According to FCC Part 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2422 MHz Upper Band Edge: 2452 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

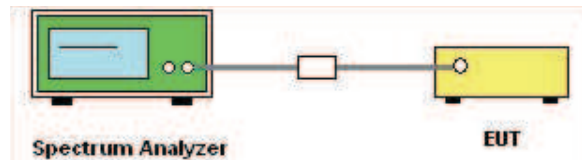

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.6 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	TX b Mode /CH01, CH06, CH11

CH 01

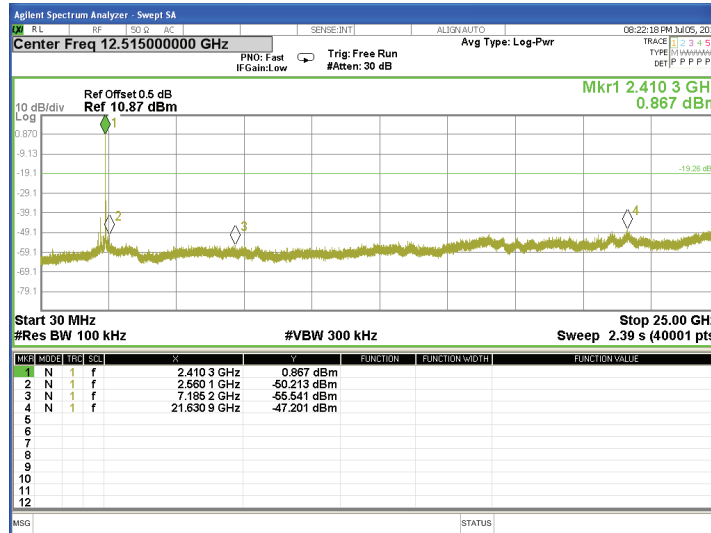


CH 06

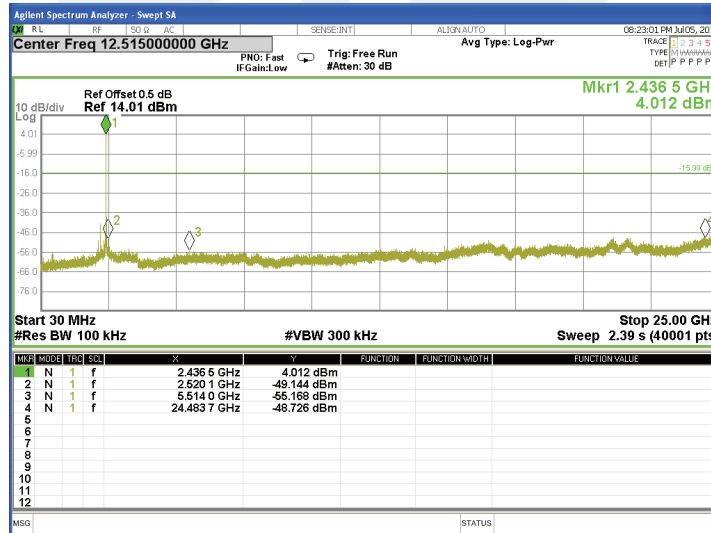




CH 11

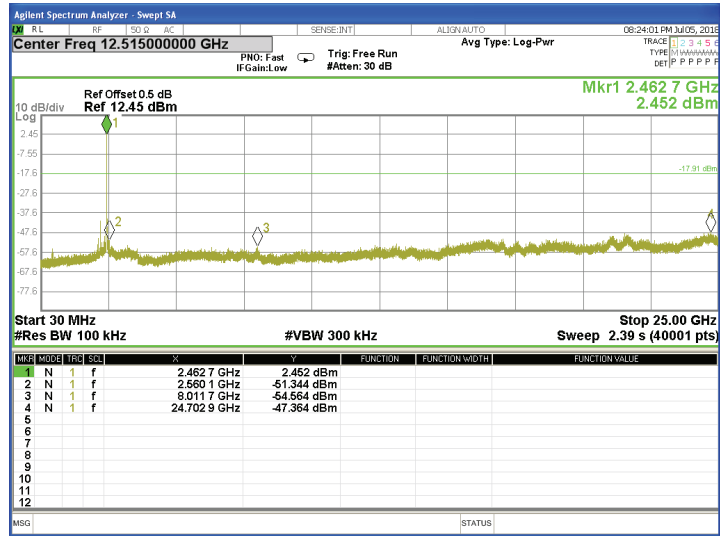




Band edge

CH 01

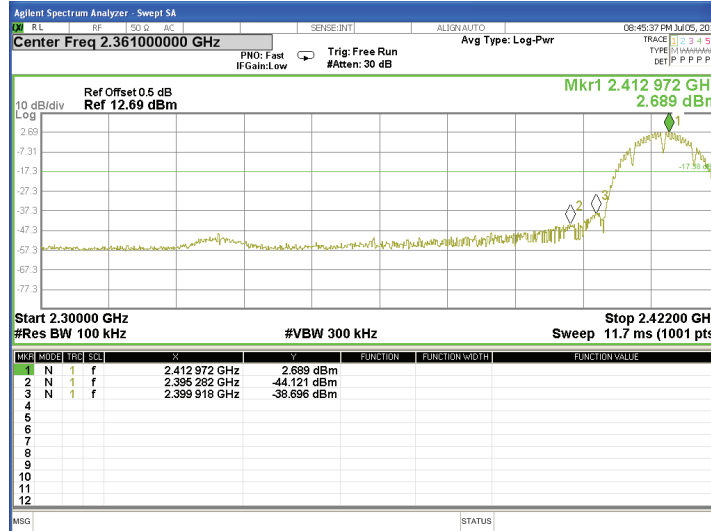


CH 11

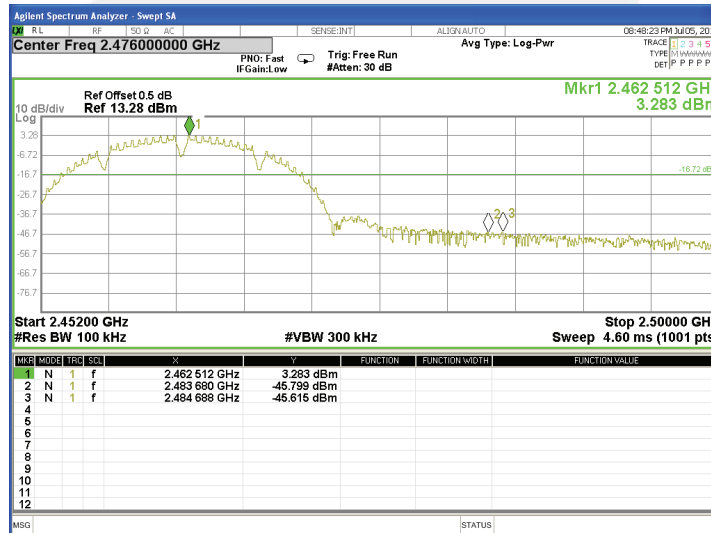




Temperature :	25 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	TX g Mode /CH01, CH06, CH11

CH 01

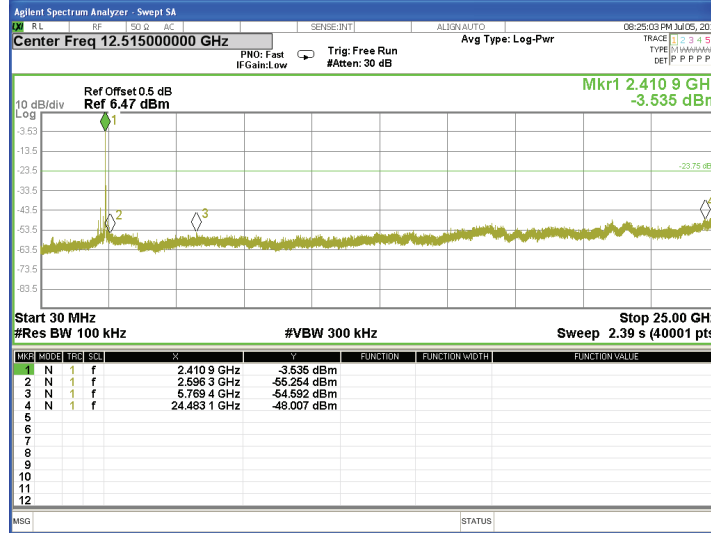


CH06

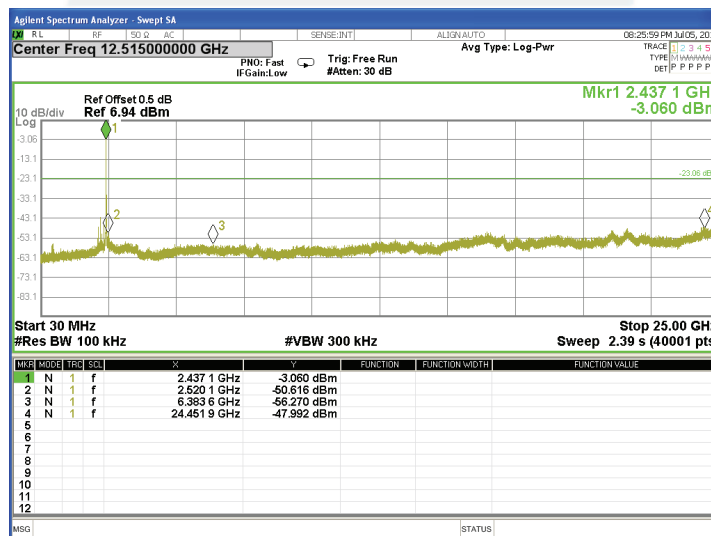




CH 11

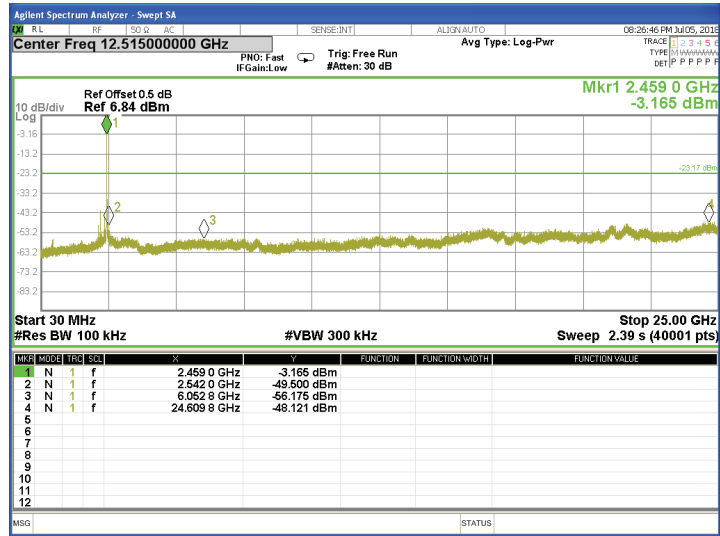




Band edge

CH 01

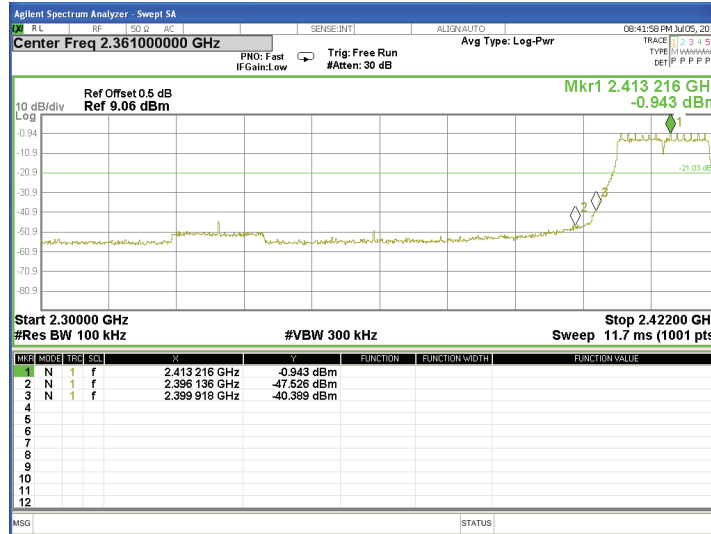


CH11

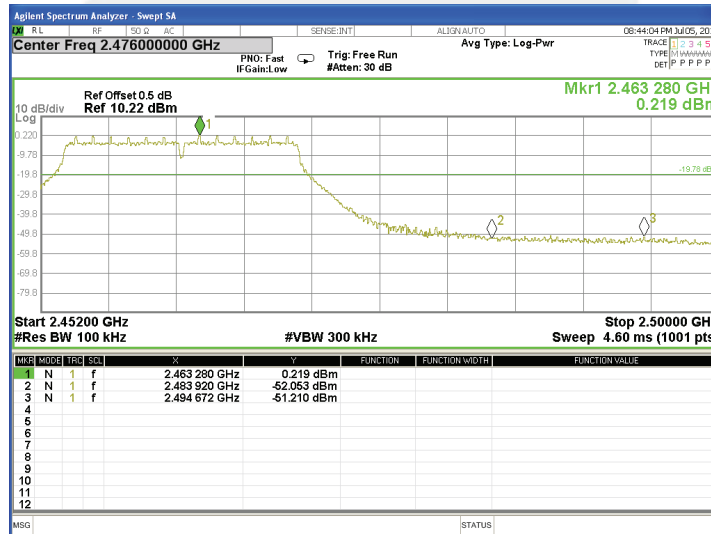




Temperature :	25 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	TX n Mode(20M) /CH01, CH06, CH11

CH 01

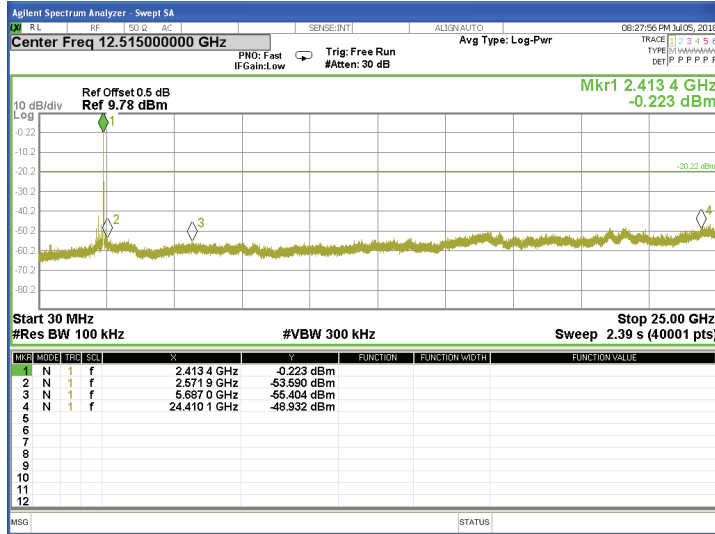


CH 06

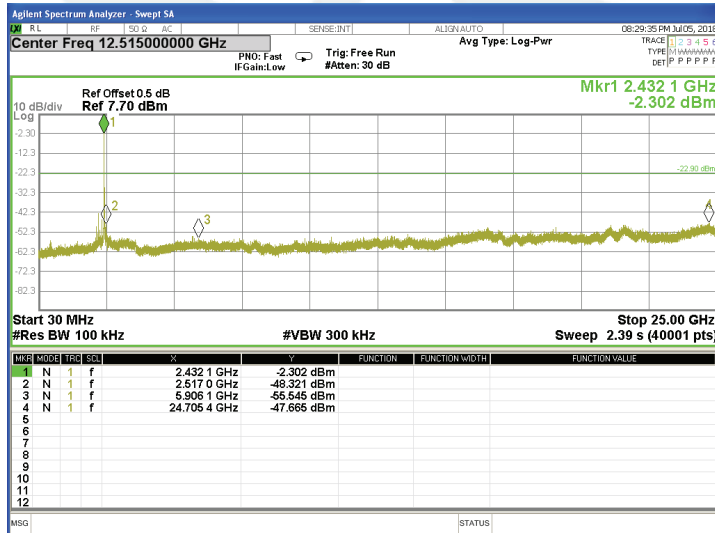




CH 11

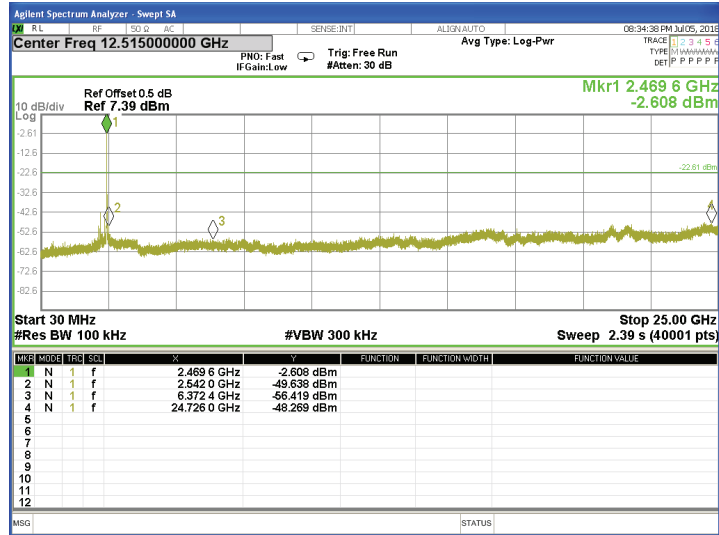




Band edge

CH 01

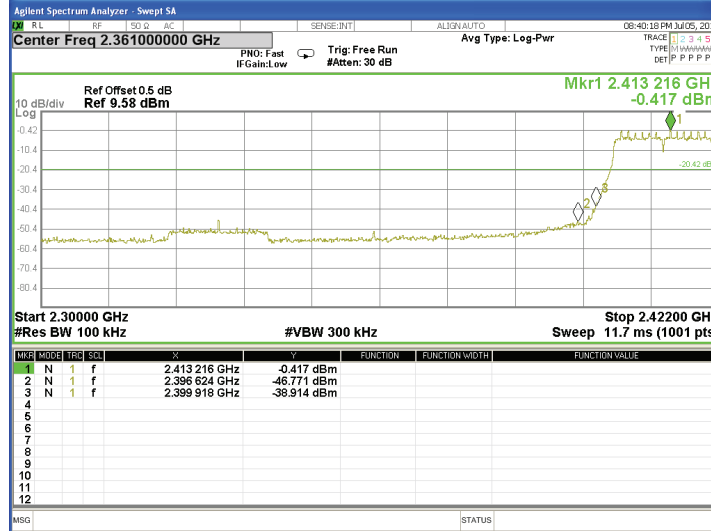

CH 11

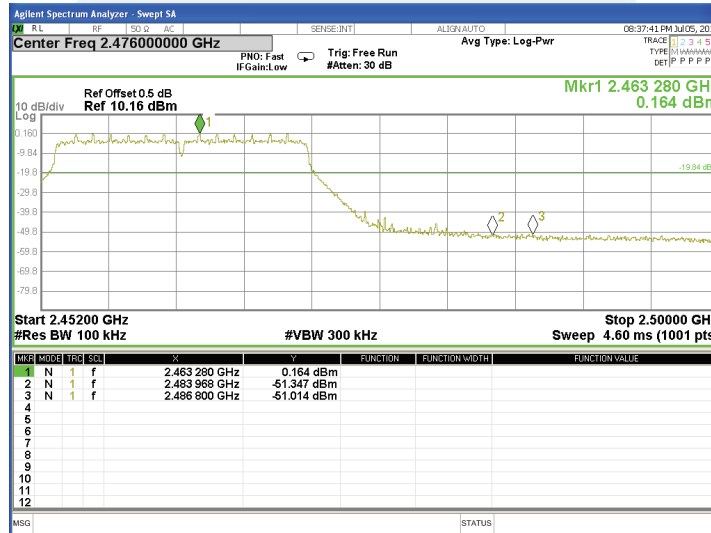

5 POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤8 dBm (RBW ≥ 3KHz)	2400-2483.5	PASS


5.2 TEST PROCEDURE

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS channel bandwidth.
- 3) Set the 100 kHz ≥ RBW ≥ 3 kHz.
- 4) Set the VBW ≥ 3 x RBW.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

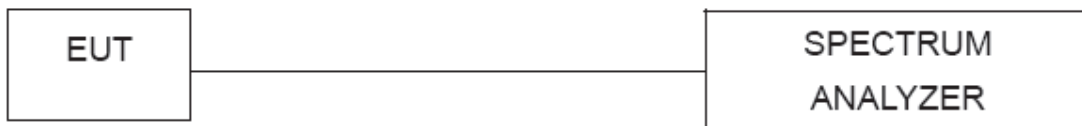

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




5.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX b Mode /CH01, CH06, CH11


Test Mode	Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
b mode (1 Mbps)	2412.00	-11.482	≤ 8.00	PASS
	2437.00	-9.207	≤ 8.00	PASS
	2462.00	-10.71	≤ 8.00	PASS

TX CH01

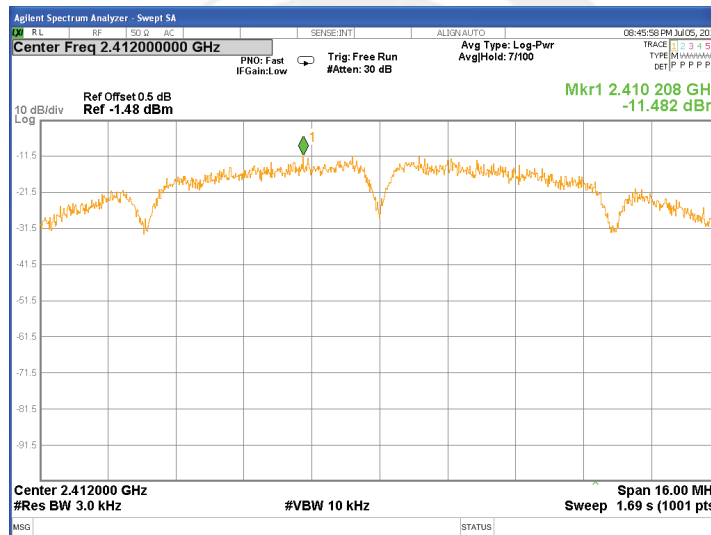




TX CH06

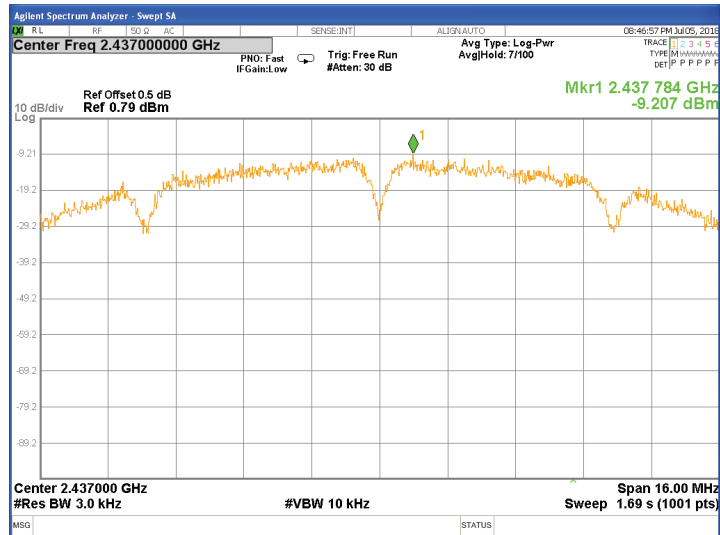

TX CH11

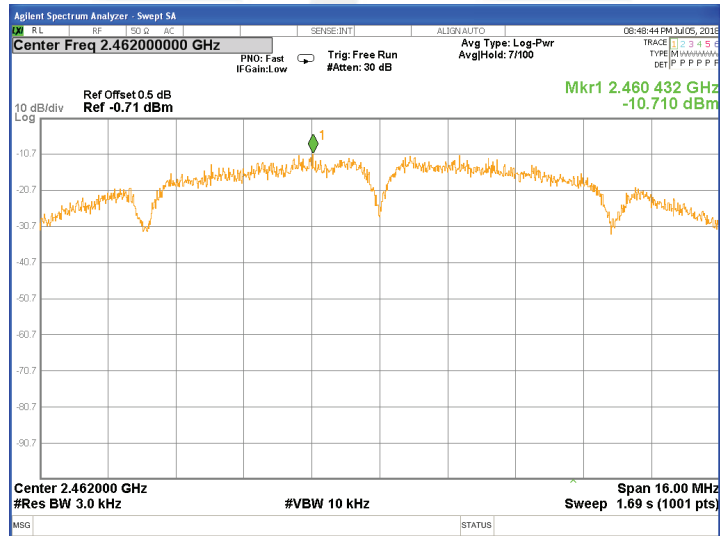




Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX g Mode /CH01, CH06, CH11


Test Mode	Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
g mode (6 Mbps)	2412.00	-13.923	≤ 8.00	PASS
	2437.00	-13.418	≤ 8.00	PASS
	2462.00	-14.972	≤ 8.00	PASS

TX CH01

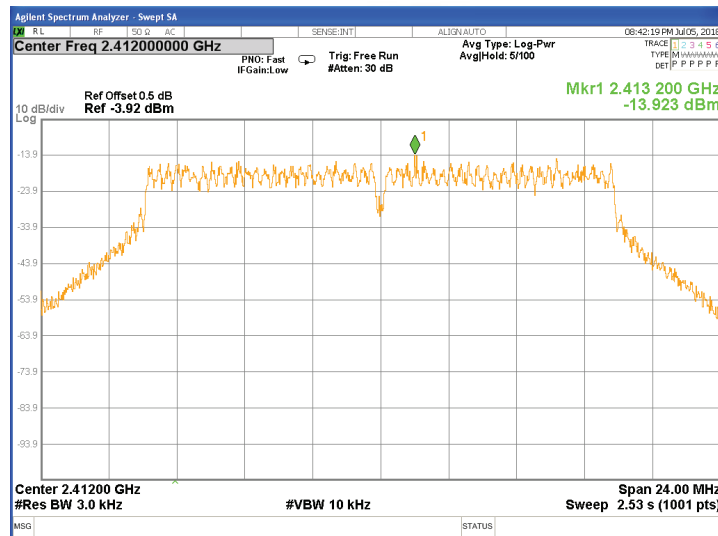




TX CH06

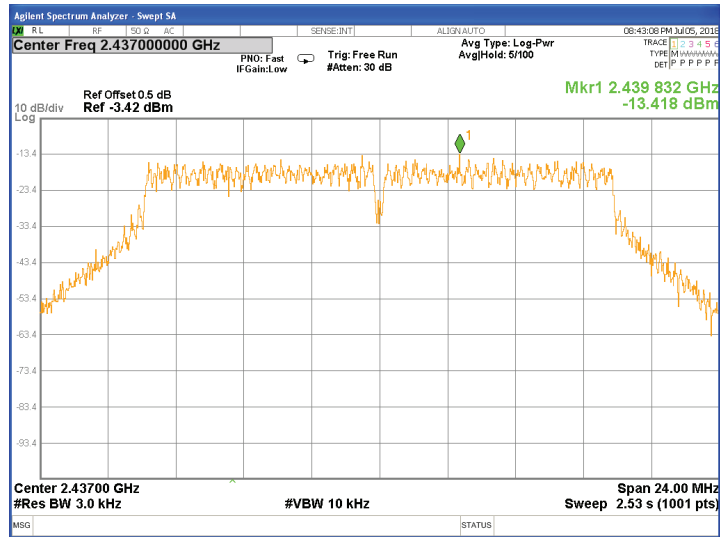

TX CH11

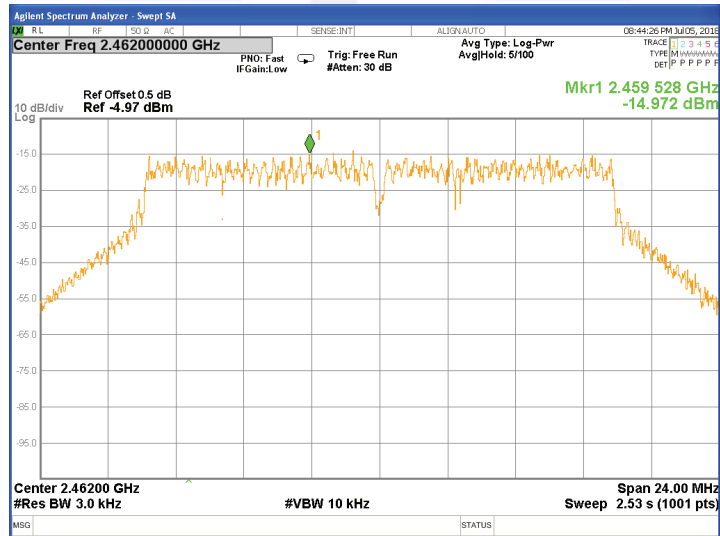




Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11


Test Mode	Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
n(HT20) mode (MCS0)	2412.00	-15.378	≤ 8.00	PASS
	2437.00	-14.299	≤ 8.00	PASS
	2462.00	-14.468	≤ 8.00	PASS

TX CH01

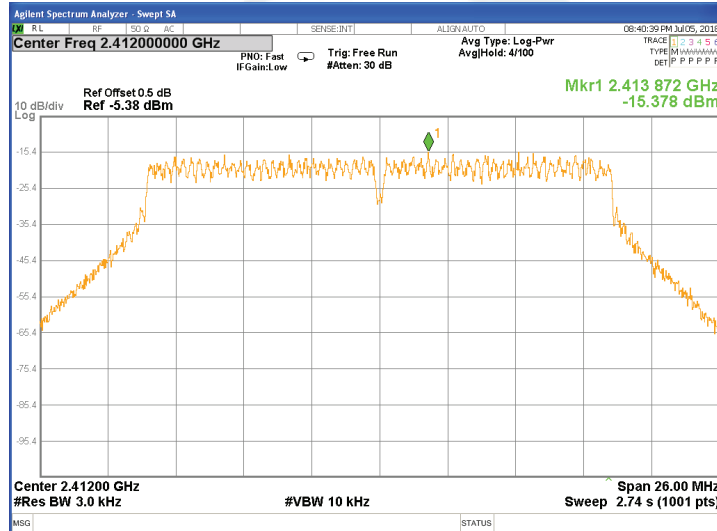




TX CH06

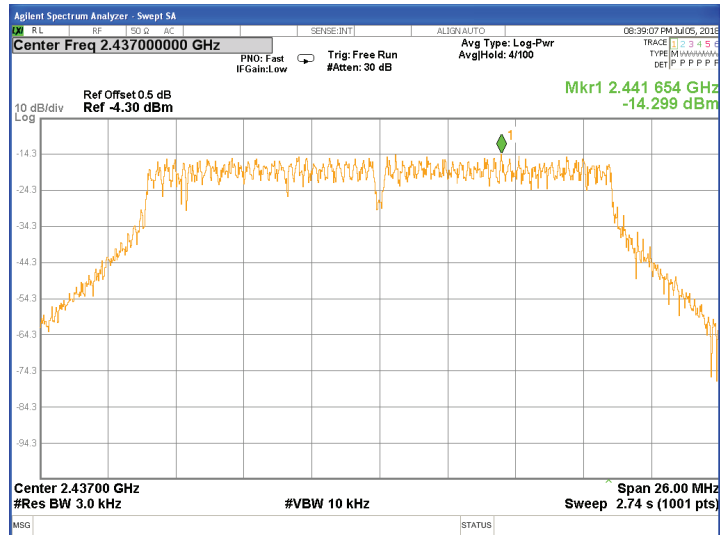

TX CH11

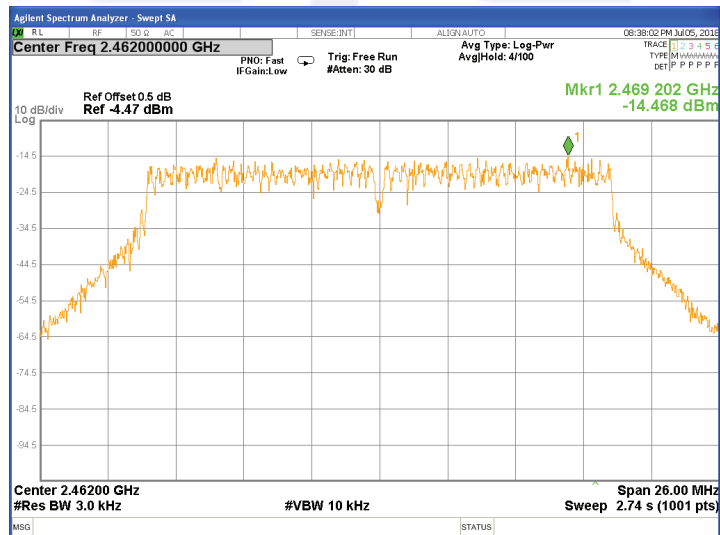

6 BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part 15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX b Mode /CH01, CH06, CH11

Remark: PEAK DETECTOR IS USED


Test Mode	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit of 6dB Bandwidth (MHz)	Result
b mode (1 Mbps)	2412.00	10.04	14.247	≥ 0.50	PASS
	2437.00	10.04	14.260	≥ 0.50	PASS
	2462.00	10.05	14.253	≥ 0.50	PASS

TX CH 01

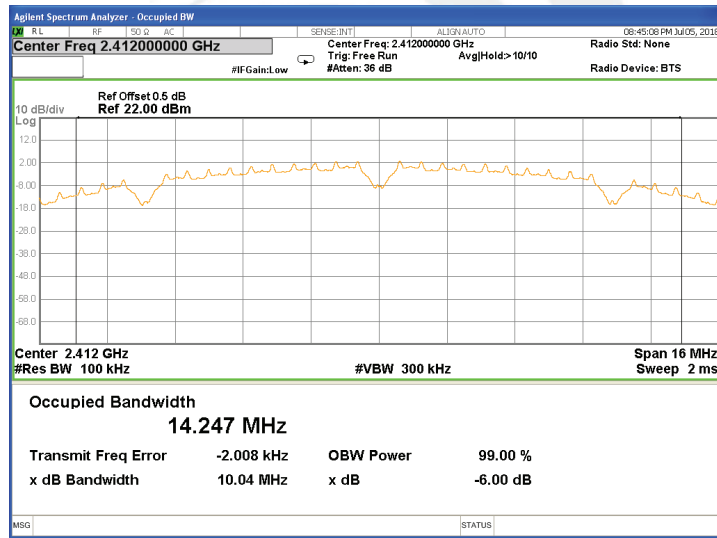




TX CH 06

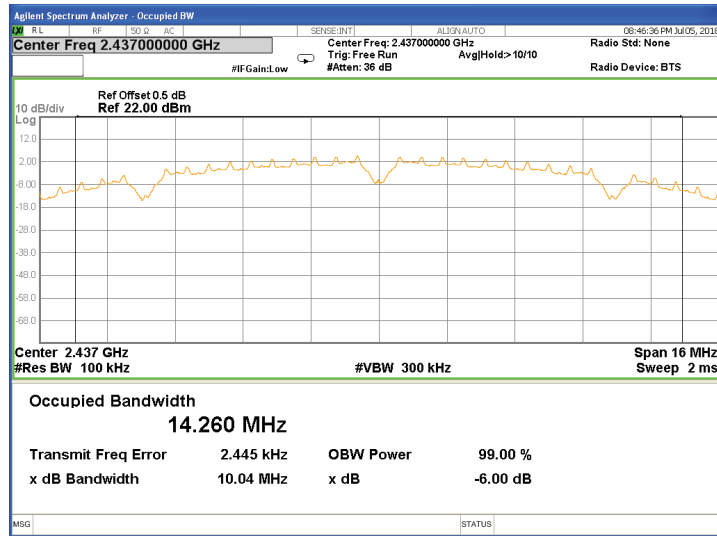

TX CH 11

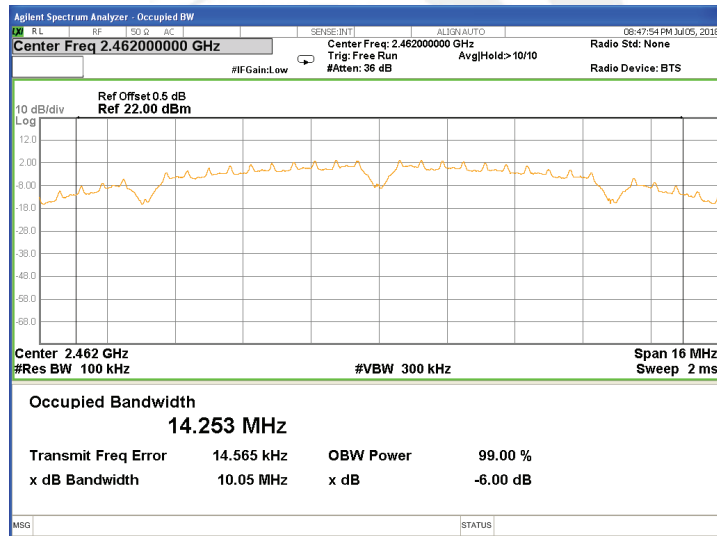




Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX g Mode /CH01, CH06, CH11


Test Mode	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit of 6dB Bandwidth (MHz)	Result
g mode (6 Mbps)	2412.00	16.37	16.491	≥ 0.50	PASS
	2437.00	16.38	16.433	≥ 0.50	PASS
	2462.00	16.36	16.491	≥ 0.50	PASS

TX CH 01

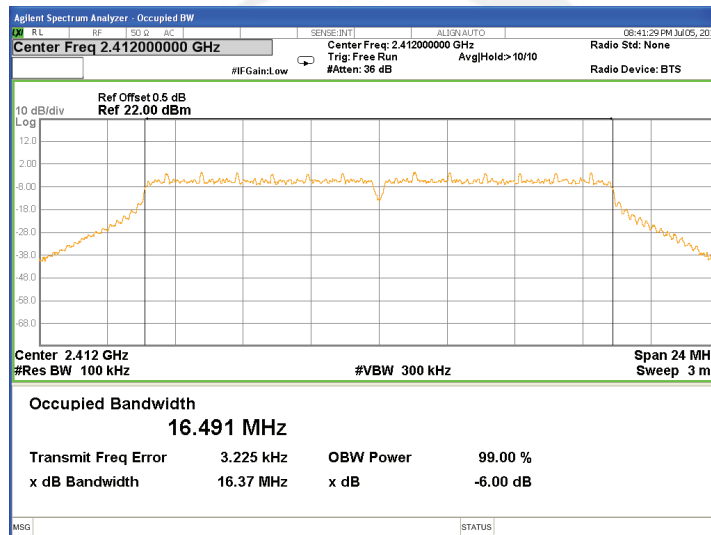




TX CH 06

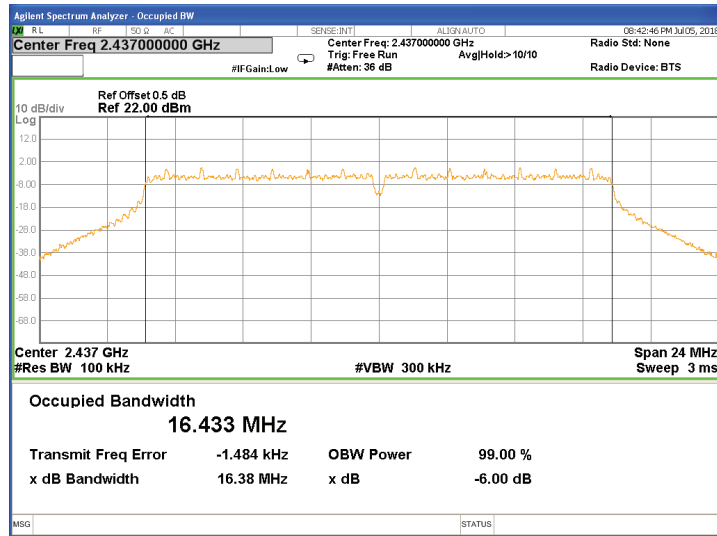

TX CH 11

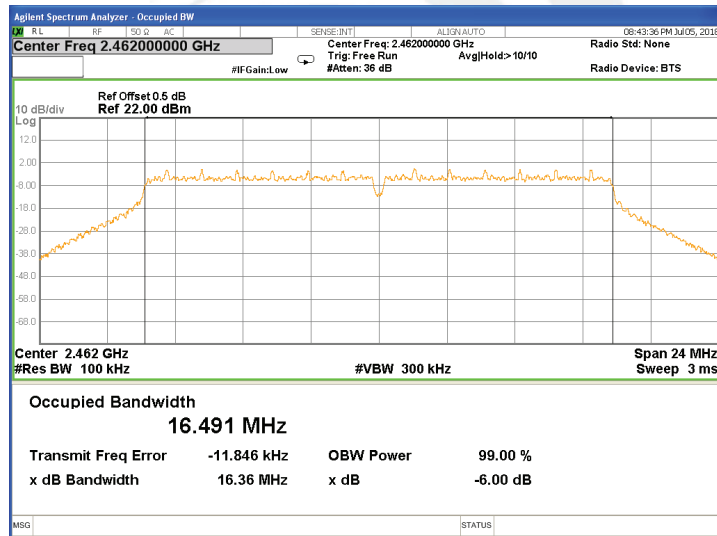




Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11


Test Mode	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit of 6dB Bandwidth (MHz)	Result
n(HT20) mode (MCS0)	2412.00	17.58	17.615	≥ 0.50	PASS
	2437.00	17.59	17.614	≥ 0.50	PASS
	2462.00	17.56	17.607	≥ 0.50	PASS

TX CH 01

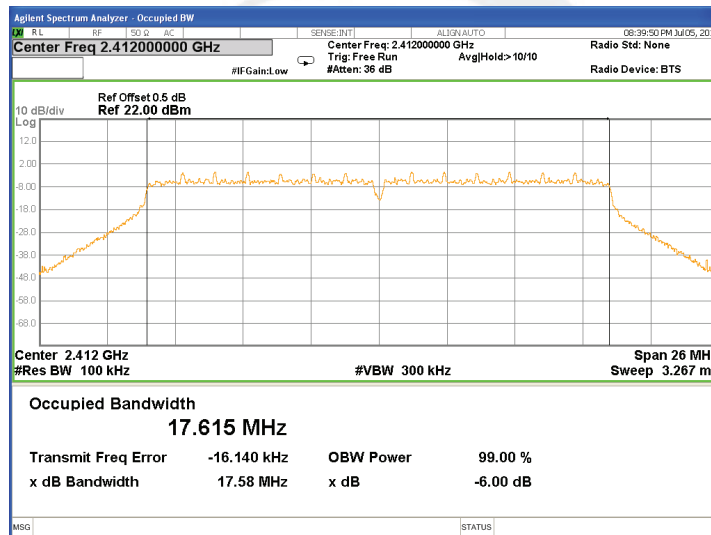




TX CH 06

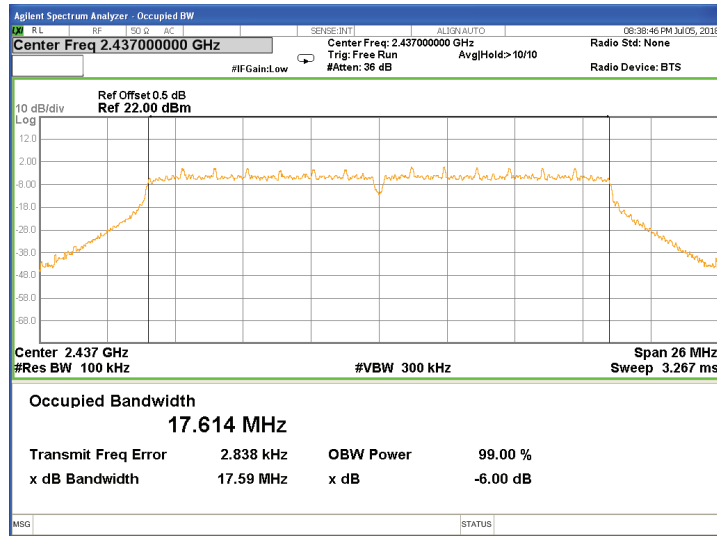

TX CH 11

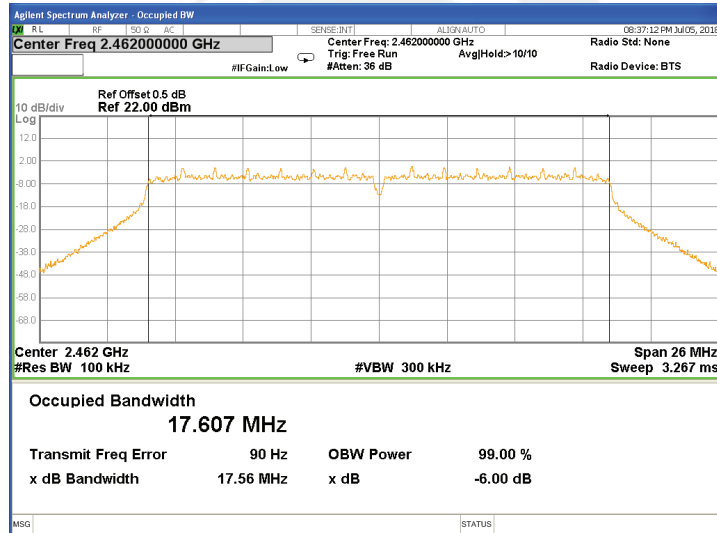



7 PEAK OUTPUT POWER TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power Meter

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz		

TX 802.11 b mode (1 Mbps)				
Test Channel	Frequency (MHz)	Conducted Output Power		Limit (dBm)
		Peak(dBm)	AVG(dBm)	
CH01	2412.00	13.47	12.47	30.00
CH06	2437.00	13.99	12.99	30.00
CH11	2462.00	11.50	10.50	30.00

TX 802.11 g mode (6 Mbps)				
Test Channel	Frequency (MHz)	Conducted Output Power		Limit (dBm)
		Peak(dBm)	AVG(dBm)	
CH01	2412.00	13.06	13.05	30.00
CH06	2437.00	12.14	11.13	30.00
CH11	2462.00	11.05	10.04	30.00

TX 802.11 n(HT20) mode (MCS0)				
Test Channel	Frequency (MHz)	Conducted Output Power		Limit (dBm)
		Peak(dBm)	AVG(dBm)	
CH01	2412.00	13.34	11.31	30.00
CH06	2437.00	12.45	10.42	30.00
CH11	2462.00	11.01	8.99	30.00



8 ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is Integral Antenna. It comply with the standard requirement.

