


Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

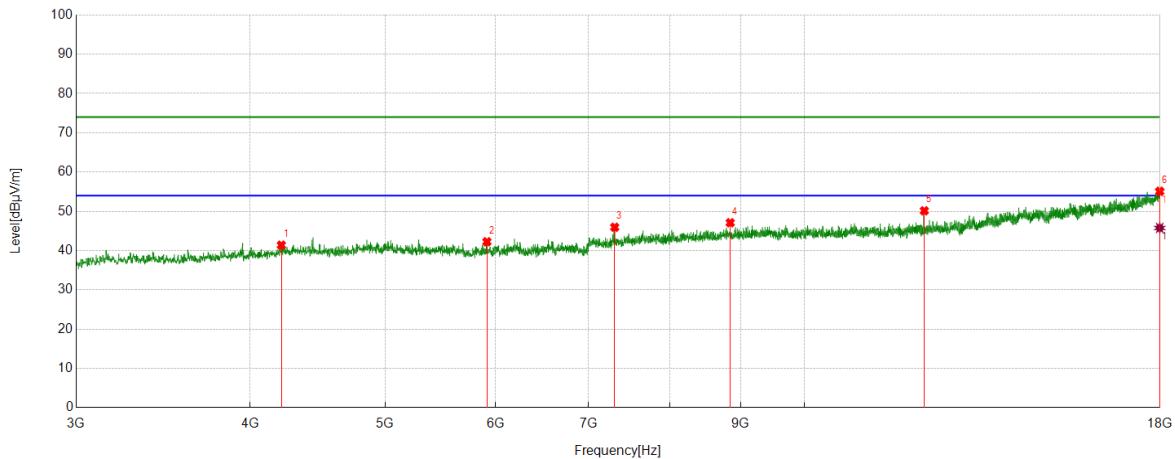

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4211.4014	47.04	-5.65	41.39	74.00	32.61	peak
2	5915.9895	44.94	-2.69	42.25	74.00	31.75	peak
3	7307.4134	46.01	-0.06	45.95	74.00	28.05	peak
4	8845.1056	44.41	2.69	47.10	74.00	26.90	peak
5	12190.5238	43.79	6.35	50.14	74.00	23.86	peak
6	17990.6238	36.51	18.59	55.10	74.00	18.90	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17990.6238	27.18	18.59	45.77	54.00	8.23	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

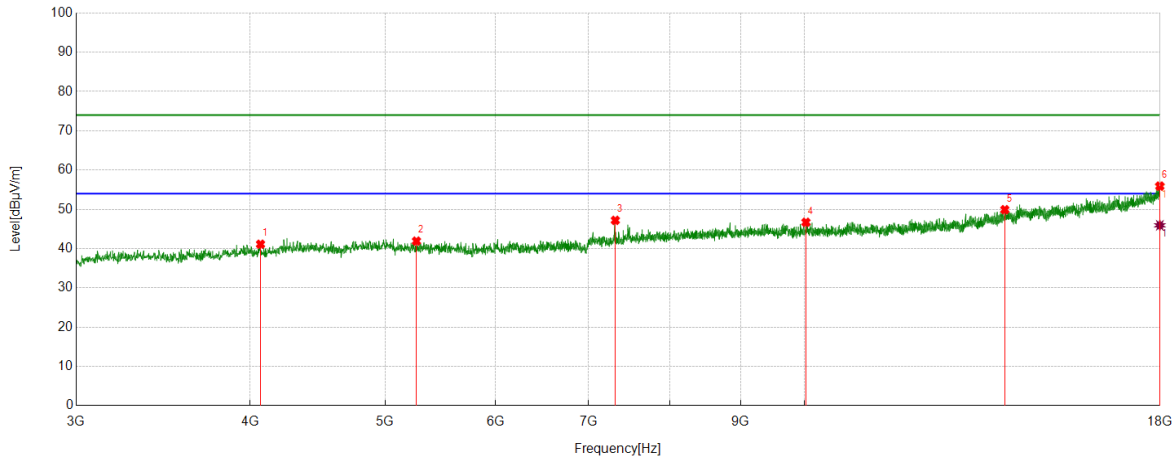

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4068.8836	48.30	-7.18	41.12	74.00	32.88	peak
2	5265.2832	45.52	-3.61	41.91	74.00	32.09	peak
3	7314.9144	47.21	-0.01	47.20	74.00	26.80	peak
4	10024.6281	42.76	3.94	46.70	74.00	27.30	peak
5	13926.9909	39.32	10.59	49.91	74.00	24.09	peak
6	17994.3743	37.25	18.66	55.91	74.00	18.09	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17994.3743	27.27	18.66	45.93	54.00	8.07	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

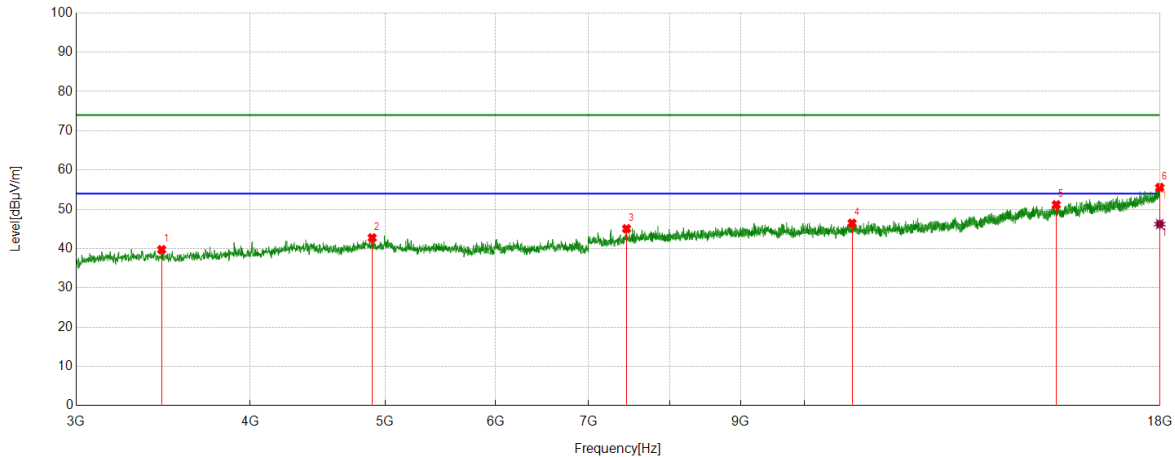

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3455.682	48.62	-8.89	39.73	74.00	34.27	peak
2	4893.9867	46.36	-3.62	42.74	74.00	31.26	peak
3	7451.8065	44.08	0.98	45.06	74.00	28.94	peak
4	10819.7275	42.17	4.29	46.46	74.00	27.54	peak
5	15162.7703	39.24	11.92	51.16	74.00	22.84	peak
6	17992.4991	36.94	18.63	55.57	74.00	18.43	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17992.4991	27.61	18.63	46.24	54.00	7.76	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

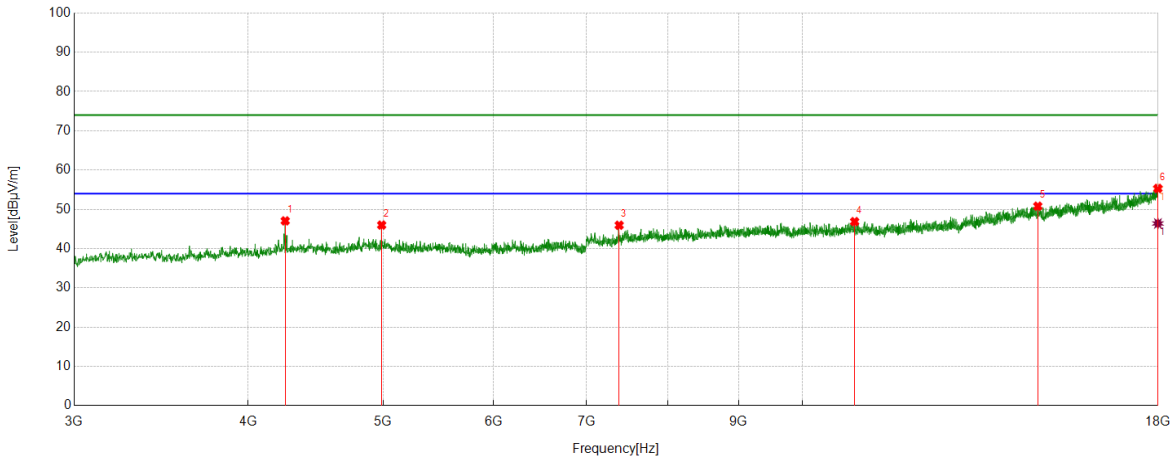

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4252.6566	52.62	-5.56	47.06	74.00	26.94	peak
2	4987.7485	49.48	-3.49	45.99	74.00	28.01	peak
3	7386.1733	45.97	-0.02	45.95	74.00	28.05	peak
4	10900.3625	41.84	5.03	46.87	74.00	27.13	peak
5	14755.8445	39.49	11.31	50.80	74.00	23.20	peak
6	17996.2495	36.63	18.69	55.32	74.00	18.68	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17996.2495	27.71	18.69	46.40	54.00	7.60	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

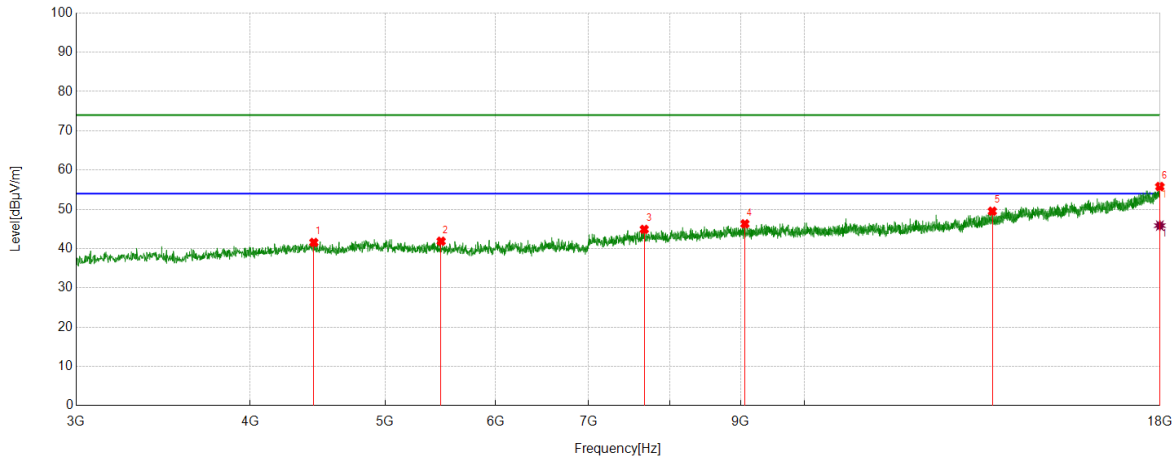

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4443.9305	46.61	-5.04	41.57	74.00	32.43	peak
2	5484.6856	44.63	-2.76	41.87	74.00	32.13	peak
3	7673.0841	43.51	1.39	44.90	74.00	29.10	peak
4	9062.6328	43.39	2.92	46.31	74.00	27.69	peak
5	13641.9552	40.03	9.48	49.51	74.00	24.49	peak
6	17994.3743	37.13	18.66	55.79	74.00	18.21	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17994.3743	27.20	18.66	45.86	54.00	8.14	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

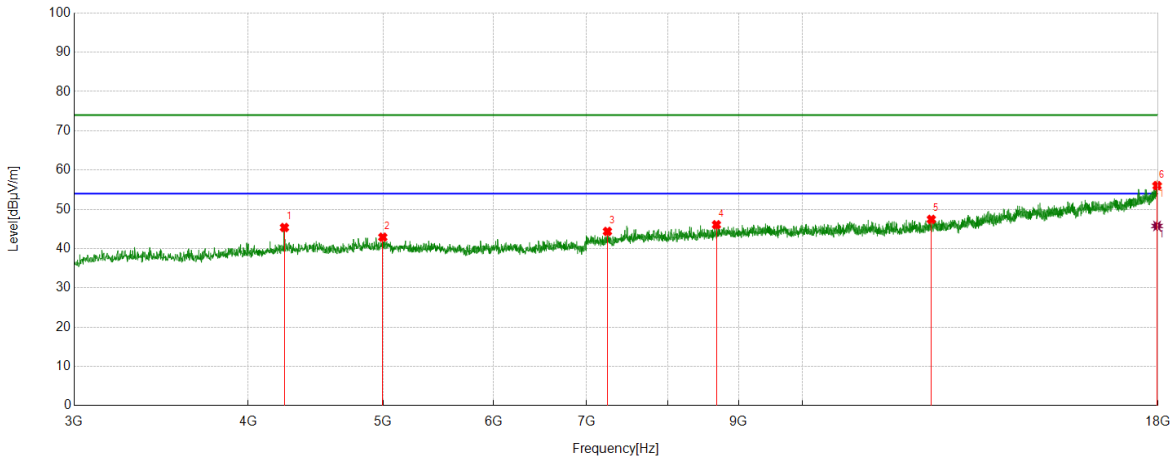

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4247.0309	50.98	-5.61	45.37	74.00	28.63	peak
2	4997.1246	46.56	-3.66	42.90	74.00	31.10	peak
3	7243.6555	44.25	0.12	44.37	74.00	29.63	peak
4	8674.4593	43.90	2.17	46.07	74.00	27.93	peak
5	12374.2968	40.88	6.56	47.44	74.00	26.56	peak
6	17971.8715	37.33	18.70	56.03	74.00	17.97	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17971.8715	27.06	18.70	45.76	54.00	8.24	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

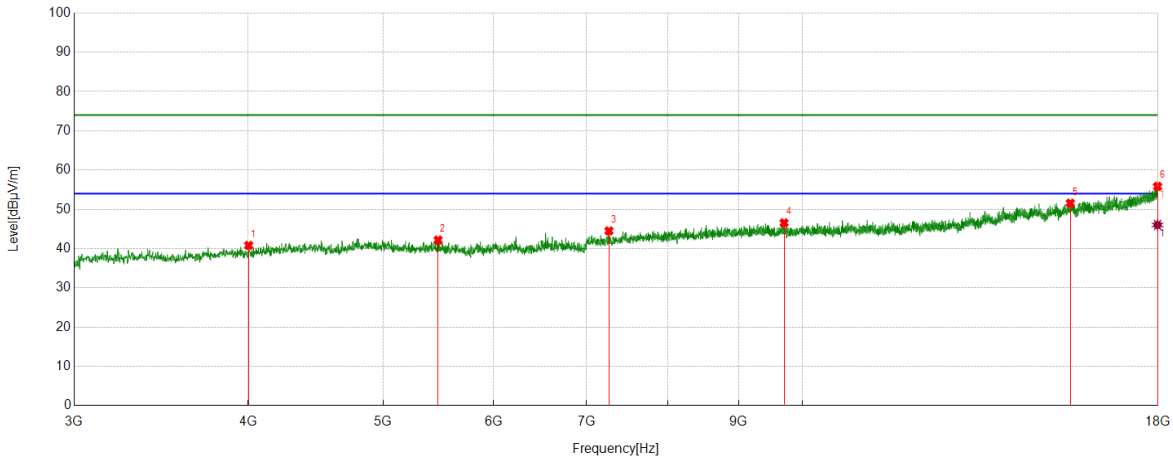

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4003.2504	47.58	-6.76	40.82	74.00	33.18	peak
2	5475.3094	44.94	-2.77	42.17	74.00	31.83	peak
3	7262.4078	44.60	-0.10	44.50	74.00	29.50	peak
4	9700.2125	43.00	3.56	46.56	74.00	27.44	peak
5	15569.6962	38.93	12.63	51.56	74.00	22.44	peak
6	17984.9981	37.22	18.62	55.84	74.00	18.16	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17984.9981	27.40	18.62	46.02	54.00	7.98	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

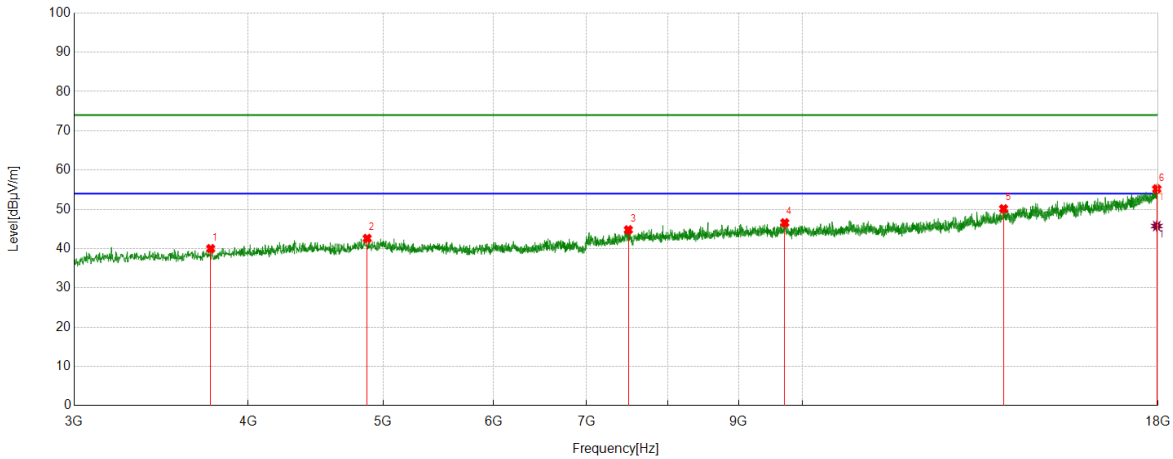

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3759.4699	48.29	-8.31	39.98	74.00	34.02	peak
2	4869.6087	46.28	-3.69	42.59	74.00	31.41	peak
3	7498.6873	44.43	0.35	44.78	74.00	29.22	peak
4	9711.4639	42.92	3.64	46.56	74.00	27.44	peak
5	13943.868	39.30	10.84	50.14	74.00	23.86	peak
6	17962.4953	36.67	18.52	55.19	74.00	18.81	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17962.4953	27.22	18.52	45.74	54.00	8.26	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

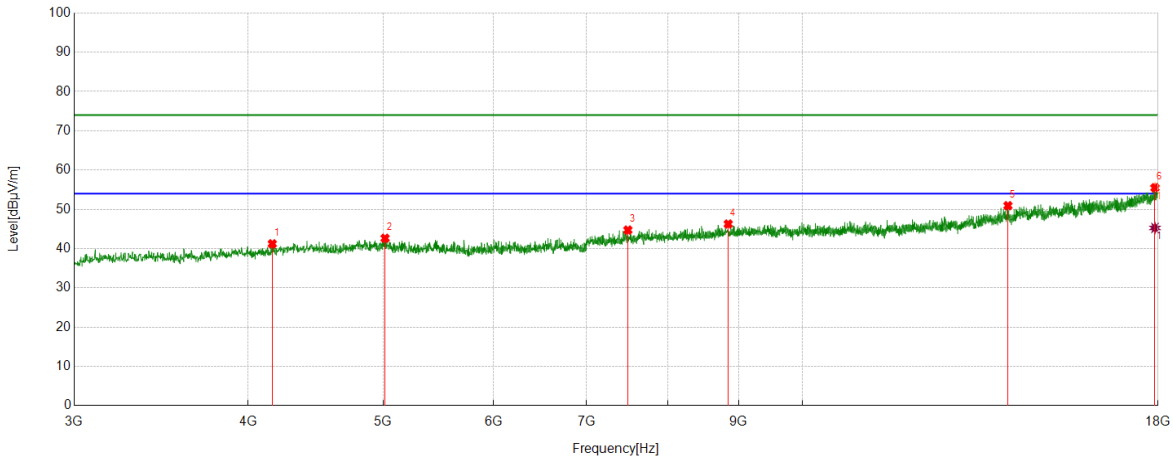

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4162.6453	47.71	-6.49	41.22	74.00	32.78	peak
2	5015.877	46.32	-3.69	42.63	74.00	31.37	peak
3	7493.0616	44.31	0.41	44.72	74.00	29.28	peak
4	8845.1056	43.57	2.69	46.26	74.00	27.74	peak
5	14045.1306	39.93	11.00	50.93	74.00	23.07	peak
6	17909.9887	36.46	19.04	55.50	74.00	18.50	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17909.9887	26.22	19.04	45.26	54.00	8.74	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

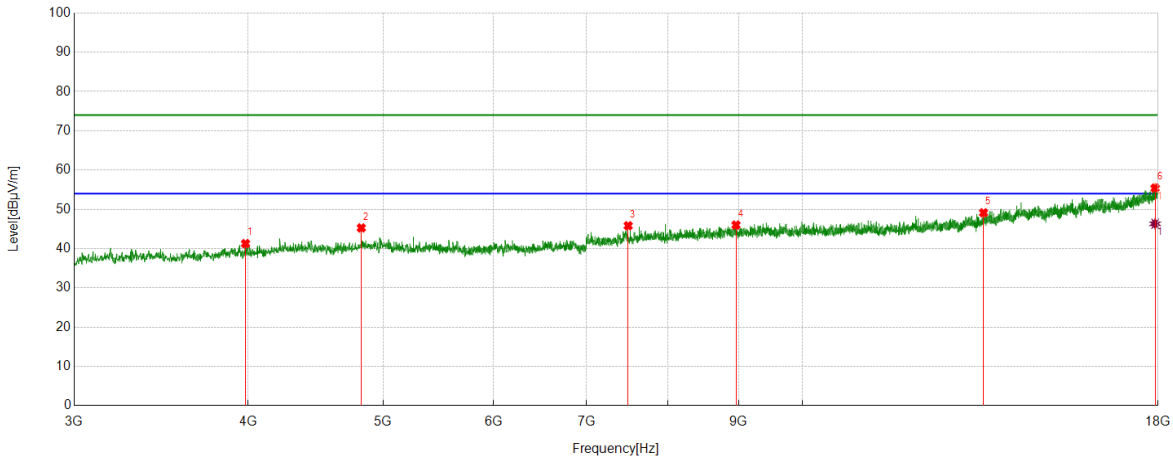

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3982.6228	48.10	-6.83	41.27	74.00	32.73	peak
2	4822.7278	49.36	-4.09	45.27	74.00	28.73	peak
3	7496.8121	45.45	0.37	45.82	74.00	28.18	peak
4	8959.4949	43.58	2.42	46.00	74.00	28.00	peak
5	13490.0613	40.16	8.96	49.12	74.00	24.88	peak
6	17913.7392	36.49	18.92	55.41	74.00	18.59	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17913.7392	27.41	18.92	46.33	54.00	7.67	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

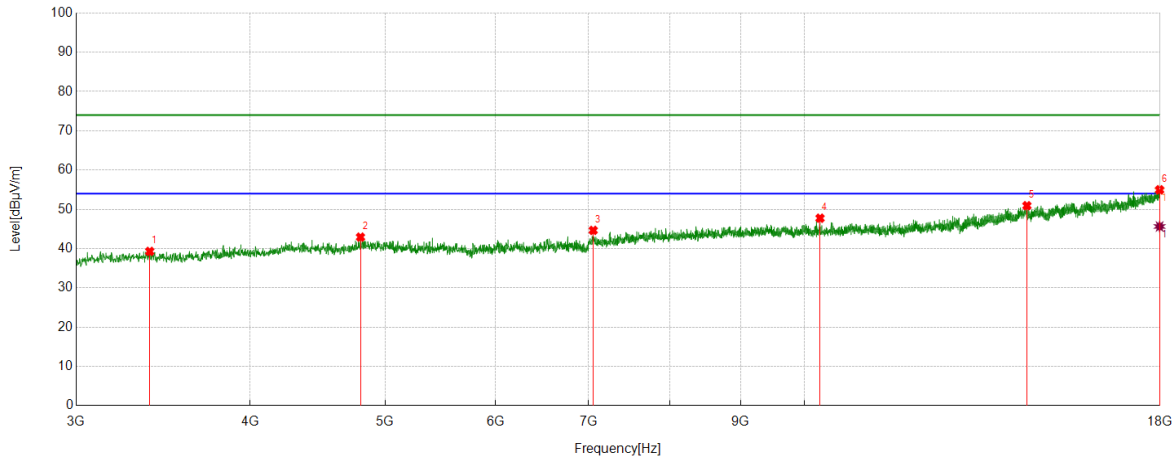

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3388.1735	48.62	-9.33	39.29	74.00	34.71	peak
2	4800.225	46.69	-3.77	42.92	74.00	31.08	peak
3	7052.3815	44.43	0.21	44.64	74.00	29.36	peak
4	10260.9076	43.56	4.18	47.74	74.00	26.26	peak
5	14444.5556	39.26	11.66	50.92	74.00	23.08	peak
6	17986.8734	36.36	18.60	54.96	74.00	19.04	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17986.8734	27.03	18.60	45.63	54.00	8.37	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

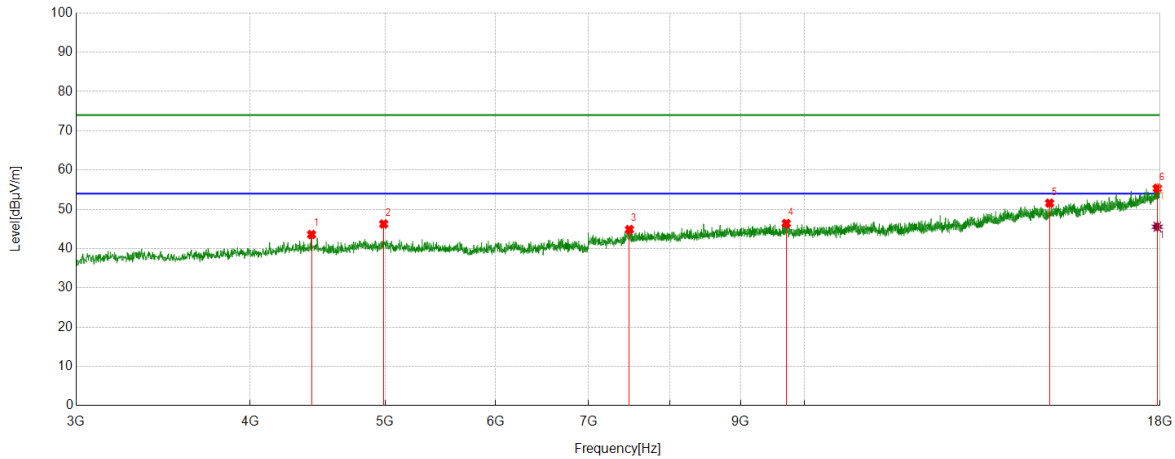

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4427.0534	48.98	-5.39	43.59	74.00	30.41	peak
2	4987.7485	49.76	-3.49	46.27	74.00	27.73	peak
3	7487.4359	44.33	0.53	44.86	74.00	29.14	peak
4	9703.963	42.83	3.58	46.41	74.00	27.59	peak
5	14995.8745	39.51	12.07	51.58	74.00	22.42	peak
6	17919.3649	36.63	18.73	55.36	74.00	18.64	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17919.3649	26.83	18.73	45.56	54.00	8.44	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

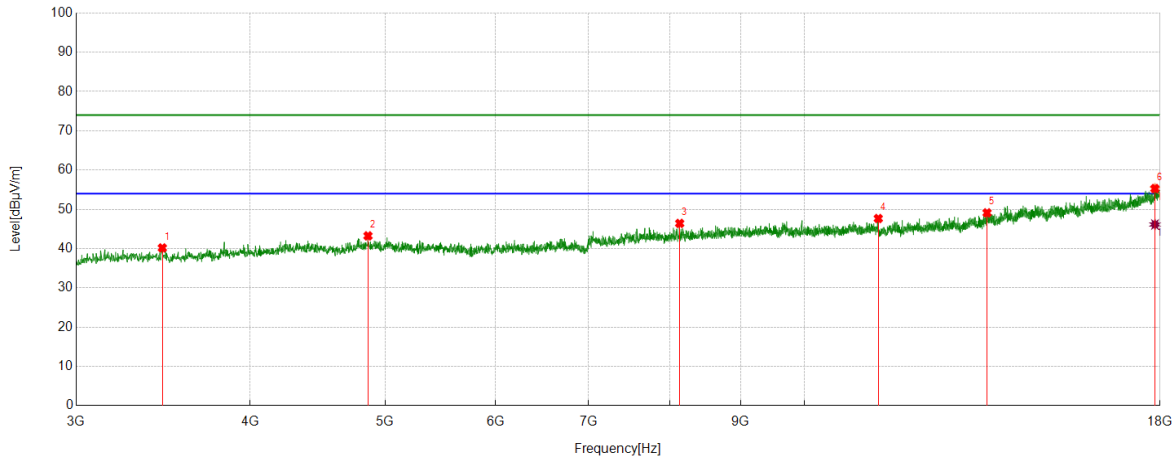

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3459.4324	49.03	-8.86	40.17	74.00	33.83	peak
2	4860.2325	46.95	-3.71	43.24	74.00	30.76	peak
3	8136.267	44.93	1.49	46.42	74.00	27.58	peak
4	11297.9122	42.26	5.40	47.66	74.00	26.34	peak
5	13523.8155	40.07	9.03	49.10	74.00	24.90	peak
6	17849.9812	36.62	18.67	55.29	74.00	18.71	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17849.9812	27.47	18.67	46.14	54.00	7.86	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

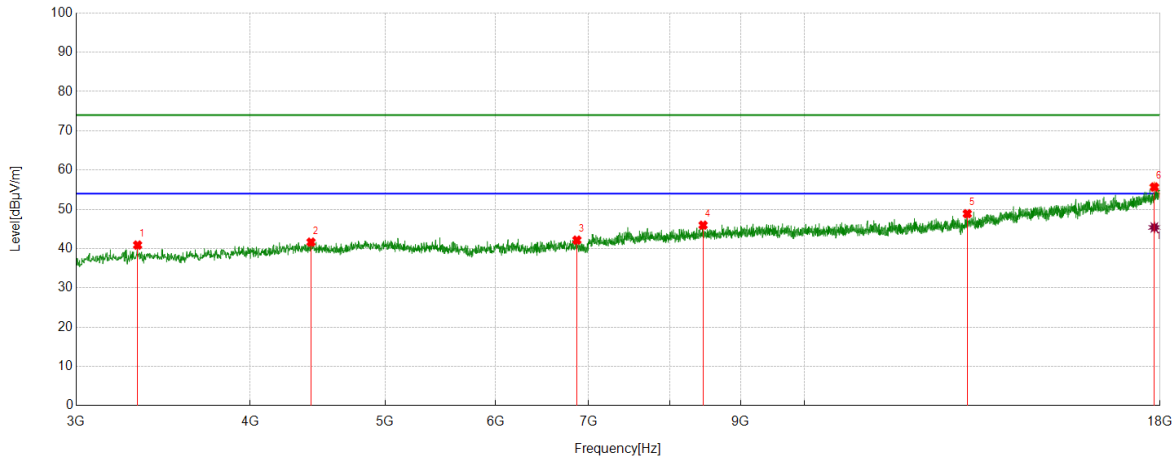

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3320.6651	50.44	-9.54	40.90	74.00	33.10	peak
2	4423.3029	46.95	-5.31	41.64	74.00	32.36	peak
3	6864.8581	43.20	-1.04	42.16	74.00	31.84	peak
4	8456.9321	43.99	1.97	45.96	74.00	28.04	peak
5	13088.7611	41.03	7.85	48.88	74.00	25.12	peak
6	17831.2289	37.42	18.26	55.68	74.00	18.32	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17831.2289	27.13	18.26	45.39	54.00	8.61	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

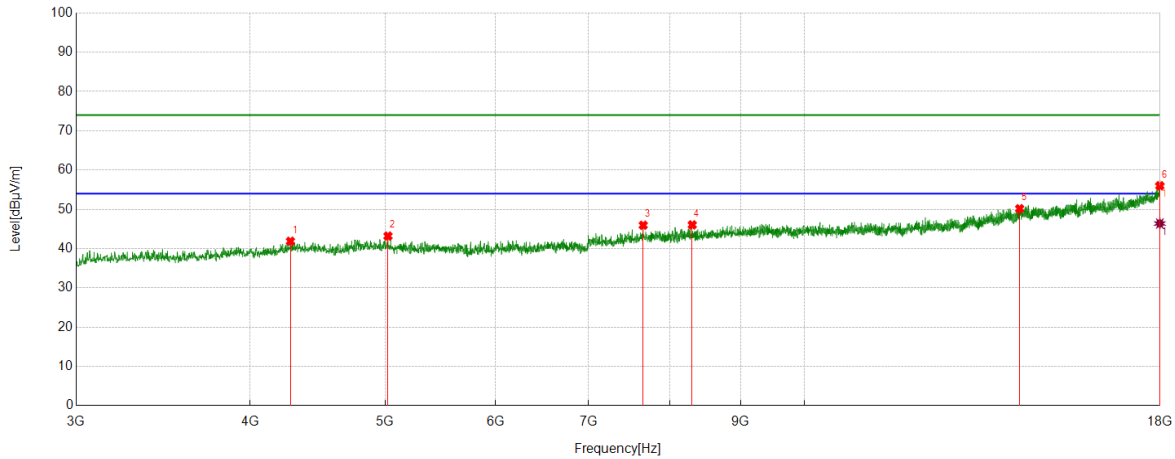

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4275.1594	47.10	-5.23	41.87	74.00	32.13	peak
2	5023.3779	46.76	-3.57	43.19	74.00	30.81	peak
3	7659.9575	44.40	1.55	45.95	74.00	28.05	peak
4	8306.9134	44.25	1.79	46.04	74.00	27.96	peak
5	14272.034	38.20	11.96	50.16	74.00	23.84	peak
6	17994.3743	37.34	18.66	56.00	74.00	18.00	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17994.3743	27.73	18.66	46.39	54.00	7.61	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

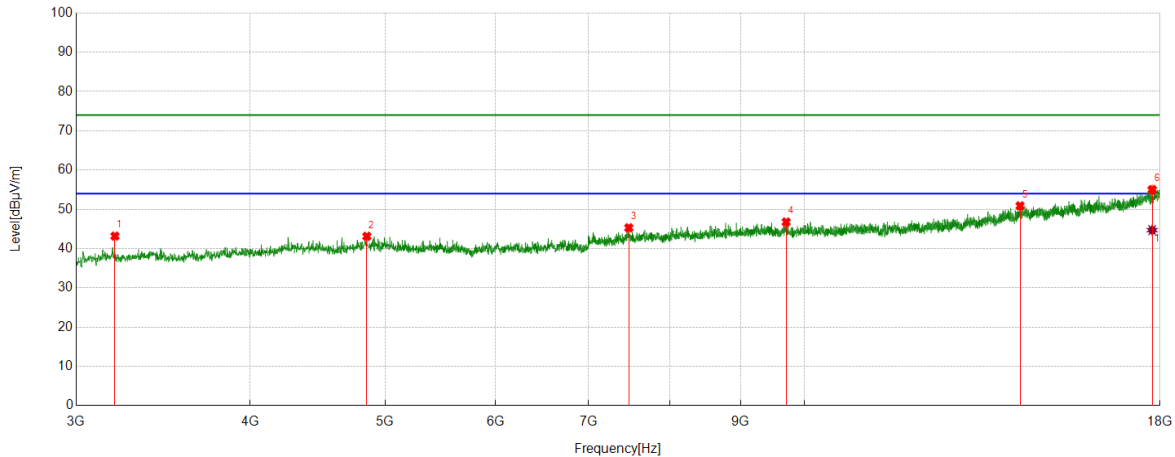

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3198.7748	53.04	-9.86	43.18	74.00	30.82	peak
2	4850.8564	46.68	-3.55	43.13	74.00	30.87	peak
3	7479.935	44.53	0.77	45.30	74.00	28.70	peak
4	9702.0878	43.19	3.58	46.77	74.00	27.23	peak
5	14281.4102	39.04	11.85	50.89	74.00	23.11	peak
6	17767.4709	36.97	18.05	55.02	74.00	18.98	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17767.4709	26.66	18.05	44.71	54.00	9.29	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX20	LCH	Horizontal	PASS

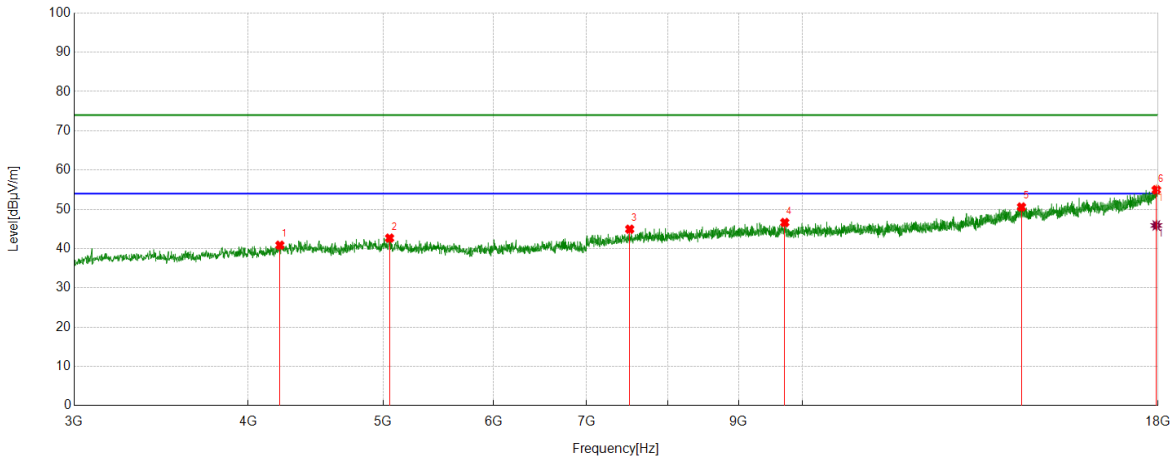

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4215.1519	46.61	-5.75	40.86	74.00	33.14	peak
2	5053.3817	45.76	-3.09	42.67	74.00	31.33	peak
3	7515.5644	44.67	0.27	44.94	74.00	29.06	peak
4	9711.4639	43.00	3.64	46.64	74.00	27.36	peak
5	14362.0453	39.63	10.96	50.59	74.00	23.41	peak
6	17949.3687	36.58	18.38	54.96	74.00	19.04	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17949.3687	27.51	18.38	45.89	54.00	8.11	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX20	LCH	Vertical	PASS

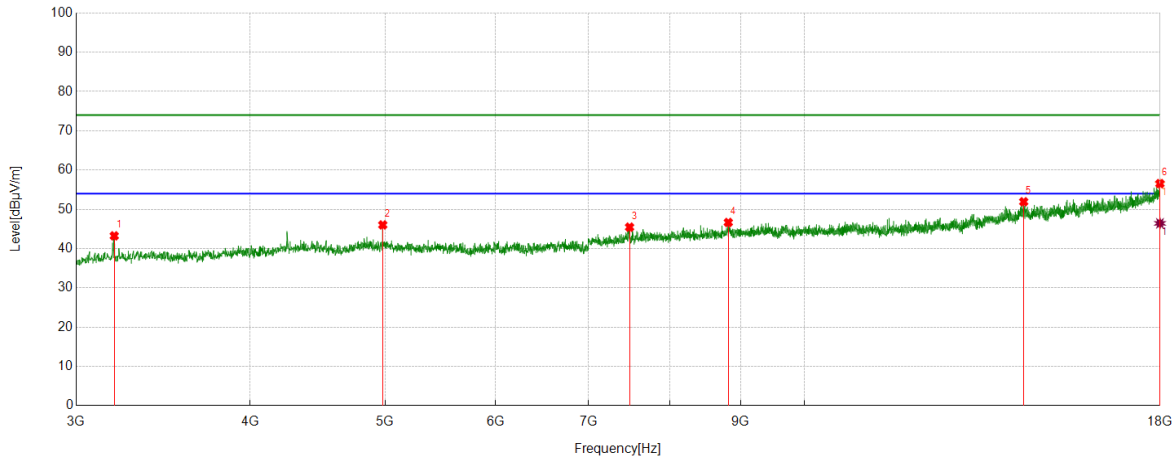

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3195.0244	53.12	-9.88	43.24	74.00	30.76	peak
2	4980.2475	49.89	-3.86	46.03	74.00	27.97	peak
3	7489.3112	44.99	0.47	45.46	74.00	28.54	peak
4	8816.9771	44.13	2.53	46.66	74.00	27.34	peak
5	14367.671	41.10	10.83	51.93	74.00	22.07	peak
6	17998.1248	37.83	18.72	56.55	74.00	17.45	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17998.1248	27.71	18.72	46.43	54.00	7.57	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX20	MCH	Horizontal	PASS

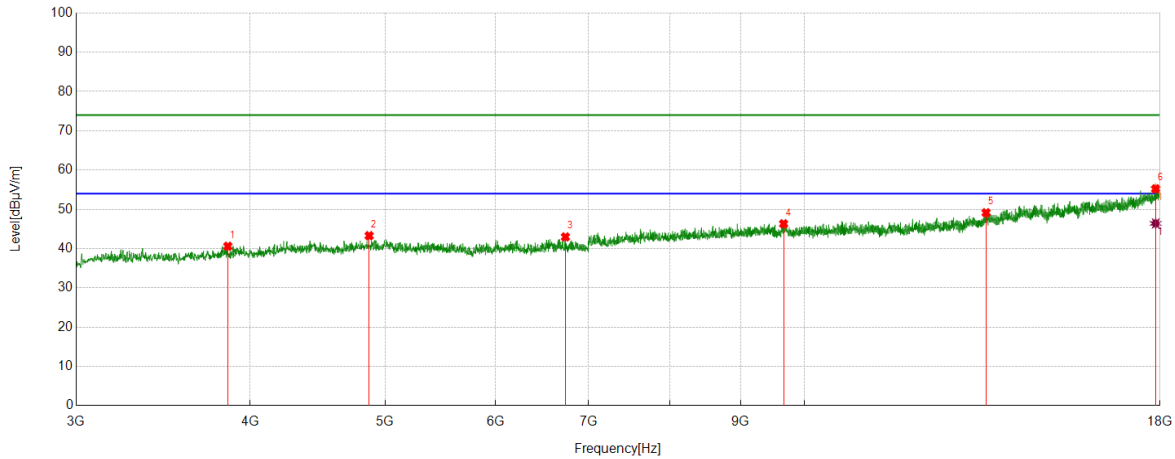

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3855.1069	48.01	-7.42	40.59	74.00	33.41	peak
2	4869.6087	46.97	-3.69	43.28	74.00	30.72	peak
3	6735.4669	43.80	-0.83	42.97	74.00	31.03	peak
4	9660.8326	42.66	3.66	46.32	74.00	27.68	peak
5	13501.3127	40.25	8.88	49.13	74.00	24.87	peak
6	17870.6088	36.47	18.74	55.21	74.00	18.79	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17870.6088	27.67	18.74	46.41	54.00	7.59	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX20	MCH	Vertical	PASS

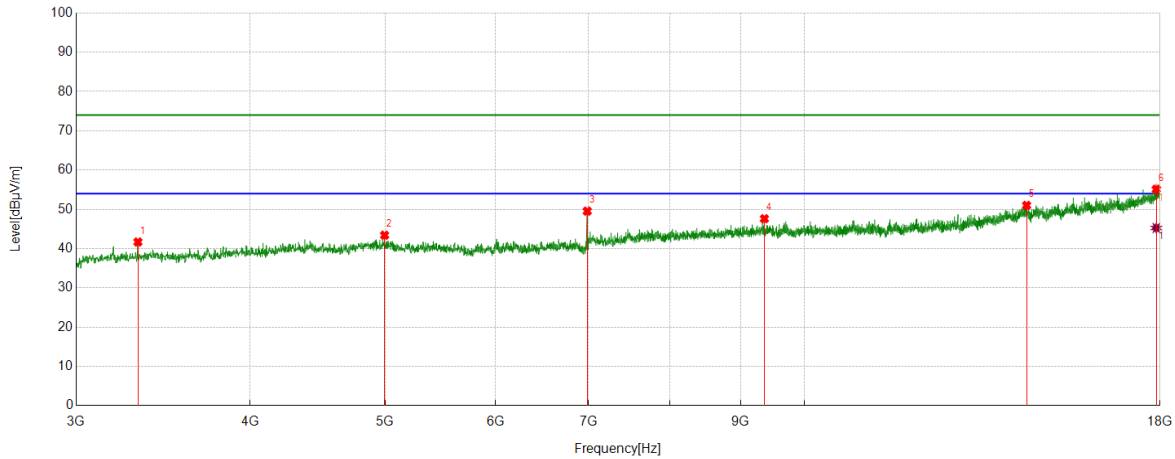

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3322.5403	51.23	-9.55	41.68	74.00	32.32	peak
2	4995.2494	46.99	-3.58	43.41	74.00	30.59	peak
3	6982.9979	50.49	-0.95	49.54	74.00	24.46	peak
4	9358.9199	44.50	3.11	47.61	74.00	26.39	peak
5	14437.0546	39.31	11.69	51.00	74.00	23.00	peak
6	17889.3612	35.88	19.24	55.12	74.00	18.88	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17889.3612	26.01	19.24	45.25	54.00	8.75	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX20	HCH	Horizontal	PASS

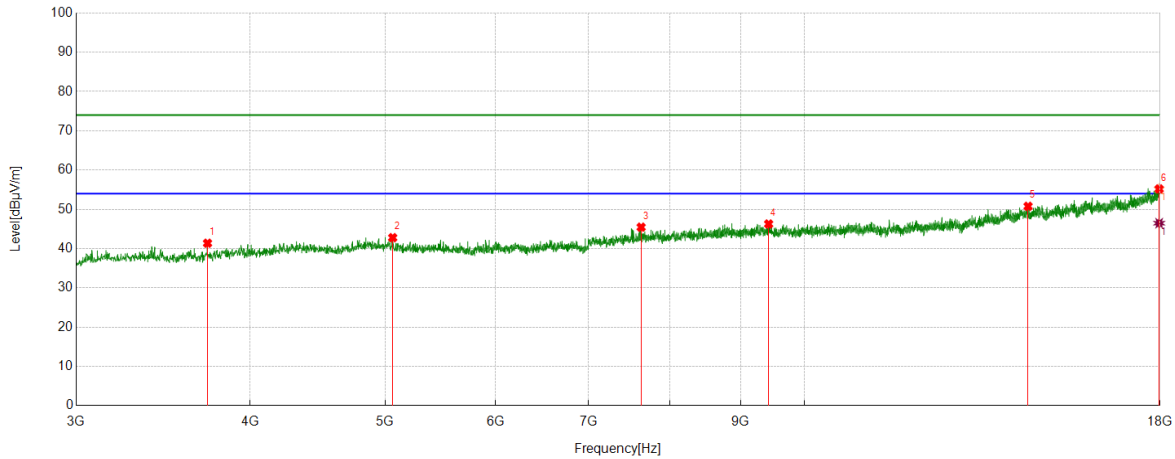

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3727.5909	49.15	-7.78	41.37	74.00	32.63	peak
2	5062.7578	45.91	-3.13	42.78	74.00	31.22	peak
3	7633.7042	43.82	1.63	45.45	74.00	28.55	peak
4	9424.5531	42.94	3.33	46.27	74.00	27.73	peak
5	14472.6841	38.91	11.86	50.77	74.00	23.23	peak
6	17973.7467	36.51	18.68	55.19	74.00	18.81	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17973.7467	27.79	18.68	46.47	54.00	7.53	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX20	HCH	Vertical	PASS

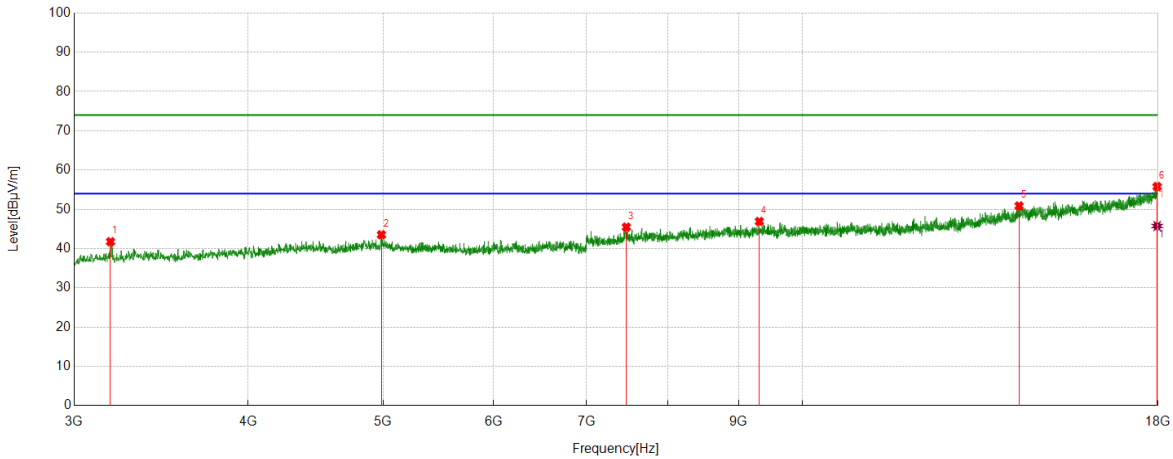

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3185.6482	51.65	-9.89	41.76	74.00	32.24	peak
2	4985.8732	47.11	-3.59	43.52	74.00	30.48	peak
3	7474.3093	44.56	0.91	45.47	74.00	28.53	peak
4	9312.039	43.91	3.00	46.91	74.00	27.09	peak
5	14305.7882	39.60	11.27	50.87	74.00	23.13	peak
6	17973.7467	37.11	18.68	55.79	74.00	18.21	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17973.7467	27.06	18.68	45.74	54.00	8.26	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX40	LCH	Horizontal	PASS

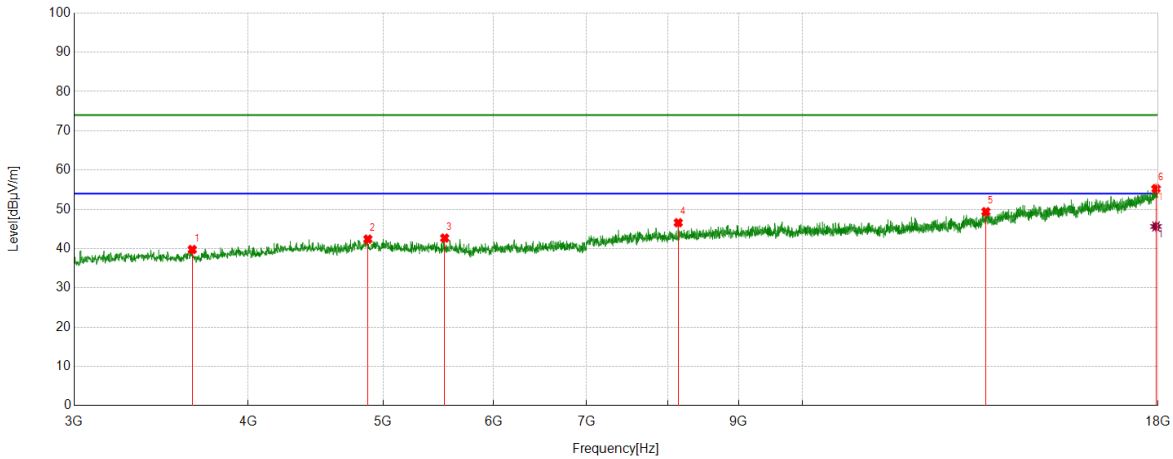

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3646.9559	48.07	-8.31	39.76	74.00	34.24	peak
2	4875.2344	45.99	-3.58	42.41	74.00	31.59	peak
3	5535.3169	45.72	-3.04	42.68	74.00	31.32	peak
4	8143.768	44.97	1.62	46.59	74.00	27.41	peak
5	13542.5678	40.40	9.00	49.40	74.00	24.60	peak
6	17939.9925	36.62	18.63	55.25	74.00	18.75	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17939.9925	27.00	18.63	45.63	54.00	8.37	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX40	LCH	Vertical	PASS

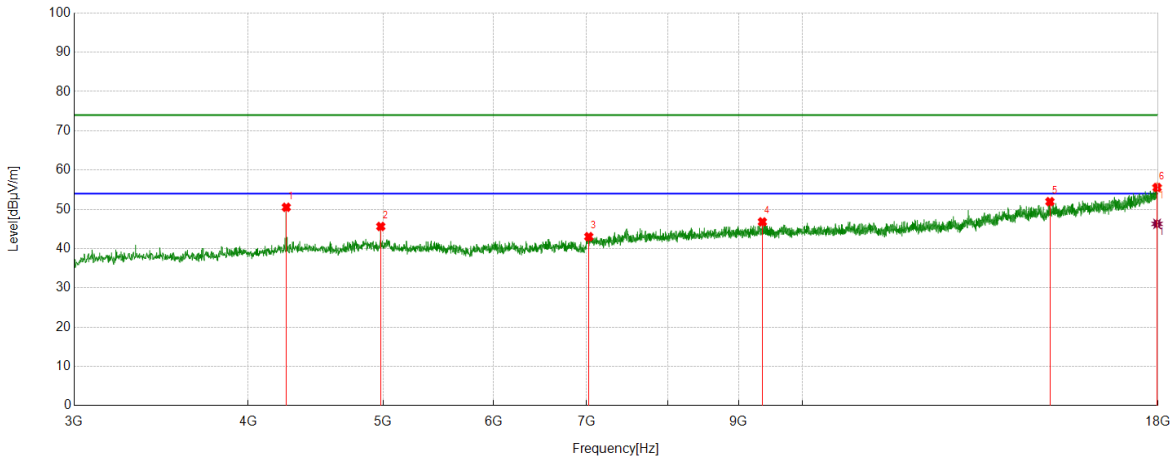

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4260.1575	56.18	-5.66	50.52	74.00	23.48	peak
2	4980.2475	49.49	-3.86	45.63	74.00	28.37	peak
3	7024.253	43.36	-0.33	43.03	74.00	30.97	peak
4	9358.9199	43.70	3.11	46.81	74.00	27.19	peak
5	15054.0068	39.89	12.06	51.95	74.00	22.05	peak
6	17971.8715	36.86	18.70	55.56	74.00	18.44	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17971.8715	27.60	18.70	46.30	54.00	7.70	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX40	MCH	Horizontal	PASS

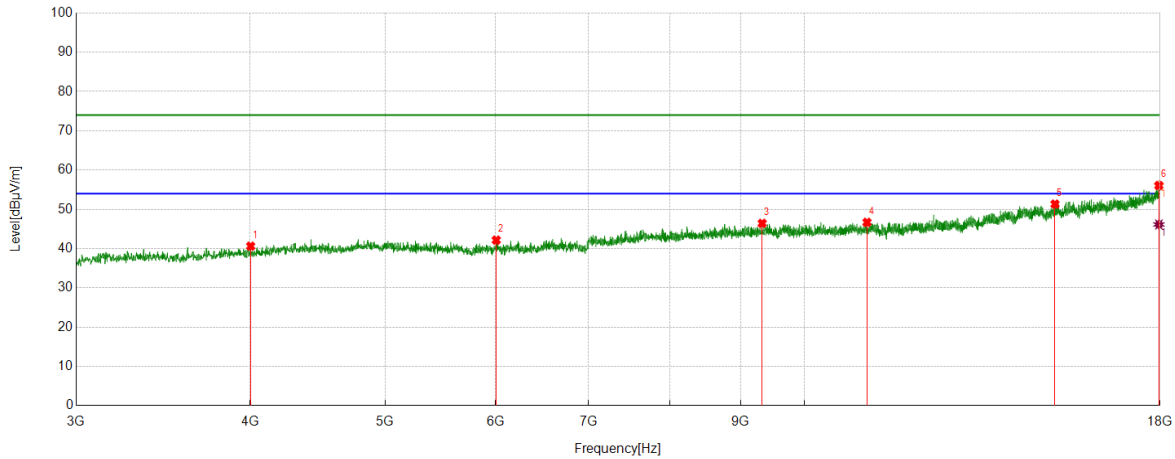

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4003.2504	47.38	-6.76	40.62	74.00	33.38	peak
2	6007.876	44.19	-2.03	42.16	74.00	31.84	peak
3	9325.1656	43.19	3.25	46.44	74.00	27.56	peak
4	11089.7612	41.19	5.50	46.69	74.00	27.31	peak
5	15130.8914	39.32	12.01	51.33	74.00	22.67	peak
6	17966.2458	37.45	18.61	56.06	74.00	17.94	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17966.2458	27.53	18.61	46.14	54.00	7.86	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX40	MCH	Vertical	PASS

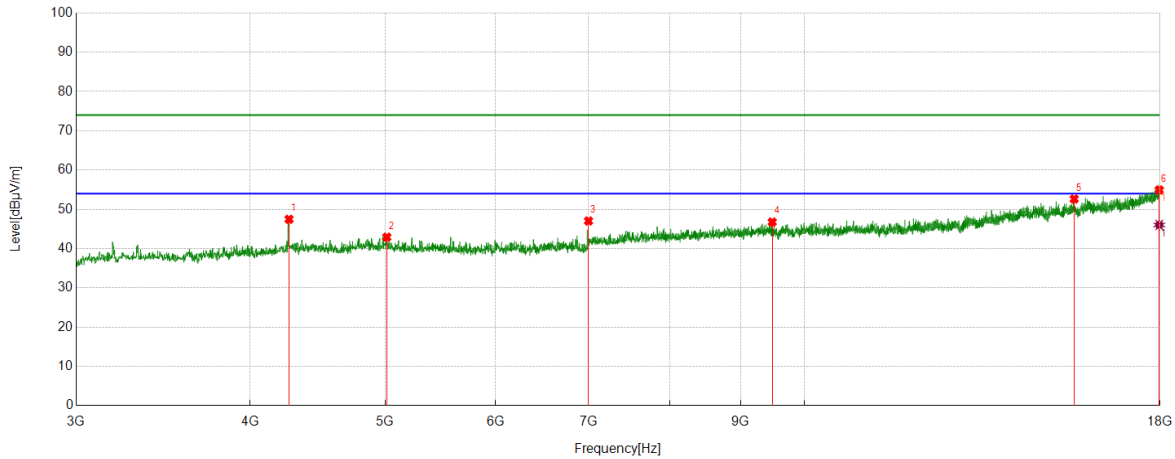

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4265.7832	52.95	-5.48	47.47	74.00	26.53	peak
2	5014.0018	46.65	-3.73	42.92	74.00	31.08	peak
3	6997.9998	47.46	-0.42	47.04	74.00	26.96	peak
4	9480.8101	43.38	3.38	46.76	74.00	27.24	peak
5	15618.4523	39.16	13.47	52.63	74.00	21.37	peak
6	17977.4972	36.27	18.67	54.94	74.00	19.06	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17977.4972	27.35	18.67	46.02	54.00	7.98	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX40	HCH	Horizontal	PASS

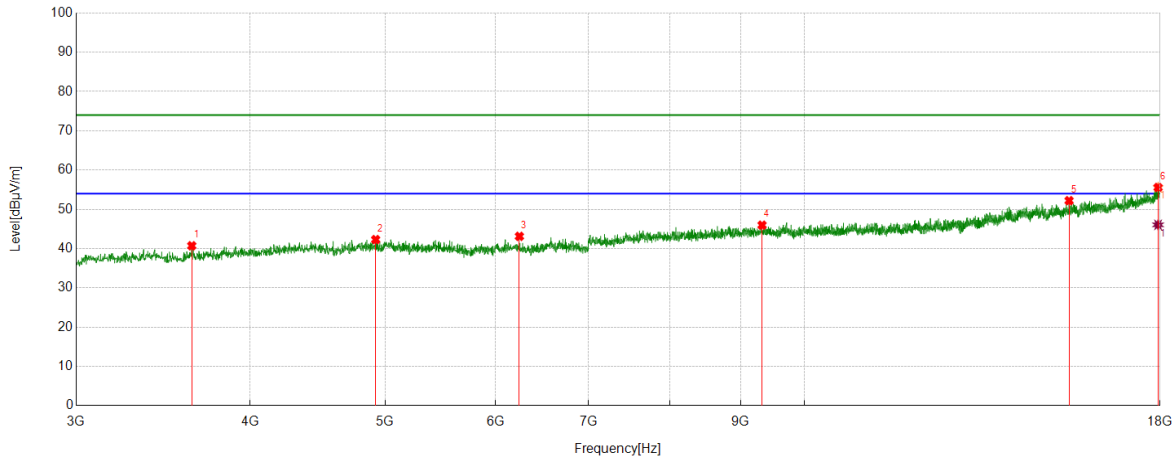

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3631.954	49.30	-8.58	40.72	74.00	33.28	peak
2	4922.1153	46.18	-3.89	42.29	74.00	31.71	peak
3	6242.2803	44.82	-1.70	43.12	74.00	30.88	peak
4	9323.2904	42.68	3.29	45.97	74.00	28.03	peak
5	15487.1859	39.70	12.51	52.21	74.00	21.79	peak
6	17941.8677	36.99	18.58	55.57	74.00	18.43	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17941.8677	27.47	18.58	46.05	54.00	7.95	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 - Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 - For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 - Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX40	HCH	Vertical	PASS

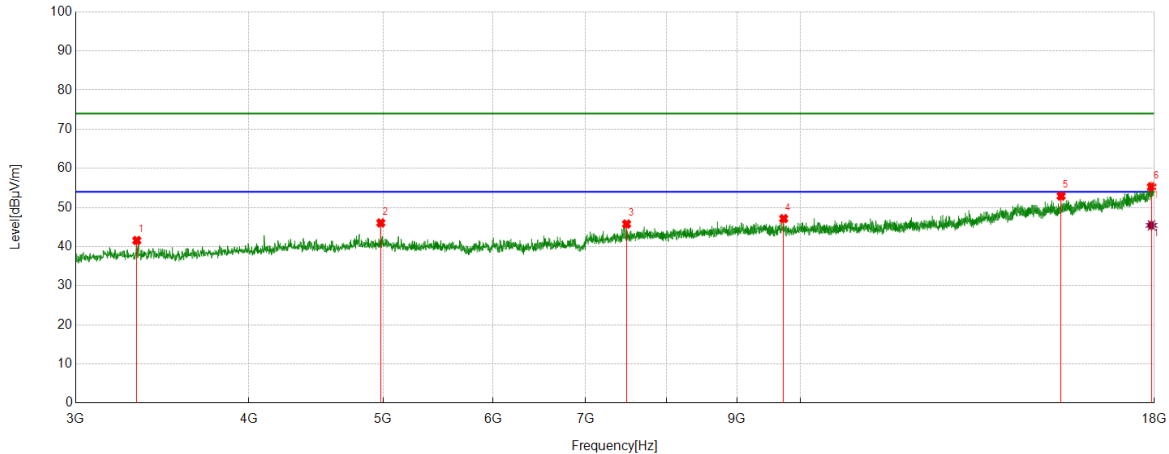

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3320.6651	51.10	-9.54	41.56	74.00	32.44	peak
2	4980.2475	49.91	-3.86	46.05	74.00	27.95	peak
3	7491.1864	45.33	0.44	45.77	74.00	28.23	peak
4	9724.5906	43.53	3.62	47.15	74.00	26.85	peak
5	15417.8022	39.68	13.23	52.91	74.00	21.09	peak
6	17917.4897	36.50	18.79	55.29	74.00	18.71	peak

AV Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17917.4897	26.64	18.79	45.43	54.00	8.57	AV

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part III: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

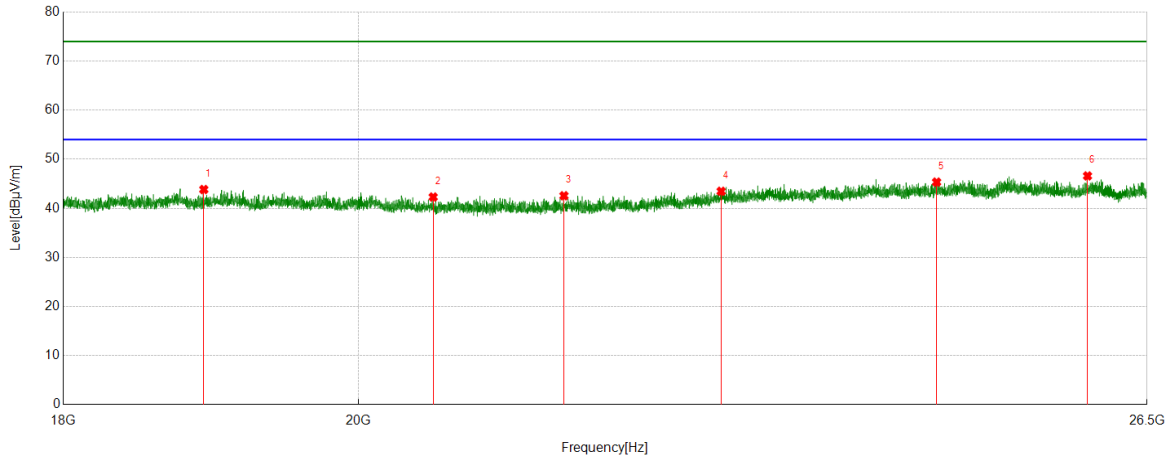


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	18926.5927	49.97	-6.14	43.83	74.00	30.17	peak
2	20540.9041	48.01	-5.71	42.30	74.00	31.70	peak
3	21521.9022	48.39	-5.83	42.56	74.00	31.44	peak
4	22763.8764	47.48	-4.01	43.47	74.00	30.53	peak
5	24583.0583	48.41	-3.07	45.34	74.00	28.66	peak
6	25943.1943	49.34	-2.74	46.60	74.00	27.40	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable) – Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

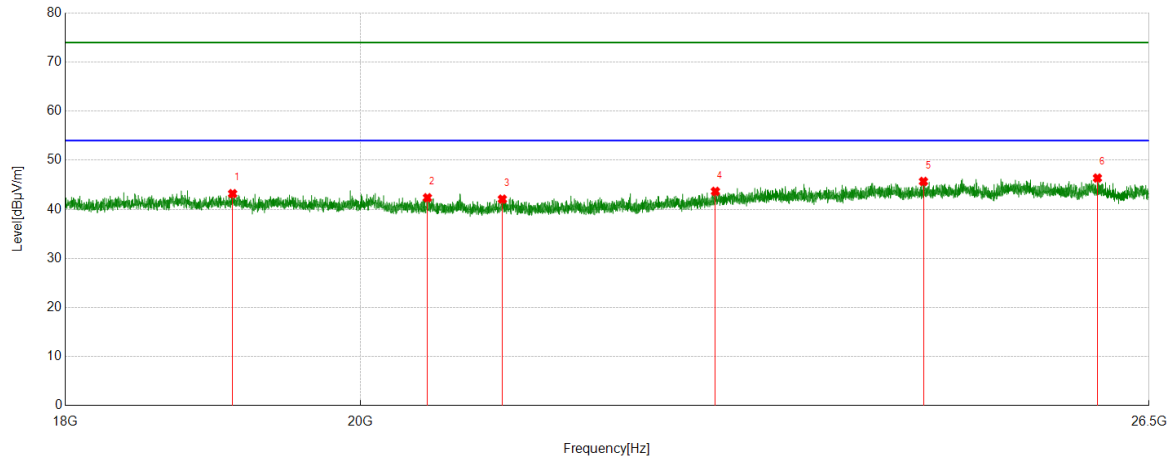

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	19108.5109	49.09	-5.90	43.19	74.00	30.81	peak
2	20483.9484	48.00	-5.64	42.36	74.00	31.64	peak
3	21039.0539	48.07	-6.00	42.07	74.00	31.93	peak
4	22700.9701	47.81	-4.16	43.65	74.00	30.35	peak
5	24450.445	48.64	-2.96	45.68	74.00	28.32	peak
6	26016.3016	49.03	-2.66	46.37	74.00	27.63	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable) – Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part IV: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)


Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

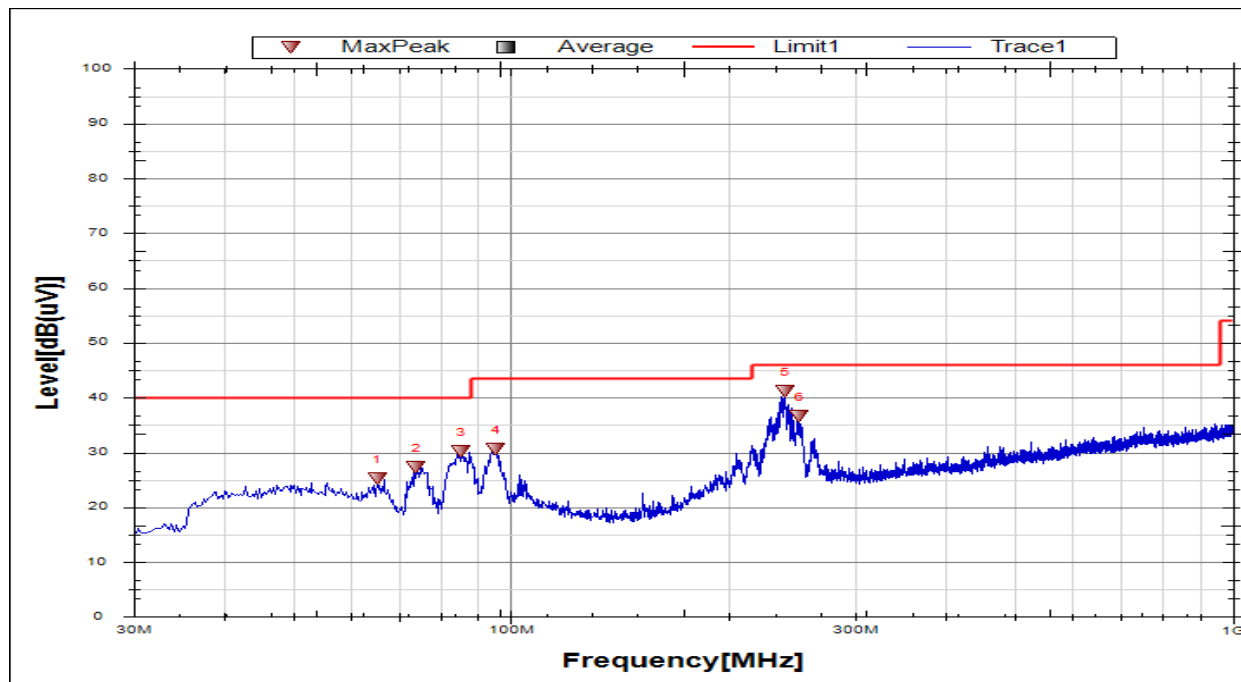

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	65.1713	7.31	17.92	25.23	40	14.77	peak
2	73.9035	12.02	15.34	27.36	40	12.64	peak
3	85.3039	14.79	15.43	30.22	40	9.78	peak
4	95.2489	12.65	17.94	30.59	43.5	12.91	peak
5	239.8153	21.12	20.07	41.19	46	4.81	peak
6	250.7305	16.26	20.4	36.66	46	9.34	peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable).

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

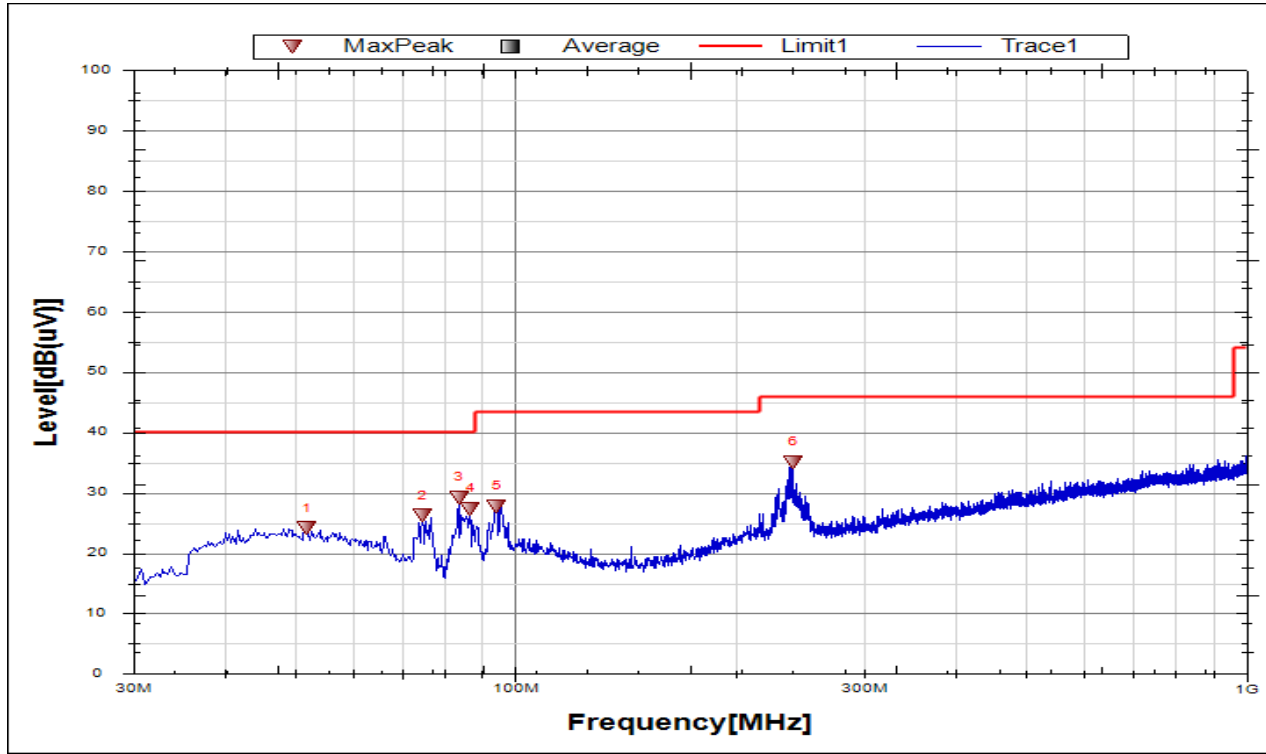


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	51.8305	3.32	20.79	24.11	40	15.89	peak
2	74.6312	11.04	15.16	26.2	40	13.8	peak
3	83.606	14.33	14.93	29.26	40	10.74	peak
4	86.7593	11.52	15.86	27.38	40	12.62	peak
5	94.2787	10.05	17.75	27.8	43.5	15.7	peak
6	239.8153	14.95	20.07	35.02	46	10.98	peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable).

Part V: 9kHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)


Test Mode	Channel	Frequency Range	Verdict
11B	MCH	9kHz~150kHz	PASS

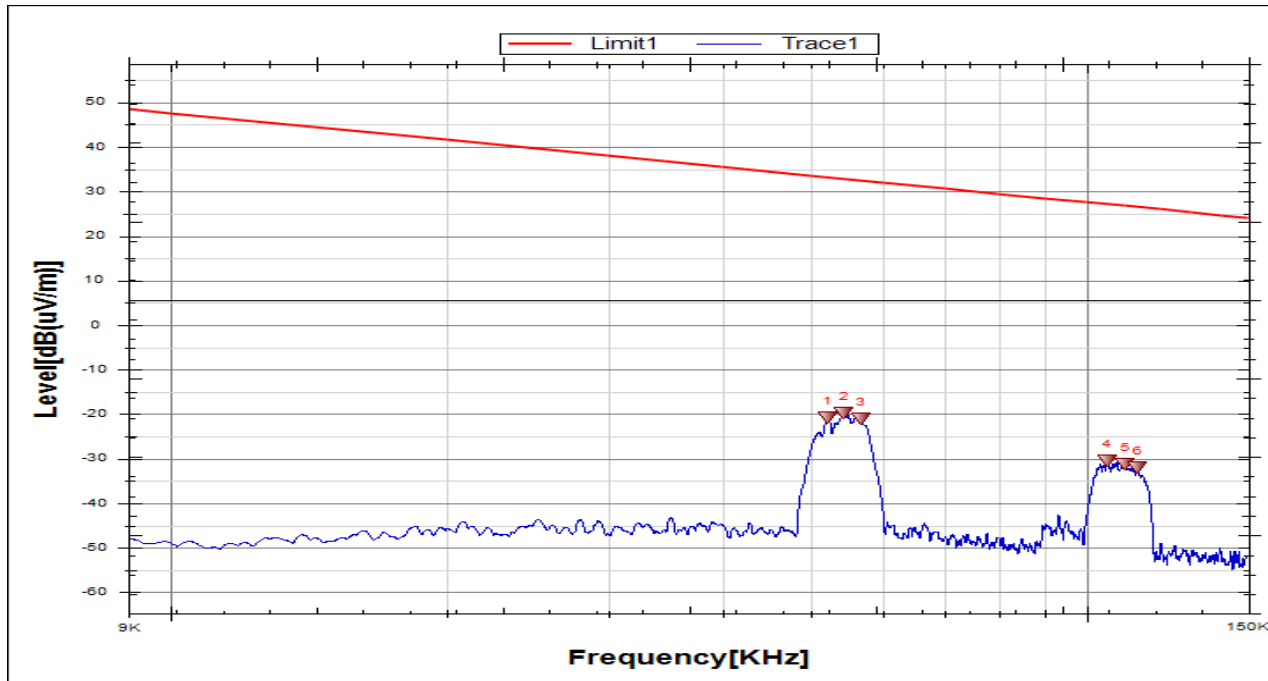

No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0521	40.99	-61.72	-20.73	33.29	54.02	Peak
2	0.0543	41.95	-61.72	-19.77	32.94	52.71	Peak
3	0.0566	40.67	-61.73	-21.06	32.58	53.64	Peak
4	0.1051	31.27	-61.81	-30.54	27.18	57.72	Peak
5	0.1101	30.61	-61.82	-31.21	26.77	57.98	Peak
6	0.1135	29.88	-61.82	-31.94	26.51	58.45	Peak

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) + Distance Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


Test Mode	Channel	Frequency Range	Verdict
11B	MCH	150kHz~490kHz	PASS

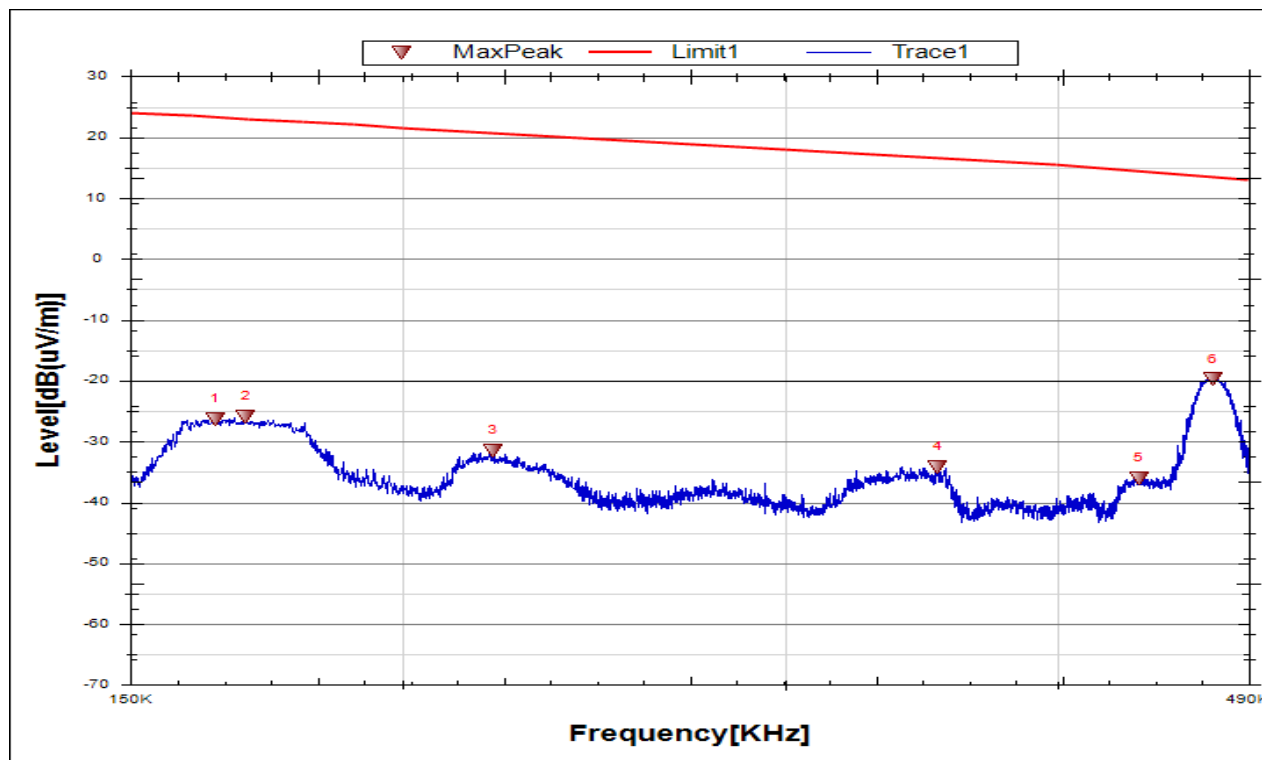

No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.1639	35.56	-61.84	-26.28	23.32	49.6	Peak
2	0.1694	35.99	-61.84	-25.85	23.03	48.88	Peak
3	0.2201	30.35	-61.87	-31.52	20.87	52.39	Peak
4	0.3525	27.77	-61.9	-34.13	16.75	50.88	Peak
5	0.4361	25.9	-61.88	-35.98	14.57	50.55	Peak
6	0.4716	42.07	-61.87	-19.8	13.59	33.39	Peak

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) + Distance Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Test Mode	Channel	Frequency Range	Verdict
11B	MCH	490kHz~30MHz	PASS

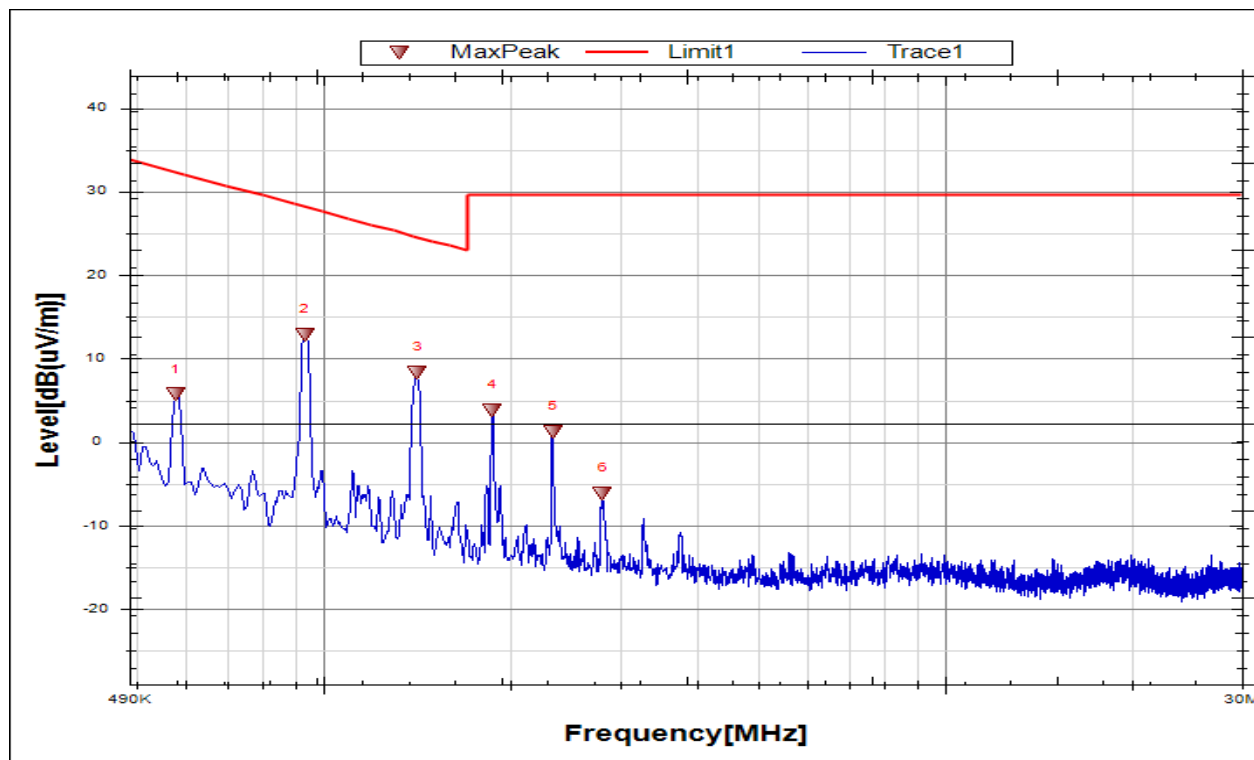

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	FCC Result [dBuV/m]	FCC Limit [dBuV/m]	Margin [dB]	Remark
1	0.5785	27.62	-21.88	5.74	32.38	26.64	Peak
2	0.9327	34.74	-21.85	12.89	28.22	15.33	Peak
3	1.4198	30.22	-21.83	8.39	24.56	16.17	Peak
4	1.8699	25.67	-21.82	3.85	29.54	25.69	Peak
5	2.3421	23.11	-21.8	1.31	29.54	28.23	Peak
6	2.8144	15.68	-21.8	-6.12	29.54	35.66	Peak

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) + Distance Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is more than 6 dBi, so the power and power density limit shall be reduced amount in dB that the directional gain of the antenna exceeds 6dBi.

END OF REPORT