



Test Mode	Channel	Polarization	Verdict
11AX20	5180	Vertical	PASS

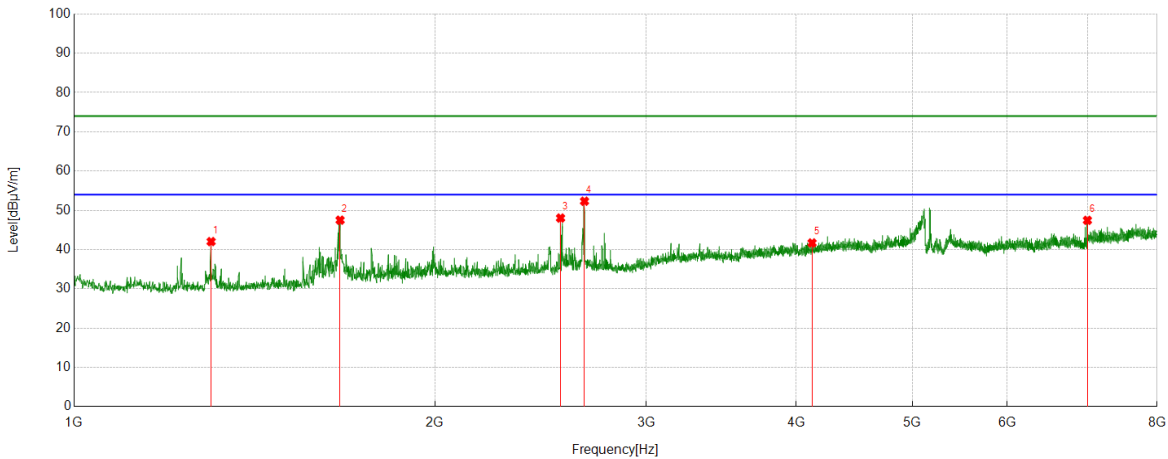

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	62.30	-20.26	42.04	74.00	31.96	peak
2	1666.6296	65.49	-17.99	47.50	74.00	26.50	peak
3	2544.8383	61.33	-13.30	48.03	74.00	25.97	peak
4	2664.6294	65.03	-12.71	52.32	74.00	21.68	peak
5	4124.6805	47.73	-6.03	41.70	74.00	32.30	peak
6	6998.1109	46.72	0.74	47.46	74.00	26.54	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5200	Horizontal	PASS

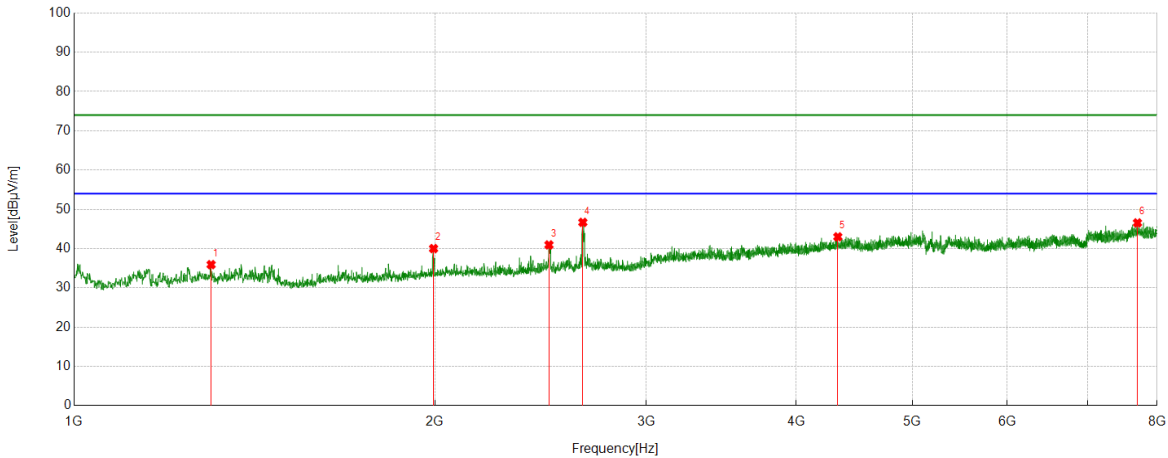

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	56.18	-20.26	35.92	74.00	38.08	peak
2	1994.1105	56.01	-16.01	40.00	74.00	34.00	peak
3	2488.8321	54.80	-13.86	40.94	74.00	33.06	peak
4	2656.0729	59.47	-12.79	46.68	74.00	27.32	peak
5	4333.926	47.63	-4.63	43.00	74.00	31.00	peak
6	7704.4116	44.06	2.49	46.55	74.00	27.45	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5200	Vertical	PASS

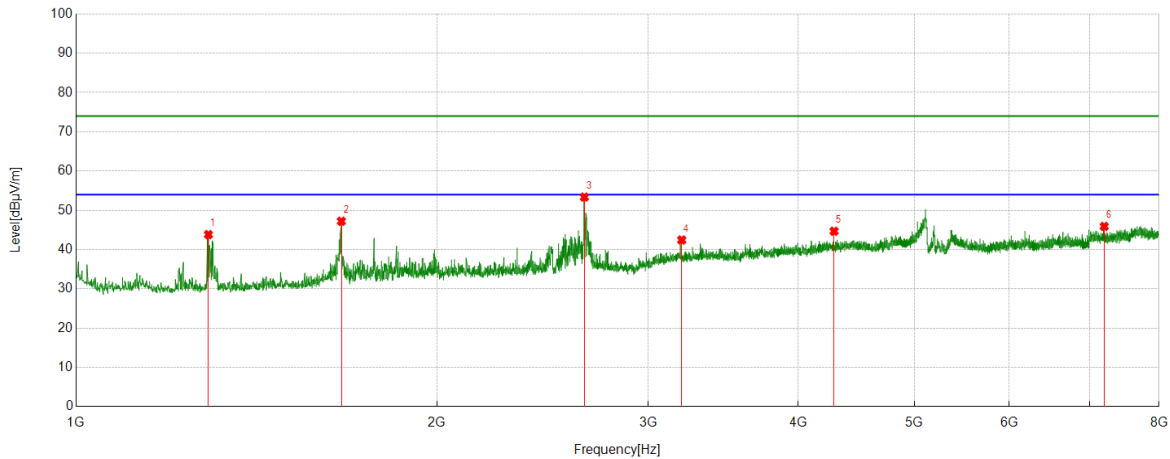

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1289.3655	64.24	-20.42	43.82	74.00	30.18	peak
2	1664.296	65.26	-18.03	47.23	74.00	26.77	peak
3	2653.7393	66.18	-12.81	53.37	74.00	20.63	peak
4	3199.0221	52.35	-9.90	42.45	74.00	31.55	peak
5	4286.4763	49.36	-4.68	44.68	74.00	29.32	peak
6	7200.3556	44.80	1.11	45.91	74.00	28.09	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5240	Horizontal	PASS

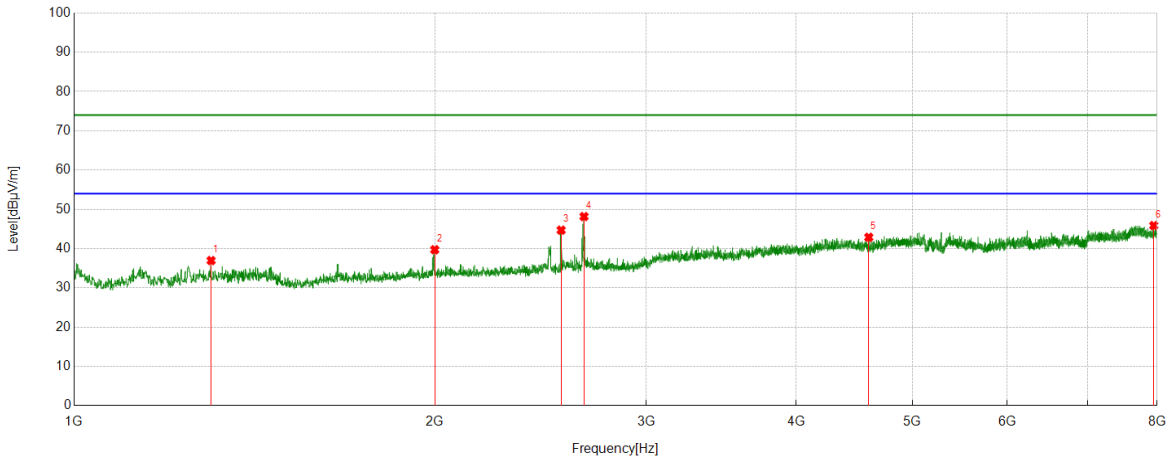

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	57.22	-20.26	36.96	74.00	37.04	peak
2	1998.7776	55.66	-15.94	39.72	74.00	34.28	peak
3	2547.9498	58.05	-13.35	44.70	74.00	29.30	peak
4	2662.2958	60.89	-12.73	48.16	74.00	25.84	peak
5	4599.1777	47.78	-4.90	42.88	74.00	31.12	peak
6	7949.4388	43.11	2.76	45.87	74.00	28.13	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5240	Vertical	PASS

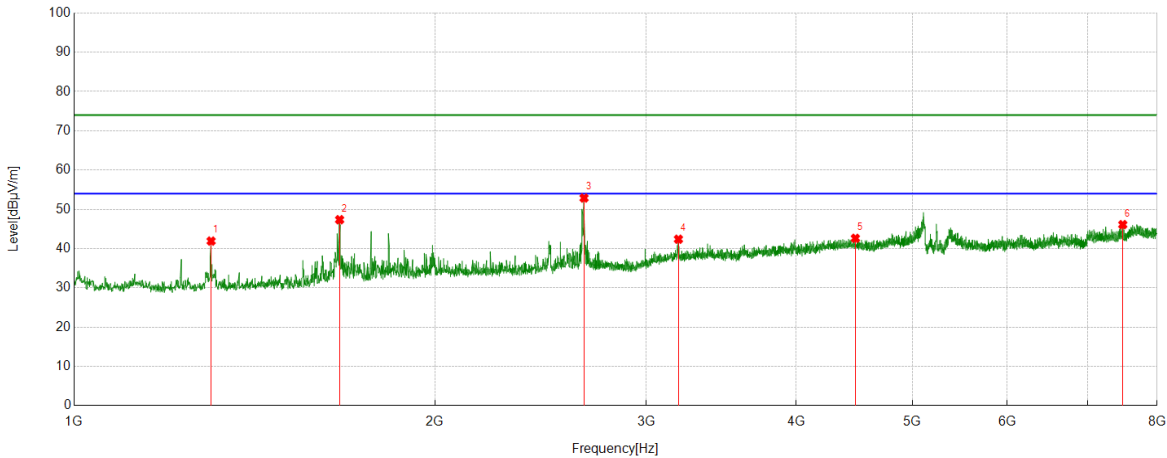

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	62.18	-20.26	41.92	74.00	32.08	peak
2	1665.0739	65.38	-18.02	47.36	74.00	26.64	peak
3	2662.2958	65.61	-12.73	52.88	74.00	21.12	peak
4	3191.2435	52.13	-9.74	42.39	74.00	31.61	peak
5	4482.4981	47.39	-4.77	42.62	74.00	31.38	peak
6	7489.7211	44.52	1.59	46.11	74.00	27.89	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5260	Horizontal	PASS

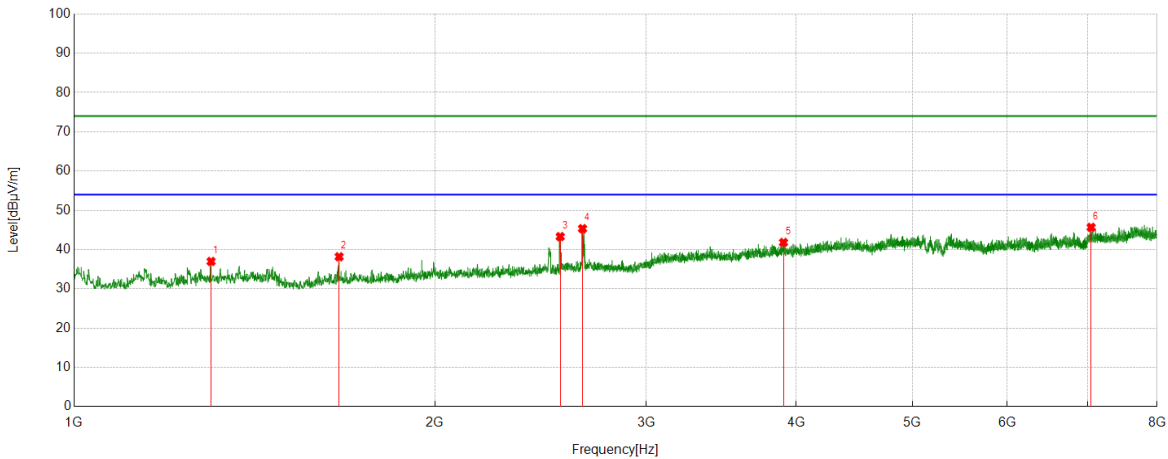

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	57.24	-20.26	36.98	74.00	37.02	peak
2	1663.5182	56.22	-18.04	38.18	74.00	35.82	peak
3	2543.2826	56.57	-13.26	43.31	74.00	30.69	peak
4	2654.5172	58.14	-12.80	45.34	74.00	28.66	peak
5	3904.5449	48.50	-6.68	41.82	74.00	32.18	peak
6	7048.6721	44.57	1.10	45.67	74.00	28.33	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5260	Vertical	PASS

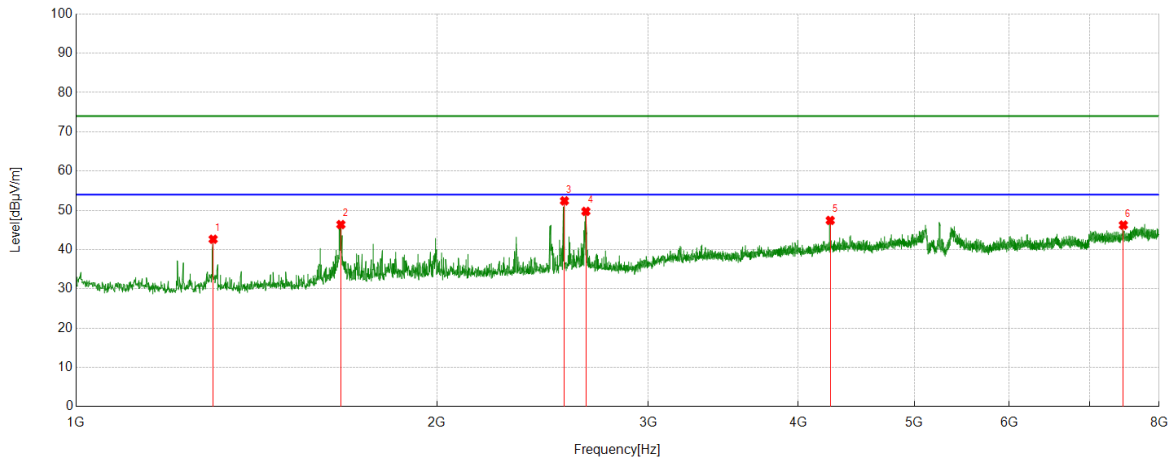

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	62.90	-20.26	42.64	74.00	31.36	peak
2	1662.7403	64.44	-18.06	46.38	74.00	27.62	peak
3	2554.1727	65.78	-13.37	52.41	74.00	21.59	peak
4	2661.5179	62.46	-12.73	49.73	74.00	24.27	peak
5	4254.5838	52.53	-5.10	47.43	74.00	26.57	peak
6	7469.4966	44.29	1.96	46.25	74.00	27.75	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5280	Horizontal	PASS

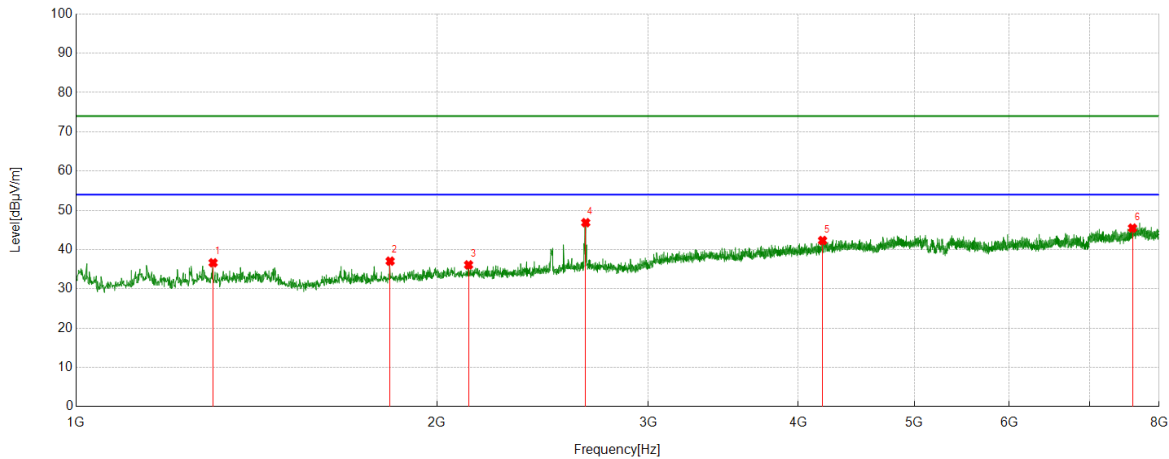

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	56.90	-20.26	36.64	74.00	37.36	peak
2	1827.6475	54.26	-17.20	37.06	74.00	36.94	peak
3	2124.7916	51.61	-15.51	36.10	74.00	37.90	peak
4	2660.7401	59.61	-12.75	46.86	74.00	27.14	peak
5	4192.3547	47.82	-5.51	42.31	74.00	31.69	peak
6	7601.7335	43.18	2.29	45.47	74.00	28.53	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5280	Vertical	PASS

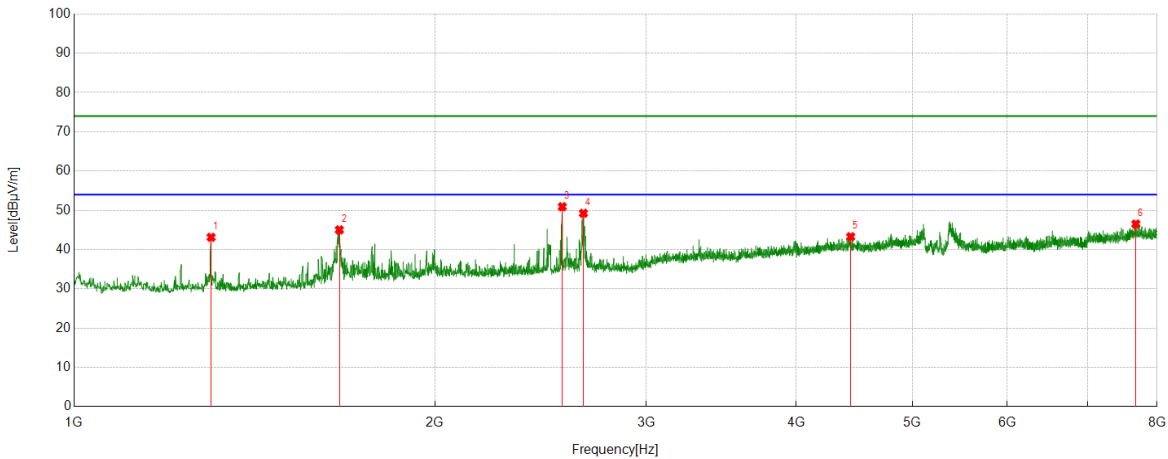

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	63.40	-20.26	43.14	74.00	30.86	peak
2	1664.296	63.05	-18.03	45.02	74.00	28.98	peak
3	2553.3948	64.30	-13.38	50.92	74.00	23.08	peak
4	2659.1844	62.00	-12.75	49.25	74.00	24.75	peak
5	4442.0491	47.57	-4.29	43.28	74.00	30.72	peak
6	7680.2978	44.35	2.16	46.51	74.00	27.49	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5320	Horizontal	PASS

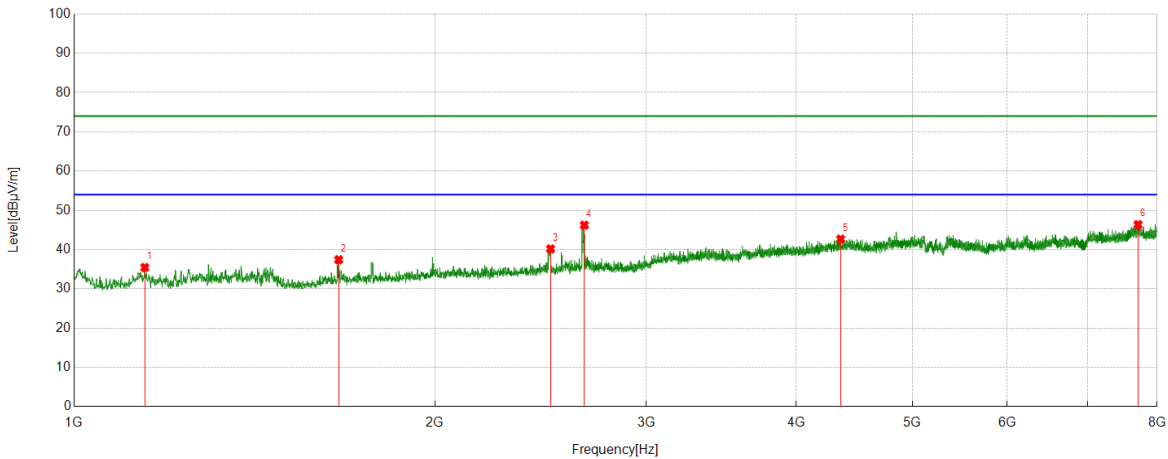

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1145.4606	56.56	-21.11	35.45	74.00	38.55	peak
2	1661.9624	55.49	-18.07	37.42	74.00	36.58	peak
3	2496.6107	54.02	-13.83	40.19	74.00	33.81	peak
4	2663.8515	58.93	-12.71	46.22	74.00	27.78	peak
5	4357.2619	47.55	-4.87	42.68	74.00	31.32	peak
6	7712.9681	43.71	2.66	46.37	74.00	27.63	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5320	Vertical	PASS

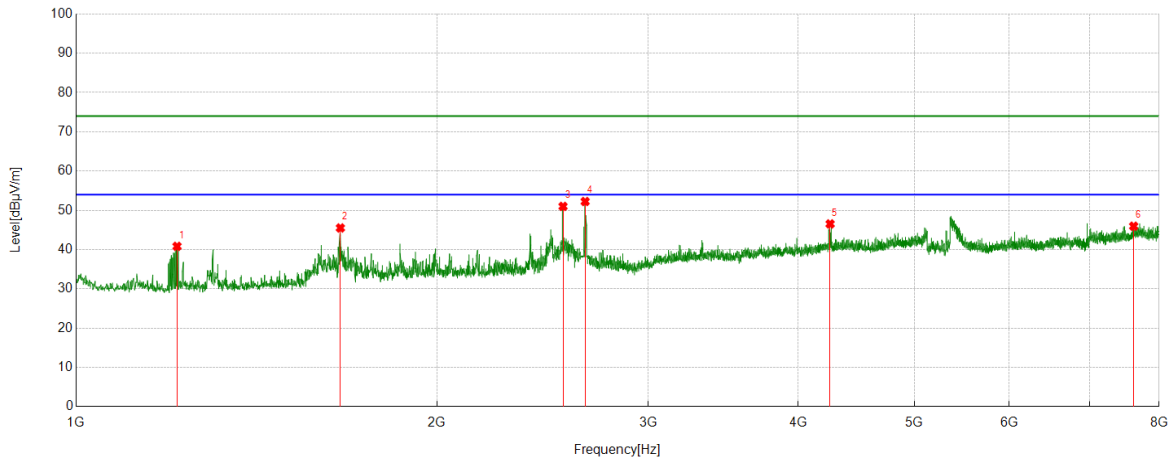

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1213.9127	62.11	-21.28	40.83	74.00	33.17	peak
2	1661.1846	63.59	-18.08	45.51	74.00	28.49	peak
3	2547.1719	64.35	-13.35	51.00	74.00	23.00	peak
4	2657.6286	65.02	-12.77	52.25	74.00	21.75	peak
5	4253.806	51.63	-5.09	46.54	74.00	27.46	peak
6	7618.8465	43.22	2.74	45.96	74.00	28.04	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5500	Horizontal	PASS

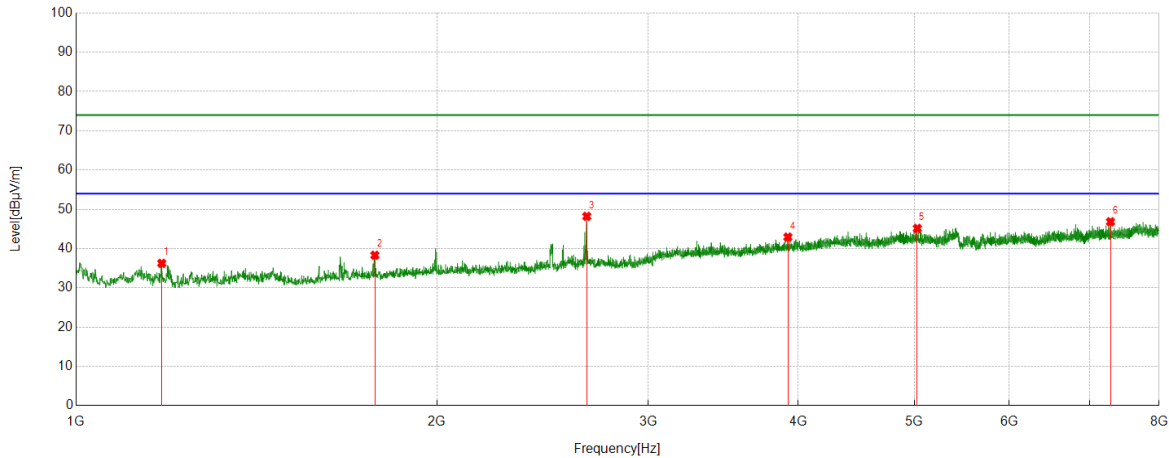

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1178.9088	57.70	-21.45	36.25	74.00	37.75	peak
2	1774.7528	55.84	-17.53	38.31	74.00	35.69	peak
3	2666.1851	60.67	-12.45	48.22	74.00	25.78	peak
4	3922.4358	49.69	-6.75	42.94	74.00	31.06	peak
5	5029.3366	47.92	-2.78	45.14	74.00	28.86	peak
6	7287.4764	45.93	0.90	46.83	74.00	27.17	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5500	Vertical	PASS

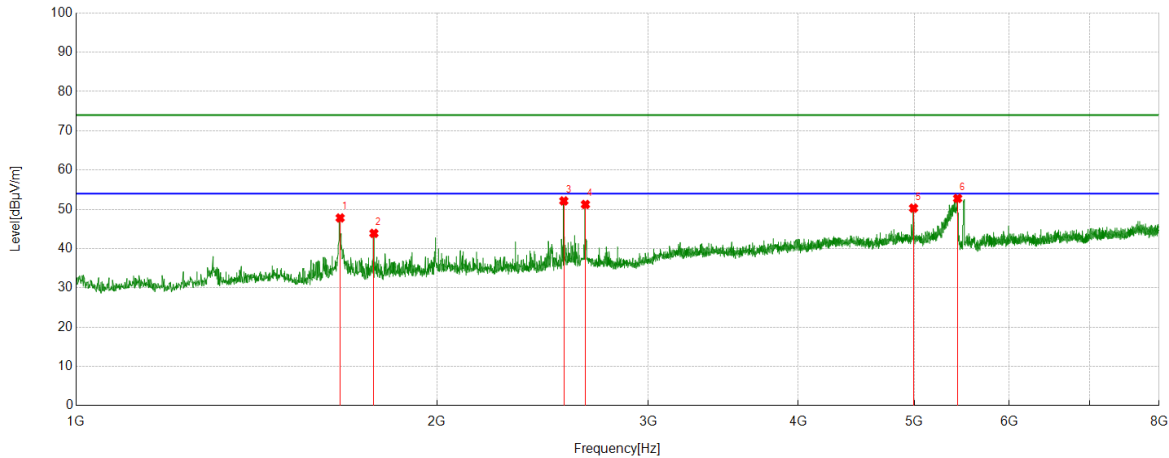

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1660.4067	65.88	-18.07	47.81	74.00	26.19	peak
2	1771.6413	61.47	-17.58	43.89	74.00	30.11	peak
3	2551.0612	65.05	-12.91	52.14	74.00	21.86	peak
4	2659.1844	63.73	-12.49	51.24	74.00	22.76	peak
5	4992.777	52.52	-2.22	50.30	74.00	23.70	peak
6	5433.826	54.31	-1.53	52.78	74.00	21.22	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5580	Horizontal	PASS

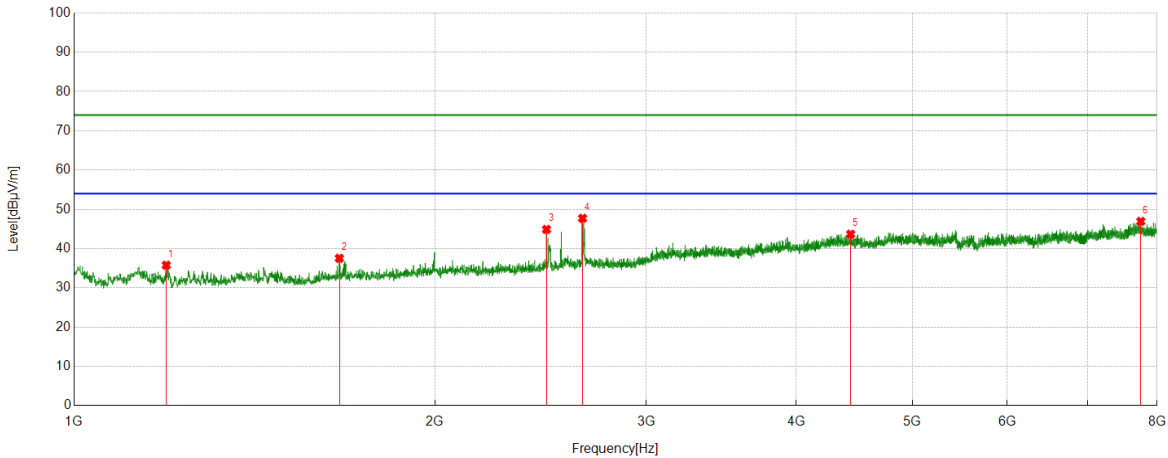

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1193.6882	57.38	-21.61	35.77	74.00	38.23	peak
2	1664.296	55.55	-18.01	37.54	74.00	36.46	peak
3	2477.1641	58.84	-13.95	44.89	74.00	29.11	peak
4	2654.5172	60.26	-12.55	47.71	74.00	26.29	peak
5	4442.0491	47.93	-4.26	43.67	74.00	30.33	peak
6	7753.417	44.02	2.91	46.93	74.00	27.07	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5580	Vertical	PASS

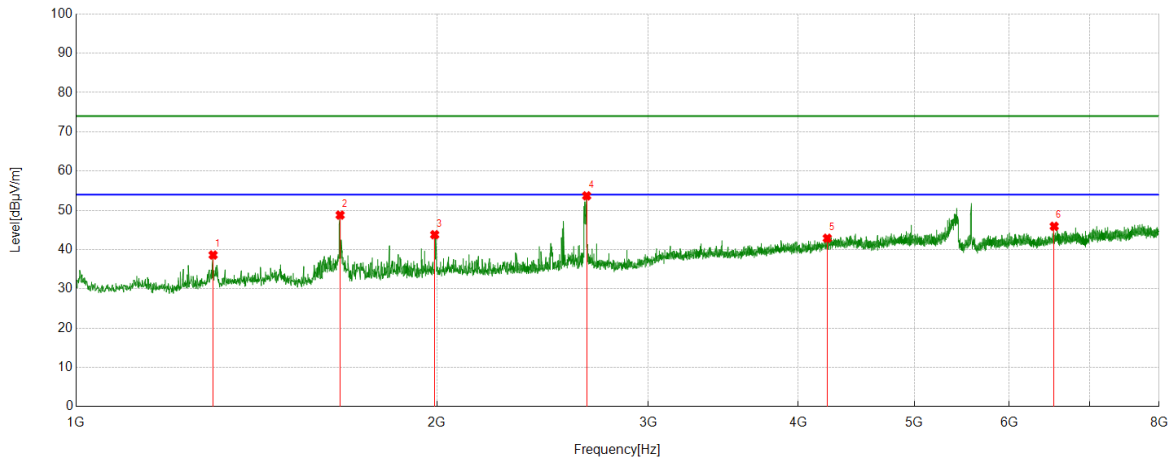

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	58.80	-20.18	38.62	74.00	35.38	peak
2	1660.4067	66.86	-18.07	48.79	74.00	25.21	peak
3	1990.999	59.77	-15.98	43.79	74.00	30.21	peak
4	2665.4073	66.14	-12.45	53.69	74.00	20.31	peak
5	4230.4701	48.09	-5.20	42.89	74.00	31.11	peak
6	6540.7267	46.09	-0.16	45.93	74.00	28.07	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5700	Horizontal	PASS

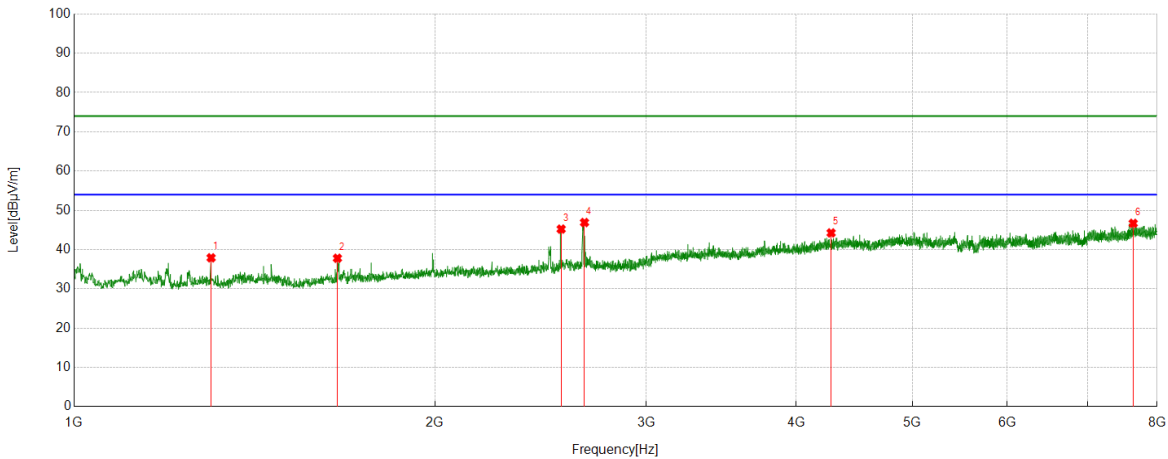

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	58.09	-20.18	37.91	74.00	36.09	peak
2	1658.0731	55.88	-18.08	37.80	74.00	36.20	peak
3	2547.9498	58.12	-12.90	45.22	74.00	28.78	peak
4	2664.6294	59.35	-12.45	46.90	74.00	27.10	peak
5	4278.6976	48.59	-4.34	44.25	74.00	29.75	peak
6	7641.4046	44.38	2.31	46.69	74.00	27.31	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5700	Vertical	PASS

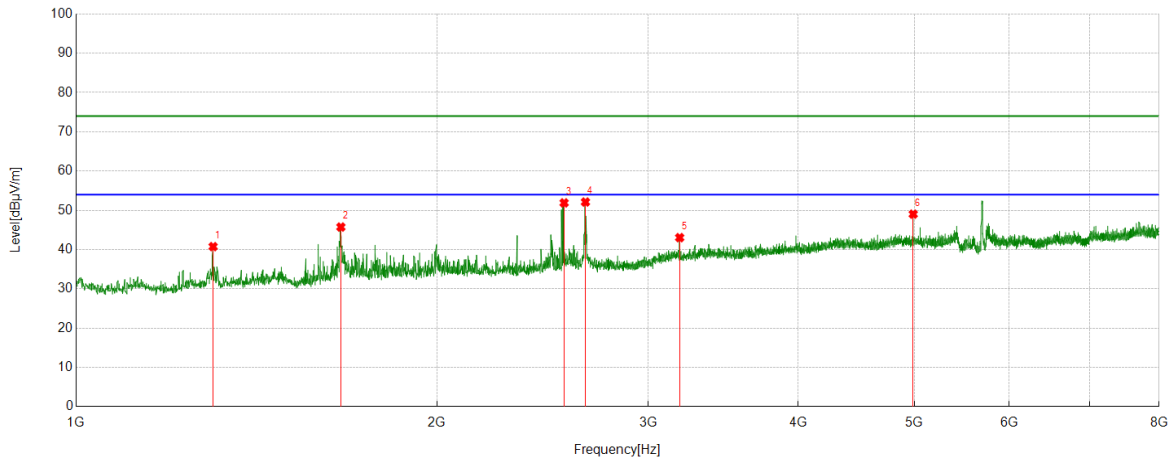

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	60.94	-20.18	40.76	74.00	33.24	peak
2	1662.7403	63.78	-18.03	45.75	74.00	28.25	peak
3	2552.617	64.79	-12.89	51.90	74.00	22.10	peak
4	2659.1844	64.61	-12.49	52.12	74.00	21.88	peak
5	3186.5763	52.39	-9.34	43.05	74.00	30.95	peak
6	4989.6655	51.16	-2.13	49.03	74.00	24.97	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5720	Horizontal	PASS

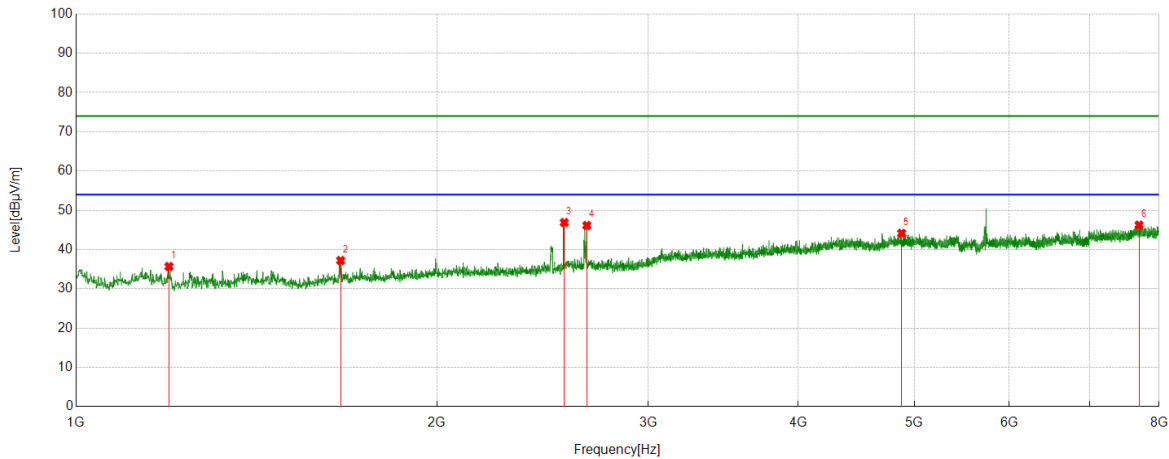

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.2439	57.33	-21.63	35.70	74.00	38.30	peak
2	1661.9624	55.28	-18.05	37.23	74.00	36.77	peak
3	2553.3948	59.78	-12.89	46.89	74.00	27.11	peak
4	2666.1851	58.60	-12.45	46.15	74.00	27.85	peak
5	4879.9867	46.72	-2.56	44.16	74.00	29.84	peak
6	7698.1887	43.84	2.39	46.23	74.00	27.77	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5720	Vertical	PASS

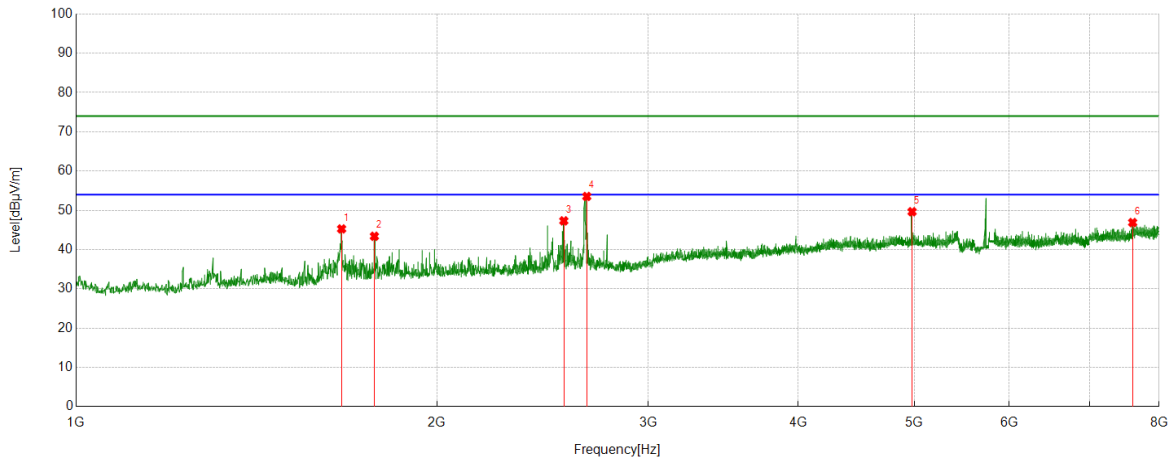

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1665.0739	63.26	-17.99	45.27	74.00	28.73	peak
2	1773.197	60.95	-17.55	43.40	74.00	30.60	peak
3	2551.0612	60.23	-12.91	47.32	74.00	26.68	peak
4	2666.1851	65.99	-12.45	53.54	74.00	20.46	peak
5	4978.7754	52.37	-2.73	49.64	74.00	24.36	peak
6	7604.0671	44.68	2.21	46.89	74.00	27.11	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5745	Horizontal	PASS

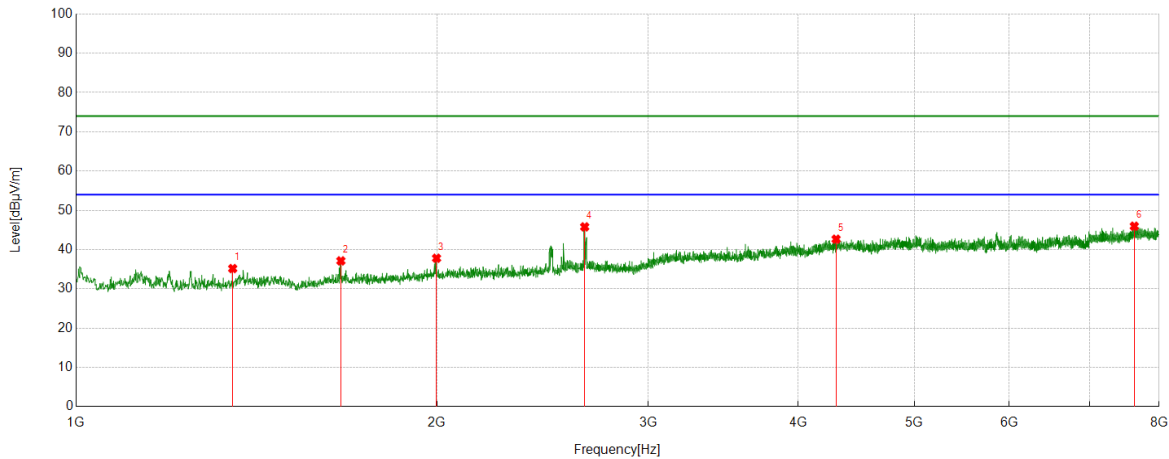

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1350.8168	55.52	-20.35	35.17	74.00	38.83	peak
2	1662.7403	55.14	-18.01	37.13	74.00	36.87	peak
3	1997.9998	53.73	-15.93	37.80	74.00	36.20	peak
4	2655.295	58.67	-12.88	45.79	74.00	28.21	peak
5	4302.8114	46.81	-4.16	42.65	74.00	31.35	peak
6	7628.1809	43.41	2.55	45.96	74.00	28.04	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5745	Vertical	PASS

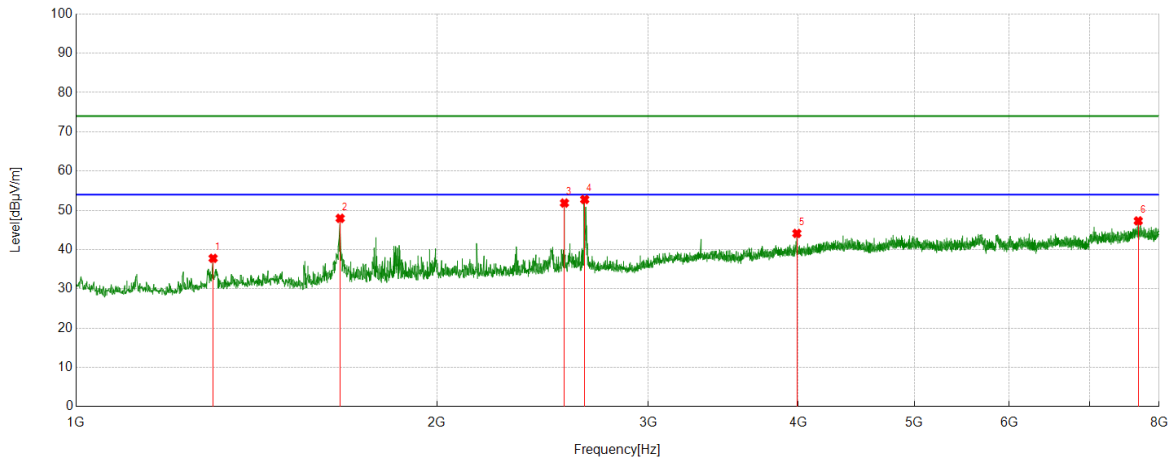

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	57.96	-20.18	37.78	74.00	36.22	peak
2	1660.4067	66.02	-18.06	47.96	74.00	26.04	peak
3	2554.1727	65.37	-13.51	51.86	74.00	22.14	peak
4	2655.295	65.64	-12.88	52.76	74.00	21.24	peak
5	3990.8879	50.44	-6.32	44.12	74.00	29.88	peak
6	7686.5207	45.12	2.19	47.31	74.00	26.69	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5785	Horizontal	PASS

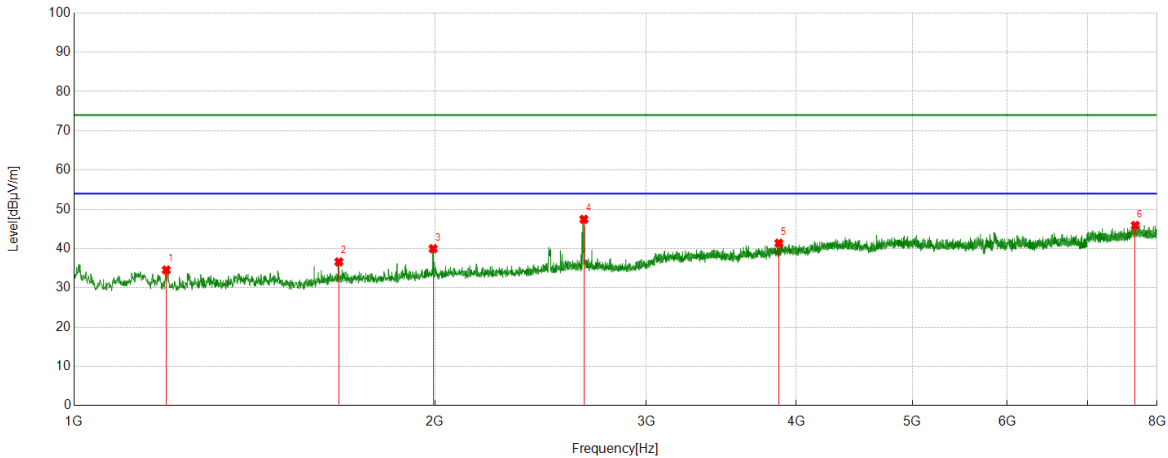

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1193.6882	56.13	-21.58	34.55	74.00	39.45	peak
2	1662.7403	54.63	-18.01	36.62	74.00	37.38	peak
3	1992.5547	56.00	-16.03	39.97	74.00	34.03	peak
4	2661.5179	60.34	-12.89	47.45	74.00	26.55	peak
5	3870.3189	47.75	-6.37	41.38	74.00	32.62	peak
6	7671.7413	43.60	2.29	45.89	74.00	28.11	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5785	Vertical	PASS

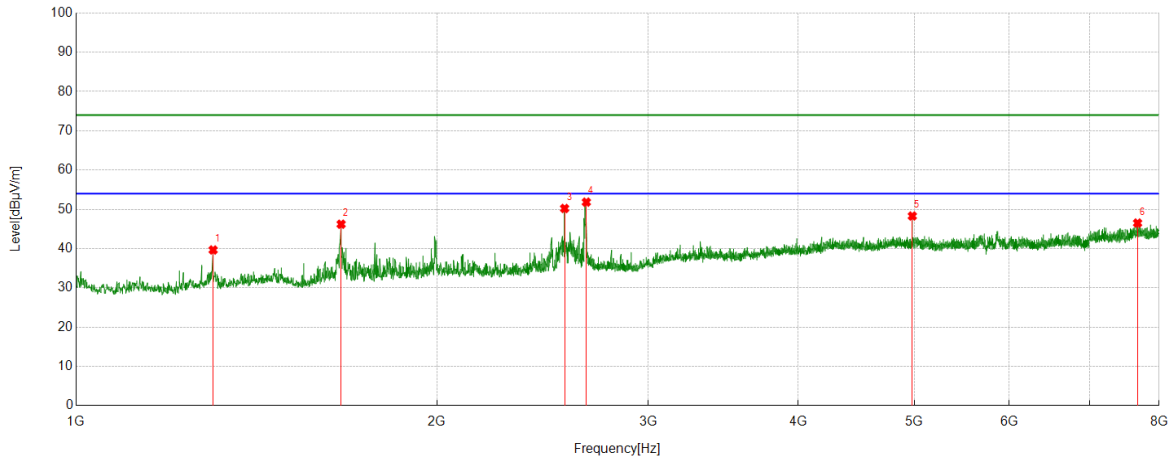

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	59.83	-20.18	39.65	74.00	34.35	peak
2	1663.5182	64.20	-17.99	46.21	74.00	27.79	peak
3	2554.9506	63.73	-13.51	50.22	74.00	23.78	peak
4	2663.8515	64.71	-12.88	51.83	74.00	22.17	peak
5	4981.109	51.22	-2.92	48.30	74.00	25.70	peak
6	7676.4085	44.24	2.26	46.50	74.00	27.50	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5825	Horizontal	PASS

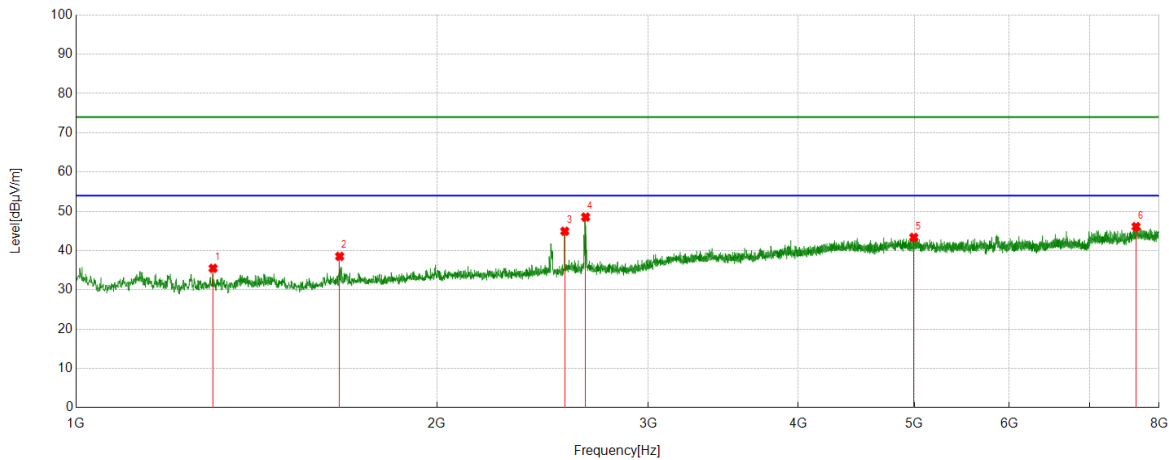

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	55.68	-20.18	35.50	74.00	38.50	peak
2	1658.851	56.60	-18.07	38.53	74.00	35.47	peak
3	2555.7284	58.44	-13.51	44.93	74.00	29.07	peak
4	2659.9622	61.44	-12.90	48.54	74.00	25.46	peak
5	4995.1106	46.02	-2.66	43.36	74.00	30.64	peak
6	7653.8504	44.06	2.04	46.10	74.00	27.90	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX20	5825	Vertical	PASS

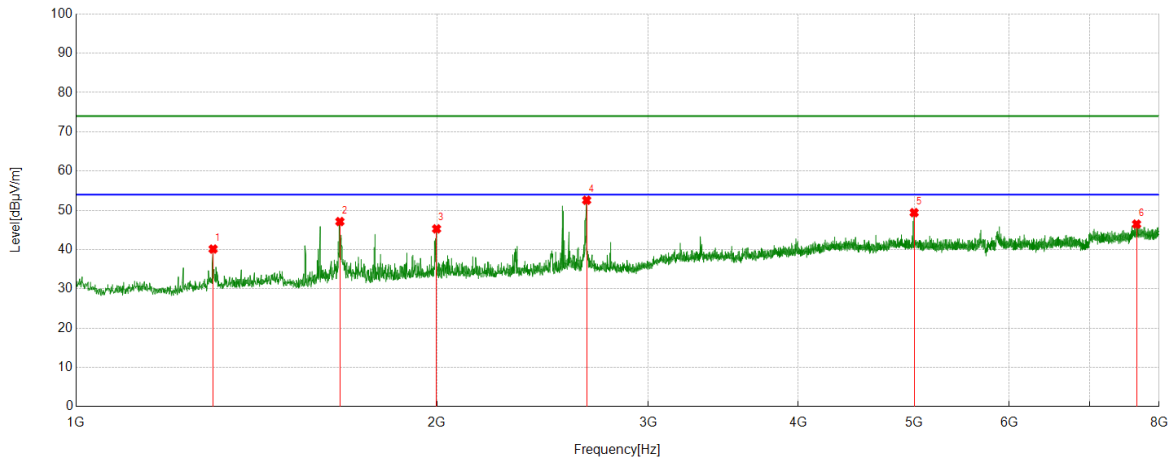

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	60.32	-20.18	40.14	74.00	33.86	peak
2	1659.6288	65.21	-18.07	47.14	74.00	26.86	peak
3	1997.9998	61.21	-15.93	45.28	74.00	28.72	peak
4	2665.4073	65.46	-12.89	52.57	74.00	21.43	peak
5	4998.222	52.18	-2.77	49.41	74.00	24.59	peak
6	7661.6291	44.27	2.22	46.49	74.00	27.51	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5190	Horizontal	PASS

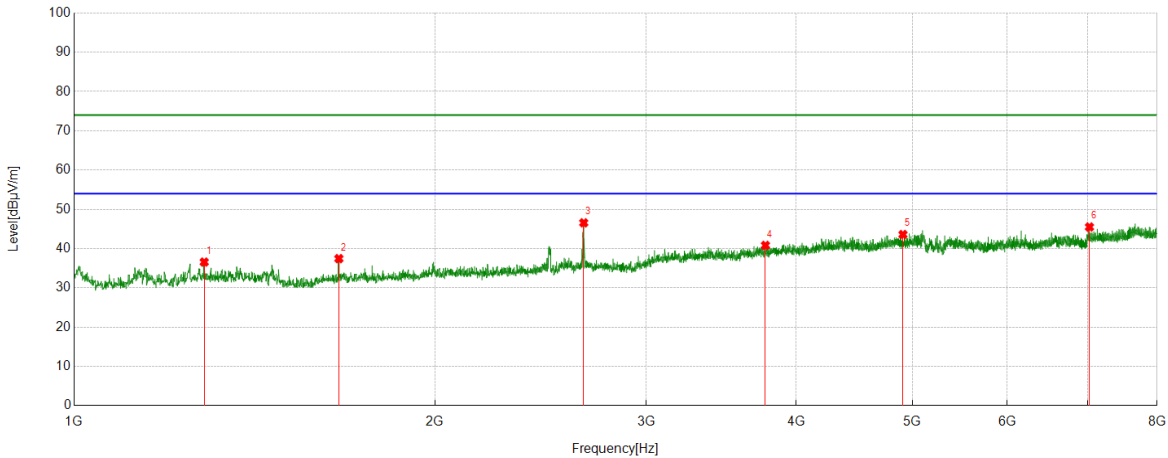

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1283.9204	57.09	-20.52	36.57	74.00	37.43	peak
2	1662.7403	55.51	-18.06	37.45	74.00	36.55	peak
3	2660.7401	59.32	-12.75	46.57	74.00	27.43	peak
4	3771.5302	47.89	-7.07	40.82	74.00	33.18	peak
5	4911.1012	46.74	-3.15	43.59	74.00	30.41	peak
6	7026.114	44.80	0.70	45.50	74.00	28.50	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5190	Vertical	PASS

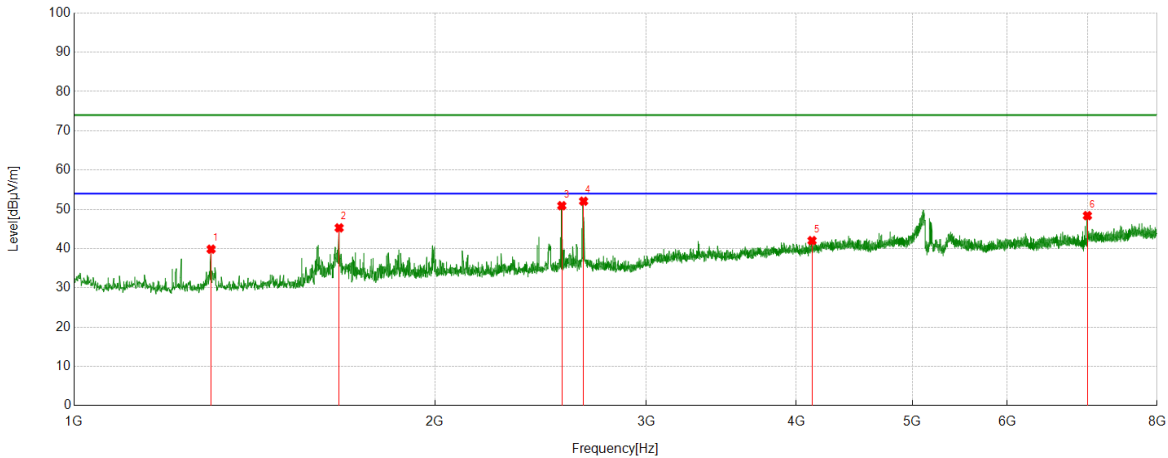

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	60.11	-20.26	39.85	74.00	34.15	peak
2	1663.5182	63.32	-18.04	45.28	74.00	28.72	peak
3	2551.0612	64.31	-13.39	50.92	74.00	23.08	peak
4	2659.9622	64.82	-12.75	52.07	74.00	21.93	peak
5	4124.6805	48.06	-6.03	42.03	74.00	31.97	peak
6	6998.1109	47.65	0.74	48.39	74.00	25.61	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5230	Horizontal	PASS

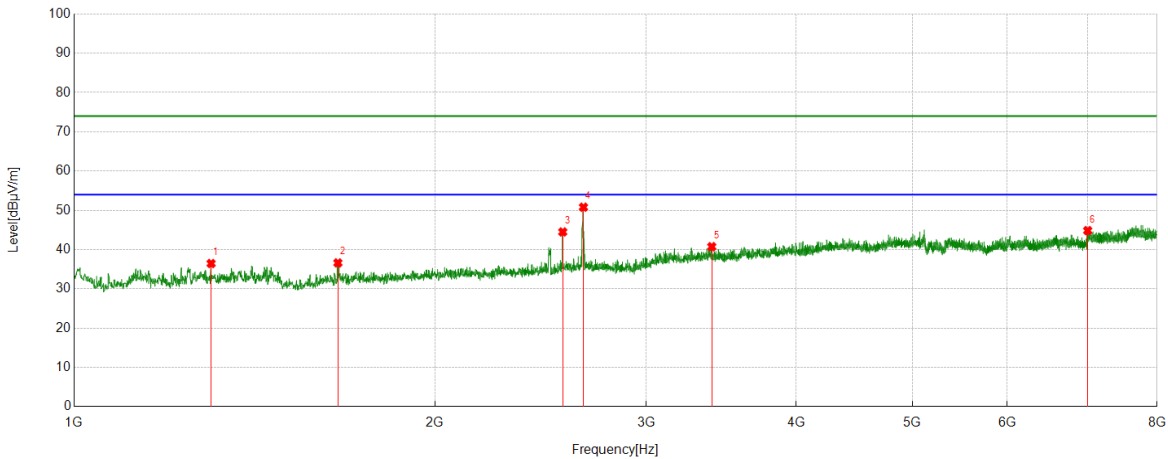

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	56.72	-20.26	36.46	74.00	37.54	peak
2	1659.6288	54.72	-18.10	36.62	74.00	37.38	peak
3	2555.7284	57.86	-13.36	44.50	74.00	29.50	peak
4	2659.1844	63.55	-12.75	50.80	74.00	23.20	peak
5	3402.0447	49.64	-8.90	40.74	74.00	33.26	peak
6	7002.0002	44.03	0.81	44.84	74.00	29.16	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5230	Vertical	PASS

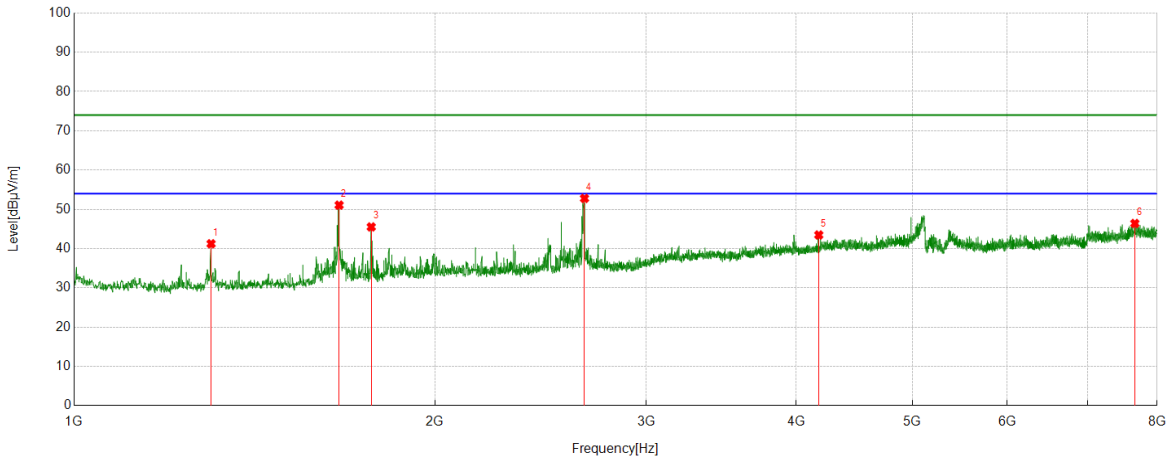

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	61.49	-20.26	41.23	74.00	32.77	peak
2	1663.5182	69.11	-18.04	51.07	74.00	22.93	peak
3	1769.3077	63.21	-17.69	45.52	74.00	28.48	peak
4	2664.6294	65.49	-12.71	52.78	74.00	21.22	peak
5	4178.3532	49.26	-5.79	43.47	74.00	30.53	peak
6	7665.5184	44.22	2.18	46.40	74.00	27.60	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5270	Horizontal	PASS

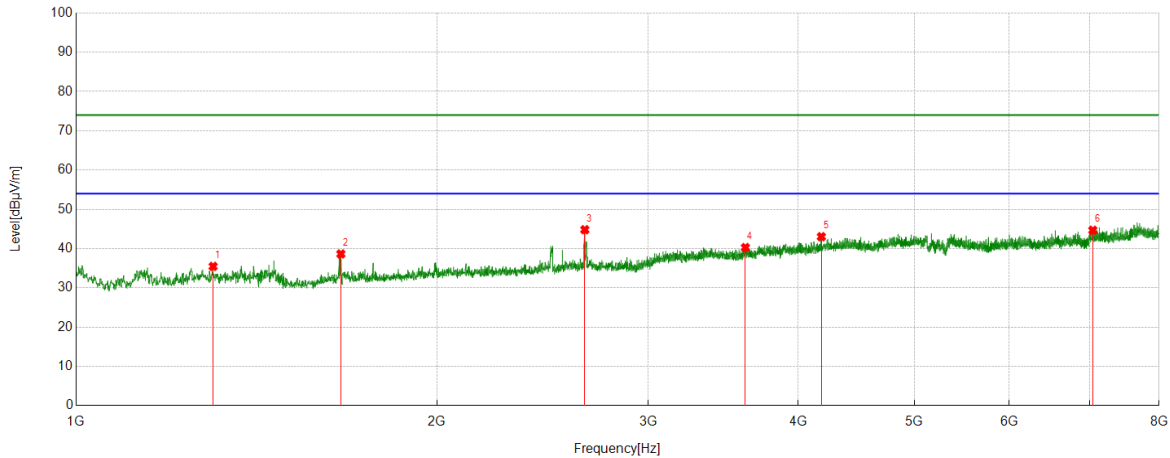

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	55.73	-20.26	35.47	74.00	38.53	peak
2	1662.7403	56.70	-18.06	38.64	74.00	35.36	peak
3	2656.0729	57.60	-12.79	44.81	74.00	29.19	peak
4	3615.1795	48.12	-7.85	40.27	74.00	33.73	peak
5	4183.0203	48.73	-5.70	43.03	74.00	30.97	peak
6	7044.0049	43.69	0.98	44.67	74.00	29.33	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5270	Vertical	PASS

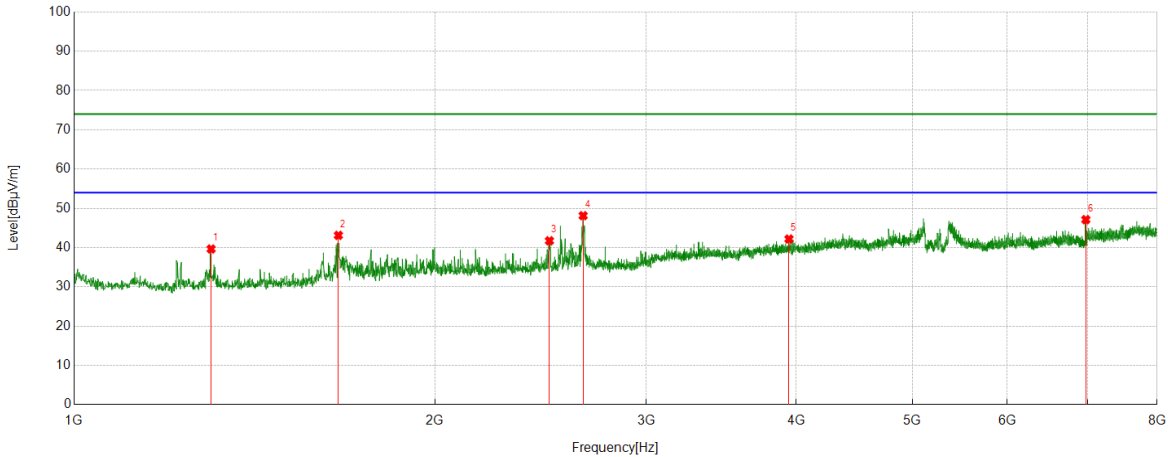

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	59.91	-20.26	39.65	74.00	34.35	peak
2	1661.1846	61.20	-18.08	43.12	74.00	30.88	peak
3	2491.1657	55.59	-13.85	41.74	74.00	32.26	peak
4	2657.6286	60.90	-12.77	48.13	74.00	25.87	peak
5	3945.7718	48.49	-6.31	42.18	74.00	31.82	peak
6	6977.1086	46.99	0.13	47.12	74.00	26.88	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5310	Horizontal	PASS

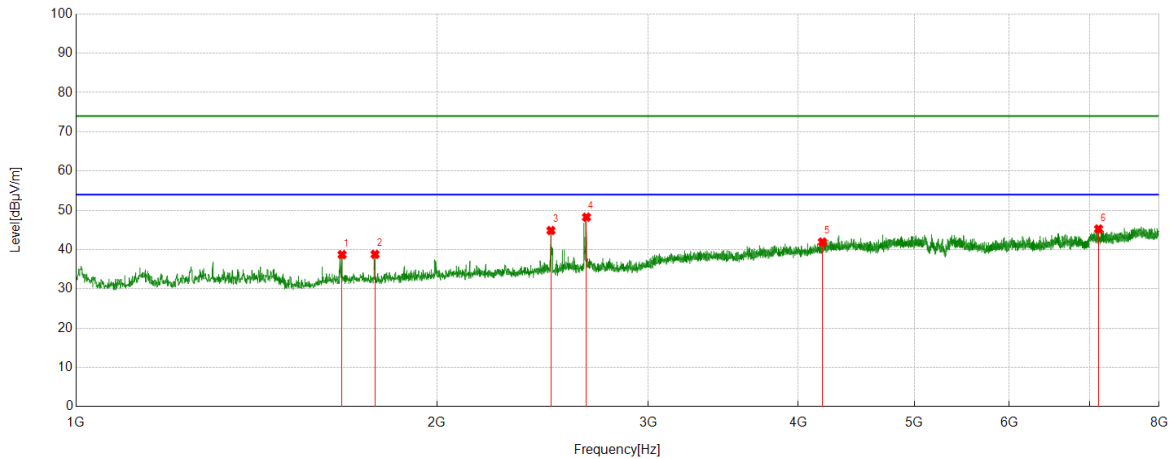

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1666.6296	56.70	-17.99	38.71	74.00	35.29	peak
2	1775.5306	56.40	-17.61	38.79	74.00	35.21	peak
3	2488.8321	58.72	-13.86	44.86	74.00	29.14	peak
4	2664.6294	60.97	-12.71	48.26	74.00	25.74	peak
5	4191.5768	47.43	-5.51	41.92	74.00	32.08	peak
6	7122.5692	44.15	1.10	45.25	74.00	28.75	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5310	Vertical	PASS

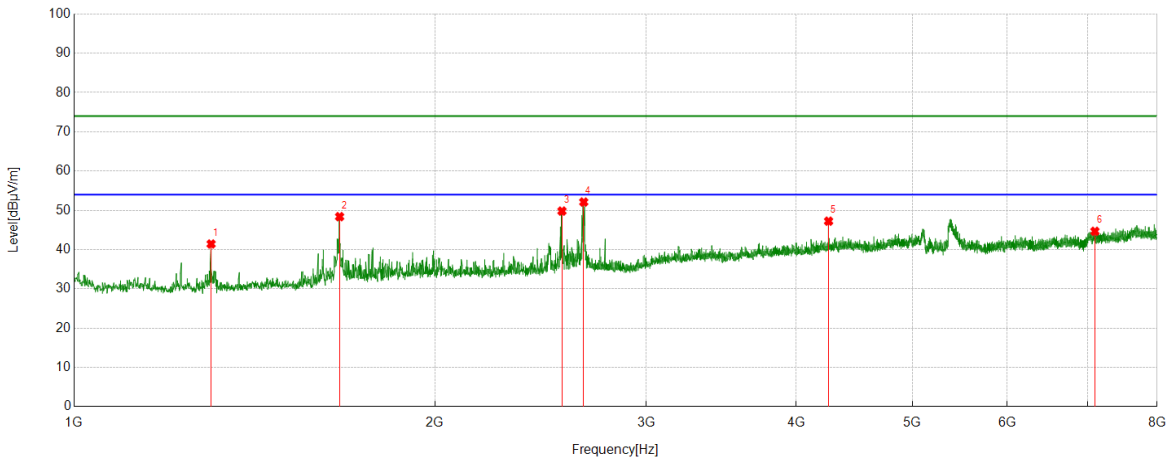

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	61.69	-20.26	41.43	74.00	32.57	peak
2	1665.0739	66.41	-18.02	48.39	74.00	25.61	peak
3	2551.8391	63.20	-13.39	49.81	74.00	24.19	peak
4	2660.7401	64.86	-12.75	52.11	74.00	21.89	peak
5	4257.6953	52.39	-5.15	47.24	74.00	26.76	peak
6	7100.0111	43.68	0.98	44.66	74.00	29.34	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5510	Horizontal	PASS

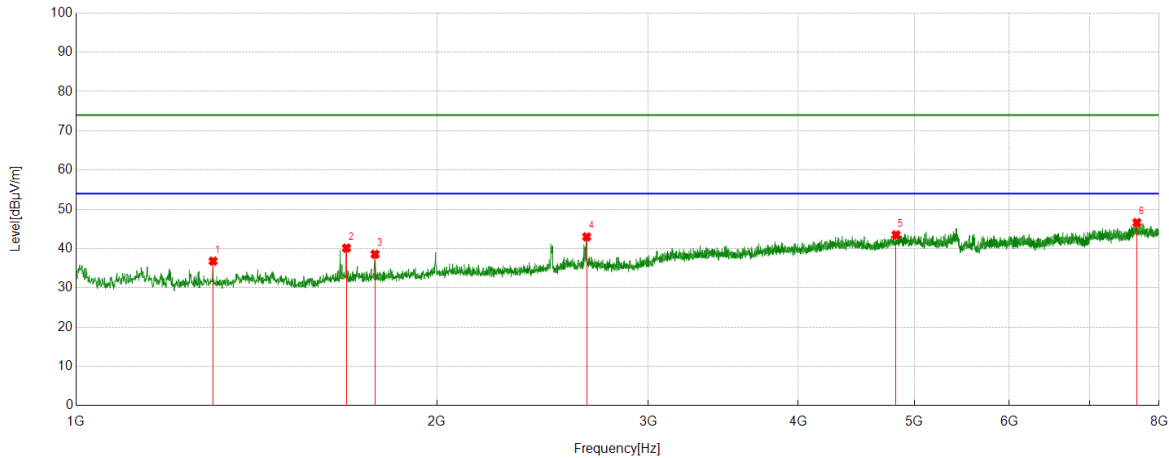

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	57.00	-20.18	36.82	74.00	37.18	peak
2	1680.6312	58.15	-18.02	40.13	74.00	33.87	peak
3	1775.5306	56.09	-17.52	38.57	74.00	35.43	peak
4	2665.4073	55.45	-12.45	43.00	74.00	31.00	peak
5	4827.8698	46.43	-2.95	43.48	74.00	30.52	peak
6	7666.2963	44.36	2.26	46.62	74.00	27.38	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5510	Vertical	PASS

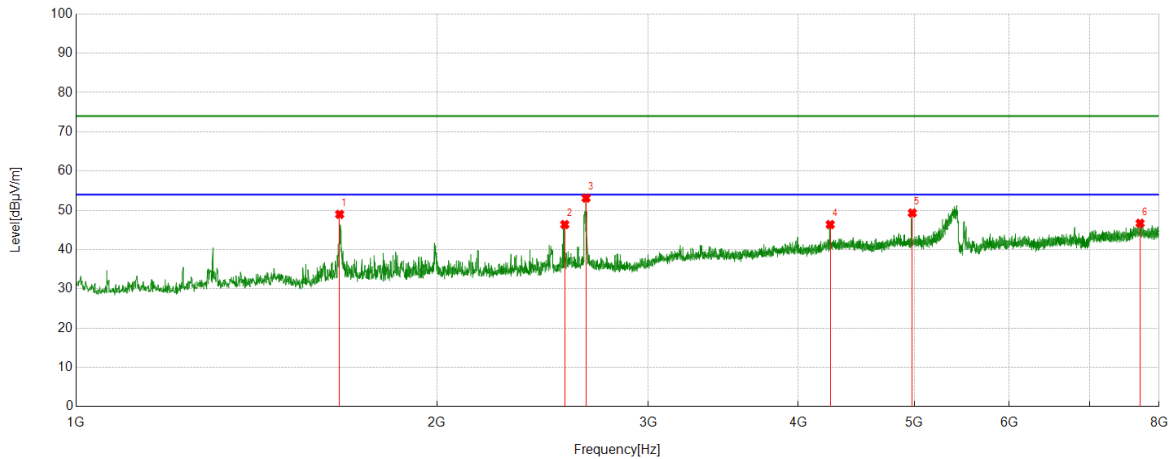

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1658.851	67.06	-18.08	48.98	74.00	25.02	peak
2	2555.7284	59.25	-12.87	46.38	74.00	27.62	peak
3	2662.2958	65.59	-12.47	53.12	74.00	20.88	peak
4	4254.5838	51.45	-5.07	46.38	74.00	27.62	peak
5	4981.109	51.95	-2.62	49.33	74.00	24.67	peak
6	7713.746	44.12	2.59	46.71	74.00	27.29	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5550	Horizontal	PASS

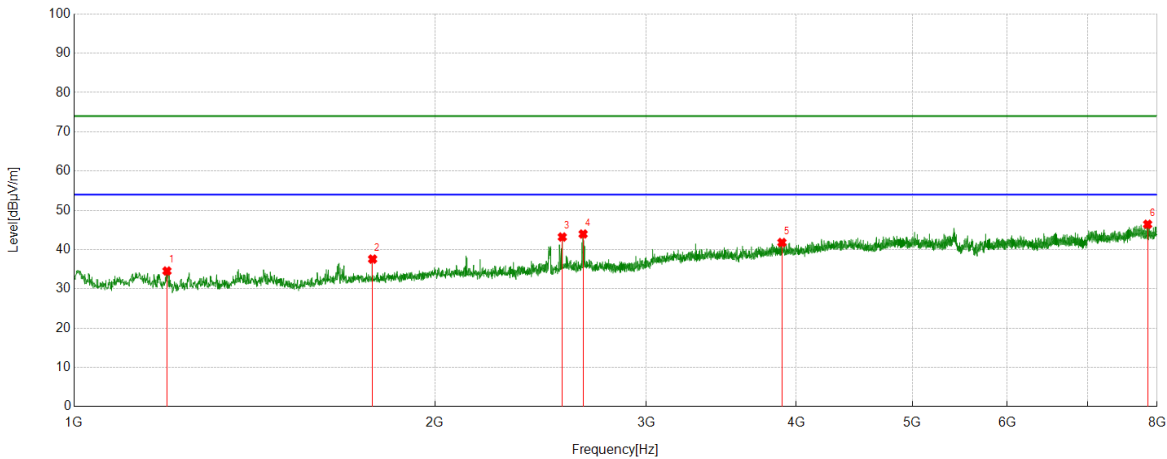

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.2439	56.18	-21.63	34.55	74.00	39.45	peak
2	1773.9749	55.12	-17.54	37.58	74.00	36.42	peak
3	2553.3948	56.09	-12.89	43.20	74.00	30.80	peak
4	2657.6286	56.48	-12.51	43.97	74.00	30.03	peak
5	3892.877	48.38	-6.58	41.80	74.00	32.20	peak
6	7856.0951	44.00	2.45	46.45	74.00	27.55	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5550	Vertical	PASS

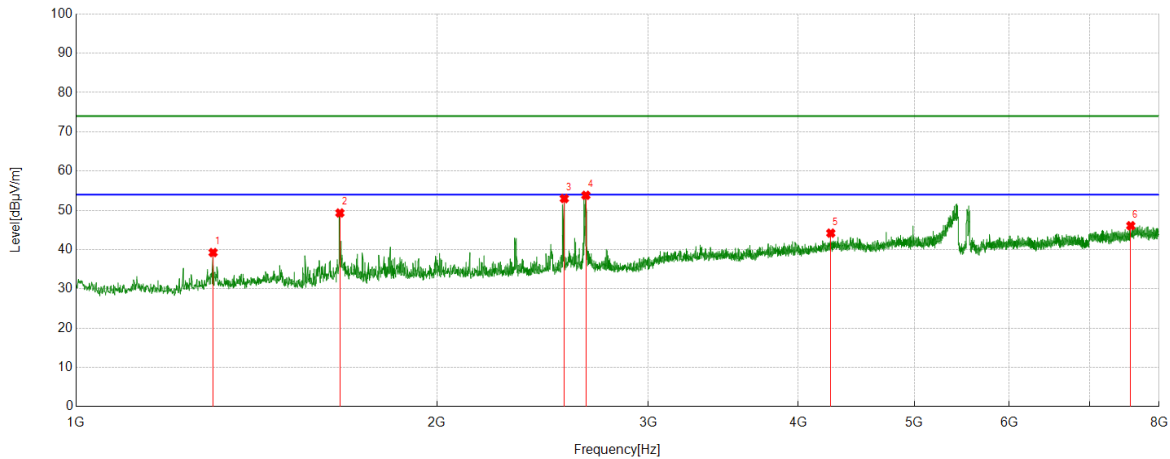

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	59.43	-20.18	39.25	74.00	34.75	peak
2	1659.6288	67.41	-18.08	49.33	74.00	24.67	peak
3	2553.3948	65.88	-12.89	52.99	74.00	21.01	peak
4	2661.5179	66.30	-12.47	53.83	74.00	20.17	peak
5	4259.251	49.35	-5.16	44.19	74.00	29.81	peak
6	7576.8419	43.88	2.20	46.08	74.00	27.92	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5670	Horizontal	PASS

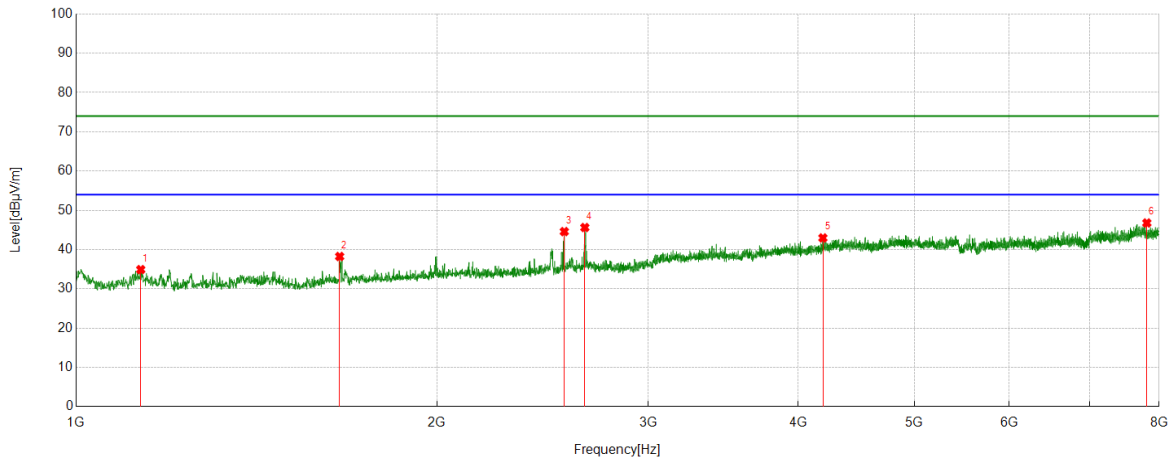

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1132.2369	56.13	-21.22	34.91	74.00	39.09	peak
2	1658.851	56.33	-18.08	38.25	74.00	35.75	peak
3	2553.3948	57.48	-12.89	44.59	74.00	29.41	peak
4	2656.0729	58.16	-12.54	45.62	74.00	28.38	peak
5	4195.4662	48.47	-5.50	42.97	74.00	31.03	peak
6	7814.0905	44.63	2.15	46.78	74.00	27.22	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5670	Vertical	PASS

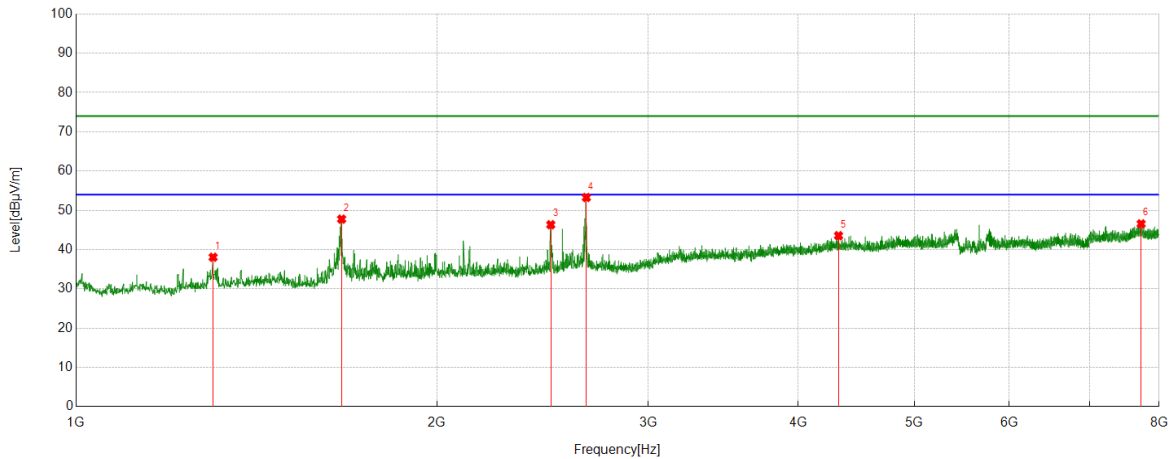

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	58.24	-20.18	38.06	74.00	35.94	peak
2	1665.0739	65.75	-17.99	47.76	74.00	26.24	peak
3	2488.0542	60.30	-13.96	46.34	74.00	27.66	peak
4	2663.8515	65.72	-12.45	53.27	74.00	20.73	peak
5	4323.0359	48.16	-4.61	43.55	74.00	30.45	peak
6	7729.3033	43.84	2.72	46.56	74.00	27.44	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5710	Horizontal	PASS

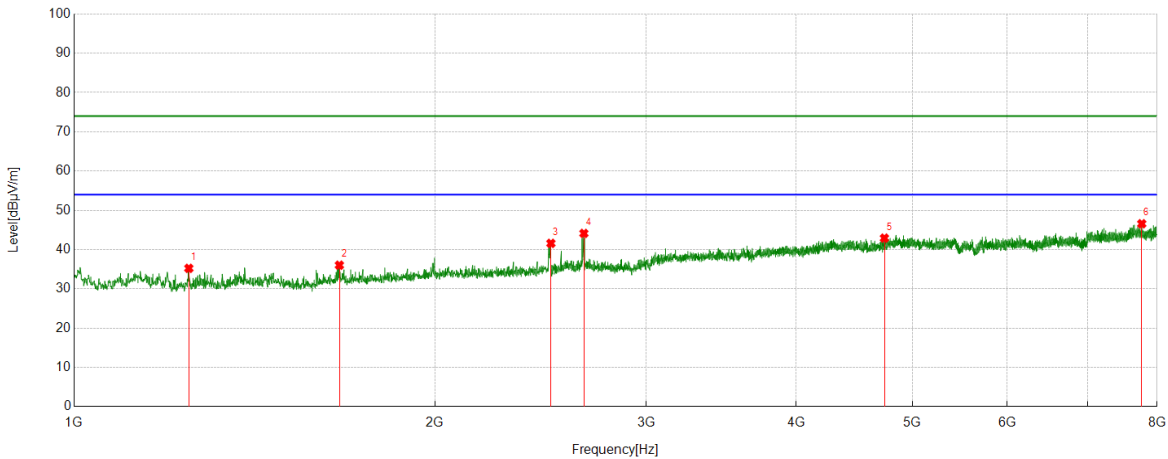

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1246.583	55.89	-20.66	35.23	74.00	38.77	peak
2	1664.296	54.04	-18.01	36.03	74.00	37.97	peak
3	2498.1665	55.45	-13.86	41.59	74.00	32.41	peak
4	2661.5179	56.60	-12.47	44.13	74.00	29.87	peak
5	4739.1932	46.41	-3.49	42.92	74.00	31.08	peak
6	7768.1965	43.74	2.84	46.58	74.00	27.42	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5710	Vertical	PASS

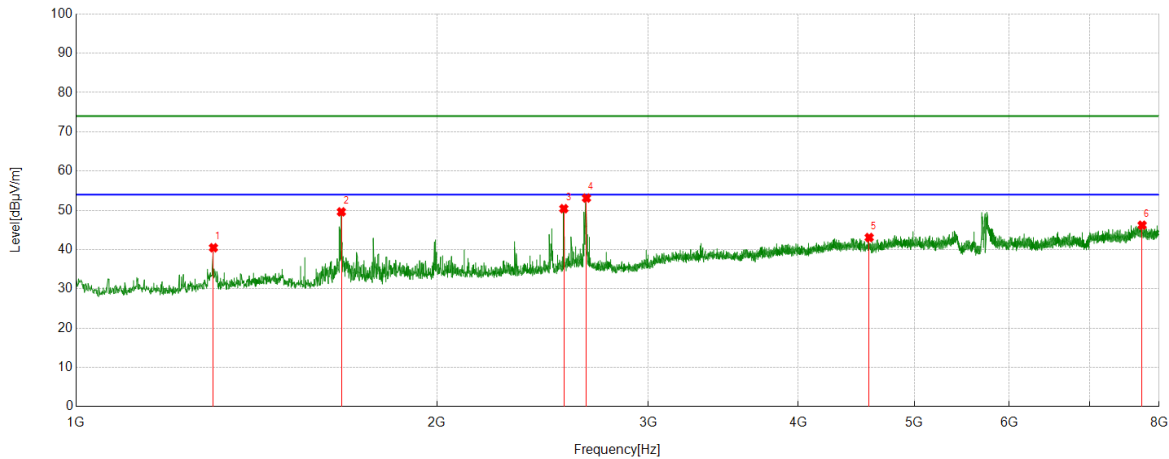

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.8113	60.65	-20.18	40.47	74.00	33.53	peak
2	1664.296	67.62	-18.01	49.61	74.00	24.39	peak
3	2551.0612	63.33	-12.91	50.42	74.00	23.58	peak
4	2664.6294	65.57	-12.45	53.12	74.00	20.88	peak
5	4585.1761	47.85	-4.77	43.08	74.00	30.92	peak
6	7744.0827	43.39	2.82	46.21	74.00	27.79	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5755	Horizontal	PASS

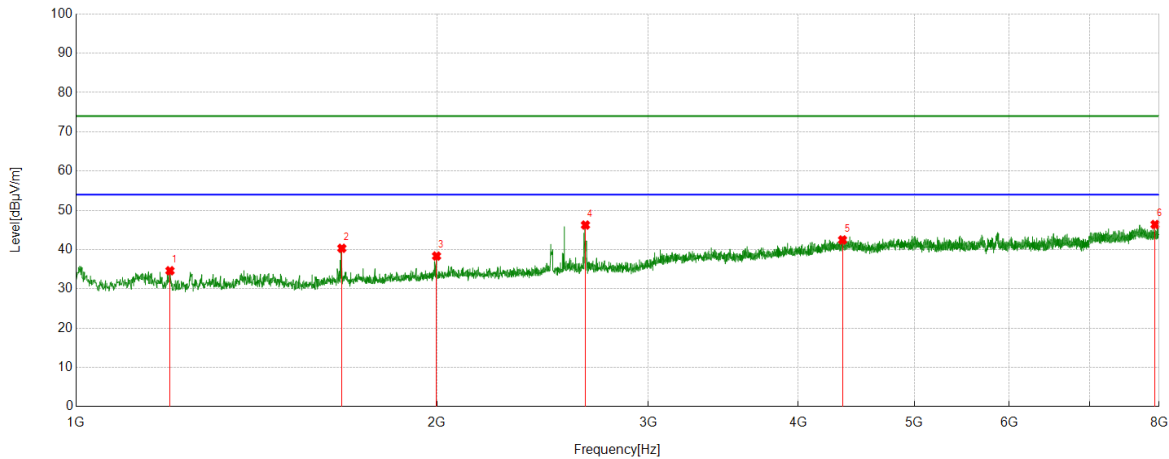

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.5775	56.26	-21.64	34.62	74.00	39.38	peak
2	1665.8518	58.27	-17.94	40.33	74.00	33.67	peak
3	1997.9998	54.29	-15.93	38.36	74.00	35.64	peak
4	2659.1844	59.14	-12.89	46.25	74.00	27.75	peak
5	4356.4841	47.48	-5.02	42.46	74.00	31.54	peak
6	7937.7709	43.81	2.58	46.39	74.00	27.61	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5755	Vertical	PASS

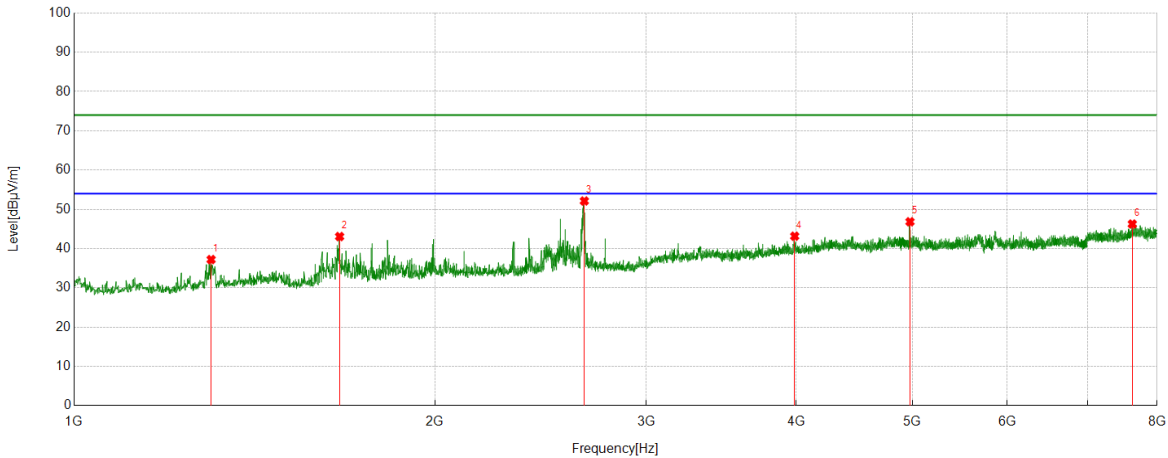

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	57.39	-20.18	37.21	74.00	36.79	peak
2	1665.0739	61.03	-17.96	43.07	74.00	30.93	peak
3	2663.8515	65.00	-12.88	52.12	74.00	21.88	peak
4	3989.3321	49.48	-6.32	43.16	74.00	30.84	peak
5	4977.9976	49.88	-3.04	46.84	74.00	27.16	peak
6	7628.1809	43.70	2.55	46.25	74.00	27.75	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5795	Horizontal	PASS

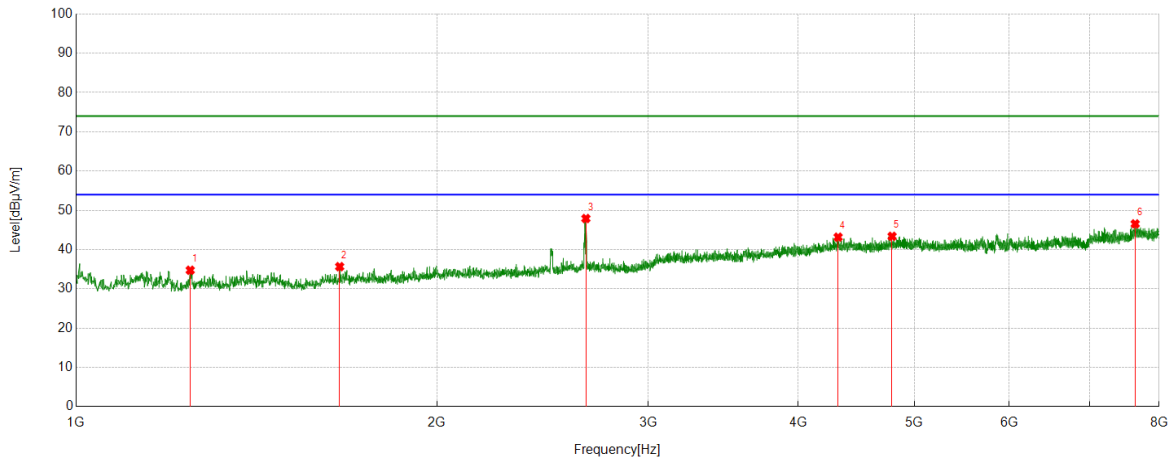

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1245.0272	55.45	-20.70	34.75	74.00	39.25	peak
2	1658.851	53.73	-18.07	35.66	74.00	38.34	peak
3	2661.5179	60.80	-12.89	47.91	74.00	26.09	peak
4	4319.9244	47.49	-4.32	43.17	74.00	30.83	peak
5	4791.3101	45.92	-2.54	43.38	74.00	30.62	peak
6	7641.4046	44.14	2.41	46.55	74.00	27.45	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX40	5795	Vertical	PASS

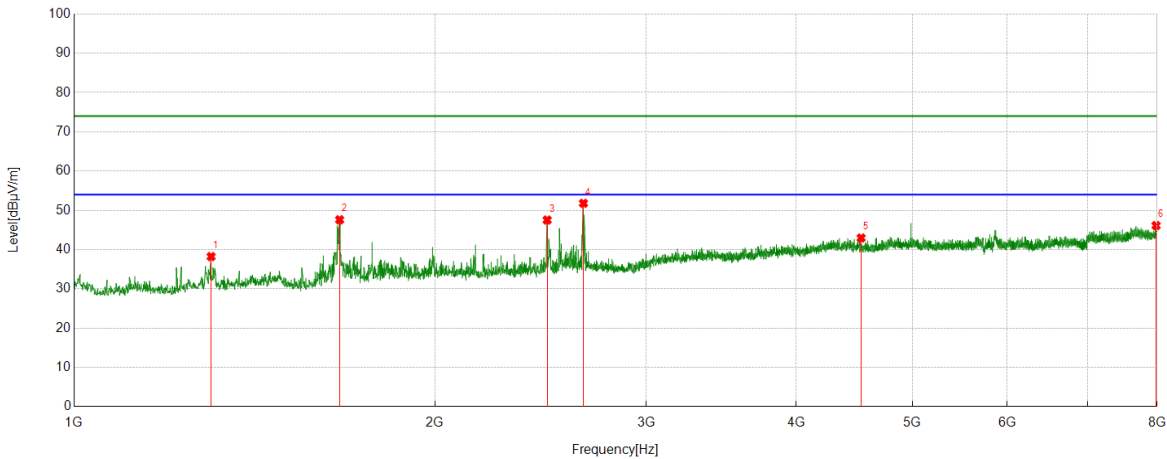

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	58.41	-20.18	38.23	74.00	35.77	peak
2	1665.0739	65.56	-17.96	47.60	74.00	26.40	peak
3	2480.2756	61.40	-13.87	47.53	74.00	26.47	peak
4	2659.1844	64.68	-12.89	51.79	74.00	22.21	peak
5	4532.2814	47.99	-5.03	42.96	74.00	31.04	peak
6	7984.4427	43.51	2.61	46.12	74.00	27.88	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5210	Horizontal	PASS

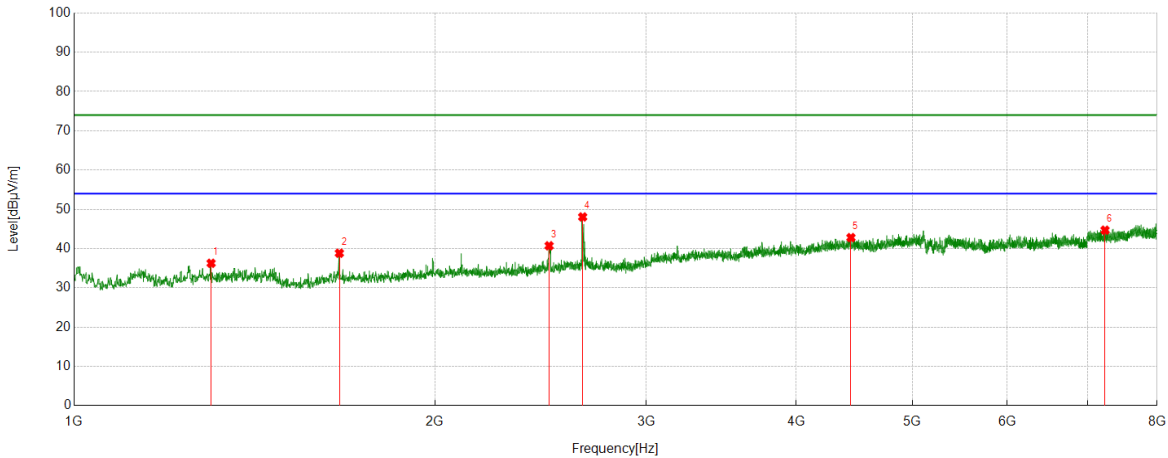

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	56.53	-20.26	36.27	74.00	37.73	peak
2	1664.296	56.86	-18.03	38.83	74.00	35.17	peak
3	2489.61	54.58	-13.86	40.72	74.00	33.28	peak
4	2655.295	60.85	-12.79	48.06	74.00	25.94	peak
5	4444.3827	47.03	-4.23	42.80	74.00	31.20	peak
6	7239.2488	43.97	0.72	44.69	74.00	29.31	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5210	Vertical	PASS

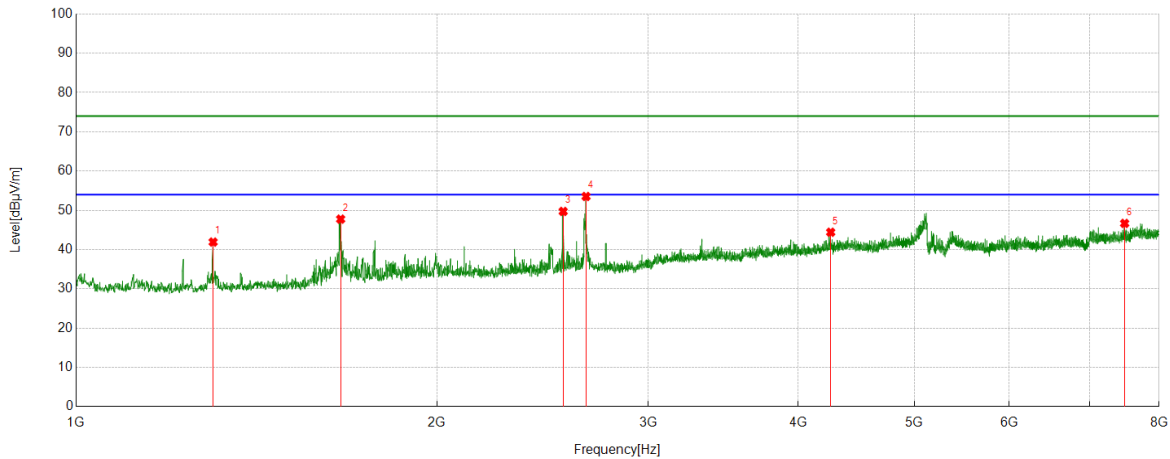

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	62.18	-20.26	41.92	74.00	32.08	peak
2	1661.9624	65.83	-18.07	47.76	74.00	26.24	peak
3	2547.9498	63.07	-13.35	49.72	74.00	24.28	peak
4	2662.2958	66.26	-12.73	53.53	74.00	20.47	peak
5	4258.4732	49.58	-5.16	44.42	74.00	29.58	peak
6	7488.1654	45.04	1.63	46.67	74.00	27.33	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5290	Horizontal	PASS

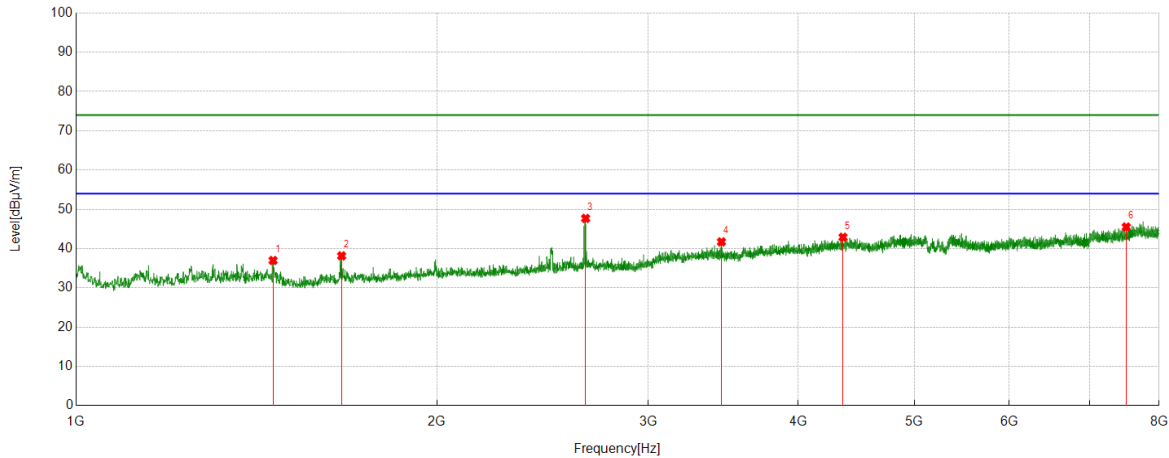

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1459.7177	56.56	-19.58	36.98	74.00	37.02	peak
2	1665.0739	56.17	-18.02	38.15	74.00	35.85	peak
3	2659.9622	60.44	-12.75	47.69	74.00	26.31	peak
4	3452.6058	50.37	-8.66	41.71	74.00	32.29	peak
5	4360.3734	47.81	-4.92	42.89	74.00	31.11	peak
6	7511.5013	43.99	1.51	45.50	74.00	28.50	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5290	Vertical	PASS

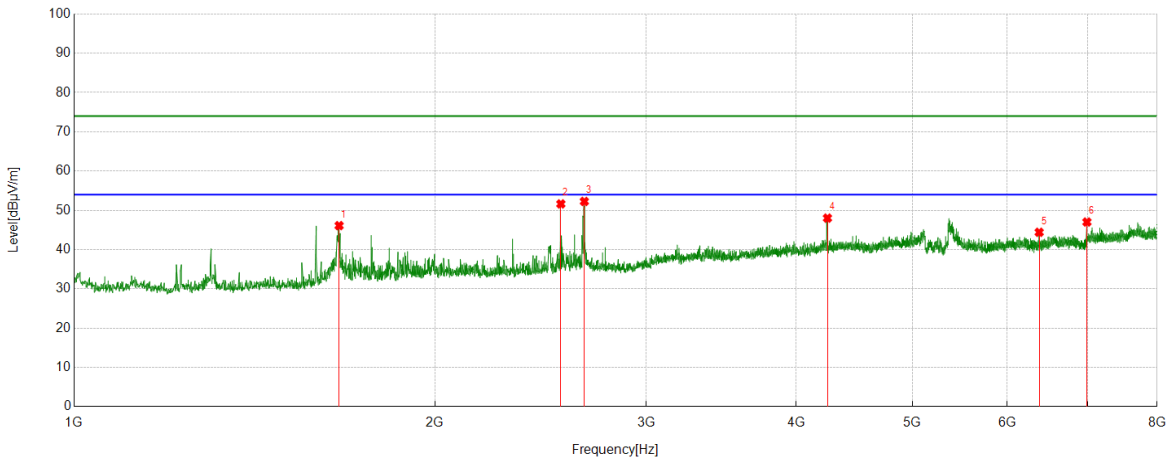

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1663.5182	64.15	-18.04	46.11	74.00	27.89	peak
2	2546.394	64.96	-13.33	51.63	74.00	22.37	peak
3	2663.8515	64.98	-12.71	52.27	74.00	21.73	peak
4	4248.3609	53.09	-5.07	48.02	74.00	25.98	peak
5	6379.7089	45.39	-0.98	44.41	74.00	29.59	peak
6	6991.888	46.59	0.43	47.02	74.00	26.98	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5530	Horizontal	PASS

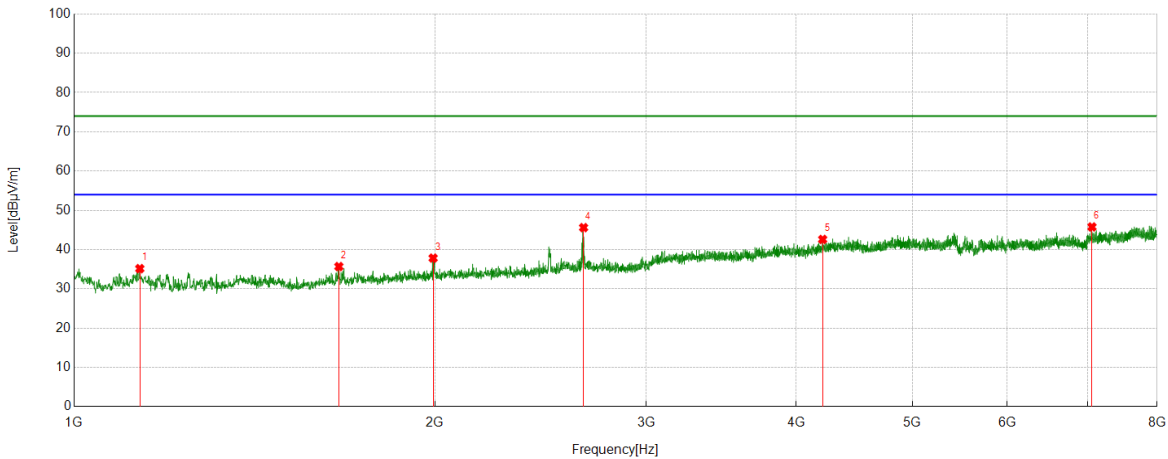

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1134.5705	56.34	-21.19	35.15	74.00	38.85	peak
2	1662.7403	53.71	-18.03	35.68	74.00	38.32	peak
3	1992.5547	53.77	-15.94	37.83	74.00	36.17	peak
4	2659.9622	58.08	-12.48	45.60	74.00	28.40	peak
5	4209.4677	47.56	-4.96	42.60	74.00	31.40	peak
6	7060.34	44.72	1.05	45.77	74.00	28.23	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5530	Vertical	PASS

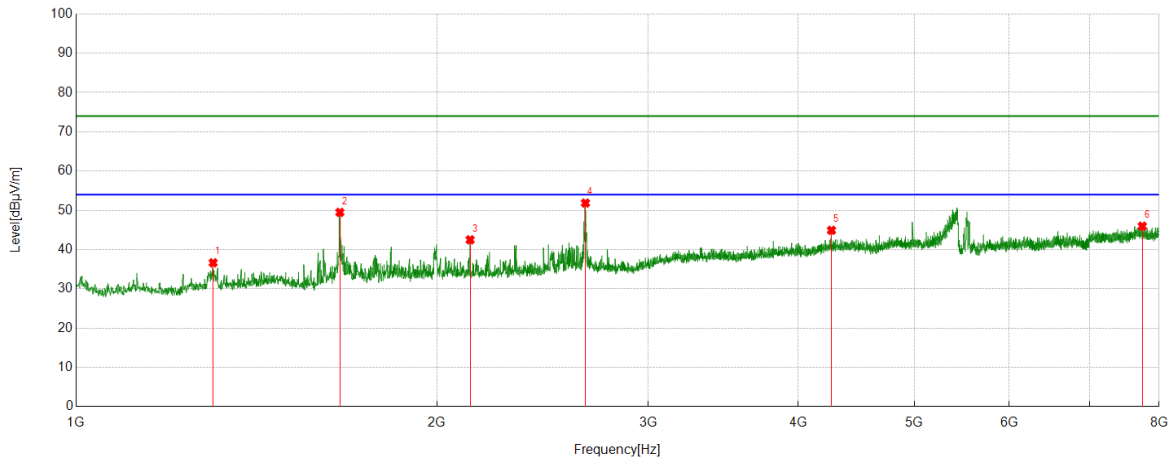

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	56.83	-20.18	36.65	74.00	37.35	peak
2	1659.6288	67.57	-18.08	49.49	74.00	24.51	peak
3	2131.0146	57.98	-15.49	42.49	74.00	31.51	peak
4	2659.1844	64.34	-12.49	51.85	74.00	22.15	peak
5	4264.6961	49.87	-4.96	44.91	74.00	29.09	peak
6	7746.4163	43.11	2.85	45.96	74.00	28.04	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5610	Horizontal	PASS

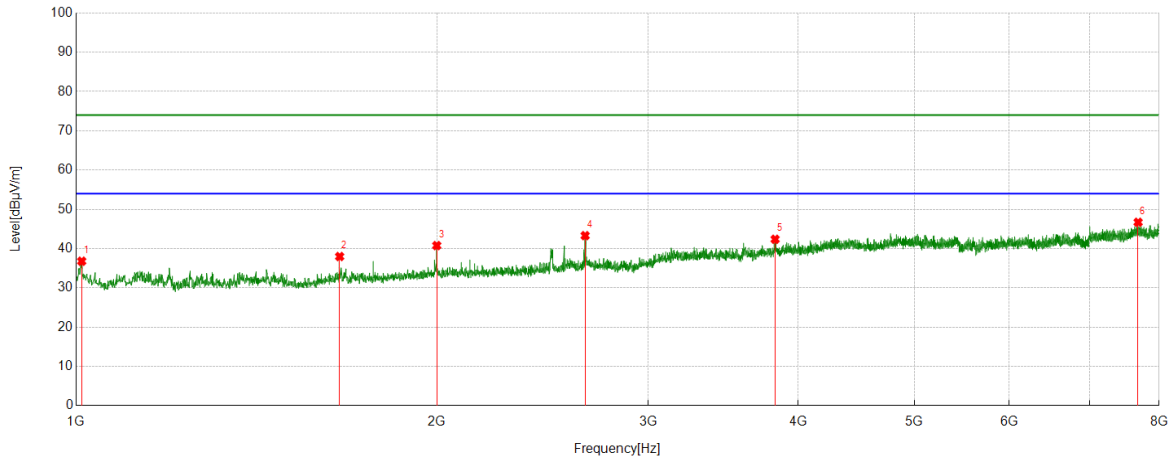

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1010.8901	58.33	-21.54	36.79	74.00	37.21	peak
2	1658.851	56.06	-18.08	37.98	74.00	36.02	peak
3	1998.7776	56.57	-15.80	40.77	74.00	33.23	peak
4	2657.6286	55.81	-12.51	43.30	74.00	30.70	peak
5	3827.5364	48.89	-6.51	42.38	74.00	31.62	peak
6	7684.1871	44.48	2.23	46.71	74.00	27.29	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5610	Vertical	PASS

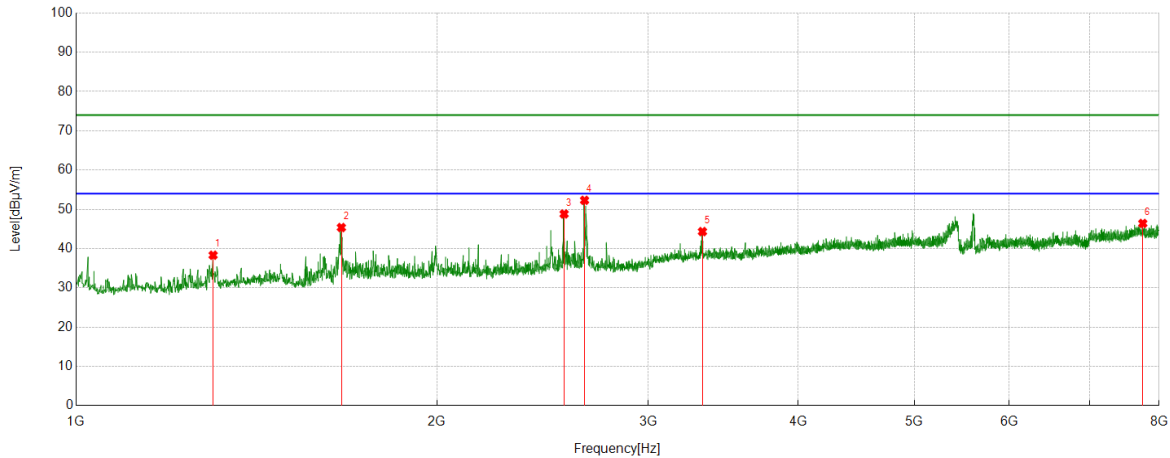

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	58.50	-20.18	38.32	74.00	35.68	peak
2	1664.296	63.38	-18.01	45.37	74.00	28.63	peak
3	2552.617	61.71	-12.89	48.82	74.00	25.18	peak
4	2654.5172	64.85	-12.55	52.30	74.00	21.70	peak
5	3328.9254	53.56	-9.23	44.33	74.00	29.67	peak
6	7753.417	43.50	2.91	46.41	74.00	27.59	peak

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5690	Horizontal	PASS

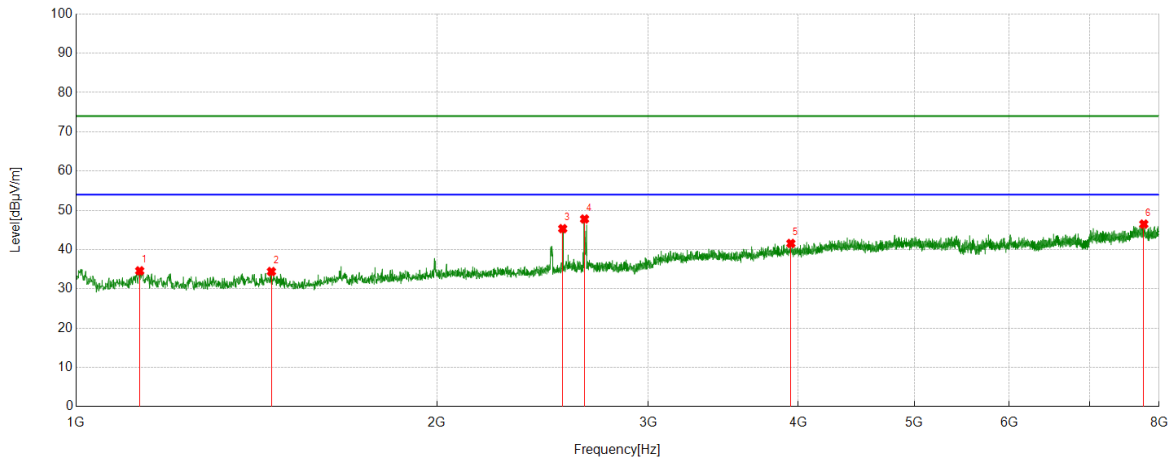

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1129.9033	55.84	-21.25	34.59	74.00	39.41	peak
2	1455.0506	53.88	-19.47	34.41	74.00	39.59	peak
3	2545.6162	58.21	-12.88	45.33	74.00	28.67	peak
4	2654.5172	60.33	-12.55	47.78	74.00	26.22	peak
5	3944.9939	47.95	-6.38	41.57	74.00	32.43	peak
6	7768.9743	43.67	2.82	46.49	74.00	27.51	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5690	Vertical	PASS

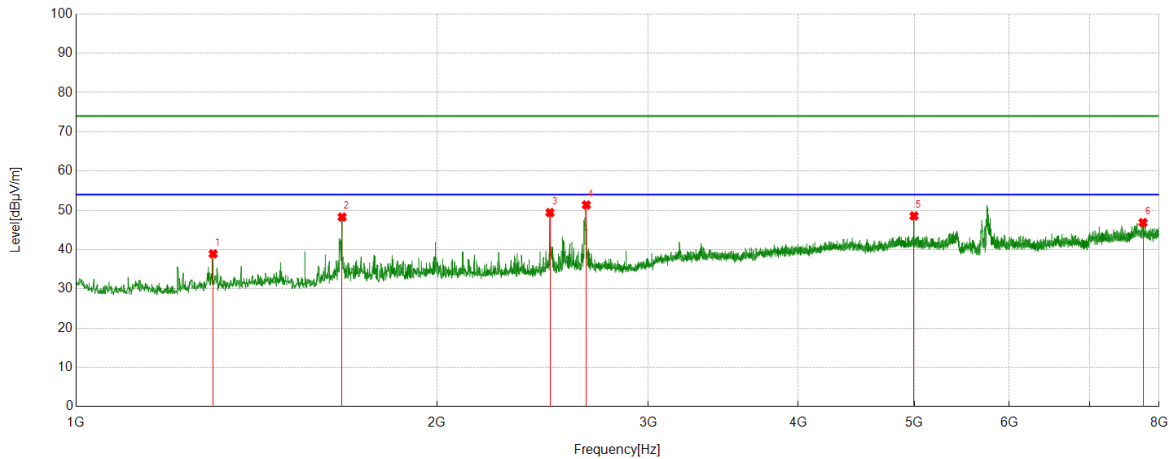

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	59.10	-20.18	38.92	74.00	35.08	peak
2	1666.6296	66.25	-17.97	48.28	74.00	25.72	peak
3	2484.1649	63.40	-13.98	49.42	74.00	24.58	peak
4	2663.8515	63.82	-12.45	51.37	74.00	22.63	peak
5	4997.4442	51.00	-2.43	48.57	74.00	25.43	peak
6	7757.3064	43.93	2.95	46.88	74.00	27.12	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.


Test Mode	Channel	Polarization	Verdict
11AX80	5775	Horizontal	PASS

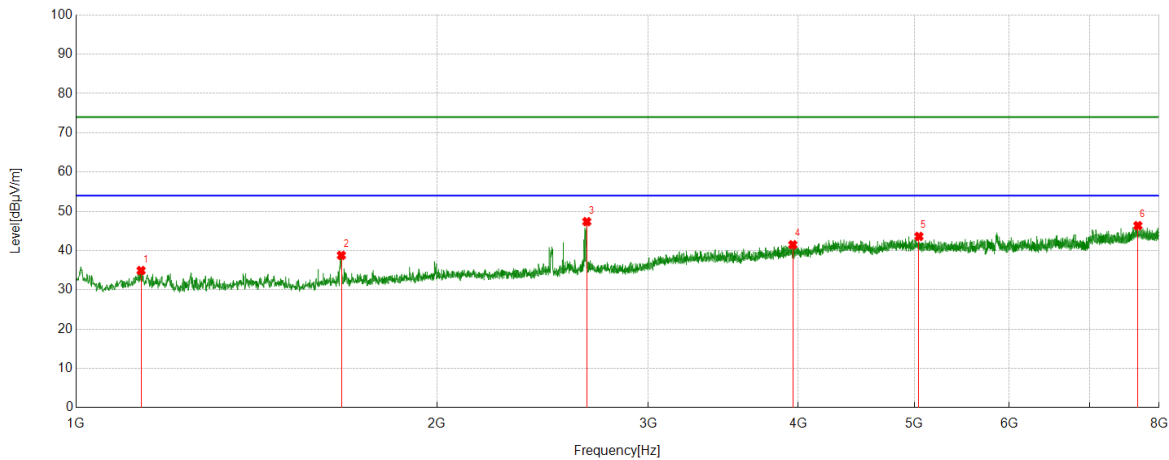

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1133.0148	56.13	-21.21	34.92	74.00	39.08	peak
2	1664.296	56.77	-17.98	38.79	74.00	35.21	peak
3	2666.1851	60.26	-12.89	47.37	74.00	26.63	peak
4	3959.7733	47.35	-5.86	41.49	74.00	32.51	peak
5	5044.8939	46.22	-2.61	43.61	74.00	30.39	peak
6	7681.0757	44.13	2.23	46.36	74.00	27.64	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11AX80	5775	Vertical	PASS

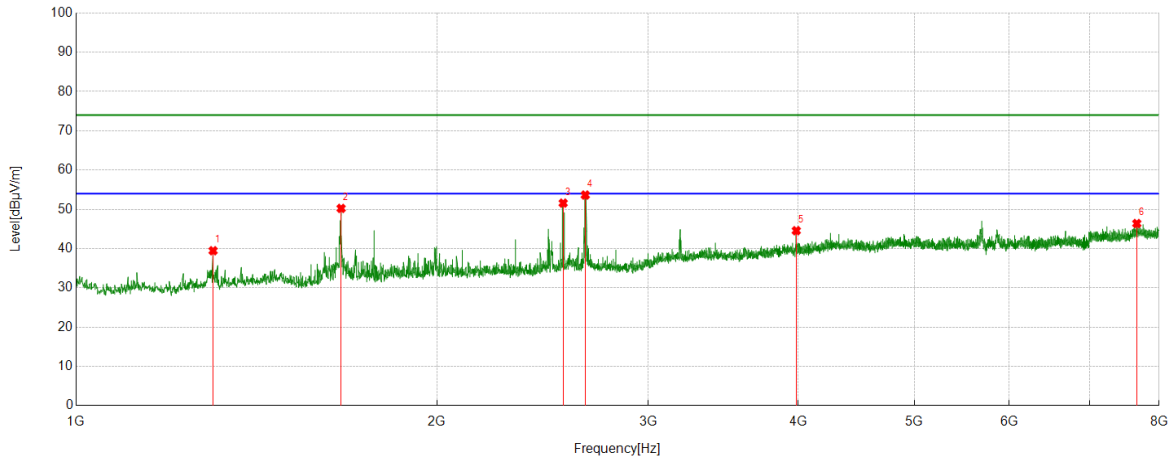


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.0334	59.64	-20.18	39.46	74.00	34.54	peak
2	1663.5182	68.23	-17.99	50.24	74.00	23.76	peak
3	2547.9498	65.04	-13.46	51.58	74.00	22.42	peak
4	2658.4065	66.54	-12.90	53.64	74.00	20.36	peak
5	3986.2207	50.75	-6.19	44.56	74.00	29.44	peak
6	7665.5184	44.13	2.26	46.39	74.00	27.61	peak

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

PART II: For 6.5GHz to 18GHz:

Test Mode	Channel	Polarization	Verdict
11A	5180	Horizontal	PASS

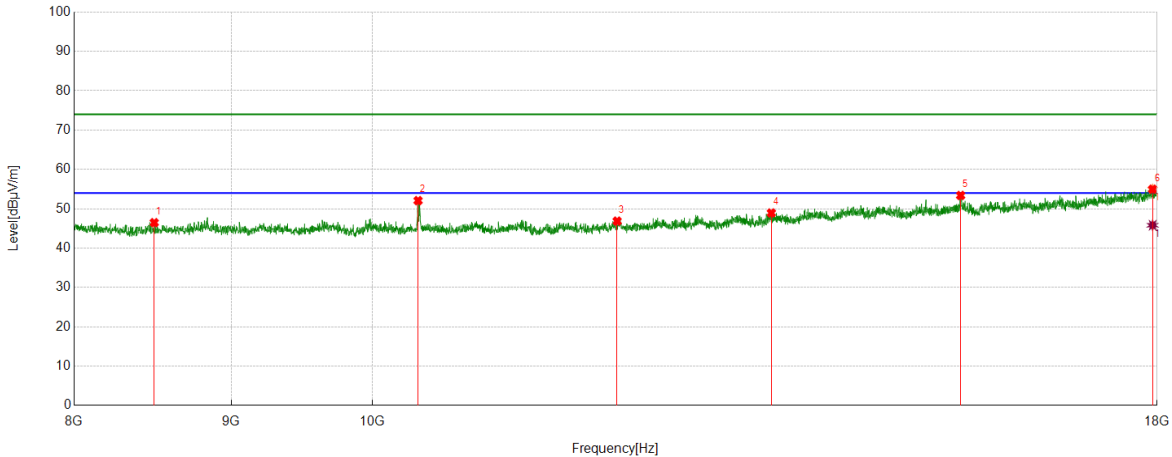

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8495.0825	43.46	3.01	46.47	74.00	27.53	peak
2	10350.3917	47.99	4.08	52.07	74.00	21.93	peak
3	12014.0023	40.38	6.48	46.86	74.00	27.14	peak
4	13484.2474	39.83	9.10	48.93	74.00	25.07	peak
5	15537.923	40.68	12.71	53.39	74.00	20.61	peak
6	17939.99	36.34	18.63	54.97	74.00	19.03	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17939.99	27.18	18.63	45.81	54.00	8.19	AV

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5180	Vertical	PASS

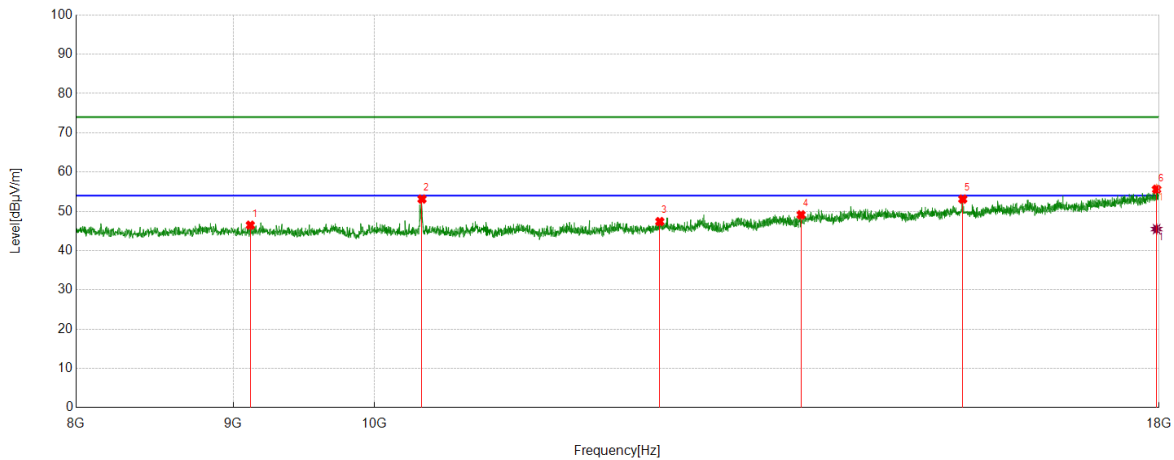

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9115.1859	43.70	2.77	46.47	74.00	27.53	peak
2	10365.3942	48.80	4.32	53.12	74.00	20.88	peak
3	12385.731	40.33	7.06	47.39	74.00	26.61	peak
4	13767.6279	39.44	9.67	49.11	74.00	24.89	peak
5	15539.5899	40.41	12.70	53.11	74.00	20.89	peak
6	17966.6611	37.00	18.61	55.61	74.00	18.39	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17966.6611	26.86	18.61	45.47	54.00	8.53	AV

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5200	Horizontal	PASS

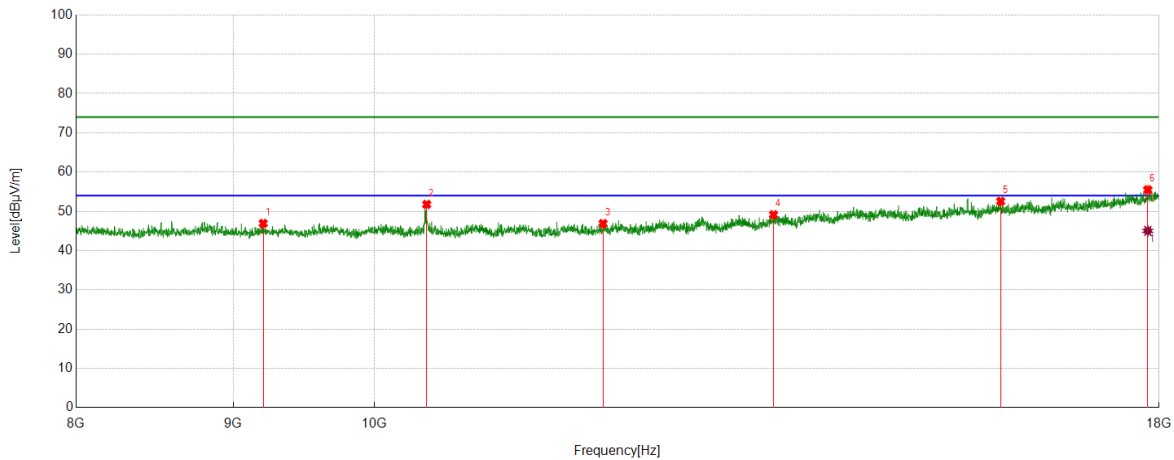

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9203.5339	43.34	3.59	46.93	74.00	27.07	peak
2	10402.067	47.52	4.25	51.77	74.00	22.23	peak
3	11870.6451	41.03	5.86	46.89	74.00	27.11	peak
4	13485.9143	40.06	9.09	49.15	74.00	24.85	peak
5	15986.3311	38.73	13.82	52.55	74.00	21.45	peak
6	17848.3081	36.90	18.57	55.47	74.00	18.53	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17848.3081	26.46	18.57	45.03	54.00	8.97	AV

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5200	Vertical	PASS

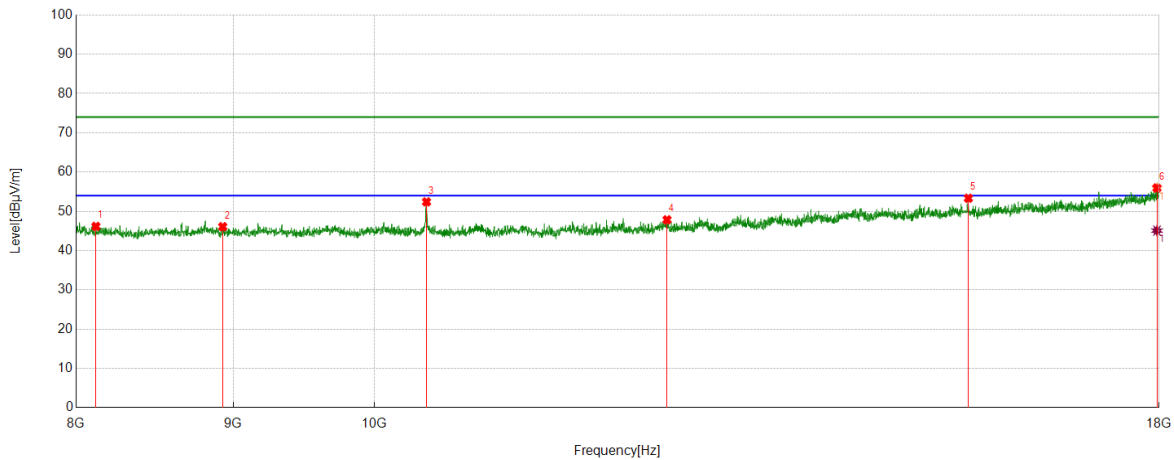

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8120.02	43.09	3.07	46.16	74.00	27.84	peak
2	8928.4881	42.90	3.19	46.09	74.00	27.91	peak
3	10400.4001	48.15	4.26	52.41	74.00	21.59	peak
4	12452.4087	40.95	6.90	47.85	74.00	26.15	peak
5	15604.6008	40.54	12.79	53.33	74.00	20.67	peak
6	17971.6619	37.26	18.68	55.94	74.00	18.06	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17971.6619	26.41	18.68	45.09	54.00	8.91	AV

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

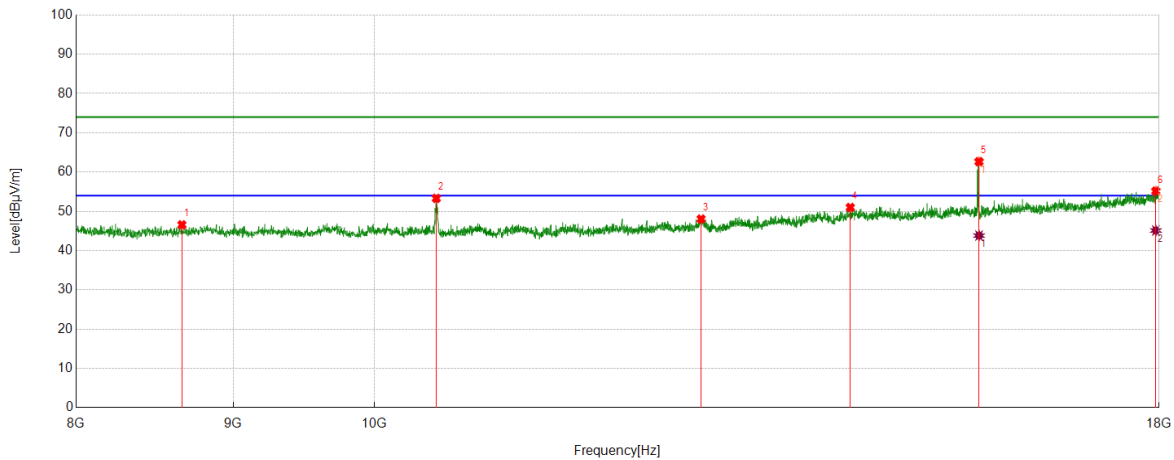

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8660.11	43.41	3.16	46.57	74.00	27.43	peak
2	10477.0795	49.11	4.20	53.31	74.00	20.69	peak
3	12774.129	40.37	7.68	48.05	74.00	25.95	peak
4	14284.3807	39.51	11.48	50.99	74.00	23.01	peak
5	15729.6216	49.77	12.89	62.66	74.00	11.34	peak
6	17956.6594	36.78	18.39	55.17	74.00	18.83	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15729.6216	30.93	12.89	43.82	54.00	10.18	AV
2	17956.6594	26.73	18.39	45.12	54.00	8.88	AV

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

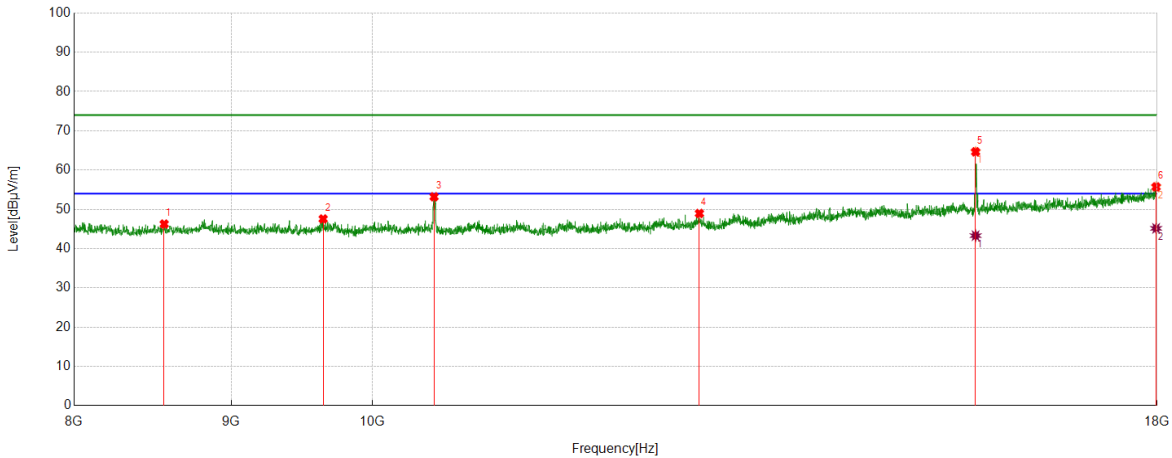

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8558.4264	43.17	3.08	46.25	74.00	27.75	peak
2	9640.2734	43.81	3.75	47.56	74.00	26.44	peak
3	10475.4126	48.93	4.27	53.20	74.00	20.80	peak
4	12777.4629	41.28	7.67	48.95	74.00	25.05	peak
5	15712.9522	51.75	12.90	64.65	74.00	9.35	peak
6	17986.6644	37.15	18.57	55.72	74.00	18.28	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15712.9522	30.40	12.90	43.30	54.00	10.70	AV
2	17986.6644	26.58	18.57	45.15	54.00	8.85	AV

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.

Test Mode	Channel	Polarization	Verdict
11A	5260	Horizontal	PASS

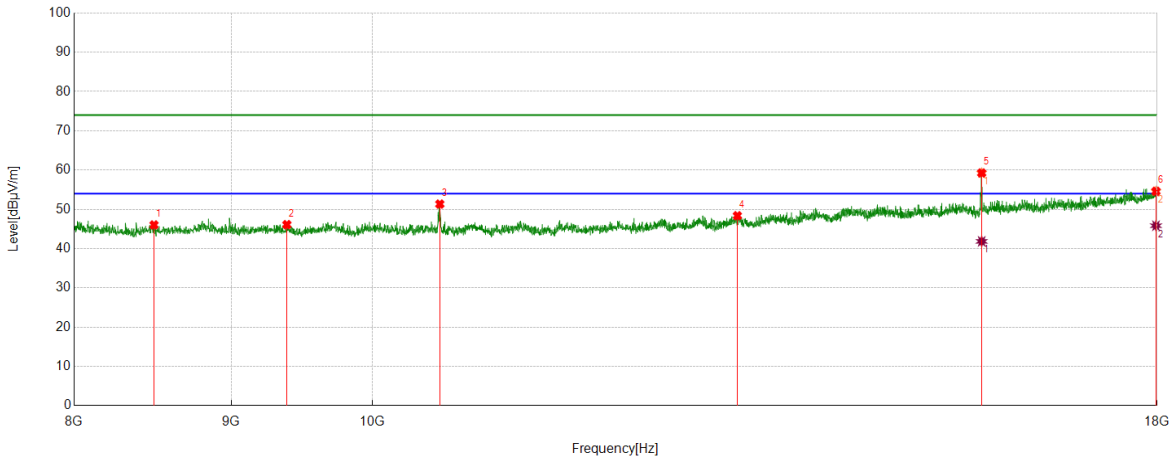

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8493.4156	43.03	3.00	46.03	74.00	27.97	peak
2	9381.897	42.17	3.93	46.10	74.00	27.90	peak
3	10520.4201	46.86	4.48	51.34	74.00	22.66	peak
4	13145.8576	40.01	8.36	48.37	74.00	25.63	peak
5	15784.6308	45.86	13.40	59.26	74.00	14.74	peak
6	17984.9975	36.01	18.58	54.59	74.00	19.41	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15784.6308	28.44	13.40	41.84	54.00	12.16	AV
2	17984.9975	27.25	18.58	45.83	54.00	8.17	AV

- Remark:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.1.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.