



# TEST REPORT

**Test Report No. : UL-RPT-RP-12266880-116-ISED**

**Applicant** : Casambi Technologies Oy  
**PMN** : CBU-DCS  
**HVIN** : CBU-DCS  
**ISED ID** : 22496-CBUDCS  
**Technology** : *Bluetooth – Low Energy*  
**Test Standard(s)** : Innovation, Science and Economic Development Canada  
RSS-247 Issue 2 February 2017 & RSS-Gen Issue 4 November 2014

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**

Prepared by: Segun I. Adeniji  
Title: Engineer  
Date: 26.June. 2018

Approved by: Ajit, Phadtare  
Title: Lead Test Engineer  
Date: 26.June. 2018



Deutsche  
Akkreditierungsstelle  
D-PL-19381-02-00

This laboratory is accredited by DAkkS.  
The tests reported herein have been performed in  
accordance with its' terms of accreditation.

**UL INTERNATIONAL GERMANY GMBH**

Hedelfinger Str. 61  
70327 Stuttgart, Germany  
STU.CTECHLab@ul.com

This page has been left intentionally blank.

## **Table of Contents**

<b>1. Customer Information.....</b>	<b>4</b>
1.1.Applicant Information	4
1.2.Manufacturer Information	4
<b>2. Summary of Testing.....</b>	<b>5</b>
2.1. General Information	5
Location	5
Date information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
<b>3. Equipment Under Test (EUT) .....</b>	<b>7</b>
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	8
A. Support Equipment (In-house)	8
B. Support Equipment (Manufacturer supplied)	8
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>9</b>
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
<b>5. Measurements, Examinations and Derived Results .....</b>	<b>10</b>
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter AC Conducted Spurious Emissions	11
5.2.2. Transmitter 99% Occupied Bandwidth	15
5.2.3. Transmitter Minimum 6 dB Bandwidth	18
5.2.4. Transmitter Duty Cycle	21
5.2.5. Transmitter Maximum Peak Output Power	23
5.2.6. Transmitter Radiated Emissions	26
5.2.7. Transmitter Band Edge Radiated Emissions	33
<b>6. Measurement Uncertainty .....</b>	<b>37</b>
<b>7. Used equipment .....</b>	<b>38</b>
<b>8. Report Revision History .....</b>	<b>39</b>

## 1. Customer Information

### 1.1.Applicant Information

<b>Company Name:</b>	Casambi Technologies Oy
<b>Company Address:</b>	Bertel Jungin aukio 1 E, Espoo, 02600 Finland
<b>Company Phone No.:</b>	--
<b>Company E-Mail:</b>	--
<b>Contact Person:</b>	Mr. Kai Toetterman
<b>Contact E-Mail Address:</b>	kai.totterman@casambi.com
<b>Contact Phone No.:</b>	+358 45 137 9988

### 1.2.Manufacturer Information

<b>Company Name:</b>	Casambi Technologies Oy
<b>Company Address:</b>	Bertel Jungin aukio 1 E, Espoo, 02600 Finland
<b>Company Phone No.:</b>	--
<b>Company E-Mail:</b>	--
<b>Contact Person:</b>	Mr. Kai Toetterman
<b>Contact E-Mail Address:</b>	kai.totterman@casambi.com
<b>Contact Phone No.:</b>	+358 45 137 9988

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	RSS-Gen Issue 4 November 2014
<b>Specification Title:</b>	General Requirements for Compliance of Radio Apparatus
<b>Specification Reference:</b>	RSS-247 Issue 2 February 2017
<b>Specification Title:</b>	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
<b>Site Registration:</b>	22511-1

### **Location**

<b>Location of Testing:</b>	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
-----------------------------	--

### **Date information**

<b>Order Date:</b>	16 April 2017
<b>EUT arrived:</b>	30 May 2018
<b>Test Dates:</b>	30 May 2018
<b>EUT returned:</b>	-/-

**2.2. Summary of Test Results**

Industry Canada Reference	Measurement	Complied	Did not complied	Not performed	Not applicable
RSS-Gen 8.8	Transmitter AC Conducted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.6	Transmitter 99% Occupied Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.6 / RSS-247 5.2(a)	Transmitter Minimum 6 dB Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-247 5.2(b)	Transmitter Power Spectral Density	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.12 / RSS-247 5.4(d) & RSS-247 5.4 (e)	Transmitter Maximum Peak Output Power	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.13 & 8.9 / RSS-247 5.5	Transmitter Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-Gen 6.13, 8.9 & 8.10 / RSS-247 5.5	Transmitter Band Edge Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Note(s):**

For the purpose of this report, In accordance with FCC KDB 558074 D01 Section 10.1, PSD is not required if the maximum conducted output power is less than the PSD limit of 8 dBm / 3 kHz. The PSD level is therefore deemed to be equal to the measured total output power. Nevertheless, a measurement was performed for PSD and the result is stored in our internal database.

**2.3. Methods and Procedures**

<b>Reference:</b>	ANSI C63.10-2013
<b>Title:</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>Reference:</b>	KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017
<b>Title:</b>	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
<b>Reference:</b>	Line Conducted FAQ v01r01 June 3, 2015
<b>Title:</b>	AC Power-Line Conducted Emissions Frequently Asked Questions

**2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>EUT Description:</b>	Bluetooth controllable DALI controller
<b>Brand Name:</b>	Casambi
<b>PMN:</b>	CBU-DCS
<b>HVIN:</b>	CBU-DCS
<b>Test Sample Serial Number:</b>	D27C7C5448C9
<b>Software/ Firmware Version Number:</b>	23.1
<b>ISED ID:</b>	22496-CBUDCS

#### **3.2. Description of EUT**

The equipment under test was a Bluetooth controllable DALI controller with a Bluetooth low energy module.

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

#### **3.4. Additional Information Related to Testing**

<b>Technology Tested:</b>	Bluetooth Low Energy (Digital Transmission System)		
<b>Type of Unit:</b>	Transceiver		
<b>Channel Spacing:</b>	2 MHz		
<b>Modulation:</b>	GFSK		
<b>Data Rate:</b>	1 Mbps		
<b>Power Supply Requirement(s):</b>	Nominal	16 VDC	
<b>Antenna Gain:</b>	2.0 dBi		
<b>Transmit Frequency Range:</b>	2402 MHz to 2480 MHz		
<b>Transmit Channels Tested:</b>	<b>Channel ID</b>	<b>RF Channel Number</b>	<b>Channel Frequency (MHz)</b>
	Bottom	0	2402
	Middle	19	2440
	Top	39	2480

### **3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

#### **A. Support Equipment (In-house)**

Item	Description	Brand Name	Model Name or Number	Serial Number
1				
2				
3				

#### **B. Support Equipment (Manufacturer supplied)**

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Power Cable (Length: 2 metres)	Not marked or stated	Not marked or stated	Not marked or stated
2	Laboratory Power Supply	Conrad Electronic Germany	PS -2403D	Not marked or stated
3	MP3 player	Apple	iPod Touch	CCQSCOZMGGK6
4	DALI bus power supply	Tridonic	DALI-PS1	N/A



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

Transmitting at maximum power in *Bluetooth* LE mode with modulation, maximum possible data length available.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The EUT was powered using a 16 V DC power supply.
- Controlled in test mode using a software application Utility installed on the MP3 player supplied by the customer. The application was used to enable a continuous transmission and to select the test channels as required.
- For the conducted measurement, the EUT was made to transmit with a transmitter delay between packets of 100 us. The duty cycle for this mode is presented in section 5.2.3 and for the radiated measurements the EUT was made to transmit continuously with a duty cycle of more than 98 %.
- EMC32 V10.1.0 Software was used for the Radiated spurious emission measurement.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## **5.2. Test Results**

### **5.2.1. Transmitter AC Conducted Spurious Emissions**

#### **Test Summary:**

<b>Test Engineer:</b>	M. Asim Shahzad	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 7/8		

<b>Industry Canada Reference:</b>	RSS-Gen 8.8
<b>Test Method Used:</b>	ANSI C63.10 Section 6.2 and notes below

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	38

#### **Settings of the Instrument**


<b>Detector</b>	Quasi Peak/ Average Peak
-----------------	--------------------------

#### **Note(s):**

1. The EUT was connected to an AC/DC Power Supply.
2. The AC/DC Power Supply was connected to a 120 VAC 60 Hz single phase supply via a LISN.
3. The final measured value, for the given emission, in the table below incorporates the cable loss.
4. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
5. Measurements were performed in shielded room (SR7/ 8 Asset Number 1603671). The EUT was placed at a height of 80 cm above the reference ground plane and in a distance of 40 cm from the vertical ground plane at the edge of the table.
6. The device was configured to the test mode with a test program installed on the ipod.

**Transmitter AC Conducted Spurious Emissions (continued)**

**Test setup:**

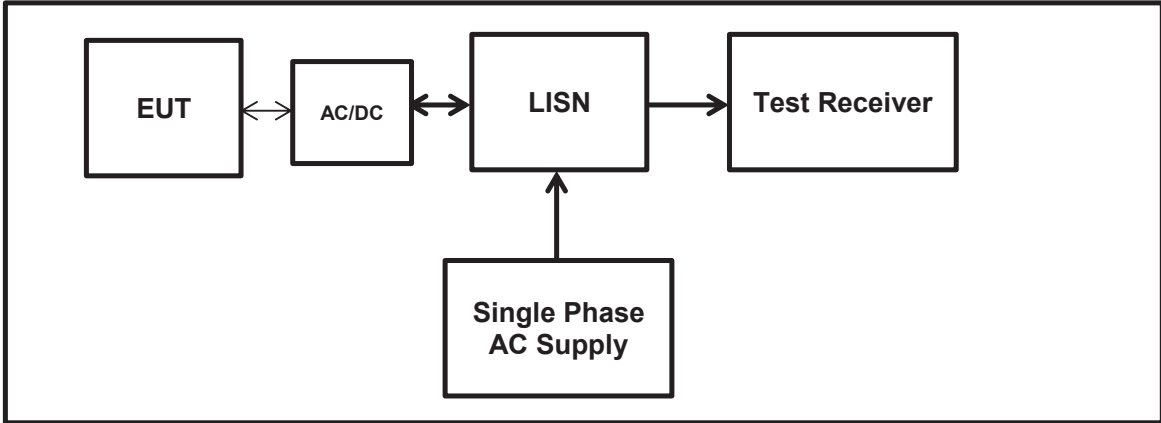

**Results: Live / Quasi Peak**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.20288	Live	25.5	63.5	38	Complied
0.57222	Live	28.6	56	27.4	Complied
1.13079	Live	9.4	56	46.6	Complied
2.17858	Live	11.2	56	44.8	Complied
4.11899	Live	13.3	56	42.7	Complied

**Results: Live / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.20288	Live	15	53.5	38.5	Complied
0.57222	Live	23.5	46	22.5	Complied
1.13079	Live	5.2	46	40.8	Complied
2.17858	Live	7.3	46	38.7	Complied
4.11899	Live	9.9	46	36.1	Complied
7.61006	Live	9.5	50	40.5	Complied

**Results: Neutral / Quasi Peak**


Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.20765	Neutral	25.5	63.3	37.8	Complied
0.57593	Neutral	29.8	56	26.2	Complied
1.06151	Neutral	10.5	56	45.5	Complied
4.16318	Neutral	14.2	56	41.8	Complied
7.15494	Neutral	14	60	46	Complied
7.85373	Neutral	14.3	60	45.7	Complied

**Results: Neutral / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.20765	Neutral	15	53.3	38.3	Complied
0.57593	Neutral	23.1	46	22.9	Complied
1.06151	Neutral	7.4	46	38.6	Complied
4.16318	Neutral	9.4	46	36.6	Complied
7.15494	Neutral	9.5	50	40.5	Complied
7.85373	Neutral	9.5	50	40.5	Complied

**Result: Pass**

**Plot: Live and Neutral Line**

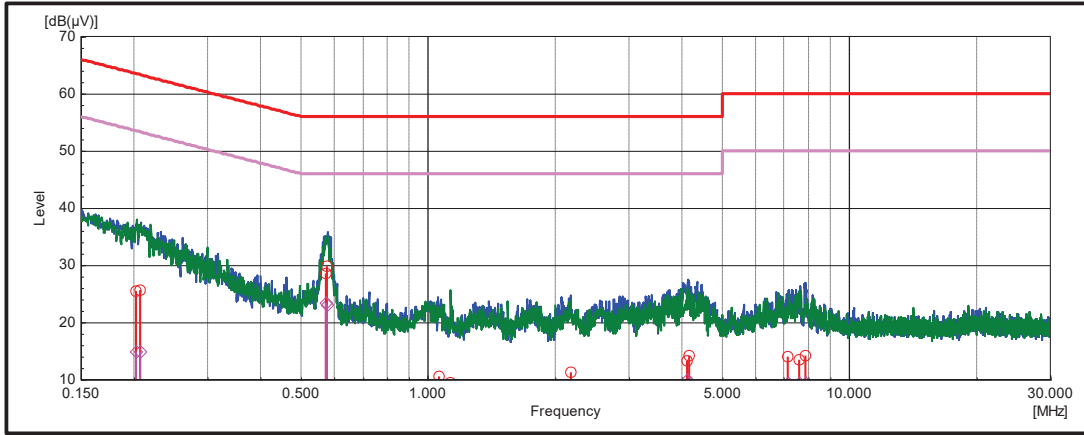

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

### **5.2.2. Transmitter 99% Occupied Bandwidth**

#### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 9		

<b>Industry Canada Reference:</b>	RSS-Gen 6.6
<b>Test Method Used:</b>	RSS-Gen 6.6


#### **Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	33

#### **Note(s):**

1. The 99% emission bandwidth was measured using the spectrum analyser occupied bandwidth function. The resolution bandwidth was set in the range of 1% to 5% of the occupied bandwidth and the video bandwidth set to 3 times the resolution bandwidth. The span was set to capture all products of the modulation process including emission skirts.
2. The spectrum analyser resolution bandwidth was set to 20 kHz and video bandwidth 50 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 3 MHz. The spectrum analyser function set the measurements to be made at 99% of the emission bandwidth. The results are given in the tables below.
3. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

**Transmitter 99% Occupied Bandwidth Test Setup:**

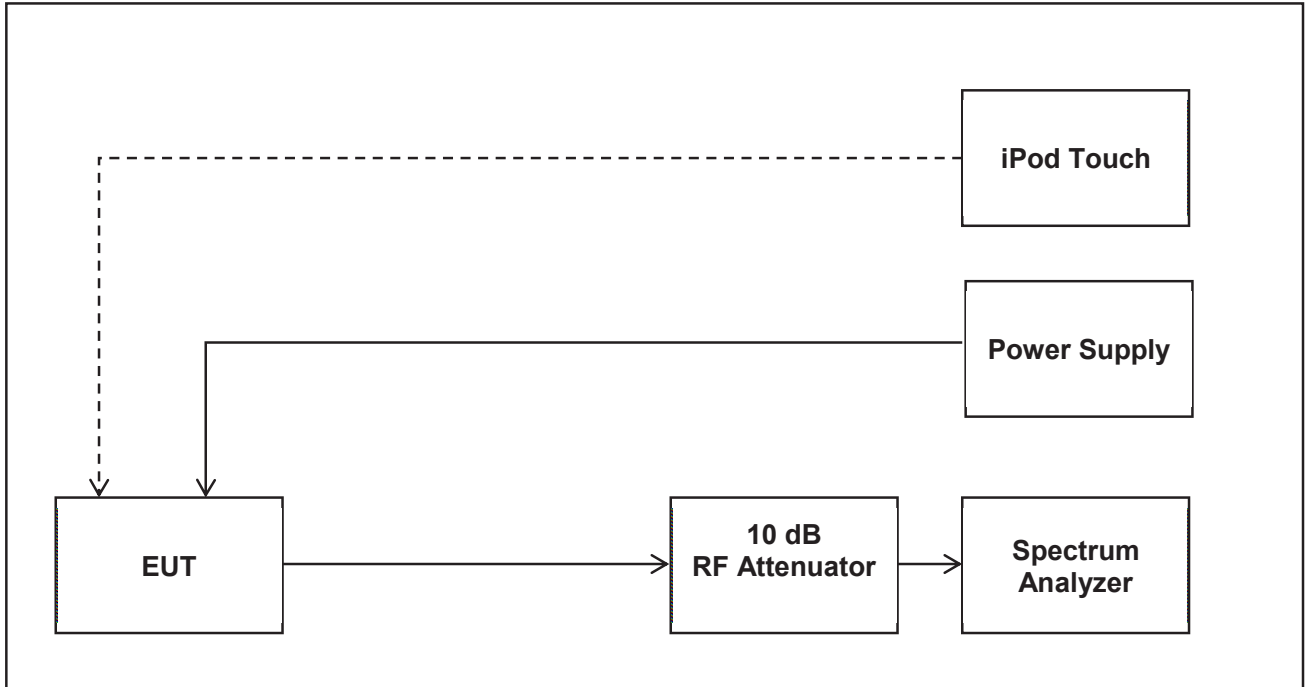




**Transmitter 99% Occupied Bandwidth (continued)**

**Results:**


Channel	99% Occupied Bandwidth (kHz)
Bottom	1085
Middle	1089
Top	1085



Bottom Channel

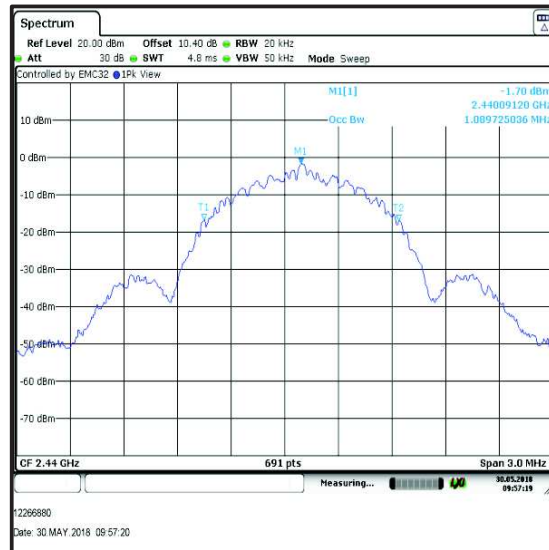

Middle Channel

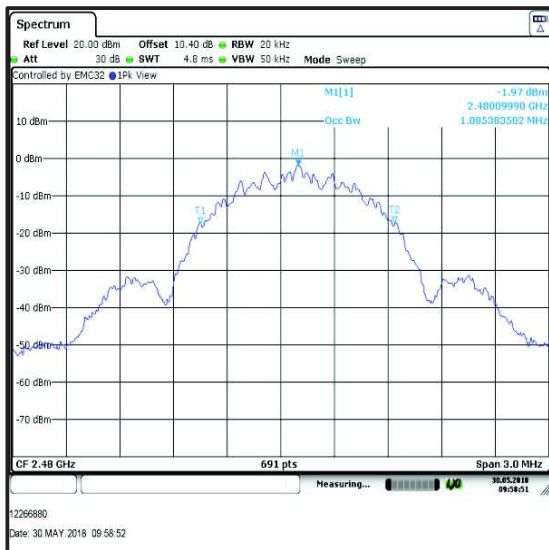

Top Channel

**Result: Pass**

### **5.2.3. Transmitter Minimum 6 dB Bandwidth**

#### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 9		

<b>Industry Canada Reference:</b>	RSS-Gen 6.6 / RSS-247 5.2(a)
<b>Test Method Used:</b>	ANSI C63.10 Section 11.8.1 Option 1


#### **Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	33

#### **Note(s):**

1. 6 dB DTS bandwidth tests were performed using a spectrum analyser in accordance with ANSI C63.10 Section 11.8.1 Option 1 measurement procedure. The spectrum analyser resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The DTS bandwidth was measured at 6 dB down from the peak of the signal.
2. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.


**Test Setup:**

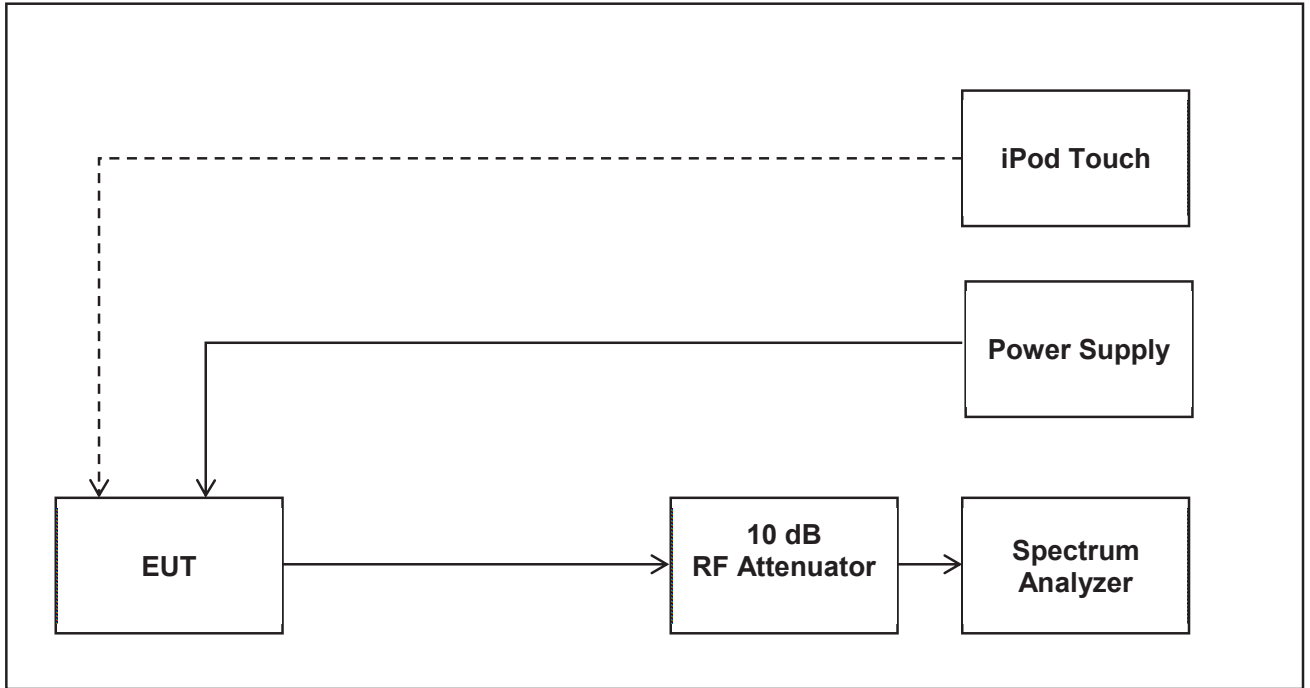


**Transmitter Minimum 6 dB Bandwidth (continued)**

**Results:**


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	792.080	≥500	292.080	Complied
Middle	792.080	≥500	292.080	Complied
Top	792.080	≥500	292.080	Complied

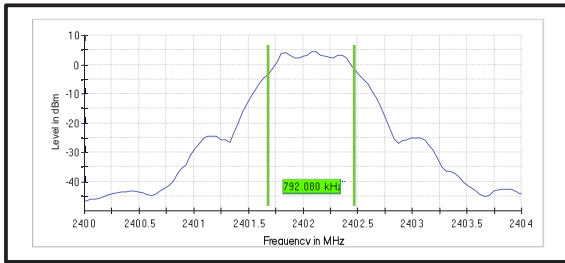

**Bottom Channel**

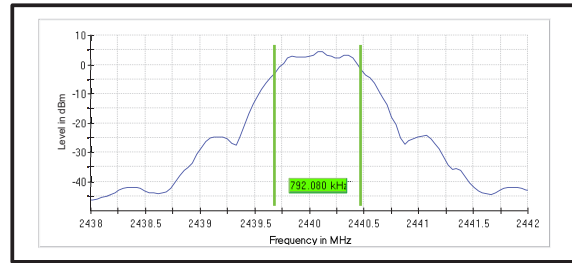

**Middle Channel**

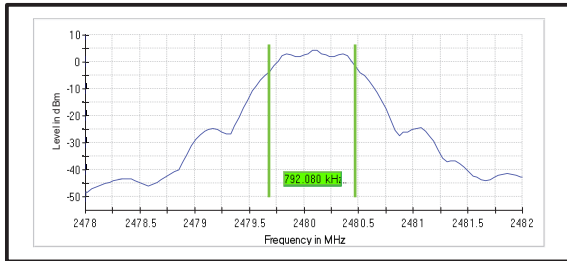

**Top Channel**

**Result: Pass**

**System Measurement Settings:**

Setting	Instrument Value	Target Value
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.13 dB	0.50 dB

**5.2.4. Transmitter Duty Cycle**

Test Summary:

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 9		

<b>FCC Reference:</b>	Part 15.35(c)
<b>Test Method Used:</b>	FCC KDB 558074 Section 6.0

Environmental Conditions:

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	44


Note(s):

The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$10 \log (1 / (\text{On Time} / [\text{Period or } 100 \text{ ms whichever is the lesser}])).$$

$$\text{BLE duty cycle: } 10 \log (1 / (774.78 \mu\text{s} / 1.00435 \text{ ms})) = 1.13 \text{ dB}$$


Test setup:

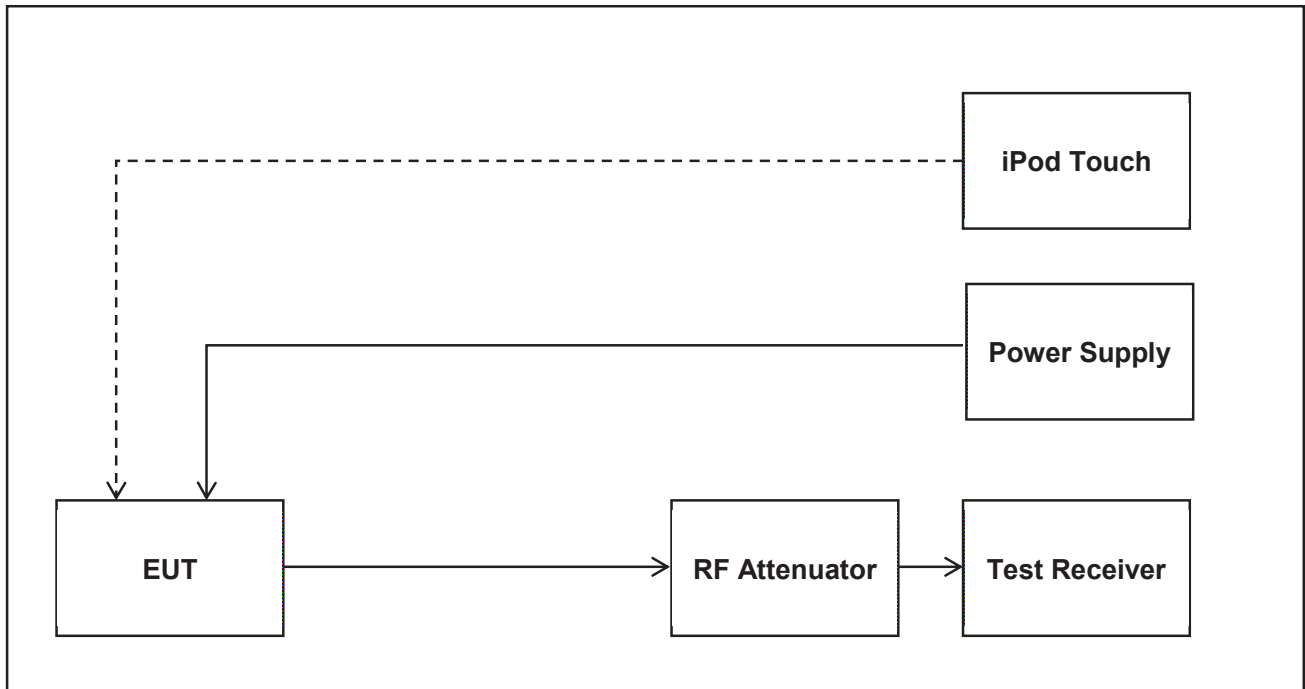

**Transmitter Duty Cycle continued**

**Results:**

Pulse Duration (µs)	Period (µs)	Duty Cycle Correction (dB)
774.78	1004.35	1.13

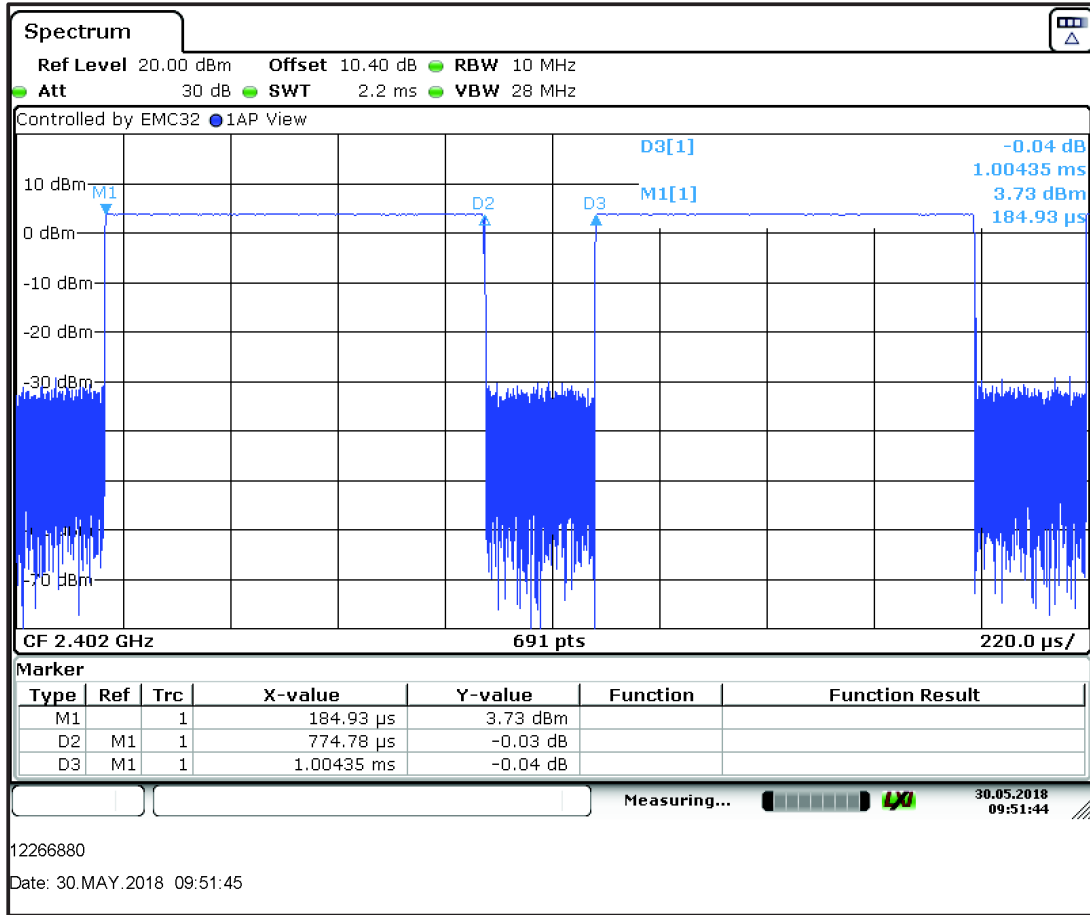

### **5.2.5. Transmitter Maximum Peak Output Power**

#### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 9		

<b>Industry Canada Reference:</b>	RSS-Gen 6.12 / RSS-247 5.4(d) & RSS-247 5.4 (e)
<b>Test Method Used:</b>	ANSI C63.10 Section 11.9.1.1

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	42

#### **Note(s):**

Conducted power tests were performed using a spectrum analyser in accordance with FCC KDB 558074 D01 Section 9.1.1 with the RBW > *DTS bandwidth* procedure.


The signal analyser resolution bandwidth was set to 3 MHz and video bandwidth of 10 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 9 MHz. A marker was placed at the peak of the signal and the results recorded in the table below.

The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the spectrum analyser to compensate for the loss of the attenuator and RF cable.

The measurement was made with highest possible duty cycle

The conducted power was added to the declared antenna gain to obtain the EIRP.

**Test Setup:**

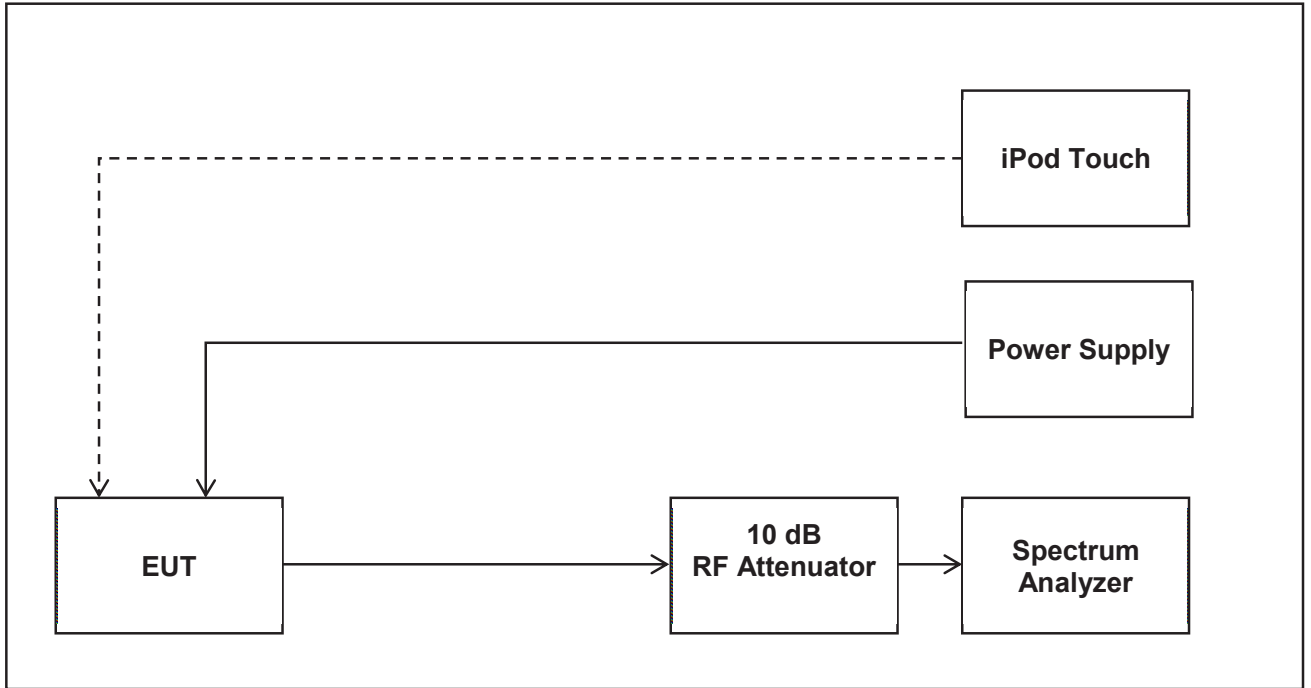





**Results:**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	4.8	30.0	25.2	Complied
Middle	4.7	30.0	25.3	Complied
Top	4.4	30.0	25.6	Complied


Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	4.8	2.0	6.8	36.0	29.2	Complied
Middle	4.7	2.0	6.7	36.0	29.3	Complied
Top	4.4	2.0	6.4	36.0	29.6	Complied

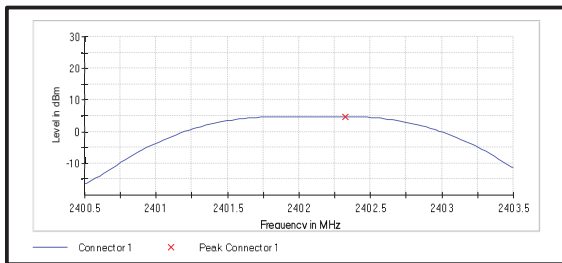

**Bottom Channel**

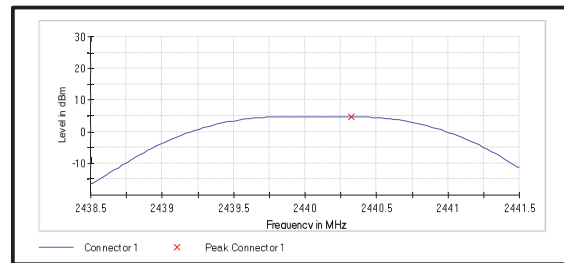

**Middle Channel**

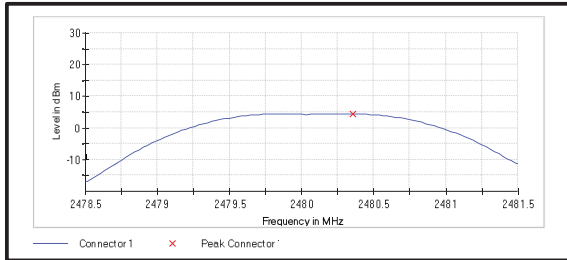

**Top Channel**

**Result: Pass**

**System Measurement Settings:**

Setting	Instrument Value	Target Value
Span	9.000 MHz	9.000 MHz
RBW	3.000 MHz	>= 3.000 MHz
VBW	10.000 MHz	>= 9.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.271 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	-1 / max. 150	max. 150
Stable	-1 / 3	3
Max Stable Difference	-1.00 dB	0.50 dB

### **5.2.6. Transmitter Radiated Emissions**

#### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 9		

<b>Industry Canada Reference:</b>	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
<b>Test Method Used:</b>	ANSI C63.10 Sections 6.3 and 6.5
<b>Frequency Range</b>	30 MHz to 1000 MHz


#### **Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	45

#### **Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the Middle channel only.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
5. Final measurements were performed on the marker frequencies and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR quasi-peak detector and span big enough to see the whole emission.

**Transmitter Radiated Emissions Test setup**

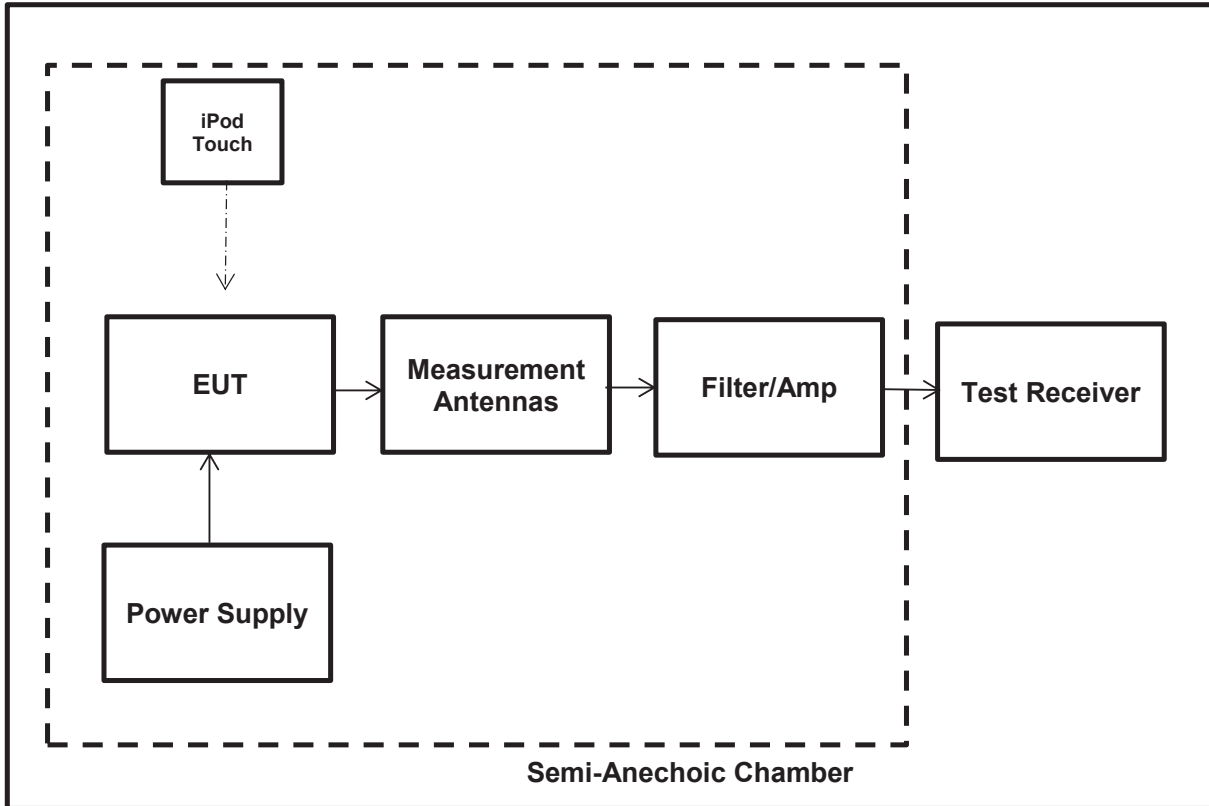


**Transmitter Radiated Emissions (continued)**

**Results: Middle Channel**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
39.765000	H	13.78	40.00	26.22	Complied
59.925000	H	15.31	40.00	24.69	Complied
65.325000	H	14.62	40.00	25.38	Complied
480.200000	V	22.50	46.00	23.50	Complied
667.125000	V	25.93	46.00	20.07	Complied
927.083333	H	31.42	46.00	14.58	Complied

**Plot: 30 MHz – 1GHz**

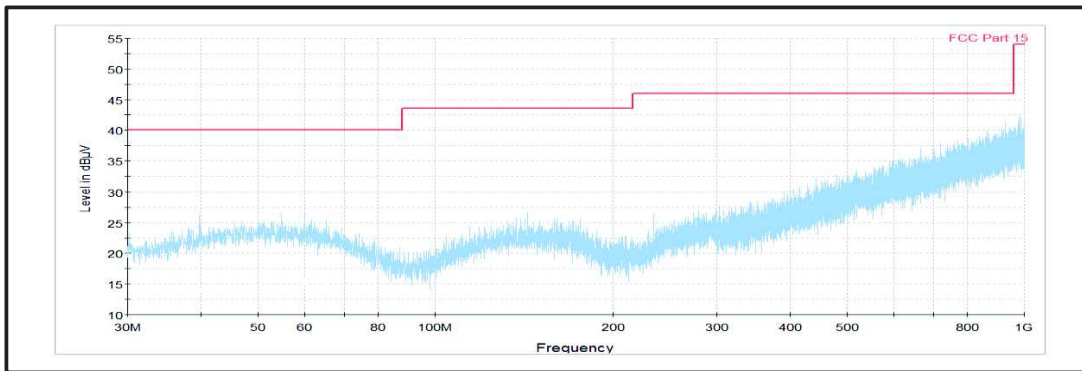

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

**Result: Pass**

## **Transmitter Radiated Emissions (continued)**

### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 1/2		

<b>Industry Canada Reference:</b>	RSS-Gen 6.13 & 8.9, RSS-247 5.5
<b>Test Method Used:</b>	ANSI C63.10 Sections 11.11 & 11.12 referencing Sections 6.3 and 6.6
<b>Frequency Range</b>	1 GHz to 25 GHz

### **Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	42

### **Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All the spurious emissions detected were re-investigated and re-measured with an average detector and in this case the emission was compared to the peak limit. For frequency range between 18 GHz and 25 GHz, no critical emission was found so only the measurement receiver noise floor level has been measured and recorded in the table. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit. Only the bottom channel plot was included in the report as similar result was obtained on both middle and top channels.
3. The emission shown around the 2.4 GHz is the EUT fundamental.
4. Measurements above 1 GHz were performed in a semi-anechoic chamber at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto.
6. \*In accordance with ANSI C63.10 Section 6.6.4.3, Note 1, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The reference level for the emission in the non-restricted band was established by following KDB 558074 D01 Section 11.2 procedure.

**Results:**

**Results: Peak / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4802	Horizontal	52.15	74.0	21.85	Complied
7204	Horizontal	53.87	74.0	20.13	Complied

**Results: Average / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4802	Horizontal	50.01	54.0	3.99	Complied
7204	Horizontal	43.12	54.0	10.88	Complied

**Results: Peak / Middle Channel**

Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4880	Horizontal	53.97	74.0	20.03	Complied
7320	Horizontal	53.13	74.0	20.87	Complied

**Results: Average / Middle Channel**

Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4880	Horizontal	50.02	54.0	3.98	Complied
7320	Horizontal	38.17	54.0	15.83	Complied

**Results: Peak / Top Channel**


Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2479.92	Vertical	51.27	74.0	22.73	Complied
4960.33	Horizontal	60.01	74.0	13.99	Complied

**Results: Average / Top Channel**


Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2479.92	Vertical	48.53	54.0	5.47	Complied
4960.33	Horizontal	36.12	54.0	17.88	Complied

**Result: Pass**


**Plot: 1 GHz – 18GHz (Bottom channel) with Peak detector**

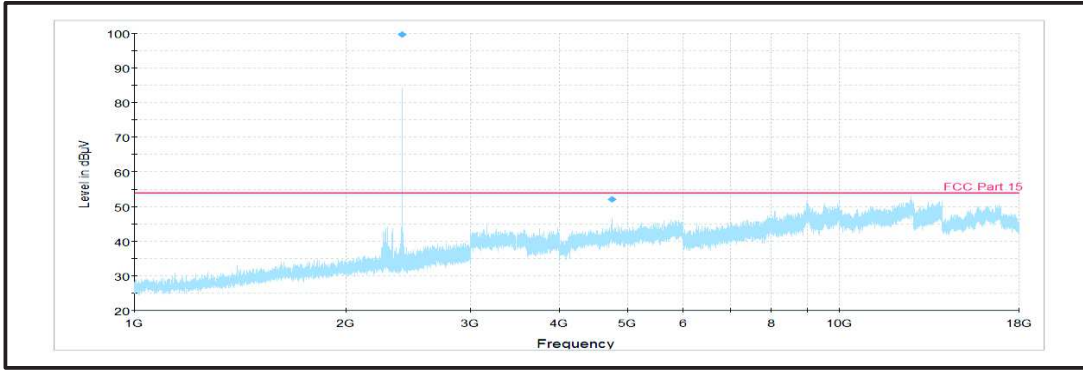


**Plot: 1 GHz – 18GHz (Middle channel) with Peak detector**

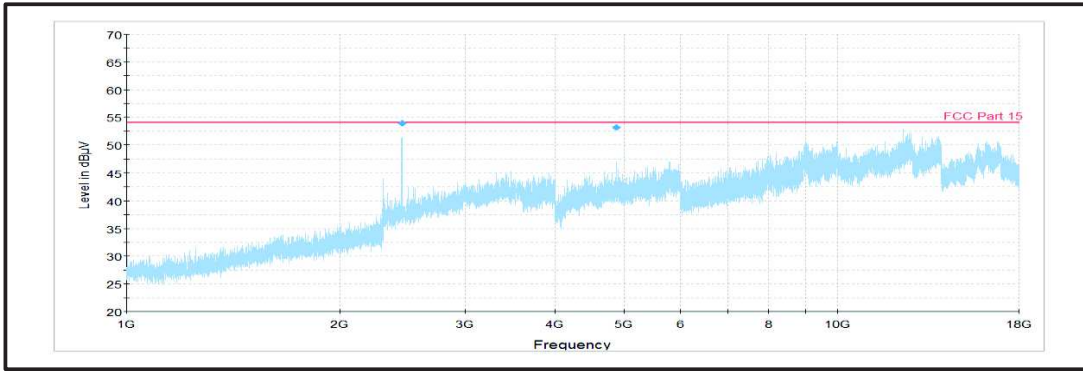

**Plot: 1 GHz – 18GHz (Top channel) with Peak detector**

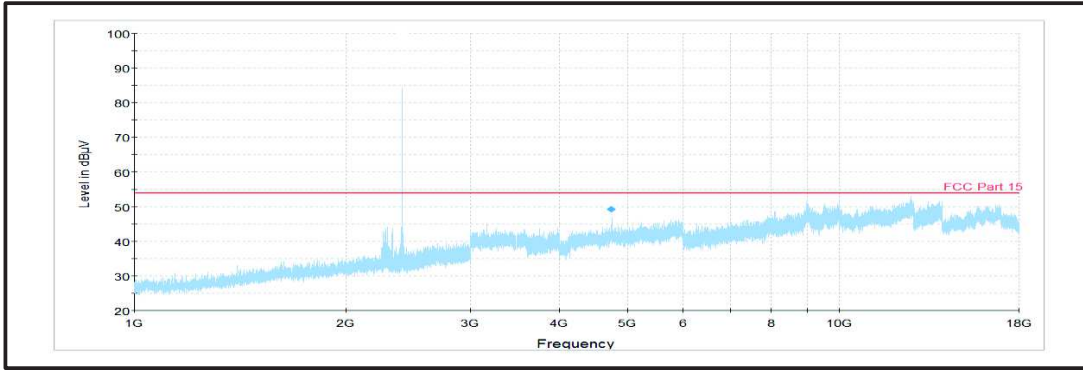

**Plot: 18 GHz – 25GHz (Middle channel) with Peak detector**

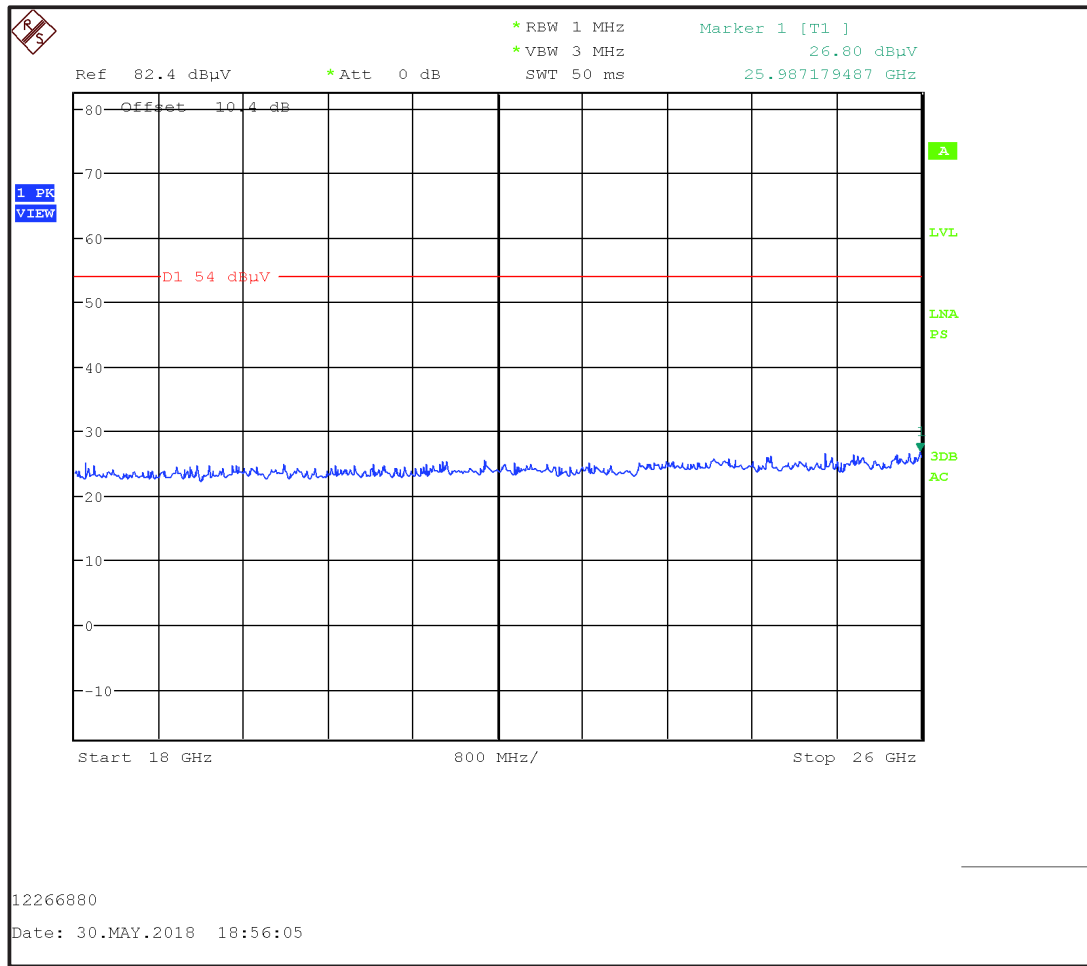

*Note: The above plots are pre-scans with peak detector and for indication purposes only. For final measurements, see accompanying tables.*



### **5.2.7. Transmitter Band Edge Radiated Emissions**

#### **Test Summary:**

<b>Test Engineer:</b>	Segun I. Adeniji	<b>Test Date:</b>	30 May 2018
<b>Test Sample Serial Number:</b>	D27C7C5448C9		
<b>Test Site Identification</b>	SR 9		

<b>Industry Canada Reference:</b>	RSS-Gen 6.13, 8.9 & 8.10 / RSS-247 5.5
<b>Test Method Used:</b>	ANSI C63.10 Section 6.10.4, 6.10.5 & Section 11.11


#### **Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	41

#### **Note(s):**

1. As the lower band edges fall within non-restricted bands, only peak measurements are required. In accordance with FCC KDB 558074 D01 Section 11.1, the test method in Section 11.3 was followed: the test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. As the maximum peak conducted output power was measured using a peak detector in accordance with FCC KDB 558074 D01 Section 9.1.1 an out-of-band limit line was placed 20 dB below the peak level (FCC KDB 558074 D01 Section 11.1(a)). A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent non-restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
2. As the upper band edge falls within a restricted band both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. An average detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
3. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.
4. \*Emissions in restricted bands: In accordance with C63.10 Section 6.6.4.3, Note 1, where the peak detected amplitude was shown to comply with the average limit, an average measurement was not performed.

**Transmitter Band Edge Radiated Emissions Test setup**

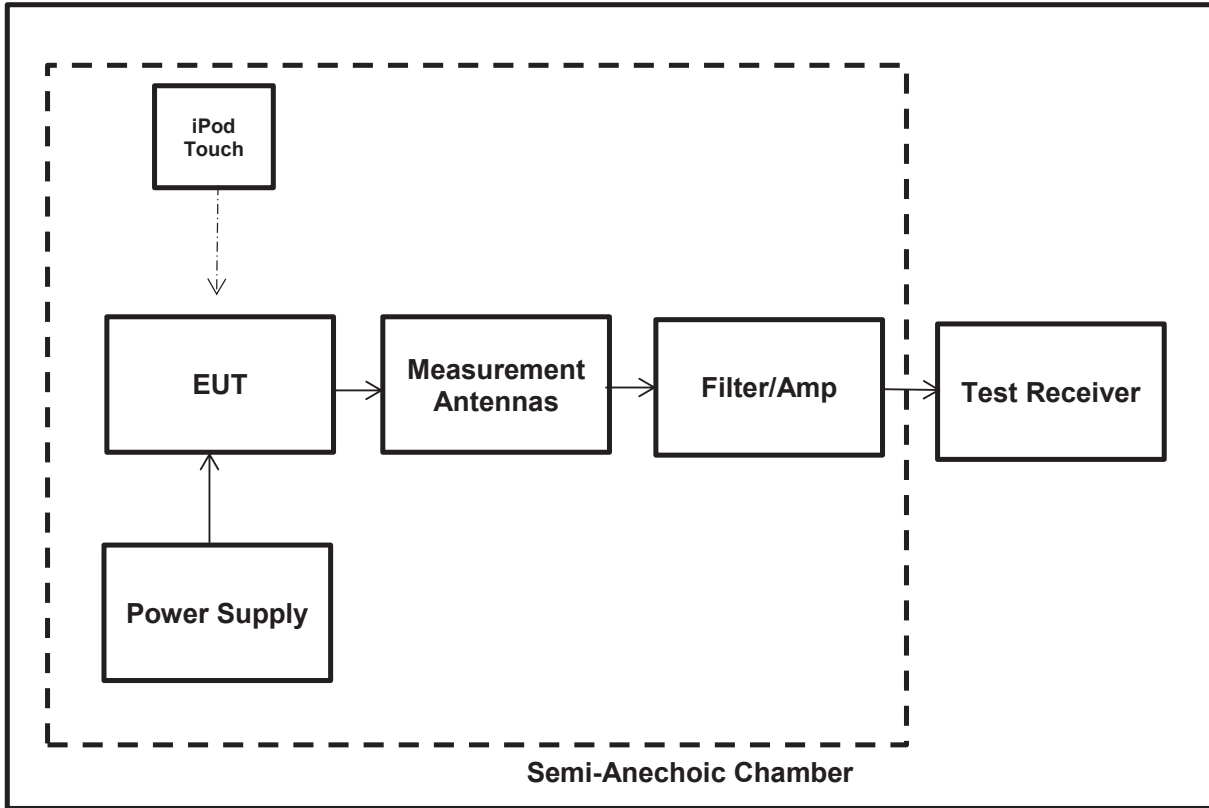

**Transmitter Band Edge Radiated Emissions (continued)**

**Results: Lower Band Edge/Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	-20 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2400.000	52.89	79.26	26.37	Complied

**Results: Upper Band Edge / Restricted Band / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	57.89	74.0	16.11	Complied

**Results: Upper Band Edge / Restricted Band / Average**


Frequency (MHz)	Average Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	53.38	54.0	0.62	Complied

**Results: 2310 to 2390 MHz Restricted Band / Peak**


Frequency (MHz)	Peak Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2330.25	59.10	74.0	14.90	Complied

**Results: 2310 to 2390 MHz Restricted Band / Average**


Frequency (MHz)	Average Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2390.00	47.73	54.0	6.27	Complied

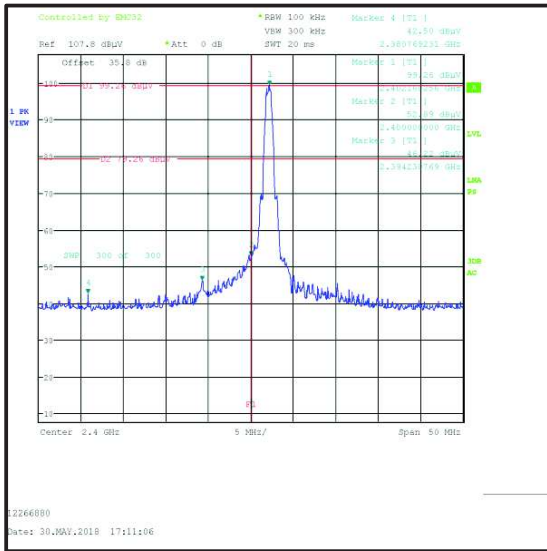

Lower Band Edge Peak Measurement

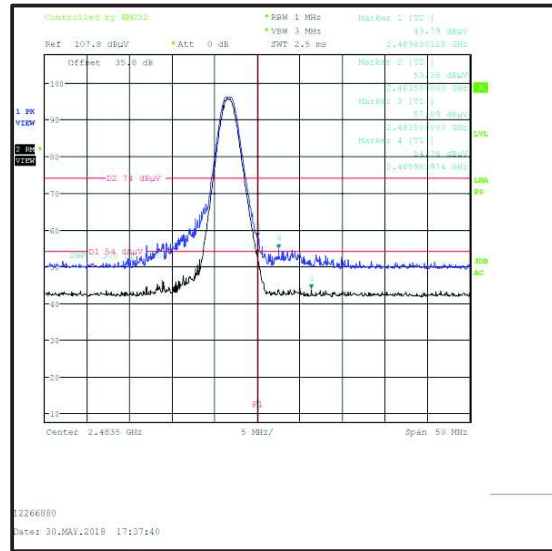

Upper Band Edge Peak & Average Measurement

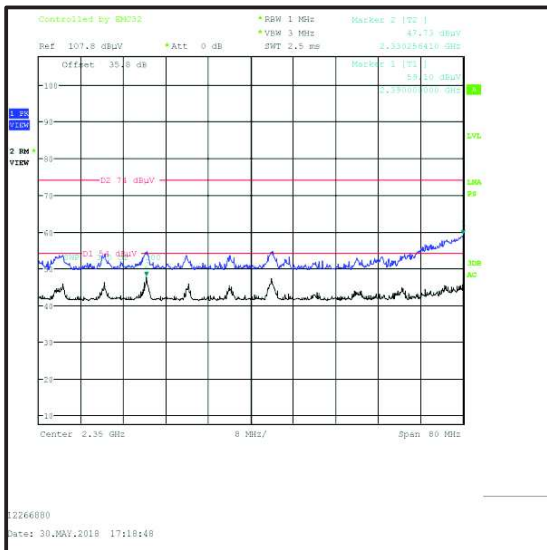

2310 MHz to 2390 MHz Restricted Band Plot

## **6. Measurement Uncertainty**

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

<b>Measurement Type</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
AC Conducted Spurious Emissions	95%	±2.49 dB
Conducted Maximum Peak Output Power	95%	±0.59 dB
Radiated Spurious Emissions	95%	±3.10 dB
Band Edge Radiated Emissions	95%	±3.10 dB
Minimum 6 dB Bandwidth	95%	±0.87 %
99% Emission Bandwidth	95%	±0.87 %
Spectral Power Density	95%	±0.59 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## 7. Used equipment

### Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
350	Rohde & Schwarz	Receiver, EMI Test	ESIB7	836697/014	7/13/2017	12
377	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 0118-1A	025294B	7/11/2017	12
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	055929	7/12/2017	12
460	Deisl	Turntable	DT 4250 S		n/a	n/a
465	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	8/8/2016	36
496	Rohde & Schwarz	Antenna, log. - periodical	HL050	100297	7/20/2016	24
587	Maturo	antenna mast, tilting	TAM 4.0-E	011/7180311	n/a	n/a
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	7/12/2017	12
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	4/8/2014	60
614	Wainwright Instruments	Highpass Filter 3GHz	WHKX10-	1	Lab verification	n/a
615	Wainwright Instruments	Highpass Filter 1GHz	WHKX12-	3	Lab verification	n/a
620	Bonn Elektronik	pre-amplifier	BLNA 0110-01N	1510111	7/12/2017	24
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a

### Test site: SR 9

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
424	EMCO	Antenna, Horn	EMCO 3116	00046537	7/28/2016	24
634	Rohde & Schwarz	Wireless Devices Test System	TS8997		7/11/2017	12
636	Rohde & Schwarz	switching unit	OSP120	101698	7/14/2017	12
637	Rohde & Schwarz	Spectrum Analyzer	FSV40	101587	7/11/2017	12
195	SPS	Power Supply	TOE8842-24	51455	Verified by Multimeter	12
216	Agilent	Multimeter	34401A	US36017458	7/11/2017	24

### Test site: SR 7/8

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
22	Rohde & Schwarz	Artificial Mains	50 Ohm// 50uH	831767/014	7/12/2017	12
215	Rohde & Schwarz	Artificial Mains Network	9 kHz - 30 MHz; 3 phase	879675/002	7/12/2017	12
350	Rohde & Schwarz	Receiver, EMI Test	20 Hz - 7 GHz	836697/014	7/13/2017	12
616	Rohde & Schwarz	ISN	8 wire ISN for CAT6	101656	7/13/2017	12

## **8. Report Revision History**

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version

--- END OF REPORT ---