



# TEST REPORT

**Report Reference No.**..... : **TRE1801004507** R/C.....: 93644  
**FCC ID**..... : **2ALAVA81F**  
**Applicant's name**..... : **Haier International Business Corporation Limited**  
**Address**.....: Room 1602,16th Floor,Tower A,No. 1 Ke Yuan Wei Yi Road,  
 Lao Shan District,Qingdao,Shandong,China  
**Manufacturer**.....: Haier International Business Corporation Limited  
**Address**.....: Room 1602,16th Floor,Tower A,No. 1 Ke Yuan Wei Yi Road,  
 Lao Shan District,Qingdao,Shandong,China  
**Test item description** ..... : **Tablet PC**  
**Trade Mark** ..... : **IBIRAPITÁ**  
**Model/Type reference**.....: A81F  
**Listed Model(s)** ..... : -  
**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**  
**Date of receipt of test sample**.....: Jan.05,2018  
**Date of testing**.....: Jan.06,2018-Jan.18,2018  
**Date of issue**.....: Jan.19,2018  
**Result**.....: **PASS**

**Compiled by**  
 ( position+printedname+signature)....: File administrators Candy Liu *Candy Liu*  
**Supervised by**  
 (position+printedname+signature)....: Project Engineer : Edward Pan *Edward Pan*  
**Approved by**  
 ( Position+Printed name+Signature) : RF Manager Hans Hu *Hans Hu*

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**  
**Address**.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,  
 Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
5.1.	Antenna Requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	18
5.6.	Restricted band	20
5.7.	Band edge and Spurious Emissions (conducted)	22
5.8.	Spurious Emissions (radiated)	27
<b>6.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>31</b>
<b>7.</b>	<b><u>EXTERANAL AND INTERNAL PHOTOS</u></b>	<b>32</b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v04](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

### 1.2. Report version

Version No.	Date of issue	Description
00	Jan.19,2018	Original

## **2. TEST DESCRIPTION**

<b>Test Item</b>	<b>FCC Rule</b>	<b>Result</b>	<b>Test Engineer</b>
Antenna requirement	15.203/15.247(c)	PASS	William Wang
Line Conducted Emissions (AC Main)	15.207	PASS	William Wang
Conducted Peak Output Power	15.247(b)(3)	PASS	Baozhu.hu
Power Spectral Density	15.247(e)	PASS	Baozhu.hu
6dB Bandwidth	15.247(a)(2)	PASS	Baozhu.hu
Restricted band	15.247(d)/15.205	PASS	William Wang
Spurious Emissions	15.247(d)/15.209	PASS	William Wang

Note: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Haier International Business Corporation Limited
Address:	Room 1602,16th Floor,Tower A,No. 1 Ke Yuan Wei Yi Road, Lao Shan District,Qingdao,Shandong,China
Manufacturer:	Haier International Business Corporation Limited
Address:	Room 1602,16th Floor,Tower A,No. 1 Ke Yuan Wei Yi Road, Lao Shan District,Qingdao,Shandong,China

#### 3.2. Product Description

Name of EUT:	Tablet PC
Trade Mark:	<b>IBIRAPITÁ</b>
Model No.:	A81F
Listed Model(s):	-
IMEI:	868758030000008
Power supply:	DC 3.7V
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.5A Output: 5Vd.c.,2.0A
Hardware version:	L808WF_V1_20171129
Software version:	Ibirapita.PadA81F.GM20180126.SV1.0
<b>Bluetooth</b>	
Version:	Supported BT4.0+BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	PIFA Antenna
Antenna gain:	1.0dBi

### 3.3. Operation state

➤ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2404
⋮	⋮
19	2440
⋮	⋮
38	2478
39	2480

➤ **Test mode**

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

### 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.:5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.



#### 4.5. Equipments Used during the Test

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018
3	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2018
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2018
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
12	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
13	EMI Test Software	Audix	E3	N/A	N/A	N/A
14	Turntable	MATURO	TT2.0	/	N/A	N/A
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A

<b>RF Conducted Test</b>						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Agilent	U2021XA	178231	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

The Cal.Interval was one year.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST RESULTS

**Passed**       **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



## 5.2. Conducted Emissions (AC Main)


### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

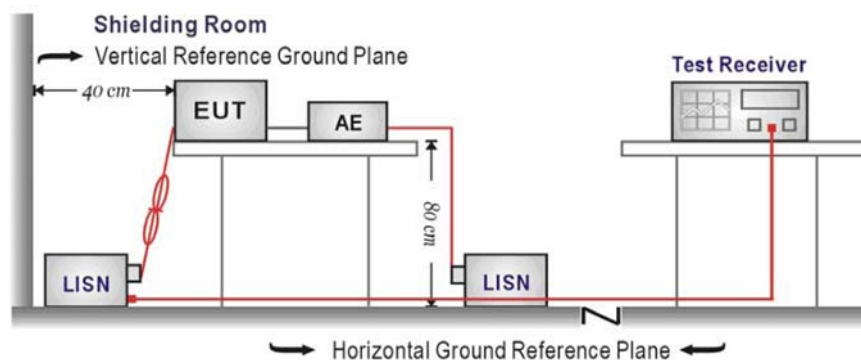

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Transd = Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin = Limit - Level

Test Line: L

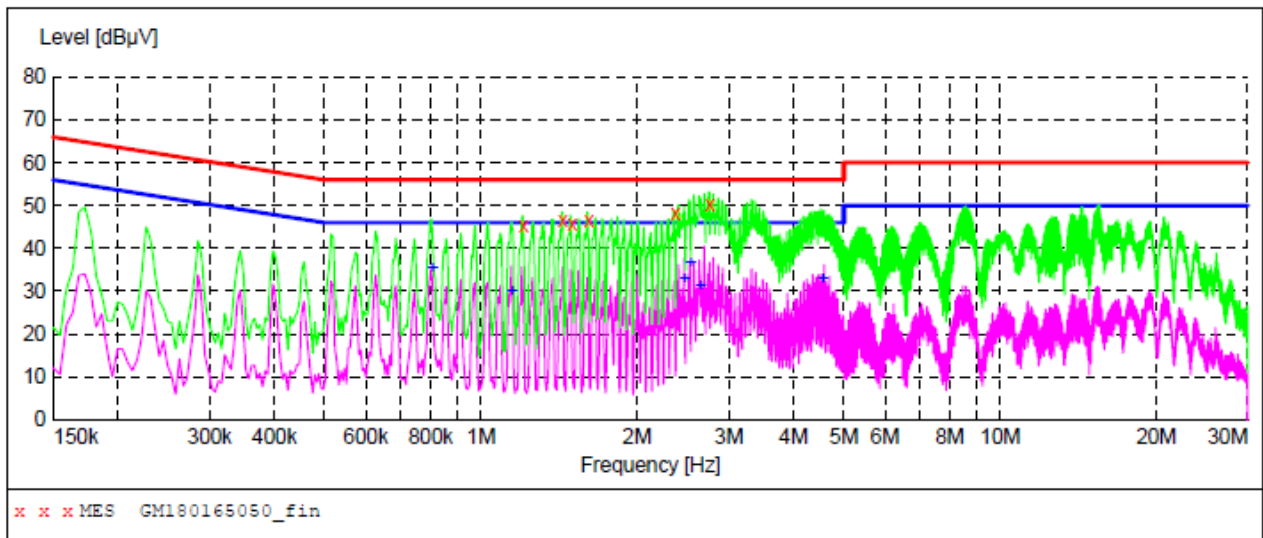

**MEASUREMENT RESULT: "GM180165050\_fin"**

1/16/2018 2:44PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.207500	45.30	10.1	56	10.7	QP	L1	GND
1.437000	46.40	10.1	56	9.6	QP	L1	GND
1.500000	45.80	10.1	56	10.2	QP	L1	GND
1.612500	46.70	10.1	56	9.3	QP	L1	GND
2.368500	48.30	10.1	56	7.7	QP	L1	GND
2.760000	50.10	10.1	56	5.9	QP	L1	GND

**MEASUREMENT RESULT: "GM180165050\_fin2"**

1/16/2018 2:44PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.807000	35.40	10.0	46	10.6	AV	L1	GND
1.149000	30.10	10.1	46	15.9	AV	L1	GND
2.472000	32.80	10.1	46	13.2	AV	L1	GND
2.535000	36.40	10.1	46	9.6	AV	L1	GND
2.647500	31.30	10.1	46	14.7	AV	L1	GND
4.551000	32.70	10.2	46	13.3	AV	L1	GND

Test Line: N

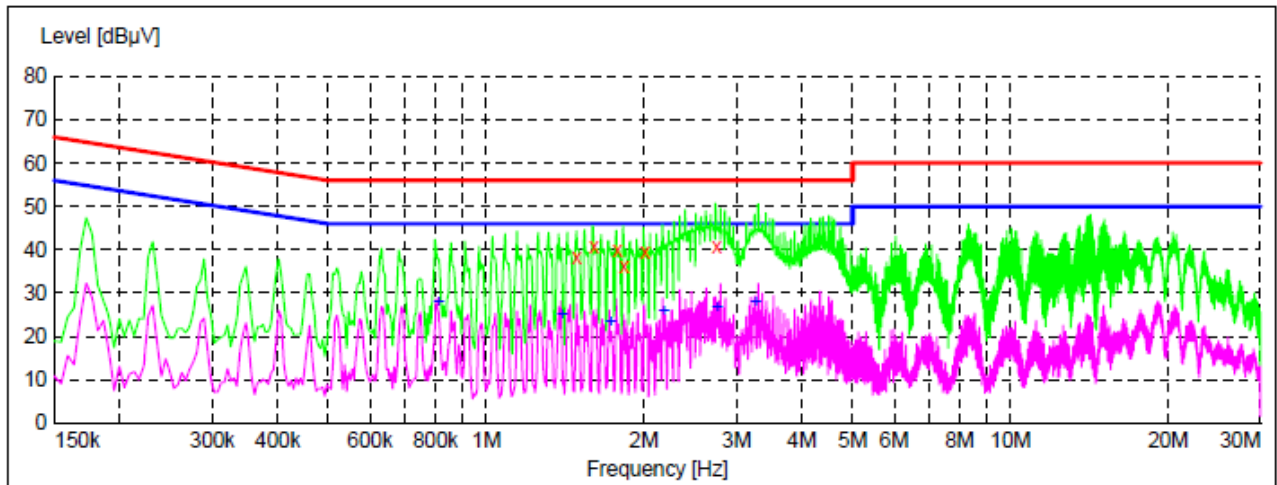

**MEASUREMENT RESULT: "GM180165051\_fin"**

1/16/2018 2:47PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.486500	38.10	10.1	56	17.9	QP	N	GND
1.603500	40.80	10.1	56	15.2	QP	N	GND
1.779000	39.80	10.1	56	16.2	QP	N	GND
1.828500	36.30	10.1	56	19.7	QP	N	GND
2.008500	39.50	10.1	56	16.5	QP	N	GND
2.746500	40.60	10.1	56	15.4	QP	N	GND

**MEASUREMENT RESULT: "GM180165051\_fin2"**

1/16/2018 2:47PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.811500	28.10	10.0	46	17.9	AV	N	GND
1.396500	24.90	10.1	46	21.1	AV	N	GND
1.725000	23.20	10.1	46	22.8	AV	N	GND
2.179500	25.70	10.1	46	20.3	AV	N	GND
2.755500	26.60	10.1	46	19.4	AV	N	GND
3.264000	27.90	10.1	46	18.1	AV	N	GND

### 5.3. Conducted Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30 dBm

#### TEST CONFIGURATION

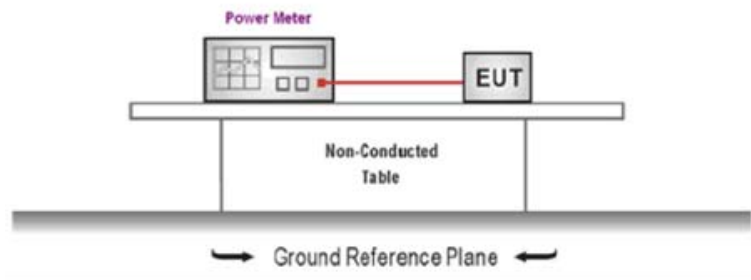

#### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Type	Channel	Output power (dBm)	Limit (dBm)	Result
BT-BLE	00	2.79	≤30.00	Pass
	19	3.30		
	39	2.00		


### 5.4. Power Spectral Density

#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST CONFIGURATION

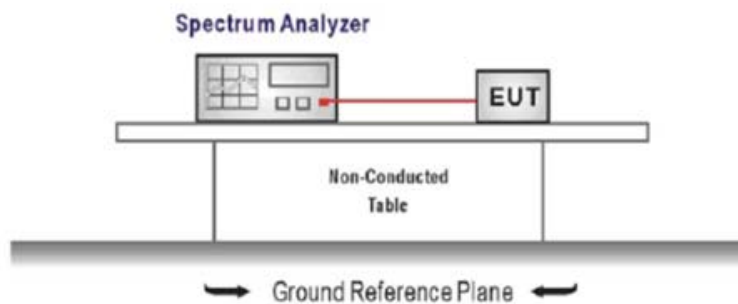

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
 Center frequency=DTS channel center frequency  
 Span =1.5 times the DTS bandwidth  
 RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW  
 Sweep time = auto couple  
 Detector = peak  
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST MODE:

Please refer to the clause 3.3




#### TEST RESULTS

Passed       Not Applicable

Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
BT-BLE	00	-12.86	≤8.00	Pass
	19	-12.30		
	39	-13.61		

Test plot as follows:

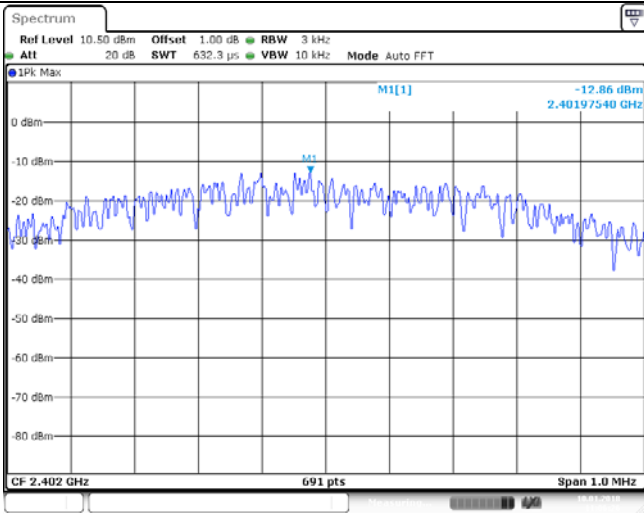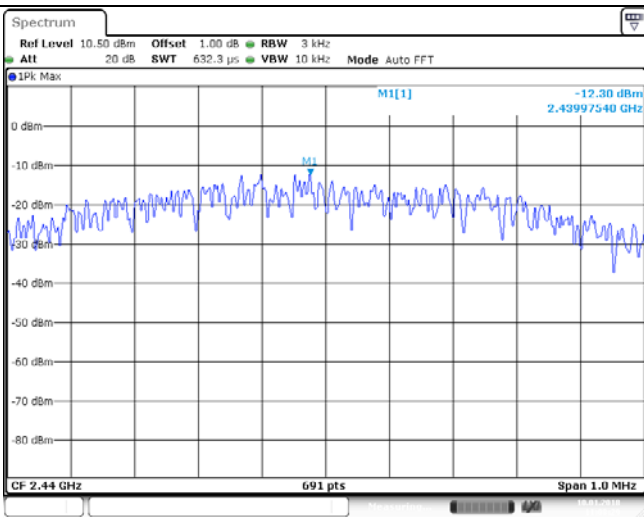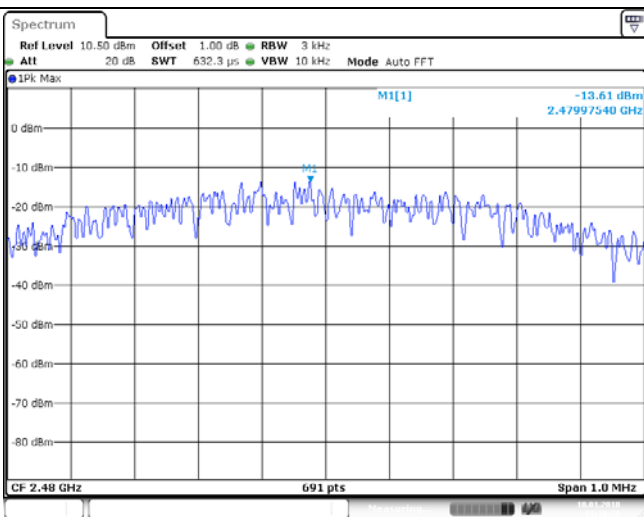

CH00	
CH19	
CH39	


### 5.5. 6dB bandwidth

#### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST CONFIGURATION

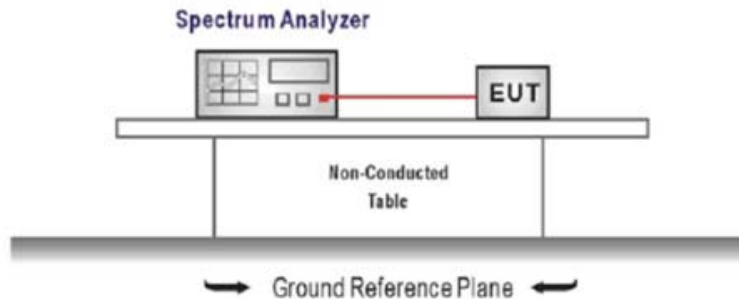

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
 Center Frequency =DTS channel center frequency  
 Span=2 x DTS bandwidth  
 RBW = 100 kHz, VBW ≥ 3 × RBW  
 Sweep time= auto couple  
 Detector = Peak  
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

#### TEST MODE:




Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Type	Channel	6dB Bandwidth(MHz)	Limit (kHz)	Result
BT-BLE	00	0.71	≥500	Pass
	19	0.70		
	39	0.70		

Test plot as follows:
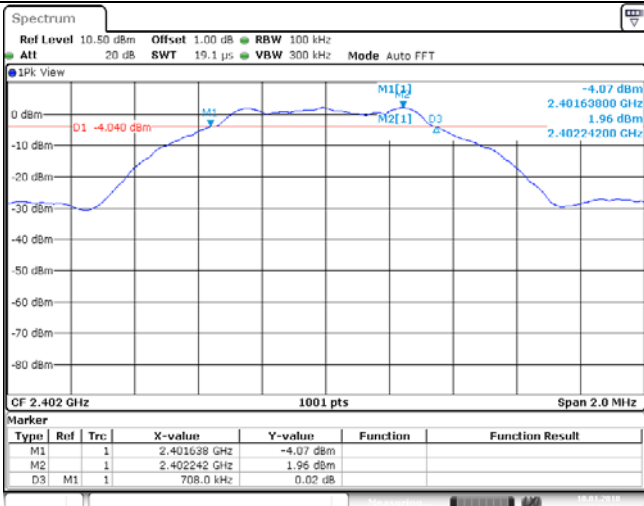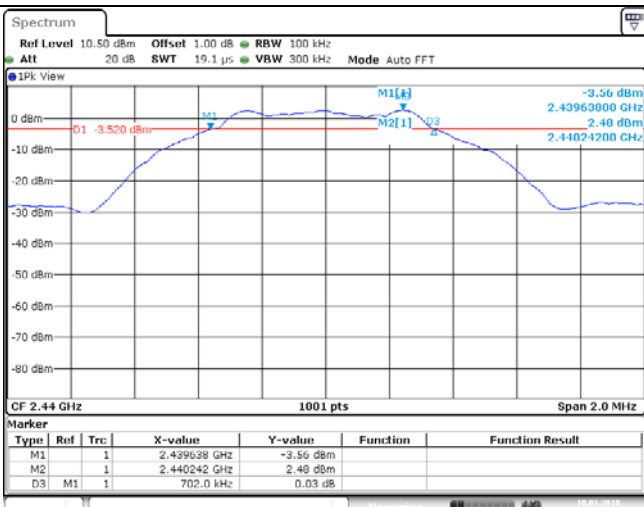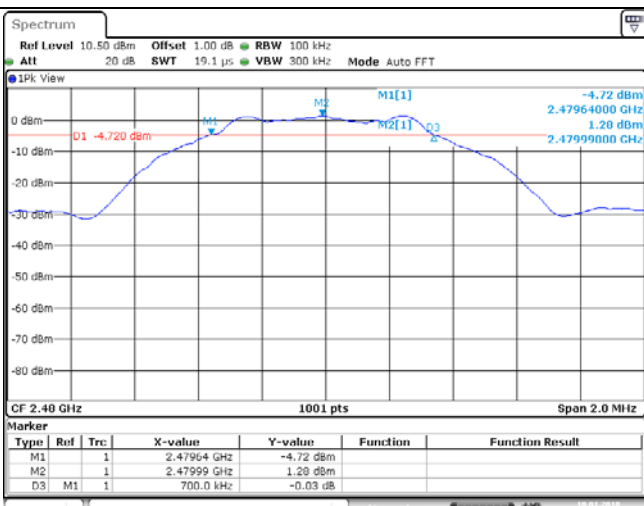
<p>CH00</p>	 <p>Spectrum</p> <p>Ref Level 10.50 dBm Offset 1.00 dB RBW 100 kHz          Alt 20 dB SWT 19.1 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>0 dBm -4.07 dBm          -10 dBm          -20 dBm          -30 dBm          -40 dBm          -50 dBm          -60 dBm          -70 dBm          -80 dBm</p> <p>CF 2.402 GHz 1001 pts Span 2.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td></td> <td>2.401638 GHz</td> <td>-4.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td></td> <td>2.402242 GHz</td> <td>1.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td></td> <td>708.0 kHz</td> <td>0.02 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1		2.401638 GHz	-4.07 dBm			M2		1		2.402242 GHz	1.96 dBm			D3	M1	1		708.0 kHz	0.02 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1		1		2.401638 GHz	-4.07 dBm																												
M2		1		2.402242 GHz	1.96 dBm																												
D3	M1	1		708.0 kHz	0.02 dB																												
<p>CH19</p>	 <p>Spectrum</p> <p>Ref Level 10.50 dBm Offset 1.00 dB RBW 100 kHz          Alt 20 dB SWT 19.1 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>0 dBm -3.56 dBm          -10 dBm          -20 dBm          -30 dBm          -40 dBm          -50 dBm          -60 dBm          -70 dBm          -80 dBm</p> <p>CF 2.44 GHz 1001 pts Span 2.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td></td> <td>2.439638 GHz</td> <td>-3.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td></td> <td>2.440242 GHz</td> <td>2.40 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td></td> <td>702.0 kHz</td> <td>0.03 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1		2.439638 GHz	-3.56 dBm			M2		1		2.440242 GHz	2.40 dBm			D3	M1	1		702.0 kHz	0.03 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1		1		2.439638 GHz	-3.56 dBm																												
M2		1		2.440242 GHz	2.40 dBm																												
D3	M1	1		702.0 kHz	0.03 dB																												
<p>CH39</p>	 <p>Spectrum</p> <p>Ref Level 10.50 dBm Offset 1.00 dB RBW 100 kHz          Alt 20 dB SWT 19.1 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>0 dBm -4.72 dBm          -10 dBm          -20 dBm          -30 dBm          -40 dBm          -50 dBm          -60 dBm          -70 dBm          -80 dBm</p> <p>CF 2.4796 GHz 1001 pts Span 2.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td></td> <td>2.47964 GHz</td> <td>-4.72 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td></td> <td>2.47999 GHz</td> <td>1.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td></td> <td>700.0 kHz</td> <td>-0.03 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1		2.47964 GHz	-4.72 dBm			M2		1		2.47999 GHz	1.20 dBm			D3	M1	1		700.0 kHz	-0.03 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1		1		2.47964 GHz	-4.72 dBm																												
M2		1		2.47999 GHz	1.20 dBm																												
D3	M1	1		700.0 kHz	-0.03 dB																												


**5.6. Restricted band**

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

**TEST CONFIGURATION**

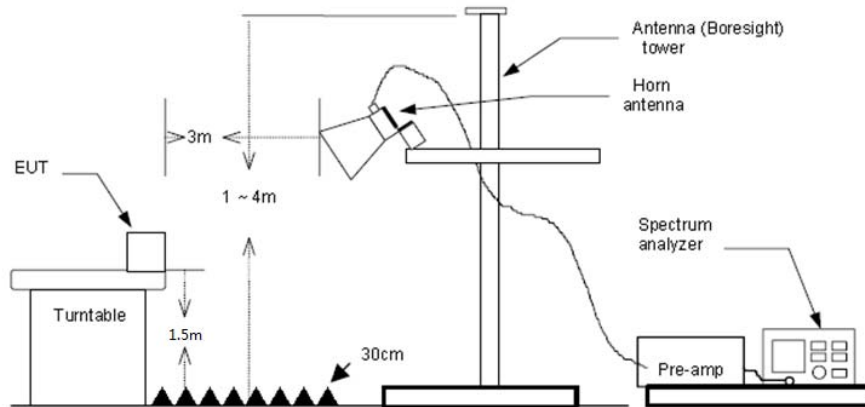

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

Passed       Not Applicable

**Note:**

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Test channel					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	31.94	28.05	6.62	37.65	28.96	74.00	-45.04	Vertical	Peak
2390.03	31.77	27.65	6.75	37.87	28.30	74.00	-45.70	Vertical	Peak
2310.00	31.41	28.05	6.62	37.65	28.43	74.00	-45.57	Horizontal	Peak
2390.03	30.76	27.65	6.75	37.87	27.29	74.00	-46.71	Horizontal	Peak
2310.00	24.43	28.05	6.62	37.65	21.45	54.00	-32.55	Vertical	Average
2390.03	24.63	27.65	6.75	37.87	21.16	54.00	-32.84	Vertical	Average
2310.00	25.29	28.05	6.62	37.65	22.31	54.00	-31.69	Horizontal	Average
2390.03	23.71	27.65	6.75	37.87	20.24	54.00	-33.76	Horizontal	Average


Test channel					CH39				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	54.66	27.26	6.83	37.87	50.88	74.00	-23.12	Vertical	Peak
2500.00	31.76	27.20	6.84	37.87	27.93	74.00	-46.07	Vertical	Peak
2483.50	52.28	27.26	6.83	37.87	48.50	74.00	-25.50	Horizontal	Peak
2500.00	31.28	27.20	6.84	37.87	27.45	74.00	-46.55	Horizontal	Peak
2483.50	50.69	27.26	6.83	37.87	46.91	54.00	-7.09	Vertical	Average
2500.00	24.36	27.20	6.84	37.87	20.53	54.00	-33.47	Vertical	Average
2483.50	48.87	27.26	6.83	37.87	45.09	54.00	-8.91	Horizontal	Average
2500.00	24.55	27.20	6.84	37.87	20.72	54.00	-33.28	Horizontal	Average

## 5.7. Band edge and Spurious Emissions (conducted)

### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

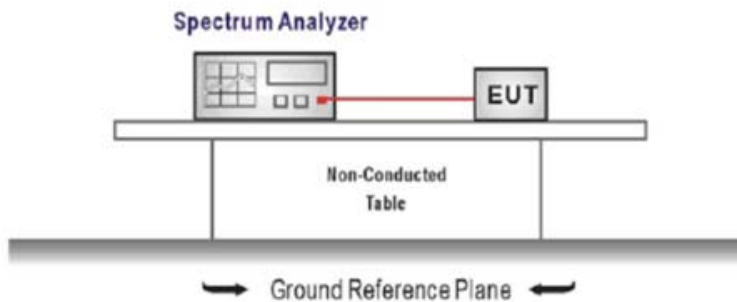

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.



3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.




### TEST MODE:

Please refer to the clause 3.3




### TEST RESULTS




Passed       Not Applicable

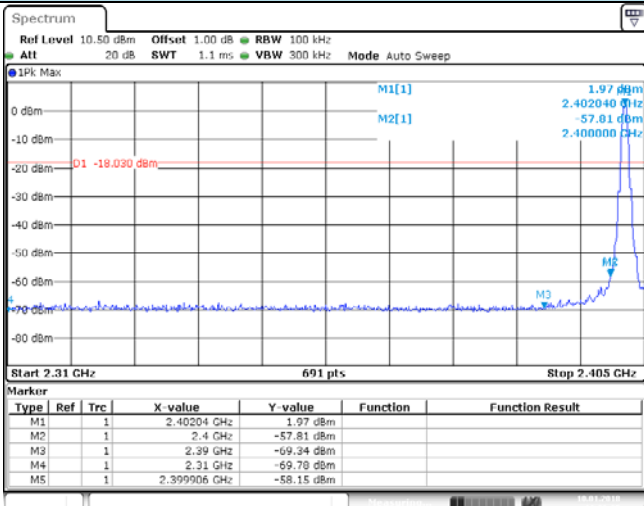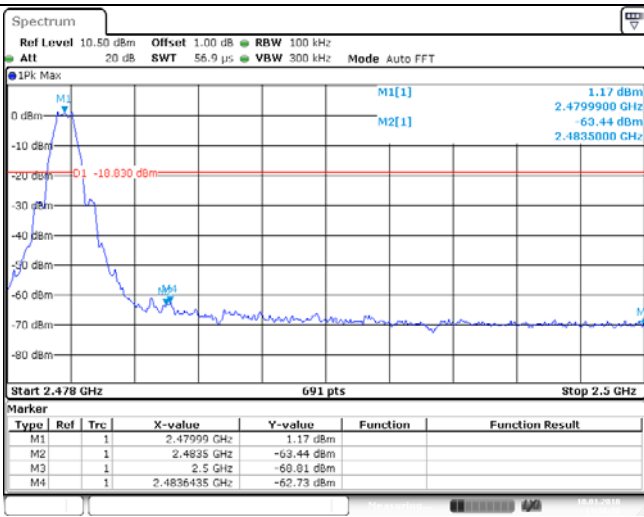Test Item:	Band edge																																										
CH00	 <p>Spectrum</p> <p>Ref Level 10.50 dBm Offset 1.00 dB RBW 100 kHz          Att 20 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep</p> <p>1Pk Max</p> <p>M1[1] 1.97 dBm          M2[1] 2.40204 GHz -57.81 dBm          M3 2.400000 GHz -57.01 dBm          M4 2.400000 GHz -57.01 dBm</p> <p>D1 -18.030 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40204 GHz</td> <td>1.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-57.81 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.34 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.79 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399906 GHz</td> <td>-58.15 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40204 GHz	1.97 dBm			M2	1		2.4 GHz	-57.81 dBm			M3	1		2.39 GHz	-59.34 dBm			M4	1		2.31 GHz	-59.79 dBm			M5	1		2.399906 GHz	-58.15 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																					
M1	1		2.40204 GHz	1.97 dBm																																							
M2	1		2.4 GHz	-57.81 dBm																																							
M3	1		2.39 GHz	-59.34 dBm																																							
M4	1		2.31 GHz	-59.79 dBm																																							
M5	1		2.399906 GHz	-58.15 dBm																																							
CH39	 <p>Spectrum</p> <p>Ref Level 10.50 dBm Offset 1.00 dB RBW 100 kHz          Att 20 dB SWT 56.9 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk Max</p> <p>M1[1] 1.17 dBm          M2[1] 2.479990 GHz -63.44 dBm          M3 2.483500 GHz -62.73 dBm          M4 2.483500 GHz -62.73 dBm</p> <p>D1 -18.030 dBm</p> <p>Start 2.478 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.47999 GHz</td> <td>1.17 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-63.44 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-60.01 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4836455 GHz</td> <td>-62.73 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.47999 GHz	1.17 dBm			M2	1		2.4835 GHz	-63.44 dBm			M3	1		2.5 GHz	-60.01 dBm			M4	1		2.4836455 GHz	-62.73 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																					
M1	1		2.47999 GHz	1.17 dBm																																							
M2	1		2.4835 GHz	-63.44 dBm																																							
M3	1		2.5 GHz	-60.01 dBm																																							
M4	1		2.4836455 GHz	-62.73 dBm																																							

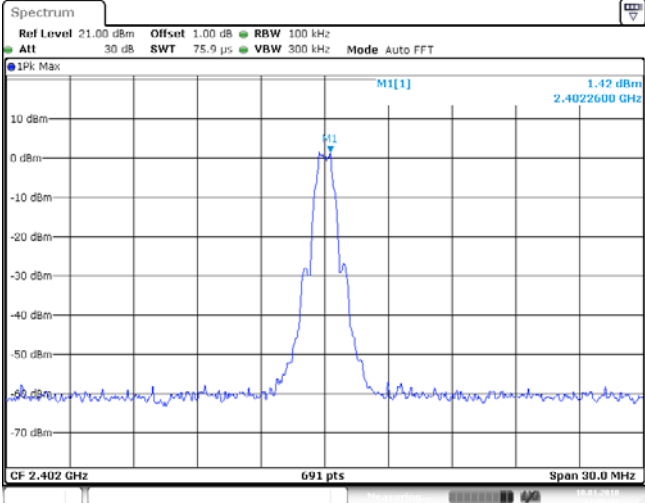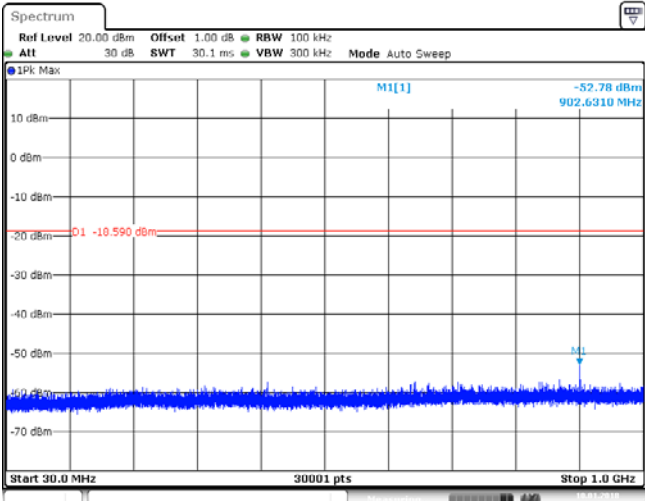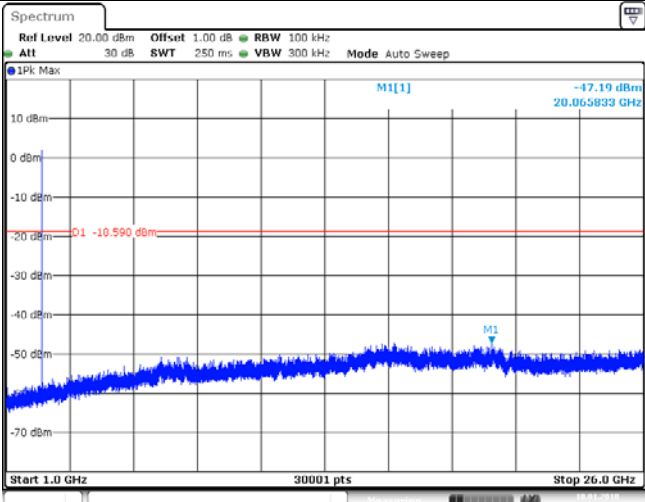Test Item:	SE
<p>CH00 Reference level</p>	
<p>CH00 30MHz~1000MHz</p>	
<p>CH00 1GHz~26GHz</p>	

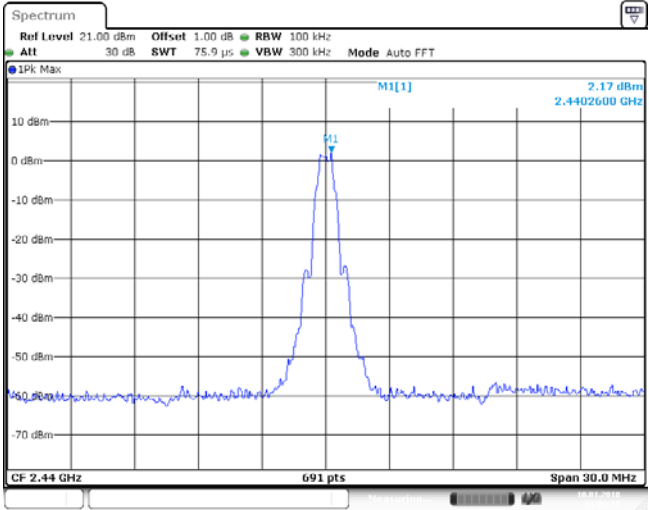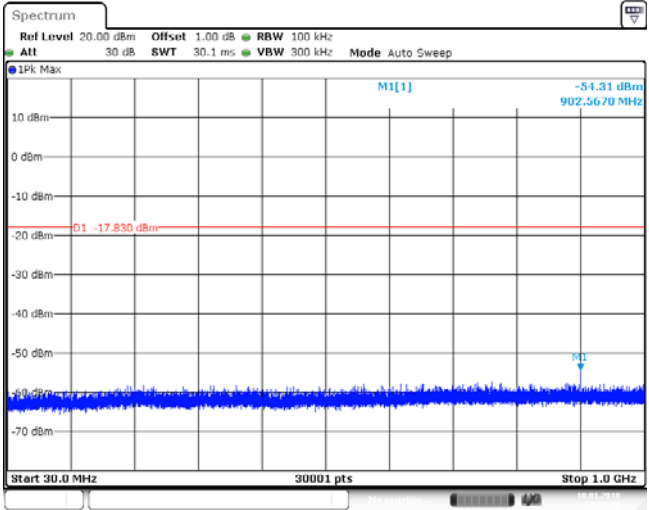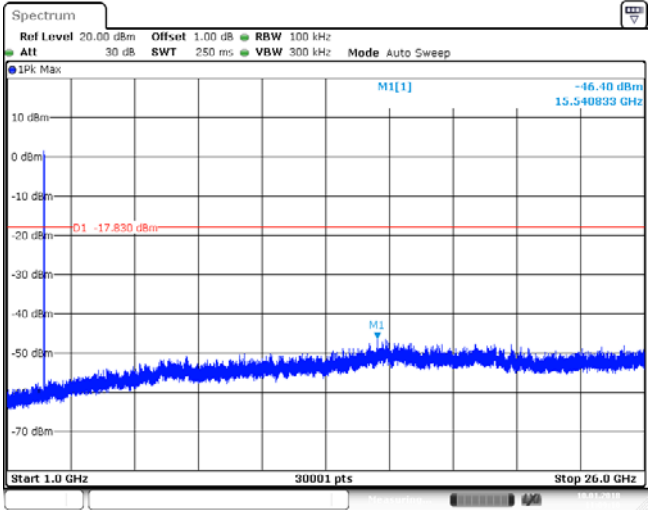

<p>CH19 Reference level</p>	
<p>CH19 30MHz~1000MHz</p>	
<p>CH19 1GHz~26GHz</p>	
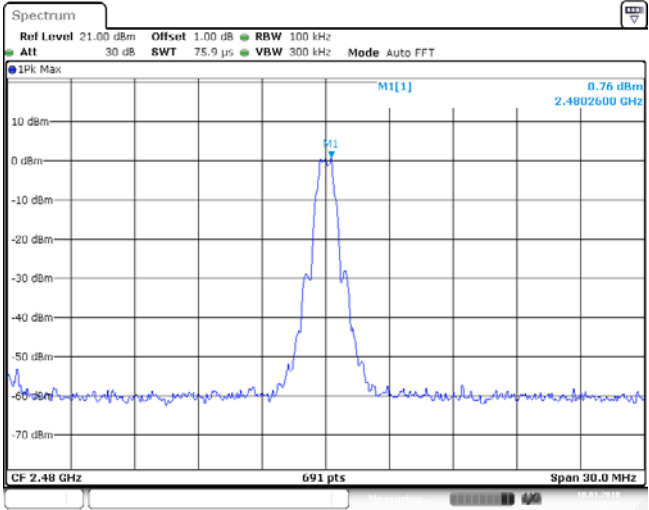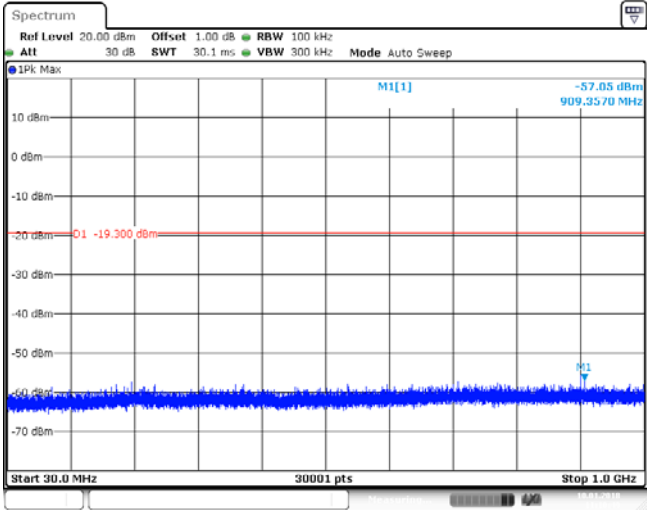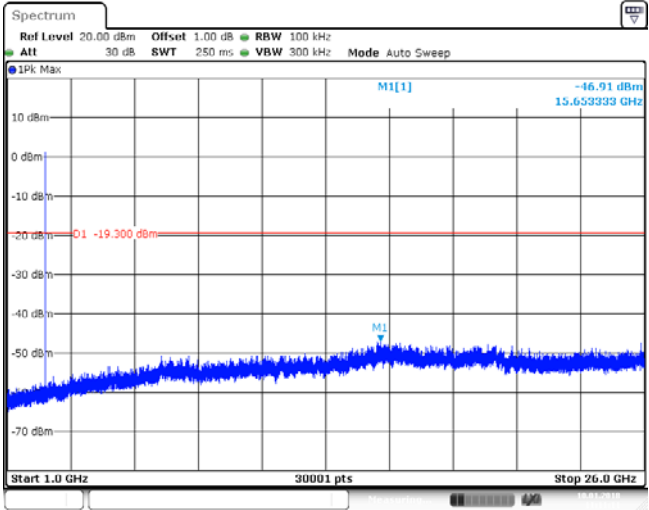
<p>CH39 Reference level</p>	
<p>CH39 30MHz~1000MHz</p>	
<p>CH39 1GHz~26GHz</p>	

### 5.8. Spurious Emissions (radiated)


**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.209**


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

**TEST CONFIGURATION**


- 9 kHz ~ 30 MHz

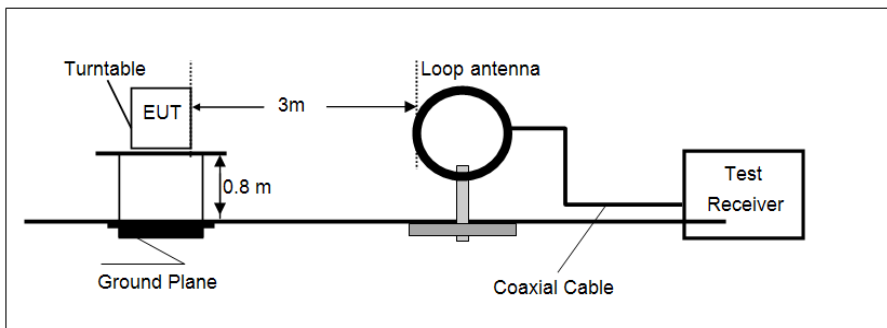

- 30 MHz ~ 1 GHz

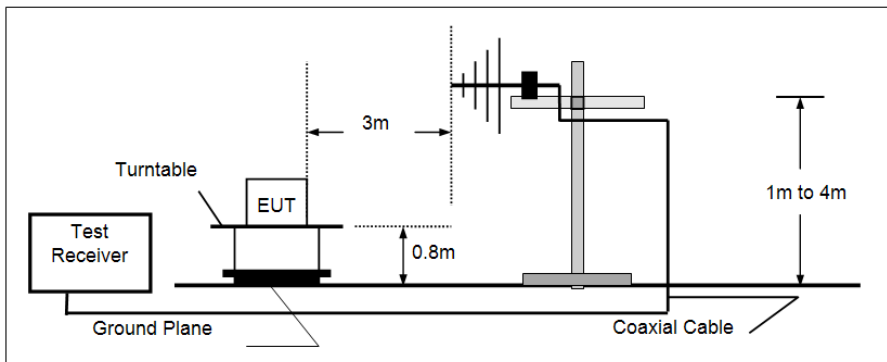

- Above 1 GHz

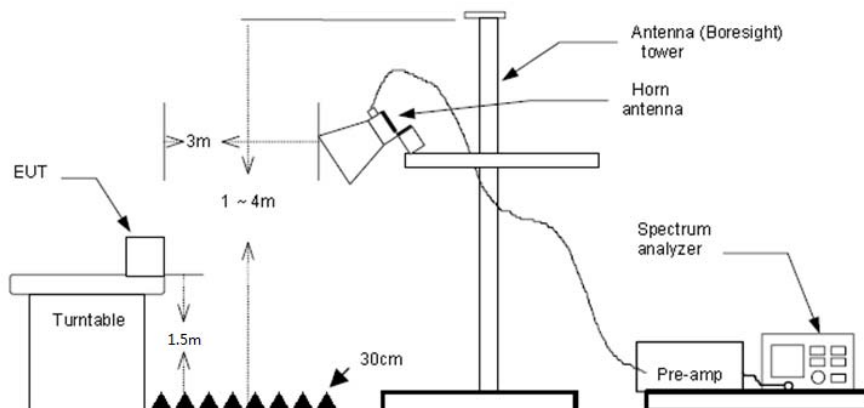

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**


**Passed**       **Not Applicable**

**Note:**

- 1) Above 1GHz Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
  - 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- **9 kHz ~ 30 MHz**  
The EUT was pre-scanned the frequency band (9 kHz ~ 30 MHz), found the radiated level lower than the limit, so don't show on the report.
- **30 MHz ~ 1000 MHz**  
Have pre-scan all modulation mode, found the BT-BLE mode CH39 which it was worst case, so only the worst case's data on the test report.

➤ 30 MHz ~ 1 GHz

Polarization: Vertical

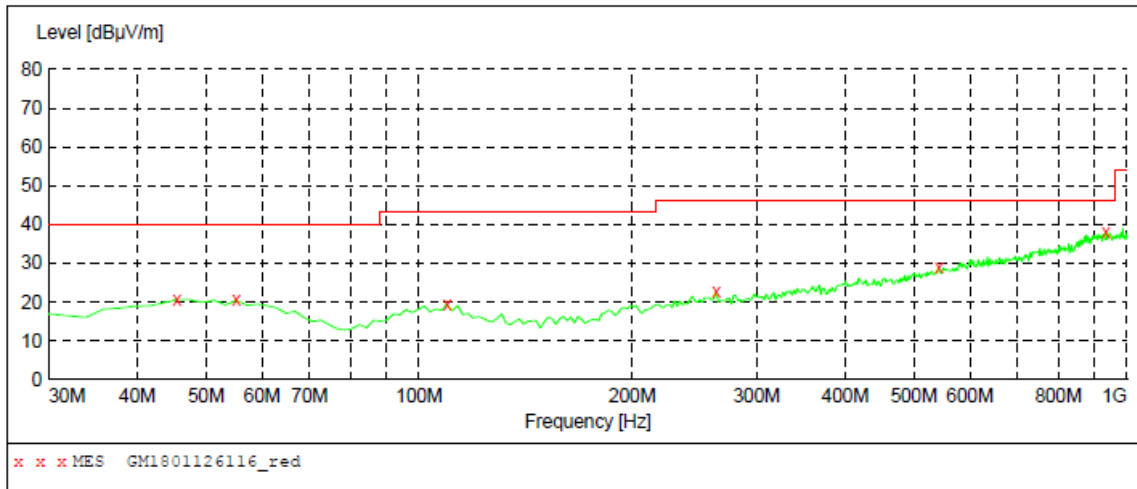


**MEASUREMENT RESULT: "GM1801126116\_red"**

1/12/2018 11:44PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	20.70	-8.8	40.0	19.3	QP	100.0	337.00	VERTICAL
55.220000	20.50	-9.2	40.0	19.5	QP	100.0	337.00	VERTICAL
109.540000	19.40	-10.8	43.5	24.1	QP	100.0	193.00	VERTICAL
262.800000	22.60	-8.1	46.0	23.4	QP	100.0	312.00	VERTICAL
542.160000	29.00	-0.9	46.0	17.0	QP	100.0	116.00	VERTICAL
934.040000	38.10	7.1	46.0	7.9	QP	100.0	0.00	VERTICAL

Polarization: Horizontal

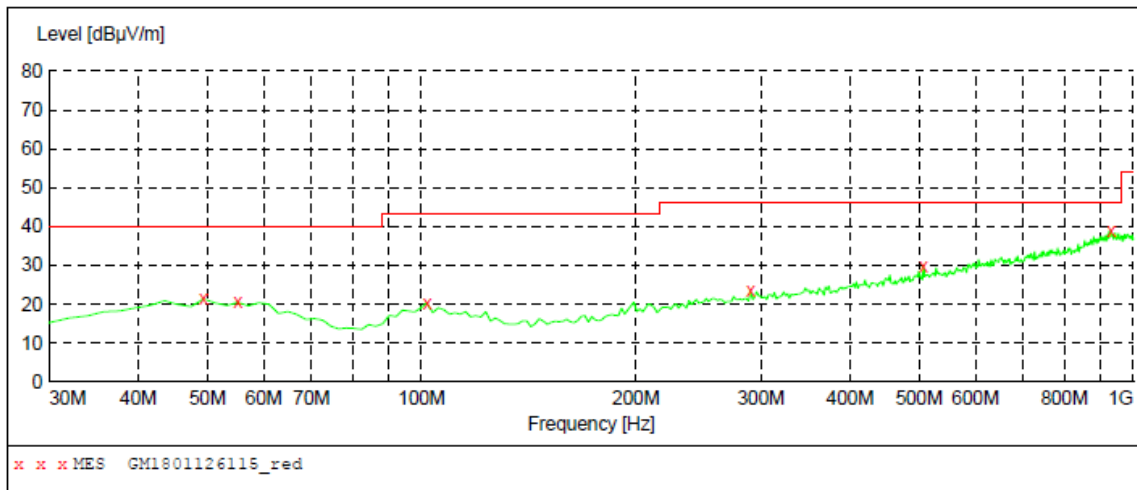

**MEASUREMENT RESULT: "GM1801126115\_red"**

1/12/2018 11:42PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	21.40	-8.7	40.0	18.6	QP	300.0	25.00	HORIZONTAL
55.220000	20.50	-9.2	40.0	19.5	QP	100.0	143.00	HORIZONTAL
101.780000	20.40	-10.5	43.5	23.1	QP	100.0	195.00	HORIZONTAL
289.960000	23.40	-7.4	46.0	22.6	QP	100.0	360.00	HORIZONTAL
507.240000	30.00	-1.6	46.0	16.0	QP	300.0	63.00	HORIZONTAL
930.160000	38.80	7.1	46.0	7.2	QP	100.0	218.00	HORIZONTAL

## ➤ 1 GHz ~ 25 GHz

Test channel					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1303.09	35.94	26.19	4.84	36.51	30.46	74.00	-43.54	Vertical	Peak
2740.20	39.71	28.10	7.23	38.20	36.84	74.00	-37.16	Vertical	Peak
4809.50	41.82	31.58	9.55	36.93	46.02	74.00	-27.98	Vertical	Peak
7376.08	32.05	36.30	12.04	34.85	45.54	74.00	-28.46	Vertical	Peak
1371.15	35.84	25.98	4.95	36.48	30.29	74.00	-43.71	Horizontal	Peak
3151.99	34.36	28.80	7.66	38.21	32.61	74.00	-41.39	Horizontal	Peak
4809.50	37.65	31.58	9.55	36.93	41.85	74.00	-32.15	Horizontal	Peak
7527.83	31.51	36.13	12.49	34.92	45.21	74.00	-28.79	Horizontal	Peak

Test channel					CH19				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1581.22	36.39	25.06	5.52	36.70	30.27	74.00	-43.73	Vertical	Peak
3096.33	34.97	28.79	7.60	38.22	33.14	74.00	-40.86	Vertical	Peak
4883.52	45.60	31.43	9.59	36.73	49.89	74.00	-24.11	Vertical	Peak
8187.50	32.60	36.74	12.74	34.55	47.53	74.00	-26.47	Vertical	Peak
1777.65	44.37	25.36	5.92	37.09	38.56	74.00	-35.44	Horizontal	Peak
4034.78	33.68	29.77	8.81	38.03	34.23	74.00	-39.77	Horizontal	Peak
4883.52	44.33	31.43	9.59	36.73	48.62	74.00	-25.38	Horizontal	Peak
8792.37	33.73	37.72	13.09	34.29	50.25	74.00	-23.75	Horizontal	Peak

Test channel					CH39				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1764.12	46.37	25.33	5.89	37.06	40.53	74.00	-33.47	Vertical	Peak
3570.71	35.14	29.21	8.22	38.31	34.26	74.00	-39.74	Vertical	Peak
4958.68	50.45	31.46	9.64	36.52	55.03	74.00	-18.97	Vertical	Peak
7451.57	34.92	36.20	12.24	34.86	48.50	74.00	-25.50	Vertical	Peak
4958.68	26.01	31.46	9.64	36.52	30.59	54.00	-23.41	Vertical	Average
1613.75	35.25	24.94	5.60	36.75	29.04	74.00	-44.96	Horizontal	Peak
4014.29	33.63	29.73	8.79	38.08	34.07	74.00	-39.93	Horizontal	Peak
4958.68	40.97	31.46	9.64	36.52	45.55	74.00	-28.45	Horizontal	Peak
6219.51	33.84	32.94	11.01	35.29	42.50	74.00	-31.50	Horizontal	Peak

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


## 6. TEST SETUP PHOTOS

### Conducted Emissions



### Radiated Emissions

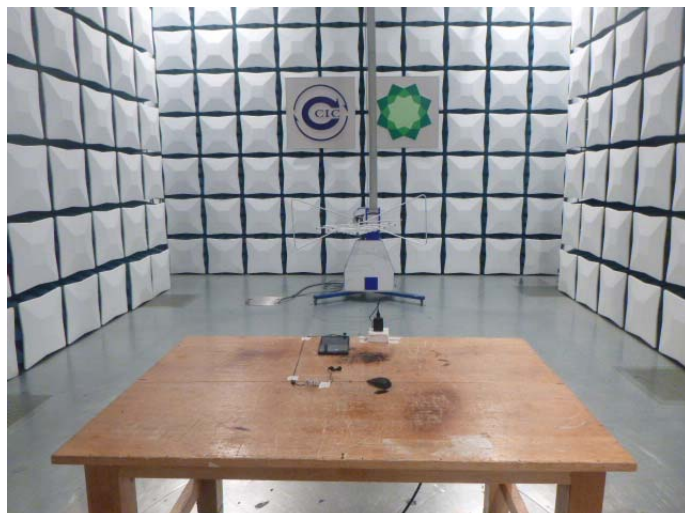

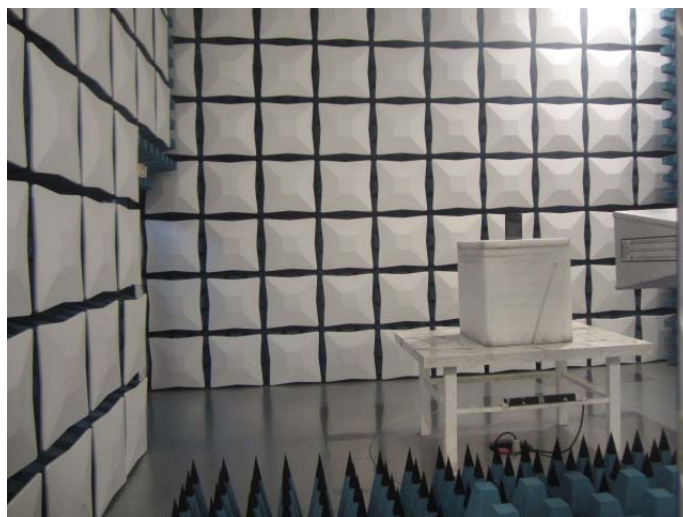

## 7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: TRE1801004501.

-----End of Report-----