

# FCC Part 15C Measurement and Test Report

For

Tech4home, Lda

Rua de Fundoes, No. 151, 3700-121, Sao Joao da Madeira, Portugal, Sao Joao  
da Madeira, Portugal

**FCC ID: 2ALB6-T4HU1722**

<b>FCC Rule(s):</b>	<u>FCC Part 15.247</u>
<b>Product Description:</b>	<u>REMOTE CONTROL UNIT</u>
<b>Tested Model:</b>	<u>T4HU1722 45K Khamzin</u>
<b>Report No.:</b>	<u>STR18068112I</u>
<b>Sample Receipt Date:</b>	<u>2018-06-06</u>
<b>Tested Date:</b>	<u>2018-06-07 to 2018-06-20</u>
<b>Issued Date:</b>	<u>2018-06-21</u>
<b>Tested By:</b>	<u>Long Tang / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	

*Long Tang*

*Silin Chen*

*Jandy So*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. RF EXPOSURE</b>	<b>8</b>
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
<b>4. ANTENNA REQUIREMENT</b>	<b>9</b>
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
<b>5. POWER SPECTRAL DENSITY</b>	<b>10</b>
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 SUMMARY OF TEST RESULTS/PLOTS	10
<b>6. 6DB BANDWIDTH</b>	<b>13</b>
6.1 STANDARD APPLICABLE	13
6.2 TEST PROCEDURE	13
6.3 ENVIRONMENTAL CONDITIONS	13
6.4 SUMMARY OF TEST RESULTS/PLOTS	13
<b>7. RF OUTPUT POWER</b>	<b>16</b>
7.1 STANDARD APPLICABLE	16
7.2 TEST PROCEDURE	16
7.3 ENVIRONMENTAL CONDITIONS	16
7.4 SUMMARY OF TEST RESULTS/PLOTS	16
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>19</b>
8.1 STANDARD APPLICABLE	19
8.2 TEST PROCEDURE	19
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
8.4 ENVIRONMENTAL CONDITIONS	20
8.5 SUMMARY OF TEST RESULTS/PLOTS	21
<b>9. OUT OF BAND EMISSIONS</b>	<b>28</b>
9.1 STANDARD APPLICABLE	28
9.2 TEST PROCEDURE	28
9.3 ENVIRONMENTAL CONDITIONS	29
9.4 SUMMARY OF TEST RESULTS/PLOTS	29

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Tech4home, Lda  
Address of applicant: Rua de Fundoes, No. 151, 3700-121, Sao Joao da Madeira, Portugal, Sao Joao da Madeira, Portugal

Manufacturer: Shenzhen C&D Electronics Co., Ltd  
Address of manufacturer: The 9th floor of 9th A Building Baoneng technology park, Longhua Town, BaoAn District, Shenzhen, Guangdong, China

General Description of EUT	
Product Name:	REMOTE CONTROL UNIT
Brand Name:	/
Model No.:	T4HU1722 45K Khamsin
Adding Model(s):	/
Rated Voltage:	DC 3.0V
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	-7.556dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	PCB
Antenna Gain:	3dBi
Lowest Internal Frequency:	32.768kHz

## 1.2 Test Standards

The following report is prepared on behalf of the Tech4home, Lda in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v04 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GFSK(BLE)	2402MHz, 2440MHz, 2480MHz

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
/	/	/	/
Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v04, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	2402	-20.19	8
	2440	-20.07	8
	2480	-18.08	8

Please refer to the following test plots:


Low Channel

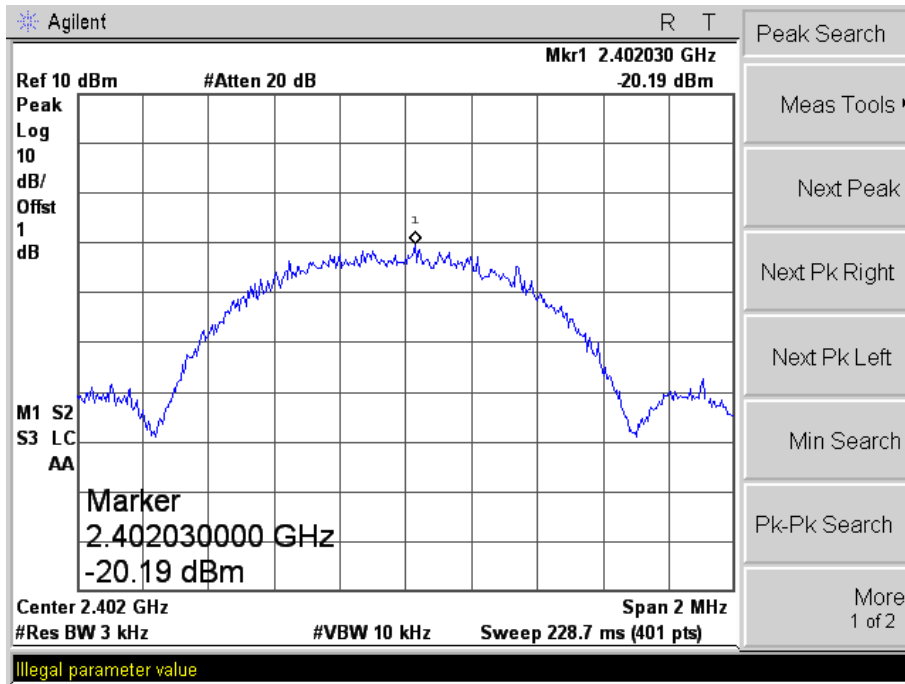

Middle Channel

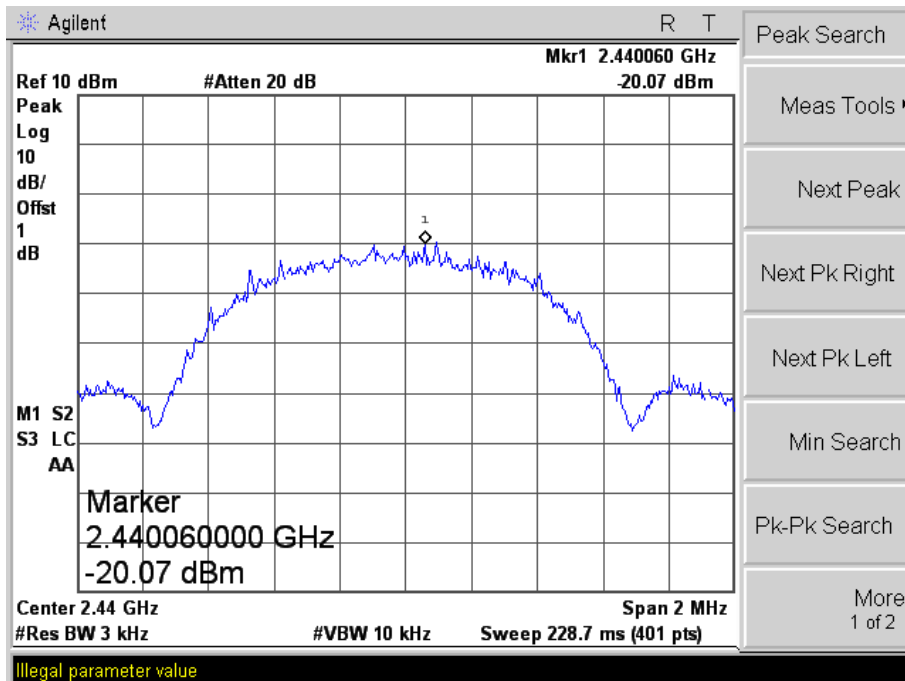

## High Channel

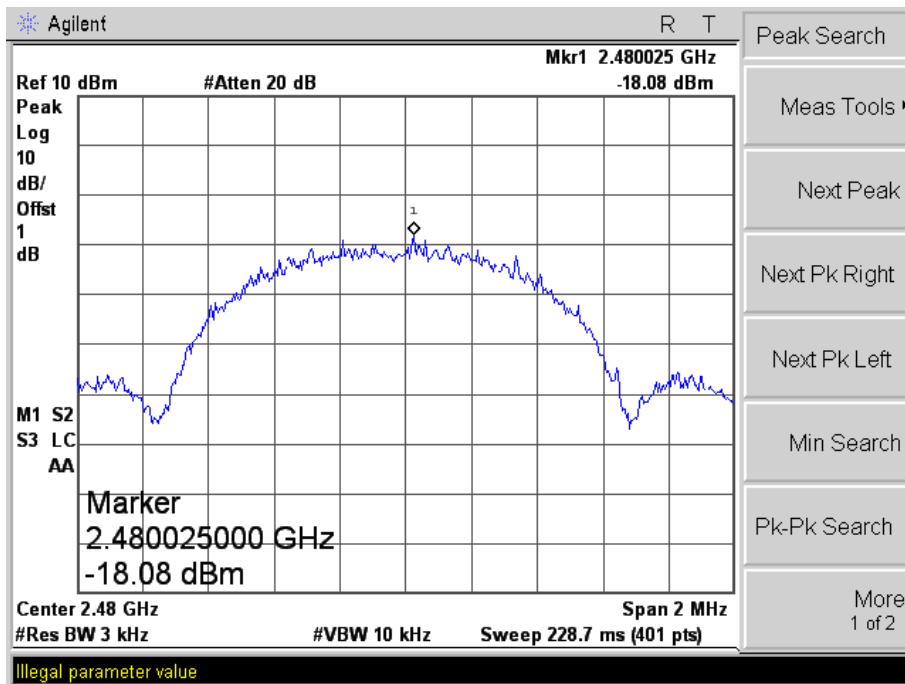

## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
GFSK(BLE)	2402	722.782	1112.0	$\geq 500$
	2440	802.076	1130.2	$\geq 500$
	2480	788.847	1134.3	$\geq 500$

Please refer to the following test plots:


For BLE  
Low Channel:

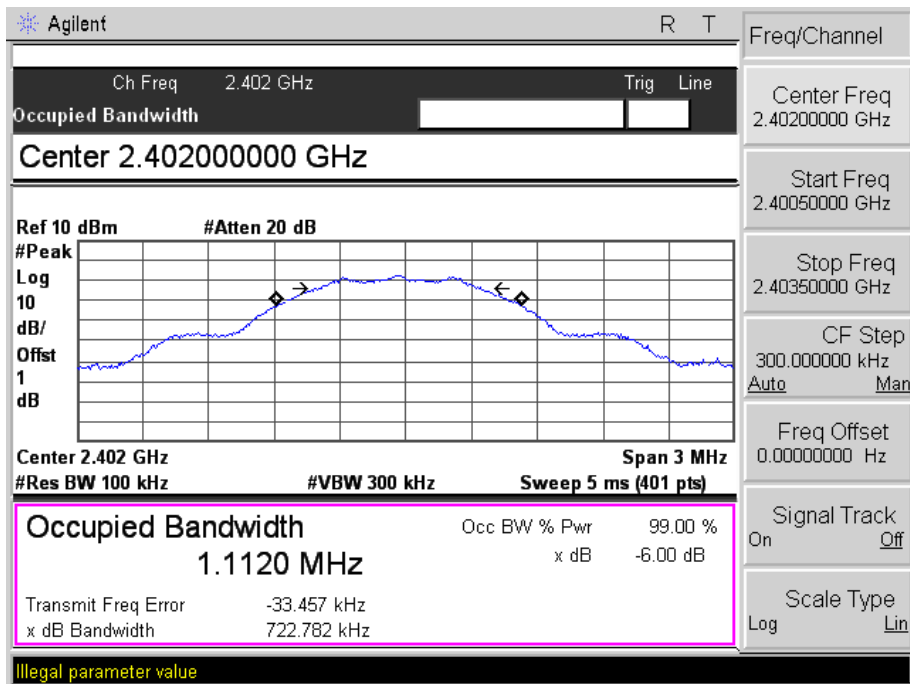

Middle Channel:

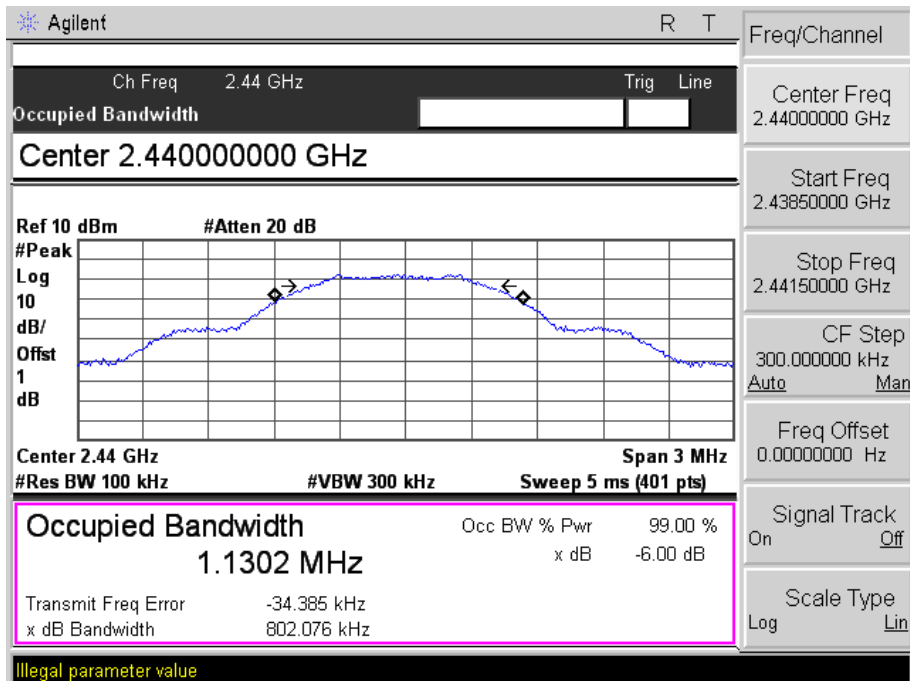

High Channel:

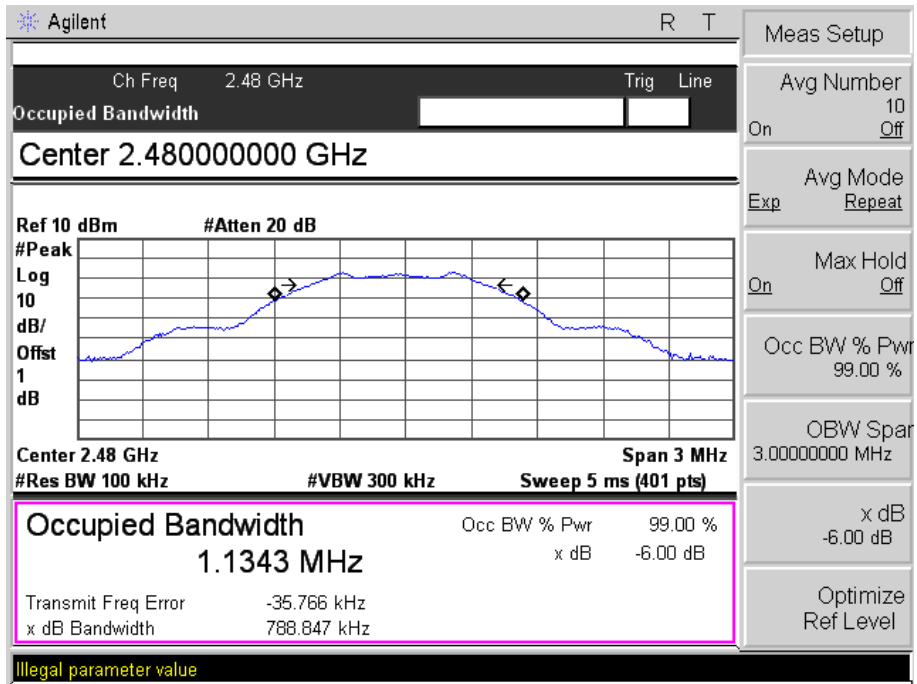

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to section KDB-558074 D01 v04 section 9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


### 7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	2402	-9.087	0.12	1000
	2440	-8.185	0.15	1000
	2480	-7.556	0.18	1000


*Note: the antenna gain of 3dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.*




For BLE  
Low Channel:

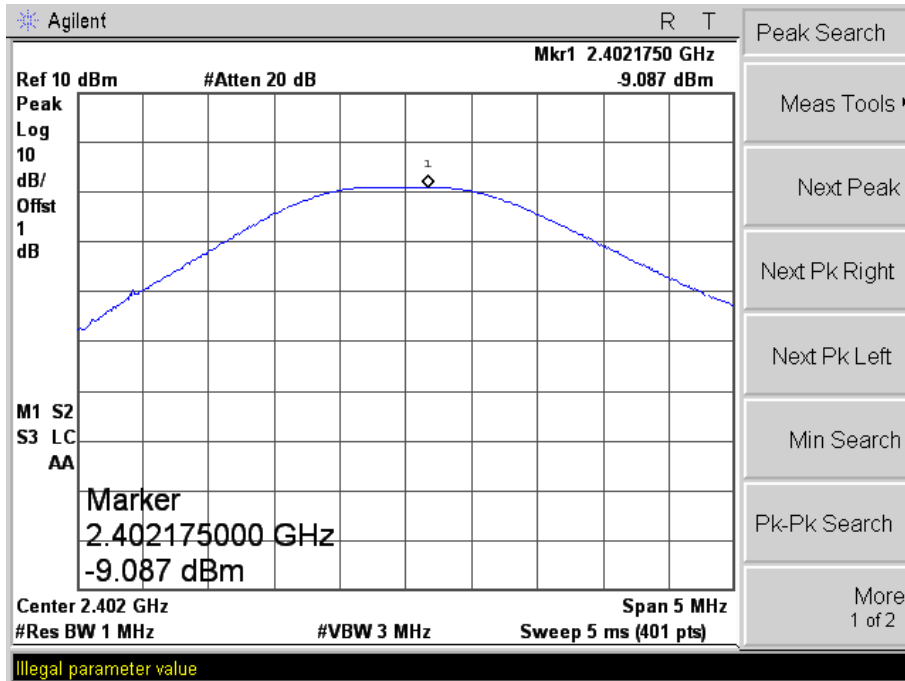

Middle Channel:

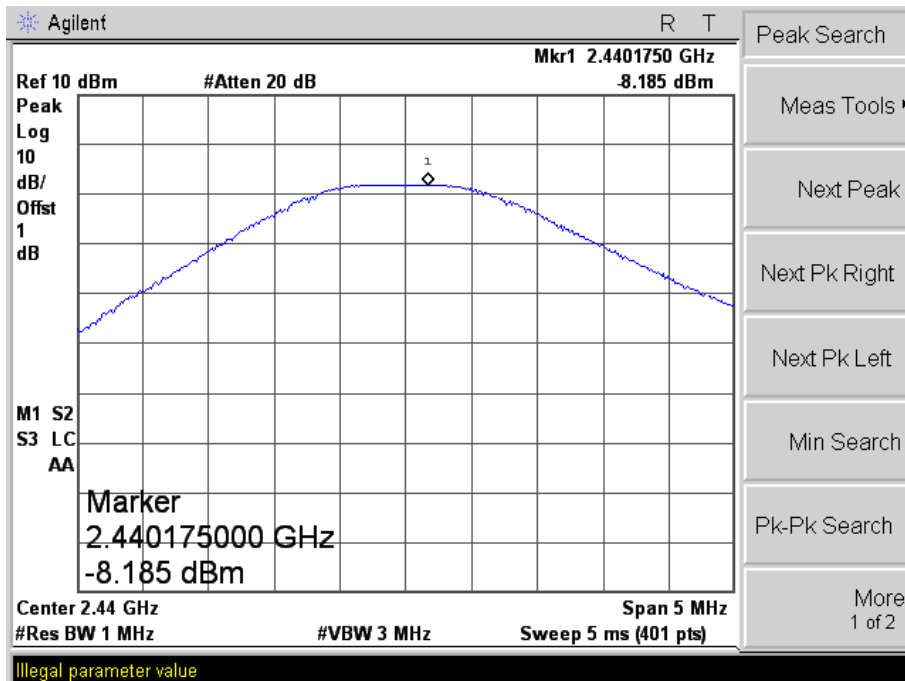

High Channel:

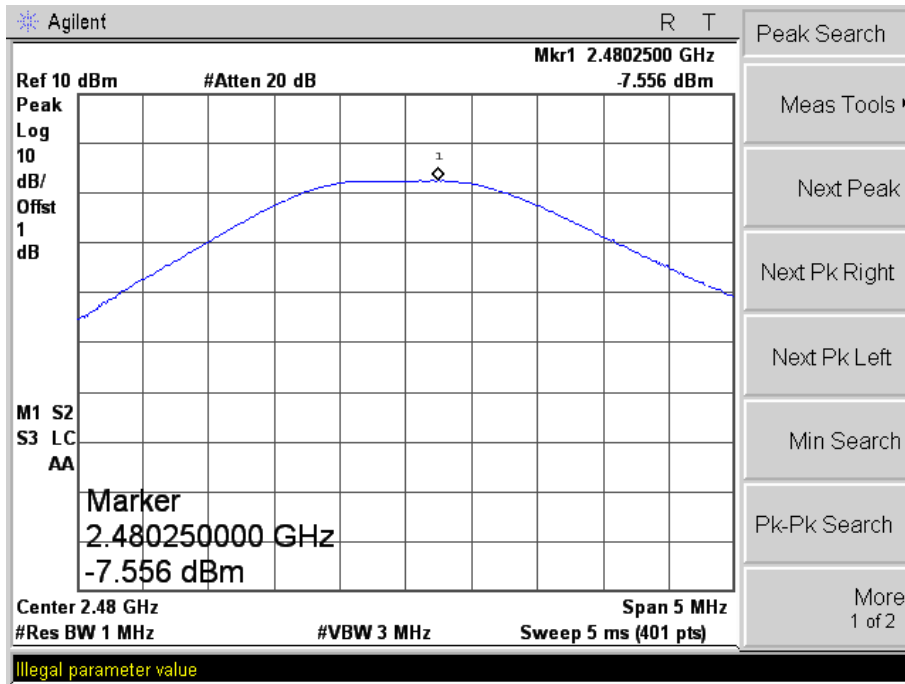

## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

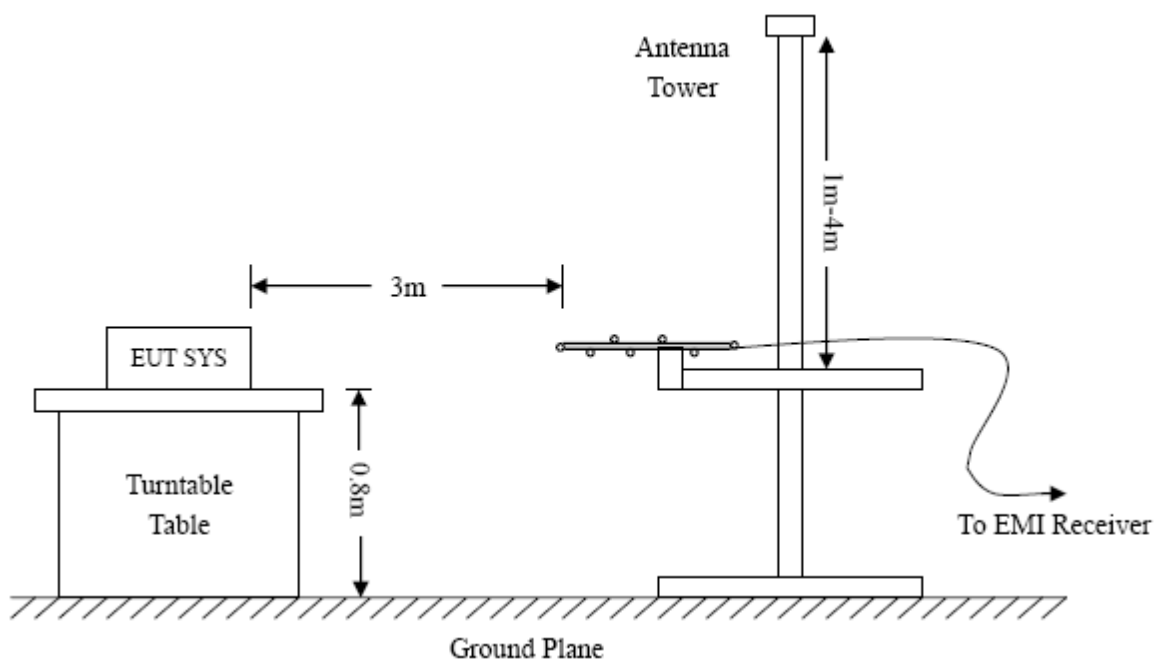

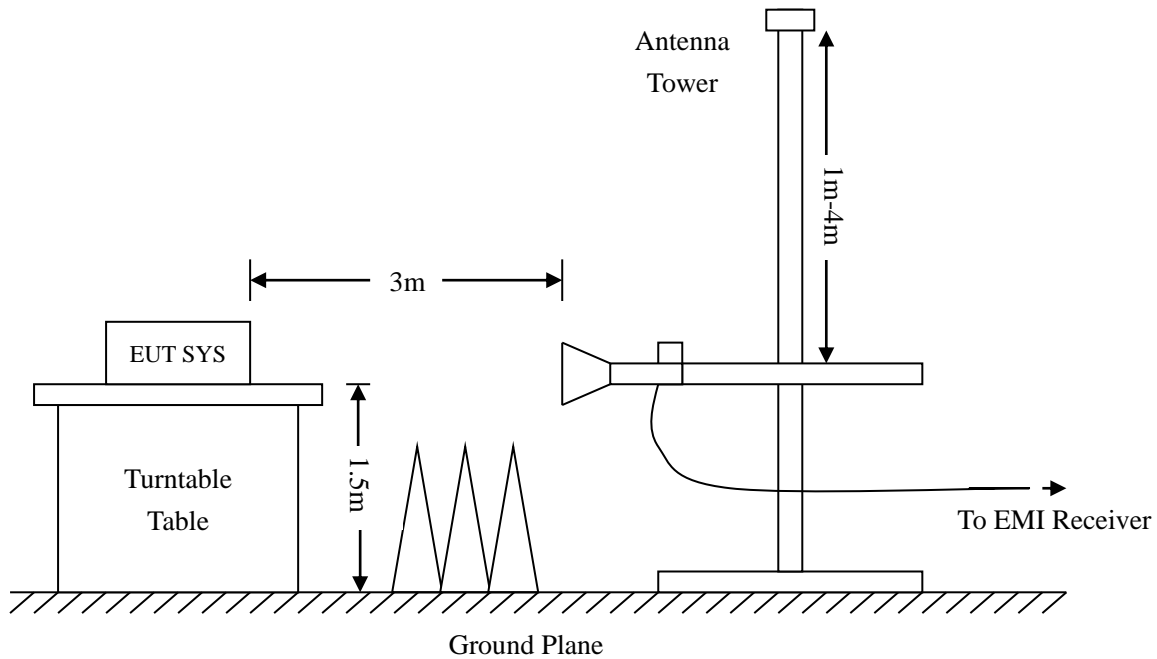

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar


## 8.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


### Plot of Radiated Emissions Test Data

**EUT:** REMOTE CONTROL UNIT  
**Tested Model:** T4HU1722 45K Khamsin  
**Operating Condition:** Transmitting-Low channel (2402MHz)  
**Comment:** DC 3.0V  
  
**Test Specification:** Horizontal

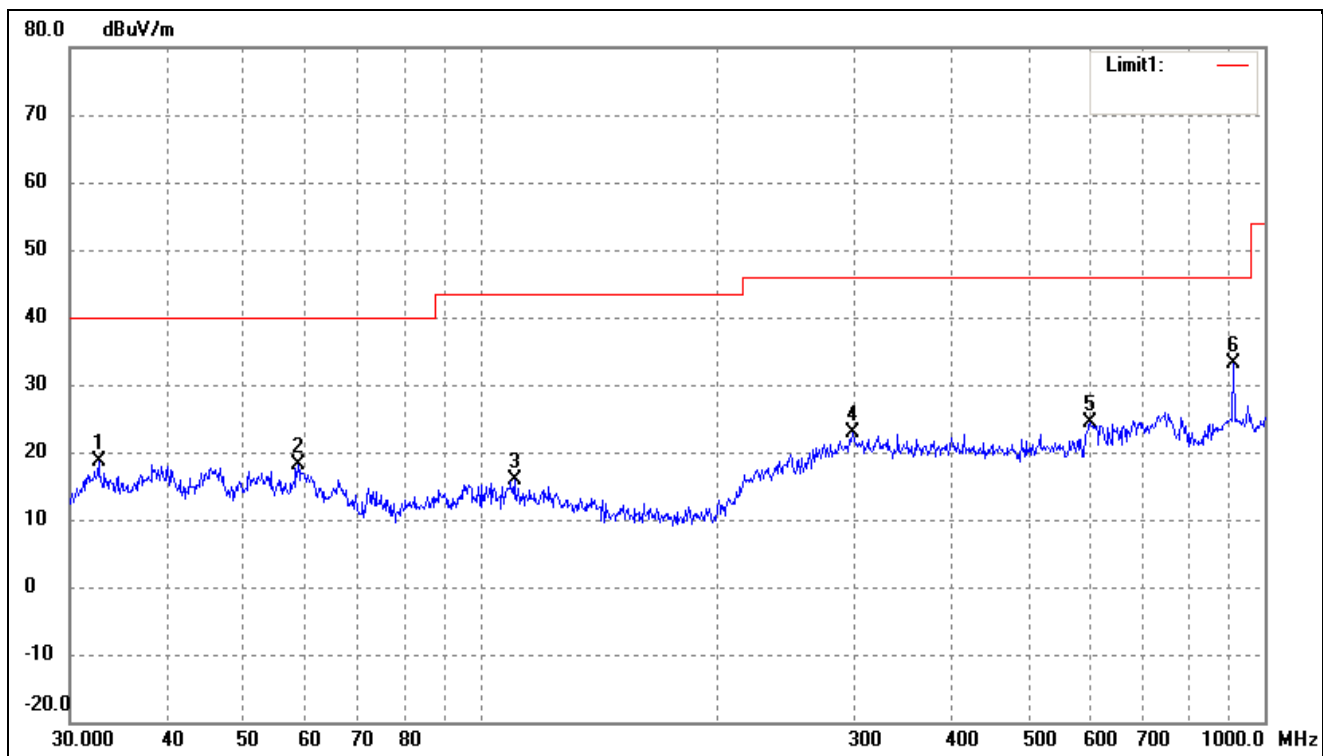

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.6340	38.26	-19.71	18.55	40.00	-21.45	256	100	peak
2	58.6126	36.32	-18.26	18.06	40.00	-21.94	98	100	peak
3	110.5687	33.76	-17.98	15.78	43.50	-27.72	138	100	peak
4	298.2681	30.80	-8.01	22.79	46.00	-23.21	105	100	peak
5	599.3212	26.97	-2.68	24.29	46.00	-21.71	132	100	peak
6	912.8620	37.84	-4.69	33.15	46.00	-12.85	113	100	peak

Test Specification: Vertical

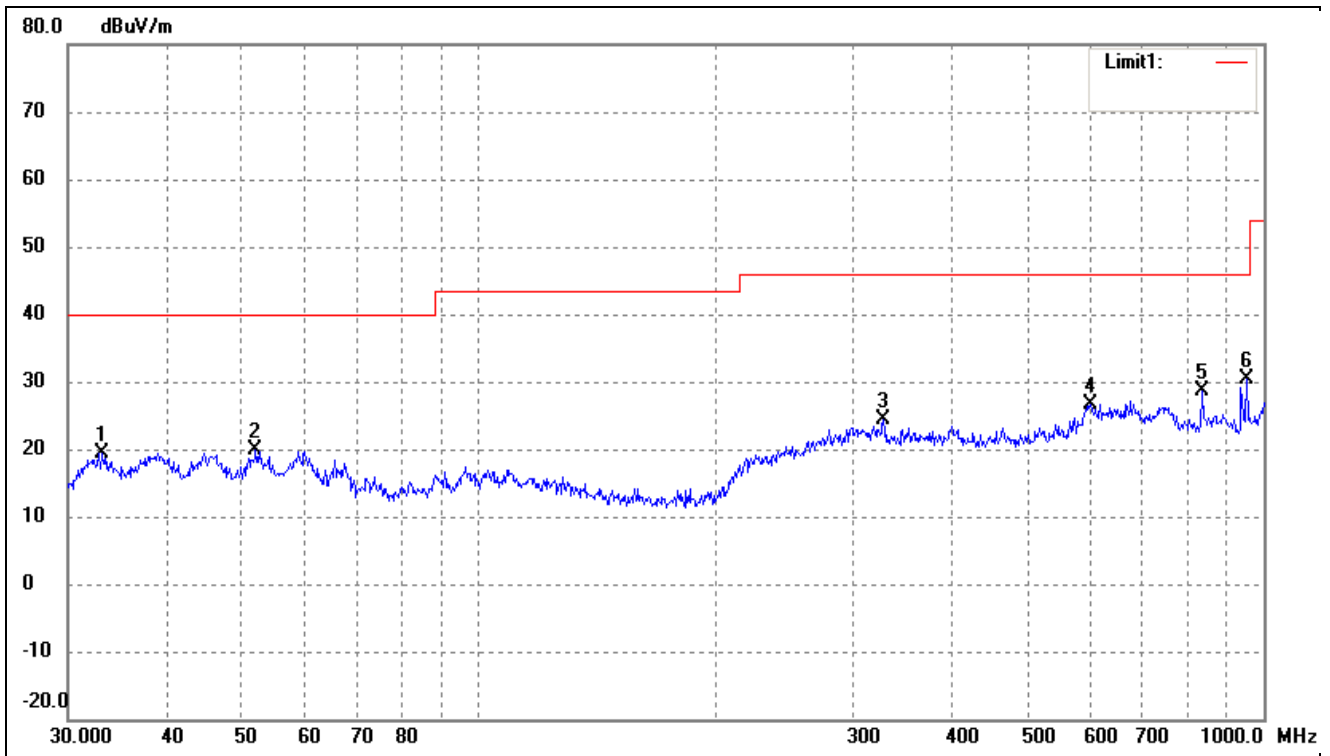


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	33.2112	39.11	-19.63	19.48	40.00	-20.52	344	100	peak
2	52.0251	38.42	-18.52	19.90	40.00	-20.10	99	100	peak
3	327.8873	32.48	-8.20	24.28	46.00	-21.72	165	100	peak
4	601.4265	29.37	-2.66	26.71	46.00	-19.29	99	100	peak
5	836.2443	32.82	-4.12	28.70	46.00	-17.30	274	100	peak
6	952.0937	34.27	-3.98	30.29	46.00	-15.71	255	100	peak

Operating Condition: Transmitting-Middle channel (2440MHz)


Comment: DC 3.0V

Test Specification: Horizontal

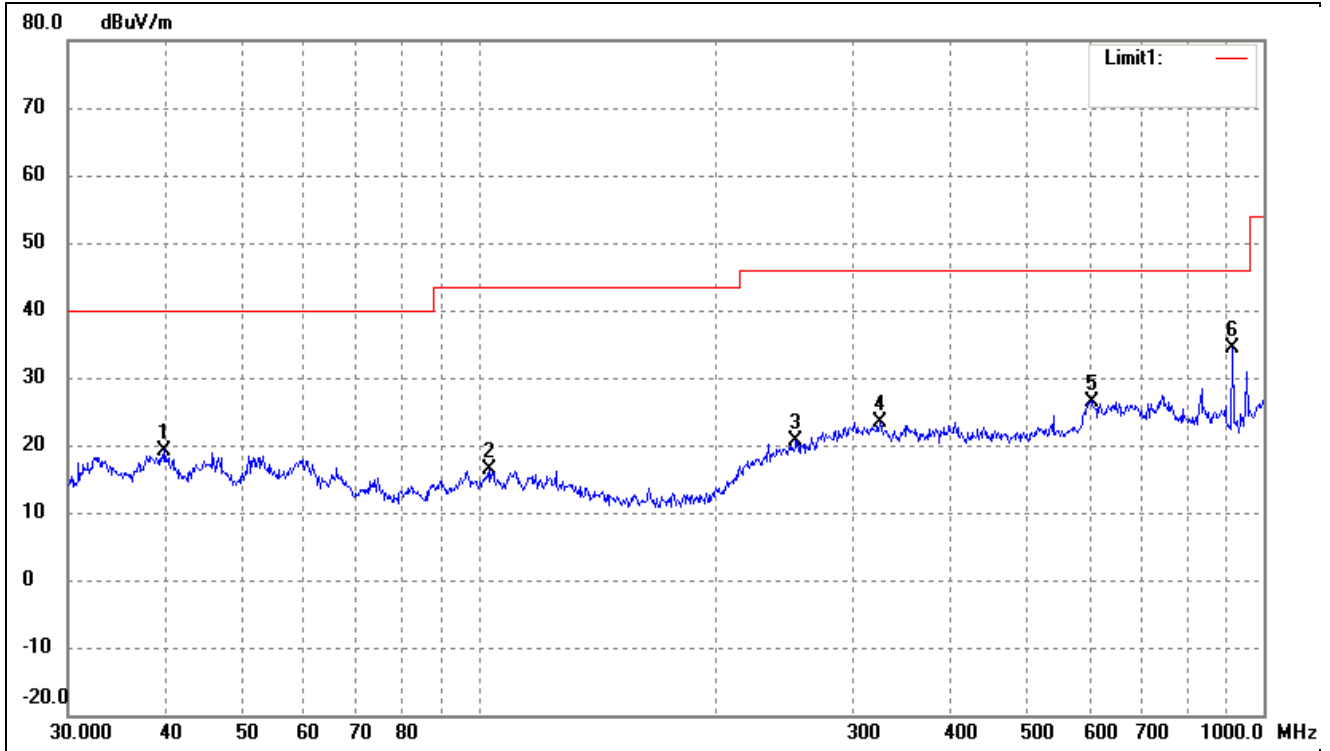

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.8542	37.80	-18.55	19.25	40.00	-20.75	212	100	peak
2	103.4421	34.44	-18.05	16.39	43.50	-27.11	273	100	peak
3	253.8367	31.81	-11.08	20.73	46.00	-25.27	63	100	peak
4	324.4561	31.49	-8.09	23.40	46.00	-22.60	250	100	peak
5	603.5392	29.30	-2.80	26.50	46.00	-19.50	303	100	peak
6	912.8620	38.99	-4.69	34.30	46.00	-11.70	249	100	peak

Test Specification: Vertical

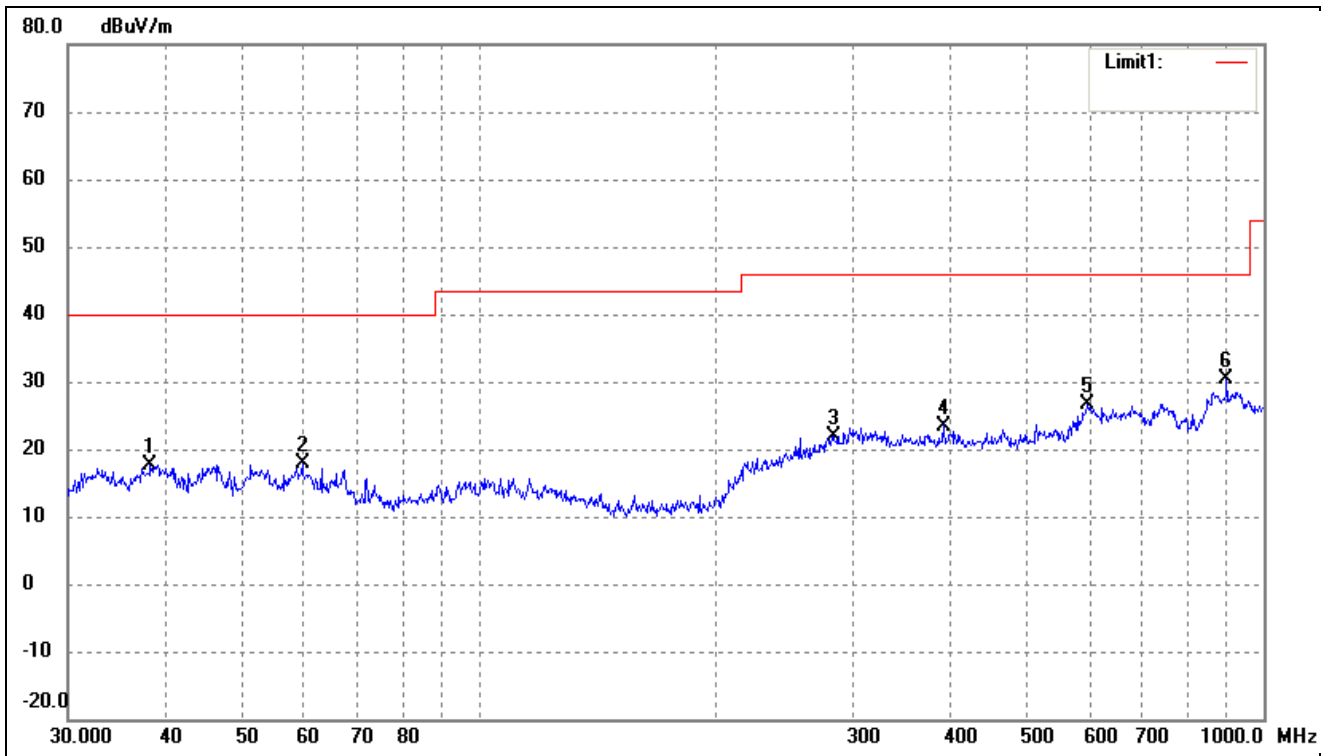


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.2120	36.44	-18.82	17.62	40.00	-22.38	168	100	peak
2	59.6493	36.09	-18.22	17.87	40.00	-22.13	140	100	peak
3	282.9852	30.83	-8.87	21.96	46.00	-24.04	82	100	peak
4	390.7226	31.54	-8.04	23.50	46.00	-22.50	195	100	peak
5	597.2234	29.66	-3.06	26.60	46.00	-19.40	61	100	peak
6	896.9965	34.16	-3.83	30.33	46.00	-15.67	98	100	peak



Operating Condition: Transmitting-High channel (2480MHz)


Comment: DC 3.0V

Test Specification: Horizontal

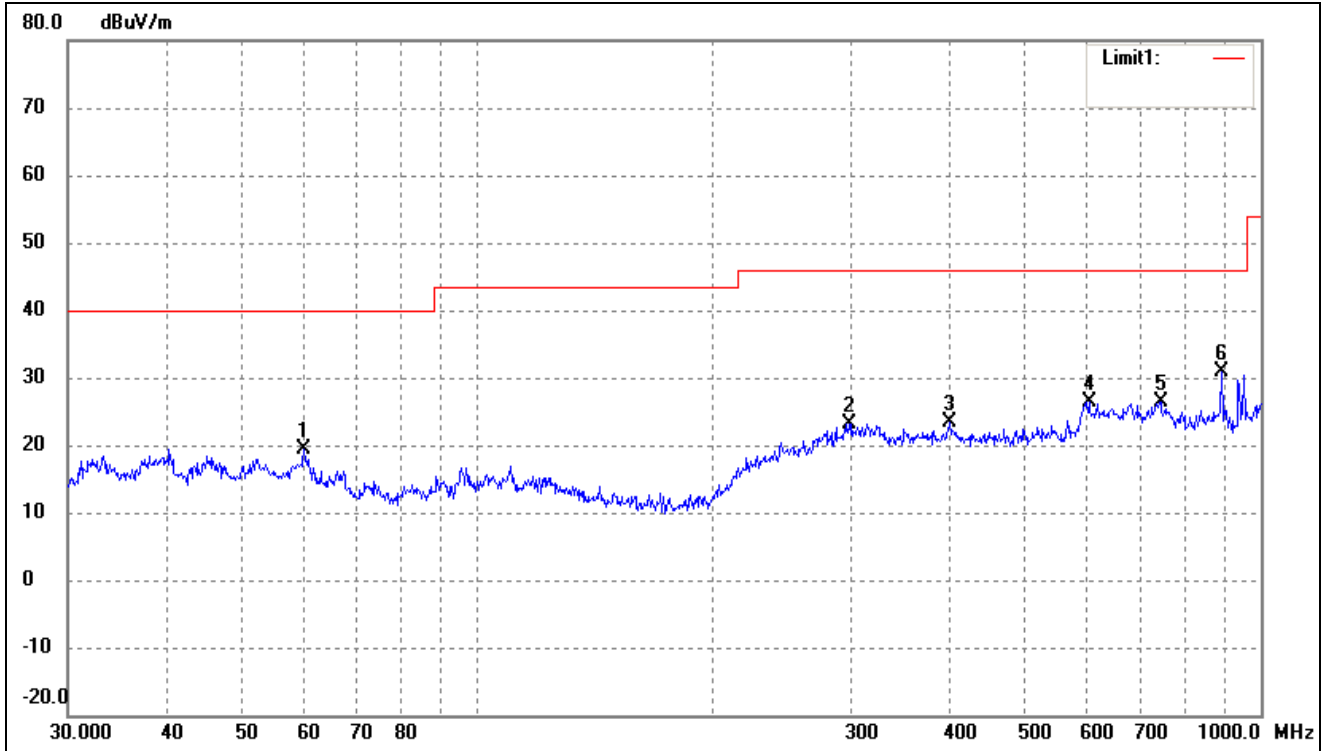

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.0691	37.69	-18.23	19.46	40.00	-20.54	134	100	peak
2	298.2681	31.25	-8.01	23.24	46.00	-22.76	135	100	peak
3	400.4319	31.15	-7.70	23.45	46.00	-22.55	116	100	peak
4	603.5392	29.20	-2.80	26.40	46.00	-19.60	148	100	peak
5	744.8661	29.04	-2.59	26.45	46.00	-19.55	205	100	peak
6	890.7278	34.38	-3.61	30.77	46.00	-15.23	300	100	peak

Test Specification: Vertical

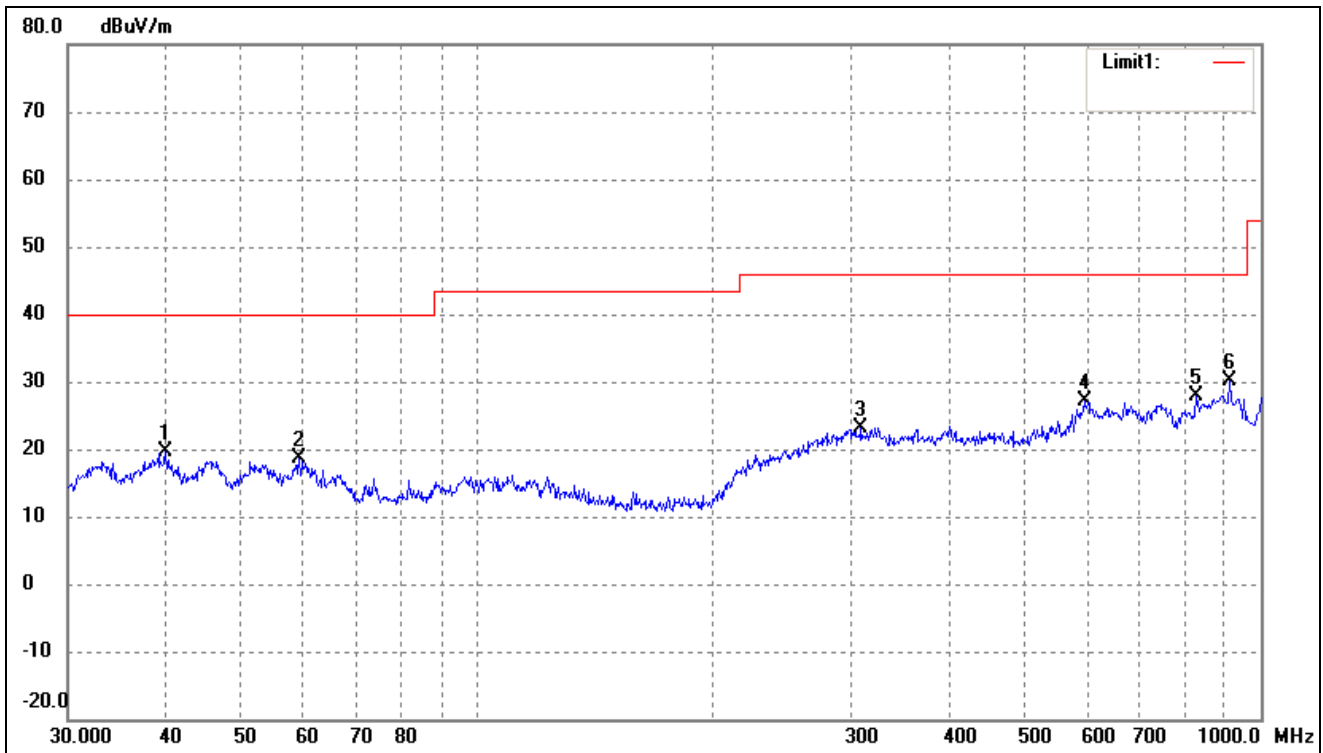

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.9942	38.19	-18.52	19.67	40.00	-20.33	73	100	peak
2	59.2325	36.79	-18.24	18.55	40.00	-21.45	109	100	peak
3	308.9126	31.17	-7.92	23.25	46.00	-22.75	112	100	peak
4	595.1329	30.62	-3.44	27.18	46.00	-18.82	132	100	peak
5	827.4934	32.43	-4.50	27.93	46.00	-18.07	278	100	peak
6	912.8620	34.84	-4.69	30.15	46.00	-15.85	144	100	peak

*Spurious Emissions Above 1GHz*
*Transmitting: BLE mode:*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	60.36	-3.59	56.77	74	-17.23	H	Peak
4804	41.35	-3.59	37.76	54	-16.24	H	AV
7206	59.19	-0.52	58.67	74	-15.33	H	Peak
7206	40.14	-0.52	39.62	54	-14.38	H	AV
4804	60.28	-3.59	56.69	74	-17.31	V	Peak
4804	41.11	-3.59	37.52	54	-16.48	V	AV
7206	58.19	-0.52	57.67	74	-16.33	V	Peak
7206	41.64	-0.52	41.12	54	-12.88	V	AV
Middle Channel-2440MHz							
4880	58.06	-3.49	54.57	74	-19.43	H	Peak
4880	38.07	-3.49	34.58	54	-19.42	H	AV
7320	58.22	-0.47	57.75	74	-16.25	H	Peak
7320	41	-0.47	40.53	54	-13.47	H	AV
4880	60.7	-3.49	57.21	74	-16.79	V	Peak
4880	38.21	-3.49	34.72	54	-19.28	V	AV
7320	61.85	-0.47	61.38	74	-12.62	V	Peak
7320	40.46	-0.47	39.99	54	-14.01	V	AV
High Channel-2480MHz							
4960	59.83	-3.41	56.42	74	-17.58	H	Peak
4960	38.4	-3.41	34.99	54	-19.01	H	AV
7440	58.97	-0.42	58.55	74	-15.45	H	Peak
7440	38.43	-0.42	38.01	54	-15.99	H	AV
4960	61.73	-3.41	58.32	74	-15.68	V	Peak
4960	40.94	-3.41	37.53	54	-16.47	H	AV
7440	59.94	-0.42	59.52	74	-14.48	V	Peak
7440	38.69	-0.42	38.27	54	-15.73	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074 D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


### 9.4 Summary of Test Results/Plots

Bandedge (Radiated)  
 Lowest Bandedge-BLE  
 Horizontal (Worst case)

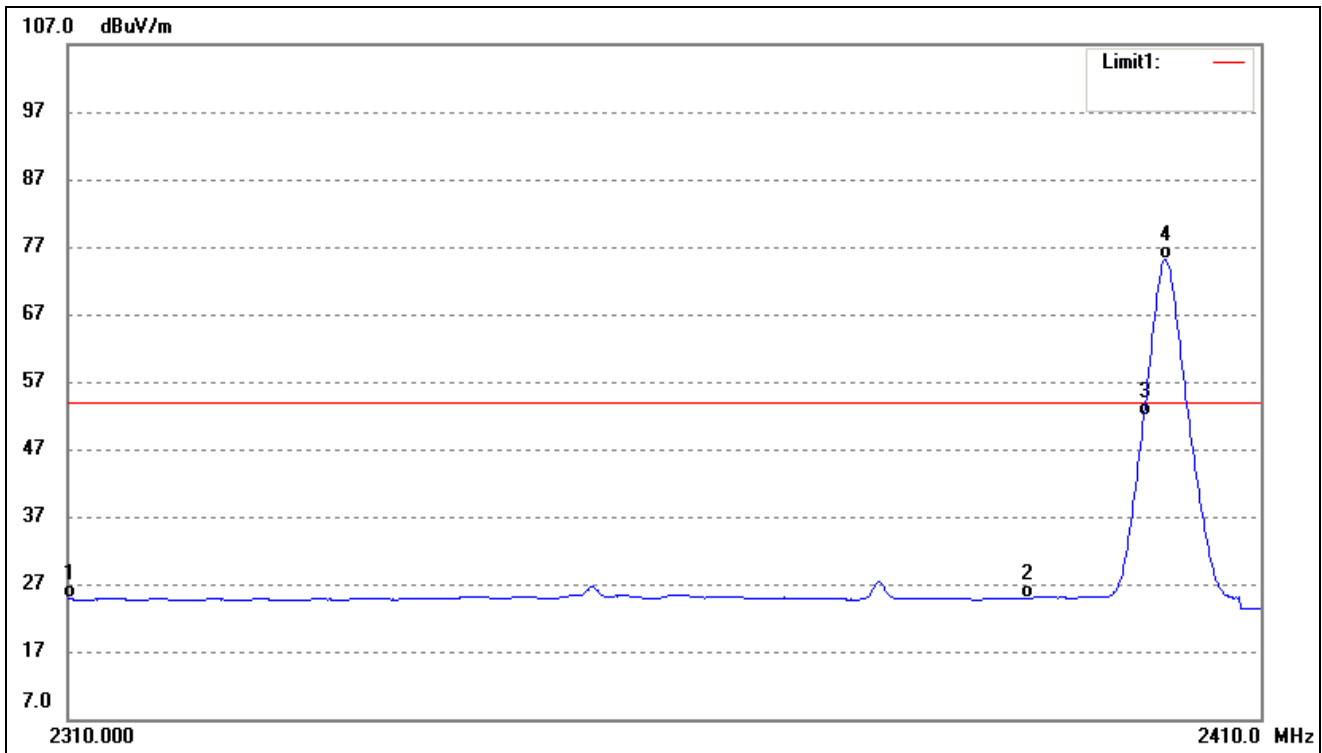



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.49	-12.69	24.80	54.00	-29.20	Average Detector
	2310.000	48.82	-12.69	36.13	74.00	-37.87	Peak Detector
2	2390.000	37.37	-12.49	24.88	54.00	-29.12	Average Detector
	2390.000	48.62	-12.49	36.13	74.00	-37.87	Peak Detector
3	2400.000	64.32	-12.46	51.86	54.00	-2.14	Average Detector
	2400.000	71.91	-12.46	59.45	74.00	-14.55	Peak Detector

Highest Bandedge-BLE  
Horizontal (Worst case)


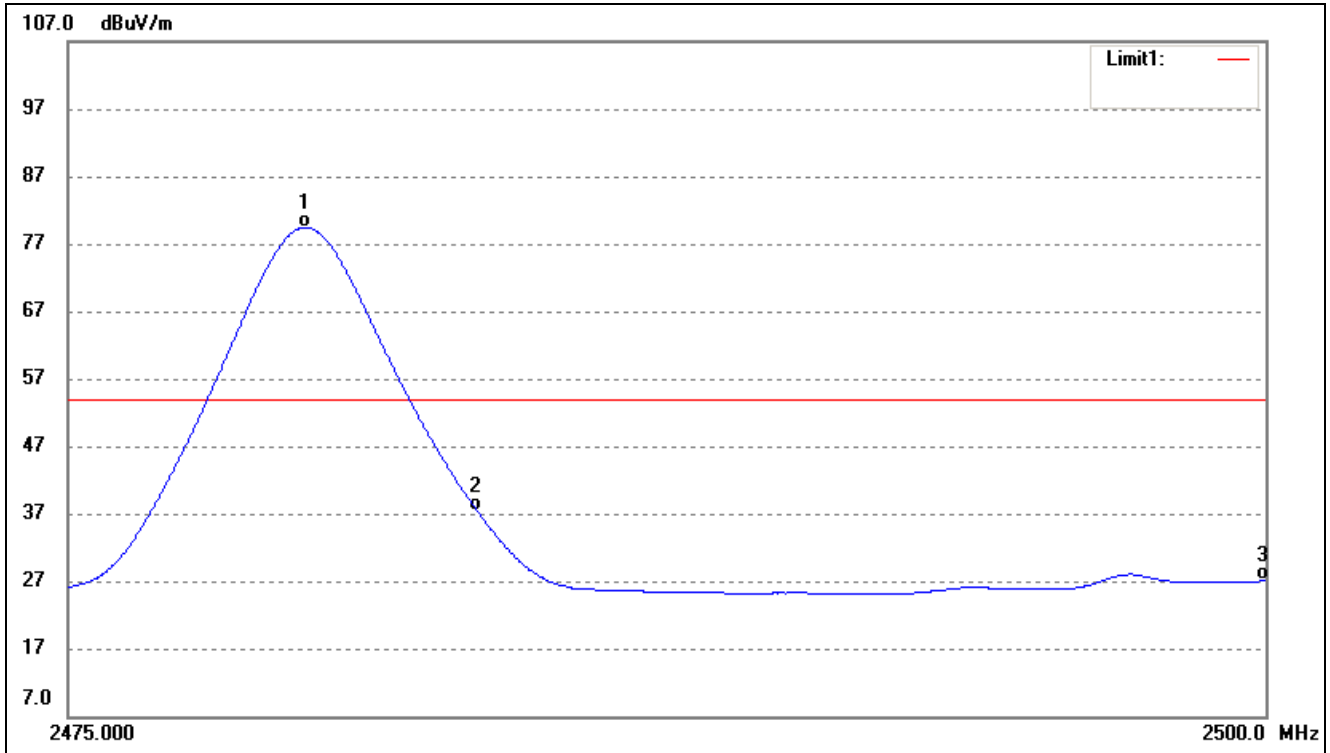


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.930	91.70	-12.25	79.45	/	/	Average Detector
	2480.179	92.64	-12.25	80.39	/	/	Peak Detector
2	2483.500	49.61	-12.25	37.36	54.00	-16.64	Average Detector
	2483.500	55.32	-12.25	43.07	74.00	-30.93	Peak Detector
3	2500.000	39.26	-12.20	27.06	54.00	-26.94	Average Detector
	2500.000	50.94	-12.20	38.74	74.00	-35.26	Peak Detector

Bandedge (Conducted)  
Lowest

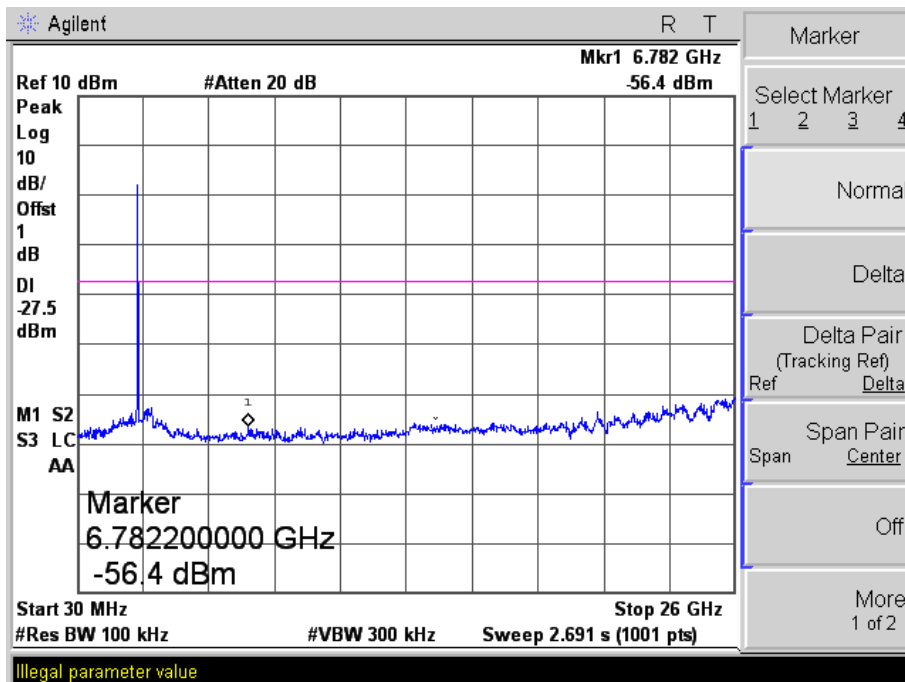
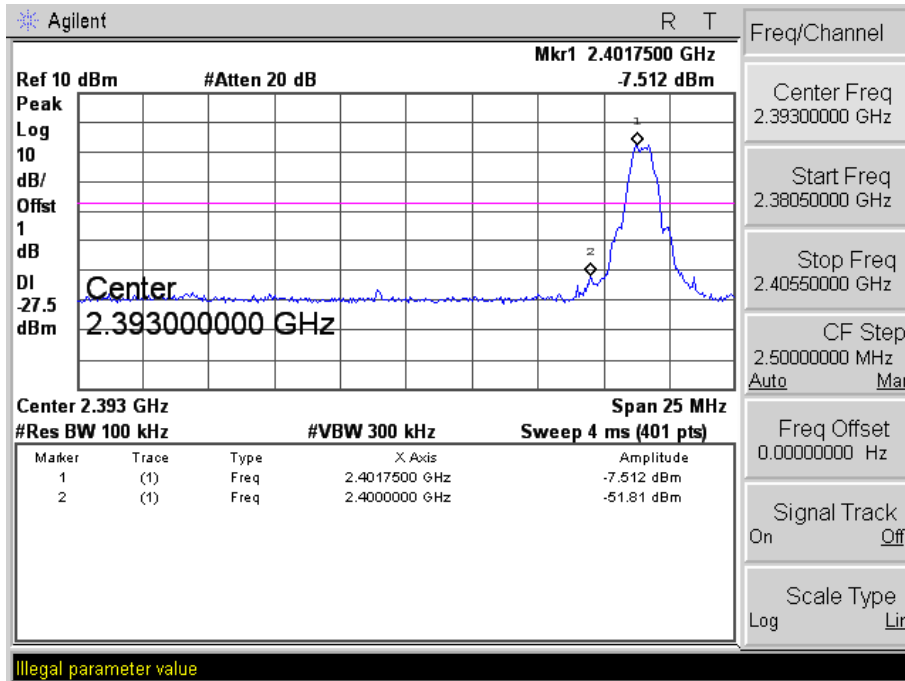


Middle Channel:

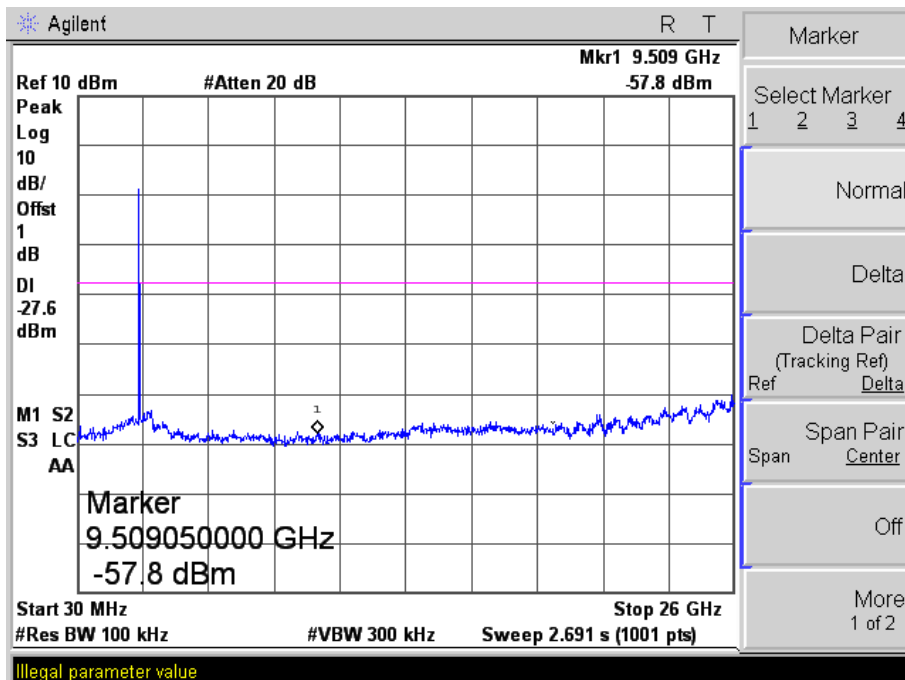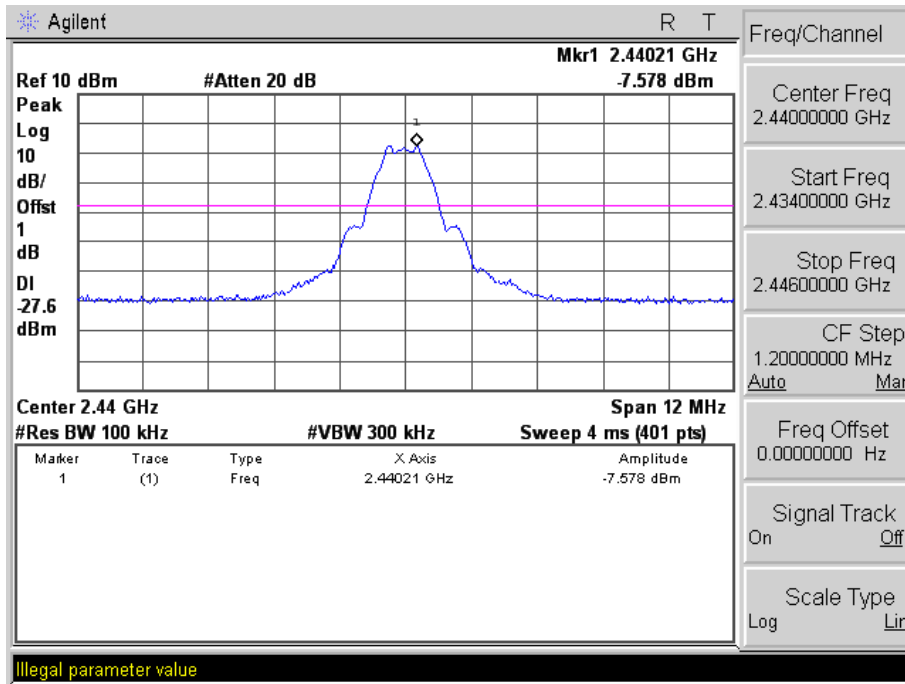



High Channel:

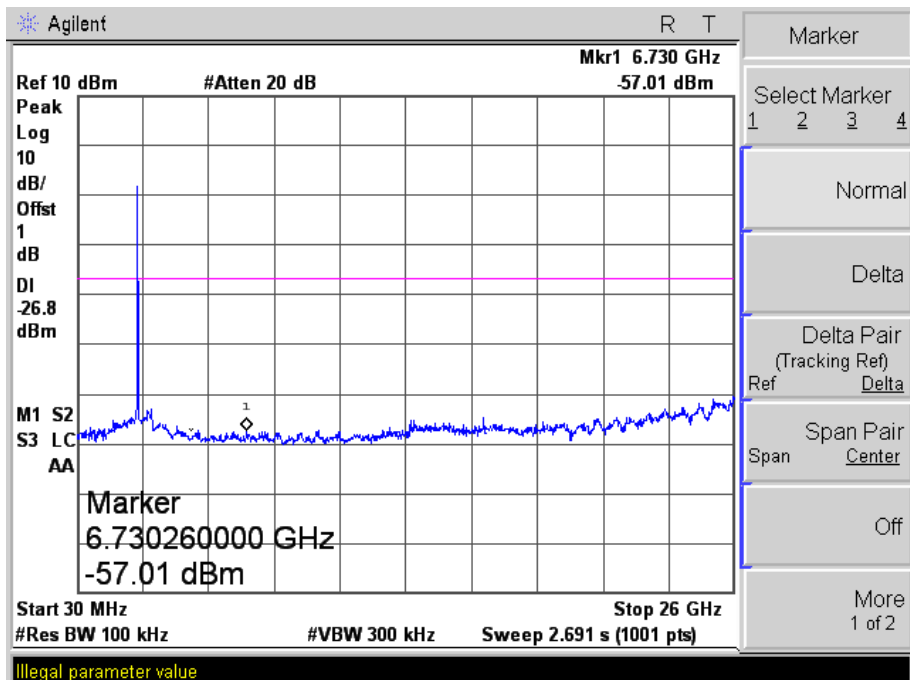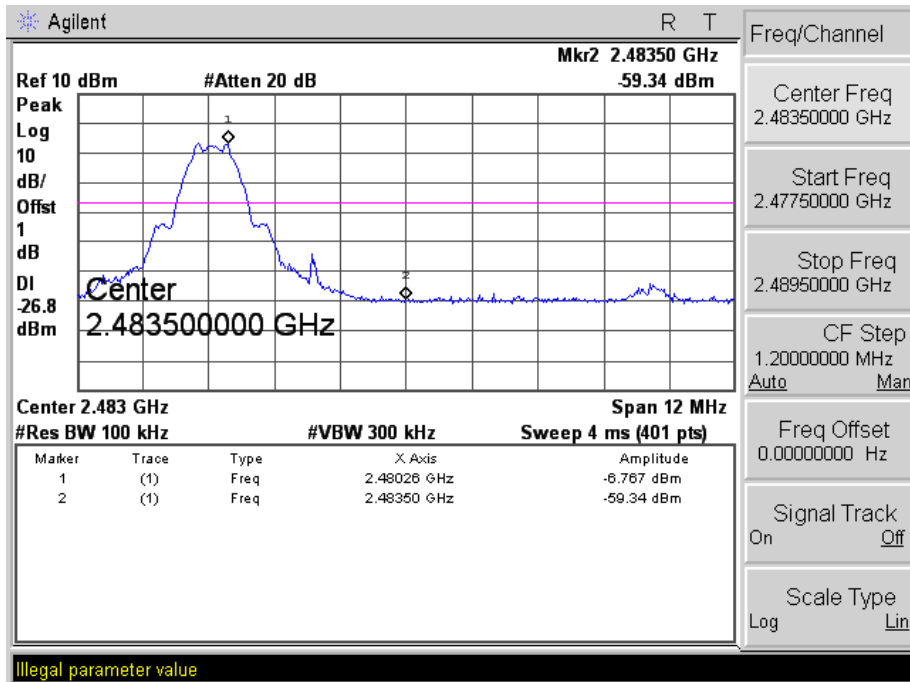

\*\*\*\*\* END OF REPORT \*\*\*\*\*