

Electromagnetic Compatibility Test Report

Tested to: FCC Part 15.247, RSS-247 issue 2 and ANSI C63.10:2013

On

Wireless RF Bridge Module

CC-WF25

Airgas, USA, LLC
180 Sandbank Road
Cheshire CT 06410-1521 USA

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Manufacturer's statement - attestation

The manufacturer; Airgas, USA, LLC, as the responsible party for the equipment tested, hereby affirms:

- a) That he has reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

Robert Shock

Printed name of official



Signature of official

180 Sandbank Road
Cheshire CT 06410-1521 USA

Address

5/9/2017

Date

203-272-5800 X222

Telephone number



rob.shock@airgas.com

Email address of official

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
31750770.001

Page 3 of 44

Client:		Airgas, USA, LLC 180 Sandbank Road Cheshire CT 06410-1521 USA	Robert Shock 203-272-5800 x222 rob.shock@airgas.com	
Identification:	Wireless RF Bridge Module	Serial No.:	C4:BE:84:F2:FA:40	
Test item:	CC-WF25	Date tested:	17 March 2017	
Testing location:	TUV Rheinland of North America 762 Park Avenue Youngsville, NC 27596-9470 U.S.A.	Tel: (919) 554-3668 Fax: (919) 554-3542		
Test specification:	Emissions: FCC Part 15C:2017, RSS-247 Issue 2:2017: FCC Part 15.207(a) and RSS-GEN FCC Parts 15.247(d), 15.205, 15.209, 15.215(c) and RSS-210 Clause 5.5 and RSS-GEN FCC Part 15.247(a)(2) and RSS-247 Clause 5.2 a), FCC Part 15.247 and RSS-247 Clause 5, FCC Part 15.247(b)(3) and RSS-247 Clause 5.4 and FCC Part 15.247(d) and RSS-247 clause 5.5,			
Test Result	The above product was found to be Compliant to the above test standard(s)			
tested by: Mark Ryan		reviewed by: Robert Richards		
10 May 2017 _____ <i>Signature</i>		10 May 2017 _____ <i>Signature</i>		
Other Aspects:	None			
Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable				
 90552 and 100881		 Testing Cert #3331.05		Industry Canada 2932H-1 and 2932H-2

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	PURPOSE	5
1.3	REVISION HISTORY	5
1.4	SUMMARY OF TEST RESULTS	6
2	LABORATORY INFORMATION	7
2.1	ACCREDITATIONS AND ENDORSEMENTS	7
2.2	MEASUREMENT UNCERTAINTY FOR CONDUCTED TRANSMITTER TESTING	8
2.3	CALIBRATION TRACEABILITY	13
2.4	SOFTWARE USED	13
2.5	MEASUREMENT EQUIPMENT USED	13
3	PRODUCT INFORMATION	14
3.1	PRODUCT DESCRIPTION	14
3.2	EQUIPMENT MODIFICATIONS	14
3.3	EQUIVALENT MODELS	14
3.4	TEST PLAN	14
4	RADIATED EMISSIONS	15
4.1	SPURIOUS EMISSIONS OUTSIDE THE BAND - FCC 15.247(D), RSS-247 CLAUSE 5.2	15
4.2	BAND EDGE	27
5	CONDUCTED EMISSIONS ON AC MAINS IN TRANSMIT MODE.....	31
5.1	CONDUCTED EMISSIONS	31
6	ANTENNA PORT CONDUCTED EMISSIONS	34
6.1	CONDUCTED OUTPUT POWER, FCC 15.247(B)(3) AND RSS-247 CLAUSE 5.4 D)	34
6.2	PEAK POWER SPECTRAL DENSITY	37
6.3	OCCUPIED BANDWIDTH	38
6.4	99% POWER BANDWIDTH	41
APPENDIX A		43
7	TEST PLAN.....	43
7.1	GENERAL INFORMATION	43
7.2	PRODUCT NAME	43
7.3	MODEL(S) NAME	43
7.4	EQUIPMENT UNDER TEST (EUT) DESCRIPTION	43
7.5	TEST PREPARATION	44

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the standard(s), based on the results of testing performed on 17 March 2017 on the Wireless RF Bridge Module, Model No. CC-WF25, manufactured by Airgas, USA, LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Revision History

Revision	Date	Description of Revision
.001		Initial Release

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

1.4 Summary of Test Results

Applicant	Airgas, USA, LLC 180 Sandbank Road Cheshire CT 06410-1521 USA	Tel	203-272-5800 x222	Contact	Robert Shock
		Fax	203-272-5833	e-mail	rob.shock@airgas.com
Description	Wireless RF Bridge Module	Model Number	CC-WF25		
Serial Number	C4:BE:84:F2:FA:40	Test Voltage/Freq.	5 VDC (USB Powered)		
Test Date Completed:	17 March 2017	Test Engineer	Mark Ryan		
Standards	Description	Severity Level or Limit		Criteria	Test Result
FCC Part 15C:2017 Standard	Radio Frequency Devices- Subpart C: Intentional Radiators	See called out parts below		See Below	Complies
RSS-247 Issue 2:2017 Standard	DTS, FHS and Licence- Exempt Local Area Network Devices	See called out parts below		See Below	Complies
FCC Part 15.247 and RSS-247 Clause 5	Operation within the band 2400 to 2483.5 MHz	See called out parts below		Below Limit	Complies
FCC Parts 15.247(d), 15.205, 15.209, 15.215(c) and RSS-210 Clause 5.5 and RSS-GEN	Out-of-Band Spurious and Harmonic Emissions (EUT in Transmit Mode)	Below the applicable limits		Below Limit	Complies
FCC Part 15.207(a) and RSS-GEN	Conducted Emissions on Mains EUT in Transmit Mode	Below limit of section 15.207(a)		Below Limit	Complies
FCC Part 15.247(d) and RSS-247 clause 5.5	Band Edge Radiated Emission	Per requirements of the standard		Below Limit	Complies
FCC Part 15.247(b)(3) and RSS-247 Clause 5.4	Conducted Output Power	Shall not exceed 1.0 Watts		Below Limit	Complies
FCC Part 15.247(a)(2) and RSS-247 Clause 5.2 a)	Occupied Bandwidth	6 dB BW \geq 500 kHz		Below Limit	Complies
99% Power Bandwidth RSS-GEN Clause 6.6	99% Power Bandwidth	99% BW \leq 0.5% of center freq.		NA	Complies
FCC Part 15.247(e) and RSS-247 Clause 5.2 b)	Peak Power Spectral Density	\leq 8 dBm in any 3 kHz		Below Limit	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

2 Laboratory Information

2.1 Accreditations and Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 762 Park Avenue, Youngsville, NC 27596-9470 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 ILAC / A2LA

The laboratory has been assessed and accredited by A2LA in accordance with ISO Standard 17025:2005 (Certificate Number: 3331.05, Master Code: 134288). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Industry Canada

Registration No.: 2932H-1 The OATS has been accepted by Industry Canada to perform testing to 3 and to 10 meters, based on the test procedures described in ANSI C63.4-2009.

Registration No.: 2932H-2 The 5 meter chamber has been accepted by Industry Canada to perform testing to 3 meters, based on the test procedures described in ANSI C63.4-2009.

2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Laboratory Registration No: A-0034).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

2.1.5 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

2.1.1 Sample radiated emissions calculation @ 30 MHz

Measurement + Antenna Factor – Amplifier Gain + Cable loss = Radiated Emissions (dB μ V/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

2.2 Measurement Uncertainty for Conducted Transmitter Testing

The following tables list the uncertainty contributors, their distribution and the associated uncertainties for vertically polarized radiated fields over the frequency range 9kHz -40 GHz.

Combined standard uncertainty $u_C(y)$ can be computed from this as:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

Unless the repeatability of the EUT is particularly poor and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore: $U = 2 u_C(y)$

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
31750770.001

Page 9 of 44

2.2.1 Total Measurement Uncertainty

Total uncertainty

Band 1 uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(Hz)	-u(Hz)	
Time base	Time base drift (1x10-9 = 0.001ppm)	0.05	0.05	Rectangular	1.73	1.00	1.00	0.03	0.03
Counter	Counter (±20pHz/Hz+0.6Hz)	0.60	0.60	Rectangular	1.73	1.00	1.00	0.35	0.35
Temp	Ambient temperature uncertainty	1.00	1.00	Rectangular	1.73	1.12	1.00	0.65	0.65
Combined (RSS) Standard Uncertainty (U _c):								0.73	0.73
Expanded Uncertainty (U ₉₅):								1.44	1.44

Band 2 uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(Hz)	-u(Hz)	
Time base	Time base drift (1x10-9 = 0.001ppm)	0.92	0.92	Rectangular	1.73	1.00	1.00	0.53	0.53
Counter	Counter (±20pHz/Hz+0.6Hz)	0.62	0.62	Rectangular	1.73	1.00	1.00	0.36	0.36
Temp	Ambient temperature uncertainty	1.00	1.00	Rectangular	1.73	1.12	1.00	0.65	0.65
Combined (RSS) Standard Uncertainty (U _c):								0.91	0.91
Expanded Uncertainty (U ₉₅):								1.78	1.78

Band 3 uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(Hz)	-u(Hz)	
Time base	Time base drift (1x10-9 = 0.001ppm)	2.45	2.45	Rectangular	1.73	1.00	1.00	1.41	1.41
Counter	Counter (±20pHz/Hz+0.6Hz)	0.65	0.65	Rectangular	1.73	1.00	1.00	0.37	0.37
Temp	Ambient temperature uncertainty	1.00	1.00	Rectangular	1.73	1.12	1.00	0.65	0.65
Combined (RSS) Standard Uncertainty (U _c):								1.60	1.60
Expanded Uncertainty (U ₉₅):								3.13	3.13

Total uncertainty (all bands)

Combined (RSS) Standard Uncertainty (U _c):	1.98	1.98
Expanded Uncertainty (U ₉₅):	3.88	3.88

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

2.2.2 Total Carrier Power Measurement Uncertainty

Total uncertainty

Power meter & sensor

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(dB)	-u(dB)	
Meter ref	Power meter reference level	1.500	1.500	Rectangular	1.732	1.000	23.000	0.038	0.038
Cal fact	Cal factor uncert	2.300	2.300	Rectangular	1.732	1.000	23.000	0.058	0.058
Range err	Range to range change error	0.500	0.500	Rectangular	1.732	1.000	23.000	0.013	0.013
Meter lin	Power meter linearity	0.500	0.500	Rectangular	1.732	1.000	23.000	0.013	0.013
	Mismatch when calibrating	0.022	0.022		1.000	1.000	1.000	0.022	0.022
					1.000	1.000	1.000	0.000	0.000
Combined (RSS) Standard Uncertainty (u_{c1}):								0.074	0.074

Uncertainty when measuring atten/cable

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(dB)	-u(dB)	
	measurement	0.175	0.175		1.000	1.000	1.000	0.175	0.175
Range err	Range to range change error	0.500	0.500	Rectangular	1.732	1.000	23.000	0.013	0.013
Meter lin	Power meter linearity	0.500	0.500	Rectangular	1.732	1.000	23.000	0.013	0.013
Combined (RSS) Standard Uncertainty (U_{c2}):								0.175	0.175

Carrier power measurement

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(dB)	-u(dB)	
	Mismatch during power measurement	0.643	0.643		1.000	1.000	1.000	0.643	0.643
Atten PI	Attenuator power influence	0.750	0.750	Rectangular	1.732	1.000	1.000	0.433	0.433
Temp	Temperature uncertainty	1.000	1.000	Rectangular	1.732	4.176	23.000	0.105	0.105
Supply	Supply uncertainty	0.100	0.100	Rectangular	1.732	10.440	23.000	0.026	0.026
Random	Random uncertainty (see note in section 6.4.7 , Part 1)	0.010	0.010	Normal	1.000	1.000	1.000	0.010	0.010
Time duty	Time duty cycle	2.000	2.000	Normal	1.000	1.000	23.000	0.087	0.087
					1.000	1.000	1.000	0.000	0.000
Combined (RSS) Standard Uncertainty (U_{c3}):								0.788	0.788

Total uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+u or x	-u or x				+u(dB)	-u(dB)	
Uc1	Power meter & sensor	0.074	0.074		1.000	1.000	1.000	0.074	0.074
Uc2	Uncertainty when measuring atten/cable	0.175	0.175		1.000	1.000	1.000	0.175	0.175
Uc3	Carrier power measurement	0.788	0.788		1.000	1.000	1.000	0.788	0.788
					1.000	1.000	1.000	0.000	0.000
Combined (RSS) Standard Uncertainty (U_c):								0.810	0.810
Expanded Uncertainty (U_{95}):								1.588	1.588

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

2.2.3 Total Adjacent channel power Measurement Uncertainty

Total uncertainty

Total relative RF level uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divisor	Std uncertainty		
		+x	-x				+u(dB)	-u(dB)	
Filter pwr bw	Filter power bw	0.200	0.200	Rectangular	1.732	1.000	1.000	0.115	0.115
Relative acc	Relative accuracy	0.500	0.500	Rectangular	1.732	1.000	1.000	0.289	0.289
Random	Random uncertainty (see note in section 6.4.7 , Part 1)	0.110	0.110	Normal	1.000	1.000	1.000	0.110	0.110
Deviation	Deviation uncertainty	30.000	30.000	Rectangular	1.732	0.054	23.000	0.041	0.041
6dB pt unc	Uncertainty of 6dB point	0.075	0.075	Rectangular	1.732	15.524	1.000	0.672	0.672
					1.000	0.000	23.000	0.000	0.000
					1.000	1.000	1.000	0.000	0.000
					1.000	1.000	1.000	0.000	0.000
					1.000	1.000	1.000	0.000	0.000
Combined (RSS) Standard Uncertainty (u_c):								0.750	0.750
Expanded Uncertainty (U_{95}):								1.470	1.470

2.2.4 Total Conducted Spurious Emissions Measurement Uncertainty

Total uncertainty

Total uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conversion divisor	Std uncertainty		
		+x	-x				+u(dB)	-u(dB)	
	Total Mismatch EUT to Spectrum Anal.	1.01	1.01		1.00	1.00	1.00	1.01	1.01
	Total Mismatch cal of Spectrum Analyzer	0.30	0.30		1.00	1.00	1.00	0.30	0.30
SA Cal ref	Spec. Ana. Cal output reference level	0.30	0.30	Rectangular	1.73	1.00	1.00	0.17	0.17
SA freq res.	Spec. Ana. frequency response	2.50	2.50	Rectangular	1.73	1.00	1.00	1.44	1.44
SA BW Sw	Spec. Ana. Bandwidth switching	0.50	0.50	Rectangular	1.73	1.00	1.00	0.29	0.29
SA Log Fid	Spec. Ana. Log fidelity	1.50	1.50	Rectangular	1.73	1.00	1.00	0.87	0.87
Supply Volt	Supply voltage uncertainty	0.10	0.10	Rectangular	1.73	10.44	23.00	0.03	0.03
Filtr loss unc	Filter loss uncertainty	0.15	0.15	Rectangular	1.73	1.00	1.00	0.09	0.09
Atten unc	Attenuator loss uncertainty	0.15	0.15	Rectangular	1.73	1.00	1.00	0.09	0.09
SA i/p att sv	SA atten switching uncertainty	0.20	0.20	Rectangular	1.73	1.00	1.00	0.12	0.12
Att pwr coef	Attenuator power coefficient	0.30	0.30	Rectangular	1.73	1.00	1.00	0.17	0.17
Cable	Measurement cable loss uncert	0.20	0.20	Normal	1.00	1.00	1.00	0.20	0.20
Rnd	Random contribution (see note in section 6.4.7 , Part 1)	0.20	0.20	Normal	1.00	1.00	1.00	0.20	0.20
Combined (RSS) Standard Uncertainty (u_c):								2.05	2.05
Expanded Uncertainty (U_{95}):								4.01	4.01

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
31750770.001

Page 12 of 44

2.2.5 Total Frequency Deviation Measurement Uncertainty

Total uncertainty

Total deviation uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution		Dependency multiplier	Unit conver'n divider	Std uncertainty	
		+x	-x	divisor				+u(%)	-u(%)
Dev Unc	Deviation uncertainty	1.00	1.00	Rectangular	1.73	1.00	1.00	0.58	0.58
Last Digit	+/- last digit of deviation meter display	0.25	0.25	Rectangular	1.73	1.00	1.00	0.14	0.14
Res mod	Residual modulation	0.50	0.50	Rectangular	1.73	1.00	1.00	0.29	0.29
Rand unc	Random uncertainty (see note in section 6.4.7 , Part 1)	0.00	0.00	Normal	1.00	1.00	1.00	0.00	0.00
Combined (RSS) Standard Uncertainty (u_c):								0.66	0.66
Expanded Uncertainty (U_{95}):								1.30	1.30

2.2.6 Total Response Measurement Uncertainty

Deviation uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution		Dependency multiplier	Unit conver'n divider	Std uncertainty	
		+x	-x	divisor				+u(%)	-u(%)
Dev Unc	Deviation uncertainty	1.00	1.00	Rectangular	1.732	1.00	1.00	0.58	0.58
AF Osc	AF oscillator uncertainty	0.70	0.70	Rectangular	1.732	1.00	1.00	0.40	0.40
AC volt mtr	AC Volt meter uncertainty	4.00	4.00	Rectangular	1.732	1.00	1.00	2.31	2.31
AF gain unc	AF gain uncertainty	2.00	2.00	Rectangular	1.732	1.00	1.00	1.15	1.15
Rand unc	Random uncertainty (see note in section 6.4.7 , Part 1)	0.00	0.00	Normal	1.000	1.00	1.00	0.00	0.00
Combined (RSS) Standard Uncertainty (u_{c1}):								2.68	2.68

Total uncertainty

Symbol	Source of uncertainty	Uncertainty value		Distribution divisor	Dependency multiplier	Unit conver'n divider	Std uncertainty	
		+u or x	-u or x				+u(dB)	-u(dB)
Uc1	Deviation uncertainty	2.68	2.68		1.000	11.50	0.23	0.23
					1.000	1.00	0.00	0.00
					1.000	1.00	0.00	0.00
					1.000	1.00	0.00	0.00
Combined (RSS) Standard Uncertainty (U_c):							0.23	0.23
Expanded Uncertainty (U_{95}):							0.46	0.46

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
31750770.001

Page 13 of 44

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

2.4 Software Used

Manufacturer	Name	Version
Quantum Change/EMC Systems LLC.	Tile	3.2U
TUV	Alt "R"	1
TUV	Alt "C"	1
ETS-Lindgren	EMPower	1.0.2.11

2.5 Measurement Equipment Used

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Radiated and Conducted RF Emissions (5 Meter Chamber)					
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	16-Aug-16	16-Aug-17
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	16-Aug-16	16-Aug-17
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	20-Aug-15	20-Aug-17
Antenna Horn 1-18GHz	EMCO	3115	2236	18-Nov-15	18-Nov-17
18-40GHz Horn and Amp	COM-POWER	AHA-B40	105002	12-Sep-16	12-Sep-16
Cable, Coax	MicroCoax	MKR300C-0-0-1200-500500	002	17-Aug-16	17-Aug-17
Cable, Coax	MicroCoax	MKR300C-0-1968-500310	005	17-Aug-16	17-Aug-17
Cable, Coax	MicroCoax	UFB29C-1-5905-50U-50U	009	17-Aug-16	17-Aug-17
Notch Filter: 2.4-2.4835GHz	Micro-Tronics	BRM50702	049	18-Aug-16	18-Aug-17
USB RF Power Sensor	ETS-Lindgren	7002-006	14I000SNO054	18-Aug-16	18-Aug-17
USB RF Power Sensor	ETS-Lindgren	7002-006	14I000SNO055	18-Aug-16	18-Aug-17
Conducted Emissions (AC/DC and Signal I/O)					
Receiver, EMI	Rohde & Schwarz	ESCI 7	100917	16-Aug-16	16-Aug-17
LISN 15-18 (NSLK 8126)	Schwarzbeck Mess-Electronik	NSLK 8126	003885	15-Aug-16	15-Aug-18
Transient Limiter	Schaffner	CFL-9206	1629	18-Aug-16	18-Aug-17
Cable, Coax	Pasternack	RG-223	051	17-Aug-16	17-Aug-17
General Laboratory Equipment					
Meter, Multi	Fluke	179	90580752	18-Aug-16	18-Aug-17
Meter, Temp/Humid/Barom	ExTech	SD700	Q677933	21-Dec-15	21-Dec-17
Meter, Temp/Humid/Barom	ExTech	SD700	Q677942	21-Dec-15	21-Dec-17

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

3 Product Information

3.1 Product Description

See Appendix A of this report

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

3.3 Equivalent Models

No additional models covered by test report.

3.4 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

4 Radiated Emissions

4.1 Spurious Emissions Outside the band - FCC 15.247(d), RSS-247 Clause 5.2

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

4.1.1 Over View of Test

Results	Complies (as tested per this report)				Date	3 March 2017	
Standard	FCC Parts 15.205, 15.209, 15.215(c), 15.247(d), RSS-247, and RSS-GEN						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details						
EUT Powered By	5 VDC	Temp	74 °F	Humidity	36%	Pressure	1000 mbar
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit		
Mod. to EUT	None		Test Performed By		Mark Ryan		


4.1.2 Test Procedure

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSS-GEN Issue 2. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

4.1.4 Test Setup Block Diagram

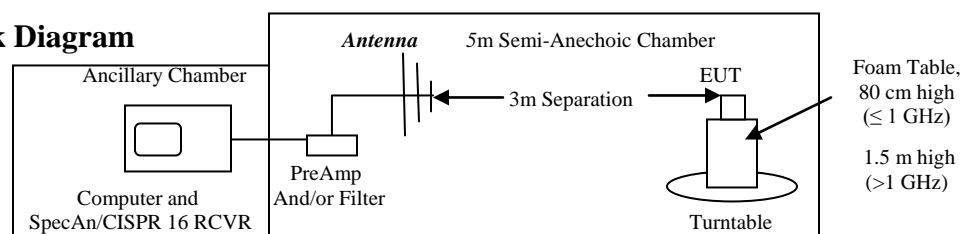

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

4.1.5 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

The worst –case emissions are shown below. All other emissions are on file at TUV Rheinland.

4.1.5.1 Emissions Outside the Frequency Band

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

Emissions inside the Frequency Band to find worst-case reference:

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBµV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBµV/m)
Orientation A:								
2405.00	H	2.9	174	63.28	0.00	5.89	28.52	97.69
2405.00	V	2	236	68.34	0.00	5.89	28.52	102.75
2405.00	V	2	236	62.07	0.00	5.89	28.52	96.48
2440.00	H	3.1	346	61.47	0.00	5.98	28.76	96.21
2440.00	V	1.8	239	67.75	0.00	5.95	28.65	102.35
2475.00	V	1.6	233	67.10	0.00	5.98	28.76	101.84
Orientation B:								
2402.00	H	2.4	164	66.74	0.00	5.89	28.51	101.14
2440.00	H	2.8	176	66.31	0.00	5.95	28.65	100.91
2440.00	V	1.8	183	56.68	0.00	5.95	28.65	91.28
2475.00	H	1.8	343	66.93	0.00	5.98	28.76	101.67
Orientation C:								
2405.00	H	1.5	178	66.95	0.00	5.89	28.51	101.35
2405.00	V	1.7	113	56.58	0.00	5.89	28.51	90.98
2440.00	H	1.8	181	66.36	0.00	5.95	28.65	100.96
2440.00	V	1.6	114	57.66	0.00	5.95	28.65	92.26
2475.00	H	1.8	173	65.78	0.00	5.98	28.76	100.52

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor


Notes: **GREEN = Average Detector, Blue = Peak Detector**

EUT in Orientation A is worst case as shown. All other data is on file at TUV Rheinland.

This **highlighted** frequency and orientation was Highest Emission (2405 MHz, Orientation A, Vertical).

The highest average emission is 96.48 dBµV/m at 3m. FCC part 15.247 and RSS-247 must be used.

Worst-Case Radiated Emissions 30MHz to 1000MHz
Horizontal

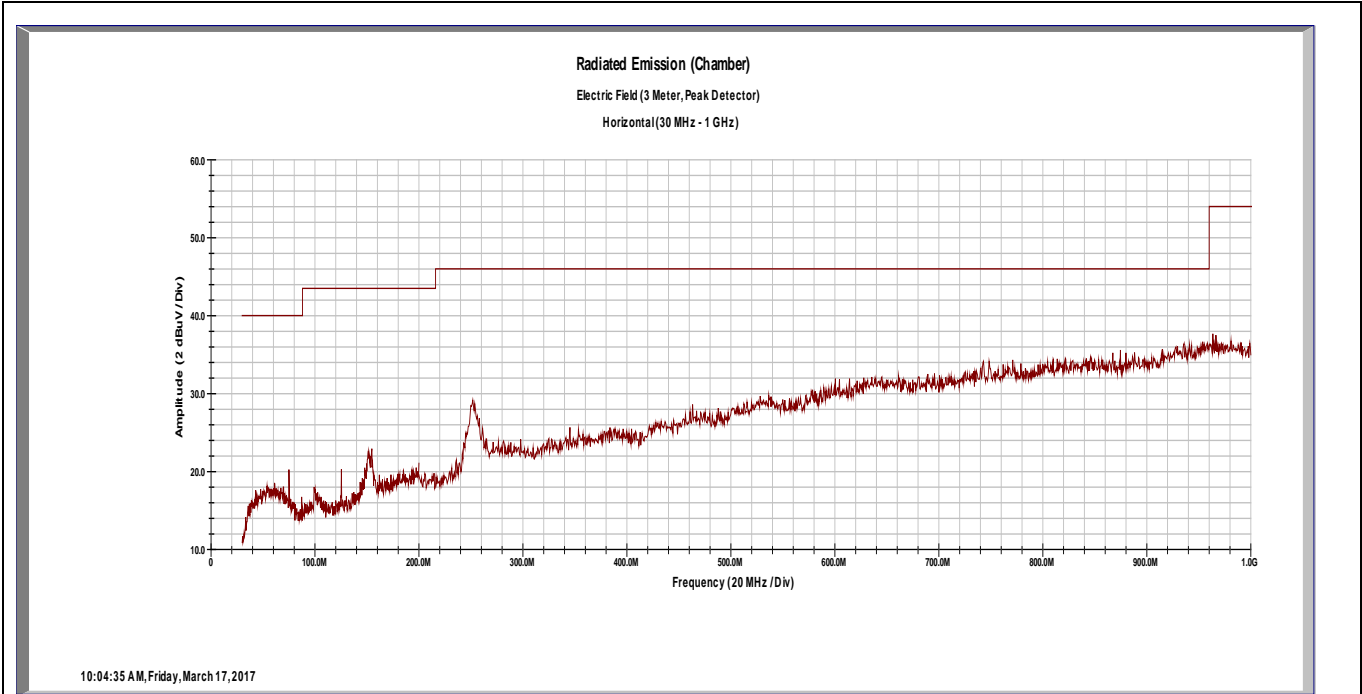


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
150.36	H	1.3	60	6.75	0.00	1.40	11.90	20.05	43.50	-23.45
253.76	H	1	173	7.30	0.00	1.82	17.02	26.15	46.00	-19.85

Notes: All three frequencies had similar responses.
All emissions are more than 20 dB below the limit, or are below the noise floor of the receiver.
The emissions shown around 120MHz are anomalies of the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Worst-Case Radiated Emissions 1GHz to 10GHz
Horizontal

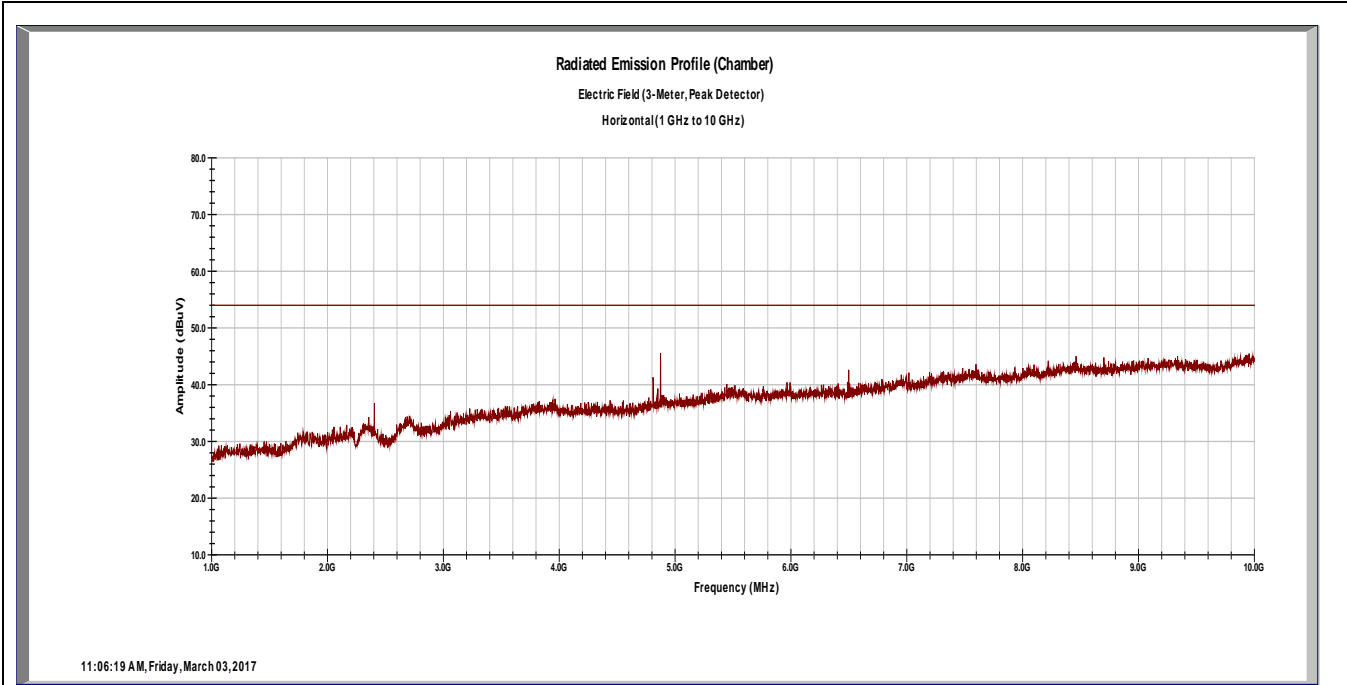

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
4874.40	H	2	1.6	23.76	33.77	11.70	32.99	34.68	54.00	-19.32
4874.40	H	2	1.6	42.64	33.77	11.70	32.99	53.56	74.00	-20.44


Notes: Above 1 GHz requires that both the **Peak** and **Average** values are below the respective limits. A 2.4 to 2.485 GHz band notch filter is used to prevent swamping the preamp.

ALL EMISSIONS including those outside Restricted Bands are below the limits of Part FCC 15.209.

The in-band Fundamental Emissions is attenuated by use of a notch filter.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Worst-Case Radiated Emissions 1GHz to 10GHz
Vertical

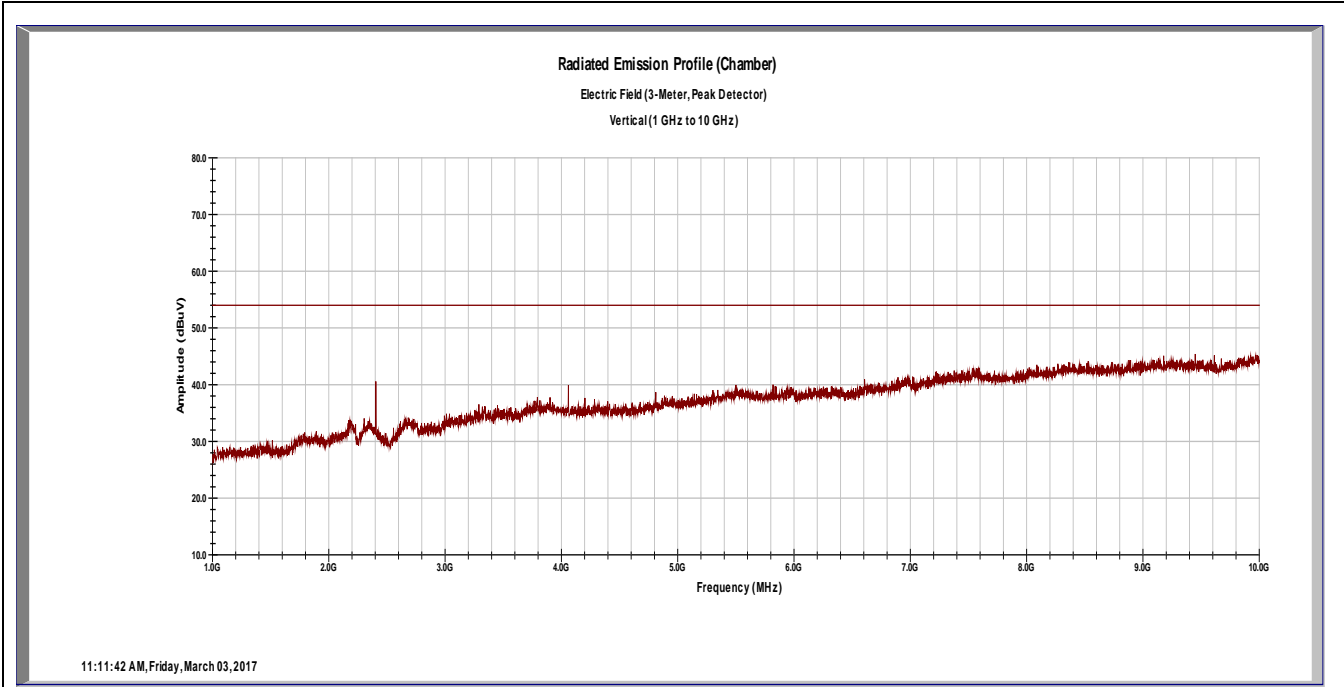

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Notes: Above 1 GHz requires that both the **Peak** and **Average** values are below the respective limits. A 2.4 to 2.485 GHz band notch filter is used to prevent swamping the preamp.

ALL EMISSIONS including those outside Restricted Bands are below the limits of Part FCC 15.209.

The in-band Fundamental Emissions is attenuated by use of a notch filter.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

4.2 Band Edge

4.2.1 Test Over View

Results	Complies (as tested per this report)				Date	13 March 2017	
Standard	FCC Part 15.247(d), RSS 247 Clause 5.5						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	5 VDC (USB)	Temp	74° F	Humidity	32%	Pressure	1010mbar
Perf. Criteria	(Below Limit)			Perf. Verification	Readings Under Limit		
Mod. to EUT	None			Test Performed By	Mark Ryan		

4.2.2 Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

4.2.4 Final Test

The EUT met the performance criteria requirement as specified in the standards.

4.2.1 Test Setup Block Diagram

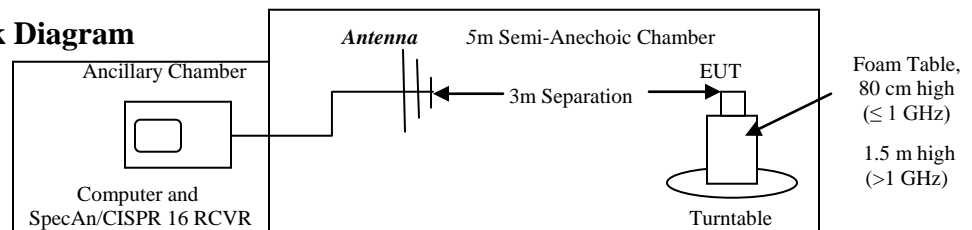

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:

31750770.001

Page 28 of 44



Marker 2 [T1]


RBW 100 kHz RF Att 0 dB

Ref Lvl 53.55 dB μ V

VBW 300 kHz

99.9 dB μ V 2.39997194 GHz

SWT 5 ms Unit dB μ V

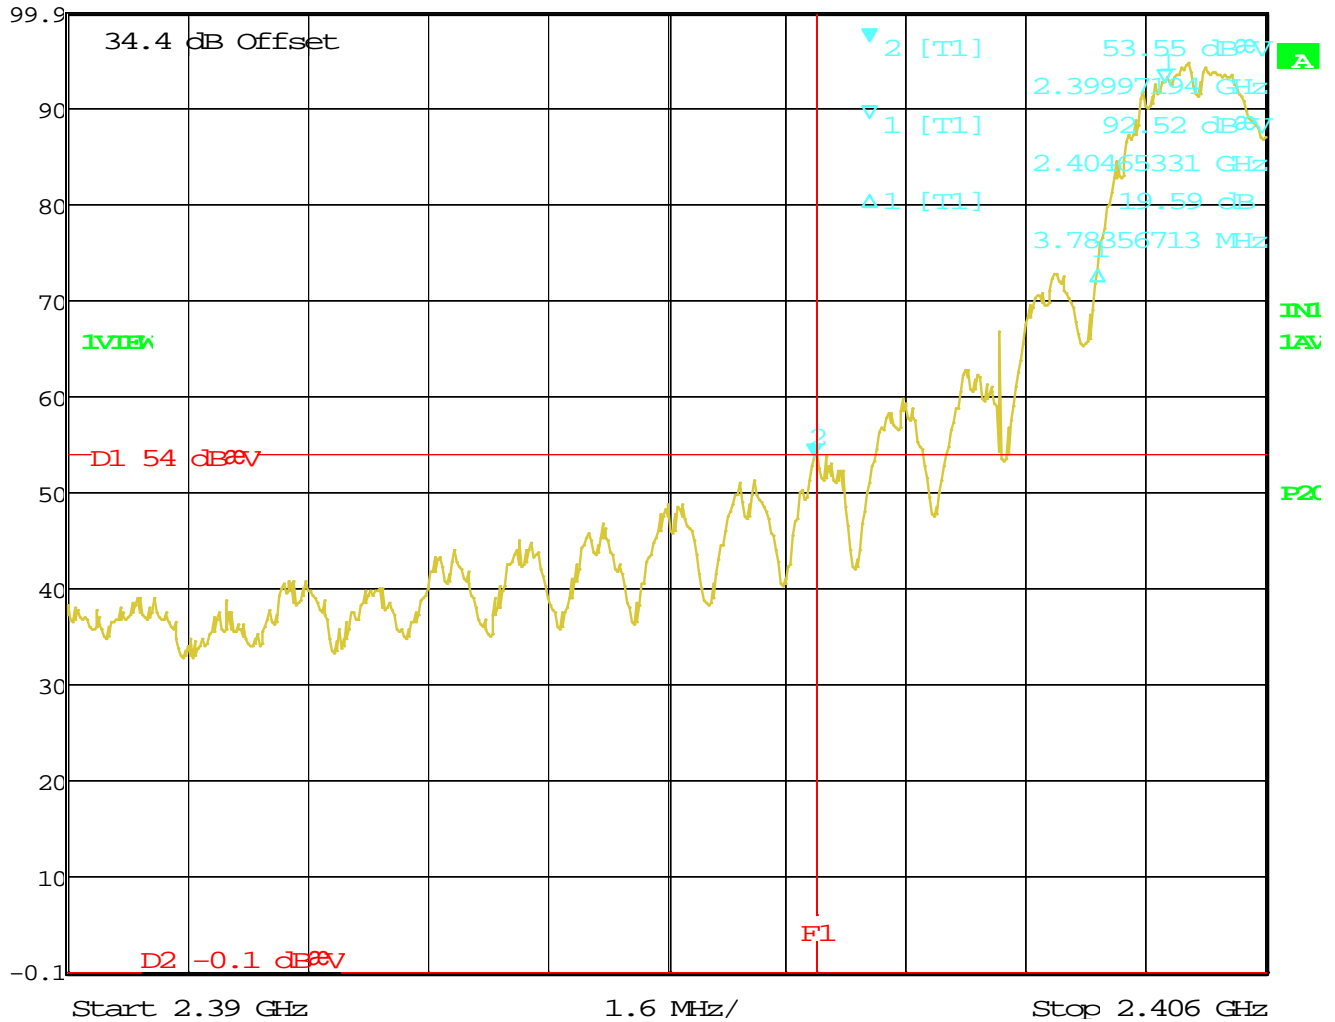


Date: 13.MAR.2017 10:50:12

Figure 1: Lower Band Edge Average Measurement (Radiated Emission)

Note: Band Edge is at 2.4 GHz, and the nearest restricted band (2390MHz) is 10 MHz away

At the lowest channel, the 20dB down point is at 2401.22 MHz. The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

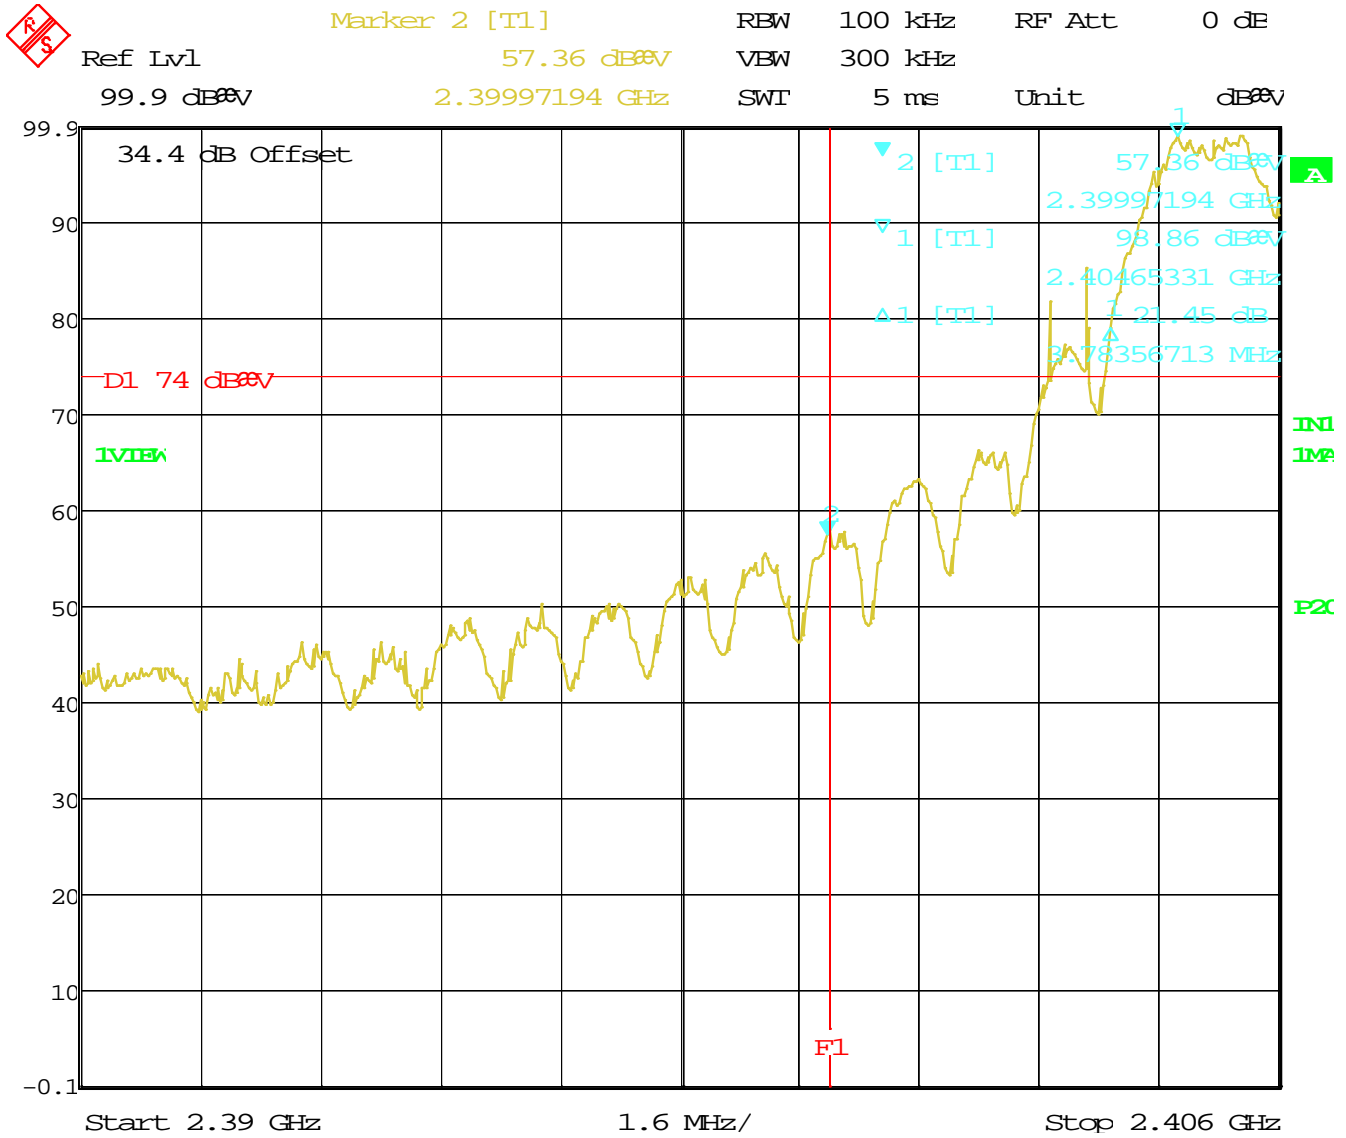

Date: 13.MAR.2017 10:48:45

Figure 2: Lower Band Edge Peak Measurement (Radiated Emission)


Note: Band Edge is at 2.4 GHz, and the nearest restricted band (2390MHz) is 10 MHz away.

All emissions outside the band are well below the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	0 dB
100 dB μ V	46.58 dB μ V	VBW	300 kHz		
	2.48423347 GHz	SWT	11 ms	Unit	dB μ V

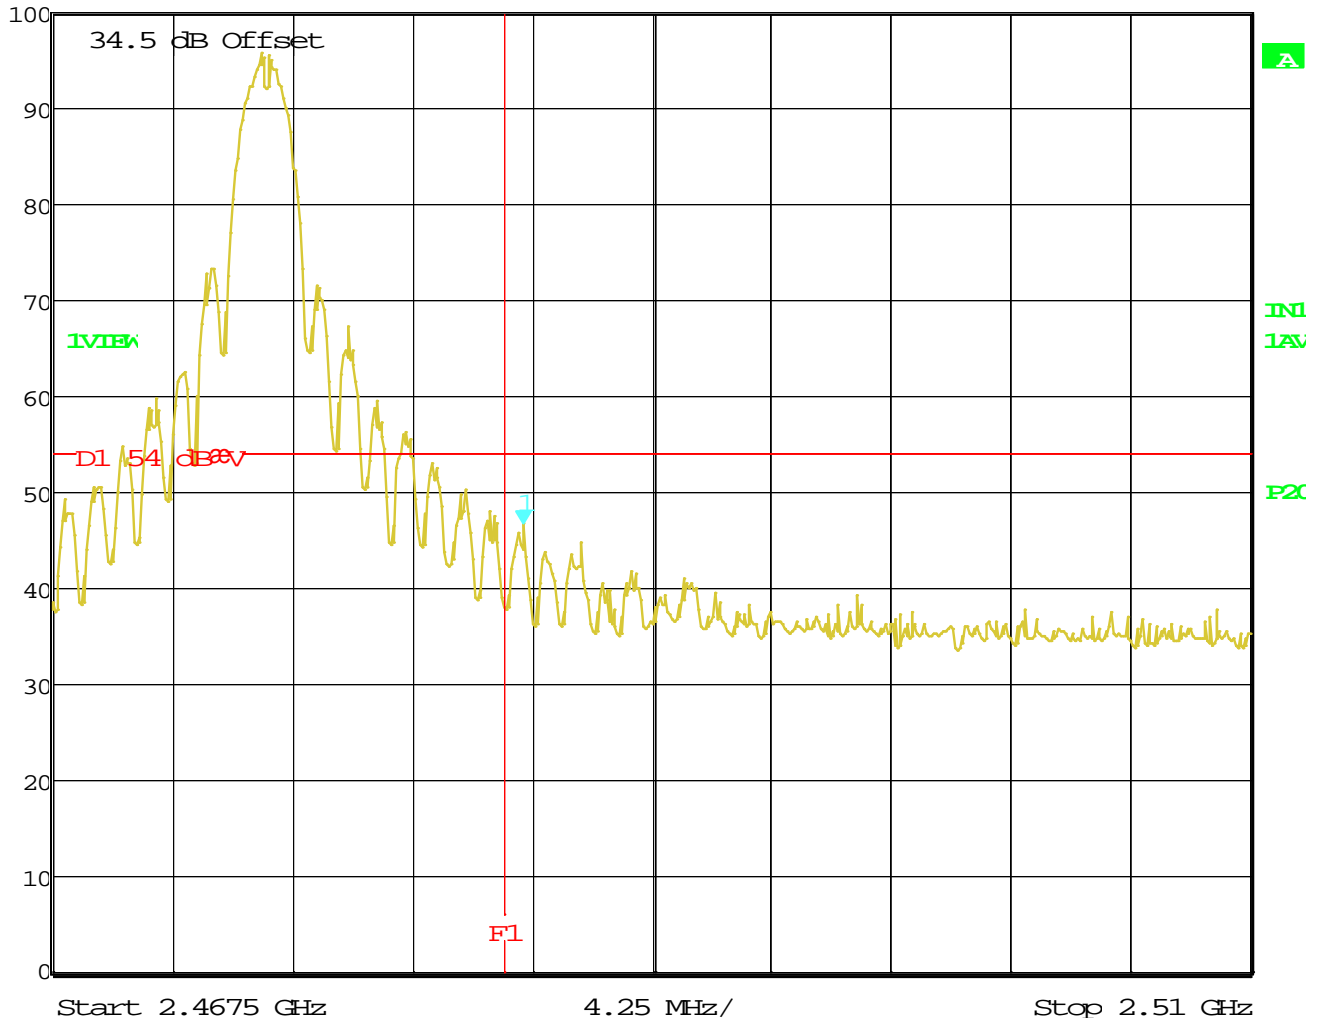

Date: 13.MAR.2017 10:34:43

Figure 3: Upper Band Edge Average Measurement (Radiated Emission)

Note: Band edge (F1) at 2483.5 MHz is also the start of a restricted band, so the rules for restricted bands apply.

The highest channel frequency outside the band-edge (2.4835 GHz) is 46.58 dB μ V/m (average) which is 7dB below the 54 dB restrict-band limit.

The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

5 Conducted Emissions on AC MAINS in Transmit mode

5.1 Conducted Emissions

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

5.1.1 Over View of Test

Results	Complies (as tested per this report)				Date	15 March 2017	
Standard	FCC Part 15.207(a) and RSS-GEN						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Tested in shielded room. EUT placed on table, see test plans for details						
EUT Powered By	120VAC / 60 Hz	Temp	70° F	Humidity	18%	Pressure	1002 mbar
Frequency Range	150 kHz – 30 MHz						
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit for L1 & Neutral			
Mod. to EUT	None		Test Performed By	Mark Ryan			

5.1.1 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.4:2014 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 150 kHz – 30 MHz was investigated for conducted emissions.

EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane, 40cm from a vertical ground plane, using procedures specified in the test plan and standard.


5.1.2 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

5.1.3 Final Test

All final conducted emissions measurements were below (in compliance) the limits.

5.1.1 Test Setup Block Diagram

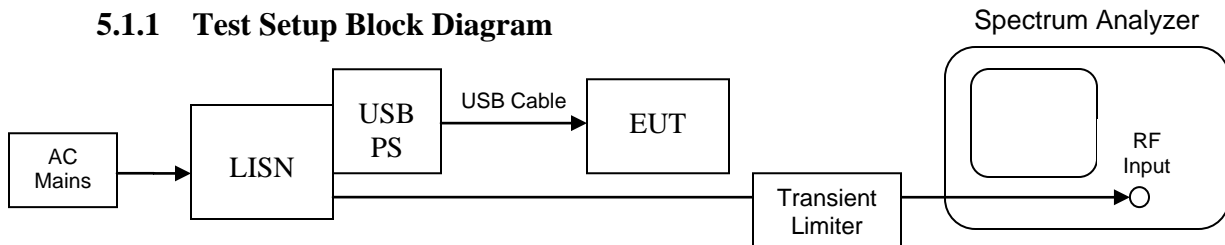


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

5.1.2 Final data and Graphs

Conducted Emissions @ 120V/60Hz

Line 1

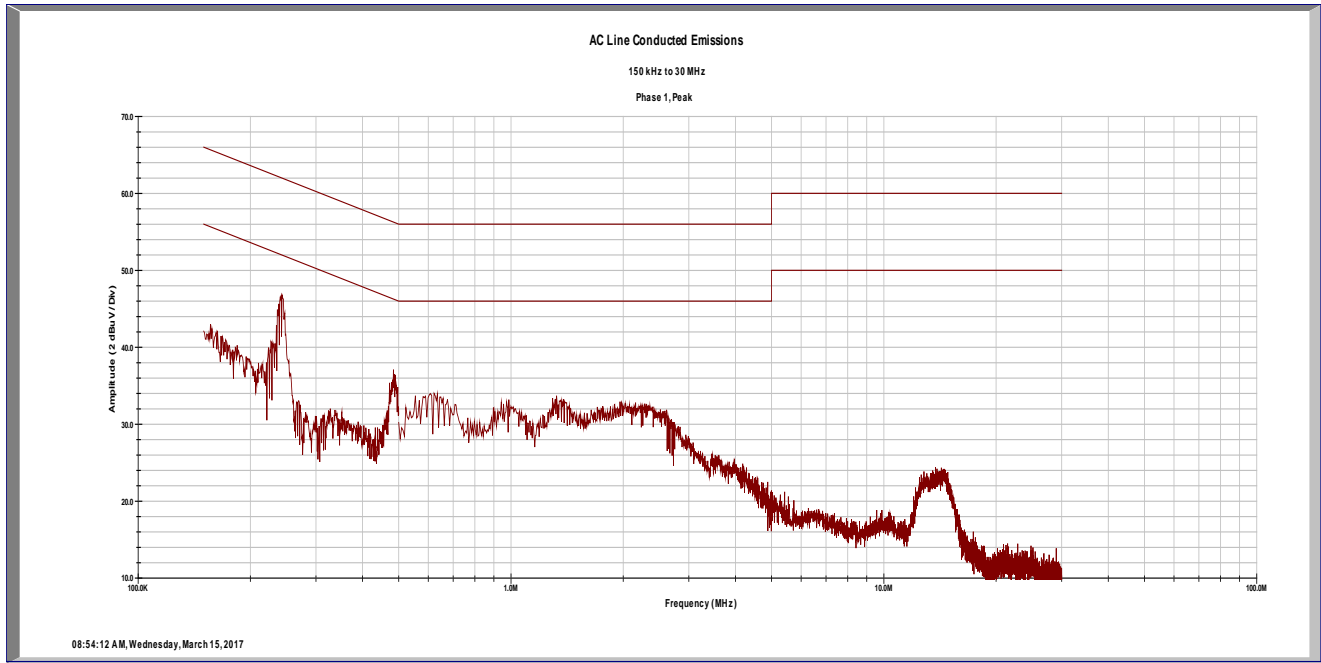


Freq (MHz)	ID (1,2,3,N)	Quasi FIM (dBµV)	Ave FIM (dBµV)	Cable Loss (dB)	TL/LISN (dB)	Limit QP (dBµV)	Limit AVE (dBµV)	Margin QP (dB)	Margin AVE (dB)
0.24	1	34.62	28.15	0.03	9.93	62.03	52.03	-17.45	-13.92
0.49	1	24.84	16.16	0.04	9.94	56.24	46.24	-21.42	-20.10
0.65	1	20.63	13.84	0.05	9.94	56.00	46.00	-25.38	-22.17
1.38	1	19.72	12.45	0.07	9.97	56.00	46.00	-26.24	-23.51
2.00	1	19.00	9.55	0.08	9.99	56.00	46.00	-26.93	-26.38
13.90	1	8.88	3.14	0.25	10.32	60.00	50.00	-40.55	-36.29

Quasi Spec Margin = Quasi FIM + Cable Loss + TL/LISN - QP Limit
Ave Spec Margin = Ave FIM + Cable Loss + TL/LISN CF - Ave Limit

Notes:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Conducted Emissions @ 120V/60Hz
Neutral

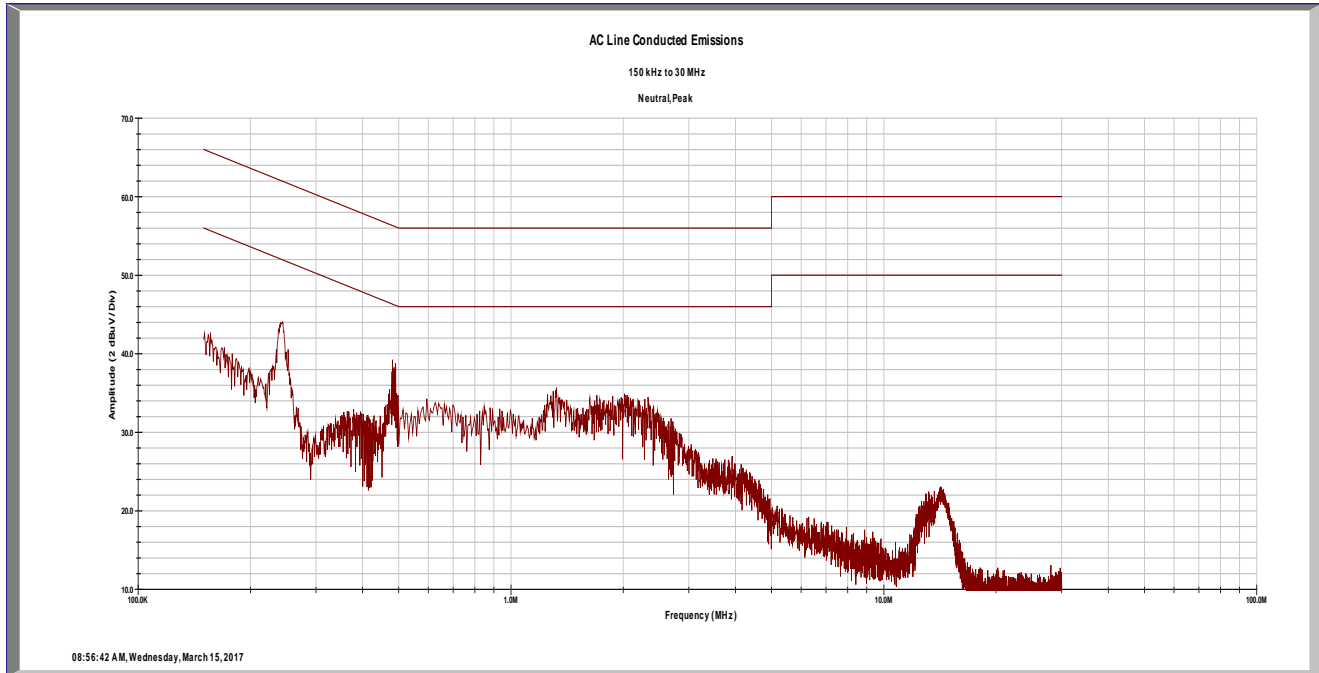

Freq (MHz)	ID (1,2,3,N)	Quasi FIM (dBµV)	Ave FIM (dBµV)	Cable Loss (dB)	TL/LISN (dB)	Limit QP (dBµV)	Limit AVE (dBµV)	Margin QP (dB)	Margin AVE (dB)
0.24	N	32.23	28.37	0.03	9.94	62.03	52.03	-19.83	-13.69
0.49	N	23.16	14.69	0.04	9.95	56.24	46.24	-23.09	-21.56
1.37	N	19.10	12.82	0.07	10.00	56.00	46.00	-26.84	-23.12
2.09	N	17.98	9.97	0.08	10.03	56.00	46.00	-27.90	-25.91
14.27	N	8.40	2.11	0.25	10.65	60.00	50.00	-40.70	-36.99

Quasi Spec Margin = Quasi FIM + Cable Loss + TL/LISN - QP Limit
Ave Spec Margin = Ave FIM + Cable Loss + TL/LISN CF - Ave Limit

Notes:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

6 Antenna Port Conducted Emissions

For conducted tests, the emissions were measured at the antenna port.

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2013, RSP-100 Issue 9. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

6.1 Conducted Output Power, FCC 15.247(b)(3) and RSS-247 Clause 5.4 d)

6.1.1 For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

6.1.2 Test Over View


Results	Complies (as tested per this report)				Date	16 March 2017	
Standard	FCC Part 15.247(b)(3) and RSS-247 Clause 5.4 d)						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	5 VDC (USB)	Temp	72° F	Humidity	10%	Pressure	1001 mbar
Perf. Criteria	(Below Limit)			Perf. Verification	Readings Under Limit		
Mod. to EUT	None			Test Performed By	Mark Ryan		

6.1.3 Test Procedure

The peak output power was measured at the low, mid and high band frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The cable loss and the attenuator was measured and added in the reference level offset in the spectrum analyzer. The spectrum analyzer's resolution bandwidth was greater than the 20dB bandwidth of the modulated carrier and the video bandwidth was equal to the resolution bandwidth.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

6.1.4 Test Setup Block Diagram

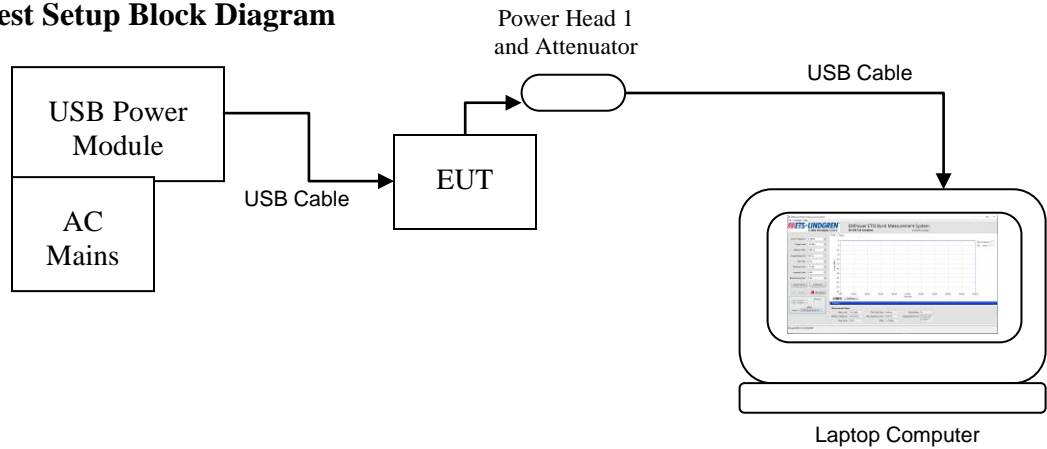

6.1.5 Deviations

There were no deviations from the test methodology listed in the test plan for the Surge Immunity test.

6.1.6 Final Test

The EUT met the requirements of the standard(s).

6.1.7 Type of Antenna used

The antenna used is a TEKFUN Model M04-S 2.4 GHz Swivel Rubber Dipole antenna with a reverse SMA connector that has a 2 dBi Gain.

The maximum EIRP output is $5.36 \text{ dBm} + 2 \text{ dBi} = 7.36 \text{ dBm eirp} = 0.0054 \text{ W eirp}$

6.1.8 Peak Power Output

Peak Output Conducted Power Measurements

Emission Freq (MHz)	Corrected Value (dBm)	Spec Limit (dBm)	Spec Margin (dB)
2405.00 (f_L)	5.36	+30.00	-24.64
2440.00 (f_M)	5.25	+30.00	-24.75
2475.00 (f_H)	5.06	+30.00	-24.94

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

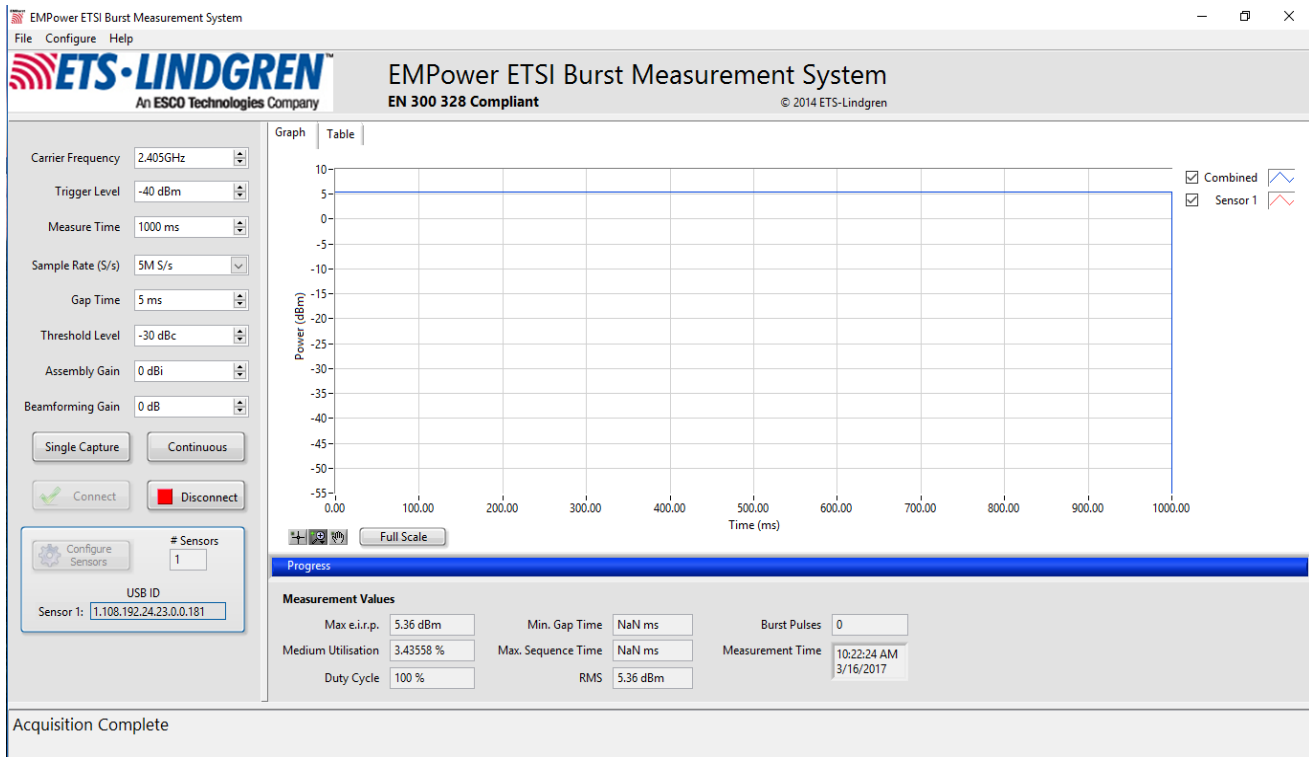


Figure 4 – Highest Peak Conducted Power Output for EUT highest frequency.

Graphs of the other frequencies are on file at the manufacturer and at TUV.

Antenna Gain

Refer to table in section error. All Antennas investigated are below 6dBi gain.

The EUT is also compliant to FCC Part 15.247(b)(4)

Results

As tested, the EUT was found to be compliant to the requirements of the test standard.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

6.2 Peak Power Spectral Density

6.2.1 Test Over View

Results	NA (as tested per this report)			Date	-		
Standard	FCC Part 15.247(e) and RSS-247 Clause 5.2 b)						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	5VDC (USB)	Temp	-	Humidity	-	Pressure	-
Perf. Criteria	Below Limit (10dBm)		Perf. Verification		≤ 8 dBm in any 3 kHz		
Mod. to EUT	None		Test Performed By		Mark Ryan		

6.2.2 Test Procedure

Using the methods of ANSI C63.10:2013.

6.2.3 Deviations

The 5.36 dBm Peak EIRP output of the EUT is below the 8 dBm Peak Power Spectral Density limit.

6.2.4 Final Test

This test is not applicable as the Peak EIRP output of the EUT is 2.64 dB below the PPSD limit.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

6.3 Occupied Bandwidth

6.3.1 Test Over View

Results	Complies (as tested per this report)				Date	15 March 2017	
Standard	FCC Part 15.247(a)(2)						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	5 VDC (USB)	Temp	70° F	Humidity	18%	Pressure	1002 mbar
Perf. Criteria	(Below Limit)			Perf. Verification	Readings Under Limit		
Mod. to EUT	None			Test Performed By	Mark Ryan		

6.3.2 Test Procedure


Systems using digital modulation techniques may operate in the 2400-2483.5 MHz band. The minimum 6dB bandwidth shall be at least 500 kHz.

A 20dB Bandwidth measurement will also be made for the purpose of the emissions designator.

6.3.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

6.3.4 Test Setup Block Diagram

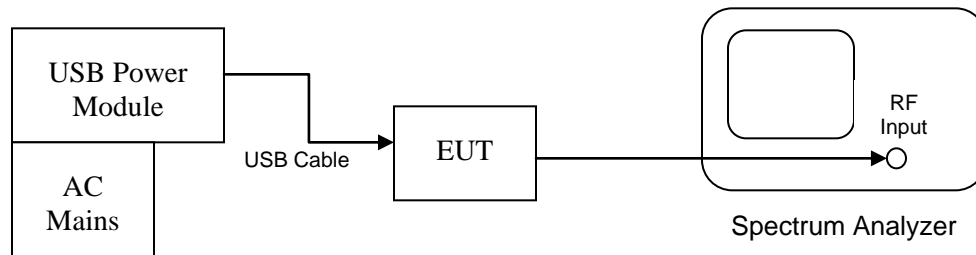

6.3.5 Final Results


The EUT met the performance criteria requirement as specified.

Frequency (MHz)	20 dB BW (MHz)	6 dB BW (MHz)	Min 6dB BW (MHz)	Results
2405	2.608	1.60	0.5	Complies
2440	2.608	1.58	0.5	Complies
2475	2.616	1.58	0.5	Complies

20 dB and 6 dB Occupied Bandwidths.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

6.3.6 Final Data

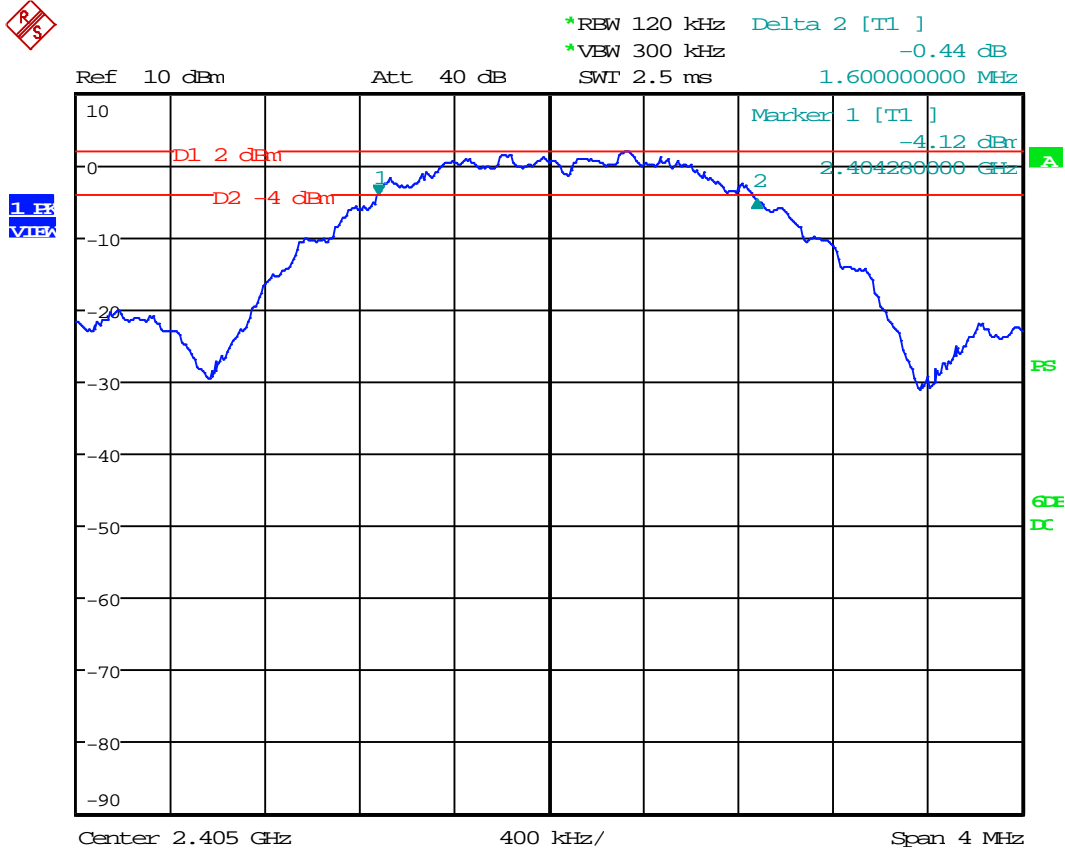


Date: 15.MAR.2017 10:54:41

Figure 5: 6dB Occupied Bandwidth

Note: The above plot is the highest 6dB OBW.

6dB OBW is 1.60 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

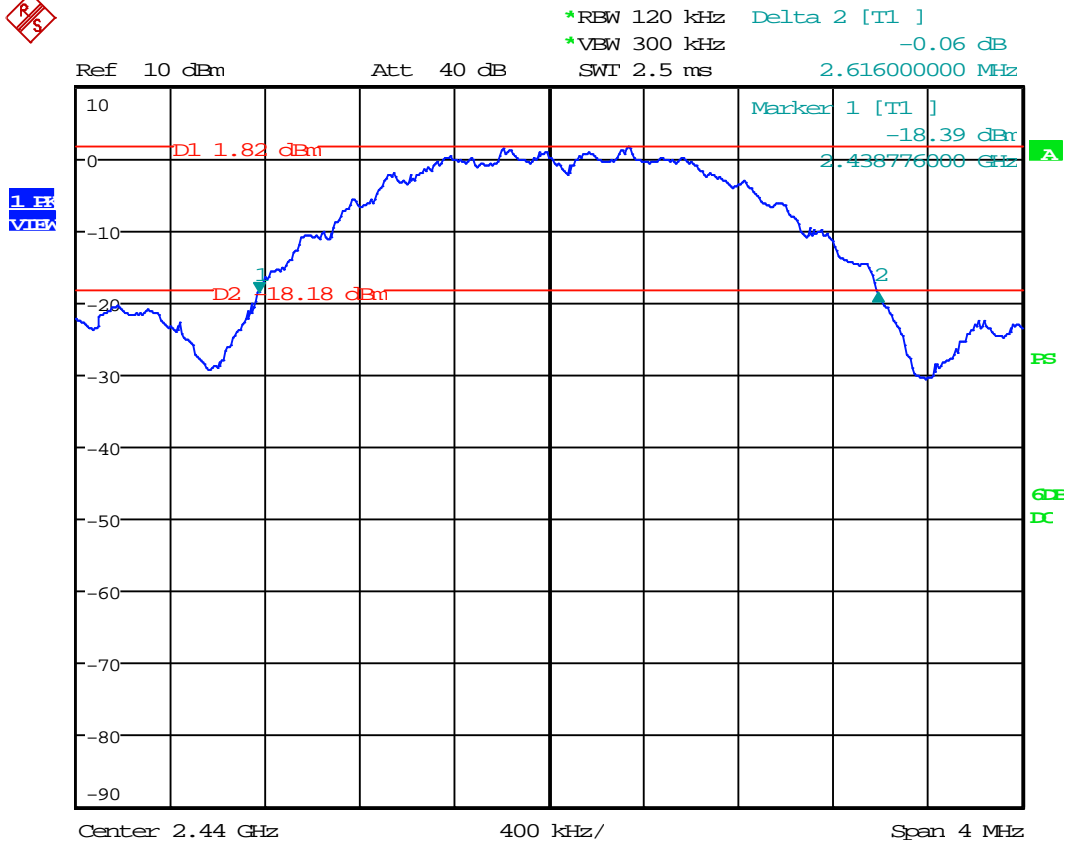

Date: 15.MAR.2017 10:59:39

Figure 6: 20 dB Occupied Bandwidth

Note: The above plot is the highest 20 dB OBW.

20dB OBW is 2.62 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

6.4 99% Power Bandwidth

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than .25% of the center frequency for devices operating between 70-900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

6.4.1 Test Over View

Results	Complies (as tested per this report)				Date	15 March 2017	
Standard	RSS-GEN Clause 6.6						
Product Model	CC-WF25			Serial#	C4:BE:84:F2:FA:40		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	5 VDC (USB)	Temp	70° F	Humidity	18%	Pressure	1002 mbar
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit		
Mod. to EUT	None		Test Performed By		Mark Ryan		

6.4.2 Test Procedure

Using the procedures of RSS-GEN Clause 6.6; the.


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

The limit of the bandwidth would be 0.25% of 902.8MHz is 1.08 MHz. The measured 99% bandwidth is 412.8 kHz.

6.4.3 Deviations

A Peak detector was used for a worst-case measurement). Otherwise there were no deviations from the test methodology listed.

6.4.4 Test Setup Block Diagram

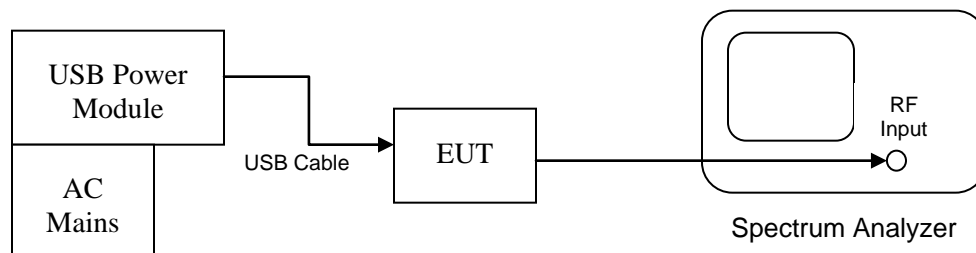

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.


6.4.5 Final Results

The EUT met the performance criteria requirement as specified in the standards.

Frequency (MHz)	99% BW (MHz)
2405	2.328
2440	2.328
2475	2.336

99% Power Band Width.

6.4.6 Final Data

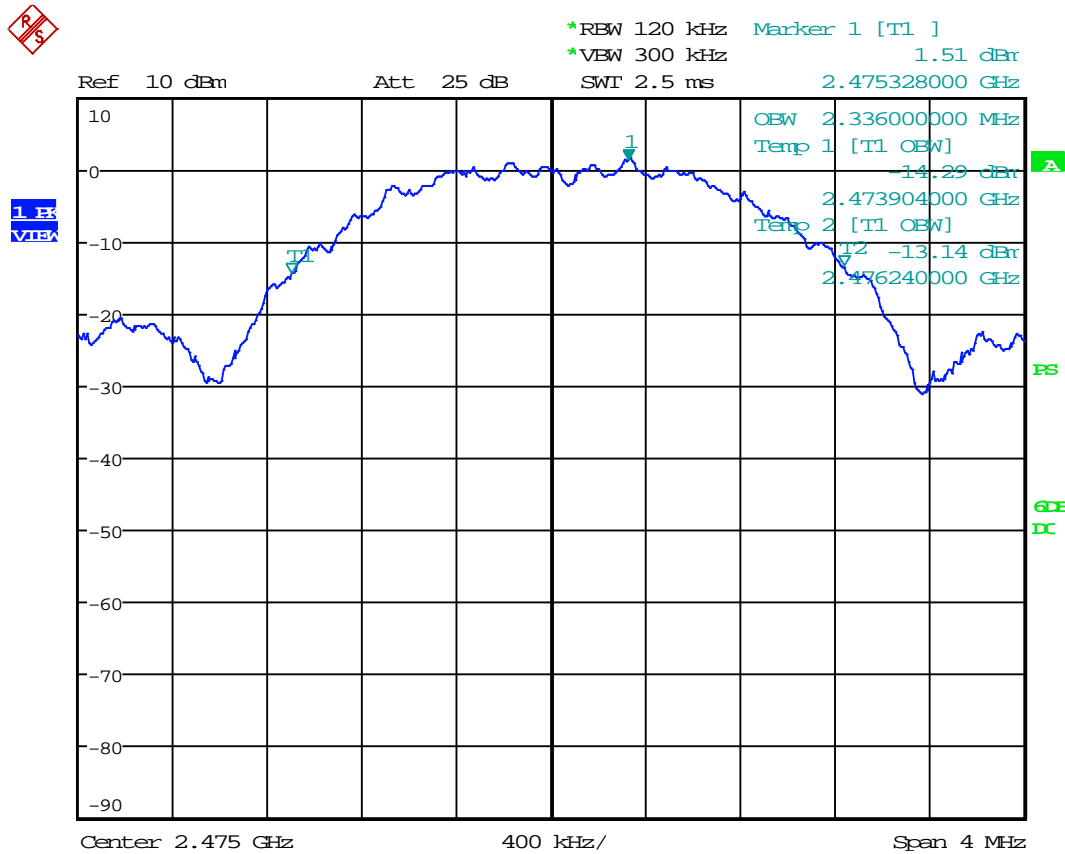

Date: 15.MAR.2017 11:10:44

Figure 7 – 99% Power Bandwidth = 2.34 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Appendix A

7 Test Plan

This test report is intended to follow this test plan outlined here in unless otherwise stated in this here report. The following test plan will give details on product information, standards to be used, test set ups and refer to TUV test procedures. The test procedures will give the steps to be taken when performing the stated test. The product information below came via client, product manual, product itself and or the internet.

7.1 General Information

Client	Airgas USA, LLC
Address	180 Sandbank Road
Address	Cheshire, Connecticut 06410
Contact Person	Robert Shock
Telephone	203-272-5800 x222
Fax	203-250-6842
e-mail	Rob.Shock@airgas.com

7.2 Product Name

Cylinder Asset Monitor (CAM)

7.3 Model(s) Name

CAM Wi-Fi Concentrator

7.4 Equipment Under Test (EUT) Description

CAM system consists of 2 main components:

- CAM Pressure Remote
- CAM Wi-Fi Concentrator
- The Pressure Remote is typically connected to a regulator of a compressed gas cylinder and acquires cylinder pressure, voltage, and temperature data. It then sends this data to the CAM Wi-Fi Concentrator. The CAM Pressure Remote under test has the model number CAM_PR.
- The CAM Wi-Fi Concentrator collects and forwards the data acquired to the Airgas Cloud Services Database. This device connects to the end users Wi-Fi Access Point (AP) and “Remote” while displaying the current connectivity and time.
- The CAM Wi-Fi Concentrator under test has the model number CC – WF25.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

7.5 Test Preparation

Please refer to the *Technical Description – Concentrator* document for details of the test setup, configuration, and execution.

Please refer to user manual for instructions on how to operate the CAM Wi-Fi Concentrator and CAM Pressure Remote.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.