



# RF - TEST REPORT

- Human Exposure -

**Type / Model Name** : KNX-T6.1-1.2 / High-Capacity X-Tag

**Product Description** : Tracking Tag

**Applicant** : KINEXON Inc.

**Address** : 200 S Wacker Dr Suite 3100

CHICAGO, IL 60606, U.S.A.

**Manufacturer** : Kinexon GmbH

**Address** : Schellingstraße 35

80799 MÜNCHEN, GERMANY

|   |  |
|---|--|
| <p><b>Test Result</b> according to the standards listed in clause 1 test standards:</p> | <p style="text-align: center;"><b>POSITIVE</b></p> |
|---|--|

|  |   |
|--|---|
| <p><b>Test Report No. :</b>      <b>80115860-04 Rev2</b></p> | <p style="text-align: center;">22. September 2022<br/>Date of issue</p> |
|--|---|



Deutsche  
Akkreditierungsstelle  
D-PL-12030-01-03  
D-PL-12030-01-04

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

# Contents

|          |   |                  |
|----------|---|------------------|
| <b>1</b> | <b><u>TEST STANDARDS</u></b>                                      | <b><u>3</u></b>  |
| <b>2</b> | <b><u>EQUIPMENT UNDER TEST</u></b>                                | <b><u>4</u></b>  |
| 2.1      | Information provided by the Client                                | 4                |
| 2.2      | Sampling  | 4                |
| 2.3      | Photo documentation of the EUT – Detailed photos see ATTACHMENT A | 4                |
| 2.4      | Equipment type, category  | 4                |
| 2.5      | Short description of the equipment under test (EUT)               | 4                |
| 2.6      | Variants of the EUT   | 4                |
| 2.7      | Operation frequency and channel plan                              | 4                |
| 2.8      | Transmit operating modes  | 4                |
| 2.9      | Antennas  | 5                |
| 2.10     | Power supply system utilised                                      | 5                |
| <b>3</b> | <b><u>TEST RESULT SUMMARY</u></b>                                 | <b><u>6</u></b>  |
| 3.1      | Revision history of test report                                   | 6                |
| 3.2      | Final assessment  | 6                |
| <b>4</b> | <b><u>TEST ENVIRONMENT</u></b>                                    | <b><u>7</u></b>  |
| 4.1      | Address of the test laboratory                                    | 7                |
| 4.2      | Environmental conditions  | 7                |
| 4.3      | Statement of the measurement uncertainty                          | 7                |
| <b>5</b> | <b><u>HUMAN EXPOSURE</u></b>                                      | <b><u>8</u></b>  |
| 5.1      | SAR test exclusion considerations                                 | 8                |
| 5.2      | Exemption limits for routine evaluation - SAR evaluation          | 10               |
| <b>6</b> | <b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>                 | <b><u>12</u></b> |

ATTACHMENT A as separate supplement

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

# 1 TEST STANDARDS

The tests were performed according to following standards:

## FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

|   |  |
|---|--|
| Part 1, Subpart I, Section 1.1310                                 | Radiofrequency radiation exposure limits   |
| Part 1, Subpart 2, Section 2.1091                                 | Radiofrequency radiation exposure evaluation: <b>mobile devices</b> .  |
| Part 1, Subpart 2, Section 2.1093                                 | Radiofrequency radiation exposure evaluation: <b>portable devices</b> .  |
| KDB 447498 D01  | RF Exposure procedures and equipment authorisation policies for mobile and portable devices, November 29, 2021.  |
| RSS-102, issue 5, March 2015, incl. Amendment 1, February 2021    | Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)   |
| Health Canada Notice, January 2021                                | Localized human exposure limits for radiofrequency fields in the range of 6 GHz to 300 GHz   |
| ISED Notice 2016-DRS0001<br>September 20, 2016, updated July 2020 | Applicability of Latest FCC RF Exposure KDB Procedures and Other Procedures  |
| ISED Notice 2021-DRS0005<br>July 20, 2021                         | Introduction of an interim exemption limit for routine localized power density evaluations of transmitters operating in the 6 – 30 GHz frequency range       |
| ANSI C95.1: 2005  | IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz                                   |
| ETSI TR 100 028 V1.3.1: 2001-03,                                  | Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the Measurement of Mobile Radio Equipment Characteristics—Part 1 and Part 2 |

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

## **2 EQUIPMENT UNDER TEST**

### **2.1 Information provided by the Client**

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

### **2.2 Sampling**

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according to his/her instructions.

### **2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A**

### **2.4 Equipment type, category**

portable UWB device

### **2.5 Short description of the equipment under test (EUT)**

The KINEXON tracking tag facilitates tracking of objects with a KINEXON RTLS system (Real Time Locating System).

Number of tested samples: 1  
Serial number: 255036  
Firmware version: production\_tate\_xtag\_workertag\_v5

### **2.6 Variants of the EUT**

There are no variants.

### **2.7 Operation frequency and channel plan**

Operating range 1: 5925 MHz to 7250 MHz

### **2.8 Transmit operating modes**

Modulation: variable pulse position modulation (PPM) in combination with binary phase shift keying (BPSK)

Data rate: 6.8 Mbit/s

**FCC ID: 2ALC5-KNX-HCTAG1**

**IC: 25557-KNXHCTAG1**

**2.9 Antennas**

The following antenna shall be used with the EUT:

| Number | Characteristic | Model number   | Plug       | f-range (GHz) | Gain at 6.5 GHz (dBi) |
|--------|----------------|----------------|------------|---------------|-----------------------|
| 1      | Omni           | Decawave WB001 | None (PCB) | 3.5 – 7.0     | 3.7                   |

**2.10 Power supply system utilised**

Power supply voltage (operating) : 3.1 V DC (internal battery)  
 Power supply voltage (nominal) : 3.0 V DC

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

### 3 TEST RESULT SUMMARY

| FCC Rule Part     | RSS Rule Part  | Description                  | Result         |
|-------------------|----------------|------------------------------|----------------|
| KDB 447498, 7.1   | RSS 102, 2.5.2 | MPE                          | not applicable |
| KDB 447498, 4.3.1 | RSS 102, 2.5.1 | SAR exclusion consideration  | passed         |
| KDB 447498, 7.2   | RSS102, 3.2    | Co-location, Co-transmission | not applicable |

#### 3.1 Revision history of test report

| Test report No | Rev. | Issue Date        | Changes   |
|----------------|------|-------------------|---|
| 80115860-04    | 0    | 09 September 2022 | Initial test report                                   |
| 80115860-04    | 1    | 19 September 2022 | Applicant changed on page 1 of 12                     |
| 80115860-04    | 2    | 22 September 2022 | Correction of IC Certification Number in heading line |

The test report with the highest revision number replaces the previous test reports.

#### 3.2 Final assessment

The equipment under test fulfills the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 08 August 2022

Testing concluded on : 08 August 2022

Checked by:

Tested by:

\_\_\_\_\_  
Klaus Gegenfurtner  
Teamleader Radio

\_\_\_\_\_  
Franz-Xaver Schrettenbrunner  
Radio Team

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

**CSA Group Bayern GmbH  
Ohmstrasse 1-4  
94342 STRASSKIRCHEN  
GERMANY**

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

### 4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor  $k = 2$ . The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ( $w = 0$ ).

Details can be found in the procedure CSA\_B\_V50\_29.

## 5 HUMAN EXPOSURE

### 5.1 SAR test exclusion considerations


For test instruments and accessories used see section 6 Part HE.

#### 5.1.1 Applicable standard

According to RF exposure guidance:

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

#### 5.1.2 Photo documentation of the test set-up

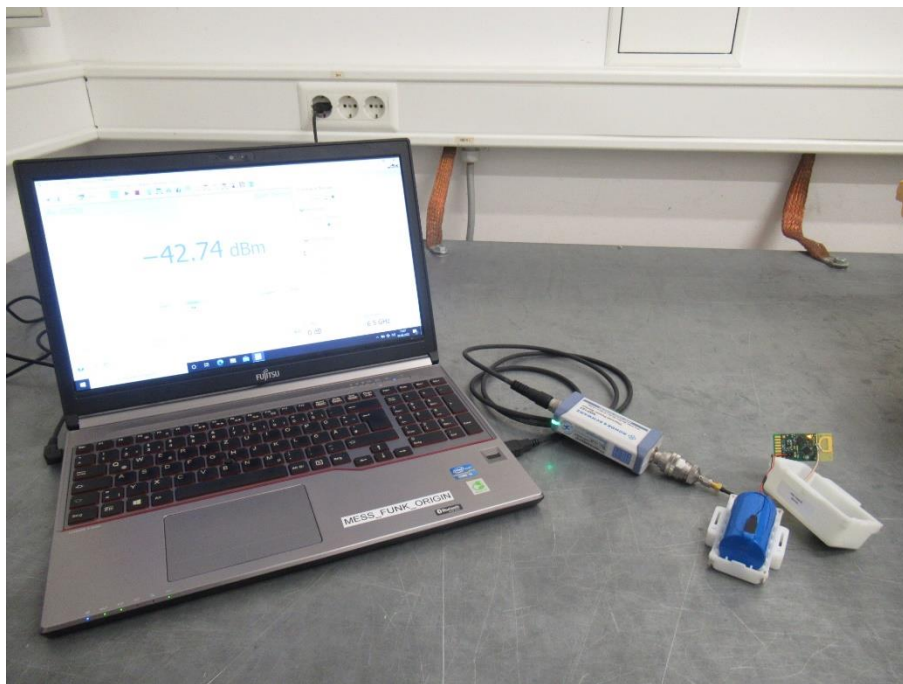

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.



FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

**5.1.3 Determination of the standalone SAR test exclusion threshold**

The max conducted average power of the EUT is measured with a power meter.

|                           |           |               |
|---------------------------|-----------|---------------|
| Averaged conducted power: | -42.7 dBm | 0.054 $\mu$ W |
| Tune-up tolerance:        | + 2.0 dB  |               |
| Antenna gain:             | + 3.7 dB  |               |
| EIRP:                     | -37.0 dBm | 0.20 $\mu$ W  |

According to KDB 447498D04 Interim, clause 2.1.2: Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Conclusion: The EUT meets the SAR test exclusion criterion in a standalone configuration.

The requirements are **FULFILLED**.

**Remarks:** None.

---

---

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

**FCC ID: 2ALC5-KNX-HCTAG1**
**IC: 25557-KNXHCTAG1**


## 5.2 Exemption limits for routine evaluation - SAR evaluation

For test instruments and accessories used see section 6 Part HE.

### 5.2.1 Applicable standard

Notice 2021-DRS0005 – “Introduction of an interim exemption limit for routine localized power density evaluations of transmitters operating in the 6 –30 GHz frequency range”, published on July 20, 2021.

### 5.2.2 Photo documentation of the test set-up

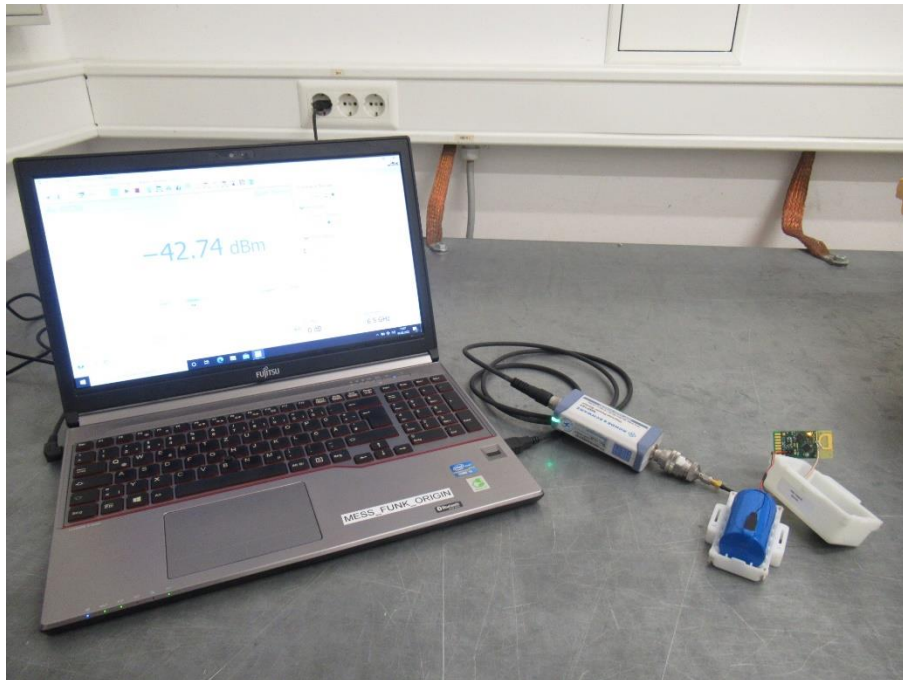

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

**5.2.3 Conclusion according to RSS-102.**

The max conducted average power of the EUT is measured with a power meter.

|                           |           |               |
|---------------------------|-----------|---------------|
| Averaged conducted power: | -42.7 dBm | 0.054 $\mu$ W |
| Tune-up tolerance:        | + 2.0 dB  |               |
| Antenna gain:             | + 3.7 dB  |               |
| EIRP:                     | -37.0 dBm | 0.20 $\mu$ W  |

According to Notice 2021-DRS0005, July 20, 2021 (Introduction of an interim exemption limit for routine localized power density evaluations of transmitters operating in the 6 –30 GHz frequency range):

“A transmitter producing emissions in the 6 –30 GHz frequency range, i.e. where the occupied bandwidth (99% emission bandwidth) is fully contained within this range, is exempt from routine LPD evaluation if the higher of the maximum six-minute time-averaged conducted power or equivalent isotropic radiated power (EIRP), adjusted for tune-up tolerance, is 1 mW (0 dBm) or lower.”

Conclusion: The EUT meets the SAR test exclusion criterion in a standalone configuration.

The requirements are **FULFILLED**.

Remarks: None.

---

---

FCC ID: 2ALC5-KNX-HCTAG1

IC: 25557-KNXHCTAG1

## 6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

| Test ID | Model Type | Equipment No.   | Next Calib. | Last Calib. | Next Verif. | Last Verif. |
|---------|------------|-----------------|-------------|-------------|-------------|-------------|
| HE      | NRP18T     | 02-02/07-19-001 | 28/10/2022  | 28/10/2021  |             |             |

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.