

TEST REPORT

Reference No. : WTS17S1194804E
FCC ID..... : 2ALCVER100102
Applicant : Emerson Radio Corp.
Address : 3 University Plaza, Suite 405, Hackensack, New Jersey, United States
Manufacturer : The same as above
Address : The same as above
Product : Alarm Clock Radio with Bluetooth and USB Charging
Model(s)..... : ER100102, ER100112, ER100122, ER100132
Standards : FCC CFR47 Part 15.247: 2016
Date of Receipt sample : 2017-11-09
Date of Test : 2017-11-10 to 2017-12-07
Date of Issue : 2017-12-08
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:

Jack Wen

Jack Wen / Test Engineer

Approved by:




Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.

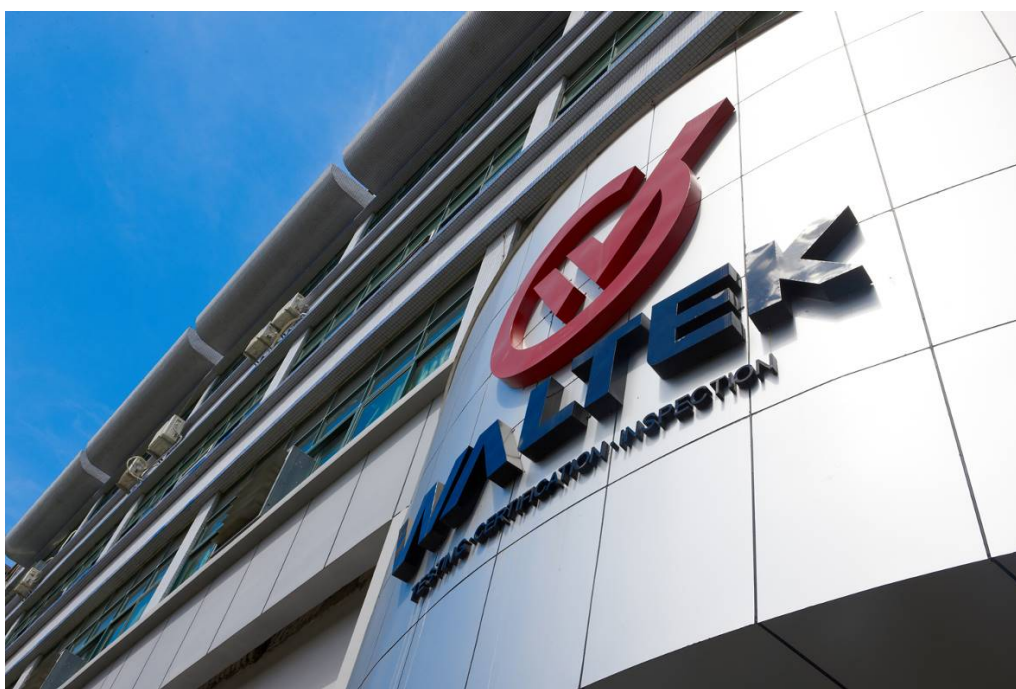

Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. IC Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
COVER PAGE	1
2 LABORATORIES INTRODUCTION	2
2.1 TEST FACILITY.....	3
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION	7
5.1 GENERAL DESCRIPTION OF E.U.T.....	7
5.2 DETAILS OF E.U.T.....	7
5.3 CHANNEL LIST.....	8
5.4 TEST MODE.....	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST.....	9
6.2 DESCRIPTION OF SUPPORT UNITS.....	10
6.3 MEASUREMENT UNCERTAINTY.....	10
6.4 SUBCONTRACTED.....	10
7 TEST SUMMARY	11
8 CONDUCTED EMISSION	12
8.1 E.U.T. OPERATION.....	12
8.2 EUT SETUP.....	12
8.3 MEASUREMENT DESCRIPTION.....	12
8.4 CONDUCTED EMISSION TEST RESULT.....	13
9 RADIATED SPURIOUS EMISSIONS	15
9.1 EUT OPERATION.....	15
9.2 TEST SETUP.....	16
9.3 SPECTRUM ANALYZER SETUP.....	17
9.4 TEST PROCEDURE.....	18
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
9.6 SUMMARY OF TEST RESULTS.....	19
10 CONDUCTED SPURIOUS EMISSIONS	22
10.1 TEST PROCEDURE.....	22
10.2 TEST RESULT.....	23
11 BAND EDGE MEASUREMENT	32
11.1 TEST PROCEDURE.....	32
11.2 TEST RESULT.....	33
12 BANDWIDTH MEASUREMENT	39
12.1 TEST PROCEDURE.....	39
12.2 TEST RESULT.....	39
13 MAXIMUM PEAK OUTPUT POWER	45
13.1 TEST PROCEDURE.....	45
13.2 TEST RESULT.....	45
14 HOPPING CHANNEL SEPARATION	51
14.1 TEST PROCEDURE.....	51
14.2 TEST RESULT.....	51
15 NUMBER OF HOPPING FREQUENCY	57

15.1	TEST PROCEDURE.....	57
15.2	TEST RESULT	57
16	DWELL TIME	59
16.1	TEST PROCEDURE.....	59
16.2	TEST RESULT	59
17	ANTENNA REQUIREMENT	65
18	RF EXPOSURE.....	66
19	PHOTOGRAPHS -TEST SETUP PHOTOS	67
19.1	PHOTOGRAPH-CONDUCTED EMISSIONS TEST SETUP	67
19.2	PHOTOGRAPH-RADIATED EMISSIONS.....	67
20	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	70
20.1	EUT – EXTERNAL PHOTOS	70
20.2	EUT – INTERNAL PHOTOS.....	74

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S1194804E	2017-11-09	2017-11-10 to 2017-12-07	2017-12-08	original	-	Valid

5 General Information

5.1 General Description of E.U.T

Product	: Alarm Clock Radio with Bluetooth and USB Charging
Model(s)	:ER100102, ER100112, ER100122, ER100132
Model Description	: Only the model names are different

5.2 Details of E.U.T

Operation Frequency	: 2402~2480MHz
The Lowest Oscillator:	: 32.768kHz
Max. RF output power	: -1.82dBm
Type of Modulation	: GFSK, Pi/4 DQPSK, 8DPSK
Bluetooth Version	: V3.0
Antenna installation	: PCB Printed Antenna
Antenna Gain	: 0dBi
Ratings	Output: DC 5V 2.1A total (Adapter: Input: AC120V, 60Hz 17W)

5.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

5.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Note: The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The product was full-charged when was testing.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions (Waltek Services (Shenzhen) Co., Ltd.)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	Laplace	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions (Waltek Services (Shenzhen) Co., Ltd.)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-04-29	2018-04-28
2	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-04-09	2018-04-08
3	Broadband Pre-amplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions (Waltek Services (Shenzhen) Co., Ltd.)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-13	2018-04-12
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-04-09	2018-04-08
4	Amplifier	ANRITSU	MH648A	M43381	2017-04-13	2018-04-12
5	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12
6	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
RF Conducted Testing (Waltek Services (Shenzhen) Co., Ltd.)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSL6	100959	2017-09-12	2018-09-11
2	Coaxial Cable	Top	10Hz-30GHz	-	2017-09-12	2018-09-11
3	Antenna Connector*	Realacc	45RSm	-	2017-09-12	2018-09-11

“*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10m Semi-anechoic Chamber for Radiation Emissions (Above18GHz) (Shenzhen Balun Technology Co.,Ltd.)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSV-40	101544	2017-02-17	2018-02-16
2	Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2017-01-07	2018-01-06
3	Amplifier	COM-MV	ZLNA-18-40G-021	1608001	2017-02-17	2018-02-16
4	Cable	Top	18-40GHz	-	2017-02-17	2018-02-16

6.2 Description of Support Units

Equipment	Manufacturer	Model No.
/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

N/A

7 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	Pass
Conducted Spurious emissions	15.247(d)	Pass
Band edge	15.247(d) 15.205(a)	Pass
Conduct Emission	15.207	Pass
Bandwidth	15.247(a)(1)	Pass
Maximum Peak Output Power	15.247(b)(1)	Pass
Frequency Separation	15.247(a)(1)	Pass
Number of Hopping Frequency	15.247(a)(1)(iii)	Pass
Dwell time	15.247(a)(1)(iii)	Pass
Antenna Requirement	15.203	Pass
RF Exposure	1.1307(b)(1)	Pass
Note: Pass=Compliance; Fail=Not Compliance; N/A=Not Applicable.		

8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB μ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	50	60
5 to 30	60	50

8.1 E.U.T. Operation

Operating Environment :

Temperature:	22.8 °C
Humidity:	52.6 % RH
Atmospheric Pressure:	101.2kPa


Test Voltage: AC 120V, 60Hz

EUT Operation :

The test was performed in transmitting mode, the worst test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

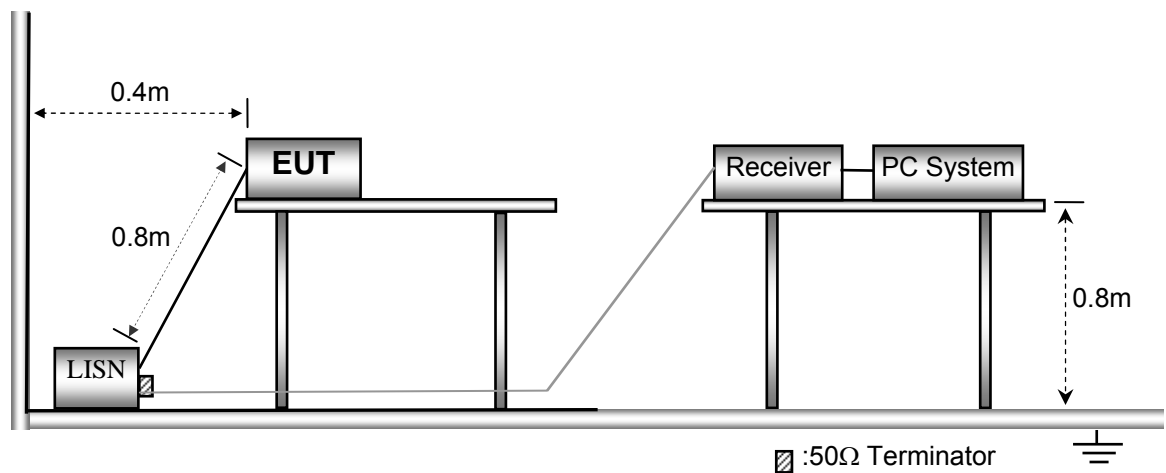


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: only the worst data (GFSK modulation Low channel mode) were reported.

Live line:

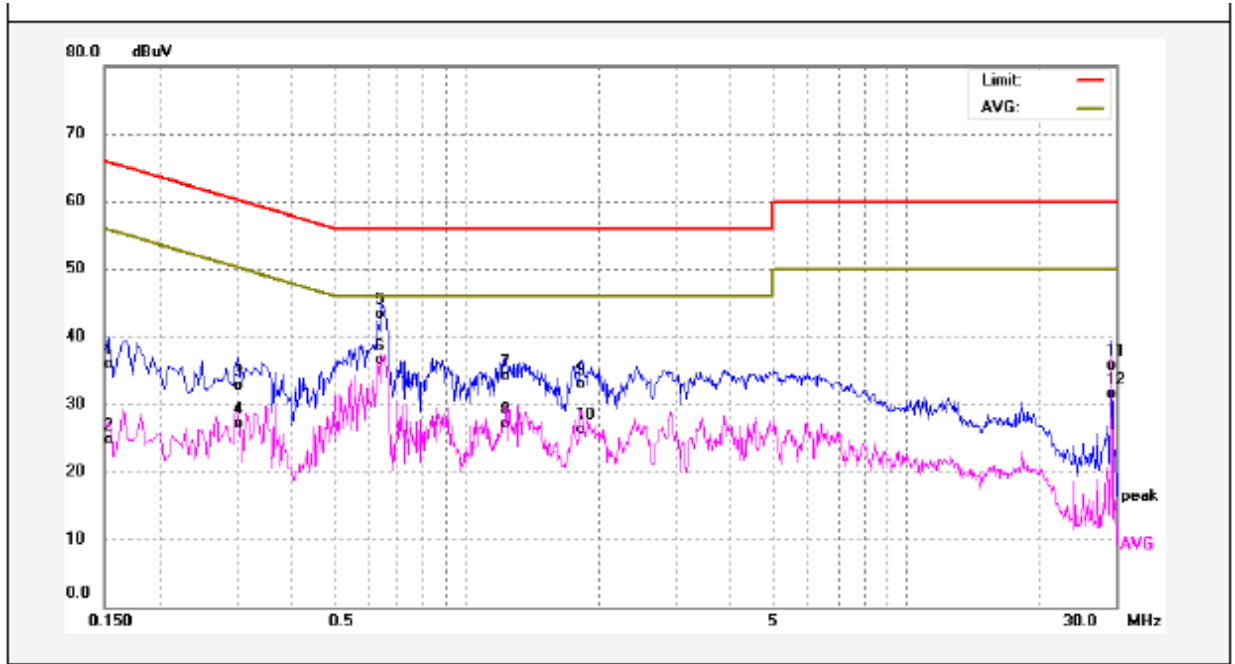

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	25.81	10.02	35.83	65.78	-29.95	QP	
2	0.1539	14.65	10.02	24.67	55.78	-31.11	AVG	
3	0.3020	22.77	9.98	32.75	60.19	-27.44	QP	
4	0.3020	17.13	9.98	27.11	50.19	-23.08	AVG	
5	0.6419	33.26	10.08	43.34	56.00	-12.66	QP	
6	0.6419	26.46	10.08	36.54	46.00	-9.46	AVG	
7	1.2180	23.81	10.39	34.20	56.00	-21.80	QP	
8	1.2180	16.66	10.39	27.05	46.00	-18.95	AVG	
9	1.8220	22.66	10.18	32.84	56.00	-23.16	QP	
10	1.8220	16.16	10.18	26.34	46.00	-19.66	AVG	
11	29.2580	25.05	10.65	35.70	60.00	-24.30	QP	
12	29.2580	20.82	10.65	31.47	50.00	-18.53	AVG	

Neutral line:

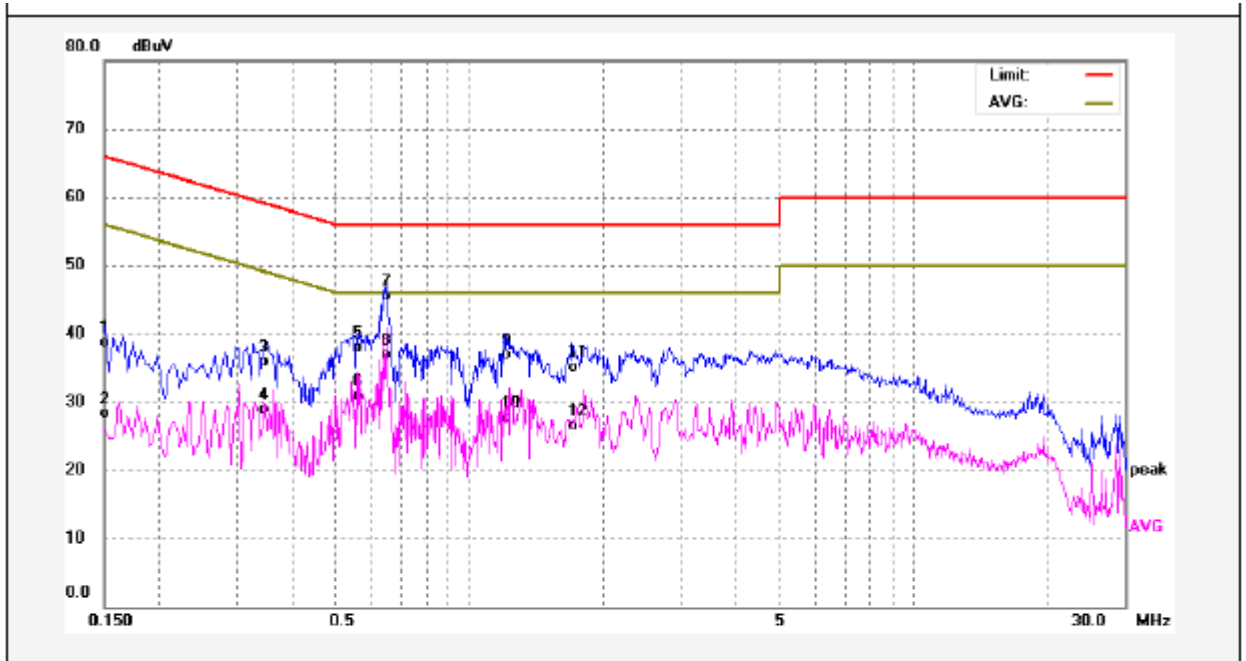

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	28.67	10.06	38.73	65.99	-27.26	QP	
2	0.1500	18.33	10.06	28.39	55.99	-27.60	AVG	
3	0.3500	25.87	10.06	35.93	58.96	-23.03	QP	
4	0.3500	18.94	10.06	29.00	48.96	-19.96	AVG	
5	0.5660	27.86	10.07	37.93	56.00	-18.07	QP	
6	0.5660	20.76	10.07	30.83	46.00	-15.17	AVG	
7	0.6500	35.52	10.08	45.60	56.00	-10.40	QP	
8	0.6500	26.86	10.08	36.94	46.00	-9.06	AVG	
9	1.1980	26.52	10.41	36.93	56.00	-19.07	QP	
10	1.1980	17.22	10.41	27.63	46.00	-18.37	AVG	
11	1.7020	24.84	10.17	35.01	56.00	-20.99	QP	
12	1.7020	16.34	10.17	26.51	46.00	-19.49	AVG	

9 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa

Test Voltage: DC 3.7V


EUT Operation :

The test was performed in transmitting mode.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

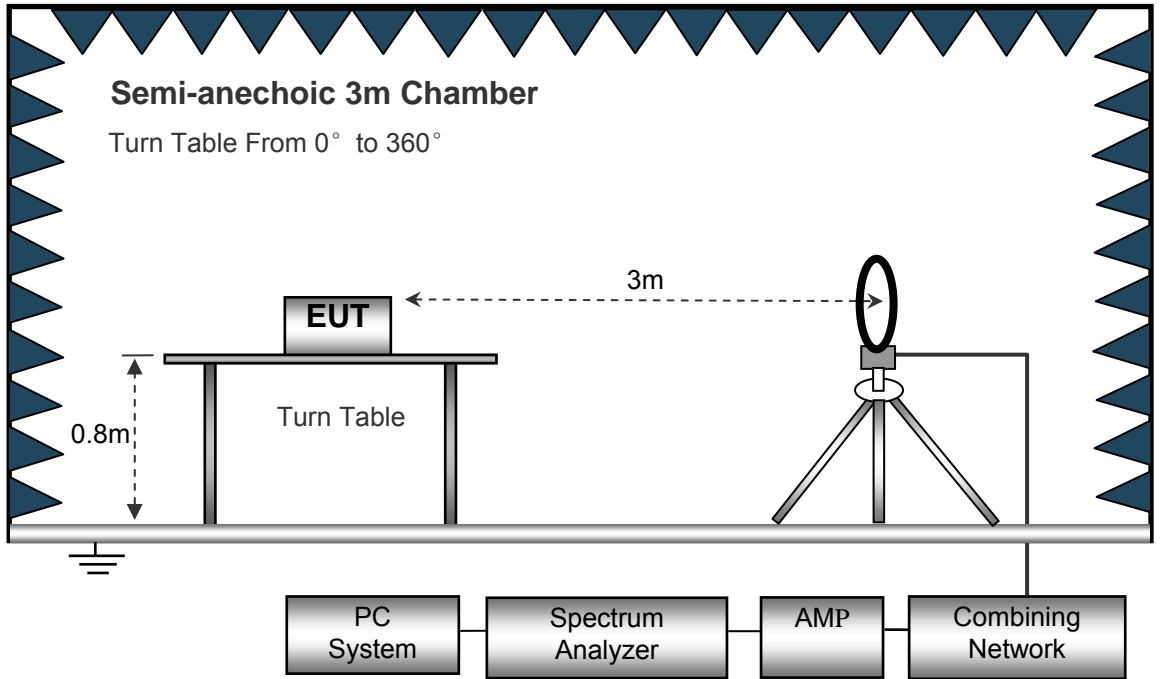

The test setup for emission measurement from 30 MHz to 1 GHz.

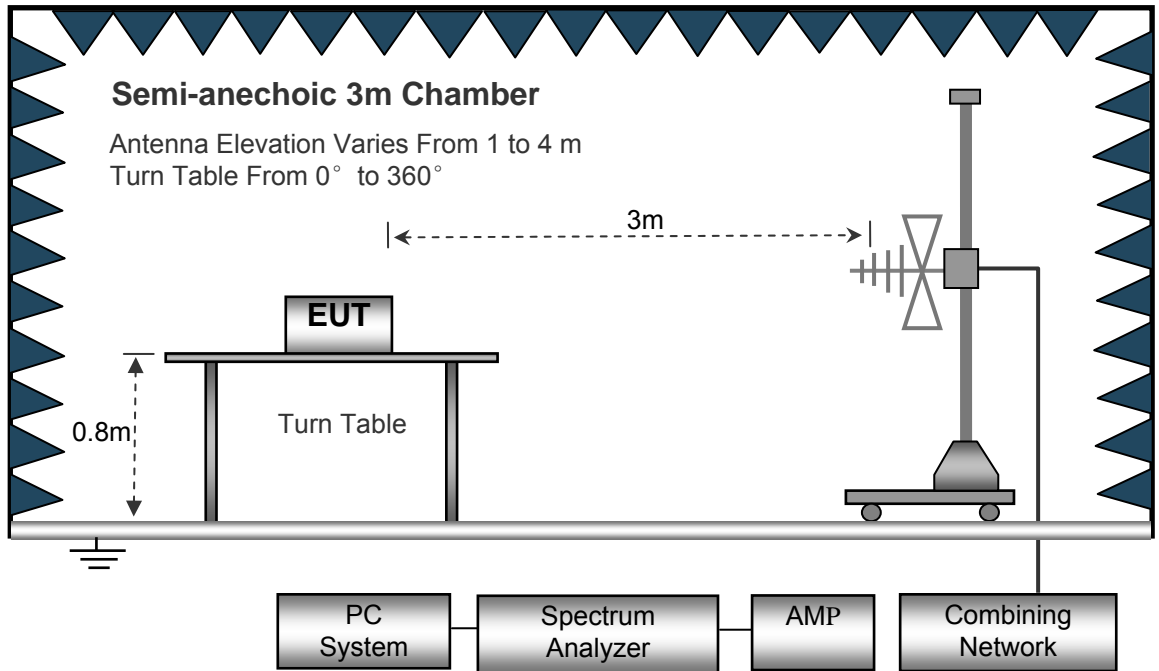

The test setup for emission measurement above 1 GHz.

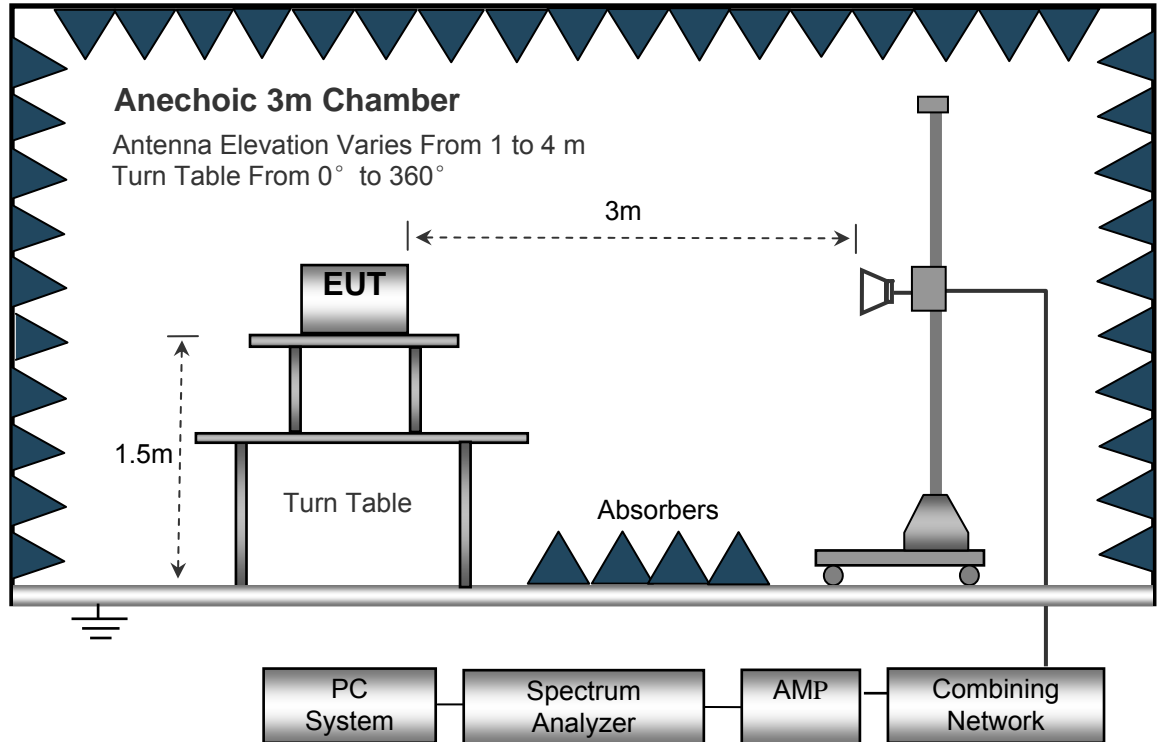

9.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth..... 10kHz
- Video Bandwidth..... 10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
236.20	36.27	QP	273	1.5	H	-13.35	22.92	46.00	-23.08
236.20	41.02	QP	124	1.1	V	-13.35	27.67	46.00	-18.33
4804.00	46.59	PK	301	1.9	V	-1.06	45.53	74.00	-28.47
4804.00	43.08	Ave	301	1.9	V	-1.06	42.02	54.00	-11.98
7206.00	40.12	PK	295	1.5	H	1.33	41.45	74.00	-32.55
7206.00	35.23	Ave	295	1.5	H	1.33	36.56	54.00	-17.44
2340.96	45.57	PK	83	2.0	V	-13.19	32.38	74.00	-41.62
2340.96	39.18	Ave	83	2.0	V	-13.19	25.99	54.00	-28.01
2376.76	43.74	PK	337	1.4	H	-13.14	30.60	74.00	-43.40
2376.76	37.39	Ave	337	1.4	H	-13.14	24.25	54.00	-29.75
2495.41	42.89	PK	67	1.2	V	-13.08	29.81	74.00	-44.19
2495.41	37.05	Ave	67	1.2	V	-13.08	23.97	54.00	-30.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel									
82.94	42.66	QP	288	1.7	H	-13.35	29.31	40.00	-10.69
236.20	37.49	QP	117	2.0	H	-13.35	24.14	46.00	-21.86
236.20	40.20	QP	127	1.5	V	-13.35	26.85	46.00	-19.15
4882.00	46.01	PK	123	1.1	V	-0.62	45.39	74.00	-28.61
4882.00	43.83	Ave	123	1.1	V	-0.62	43.21	54.00	-10.79
7323.00	40.15	PK	117	1.4	H	2.21	42.36	74.00	-31.64
7323.00	35.63	Ave	117	1.4	H	2.21	37.84	54.00	-16.16
2321.43	46.75	PK	63	1.5	V	-13.19	33.56	74.00	-40.44
2321.43	38.01	Ave	63	1.5	V	-13.19	24.82	54.00	-29.18
2374.95	42.71	PK	331	1.4	H	-13.14	29.57	74.00	-44.43
2374.95	37.89	Ave	331	1.4	H	-13.14	24.75	54.00	-29.25
2499.66	44.02	PK	6	1.9	V	-13.08	30.94	74.00	-43.06

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel									
236.20	37.46	QP	118	1.1	H	-13.35	24.11	46.00	-21.89
236.20	40.86	QP	315	1.6	V	-13.35	27.51	46.00	-18.49
4960.00	45.58	PK	151	1.2	V	-0.24	45.34	74.00	-28.66
4960.00	42.11	Ave	151	1.2	V	-0.24	41.87	54.00	-12.13
7440.00	40.08	PK	209	1.7	H	2.84	42.92	74.00	-31.08
7440.00	36.76	Ave	209	1.7	H	2.84	39.60	54.00	-14.40
2346.98	46.93	PK	125	1.6	V	-13.19	33.74	74.00	-40.26
2346.98	39.95	Ave	125	1.6	V	-13.19	26.76	54.00	-27.24
2384.88	44.43	PK	262	1.8	H	-13.14	31.29	74.00	-42.71
2384.88	37.70	Ave	262	1.8	H	-13.14	24.56	54.00	-29.44
2494.07	44.31	PK	217	1.8	V	-13.08	31.23	74.00	-42.77
2494.07	36.23	Ave	217	1.8	V	-13.08	23.15	54.00	-30.85

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded.

10 Conducted Spurious Emissions



Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 DTS Meas Guidance v04, April 5, 2017
Test Result: PASS
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


10.2 Test Result

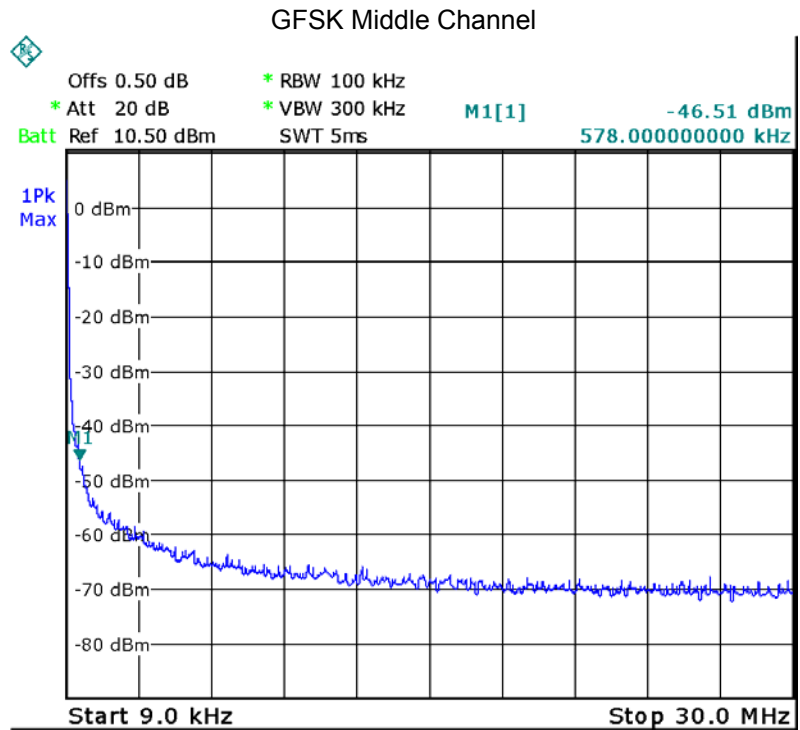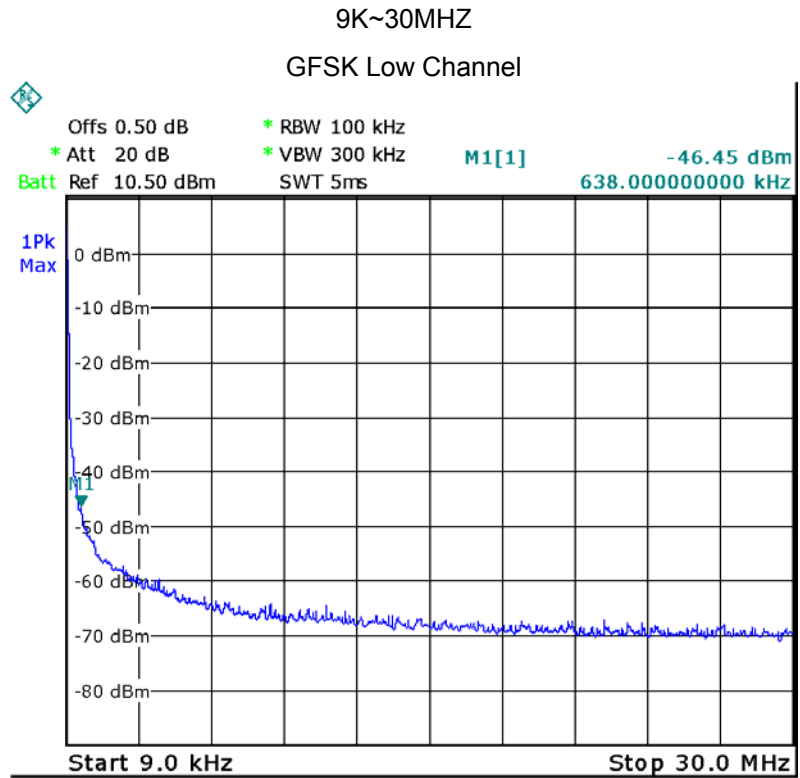


GFSK High Channel

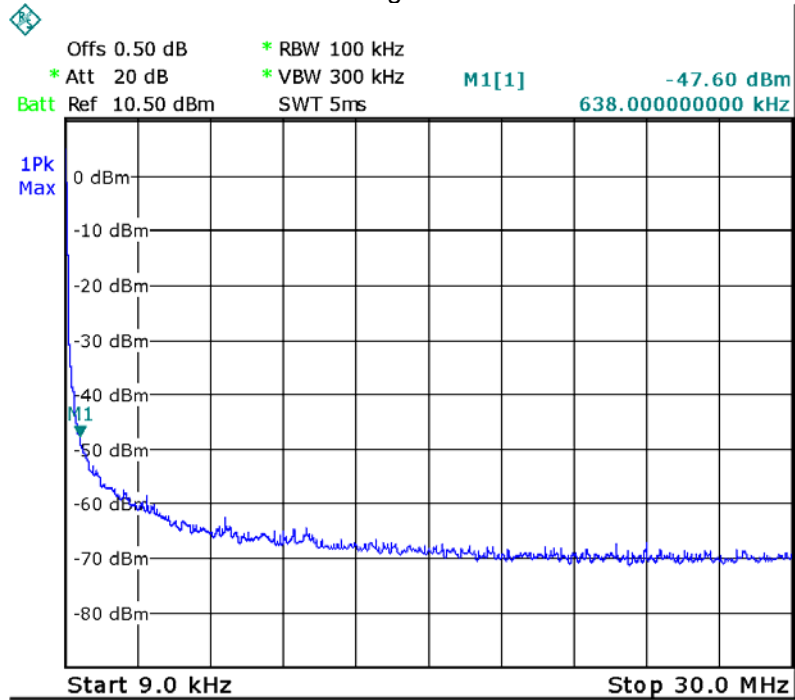


$\pi/4$ DQPSK Low Channel


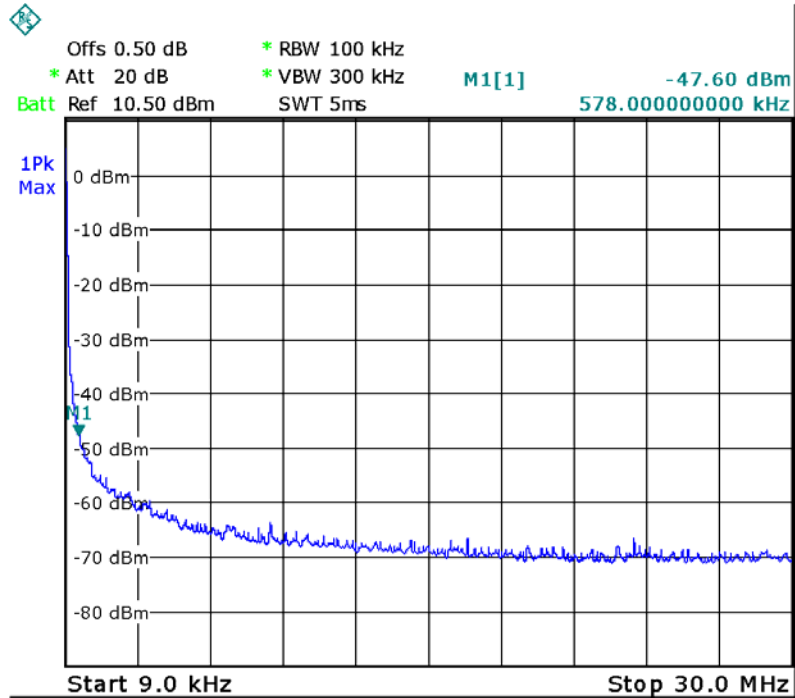



$\pi/4$ DQPSK Middle Channel

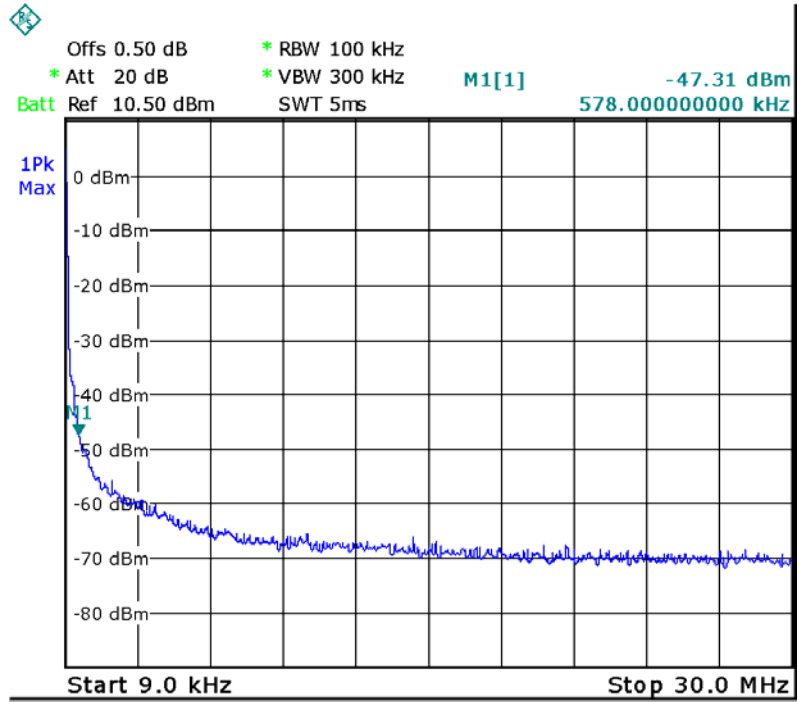

$\pi/4$ DQPSK High Channel

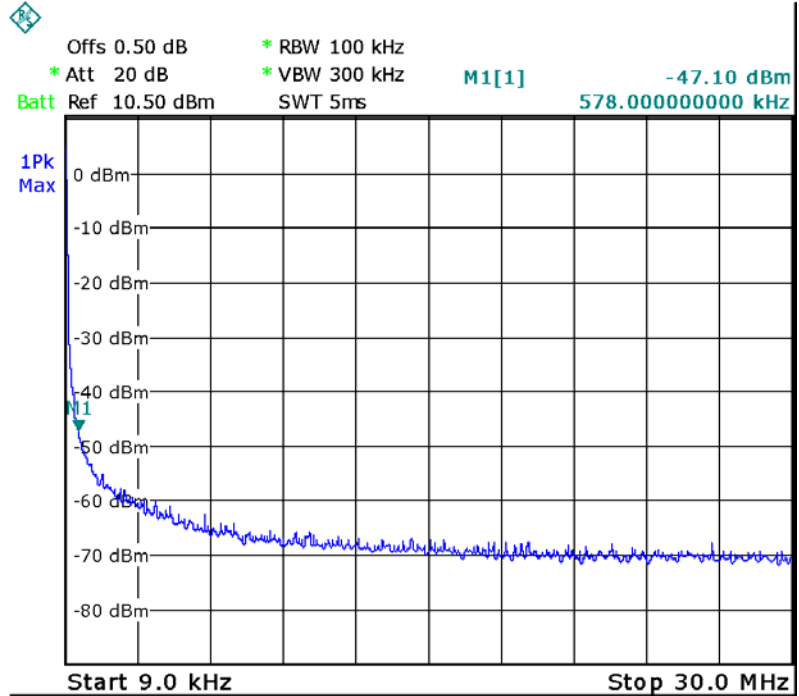

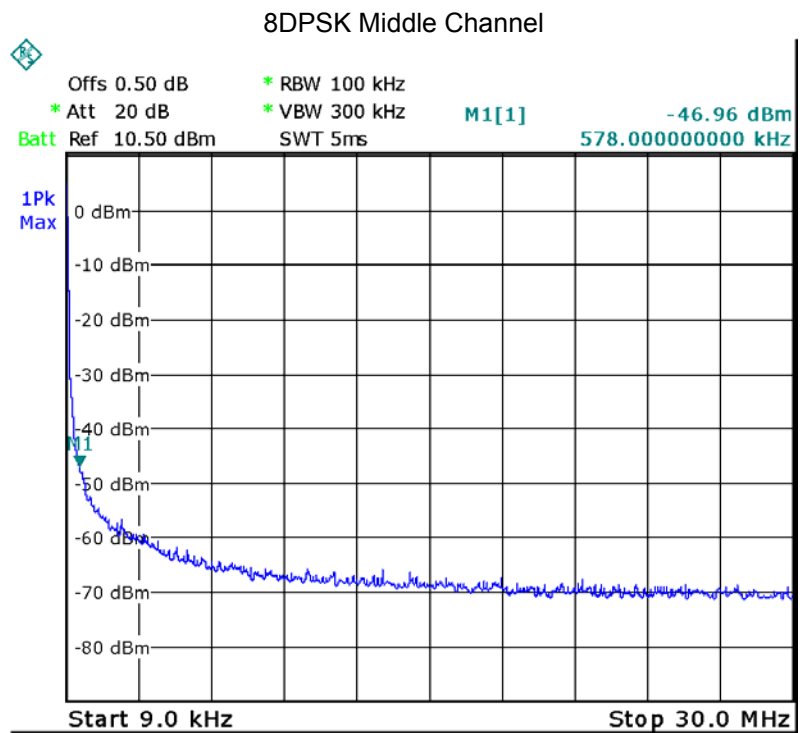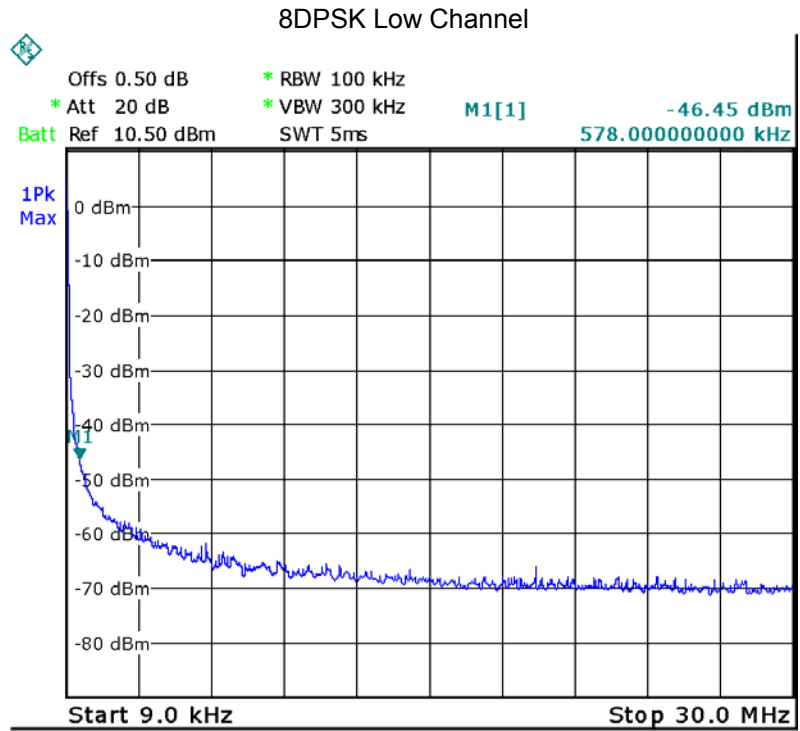


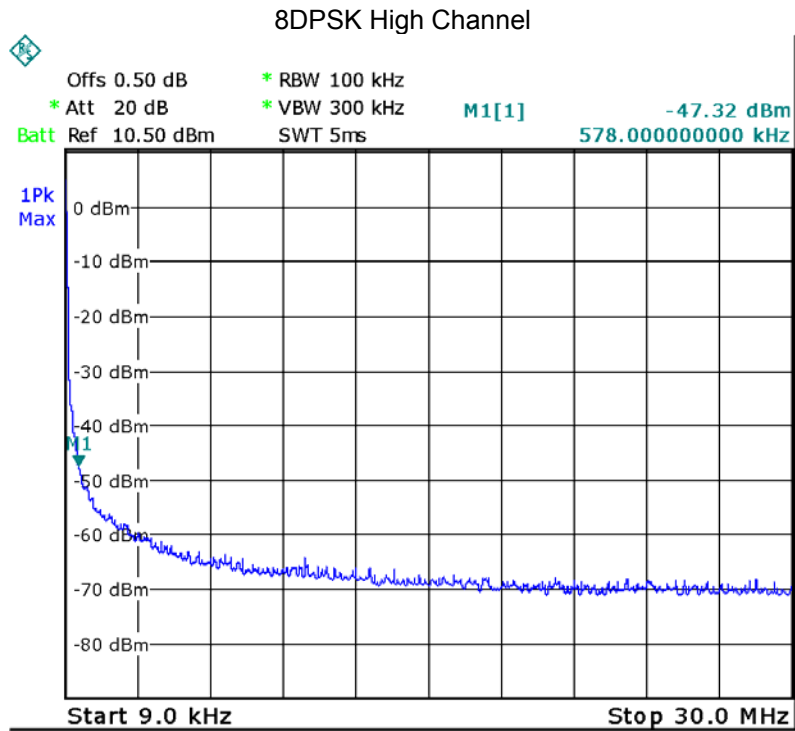

Above 30MHz


GFSK Low Channel

Fundamental

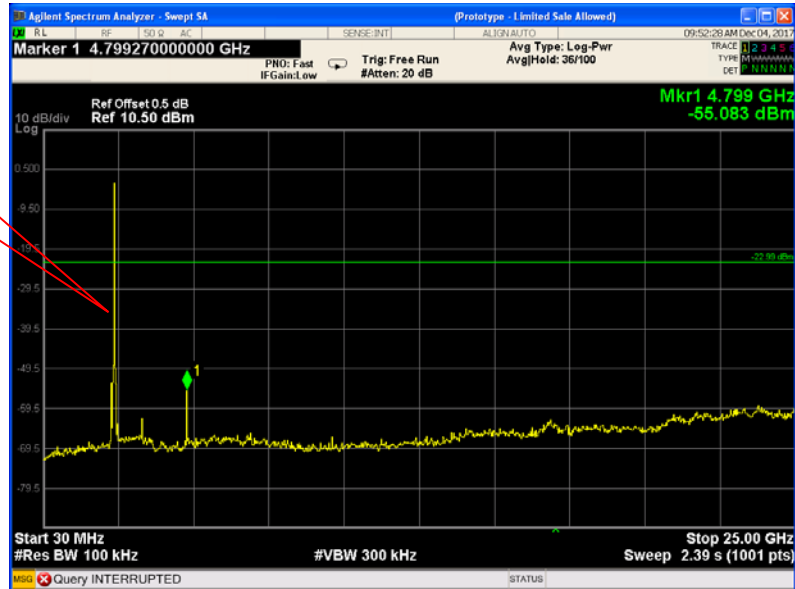


GFSK Middle Channel

Fundamental

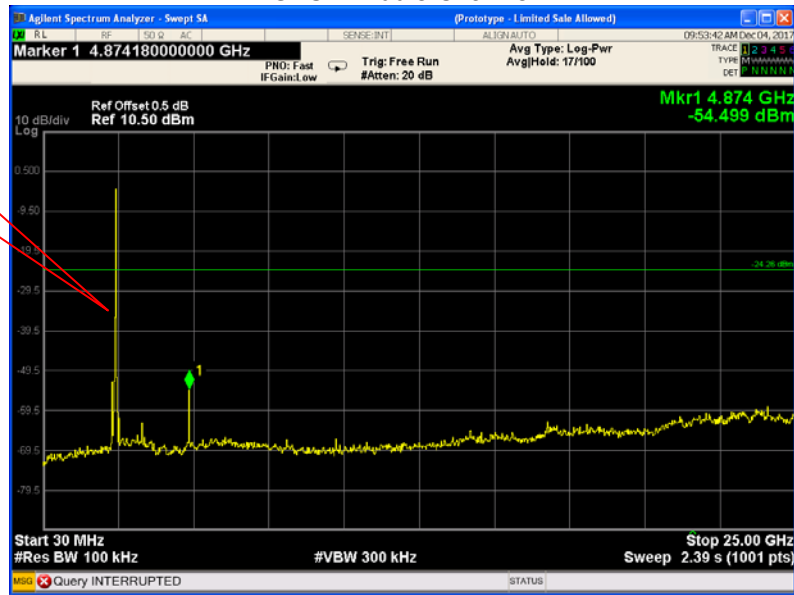


GFSK High Channel

Fundamental

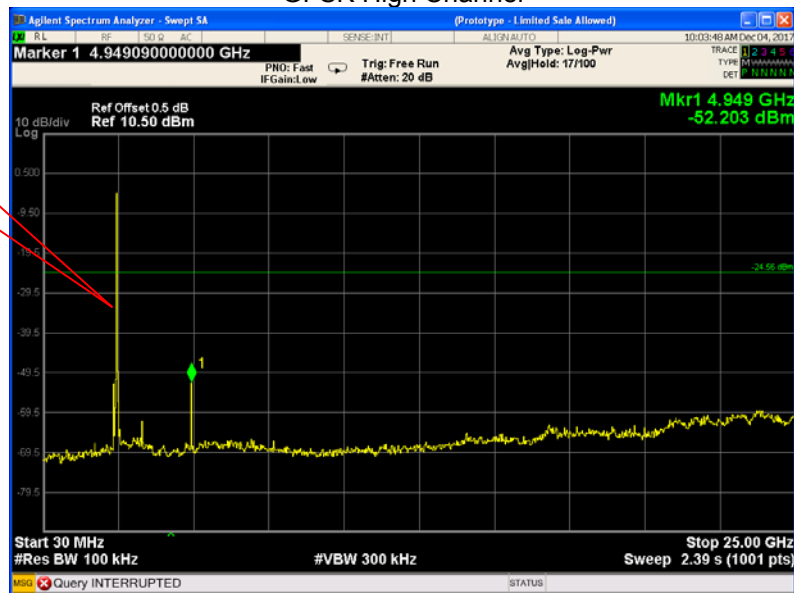


$\pi/4$ DQPSK Low Channel

Fundamental

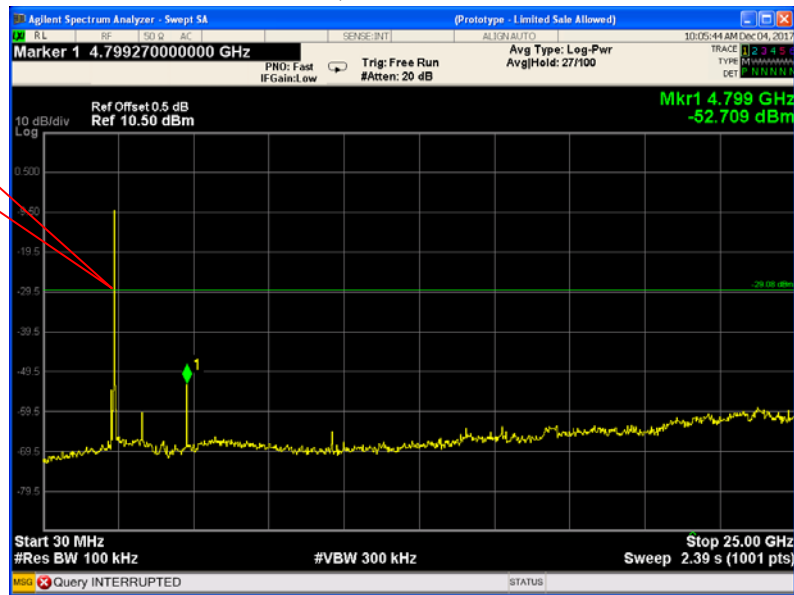

$\pi/4$ DQPSK Middle Channel

Fundamental

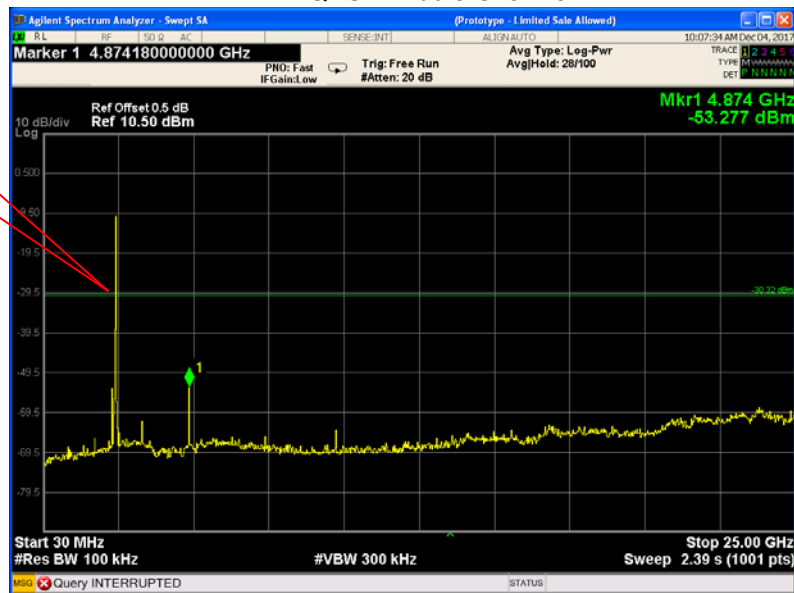


$\pi/4$ DQPSK High Channel

Fundamental




8DPSK Low Channel

Fundamental

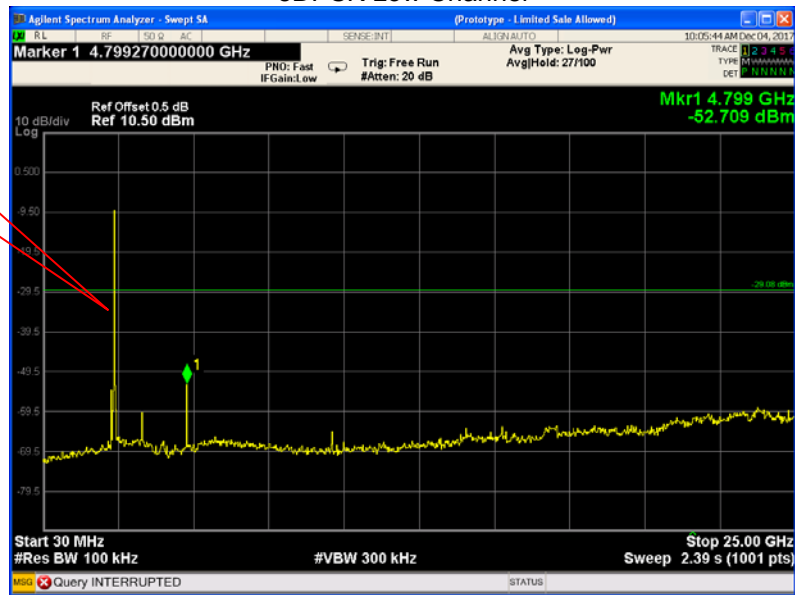


8DPSK Middle Channel

Fundamental

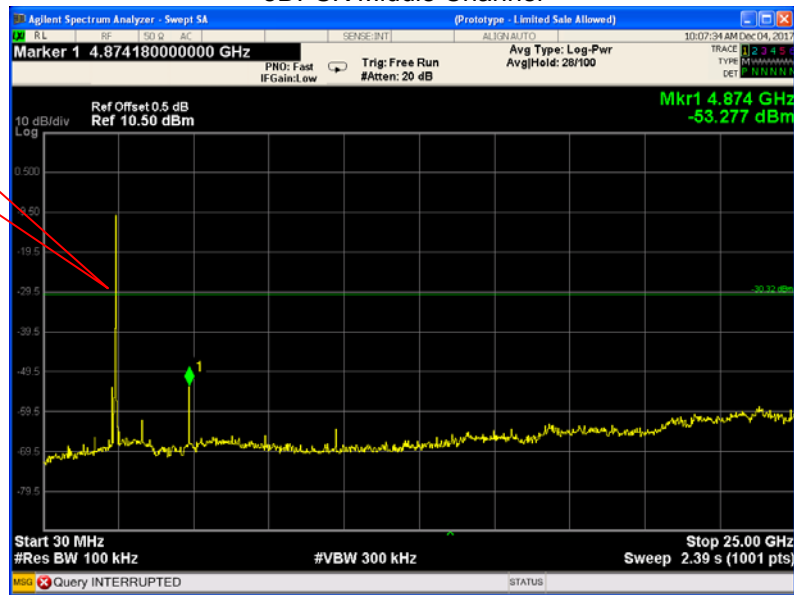

8DPSK High Channel

Fundamental

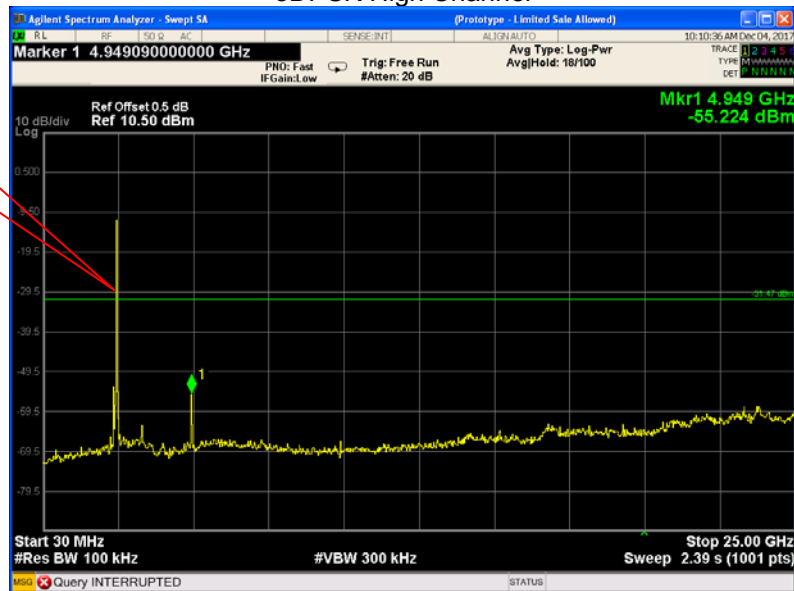



11 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


11.2 Test Result

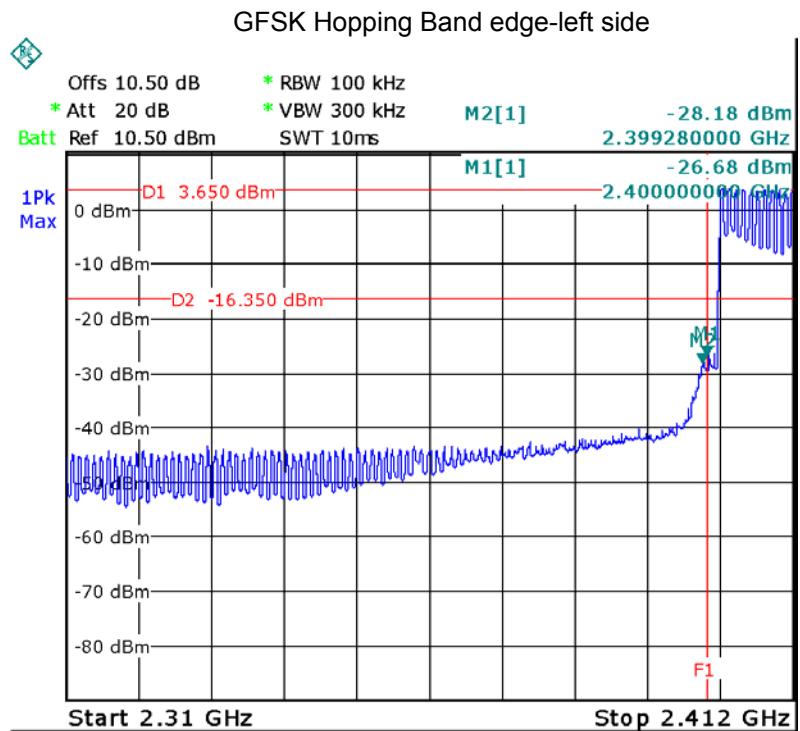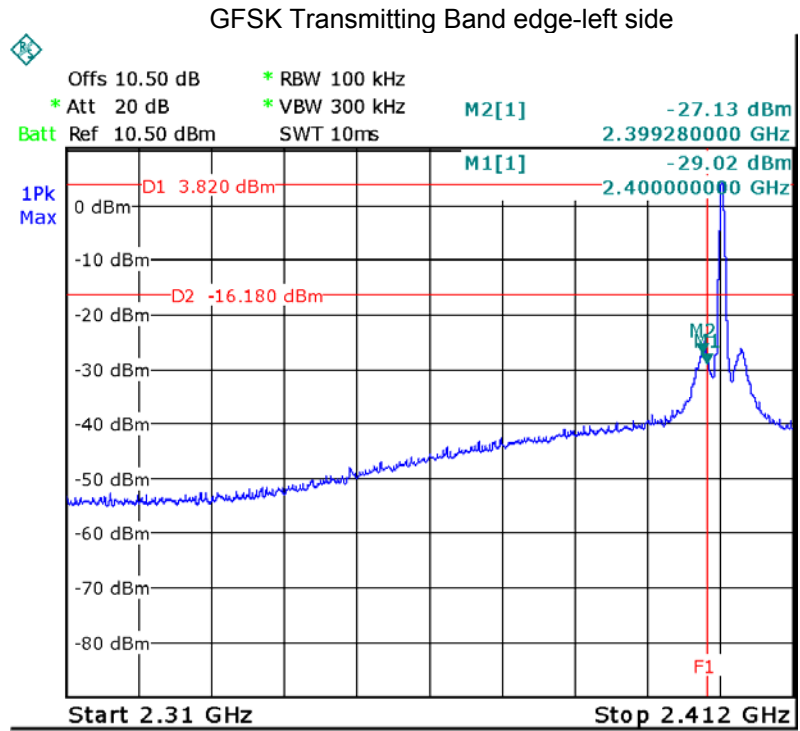

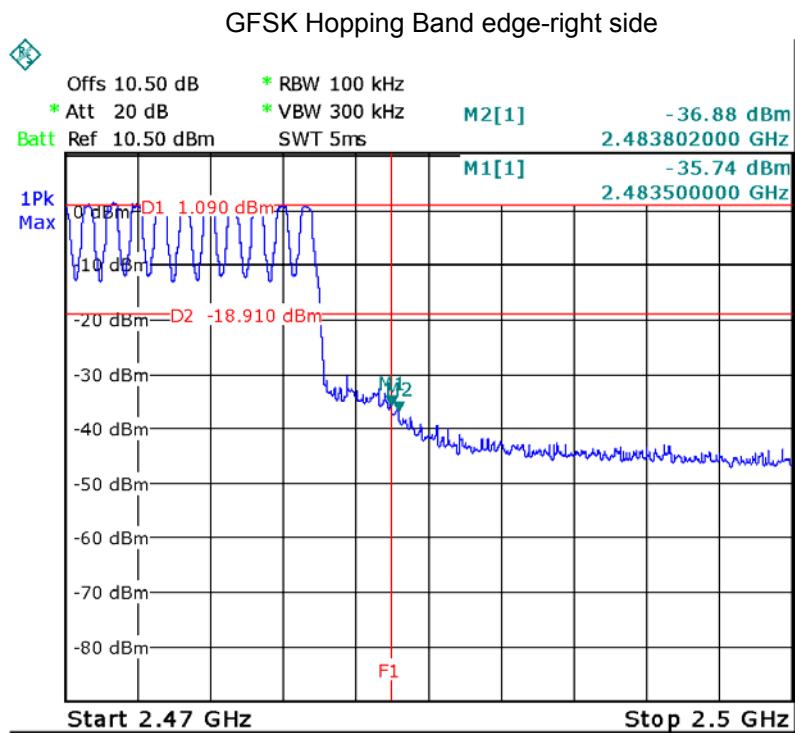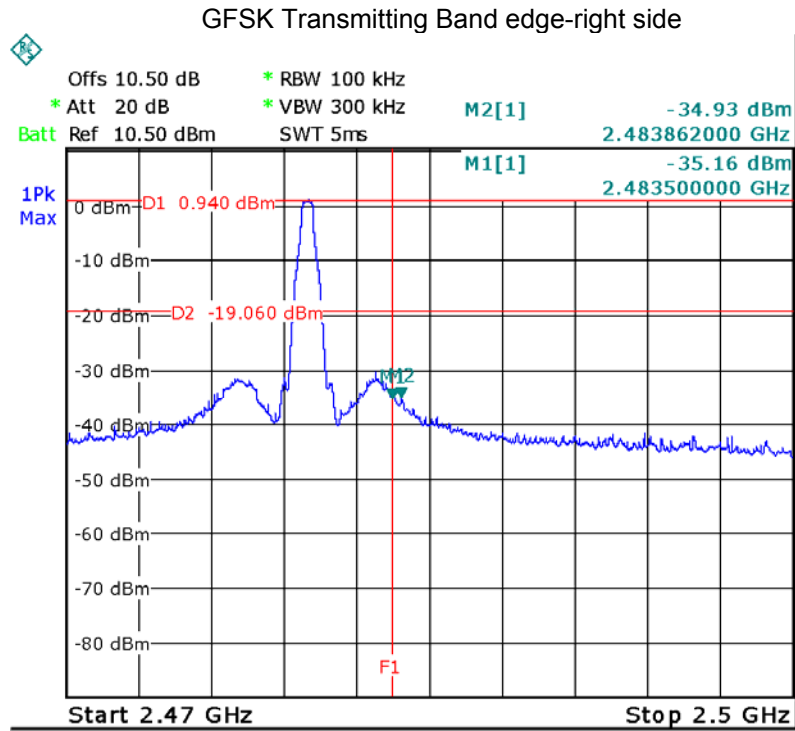


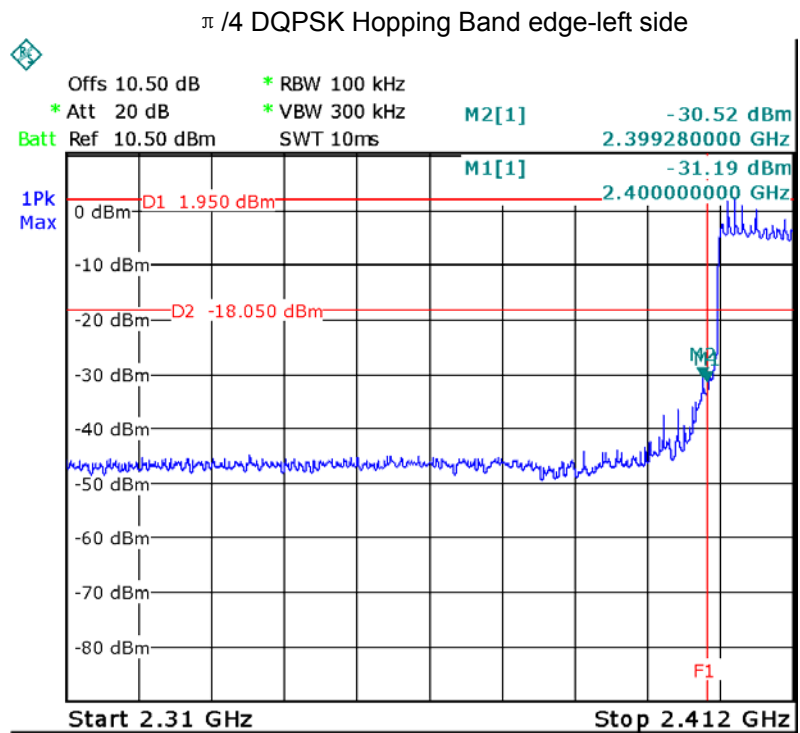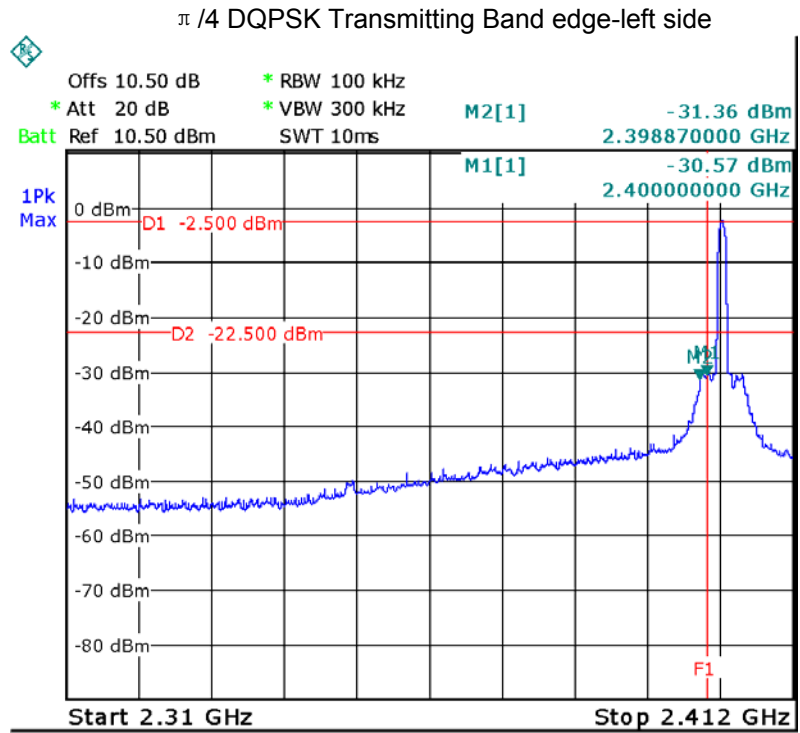


$\pi/4$ DQPSK Transmitting Band edge-right side

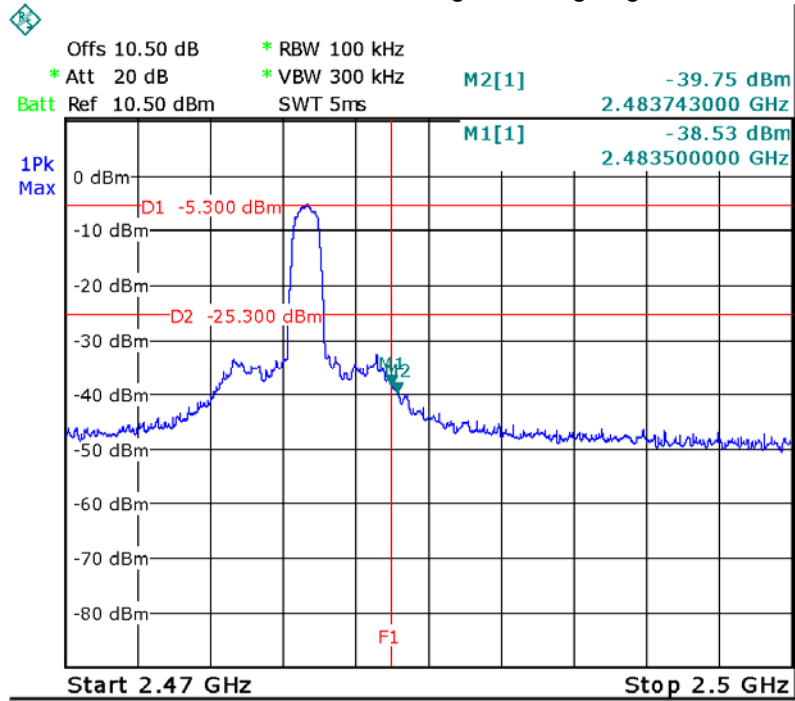


$\pi/4$ DQPSK Hopping Band edge-right side

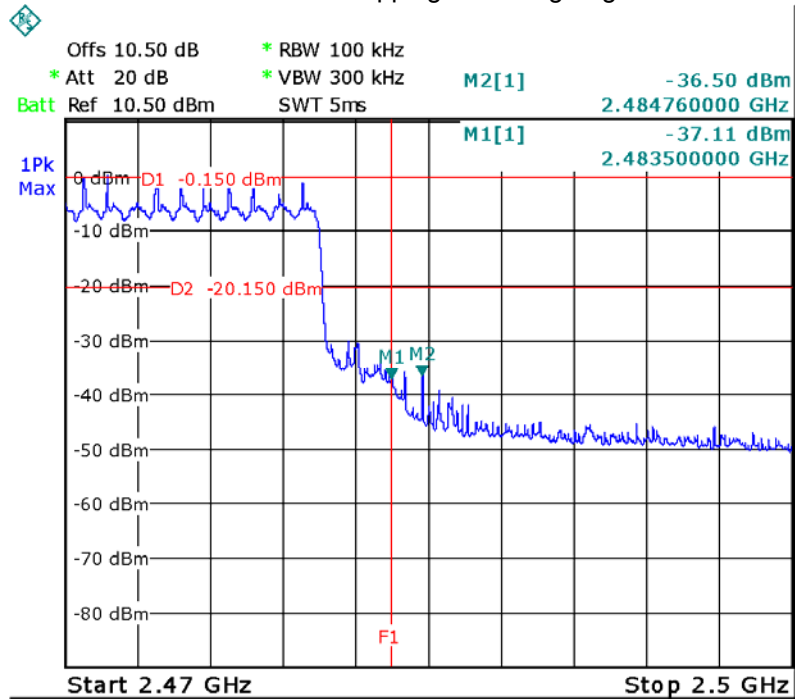


8DPSK Transmitting Band edge-left side

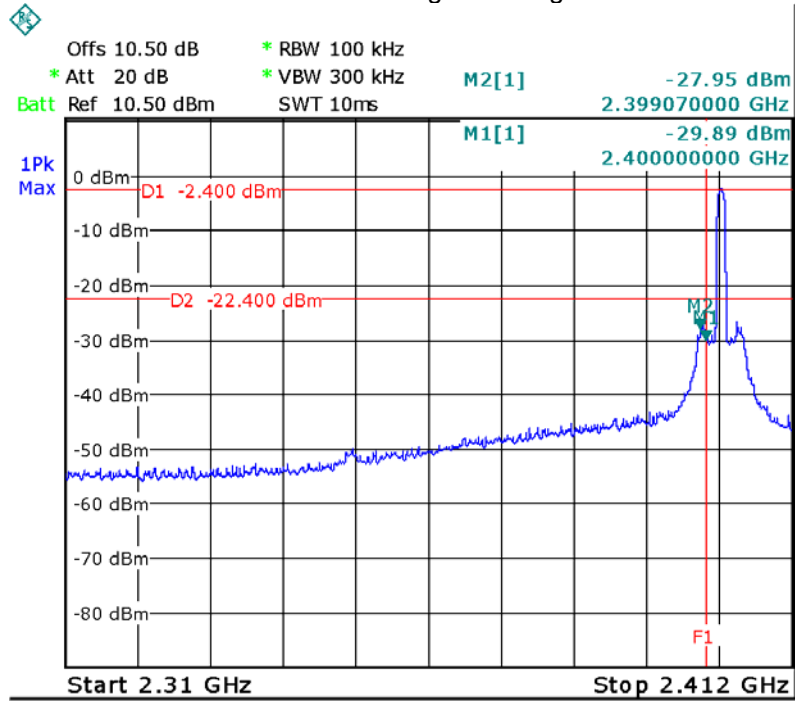


8DPSK Hopping Band edge-left side

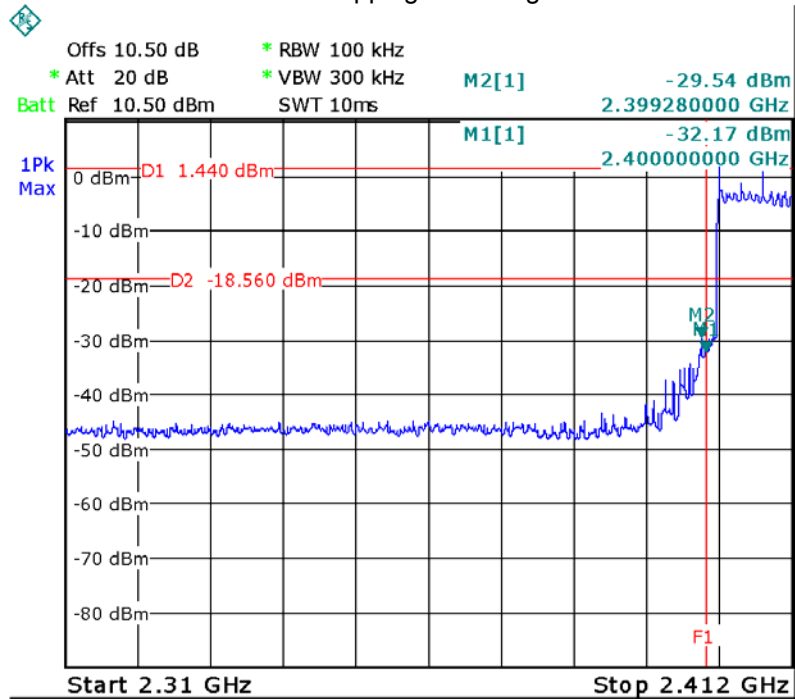

8DPSK Transmitting Band edge-right side

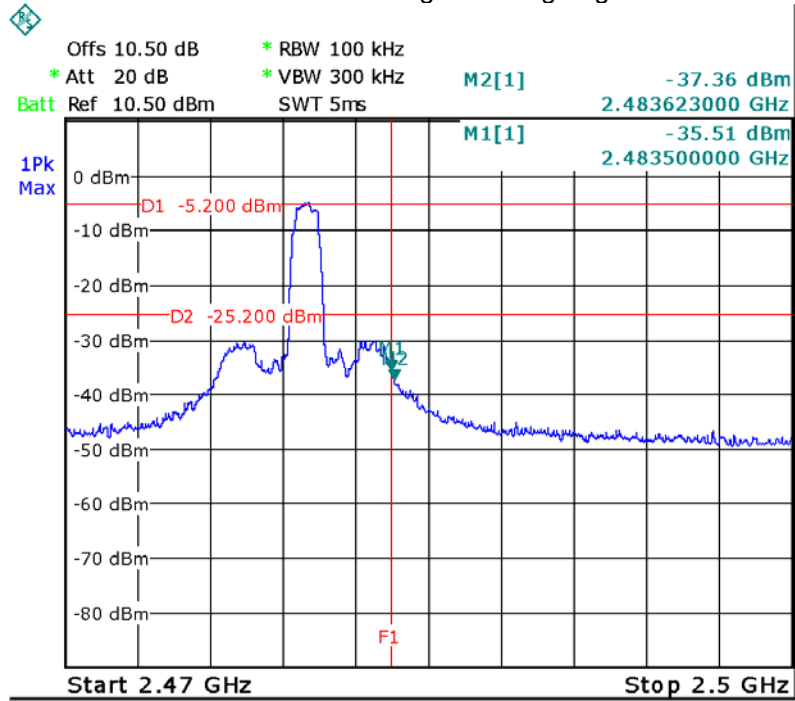

8DPSK Hopping Band edge-right side

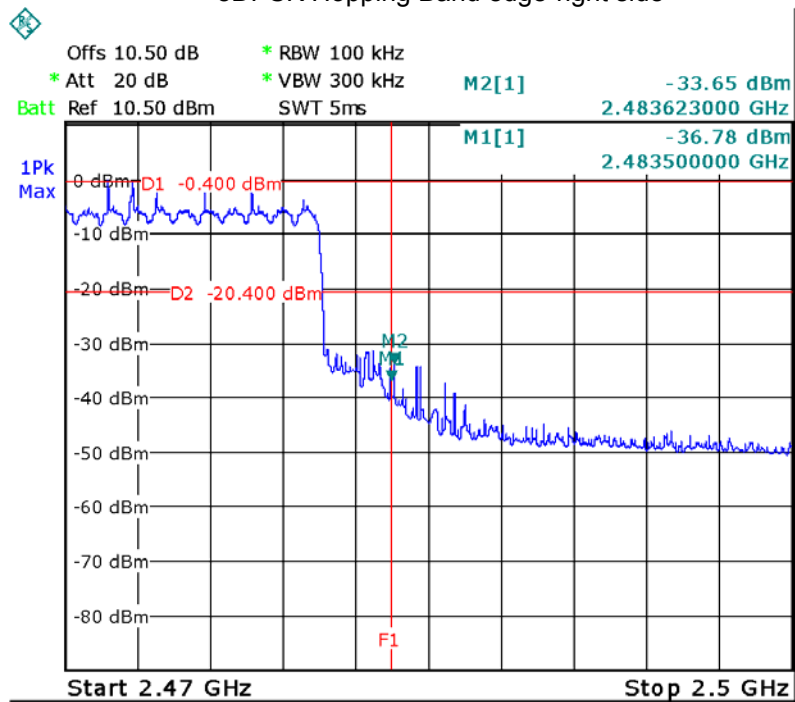

12 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10:2013

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

12.2 Test Result


Modulation	Test Channel	20dB Bandwidth(MHz)	99% Bandwidth(MHz)
GFSK	Low	1.090	1.521
GFSK	Middle	1.090	1.491
GFSK	High	1.090	1.341
$\pi/4$ DQPSK	Low	1.371	1.240
$\pi/4$ DQPSK	Middle	1.371	1.240
$\pi/4$ DQPSK	High	1.371	1.234
8DPSK	Low	1.347	1.226
8DPSK	Middle	1.347	1.228
8DPSK	High	1.347	1.228

Test plots


GFSK Low Channel

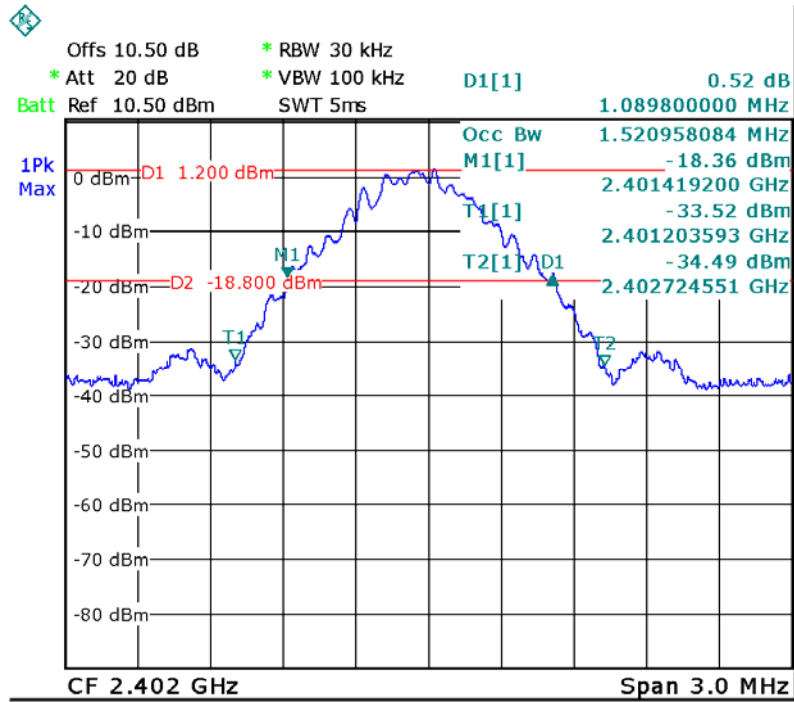


GFSK Middle Channel


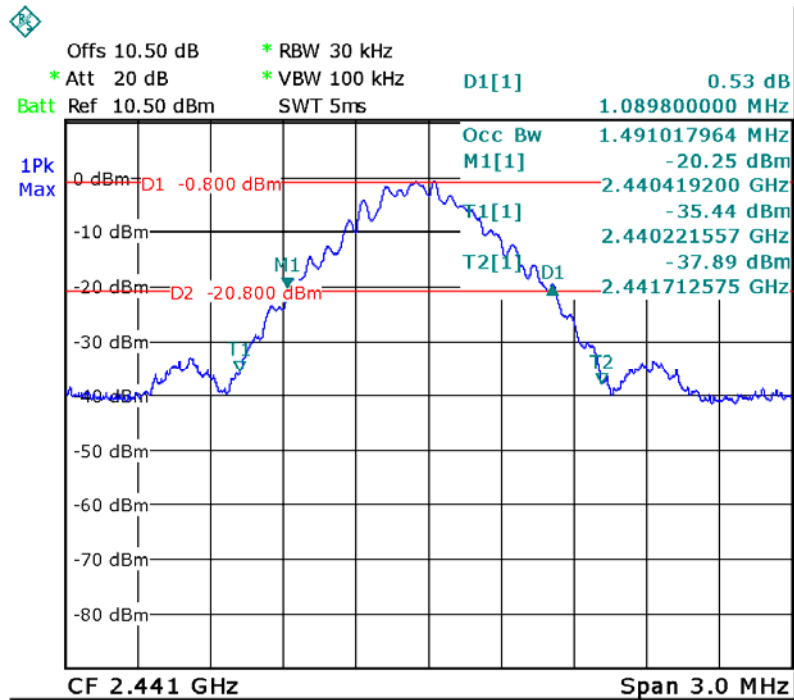


GFSK High Channel

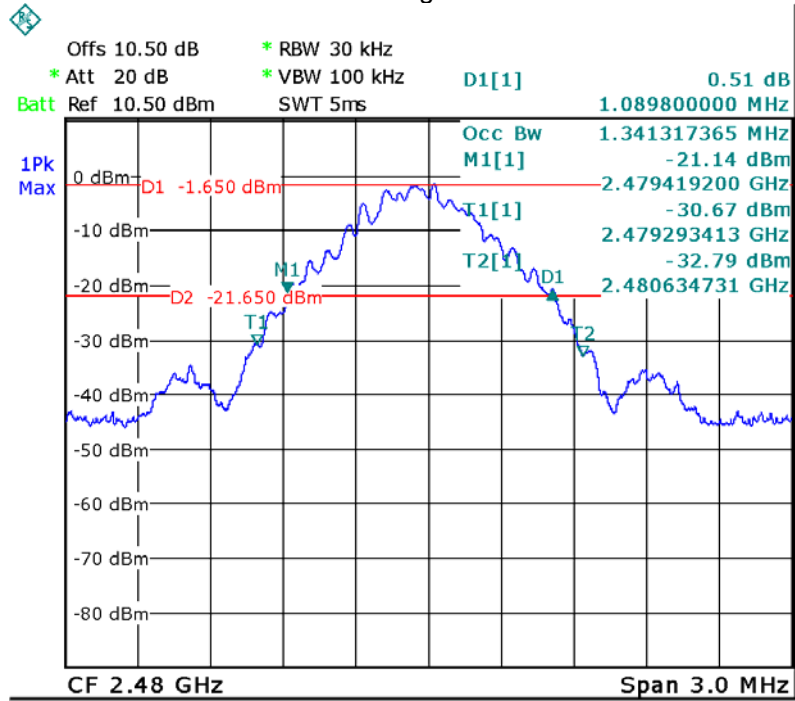


$\pi/4$ DQPSK Low Channel

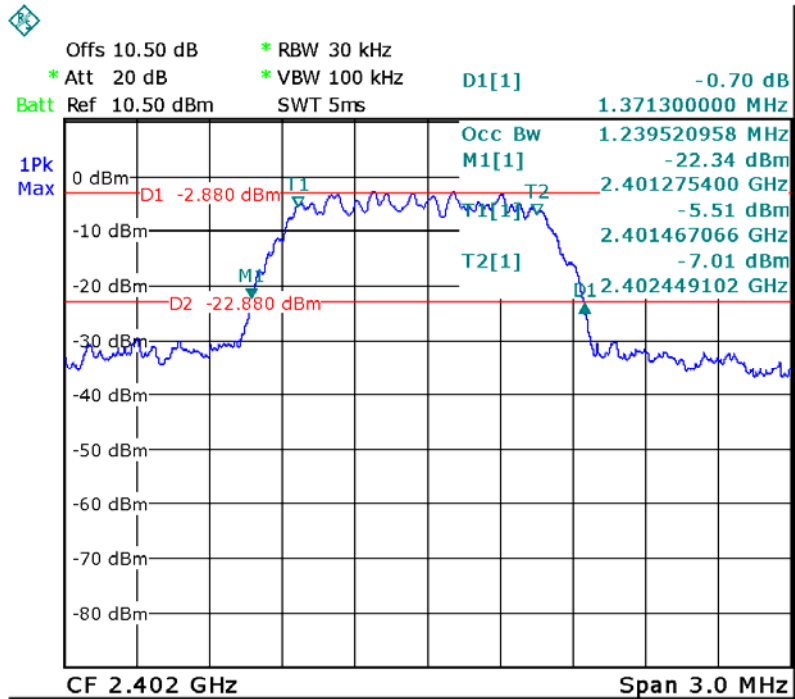


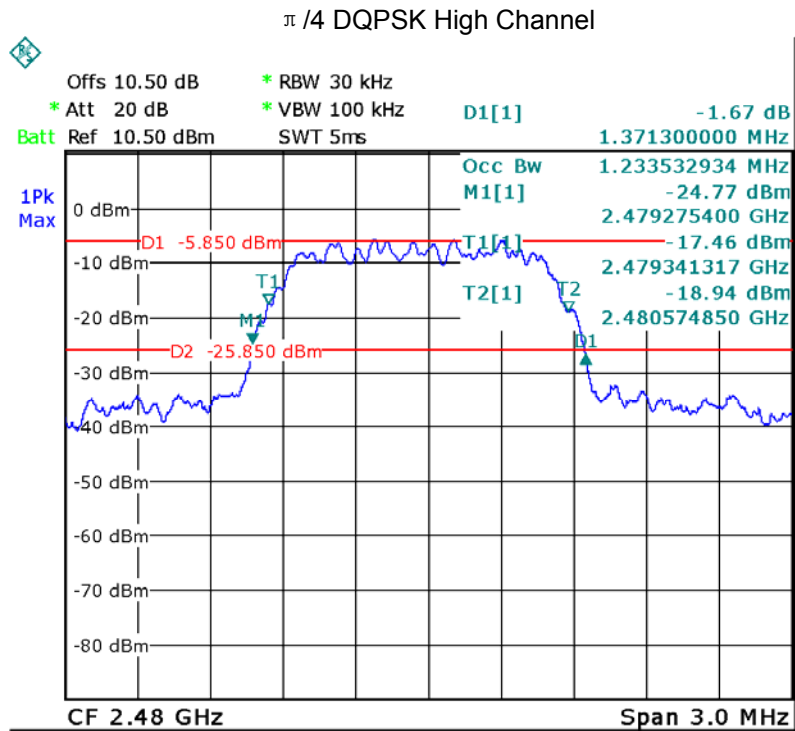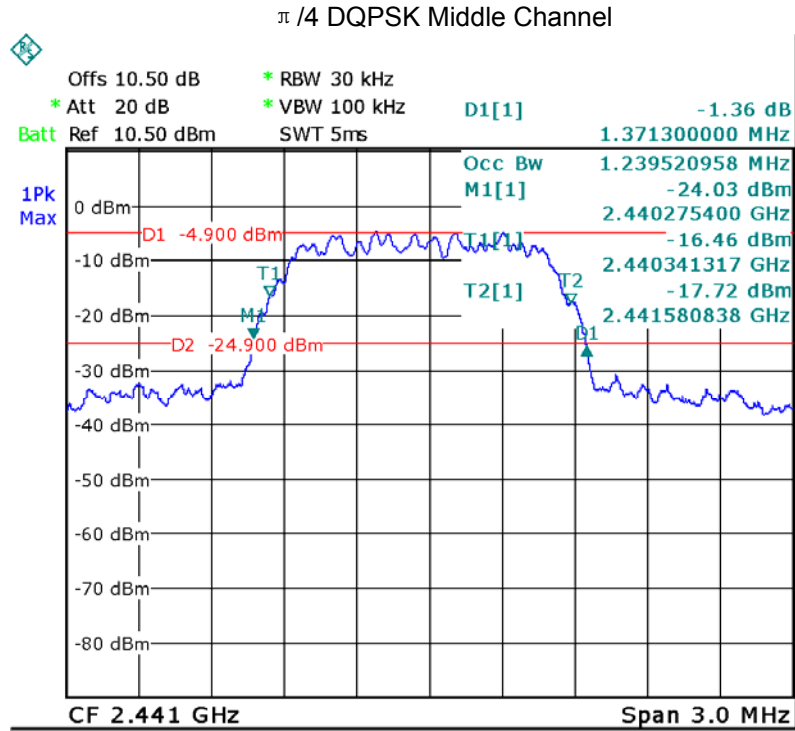


8DPSK Low Channel

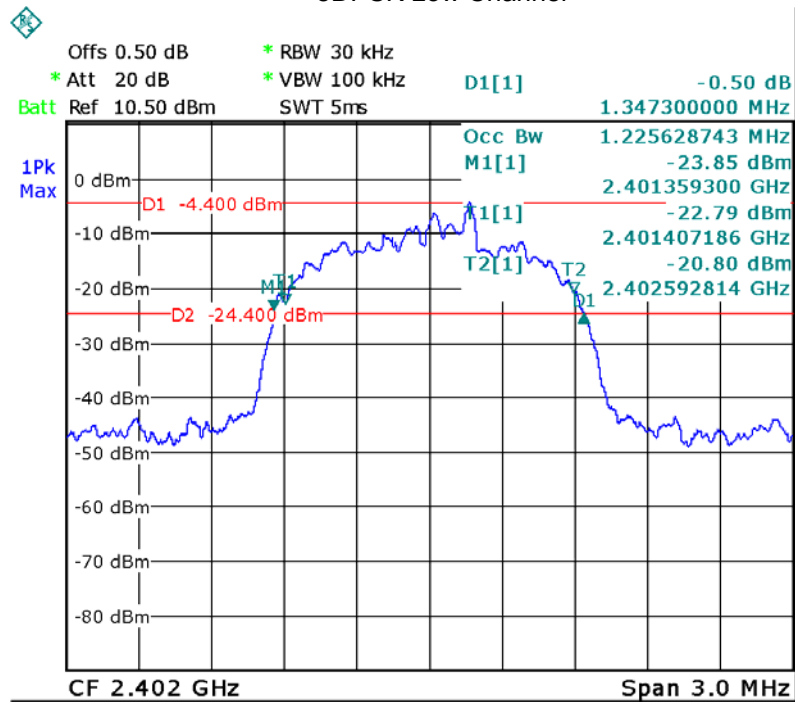

8DPSK Middle Channel

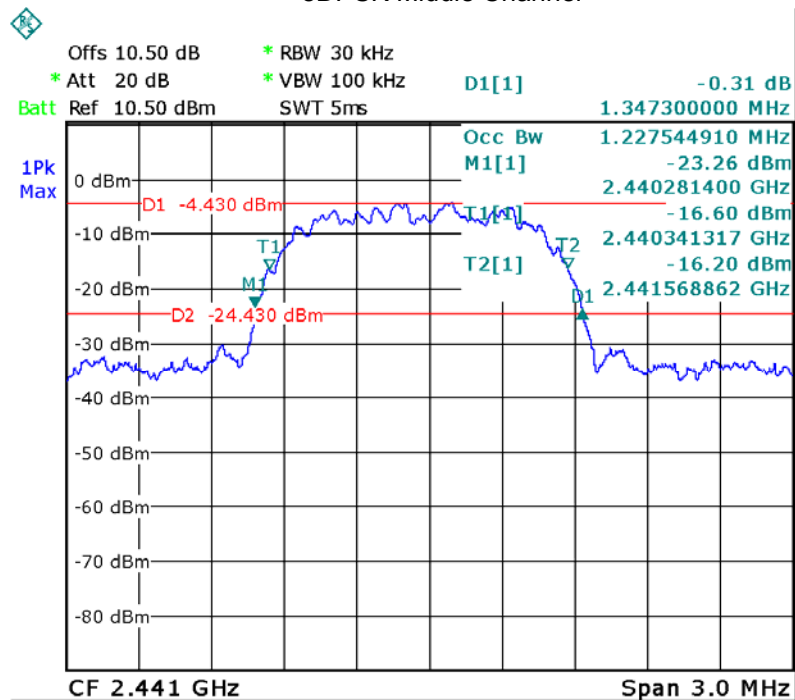

8DPSK High Channel

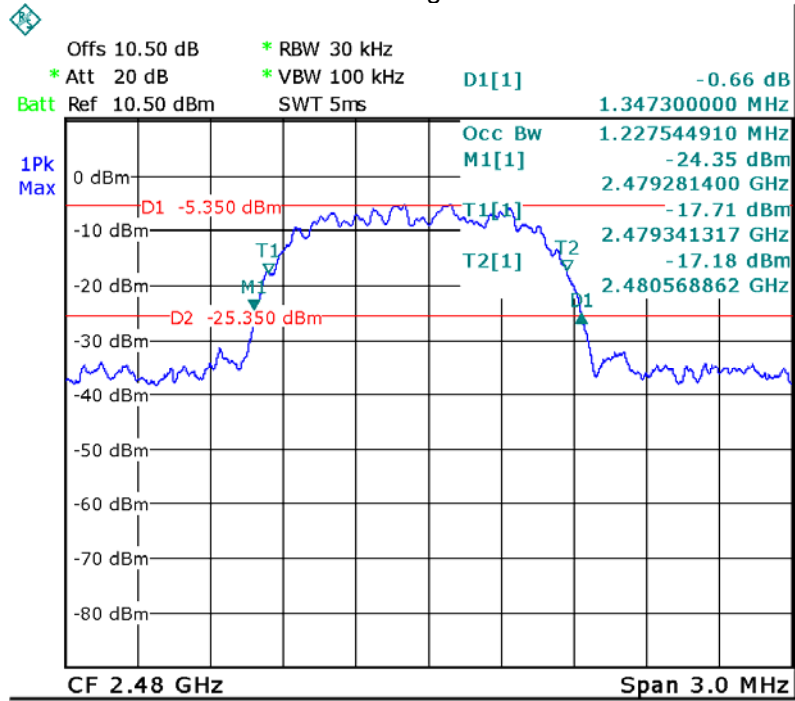

13 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode:	Test in fixing frequency transmitting mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

13.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-1.82	30
GFSK	Middle	-3.34	30
GFSK	High	-4.02	30
$\pi/4$ DQPSK	Low	-1.82	21
$\pi/4$ DQPSK	Middle	-3.40	21
$\pi/4$ DQPSK	High	-4.15	21
8DPSK	Low	-1.82	21
8DPSK	Middle	-3.39	21
8DPSK	High	-4.16	21

Test plots


GFSK Low Channel

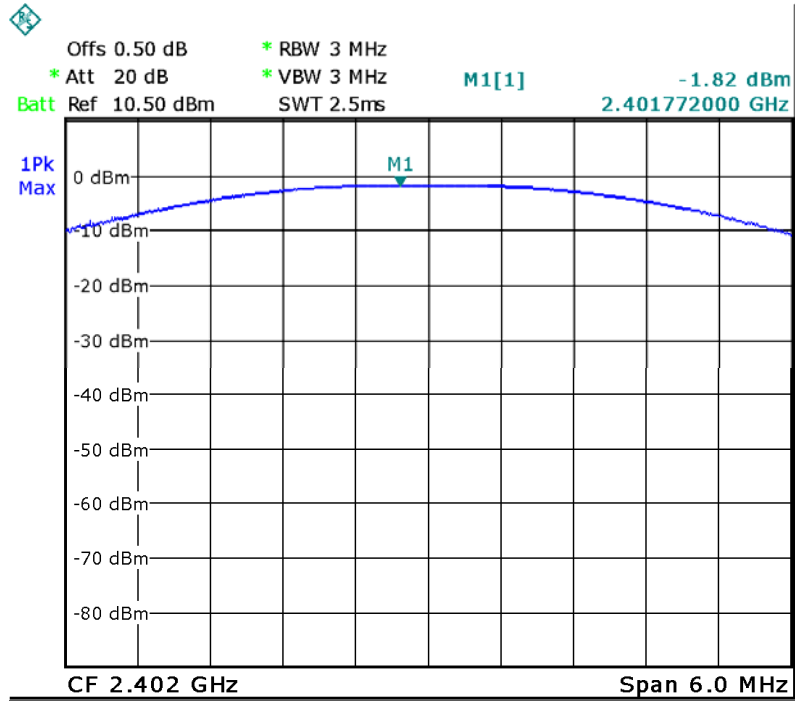


GFSK Middle Channel


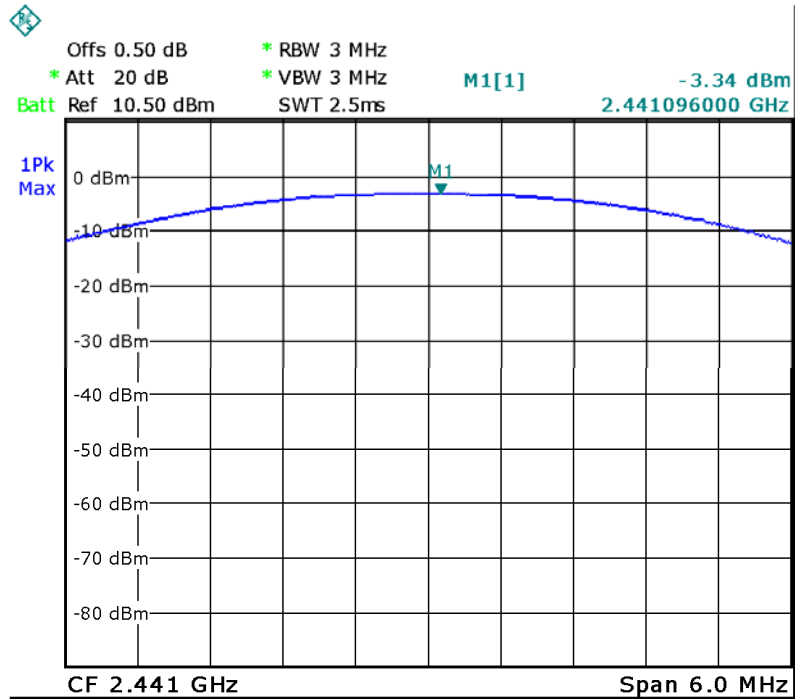


GFSK High Channel

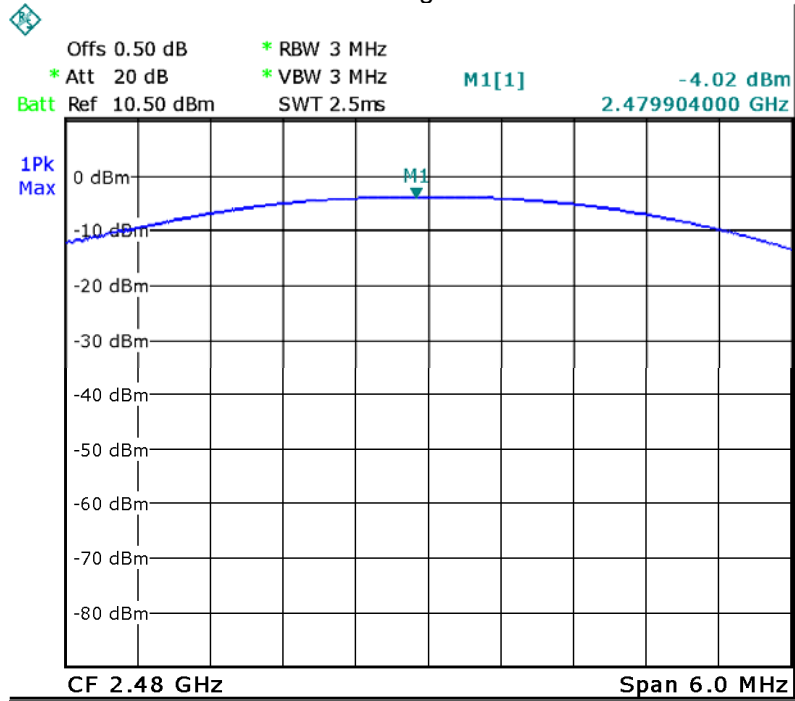


$\pi/4$ DQPSK Low Channel

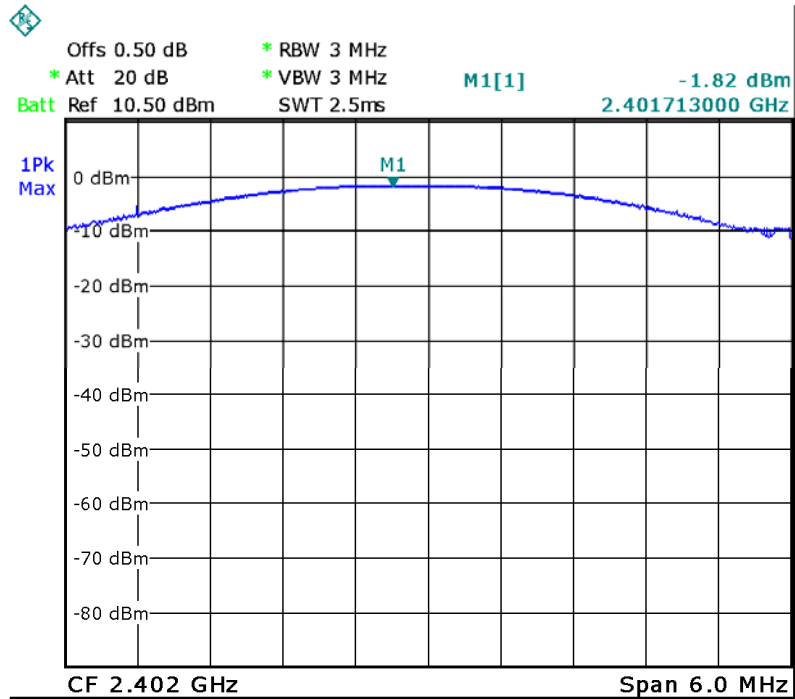


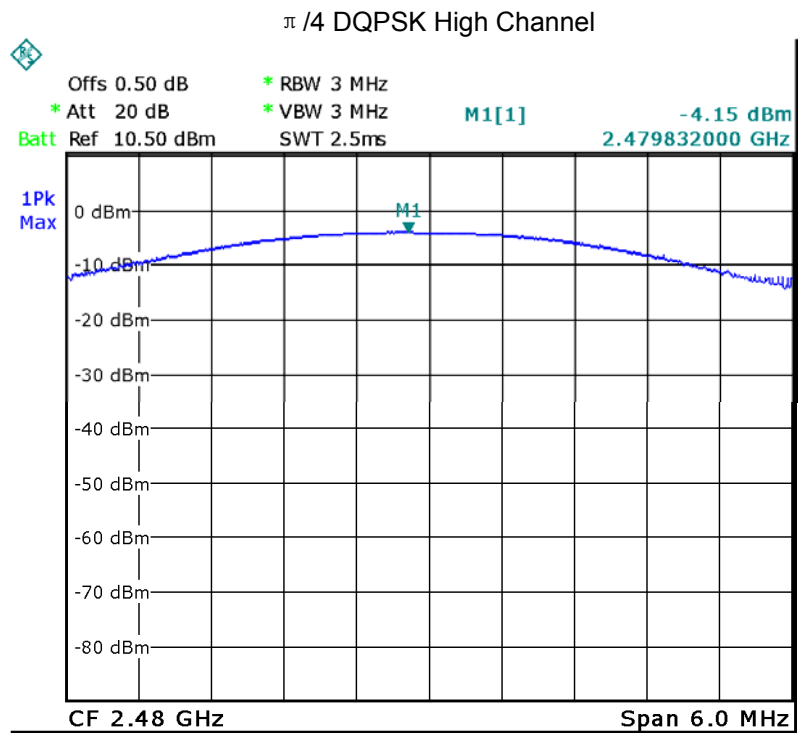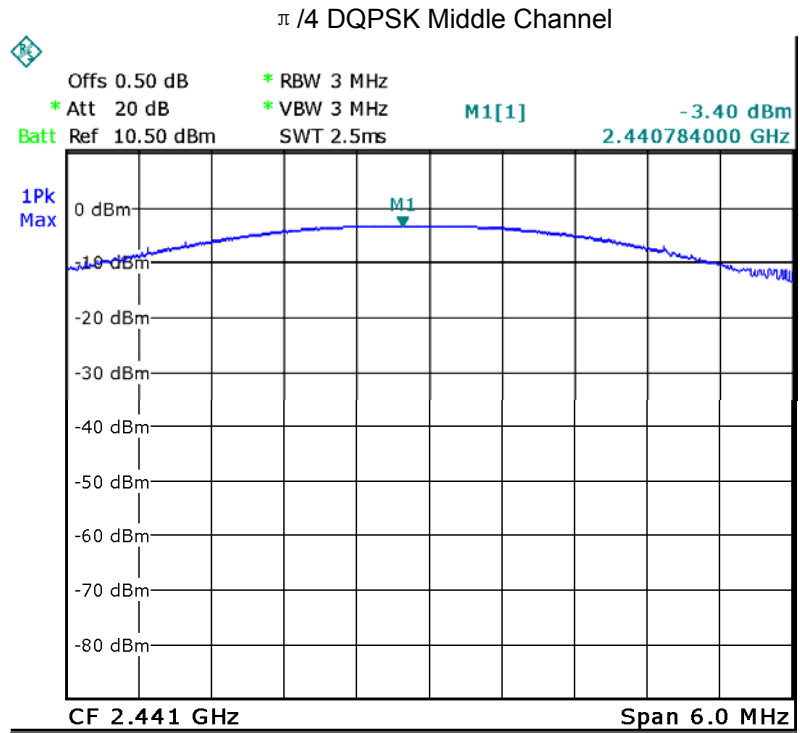


8DPSK Low Channel

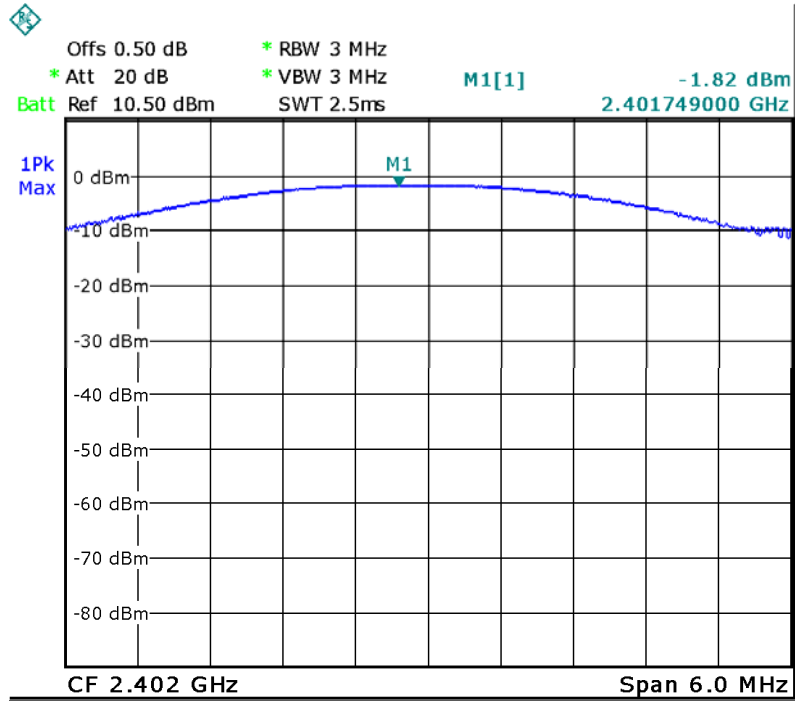

8DPSK Middle Channel

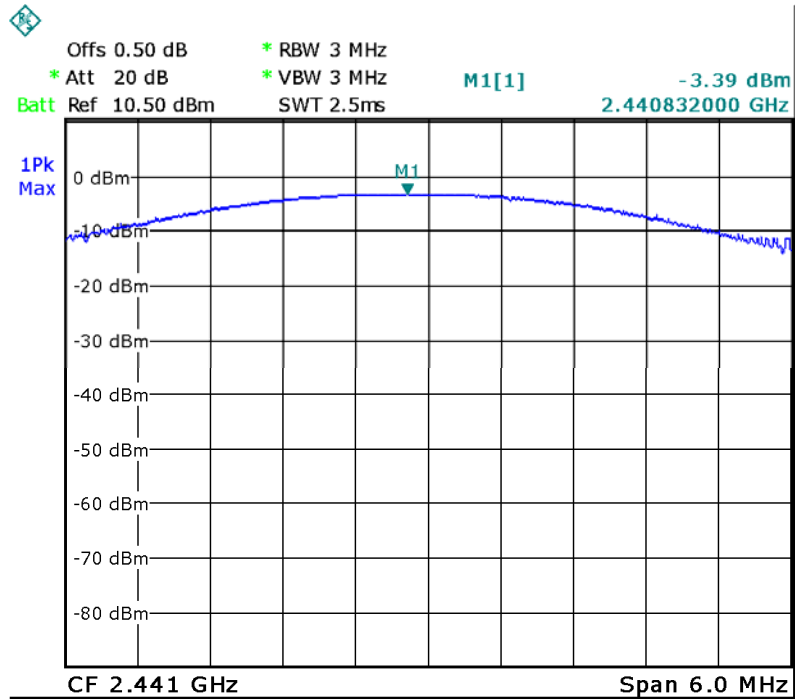

8DPSK High Channel

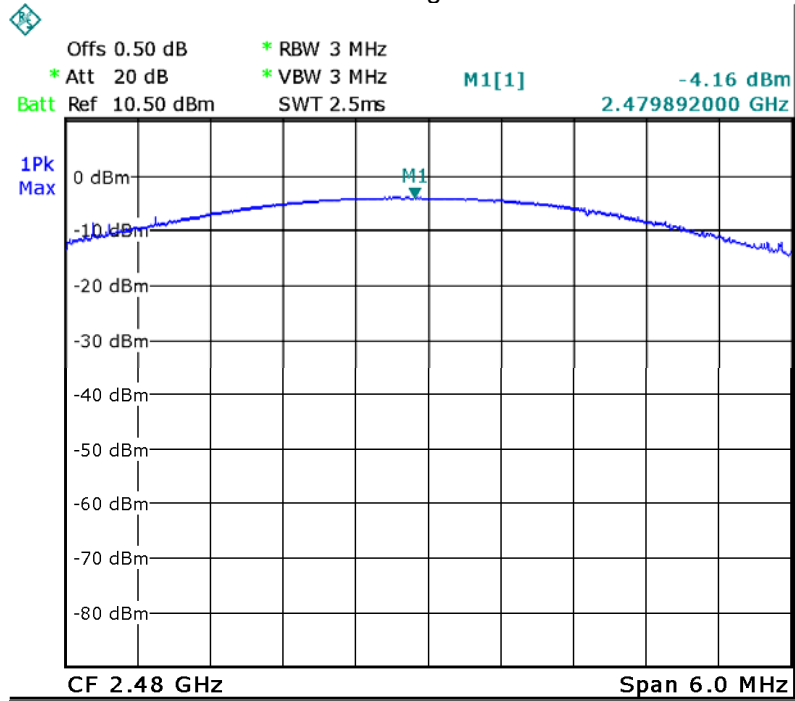

14 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

14.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
$\pi/4$ DQPSK	Low	1.000	PASS
$\pi/4$ DQPSK	Middle	1.000	PASS
$\pi/4$ DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS

Test plots


GFSK Low Channel

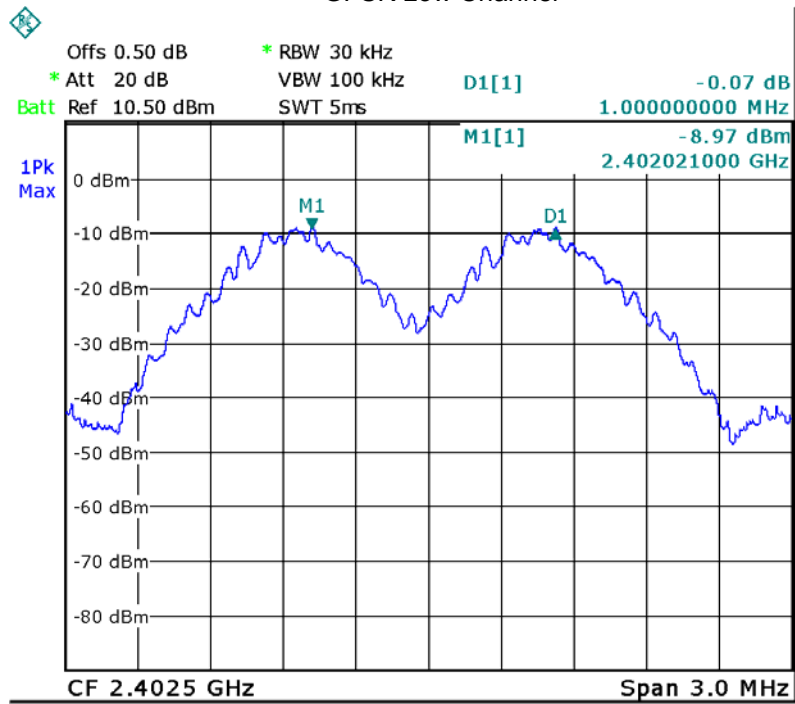


GFSK Middle Channel


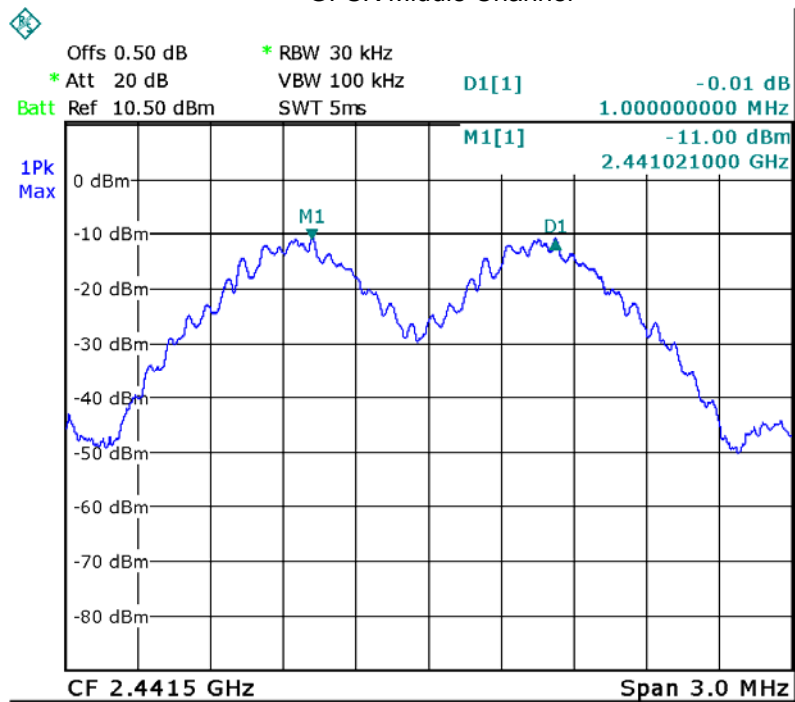


GFSK High Channel

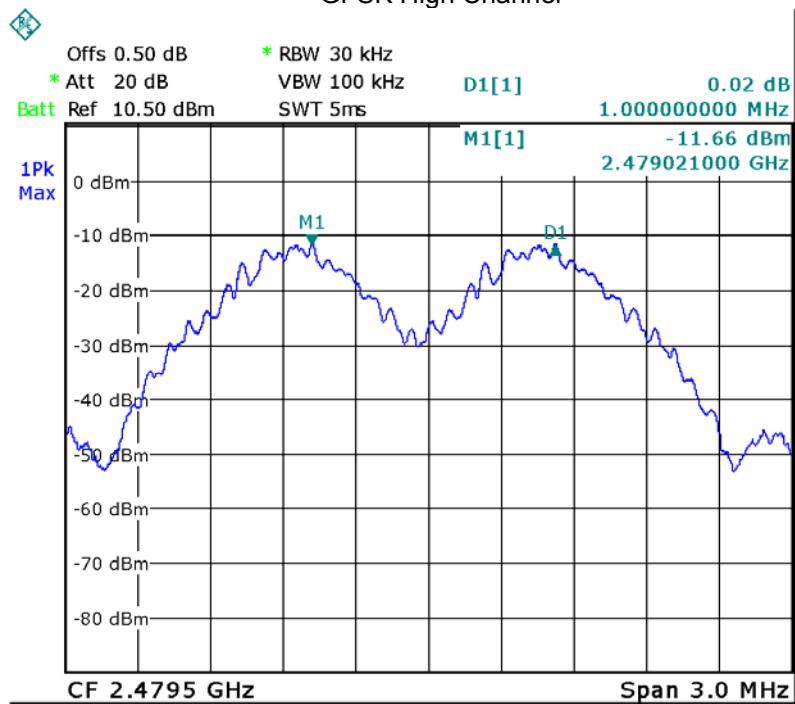


$\pi/4$ DQPSK Low Channel

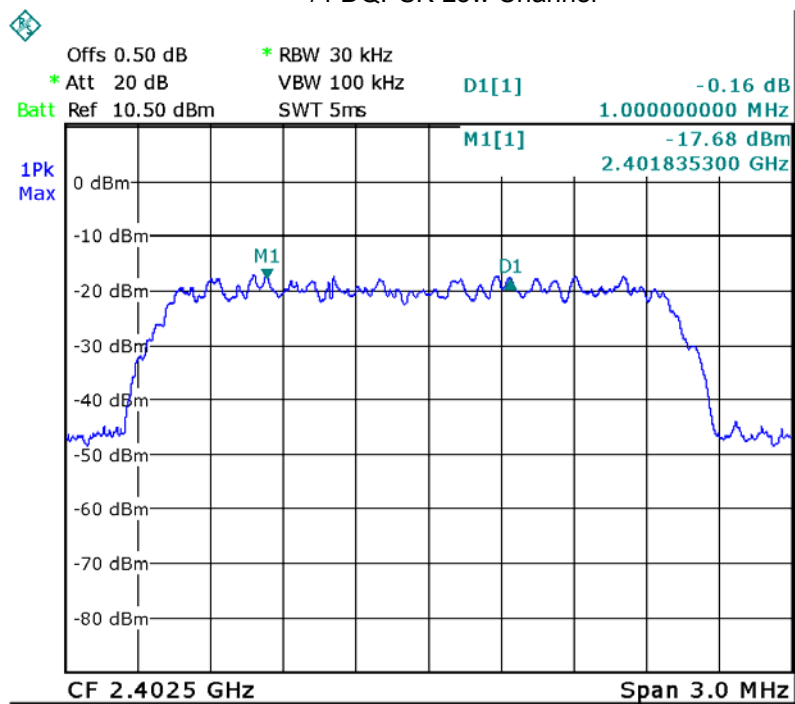


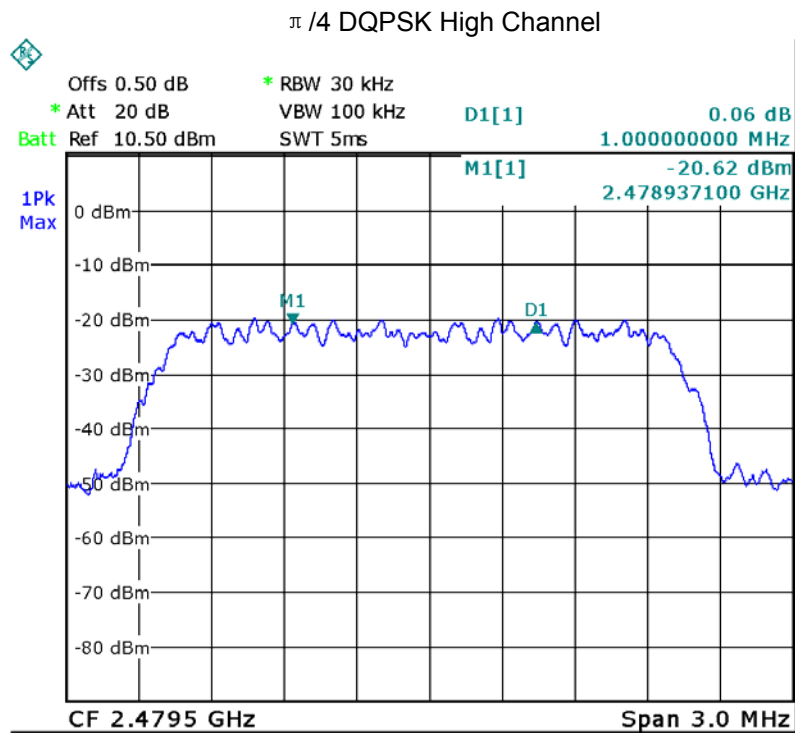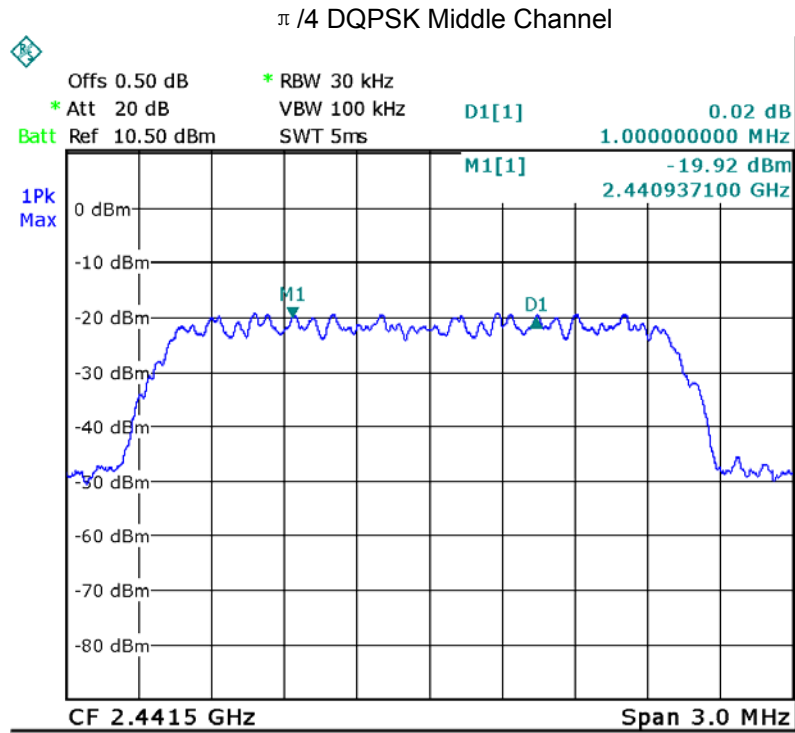


8DPSK Low Channel

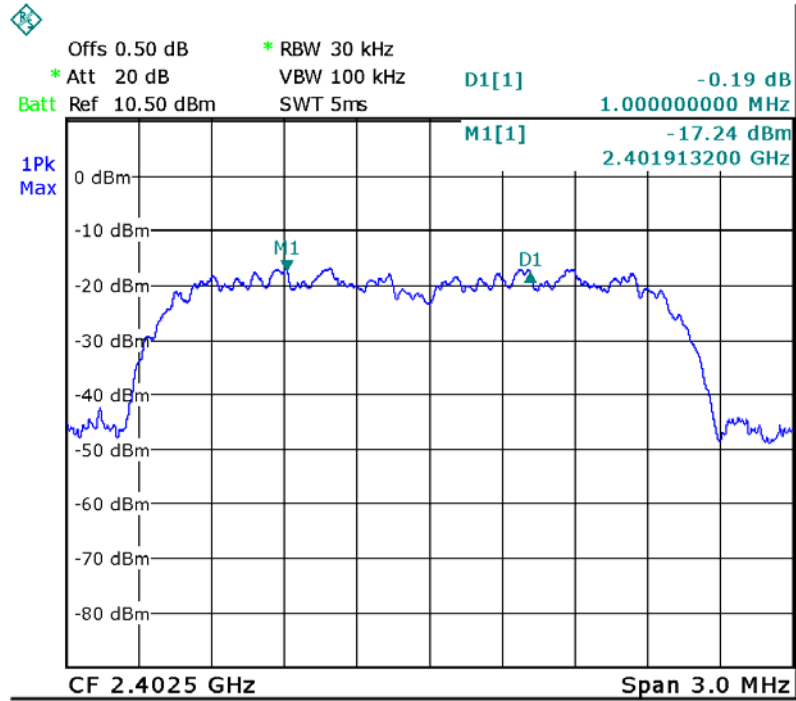

8DPSK Middle Channel

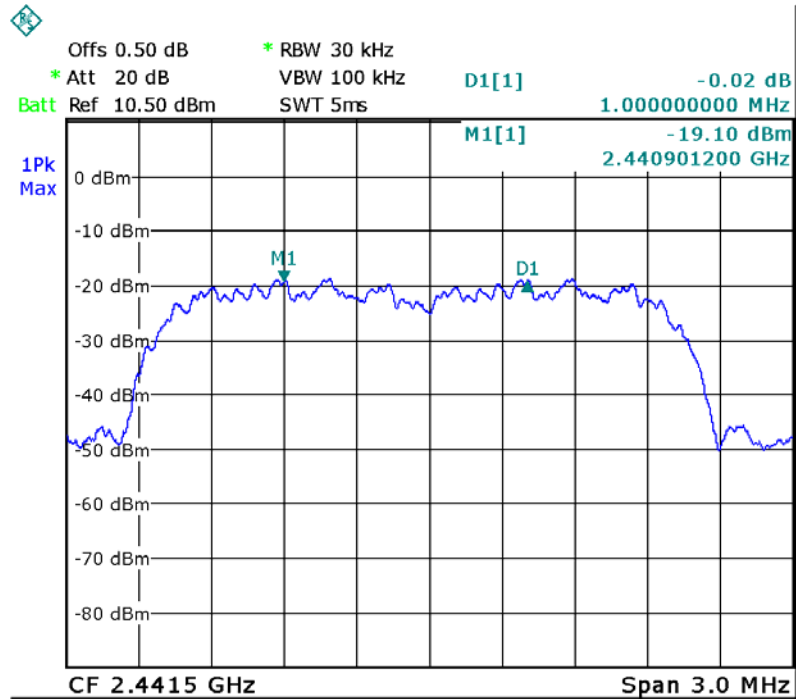

8DPSK High Channel

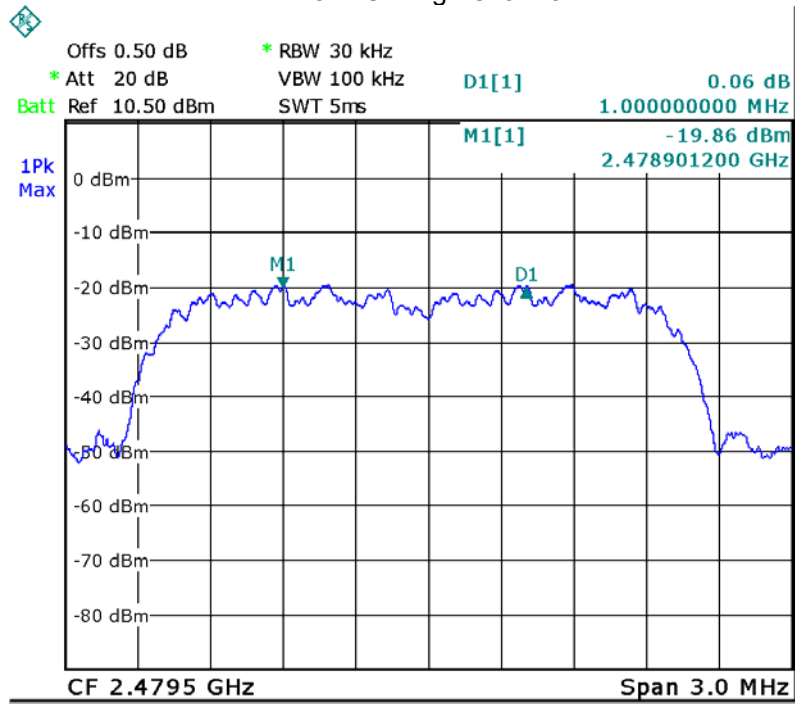


15 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300 KHz. VBW = 300 KHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;


15.2 Test Result

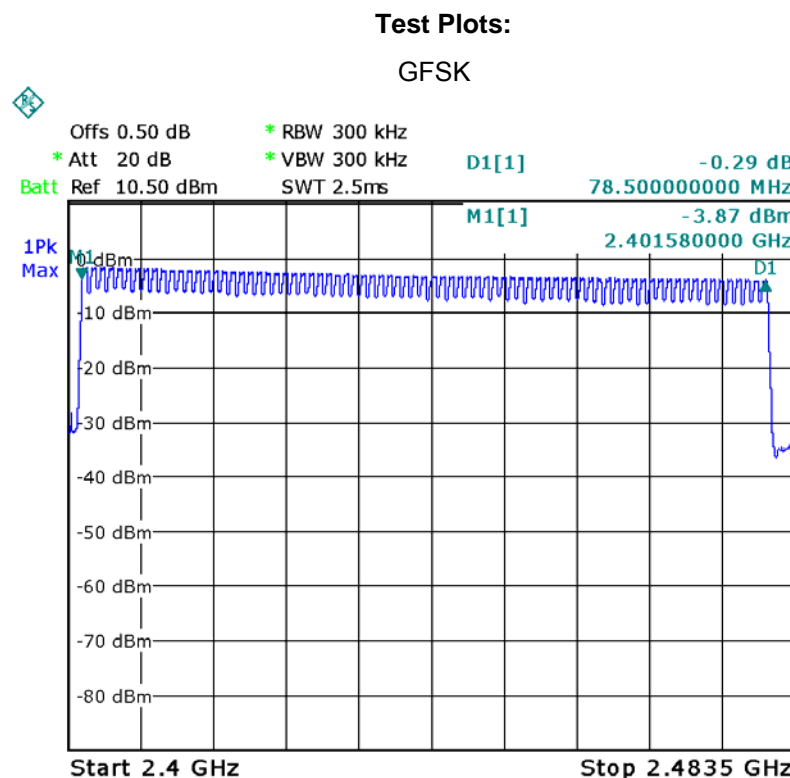

Pi/4 DQPSK

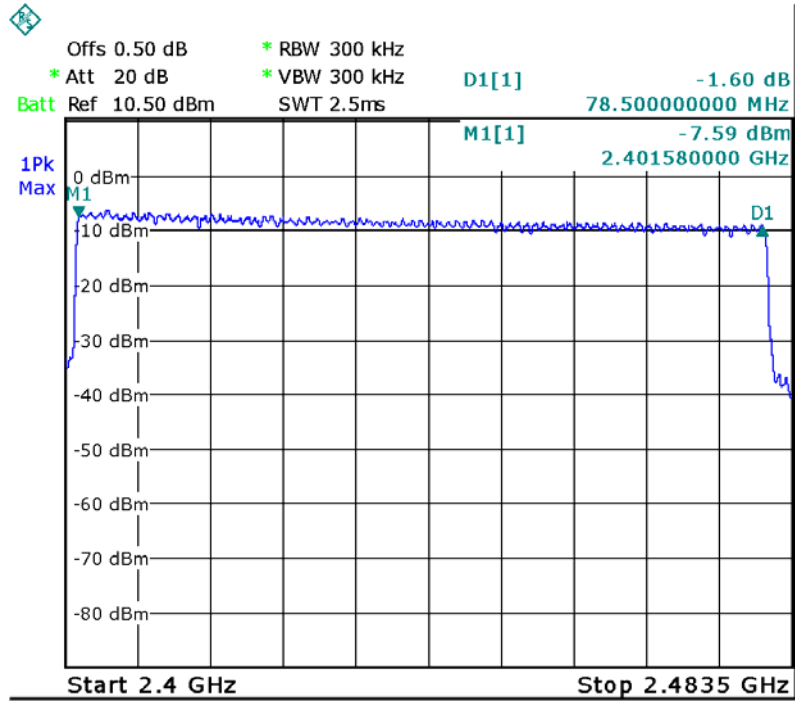

8DPSK

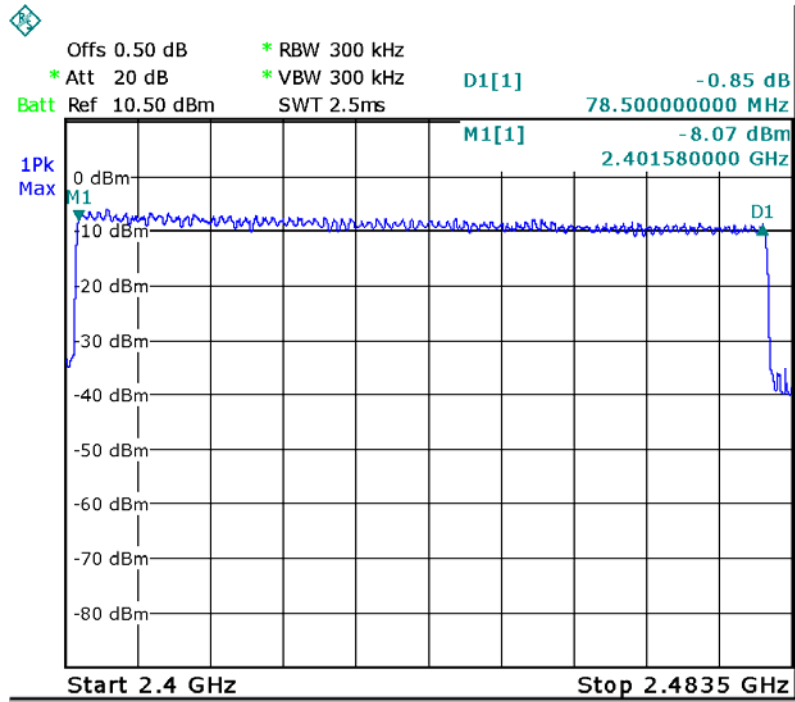

16 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

16.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

16.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.945	0.314	0.4
		middle	2.945	0.314	0.4
		High	2.945	0.314	0.4
$\pi/4$ DQPSK	2DH5	Low	2.945	0.314	0.4
		middle	2.945	0.314	0.4
		High	2.945	0.314	0.4
8DPSK	3DH5	Low	2.945	0.314	0.4
		middle	2.945	0.314	0.4
		High	2.945	0.314	0.4


Remark: Only the worst-case is recorded.


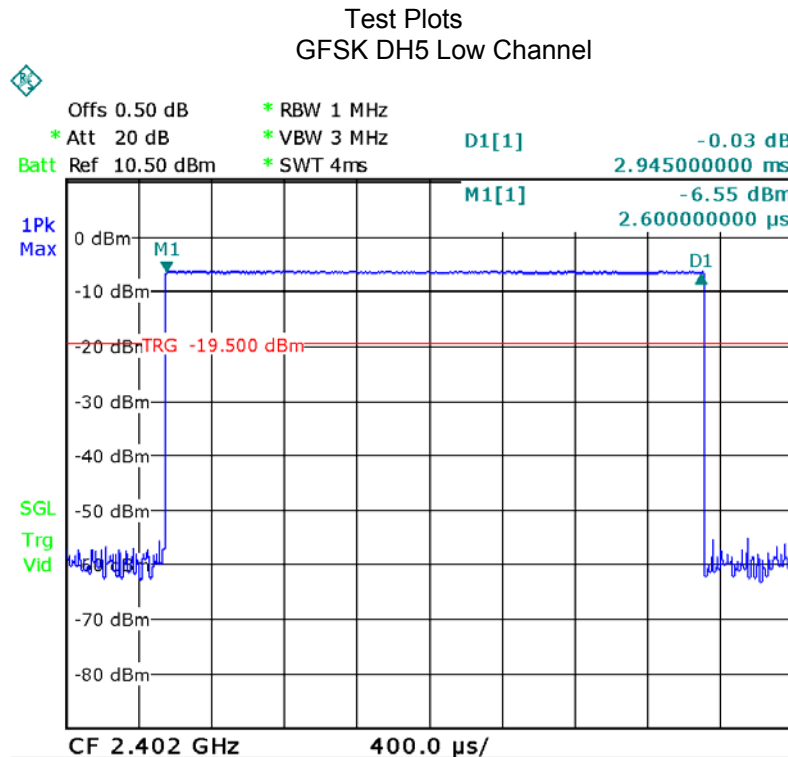




GFSK DH5 Middle Channel

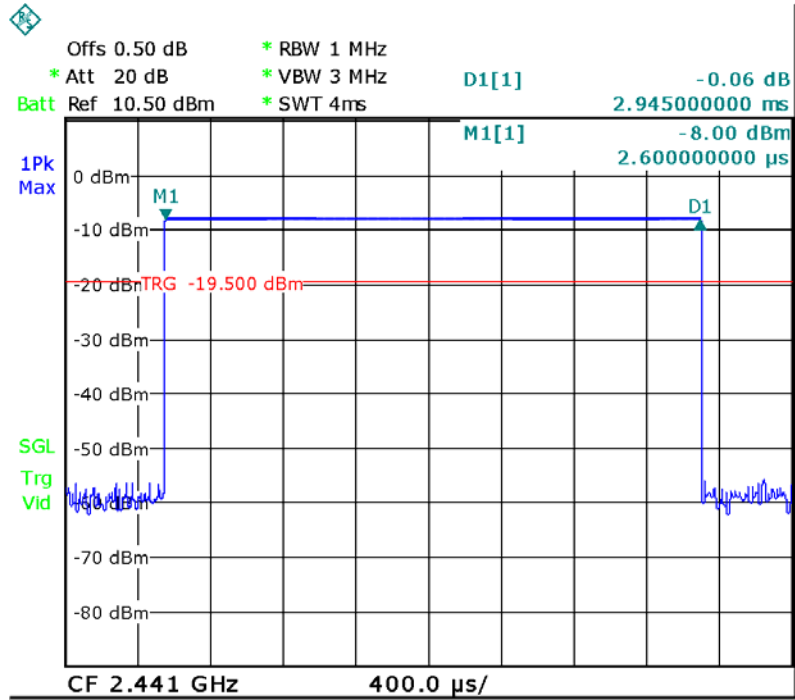


GFSK DH5 High Channel

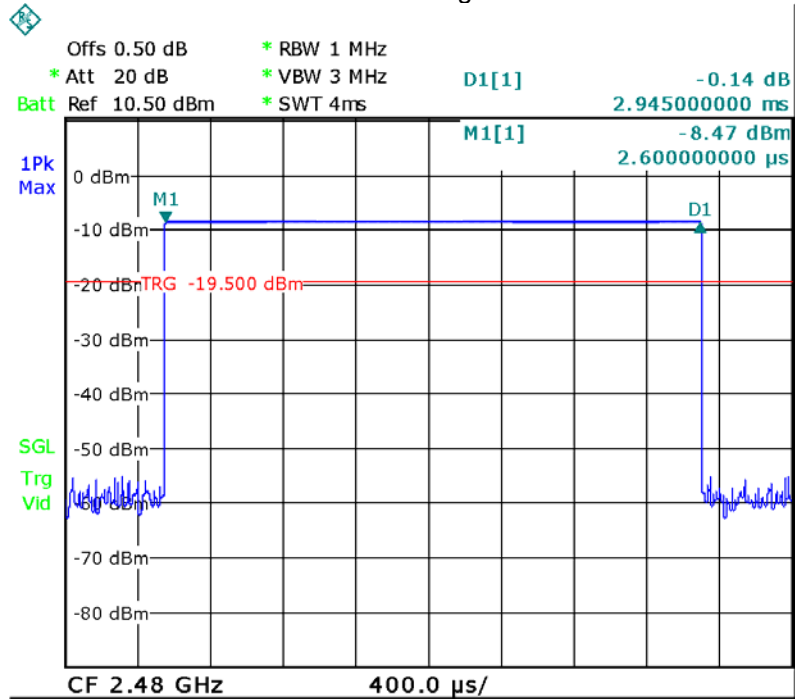

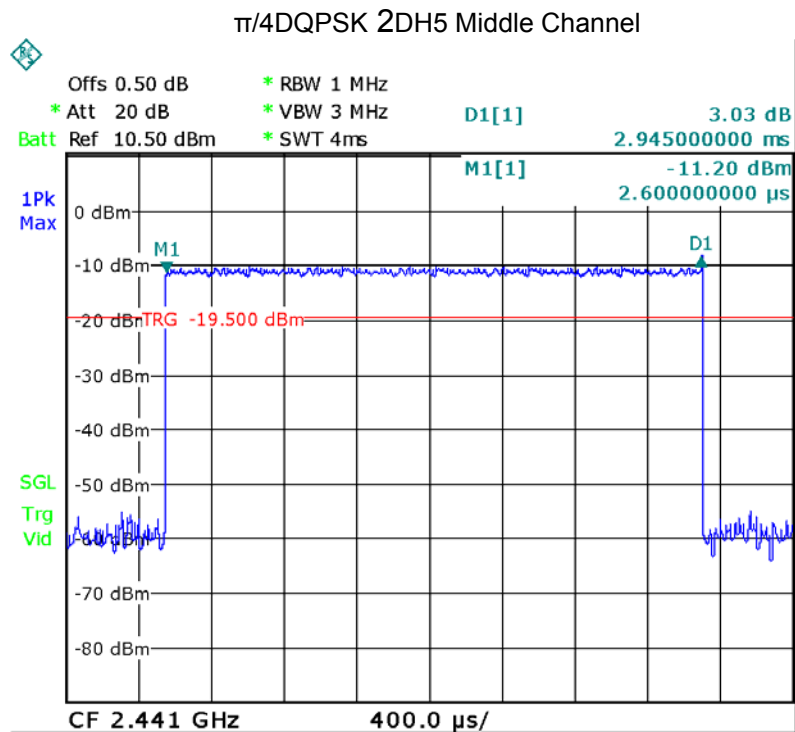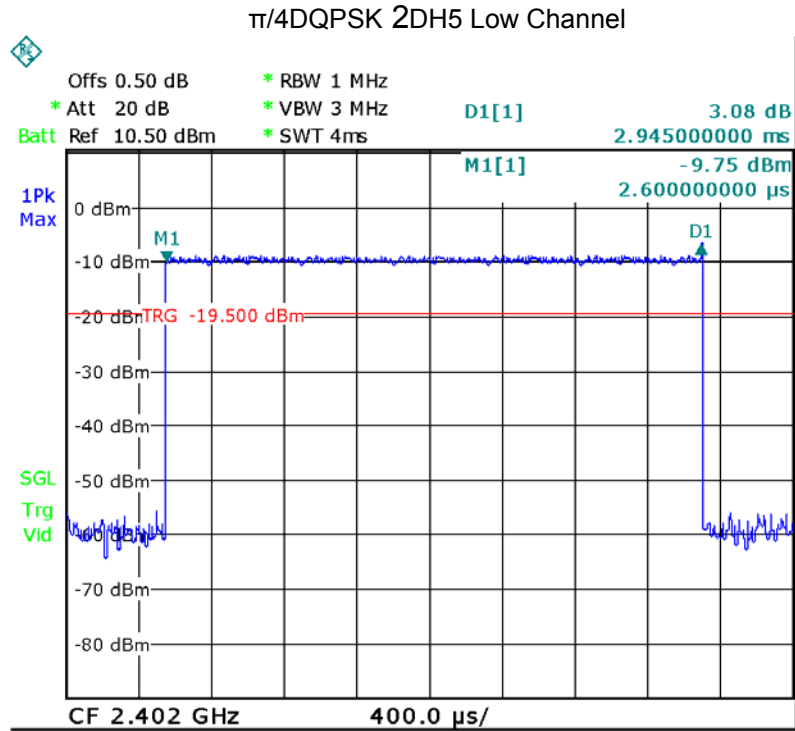


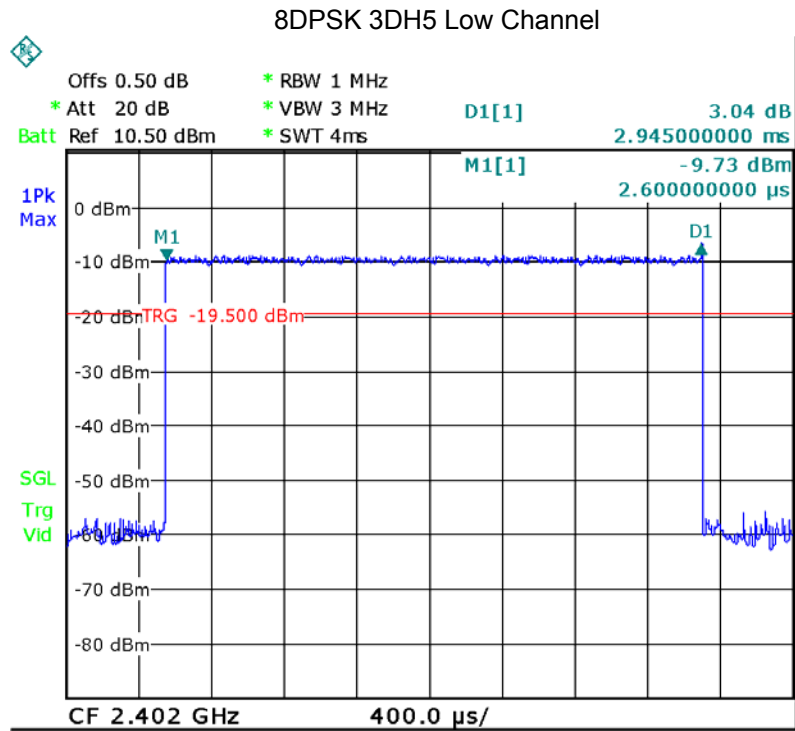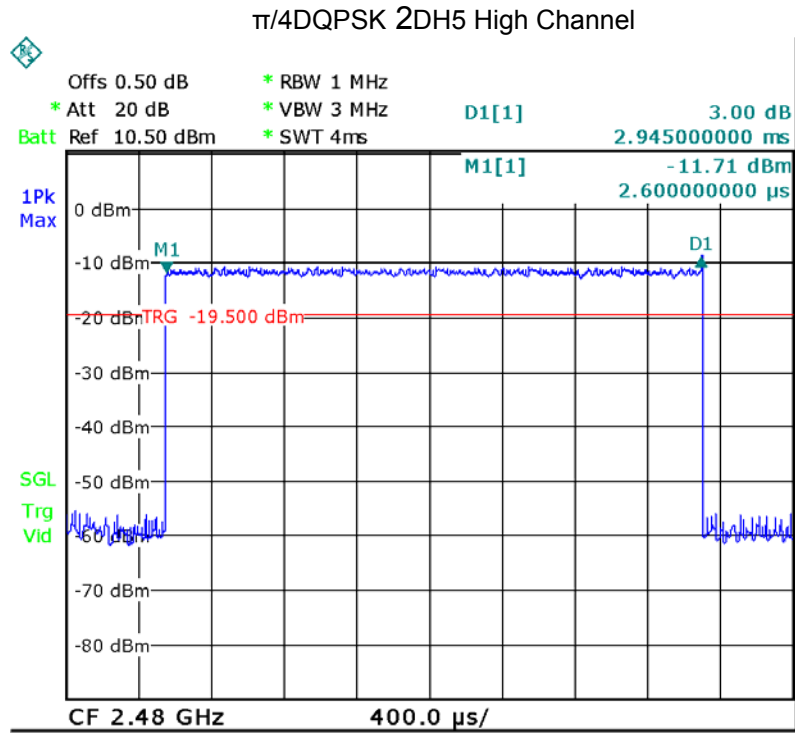

8DPSK 3DH5 Middle Channel

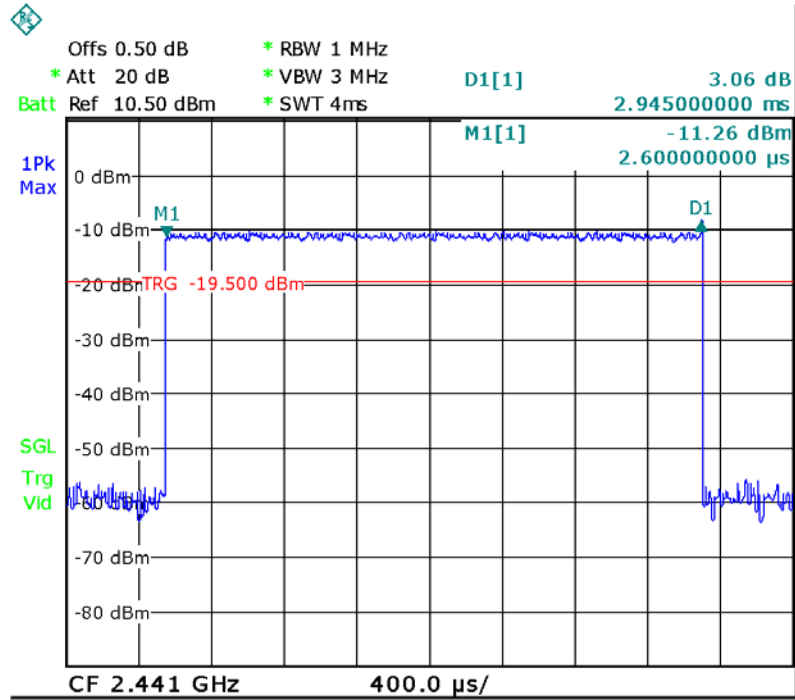

8DPSK 3DH5 High Channel

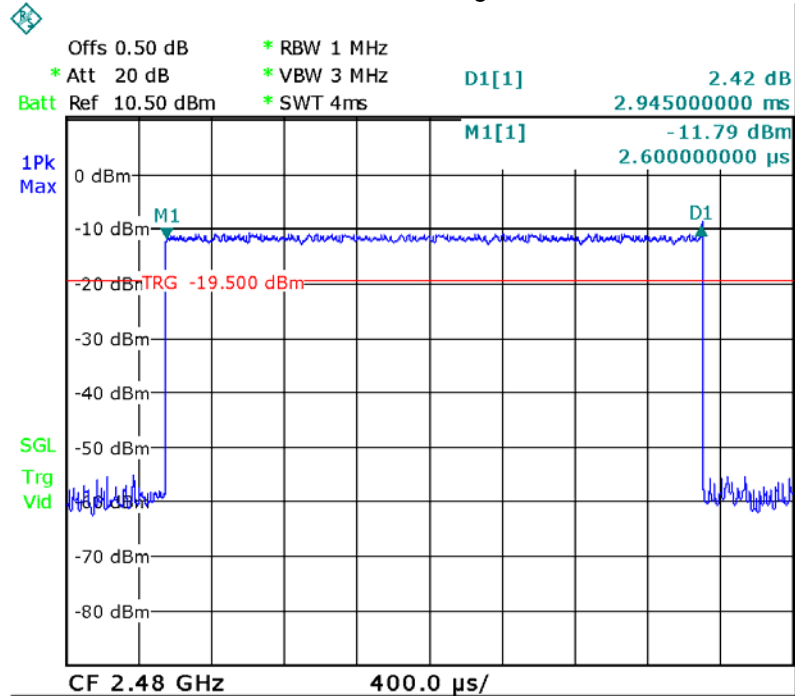


17 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one PCB Printed Antenna. meets the requirements of FCC 15.203.

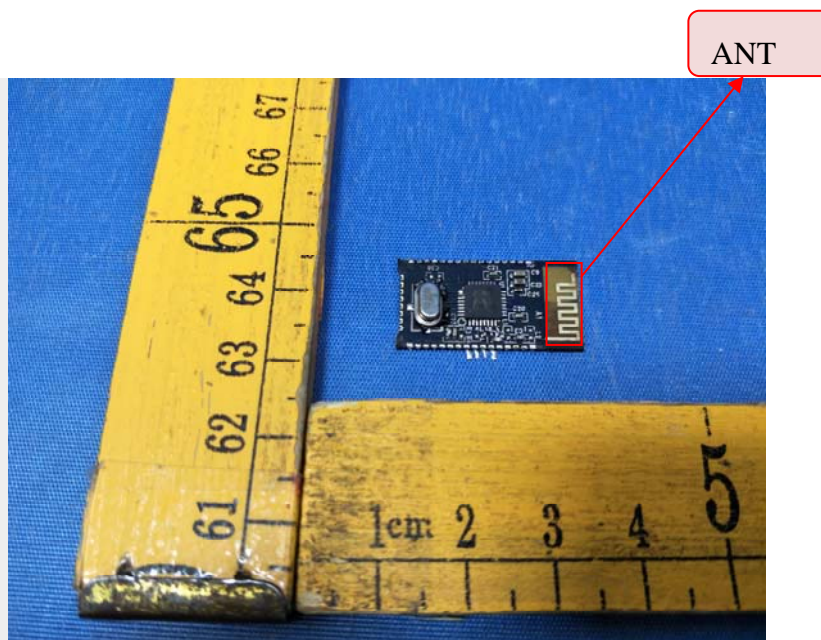

18 RF Exposure

Note: Please refer to attachment: RF Exposure Report.

19 Photographs -Test Setup Photos

19.1 Photograph-Conducted Emissions Test Setup



19.2 Photograph-Radiated Emissions


Test Frequency 30MHz to 1GHz





Test Frequency Above 1GHz



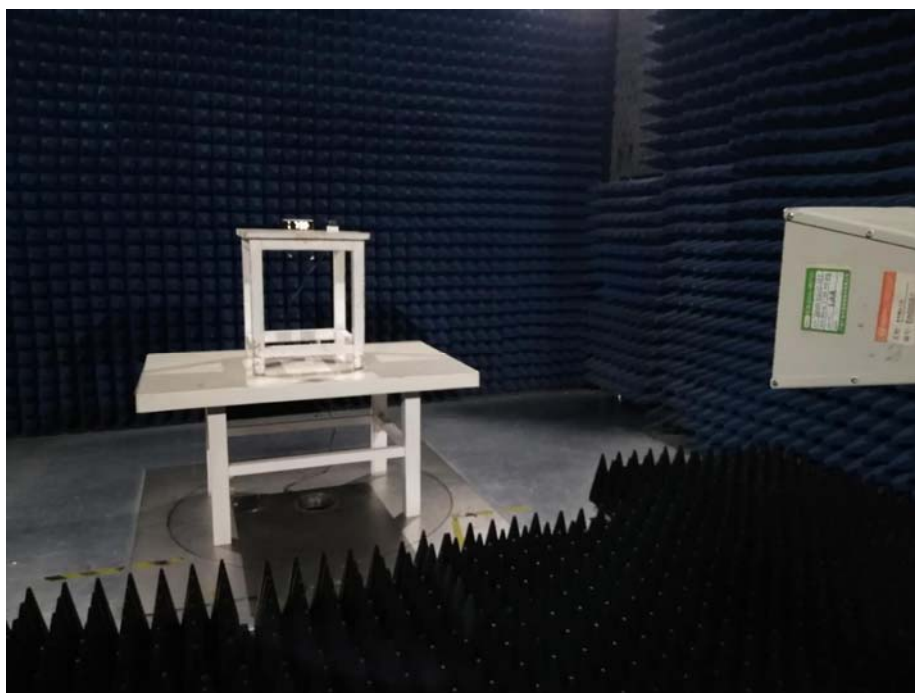

20 Photographs - Constructional Details

20.1 EUT – External photos















20.2 EUT – Internal photos





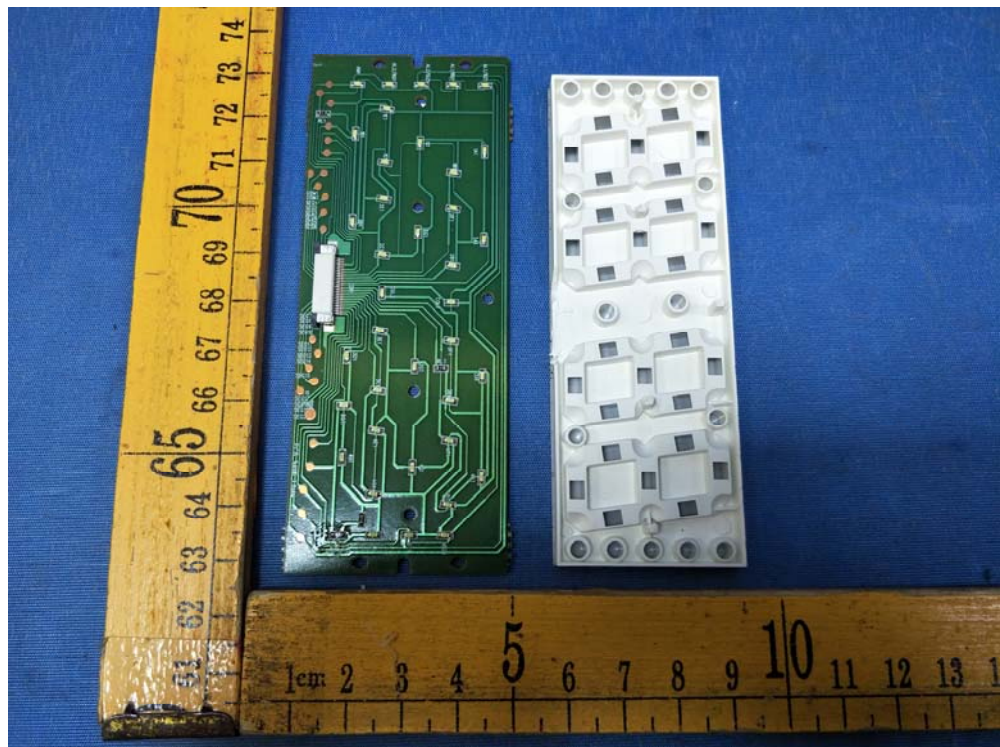


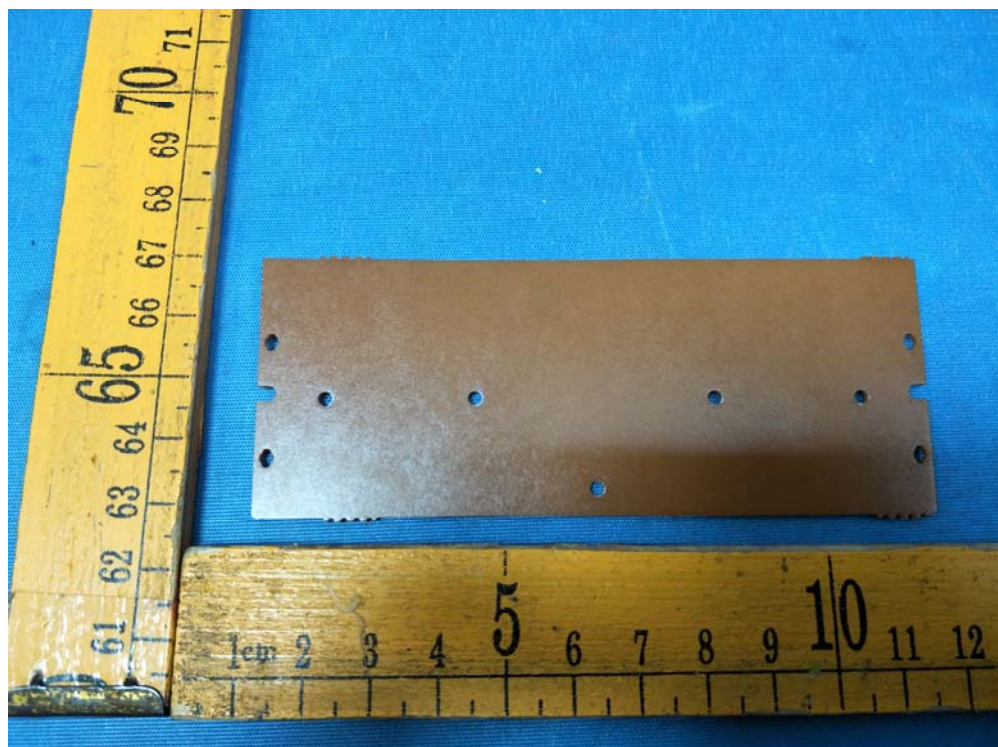
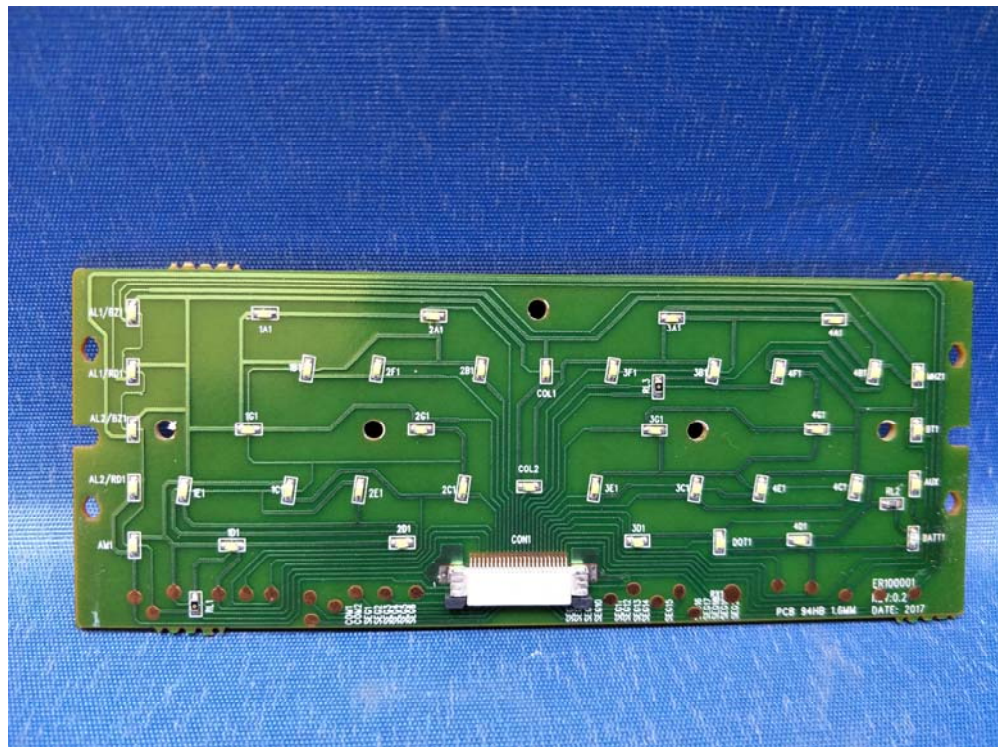


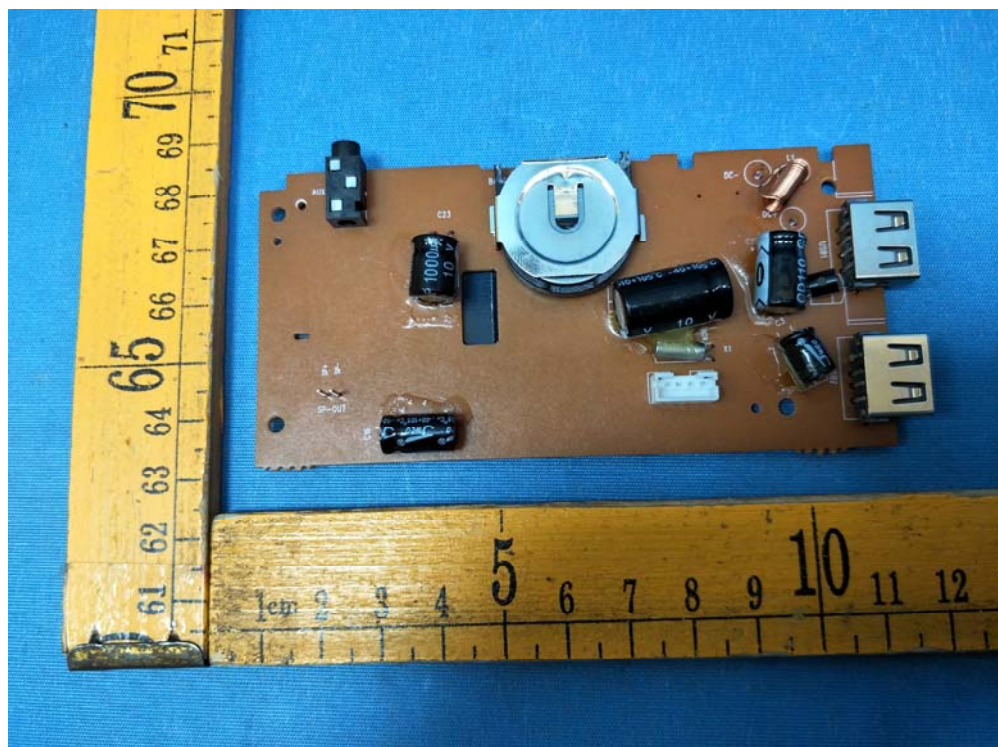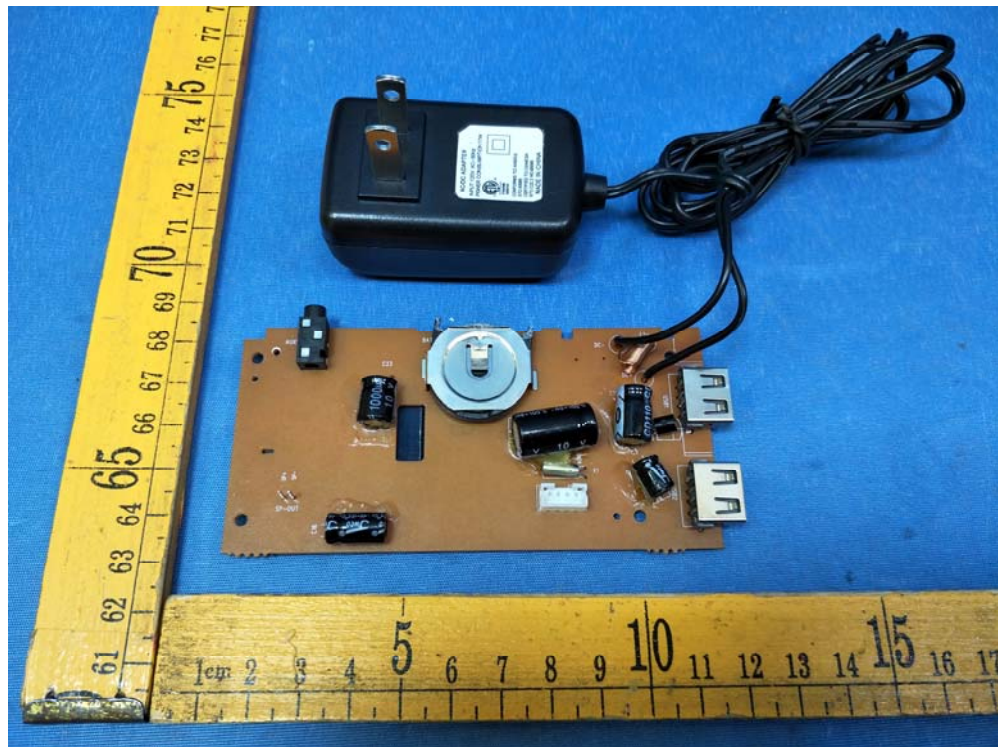


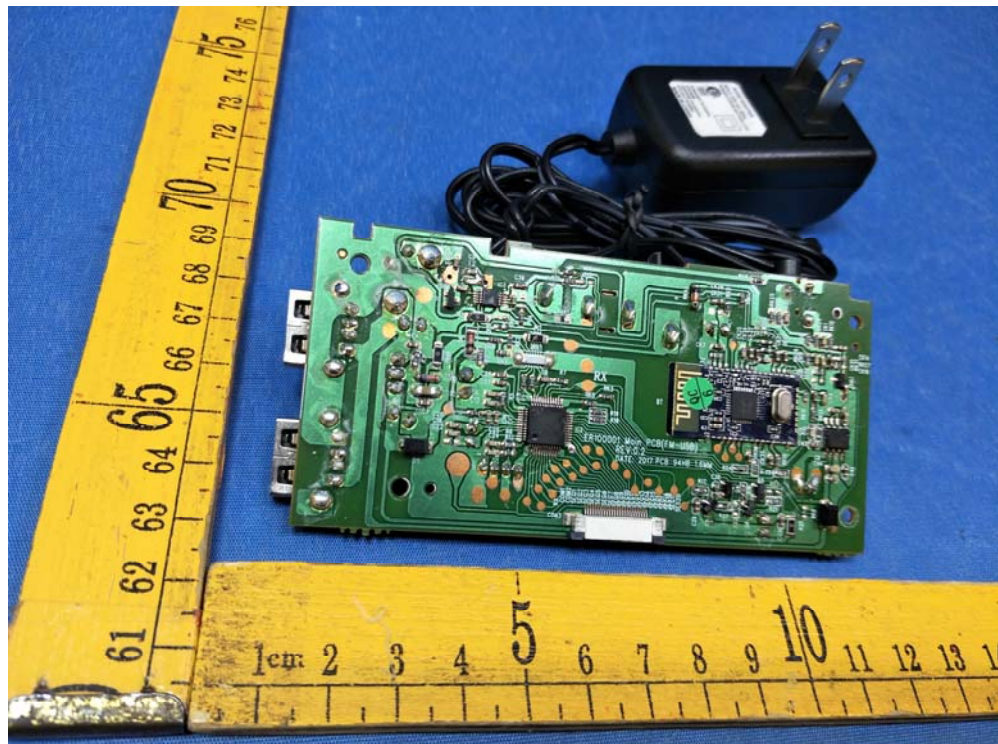

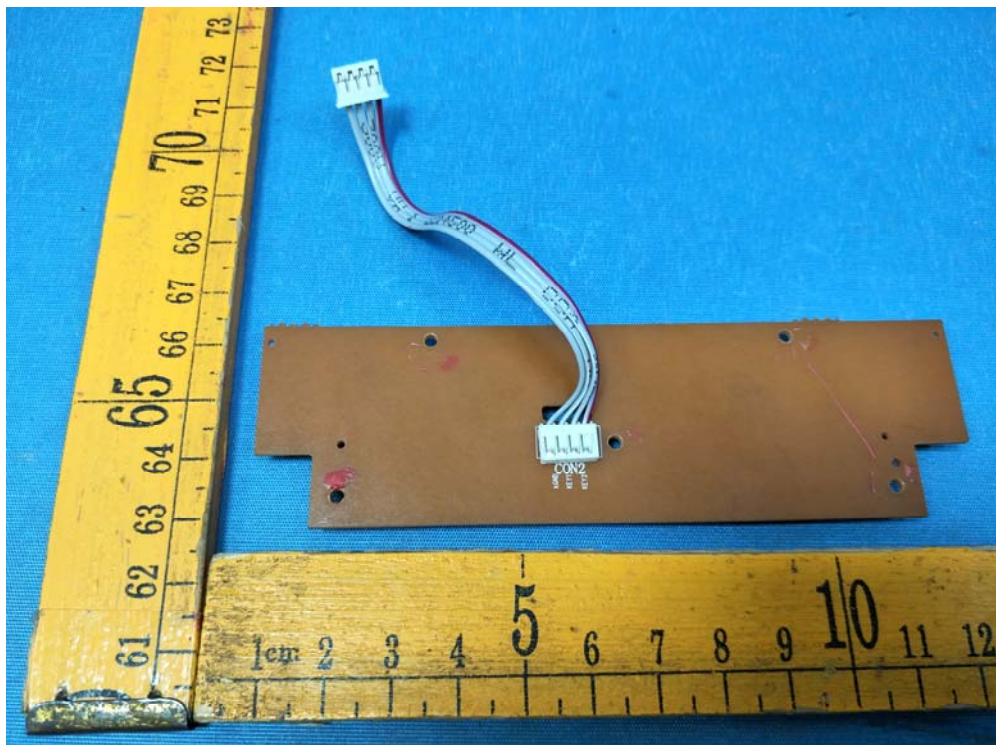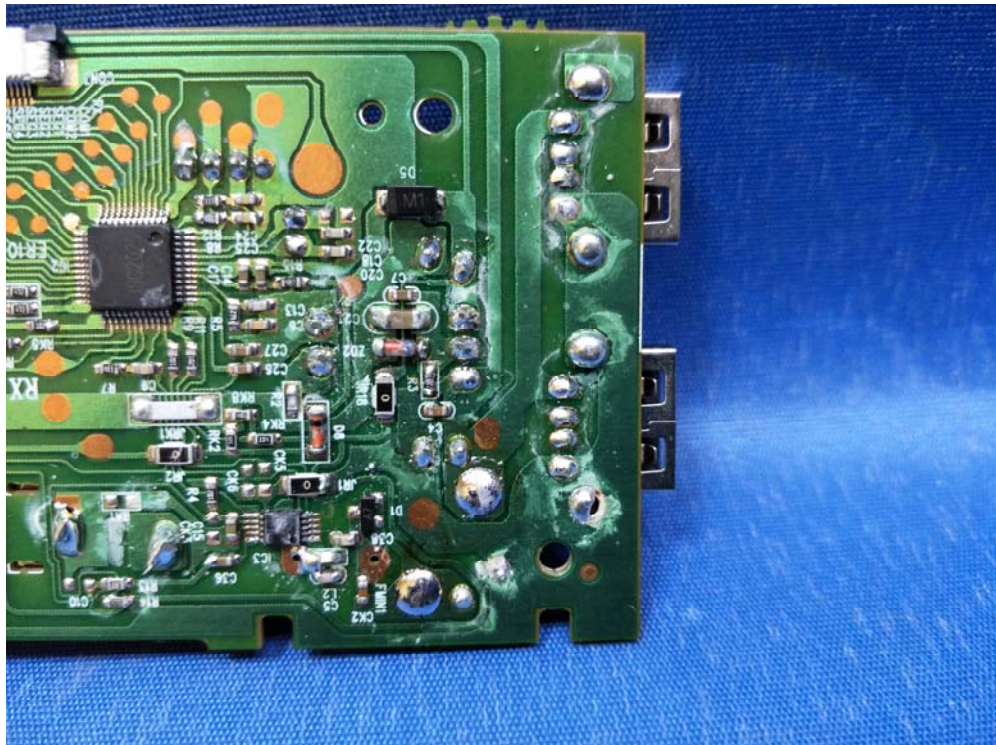

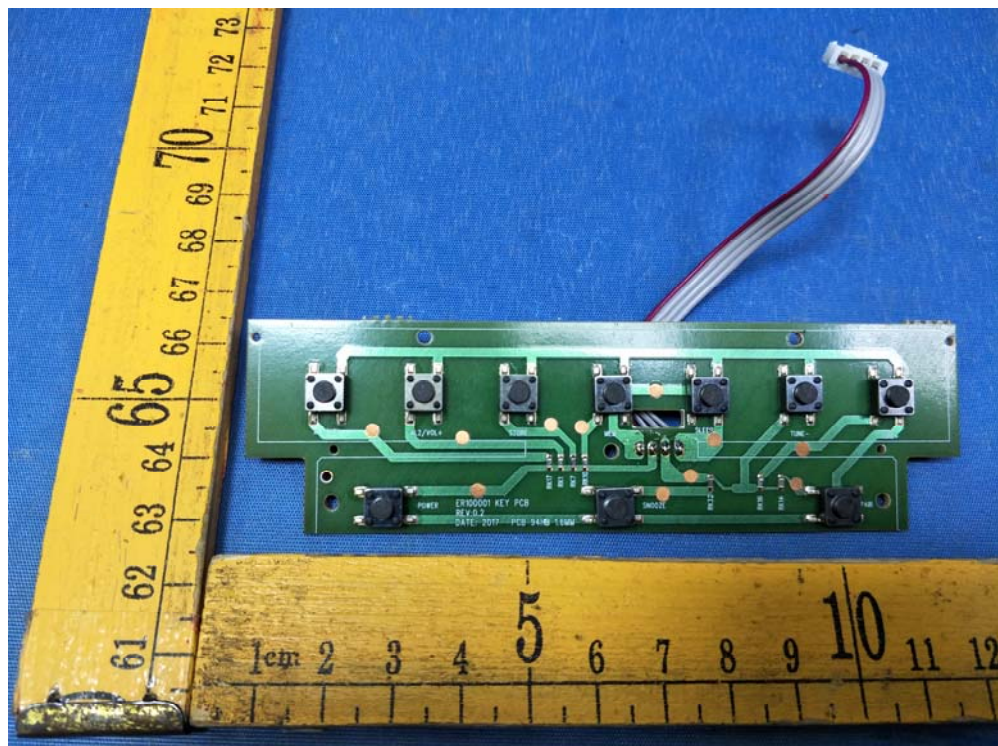

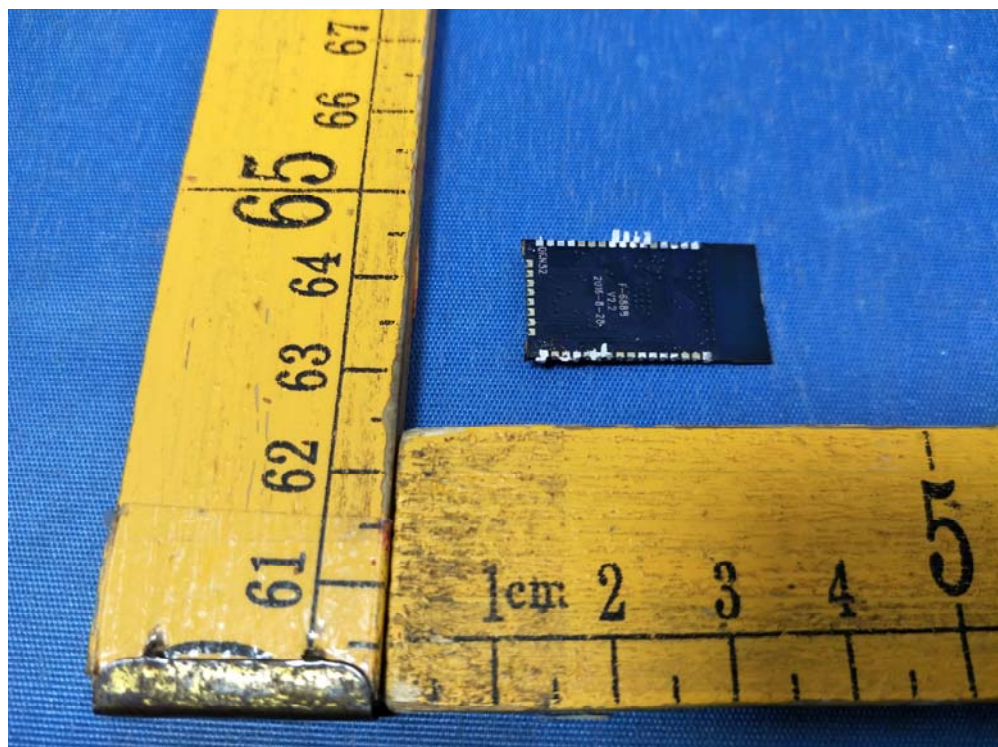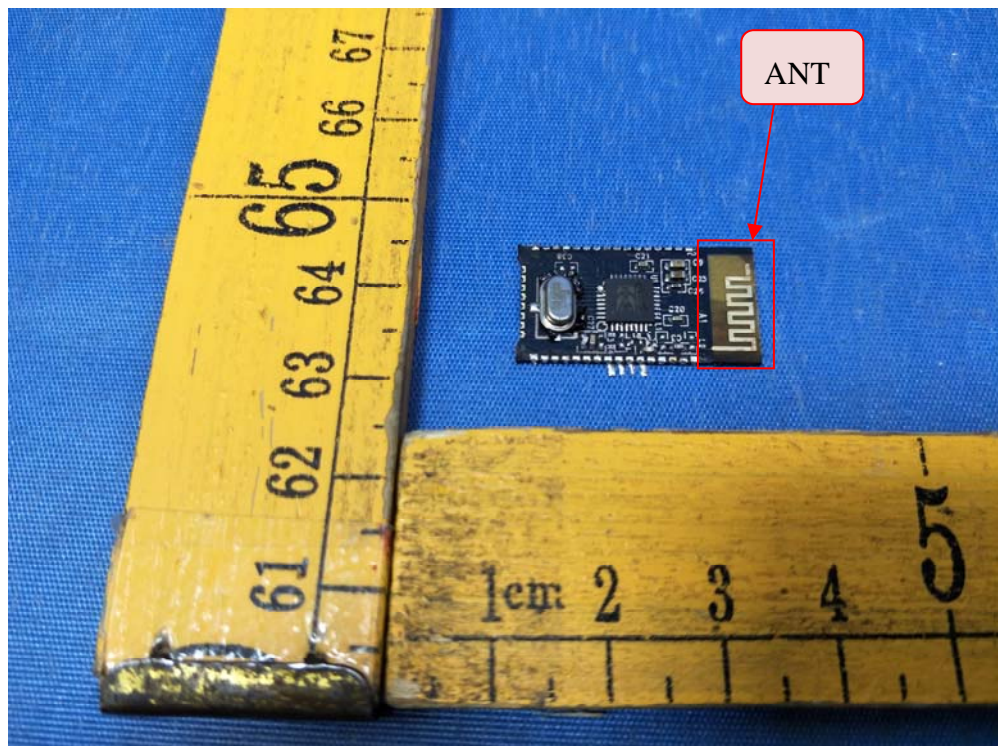

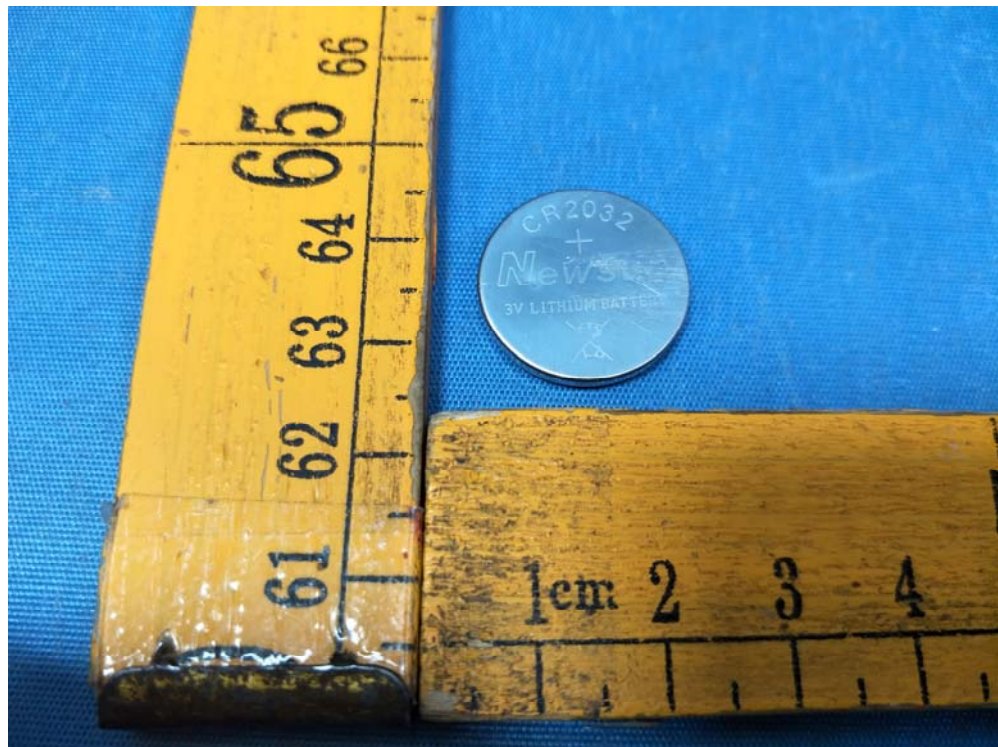

====End of Report====