

Test Plot 1#: GSM 850_Head Left Cheek_Low

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8
 Medium parameters used: 824.2 MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.886 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 6.656 V/m; Power Drift = -0.20 dB
 Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.515 W/kg

Maximum value of SAR (measured) = 0.930 W/kg

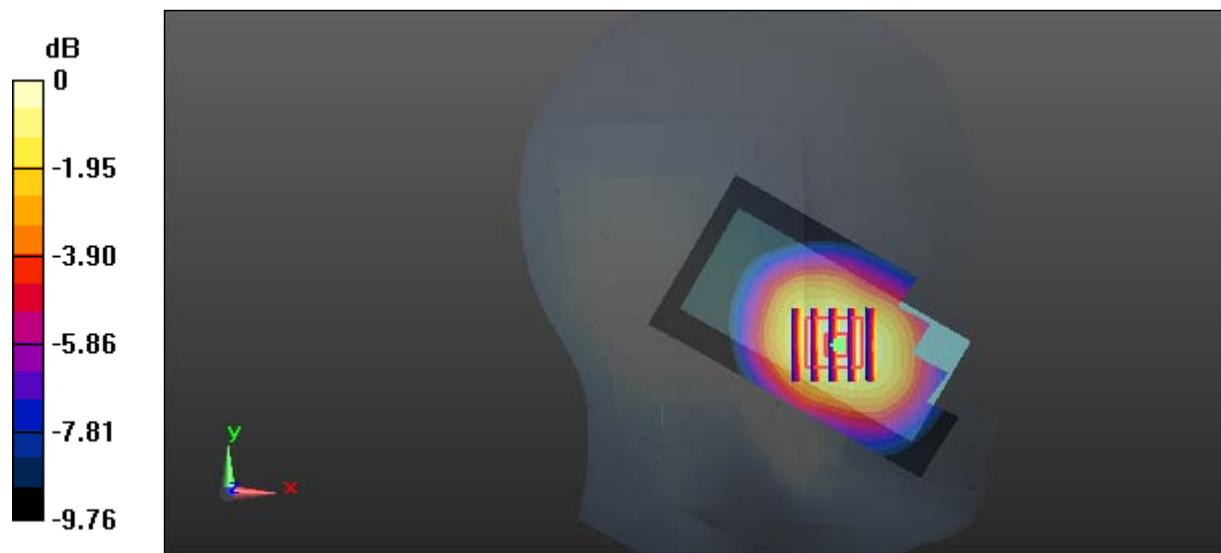

0 dB = 0.930 W/kg = -0.32 dBW/kg

Test Plot 2#: GSM 850_Head Left Cheek_Middle

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 40.48$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.989 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 7.383 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.578 W/kg

Maximum value of SAR (measured) = 0.994 W/kg

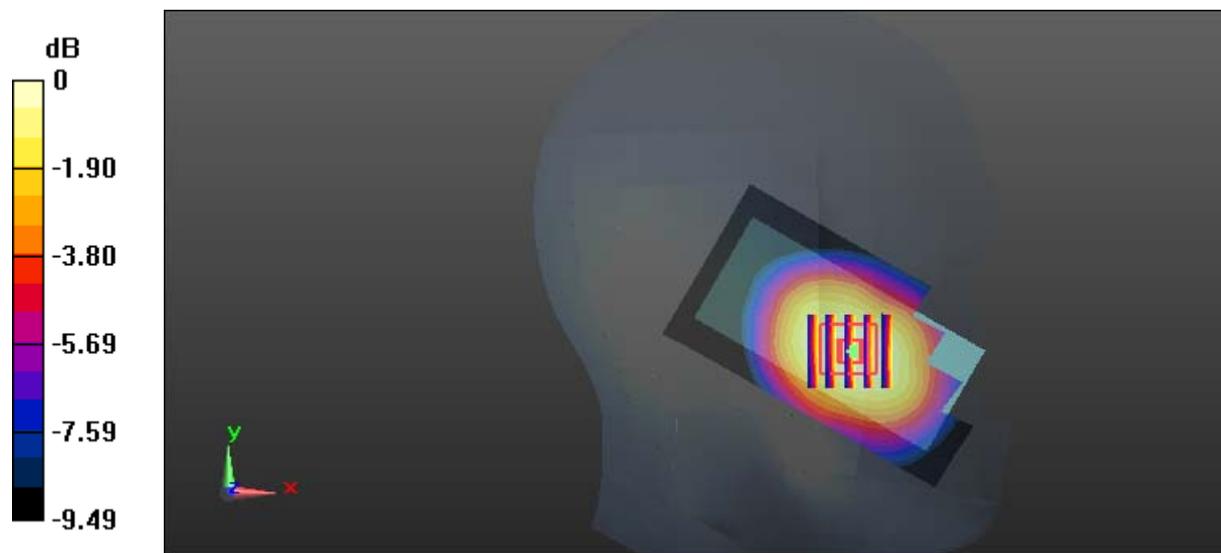

0 dB = 0.994 W/kg = -0.03 dBW/kg

Test Plot 3#: GSM 850_Head Left Cheek_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 848.8 MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 40.373$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.23 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 7.701 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.741 W/kg
 Maximum value of SAR (measured) = 1.24 W/kg

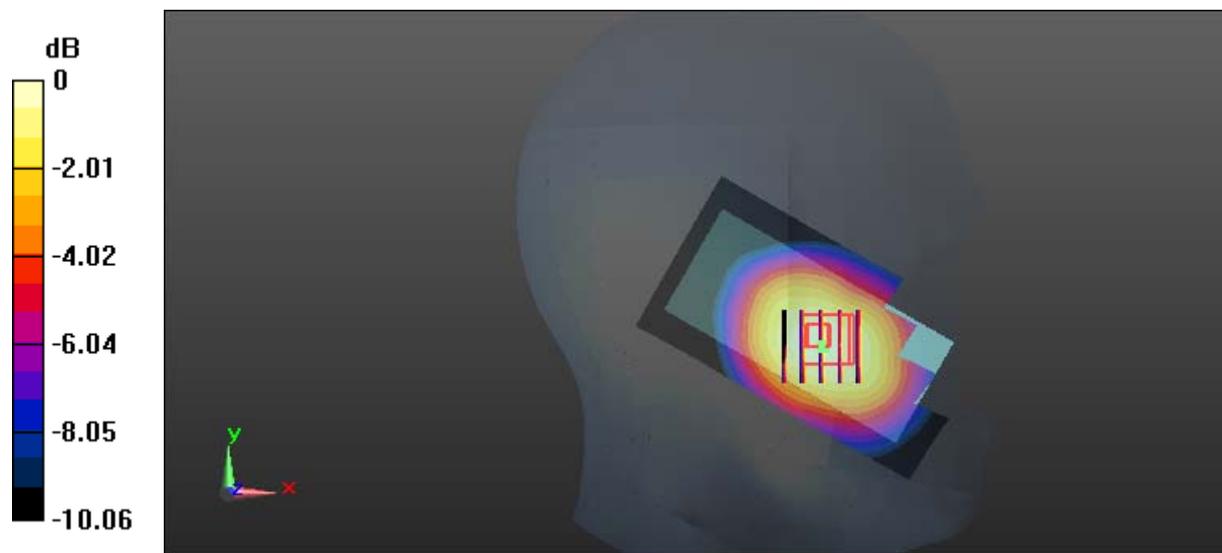

0 dB = 1.24 W/kg = 0.93 dBW/kg

Test Plot 4#: GSM 850_Head Left Tilt_Middle

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 40.48$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.402 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 9.668 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

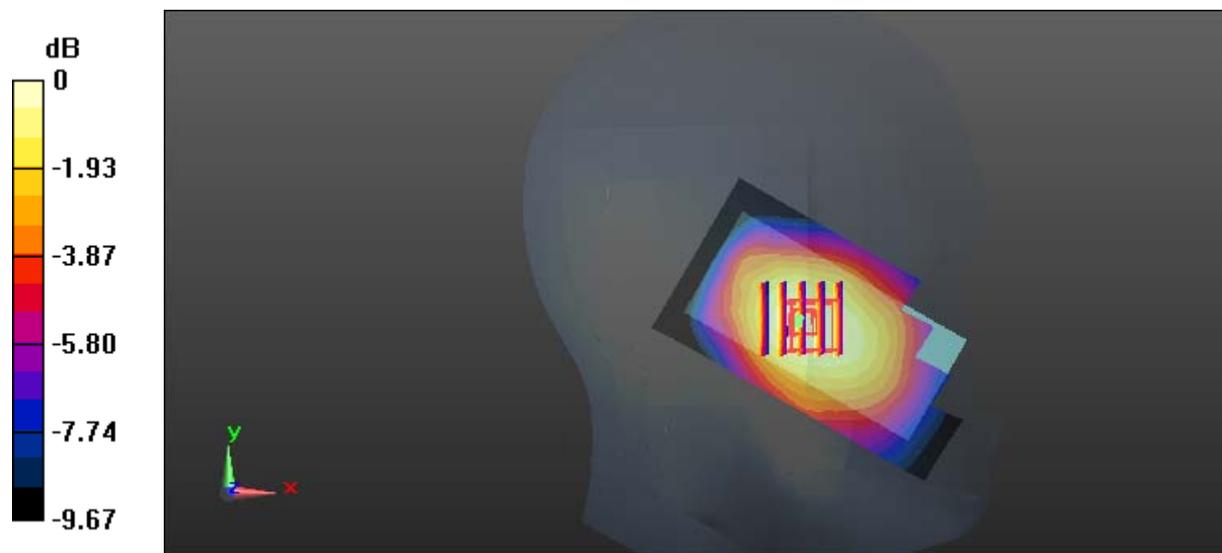

0 dB = 0.405 W/kg = -3.93 dBW/kg

Test Plot 5#: GSM 850_Head Right Cheek_Middle

DUT: Mobile Phone; Type: A8; Serial: 17040600220


Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 40.48$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.957 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 7.398 V/m; Power Drift = -0.39 dB
 Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.535 W/kg
 Maximum value of SAR (measured) = 0.956 W/kg

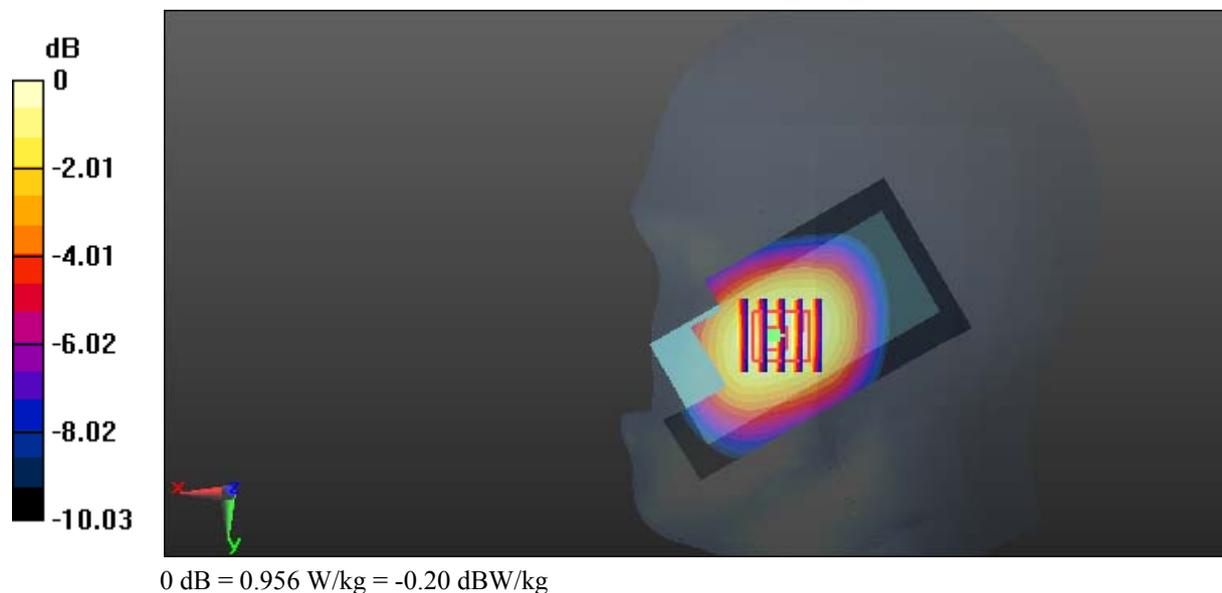

Test Plot 6#: GSM 850_Head Right Tilt_Middle**DUT: Mobile Phone; Type: A8; Serial: 17040600220**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 40.48$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.437 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.98 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.417 W/kg

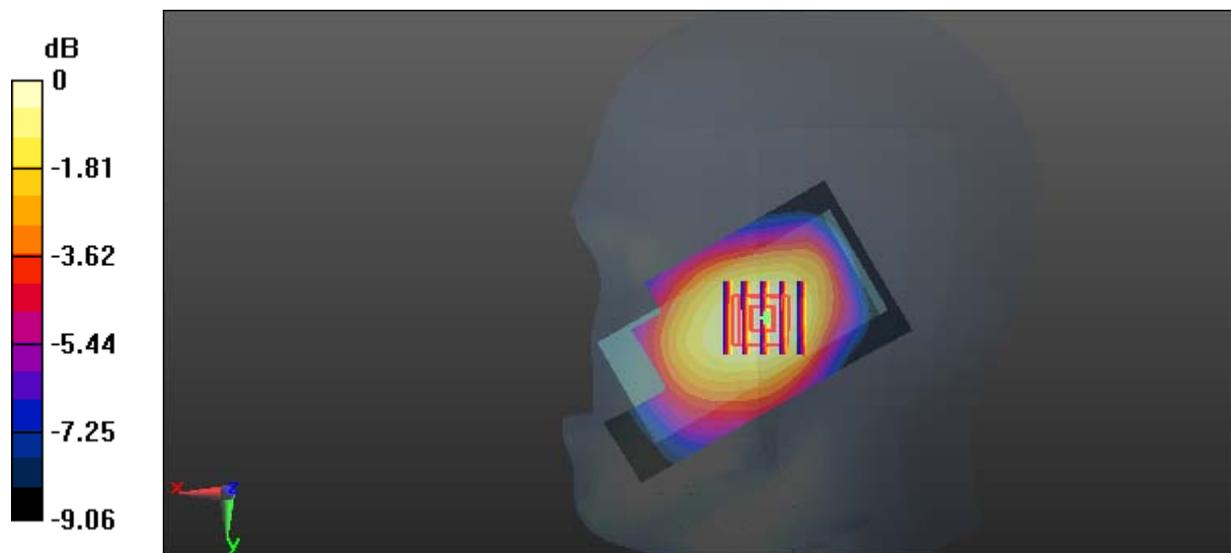

0 dB = 0.417 W/kg = -3.80 dBW/kg

Test Plot 7#: GSM 850_Body Worn Back_Low

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8
 Medium parameters used: 824.2 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 53.709$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.26 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 31.96 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.709 W/kg
 Maximum value of SAR (measured) = 1.26 W/kg

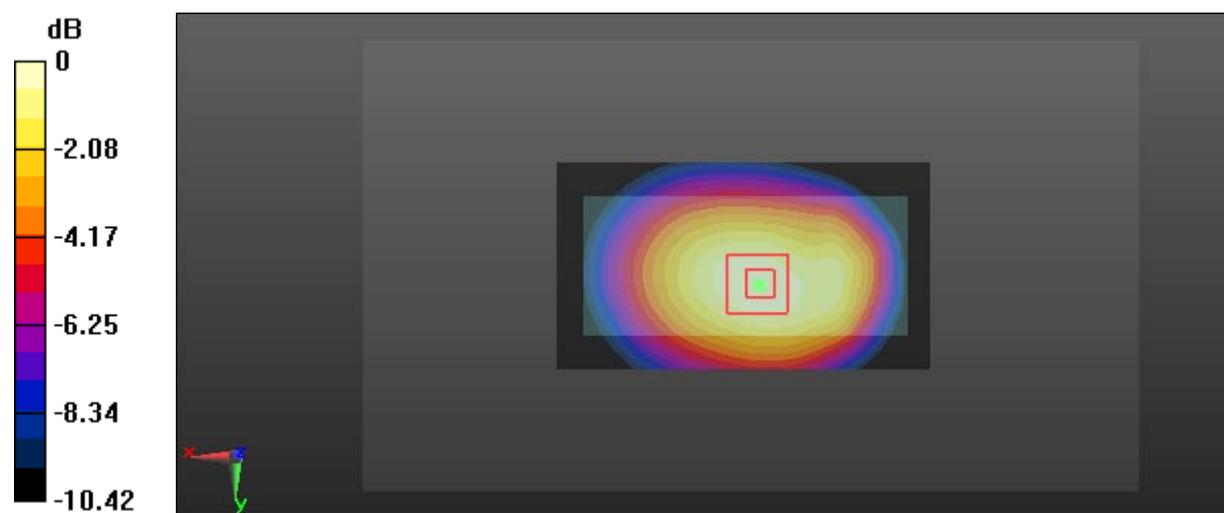

0 dB = 1.26 W/kg = 1.00 dBW/kg

Test Plot 8#: GSM 850_Body Worn Back_Middle**DUT: Mobile Phone; Type: A8; Serial: 17040600220**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: 836.6 MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 54.117$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.95 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.730 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

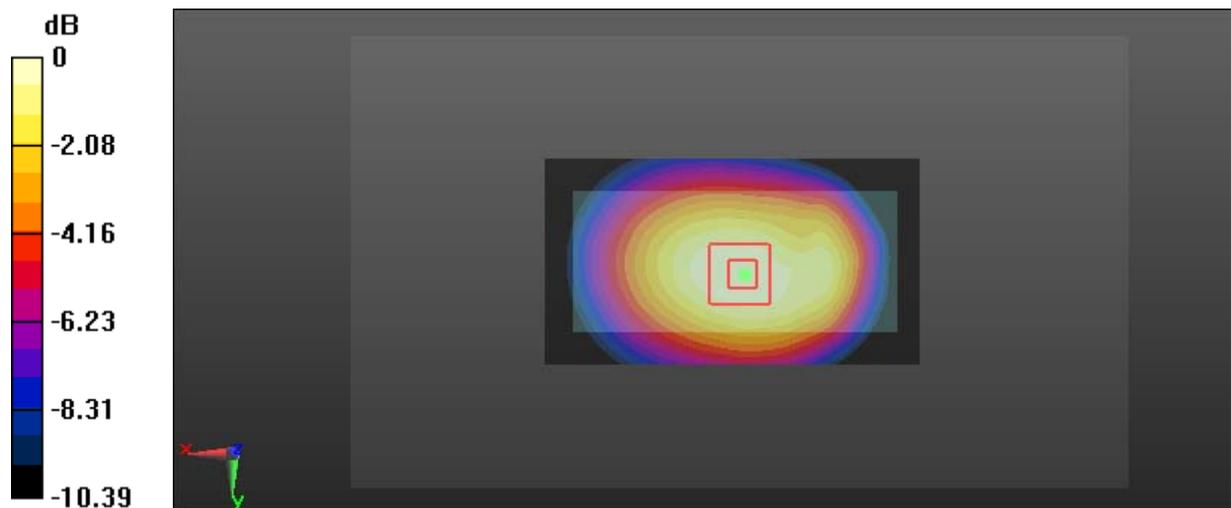

0 dB = 1.28 W/kg = 1.07 dBW/kg

Test Plot 9#: GSM 850_Body Worn Back_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220


Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 848.8 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.077$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.24 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 31.98 V/m; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.687 W/kg
 Maximum value of SAR (measured) = 1.23 W/kg

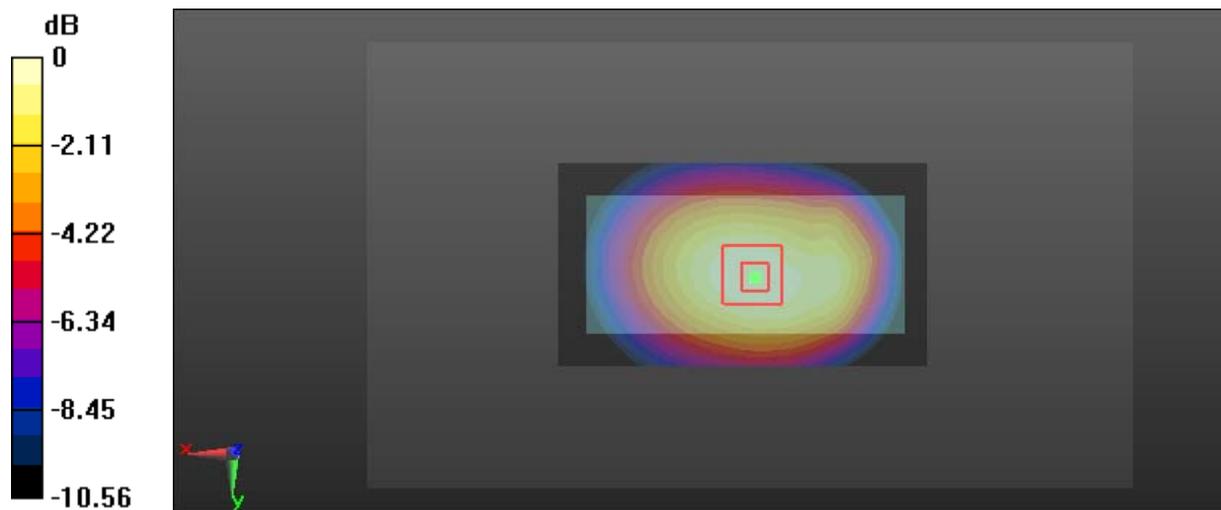

0 dB = 1.23 W/kg = 0.90 dBW/kg

Test Plot 10#: GSM 850_Body Back_Low

DUT: Mobile Phone; Type: A8; Serial: 17040600220


Communication System: GPRS-2 slots; Frequency: 824.2 MHz; Duty Cycle: 1:4
 Medium parameters used: 824.2 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 53.709$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 34.70 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.800 W/kg
 Maximum value of SAR (measured) = 1.45 W/kg

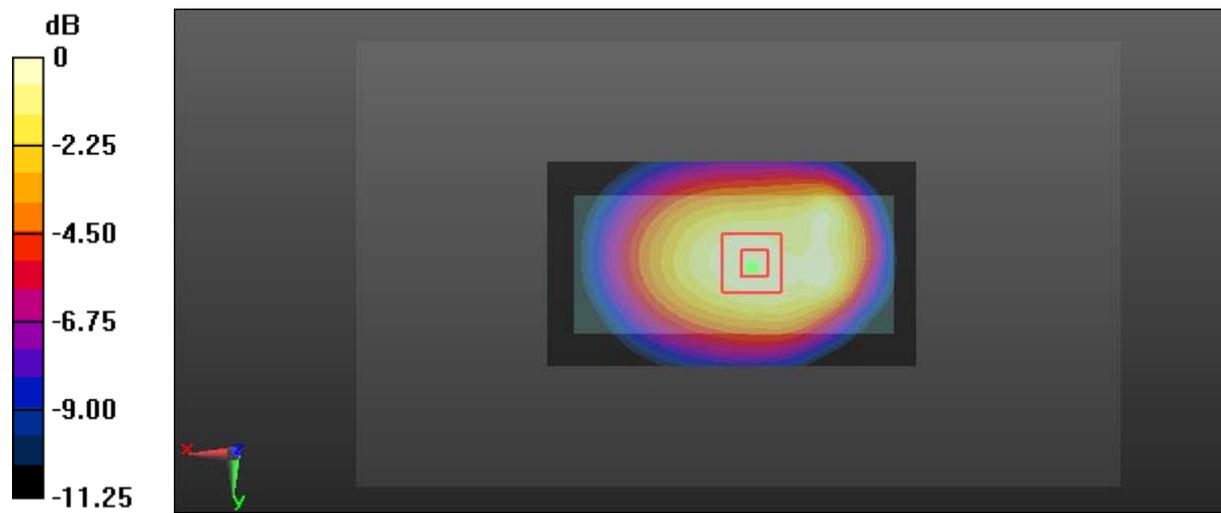

0 dB = 1.45 W/kg = 1.61 dBW/kg

Test Plot 11#: GSM 850_Body Back_Middle**DUT: Mobile Phone; Type: A8; Serial: 17040600220**

Communication System: GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: 836.6 MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 54.117$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.03 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.779 W/kg

Maximum value of SAR (measured) = 1.41 W/kg



0 dB = 1.41 W/kg = 1.49 dBW/kg

Test Plot 12#: GSM 850_Body Back_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220


Communication System: GPRS-2 slots; Frequency: 848.8 MHz; Duty Cycle: 1:4
 Medium parameters used: 848.8 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.077$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.34 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 32.90 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.729 W/kg
 Maximum value of SAR (measured) = 1.33 W/kg

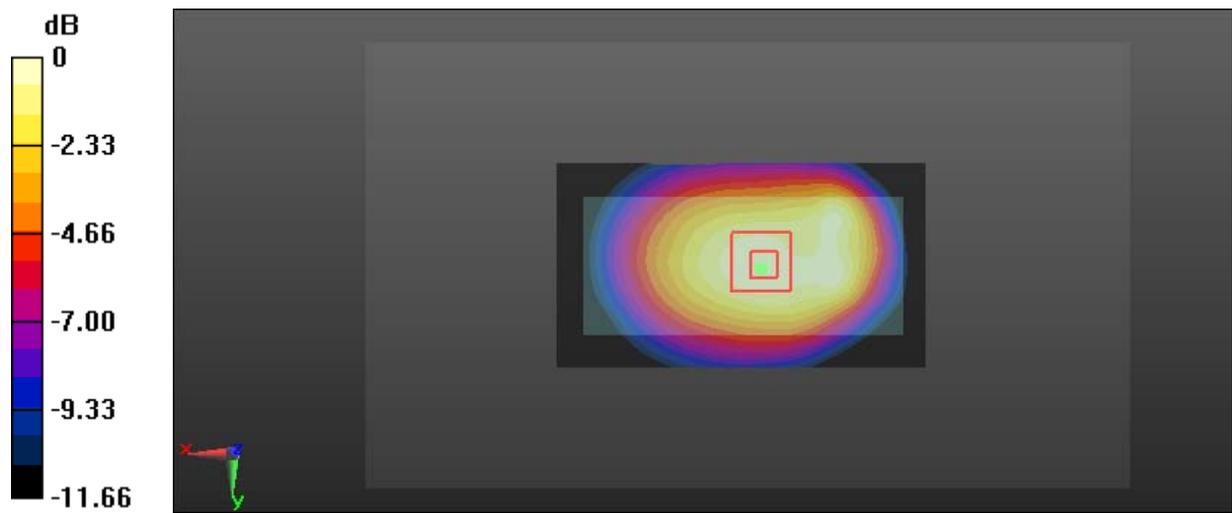

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Plot 13#: GSM 1900_Head Left Cheek_ High

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 1909.8 MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.371$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.173 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.638 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

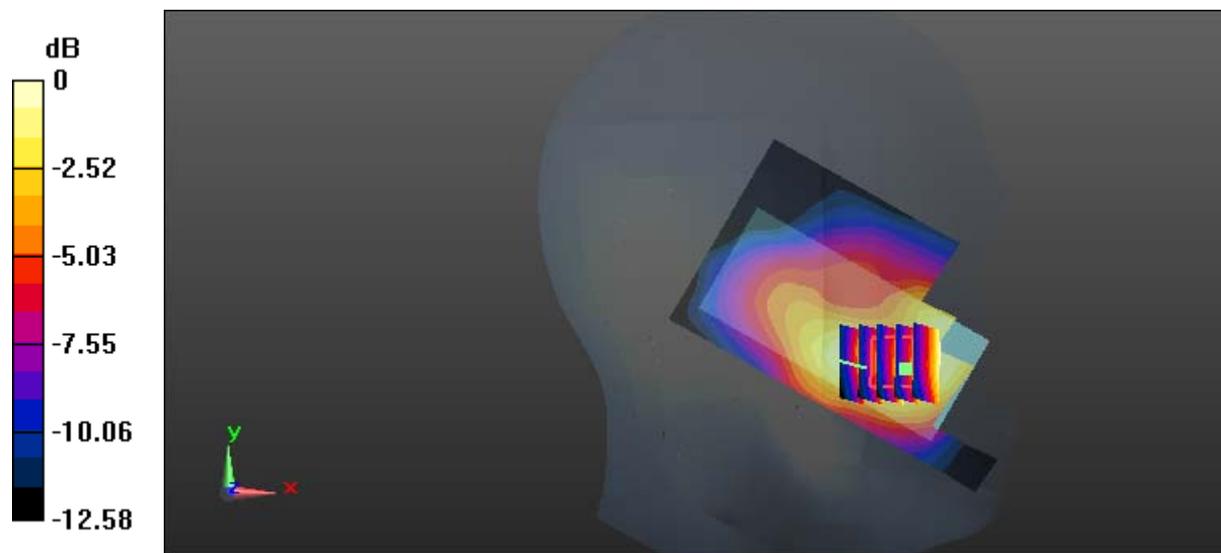

0 dB = 0.179 W/kg = -7.47 dBW/kg

Test Plot 14#: GSM 1900_Head Left Tilt_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 1909.8 MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.371$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0955 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.586 V/m; Power Drift = -0.27 dB
 Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0862 W/kg

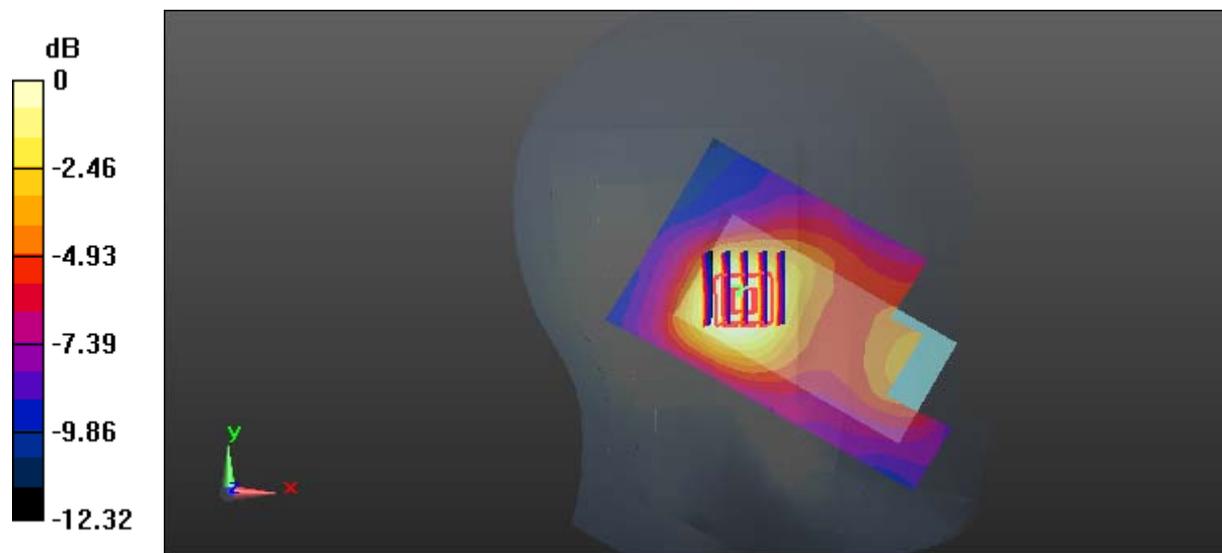

0 dB = 0.0862 W/kg = -10.64 dBW/kg

Test Plot 15#: GSM 1900_Head Right Cheek_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 1909.8 MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.371$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.157 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.219 V/m; Power Drift = -0.77 dB
 Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.246 W/kg

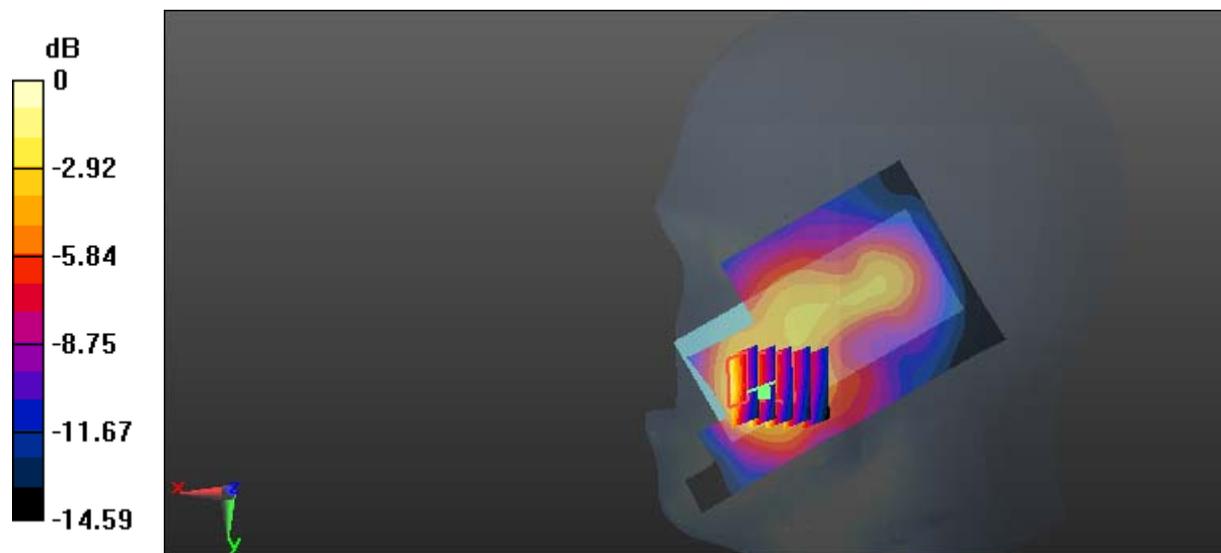

0 dB = 0.246 W/kg = -6.09 dBW/kg

Test Plot 16#: GSM 1900_Head Right Tilt_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 1909.8 MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.371$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0890 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.544 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0787 W/kg

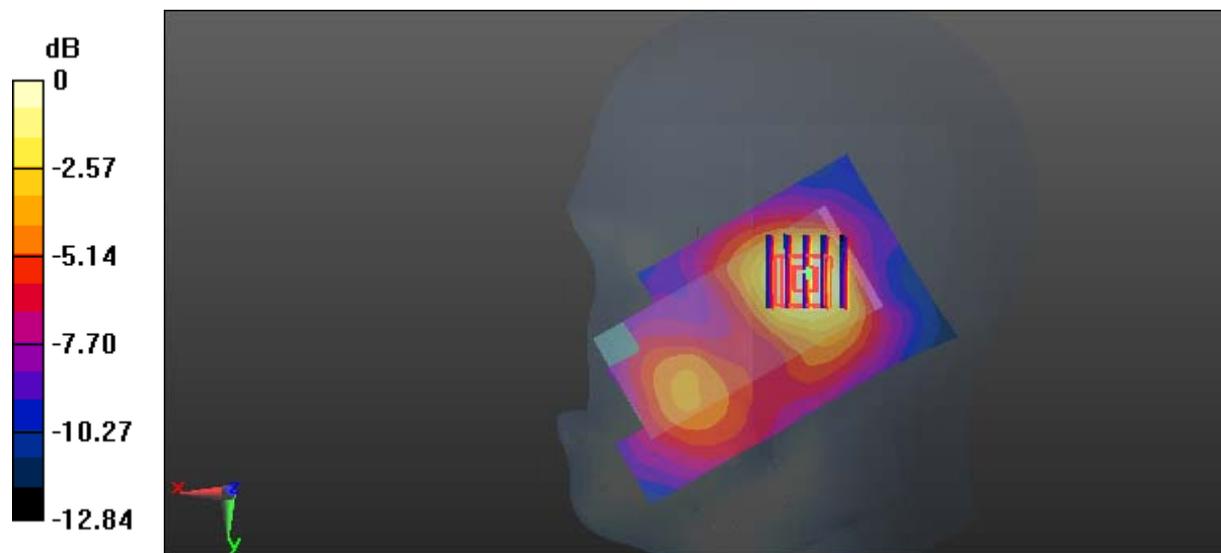

0 dB = 0.0787 W/kg = -11.04 dBW/kg

Test Plot 17#: GSM 1900_Body Worn Back_High

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 1909.8 MHz; $\sigma = 1.558$ S/m; $\epsilon_r = 52.168$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.324 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.422 V/m; Power Drift = -0.20 dB
 Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.113 W/kg
 Maximum value of SAR (measured) = 0.310 W/kg

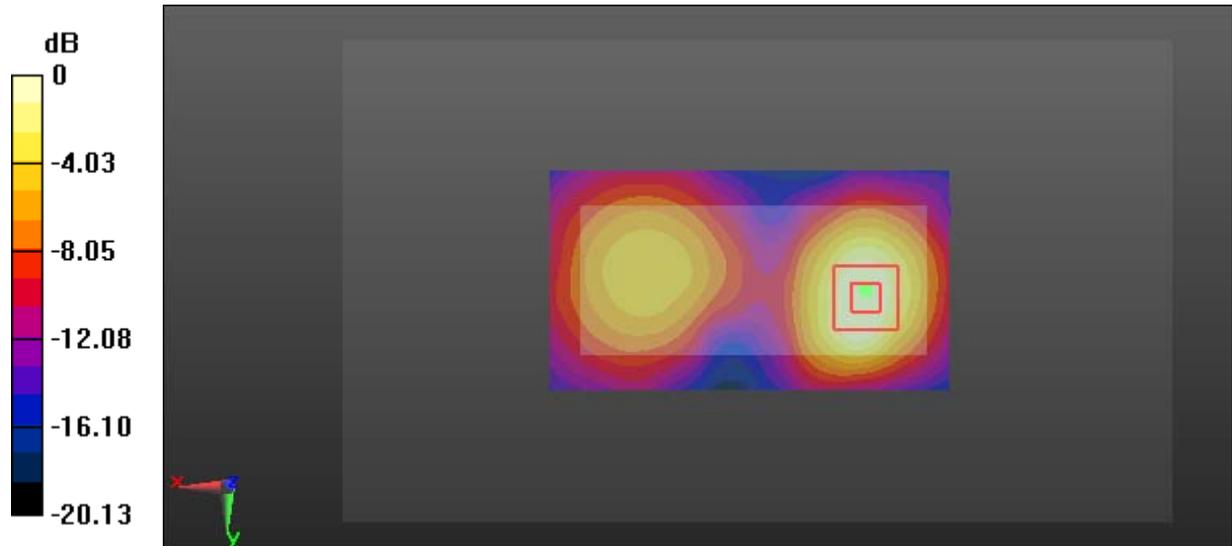

0 dB = 0.310 W/kg = -5.09 dBW/kg

Test Plot 18#: GSM 1900_Body Back_Middle

DUT: Mobile Phone; Type: A8; Serial: 17040600220

Communication System: GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: 1880 MHz; $\sigma = 1.531$ S/m; $\epsilon_r = 52.117$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.473 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 4.718 V/m; Power Drift = -0.35 dB
 Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.147 W/kg
 Maximum value of SAR (measured) = 0.438 W/kg

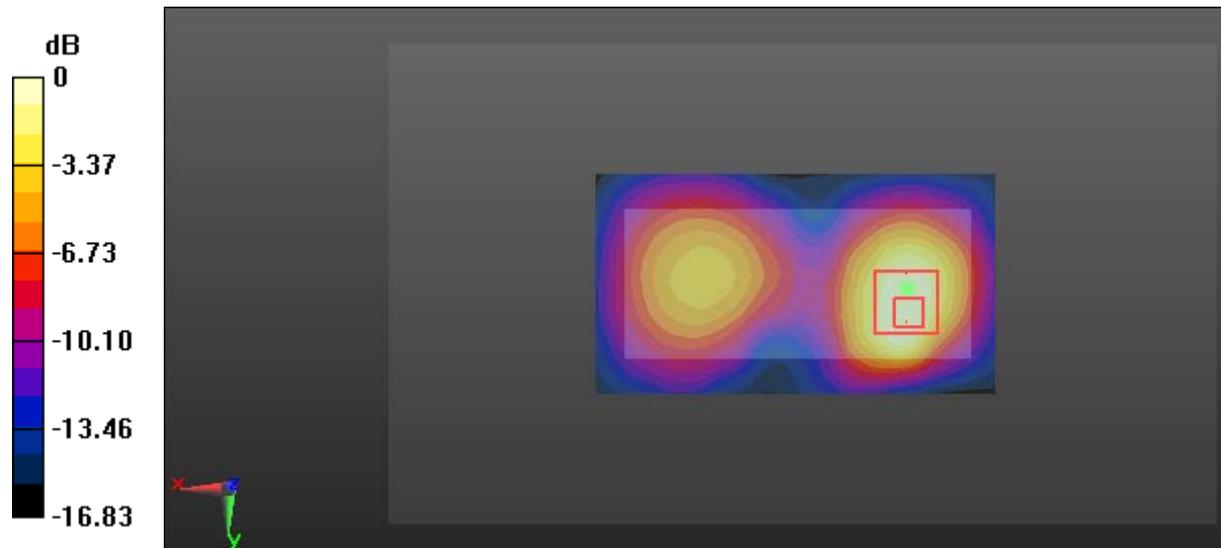

0 dB = 0.438 W/kg = -3.59 dBW/kg