

Test Report Prepared By:

Electronics Test Centre  
27 East Lake Hill  
Airdrie, Alberta  
Canada  
T4A 2K3

[sales@etc-mpbtech.com](mailto:sales@etc-mpbtech.com)  
<http://www.etc-mpb.com>

Telephone: 1-403-912-0037

ETC Report #: t29e18a131-FCC Release 1

Report date: 2018-02-14

Test Date: January 22,24,23,29, of 2018

EMC testing of the Tektelic Communication Inc. Kona Micro Outdoor Gateway  
in accordance with FCC Part 15.247, ANSI C63.4: 2014 and ANSI C63.10: 2013  
as referenced by FCC OET KDB 558074 D01 DTS Measurement Guidance v04.

**FCC ID: 2ALEPT0005158**

Test Personnel: Imran Akram/Henry Cookeygam/Bushra Muharram

Prepared for: Tektelic Communication Inc.

7657 10<sup>th</sup> Street NE  
Calgary, Alberta  
Canada  
T2E 8X2

Telephone: 1-403-338-6910



---

Imran Akram  
[iakram@etc-mpbtech.com](mailto:iakram@etc-mpbtech.com)  
Sr. EMC Technologist  
Electronics Test Centre (Airdrie)



---

Marc Rousseau  
[marc.rousseau@mpbc.ca](mailto:marc.rousseau@mpbc.ca)  
QA Manager  
Electronics Test Centre (Airdrie)

REVISION RECORD

ISSUE	DATE	AUTHOR	REVISIONS
DRAFT 1	2018-01-29	I. Akram	Initial draft submitted for review.
Release 1	2018-02-14	M. Rousseau	Sign off

## TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope .....	5
1.2	Applicant .....	5
1.3	Test Sample Description.....	5
1.4	General Test Conditions and Assumptions .....	5
1.5	Scope of Testing .....	6
1.5.1	Test Methodology.....	6
1.5.2	Variations in Test Methodology.....	6
1.5.3	Test Sample Verification, Configuration & Modifications .....	6
1.5.4	EUT Functionality.....	6
2.0	TEST CONCLUSION	7
2.1	AC Power Line Conducted Emissions: Transmit Mode .....	8
2.1.1	Test Guidance: ANSI C63.4-2014, Clause 7.3.1 .....	8
2.1.2	Deviations From The Standard: .....	8
2.1.3	Uncertainty of Measurement: .....	8
2.1.4	Test Equipment.....	9
2.1.5	Test Sample Verification, Configuration & Modifications .....	9
2.1.6	Conducted Emissions Data:.....	10
2.2	Channel Occupied Bandwidth.....	13
2.2.1	Test Guidance: ANSI C63.10-2013, Clause 6.9.2 & 6.9.3/ FCC OET KDB 558074 Section 8 Option 2.....	13
2.2.2	Deviations From The Standard: .....	13
2.2.3	Test Equipment.....	13
2.2.4	Test Sample Verification, Configuration & Modifications .....	13
2.2.5	Channel Occupied Bandwidth Data: .....	14
2.3	Max Output Power .....	20
2.3.1	Test Guidance: ANSI C63.10-2013, Clause 11.9.1.1, Clause 7.8.5 / FCC OET KDB 558074 Section 9.2.2.2 .....	20
2.3.2	Deviations From The Standard: .....	20
2.3.3	Test Equipment.....	20
2.3.4	Test Sample Verification, Configuration & Modifications .....	21
2.3.5	Max Output Power Data.....	21
2.4	Power Spectral Density.....	27
2.4.1	Test Guidance: ANSI C63.10-2013, Clause 11.10.2 / FCC OET KDB 558074 10.3 .....	27
2.4.2	Deviations From The Standard: .....	27
2.4.3	Test Equipment.....	27
2.4.4	Test Sample Verification, Configuration & Modifications .....	28
2.4.5	Peak PSD Data.....	28

2.5	Band Edge Attenuation .....	34
2.5.1	Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074 .....	34
2.5.2	Deviations From The Standard: .....	34
2.5.3	Test Equipment.....	35
2.5.4	Test Sample Verification, Configuration & Modifications .....	35
2.5.5	Band Edge Data (Worse Case) .....	35
2.6	Conducted Spurious Emissions .....	38
2.6.1	Test Guidance: ANSI C63.10-2013, Clause 6.7 .....	38
2.6.2	Deviations From The Standard: .....	38
2.6.3	Test Equipment.....	38
2.6.4	Test Sample Verification, Configuration & Modifications .....	38
2.6.5	Conducted Emissions Data: One Carrier Mode of operation.....	39
2.7	EUT Positioning Assessment.....	48
2.8	Radiated Spurious Emissions / Co-Location.....	49
2.8.1	Test Guidance: ANSI C63.10-2013, Clause 13.4.2 .....	50
2.8.2	Deviations From The Standard: .....	50
2.8.3	Uncertainty of Measurement: .....	50
2.8.4	Test Equipment.....	51
2.8.5	Test Sample Verification, Configuration & Modifications .....	51
2.8.6	Radiated Emissions Data:.....	53
2.9	Radiated Spurious Emissions (Rx Mode) .....	60
2.9.1	Test Guidance: ANSI C63.10-2013, Clause 13.4.2 .....	60
2.9.2	Deviations From The Standard: .....	61
2.9.3	Uncertainty of Measurement: .....	61
2.9.4	Test Equipment.....	61
2.9.5	Test Sample Verification, Configuration & Modifications .....	61
2.9.6	Radiated Emissions Data:.....	63
2.10	Antenna Requirements .....	70
2.10.1	EUT Antenna .....	70
2.11	RF Exposure .....	71
3.0	TEST FACILITY .....	72
3.1	Location.....	72
3.2	Grounding Plan .....	72
3.3	Power Supply .....	72
Appendix A	– 3G/4G Module Antenna .....	74
Appendix B	– LoRa Antenna .....	78

## **1.0 INTRODUCTION**

### **1.1 Scope**

The purpose of this report is to present the results of compliance testing performed in accordance with FCC Part 15.247 ANSI C63.4-2014 and ANSI C63.10-2013. All test procedures, limits, criteria, and results described in this report apply only to the Tektelic Communication Inc. Kona Micro Outdoor Gateway test sample, referred to herein as the EUT (Equipment Under Test).

This report does not imply product endorsement by the Electronics Test Centre, SCC, NAVLP, A2LA, nor any Canadian Government agency.

### **1.2 Applicant**

This test report has been prepared for Tektelic Communication Inc., located in Calgary, Alberta, Canada.

### **1.3 Test Sample Description**

As provided to ETC (Airdrie) by Tektelic Communication Inc.:

<b>Product Name:</b>	Kona Micro Outdoor Gateway	
<b>Lora Radio</b>	<b>Frequency Range</b>	923.3 – 927.5 MHz
	<b>Type of Modulation</b>	LoRa 500KHz DTS
	<b>Associated Antenna</b>	LTE (Internal): Pulse, W3907 LoRa port: L-COM, HG908U-PRO 8dBi
<b>Model# / Serial#</b>	T0004937* / 1803K0001	
<b>Power supply:</b>	48 VDC	

This product is a **Kona micro outdoor gateway is a LoRa base station**. It may incorporate a 3G/4G backhaul module; FCC ID N7NEM7355. Antenna information from vendor are provided in Appendix A.

\*This model contains all of the equipment options in this family of products. This model represents model numbers T0004937, T0005129, T0005247 and T0005248. This model was chosen as a worst-case condition for emission testing.

All models use identical electrical host board. The only electrical difference is the 3G/4G module (on model T0004937 and T0005129). The other variation is implemented purely in software and doesn't involve any additional electrical or RF circuits.

### **1.4 General Test Conditions and Assumptions**

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated.

Where relevant, the EUT was only tested using the monitoring methods and test criteria defined in this report.

The environmental conditions are recorded during each test, and are reported in the relevant sections of this document.

## **1.5 Scope of Testing**

Tests were performed in accordance with FCC Part 15.247, ANSI C63.4-2014, and ANSI C63.10-2013 as referenced in FCC KDB 558074 D01 v04 for DTS.

### **1.5.1 Test Methodology**

Test methods are specified in the Basic Standard as referenced and/or modified by the Product Standard in the part of Section 2 of this report associated with each particular test case.

### **1.5.2 Variations in Test Methodology**

Any variance in methodology or deviation from the reference Standard is documented in the part of Section 2 of this report associated with each particular Test Case.

### **1.5.3 Test Sample Verification, Configuration & Modifications**

EUT setup, configuration, protocols for operation and monitoring of EUT functions, and any modifications performed in order to meet the requirements, are detailed in each Test Case of Section 2 of this report.

### **1.5.4 EUT Functionality:**

The Kona Outdoor Micro gateway is a low-power, low cost LoRa base station. It operates in the ISM band 902 MHz–928 MHz, with receive occupying 902 MHz–915 MHz and transmit occupying 923 MHz–928 MHz. The Kona Micro Outdoor is a full-duplex module that allows for simultaneous TX and RX operation. The Kona micro outdoor have two mode of operation one channel operation and two channel operation. The Kona Micro outdoor may or may not have pre-certified 3G/4G module with transiting frequency 784 MHz. Further detail is given in operational description/user manual.

Radio Antenna port conducted emission testing is performed on both transmitting mode of operation with duty cycle  $\geq 98\%$ . For radiated spurious emission pre scan was performed on both mode of operation near low, mid and High channels all scan performed very similar result, so MID channel in signal carrier mode was used for detail analysis for spurious emission. During radiated spurious emission highest gain (8dBi) antenna was used.

## 2.0 TEST CONCLUSION

### STATEMENT OF COMPLIANCE

The customer equipment referred to in this report was found to comply with the requirements, as summarized below.

The EUT was subjected to the following tests. Compliance status is reported as **Compliant** or **Non-compliant**. **N/A** indicates the test was Not Applicable to the EUT.

**Note:** Maintenance of compliance is the responsibility of the Manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the EUT with respect to the standards detailed in this test report.

The following table summarizes the tests performed in terms of the specification, class or performance criterion applied, and the EUT modification state.

Test Case	Test Type	Specification	Test Sample	Modifications	Config.	Result
2.1	AC Conducted Emissions (Tx)	15.207	Kona Micro Outdoor Gateway	none	see § 2.1	<b>Compliant</b>
2.2	Occupied Bandwidth	15.247(a)	Kona Micro Outdoor Gateway	none	see § 2.2	<b>Compliant</b>
2.3	Max Output Power	15.247(d)	Kona Micro Outdoor Gateway	none	see § 2.3	<b>Compliant</b>
2.4	Power Spectral Density	15.247(e)	Kona Micro Outdoor Gateway	none	see § 2.4	<b>Compliant</b>
2.5	Band Edge	15.247(d)	Kona Micro Outdoor Gateway	none	see § 2.5	<b>Compliant</b>
2.6	Conducted Spurious	15.247(d)	Kona Micro Outdoor Gateway	none	see § 2.6	<b>Compliant</b>
2.7	EUT Position	ANSI C63.4	Kona Micro Outdoor Gateway	-	-	<b>n/a</b>
2.8	Radiated Spurious	15.205, 15.209 15.247(d)	Kona Micro Outdoor Gateway	none	see § 2.8	<b>Compliant</b>
2.9	Radiated Spurious (RX Mode)	FCC15.109	Kona Micro Outdoor Gateway	none	see § 2.9	<b>Compliant</b>
2.10	Antenna Requirements	FCC 15.203	Kona Micro Outdoor Gateway	none	-	<b>Compliant</b>
2.11	RF Exposure	15.247(i)	Kona Micro Outdoor Gateway	none	see § 2.10	<b>Compliant</b>

Refer to the test data for applicable test conditions.

## 2.1 AC Power Line Conducted Emissions: Transmit Mode

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: Imran Akram/ Bushra Muharram	Standard: FCC Part 15.207
Date: 2018-01-24(21.6C,11.5% RH)	Basic Standard: ANSI C63.4: 2014
<b>EUT status: Compliant</b>	

### Specification: Part15-207

Frequency (MHz)	Quasi-Peak Limit (dBµV)	Average Limit (dBµV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 – 30	60	50
<b>Criteria:</b> The conducted emissions produced by a device shall not exceed the limits as specified.		

#### 2.1.1 Test Guidance: ANSI C63.4-2014, Clause 7.3.1

Before any testing is performed, the Ambient (measurement noise floor) is recorded, and a QC check is performed to show that the system is functioning correctly.

Testing starts with a scan, performed under software control. After this is complete, the list of frequencies of interest is generated. These frequencies are then investigated for quasi-peak and average amplitude, as applicable. Emissions measured with a QP detector that fall below the Average limit are deemed to meet both requirements.

#### 2.1.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

#### 2.1.3 Uncertainty of Measurement:

The factors contributing to uncertainty of measurement are identified and calculated in accordance with UKAS (United Kingdom Accreditation Service) document “Lab 34, The Expression of Uncertainty in EMC Testing, Aug 2002.” As based on the “ISO Guide to the Expression of Uncertainty in Measurement, 1995.”

This uncertainty estimate represents an expended uncertainty expressed at approximately 95% confidence using a coverage factor of  $k = 2$ .

Test Method	Frequency	Uncertainty
Conducted Emissions Level	150 KHz – 30 MHz	±2.7 dB



### 2.1.4 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	N/A
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
LISN	Com-Power	LI-215A	6180	2017-03-24	2018-03-24
Temp/RH logger	Extech	42270	5892	2017-04-06	2018-04-06


### 2.1.5 Test Sample Verification, Configuration & Modifications

The EUT was set to selected channels with test-specific software. The output was modulated as in normal operation. Configuration in Tx mode.

The EUT was powered via a AC to DC power supply, manufacturer Kikusui, model PAB 8-3.

The EUT met the requirements without modification.

**Test setup diagram:**

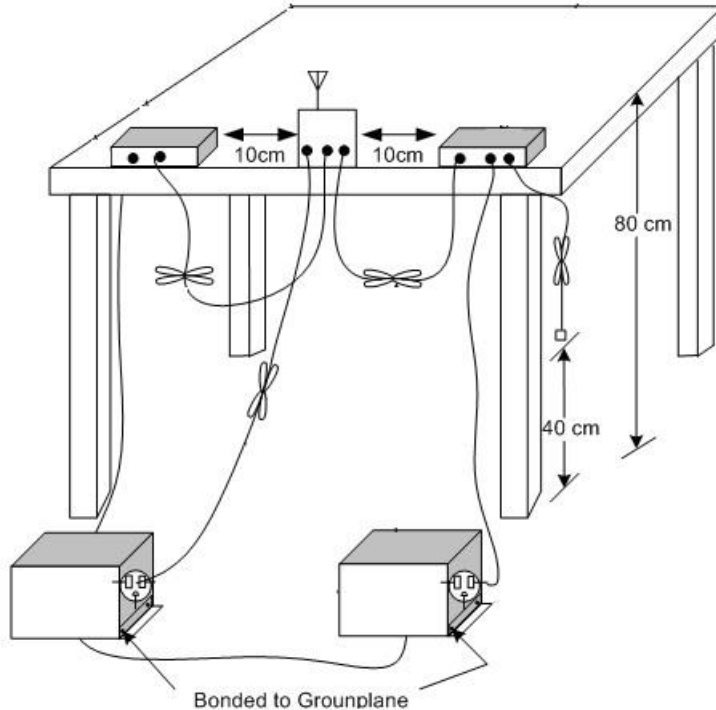

### 2.1.6 Conducted Emissions Data:

The EUT was evaluated in all transmit mode. No mode of transmission showed emission worst then another. The plots are from the DTS mode using mid-channel.

Freq. Marker	Freq. (MHz)	Raw reading (dB $\mu$ v)	Det.	LISN Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dB $\mu$ V)	FCC 15.207 Limit (dB $\mu$ V)	Delta (dB)	L / N
1	0.15249	40.51	PK	.1	10	50.61	55.86	-5.25	L
2	1.09438	27.92	PK	0	10	37.92	46	-8.08	L
1	0.15497	40.99	PK	.1	10	51.09	55.73	-4.64	N
2	1.41746	29.03	PK	0	10	39.03	46	-6.97	N

**PK = Peak Detector**


**Raw Reading in dB $\mu$ V + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dB $\mu$ V/m.**

Note: When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.


**Negative values for Delta indicate compliance.**

**The Ground Bond was measured and found to be 1.25 m $\Omega$ .**


### Plot of Conducted Emissions: Line

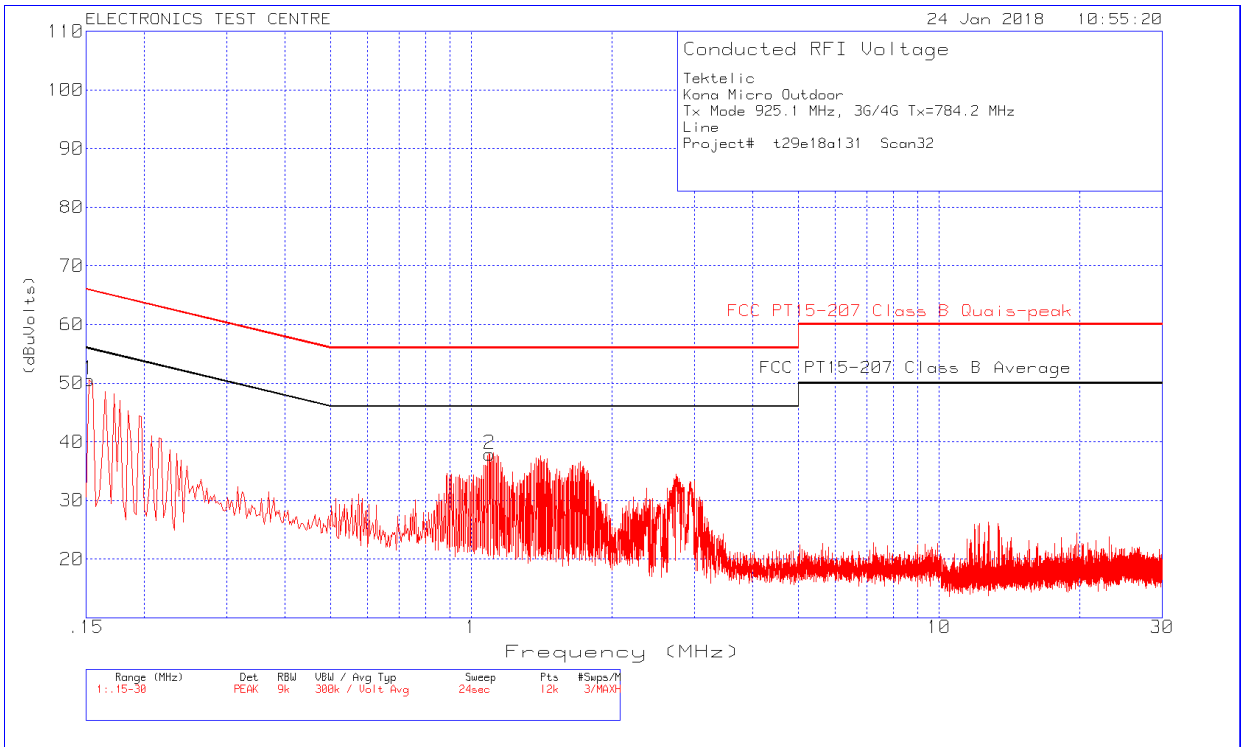


### Plot of Conducted Emissions: Neutral

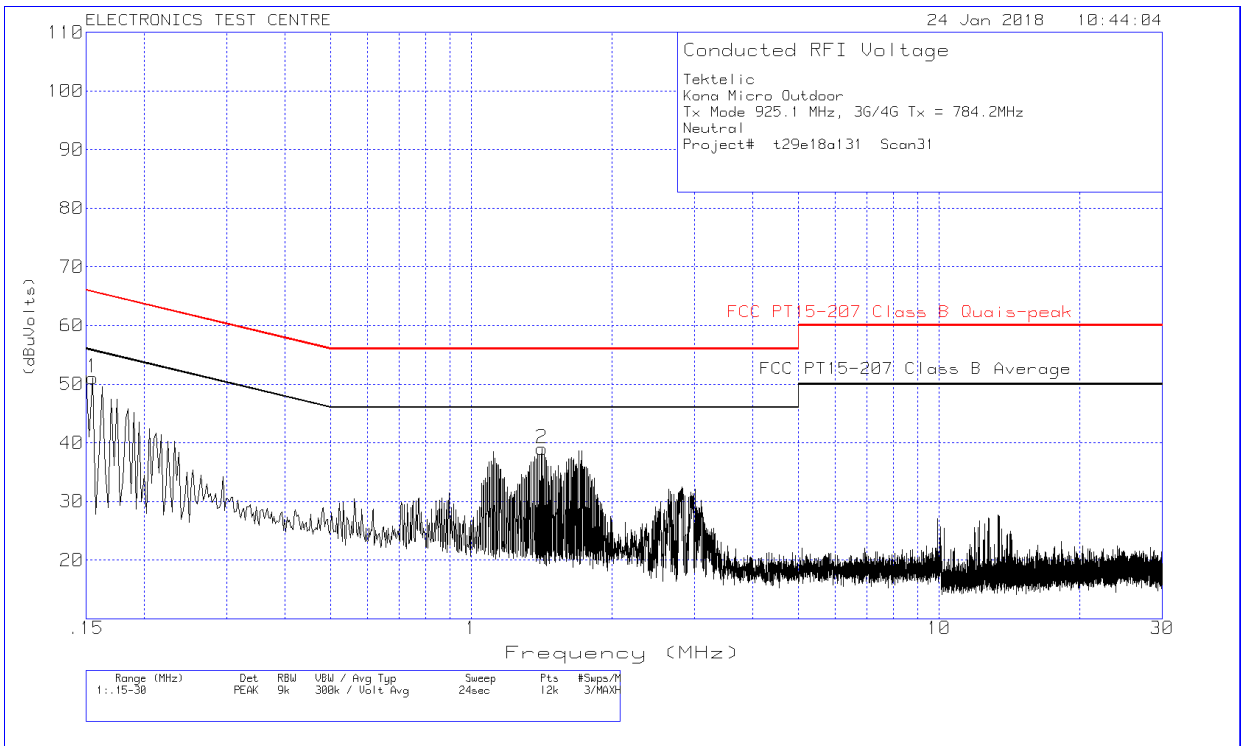

### Plot of Test Chamber Ambient: (measurement noise floor): Line

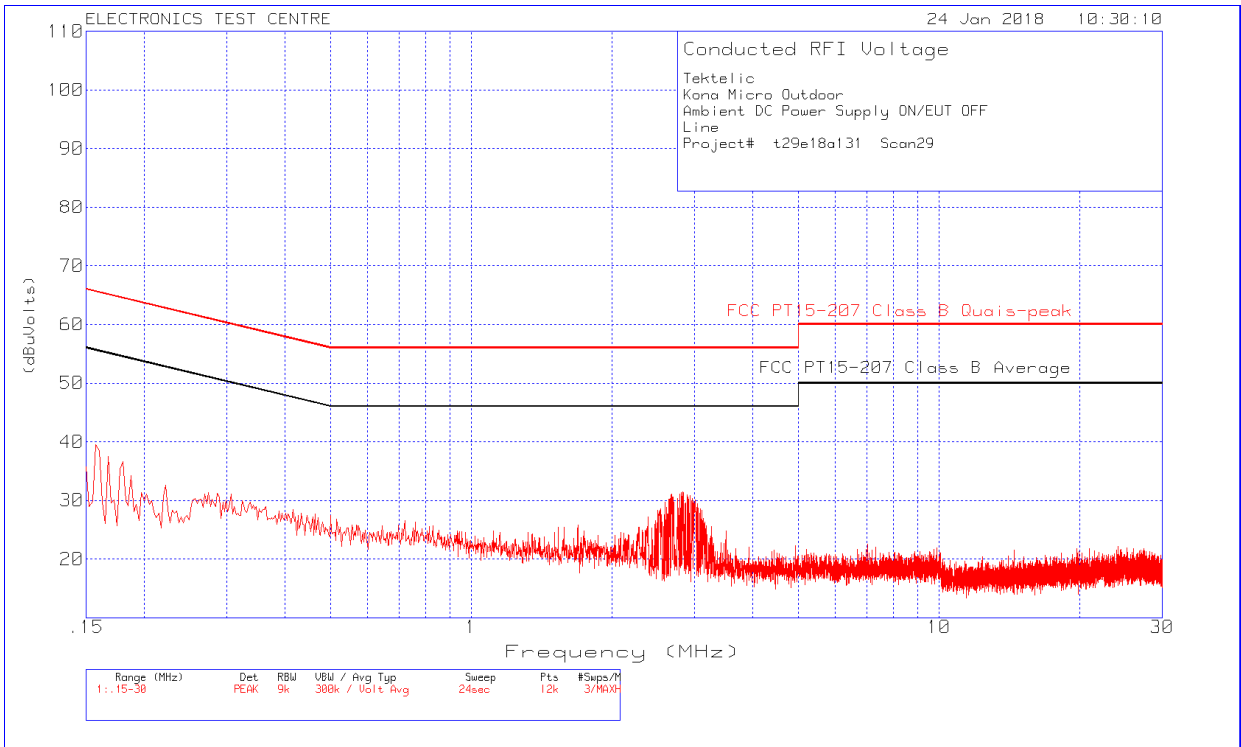

### Plot of Test Chamber Ambient: (measurement noise floor): Neutral

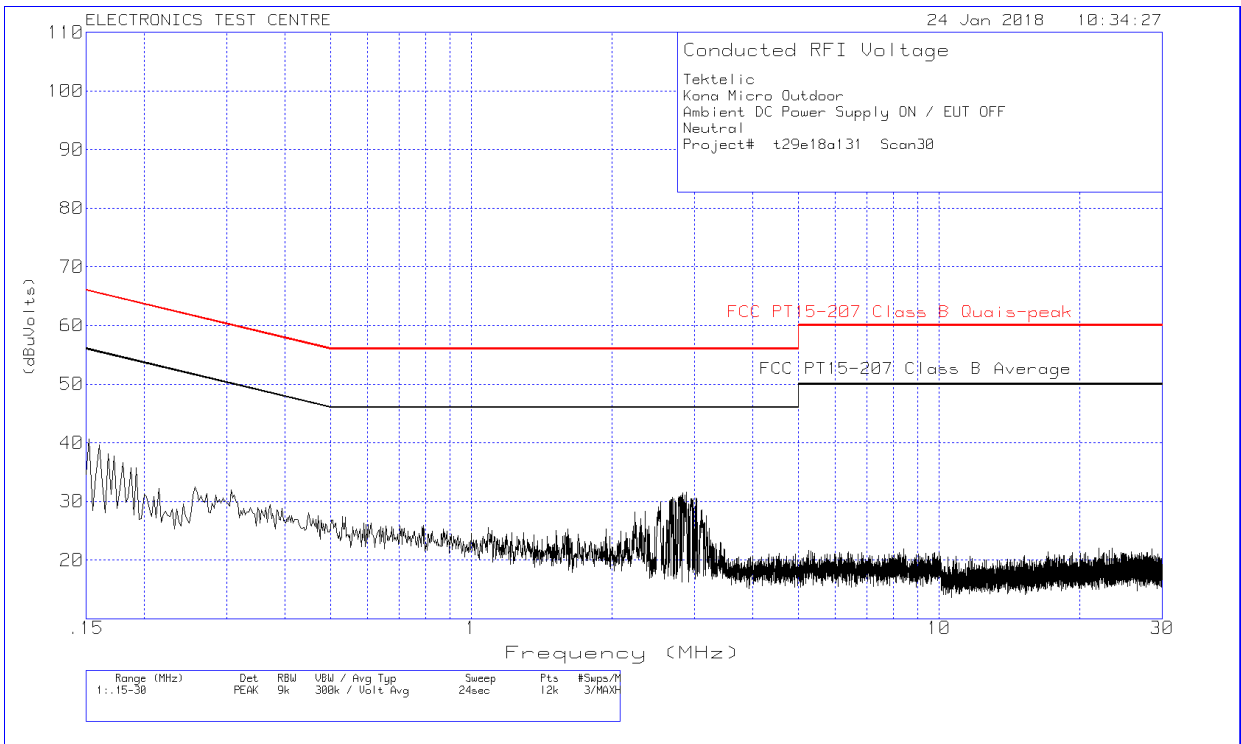

## 2.2 Channel Occupied Bandwidth

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: Imran Akram/ Bushra Muharram	Standard: FCC PART 15.247
Date: 2018-01-22 (20.0°C,14% RH)	Basic Standard: ANSI C63.10-2013 FCC OET KDB 558074
<b>EUT status: Compliant</b>	

**Specification: FCC Part 15.247 (a, 2), FCC 15.215 (c)**

**Criteria:** Systems using digital modulation techniques may operate in the 902-928 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.2.1 Test Guidance: ANSI C63.10-2013, Clause 6.9.2 & 6.9.3/ FCC OET KDB 558074 Section 8 Option 2

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, with out the need for any further corrections.

For DTS the spectrum analyzer is set for a frequency span  $\geq (2 * OBW)$ ,  $\leq (5 * OBW)$ , selected to clearly display the channel. The RBW is set to 100 kHz. The VBW is set to  $\geq (3 * RBW)$ . The Peak detector is used, with the trace set to Max Hold.

The automated 99% BW function of the spectrum analyzer is engaged, and the 6 dB OBW and/or 20 dB OBW is measured with the x dB function.

### 2.2.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.2.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
Temp/Humidity	Extech	42270	5892	2017-04-06	2018-04-06
Attenuator	JFW	50FH-020-10	-	Monitored	
DC Blocker	MCL	BLK-89-S+	-	Monitored	

### 2.2.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

**Test setup diagrams for Occupied Bandwidth testing:**

**Conducted:**




**2.2.5 Channel Occupied Bandwidth Data:**


Mode of operation	Channel	Freq. [MHz]	6 dB OBW [kHz]		99% OBW [KHz]	
LoRa 500 KHz one Carrier	Low	923.3	611.8		665.65	
	Mid	925.1	611.8		666.30	
	High	927.5	613.5		667.71	
LoRa 500 KHz Two Carrier	Channel Frequencies MHz		6 dB OBW [MHz]	6 dB OBW [kHz]	99% OBW [MHz]	99% OBW [KHz]
	923.3 & 923.9		1.210	605	1.2382	619.1
				605		619.1
	923.9 & 924.5		1.209	604.5	1.2335	616.75
				604.5		616.75
	924.5 & 925.1		1.207	603.5	1.2327	616.35
				603.5		616.35
	925.7 & 926.3		1.208	604	1.2415	620.75
				604		620.75
	926.3 & 926.9		1.210	605	1.2436	621.8
				605		621.8
	926.7 & 927.5		1.211	605.5	1.2348	617.4
		605.5		617.4		

**One Carrier Operation:**


**Screen Captures from the spectrum analyzer: Low Channel**

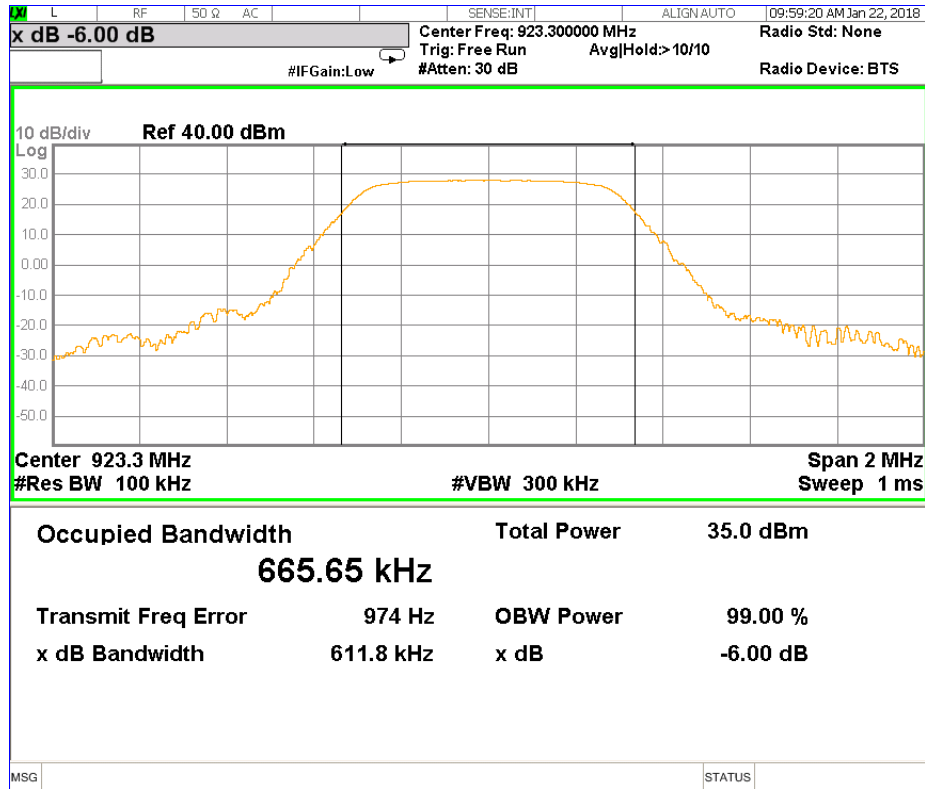

**Screen Captures from the spectrum analyzer: MID Channel**

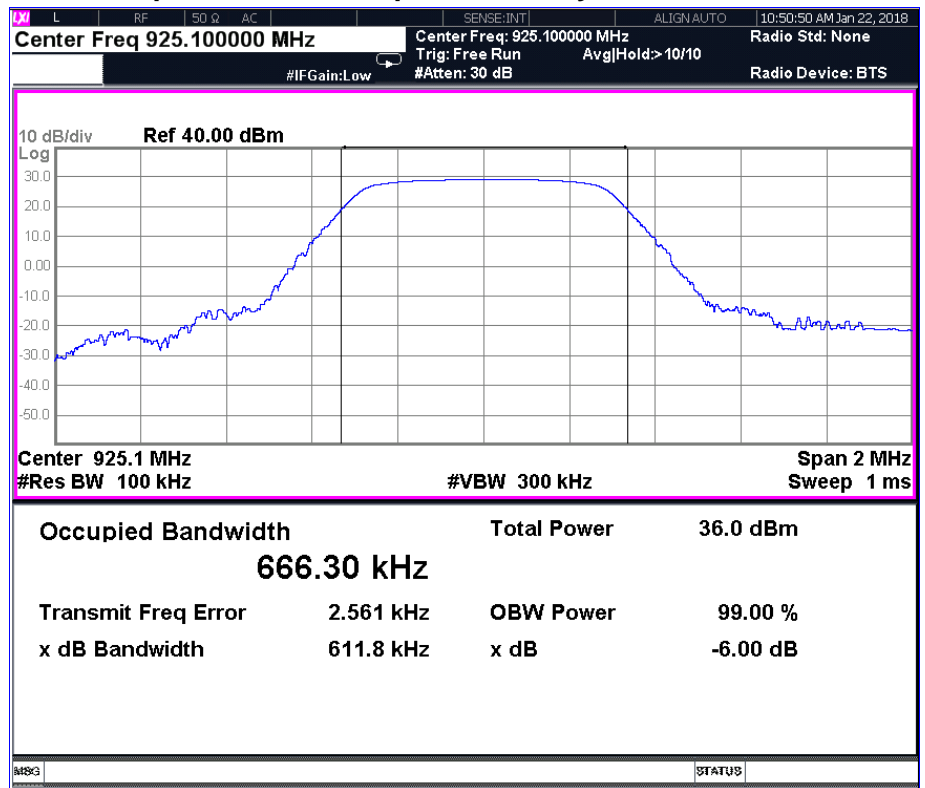


### Screen Captures from the spectrum analyzer: High Channel

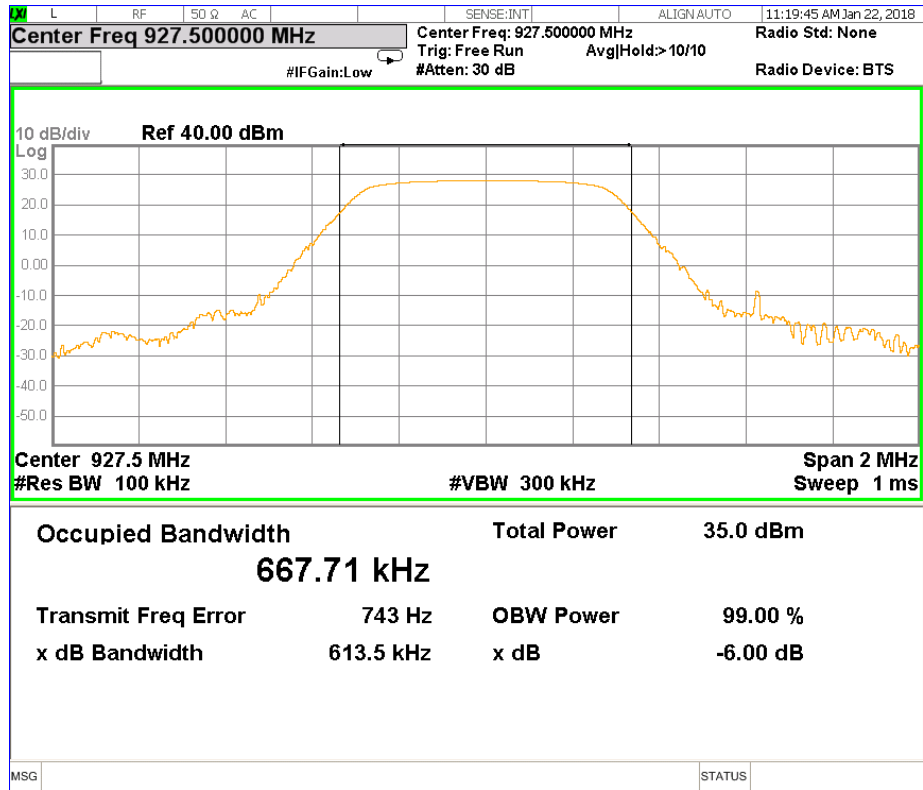




**Two Carriers Mode OF Operation**


**Screen Captures from the spectrum analyzer (923.3 & 923.9 MHz)**

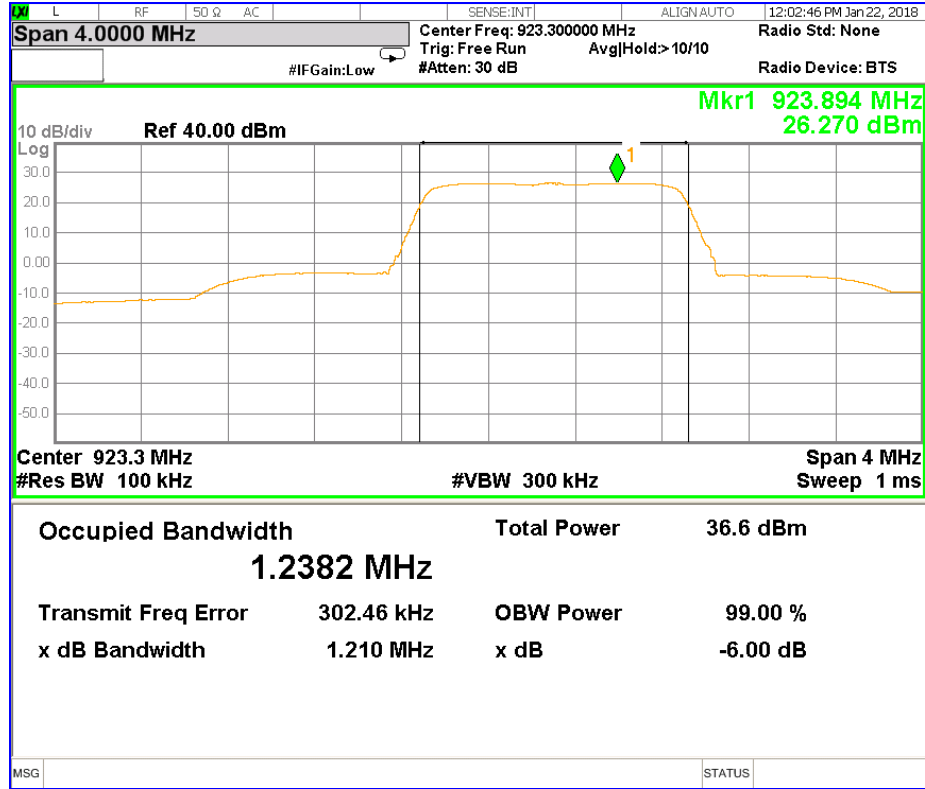


**Screen Captures from the spectrum analyzer (923.9 & 924.5 MHz)**

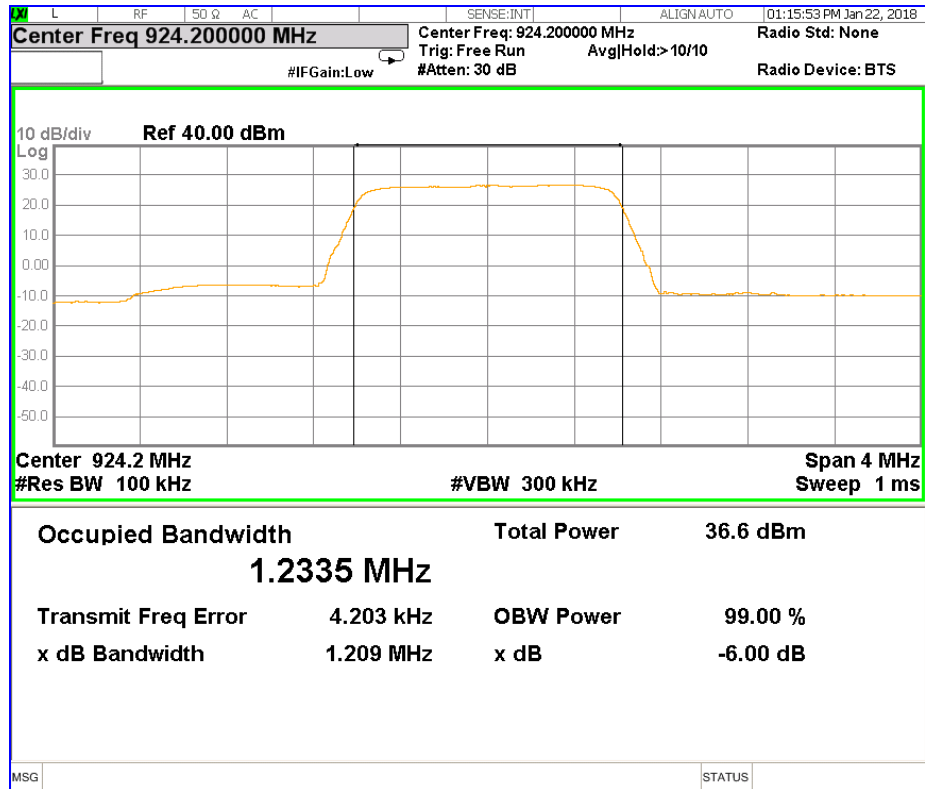


**Screen Captures from the spectrum analyzer (924.5 & 925.1 MHz)**

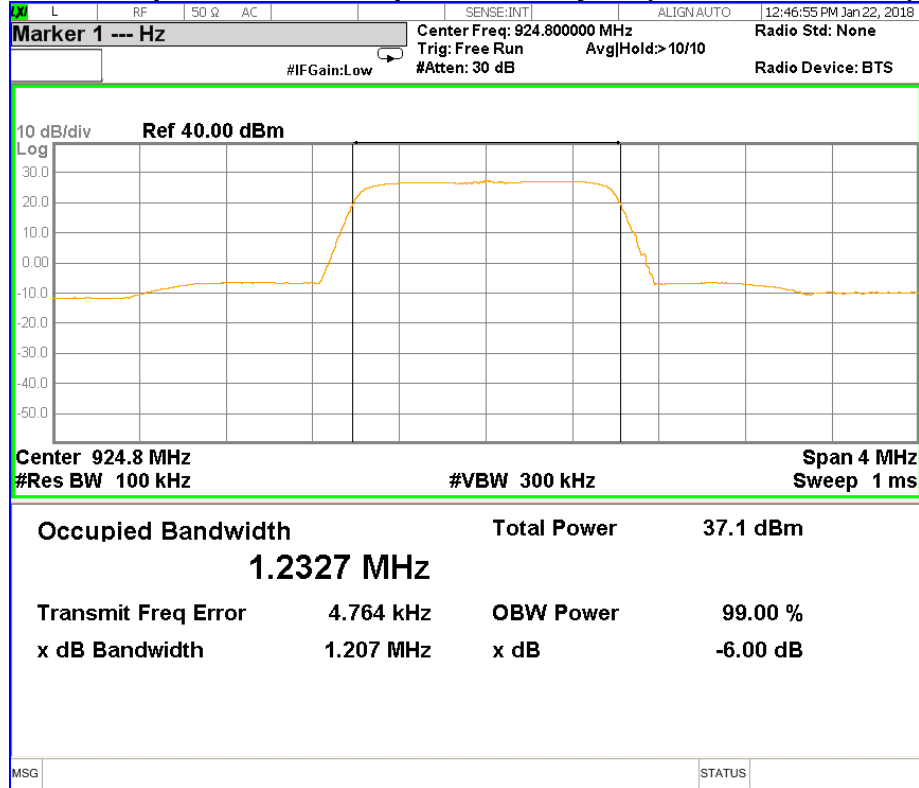


**Screen Captures from the spectrum analyzer (925.7 & 926.3 MHz)**

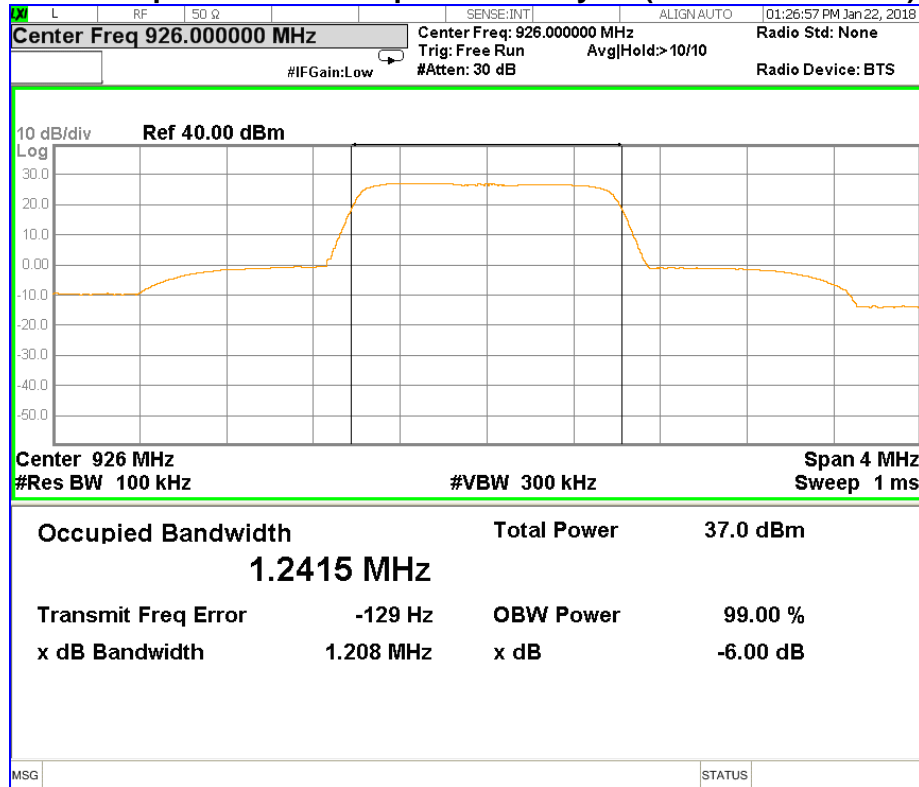

### Screen Captures from the spectrum analyzer (926.3 & 926.9 MHz)

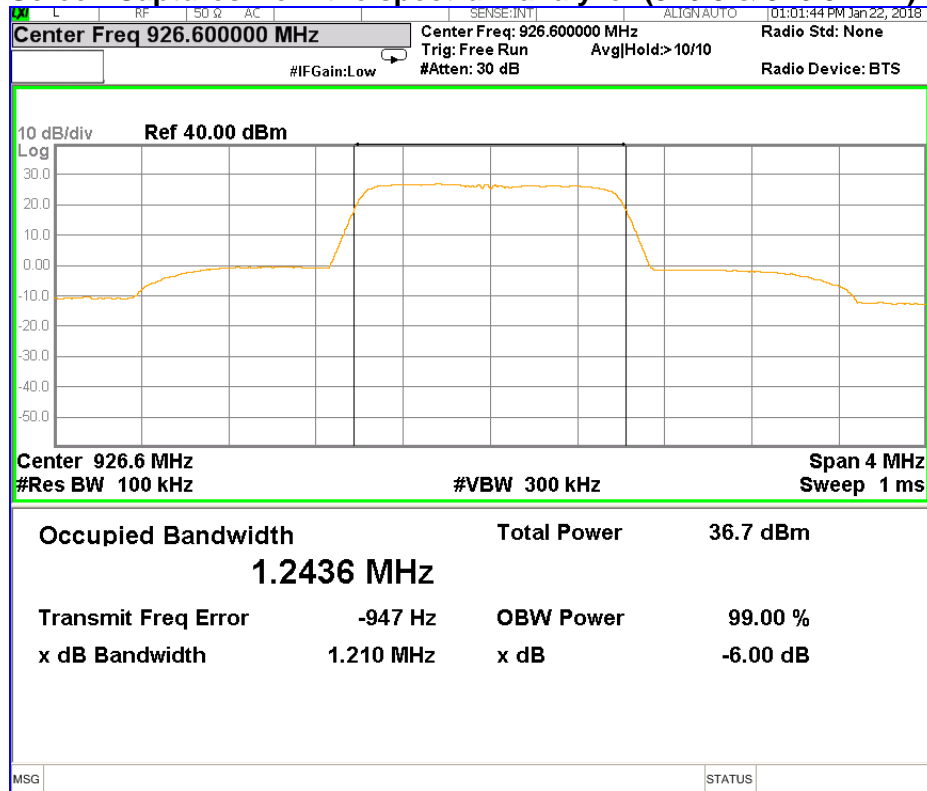

### Screen Captures from the spectrum analyzer (926.9 & 927.5 MHz)

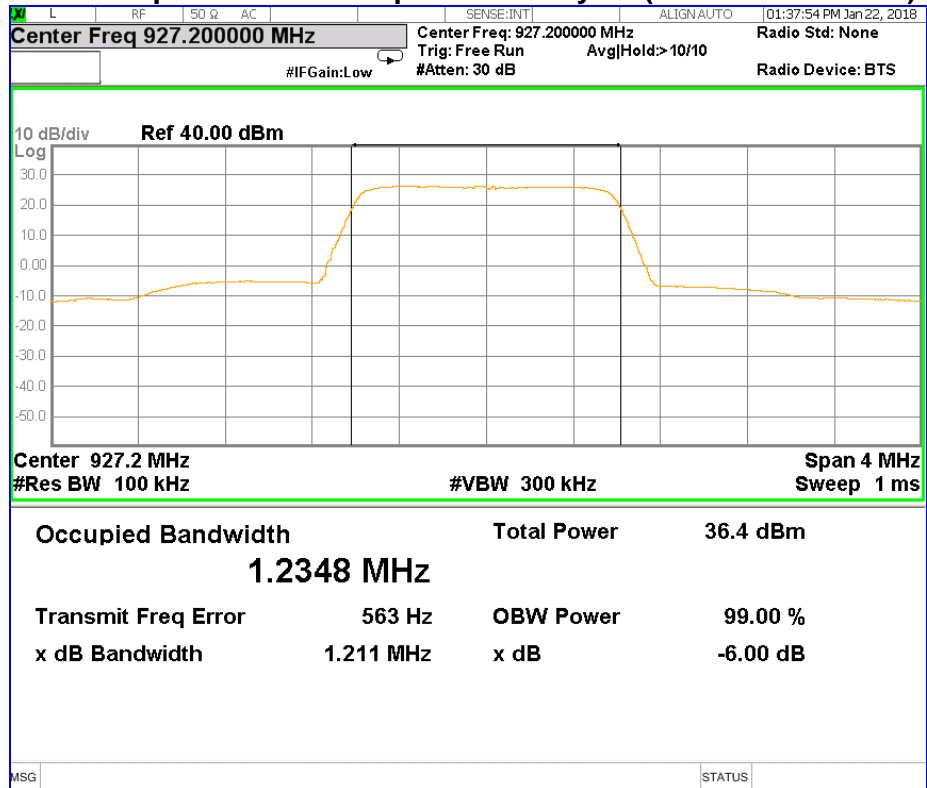

## 2.3 Max Output Power

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: : Imran Akram/ Bushra Muharram	Standard: FCC PART 15.247
Date: 2018-01-22 (20.0°C,14% RH)	Basic Standard: ANSI C63.10: 2013 FCC OET KDB 558074
<b>EUT status: Compliant</b>	

Specification: FCC Part 15.247(b, 3)

Criteria (3) For systems using digital modulation in the 902-928 MHz bands: 1 Watt.

### 2.3.1 Test Guidance: ANSI C63.10-2013, Clause 11.9.1.1, Clause 7.8.5 / FCC OET KDB 558074 Section 9.2.2.2

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, with out the need for any further corrections.

### 2.3.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.3.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
Temp/Humidity	Extech	42270	5892	2017-04-06	2018-04-06
Attenuator	JFW	50FH-020-10		Monitored	
DC Blocker	MCL	BLK-89-S+		Monitored	


### 2.3.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

#### Test setup diagrams for Peak Power testing:

Conducted:



### 2.3.5 Max Output Power Data


Mode	Channel	Freq. [MHz]	Out Put Power (dBm)	Out Put Power Limit (dBm)
LoRa 500 KHz One Carrier	Low	923.3	27.11	30
	Mid	925.1	28.41	30
	High	927.5	27.49	30

Mode	Channel Freq. [MHz]	Out Put Power (dBm)	Out Put Power Limit (dBm)
LoRa 500 KHz Two Carrier	923.3 & 923.9	28.35	30
	923.9 & 924.5	28.76	30
	924.5 & 925.1	29.29	30
	925.7 & 926.3	28.74	30
	926.3 & 926.9	28.75	30
	926.7 & 927.5	28.33	30


Output Power Method AVGSA-1 For DTS	
Span	≥ 1.5 times the OBW
RBW	1 – 5 % of the OBW, ≤ 1 MHz
VBW	≥ 3 x RBW
Number of Points in sweep	≥ 2 x Span / RBW
Sweep time	Auto
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle ≥98%)
Trace Average	100 traces in power Averaging (RMS)
Power measured	Integrated the spectrum across the OBW of the signal using the S/A band power measurement function, with band limit set equal to the OBW band edge.

**One Carrier Mode OF Operation**


**Screen Captures from the spectrum analyzer Low Channel**

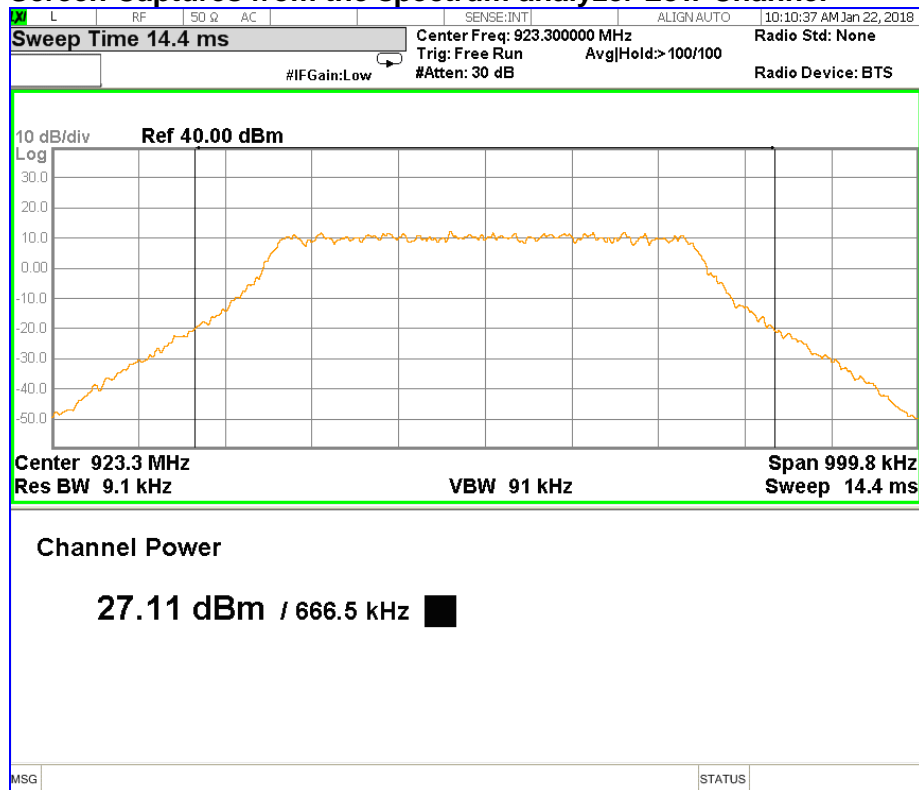


### Screen Captures from the spectrum analyzer: MID Channel

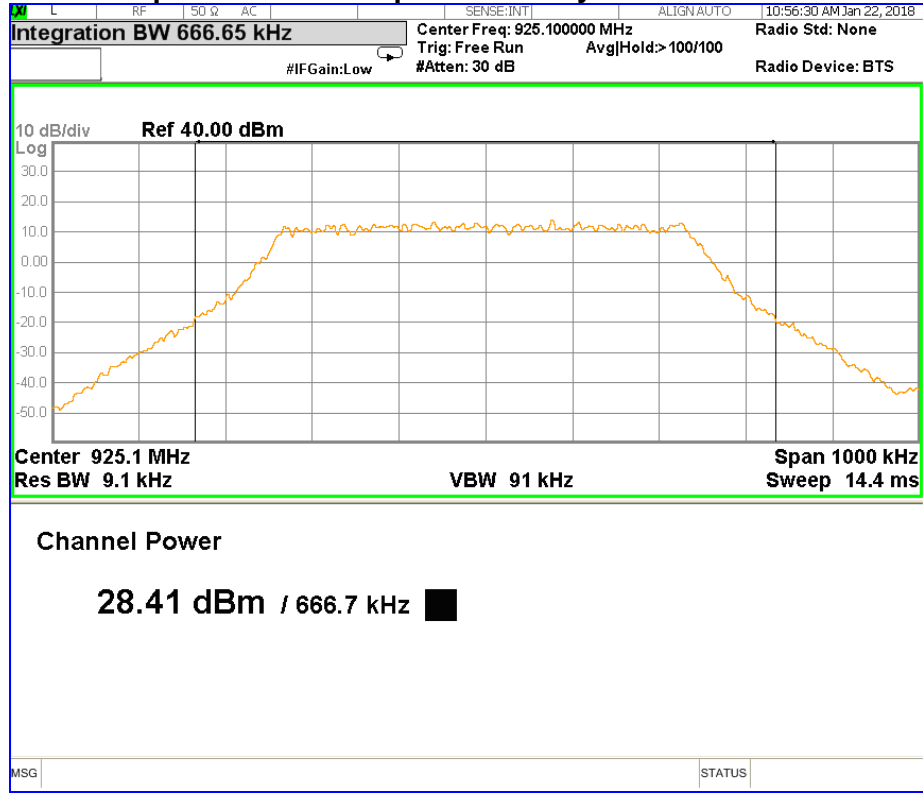


### Screen Captures from the spectrum analyzer: High Channel

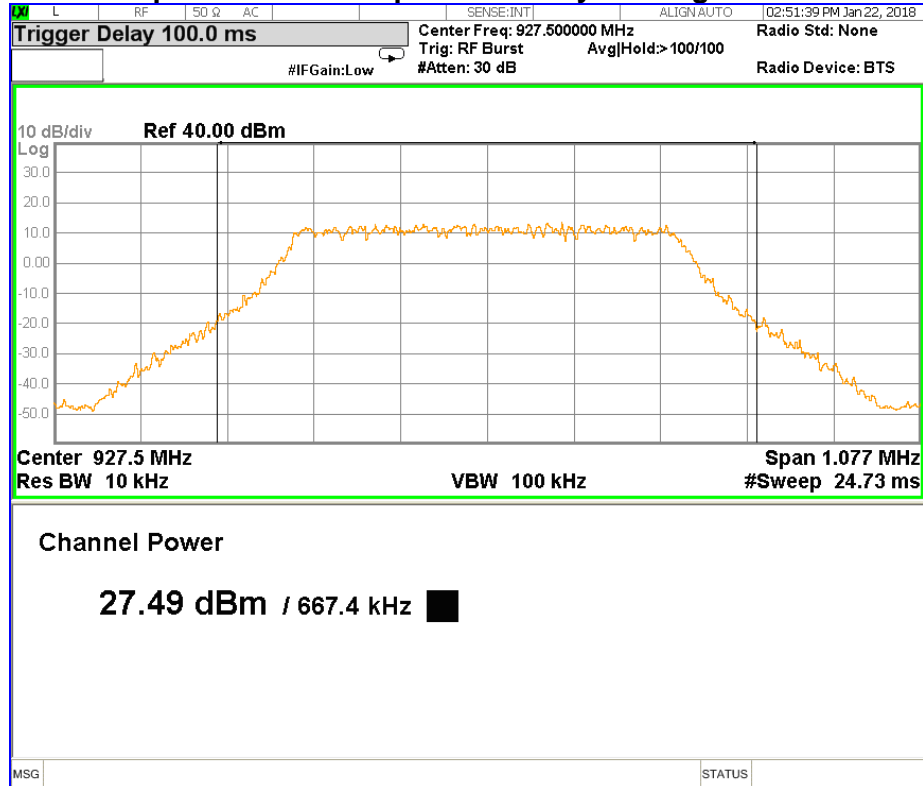

**Two Carrier Mode of Operation:  
Screen Captures from the spectrum analyzer: (923.3 & 923.9 MHz)**

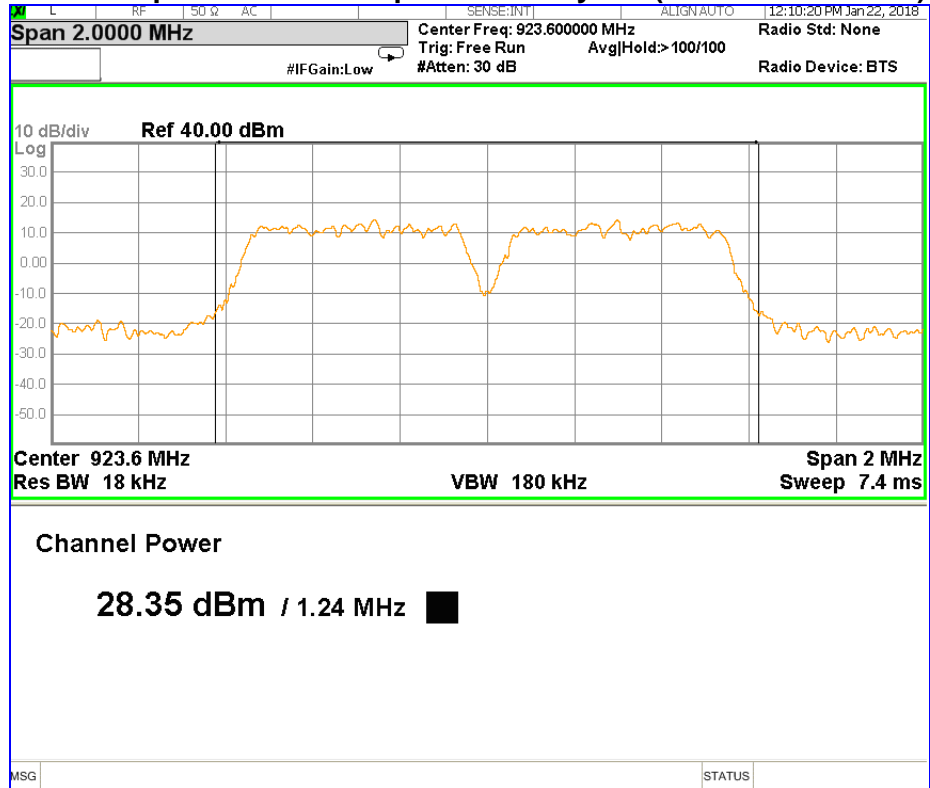


**Screen Captures from the spectrum analyzer: (923.9 & 924.5 MHz)**

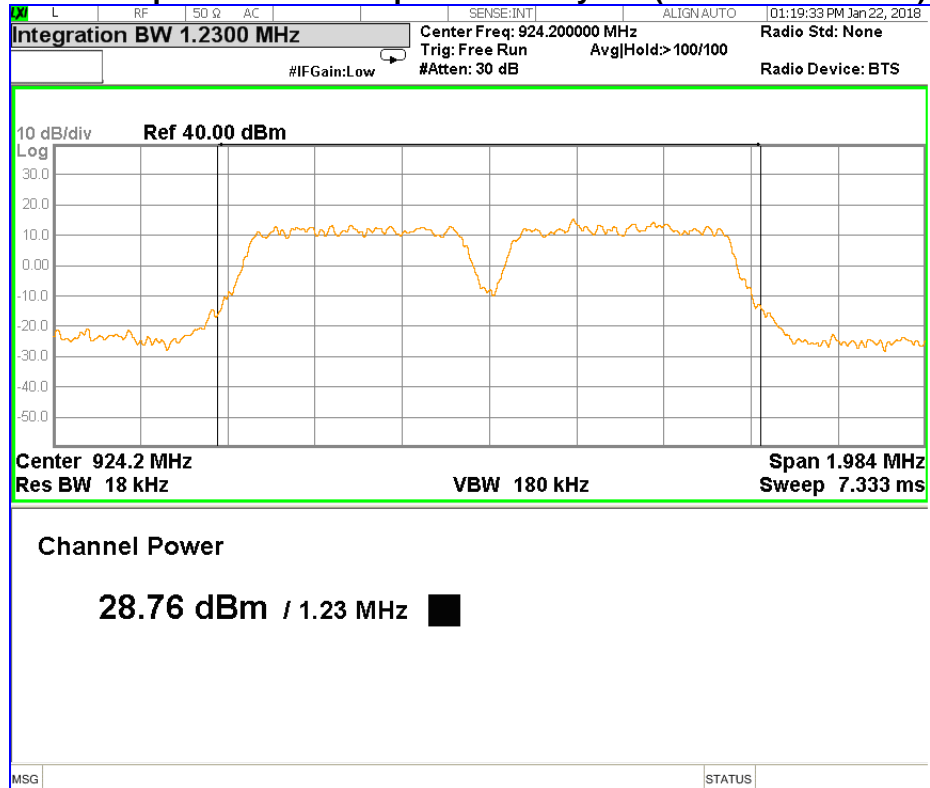





### Screen Captures from the spectrum analyzer: (924.5 & 925.1 MHz)

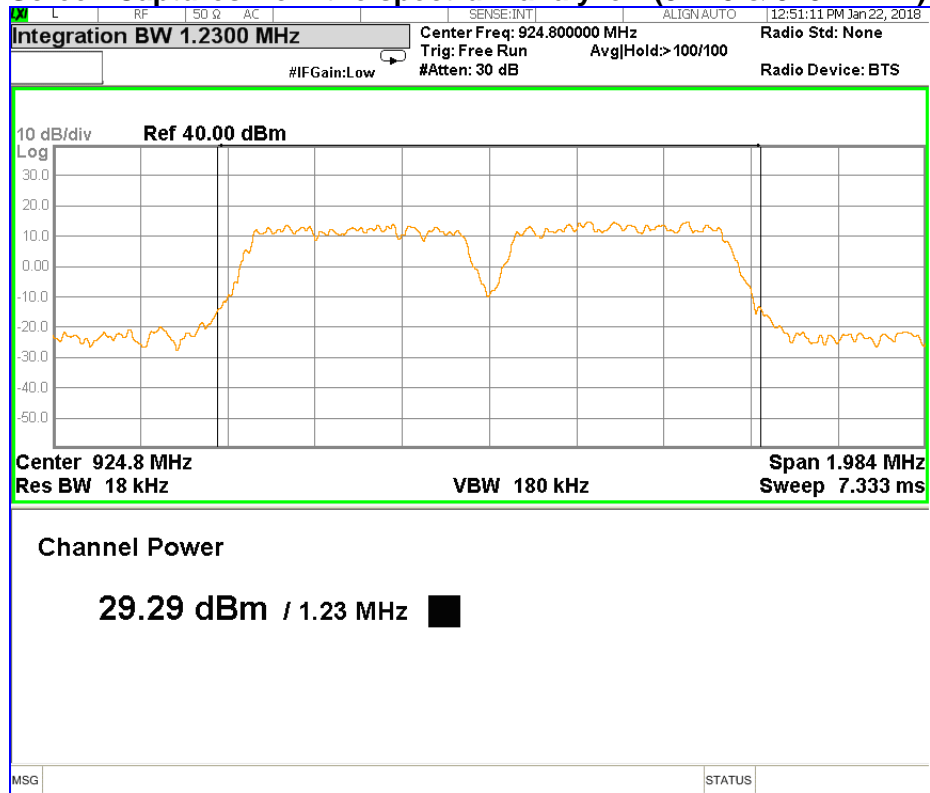


### Screen Captures from the spectrum analyzer: (925.7 & 926.3 MHz)

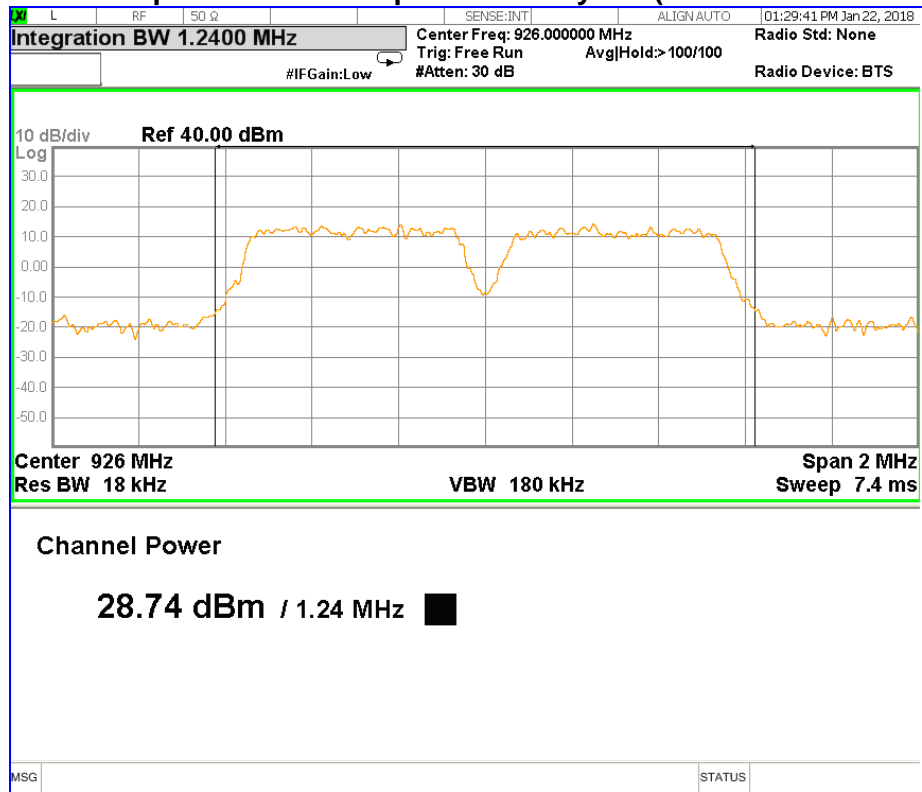

### Screen Captures from the spectrum analyzer: (926.3 & 926.9 MHz)

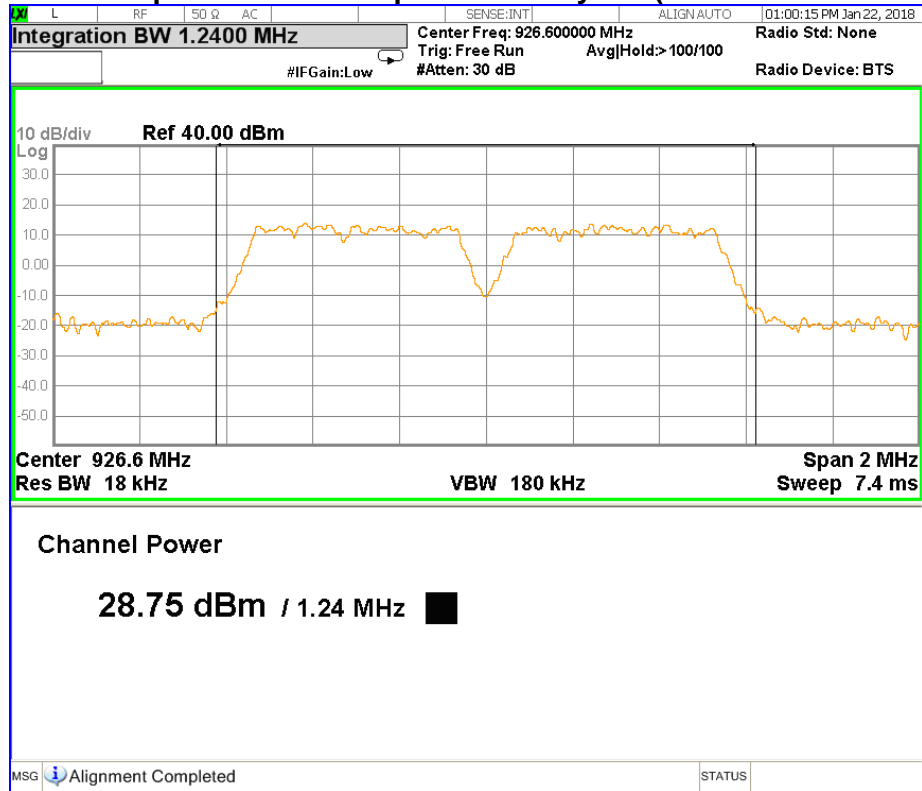

### Screen Captures from the spectrum analyzer: (926.9 & 927.5 MHz)

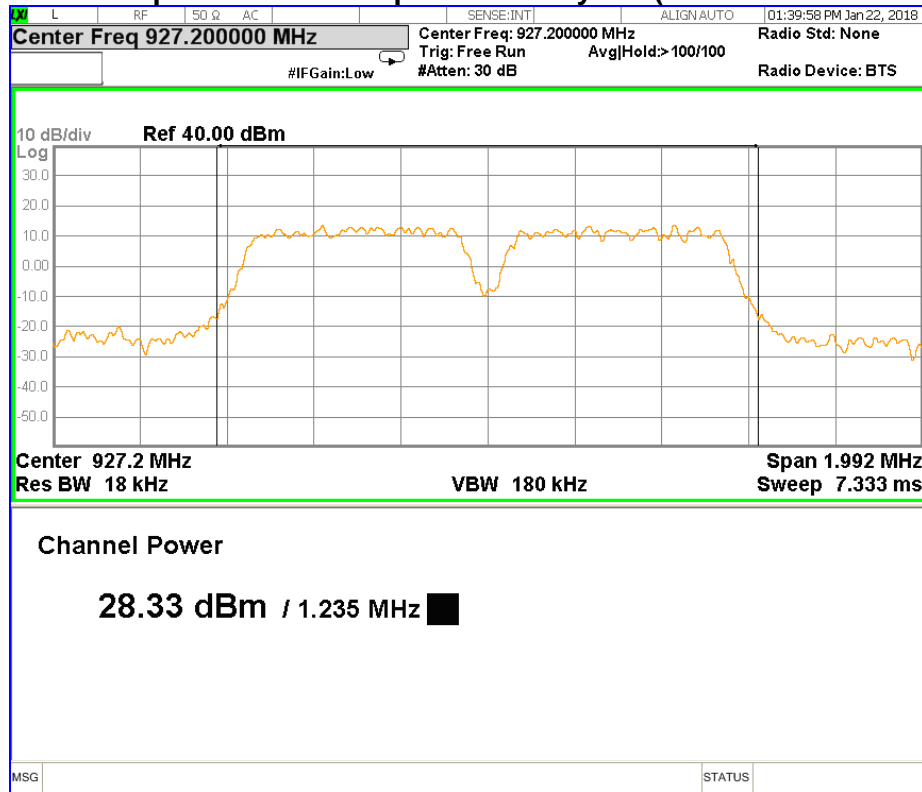

## 2.4 Power Spectral Density

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: : Imran Akram/ Bushra Muharram	Standard: FCC PART 15.247 Basic Standard: ANSI C63.10: 2013
Date: 2018-01-29 (19.9°C,8.4% RH)	
<b>EUT status: Compliant</b>	

### Specification: FCC Part 15.247(e)

**Criteria** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 2.4.1 Test Guidance: ANSI C63.10-2013, Clause 11.10.2 / FCC OET KDB 558074 10.3

This measurement is performed at low, mid and high frequencies, in continuous transmission, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, with out the need for any further corrections.

The spectrum analyzer is set for a frequency span of (1.5\*OBW)) centered on a channel. The RBW is set to 3 kHz and VBW is set to 10 kHz. The RMS average detector is used, with the trace set to average Hold. The marker is placed on the highest peak of the resulting trace.

#### 2.4.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

#### 2.4.3 Test Equipment

Testing was performed with this equipment:

Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMI receiver	Agilent	N9010A	6678	2017-05-11	2018-05-11
Temp/Humidity	Extech	42270	5892	2017-04-06	2018-04-06
Attenuator	JFW	50FH-020-10		Monitored	
DC Blocker	MCL	BLK-89-S+		Monitored	

#### 2.4.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

Test setup diagrams for Peak Power Spectral Density testing:  
Conducted:




#### 2.4.5 Peak PSD Data


Mode	Channel	Freq. [MHz]	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)
LoRa 500 KHz One Carrier	Low	923.3	6.702	8
	Mid	925.1	6.877	8
	High	927.5	6.578	8

Mode	Channel Frequencies [MHz]	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)
LoRa 500 KHz Two Carrier	923.3 & 923.9	4.604	8
	923.9 & 924.5	4.415	8
	924.5 & 925.1	4.525	8
	925.7 & 926.3	5.785	8
	926.3 & 926.9	4.553	8
	926.7 & 927.5	5.318	8


### One Carrier Mode OF Operation: Screen Capture from Spectrum Analyzer: Low Channel

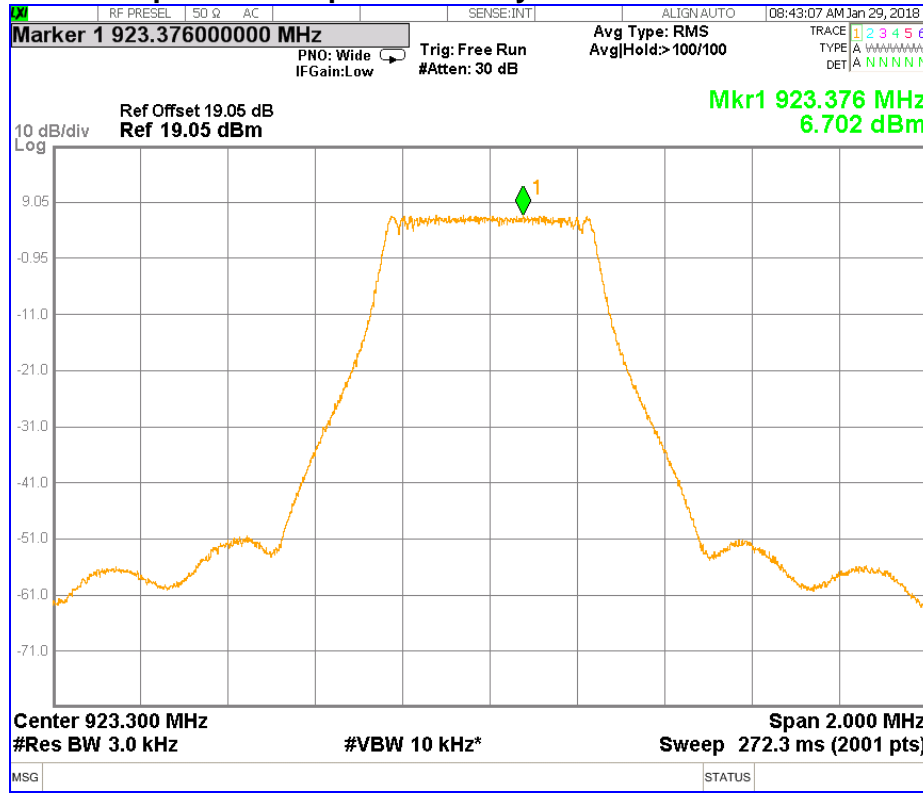

### Screen Capture from Spectrum Analyzer: MID Channel

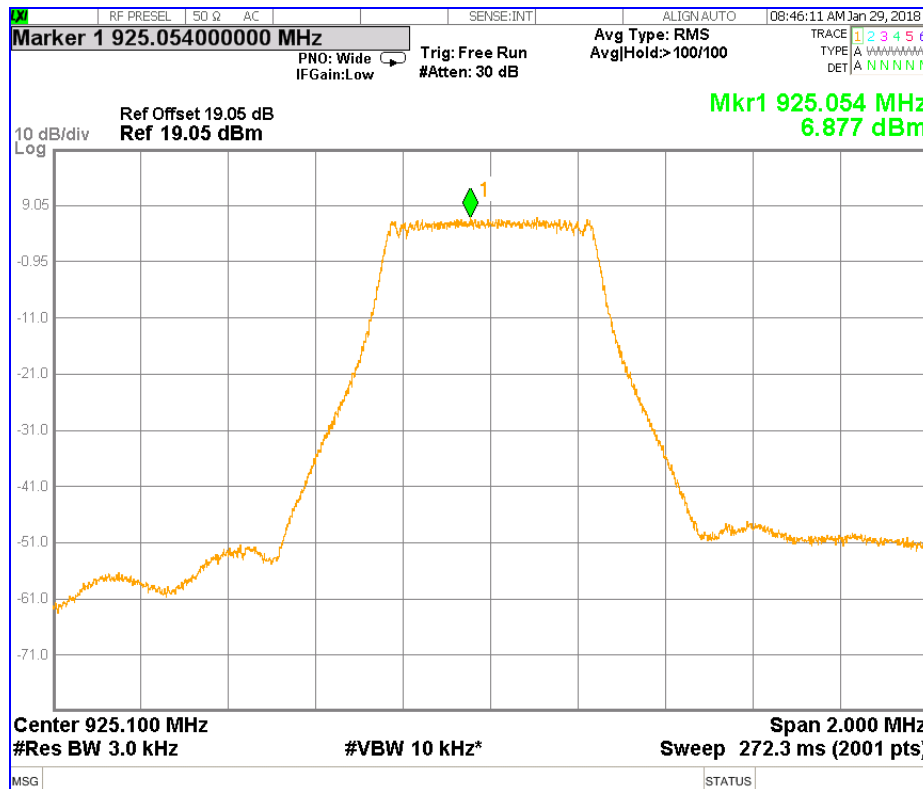


### Screen Capture from Spectrum Analyzer: High Channel

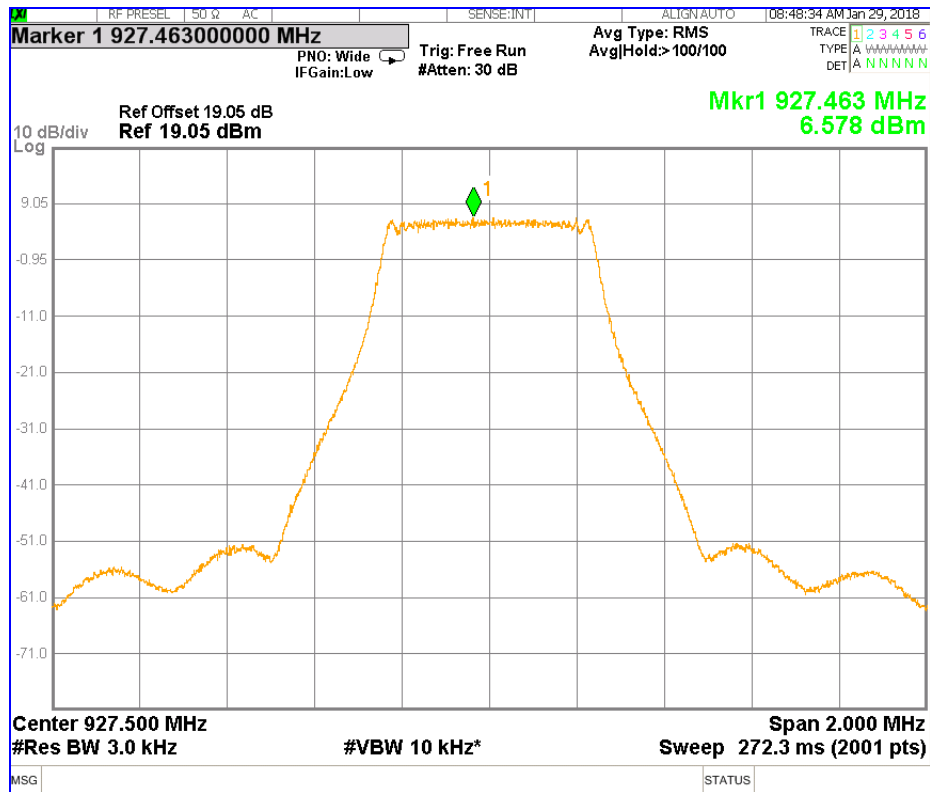


### Two Carrier Mode of Operation:


#### Screen Capture from Spectrum Analyzer: 923.3 & 923.9 MHz

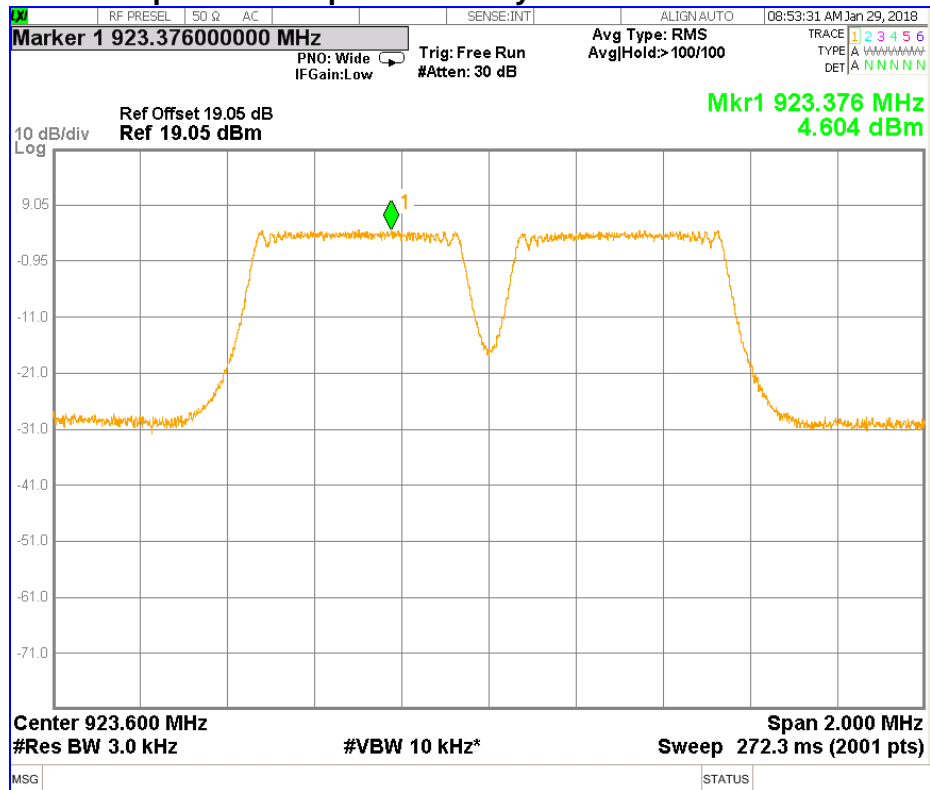


### Screen Capture from Spectrum Analyzer: 923.9 & 924.5 MHz

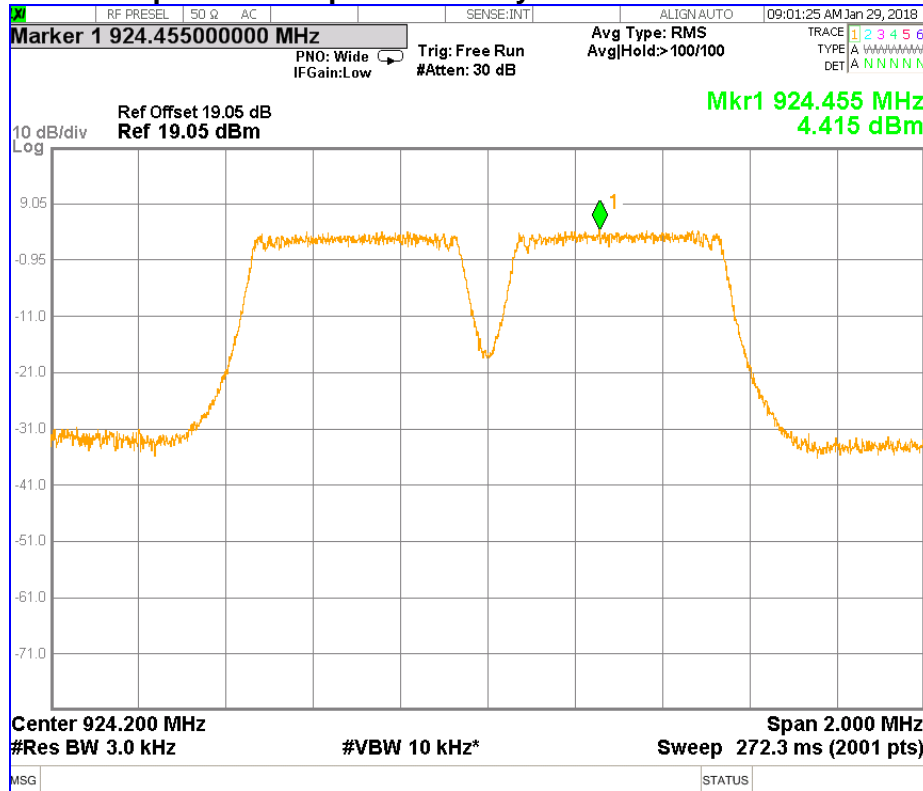


### Screen Capture from Spectrum Analyzer: 924.5 & 925.1 MHz

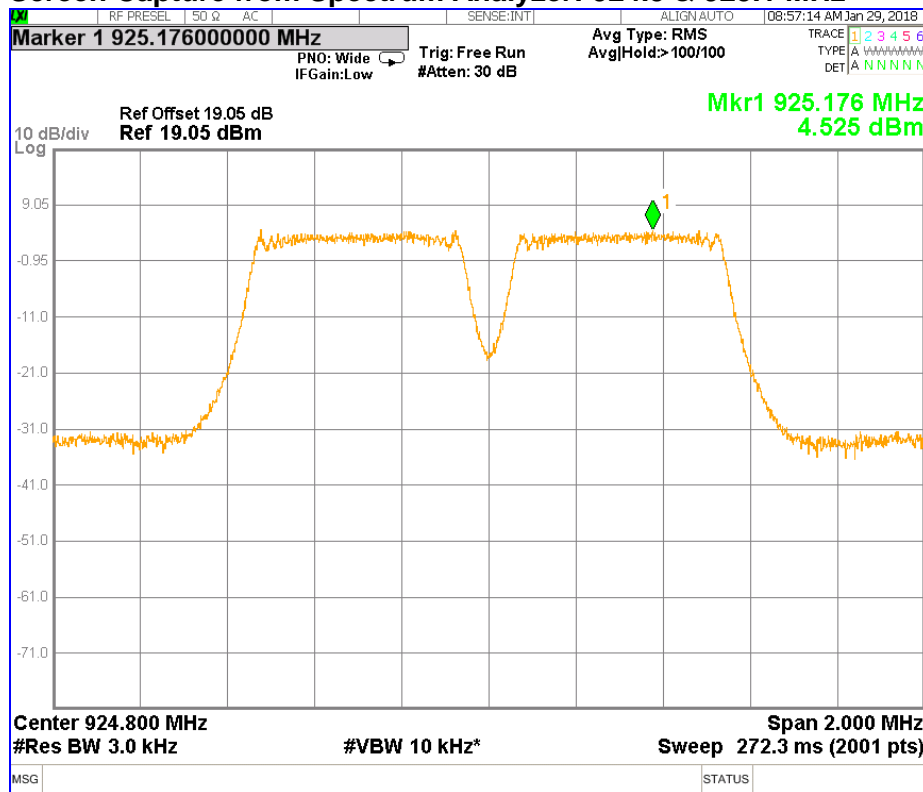

### Screen Capture from Spectrum Analyzer: 925.7 & 926.3 MHz

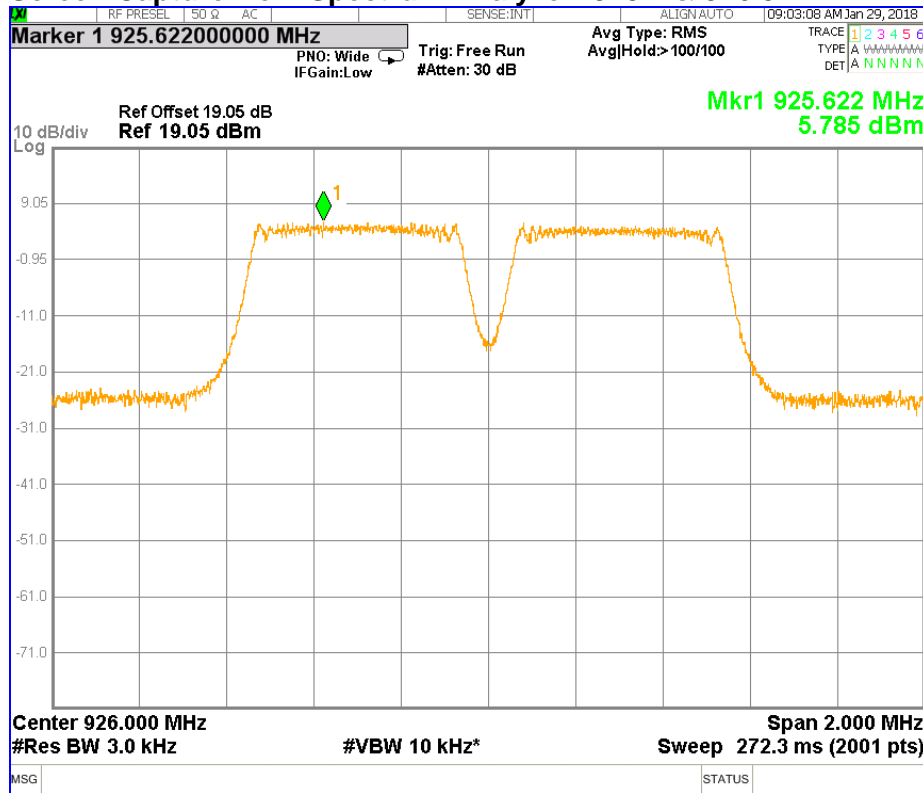


### Screen Capture from Spectrum Analyzer: 926.3 & 926.9 MHz

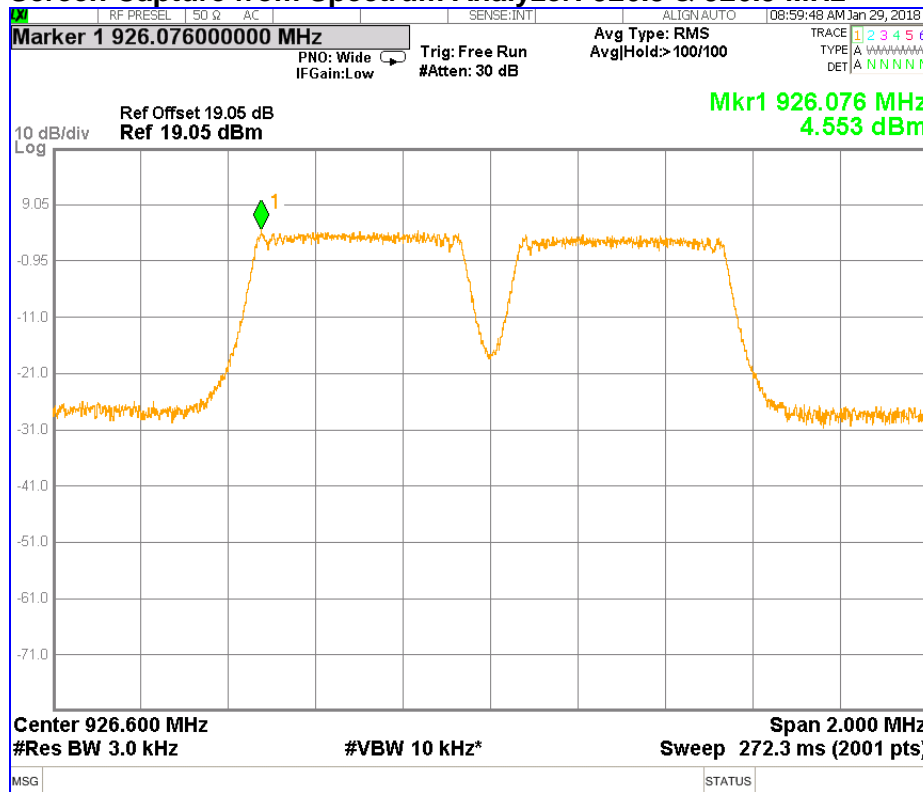



### Screen Capture from Spectrum Analyzer: 926.9 & 927.5 MHz

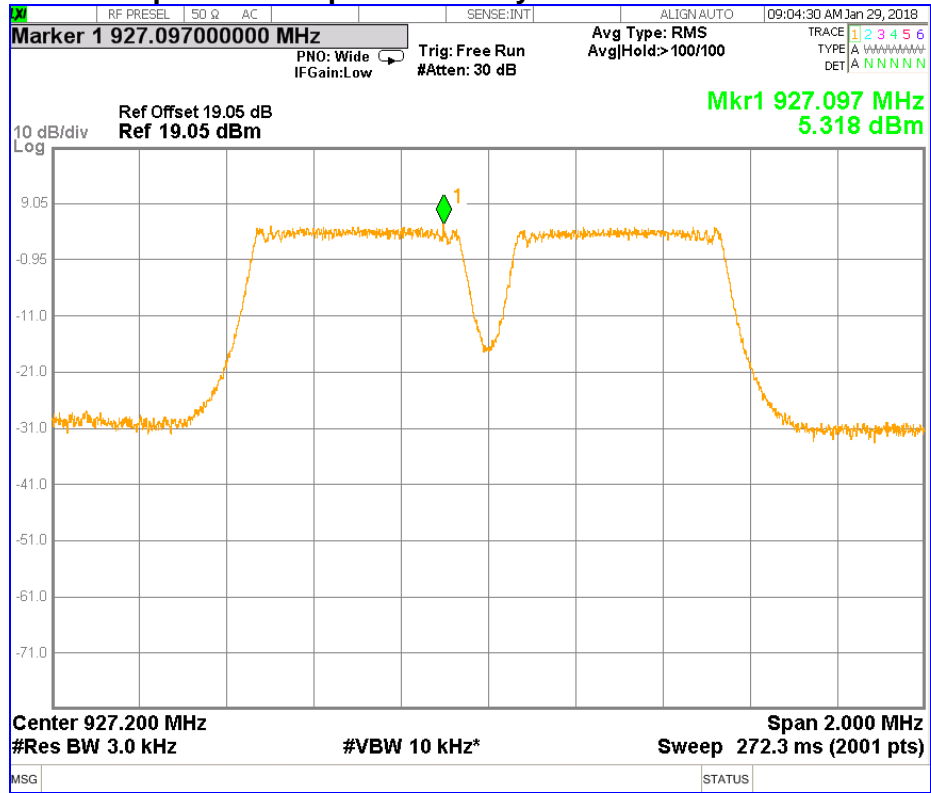

## 2.5 Band Edge Attenuation

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: Imran Akram/ Bushra Muharram	Standard: FCC PART 15.247 Basic Standard: ANSI C63.10: 2013
Date: 2018-01-29 (19.9°C,8.4% RH)	
<b>EUT status: Compliant</b>	

### Specification: FCC Part 15.247(d)

**Criteria:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 2.5.1 Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074

This measurement is performed at the low and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, with out the need for any further corrections.

The spectrum analyzer is set for a frequency span to show the band edge and the nearest channel. The RBW is set to  $\geq 100$  kHz. The VBW is set to  $\geq (\text{RBW} * 3)$ . The Peak detector is used, with the trace set to Max Hold.

The attenuation is measured with the Marker Delta function.

### 2.5.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.5.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
Temp/Humidity	Extech	42270	5892	2017-04-06	2018-04-06
Attenuator	JFW	50FH-020-10		Monitored	
DC Blocker	MCL	BLK-89-S+		Monitored	

### 2.5.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

Test setup diagrams for Band Edge Attenuation testing:

Conducted:




### 2.5.5 Band Edge Data (Worse Case)


Mode	Channel	Attenuation at Band Edge	Attenuation Limit at Band Edge
Lora 500KHz One Carrier	923.3	71.794 dBc	30 dBc
	927.5	45.662 dBc	30 dBc

Mode	Channel	Attenuation at Band Edge	Attenuation Limit at Band Edge
Lora 500KHz Two Carrier	923.3 & 923.9	69.516 dBc	30 dBc
	926.9 & 927.5	31.507 dBc	30 dBc


### One Carrier Mode: Screen Capture from the spectrum analyzer: Lower Band Edge

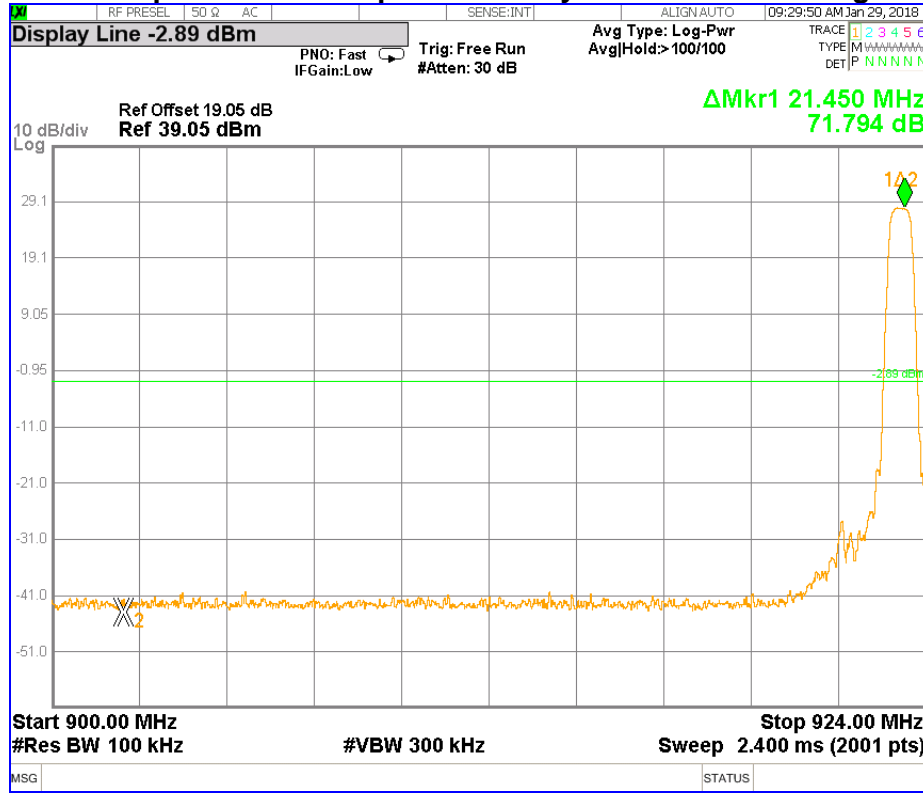


### Screen Capture from the spectrum analyzer: Upper Band Edge

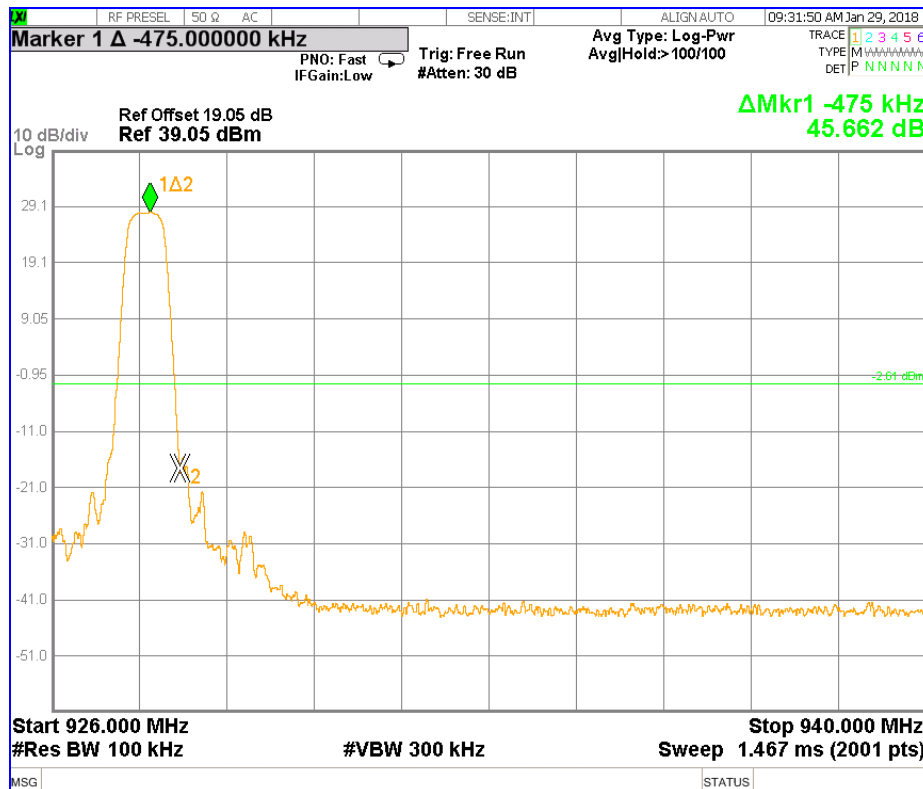

### Two Carrier Mode OF Operation: Screen Capture from the spectrum analyzer: Lower Band Edge

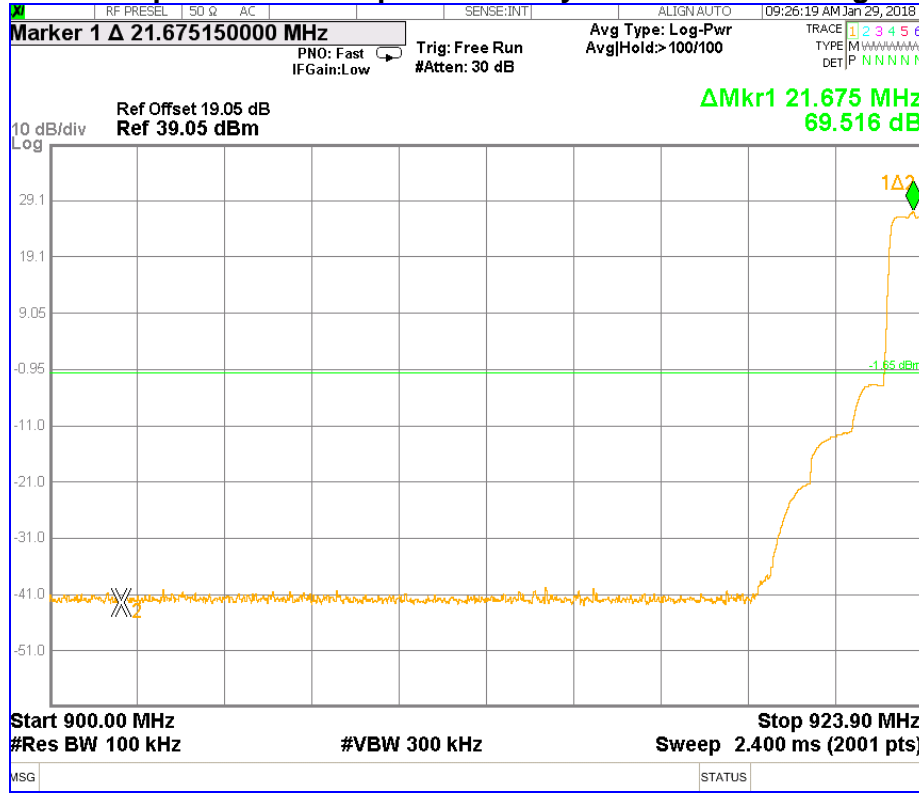

### Screen Capture from the spectrum analyzer: Upper Band Edge

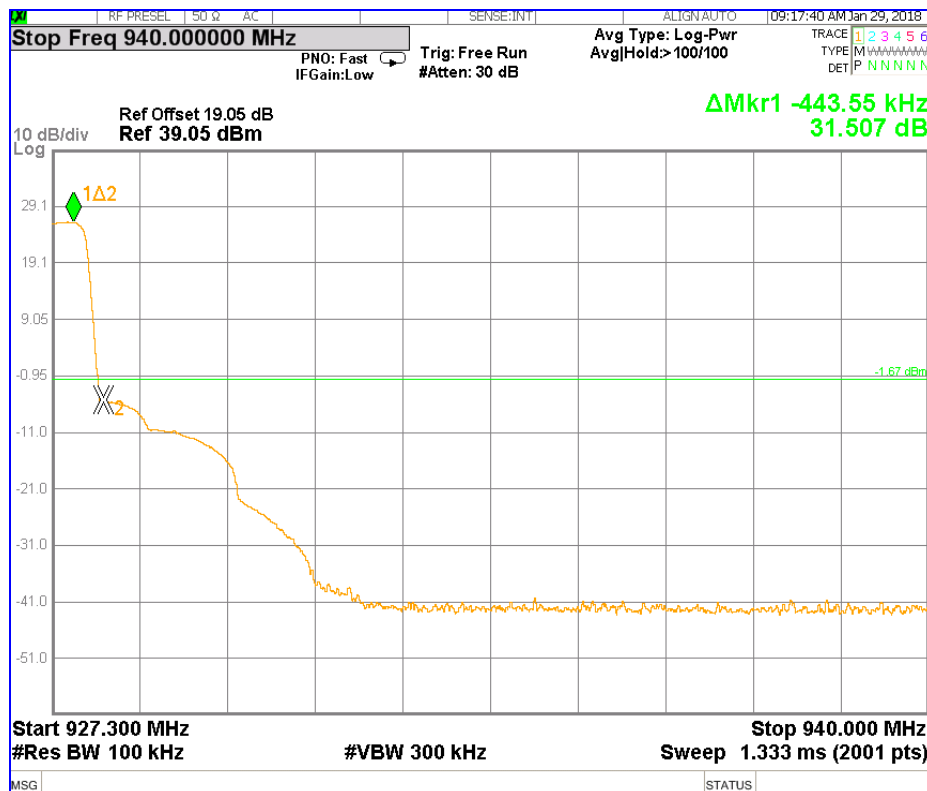

## 2.6 Conducted Spurious Emissions

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: Imran Akram/ Bushra Muharram	Standard: FCC PART 15.247
Date: 2018-01-22 (20.0°C, 14% RH)	Basic Standard: ANSI C63.4-2014 FCC OET KDB 558470 v04 DTS
<b>EUT status: Compliant</b>	

### Specification: FCC Part 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 2.6.1 Test Guidance: ANSI C63.10-2013, Clause 6.7

This measurement is performed at the low, mid and high frequencies, with modulation. The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, with out the need for any further corrections.

The spectrum analyzer is stepped through the spectrum in frequency spans selected to ensure acceptable frequency resolution. The RBW is set to 100 kHz. The VBW is set to  $\geq 300$  kHz. The Peak detector is used, with the trace set to Max Hold.

#### 2.6.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

#### 2.6.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
Temp/Humidity	Extech	42270	5892	2017-04-06	2018-04-06
Attenuator	JFW	50FH-020-10		Monitored	
DC Blocker	MCL	BLK-89-S+		Monitored	

#### 2.6.4 Test Sample Verification, Configuration & Modifications




The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

#### Test setup diagram for Conducted Spurious Emissions testing:






### 2.6.5 Conducted Emissions Data: One Carrier Mode of operation

#### Low Channel

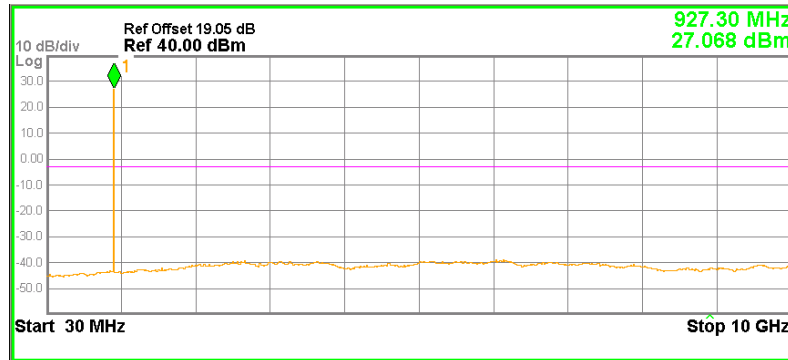
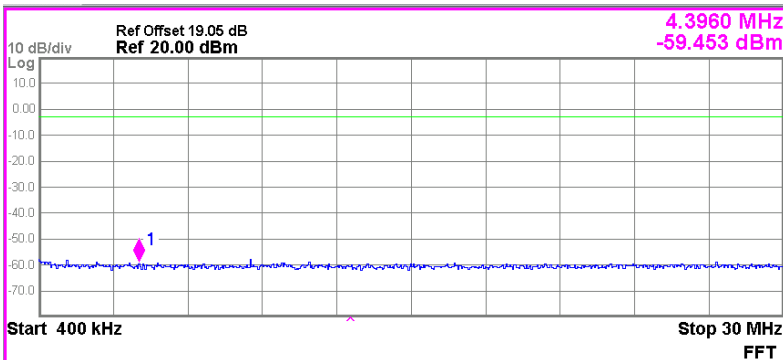
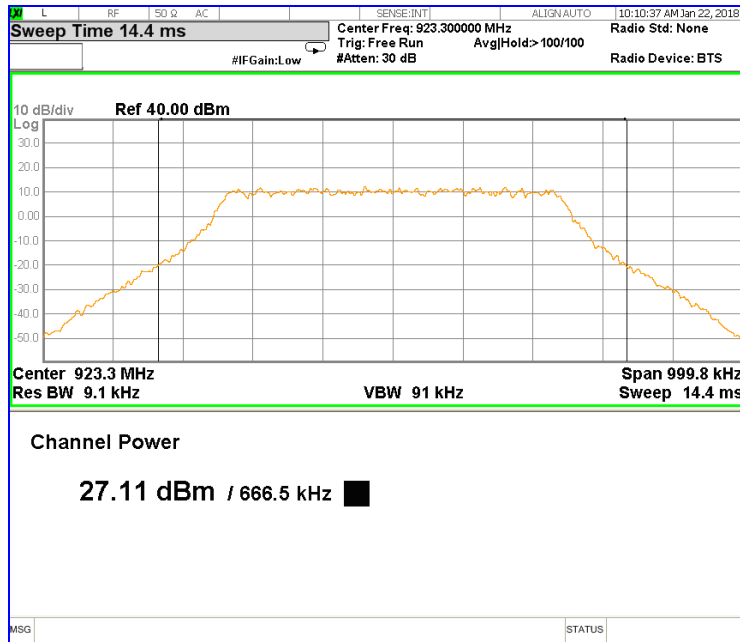


### MID Channel

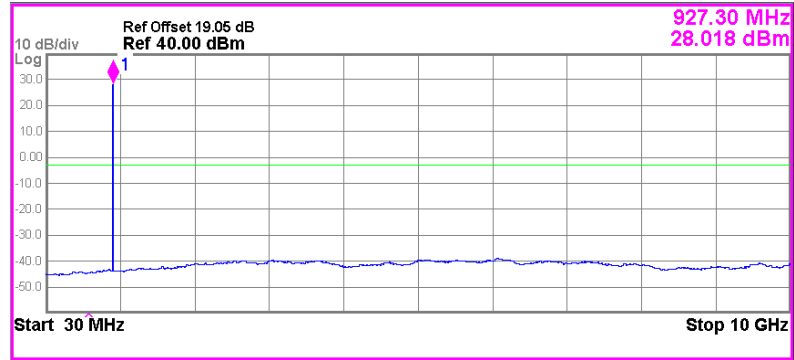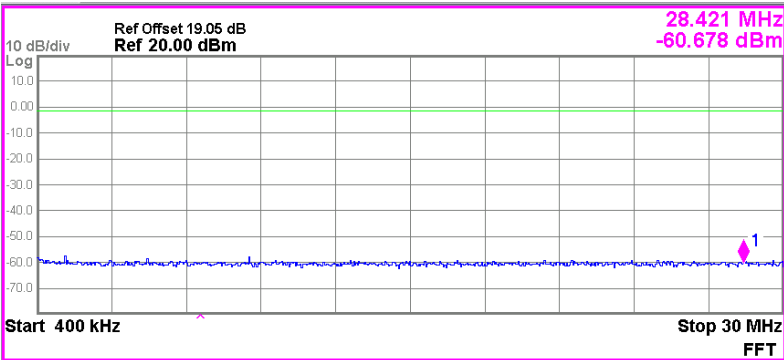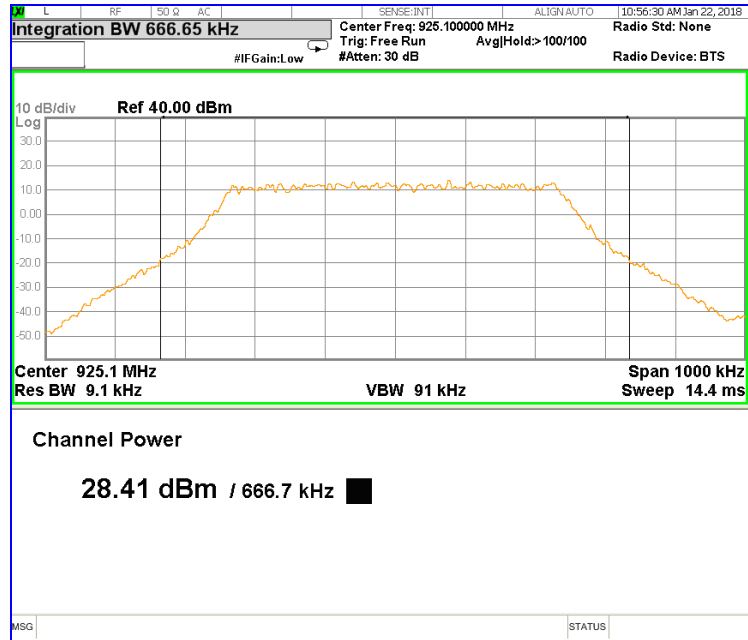






### High Channel

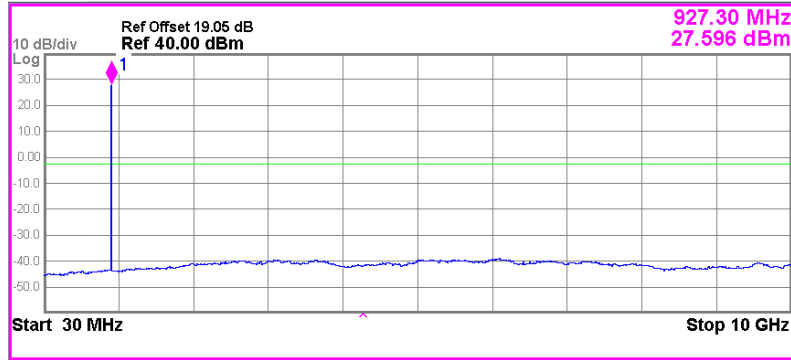
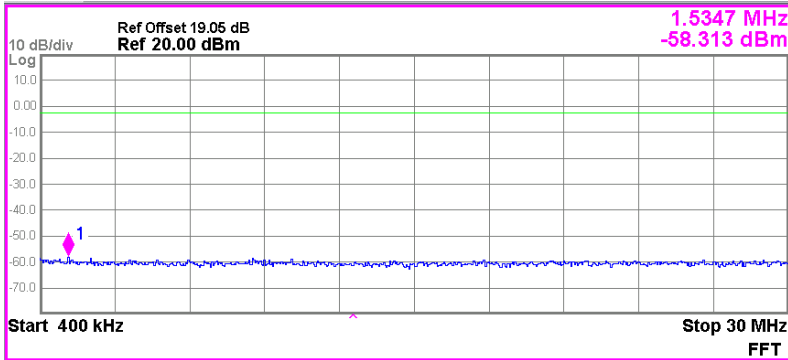
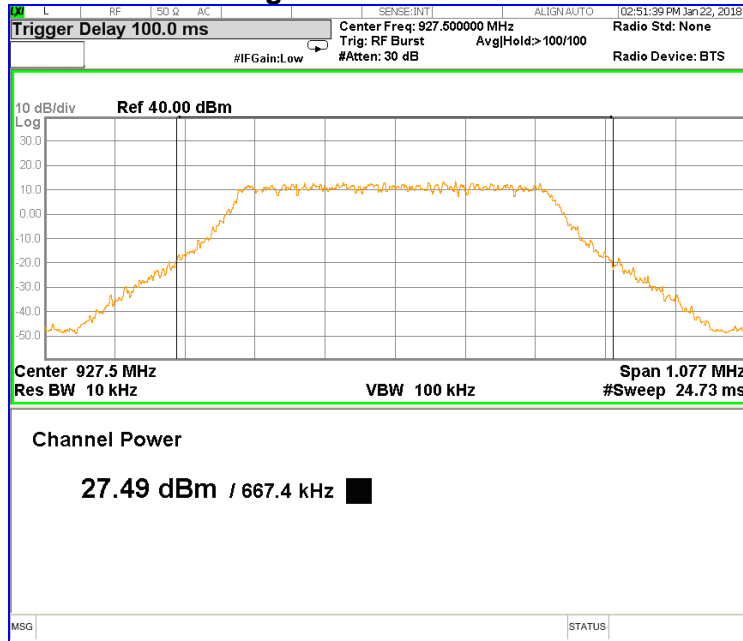


**Two Carrier Mode of Operation:**




**Screen Captures from the spectrum analyzer: (923.3 & 923.9 MHz)**

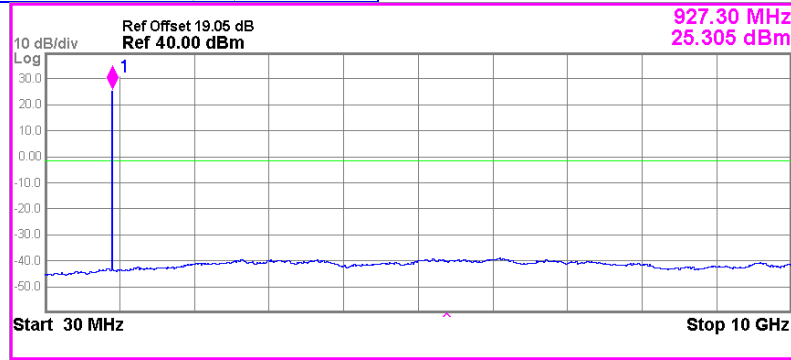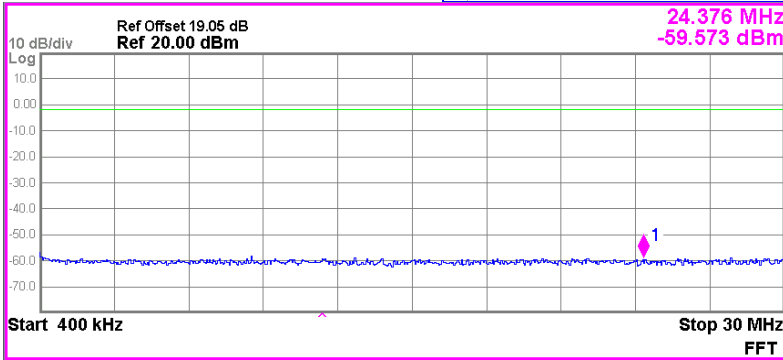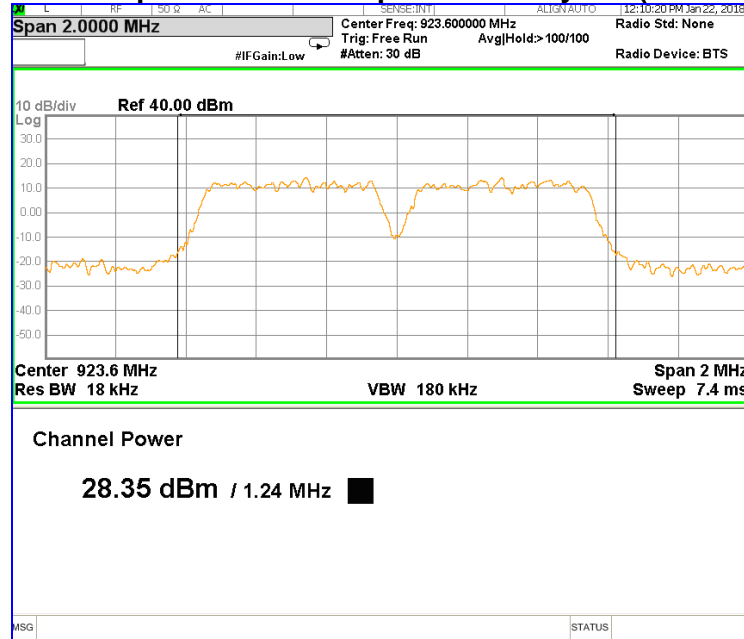




### Screen Captures from the spectrum analyzer: (923.9 & 924.5 MHz)

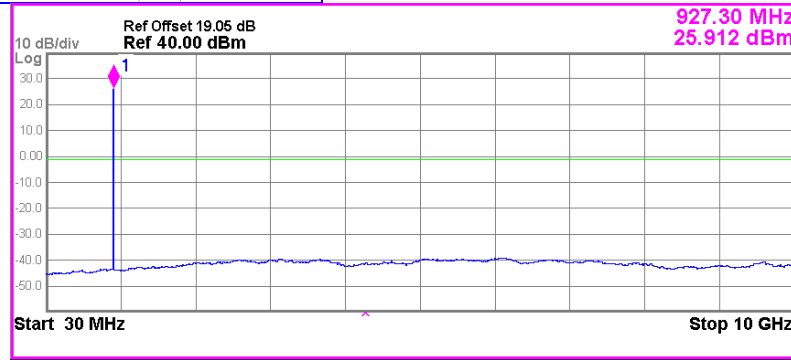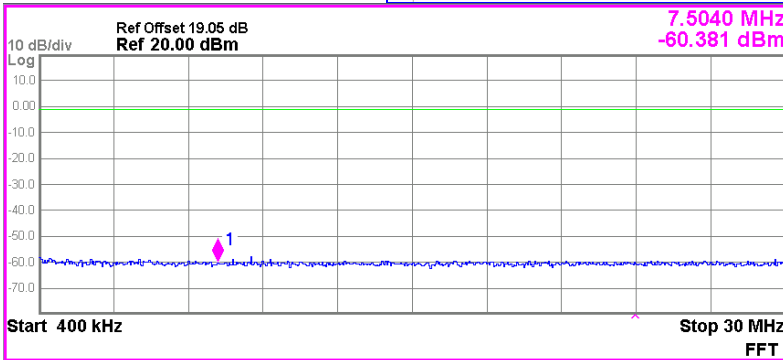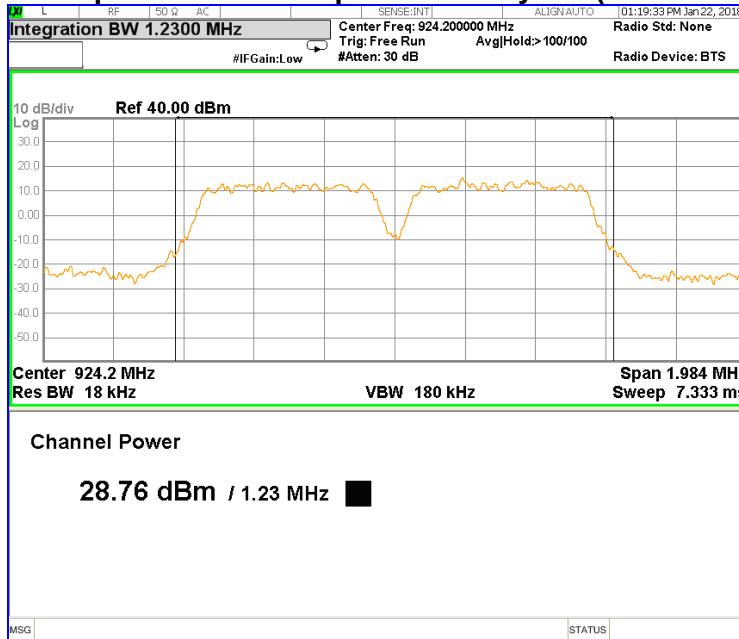




### Screen Captures from the spectrum analyzer: (924.5 & 925.1 MHz)

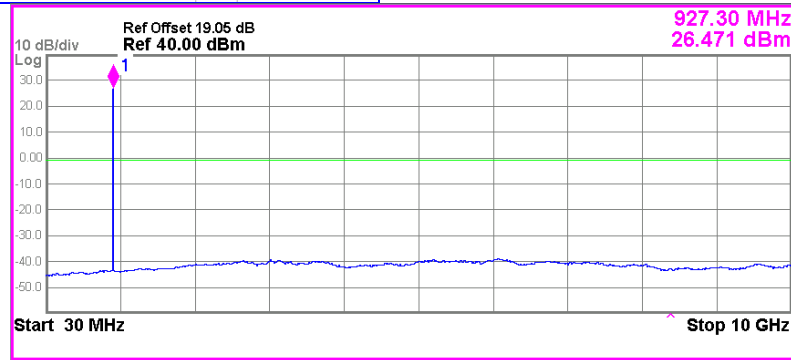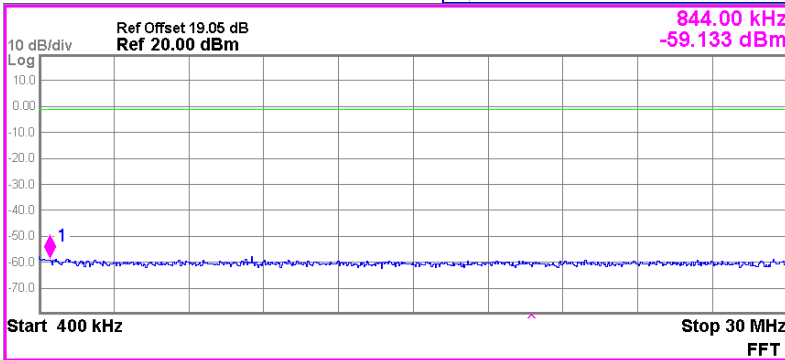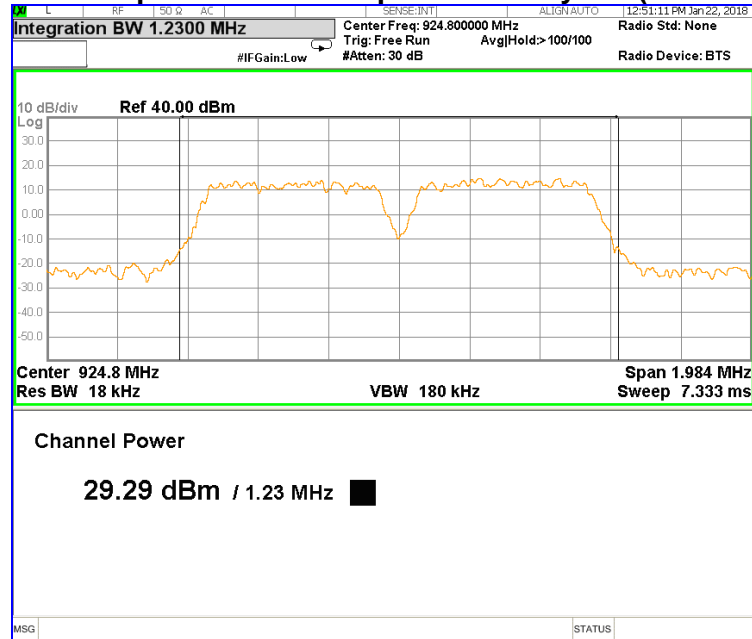




### Screen Captures from the spectrum analyzer: (925.7 & 926.3 MHz)

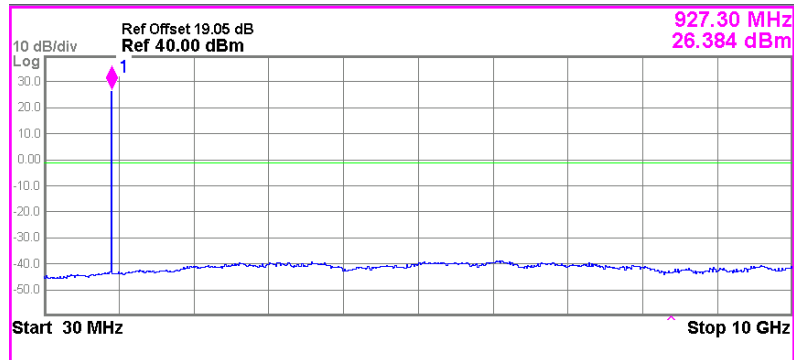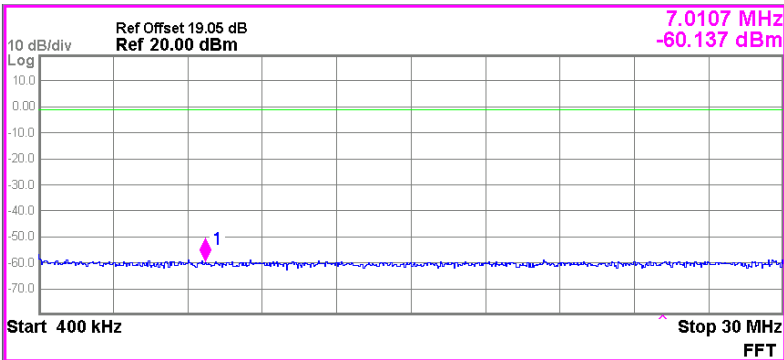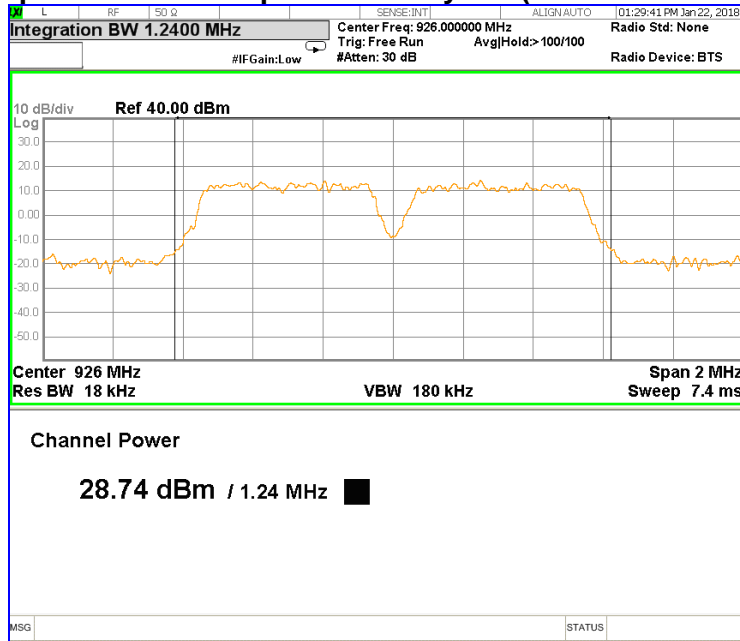

### Screen Captures from the spectrum analyzer :( 926.3 & 926.9 MHz)

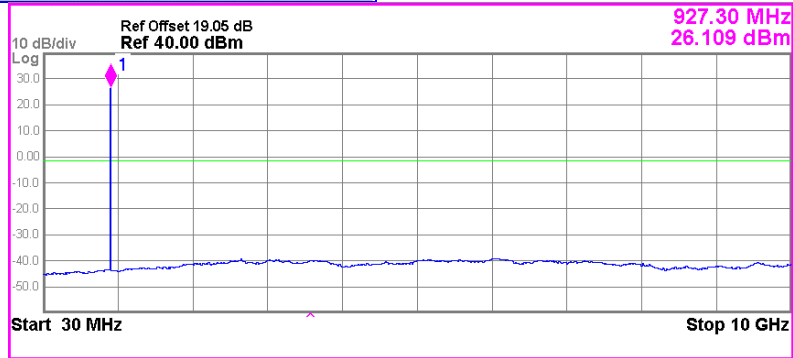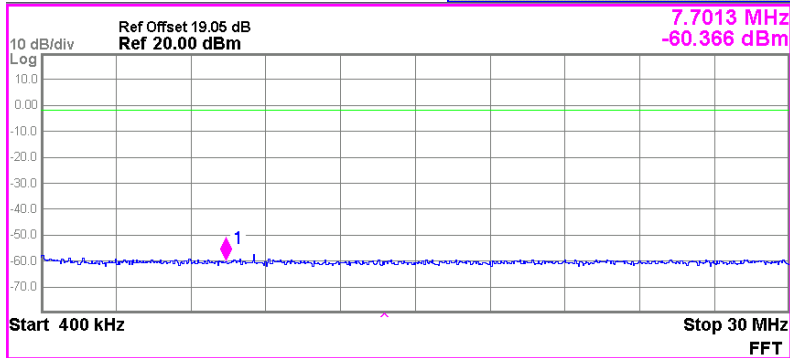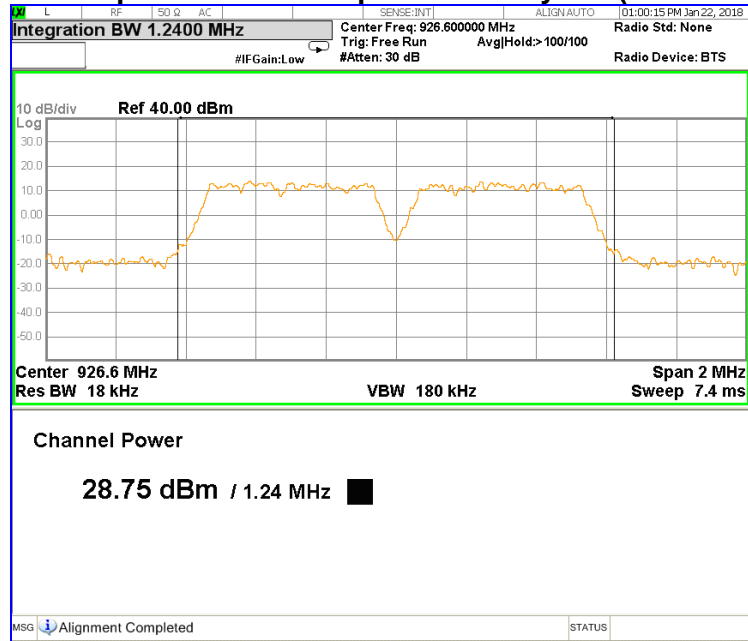

### Screen Captures from the spectrum analyzer: (926.9 & 927.5 MHz)

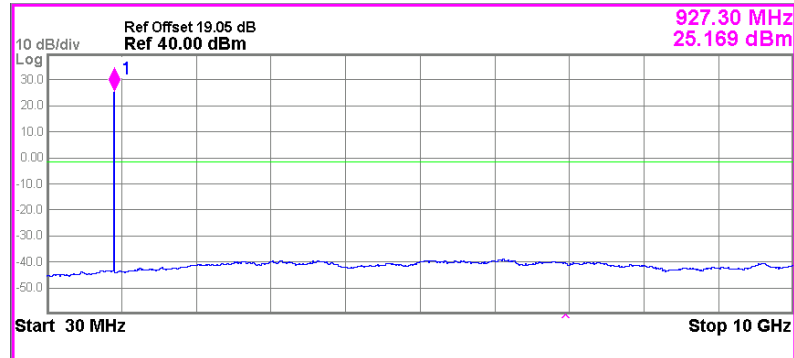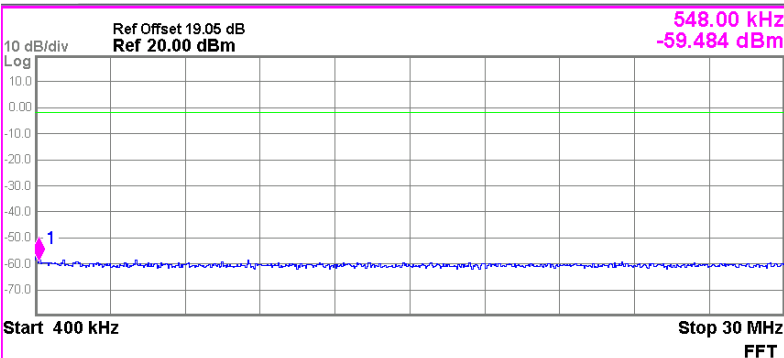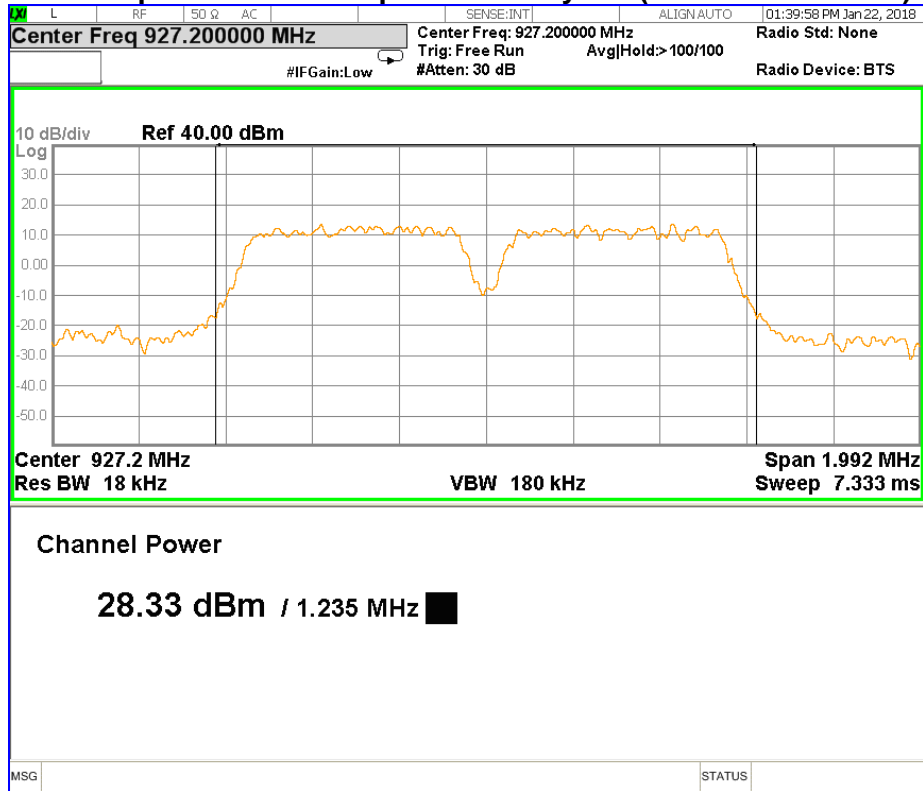

## 2.7 EUT Positioning Assessment

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Kona Micro Outdoor Gateway
<b>Test Personnel:</b>	<b>Standard:</b> FCC PART 15.247
<b>Date:</b>	<b>Basic Standard:</b> ANSI C63.4-2014
<b>EUT status: N/A</b>	
<b>Comments:</b> EUT is not a handheld or portable device. It installed in one orientation in its final installation.	

### **Specification: ANSI C63.4-2014, Clause 6.3.2.1**

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs (see Figure 6, Figure 7, and Figure 9). For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.



## 2.8 Radiated Spurious Emissions / Co-Location

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Kona Micro Outdoor Gateway
<b>Test Personnel:</b> Imran Akram Henry Coockeygam Bushra Muharram	<b>Standard:</b> FCC PART 15.247/15.209 <b>Basic Standard:</b> ANSI C63.10-2013
<b>Date:</b> 2018-01-23 (19.7° C,13% RH)	
<b>EUT status: Compliant</b>	

### Specification: FCC PART 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Restricted Bands of Operation:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.0900000 – 0.1100000	8.2910000 - 8.2940000	16.804250 - 16.804750	162.01250 - 167.17000	1660.0000 – 1710.0000	3.6000000 – 4.4000000	14.470000 – 14.500000
0.4950000 - 0.5050000	8.3620000 - 8.3660000	25.500000 - 25.670000	167.72000 - 173.20000	1718.8000 – 1722.2000	4.5000000 – 5.1500000	15.350000 – 16.200000
2.1735000 - 2.1905000	8.3762500 - 8.3867500	37.500000 - 38.250000	240.00000 – 285.00000	2200.0000 – 2300.0000	5.3500000 – 5.4600000	17.700000 – 21.400000
4.1250000 - 4.1280000	8.4142500 - 8.4147500	73.000000 - 74.600000	322.00000 - 335.40000	2310.0000 – 2390.0000	7.2500000 – 7.7500000	22.010000 – 23.120000
4.1772500 - 4.1777500	12.2900000 - 12.2930000	74.800000 - 75.200000	399.90000 – 410.00000	2483.5000 – 2500.0000	8.0250000 – 8.5000000	23.600000 – 24.000000
4.2072500 - 4.2077500	12.5197500 - 12.5202500	108.000000 - 121.940000 **	608.00000 – 614.00000	2655.0000 – 2900.0000	9.0000000 – 9.2000000	31.200000 – 31.800000
5.6770000 - 5.6830000	12.5767500 - 12.5772500	123.000000 - 138.000000 **	960.00000 – 1240.00000 ***	3260.0000 – 3267.0000	9.3000000 – 9.5000000	36.430000 – 36.500000
6.2150000 - 6.2180000	13.3600000 - 13.4100000	149.900000 - 150.050000	1300.0000 – 1427.0000 ***	3332.0000 – 3339.0000	10.6000000 – 12.7000000	Above 38.600000
6.2677500 - 6.2682500	16.4200000 - 16.4230000	156.524750 - 156.525250	1435.0000 – 1626.5000	3345.8000 – 3358.0000	13.2500000 – 13.4000000	
6.3117500 - 6.3122500	16.6947500 - 16.6952500	156.700000 - 156.900000	1645.5000 – 1646.5000	3500.0000 – 3600.0000 ****		

■ US only     
 ■ Canada 108 – 138 MHz     
 ■ Canada 960 – 1427 MHz     
 ■ Canada only

### 2.8.1 Test Guidance: ANSI C63.10-2013, Clause 13.4.2

From 9 kHz to 150 kHz (resolution bandwidth of 200 Hz) and from 150 kHz to 30 MHz (resolution bandwidth 9 kHz) measurements are performed with a loop antenna (as per KDB 460108).

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz. The EUT is raised to 150 cm above the ground plane, and the area between the EUT and the antenna mast is covered with RF absorbent material.

The scan is performed at discreet increments of turntable azimuth and antenna height, which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

Frequencies having peak emissions within 10dB of the limits are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.8.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.8.3 Uncertainty of Measurement:

The factors contributing to uncertainty of measurement are identified and calculated in accordance with UKAS (United Kingdom Accreditation Service) document “Lab 34, The Expression of Uncertainty in EMC Testing, Aug 2002.” as based on the “ISO Guide to the Expression of Uncertainty in Measurement, 1995.”

This uncertainty estimate represents an expended uncertainty expressed at approximately 95% confidence using a coverage factor of  $k = 2$ .

Test Method	Frequency	Uncertainty
Radiated Emissions Level	30 MHz – 1 GHz	±4.6 dB
Radiated Emissions Level	1 GHz – 26.5 GHz	±5.31 dB

### 2.8.4 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
Loop Antenna	EMCO	6502	10868	2017-03-29	2019-03-29
Biconilog Antenna	ARA	LPB-2520/A	4318	2016-05-18	2018-05-18
DRG Horn	EMCO	3115	19357	2016-08-24	2018-08-24
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2017-04-06	2018-04-06
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21-5P	4354	Monitored	
Pre-Amplifier	hp	8447D	9291	Monitored	

### 2.8.5 Test Sample Verification, Configuration & Modifications


The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

**Test setup diagram for Radiated Spurious Emissions testing (below 1GHz):**

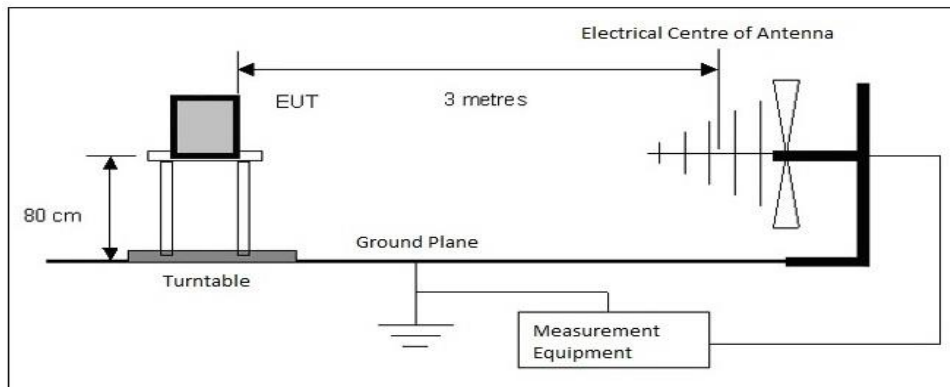

**Test setup diagram for Radiated Spurious Emissions testing (above 1GHz):**

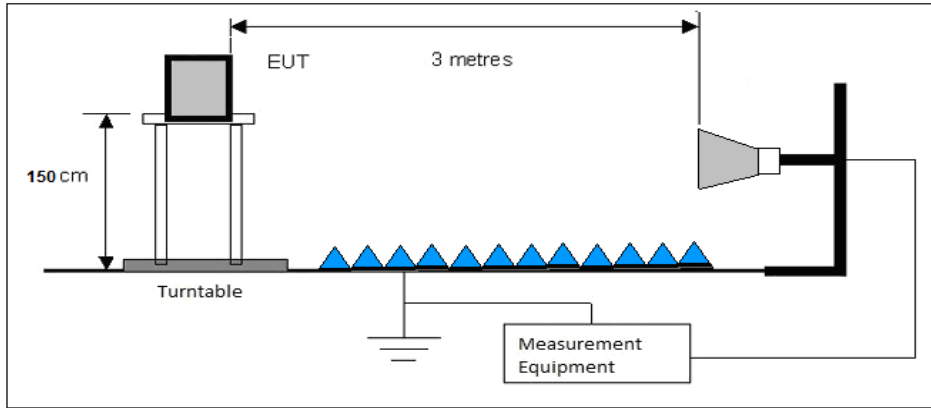

### 2.8.6 Radiated Emissions Data:

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

**Meter Reading in dB $\mu$ V + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dB $\mu$ V/m.**

**Delta = Field Strength - Limit**

**Notes:**

- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discreet increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- Preliminary scans were performed for all channels in Transmit modes. The Upper band channel 927.5 MHz was selected as the worst-case condition for detailed examination.
- In Transmit mode, the EUT was assessed up to 10.0 GHz.

**Negative values for Delta indicate compliance.**


Freq. Marker	Freq. [MHz]	Raw reading [dB $\mu$ v]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dB $\mu$ v/m]	FCC 15.209 Limit [dB $\mu$ v/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
<b>30 – 1000 MHz</b>											
1	36.5446	10.74	QP	21.4	.5	32.64	40	-7.36	194	396	Horizontal
2	34.8461	10.3	QP	21.5	.5	32.3	40	-7.7	133	374	Vertical
3	595.711	9.47	QP	23.1	1.9	34.47	46.02	-11.55	106	200	Vertical
4	842.5837	10.04	QP	25.5	2.2	37.74	46.02	-8.28	278	114	Vertical
<b>1300 – 3600 MHz -</b>											
9	2495.0	43.34	PK	28.8	-28.2	43.94	76	-32.06	360	250	Horizontal
10	2494.6	42.27	PK	28.8	-28.2	42.87	76	-33.13	320	250	Vertical
9	2495.0	43.34	PK	28.8	-28.2	43.94	54	-10.06	360	250	Horizontal
10	2494.6	42.27	PK	28.8	-28.2	42.87	54	-11.13	320	250	Vertical

\* Restricted Band


**Harmonic Emission Values:**

Freq. Marker	Freq. [MHz]	Raw reading [dBµv]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dBµv/m]	FCC 15.247 Limit [dBµv/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
LoRa Carrier	925.1	64.3	PK	26.8	18.3	109.4	125.23	-15.83	220	250	Horizontal
		79		26.8	18.3	124.1	125.23	-1.2	240	100	Vertical
GSM Carrier	784	86	PK	24.8	2.2	113	125.23	-12.23	260	100	Horizontal
		80.05		24.8	2.2	107.05	125.23	-18.18	340	100	Vertical
<b>1300 – 3600 MHz - Harmonics</b>											
GSM 1 <sup>st</sup> harmonic	1568.0	80.94	PK	25.6	-21.5	85.04	20 dBc	-7.96	340	350	Horizontal
GSM 2 <sup>nd</sup> harmonic	2352.7	63.66	PK	28.5	-26.8	65.36	20 dBc	-27.64	140	250	Horizontal
lora 2 <sup>nd</sup> harmonic	2775.9	67.11	PK	29.3	-28.5	67.91	20 dBc	-21.49	280	100	Horizontal
GSM 3 <sup>rd</sup> harmonic	3136.9	70.65	PK	30.8	-26.4	75.05	20 dBc	-17.95	80	250	Horizontal
GSM 1 <sup>st</sup> harmonic	1568.0	72.89	PK	25.6	-21.5	76.99	20 dBc	-10.06	320	250	Vertical
GSM 2 <sup>nd</sup> harmonic	2352.7	61.27	PK	28.5	-26.8	62.97	20 dBc	-24.08	260	250	Vertical
lora 2 <sup>nd</sup> harmonic	2775.9	65.86	PK	29.3	-28.5	66.66	20 dBc	-37.44	349	100	Vertical
GSM 3 <sup>rd</sup> harmonic	3136.9	79.47	PK	30.8	-26.4	83.87	20 dBc	-3.18	340	250	Vertical
<b>3600 – 10000 MHz - Harmonics</b>											
GSM 4 <sup>th</sup> harmonic	3921.7	65.0	PK	32.6	-26.9	70.7	20 dBc	-22.3	340	100	Horizontal
GSM 5 <sup>th</sup> harmonic	4706.7	62.43	PK	32.6	-28.7	66.33	20 dBc	-26.67	140	100	Horizontal
GSM 6 <sup>th</sup> harmonic	5489.0	53.31	PK	34.1	-24.9	62.51	20 dBc	-30.49	280	100	Horizontal
GSM 7 <sup>th</sup> harmonic	6278.0	51.3	PK	34.6	-27.9	58	20 dBc	-35.0	120	100	Horizontal
lora 7 <sup>th</sup> harmonic	7401.0	55.7	PK	36.5	-22.9	69.3	20 dBc	-20.1	60	250	Horizontal
lora 8 <sup>th</sup> harmonic	8325.7	55.64	PK	37.1	-26.8	65.94	20 dBc	-23.46	160	100	Horizontal
GSM 4 <sup>th</sup> harmonic	3921.7	64.33	PK	32.6	-26.9	70.3	20 dBc	-16.75	320	250	Vertical
GSM 5 <sup>th</sup> harmonic	4706.7	55.63	PK	32.6	-28.7	59.53	20 dBc	-27.52	240	250	Vertical
GSM 6 <sup>th</sup> harmonic	5489.0	52.35	PK	34.1	-24.9	61.55	20 dBc	-25.5	280	250	Vertical
GSM 7 <sup>th</sup> harmonic	6278.0	49.11	PK	34.6	-27.9	55.81	20 dBc	-31.24	220	250	Vertical
lora 7 <sup>th</sup> harmonic	7401.0	56.3	PK	36.5	-22.9	69.9	20 dBc	-34.2	40	250	Vertical
lora 8 <sup>th</sup> harmonic	8325.7	58.15	PK	37.1	-26.8	68.45	20 dBc	-35.65	240	250	Vertical


### Plot of Radiated Emissions: Measuring Antenna 1<sup>st</sup> Orientation

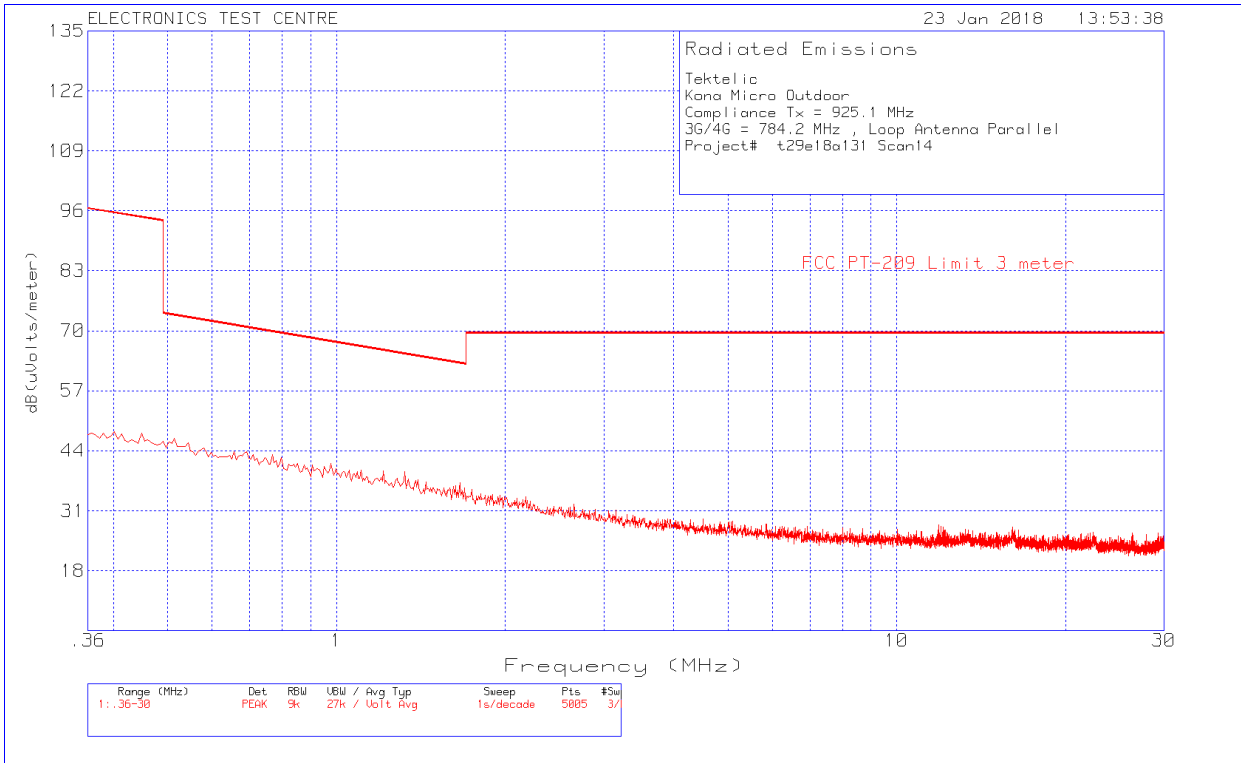


### Plot of Radiated Emissions: Measuring Antenna 2<sup>nd</sup> Orientation

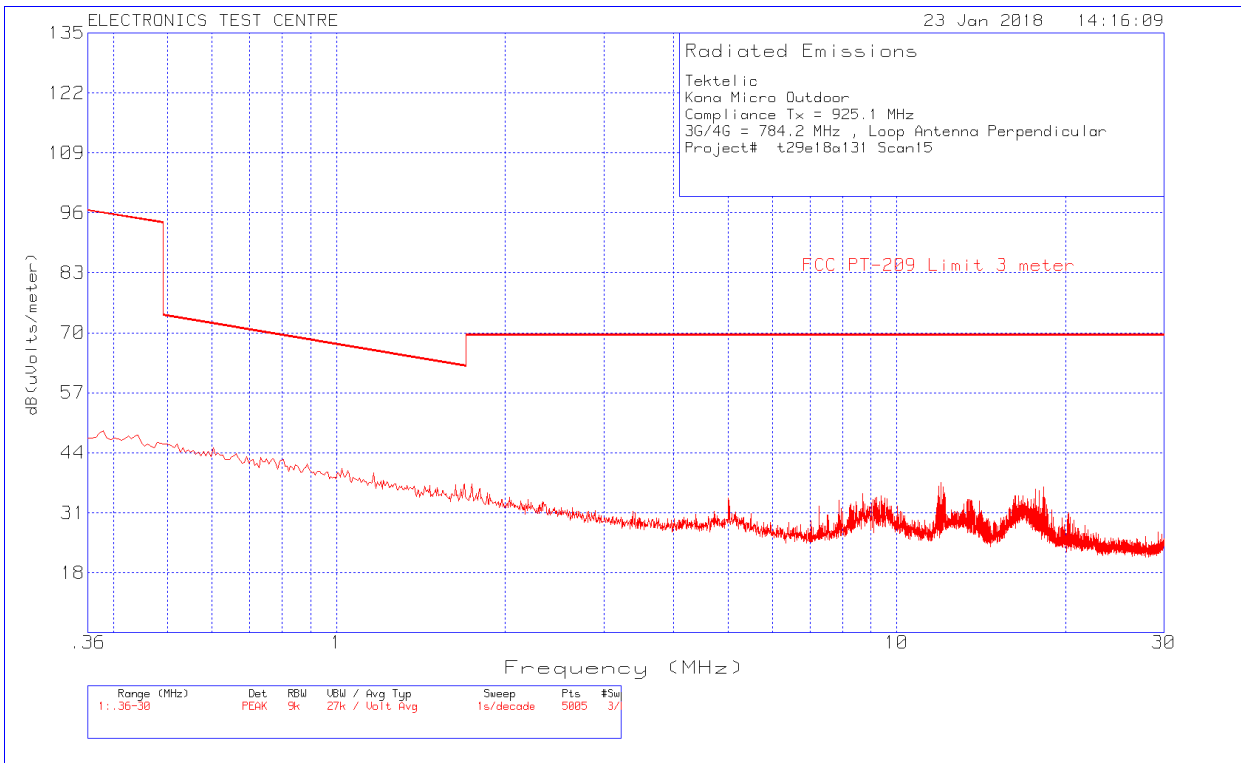

**Plot of Radiated Emissions: Horizontal polarization**

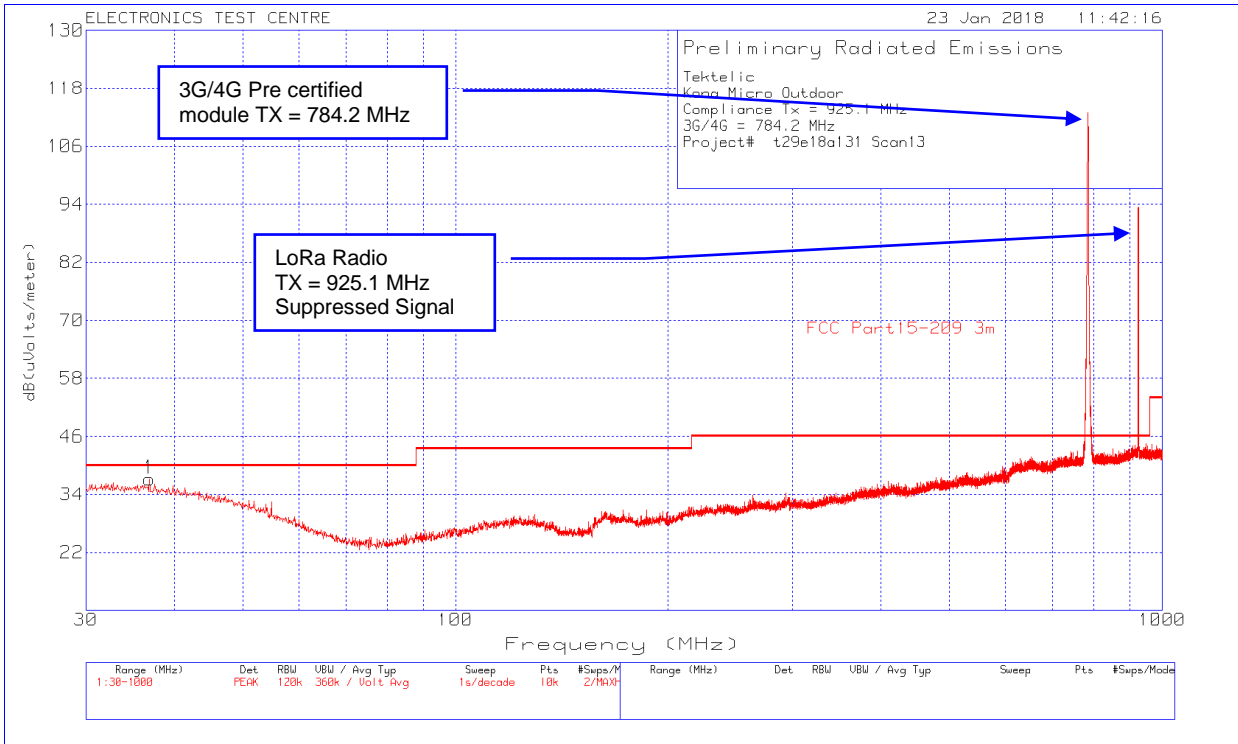


**Plot of Radiated Emissions: Vertical polarization**

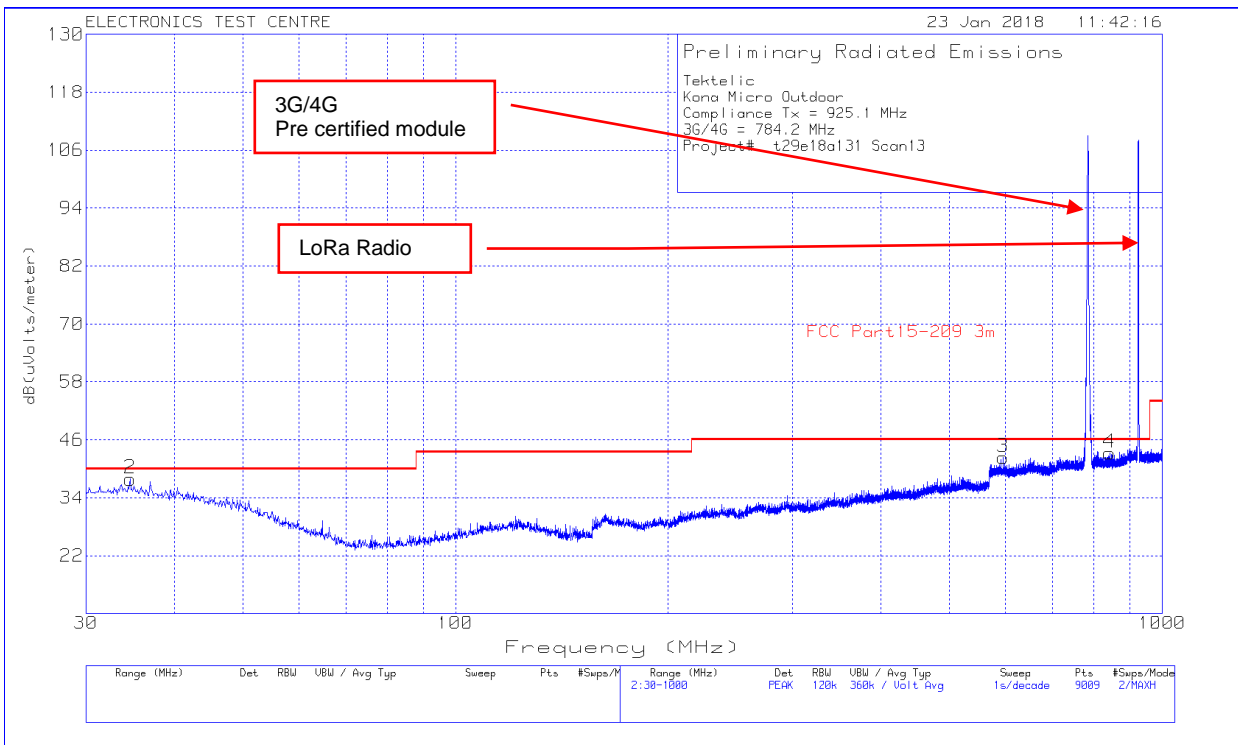





### Plot of Radiated Emissions: Horizontal polarization

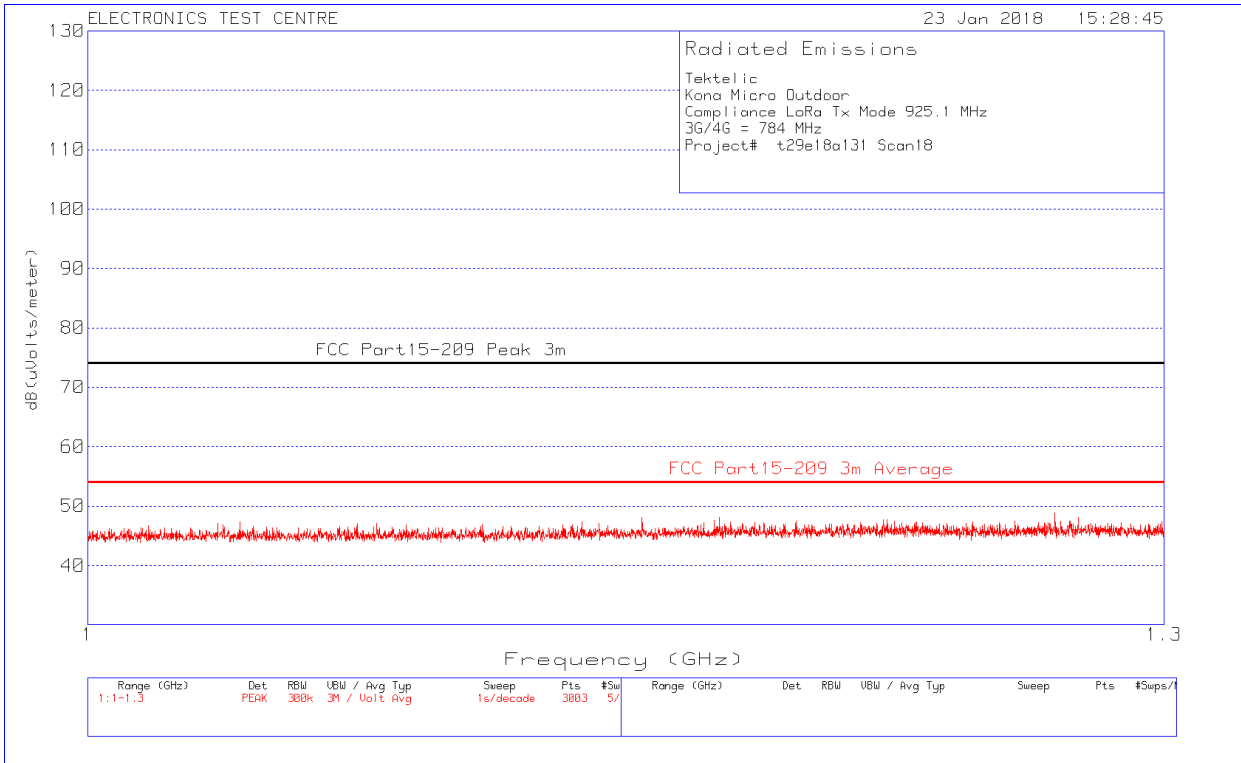


### Plot of Radiated Emissions: Vertical polarization

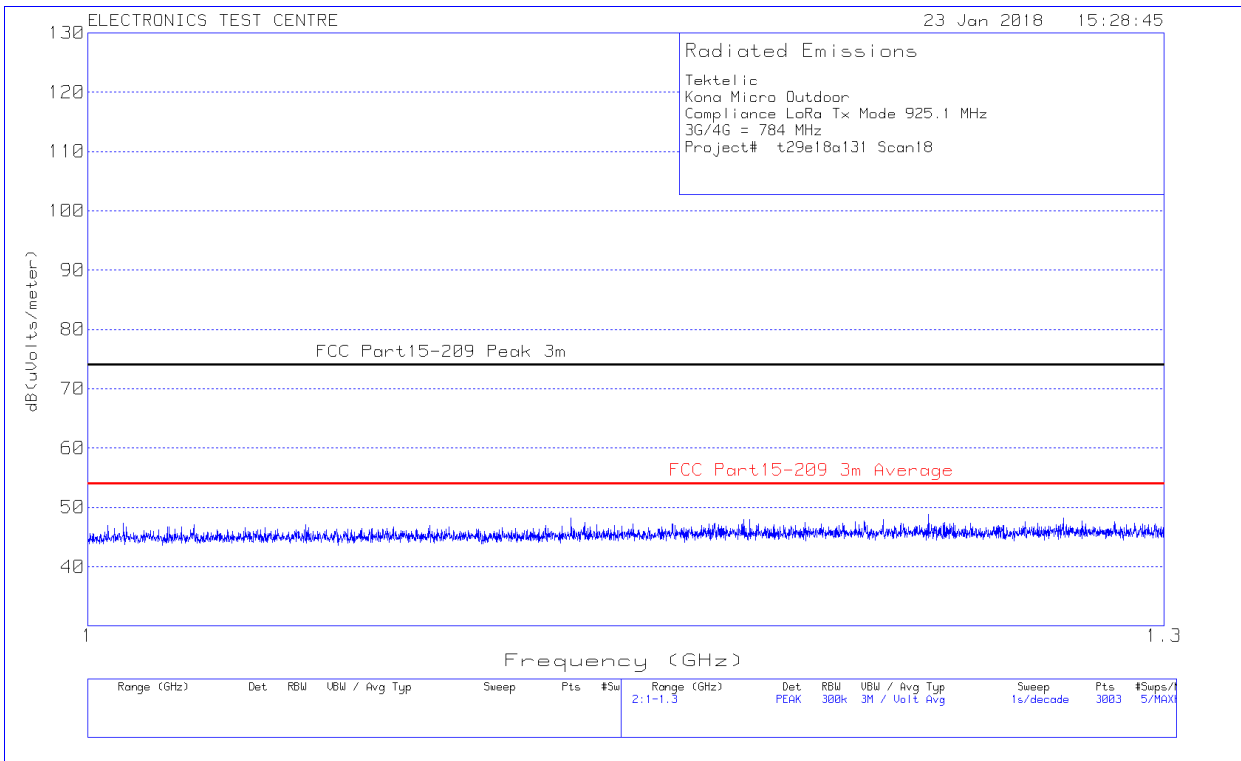


### Plot of Radiated Emissions: Horizontal polarization

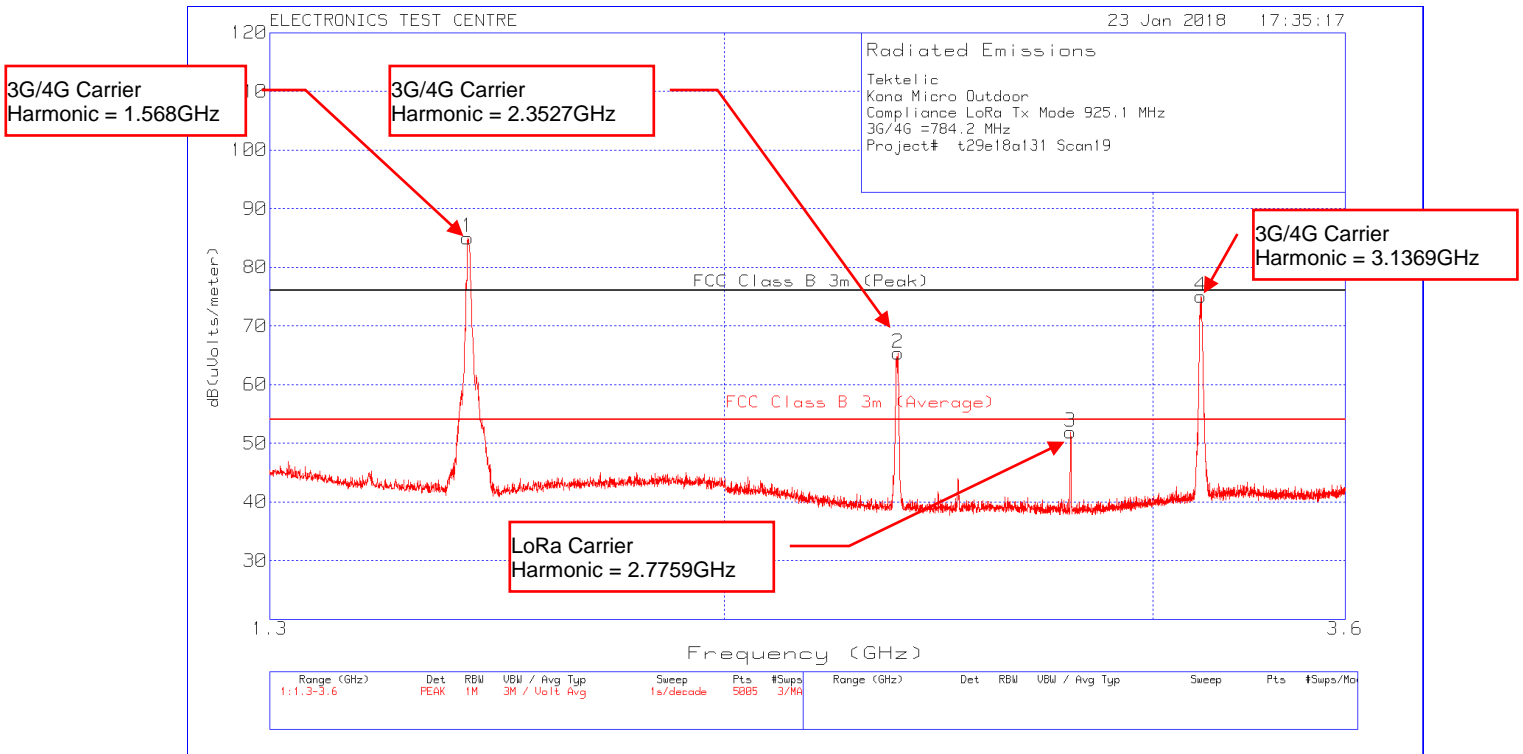


### Plot of Radiated Emissions: Vertical polarization

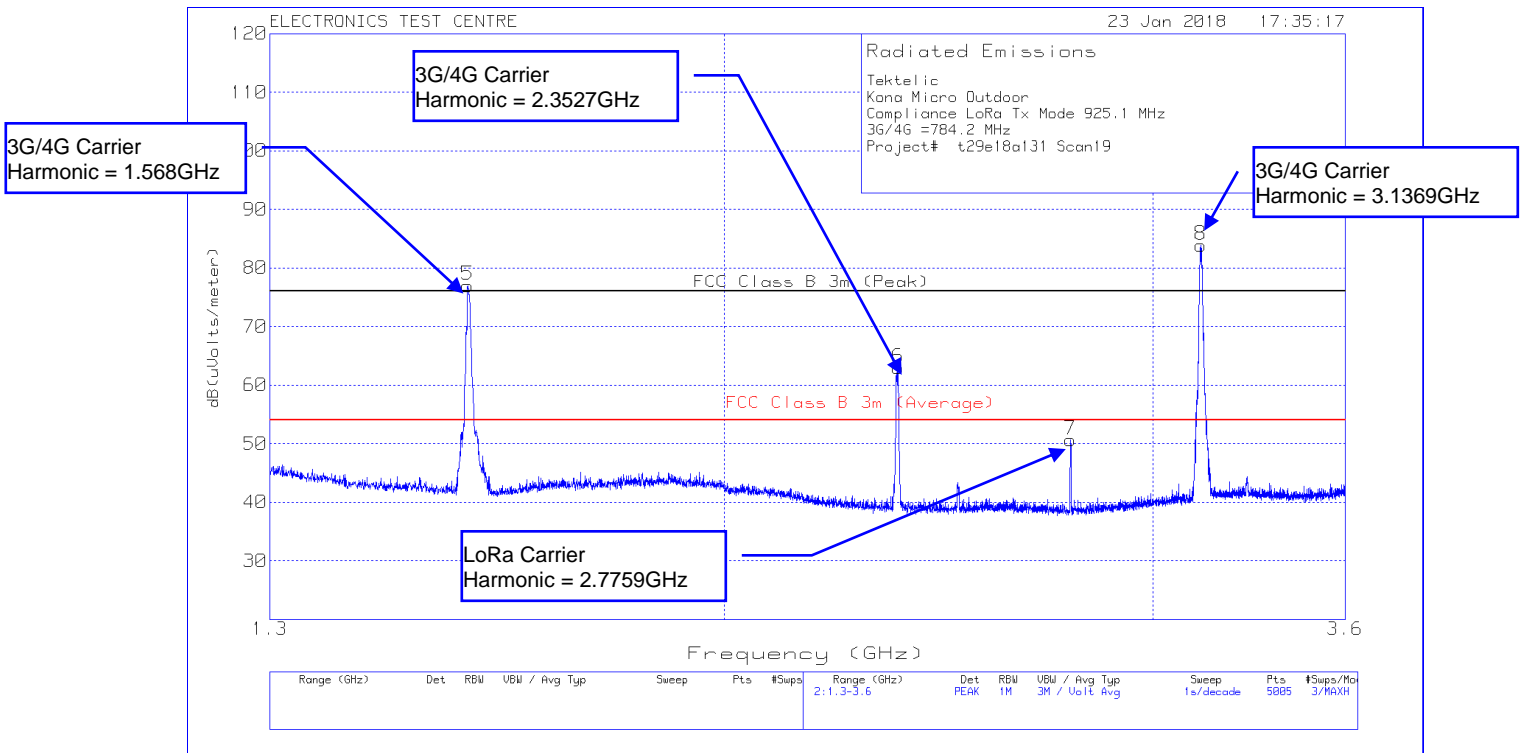

### Plot of Radiated Emissions: Horizontal polarization

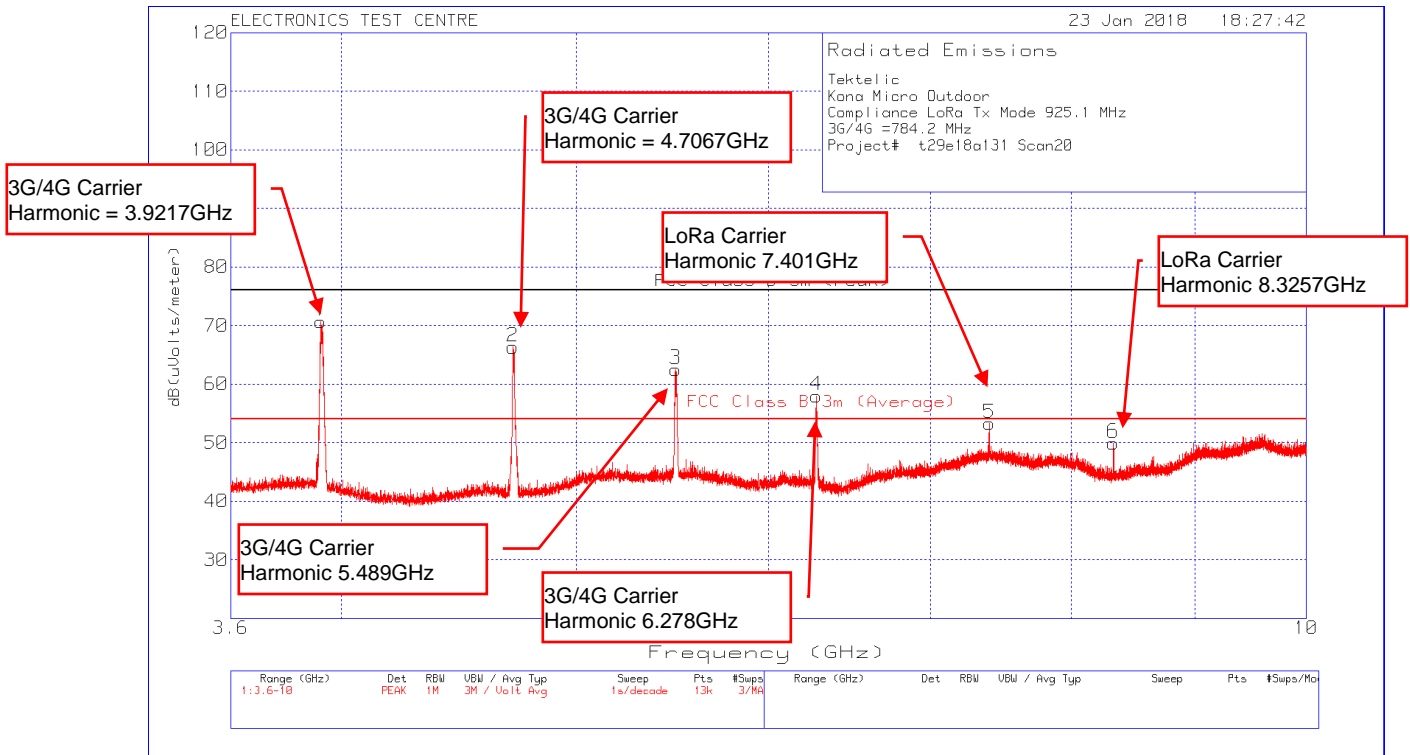

### Plot of Radiated Emissions: Vertical polarization

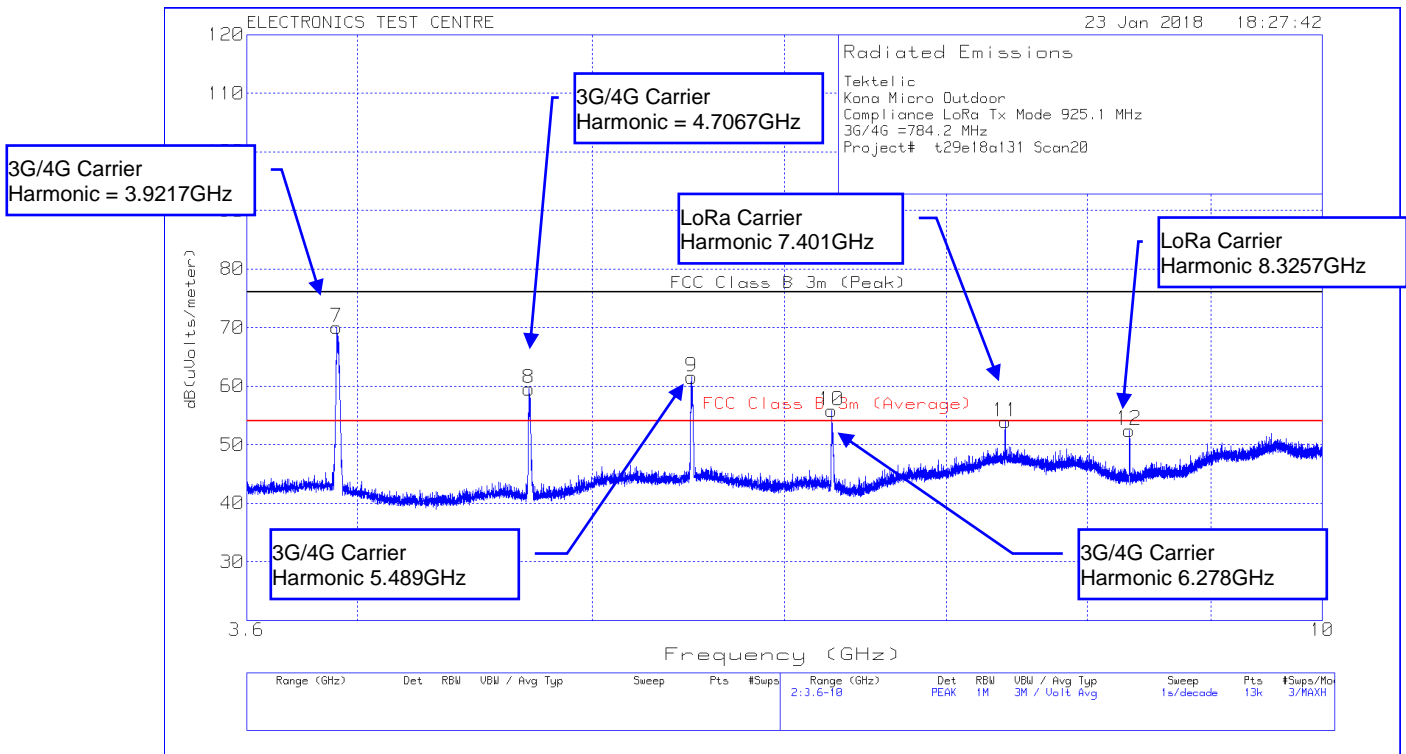

## 2.9 Radiated Spurious Emissions (Rx Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel: Henry Coockeygam	Standard: FCC Part15.109
Date: 2018-01-23 (19.7° C,13.0% RH)	Basic Standard: ANSI C63.4-2014
<b>EUT status: Compliant</b>	

### Specification: FCC PART 15.109

Frequency	FCC Class B Limit (3 m)
30 – 88 MHz	40 dB $\mu$ V/m (QP)
88 – 216 MHz	43.52 dB $\mu$ V/m (QP)
216 – 960 MHz	46.02 dB $\mu$ V/m (QP)
960 – 1000 MHz	53.98 dB $\mu$ V/m (QP)
Above 1000 MHz	53.98 dB $\mu$ V/m (Avg.)

**Criteria:** The radiated emissions produced by a device, measured at a distance of 3 meters, shall not exceed the limits as specified.

### 2.9.1 Test Guidance: ANSI C63.10-2013, Clause 13.4.2

From 9 kHz to 150 kHz (resolution bandwidth of 200 Hz) and from 150 kHz to 30 MHz (resolution bandwidth 9 kHz) measurements are performed with a loop antenna (as per KDB 460108).

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz. The EUT is raised to 150 cm above the ground plane, and the area between the EUT and the antenna mast is covered with RF absorbent material.

The scan is performed at discreet increments of turntable azimuth and antenna height, which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

Frequencies having peak emissions within 10dB of the limits are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.9.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.9.3 Uncertainty of Measurement:

The factors contributing to uncertainty of measurement are identified and calculated in accordance with UKAS (United Kingdom Accreditation Service) document “Lab 34, The Expression of Uncertainty in EMC Testing, Aug 2002.” as based on the “ISO Guide to the Expression of Uncertainty in Measurement, 1995.”

This uncertainty estimate represents an expended uncertainty expressed at approximately 95% confidence using a coverage factor of  $k = 2$ .

Test Method	Frequency	Uncertainty
Radiated Emissions Level	30 MHz – 1 GHz	±4.6 dB
Radiated Emissions Level	1 GHz – 26.5 GHz	±5.31 dB

### 2.9.4 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A	6130	2017-06-20	2018-06-20
Loop Antenna	EMCO	6502	10868	2017-03-29	2019-03-29
Biconilog Antenna	ARA	LPB-2520/A	4318	2016-05-18	2018-05-18
DRG Horn	EMCO	3115	19357	2016-08-24	2018-08-24
Standard Gain Horn	QuinStar Tech. Inc.	QWH-KPRS00	6163	2016-08-22	2018-08-22
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2017-04-06	2018-04-06
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21-5P	4354	Monitored	
Low Noise Amplifier (18 – 26 GHz)	MITEQ	JS44-01002650-33-3P	6163	Monitored	
Pre-Amplifier	hp	8447D	9291	Monitored	

### 2.9.5 Test Sample Verification, Configuration & Modifications


The EUT was set to a RX mode with test-specific software.

The EUT met the requirements without modification.

**Test setup diagram for Radiated Spurious Emissions testing (below 1GHz):**

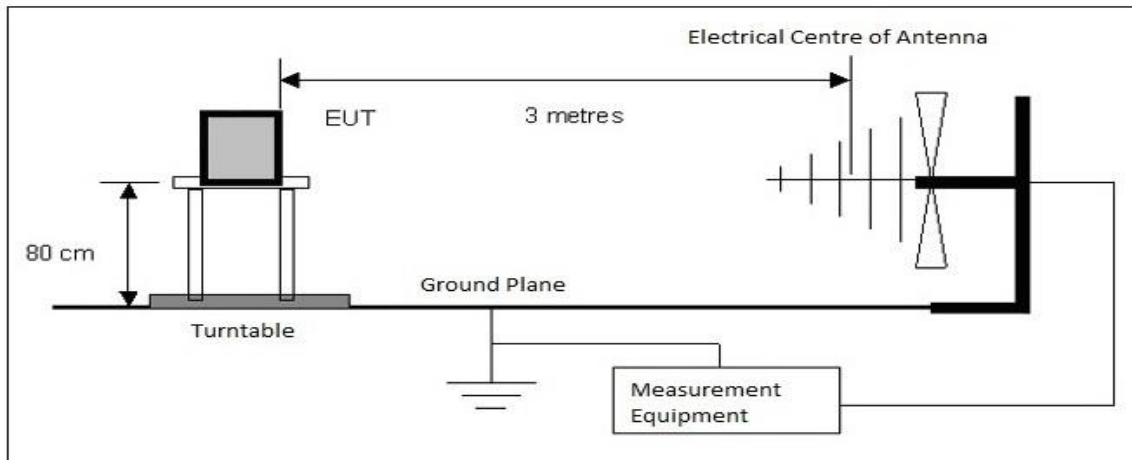

**Test setup diagram for Radiated Spurious Emissions testing (above 1GHz):**

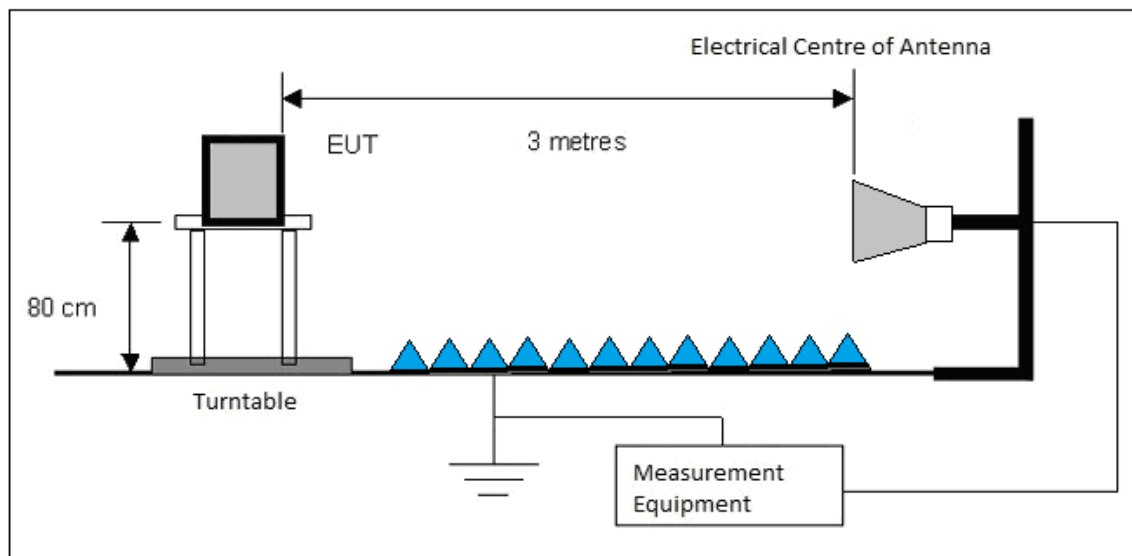

### 2.9.6 Radiated Emissions Data:

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

Freq. Marker	Freq. [MHz]	Raw reading [dBμV]	Det	Antenna Factor [dB/m]	Pre amp Gain/Cable Loss [dB]	Corrected Reading [dBμV/m]	FCC 15.109 Limit [dBμV/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
<b>30 – 1000 MHz</b>											
1	33.4458	32.55	PK	21.6	-24.5	29.65	40	-10.35	269	100	Vertical
2	106.6696	36.06	PK	13.7	-23.3	26.46	43.52	-17.06	269	100	Vertical
3	143.2815	39.6	PK	12.6	-22.8	29.4	43.52	-14.12	269	100	Vertical
4	925.161	30.77	PK	26.8	-18.5	39.07	46.02	-6.95	179	100	Vertical
<b>1000 – 3600 MHz -</b>											
1	1125.2	56.32	PK	24.9	-35.7	45.52	54	-8.48	280	100	Horizontal
2	1511.3	53.58	PK	25.4	-35	43.98	54	-10.02	240	100	Horizontal
3	1125.2	54.25	PK	24.9	-35.7	43.45	54	-10.55	40	100	Vertical
4	1521.1	49.15	PK	25.4	-35	39.55	54	-14.45	80	100	Vertical

**Meter Reading in dBμV + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dBμV/m.**


**Delta = Field Strength - Limit**

**Notes:**


- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.

In receive mode, the EUT was assessed up to 5<sup>th</sup> harmonic of the highest internal frequency.

### Plot of Radiated Emissions: Horizontal polarization

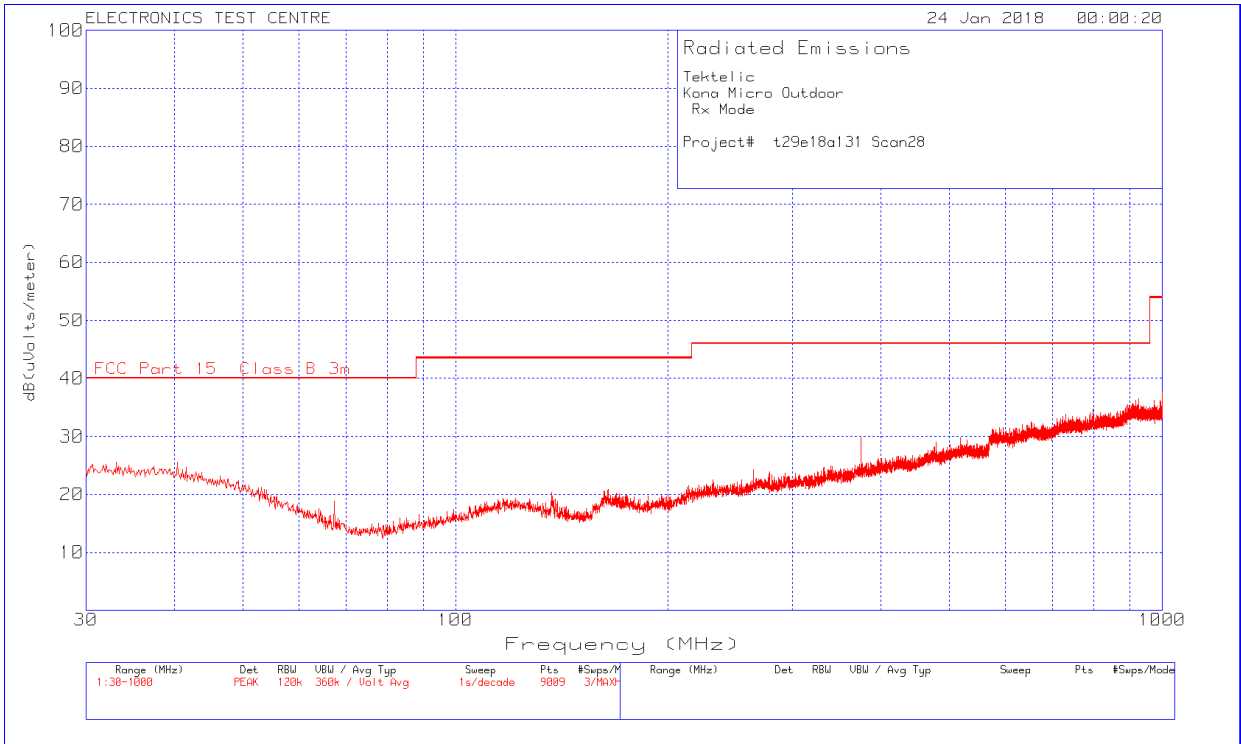


### Plot of Radiated Emissions: Vertical polarization

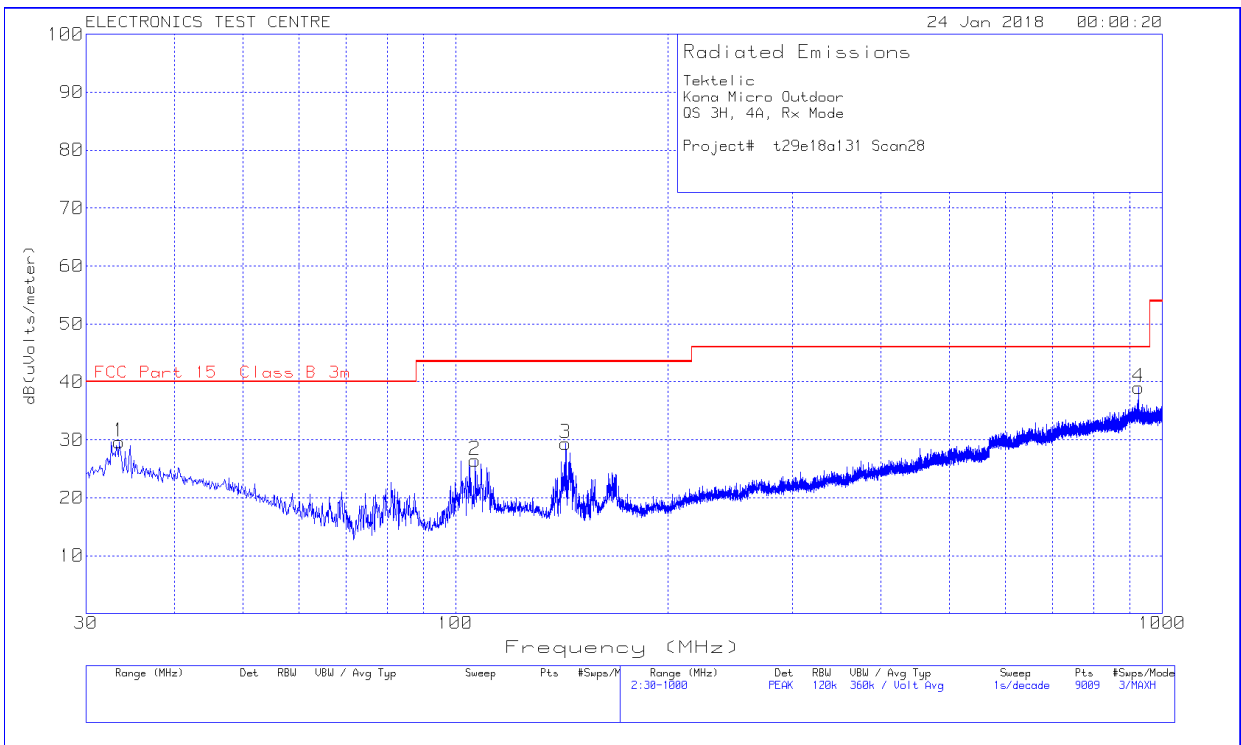





### Plot of Radiated Emissions: Horizontal polarization

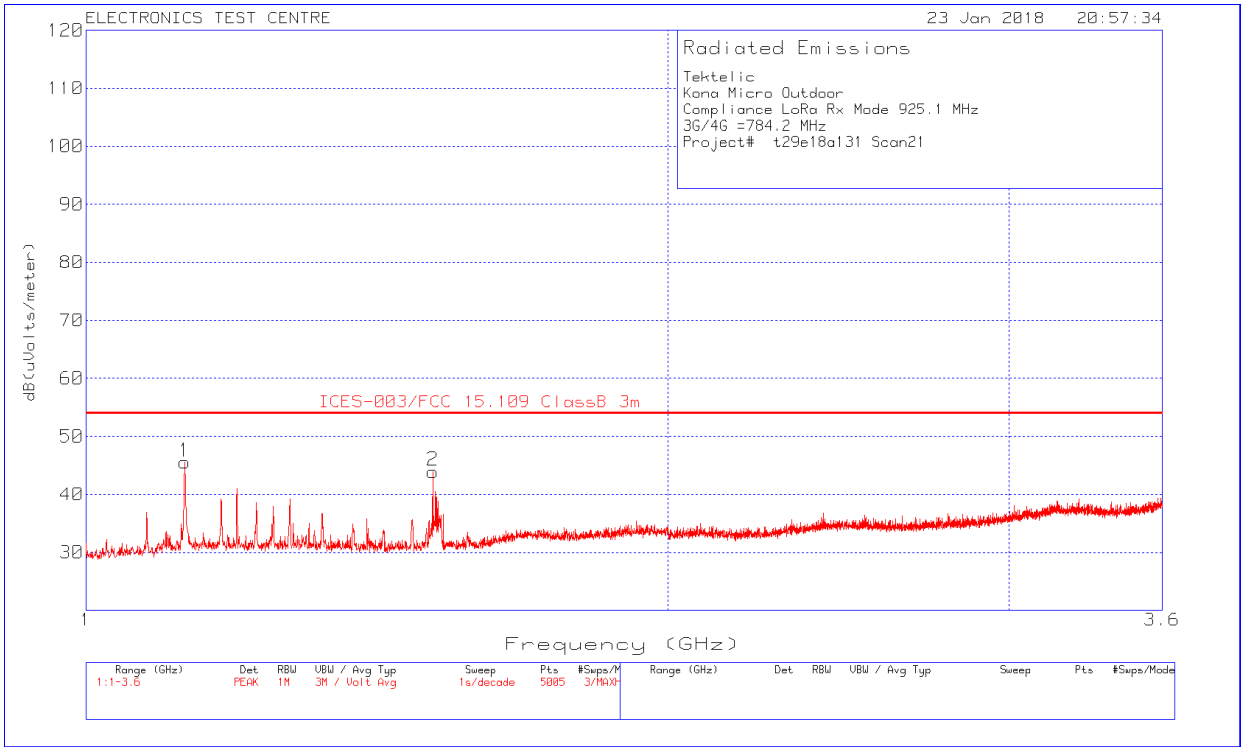


### Plot of Radiated Emissions: Vertical polarization

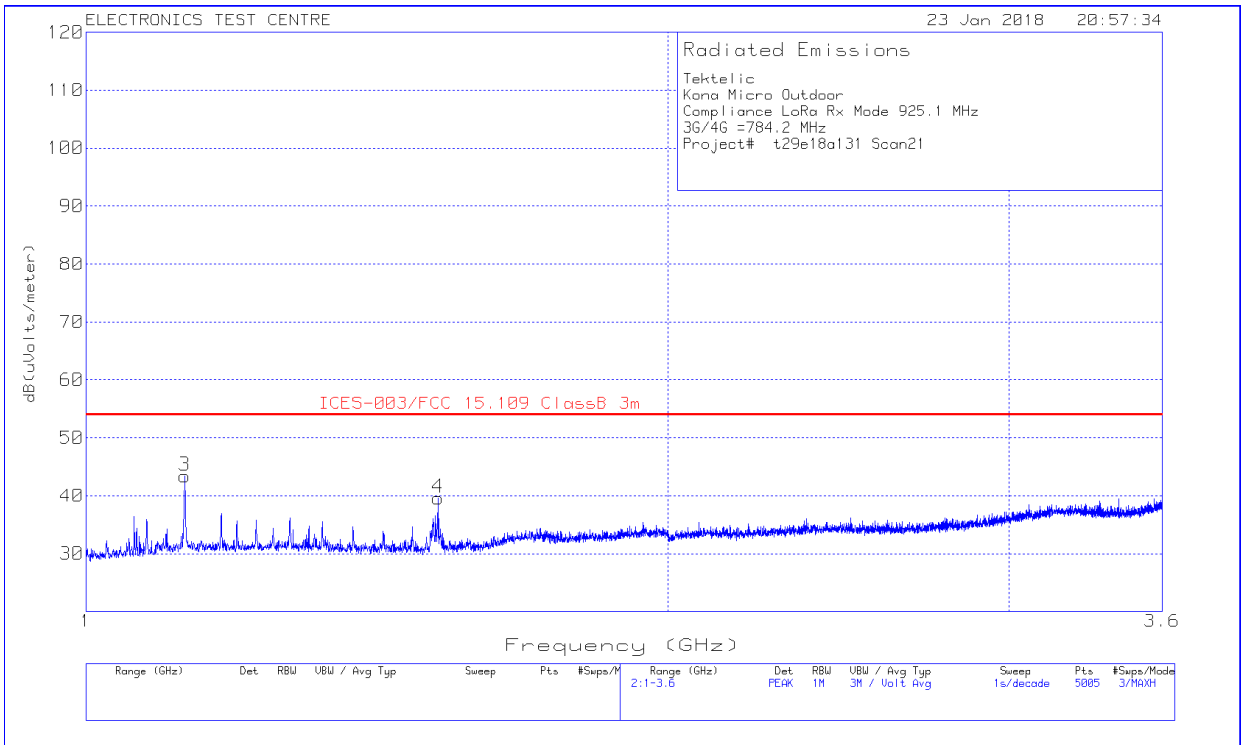


### Plot of Radiated Emissions: Horizontal polarization

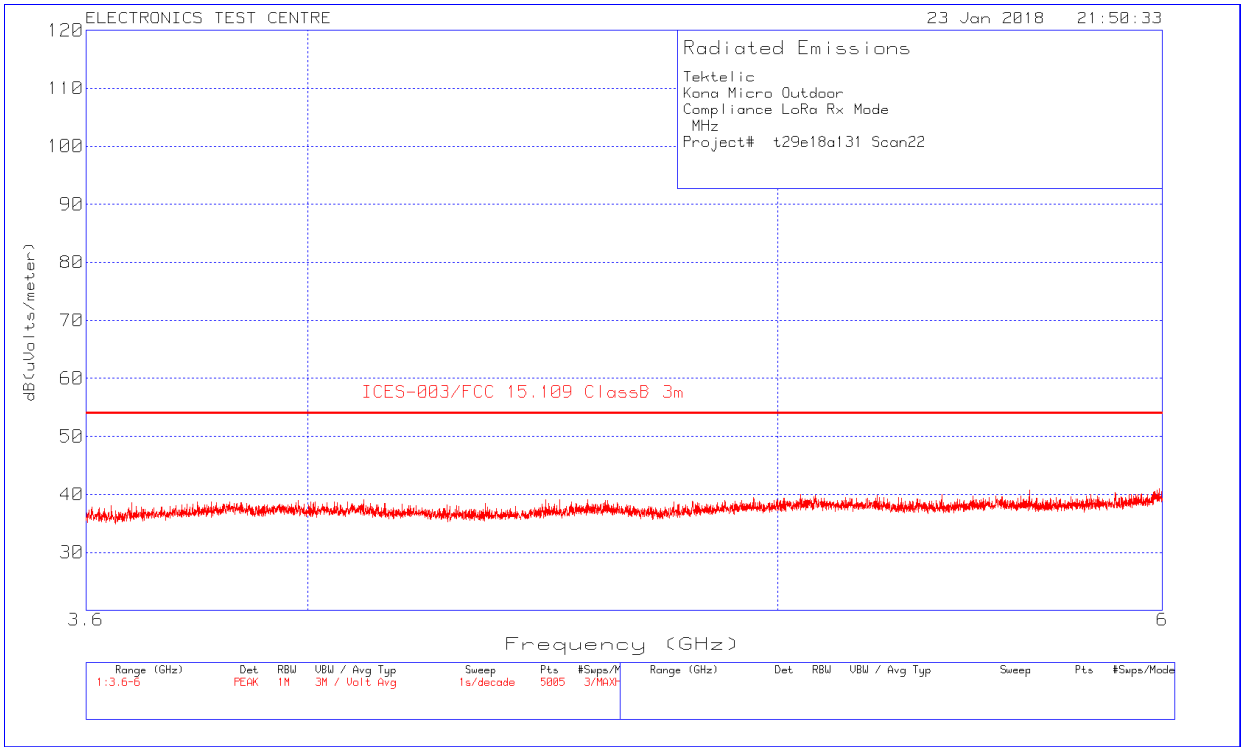


### Plot of Radiated Emissions: Vertical polarization

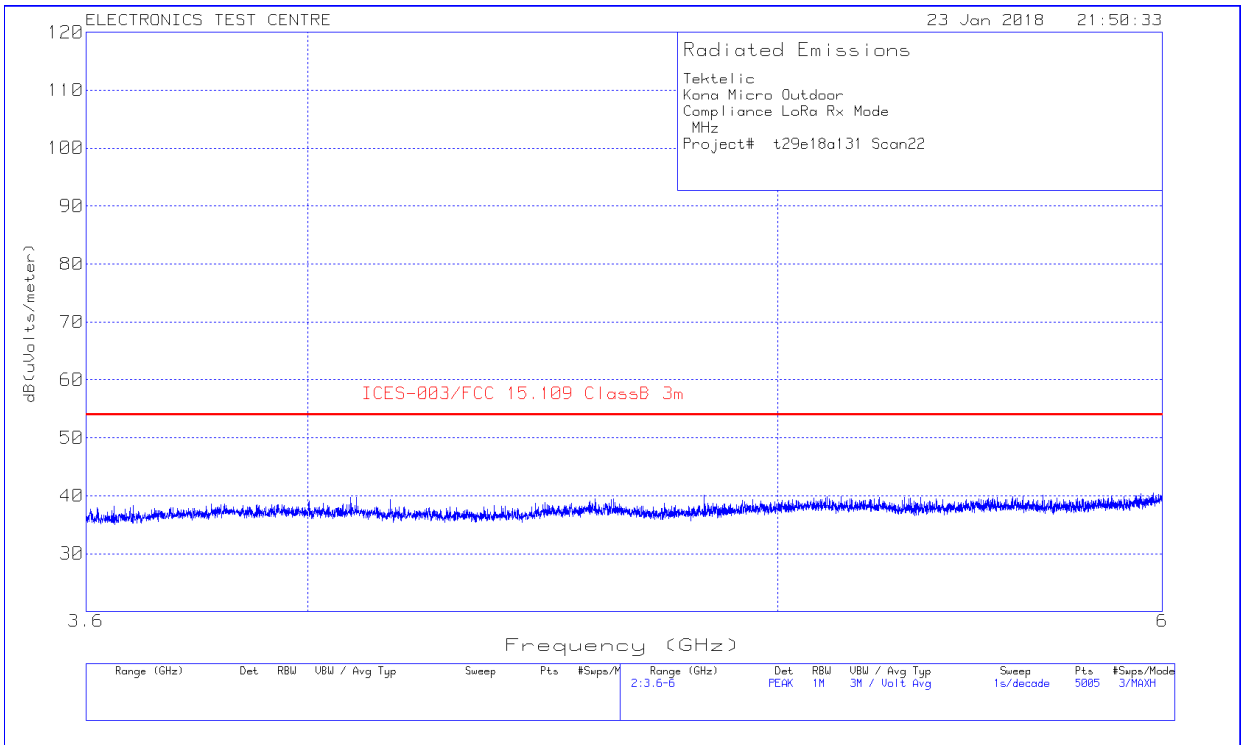


### Plot of Radiated Emissions: Horizontal polarization Ambient

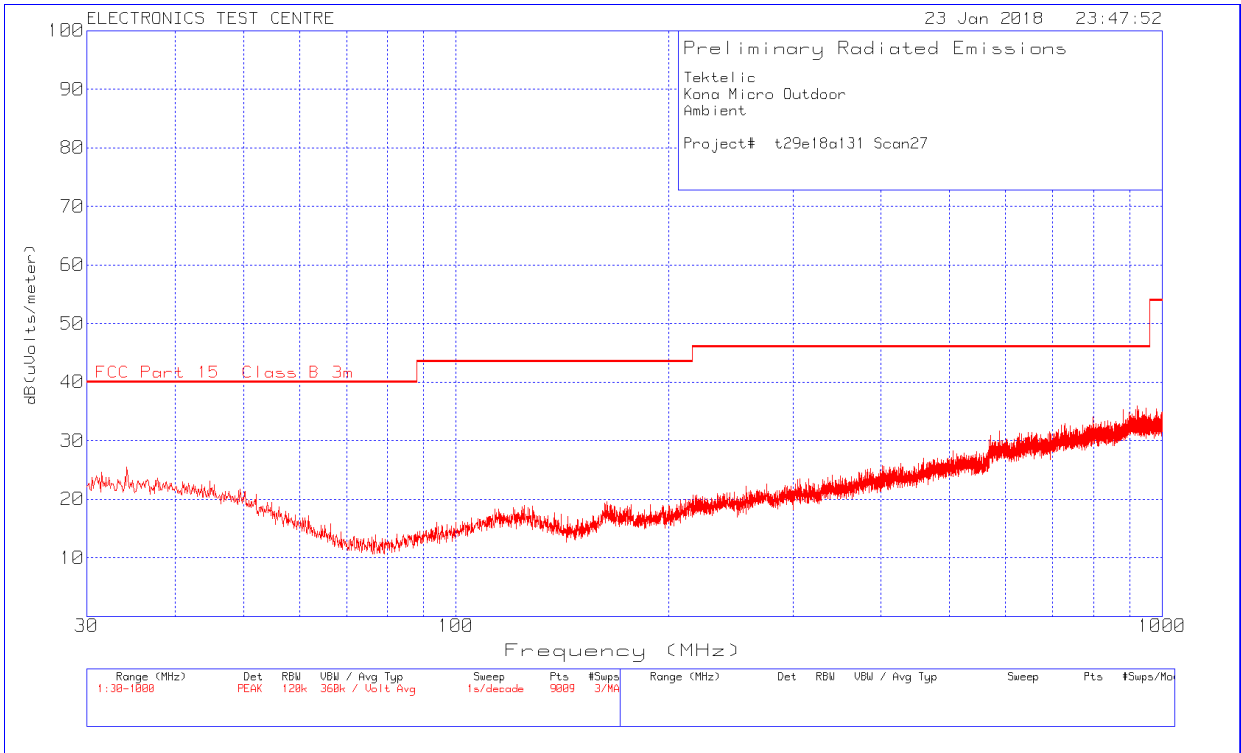


### Plot of Radiated Emissions: Vertical polarization Ambient

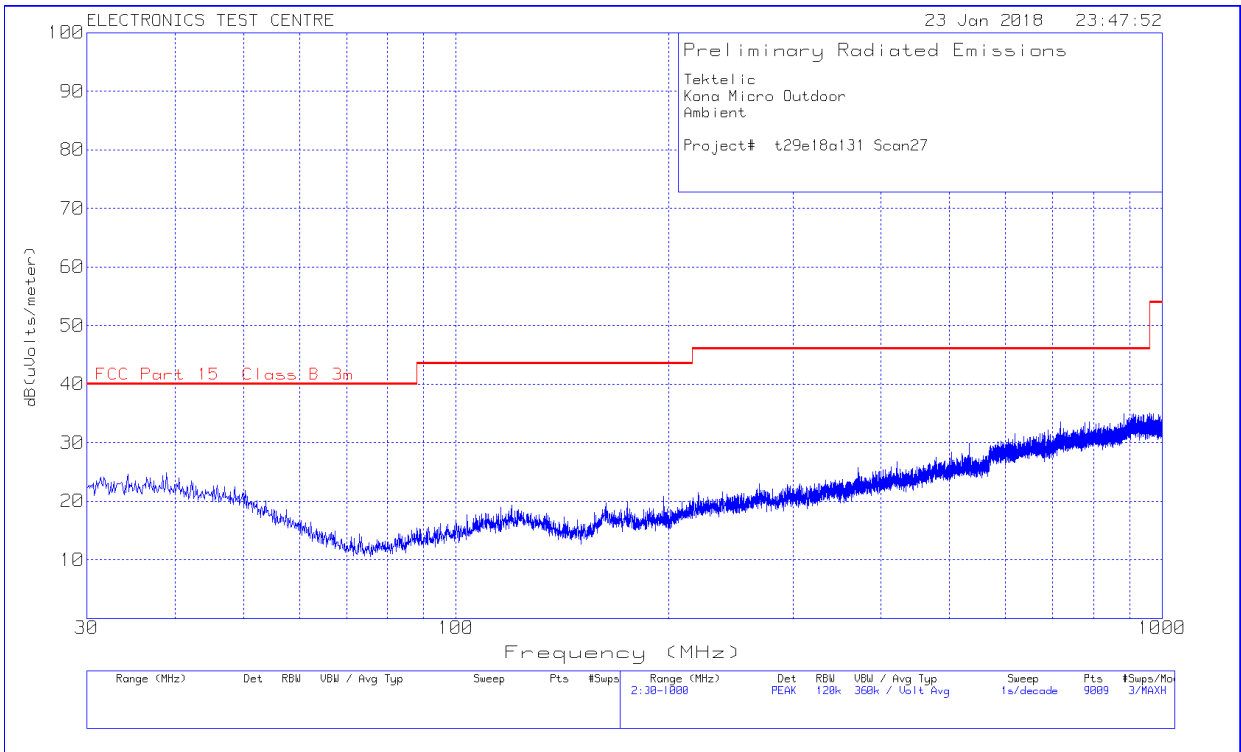


### Plot of Radiated Emissions: Horizontal polarization Ambient

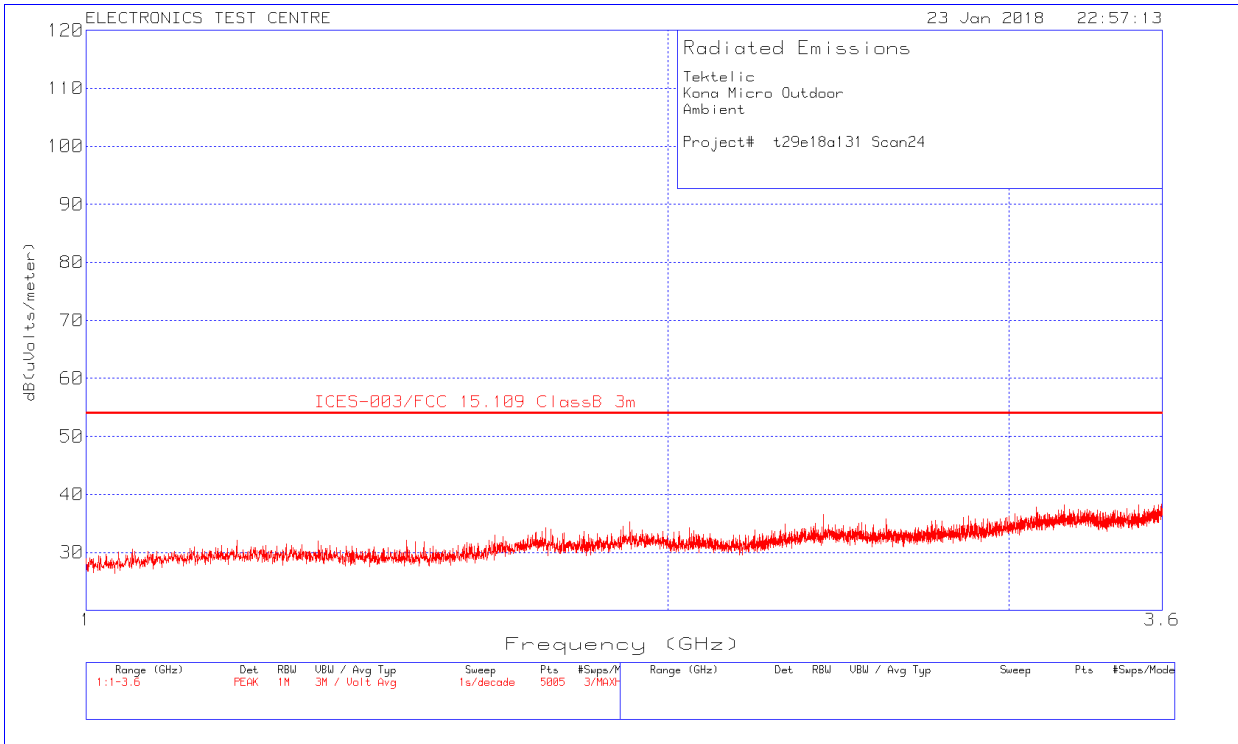


### Plot of Radiated Emissions: Vertical polarization Ambient

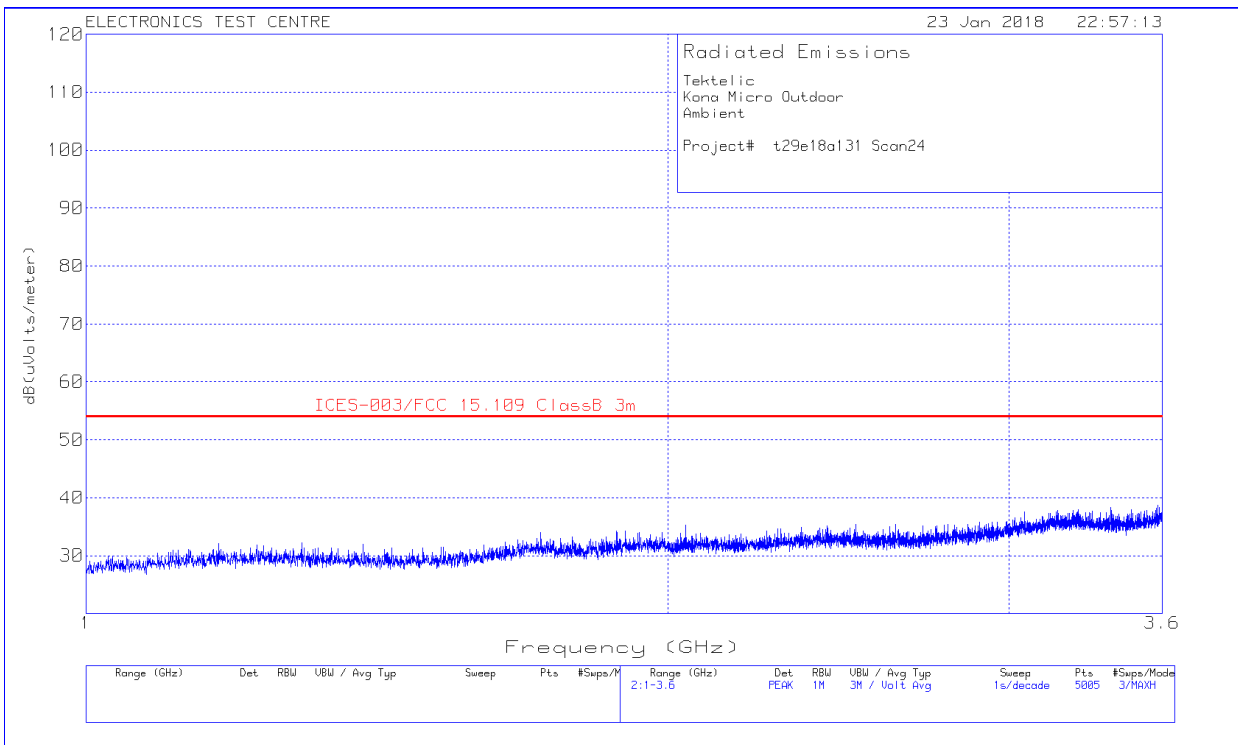

**Plot of Radiated Emissions: Horizontal polarization Ambient**

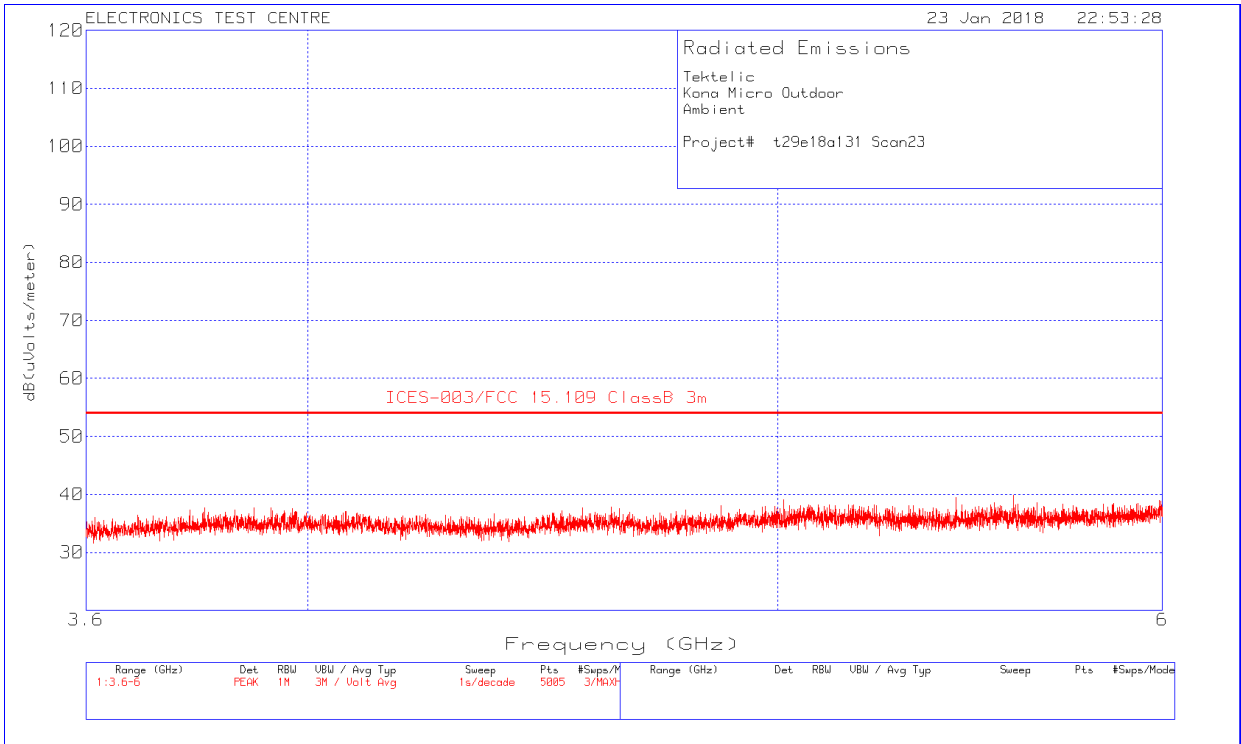

**Plot of Radiated Emissions: Vertical polarization Ambient**

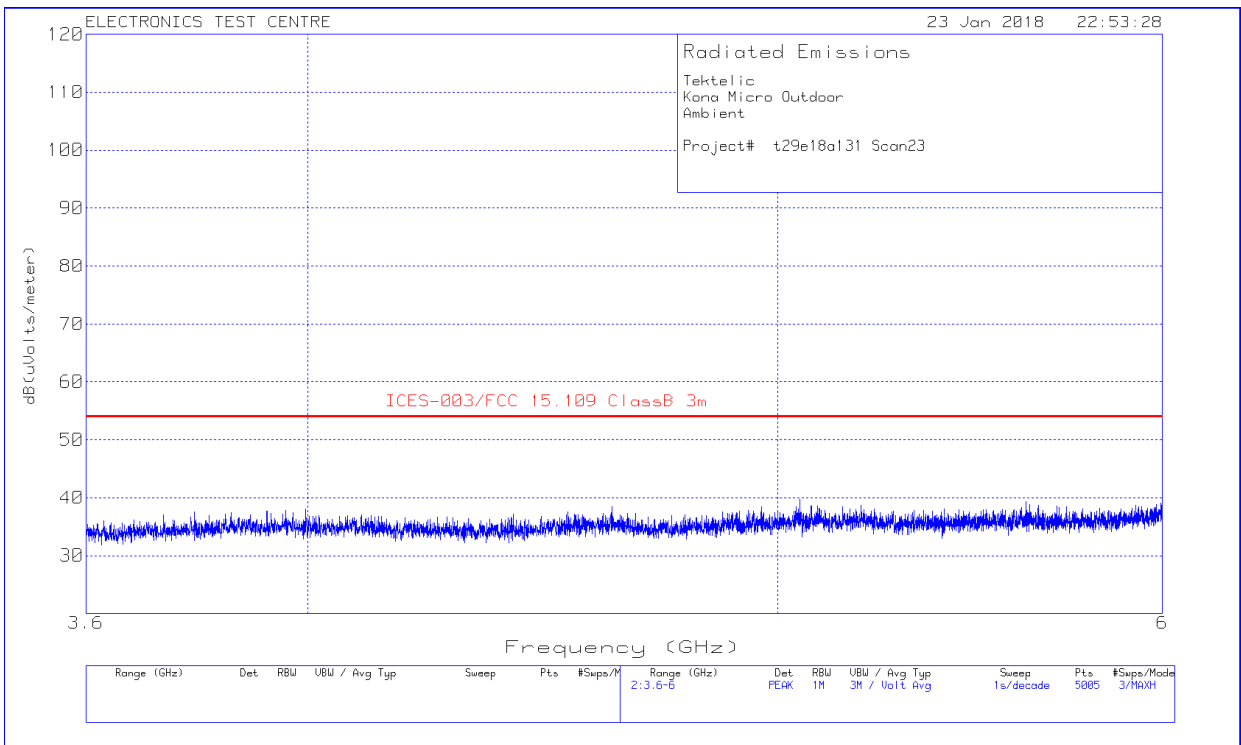

## 2.10 Antenna Requirements

Test Lab: Electronics Test Centre, Airdrie

EUT: Kona Micro Outdoor Gateway

Test Personnel: Imran Akram

Standard: FCC Part15.203

**EUT status: Compliant**

### FCC Part15.203 Requirements

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. **Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.**

#### 2.10.1 EUT Antenna

The Kona micro outdoor gateway is not commercially available in the market and going to be installed by professional under the strict installation guideline of the manufacturer.

## 2.11 RF Exposure

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Micro Outdoor Gateway
Test Personnel:	Standard: FCC PART 15.247
Date:	
<b>EUT status: Compliant</b>	

**Compliant:** RF exposure assessment to be provided in a separate Exhibit.

## **3.0 TEST FACILITY**

### **3.1 Location**

The Kona Micro Outdoor Gateway was tested for emissions at the Electronics Test Centre laboratory located in Airdrie, Alberta, Canada. The Radio Frequency Anechoic Chamber (RFAC), identified as Chamber 1, has a usable working space measuring 10.6 m long x 7.3 m wide x 6.5 m high.

Measurements taken at this site are accepted by Industry Canada as evidence of conformity per registration file # 2046A. This site is also listed with the FCC under Registration Number CA2046.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment located in the Control Room. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in the Control Room, consisting of two shielded vestibules joined together at the side of the main room. Cables are routed through bulkhead panels between the rooms and the test chamber as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

Either floor mounted or table-top equipment can be tested at this facility.

### **3.2 Grounding Plan**

The Kona Micro Outdoor Gateway was placed at the centre of the test chamber turntable on a wooden mast. The EUT was grounded according to Tektelic Communication Inc. specifications.

### **3.3 Power Supply**

All power to chamber was supplied by a filtered AC Main source. EUT Power up by DC power supply placed inside the chamber.



Test Sample:  
Kona Micro Outdoor Gateway  
FCC ID:2ALEPT0005158

FCC Part 15.247  
ANSI C63.4-2014  
ANSI C63.10-2013

Report #: t29e18a131-FCC  
Release 1

## Appendix A – 3G/4G Module Antenna



### TECHNICAL DATA SHEET

Description: LTE Diversity FPC Antenna

Series: Gemini

PART NUMBER: W3907B0100



### Features:

- 2G / 3G / 4G Div Ant for MiMo
- Used as pair for W3906B0100
- Can be used as Primary antenna
- 698-3600MHz
- Global LTE Bands:
  - B1-B23, B25-B29, B33-B42
  - N.A.; Europe, Asia (incl. Jap.)
- Foldable for tight spaces

### Applications:

- Challenging RF Environments Demanding:
  - Highest Peak Gain
  - Lowest ECC (Envelope Correlation Coeff.).
- Matched to Radio Modules from:
  - Sierra Wireless, Telit, Huawei, Gemalto, uBlox, ZTE, and others.
- Security, Video, Graphics
- IoT, SmartGrid, Meters, Remote Monitoring, Sensor Networks

All dimensions are in mm / inches

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws.

Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel: 1-858-674-8100

PulseLarsen Antennas  
18110 8E 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Co, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road #29 Bldg, 4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



1



TECHNICAL DATA SHEET

Description: LTE Diversity FPC Antenna

Series: Gemini

PART NUMBER: W3907B0100

ELECTRICAL SPECIFICATIONS

Frequency	698-960/1427.9-1510.9/1559-1610/ 1695-2200/2300-2700/3400-3600 MHz
Nominal Impedance	50Ω
Return loss(698-960MHz)	-6dB
Return loss(1427.9-1510.9/1559-1610/ 1695-2200/2300-2700/3400-3600MHz)	-7.5dB
Average Total Efficiency (698-960MHz)	55%
Average Total Efficiency (1427.9-1510.9MHz)	60%
Average Total Efficiency (1559-1610MHz)	60%
Average Total Efficiency (1695-2200MHz)	65%
Average Total Efficiency (2300-2700MHz)	70%
Average Total Efficiency (3400-3600MHz)	65%

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:





TECHNICAL DATA SHEET

Description: LTE Diversity FPC Antenna

Series: Gemini

PART NUMBER: W3907B0100

ELECTRICAL SPECIFICATIONS

Peak Gain (698-960MHz)	2.9dBi
Peak Gain (1427.9-1510.9MHz)	1.7dBi
Peak Gain (1559-1610MHz)	1.8dBi
Peak Gain (1695-2200MHz)	3.4dBi
Peak Gain (2300-2700MHz)	3.8dBi
Peak Gain (3400-3600MHz)	4.2dBi
Radiation Pattern	Omni
Polarization	Linear
Power withstanding	3W

(\*) All RF parameters measured on 2mm thick PC plate

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:






TECHNICAL DATA SHEET

Description: LTE Diversity FPC Antenna

Series: Gemini

PART NUMBER: W3907B0100

MECHANICAL DRAWING

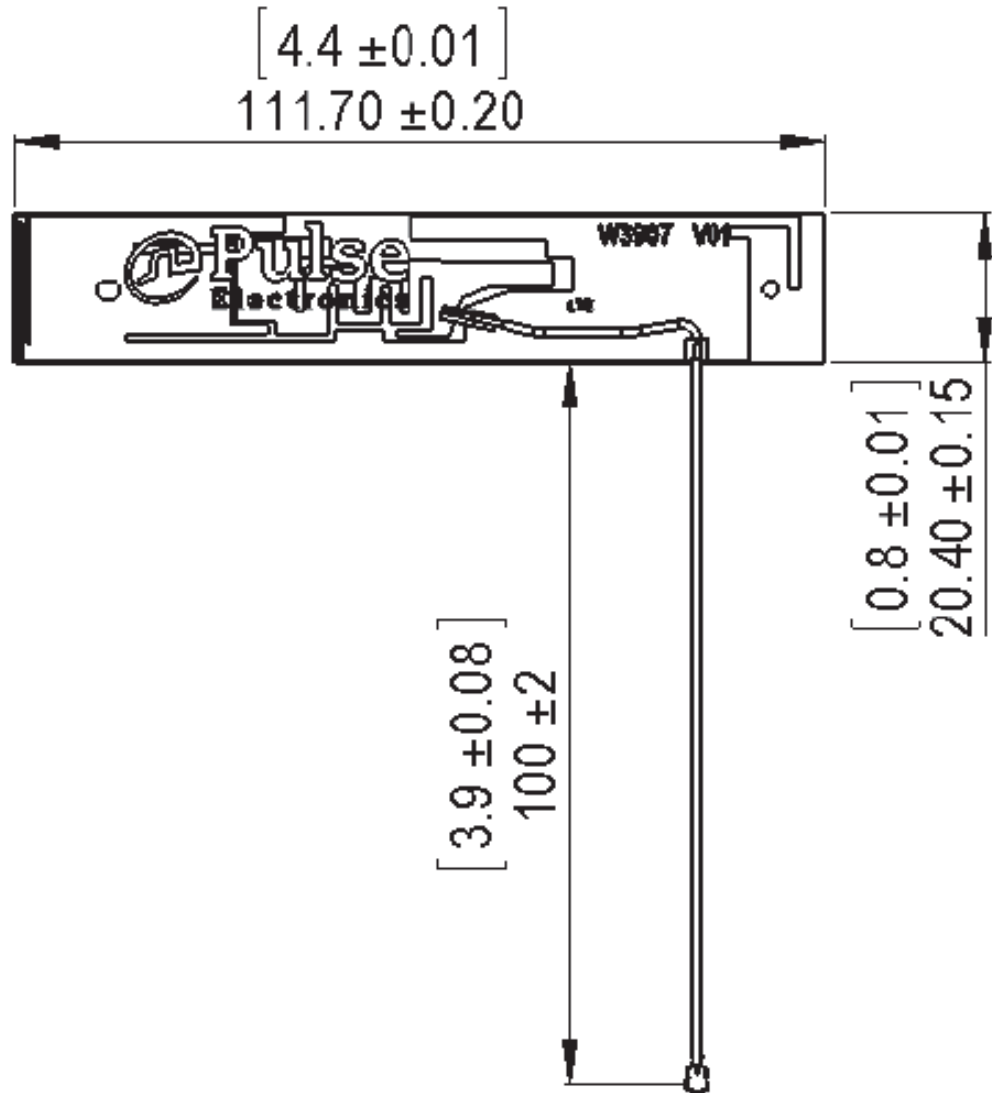

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



## Appendix B – LoRa Antenna



www.L-com.com

### HyperLink Wireless 900 MHz 8 dBi Professional High Performance Omni Antenna Model: HG908U-PRO

#### Applications

- 900 MHz ISM band
- 900 MHz wireless video
- Point to multi-point and Non Line Of Sight (NLOS) applications
- GSM, SCADA applications
- 900 MHz cellular band

#### Features

- Rugged industrial grade design
- Lightweight fiberglass radome
- All weather operation
- Integral N-Female connector
- Includes heavy duty steel mast mounting brackets



#### Description

The HyperLink HG908U-PRO is a high performance Omni-directional antenna designed for the 900 MHz ISM band. It is ideally suited for multipoint, Non Line of Sight (NLOS) and mobile applications where high gain and wide coverage is desired. Typical applications include 900MHz Wireless LAN, SCADA, Wireless Video Links and 900MHz Cellular band applications.

This antenna features an integral N-Female type connector that mounts through the wall of an equipment enclosure. Included with the HG908U-PRO is a dual u-bolt mast mounting kit. Consisting of a heavy-duty steel bracket and a pair of U-bolts, this kit allows installation on masts up to 2.0" in diameter.

This antenna's construction features a rugged 1.58" diameter white fiberglass radome for durability, aesthetics and long service life. It is designed for all weather operation.





**Specifications**


**Electrical Specifications**

Frequency	900 – 928 MHz
Gain	8 dBi
Impedance	50 Ohm
Horizontal Beam Width	360°
Vertical Beam Width	12°
Polarization	Vertical
VSWR	< 1.5
Max. Input Power	100 Watt
Lightning Protection	DC Ground

**Mechanical Specifications**

Connector	N-Female
Weight (Including Bracket)	3.75 lbs. (1.7 kg)
Length	63 in. (1.6m)
Radome Diameter	1.5 in. (38mm)
Mast Mounting Dia.	1.2 to 2 in. (31.7 to 50.8 mm)
Operating Temperature	-40° C to 60° C (-40° F to 140° F)
Max. Wind Velocity	210km/h (130mph)
RoHS Compliant	Yes

**RF Antenna Patterns**

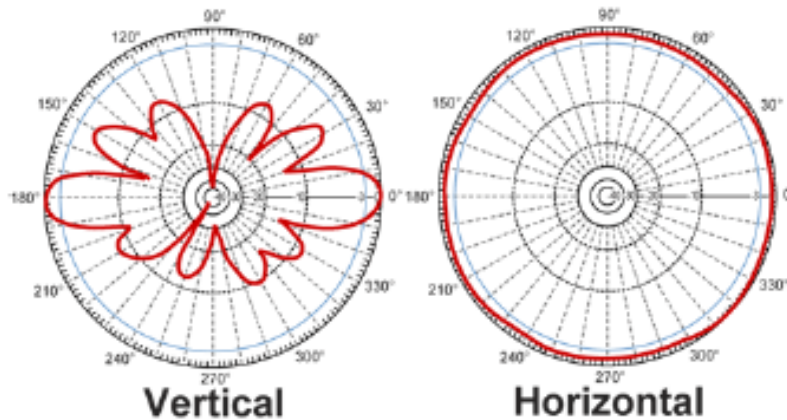

Test Sample:  
Kona Micro Outdoor Gateway  
FCC ID:2ALEPT0005158

FCC Part 15.247  
ANSI C63.4-2014  
ANSI C63.10-2013

Report #: t29e18a131-FCC  
Release 1

**End of Document**