

Test Report Prepared By:

Electronics Test Centre
27 East Lake Hill
Airdrie, Alberta
Canada
T4A 2K3

sales@etc-mpbtech.com
<http://www.etc-mpb.com>

Telephone: 1-403-912-0037


ETC Report #: t29e19a221-DSS_FCC Release 2

Report date: June 26, 2019

Test Dates: June 04,05,06,07,10,11,13 &18 of
2019

**EMC testing of the Tektelic Communication Inc. Kona Industrial Sensor
in accordance with FCC Part 15.247, ANSI C63.4: 2014 and ANSI C63.10: 2013
as referenced by KDB 558074 D01 15.247 Measurement Guidance v05r02.
FCC ID: 2ALEPT0005485**

Prepared for: Tektelic Communication Inc.
7657 10th Street NE
Calgary, Alberta
Canada
T2E 8X2
Telephone: 1-403-338-6910



Imran Akram
iakram@etc-mpbtech.com
EMC Technologist
Electronics Test Centre (Airdrie)



Marc Rousseau
marc.rousseau@mpbc.ca
QA Manager
Electronics Test Centre (Airdrie)

REVISION RECORD

ISSUE	DATE	AUTHOR	REVISIONS
DRAFT 1	2019-06-18	I. Akram	Initial draft submitted for review.
Release 1	2019-06-21	M. Rousseau	Sign off
Release 1	2019-06-26	M. Rousseau	Correct version for KDB 558074 D01 from v05r01 to v05r02

TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Applicant	5
1.3	Test Sample Description	5
1.4	General Test Conditions and Assumptions	5
1.5	Scope of Testing	6
1.5.1	Test Methodology	6
1.5.2	Variations in Test Methodology	6
1.5.3	Test Sample Verification, Configuration & Modifications	6
1.5.4	Uncertainty of Measurement:	6
2.0	TEST CONCLUSION	7
2.1	AC Power Line Conducted Emissions: Transmit Mode	8
2.1.1	Test Guidance: ANSI C63.4-2014, Clause 7.3.1	8
2.1.2	Deviations From The Standard:	8
2.1.3	Test Equipment	8
2.1.4	Test Sample Verification, Configuration & Modifications	9
2.1.5	Conducted Emissions Data:	9
2.2	Channel Occupied Bandwidth (Hybrid Mode)	11
2.2.1	Test Guidance: ANSI C63.10-2013, Clause 6.9.2, 6.9.3 & 7.8.7 / KDB 558074 D01 15.247 Measurement Guidance v05r02	11
2.2.2	Deviations From The Standard:	11
2.2.3	Test Equipment	11
2.2.4	Test Sample Verification, Configuration & Modifications	12
2.2.5	Channel Occupied Bandwidth Data: (Hybrid Mode)	12
2.3	Max Average Output Power (Hybrid Mode)	14
2.3.1	Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2, Clause 7.8.5 / 558074 D01 15.247 Measurement Guidance v05r02	14
2.3.2	Deviations From The Standard:	15
2.3.3	Test Equipment	15
2.3.4	Test Sample Verification, Configuration & Modifications	15
2.3.5	Peak Output Power Data (Hybrid Mode)	15
2.4	Power Spectral Density (Hybrid Mode)	18
2.4.1	Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / 558074 D01 15.247 Measurement Guidance v05r02	18
2.4.2	Deviations From The Standard:	18
2.4.3	Test Equipment	19
2.4.4	Test Sample Verification, Configuration & Modifications	19
2.4.5	Peak PSD Data (Hybrid Mode)	19
2.5	Band Edge Attenuation (Hybrid Mode)	22
2.5.1	Test Guidance: ANSI C63.10-2013 Clause 6.10.4, 6.10.6 & 7.8.6 / 558074 D01 15.247 Measurement Guidance v05r02	22
2.5.2	Deviations From The Standard:	23
2.5.3	Test Equipment	23
2.5.4	Test Sample Verification, Configuration & Modifications	23
2.5.5	Band Edge Data (Hybrid Mode)	23
2.6	Conducted Spurious Emissions in non-restricted frequency bands (Hybrid Mode)	26

2.6.1	Test Guidance: ANSI C63.10-2013, Clause 6.7, 7.8.8 / 558074 D01 15.247 Measurement Guidance v05r02	26
2.6.2	Deviations From The Standard:.....	26
2.6.3	Test Equipment	27
2.6.4	Test Sample Verification, Configuration & Modifications	27
2.6.5	Conducted Emissions Data: (Hybrid Mode).....	28
2.7	Channel Separation (Hybrid Mode).....	31
2.7.1	Test Guidance: ANSI 63.10 Clause 7.8.2 / 558074 D01 15.247 Measurement Guidance v05r02	31
2.7.2	Deviations From The Standard:.....	31
2.7.3	Test Equipment	31
2.7.4	Test Sample Verification, Configuration & Modifications	31
2.7.5	Channel Separation Data:	32
2.8	Time of Occupancy (Hybrid Mode)	33
2.8.1	Test Guidance: ANSI 63.10 Clause 7.8.4 / 558074 D01 15.247 Measurement Guidance v05r02	33
2.8.2	Deviations From The Standard:.....	33
2.8.3	Test Equipment	33
2.8.4	Test Sample Verification, Configuration & Modifications	34
2.8.5	Dwell Time Data:	34
2.9	EUT Positioning Assessment.....	36
2.10	Radiated Spurious Emissions in restricted frequency bands (TX Mode).....	37
2.10.1	Test Guidance: ANSI C63.10-2013, Clause 13.4.2.....	37
2.10.2	Deviations From The Standard:.....	37
2.10.3	Test Equipment	38
2.10.4	Test Sample Verification, Configuration & Modifications	38
2.10.5	Radiated Emissions Data:.....	40
2.11	RF Exposure	46
3.0	TEST FACILITY	47
3.1	Location.....	47
3.2	Grounding Plan.....	47
3.3	Power Supply.....	47
Appendix A – Antenna		48
End of Document		52

1.0 INTRODUCTION

1.1 Scope

The purpose of this report is to present the results of compliance testing performed in accordance with FCC Part 15.247, ANSI C63.4-2014 and ANSI C63.10-2013 to gain FCC Certification Authorization for Low-Power License-Exempt transmitters. All test procedures, limits, criteria, and results described in this report apply only to the Tektelic Communication Inc. Kona Industrial Sensor test sample, referred to herein as the EUT (Equipment Under Test).

The samples have been provided by the customer.

This report does not imply product endorsement by the Electronics Test Centre, A2LA, nor any Canadian Government agency.

1.2 Applicant

This test report has been prepared for Tektelic Communication Inc., located in Calgary, Alberta, Canada.

1.3 Test Sample Description

As provided to ETC (Airdrie) by Tektelic Communication Inc.:

LoRa Radio	Product Name:	Kona Industrial Sensor
	Frequency Band	902 – 928 MHz
	Type of Modulation	Chirp Spread Spectrum
	BW/Frequency Range	Hybrid 125kHz, 902.3 – 914.9 MHz
	Associated Antenna	Pulse Electronics W3907 LTE 698-3600MHz FPC Antenna Peak Gain(698-960MHz) = 2.9dBi
	Detachable/Non Detachable	Non-Detachable
Model# / Serial#		T0005500 / 1915N0006
Power supply:		Internal Battery

Note: All three channels and axis for T0005500 (DN) in Hybrid mode were evaluated. Worse Chanel and Axis was selected for detail analysis for radiated emission.

1.4 General Test Conditions and Assumptions

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated.

In this report, the EUT is only tested for the 125 kHz Hybrid transmission mode. Test results regarding DTS 500 kHz transmission mode is provided in the separate report.

The environmental conditions are recorded during each test and are reported in the relevant sections of this document.

1.5 Scope of Testing

Tests were performed in accordance with FCC Part 15.247, ANSI C63.4: 2014, ANSI C63.10: 2013 as referenced in KDB 558074 D01 15.247 Measurement Guidance v05r02.

1.5.1 Test Methodology

Test methods are specified in the Basic Standard as referenced and/or modified by the Product Standard in the part of Section 2 of this report associated with each particular test case.

1.5.2 Variations in Test Methodology

Any variance in methodology or deviation from the reference Standard is documented in the part of Section 2 of this report associated with each particular Test Case.

1.5.3 Test Sample Verification, Configuration & Modifications

EUT setup, configuration, protocols for operation and monitoring of EUT functions, and any modifications performed in order to meet the requirements, are detailed in each Test Case of Section 2 of this report.

1.5.4 Uncertainty of Measurement:

The factors contributing to uncertainty of measurement are identified and calculated in accordance with UKAS (United Kingdom Accreditation Service) document “Lab 34, The Expression of Uncertainty in EMC Testing, Aug 2002.” as based on the “ISO Guide to the Expression of Uncertainty in Measurement, 1995.”

This uncertainty estimate represents an expanded uncertainty expressed at approximately 95% confidence using a coverage factor of $k = 2$.

Test Method	Uncertainty
Radiated Emissions Level (9 KHz – 1 GHz)	±4.6 dB
Radiated Emissions Level (1 GHz – 26.5 GHz)	±5.31 dB
Conducted Emissions Level (150 KHz – 30 MHz)	±2.7 dB
Uncertainty Conducted Power level	±0.5 dB
Uncertainty Conducted Spurious emission level	±0.6 dB
Uncertainty for Bandwidth test	±1.5 %

Modulation mode: Hybrid 125 kHz

Hybrid 125 kHz DTS and frequency hopping system, are meets part 15.247's requirements for hybrid system. The channels used for the test are:

Low = 902.3 MHz

MID = 908.5 MHz

High = 914.9 MHz

2.0 TEST CONCLUSION
STATEMENT OF COMPLIANCE

The customer equipment referred to in this report was found to comply with the requirements, as summarized below.

The EUT was subjected to the following tests. Compliance status is reported as **Compliant** or **Non-compliant**. **N/A** indicates the test was Not Applicable to the EUT.

Note: Maintenance of compliance is the responsibility of the Manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the EUT with respect to the standards detailed in this test report.

The following table summarizes the tests performed in terms of the specification, class or performance criterion applied, and the EUT modification state.

Test Case	Test Type	Specification	Test Sample	Modifications	Config.	Result
Frequency Range = 902.3 – 914.9 MHz 125 KHz Hybrid Mode Max. Conducted Tx Power= 18.68 dBm (.074) Watt)						
2.1	AC Conducted Emissions (Tx)	15.207	Kona Industrial Sensor	none	see § 2.1	Compliant
2.2	Occupied Bandwidth	15.247(a)(1) 15.247(2)(2)	Kona Industrial Sensor	none	see § 2.2	Compliant
2.3	Max Output average Power Conducted	15.247(b)	Kona Industrial Sensor	none	see § 2.3	Compliant
2.4	Power Spectral Density	15.247(e) 15.247(f)	Kona Industrial Sensor	none	see § 2.4	Compliant
2.5	Band Edge	15.247(d)	Kona Industrial Sensor	none	see § 2.5	Compliant
2.6	Conducted Spurious Emission (Non-Restricted Band Operation)	15.247(d)	Kona Industrial Sensor	none	see § 2.6	Compliant
2.7	Minimum channel separation	15.247(a)(1)	Kona Industrial Sensor	none	see § 2.7	Compliant
2.8	Average time of Occupancy for hybrid System	15.247(f)	Kona Industrial Sensor	none	see § 2.8	Compliant
2.9	EUT Position	ANSI C63.4	Kona Industrial Sensor	none	see § 2.9	Assessed
2.10	Radiated Spurious Emission (Restricted Band Operation) (Tx Mode)	15.205, 15.209 15.247(d)	Kona Industrial Sensor	none	see § 2.10	Compliant
2.11	RF Exposure	15.247(i)	Kona Industrial Sensor	none	see § 2.11	Exempt

Refer to the test data for applicable test conditions.

2.1 AC Power Line Conducted Emissions: Transmit Mode

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Imran Akram	Standard: FCC Part 15.207
Date: 2019-06-18 (22.6°C,42.5% RH)	Basic Standard: ANSI C63.10: 2013
EUT status: Compliant	

Specification: Part15-207

Frequency (MHz)	Quasi-Peak Limit (dBµV)	Average Limit (dBµV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 – 30	60	50
Criteria: The conducted emissions produced by a device shall not exceed the limits as specified.		

2.1.1 Test Guidance: ANSI C63.4-2014, Clause 7.3.1

Before any testing is performed, the Ambient (measurement noise floor) is recorded, and a QC check is performed to show that the system is functioning correctly.

Testing starts with a scan, performed under software control. After this is complete, the list of frequencies of interest is generated. These frequencies are then investigated for quasi-peak and average amplitude, as applicable. Emissions measured with a QP detector that fall below the Average limit are deemed to meet both requirements.

2.1.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.1.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	N/A
EMI receiver	Agilent	N9038A	6130	2019-05-10	2020-05-10
LISN	Com-Power	LI-215A	6180	2018-06-06	2020-06-06
Temp/RH logger	Extech	42270	5892	2019-04-05	2020-04-05
RE Cable below 30MHz	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4436	2019-01-03	2020-01-03


2.1.4 Test Sample Verification, Configuration & Modifications

The EUT was set to selected channels with test-specific software. The output was modulated as in normal operation. Configuration in Tx mode radios are transmitting at low channel.

The EUT was powered via analog DC power supply.

The EUT met the requirements without modification.

Test setup diagram:

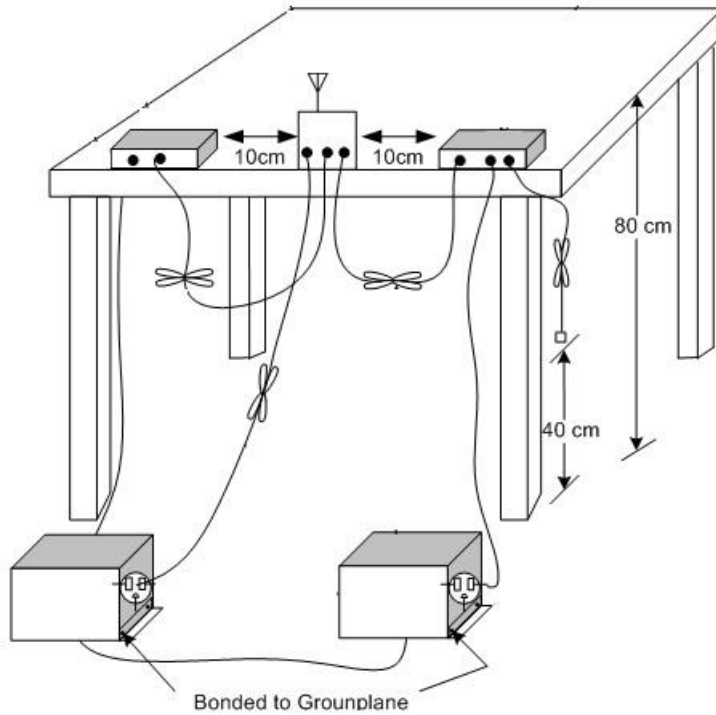


2.1.5 Conducted Emissions Data:

The EUT was evaluated in all channels. No channel showed emission worst than another. The plots are from the Hybrid mode using Low-channel.


All emission more than 10 dB below the average limit

The Ground Bond was measured and found to be 1.25 mΩ.

Plot of Conducted Emissions: Line1

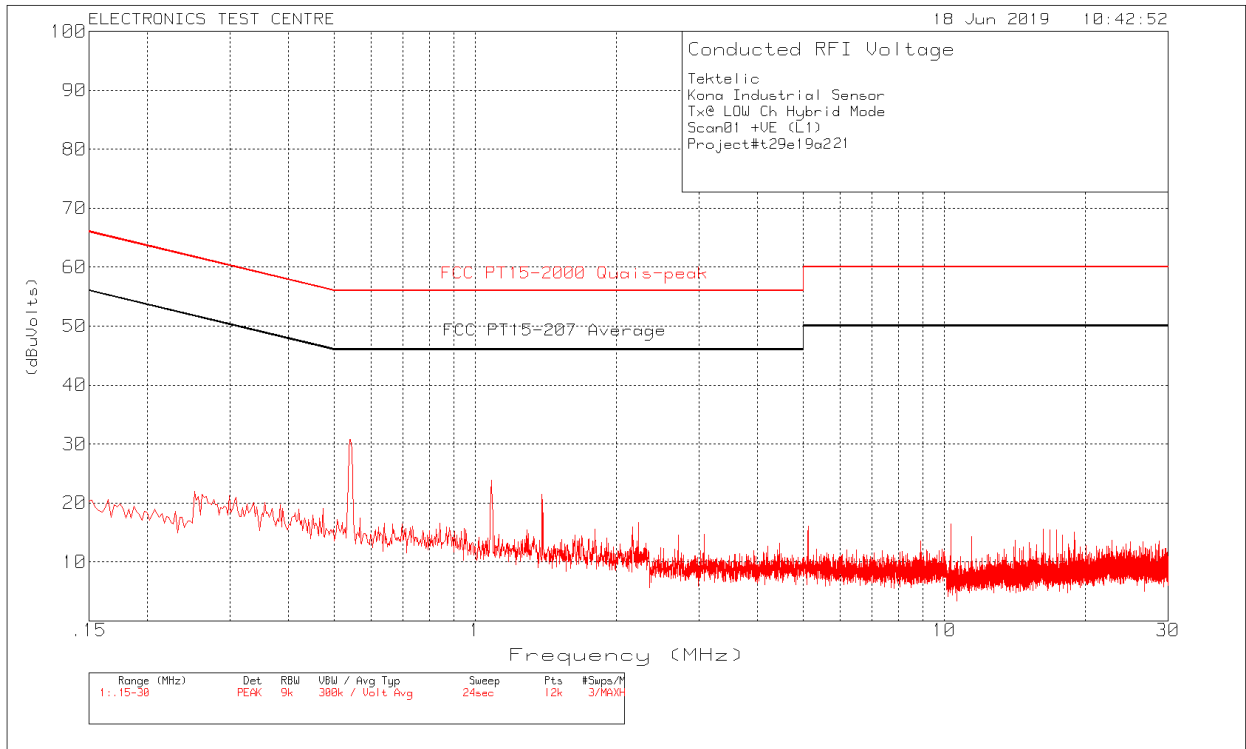

Plot of Conducted Emissions: Line2

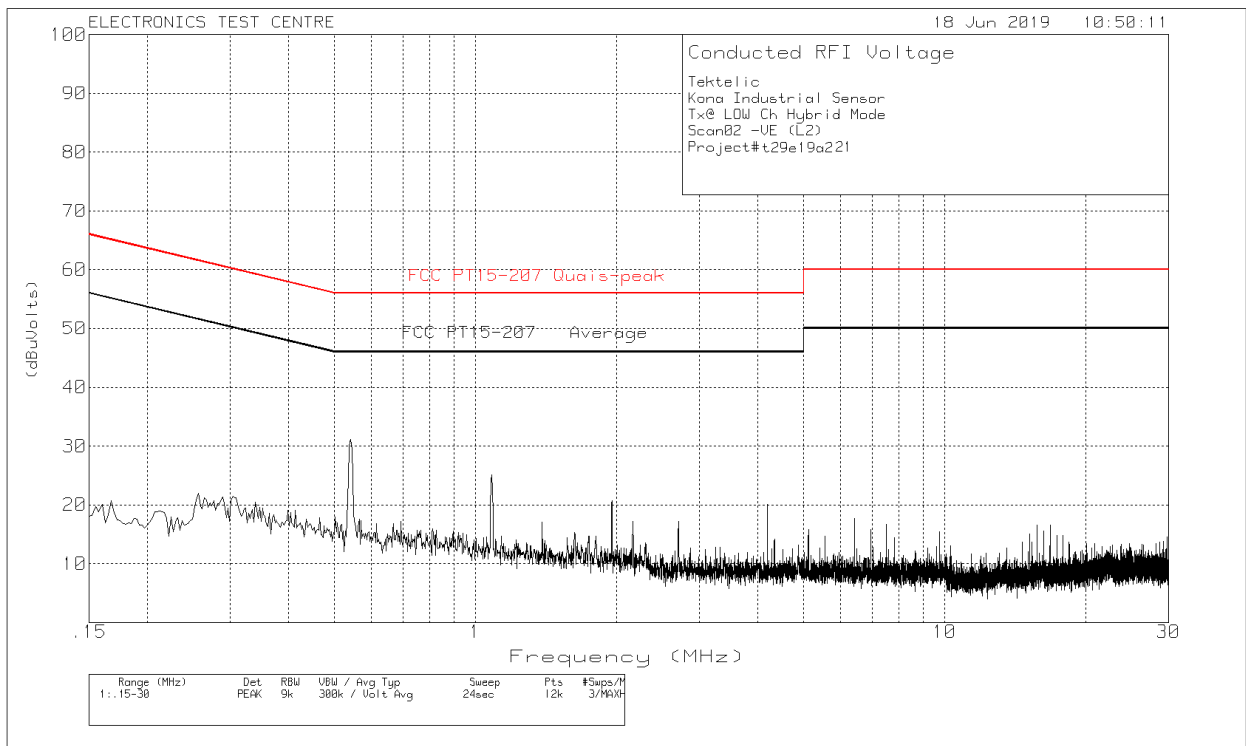

2.2 Channel Occupied Bandwidth (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-(7/10/11) (21.5°C,30 % RH)	Basic Standard: ANSI C63.10-2013
EUT status: Compliant	

Specification: FCC 15.215 (c)

Criteria: For hybrid system there is no limit for the 20dB or 99% bandwidth.

2.2.1 Test Guidance: ANSI C63.10-2013, Clause 6.9.2, 6.9.3 & 7.8.7 / KDB 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Use the following spectrum analyzer settings:	
Span	between two times and five times the channel center frequency OBW
RBW	1% to 5% of the OBW
VBW	approximately three times RBW
Sweep	auto
Detector function	peak
Trace	max hold
Allow the trace to stabilize. The automated 99% BW function of the spectrum analyzer is engaged, 20 dB OBW is measured with the x dB function.	

2.2.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.2.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.2.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.


The EUT modified to provide the direct access to antenna trace for conducted measurements.

For compliance purposes EUT met requirements without any modification

There is no Deviation and exclusions from test specifications.

Test setup diagrams for Occupied Bandwidth testing:

Conducted:




2.2.5 Channel Occupied Bandwidth Data: (Hybrid Mode)

LoRa 125 KHz Channels


Channel	Freq. [MHz]	20 dB OBW [kHz]	99% OBW [KHz]
Low	902.3	138.9	128.18
Mid	908.5	138.4	128.04
High	914.9	138.4	128.06

Screen


captures from the spectrum analyzer 125 KHz Channel (Hybrid Mode)

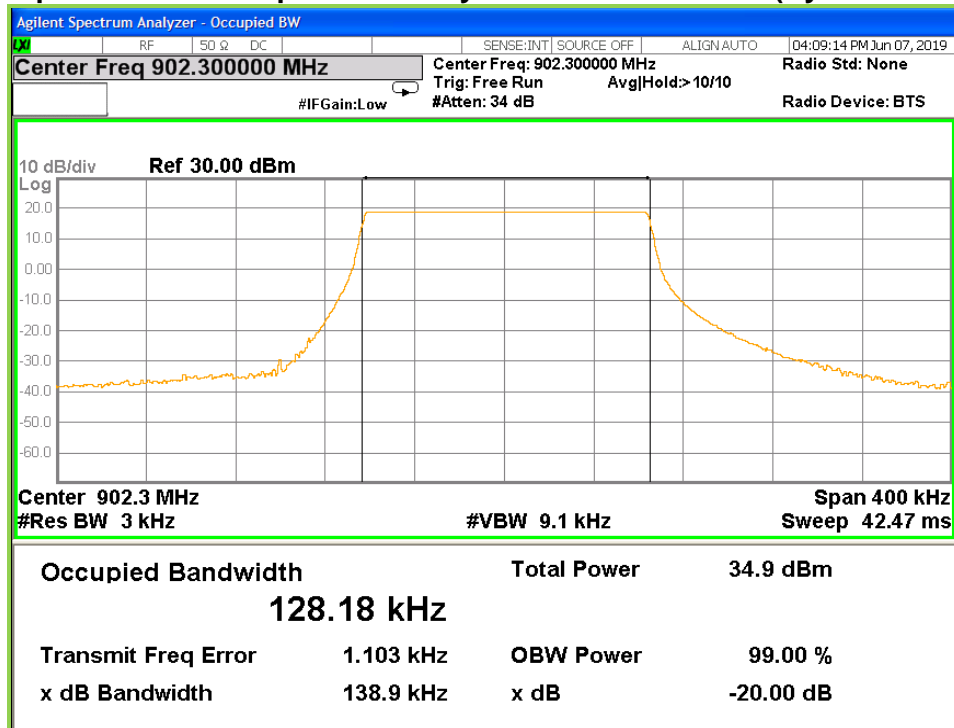

Screen captures from the spectrum analyzer 125 KHz Channel (Hybrid Mode)

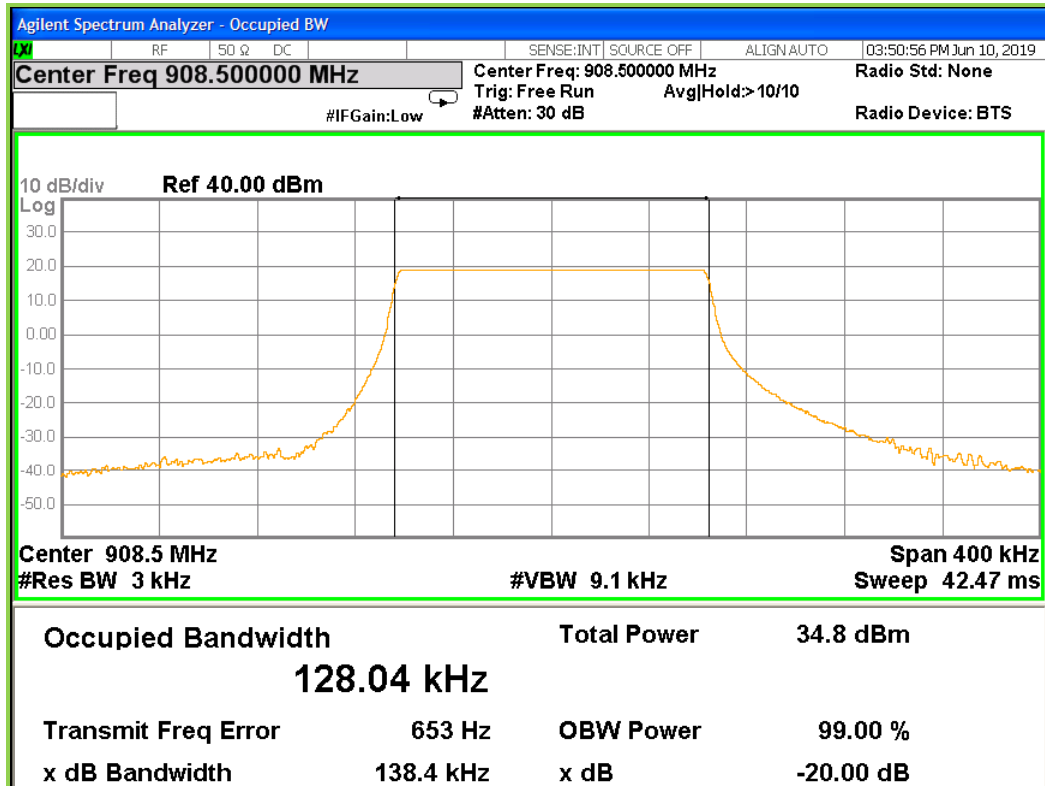

Screen captures from the spectrum analyzer 125 KHz Channel (Hybrid Mode)

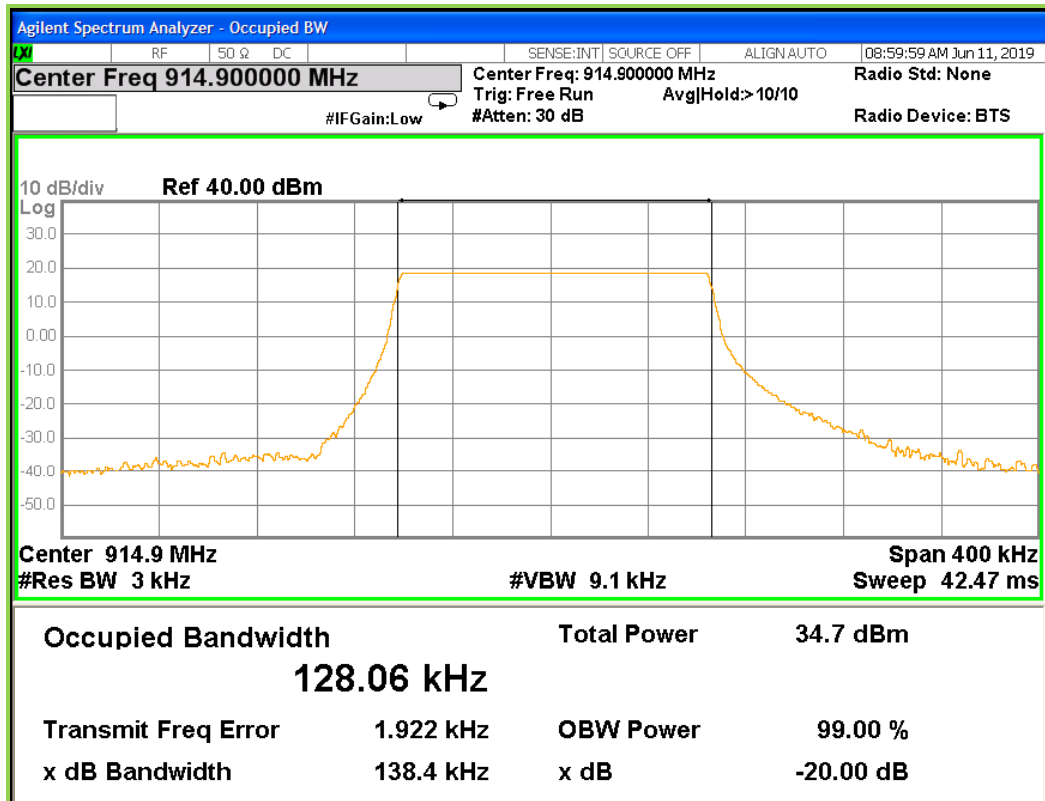

2.3 Max Average Output Power (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-(7/10/11) (24.4°C,30.2 % RH)	Basic Standard: ANSI C63.10: 2013
EUT status: Compliant	

Specification: FCC Part 15.247(b, 2)

Criteria For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels
--

2.3.1 Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2, Clause 7.8.5 / 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Output Power Method AVGSA-1	
Span	≥ 1.5 times the OBW
RBW	1 – 5 % of the OBW, ≤ 1 MHz
VBW	≥ 3 x RBW
Number of Points in sweep	≥ 2 x Span / RBW
Sweep time	Auto
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle ≥98%)
Trace Average	100 traces in power Averaging (RMS)
Power measured	Integrated the spectrum across the OBW of the signal using the S/A band power measurement function, with band limit set equal to the OBW band edge.

2.3.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.3.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.3.4 Test Sample Verification, Configuration & Modifications


The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT modified to provide the direct access to antenna trace for conducted measurements.

For compliance purposes EUT met requirements without any modification

Test setup diagrams for Peak Power testing:

Conducted:




2.3.5 Peak Output Power Data (Hybrid Mode)


Lora 125 KHz

Channel	Freq. [MHz]	Out Put Power (dBm)	Out Put Power Limit (dBm)	Margin (dB)
Low	902.3	18.68	30	11.32
Mid	908.5	18.47	30	11.53
High	914.9	18.41	30	11.59


Screen Captures from the spectrum analyzer: 125 KHz Low Channel (Hybrid Mode)

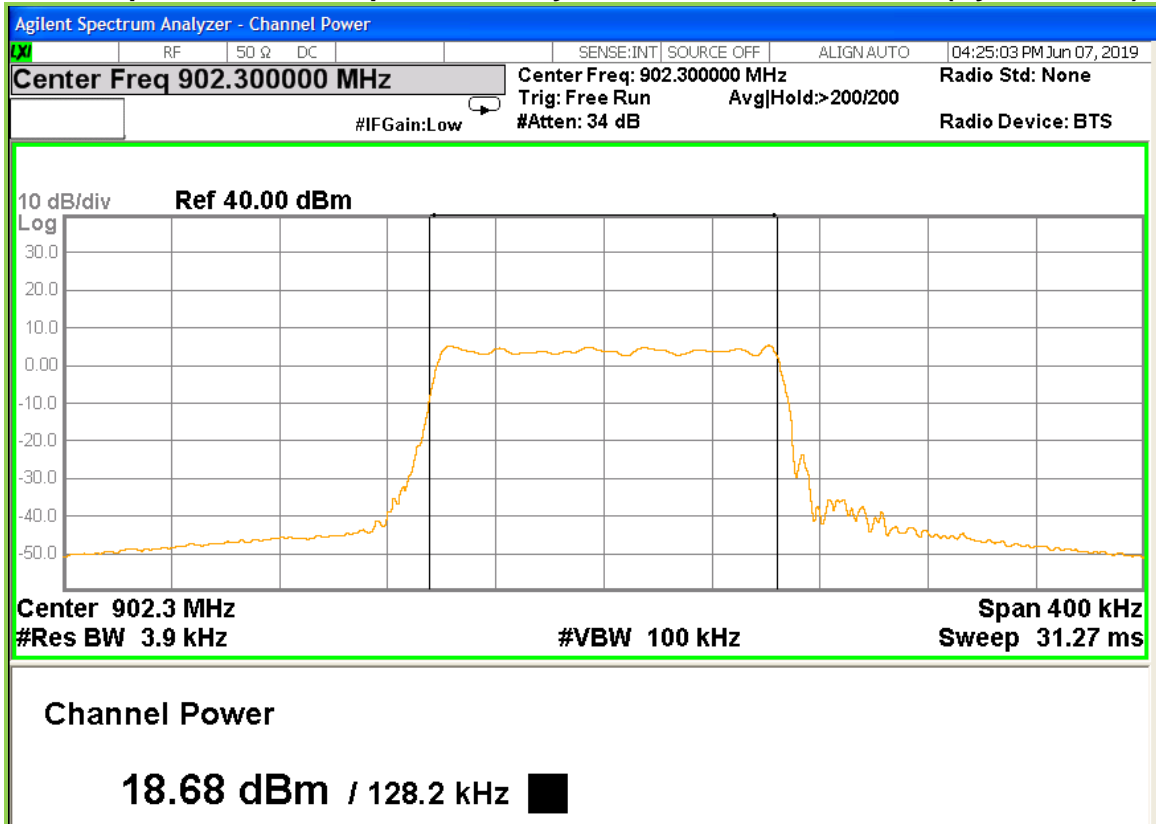

Screen Captures from the spectrum analyzer: 125 KHz MID Channel (Hybrid Mode)

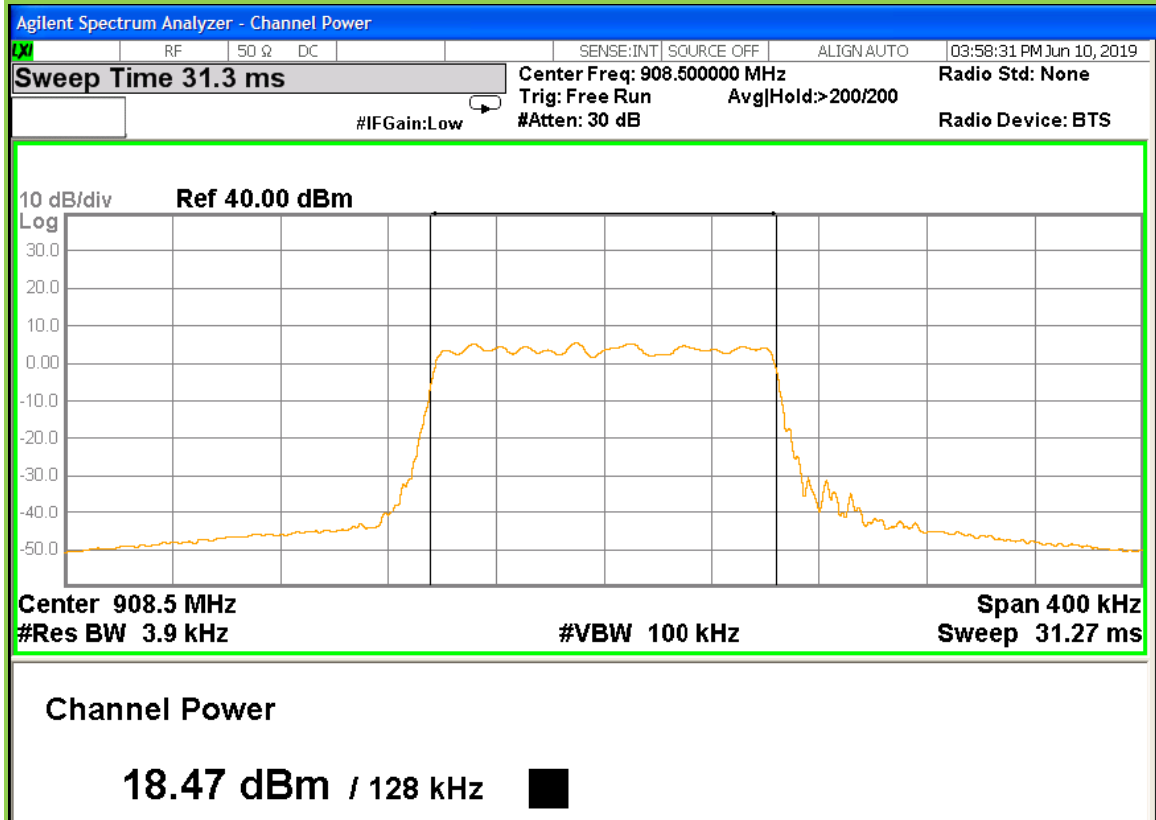

Screen Captures from the spectrum analyzer: 125 KHz High Channel (Hybrid Mode)

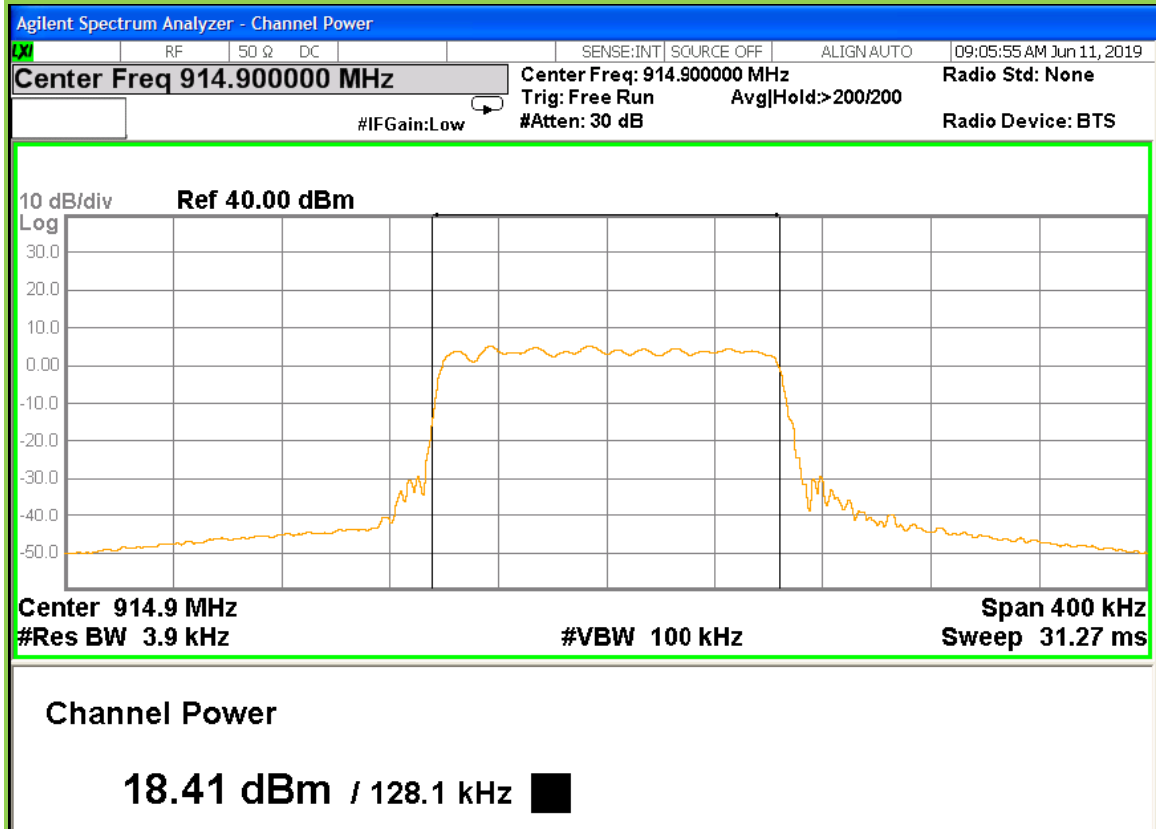

2.4 Power Spectral Density (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-(10/11) (21.5°C,30.0 % RH)	Basic Standard: ANSI C63.10: 2013
EUT status: Compliant	

Specification: FCC Part 15.247(f)

Criteria For Hybrid system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2.4.1 Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed at low, mid and high frequencies, in continuous transmission, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Use the following spectrum analyzer settings:	
Span	At least 1.5 times the OBW channel center frequency.
RBW	Set RBW to: 3
VBW	Set VBW $\geq 3 \times$ RBW].
Sweep	auto
Detector function	Power averaging (RMS) or sample detector (when RMS not available).
Trace	Employ trace averaging (rms) mode over a minimum of 100 traces.
Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$. Allow the trace to stabilize. Use the peak marker function to determine the maximum amplitude level.	

2.4.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.4.3 Test Equipment

Testing was performed with this equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.4.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

Test setup diagrams for Peak Power Spectral Density testing:

Conducted:




2.4.5 Peak PSD Data (Hybrid Mode)


125 KHz Channels

Channel	Freq. [MHz]	PSD (dBm/3KHz)	PSD Limit (dBm/3KHz)
Low	902.3	2.88	8
Mid	908.5	4.072	8
High	914.9	3.341	8


Screen Capture from Spectrum Analyzer: 125 KHz Channel LOW (Hybrid Mode)

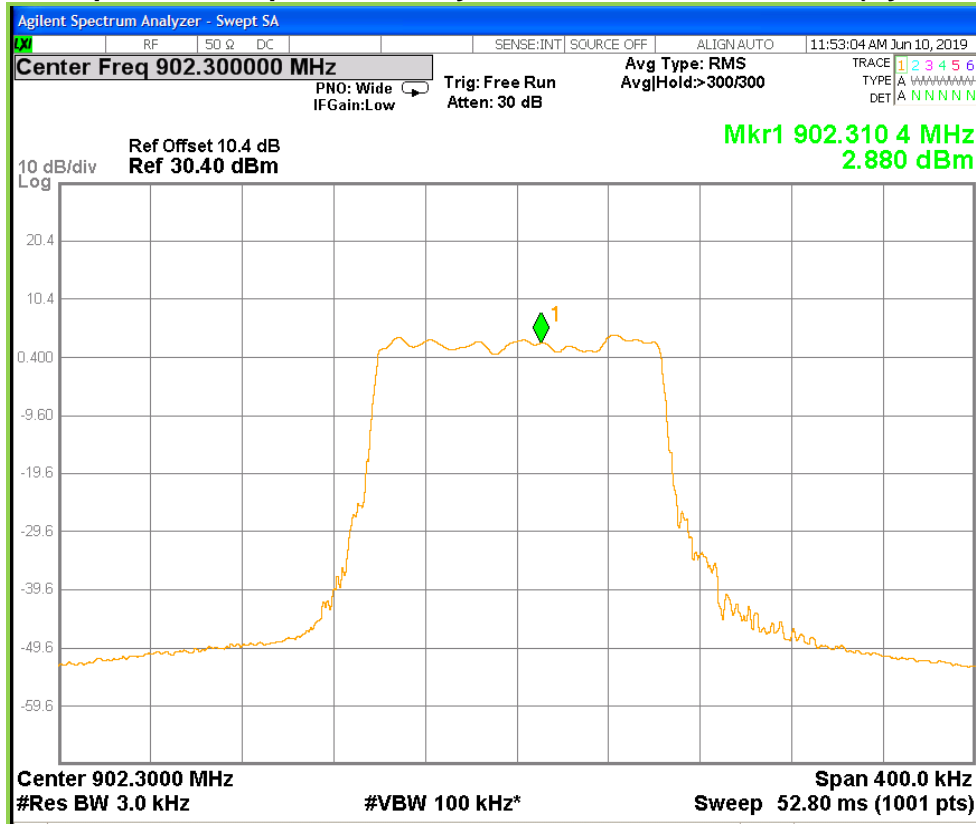

Screen Capture from Spectrum Analyzer: 125 KHz Channel MID (Hybrid Mode)

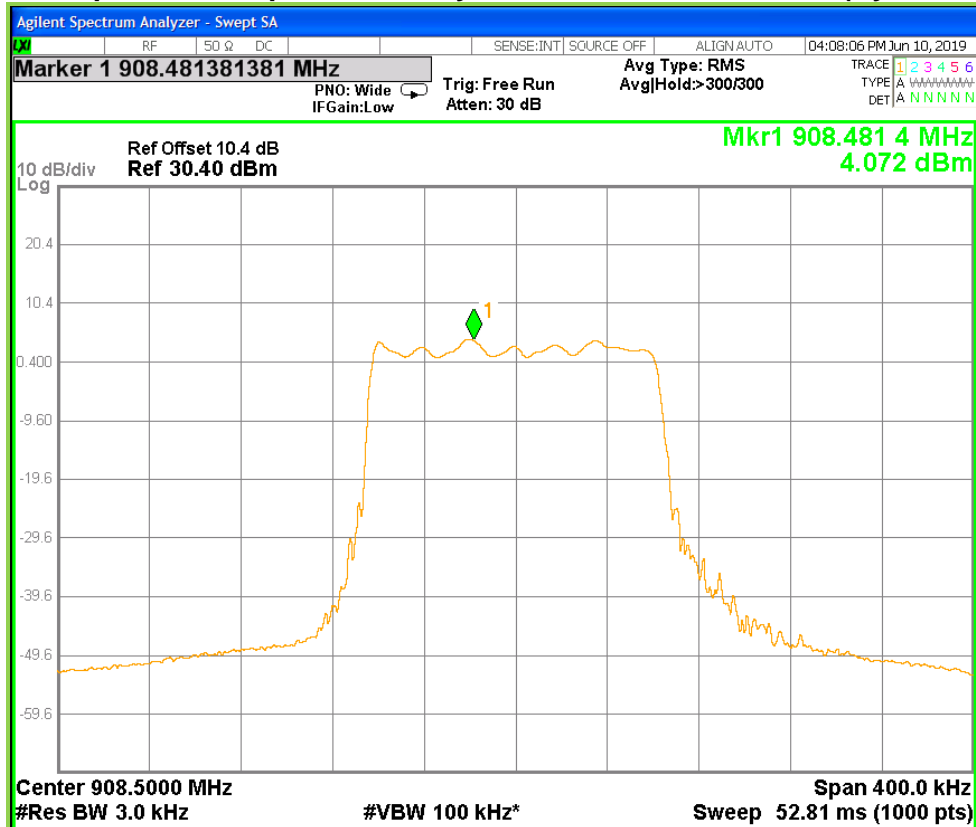

Screen Capture from Spectrum Analyzer: 125 KHz Channel High (Hybrid Mode)

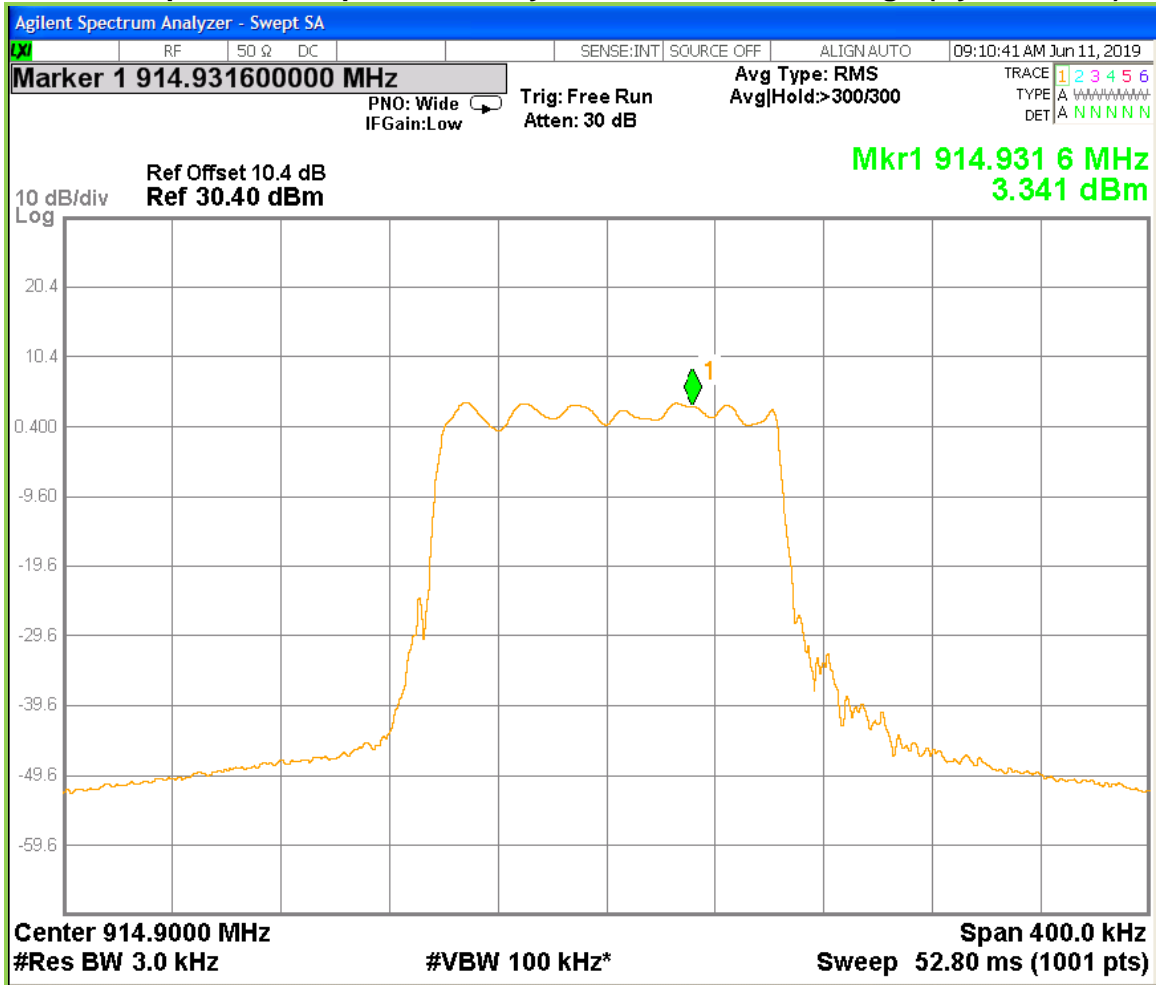

2.5 Band Edge Attenuation (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-10/11/13 (12.5°C,30.0% RH)	Basic Standard: ANSI C63.10: 2013
EUT status: Compliant	

Specification: FCC Part 15.247(d)

<p>Criteria: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
--

2.5.1 Test Guidance: ANSI C63.10-2013 Clause 6.10.4, 6.10.6 & 7.8.6 / 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed at the low and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Use the following spectrum analyzer settings:	
Span	Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
Attenuation	Auto (at least 10 dB preferred).
RBW	100 kHz
VBW	300 kHz
Sweep	Coupled
Detector function	peak
Trace	max hold
<p>Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.</p>	

2.5.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.5.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.5.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

Test setup diagrams for Band Edge Attenuation testing:


Conducted:




2.5.5 Band Edge Data (Hybrid Mode)

Modulation	Channel	Attenuation at Band Edge	Attenuation Limit at Band Edge
Lora 125KHz Channels	902.3	52.975 dBc	30 dBc
	914.9	70.328 dBc	30 dBc
Lora 125KHz Channels (Hopping)	902.3	53.447 dBc	30 dBc
	914.9	71.734 dBc	30 dBc


Screen Capture from the spectrum analyzer: Lower Band Edge (125 KHz)

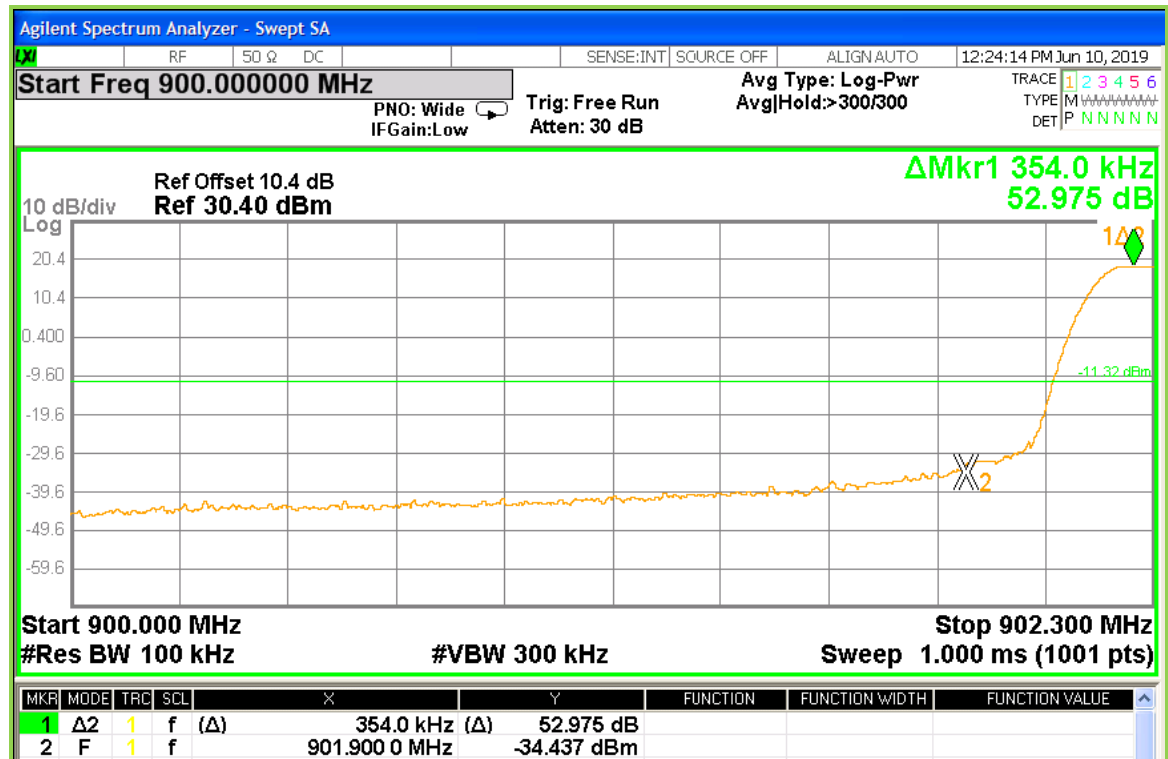


Screen Capture from the spectrum analyzer: Upper Band Edge (125 KHz)

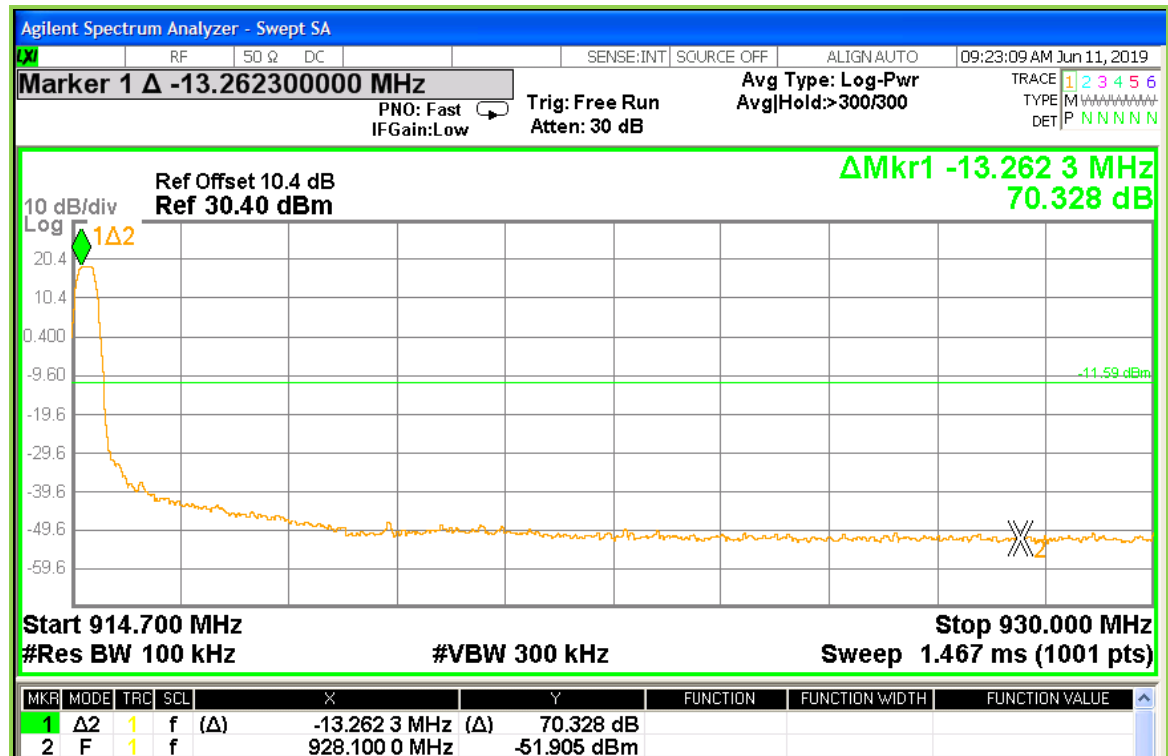

Screen Capture from the spectrum analyzer: Lower Band Edge (125 KHz Hopping)

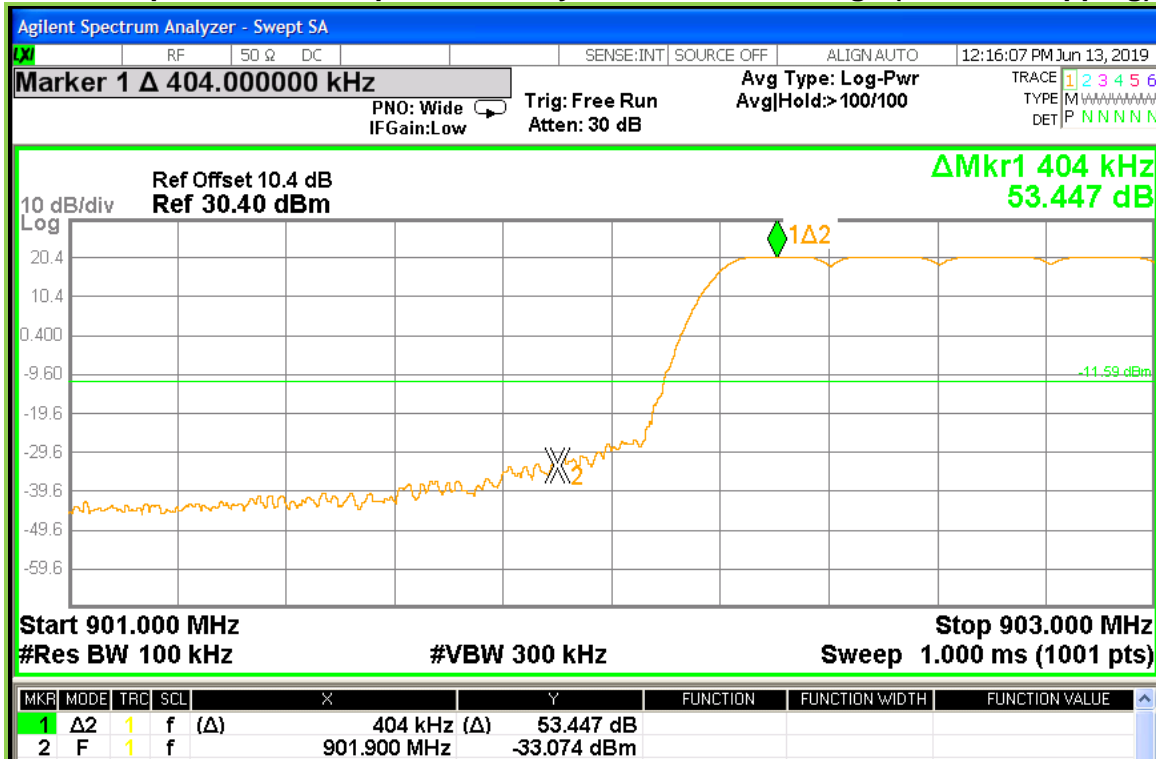

Screen Capture from the spectrum analyzer: Upper Band Edge (125 KHz Hopping)

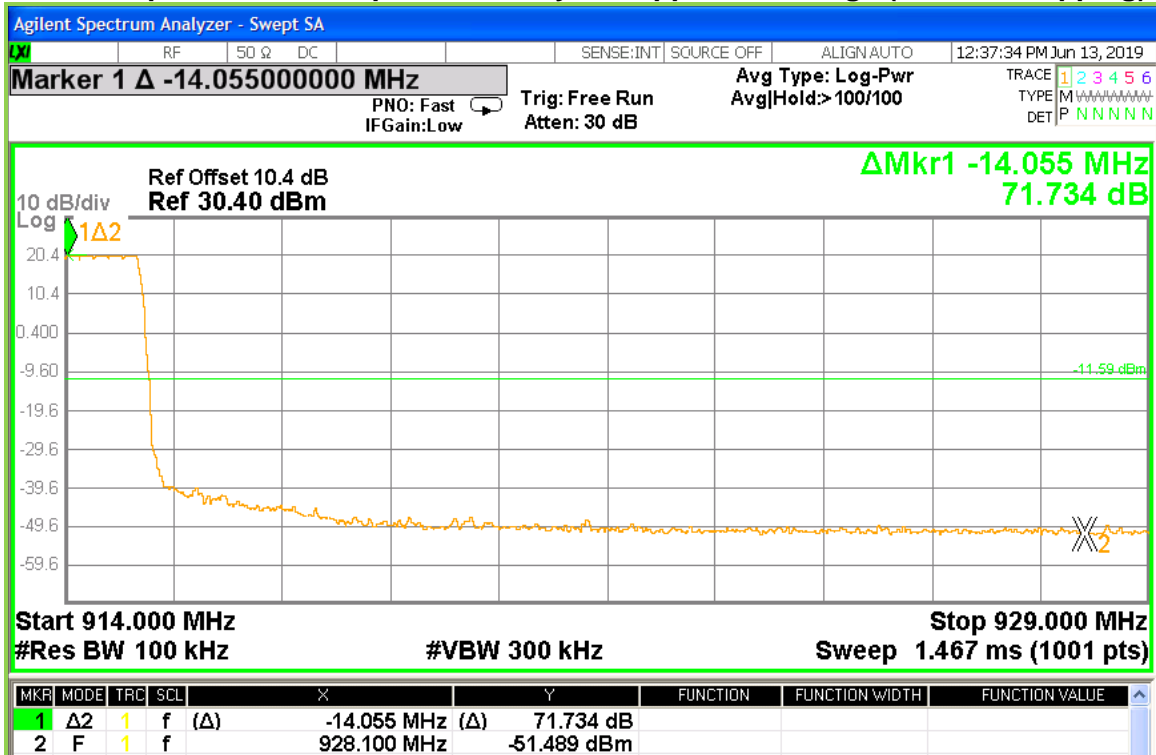

2.6 Conducted Spurious Emissions in non-restricted frequency bands (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-(10/11) (21.5°C,30.0% RH)	Basic Standard: ANSI C63.10-2013
EUT status: Compliant	

Specification: FCC Part 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

2.6.1 Test Guidance: ANSI C63.10-2013, Clause 6.7, 7.8.8 / 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed at the low, mid and high frequencies, with modulation. The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Use the following spectrum analyzer settings:	
Span	Set the center frequency and span to encompass frequency range to be measured.
RBW	100 kHz
VBW	300 kHz
Sweep	Auto Coupled
Detector function	peak
Trace	max hold
Allow the trace to stabilize. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in	

2.6.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.6.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.6.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.






The EUT modified to provide the direct access to antenna trace for conducted measurements.

Test setup diagram for Conducted Spurious Emissions testing:








2.6.5 Conducted Emissions Data: (Hybrid Mode)






125 KHz Low Channel

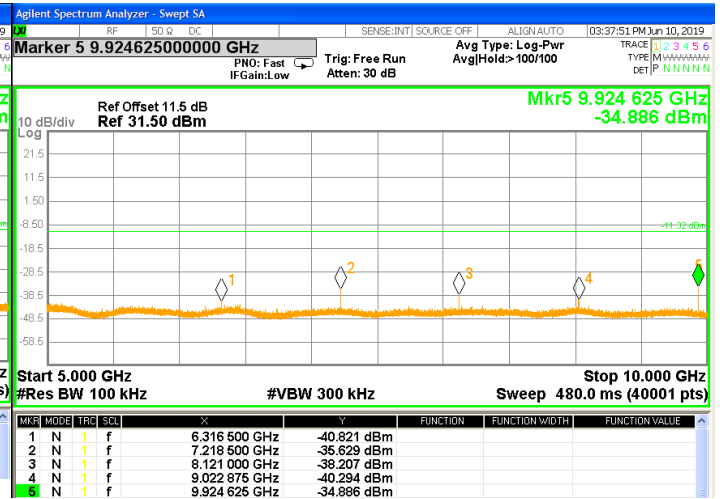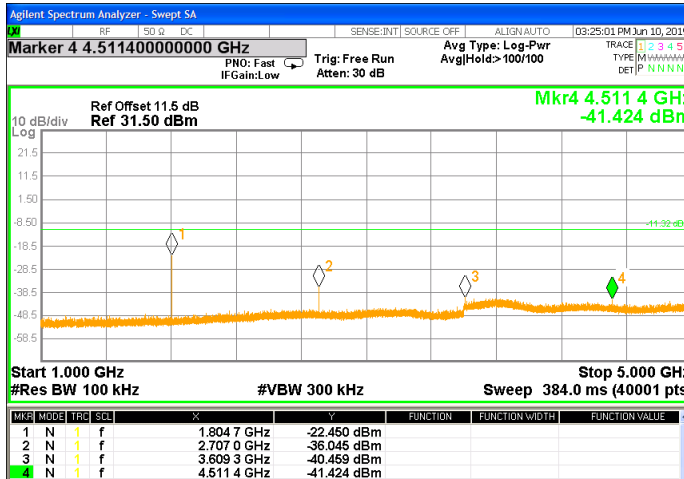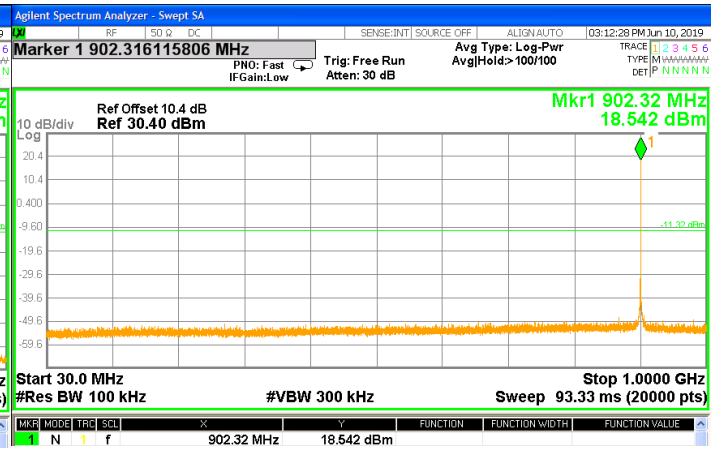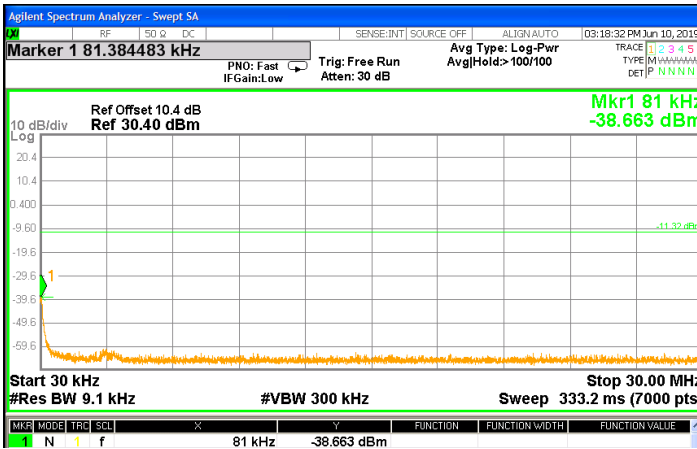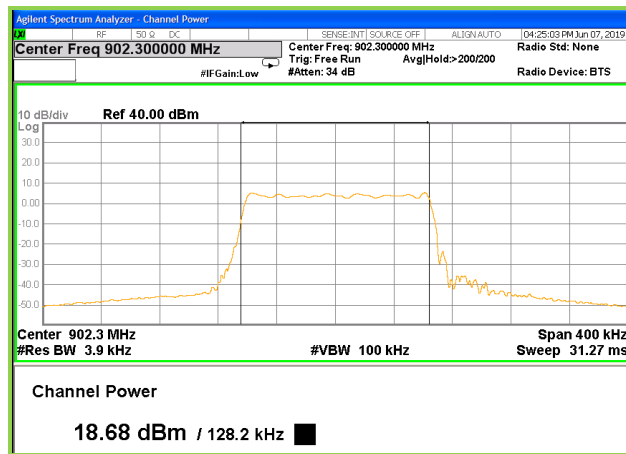

125 KHz MID Channel

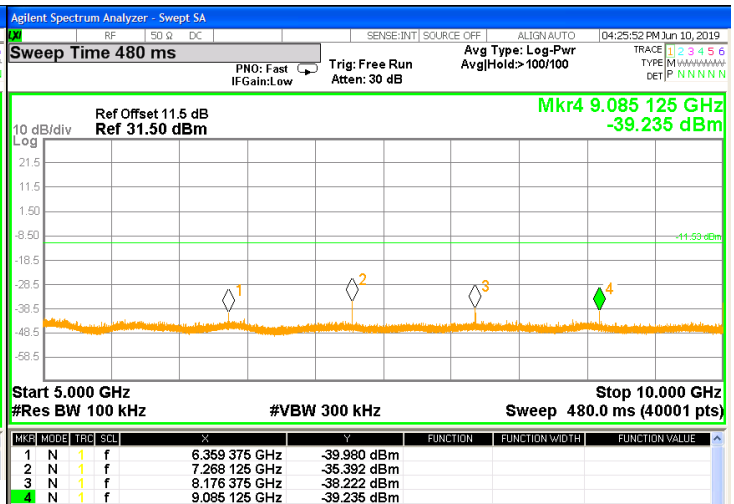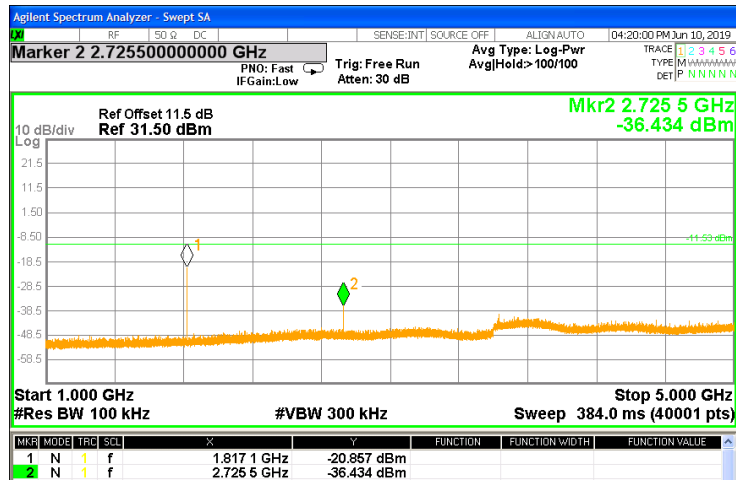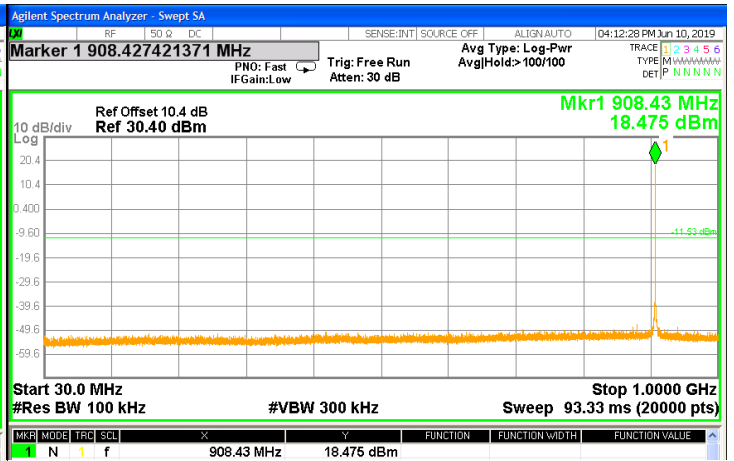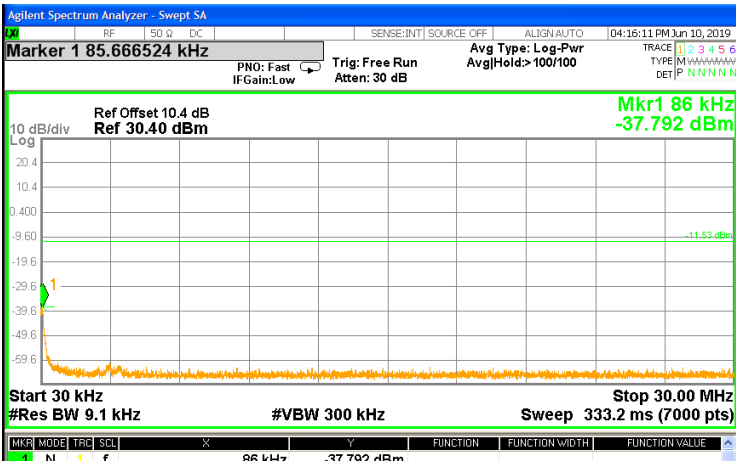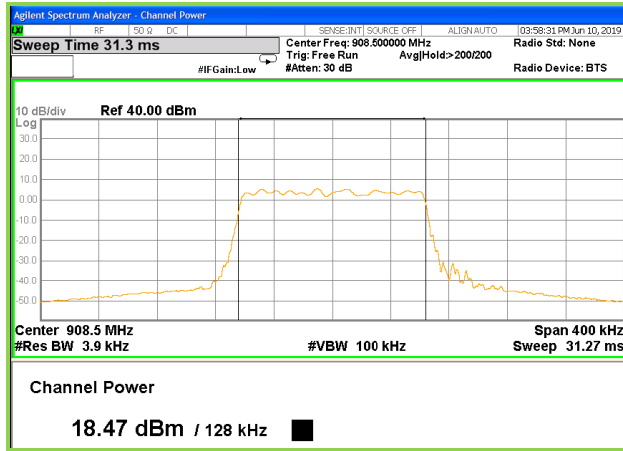

125 KHz High Channel

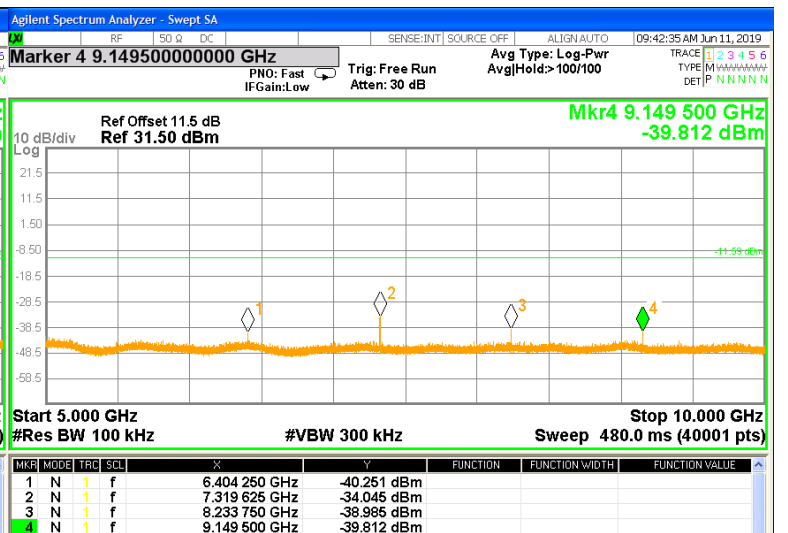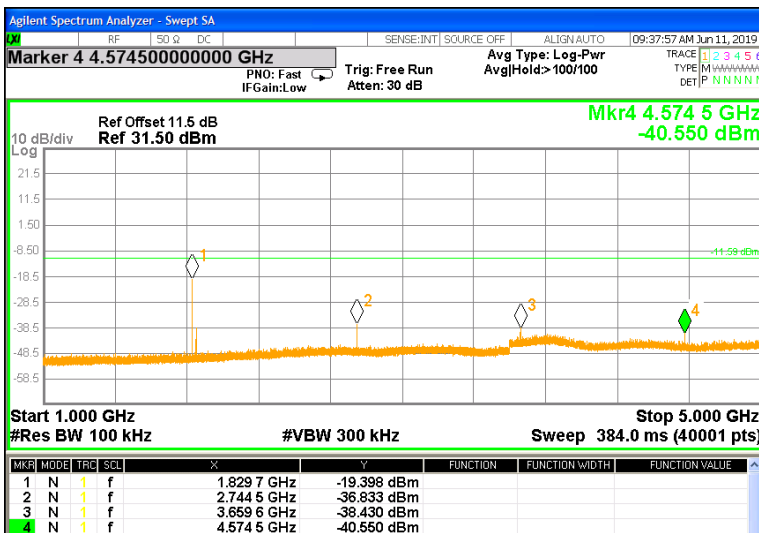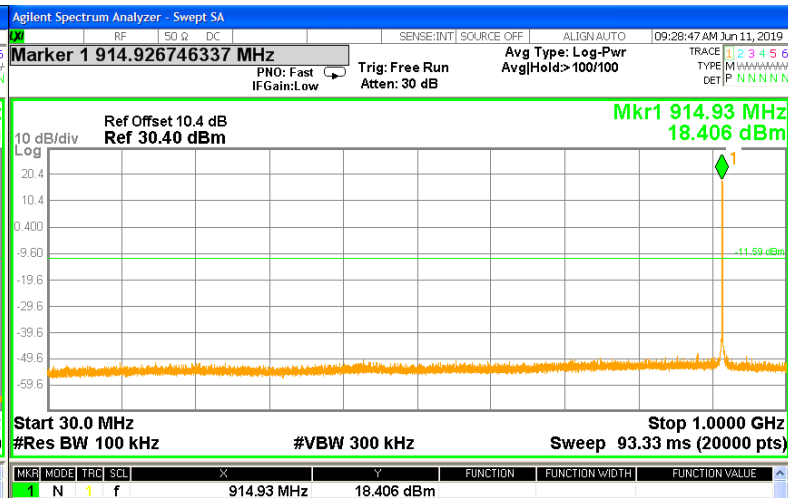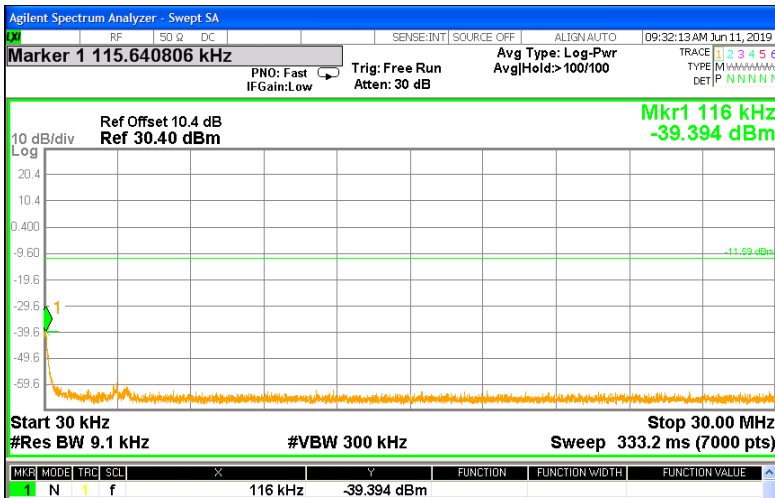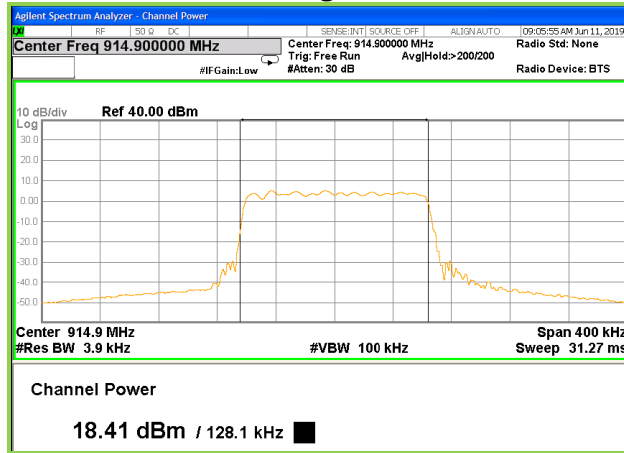

2.7 Channel Separation (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC Part 15.247
Date: 2019-06-13 (23.3°C,33.3 % RH)	Basic Standard: ANSI C63.10: 2013
EUT status: Compliant	

Specification: FCC Part 15.247(a, 1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

2.7.1 Test Guidance: ANSI 63.10 Clause 7.8.2 / 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed with the EUT transmitter frequency hopping function active.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is set for a frequency span wide enough to capture at least two adjacent channels. The RBW is set to at least 1% of the span. The Peak detector is used, with the trace set to Max Hold. Channel Separation is displayed with the Marker Delta function.

2.7.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.7.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.7.4 Test Sample Verification, Configuration & Modifications


EUT configuration for Channel Separation testing:



2.7.5 Channel Separation Data:

Compliant: The channel separation measured for this device is 201 kHz.

Screen Captures from the spectrum analyzer: Hybrid 125 KHz

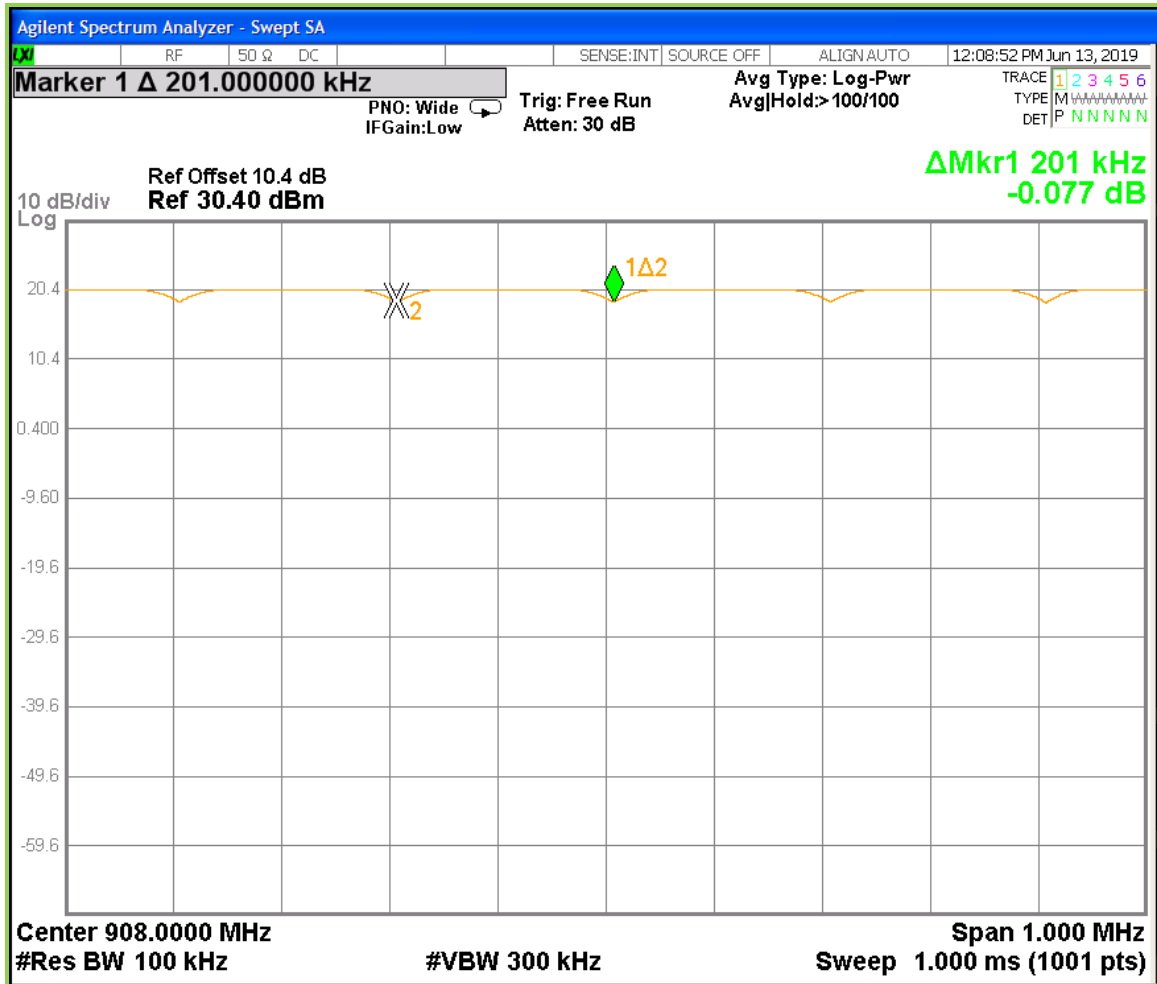

2.8 Time of Occupancy (Hybrid Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-13 (23.3°C,33.3 % RH)	Basic Standard: ANSI C63.10: 20013
EUT status: Compliant	

Specification: FCC Part 15.247 (f)

The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4

2.8.1 Test Guidance: ANSI 63.10 Clause 7.8.4 / 558074 D01 15.247 Measurement Guidance v05r02

This measurement is performed with the EUT frequency hopping function active.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is set for Peak detection over a 0 Hz frequency span (time domain) centered on a hopping channel. The RBW shall be \leq Channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel. VBW \geq RBW. The sweep time is adjusted to clearly capture one transmission. The Dwell time is measured with the Marker Delta function.

Another sweep is set to capture enough transmission events to calculate the number of events within the specified period of time. The Peak detector is used, with the trace set to Max Hold.

2.8.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.8.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Agilent	N9010A	6678	2018-07-16	2019-07-16
Temp/Humidity	Extech	42270	5892	2019-04-05	2020-04-05
Attenuator	FairView Microwave	SA18N5WA-10	6886	2018-11-23	2019-11-23
DC Blocker	MCL	BLK-89-S+	-	2019-01-15	2020-01-15
CE Cable (50cm length)	Huber+Suhner	Enviroflex 400	-	2019-01-15	2020-01-15

2.8.4 Test Sample Verification, Configuration & Modifications

The EUT was operating in normal mode. The EUT met the requirements without modification.

EUT configuration for Dwell Time testing:



2.8.5 Dwell Time Data:

Measured Dwell time = 370.8 ms

Window of measurement is equal to number of hopping channels multiple by 400ms = $0.4 \times 64 = 25.6\text{Sec}$


Number of events in 25.6Sec = 1

Margin = $400 - 370.8 = 29.2\text{ ms}$

Screen Capture from the spectrum analyzer: Dwell time in 500ms



Screen Capture from the spectrum analyzer: Dwell Time in 25.6 Sec

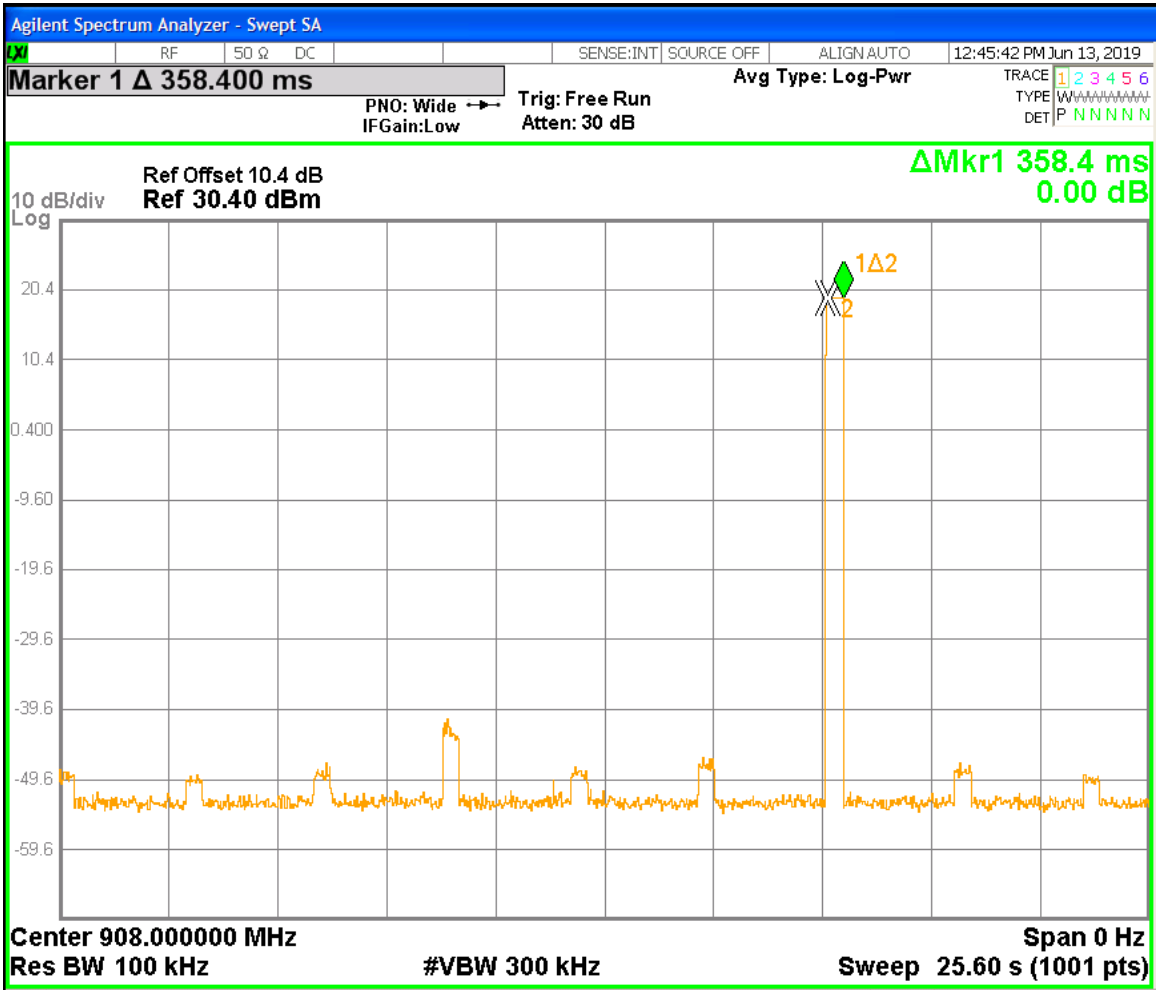




2.9 EUT Positioning Assessment

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-04 (23.6°C,28.0% RH)	Basic Standard: ANSI C63.4-2014
3rd Axis Found worse	
Comments: EUT oriented in three axis's and 3 rd axis found to be worse emission axis. .	

Specification: ANSI C63.4-2014, Clause 6.3.2.1

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs (see Figure 6, Figure 7, and Figure 9). For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

1 st Axis	
2 nd Axis	
3 rd Axis	

2.10 Radiated Spurious Emissions in restricted frequency bands (TX Mode)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel: Bushra Muharram	Standard: FCC PART 15.247
Date: 2019-06-(4/5) (23.6°C,28.0 % RH)	Basic Standard: ANSI C63.10-2013

EUT status: Compliant

Specification: FCC PART 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

2.10.1 Test Guidance: ANSI C63.10-2013, Clause 13.4.2

From 9 kHz to 150 kHz (resolution bandwidth of 200 Hz) and from 150 kHz to 30 MHz (resolution bandwidth 9 kHz) measurements are performed with a loop antenna (as per KDB 460108).

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz. The EUT is raised to 150 cm above the ground plane, and the area between the EUT and the antenna mast is covered with RF absorbent material.

The scan is performed at discrete increments of turntable azimuth and antenna height, which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

Frequencies having peak emissions within 10dB of the limits are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

2.10.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

2.10.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A	6130	2019-05-10	2020-05-10
Loop Antenna	EMCO	6502	10868	2019-04-11	2020-04-11
Biconilog Antenna	ARA	LPB-2520/A	4318	2018-09-19	2020-09-19
DRG Horn	EMCO	3115	19357	2018-09-12	2020-09-12
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2019-04-05	2020-04-05
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21-5P	4354	2019-01-03	2020-01-03
Pre-Amplifier (30 – 1300 MHz)	hp	8447D	9291	2019-01-03	2020-01-03
RE Cable below 1GHz	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4419	2019-01-03	2020-01-03
Re Cable Above 1 GHz	A.H. System Inc.	SAC-26G-8.23	6187	2019-01-03	2020-01-03

2.10.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

Test setup diagram for Radiated Spurious Emissions testing (below 1GHz):

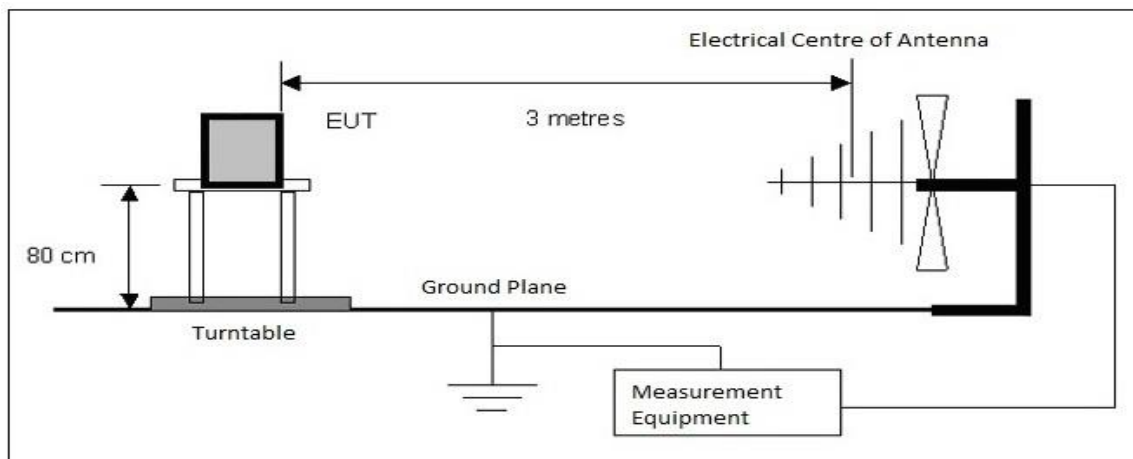

Above 1GHz, the EUT is raised using a low permittivity material (polystyrene) to a height of 1.5m.

FCC Part 15.205 Restricted Bands of Operation:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz, ² Above 38.6

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in 15.209 shall be demonstrated based on the average value of the measured emissions.

Specification: FCC15.209 Radiated emission limits.

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F(KHz)	300
0.490 – 1.705	24000 / F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

2.10.5 Radiated Emissions Data:

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

Meter Reading in dBµV + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dbµV/m.

Delta = Field Strength - Limit

Notes:


- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discrete increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- Preliminary scans were performed for all channels in Transmit modes. The Low band channel 902.3 MHz was selected as the worst-case condition for detailed examination.
- In Transmit mode, the EUT was assessed up to 10.0 GHz.

Negative values for Delta indicate compliance.


Freq. Marker	Freq. [MHz]	Raw reading [dBµV]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dBµV/m]	FCC 15.209 Limit [dBµV/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
Frequency Range 30 – 1000 MHz											
1	870.3168	10.57	QP	25.5	7.1	43.17	46.02	-2.85	254	122	Vertical
2	934.3162	3.99	QP	26.3	7.3	37.59	46.02	-8.43	226	115	Vertical
Frequency Range 1 – 3.6 GHz											
1	*1045.7	31.48	AV	24.4	-18.9	36.98	54	-17.02	307	133	Vertical
1	*2706.9	53.33	AV	29.6	-33.4	49.53	54	-4.47	82	246	Horizontal
1	*2706.9	55.19	PK	29.6	-33.4	51.39	74	-22.61	82	246	Horizontal
2	*2707.4	48.52	AV	29.6	-33.4	44.72	54	-9.28	334	258	Vertical
2	*2707.4	53.83	PK	29.6	-33.4	50.03	74	-23.97	334	258	Vertical
Frequency Range 3.6 – 10 GHz											
1	*3609.3	43.72	AV	31.5	-32.5	42.72	54	-11.28	264	103	Horizontal
1	*3609.3	49.75	PK	31.5	-32.5	48.75	74	-25.25	264	103	Horizontal
2	*4511.7	45.3	AV	32.4	-31.3	46.4	54	-7.6	304	252	Horizontal
2	*4511.7	48.52	PK	32.4	-31.3	49.69	74	-24.31	304	252	Horizontal
3	*5414.0	39.94	AV	34	-30.4	43.54	54	-10.46	292	108	Horizontal
3	*5414.0	44.39	PK	34	-30.4	47.99	74	-26.01	292	108	Horizontal
4	*8120.8	34.61	AV	36.7	-26.9	44.41	54	-9.59	100	108	Horizontal
4	*8120.8	39.27	PK	36.7	-26.9	49.07	74	-24.93	100	108	Horizontal
5	*3609.3	42.59	AV	31.5	-32.5	41.59	54	-12.41	297	272	Vertical
5	*3609.3	46.47	PK	31.5	-32.5	45.47	74	-28.53	297	272	Vertical
6	*4511.6	41.24	AV	32.4	-31.3	42.34	54	-11.66	121	134	Vertical
6	*4511.6	46.93	PK	32.4	-31.3	48.03	74	-25.97	121	134	Vertical
7	*5413.7	37.7	AV	34	-30.4	41.3	54	-12.7	145	100	Vertical
7	*5413.7	45.03	PK	34	-30.4	48.63	74	-25.37	145	100	Vertical
8	*8120.5	38.44	AV	36.7	-26.9	48.24	54	-5.76	220	101	Vertical
8	*8120.5	42.24	PK	36.7	-26.9	52.04	74	-21.96	220	101	Vertical

* Restricted Band


Plot of Radiated Emissions: Measuring Antenna Parallel

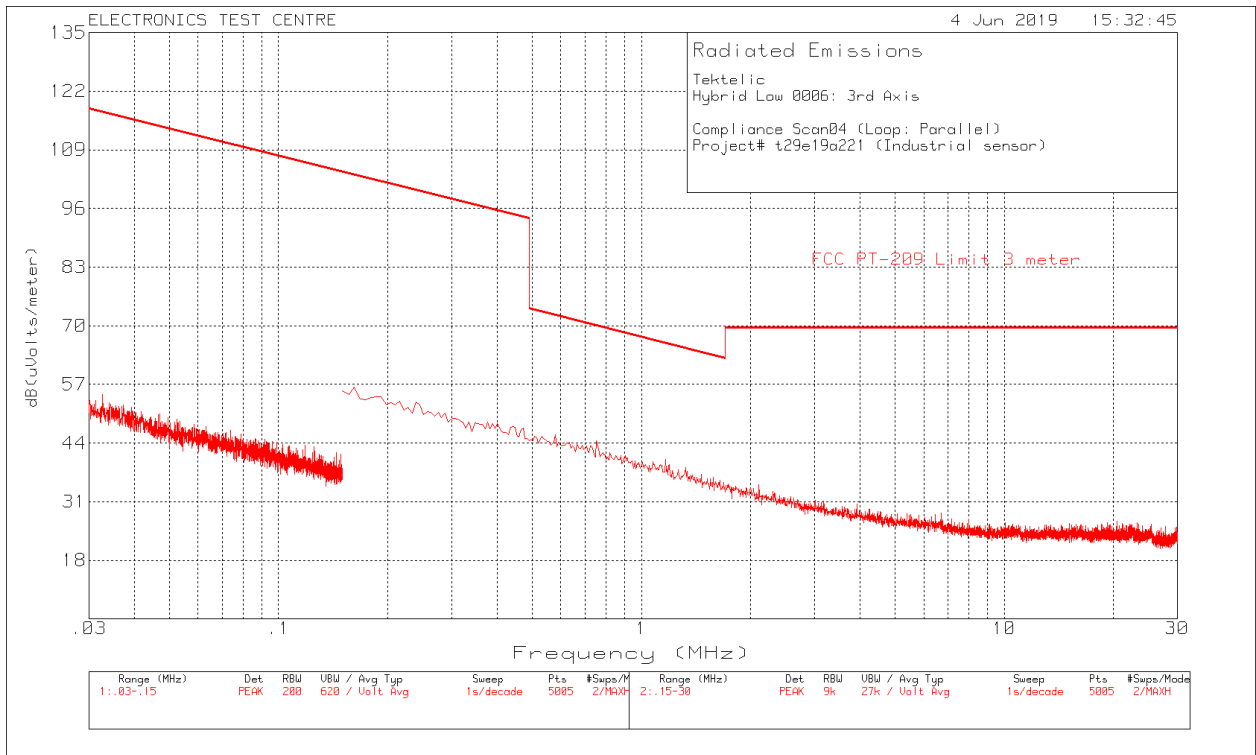


Plot of Radiated Emissions: Measuring Antenna Perpendicular

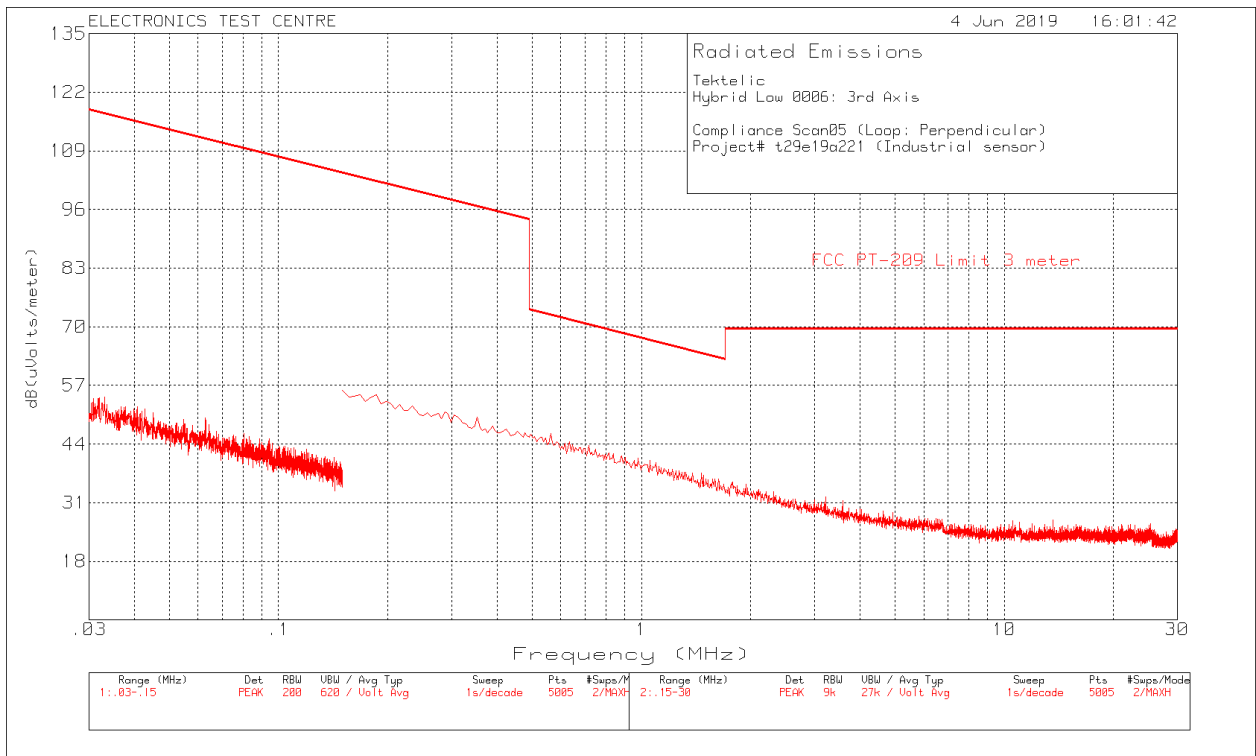

Plot of Radiated Emissions: Horizontal polarization

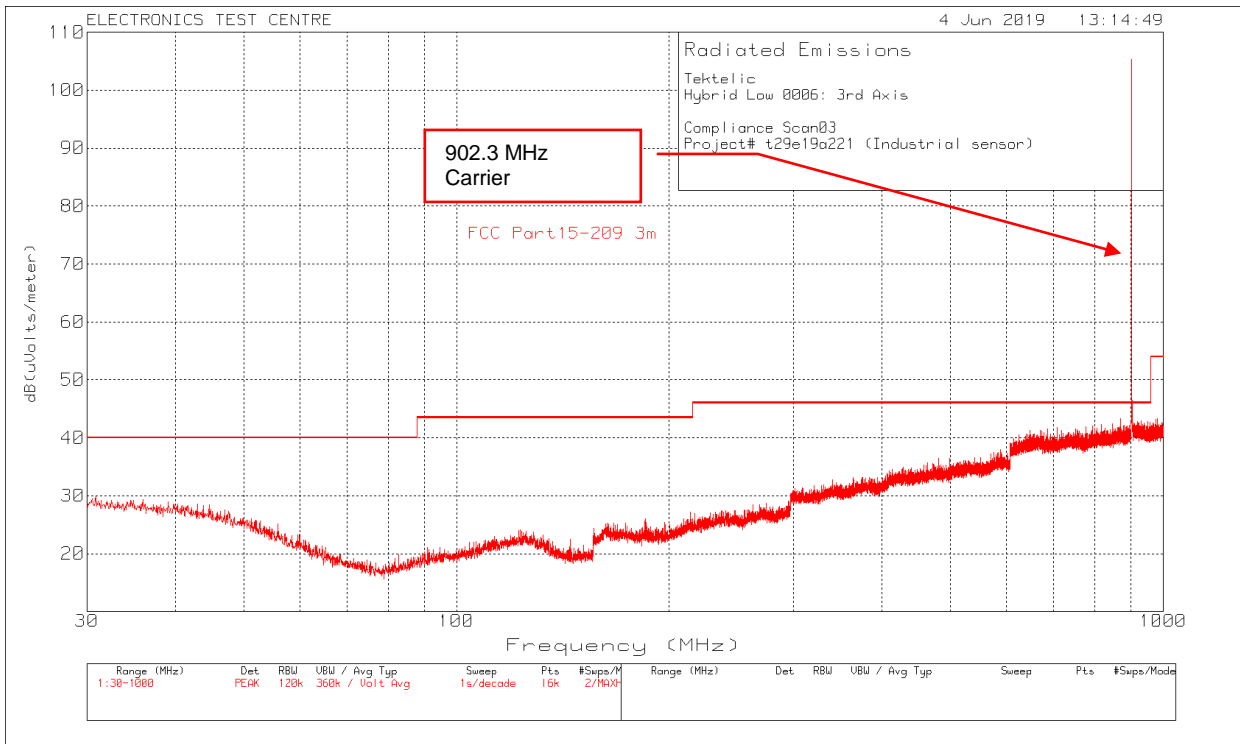


Plot of Radiated Emissions: Vertical polarization

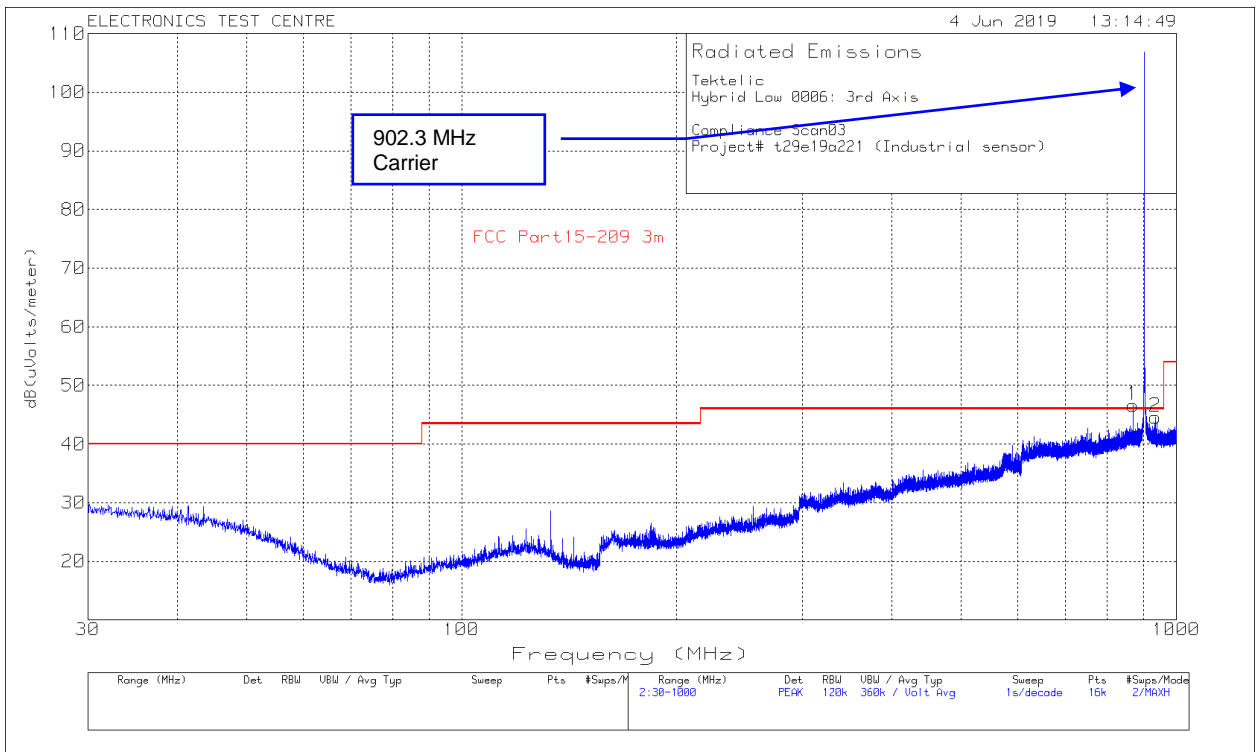


Plot of Radiated Emissions: Horizontal polarization




Plot of Radiated Emissions: Vertical polarization

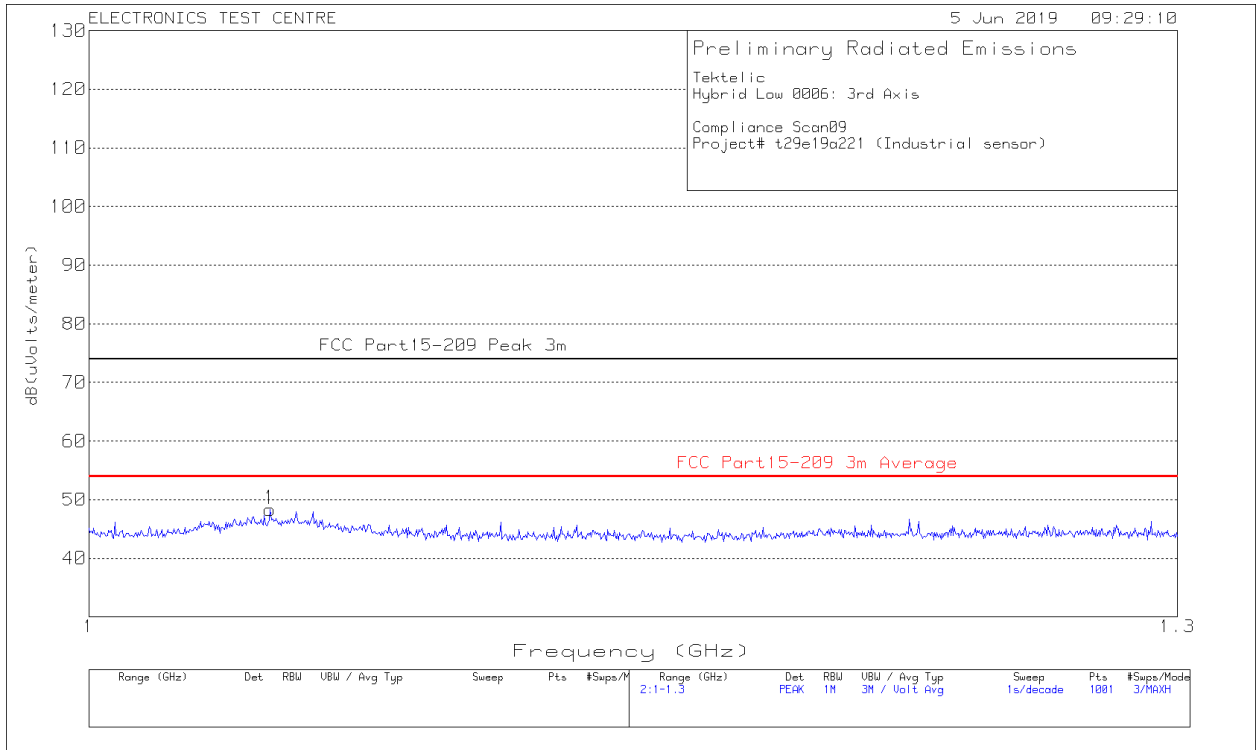


Plot of Radiated Emissions: Horizontal polarization

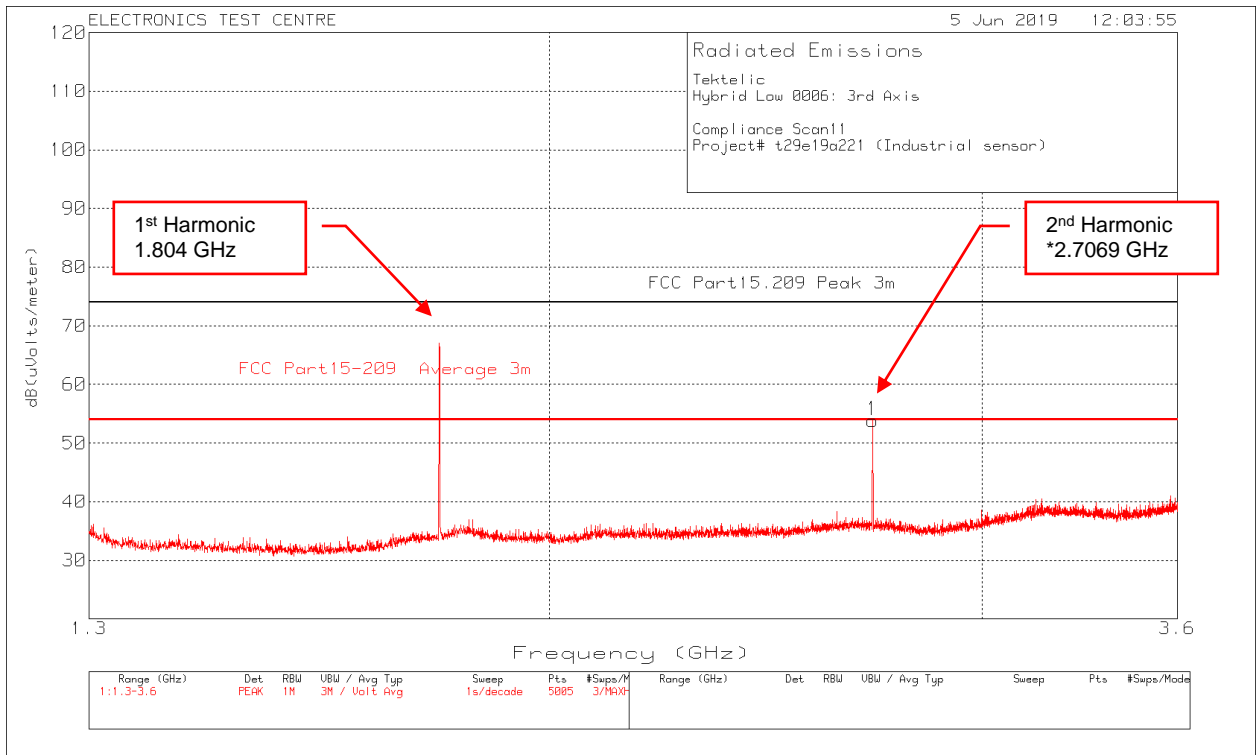


Plot of Radiated Emissions: Vertical polarization

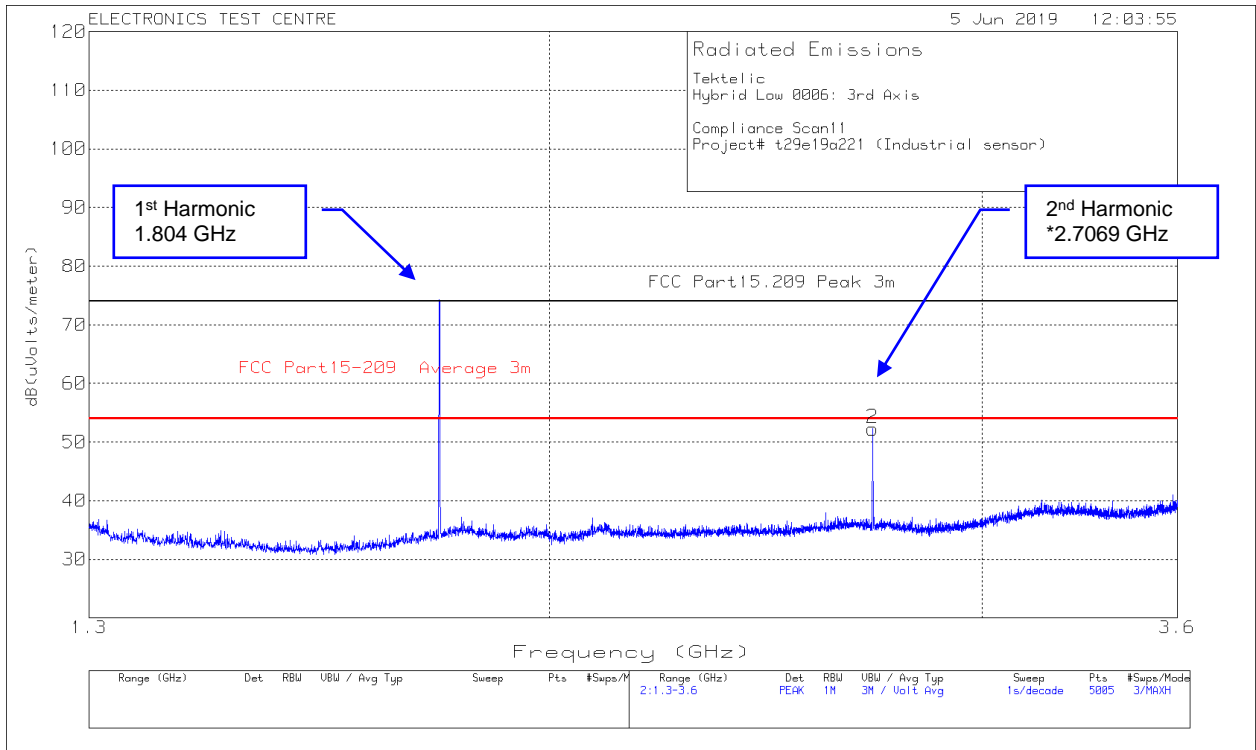

Plot of Radiated Emissions: Horizontal polarization

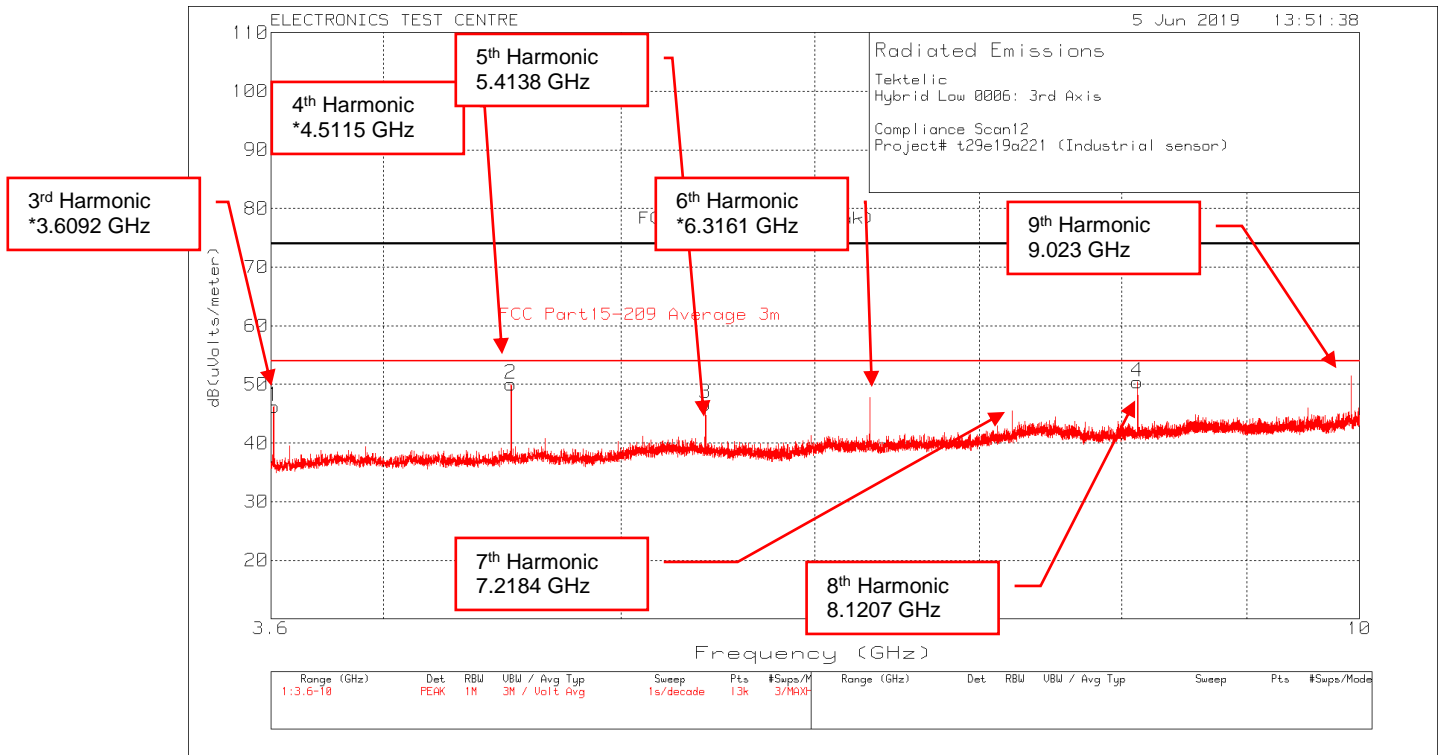

Plot of Radiated Emissions: Vertical polarization

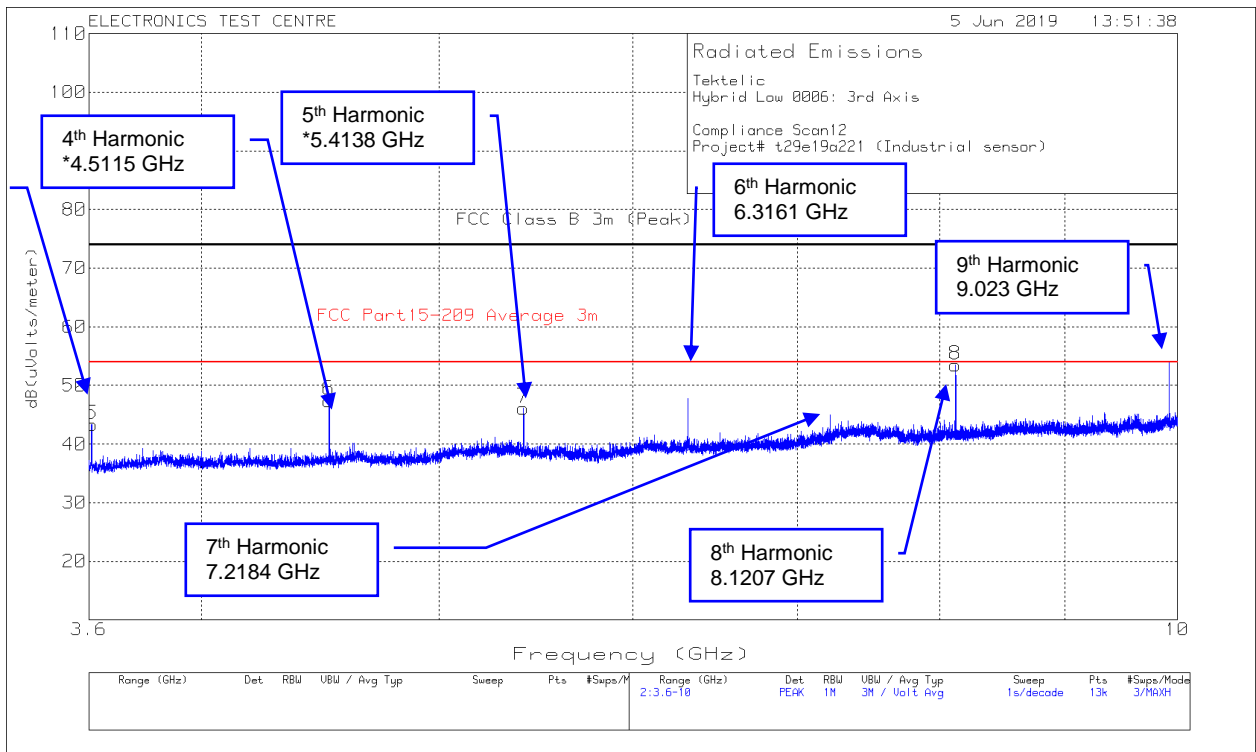

2.11 RF Exposure

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Industrial Sensor
Test Personnel:	Standard: FCC PART 15.247
Date:	
EUT status: Exempt	

Compliant: RF exposure assessment to be provided in a separate Exhibit.

3.0 TEST FACILITY

3.1 Location

The Kona Industrial Sensor was tested for emissions at the Electronics Test Centre laboratory located in Airdrie, Alberta, Canada. The Radio Frequency Anechoic Chamber (RFAC), identified as Chamber 1, has a usable working space measuring 10.6 m long x 7.3 m wide x 6.5 m high.

Measurements taken at this site are accepted by Industry Canada as evidence of conformity per registration file # 2046A. This site is also listed with the FCC under Registration Number CA2046.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment located in the Control Room. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in the Control Room, consisting of two shielded vestibules joined together at the side of the main room. Cables are routed through bulkhead panels between the rooms and the test chamber as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

Either floor mounted or table-top equipment can be tested at this facility.

3.2 Grounding Plan

The Kona Industrial Sensor was placed at the centre of the test chamber turntable on top of an 80-cm high polystyrene foam table. The EUT was grounded according to Tektelic Communication Inc. specifications.

3.3 Power Supply

All EUT power was supplied by an internal rechargeable battery. There is no EUT function while the battery is charging.

Appendix A – Antenna



TECHNICAL DATA SHEET

Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX



Features:

- 2G / 3G / 4G Div Ant for MiMo
- Used as pair for W3906B0100
- Can be used as Primary antenna
- 698-3600MHz
- Global LTE Bands:
 - B1-B23, B25-B29, B33-B42
 - N.A.; Europe, Asia (incl. Jap.)
- Foldable for tight spaces

Applications:

- Challenging RF Environments Demanding:
 - Highest Peak Gain
 - Lowest ECC (Envelope Correlation Coeff.).
- Matched to Radio Modules from:
 - Sierra Wireless, Quectel, Telit, Huawei, Gemalto, uBlox, ZTE, and others.
- Security, Video, Graphics
- IoT, SmartGrid, Meters, Remote Monitoring, Sensor Networks

All dimensions are in mm / inches

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road #29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



1



TECHNICAL DATA SHEET

Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

ELECTRICAL SPECIFICATIONS

P/N	W3907B0100/ W3907B0127/ W3907BD0100	W3907BD0350
Frequency	698-960/1427.9-1510.9/1559-1610/1695-2200/2300-2700/3400-3600MHz	698-960/1427.9-1510.9/1559-1610/1695-2200/2300-2700/3400-3600MHz
Return Loss(698-960MHz)	-6dB	-6dB
Return Loss(1427.9-1510.9/1559-1610/1695-2200/2300-2700/3400-3600MHz)	-7.5dB	-7.5dB
Average Total Efficiency(698-960MHz)	55%	49%
Average Total Efficiency(1427.9-1510.9MHz)	60%	48%
Average Total Efficiency(1559-1610MHz)	60%	52%
Average Total Efficiency(1695-2200MHz)	65%	48%
Average Total Efficiency(2300-2700MHz)	70%	48%
Average Total Efficiency(3400-3600MHz)	65%	40%

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
 15255 Innovation Drive #100
 San Diego, CA 92128
 USA
 Tel: 1-858-674-8100

Pulse/Larsen Antennas
 18110 SE 34th St Bldg 2 Suite 250
 Vancouver, WA 98683
 USA
 Tel: 1-360-944-7551

Europe Headquarters
 Pulse GmbH & Co, KG
 Zeppelinstrasse 15
 Herrenberg, Germany
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
 99 Huo Ju Road #29 Bldg, 4th Phase
 Suzhou New District
 Jiangsu Province, Suzhou 215009 PR China
 Tel: 86 512 6807 8998





TECHNICAL DATA SHEET

Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

ELECTRICAL SPECIFICATIONS		
P/N	W3907B0100/ W3907B0127/ W3907BD0100	W3907BD0350
Peak Gain(698-960MHz)	2.9dBi	1.0dBi
Peak Gain(1427.9-1510.9MHz)	1.7dBi	1.1dBi
Peak Gain(1559-1610MHz)	1.8dBi	1.4dBi
Peak Gain(1695-2200MHz)	3.4dBi	2.2dBi
Peak Gain(2300-2700MHz)	3.8dBi	2.0dBi
Peak Gain(3400-3600MHz)	4.2dBi	1.4dBi
Polarization	Linear	Linear
Nominal Impedance	50ohm	50ohm
Power Standing	3W	3W

Typical free space performance measured on 2mm thickness PC plate

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
 15255 Innovation Drive #100
 San Diego, CA 92128
 USA
 Tel: 1-858-674-8100

Pulse/Larsen Antennas
 18110 SE 34th St Bldg 2 Suite 250
 Vancouver, WA 98683
 USA
 Tel: 1-360-944-7551

Europe Headquarters
 Pulse GmbH & Co, KG
 Zeppelinstrasse 15
 Herrenberg, Germany
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
 99 Huo Ju Road/#29 Bldg, 4th Phase
 Suzhou New District
 Jiangsu Province, Suzhou 215009 P.R. China
 Tel: 86 512 6807 9998



3



TECHNICAL DATA SHEET

Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

MECHANICAL SPECIFICATIONS

Overall Length	110.7X20.4mm
Antenna Color / Material	BLACK FPC
Cable type	See table detail
Cable length	See table detail

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40~+85° C
Storage Temperature	-40~+85° C
RoHS Compliant	Yes

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



4

End of Document