



TEST REPORT

FCC PART 15.247

Report Reference No.: **CTL1912302023-WF02**

Compiled by: Happy Guo
(position+printed name+signature) (File administrators)

Happy Guo

Tested by: Nice Nong
(position+printed name+signature) (Test Engineer)

Nice Nong

Approved by: Ivan Xie
(position+printed name+signature) (Manager)

Ivan Xie

Product Name.....: TWS Earbuds

Model/Type reference: D2

List Model(s).....: D3, D4, D5

Trade Mark.....: N/A

FCC ID.....: 2ALGX-TWS-D2

Applicant's name: **Shenzhen Bighouse Electronics Commerce Co.,Ltd**

Address of applicant: Room 1319, Dongming Building, Minkang RD, MinZhi Street,
Longhua New Districtt, ShenZhen, China

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: **FCC Part 15.247:** Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of receipt of test item.....: Jan. 03, 2020

Date of sampling.....: Jan. 03, 2020

Date of Test Date.....: Jan. 03, 2020–Fed. 26, 2020

Data of Issue.....: Fed. 27, 2020

Result.....: **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1912302023-WF02	Fed. 27, 2020 Date of issue
--------------------------	---------------------------	--------------------------------

Equipment under Test : TWS Earbuds

Model /Type : D2

Listed Models : D3, D4, D5

Applicant : **Shenzhen Bighouse Electronics Commerce Co.,Ltd**

Address : Room 1319, Dongming Building, Minkang RD,
MinZhi Street, Longhua New Districtt, ShenZhen,
China

Manufacturer : **Shenzhen Bighouse Electronics Commerce Co.,Ltd**

Address : Room 1319, Dongming Building, Minkang RD,
MinZhi Street, Longhua New Districtt, ShenZhen,
China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Table of Contents

Page

1. SUMMARY 5

- 1.1. TEST STANDARDS 5
- 1.2. TEST DESCRIPTION 5
- 1.3. TEST FACILITY..... 6
- 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY 6

2. GENERAL INFORMATION 8

- 2.1. ENVIRONMENTAL CONDITIONS 8
- 2.2. GENERAL DESCRIPTION OF EUT 8
- 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY 9
- 2.4. EQUIPMENTS USED DURING THE TEST..... 10
- 2.5. RELATED SUBMITTAL(S) / GRANT (S) 10
- 2.6. MODIFICATIONS 10

3. TEST CONDITIONS AND RESULTS.....11

- 3.1. CONDUCTED EMISSIONS TEST 11
- 3.2. RADIATED EMISSIONS AND BAND EDGE..... 14
- 3.3. MAXIMUM CONDUCTED OUTPUT POWER 20
- 3.4. POWER SPECTRAL DENSITY..... 21
- 3.5. 6dB BANDWIDTH 22
- 3.6. OUT-OF-BAND EMISSIONS 23
- 3.7. ANTENNA REQUIREMENT 24

4. TEST SETUP PHOTOS OF THE EUT.....25

5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....26

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 15.247 Meas Guidance v05r02](#) : Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	TWS Earbuds
Model/Type reference:	D2
Power supply:	DC 3.7V from battery
Charging warehouse information:	Battery:2000 mA Input:5V --- 1A
BLE:	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	Ceramic antenna
Antenna gain:	3.19dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

Note3: This report is only for BLE.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 40 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

Operation Frequency List :

Channel	Frequency (MHz)
00	2402
02	2404
03	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2019/05/21	2020/05/20
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2019/05/23	2020/05/22
Horn Antenna	Ocean Microwave	OBH100400	26999002	2019/11/28	2020/11/27
EMI Test Receiver	R&S	ESCI	1166.5950.03	2019/05/21	2020/05/20
Spectrum Analyzer	Agilent	E4407B	MY41440676	2019/05/20	2020/05/19
Spectrum Analyzer	Agilent	N9020A	US46220290	2019/05/20	2020/05/19
Spectrum Analyzer	Keysight	N9020A	MY53420874	2019/05/20	2020/05/19
Controller	EM Electronics	EM 1000	060859	2019/05/21	2020/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2019/05/23	2020/05/22
Active Loop Antenna	Da Ze	ZN30900A	/	2019/05/23	2020/05/22
Amplifier	Agilent	8449B	3008A02306	2019/05/21	2020/05/20
Amplifier	Agilent	8447D	2944A10176	2019/05/21	2020/05/20
Amplifier	Brief&Smart	LNA-4018	2104197	2019/05/20	2020/05/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/05/22	2020/05/21
Power Sensor	Agilent	U2021XA	MY55130004	2019/05/20	2020/05/19
Power Sensor	Agilent	U2021XA	MY55130006	2019/05/20	2020/05/19
Power Sensor	Agilent	U2021XA	MY54510008	2019/05/20	2020/05/19
Power Sensor	Agilent	U2021XA	MY55060003	2019/05/20	2020/05/19
Spectrum Analyzer	RS	FSP	1164.4391.38	2019/05/20	2020/05/19
Test Software					
Name of Software			Version		
TST-PASS			1.0.2		
ES-K1(Below 1GHz)			V1.71		
e3(Above 1GHz)			6.111221a		

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

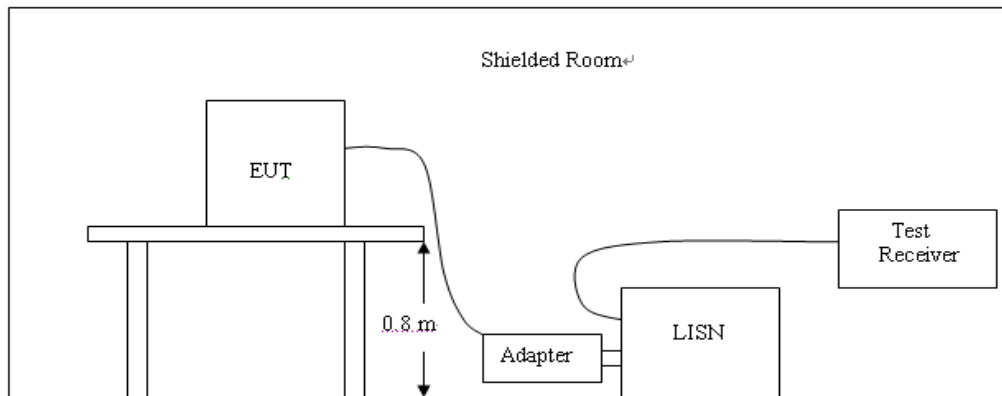


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

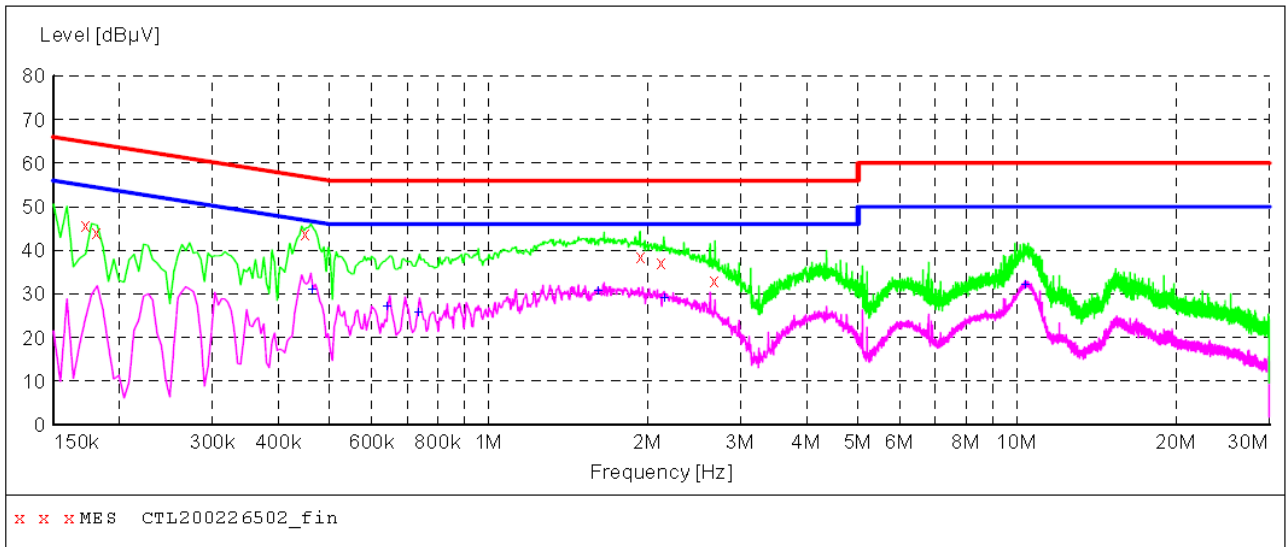

MEASUREMENT RESULT: "CTL200226502_fin"

2020-2-26 15:29

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.172500	45.80	11.2	65	19.0	QP	L1	GND
0.181500	44.30	11.2	64	20.1	QP	L1	GND
0.451500	44.00	11.2	57	12.8	QP	L1	GND
1.945500	38.80	11.2	56	17.2	QP	L1	GND
2.121000	37.30	11.3	56	18.7	QP	L1	GND
2.679000	33.10	11.3	56	22.9	QP	L1	GND


MEASUREMENT RESULT: "CTL200226502_fin2"

2020-2-26 15:29

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.465000	31.00	11.2	47	15.6	AV	L1	GND
0.645000	27.00	11.2	46	19.0	AV	L1	GND
0.739500	25.60	11.2	46	20.4	AV	L1	GND
1.617000	30.70	11.2	46	15.3	AV	L1	GND
2.161500	29.10	11.3	46	16.9	AV	L1	GND
10.410000	32.10	10.9	50	17.9	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

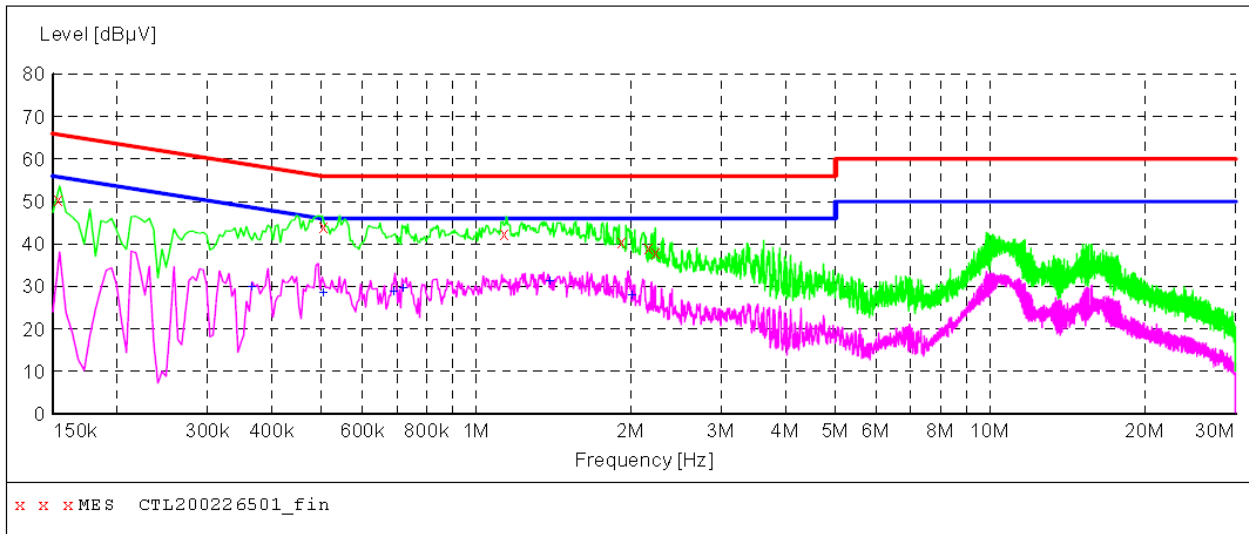

MEASUREMENT RESULT: "CTL200226501_fin"

2020-2-26 15:26

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154500	50.50	11.2	66	15.3	QP	N	GND
0.505500	44.30	11.2	56	11.7	QP	N	GND
1.135500	42.40	11.2	56	13.6	QP	N	GND
1.927500	40.70	11.2	56	15.3	QP	N	GND
2.175000	39.20	11.3	56	16.8	QP	N	GND
2.242500	38.10	11.3	56	17.9	QP	N	GND

MEASUREMENT RESULT: "CTL200226501_fin2"

2020-2-26 15:26

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.366000	29.80	11.2	49	18.8	AV	N	GND
0.505500	28.50	11.2	46	17.5	AV	N	GND
0.694500	28.80	11.2	46	17.2	AV	N	GND
0.721500	29.70	11.2	46	16.3	AV	N	GND
1.396500	31.10	11.2	46	14.9	AV	N	GND
2.017500	28.00	11.3	46	18.0	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

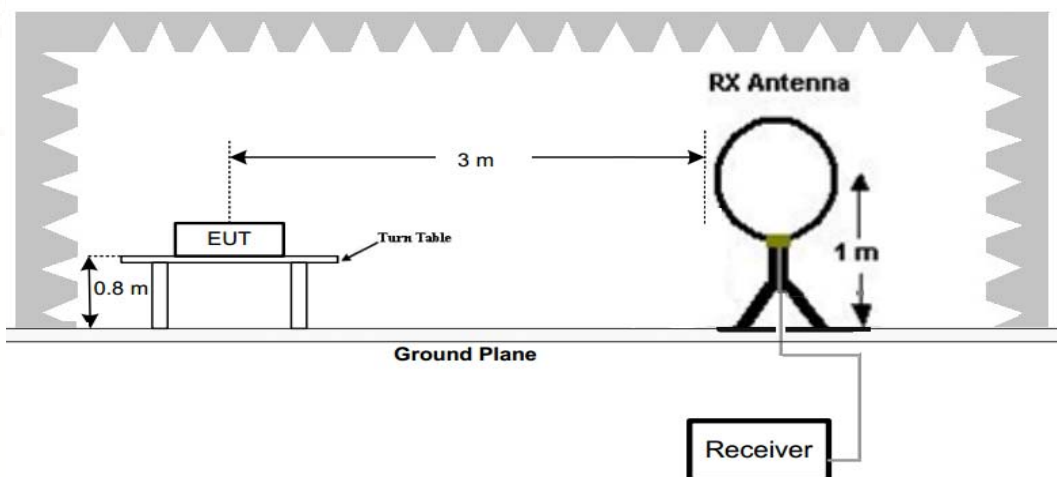

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

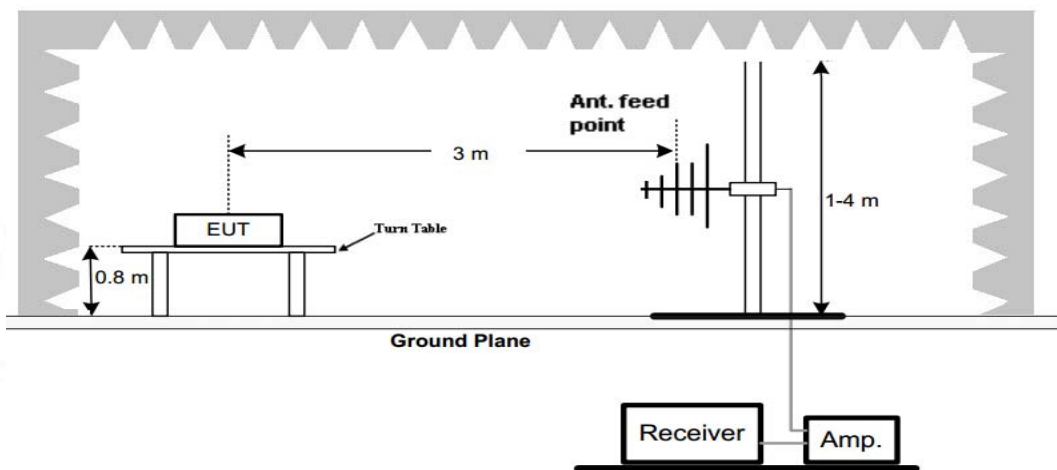

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

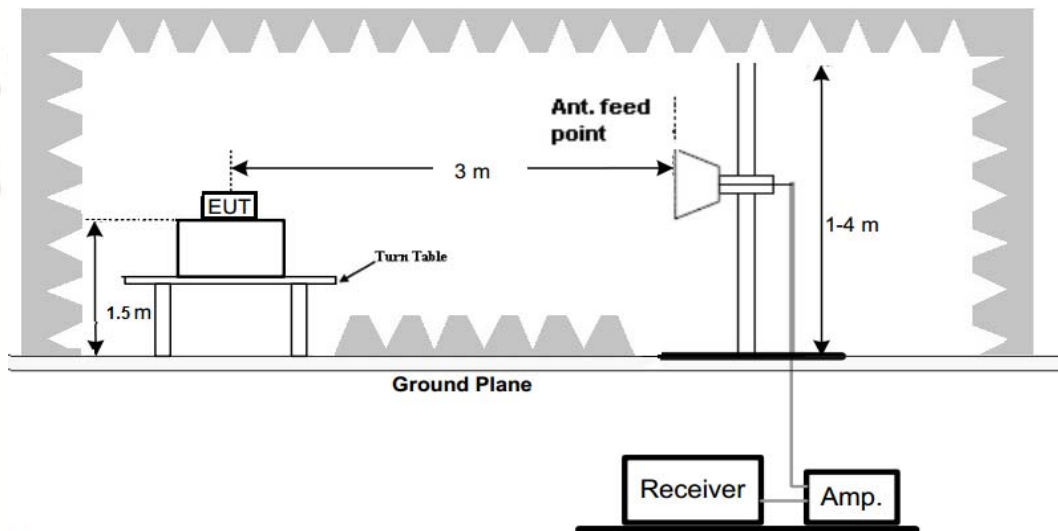

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. For below 1GHz testing recorded worst at BLE low channel.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	100 kHz	vulb 9168

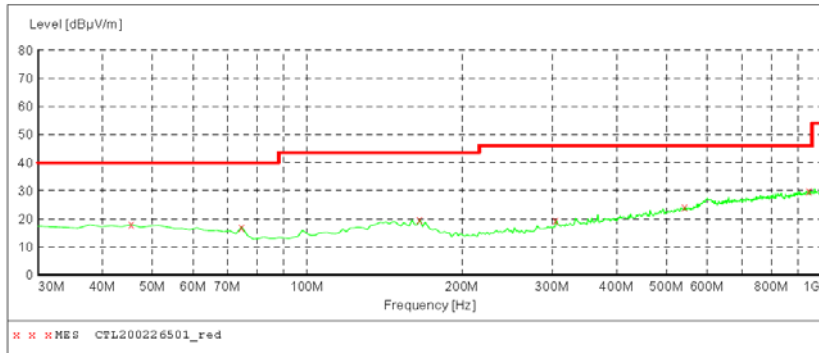

MEASUREMENT RESULT: "CTL200226501_red"


2020-2-26 10:34

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	17.90	13.8	40.0	22.1	---	0.0	0.00	HORIZONTAL
74.620000	17.00	10.6	40.0	23.0	---	0.0	0.00	HORIZONTAL
165.800000	19.70	14.7	43.5	23.8	---	0.0	0.00	HORIZONTAL
305.480000	19.50	14.7	46.0	26.5	---	0.0	0.00	HORIZONTAL
544.100000	24.20	19.9	46.0	21.8	---	0.0	0.00	HORIZONTAL
947.620000	30.00	25.9	46.0	16.0	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	100 kHz	vulb 9168

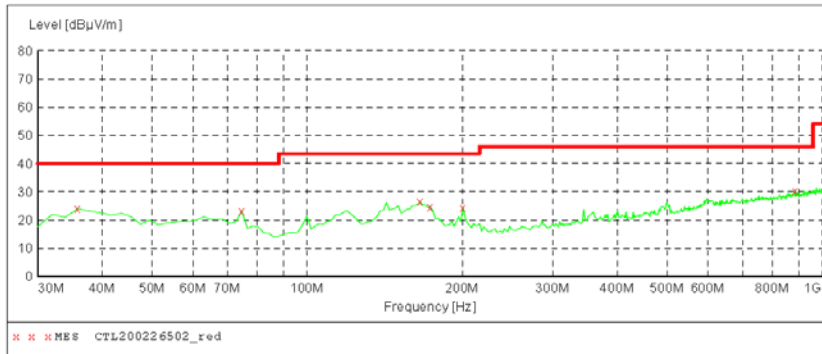

MEASUREMENT RESULT: "CTL200226502_red"

2020-2-26 10:36

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
35.820000	24.00	13.7	40.0	16.0	---	0.0	0.00	VERTICAL
74.620000	23.20	10.6	40.0	16.8	---	0.0	0.00	VERTICAL
165.800000	26.50	14.7	43.5	17.0	---	0.0	0.00	VERTICAL
173.560000	24.60	13.8	43.5	18.9	---	0.0	0.00	VERTICAL
200.720000	24.50	11.2	43.5	19.0	---	0.0	0.00	VERTICAL
887.480000	30.60	25.0	46.0	15.4	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

BLE Mode (above 1GHz)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	56.24	PK	74.00	17.76	51.73	33.49	6.91	35.89	4.51
4804.00	50.12	AV	54.00	3.78	45.71	33.49	6.91	35.89	4.51
5320.00	44.35	PK	74.00	29.65	37.14	34.38	7.10	34.27	7.21
5320.00	--	AV	54.00	--	--	--	--	--	--
7206.00	47.39	PK	74.00	26.61	36.29	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	57.05	PK	74.00	16.95	52.54	33.49	6.91	35.89	4.51
4804.00	50.39	AV	54.00	3.55	45.94	33.49	6.91	35.89	4.51
5320.00	44.36	PK	74.00	29.64	36.80	34.69	7.23	34.36	7.56
5320.00	--	AV	54.00	--	--	--	--	--	--
7206.00	46.89	PK	74.00	27.11	35.79	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	56.81	PK	74.00	17.19	50.56	33.60	6.95	34.30	6.25
4880.00	49.32	AV	54.00	4.65	43.10	33.60	6.95	34.30	6.25
6147.00	44.11	PK	74.00	29.89	36.48	34.57	7.16	34.10	7.63
6147.00	--	AV	54.00	--	--	--	--	--	--
7320.00	46.52	PK	74.00	27.48	34.83	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	57.15	PK	74.00	16.85	50.90	33.60	6.95	34.30	6.25
4880.00	49.86	AV	54.00	4.12	43.63	33.60	6.95	34.30	6.25
6147.00	44.28	PK	74.00	29.72	36.64	34.58	7.16	34.10	7.64
6147.00	--	AV	54.00	--	--	--	--	--	--
7320.00	47.22	PK	74.00	26.78	35.53	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	56.89	PK	74.00	17.11	51.97	33.84	7.00	35.92	4.92
4960.00	50.19	AV	54.00	3.72	45.36	33.84	7.00	35.92	4.92
6447.00	44.38	PK	74.00	29.62	36.84	34.67	7.22	34.35	7.54
6447.00	--	AV	54.00	--	--	--	--	--	--
7440.00	47.24	PK	74.00	26.76	35.29	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	57.31	PK	74.00	16.69	52.39	33.84	7.00	35.92	4.92
4960.00	50.42	AV	54.00	3.54	45.54	33.84	7.00	35.92	4.92
6447.00	44.27	PK	74.00	29.73	37.08	34.36	7.10	34.27	7.19
6447.00	--	AV	54.00	--	--	--	--	--	--
7440.00	47.12	PK	74.00	26.88	35.17	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	89.87	PK	--	--	56.48	28.78	4.61	0.00	33.39
2402.00	82.91	AV	--	--	49.52	28.78	4.61	0.00	33.39
2346.00	42.53	PK	74.00	31.47	9.45	28.52	4.56	0.00	33.08
2346.00	--	AV	54.00	--	--	--	--	--	--
2390.00	44.17	PK	74.00	29.83	10.85	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--
2400.00	45.28	PK	74.00	28.72	11.89	28.78	4.61	0.00	33.39
2400.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	89.94	PK	--	--	56.55	28.78	4.61	0	33.39
2402.00	83.05	AV	--	--	49.66	28.78	4.61	0	33.39
2359.00	42.68	PK	74	31.32	9.6	28.52	4.56	0	33.08
2359.00	--	AV	54	--	--	--	--	--	--
2390.00	44.29	PK	74	29.71	10.97	28.72	4.60	0	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	47.9	PK	74	26.1	14.51	28.78	4.61	0	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	90.12	PK	--	--	56.5	28.92	4.70	0.00	33.62
2480.00	83.11	AV	--	--	49.49	28.92	4.70	0.00	33.62
2483.50	46.12	PK	74	27.88	12.49	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2493.00	44.26	PK	74	29.74	10.6	28.95	4.71	0.00	33.66
2493.00	--	AV	54	--	--	--	--	--	--
2500.00	43.87	PK	74	30.13	10.19	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	90.18	PK	--	--	56.56	28.92	4.70	0.00	33.62
2480.00	83.24	AV	--	--	49.62	28.92	4.70	0.00	33.62
2483.50	46.25	PK	74	27.75	12.62	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2496.00	44.31	PK	74	29.69	10.65	28.95	4.71	0.00	33.66
2496.00	--	AV	54	--	--	--	--	--	--
2500.00	44.12	PK	74	29.88	10.44	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

See Annex Section 3

3.4. Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW \geq 3 kHz.
3. Set the VBW \geq 3 \times RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration



Test Results

See Annex Section 4

3.5. 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

See Annex Section 2

3.6. Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band-edge and out-of-band emissions.

Test Configuration



Test Results

See Annex Section 5

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):


(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 3.19dBi.

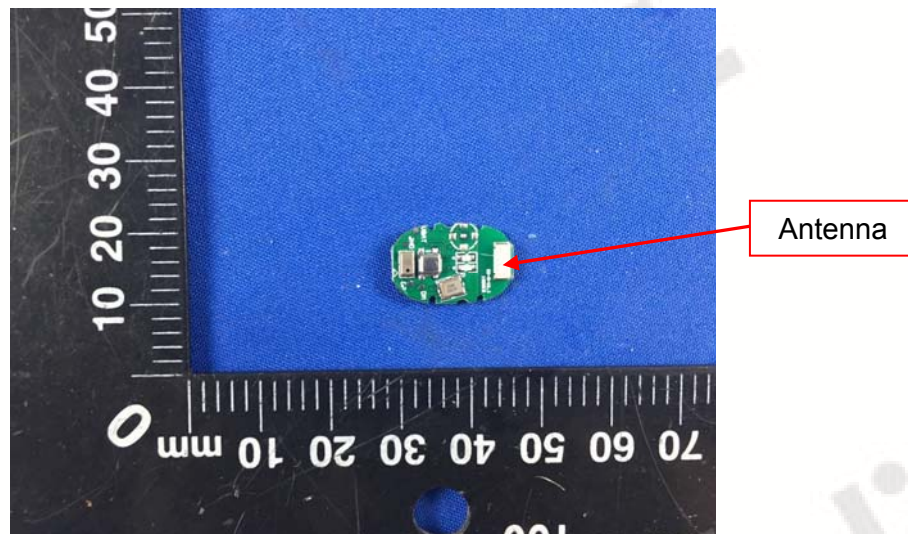

4. Test Setup Photos of the EUT

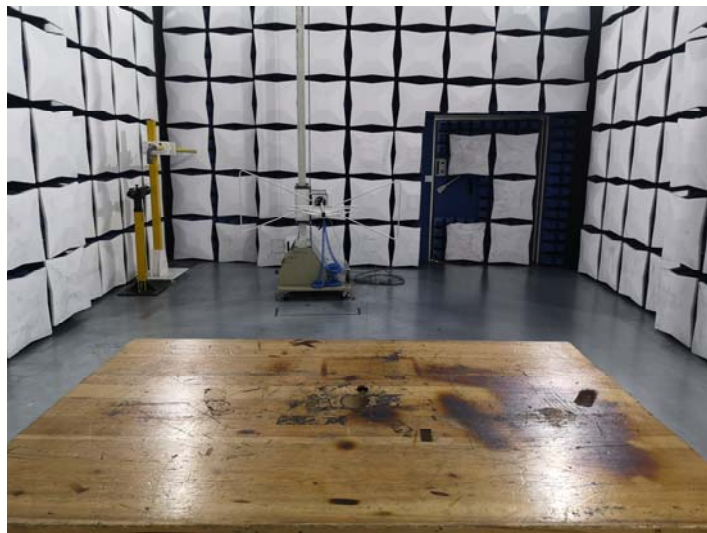

5. External and Internal Photos of the EUT

Reference to the test report No. CTL1912302023-WF01.

***** End of Report *****

Appendix for 15.247

TABLE OF CONTENTS


Appendix for 15.247.....	1
TABLE OF CONTENTS	1
1. Duty Cycle.....	2
1.1 Test Result	2
1.2 Test Graph.....	2
2. Bandwidth	3
2.1 Test Result	3
2.2 Test Graph - 6dB Bandwidth.....	3
2.3 Test Graph - 99% Occupied Bandwidth	4
3. Maximum Conducted Output Power	5
3.1 Test Result	5
3.2 Test Graph.....	5
4. Maximum Power Spectral Density (PSD)	6
4.1 Test Result	6
4.2 Test Graph.....	7
5. Unwanted Emissions in Non-restricted Frequency Bands	8
5.1 Test Result	8
5.2 Test Graph.....	8


1. Duty Cycle

1.1 Test Result

Test Mode	Channel Frequency(MHz)	TX Type	ANT No.	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1M	2402	SISO	1	0.380	0.625	60.80	2.16
	2440	SISO	1	0.380	0.625	60.80	2.16
	2480	SISO	1	0.380	0.625	60.80	2.16

1.2 Test Graph

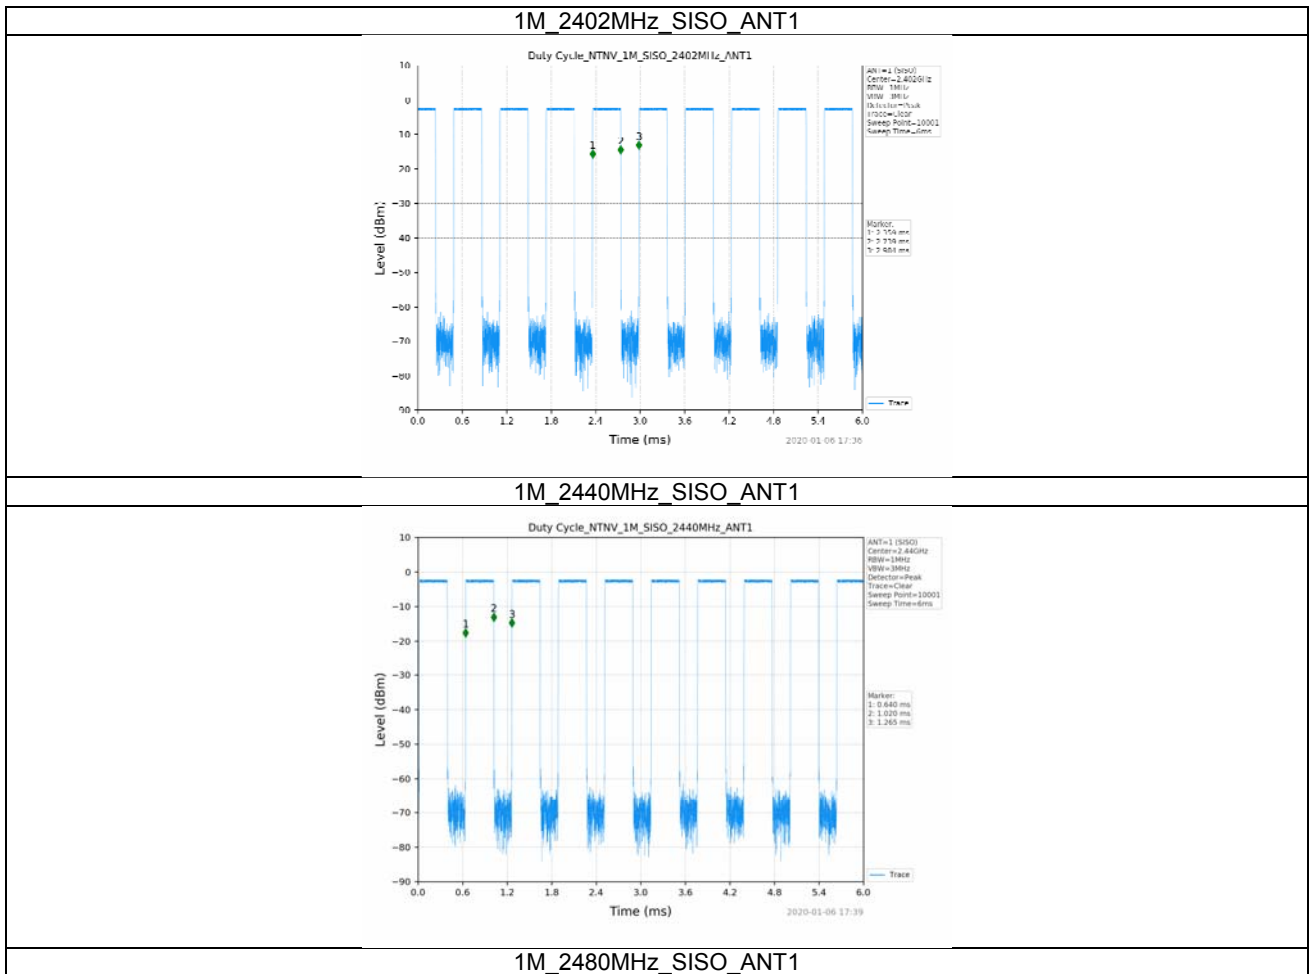

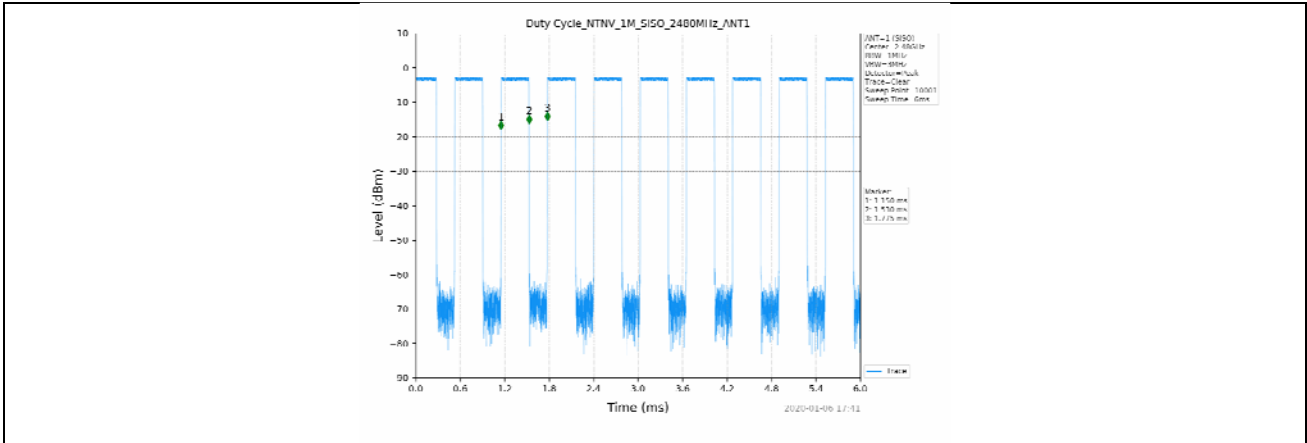


2. Bandwidth


2.1 Test Result

Test Mode	Frequency (MHz)	TX Type	ANT No.	6dB Bandwidth	Verdict
				Test Result (MHz)	
1M	2402	SISO	1	0.703	PASS
	2440	SISO	1	0.709	PASS
	2480	SISO	1	0.709	PASS


Test Mode	Frequency (MHz)	TX Type	ANT No.	99% Occupied Bandwidth	Verdict
				Test Result (MHz)	
1M	2402	SISO	1	1.038	Only for Report Use
	2440	SISO	1	1.038	Only for Report Use
	2480	SISO	1	1.038	Only for Report Use

2.2 Test Graph - 6dB Bandwidth

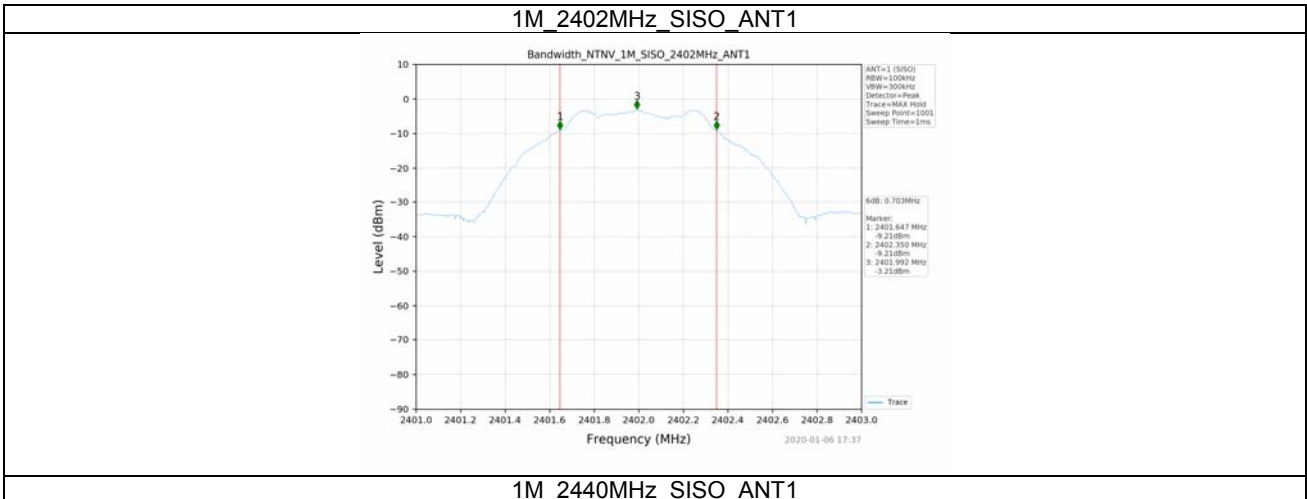

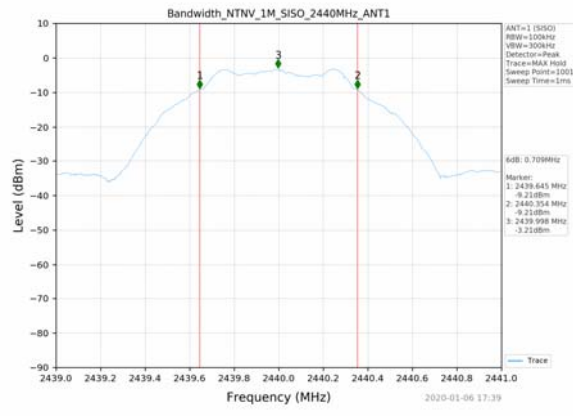


1M_2480MHz_SISO_ANT1

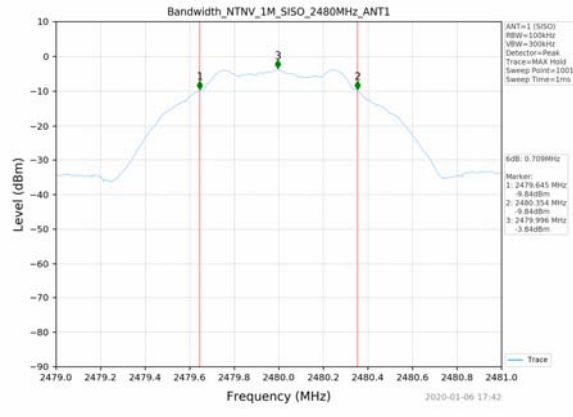


2.3 Test Graph - 99% Occupied Bandwidth


1M_2402MHz_SISO_ANT1

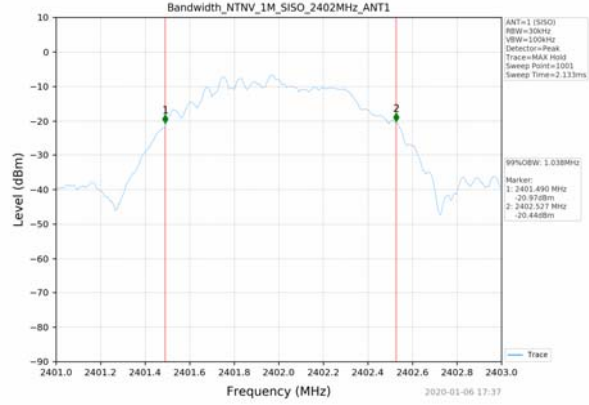

1M_2440MHz_SISO_ANT1

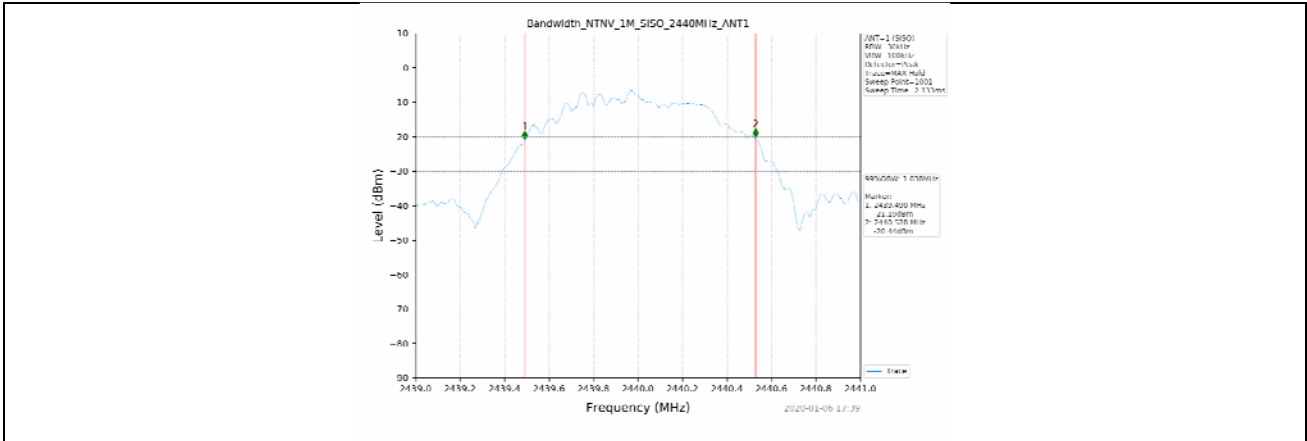

1M_2480MHz_SISO_ANT1

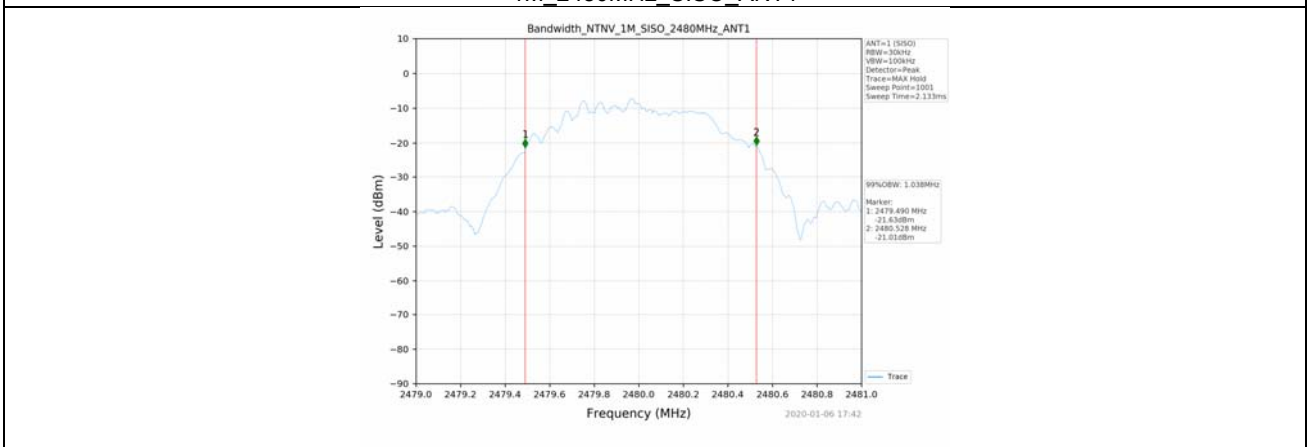


3. Maximum Conducted Output Power

3.1 Test Result


Test Mode	Frequency (MHz)	Tx Type	Measured Peak Output Power (dBm)	Limits (dBm)	Verdict
			Ant 1		
1M	2402	SISO	-2.20	30	PASS
	2440	SISO	-2.19	30	PASS
	2480	SISO	-2.84	30	PASS

3.2 Test Graph


1M_2402MHz_SISO_ANT1

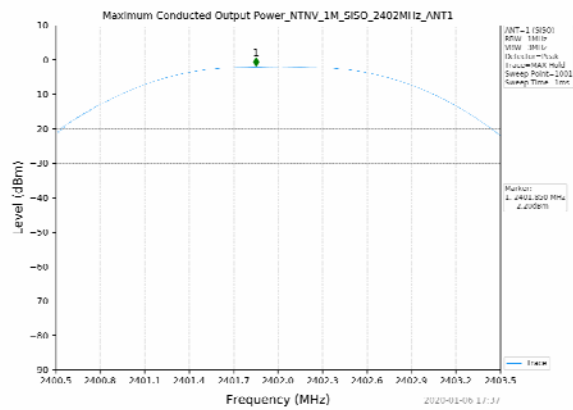

1M_2440MHz_SISO_ANT1

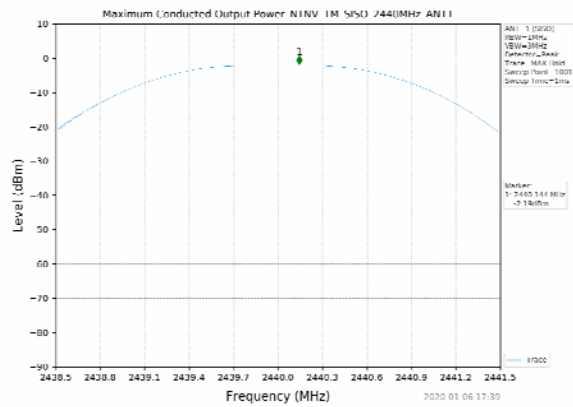

1M_2480MHz_SISO_ANT1

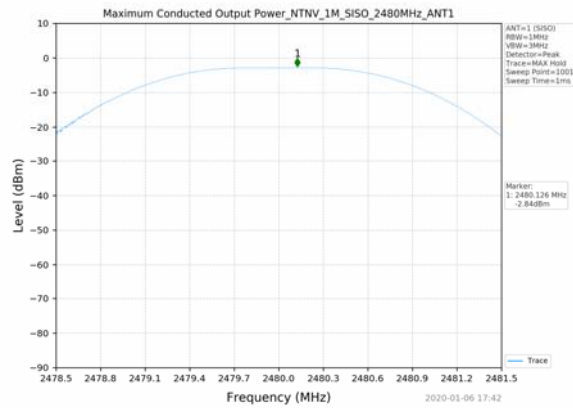


4. Maximum Power Spectral Density (PSD)

4.1 Test Result

Test Mode	Frequency (MHz)	Tx Type	Maximum Power Spectral Density (dBm/3KHz)	Limits (dBm/3kHz)	Verdict

			Ant 1		
1M	2402	SISO	-17.64	≤8	PASS
	2440	SISO	-17.58	≤8	PASS
	2480	SISO	-18.33	≤8	PASS

4.2 Test Graph

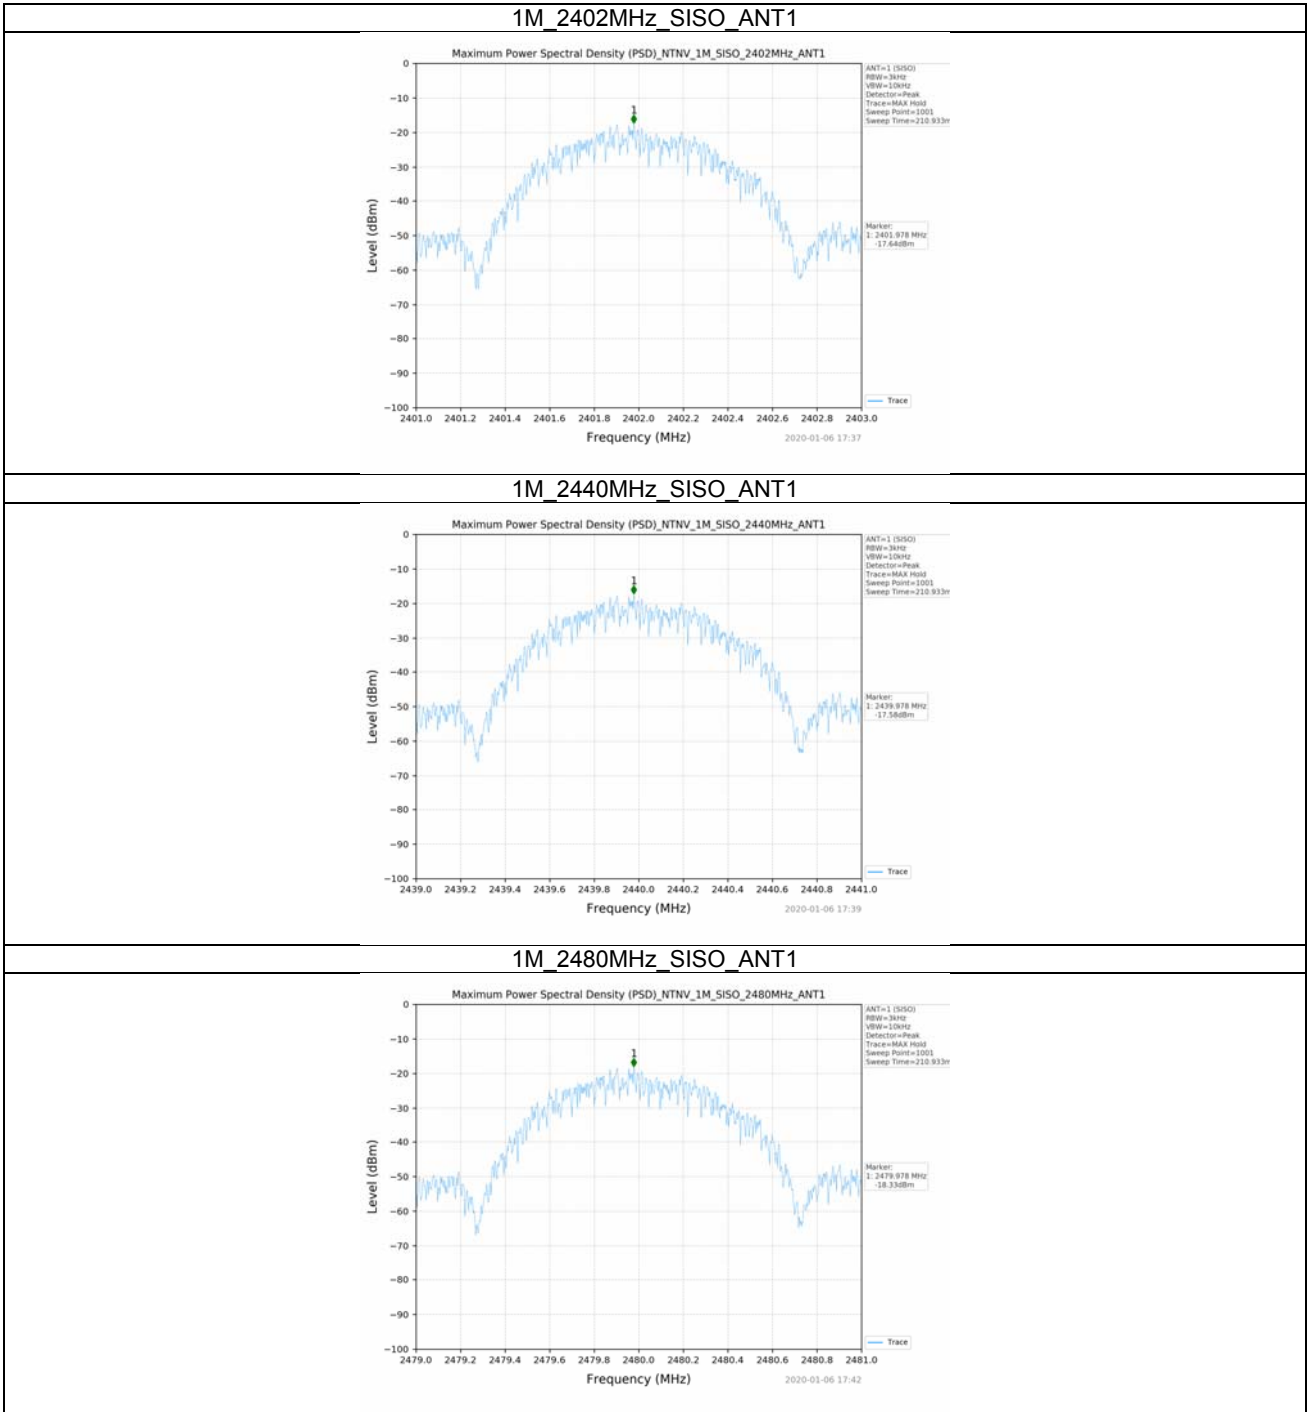



5. Unwanted Emissions in Non-restricted Frequency Bands

5.1 Test Result


Test Mode	Frequency (MHz)	TX Type	ANT No.	Spurious Conducted Emission (dBm)	Limits (dBm)	Verdict
1M	2402	SISO	1	Refer to test graph	-23.20	PASS
	2440	SISO	1	Refer to test graph	-23.20	PASS
	2480	SISO	1	Refer to test graph	-23.20	PASS

5.2 Test Graph

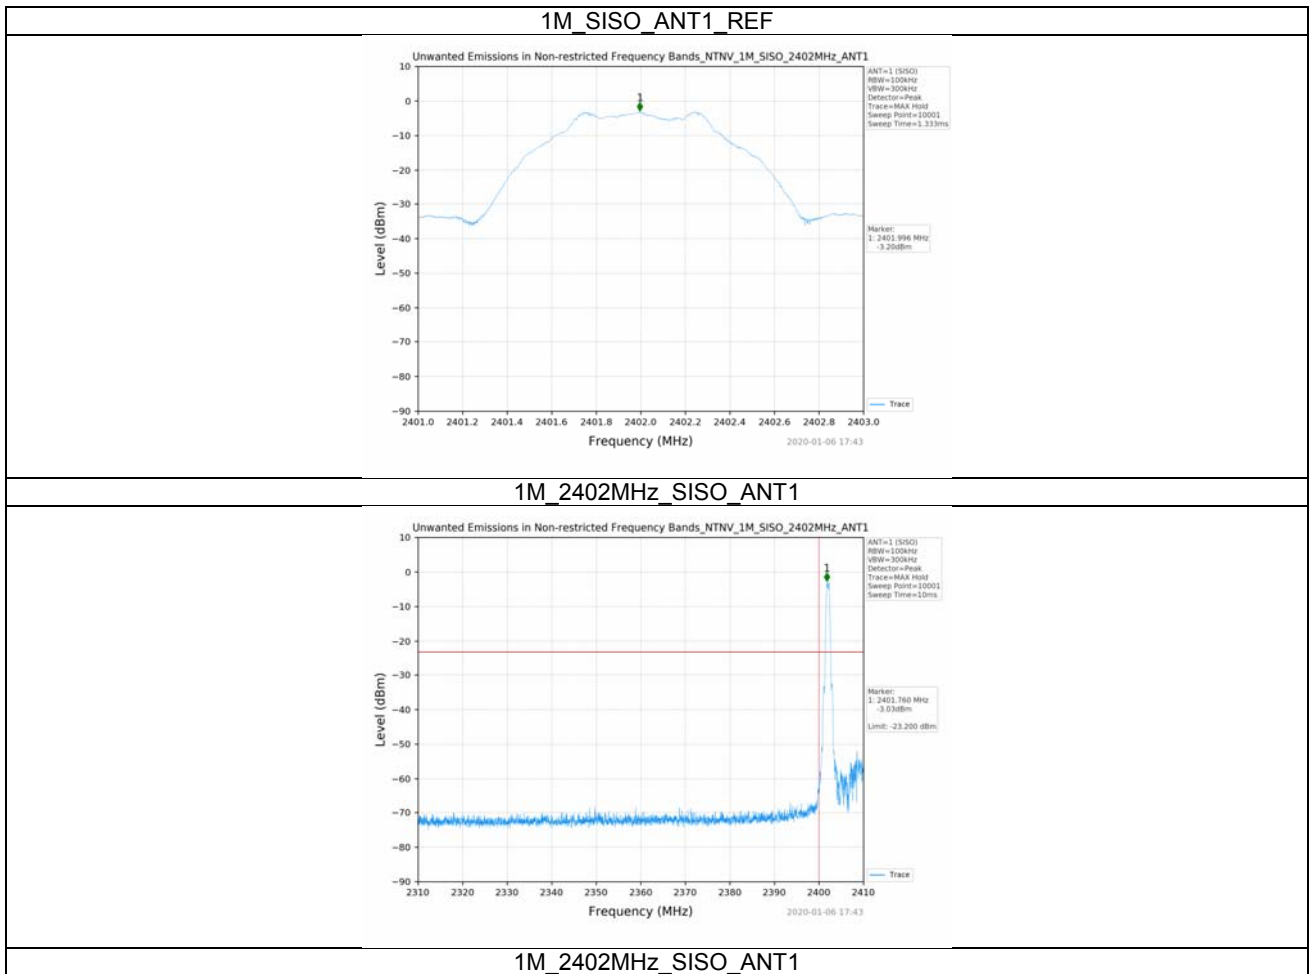


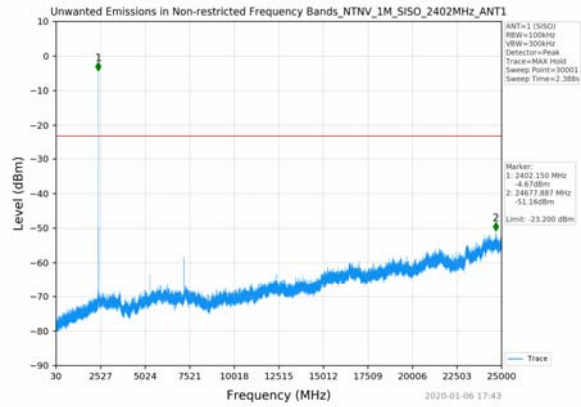

1M 2440MHz SISO ANT1

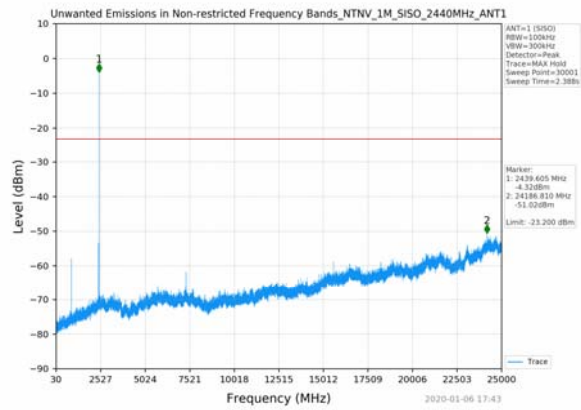

1M 2480MHz SISO ANT1

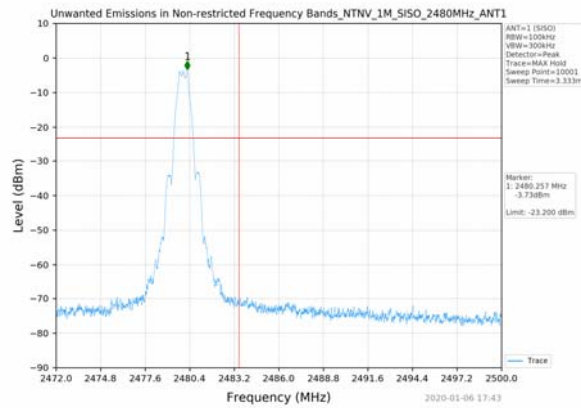

1M 2480MHz SISO ANT1

