


Detector mode: Average

Polarity: Vertical

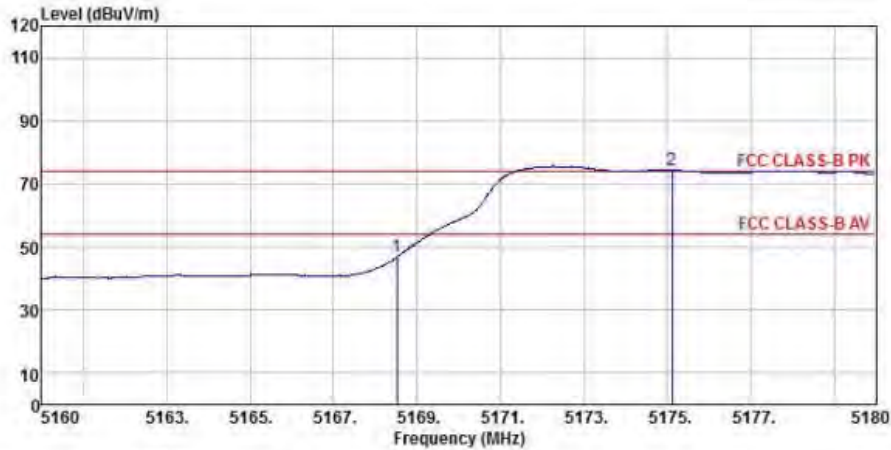


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5168.52	40.40	32.01	10.64	36.28	46.77	74.00	-27.23 Peak
2	pp	5175.12	67.94	32.01	10.64	36.28	74.31	74.00 0.31 Peak

802.11n20 (Ch48)

Detector mode: Peak

Polarity: Horizontal

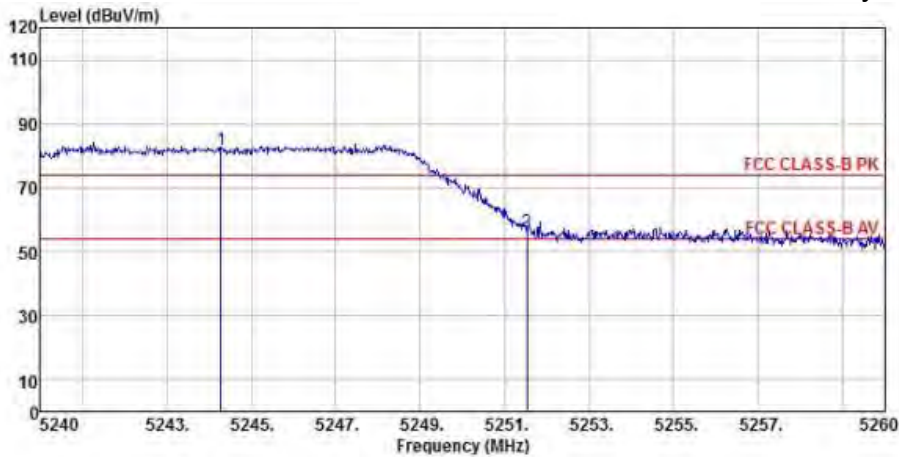


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp	5244.28	75.89	31.75	10.79	36.33	82.10	74.00 8.10 Peak
2		5251.54	49.87	31.75	10.79	36.33	56.08	74.00 -17.92 Peak

Detector mode: Average

Polarity: Horizontal

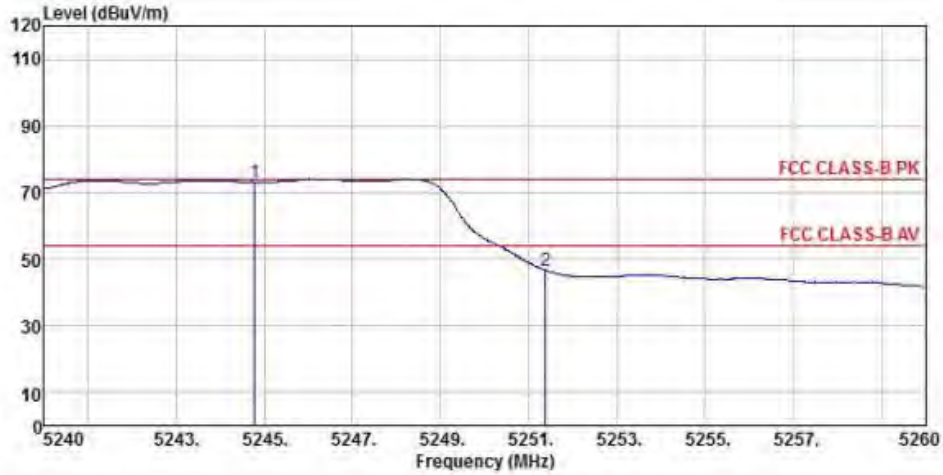


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.78	66.79	31.75	10.79	36.33	73.00	74.00	-1.00 Peak
2 5251.38	40.45	31.75	10.79	36.33	46.66	74.00	-27.34 Peak

Detector mode: Peak

Polarity: Vertical

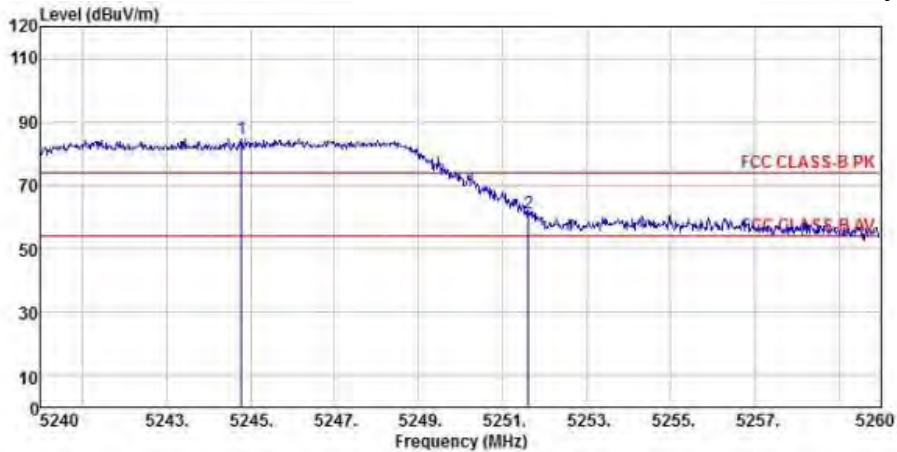


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.78	78.48	31.75	10.79	36.33	84.69	74.00	10.69 Peak
2 5251.62	55.04	31.73	10.79	36.34	61.22	74.00	-12.78 Peak

Detector mode: Average

Polarity: Vertical

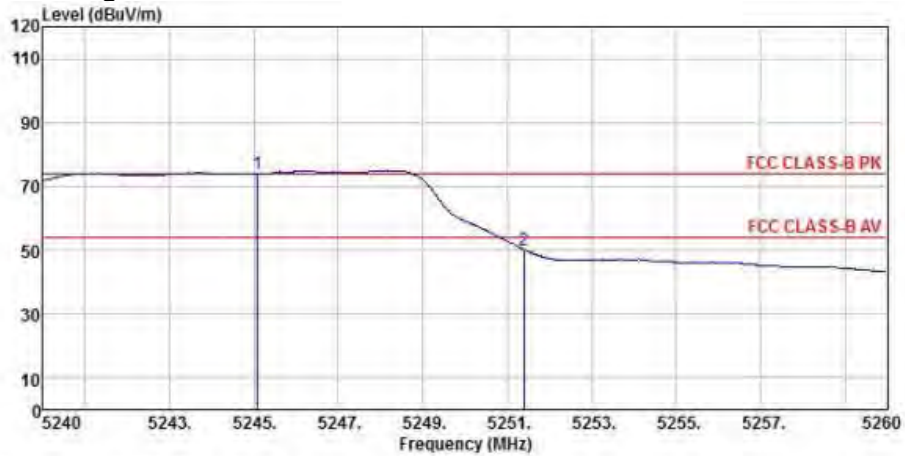

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5245.08	67.66	31.75	10.79	36.33	73.87	74.00	-0.13 Peak
2 5251.40	43.93	31.75	10.79	36.33	50.14	74.00	-23.86 Peak

802.11n20 (Ch48)(mimo)

Detector mode: Peak

Polarity: Horizontal

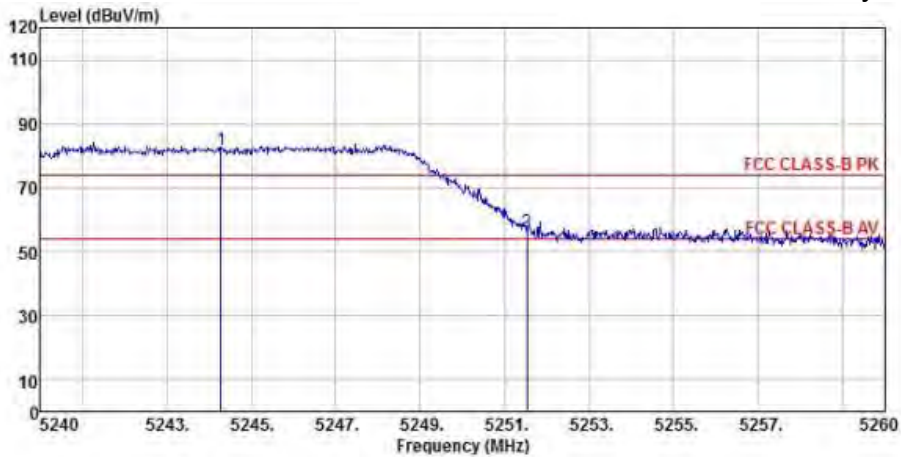


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.28	75.89	31.75	10.79	36.33	82.10	74.00	8.10 Peak
2 5251.54	49.87	31.75	10.79	36.33	56.08	74.00	-17.92 Peak

Detector mode: Average

Polarity: Horizontal

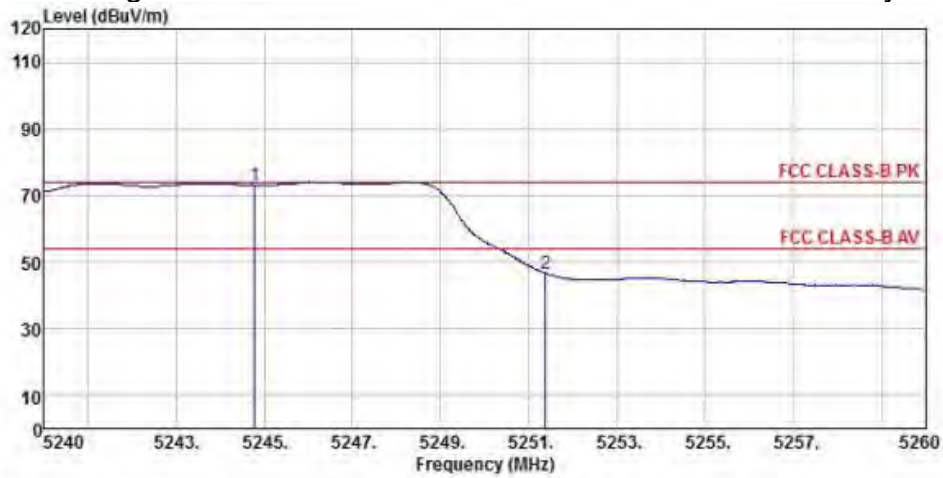


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.78	66.79	31.75	10.79	36.33	73.00	74.00	-1.00 Peak
2 5251.38	40.45	31.75	10.79	36.33	46.66	74.00	-27.34 Peak

Detector mode: Peak

Polarity: Vertical

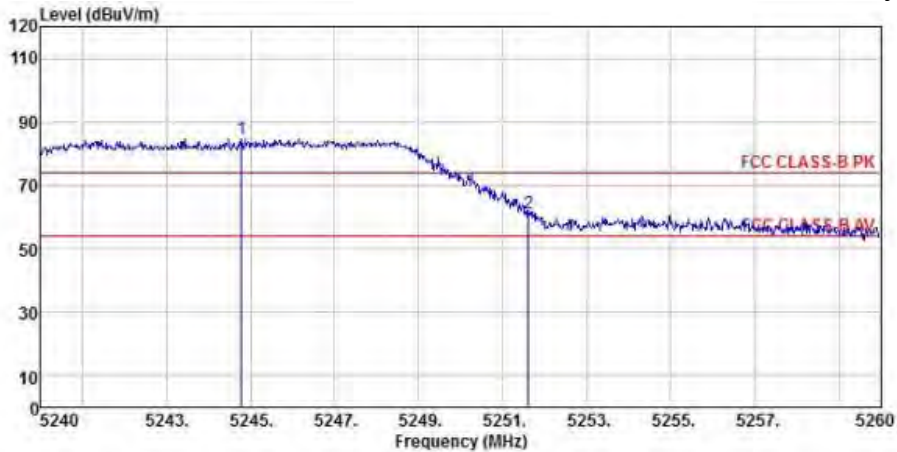


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.78	78.48	31.75	10.79	36.33	84.69	74.00	10.69 Peak
2 5251.62	55.04	31.73	10.79	36.34	61.22	74.00	-12.78 Peak

Detector mode: Average

Polarity: Vertical

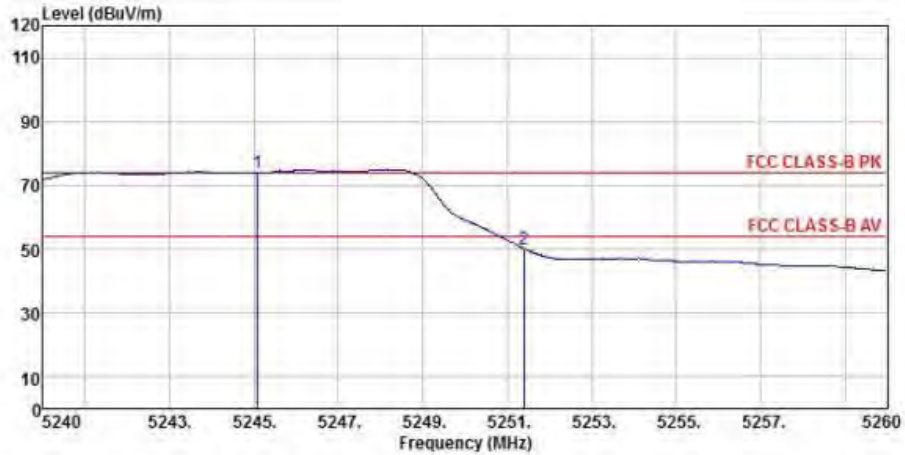


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5245.08	67.66	31.75	10.79	36.33	73.87	74.00	-0.13 Peak
2 5251.40	43.93	31.75	10.79	36.33	50.14	74.00	-23.86 Peak

802.11n40 (Ch38)

Detector mode: Peak

Polarity: Horizontal

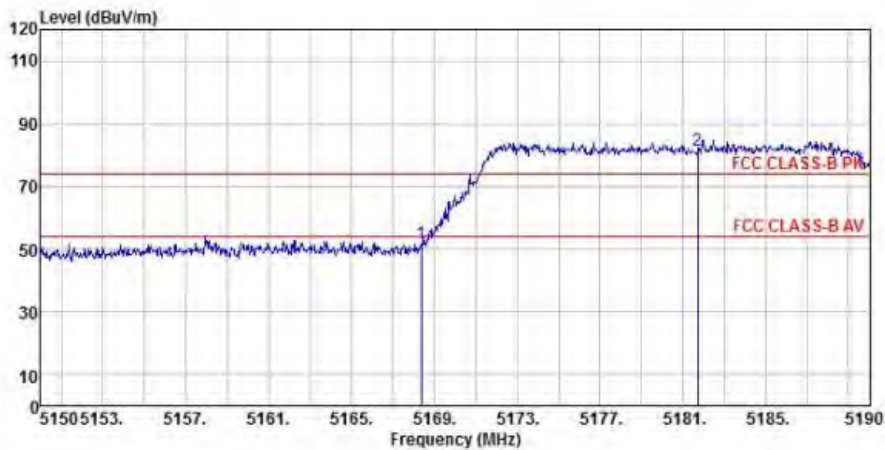


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5168.36	45.41	32.01	10.64	36.28	51.78	74.00	-22.22 Peak
2 pp 5181.72	75.27	31.96	10.64	36.29	81.58	74.00	7.58 Peak

Detector mode: Average

Polarity: Horizontal

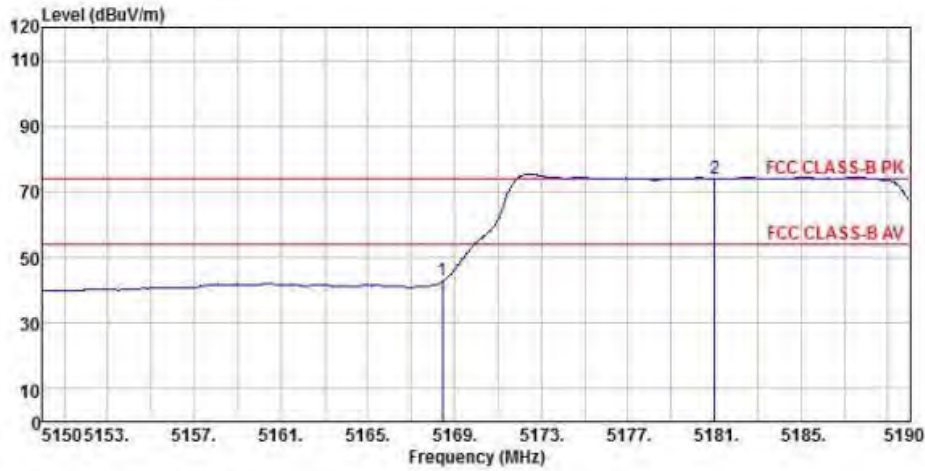


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5168.44	36.37	32.01	10.64	36.28	42.74	74.00	-31.26 Peak
2 pp 5181.00	67.80	31.96	10.64	36.29	74.11	74.00	0.11 Peak

Detector mode: Peak

Polarity: Vertical

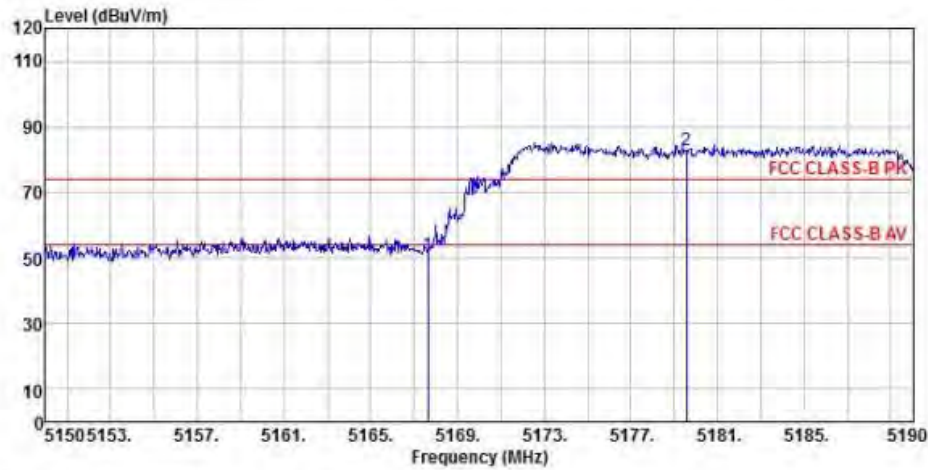


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5167.64	44.73	32.01	10.64	36.28	51.10	74.00	-22.90 Peak
2 pp 5179.56	76.35	32.01	10.64	36.29	82.71	74.00	8.71 Peak

Detector mode: Average

Polarity: Vertical

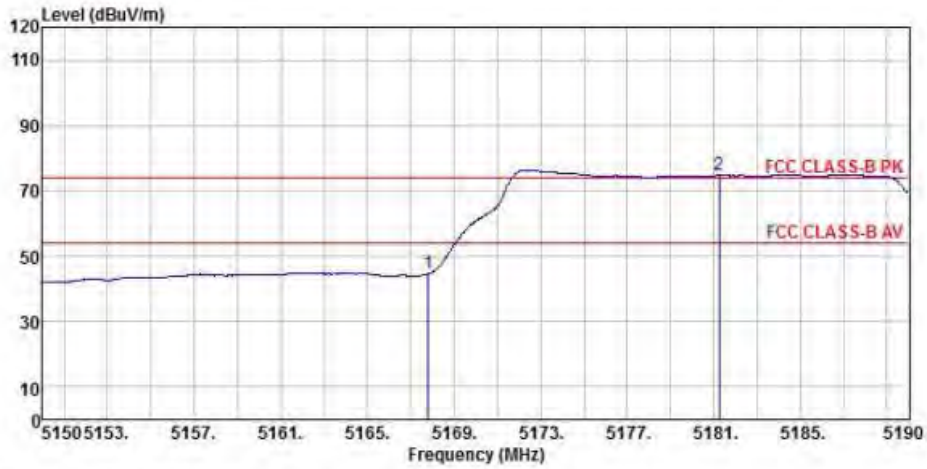


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.80	38.13	32.01	10.64	36.28	44.50	74.00	-29.50 Peak
2	5181.24	68.32	31.96	10.64	36.29	74.63	74.00	0.63 Peak

802.11n40 (Ch38)(mimo)

Detector mode: Peak

Polarity: Horizontal

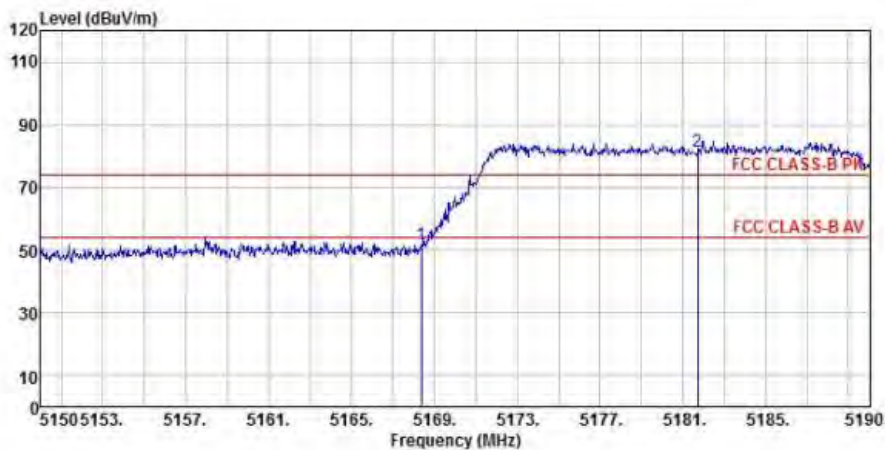


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5168.36	45.41	32.01	10.64	36.28	51.78	74.00	-22.22 Peak
2	5181.72	75.27	31.96	10.64	36.29	81.58	74.00	7.58 Peak

Detector mode: Average

Polarity: Horizontal

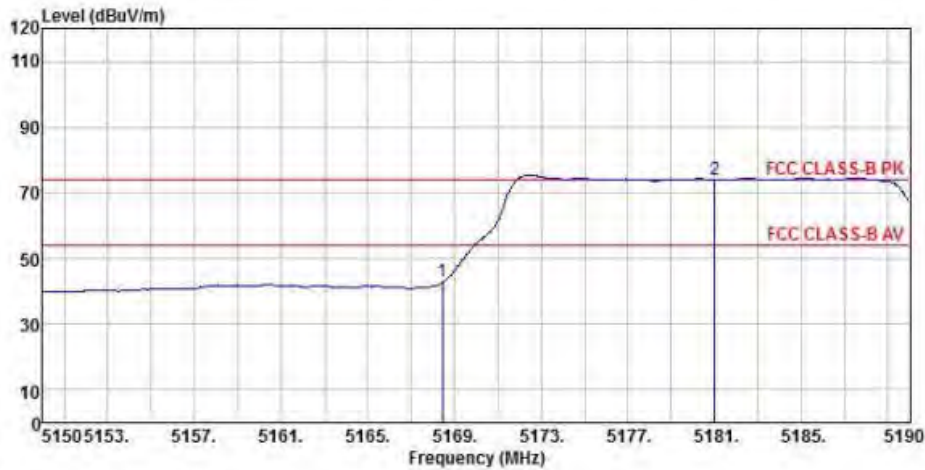


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5168.44	36.37	32.01	10.64	36.28	42.74	74.00	-31.26 Peak
2 pp 5181.00	67.80	31.96	10.64	36.29	74.11	74.00	0.11 Peak

Detector mode: Peak

Polarity: Vertical

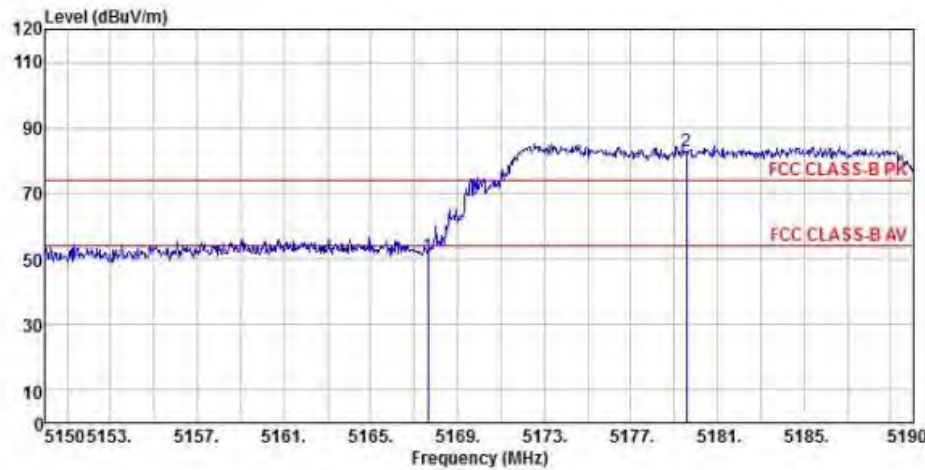


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5167.64	44.73	32.01	10.64	36.28	51.10	74.00	-22.90 Peak
2 pp 5179.56	76.35	32.01	10.64	36.29	82.71	74.00	8.71 Peak

Detector mode: Average

Polarity: Vertical

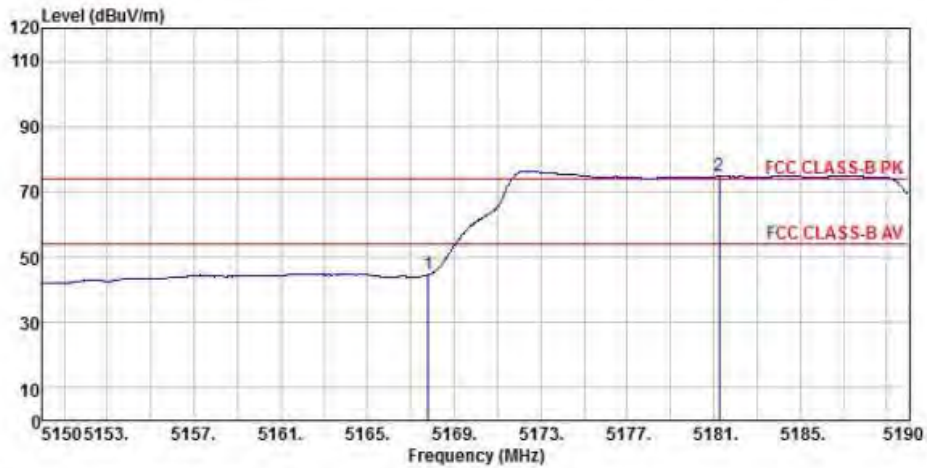


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.80	38.13	32.01	10.64	36.28	44.50	74.00	-29.50 Peak
2	5181.24	68.32	31.96	10.64	36.29	74.63	74.00	0.63 Peak

802.11n40 (Ch46)

Detector mode: Peak

Polarity: Horizontal

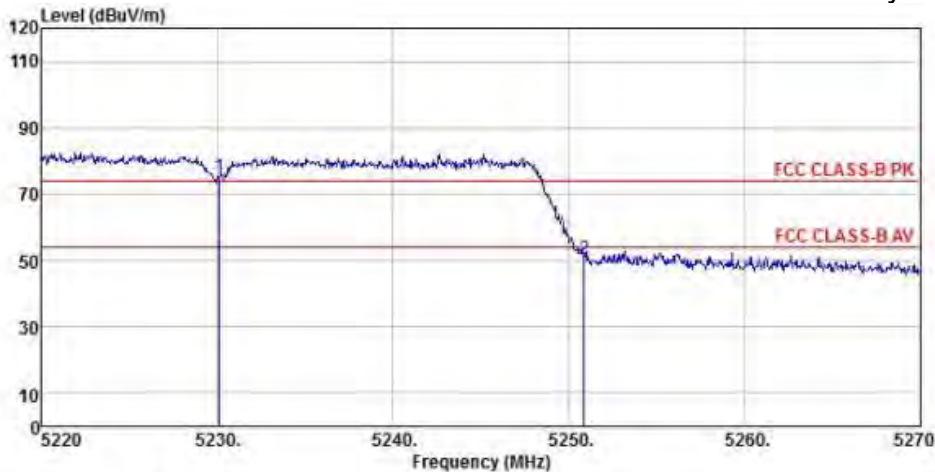


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5230.10	69.06	31.83	10.74	36.32	75.31	74.00	1.31 Peak
2	5250.90	44.22	31.75	10.79	36.33	50.43	74.00	-23.57 Peak

Detector mode: Average

Polarity: Horizontal

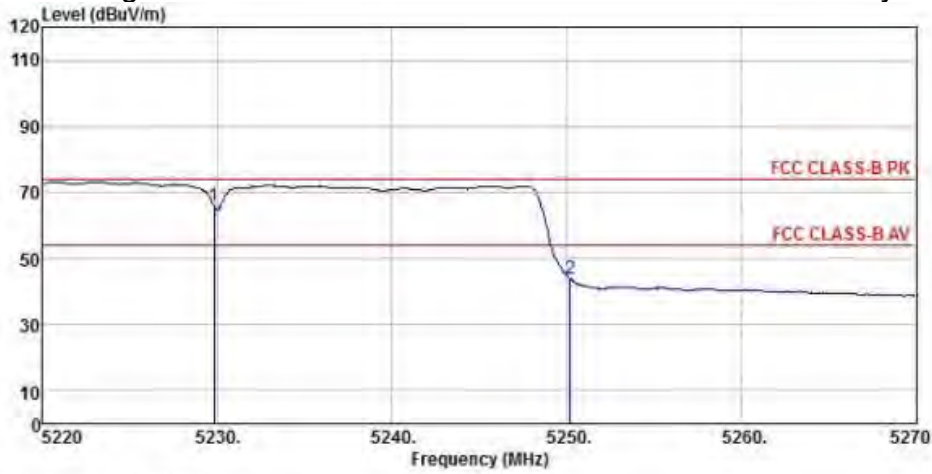

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Line	Line	Line	Line	Line
Limit	Remark	Limit	Remark	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5229.80	59.73	31.83	10.74	36.32	65.98	74.00	-8.02	Peak
2		5250.20	37.69	31.75	10.79	36.33	43.90	74.00	-30.10	Peak

Detector mode: Peak

Polarity: Vertical

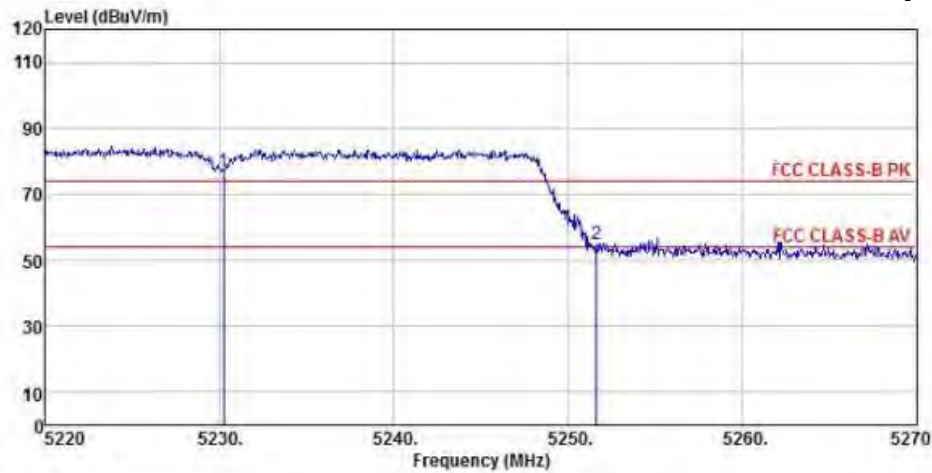

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Line	Line	Line	Line	Line
Limit	Remark	Limit	Remark	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5230.25	70.95	31.83	10.74	36.32	77.20	74.00	3.20	Peak
2		5251.65	48.72	31.73	10.79	36.34	54.90	74.00	-19.10	Peak

Detector mode: Average

Polarity: Vertical

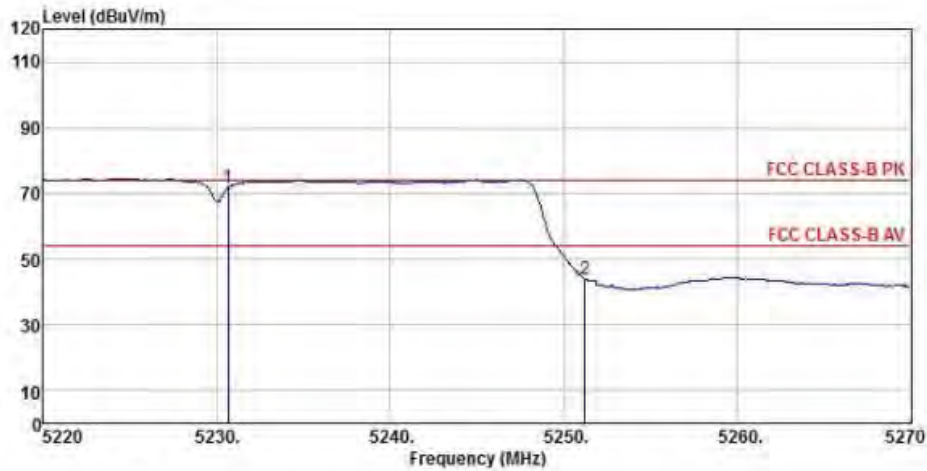

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5230.65	65.52	31.83	10.74	36.32	71.77	74.00	-2.23 Peak
2 5251.20	37.81	31.75	10.79	36.33	44.02	74.00	-29.98 Peak

802.11n40 (Ch46)(mimo)

Detector mode: Peak

Polarity: Horizontal

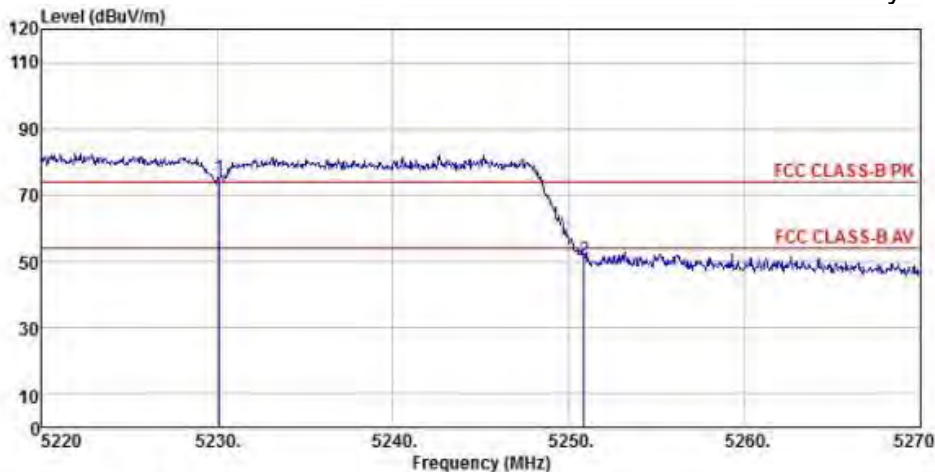


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5230.10	69.06	31.83	10.74	36.32	75.31	74.00	1.31 Peak
2 5250.90	44.22	31.75	10.79	36.33	50.43	74.00	-23.57 Peak

Detector mode: Average

Polarity: Horizontal

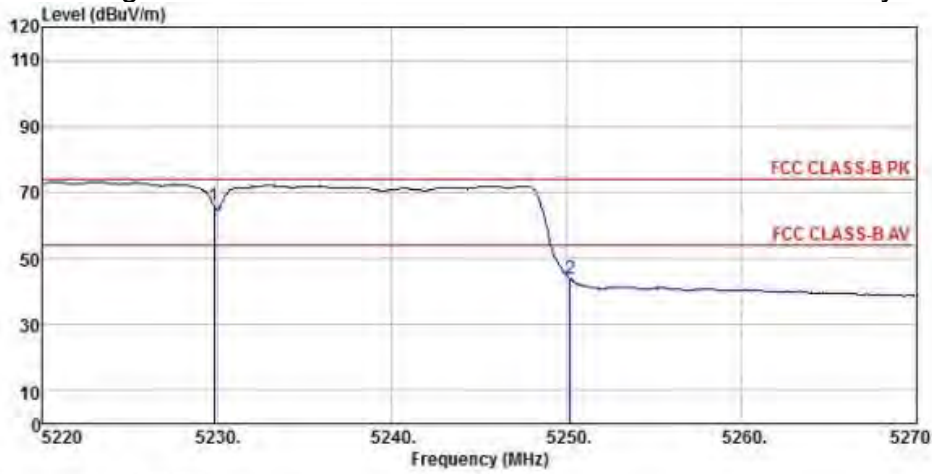


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Line	Line	Line	Line	Line
Limit	Remark				

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5229.80	59.73	31.83	10.74	36.32	65.98	74.00	-8.02 Peak
2	5250.20	37.69	31.75	10.79	36.33	43.90	74.00	-30.10 Peak

Detector mode: Peak

Polarity: Vertical

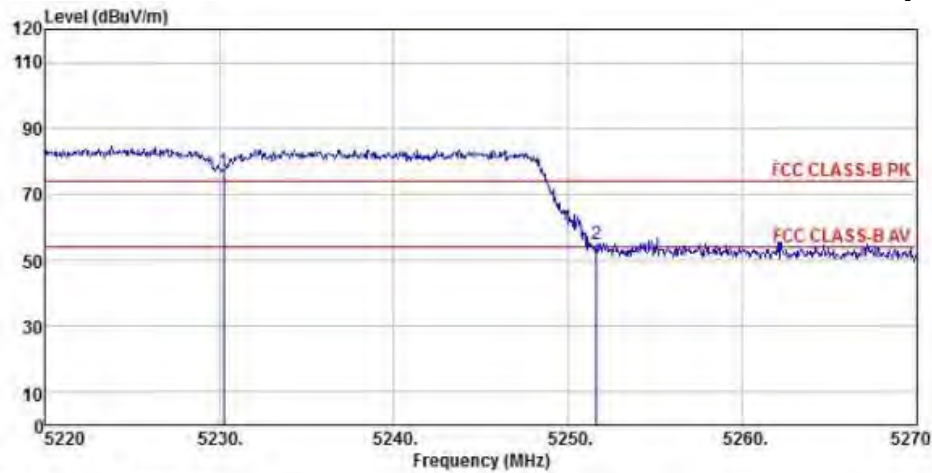


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Line	Line	Line	Line	Line
Limit	Remark				

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5230.25	70.95	31.83	10.74	36.32	77.20	74.00	3.20 Peak
2	5251.65	48.72	31.73	10.79	36.34	54.90	74.00	-19.10 Peak

Detector mode: Average

Polarity: Vertical

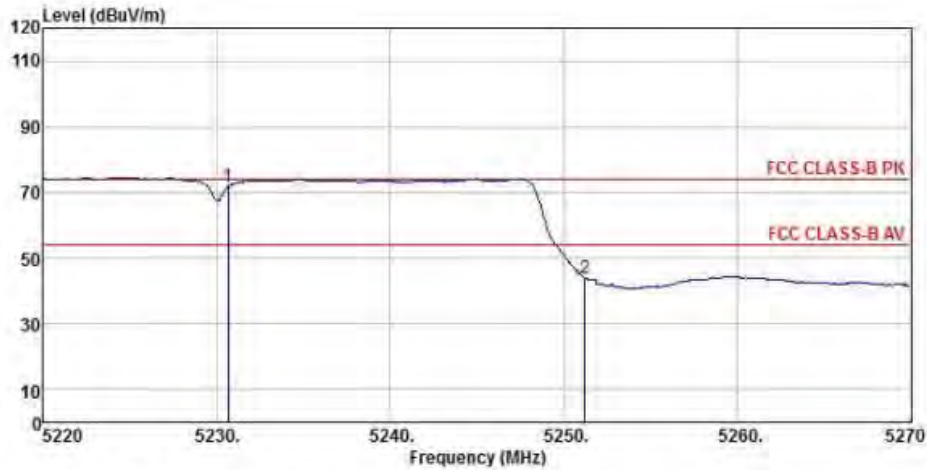

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
1	5230.65	65.52	31.83	10.74	36.32	71.77	74.00	-2.23 Peak
2	5251.20	37.81	31.75	10.79	36.33	44.02	74.00	-29.98 Peak

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----


1	pp	5230.65	65.52	31.83	10.74	36.32	71.77	74.00	-2.23	Peak
2		5251.20	37.81	31.75	10.79	36.33	44.02	74.00	-29.98	Peak

WIFI 5G(5725MHz-5850MHz)

802.11a (Ch149)

Detector mode: Peak

Polarity: Horizontal

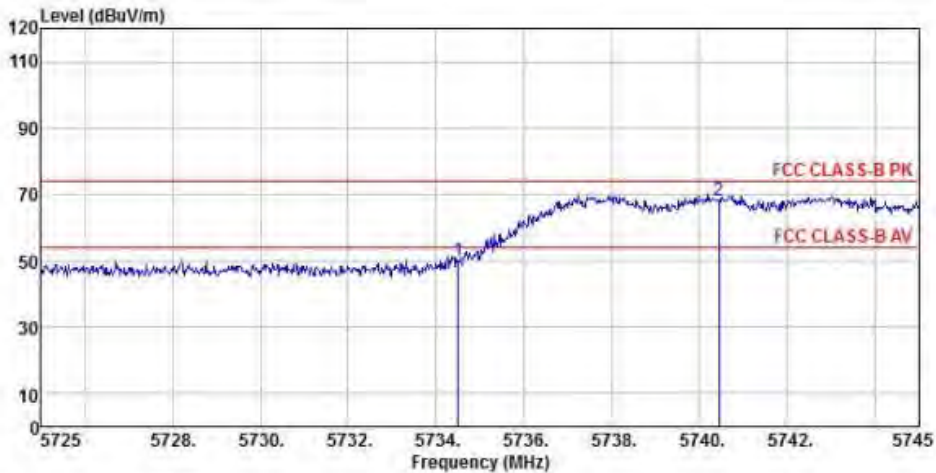

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
1	5734.50	43.53	32.34	10.99	36.65	50.21	74.00	-23.79 Peak	
2	pp	5740.46	61.59	32.34	10.88	36.65	68.16	74.00	-5.84 Peak

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1		5734.50	43.53	32.34	10.99	36.65	50.21	74.00	-23.79	Peak
2	pp	5740.46	61.59	32.34	10.88	36.65	68.16	74.00	-5.84	Peak

Detector mode: Average

Polarity: Horizontal

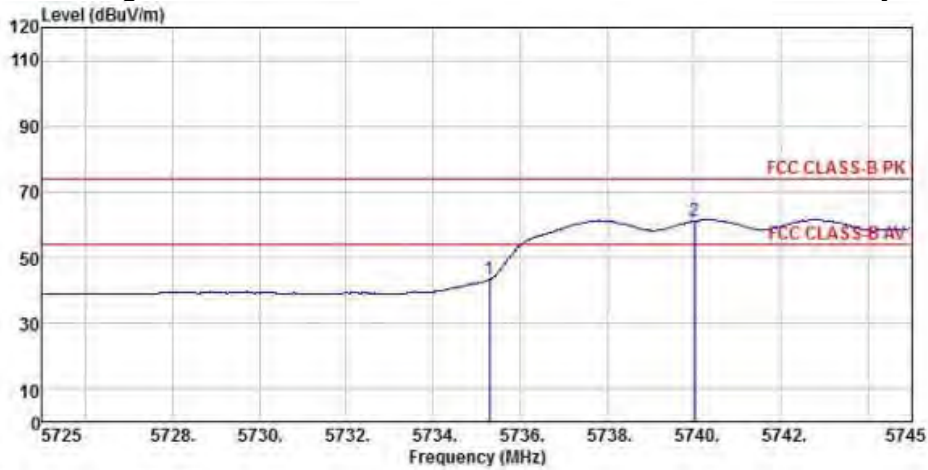


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5735.30	36.82	32.34	10.88	36.65	43.39	74.00	-30.61 Peak
2	pp	5740.02	54.54	32.34	10.88	36.65	61.11	74.00 -12.89 Peak

Detector mode: Peak

Polarity: Vertical

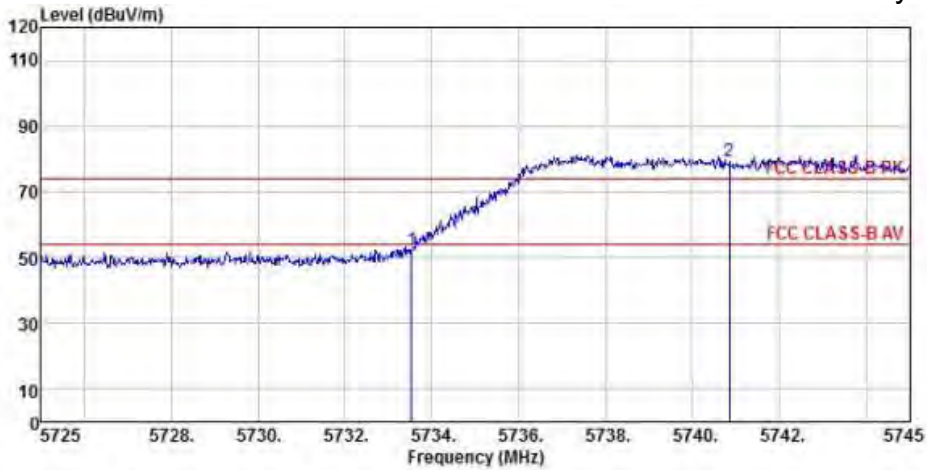


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5733.54	45.39	32.34	10.99	36.65	52.07	74.00	-21.93 Peak
2	pp	5740.86	72.47	32.34	10.88	36.65	79.04	74.00 5.04 Peak

Detector mode: Average

Polarity: Vertical

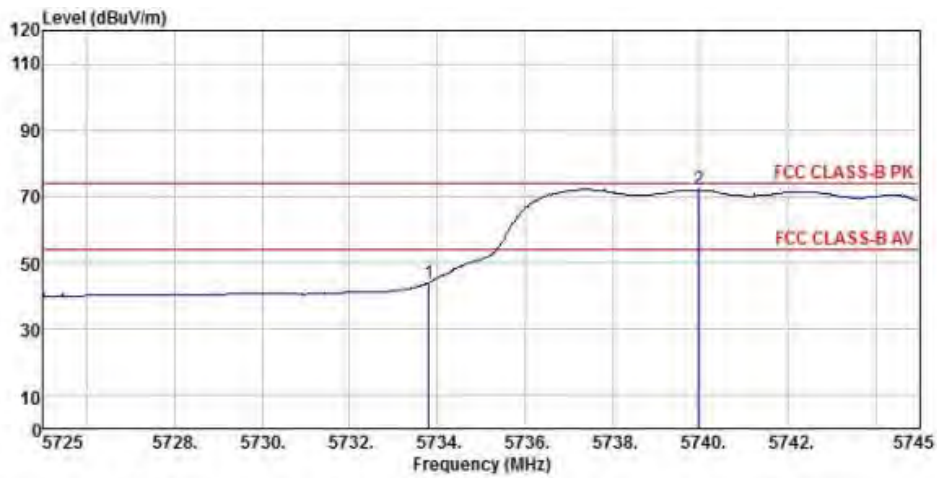

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.80	37.33	32.34	10.99	36.65	44.01	74.00	-29.99 Peak
2 pp 5739.96	65.45	32.34	10.88	36.65	72.02	74.00	-1.98 Peak

802.11a (Ch165)

Detector mode: Peak

Polarity: Horizontal

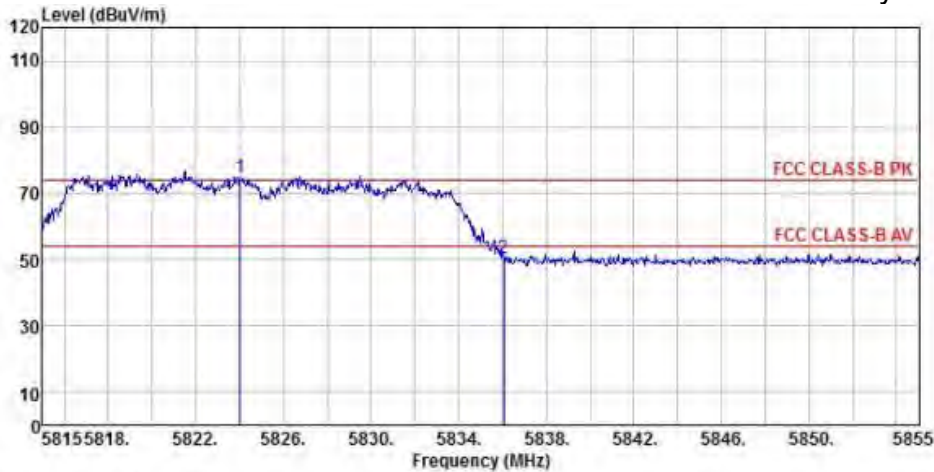


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.04	67.10	32.65	11.65	36.70	74.70	74.00	0.70 Peak
2 5836.04	42.87	32.71	11.65	36.71	50.52	74.00	-23.48 Peak

Detector mode: Average

Polarity: Horizontal

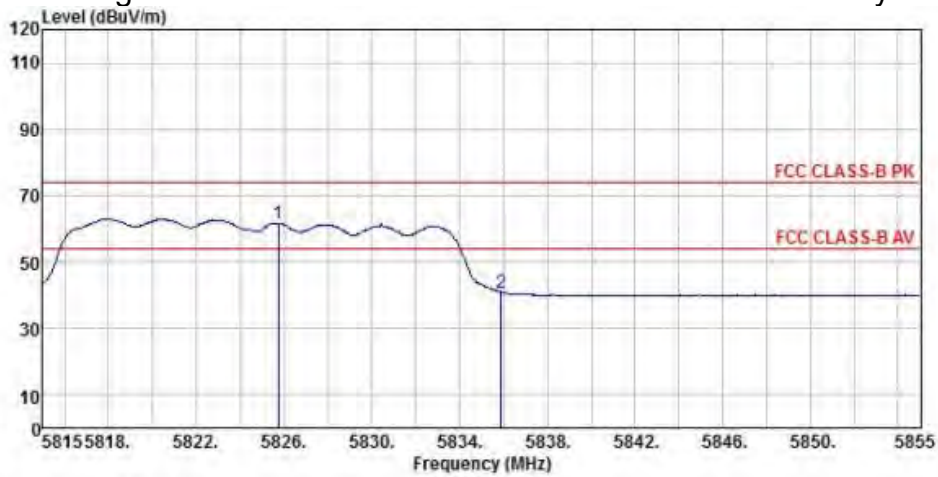


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5825.72	54.04	32.65	11.65	36.70	61.64	74.00	-12.36	Peak
2		5835.88	33.29	32.71	11.65	36.71	40.94	74.00	-33.06	Peak

Detector mode: Peak

Polarity: Vertical

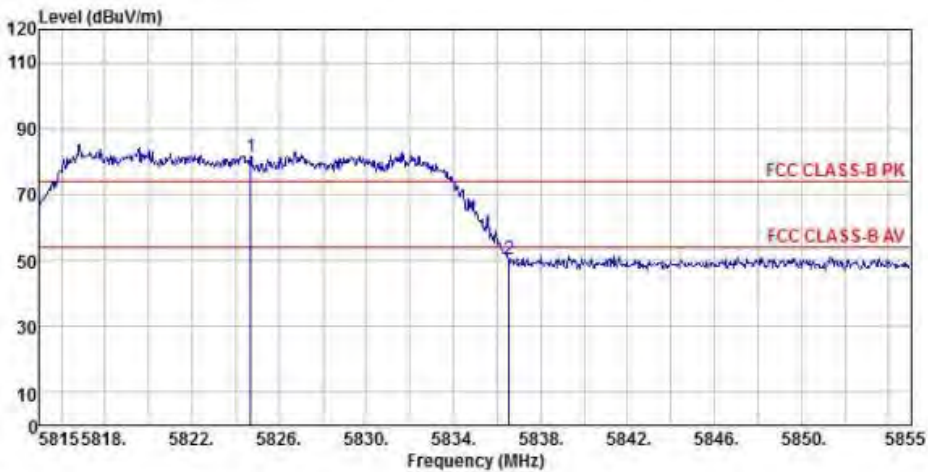


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5824.68	73.67	32.65	11.65	36.70	81.27	74.00	7.27	Peak
2		5836.56	42.64	32.71	11.72	36.71	50.36	74.00	-23.64	Peak

Detector mode: Average

Polarity: Vertical

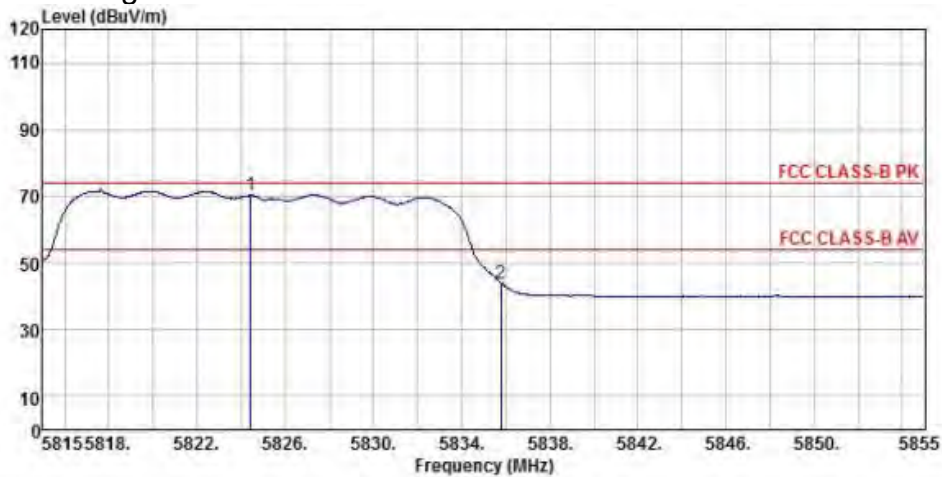

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.44	62.62	32.65	11.65	36.70	70.22	74.00	-3.78 Peak
2 5835.80	36.28	32.71	11.65	36.71	43.93	74.00	-30.07 Peak

802.11n20 (Ch149)

Detector mode: Peak

Polarity: Horizontal

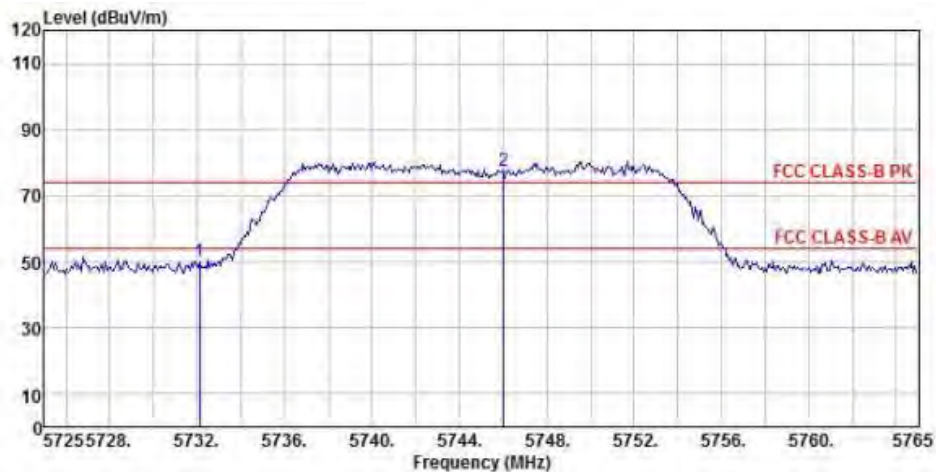


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5732.11	43.35	32.34	10.99	36.65	50.03	74.00	-23.97 Peak
2 pp 5746.02	71.03	32.34	10.88	36.66	77.59	74.00	3.59 Peak

Detector mode: Average

Polarity: Horizontal

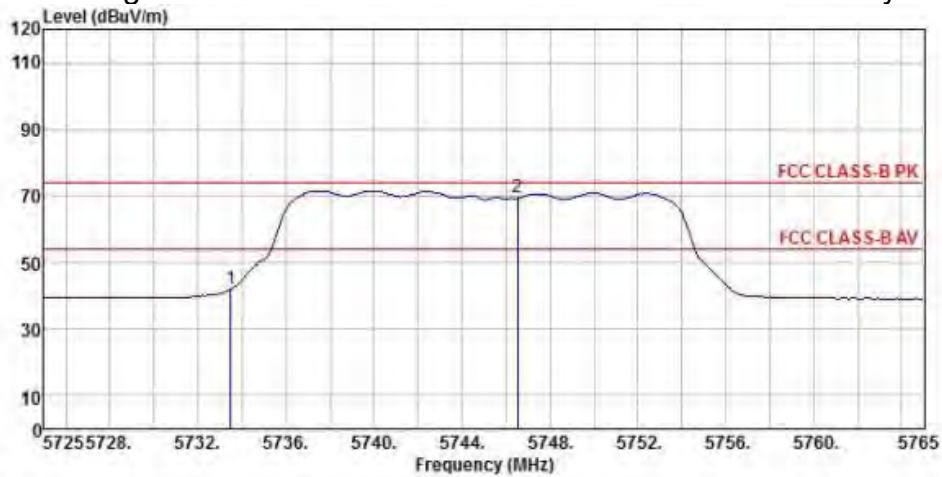


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.48	35.29	32.34	10.99	36.65	41.97	74.00	-32.03 Peak
2 pp 5746.54	62.79	32.34	10.88	36.66	69.35	74.00	-4.65 Peak

Detector mode: Peak

Polarity: Vertical

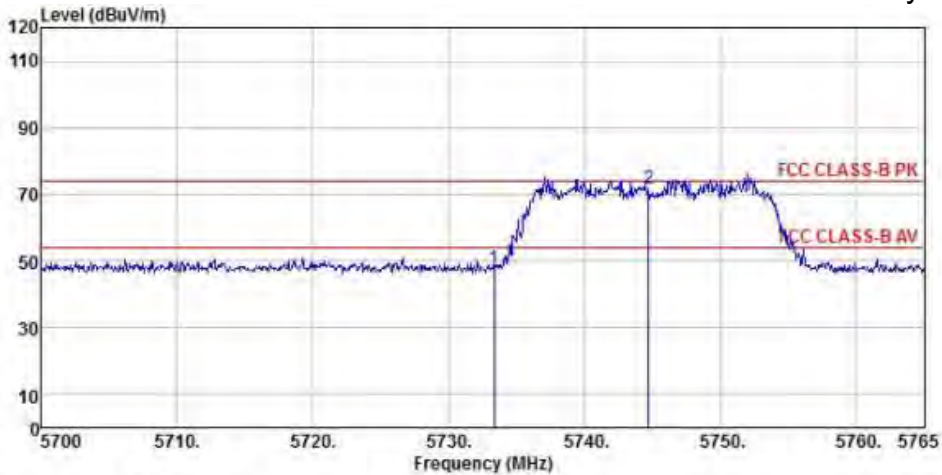


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.35	40.94	32.34	10.99	36.65	47.62	74.00	-26.38 Peak
2 pp 5744.72	64.98	32.34	10.88	36.65	71.55	74.00	-2.45 Peak

Detector mode: Average

Polarity: Vertical

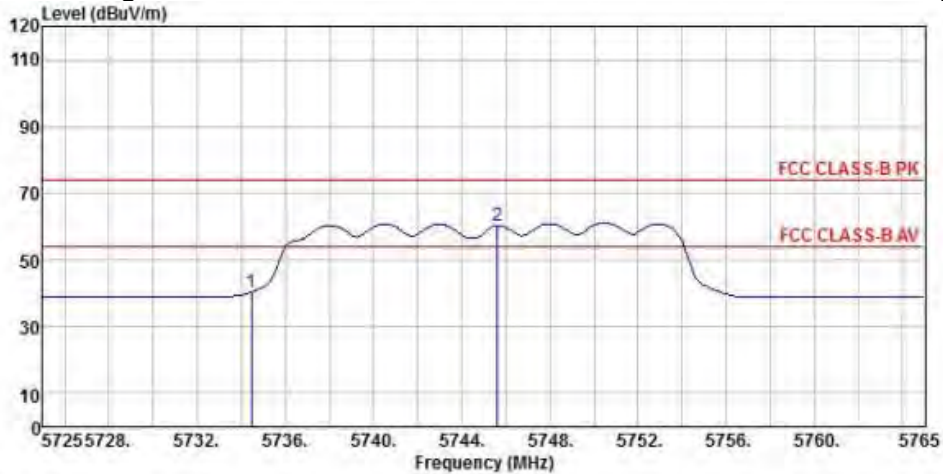


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5734.45	33.68	32.34	10.99	36.65	40.36	74.00	-33.64 Peak
2	5745.63	53.85	32.34	10.88	36.66	60.41	74.00	-13.59 Peak

802.11n20 (Ch165)

Detector mode: Peak

Polarity: Horizontal

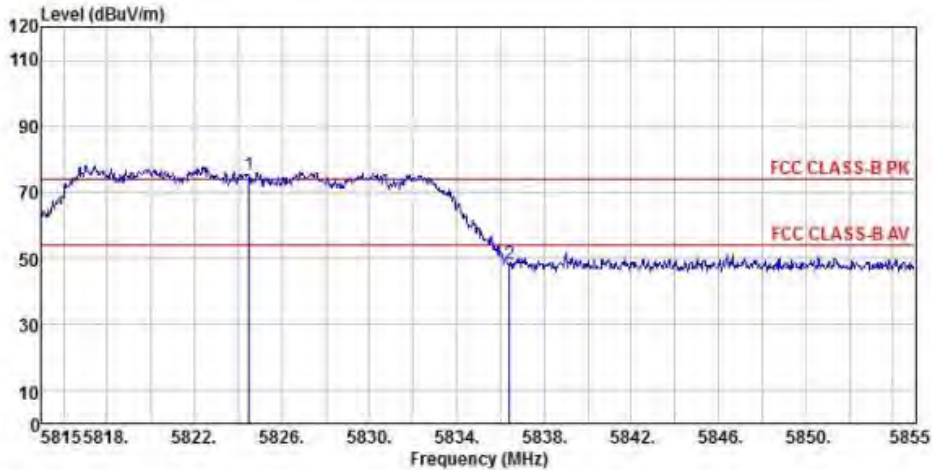


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5824.48	67.50	32.65	11.65	36.70	75.10	74.00	1.10 Peak
2	5836.44	40.48	32.71	11.65	36.71	48.13	74.00	-25.87 Peak

Detector mode: Average

Polarity: Horizontal

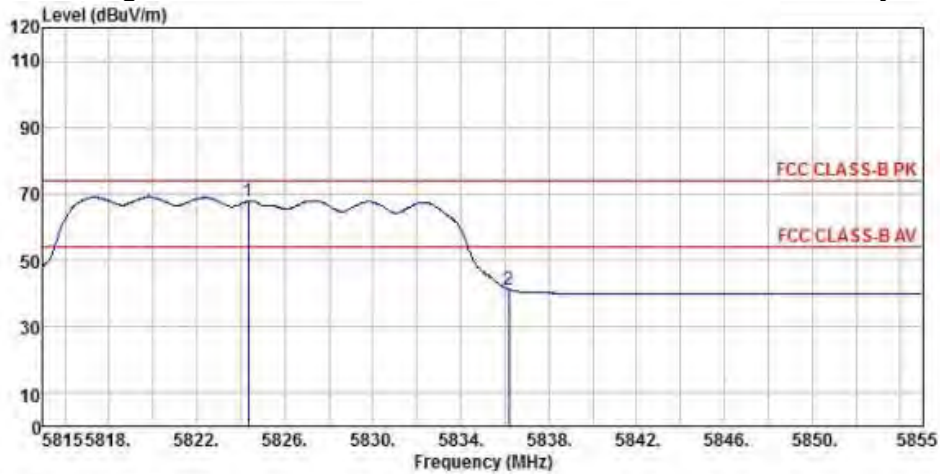

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5824.32	60.09	32.65	11.65	36.70	67.69	74.00	-6.31	Peak
2		5836.20	33.59	32.71	11.65	36.71	41.24	74.00	-32.76	Peak

Detector mode: Peak

Polarity: Vertical

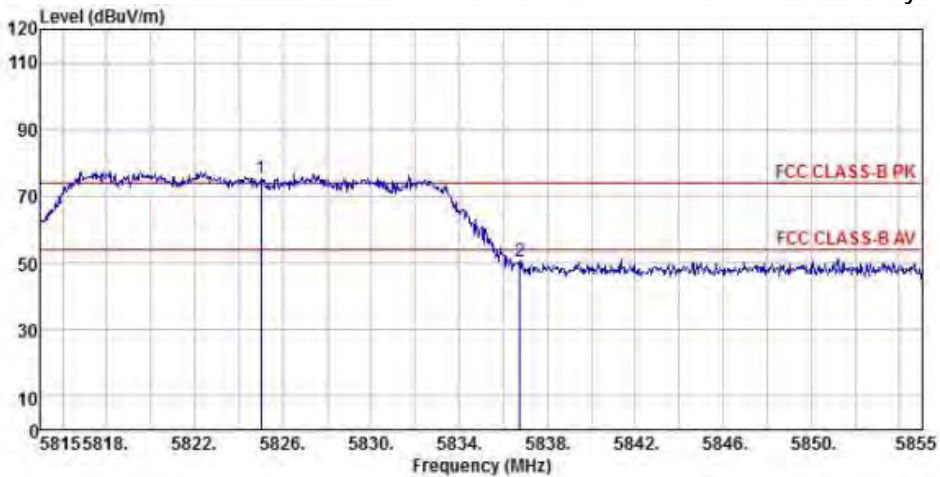

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5825.00	67.82	32.65	11.65	36.70	75.42	74.00	1.42	Peak
2		5836.76	42.62	32.71	11.72	36.71	50.34	74.00	-23.66	Peak

Detector mode: Average

Polarity: Vertical

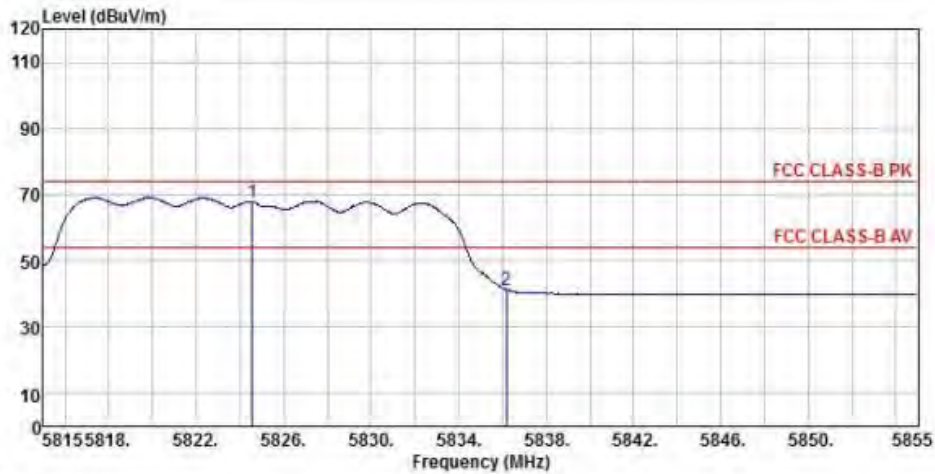

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.56	60.17	32.65	11.65	36.70	67.77	74.00	-6.23 Peak
2 5836.20	33.55	32.71	11.65	36.71	41.20	74.00	-32.80 Peak

802.11n20 (Ch165)(mimo)

Detector mode: Peak

Polarity: Horizontal

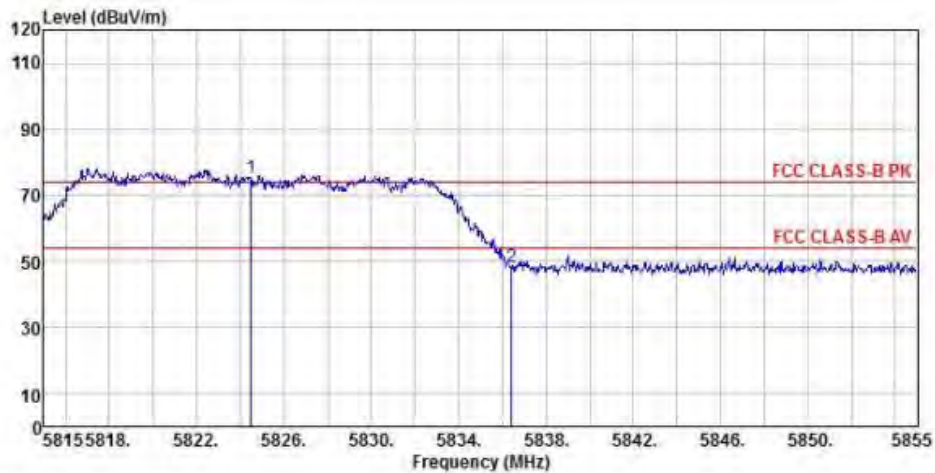


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.48	67.50	32.65	11.65	36.70	75.10	74.00	1.10 Peak
2 5836.44	40.48	32.71	11.65	36.71	48.13	74.00	-25.87 Peak

Detector mode: Average

Polarity: Horizontal

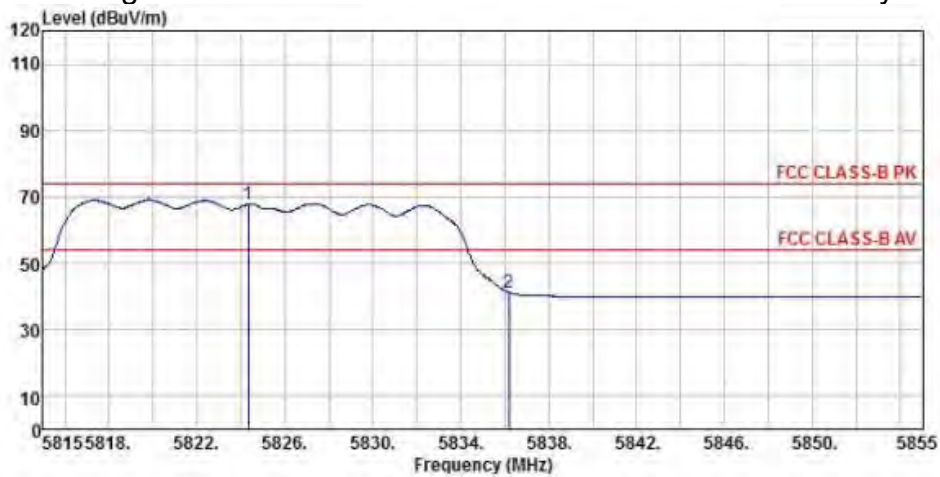


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.32	60.09	32.65	11.65	36.70	67.69	74.00	-6.31 Peak
2 5836.20	33.59	32.71	11.65	36.71	41.24	74.00	-32.76 Peak

Detector mode: Peak

Polarity: Vertical

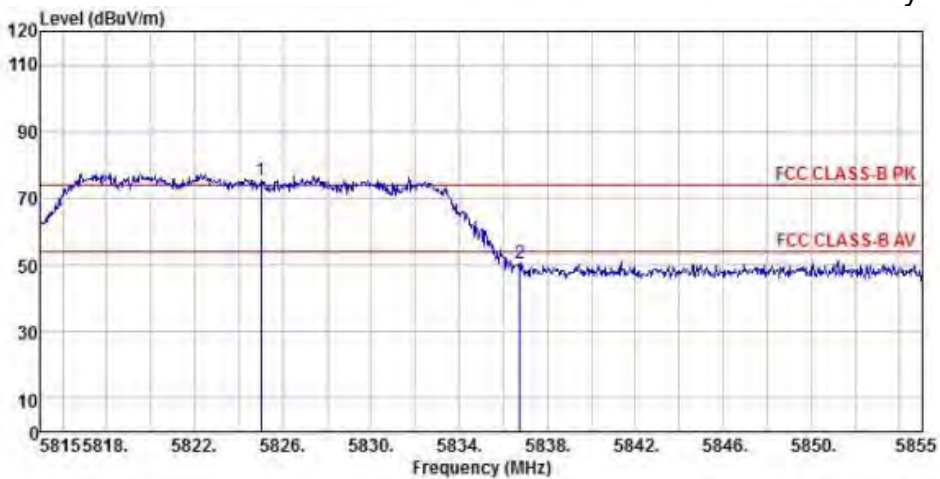


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5825.00	67.82	32.65	11.65	36.70	75.42	74.00	1.42 Peak
2 5836.76	42.62	32.71	11.72	36.71	50.34	74.00	-23.66 Peak

Detector mode: Average

Polarity: Vertical

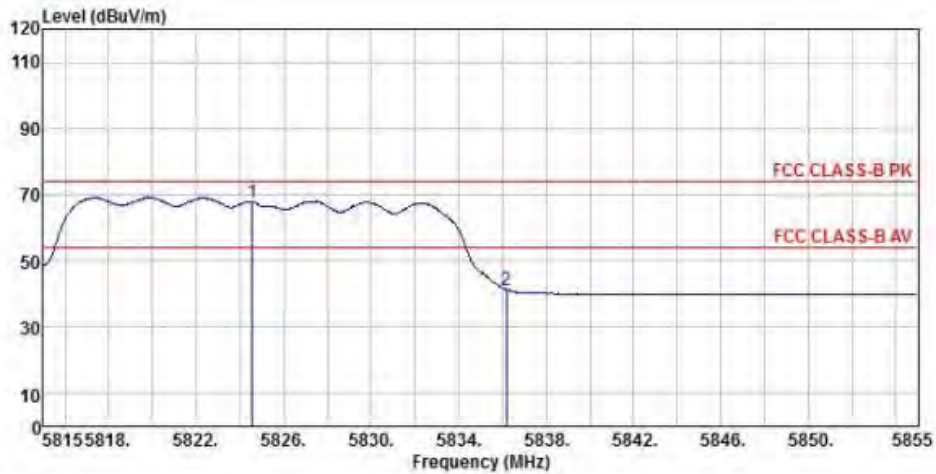

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.56	60.17	32.65	11.65	36.70	67.77	74.00	-6.23 Peak
2 5836.20	33.55	32.71	11.65	36.71	41.20	74.00	-32.80 Peak

802.11n40 (Ch151)

Detector mode: Peak

Polarity: Horizontal

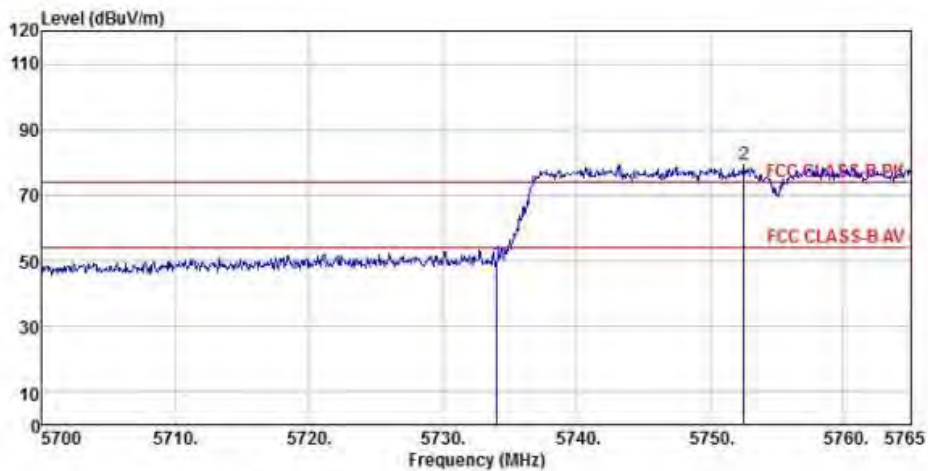


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.06	42.26	32.34	10.99	36.65	48.94	74.00	-25.06 Peak
2 pp 5752.59	72.54	32.40	11.09	36.66	79.37	74.00	5.37 Peak

Detector mode: Average

Polarity: Horizontal

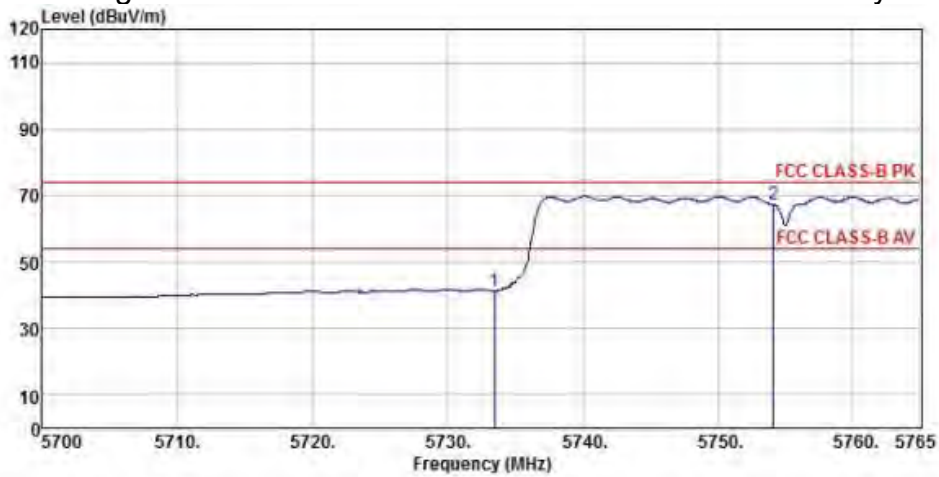


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.48	34.67	32.34	10.99	36.65	41.35	74.00	-32.65 Peak
2 pp 5754.08	60.42	32.40	11.09	36.66	67.25	74.00	-6.75 Peak

Detector mode: Peak

Polarity: Vertical

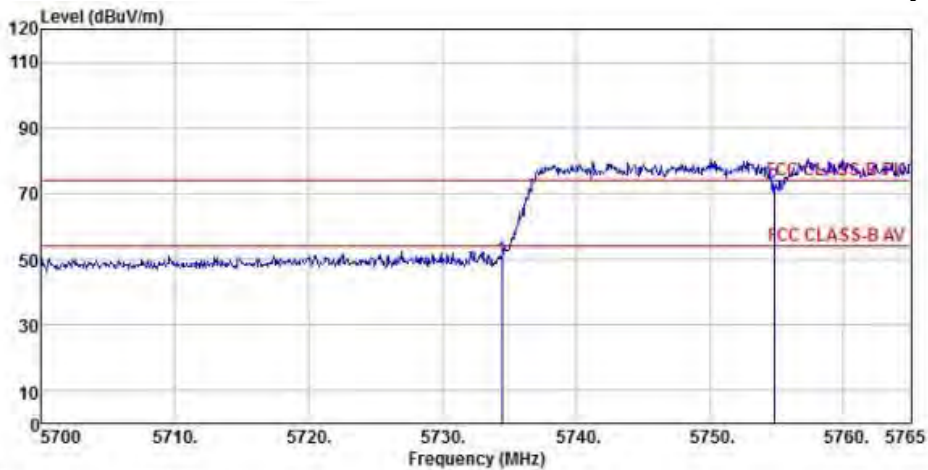


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.45	43.27	32.34	10.99	36.65	49.95	74.00	-24.05 Peak
2 pp 5754.80	65.30	32.40	11.09	36.66	72.13	74.00	-1.87 Peak

Detector mode: Average

Polarity: Vertical

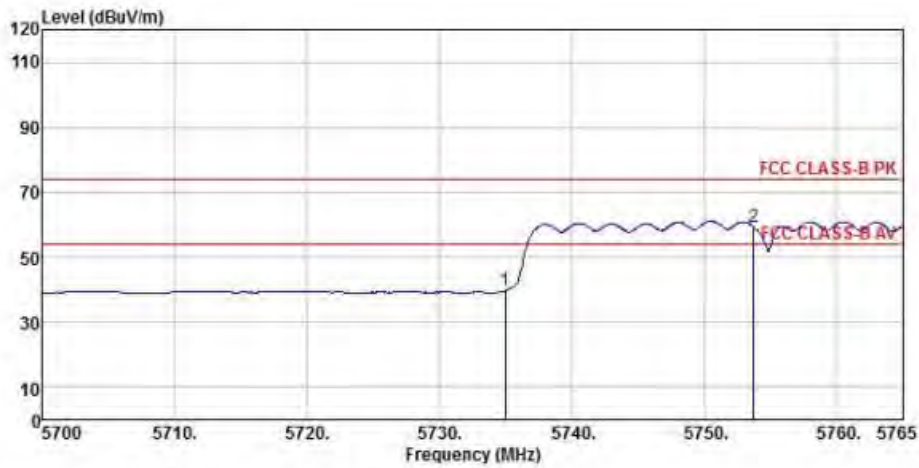


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5734.97	33.10	32.34	10.88	36.65	39.67	74.00 -34.33 Peak
2	pp	5753.76	52.36	32.40	11.09	36.66	59.19 74.00 -14.81 Peak

802.11n40 (Ch151)(mimo)

Detector mode: Peak

Polarity: Horizontal

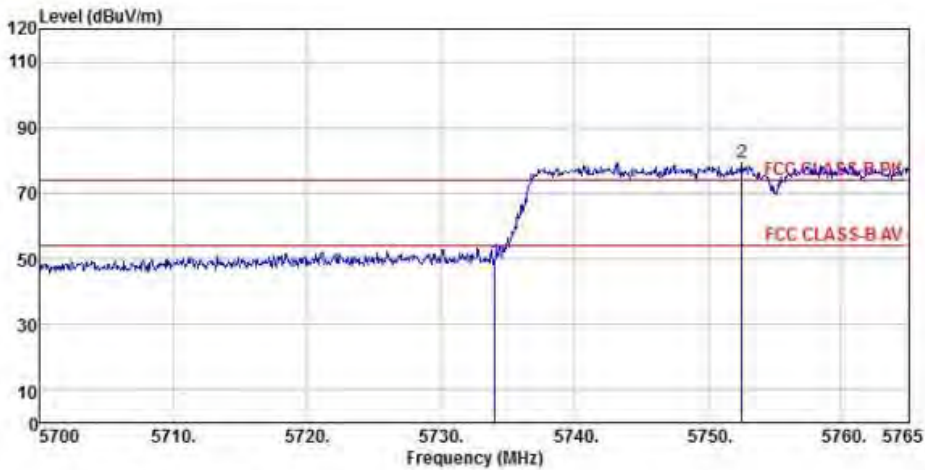


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5734.06	42.26	32.34	10.99	36.65	48.94	74.00 -25.06 Peak
2	pp	5752.59	72.54	32.40	11.09	36.66	79.37 74.00 5.37 Peak

Detector mode: Average

Polarity: Horizontal

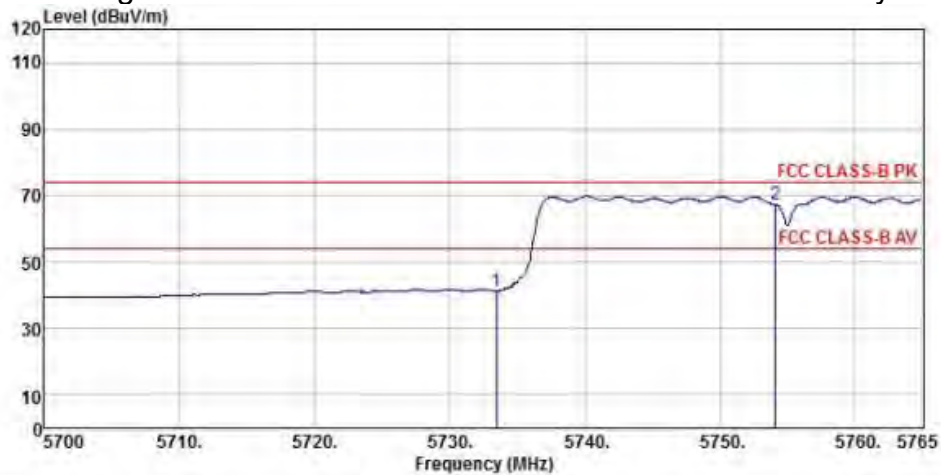


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5733.48	34.67	32.34	10.99	36.65	41.35	74.00 -32.65 Peak
2	5754.08	60.42	32.40	11.09	36.66	67.25	74.00 -6.75 Peak

Detector mode: Peak

Polarity: Vertical

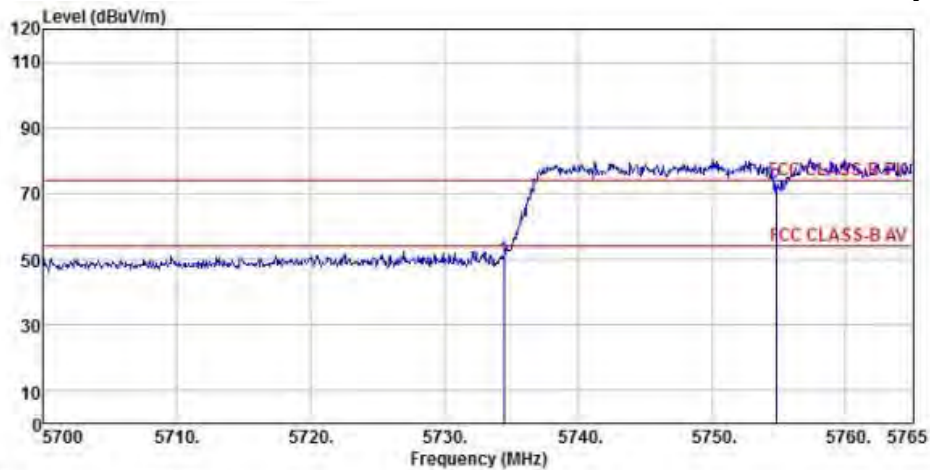


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5734.45	43.27	32.34	10.99	36.65	49.95	74.00 -24.05 Peak
2	5754.80	65.30	32.40	11.09	36.66	72.13	74.00 -1.87 Peak

Detector mode: Average

Polarity: Vertical

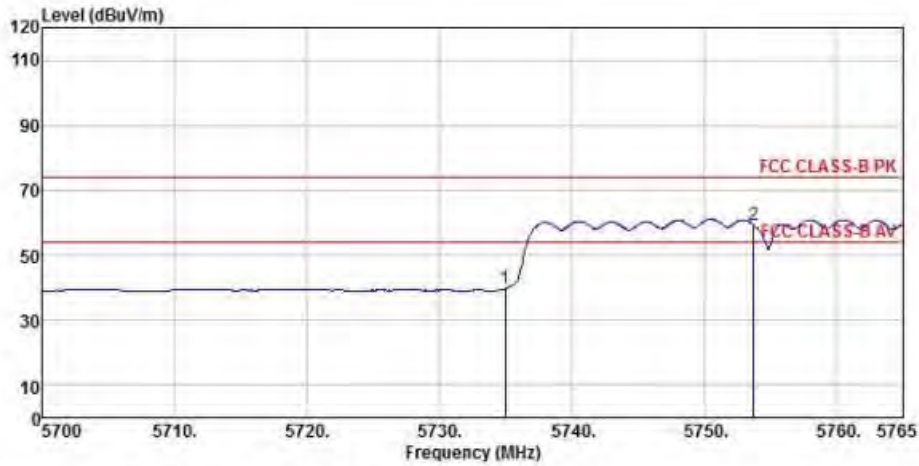


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5734.97	33.10	32.34	10.88	36.65	39.67	74.00	-34.33 Peak
2	pp	5753.76	52.36	32.40	11.09	36.66	59.19	74.00 -14.81 Peak

802.11n40 (Ch159)

Detector mode: Peak

Polarity: Horizontal

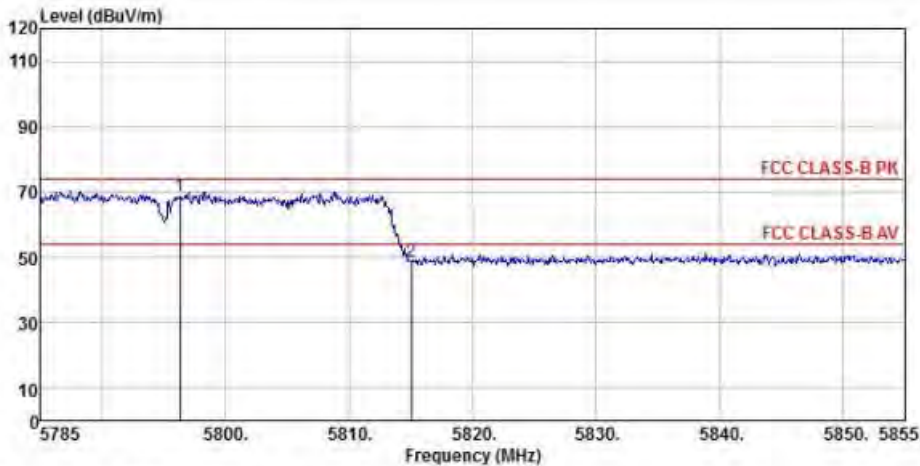


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp	5796.27	61.29	32.54	11.51	36.69	68.65	74.00 -5.35 Peak
2		5815.03	41.25	32.60	11.58	36.70	48.73	74.00 -25.27 Peak

Detector mode: Average

Polarity: Horizontal

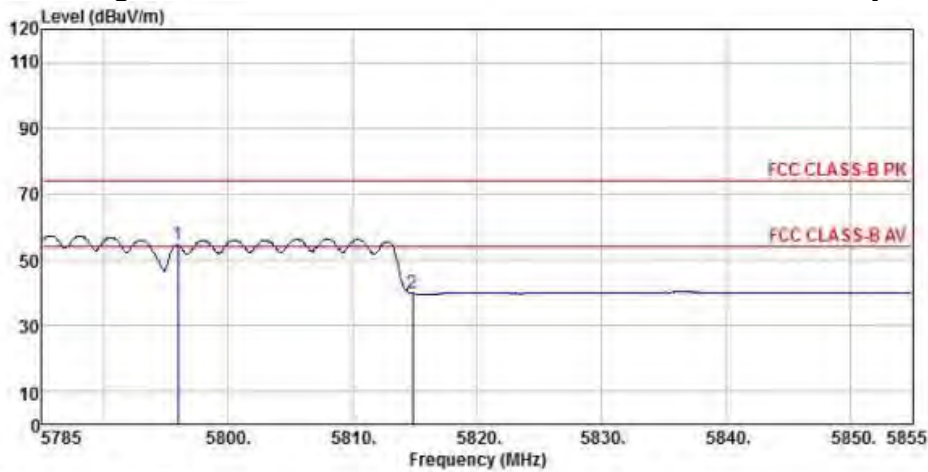


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5795.92	47.05	32.54	11.51	36.69	54.41	74.00	-19.59 Peak
2 5814.82	32.23	32.60	11.58	36.70	39.71	74.00	-34.29 Peak

Detector mode: Peak

Polarity: Vertical

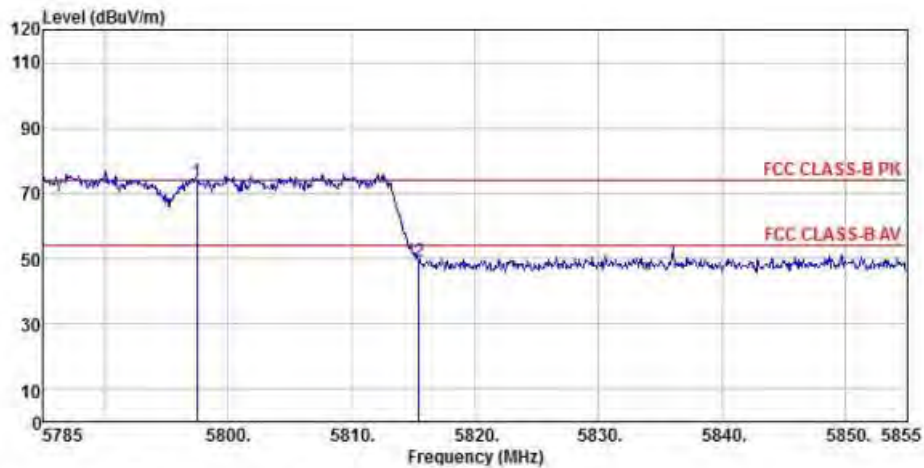


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5797.46	66.06	32.54	11.51	36.69	73.42	74.00	-0.58 Peak
2 5815.45	41.75	32.60	11.58	36.70	49.23	74.00	-24.77 Peak

Detector mode: Average

Polarity: Vertical

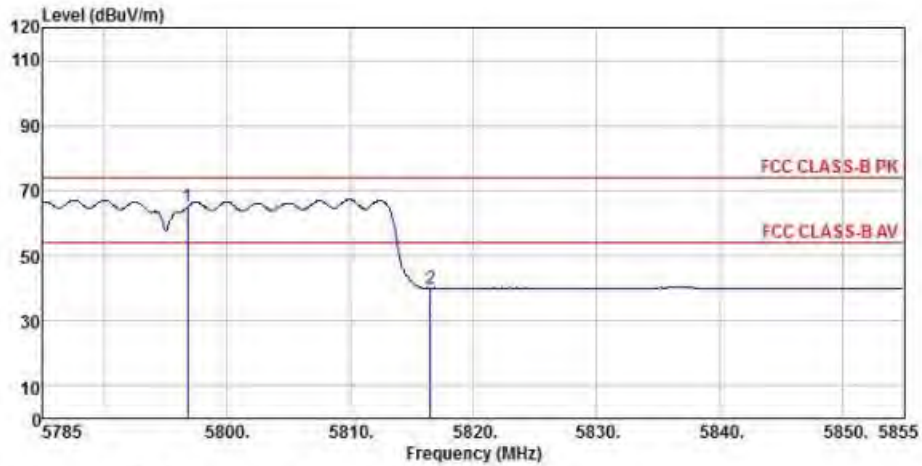


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5796.76	57.66	32.54	11.51	36.69	65.02	74.00	-8.98	Peak
2 5816.50	32.26	32.60	11.58	36.70	39.74	74.00	-34.26	Peak

802.11n40 (Ch159)(mimo)

Detector mode: Peak

Polarity: Horizontal

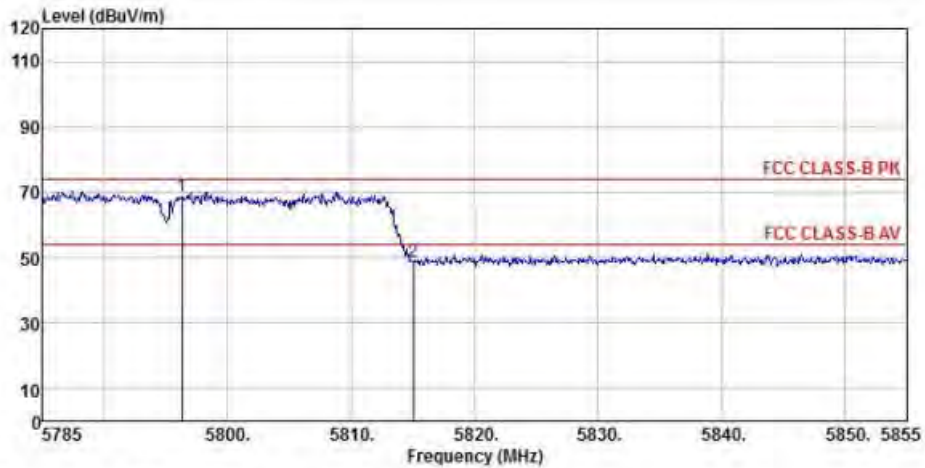


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5796.27	61.29	32.54	11.51	36.69	68.65	74.00	-5.35	Peak
2 5815.03	41.25	32.60	11.58	36.70	48.73	74.00	-25.27	Peak

Detector mode: Average

Polarity: Horizontal

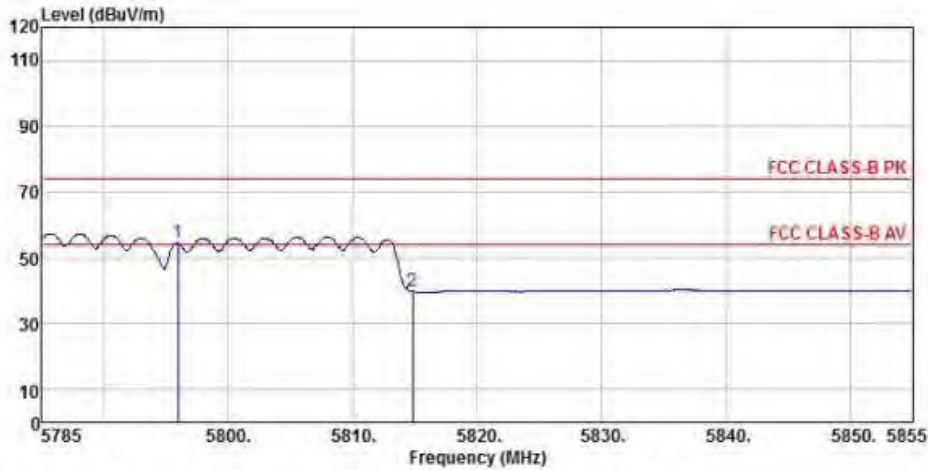

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5795.92	47.05	32.54	11.51	36.69	54.41	74.00	-19.59	Peak
2		5814.82	32.23	32.60	11.58	36.70	39.71	74.00	-34.29	Peak

Detector mode: Peak

Polarity: Vertical

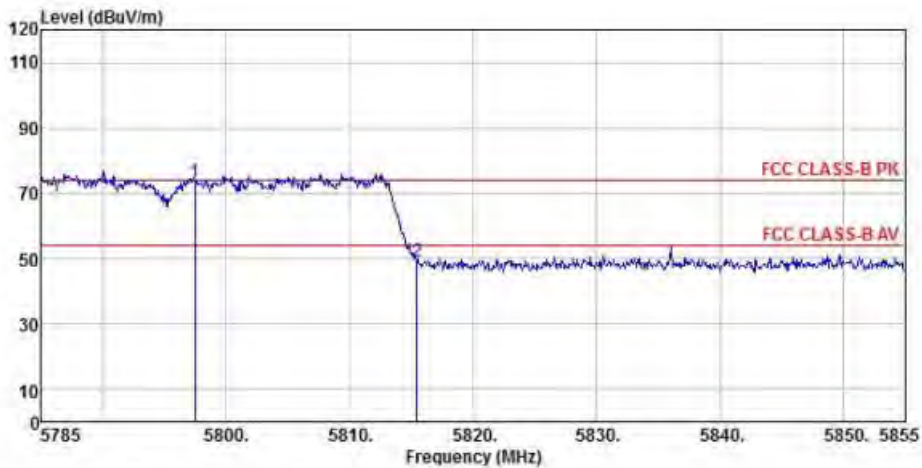

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5797.46	66.06	32.54	11.51	36.69	73.42	74.00	-0.58	Peak
2		5815.45	41.75	32.60	11.58	36.70	49.23	74.00	-24.77	Peak

Detector mode: Average

Polarity: Vertical

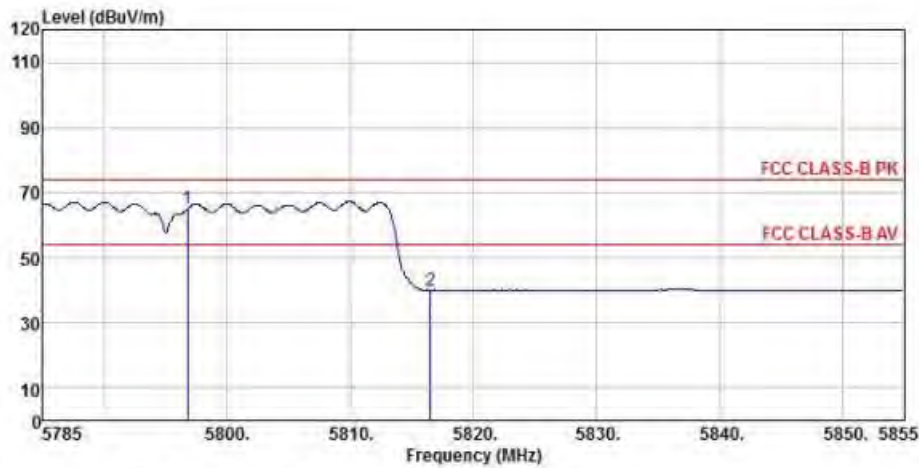

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5796.76	57.66	32.54	11.51	36.69	65.02	74.00	-8.98 Peak
2 5816.50	32.26	32.60	11.58	36.70	39.74	74.00	-34.26 Peak

802.11ac(5150MHz-5250MHz)

802.11ac20 (Ch36)

Detector mode: Peak

Polarity: Horizontal

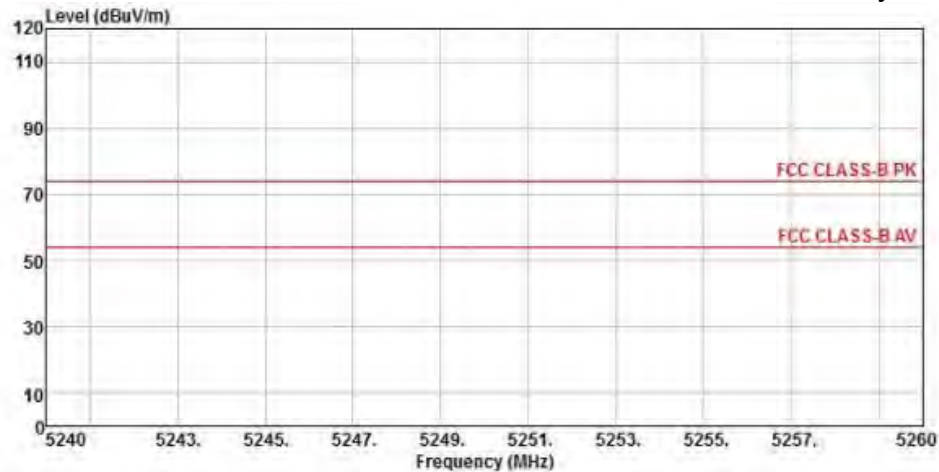


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5166.52	47.02	32.01	10.64	36.28	53.39	74.00	-20.61 Peak
2 pp 5174.32	76.82	32.01	10.64	36.28	83.19	74.00	9.19 Peak

Detector mode: Average

Polarity: Horizontal

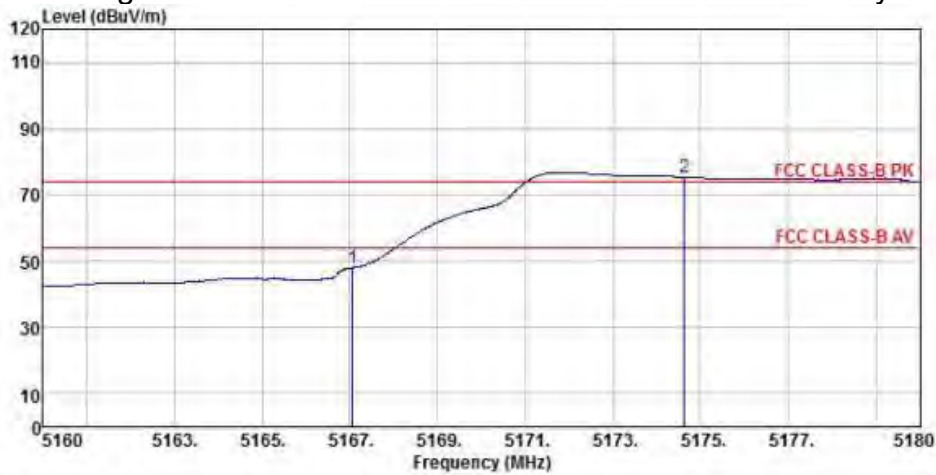


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	5167.06	41.56	32.01	10.64	36.28	47.93	74.00	-26.07	Peak	
2	pp	5174.64	69.05	32.01	10.64	36.28	75.42	74.00	1.42	Peak

Detector mode: Peak

Polarity: Vertical

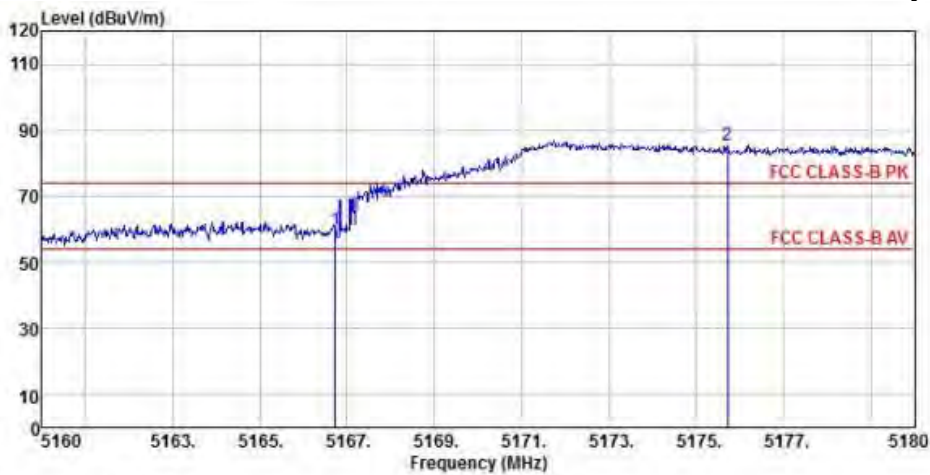


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	5166.72	53.38	32.01	10.64	36.28	59.75	74.00	-14.25	Peak	
2	pp	5175.72	79.14	32.01	10.64	36.28	85.51	74.00	11.51	Peak

Detector mode: Average

Polarity: Vertical

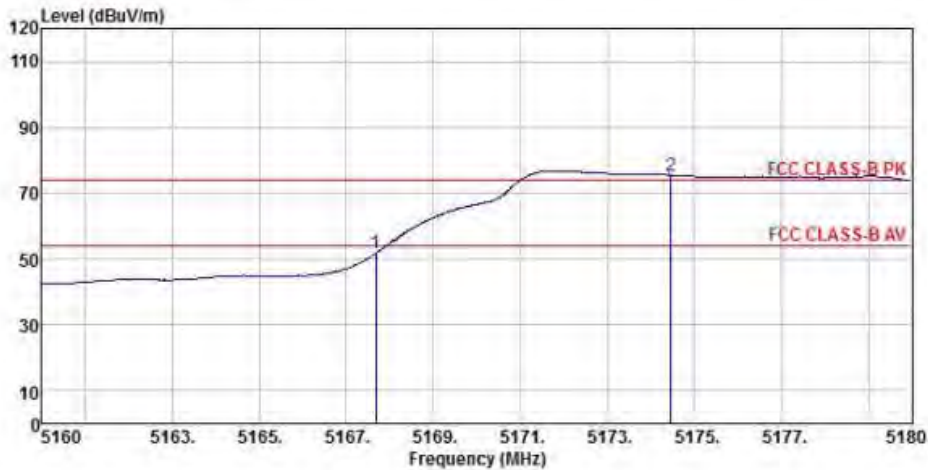


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	5167.68	45.32	32.01	10.64	36.28	51.69	74.00 -22.31 Peak
2	pp	5174.46	69.09	32.01	10.64	36.28	75.46 74.00 1.46 Peak

802.11ac20 (Ch36)(mimo)

Detector mode: Peak

Polarity: Horizontal

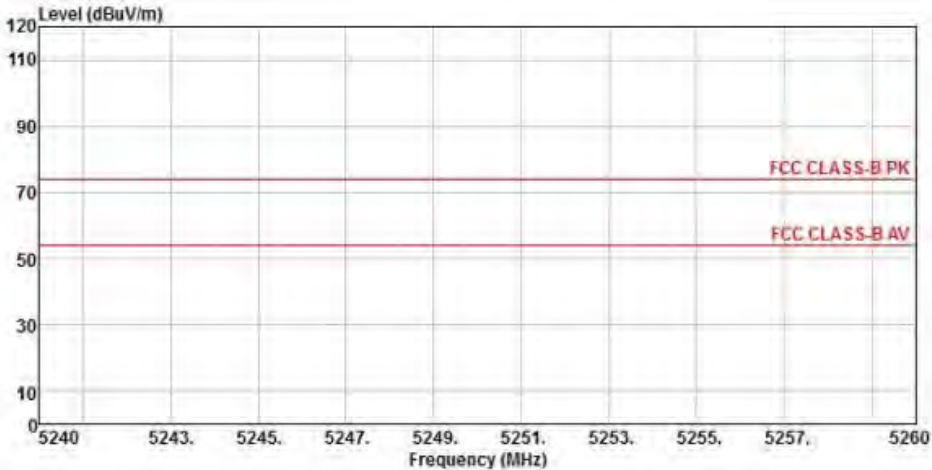


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	5166.52	47.02	32.01	10.64	36.28	53.39	74.00 -20.61 Peak
2	pp	5174.32	76.82	32.01	10.64	36.28	83.19 74.00 9.19 Peak

Detector mode: Average

Polarity: Horizontal

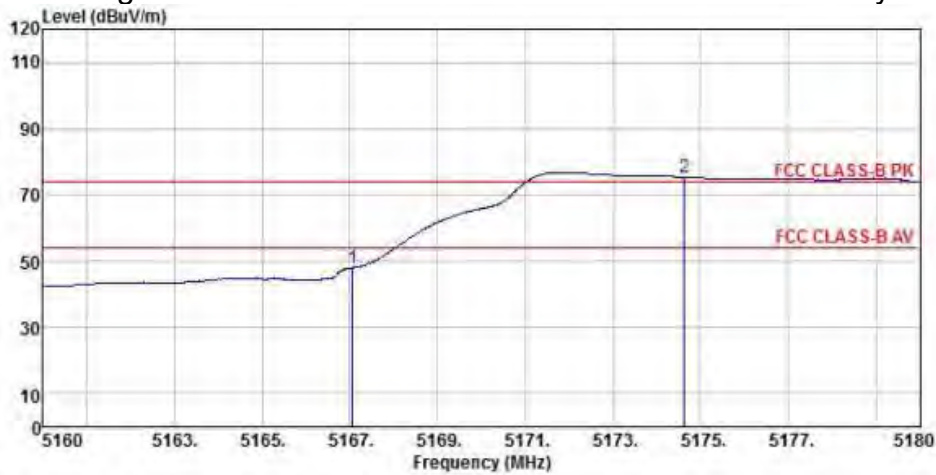


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	5167.06	41.56	32.01	10.64	36.28	47.93	74.00	-26.07	Peak	
2	pp	5174.64	69.05	32.01	10.64	36.28	75.42	74.00	1.42	Peak

Detector mode: Peak

Polarity: Vertical

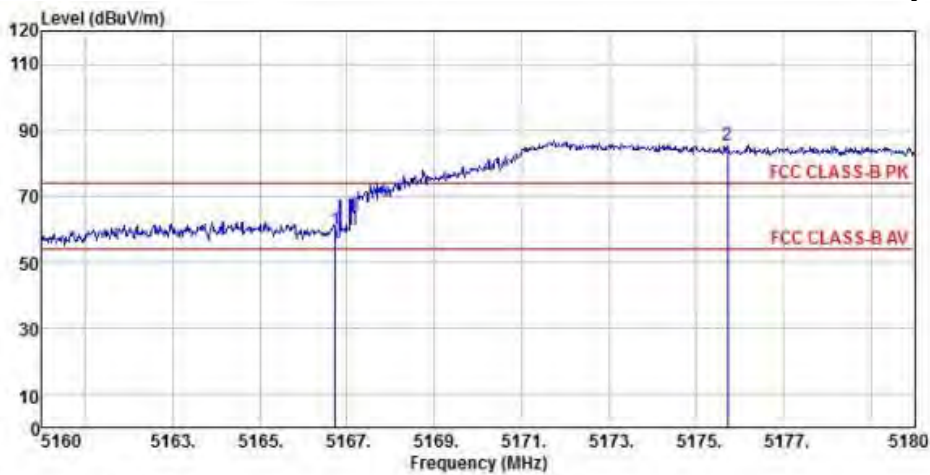


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	5166.72	53.38	32.01	10.64	36.28	59.75	74.00	-14.25	Peak	
2	pp	5175.72	79.14	32.01	10.64	36.28	85.51	74.00	11.51	Peak

Detector mode: Average

Polarity: Vertical

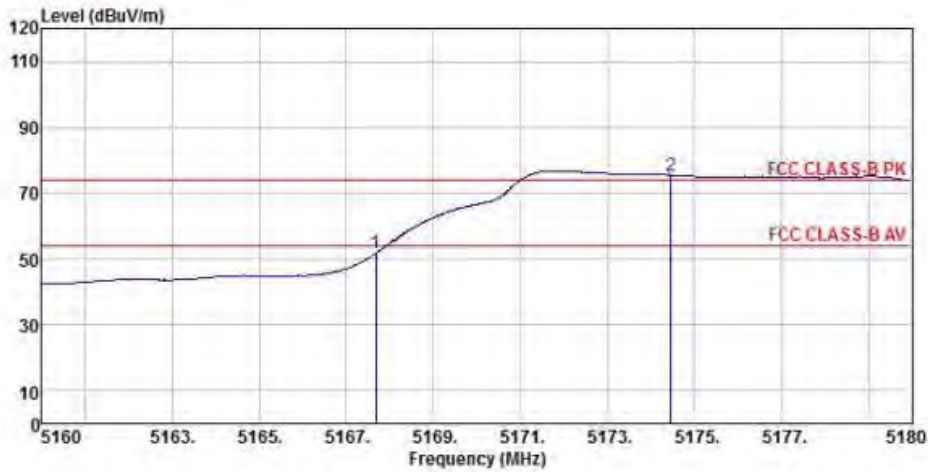


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.68	45.32	32.01	10.64	36.28	51.69	74.00	-22.31 Peak
2	5174.46	69.09	32.01	10.64	36.28	75.46	74.00	1.46 Peak

802.11ac20 (Ch48)

Detector mode: Peak

Polarity: Horizontal

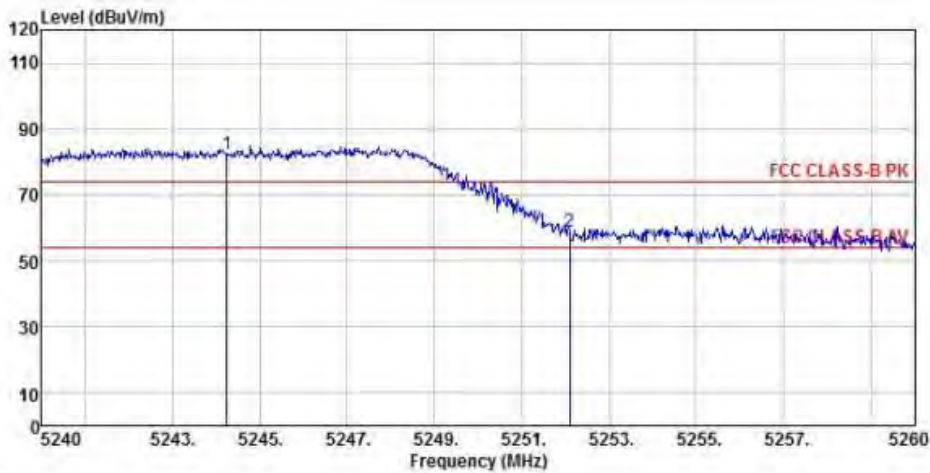


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5244.24	75.97	31.75	10.79	36.33	82.18	74.00	8.18 Peak
2	5252.10	52.85	31.73	10.79	36.34	59.03	74.00	-14.97 Peak

Detector mode: Average

Polarity: Horizontal

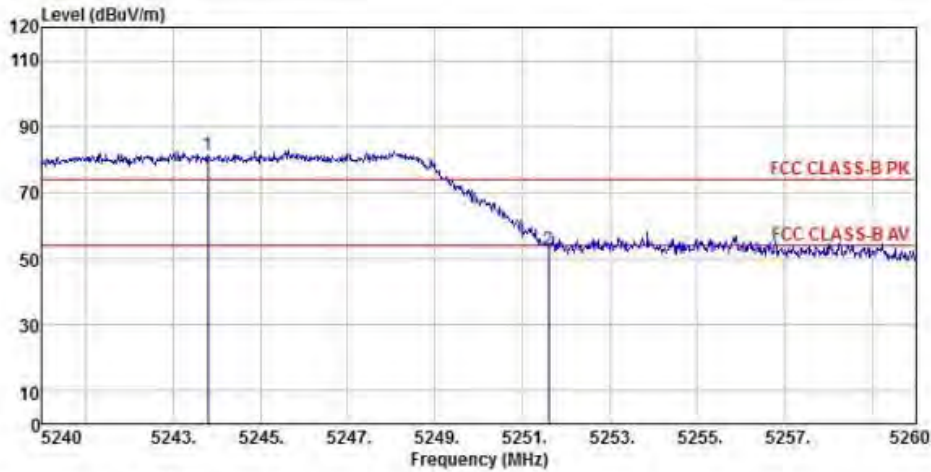


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5243.80	75.42	31.75	10.79	36.33	81.63	74.00	7.63 Peak
2 5251.60	46.66	31.73	10.79	36.34	52.84	74.00	-21.16 Peak

Detector mode: Peak

Polarity: Vertical

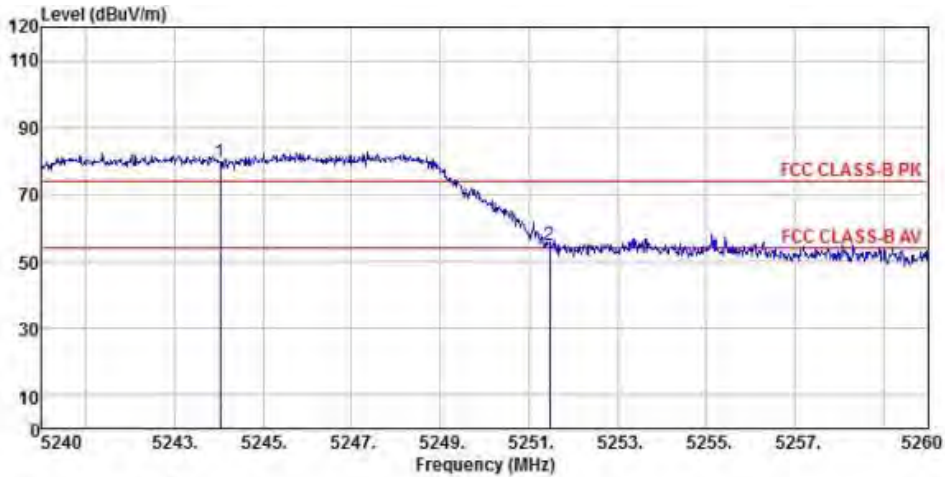


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.02	73.49	31.75	10.79	36.33	79.70	74.00	5.70 Peak
2 5251.46	48.58	31.75	10.79	36.33	54.79	74.00	-19.21 Peak

Detector mode: Average

Polarity: Vertical

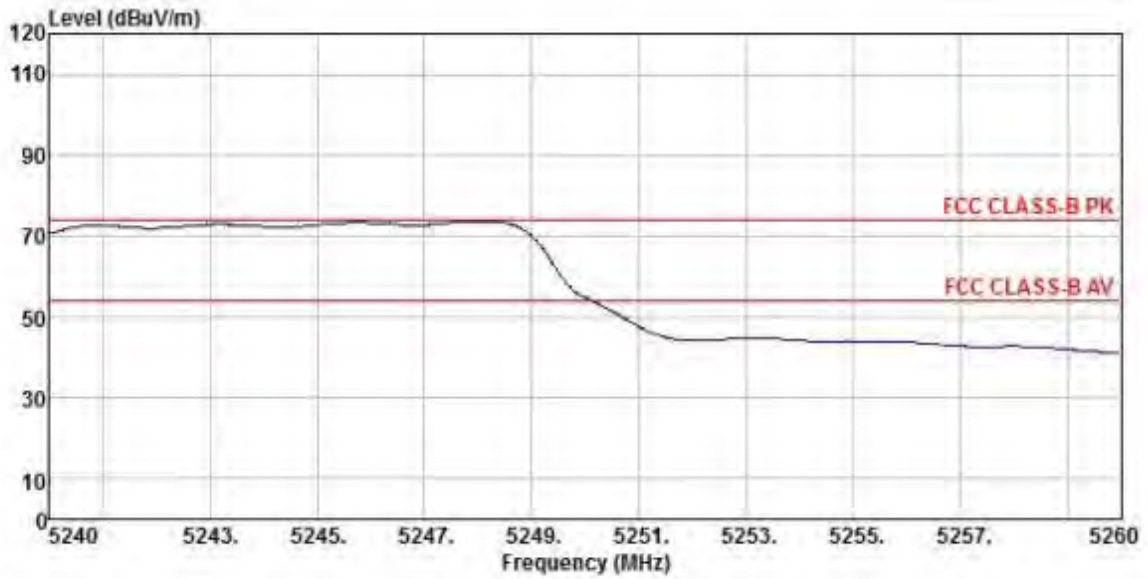


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

802.11ac20 (Ch48)(mimo)

Detector mode: Peak

Polarity: Horizontal

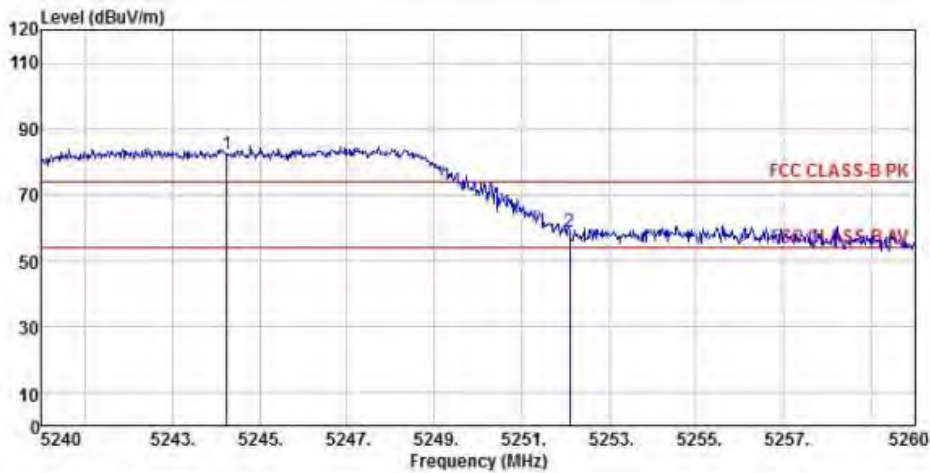


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.24	75.97	31.75	10.79	36.33	82.18	74.00	8.18 Peak
2 5252.10	52.85	31.73	10.79	36.34	59.03	74.00	-14.97 Peak

Detector mode: Average

Polarity: Horizontal

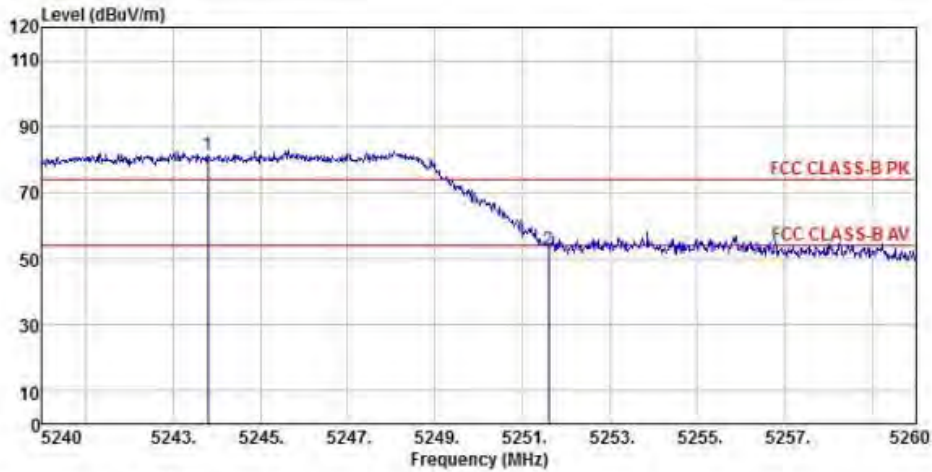


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5243.80	75.42	31.75	10.79	36.33	81.63	74.00	7.63 Peak
2 5251.60	46.66	31.73	10.79	36.34	52.84	74.00	-21.16 Peak

Detector mode: Peak

Polarity: Vertical

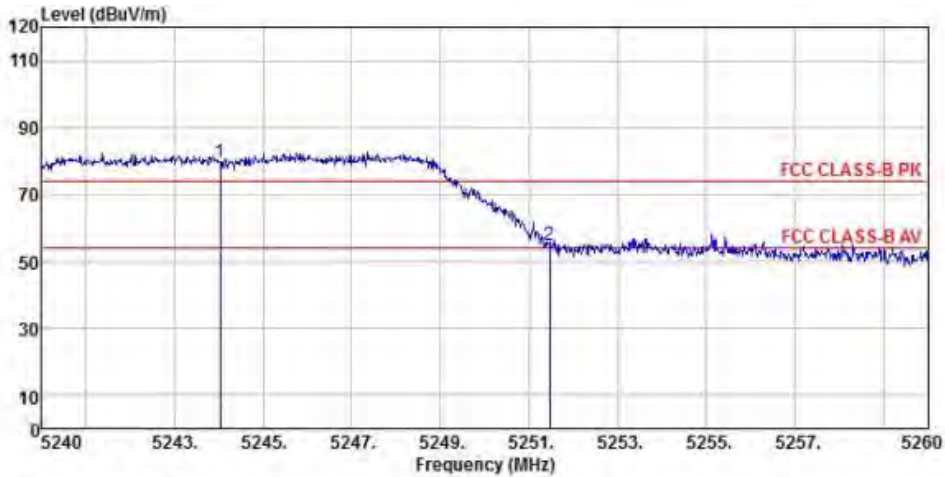


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.02	73.49	31.75	10.79	36.33	79.70	74.00	5.70 Peak
2 5251.46	48.58	31.75	10.79	36.33	54.79	74.00	-19.21 Peak

Detector mode: Average

Polarity: Vertical

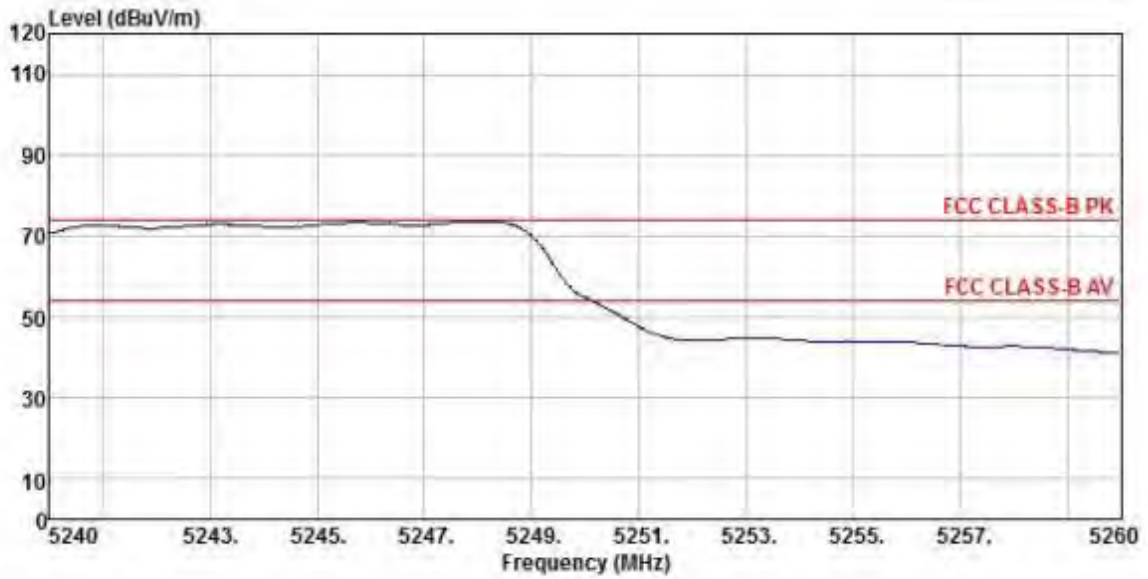


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

802.11ac40 (Ch38)

Detector mode: Peak

Polarity: Horizontal

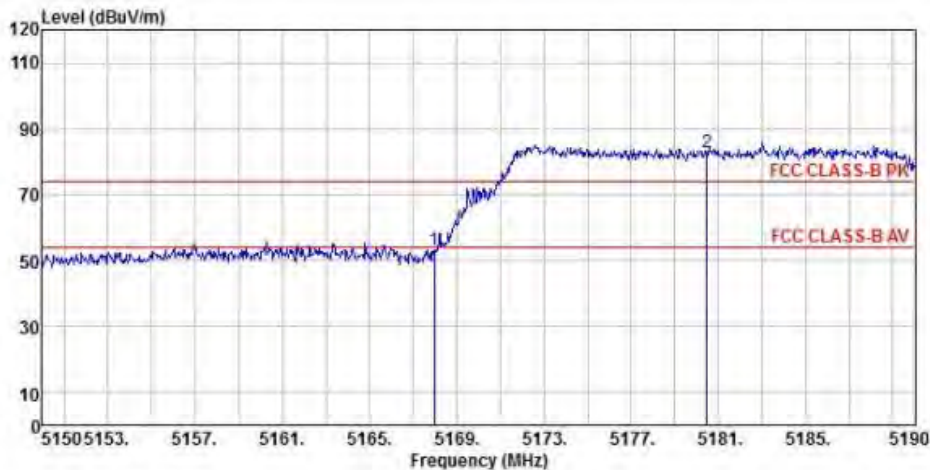


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.96	46.85	32.01	10.64	36.28	53.22	74.00 -20.78 Peak
2	pp	5180.48	76.60	32.01	10.64	36.29	82.96 74.00 8.96 Peak

Detector mode: Average

Polarity: Horizontal

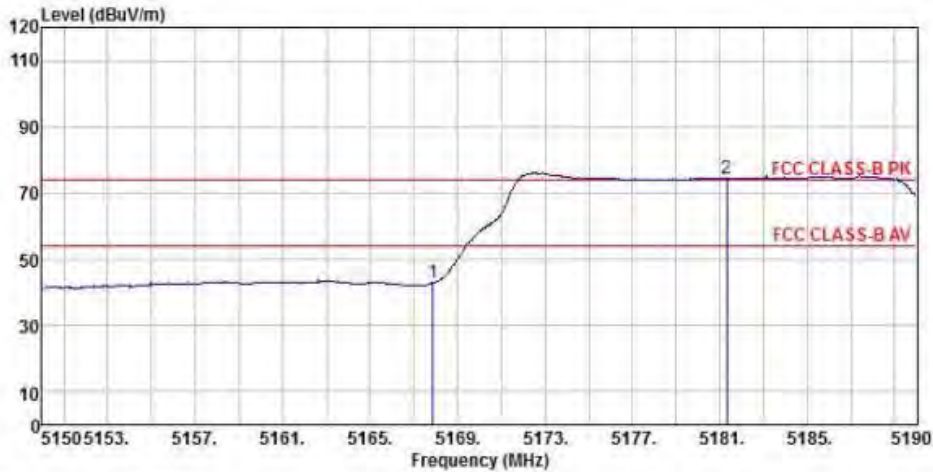


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.88	36.41	32.01	10.64	36.28	42.78	74.00	-31.22 Peak
2	pp	5181.32	68.16	31.96	10.64	36.29	74.47	74.00 0.47 Peak

Detector mode: Peak

Polarity: Vertical

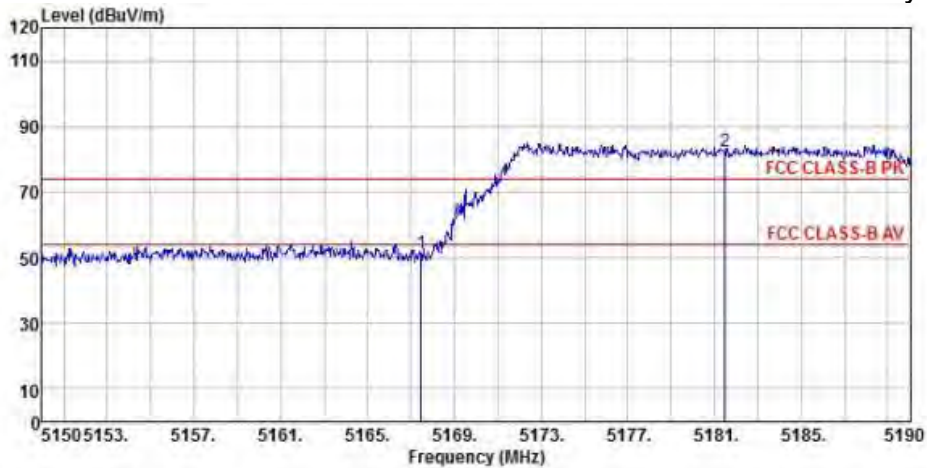


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.48	45.06	32.01	10.64	36.28	51.43	74.00	-22.57 Peak
2	pp	5181.48	75.91	31.96	10.64	36.29	82.22	74.00 8.22 Peak

Detector mode: Average

Polarity: Vertical

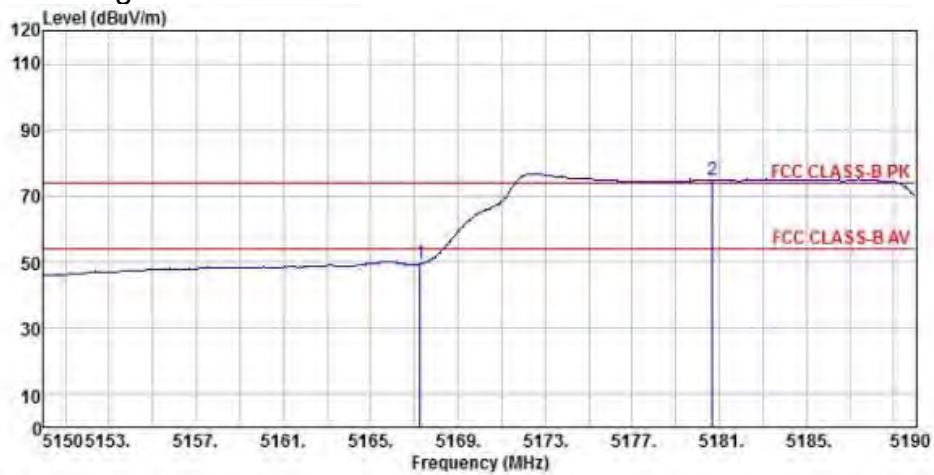


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.28	43.03	32.01	10.64	36.28	49.40	74.00 -24.60 Peak
2	5180.68	68.34	32.01	10.64	36.29	74.70	74.00 0.70 Peak

802.11ac40 (Ch38)(mimo)

Detector mode: Peak

Polarity: Horizontal

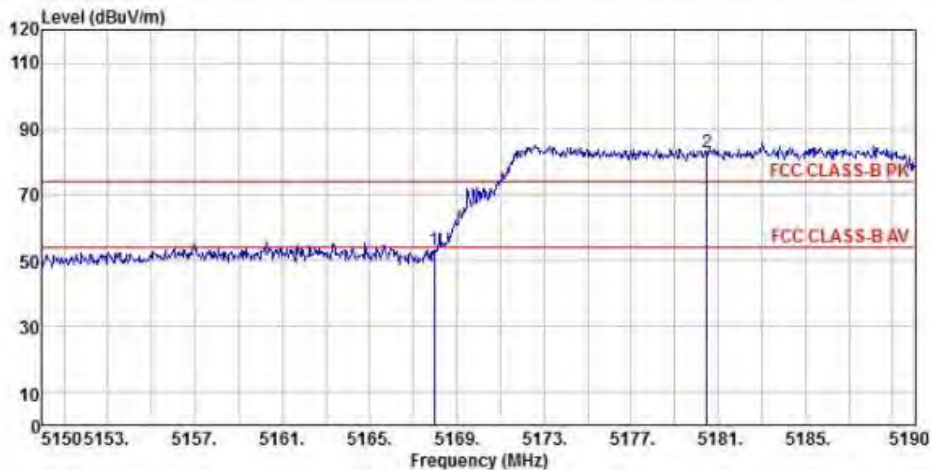


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.96	46.85	32.01	10.64	36.28	53.22	74.00 -20.78 Peak
2	5180.48	76.60	32.01	10.64	36.29	82.96	74.00 8.96 Peak

Detector mode: Average

Polarity: Horizontal

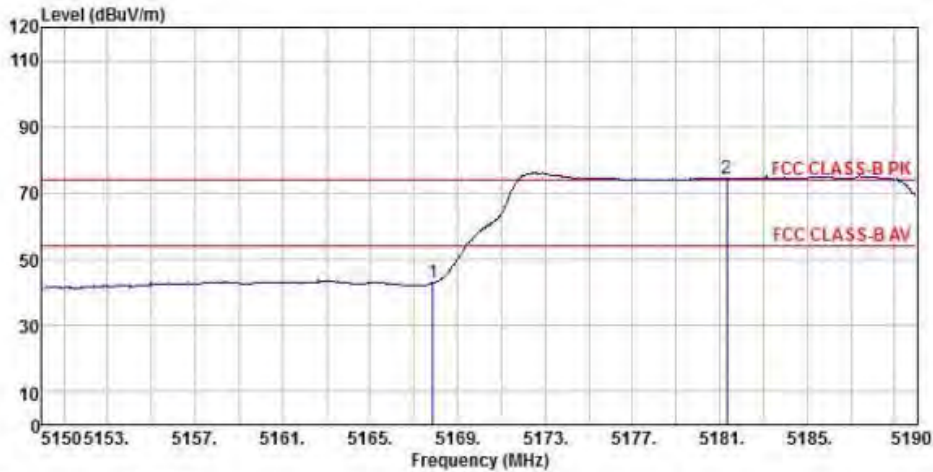


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.88	36.41	32.01	10.64	36.28	42.78	74.00	-31.22 Peak
2	5181.32	68.16	31.96	10.64	36.29	74.47	74.00	0.47 Peak

Detector mode: Peak

Polarity: Vertical

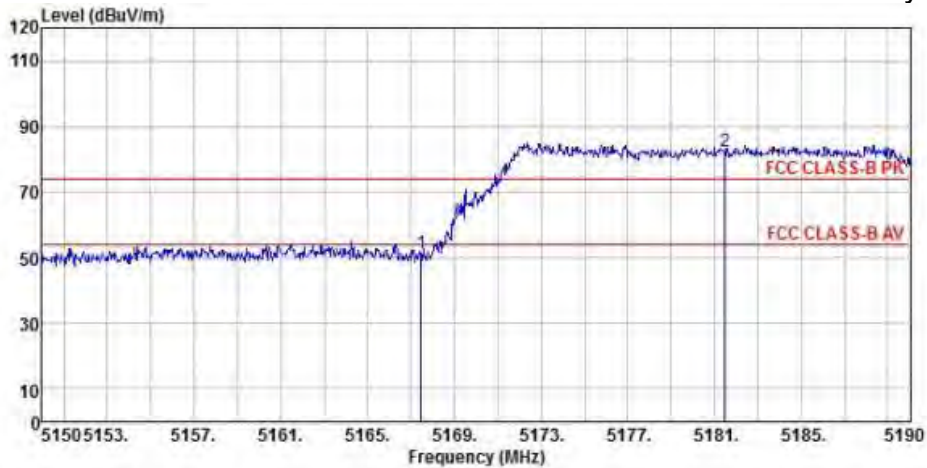


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.48	45.06	32.01	10.64	36.28	51.43	74.00	-22.57 Peak
2	5181.48	75.91	31.96	10.64	36.29	82.22	74.00	8.22 Peak

Detector mode: Average

Polarity: Vertical

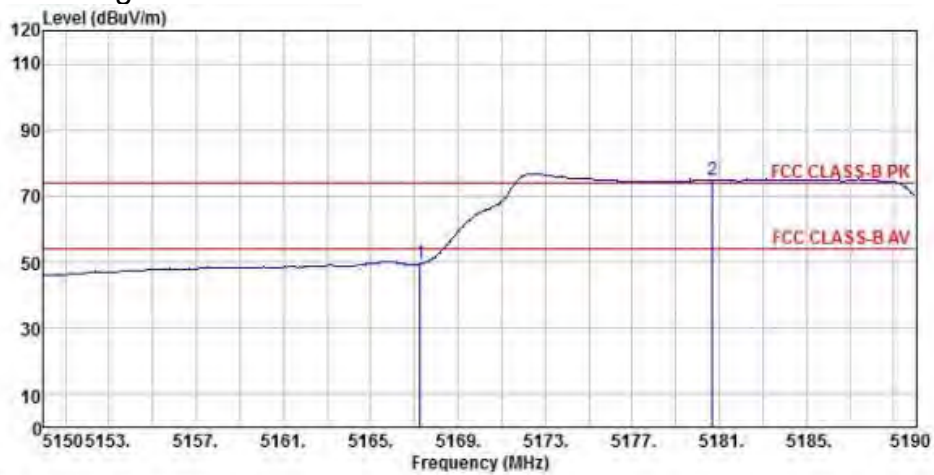


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.28	43.03	32.01	10.64	36.28	49.40	74.00 -24.60 Peak
2	pp 5180.68	68.34	32.01	10.64	36.29	74.70	74.00 0.70 Peak

802.11ac20 (Ch46)

Detector mode: Peak

Polarity: Horizontal

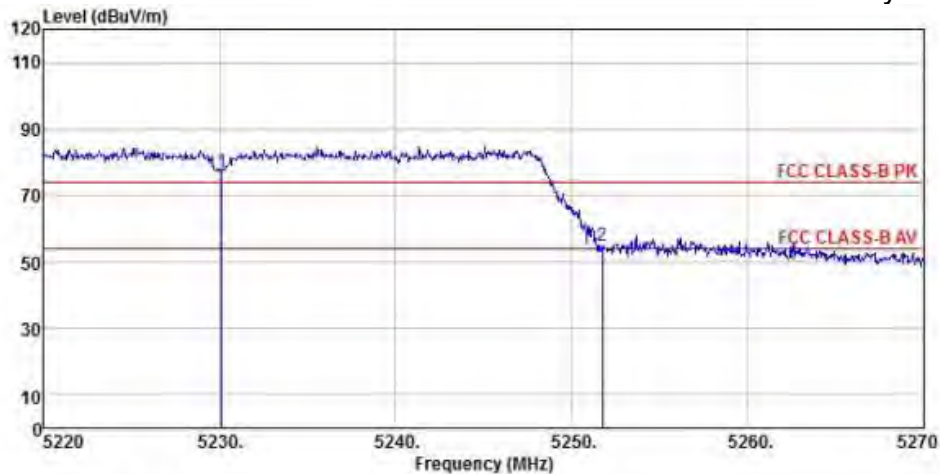


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	pp 5230.10	70.92	31.83	10.74	36.32	77.17	74.00 3.17 Peak
2	5251.75	48.78	31.73	10.79	36.34	54.96	74.00 -19.04 Peak

Detector mode: Average

Polarity: Horizontal

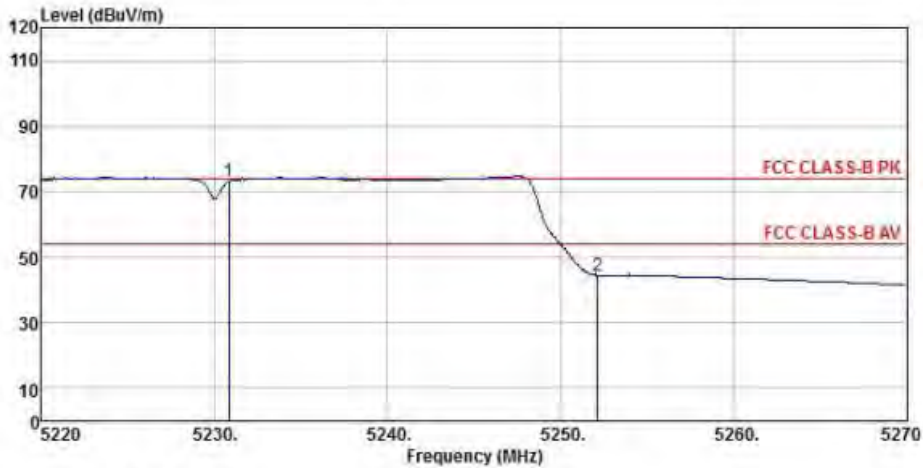


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5230.80	66.83	31.83	10.74	36.32	73.08	74.00	-0.92 Peak
2 5252.15	38.17	31.73	10.79	36.34	44.35	74.00	-29.65 Peak

Detector mode: Peak

Polarity: Vertical

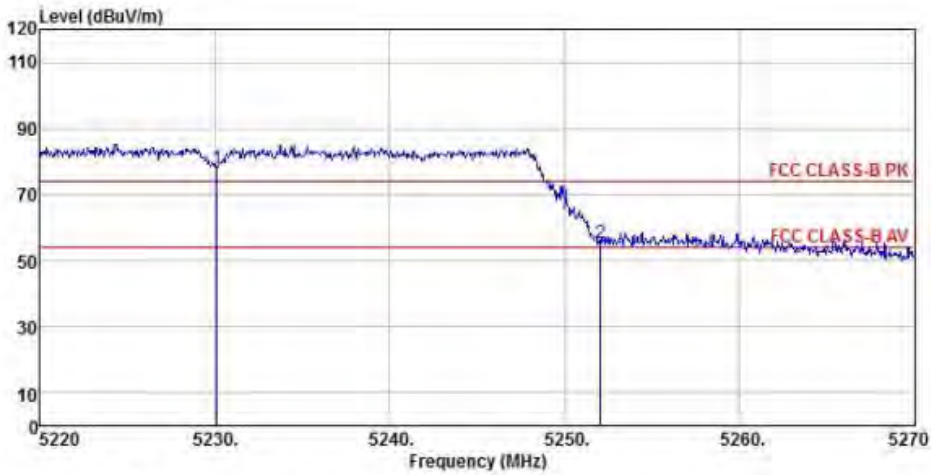


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5230.10	71.82	31.83	10.74	36.32	78.07	74.00	4.07 Peak
2 5252.05	49.09	31.73	10.79	36.34	55.27	74.00	-18.73 Peak

Detector mode: Average

Polarity: Vertical

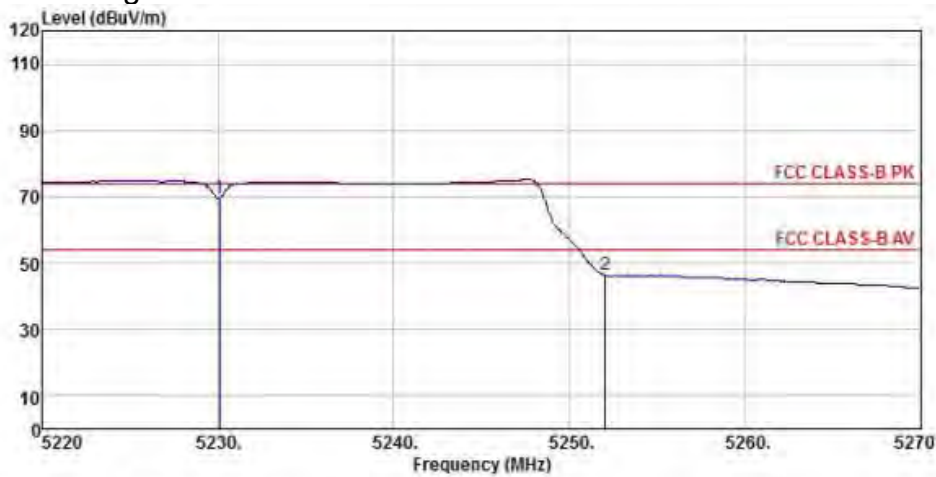

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5230.05	63.28	31.83	10.74	36.32	69.53	74.00	-4.47 Peak
2 5252.05	40.34	31.73	10.79	36.34	46.52	74.00	-27.48 Peak

802.11ac20 (Ch46)(mimo)

Detector mode: Peak

Polarity: Horizontal

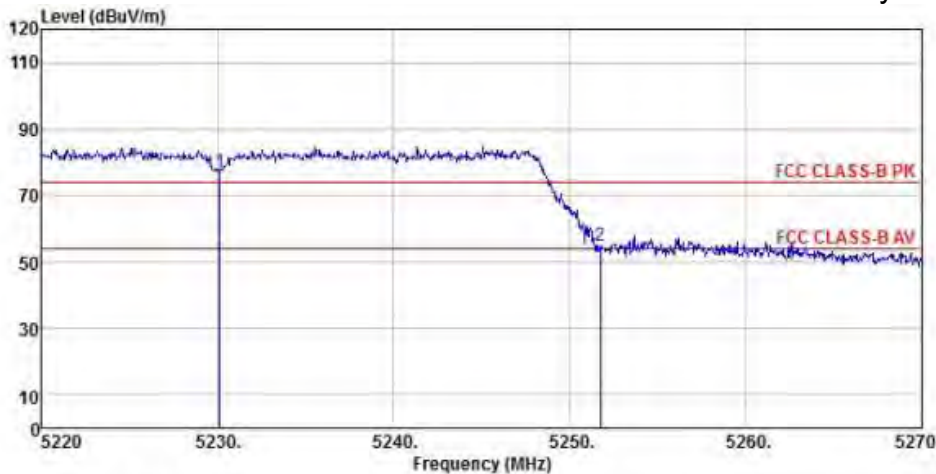


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5230.10	70.92	31.83	10.74	36.32	77.17	74.00	3.17 Peak
2 5251.75	48.78	31.73	10.79	36.34	54.96	74.00	-19.04 Peak

Detector mode: Average

Polarity: Horizontal

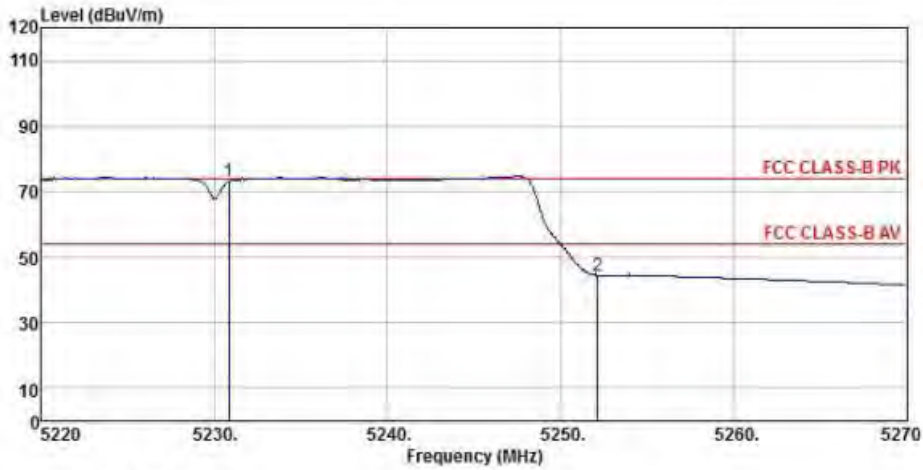

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp 5230.80	66.83	31.83	10.74	36.32	73.08	74.00	-0.92 Peak
2	5252.15	38.17	31.73	10.79	36.34	44.35	74.00	-29.65 Peak

Detector mode: Peak

Polarity: Vertical

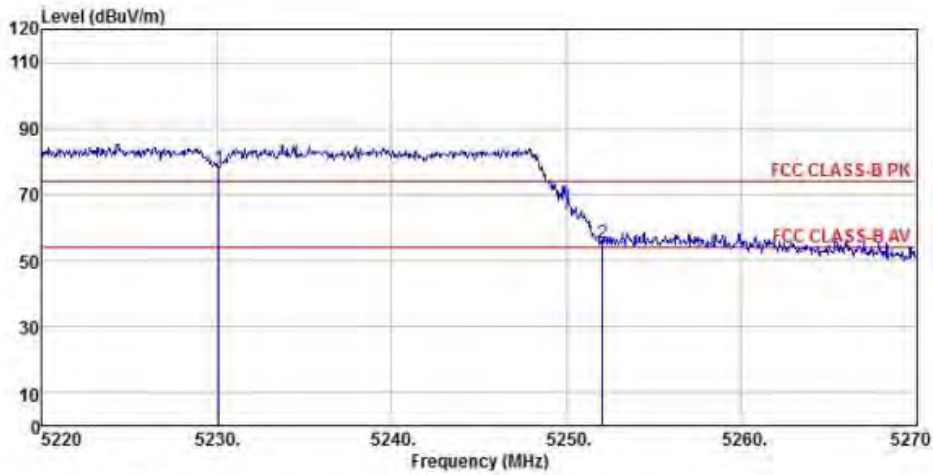

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp 5230.10	71.82	31.83	10.74	36.32	78.07	74.00	4.07 Peak
2	5252.05	49.09	31.73	10.79	36.34	55.27	74.00	-18.73 Peak

Detector mode: Average

Polarity: Vertical

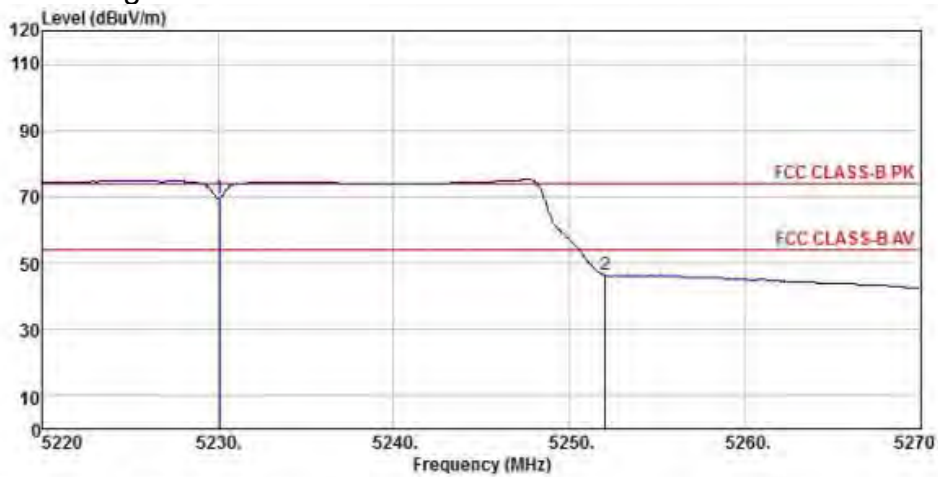

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5230.05	63.28	31.83	10.74	36.32	69.53	74.00	-4.47	Peak
2		5252.05	40.34	31.73	10.79	36.34	46.52	74.00	-27.48	Peak

802.11ac80 (Ch42)

Detector mode: Peak

Polarity: Horizontal

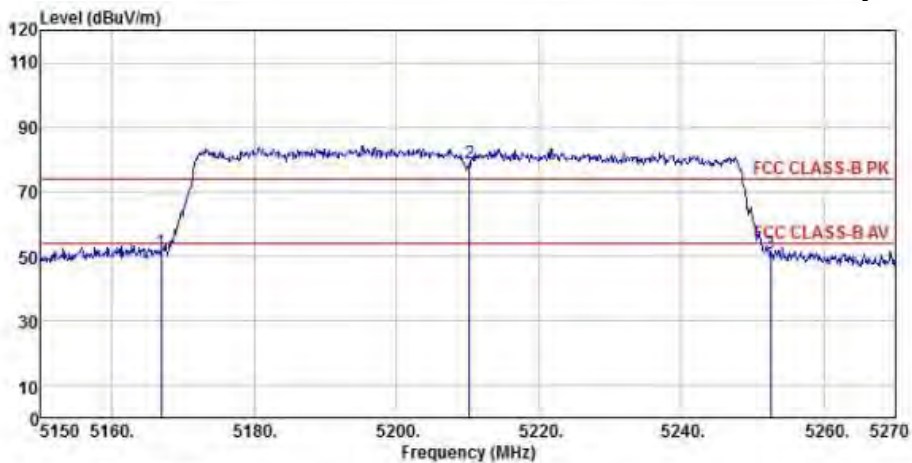

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1		5166.92	44.82	32.01	10.64	36.28	51.19	74.00	-22.81	Peak
2	pp	5210.24	72.75	31.90	10.69	36.31	79.03	74.00	5.03	Peak
3		5252.60	44.65	31.73	10.79	36.34	50.83	74.00	-23.17	Peak

Detector mode: Average

Polarity: Horizontal

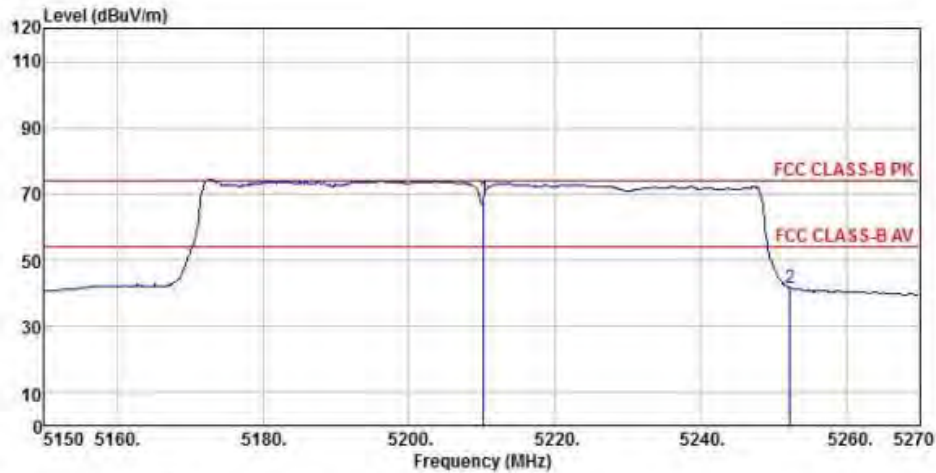


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5210.24	62.15	31.90	10.69	36.31	68.43	74.00	-5.57 Peak
2 5252.24	35.41	31.73	10.79	36.34	41.59	74.00	-32.41 Peak

Detector mode: Peak

Polarity: Vertical

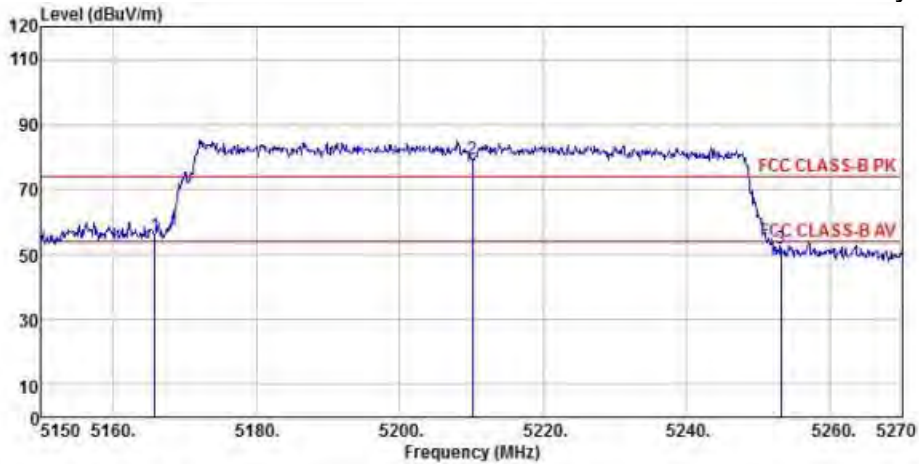


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5165.84	49.59	32.01	10.64	36.28	55.96	74.00	-18.04 Peak
2 pp 5210.12	73.01	31.90	10.69	36.31	79.29	74.00	5.29 Peak
3 5253.20	45.83	31.73	10.79	36.34	52.01	74.00	-21.99 Peak

Detector mode: Average

Polarity: Vertical

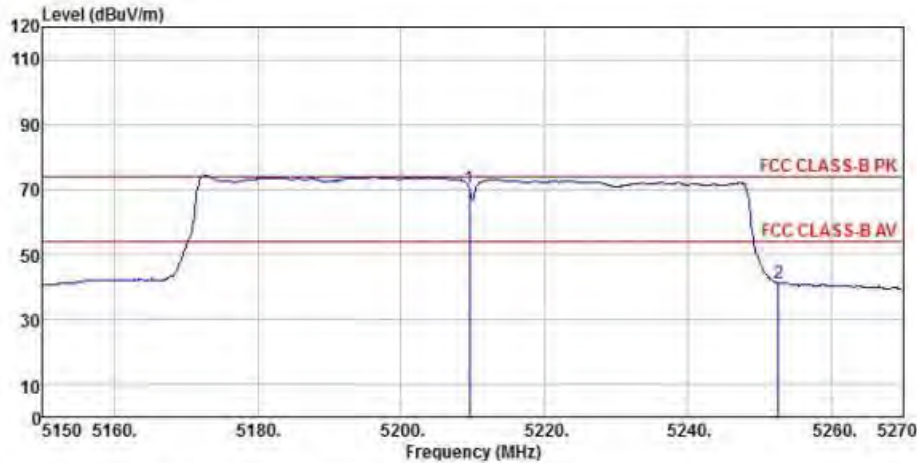

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1 pp	5209.52	64.09	31.90	10.69	36.31	70.37	74.00 -3.63 Peak
2	5252.72	35.01	31.73	10.79	36.34	41.19	74.00 -32.81 Peak

802.11ac80 (Ch42)(mimo)

Detector mode: Peak

Polarity: Horizontal

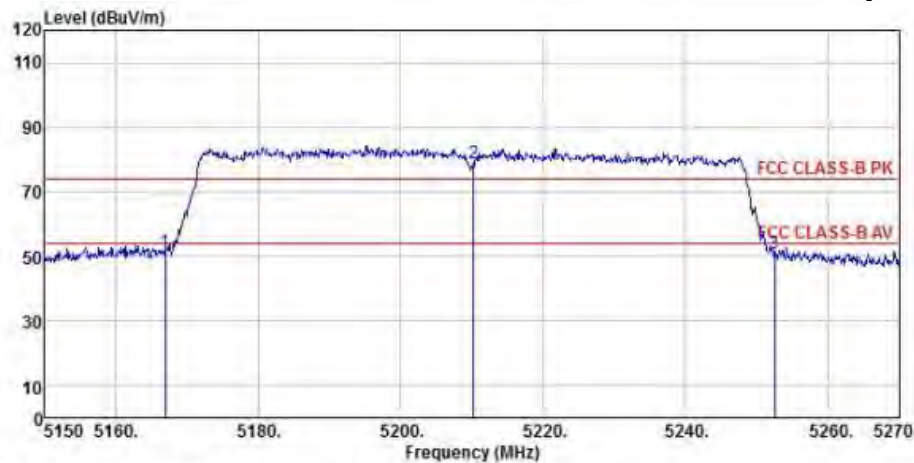

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	5166.92	44.82	32.01	10.64	36.28	51.19	74.00 -22.81 Peak
2 pp	5210.24	72.75	31.90	10.69	36.31	79.03	74.00 5.03 Peak
3	5252.60	44.65	31.73	10.79	36.34	50.83	74.00 -23.17 Peak

Detector mode: Average

Polarity: Horizontal

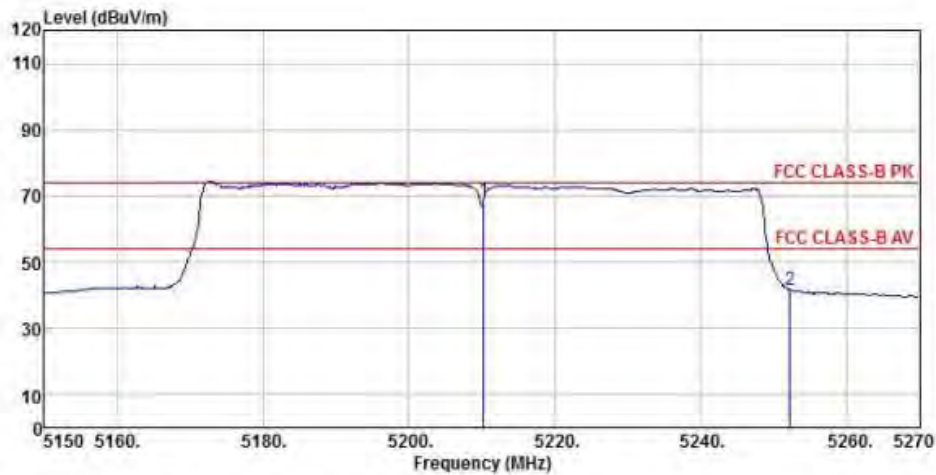


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
MHz	dBuV	dB/m	dB	dB	dBuV/m

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5210.24	62.15	31.90	10.69	36.31	68.43	74.00	-5.57 Peak
2 5252.24	35.41	31.73	10.79	36.34	41.59	74.00	-32.41 Peak

Detector mode: Peak

Polarity: Vertical

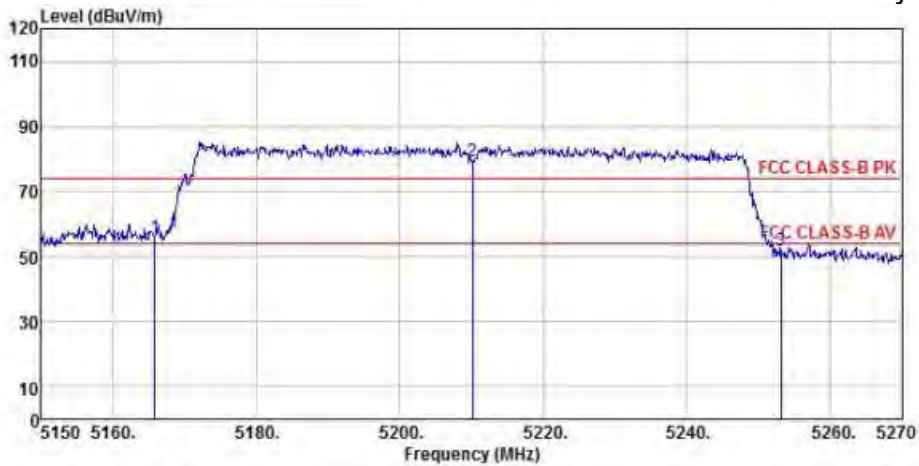


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
MHz	dBuV	dB/m	dB	dB	dBuV/m

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5165.84	49.59	32.01	10.64	36.28	55.96	74.00	-18.04 Peak
2 pp 5210.12	73.01	31.90	10.69	36.31	79.29	74.00	5.29 Peak
3 5253.20	45.83	31.73	10.79	36.34	52.01	74.00	-21.99 Peak

Detector mode: Average

Polarity: Vertical

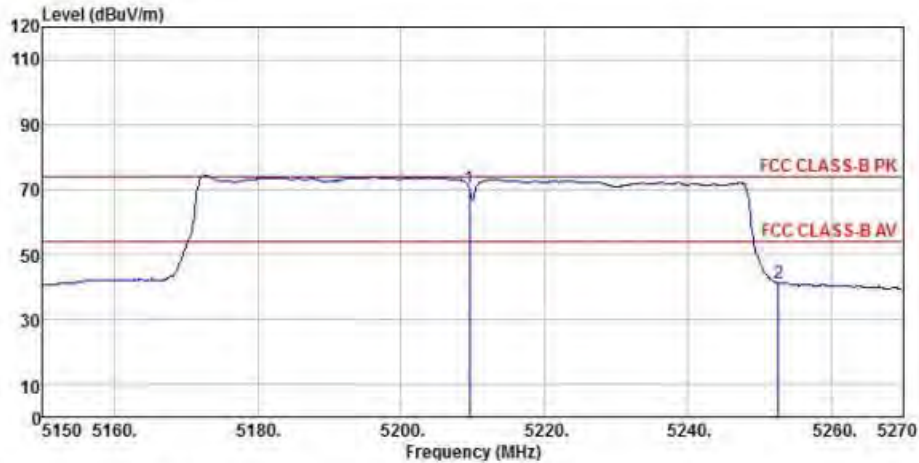

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5209.52	64.09	31.90	10.69	36.31	70.37	74.00	-3.63	Peak
2		5252.72	35.01	31.73	10.79	36.34	41.19	74.00	-32.81	Peak

802.11ac80 (Ch42)

Detector mode: Peak

Polarity: Horizontal

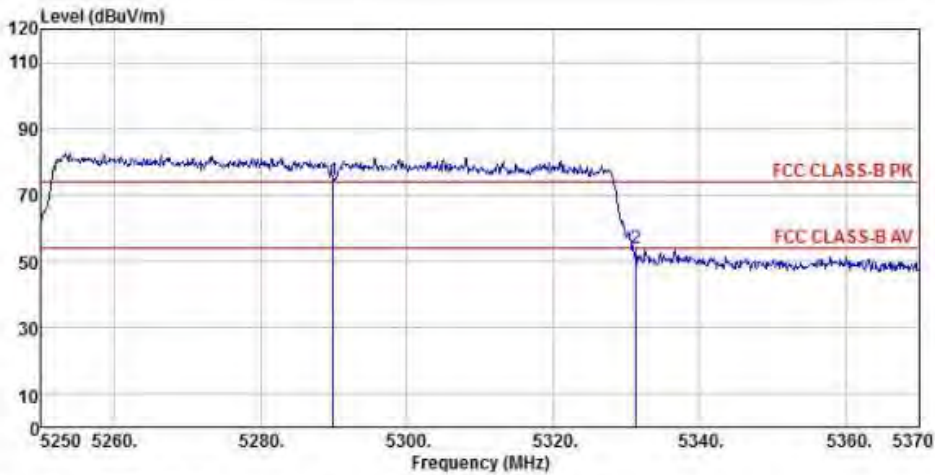

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5289.96	68.20	31.69	10.83	36.36	74.36	74.00	0.36	Peak
2		5331.36	47.65	31.75	10.87	36.39	53.88	74.00	-20.12	Peak

Detector mode: Average

Polarity: Horizontal

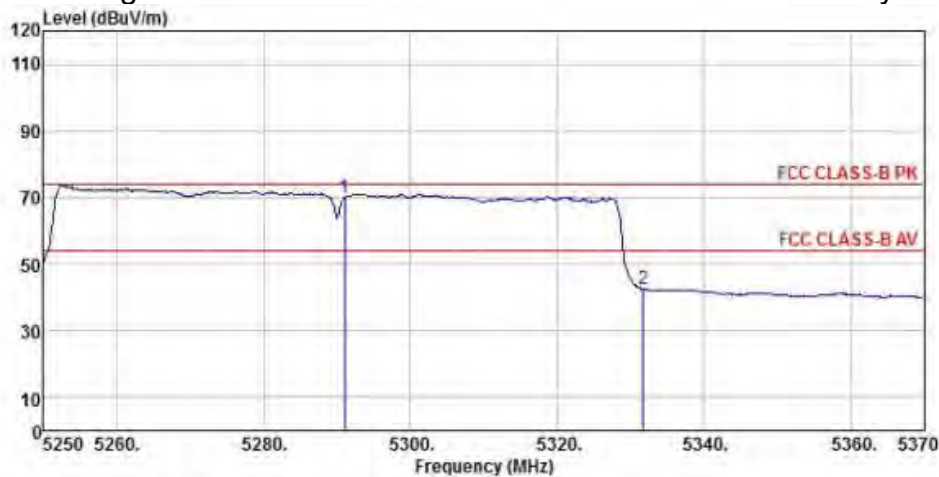


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5291.04	63.83	31.69	10.83	36.36	69.99	74.00	-4.01 Peak
2 5331.72	36.18	31.75	10.87	36.39	42.41	74.00	-31.59 Peak

Detector mode: Peak

Polarity: Vertical

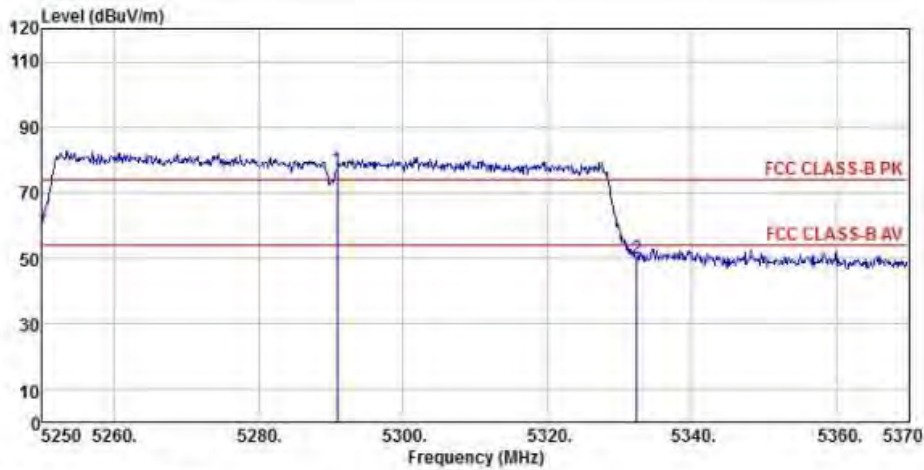


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH58
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5290.80	71.00	31.69	10.83	36.36	77.16	74.00	3.16 Peak
2 5332.32	43.95	31.75	10.87	36.39	50.18	74.00	-23.82 Peak

Detector mode: Average

Polarity: Vertical

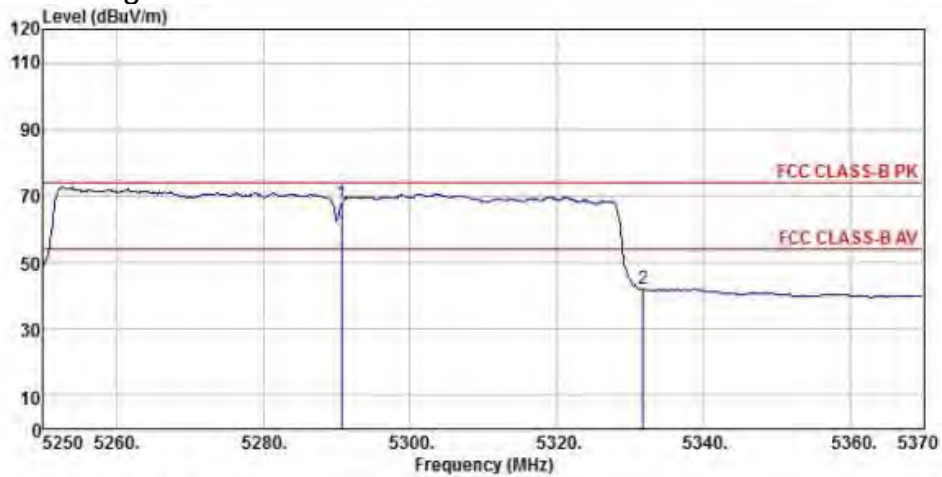

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5290.68	61.75	31.69	10.83	36.36	67.91	74.00	-6.09 Peak
2 5331.72	35.73	31.75	10.87	36.39	41.96	74.00	-32.04 Peak

802.11ac80 (Ch42)(mimo)

Detector mode: Peak

Polarity: Horizontal

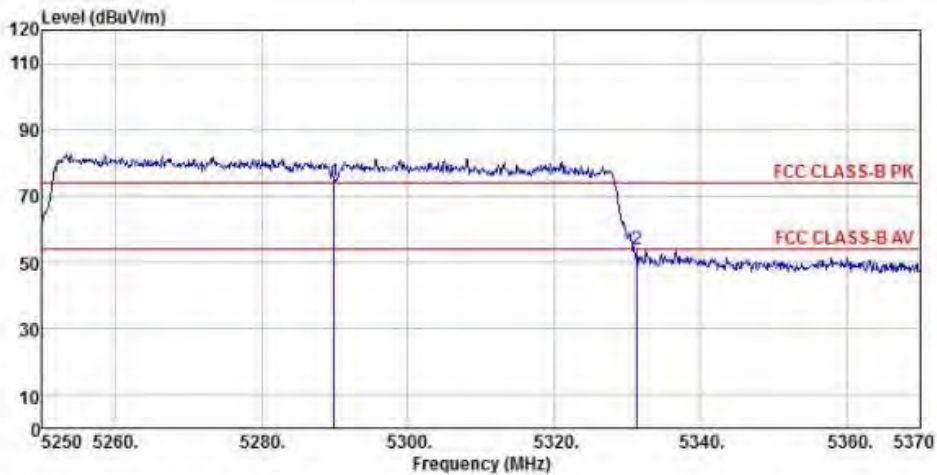


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5289.96	68.20	31.69	10.83	36.36	74.36	74.00	0.36 Peak
2 5331.36	47.65	31.75	10.87	36.39	53.88	74.00	-20.12 Peak

Detector mode: Average

Polarity: Horizontal

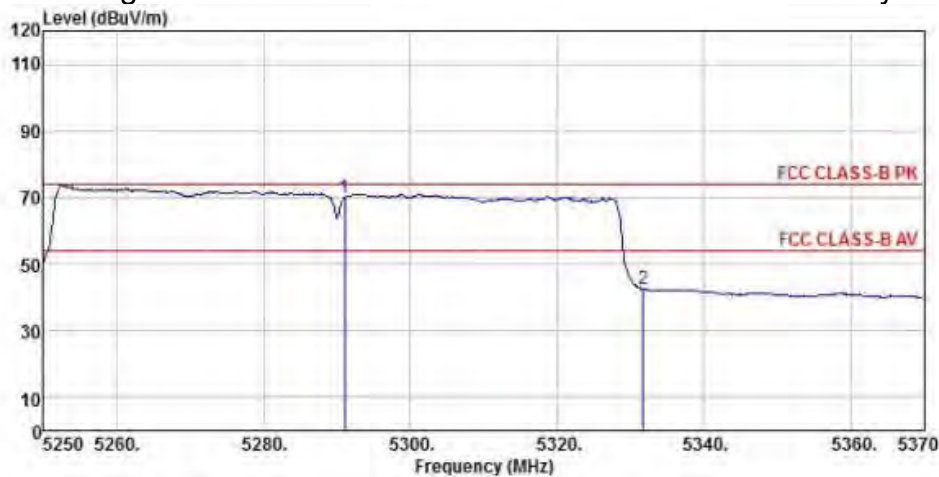


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5291.04	63.83	31.69	10.83	36.36	69.99	74.00	-4.01 Peak
2 5331.72	36.18	31.75	10.87	36.39	42.41	74.00	-31.59 Peak

Detector mode: Peak

Polarity: Vertical

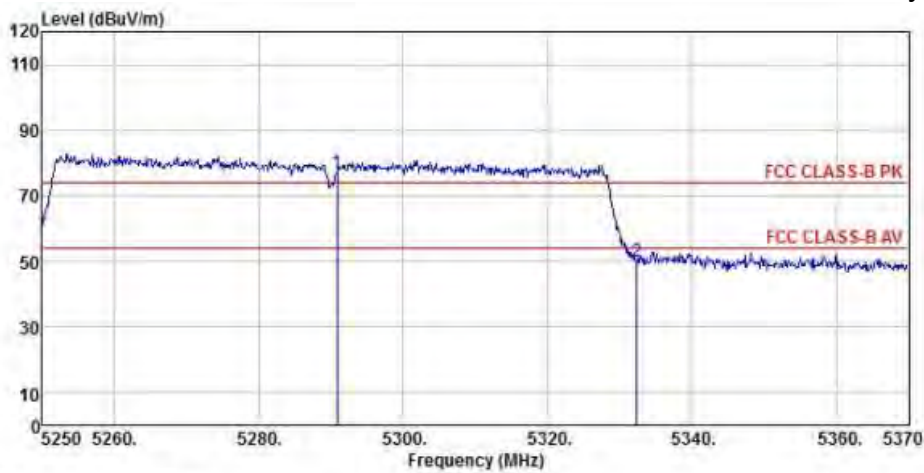


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH58
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5290.80	71.00	31.69	10.83	36.36	77.16	74.00	3.16 Peak
2 5332.32	43.95	31.75	10.87	36.39	50.18	74.00	-23.82 Peak

Detector mode: Average

Polarity: Vertical

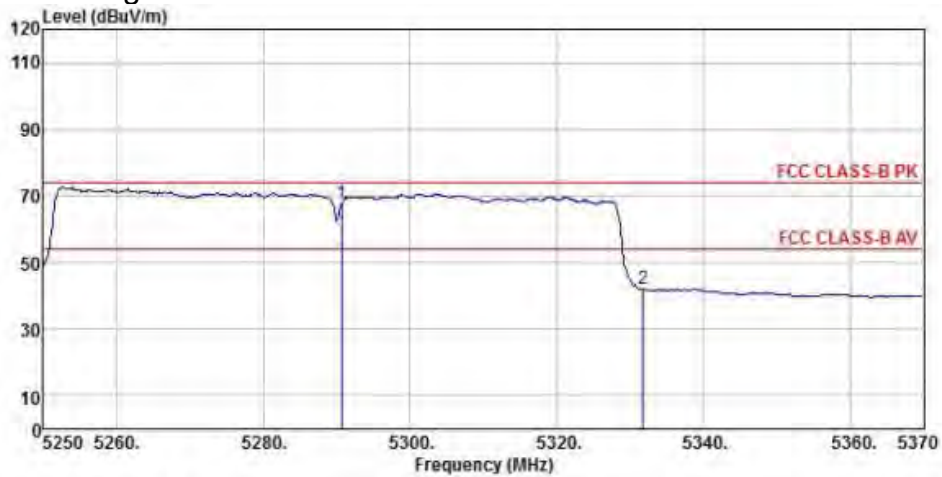

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor
Level	Line	Limit	Remark	


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5290.68	61.75	31.69	10.83	36.36	67.91	74.00	-6.09 Peak
2 5331.72	35.73	31.75	10.87	36.39	41.96	74.00	-32.04 Peak

802.11ac(5725MHz-5850MHz)

802.11ac20 (Ch149)

Detector mode: Peak

Polarity: Horizontal

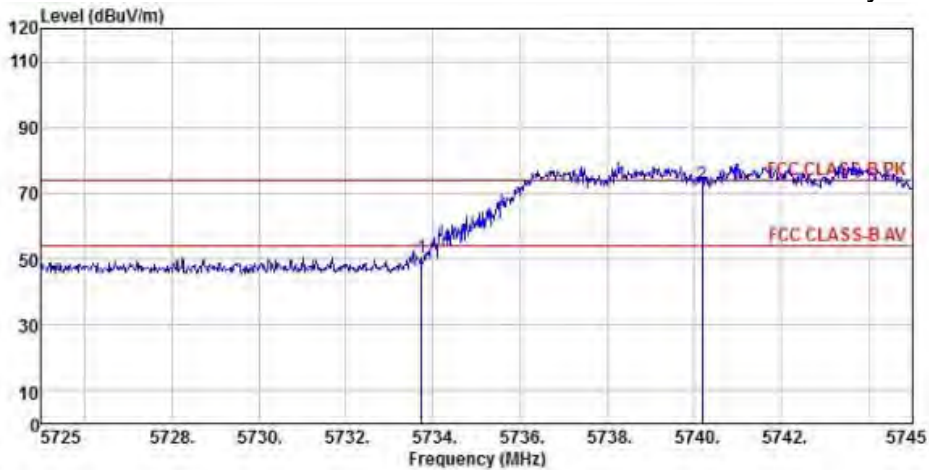


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor
Level	Line	Limit	Remark	

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.74	43.82	32.34	10.99	36.65	50.50	74.00	-23.50 Peak
2 pp 5740.18	66.16	32.34	10.88	36.65	72.73	74.00	-1.27 Peak

Detector mode: Average

Polarity: Horizontal

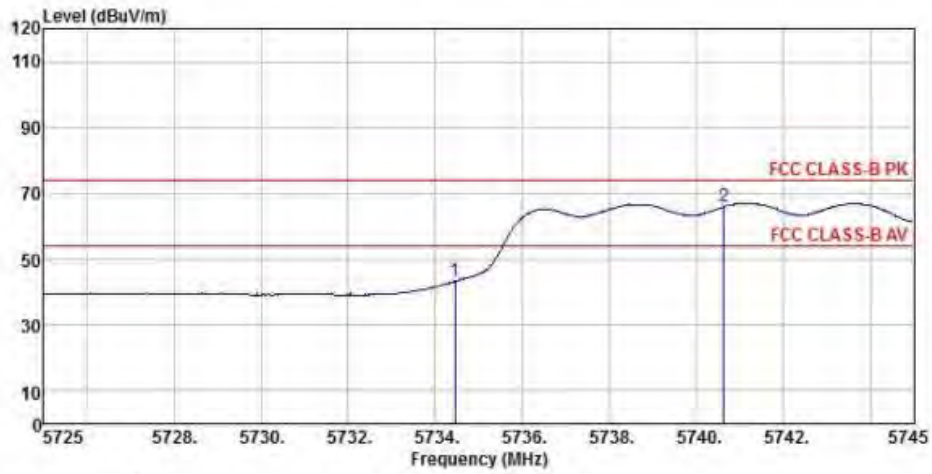


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	5734.46	36.57	32.34	10.99	36.65	43.25	74.00	-30.75 Peak
2	5740.64	59.41	32.34	10.88	36.65	65.98	74.00	-8.02 Peak

Detector mode: Peak

Polarity: Vertical

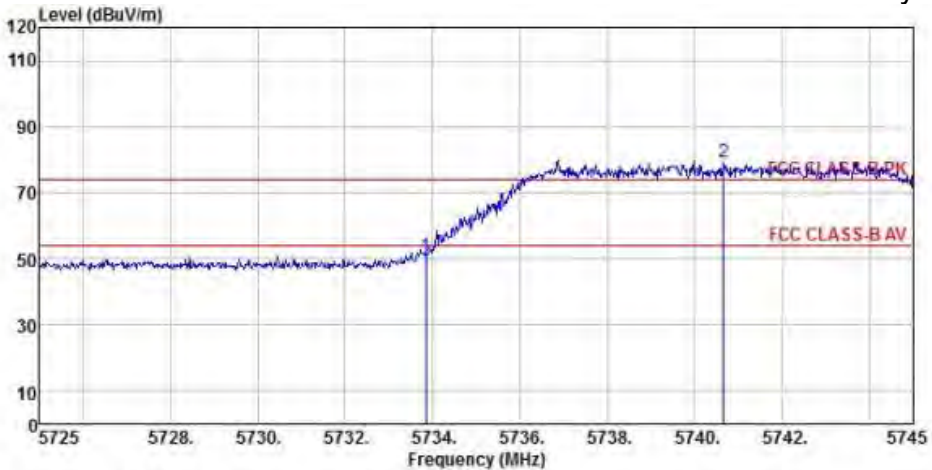


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	5733.86	44.19	32.34	10.99	36.65	50.87	74.00	-23.13 Peak
2	5740.68	72.54	32.34	10.88	36.65	79.11	74.00	5.11 Peak

Detector mode: Average

Polarity: Vertical

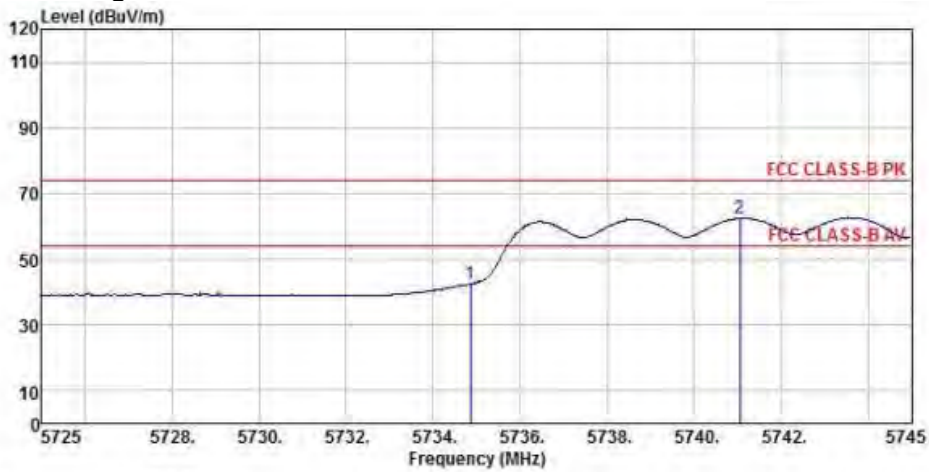

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5734.86	35.86	32.34	10.88	36.65	42.43	74.00	-31.57 Peak
2	5741.06	55.76	32.34	10.88	36.65	62.33	74.00	-11.67 Peak

802.11ac20 (Ch165)

Detector mode: Peak

Polarity: Horizontal

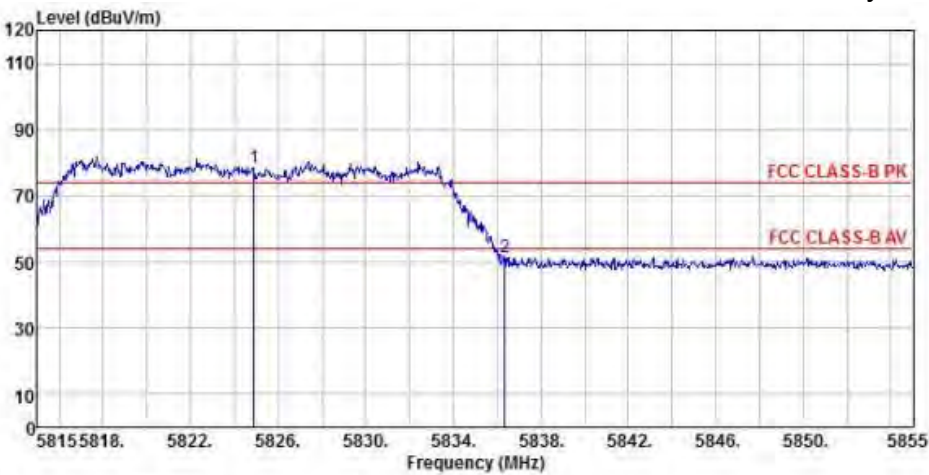


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5824.88	70.90	32.65	11.65	36.70	78.50	74.00	4.50 Peak
2	5836.36	43.68	32.71	11.65	36.71	51.33	74.00	-22.67 Peak

Detector mode: Average

Polarity: Horizontal

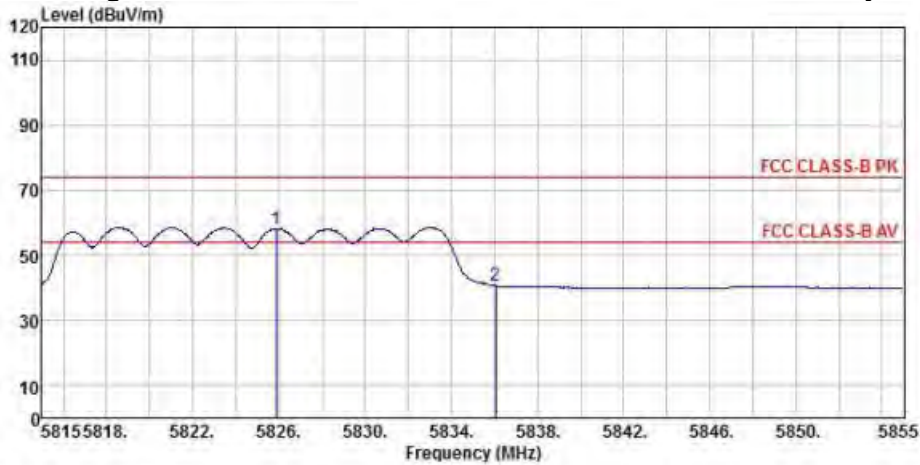


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5825.88	50.53	32.65	11.65	36.71	58.12	74.00	-15.88	Peak
2 5836.04	32.87	32.71	11.65	36.71	40.52	74.00	-33.48	Peak

Detector mode: Peak

Polarity: Vertical

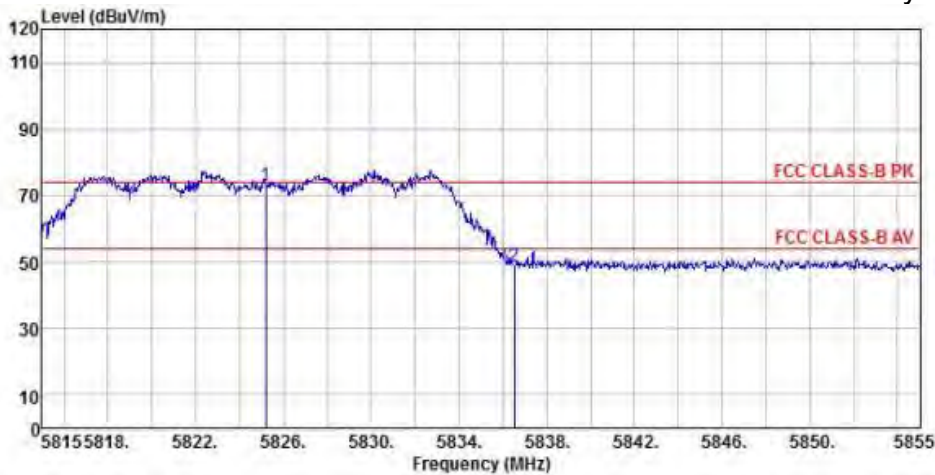


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5825.20	65.45	32.65	11.65	36.70	73.05	74.00	-0.95	Peak
2 5836.52	41.10	32.71	11.72	36.71	48.82	74.00	-25.18	Peak

Detector mode: Average

Polarity: Vertical

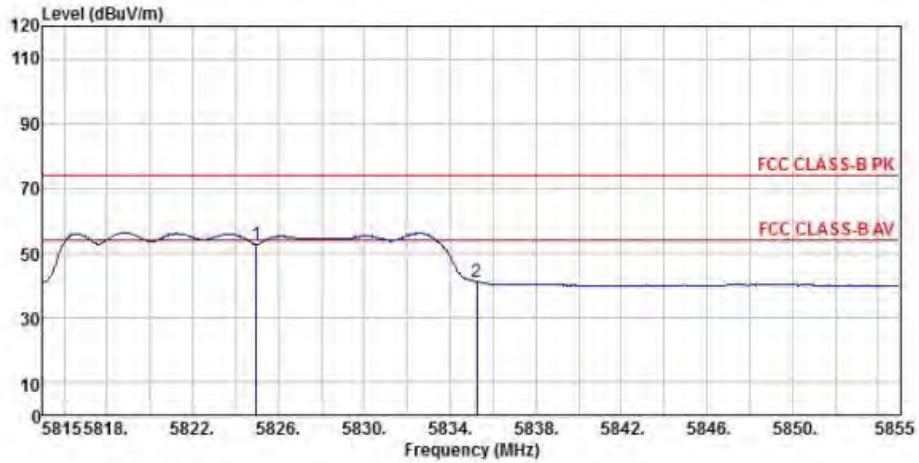


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5824.96	44.97	32.65	11.65	36.70	52.57	74.00	-21.43	Peak
2 5835.24	33.64	32.65	11.65	36.71	41.23	74.00	-32.77	Peak

802.11ac40 (Ch151)

Detector mode: Peak

Polarity: Horizontal

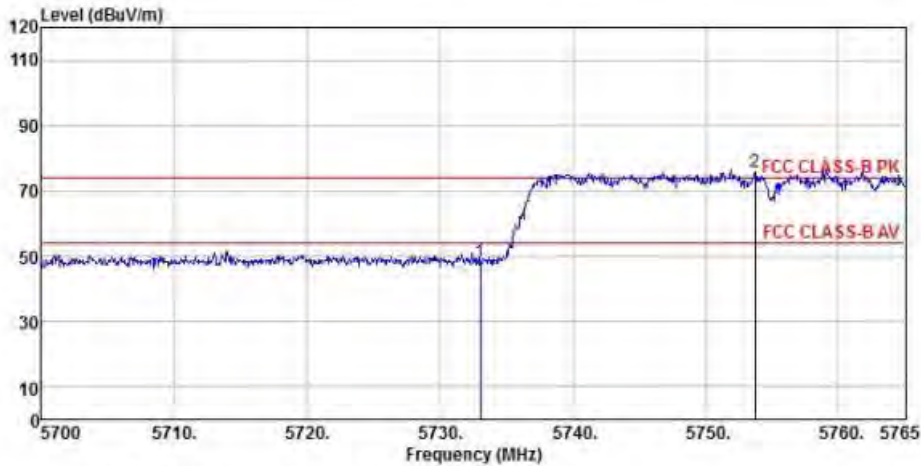


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5733.02	41.41	32.34	10.99	36.65	48.09	74.00	-25.91	Peak
2 pp 5753.69	69.11	32.40	11.09	36.66	75.94	74.00	1.94	Peak

Detector mode: Average

Polarity: Horizontal

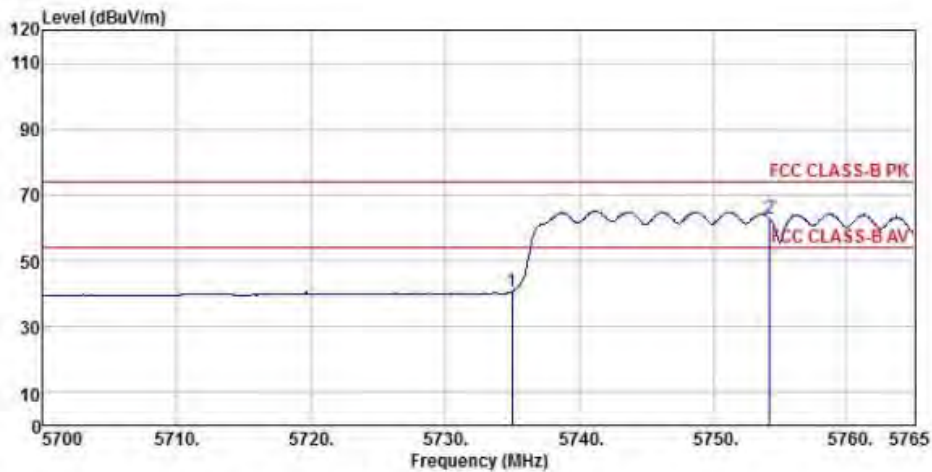


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5734.97	33.97	32.34	10.88	36.65	40.54	74.00	-33.46	Peak
2 pp 5754.21	55.94	32.40	11.09	36.66	62.77	74.00	-11.23	Peak

Detector mode: Peak

Polarity: Vertical

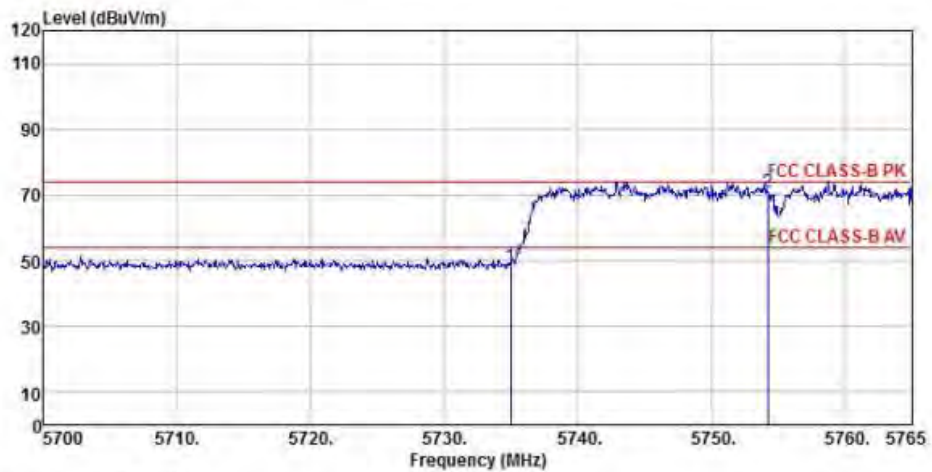


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5734.97	41.60	32.34	10.88	36.65	48.17	74.00	-25.83	Peak
2 pp 5754.28	63.83	32.40	11.09	36.66	70.66	74.00	-3.34	Peak

Detector mode: Average

Polarity: Vertical

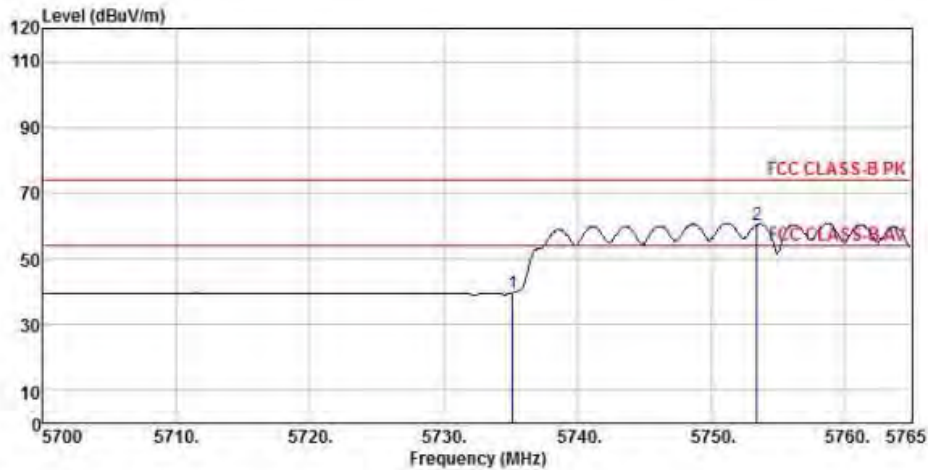

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5735.17	33.00	32.34	10.88	36.65	39.57	74.00	-34.43 Peak
2 pp 5753.43	53.56	32.40	11.09	36.66	60.39	74.00	-13.61 Peak

802.11ac40 (Ch159)

Detector mode: Peak

Polarity: Horizontal

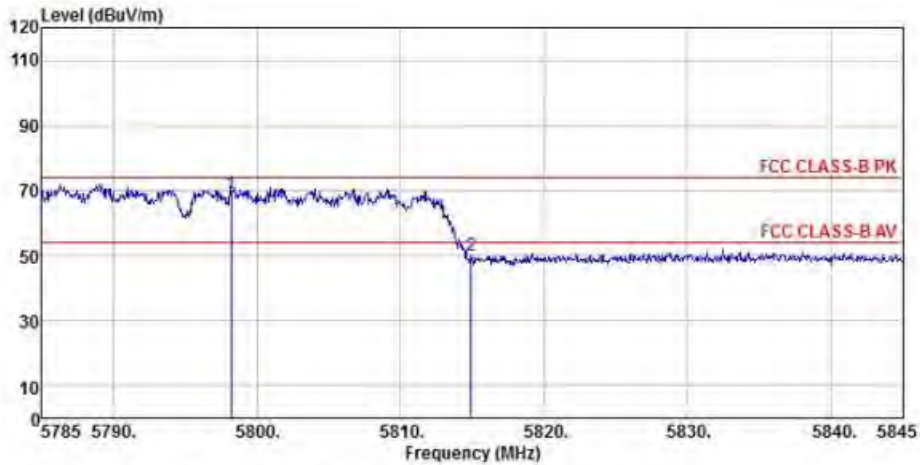


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.20	61.64	32.54	11.51	36.69	69.00	74.00	-5.00 Peak
2 5814.94	42.53	32.60	11.58	36.70	50.01	74.00	-23.99 Peak

Detector mode: Average

Polarity: Horizontal

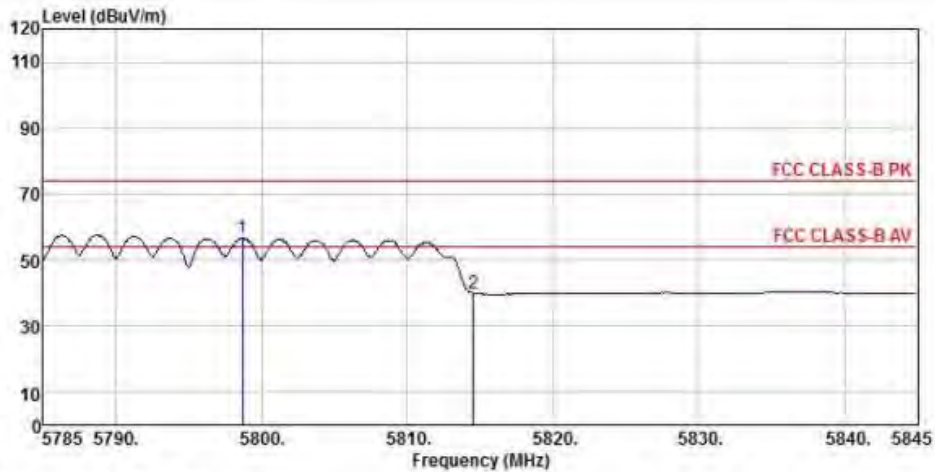


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.68	49.20	32.54	11.51	36.69	56.56	74.00	-17.44 Peak
2 5814.52	32.40	32.60	11.58	36.70	39.88	74.00	-34.12 Peak

Detector mode: Peak

Polarity: Vertical

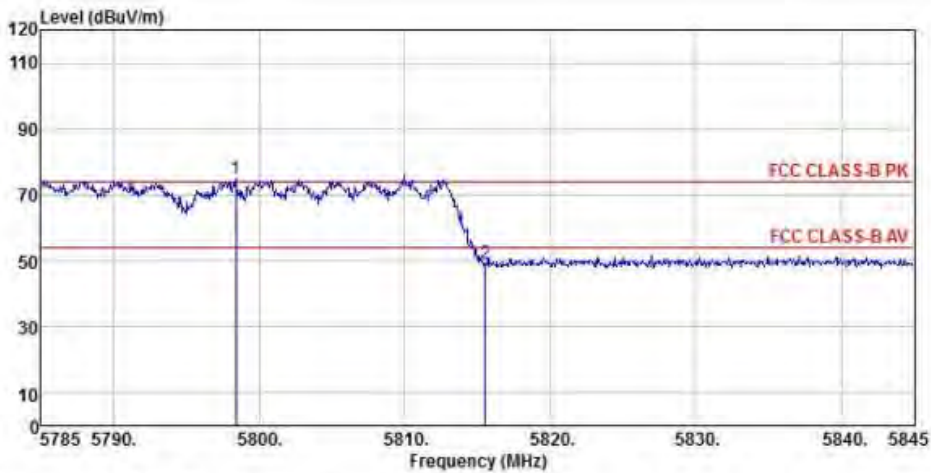


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.38	67.55	32.54	11.51	36.69	74.91	74.00	0.91 Peak
2 5815.54	41.87	32.60	11.58	36.70	49.35	74.00	-24.65 Peak

Detector mode: Average

Polarity: Vertical

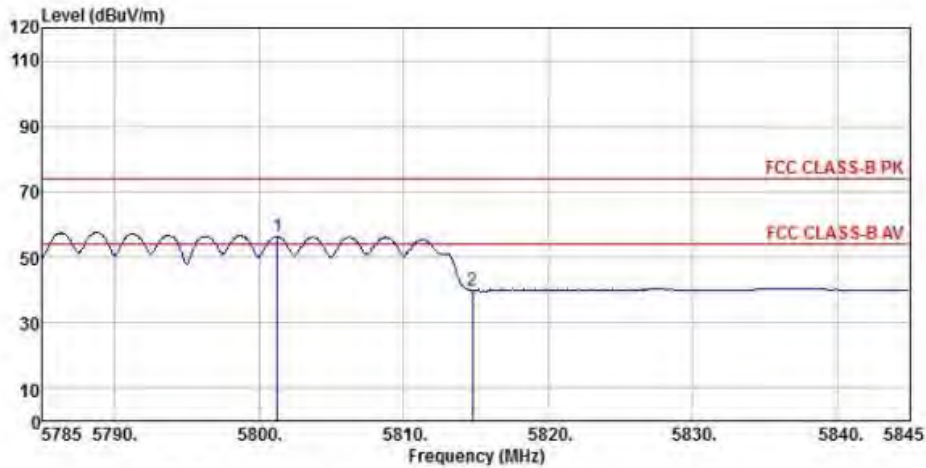

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5801.26	48.73	32.60	11.51	36.69	56.15	74.00	-17.85 Peak
2	5814.76	32.29	32.60	11.58	36.70	39.77	74.00	-34.23 Peak

802.11ac80 (Ch155)

Detector mode: Peak

Polarity: Horizontal

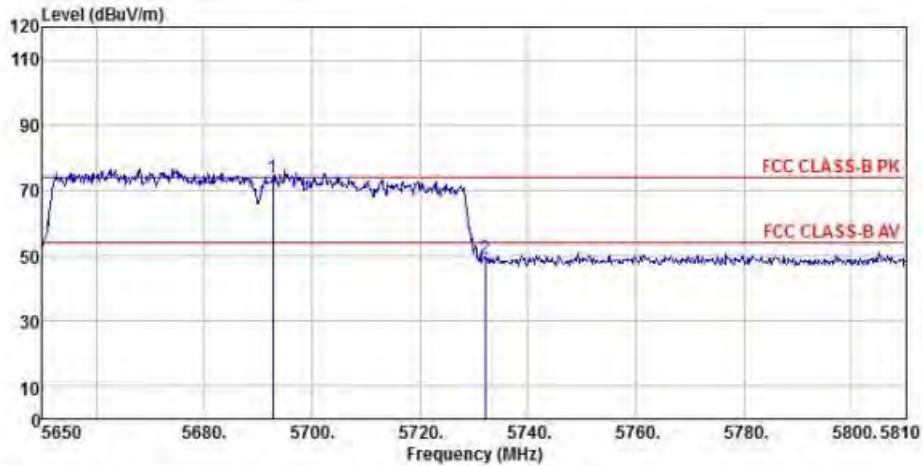


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5692.72	67.20	32.18	11.21	36.62	73.97	74.00	-0.03 Peak
2	5732.08	42.38	32.34	10.99	36.65	49.06	74.00	-24.94 Peak

Detector mode: Average

Polarity: Horizontal

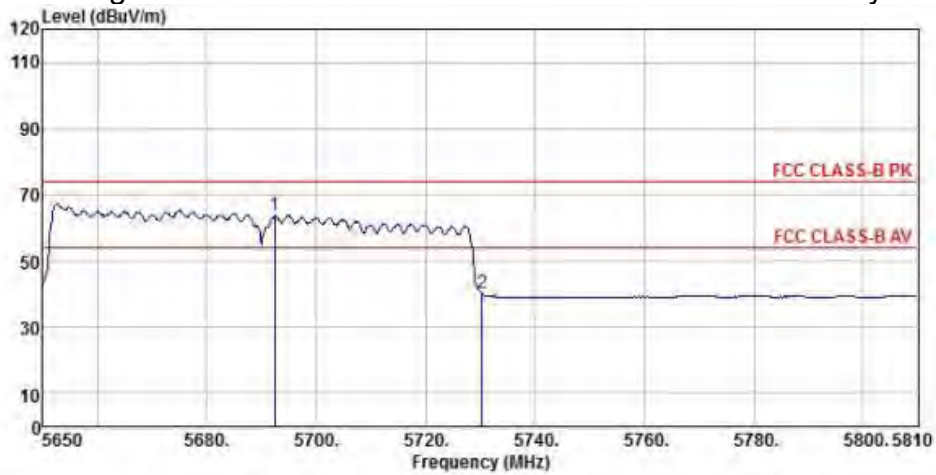


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5692.40	57.03	32.18	11.21	36.62	63.80	74.00	-10.20	Peak
2		5730.32	33.53	32.34	10.99	36.65	40.21	74.00	-33.79	Peak

Detector mode: Peak

Polarity: Vertical

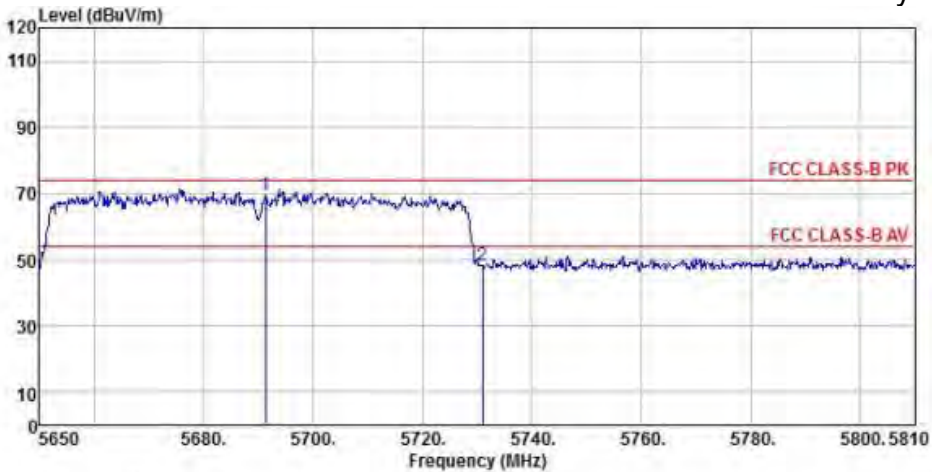


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5691.28	62.87	32.18	11.21	36.62	69.64	74.00	-4.36	Peak
2		5730.96	41.45	32.34	10.99	36.65	48.13	74.00	-25.87	Peak

Detector mode: Average

Polarity: Vertical

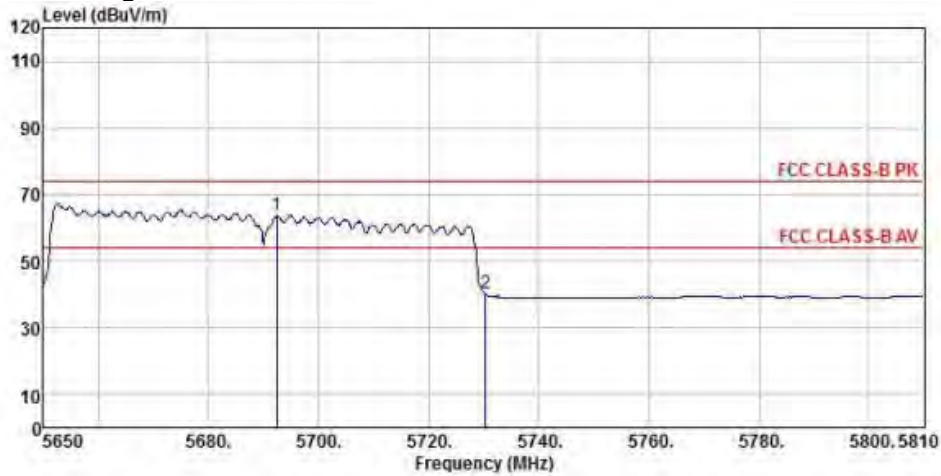

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5692.40	57.03	32.18	11.21	36.62	63.80	74.00	-10.20	Peak
2		5730.32	33.53	32.34	10.99	36.65	40.21	74.00	-33.79	Peak

802.11ac80 (Ch155)

Detector mode: Peak

Polarity: Horizontal

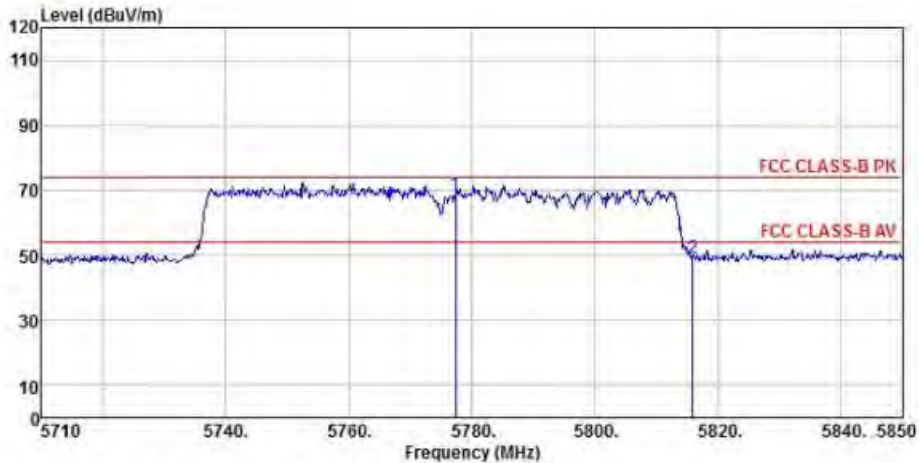


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5777.34	61.55	32.47	11.30	36.68	68.64	74.00	-5.36	Peak
2		5815.98	41.54	32.60	11.58	36.70	49.02	74.00	-24.98	Peak

Detector mode: Average

Polarity: Horizontal

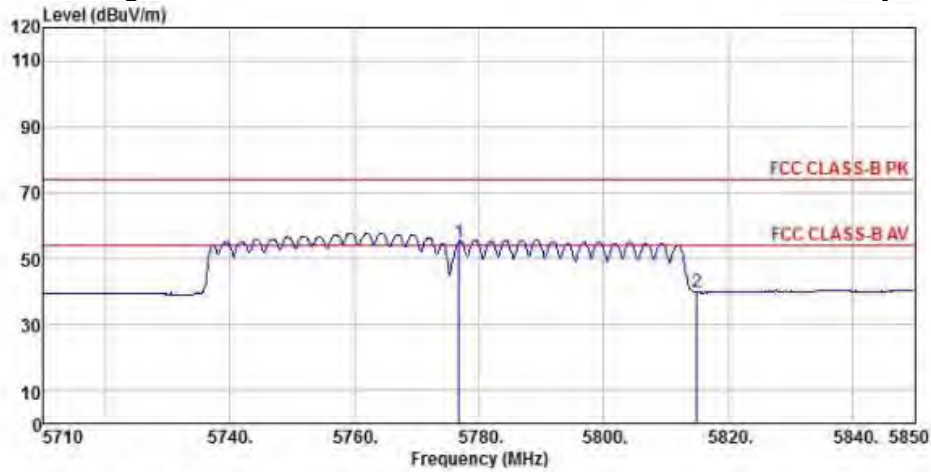


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5776.78	47.96	32.47	11.30	36.67	55.06	74.00	-18.94 Peak
2 5815.00	32.26	32.60	11.58	36.70	39.74	74.00	-34.26 Peak

Detector mode: Peak

Polarity: Vertical

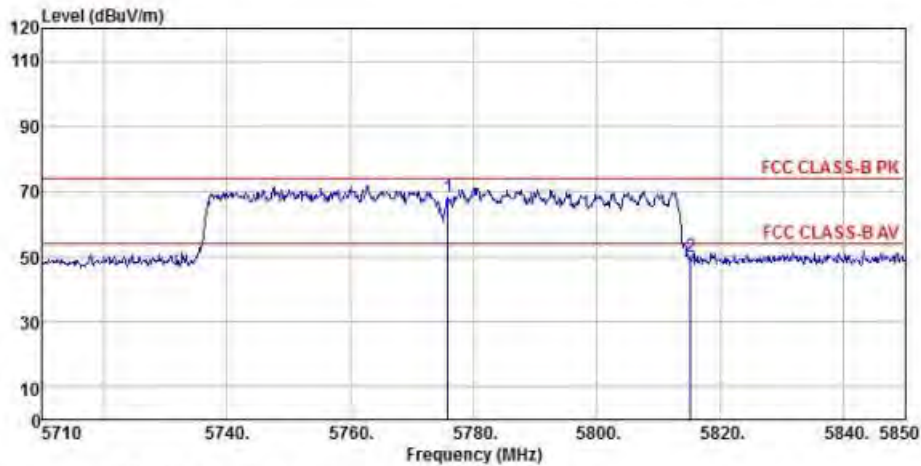


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5775.80	60.91	32.47	11.30	36.67	68.01	74.00	-5.99 Peak
2 5815.28	42.71	32.60	11.58	36.70	50.19	74.00	-23.81 Peak

Detector mode: Average

Polarity: Vertical

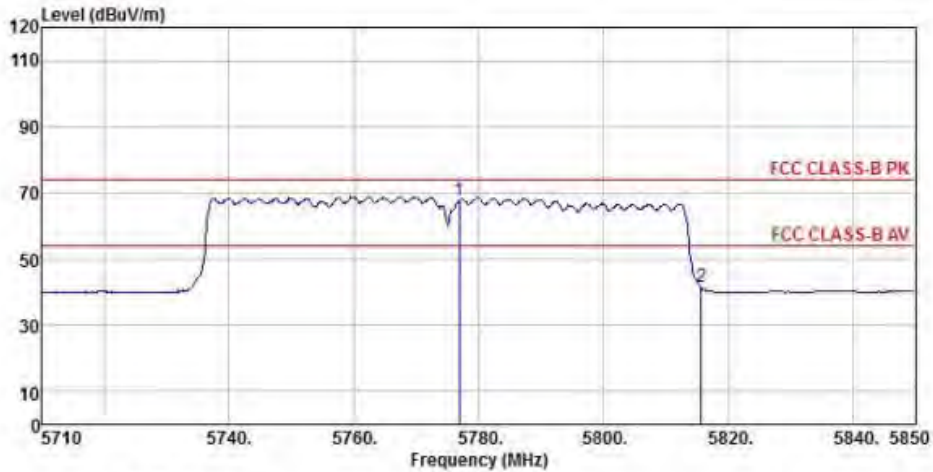

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5776.92	60.51	32.47	11.30	36.67	67.61	74.00	-6.39 Peak
2 5815.70	33.94	32.60	11.58	36.70	41.42	74.00	-32.58 Peak

802.11ac20 (Ch149)(mimo)

Detector mode: Peak

Polarity: Horizontal

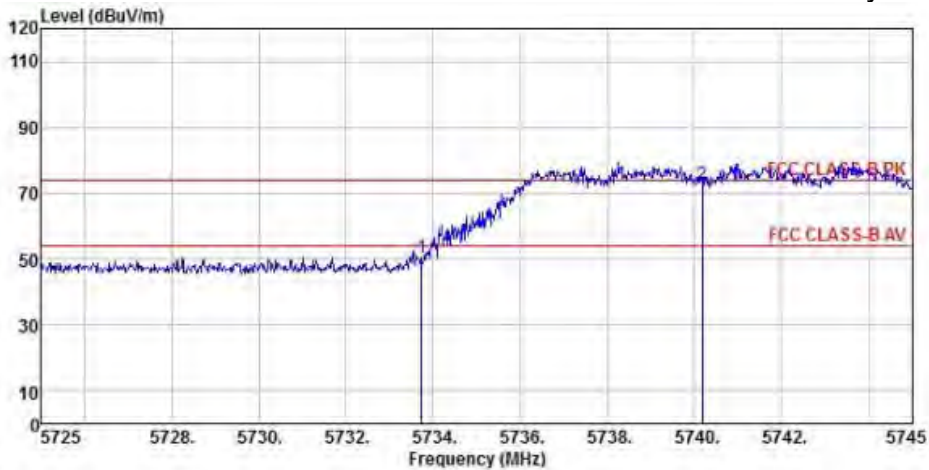


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.74	43.82	32.34	10.99	36.65	50.50	74.00	-23.50 Peak
2 pp 5740.18	66.16	32.34	10.88	36.65	72.73	74.00	-1.27 Peak

Detector mode: Average

Polarity: Horizontal

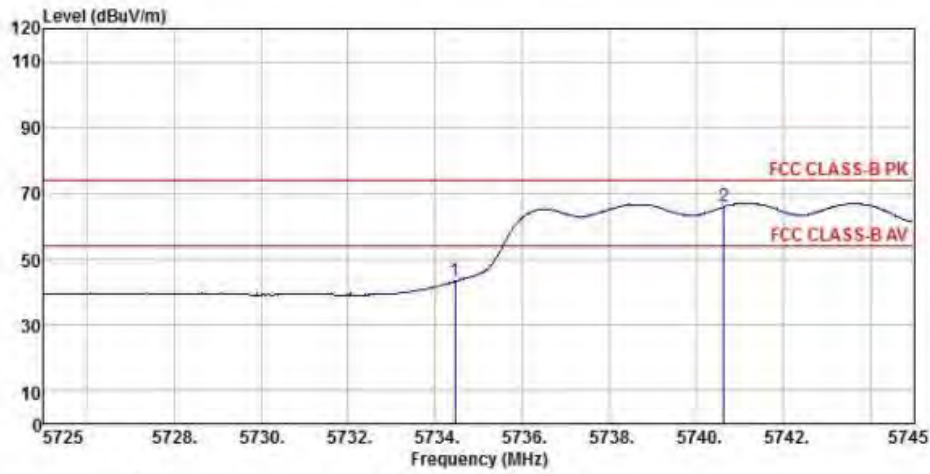


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.46	36.57	32.34	10.99	36.65	43.25	74.00	-30.75 Peak
2 pp 5740.64	59.41	32.34	10.88	36.65	65.98	74.00	-8.02 Peak

Detector mode: Peak

Polarity: Vertical

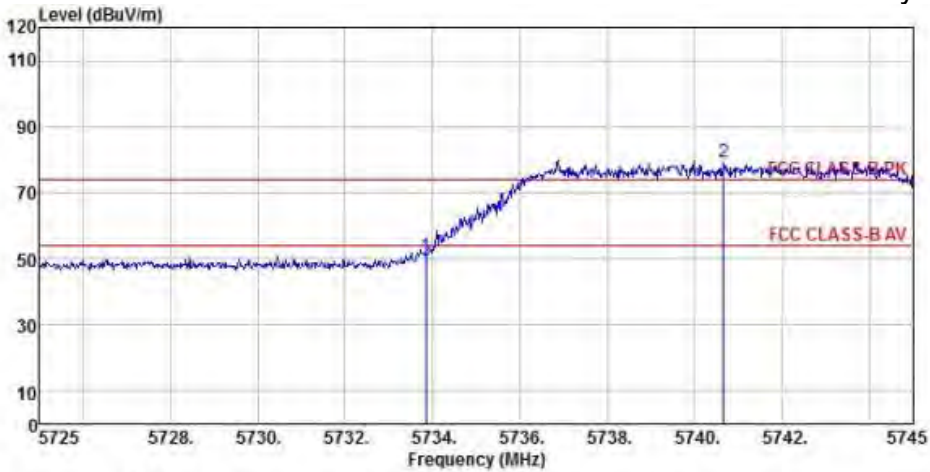


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.86	44.19	32.34	10.99	36.65	50.87	74.00	-23.13 Peak
2 pp 5740.68	72.54	32.34	10.88	36.65	79.11	74.00	5.11 Peak

Detector mode: Average

Polarity: Vertical

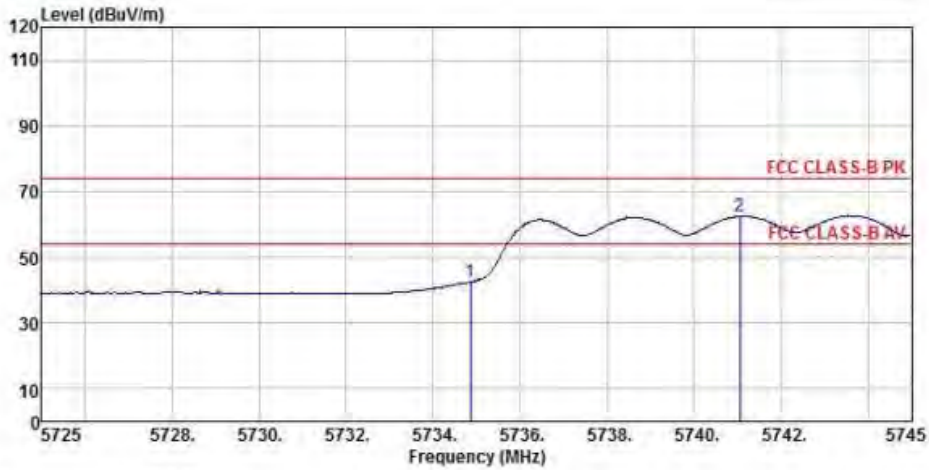

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.86	35.86	32.34	10.88	36.65	42.43	74.00	-31.57 Peak
2 pp 5741.06	55.76	32.34	10.88	36.65	62.33	74.00	-11.67 Peak

802.11ac20 (Ch165) (mimo)

Detector mode: Peak

Polarity: Horizontal

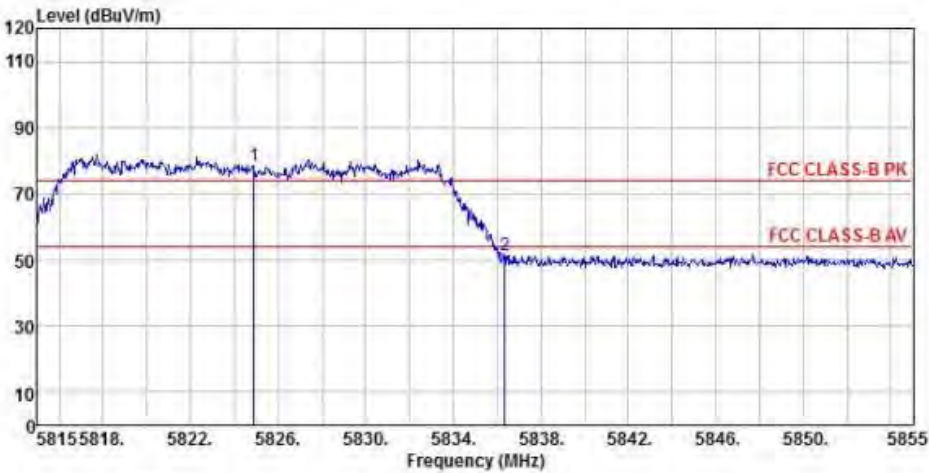


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.88	70.90	32.65	11.65	36.70	78.50	74.00	4.50 Peak
2 5836.36	43.68	32.71	11.65	36.71	51.33	74.00	-22.67 Peak

Detector mode: Average

Polarity: Horizontal

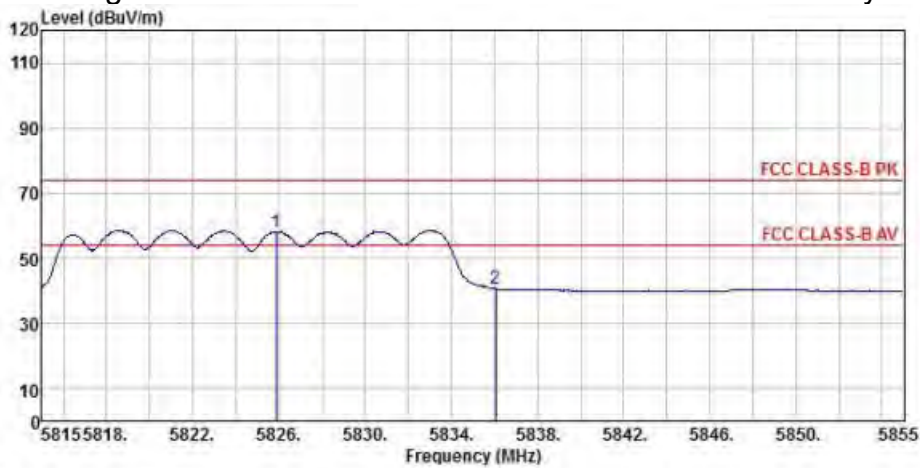


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5825.88	50.53	32.65	11.65	36.71	58.12	74.00	-15.88	Peak
2 5836.04	32.87	32.71	11.65	36.71	40.52	74.00	-33.48	Peak

Detector mode: Peak

Polarity: Vertical

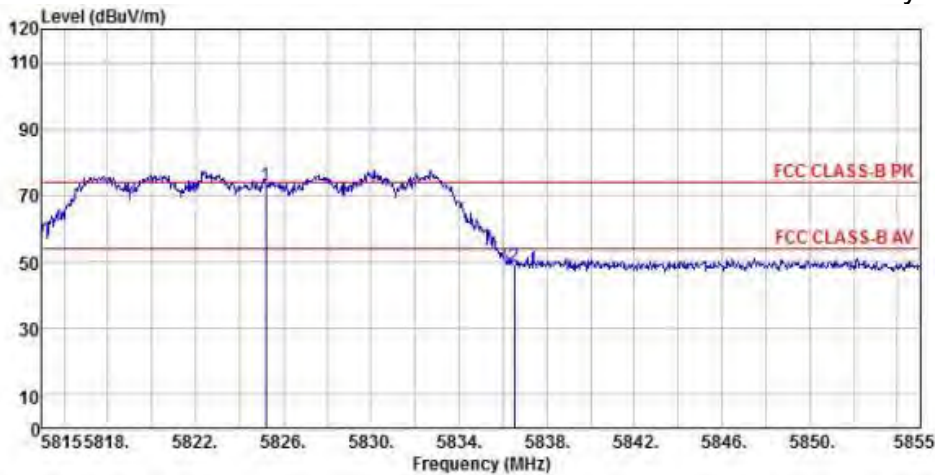


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5825.20	65.45	32.65	11.65	36.70	73.05	74.00	-0.95	Peak
2 5836.52	41.10	32.71	11.72	36.71	48.82	74.00	-25.18	Peak

Detector mode: Average

Polarity: Vertical

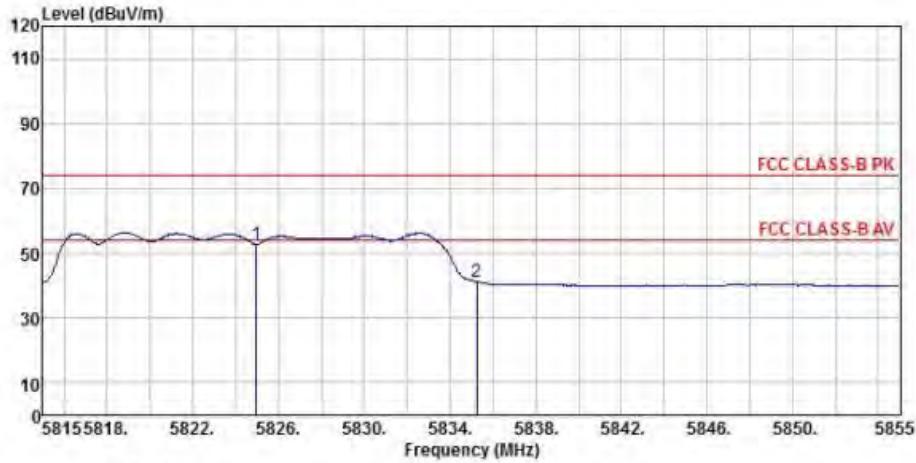


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5824.96	44.97	32.65	11.65	36.70	52.57	74.00	-21.43	Peak
2 5835.24	33.64	32.65	11.65	36.71	41.23	74.00	-32.77	Peak

802.11ac40 (Ch151) (mimo)

Detector mode: Peak

Polarity: Horizontal

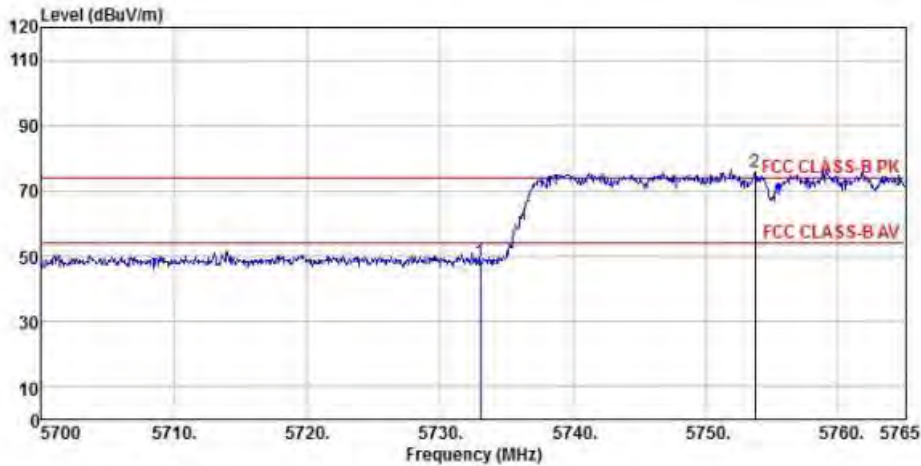


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5733.02	41.41	32.34	10.99	36.65	48.09	74.00	-25.91	Peak
2 pp 5753.69	69.11	32.40	11.09	36.66	75.94	74.00	1.94	Peak

Detector mode: Average

Polarity: Horizontal

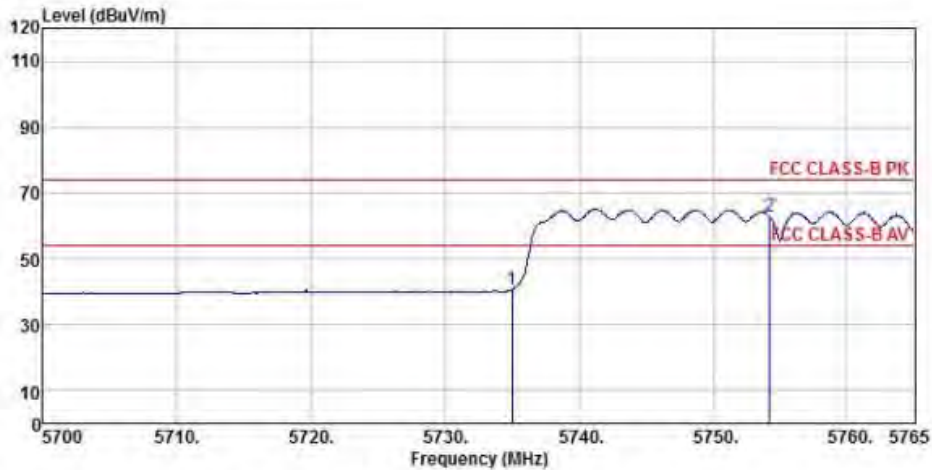


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.97	33.97	32.34	10.88	36.65	40.54	74.00	-33.46 Peak
2 pp 5754.21	55.94	32.40	11.09	36.66	62.77	74.00	-11.23 Peak

Detector mode: Peak

Polarity: Vertical

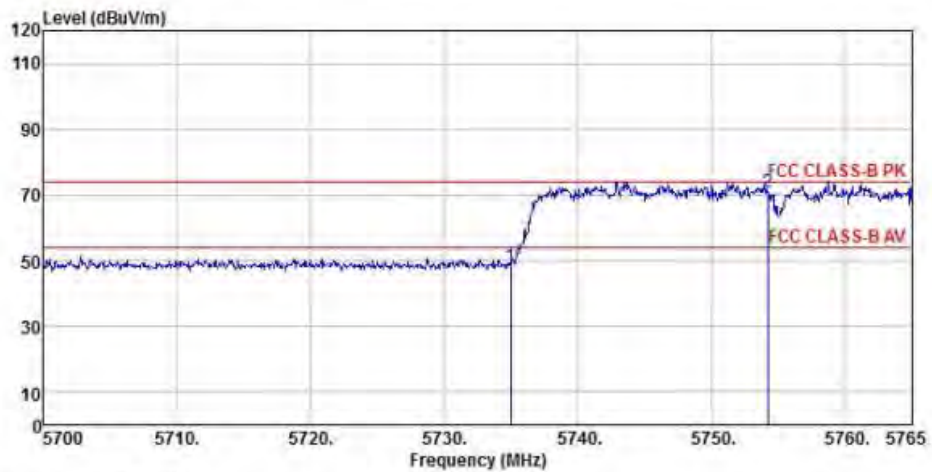


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.97	41.60	32.34	10.88	36.65	48.17	74.00	-25.83 Peak
2 pp 5754.28	63.83	32.40	11.09	36.66	70.66	74.00	-3.34 Peak

Detector mode: Average

Polarity: Vertical

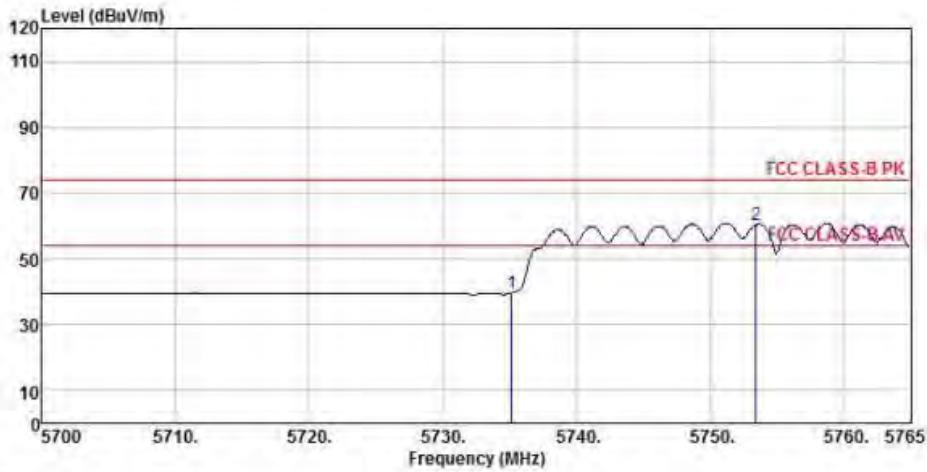

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5735.17	33.00	32.34	10.88	36.65	39.57	74.00	-34.43 Peak
2 pp 5753.43	53.56	32.40	11.09	36.66	60.39	74.00	-13.61 Peak

802.11ac40 (Ch159) (mimo)

Detector mode: Peak

Polarity: Horizontal

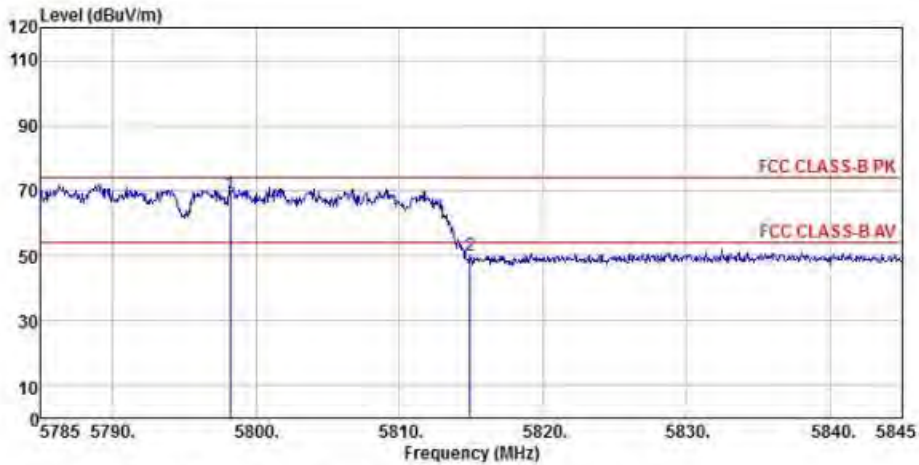


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.20	61.64	32.54	11.51	36.69	69.00	74.00	-5.00 Peak
2 5814.94	42.53	32.60	11.58	36.70	50.01	74.00	-23.99 Peak

Detector mode: Average

Polarity: Horizontal

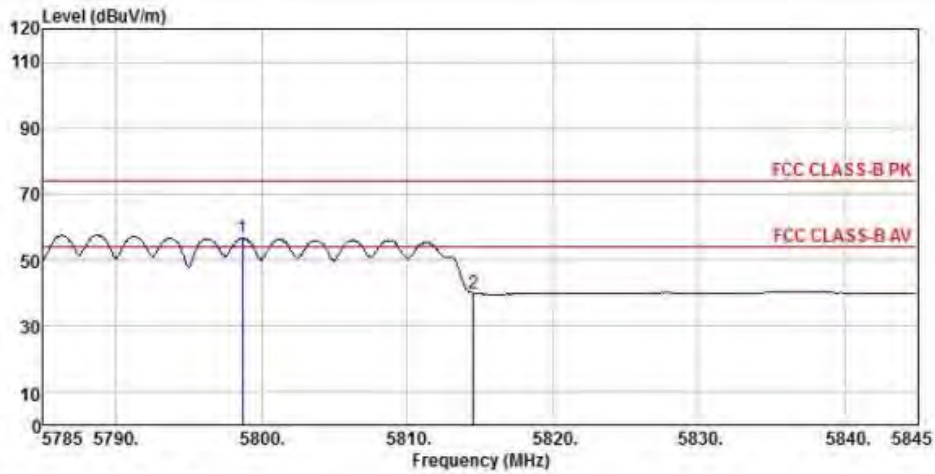


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.68	49.20	32.54	11.51	36.69	56.56	74.00	-17.44 Peak
2 5814.52	32.40	32.60	11.58	36.70	39.88	74.00	-34.12 Peak

Detector mode: Peak

Polarity: Vertical

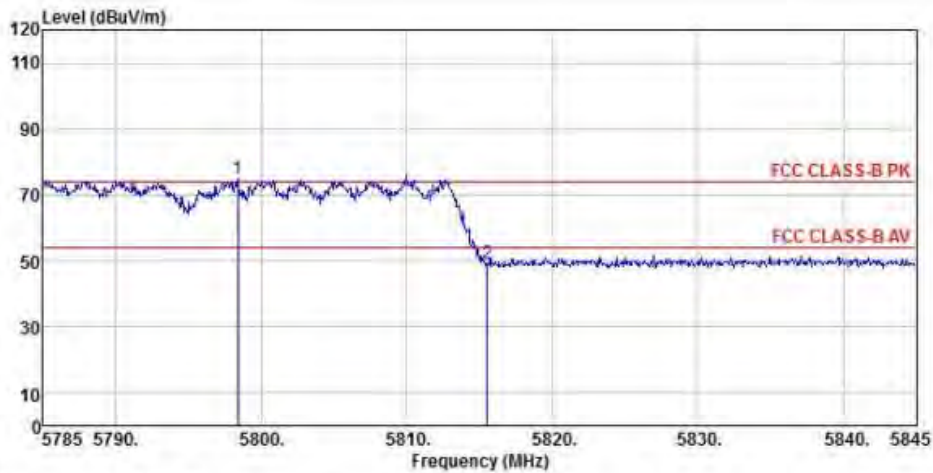


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.38	67.55	32.54	11.51	36.69	74.91	74.00	0.91 Peak
2 5815.54	41.87	32.60	11.58	36.70	49.35	74.00	-24.65 Peak

Detector mode: Average

Polarity: Vertical

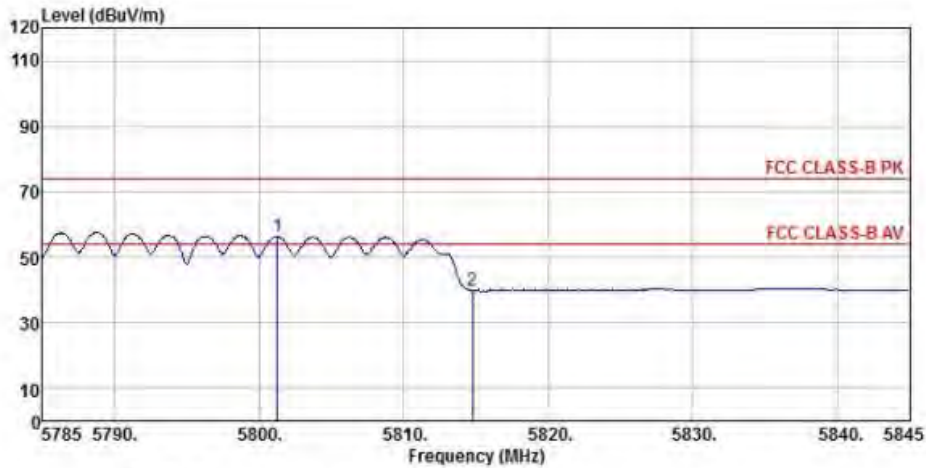

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5801.26	48.73	32.60	11.51	36.69	56.15	74.00	-17.85 Peak
2	5814.76	32.29	32.60	11.58	36.70	39.77	74.00	-34.23 Peak

802.11ac80 (Ch155) (mimo)

Detector mode: Peak

Polarity: Horizontal

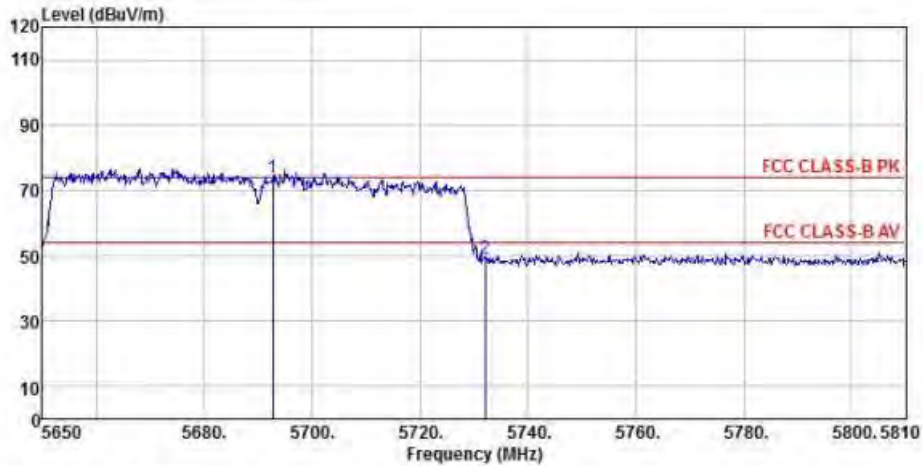


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5692.72	67.20	32.18	11.21	36.62	73.97	74.00	-0.03 Peak
2	5732.08	42.38	32.34	10.99	36.65	49.06	74.00	-24.94 Peak

Detector mode: Average

Polarity: Horizontal

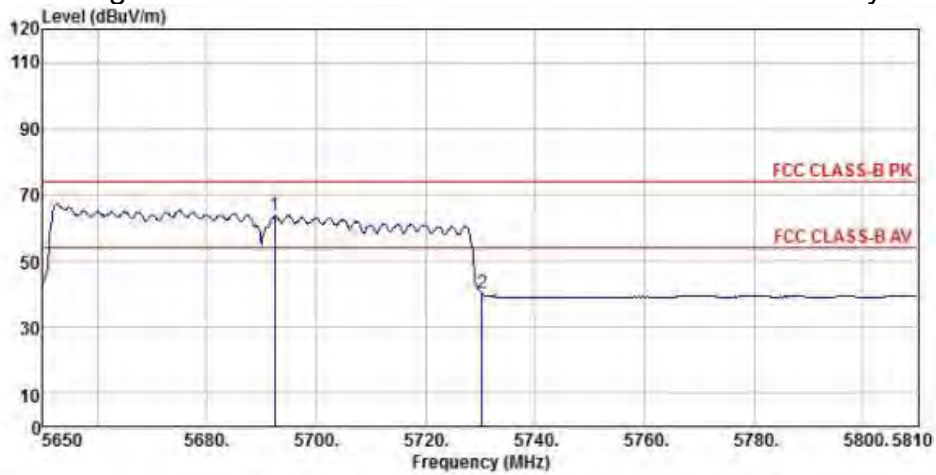


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5692.40	57.03	32.18	11.21	36.62	63.80	74.00	-10.20 Peak
2 5730.32	33.53	32.34	10.99	36.65	40.21	74.00	-33.79 Peak

Detector mode: Peak

Polarity: Vertical

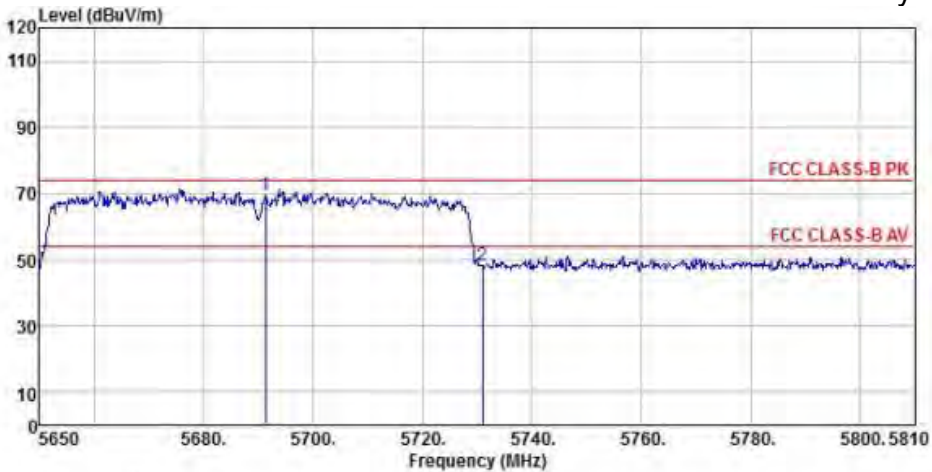


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5691.28	62.87	32.18	11.21	36.62	69.64	74.00	-4.36 Peak
2 5730.96	41.45	32.34	10.99	36.65	48.13	74.00	-25.87 Peak

Detector mode: Average

Polarity: Vertical

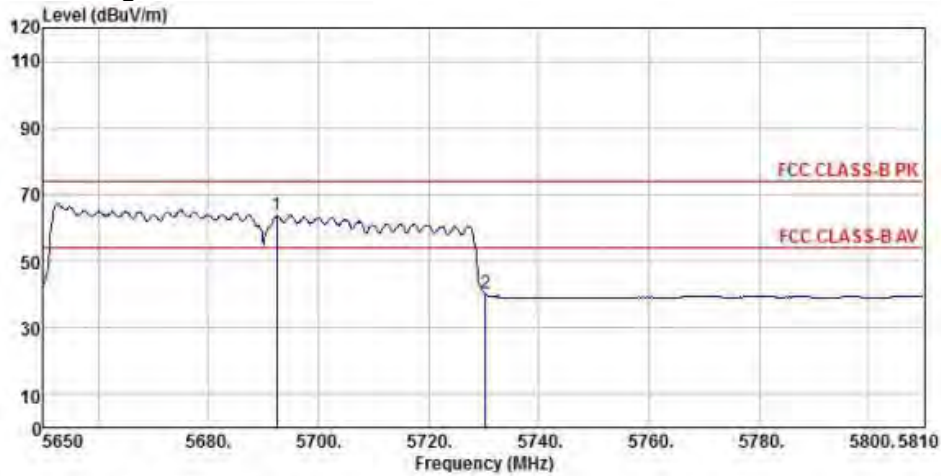

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5692.40	57.03	32.18	11.21	36.62	63.80	74.00	-10.20 Peak
2 5730.32	33.53	32.34	10.99	36.65	40.21	74.00	-33.79 Peak

802.11ac80 (Ch155) (mimo)

Detector mode: Peak

Polarity: Horizontal

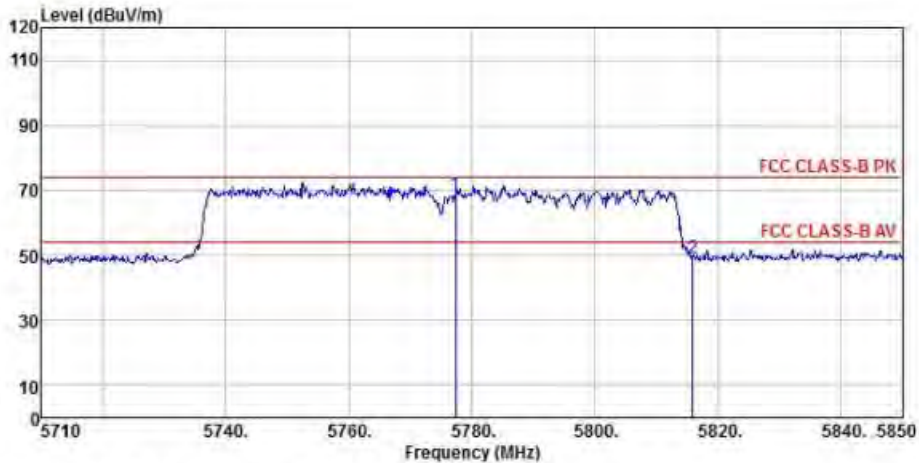


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5777.34	61.55	32.47	11.30	36.68	68.64	74.00	-5.36 Peak
2 5815.98	41.54	32.60	11.58	36.70	49.02	74.00	-24.98 Peak

Detector mode: Average

Polarity: Horizontal

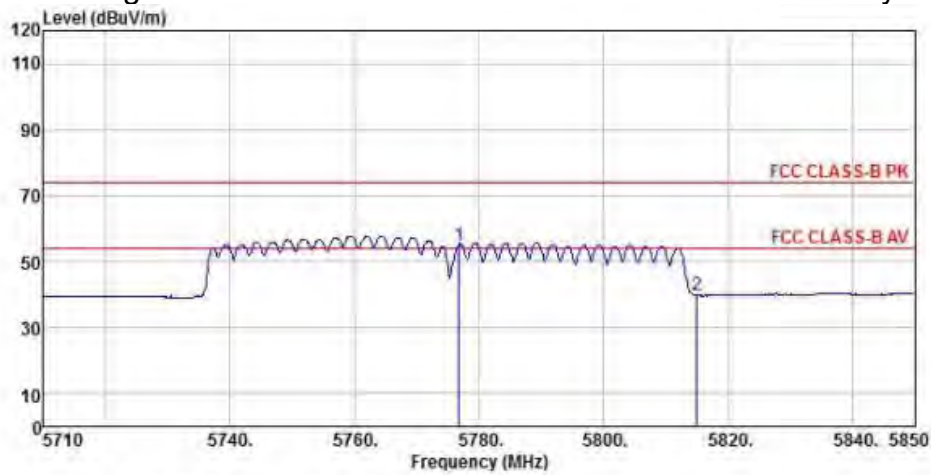


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5776.78	47.96	32.47	11.30	36.67	55.06	74.00	-18.94 Peak
2 5815.00	32.26	32.60	11.58	36.70	39.74	74.00	-34.26 Peak

Detector mode: Peak

Polarity: Vertical

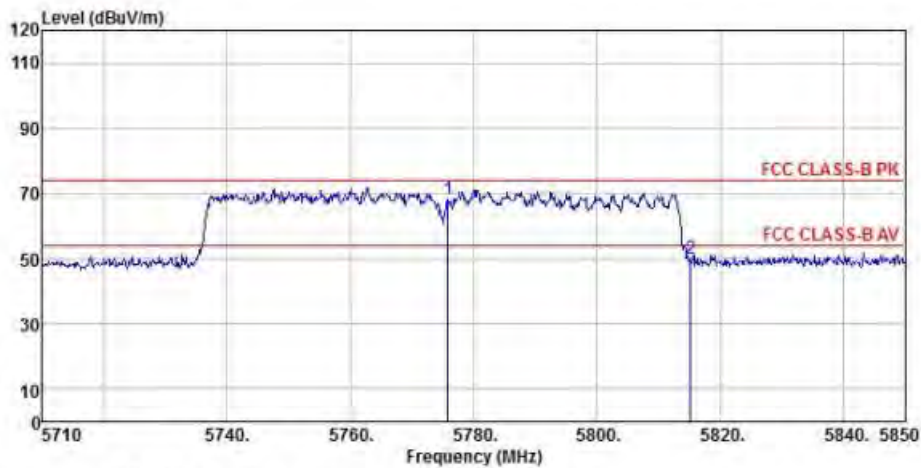


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5775.80	60.91	32.47	11.30	36.67	68.01	74.00	-5.99 Peak
2 5815.28	42.71	32.60	11.58	36.70	50.19	74.00	-23.81 Peak

Detector mode: Average

Polarity: Vertical

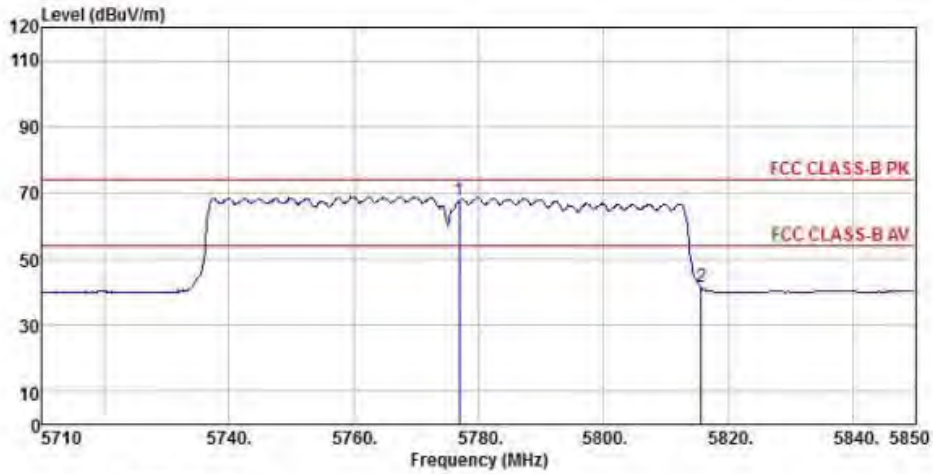

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

		ReadAntenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5776.92	60.51	32.47	11.30	36.67	67.61	74.00	-6.39	Peak
2 5815.70	33.94	32.60	11.58	36.70	41.42	74.00	-32.58	Peak

