


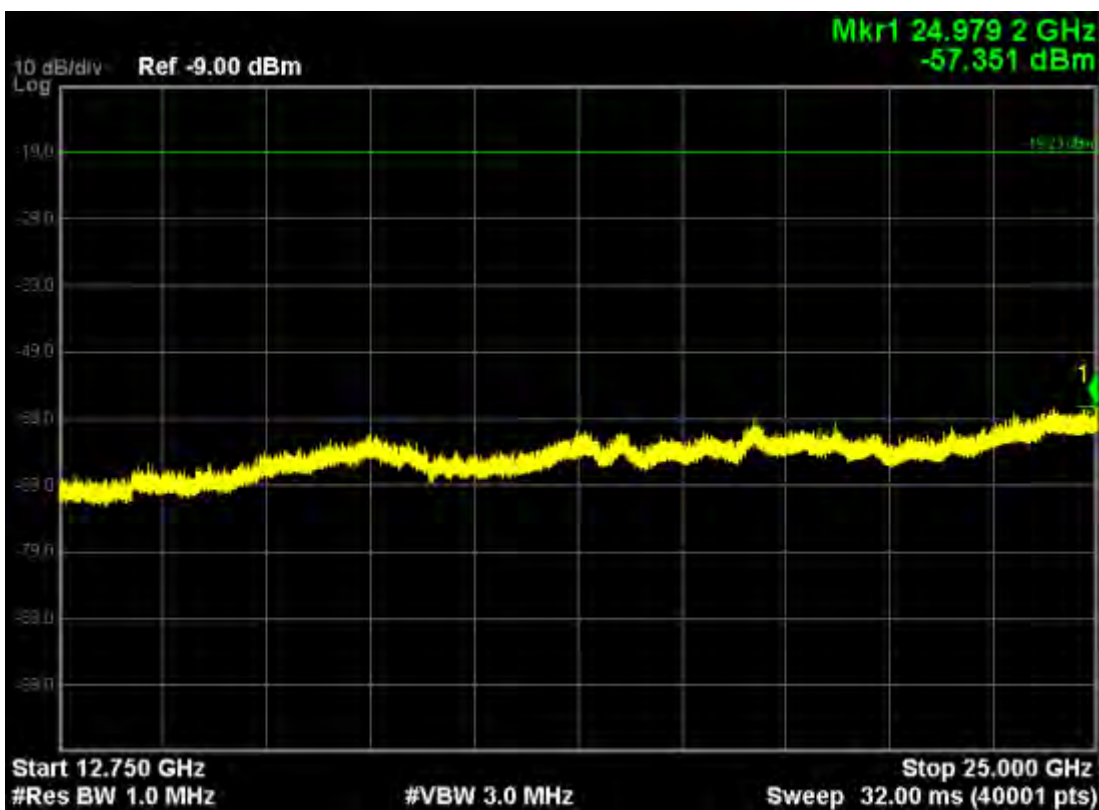
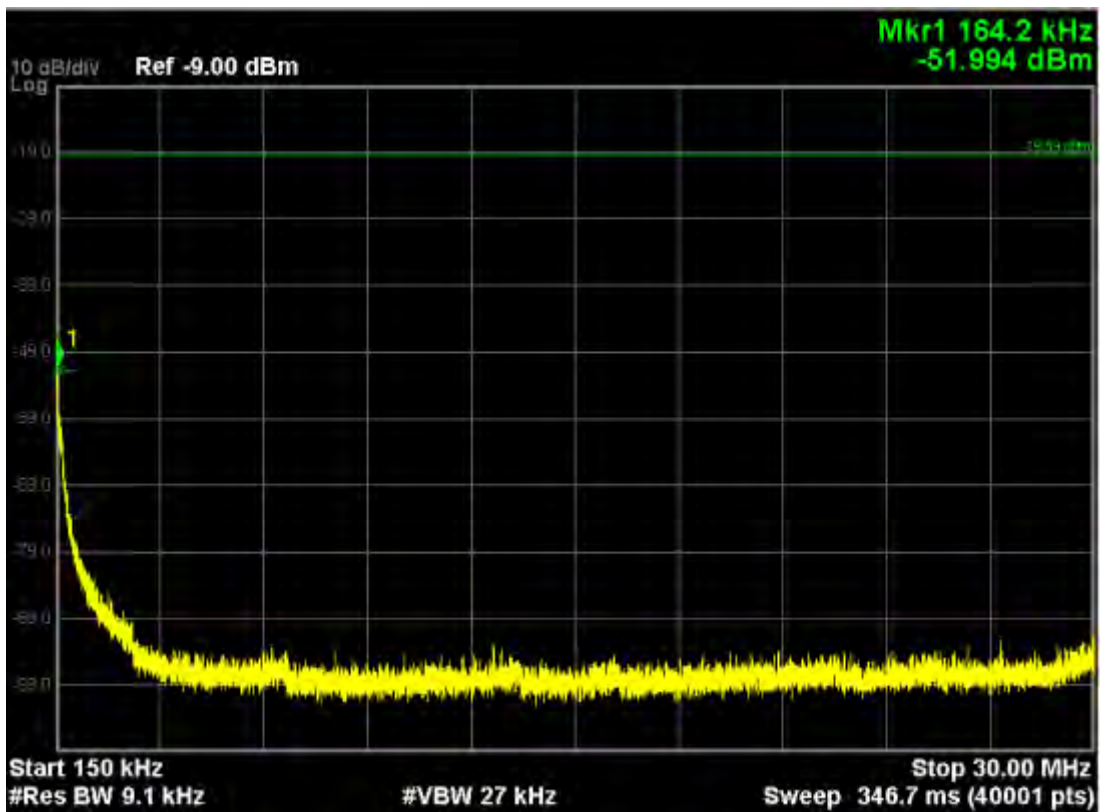


Note: The Mark1 point is carrier.

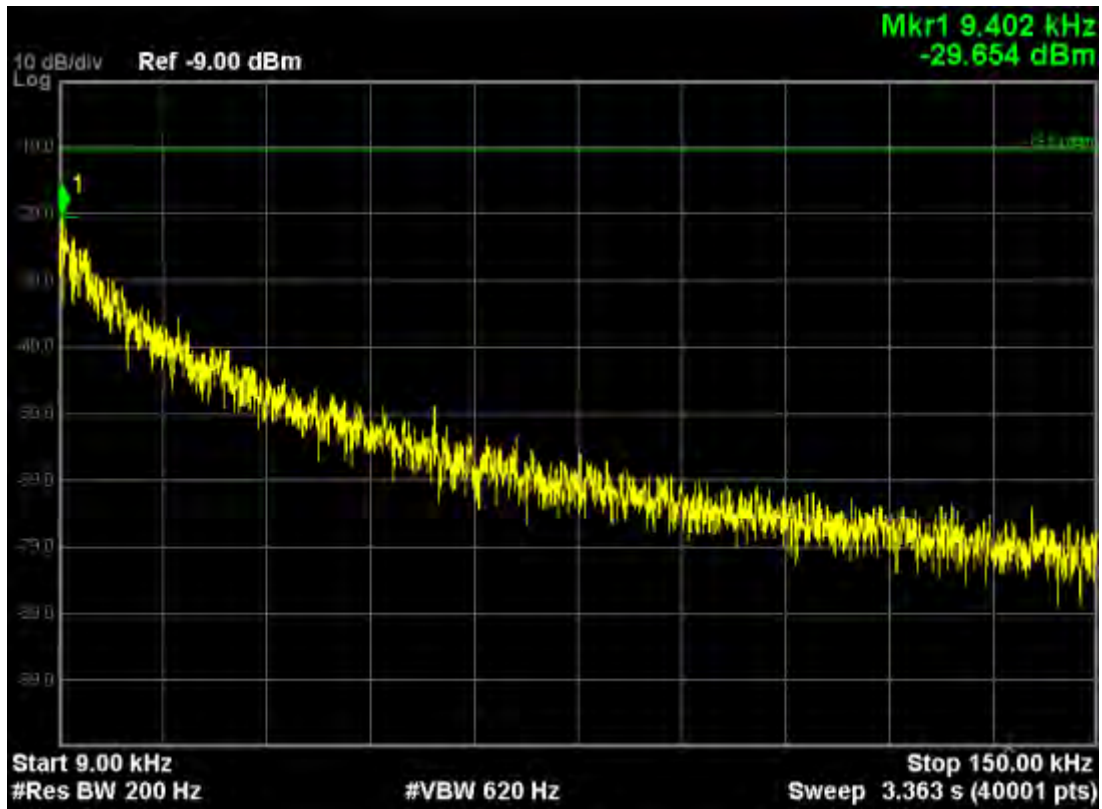


802.11a, traffic mode; Channel 165

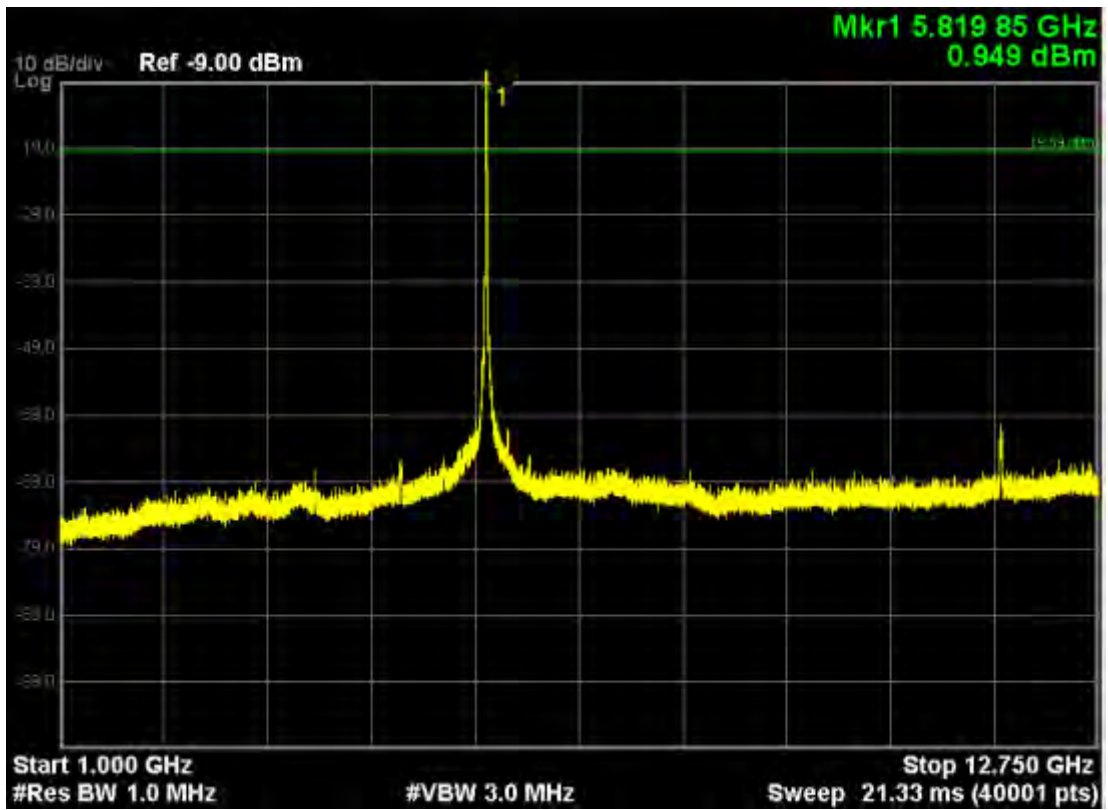



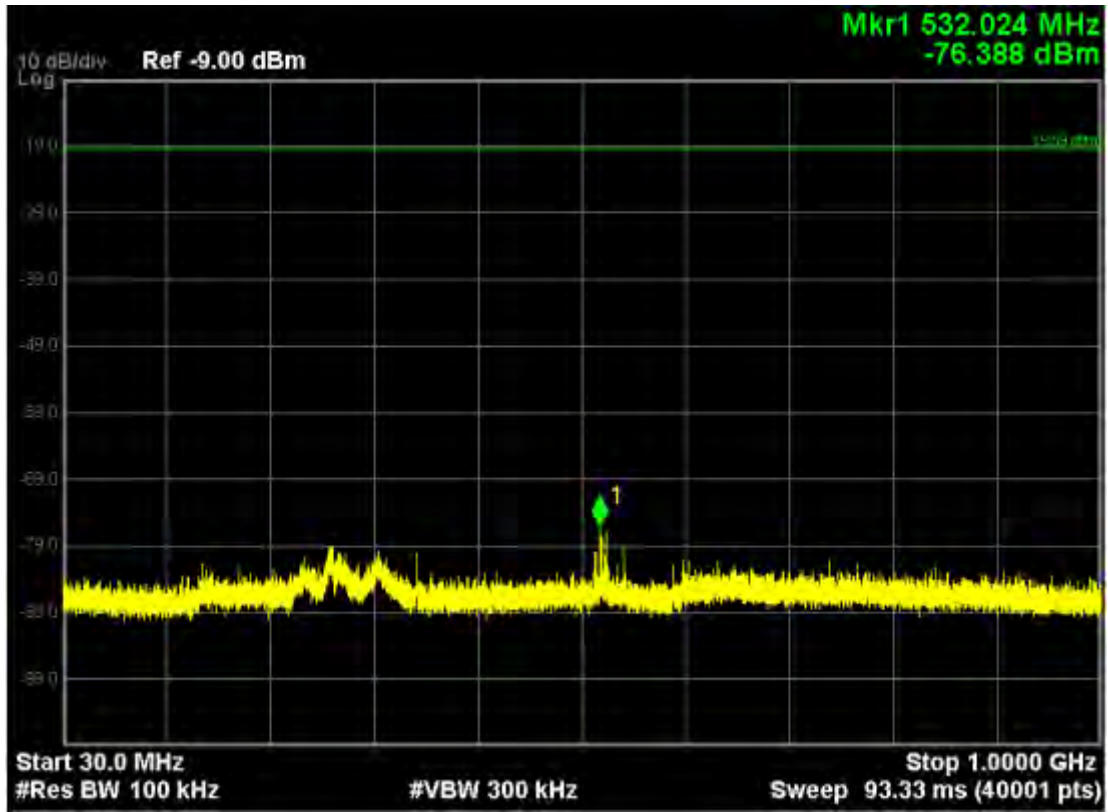



Note: The Mark1 point is carrier.

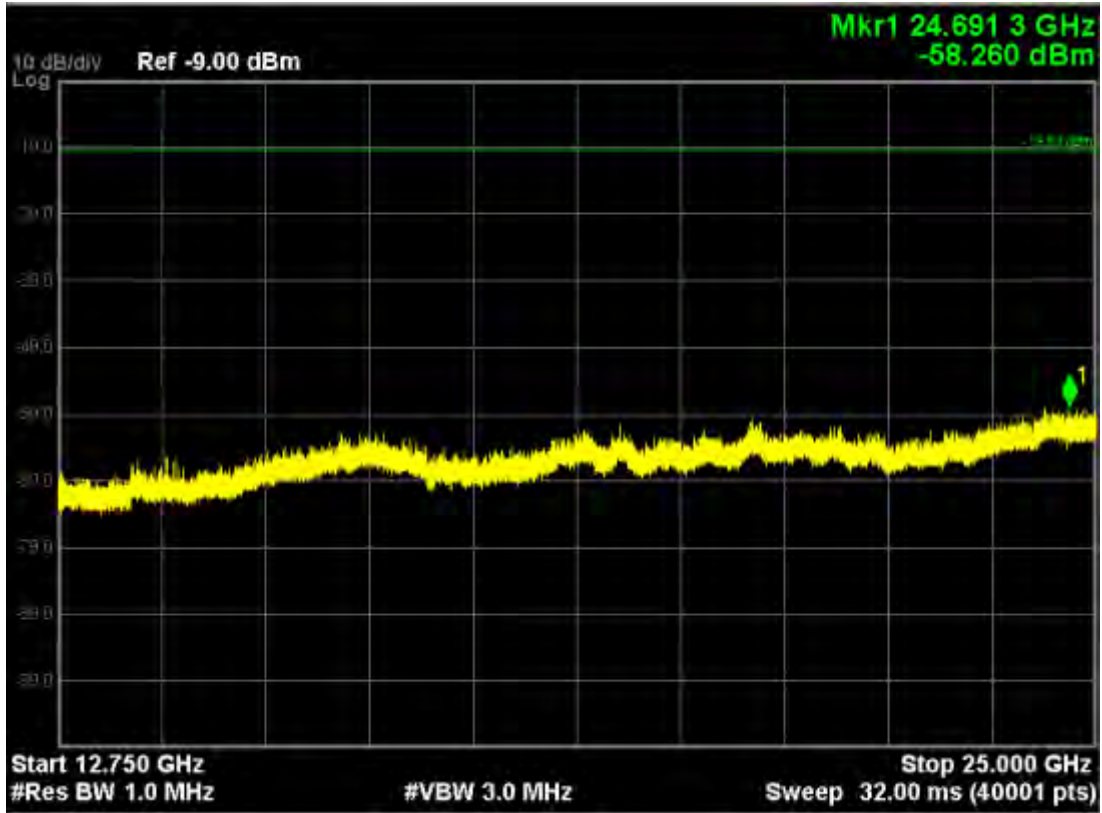


802.11n20, traffic mode; Channel 149

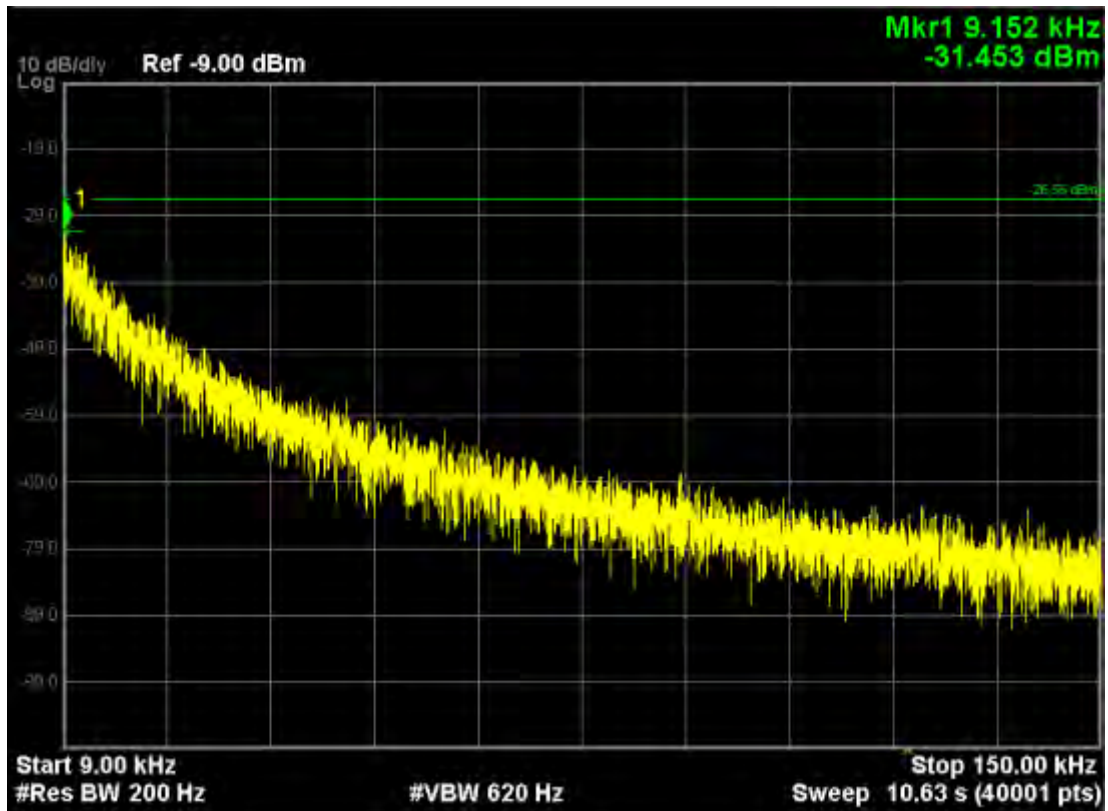

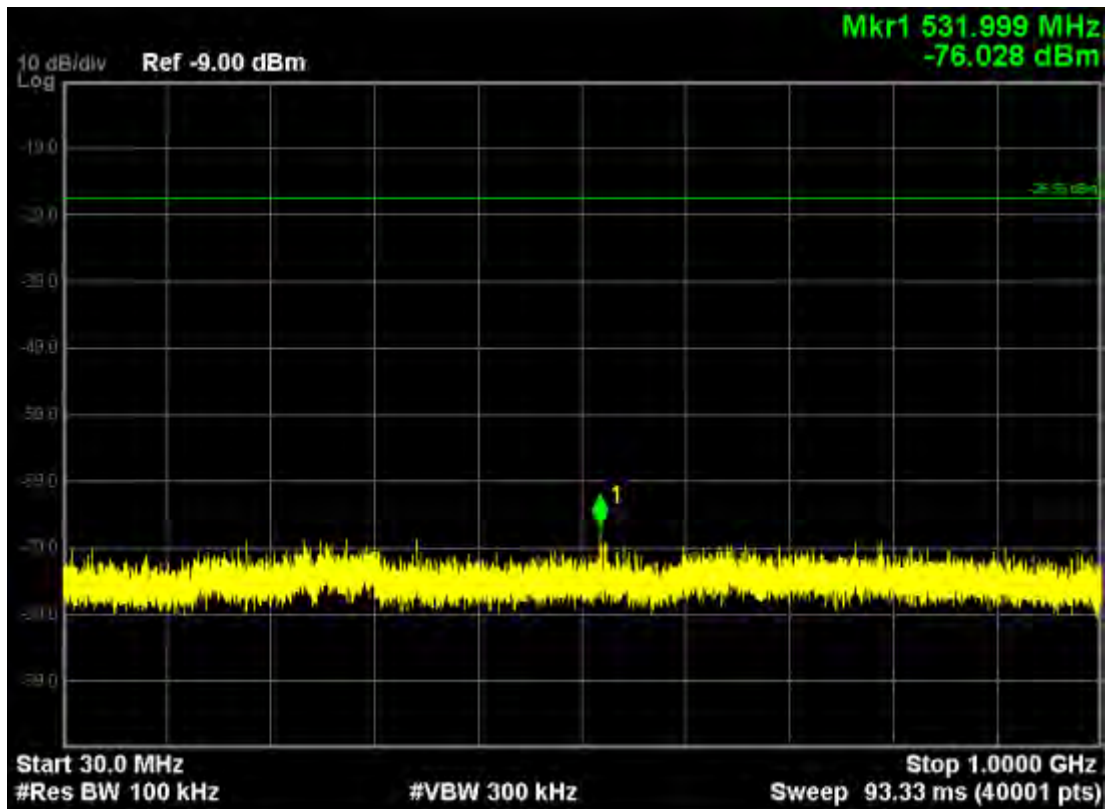
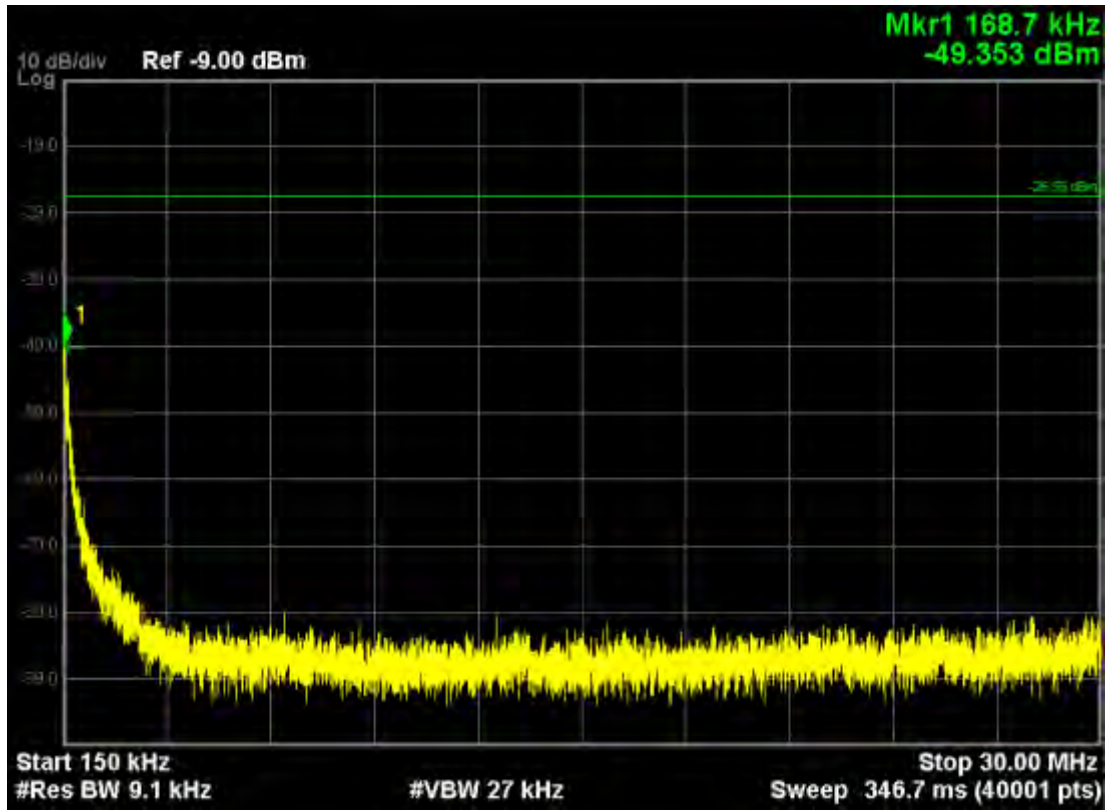



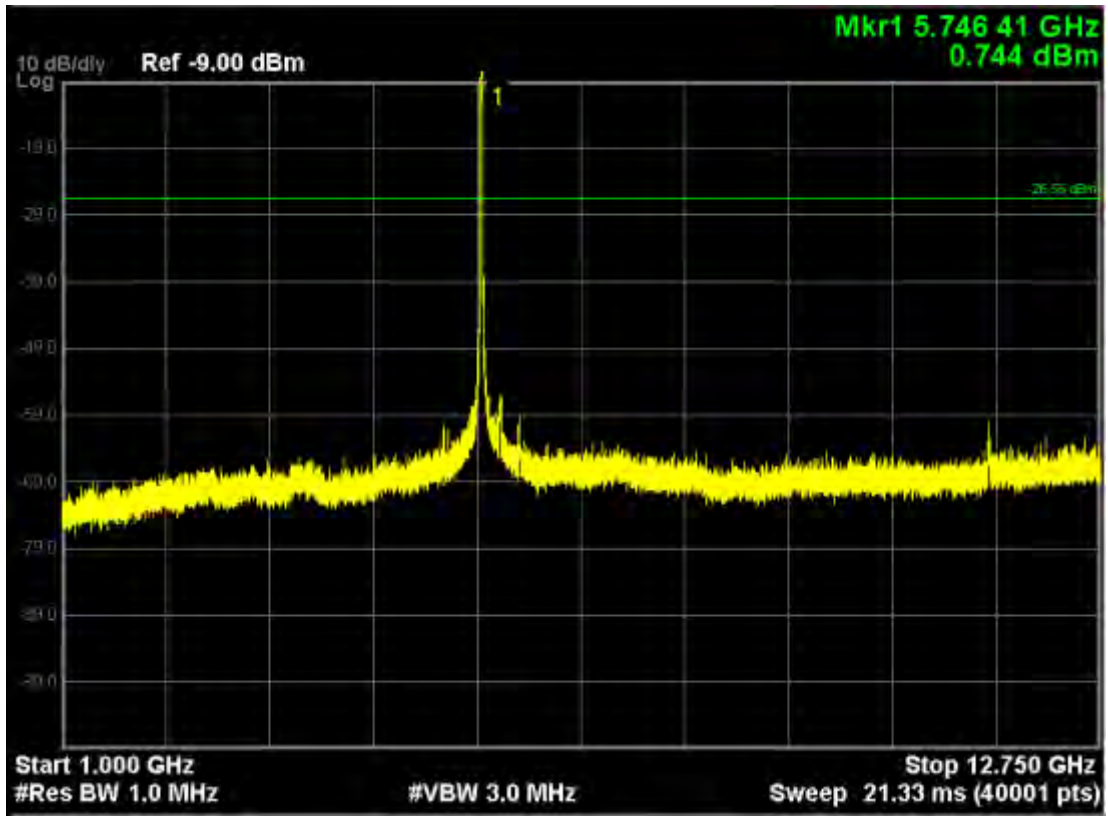


Note: The Mark1 point is carrier.

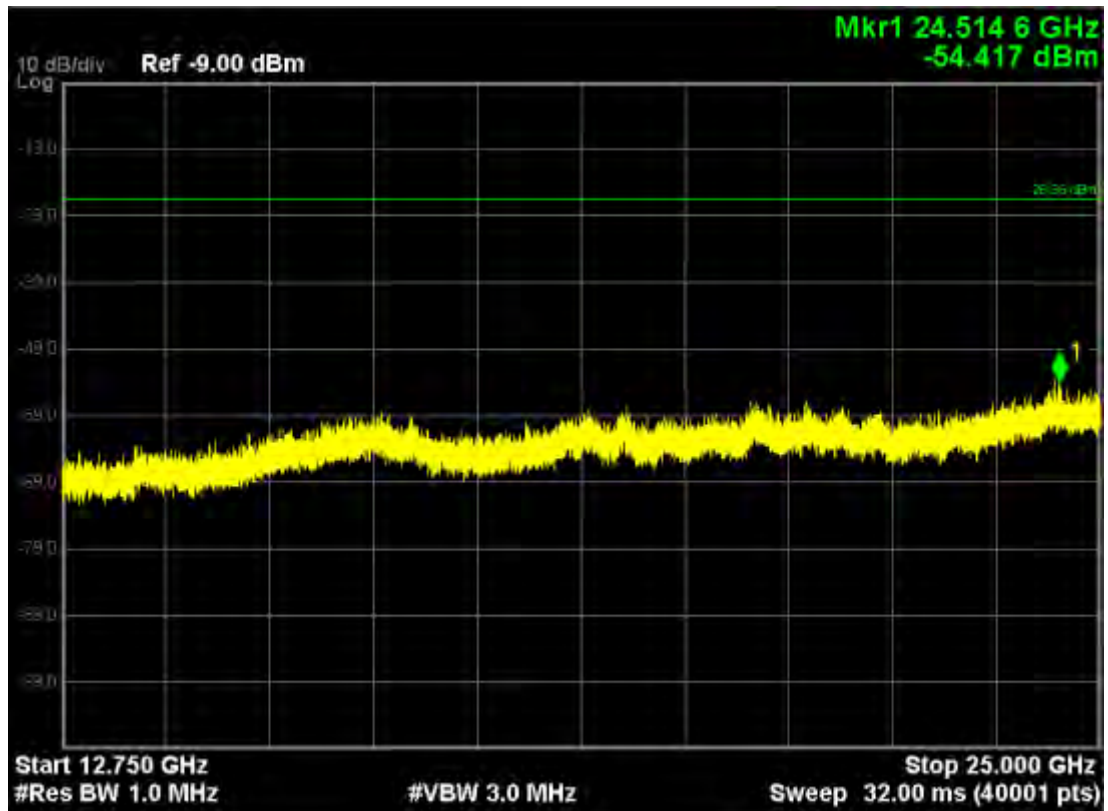


802.11n20, traffic mode; Channel 149(mimo)

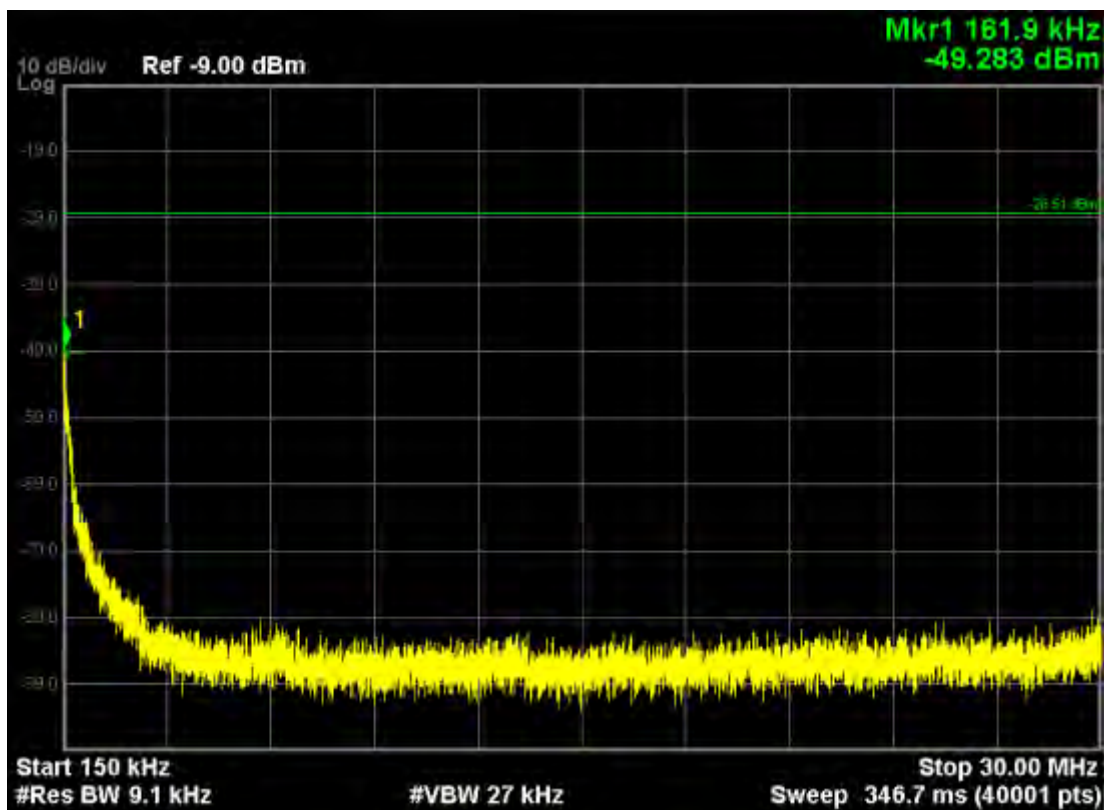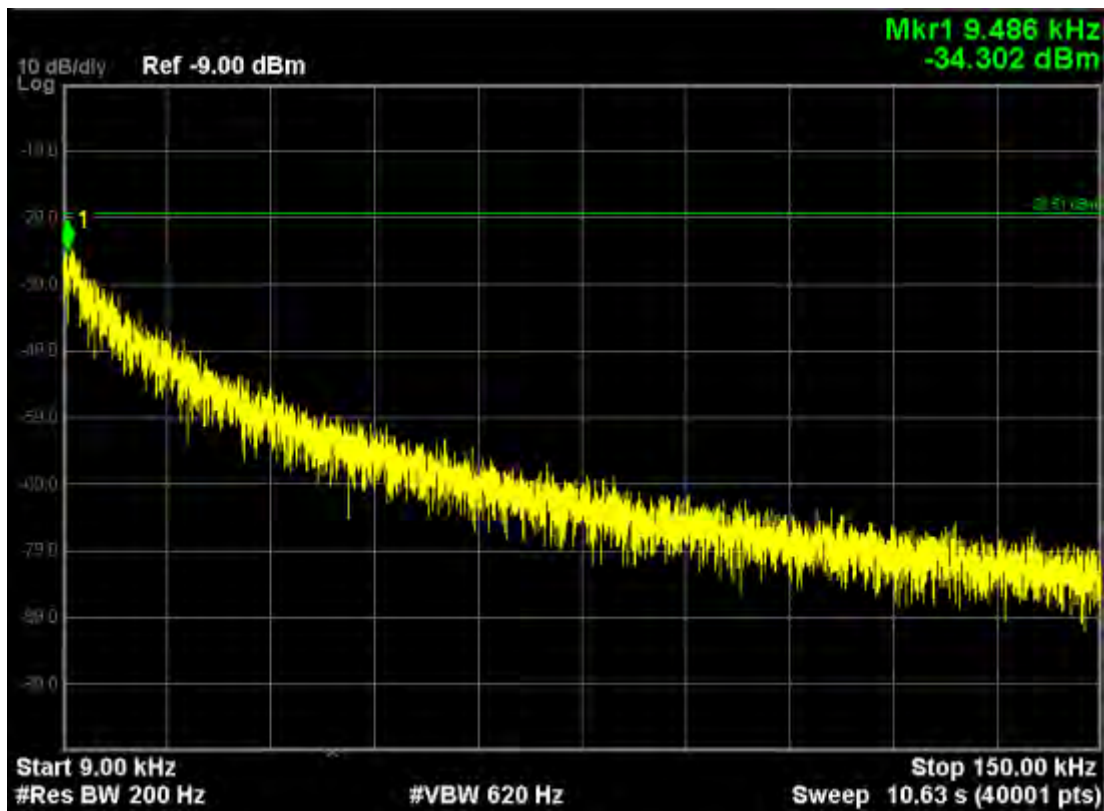


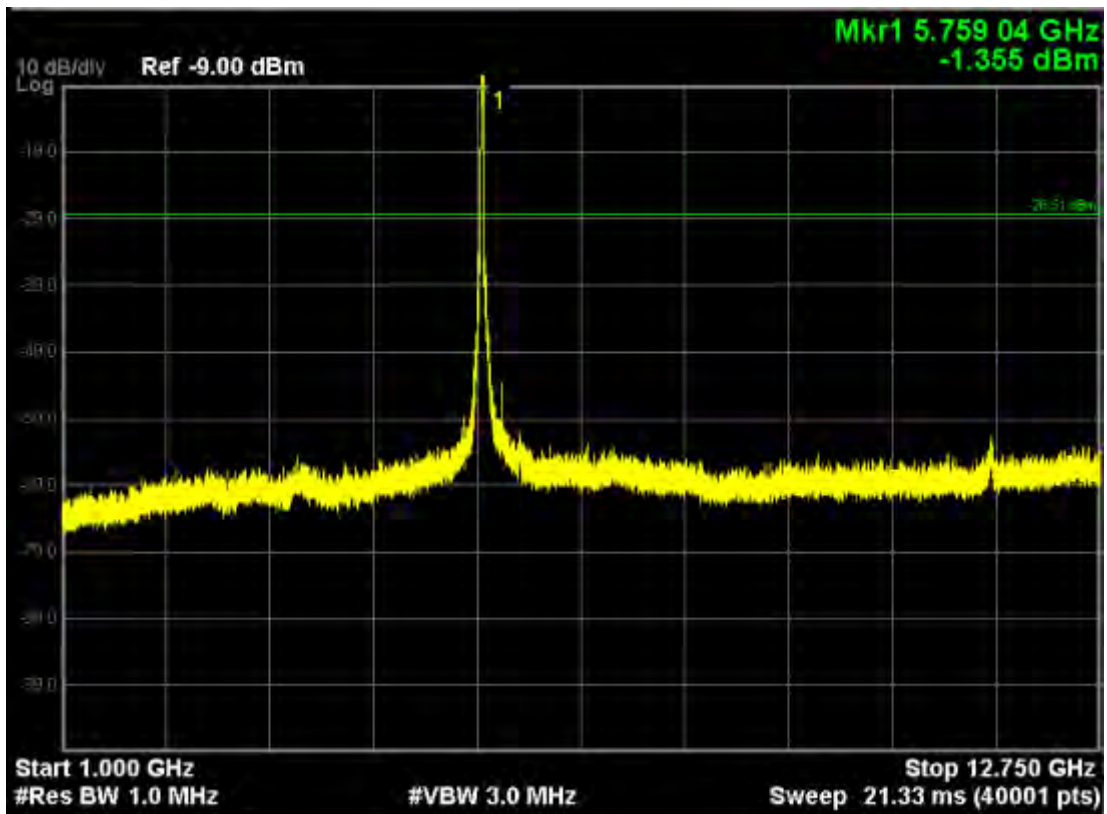
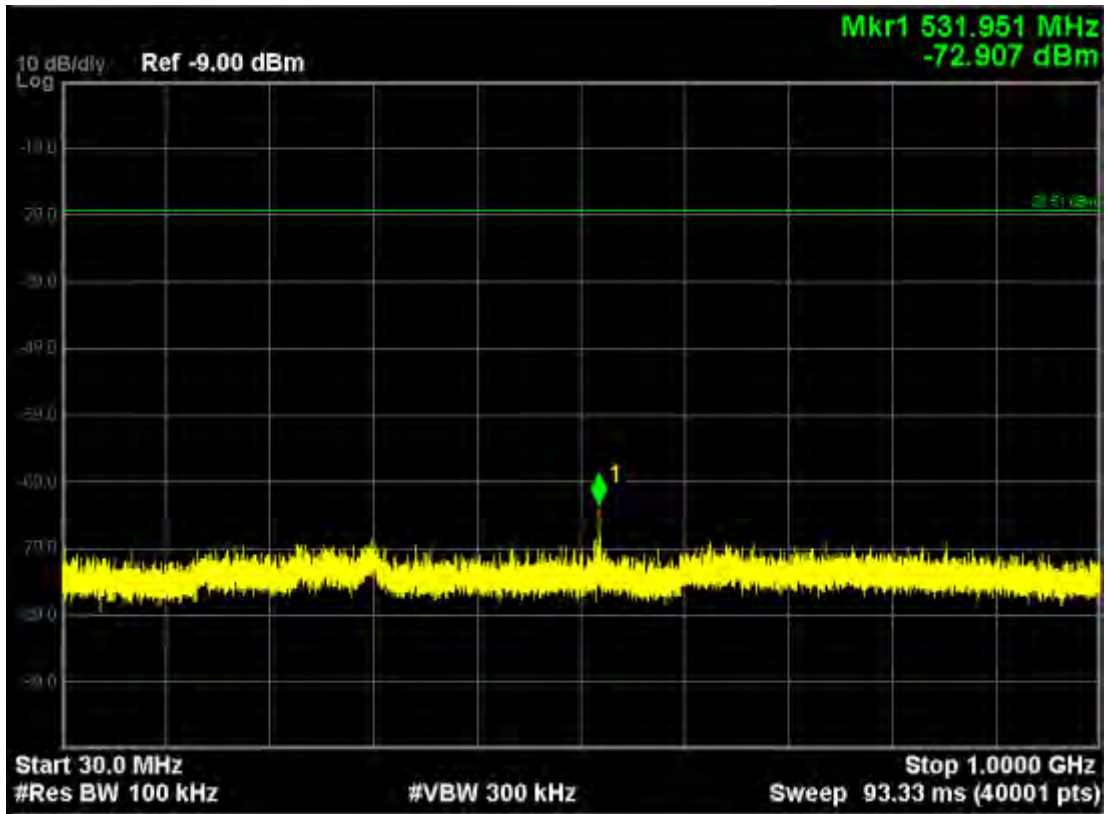



Note: The Mark1 point is carrier.

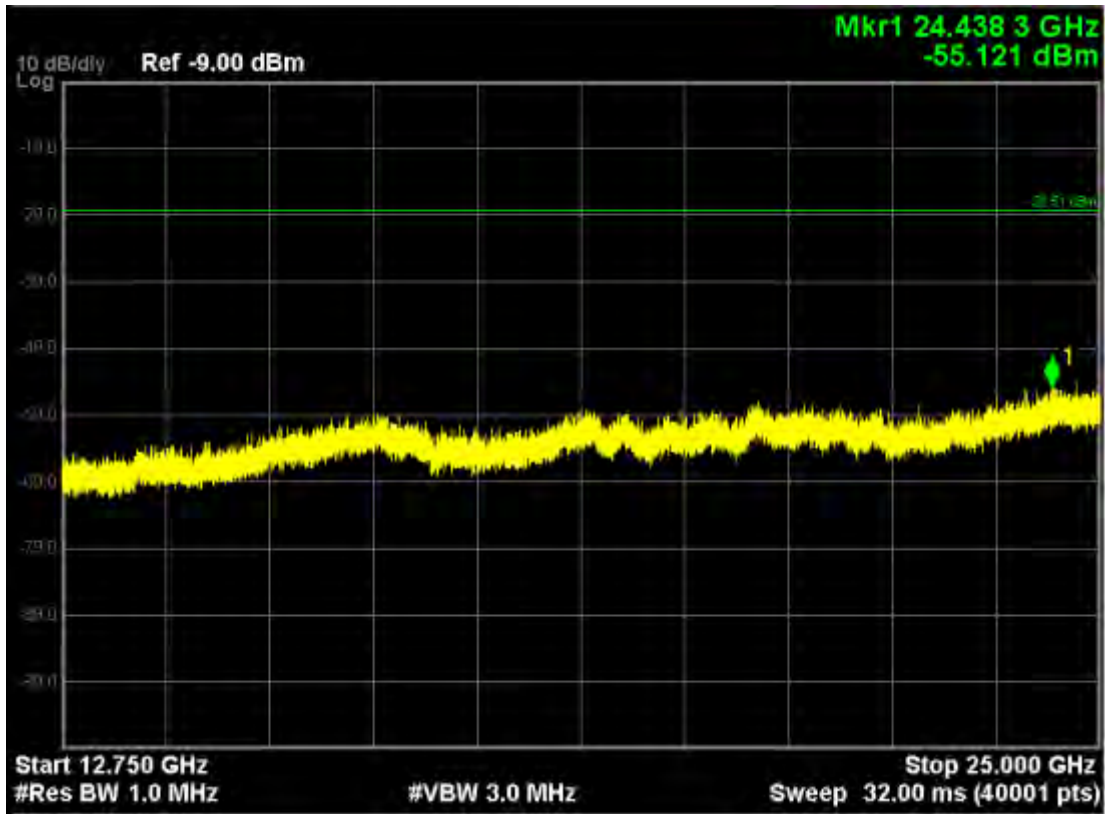


802.11n20, traffic mode; Channel 157


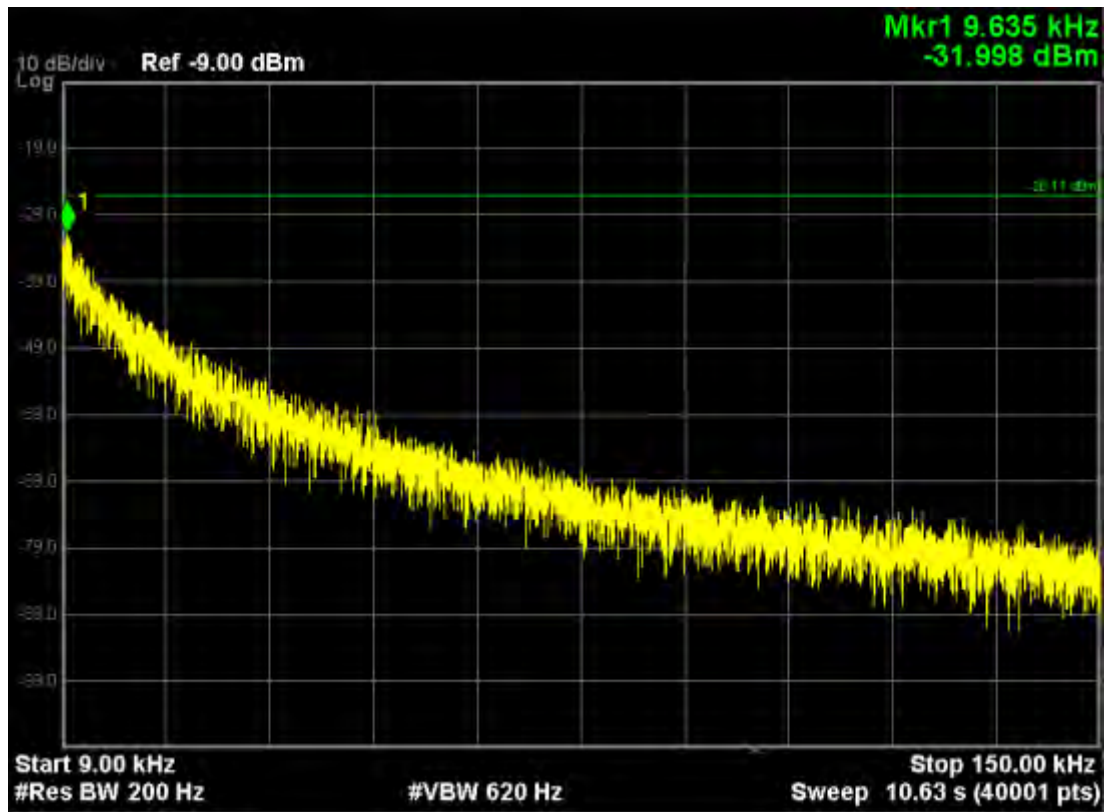


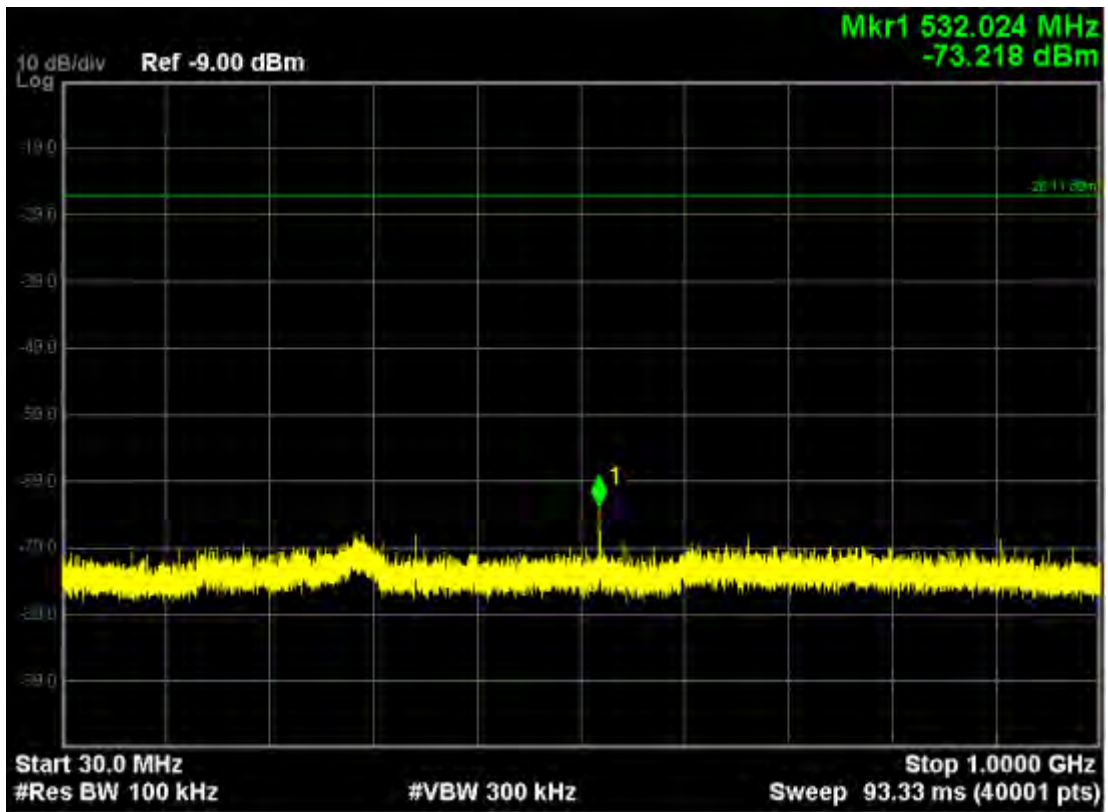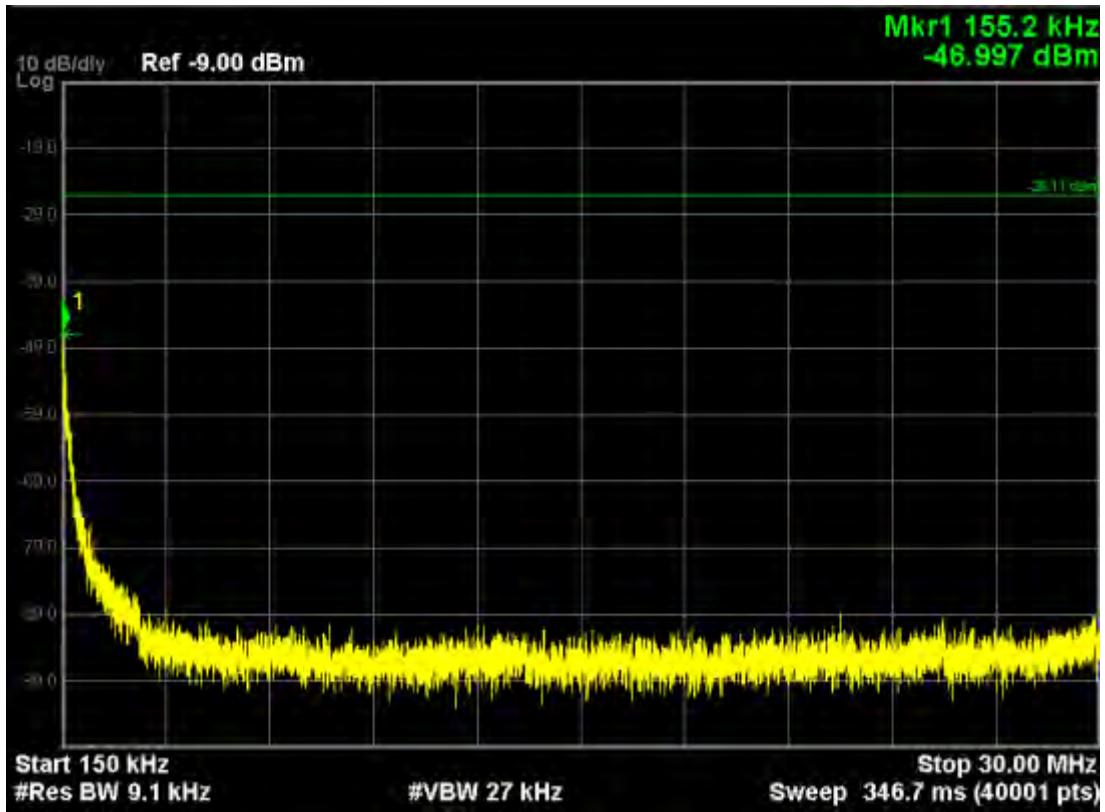

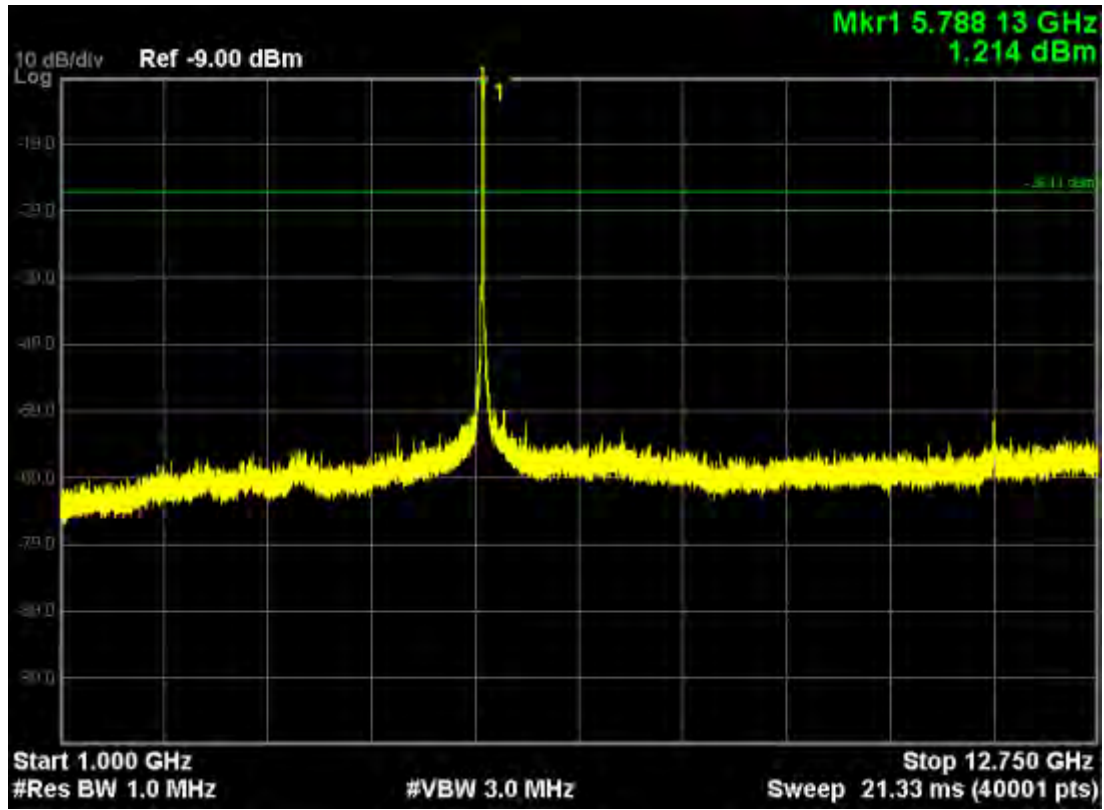


Note: The Mark1 point is carrier.

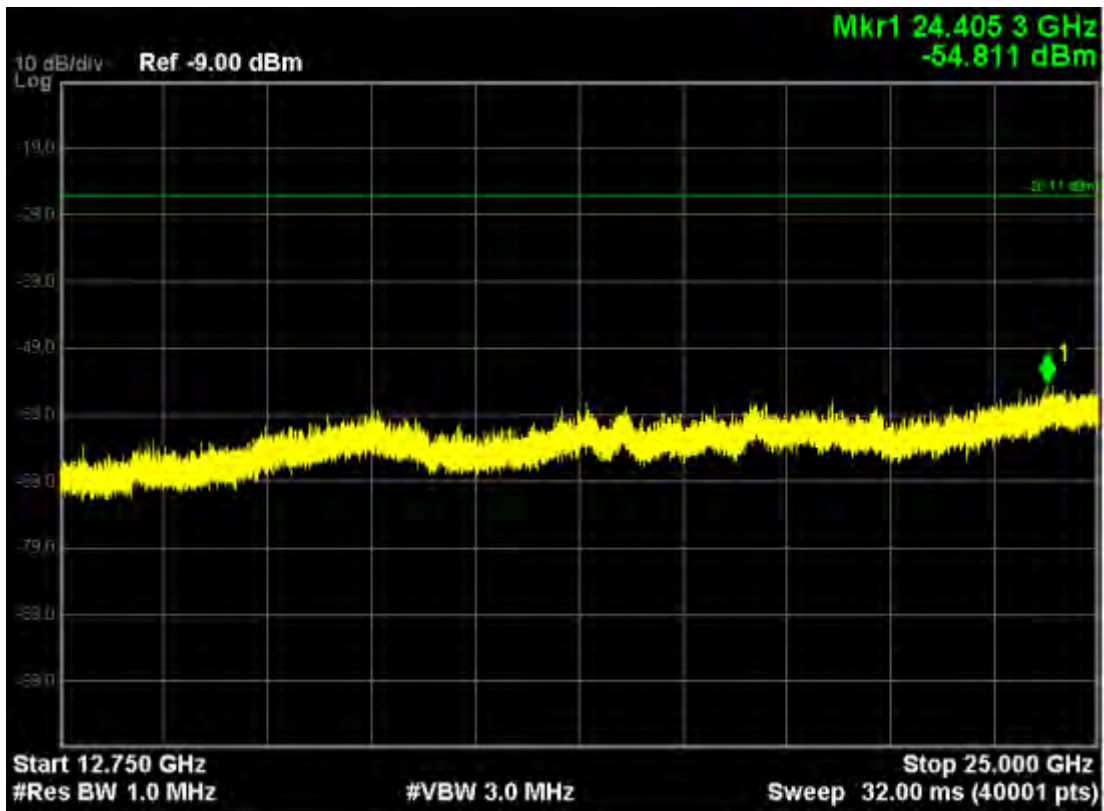


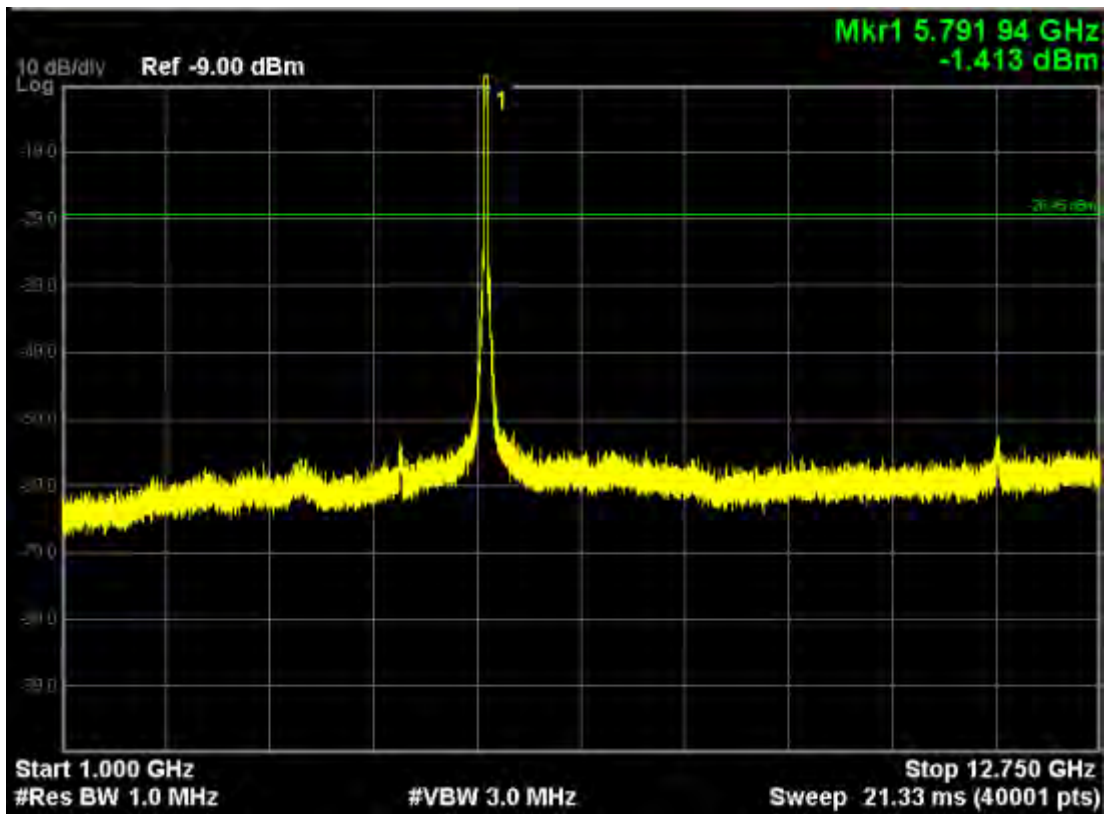
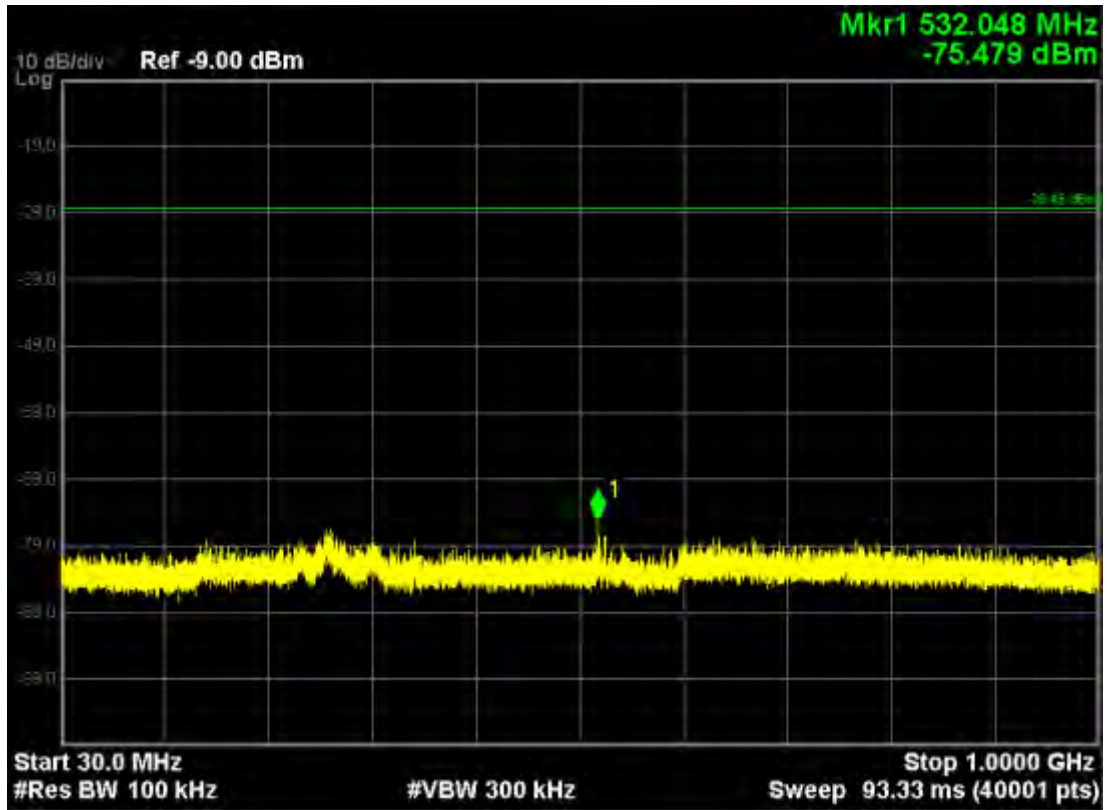



Note: The Mark1 point is carrier.

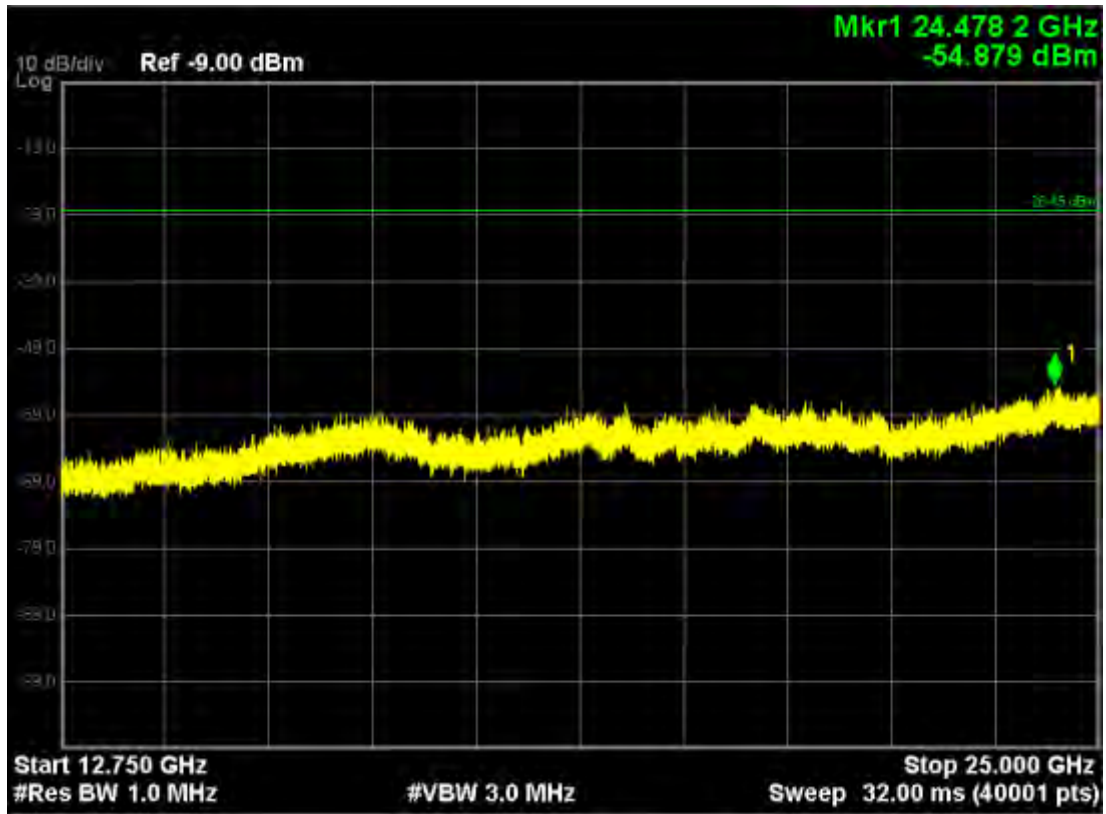


802.11n20, traffic mode; Channel 165

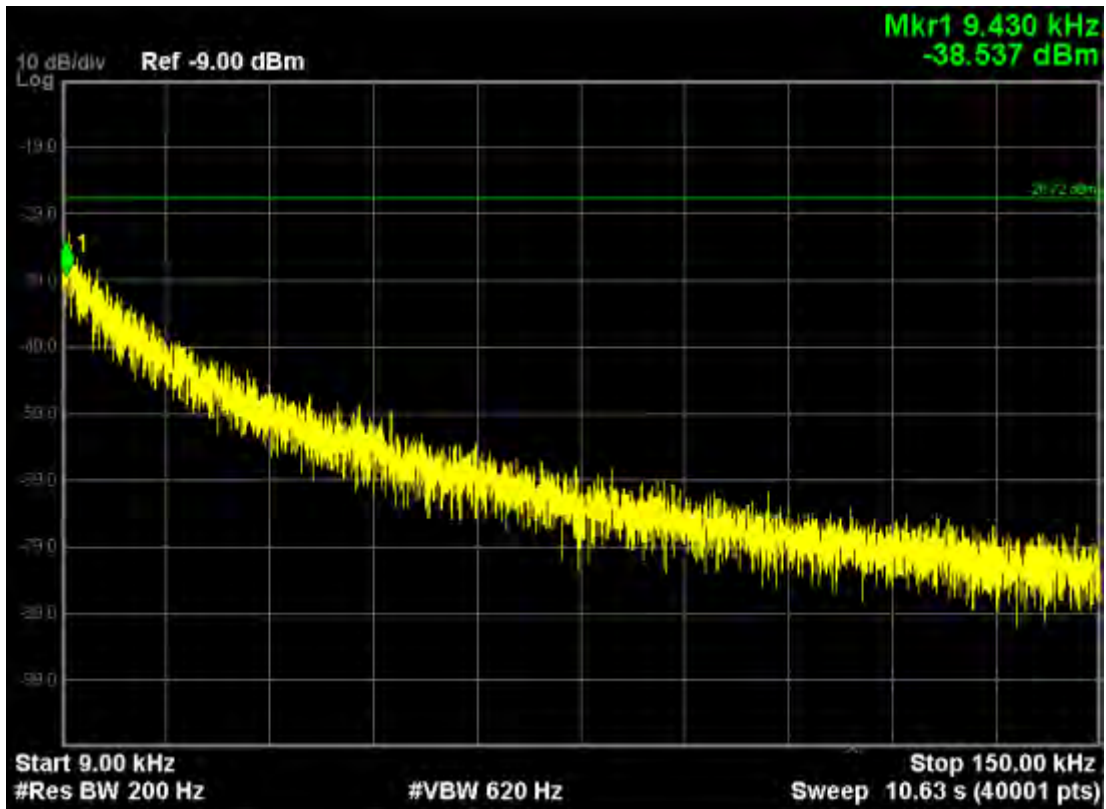

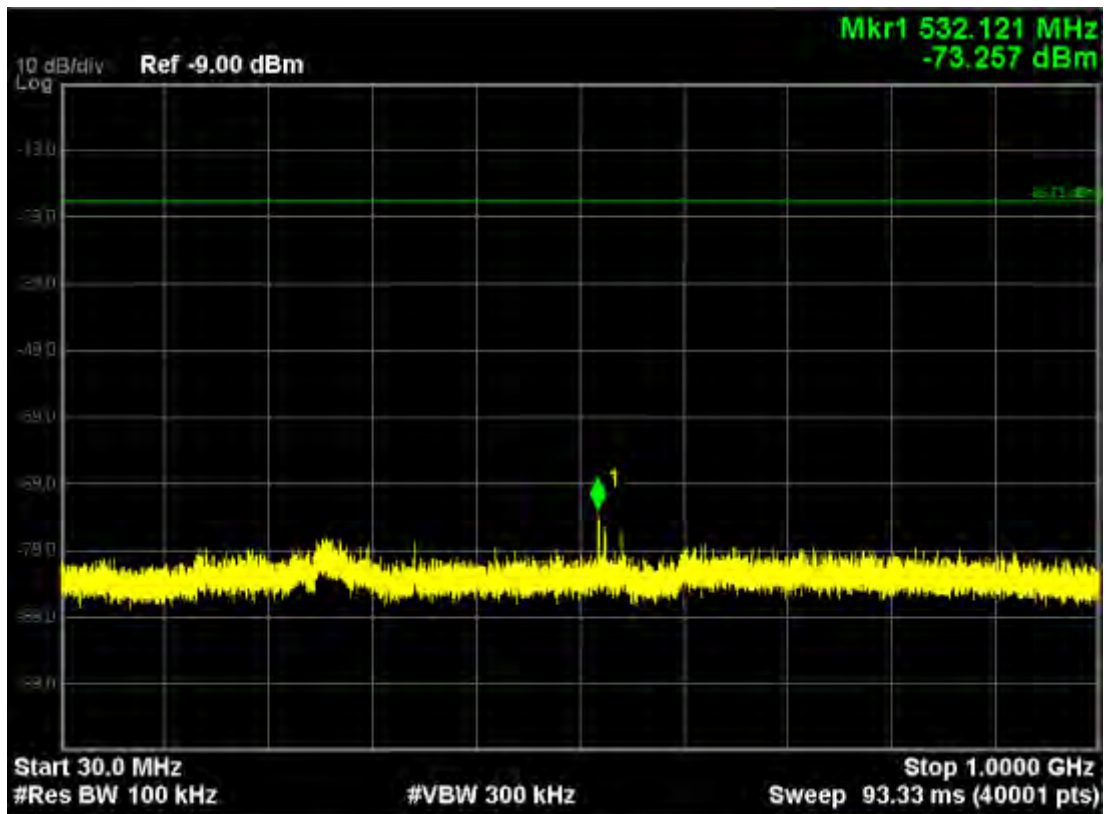
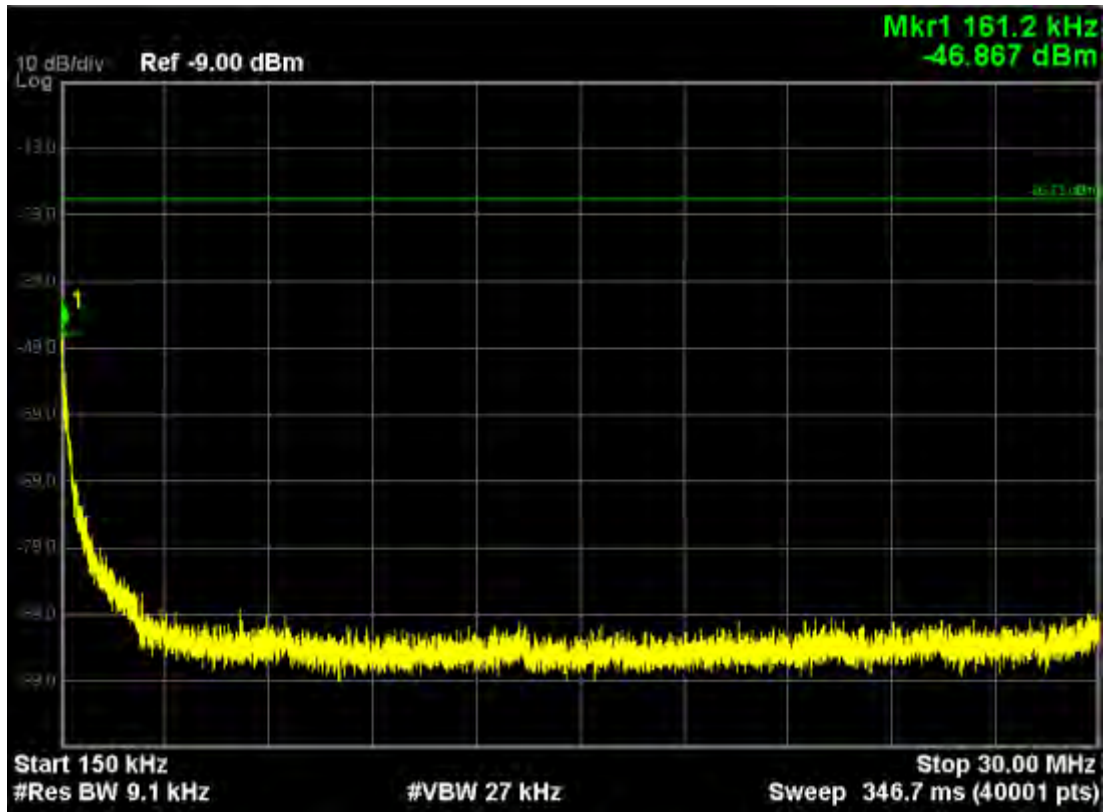



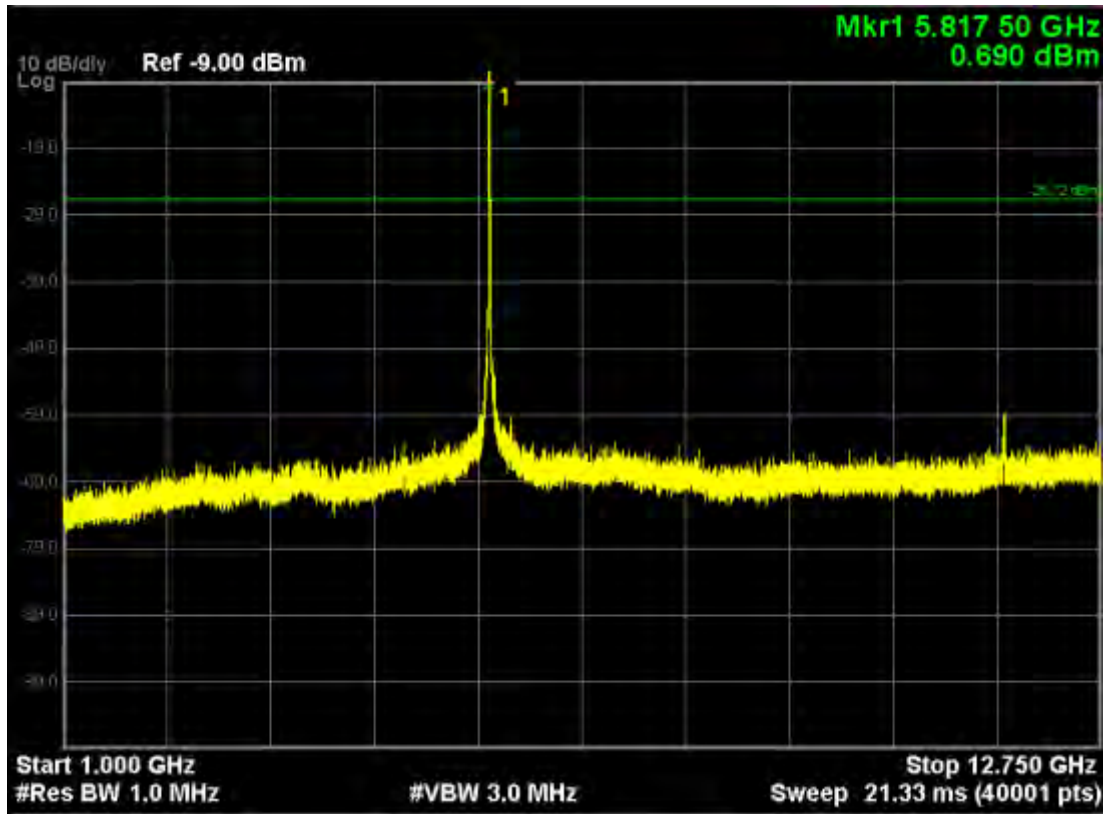


Note: The Mark1 point is carrier.

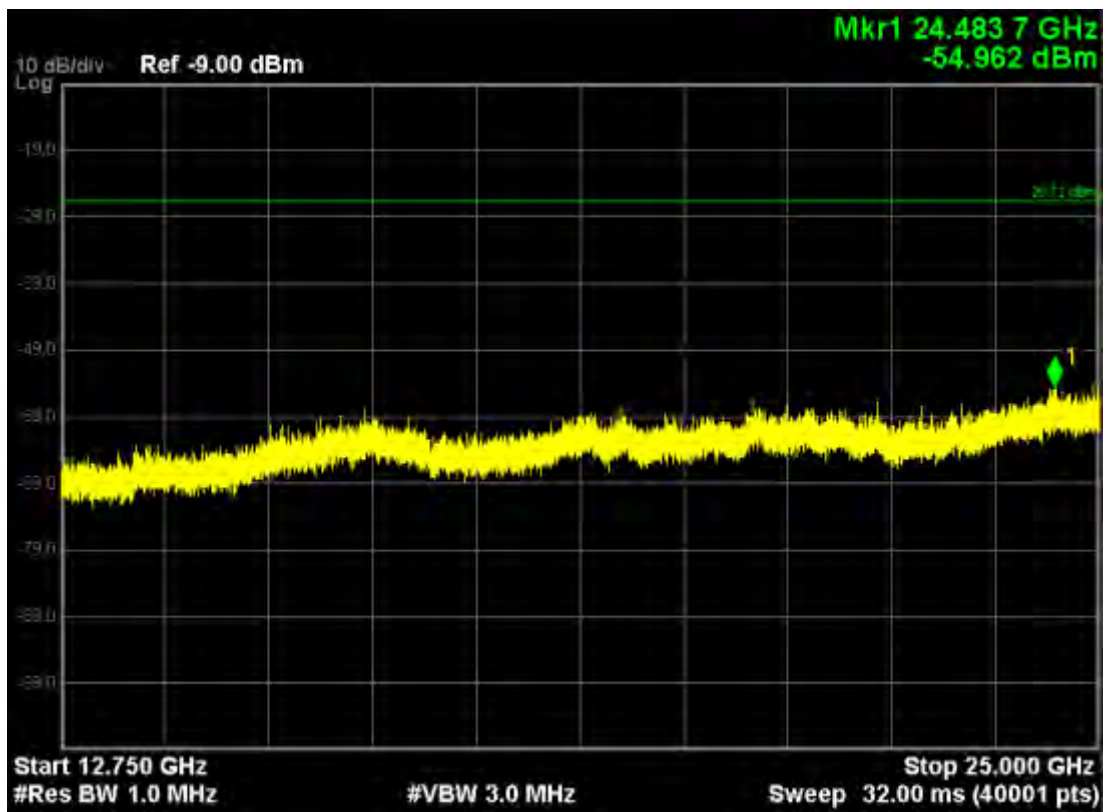


802.11n20, traffic mode; Channel 165(mimo)

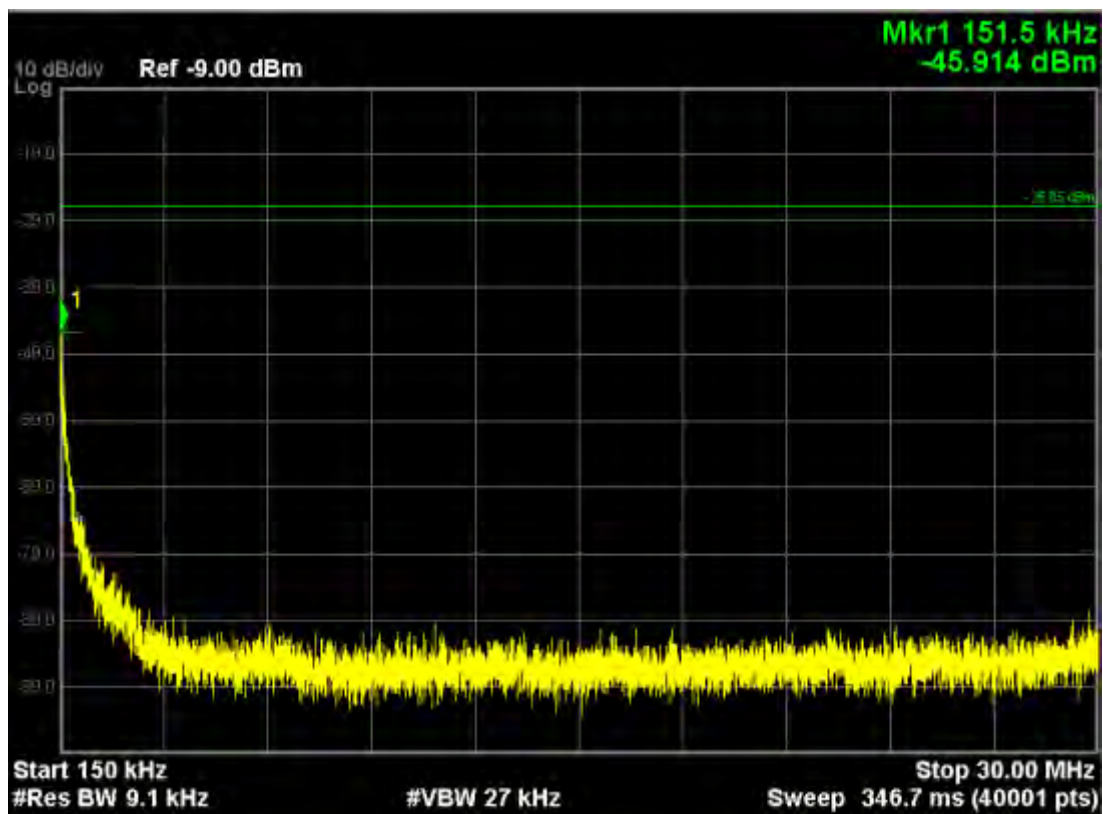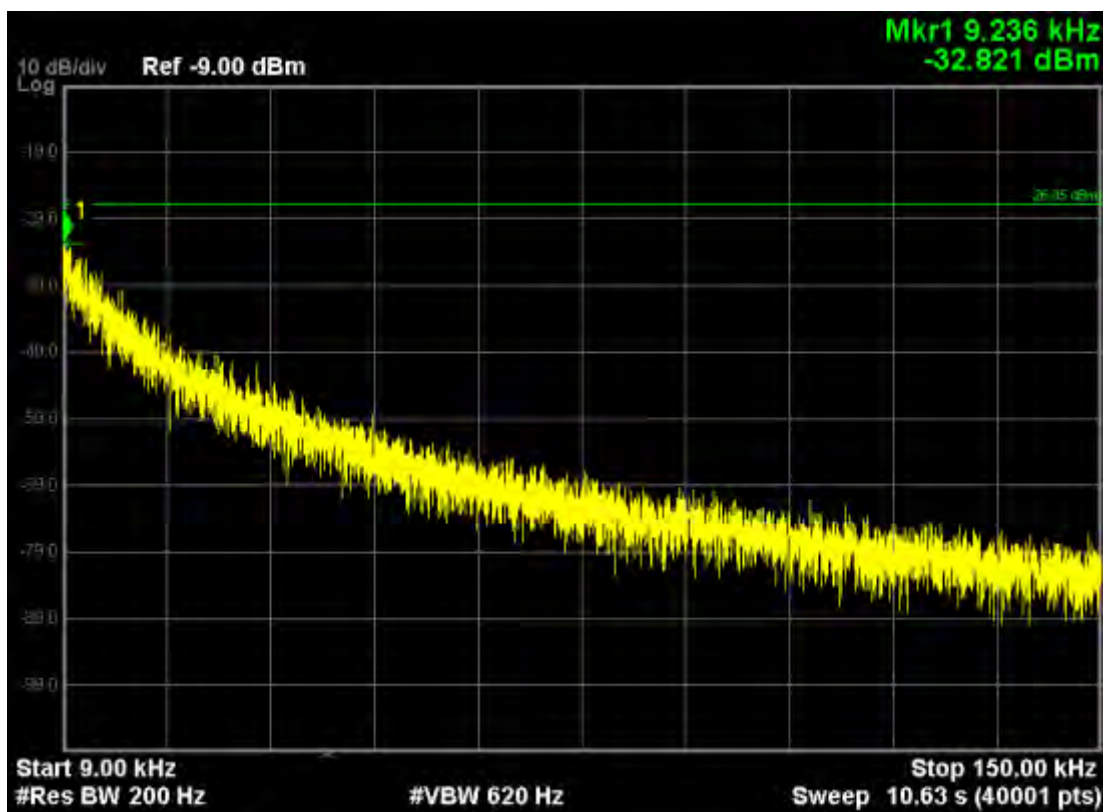


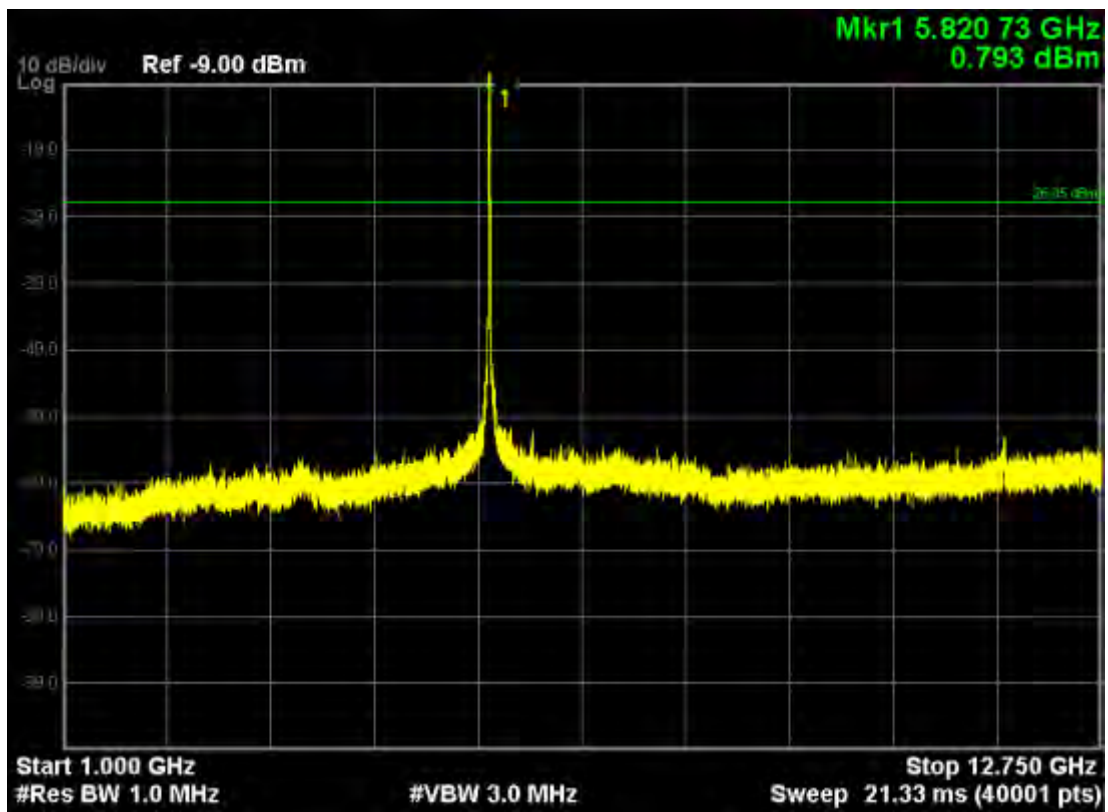
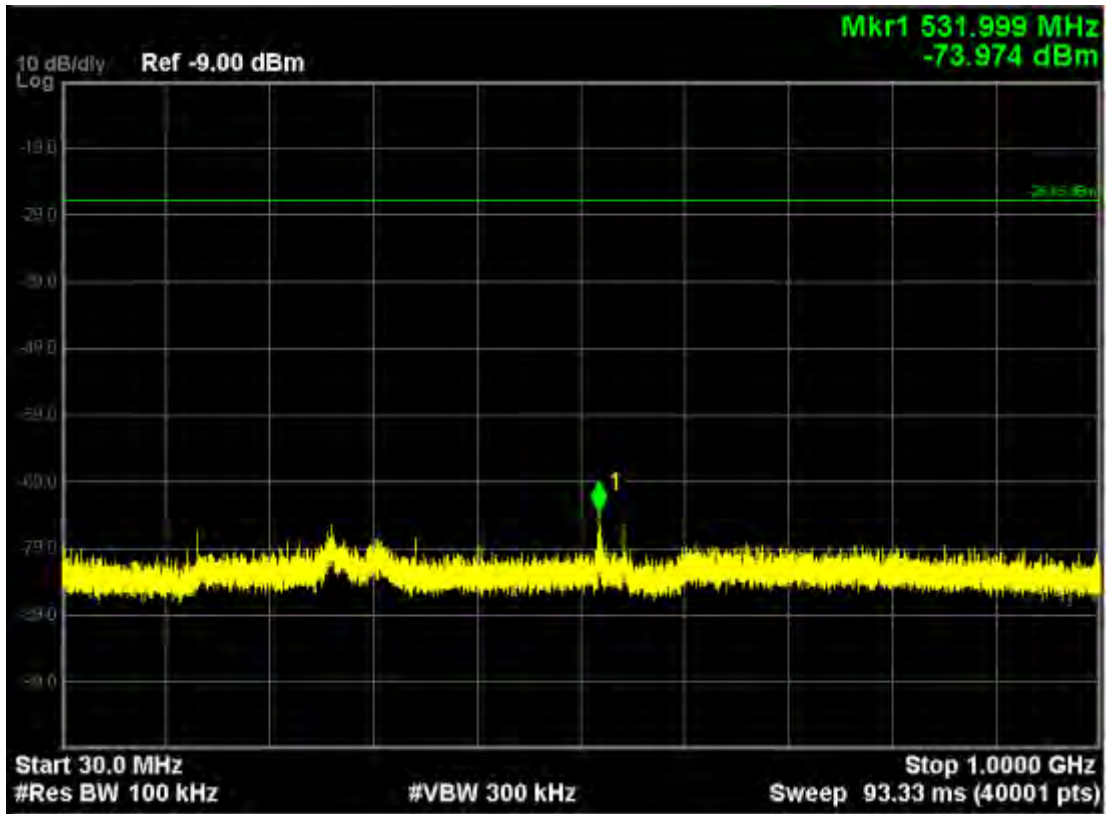



Note: The Mark1 point is carrier.

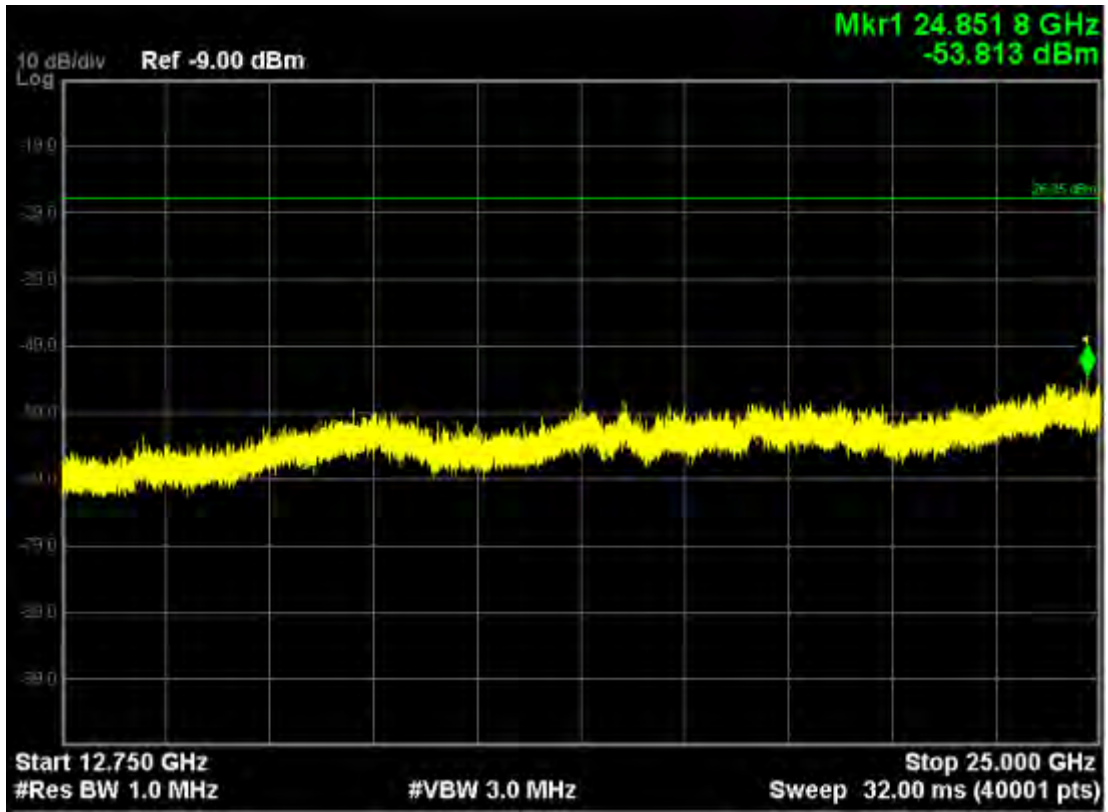


802.11n40, traffic mode; Channel 151

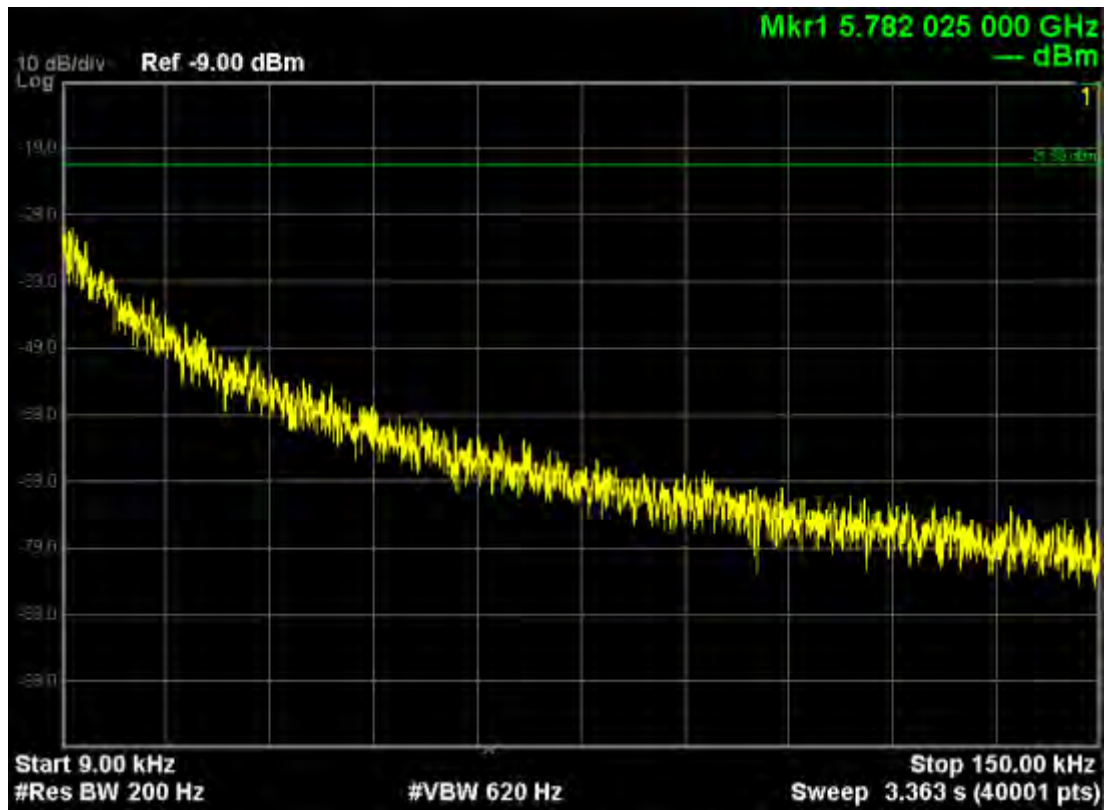

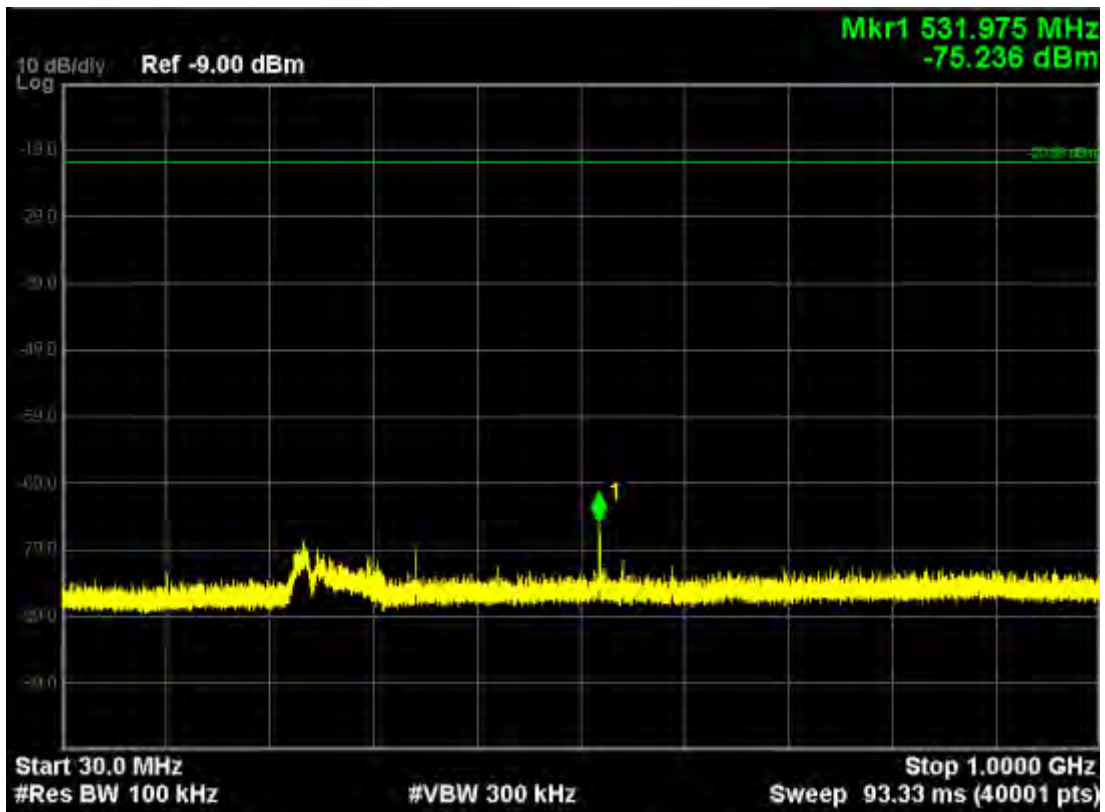
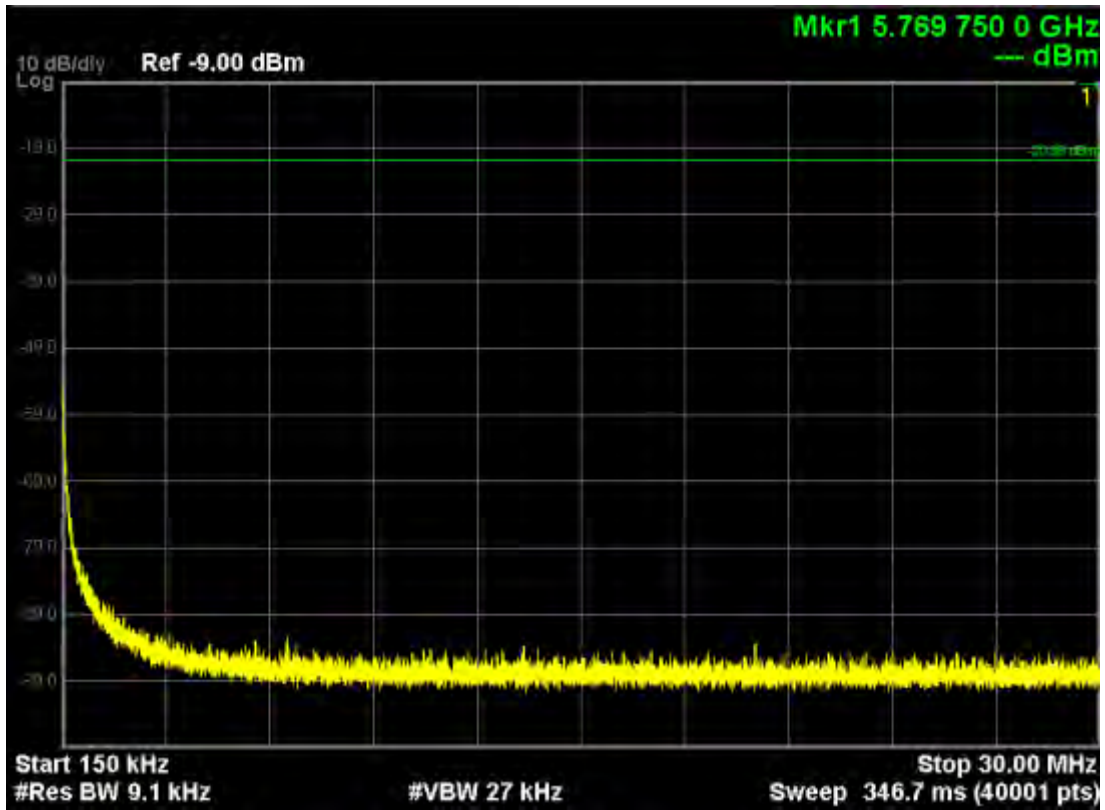



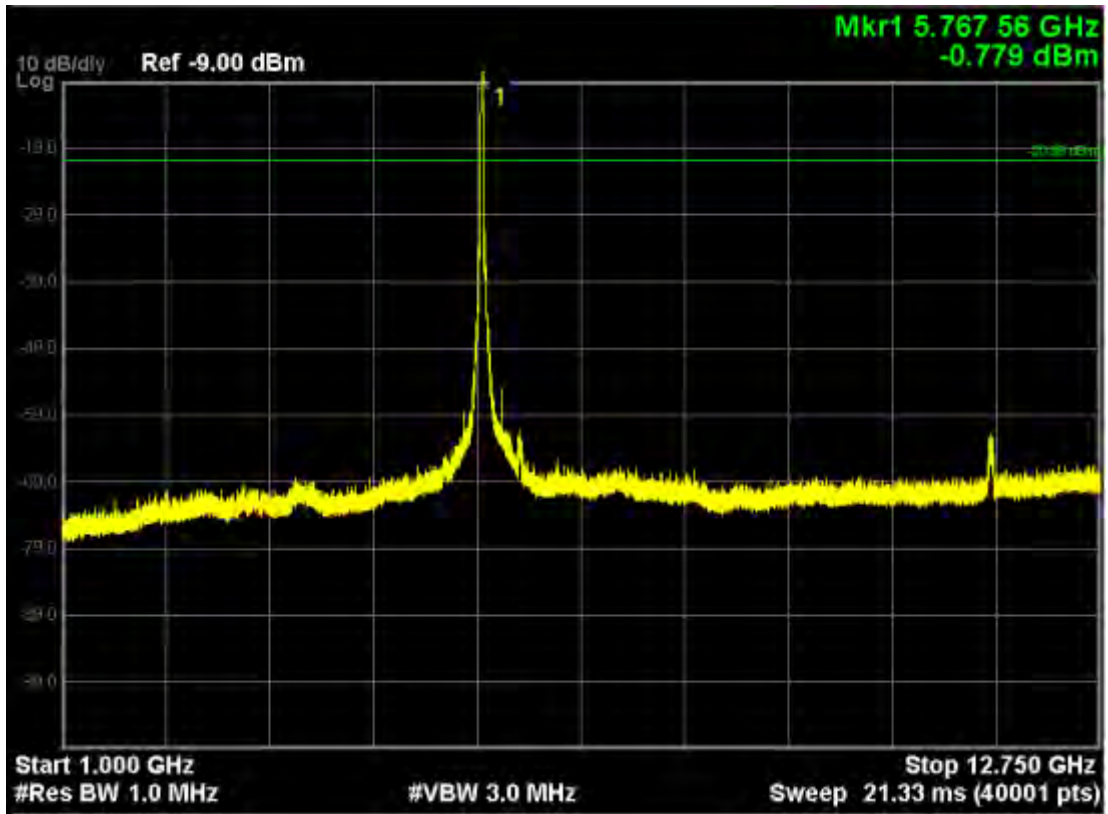


Note: The Mark1 point is carrier.

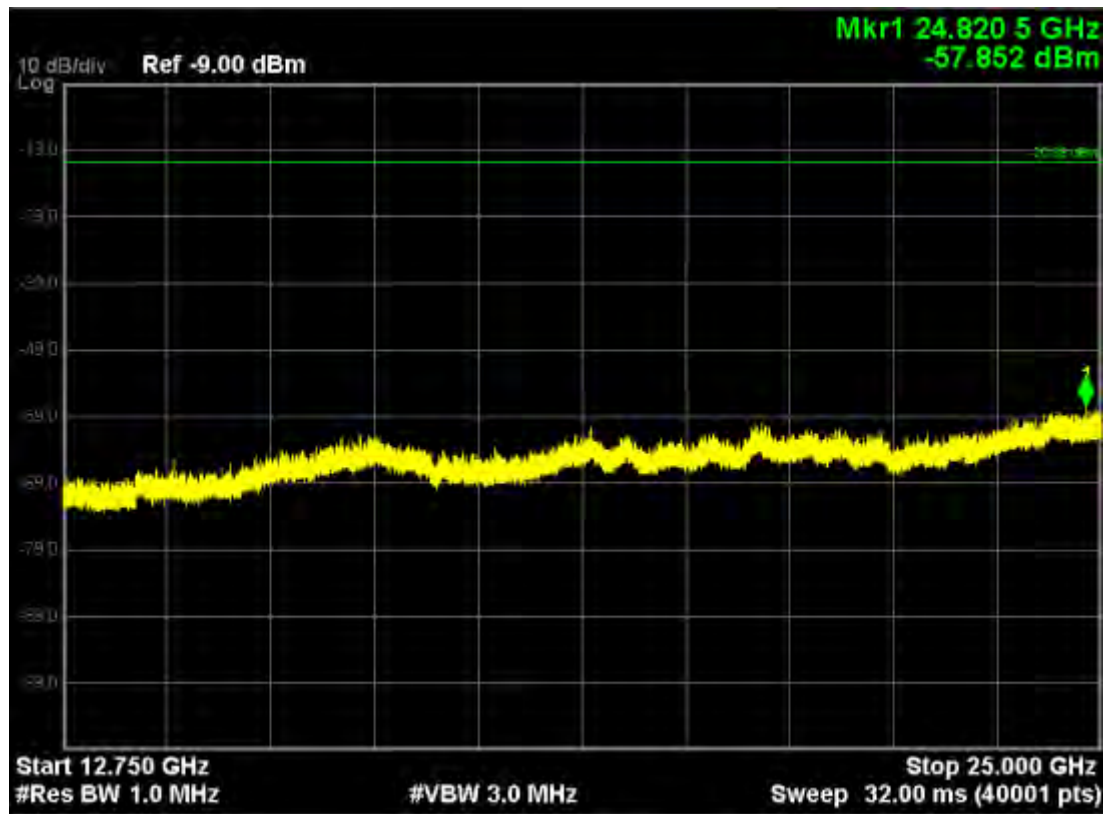


802.11n40, traffic mode; Channel 151(mimo)

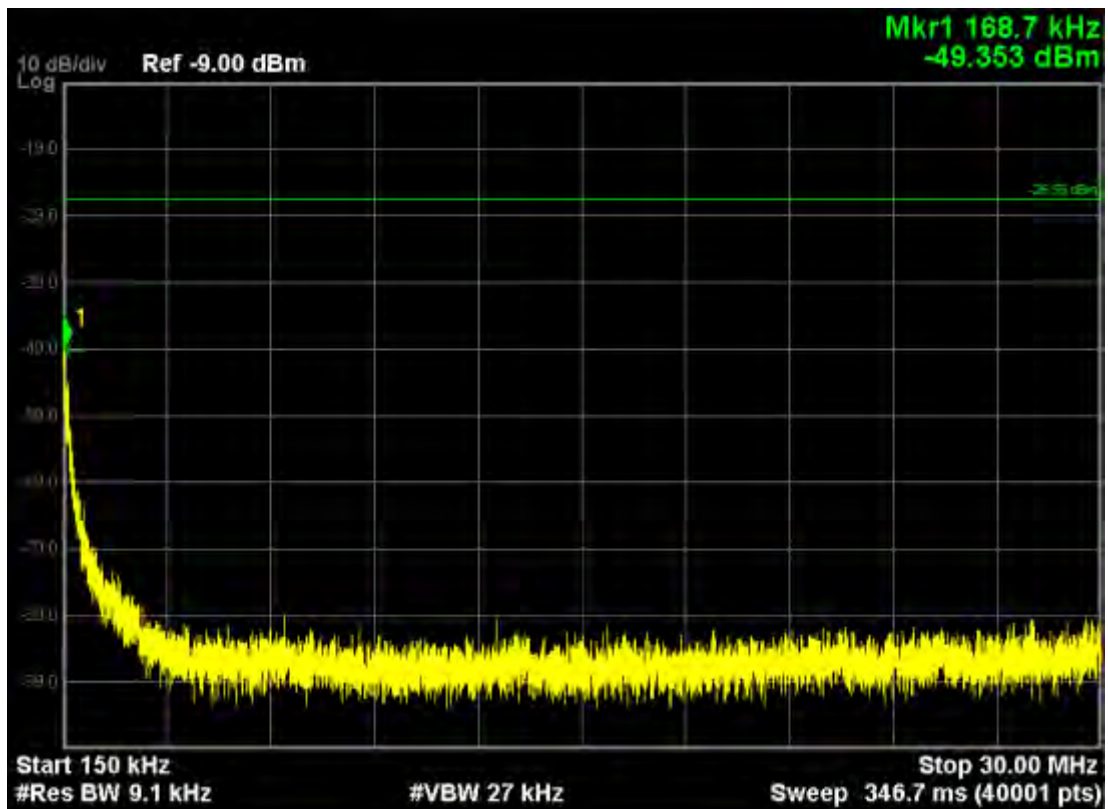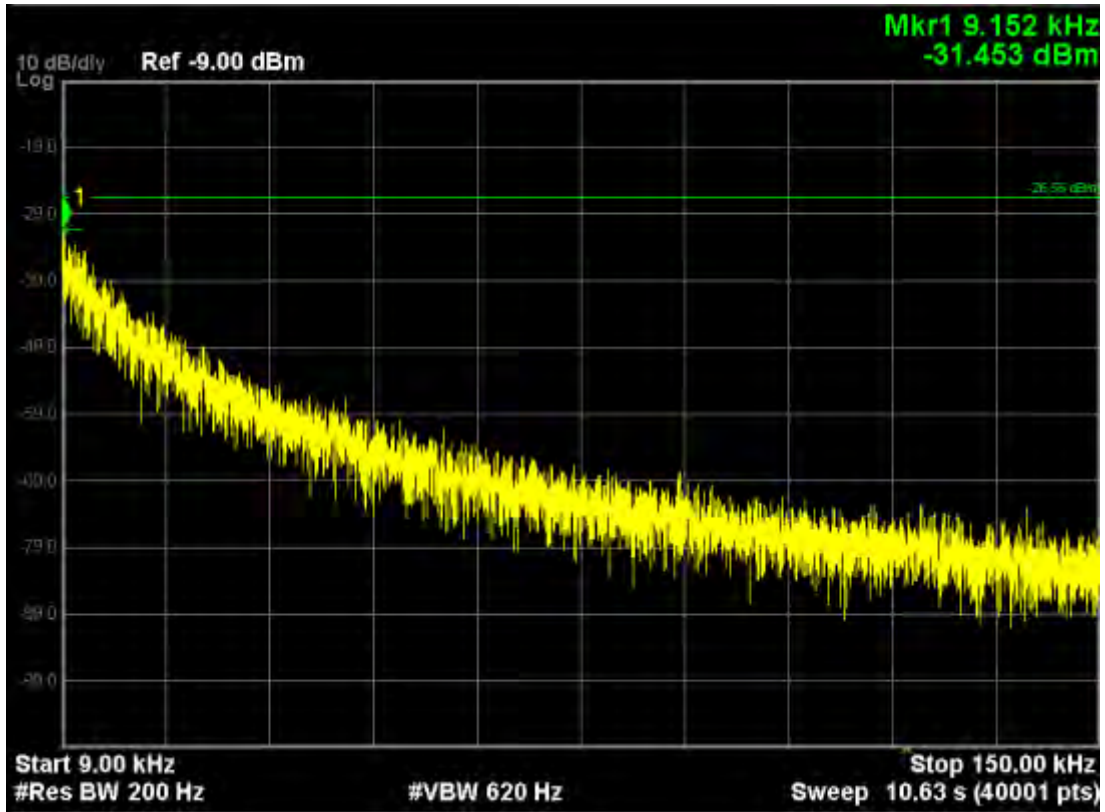


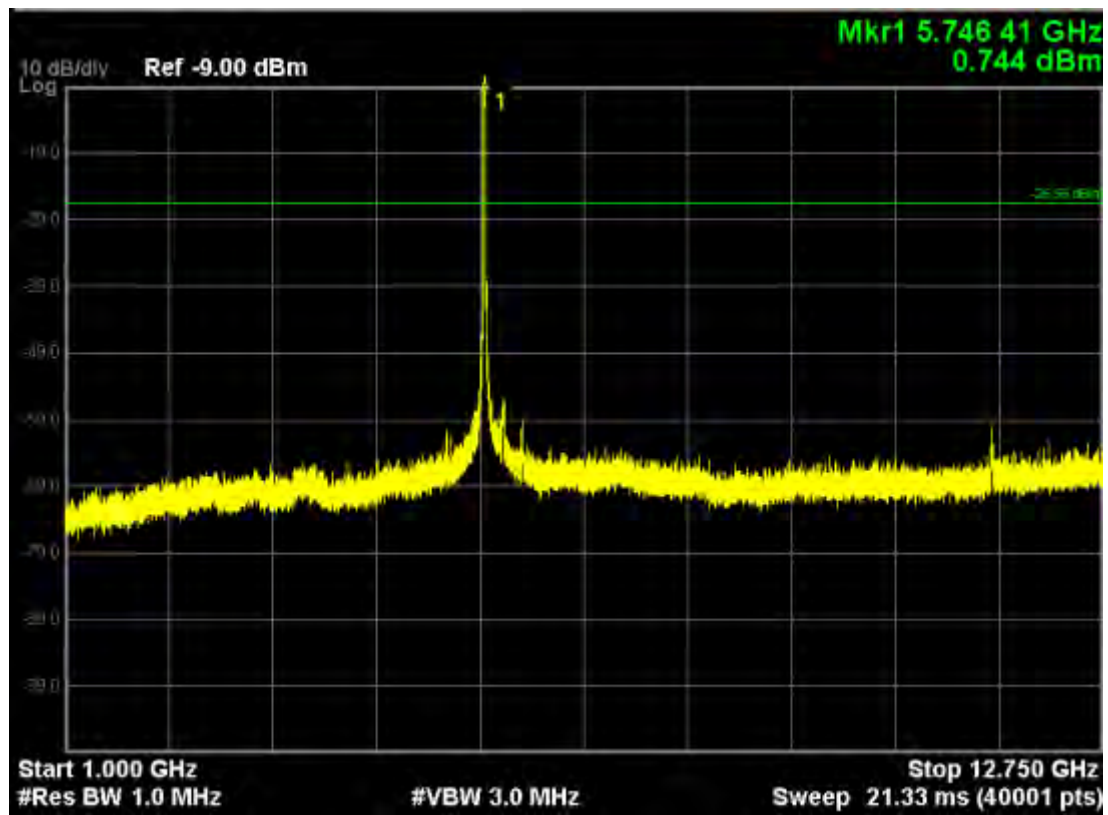
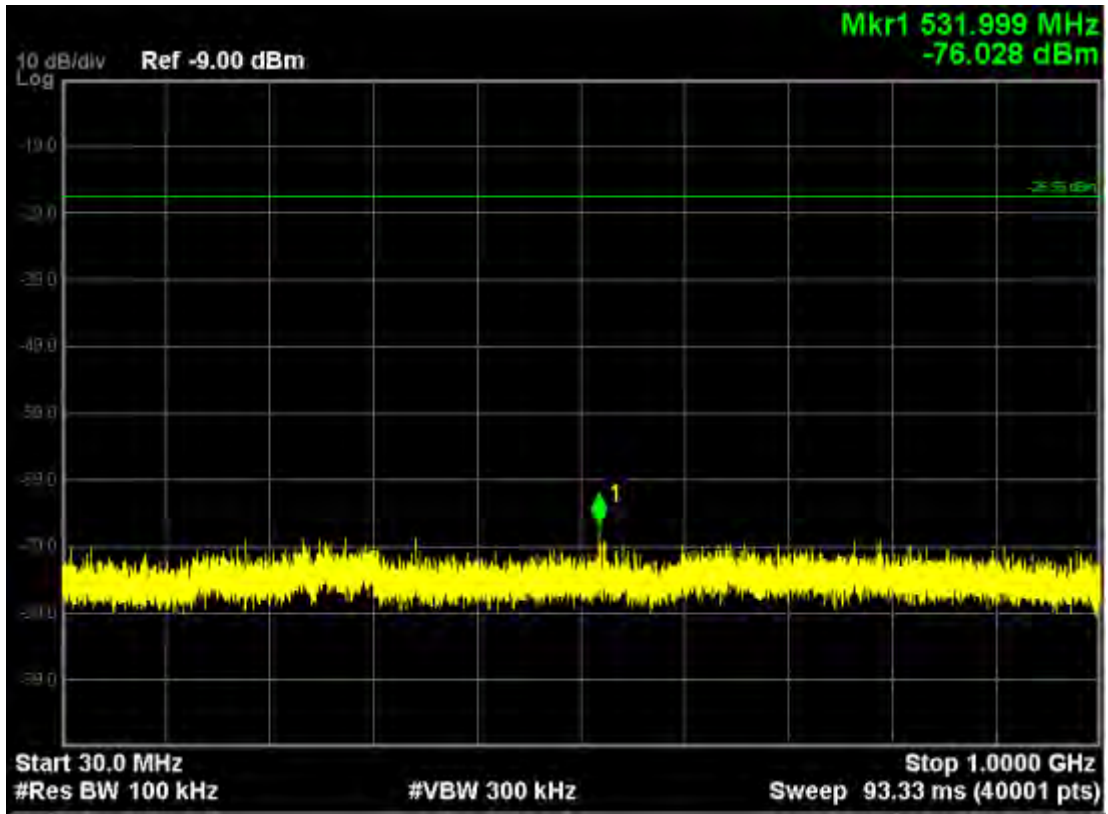



Note: The Mark1 point is carrier.

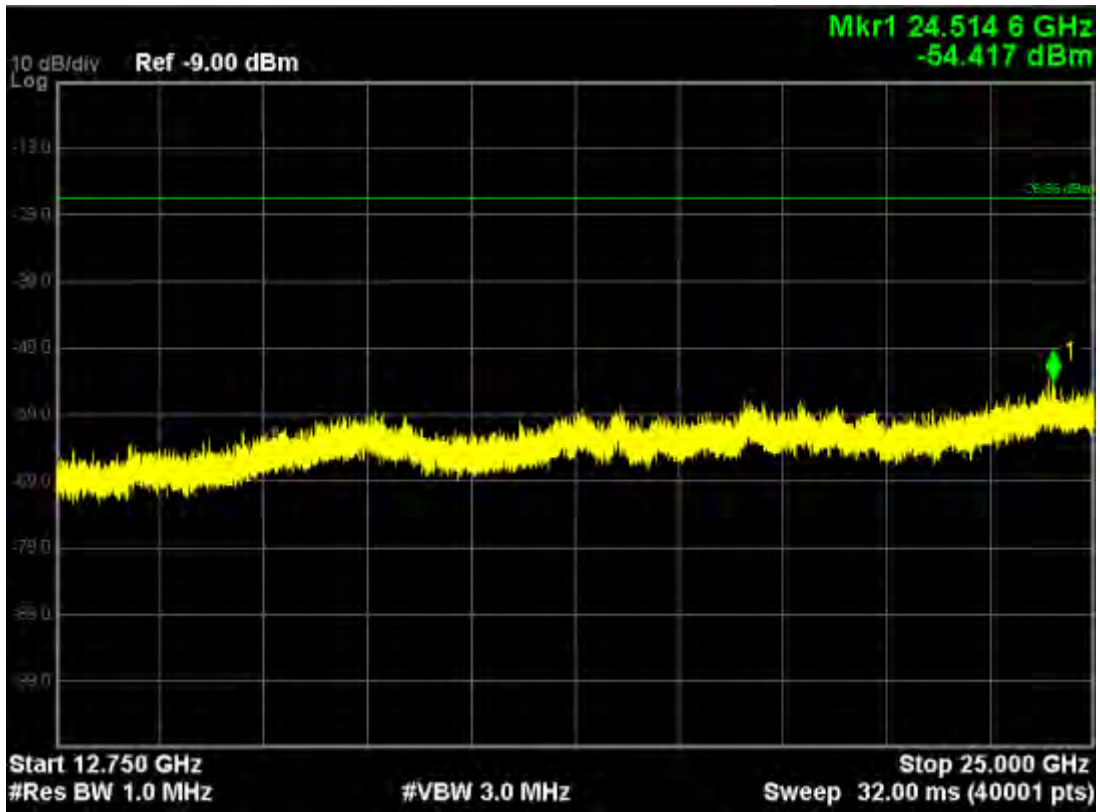


802.11n40, traffic mode; Channel 159

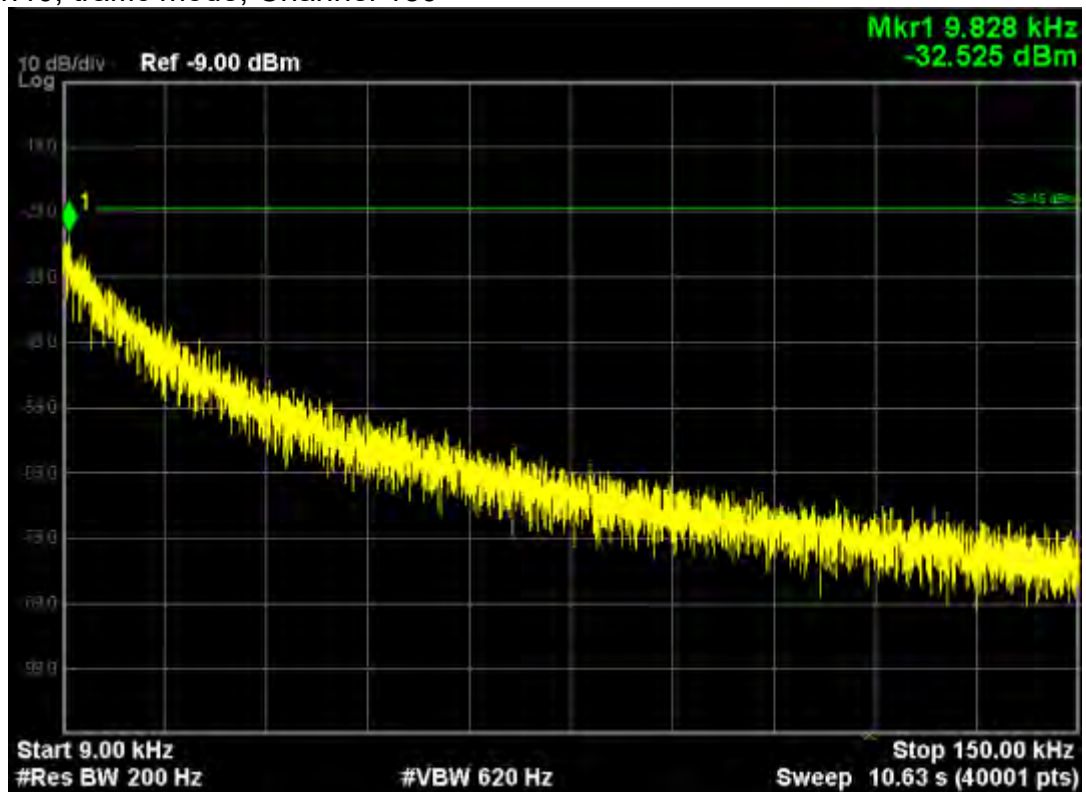

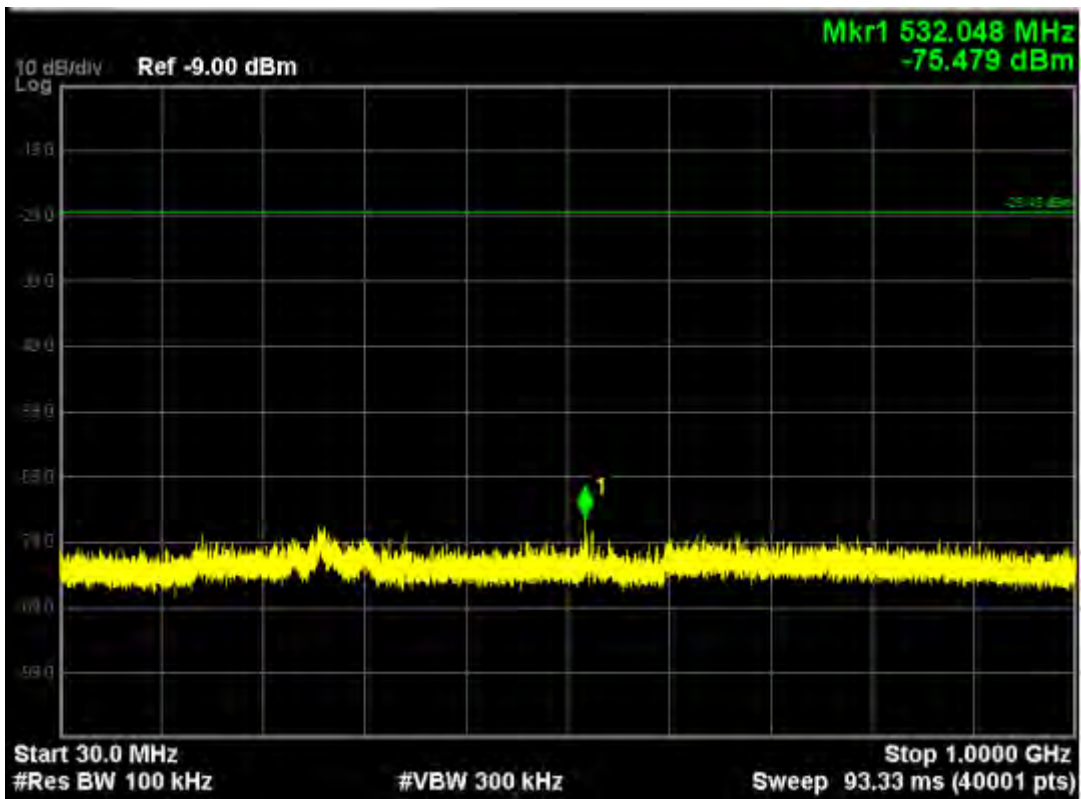
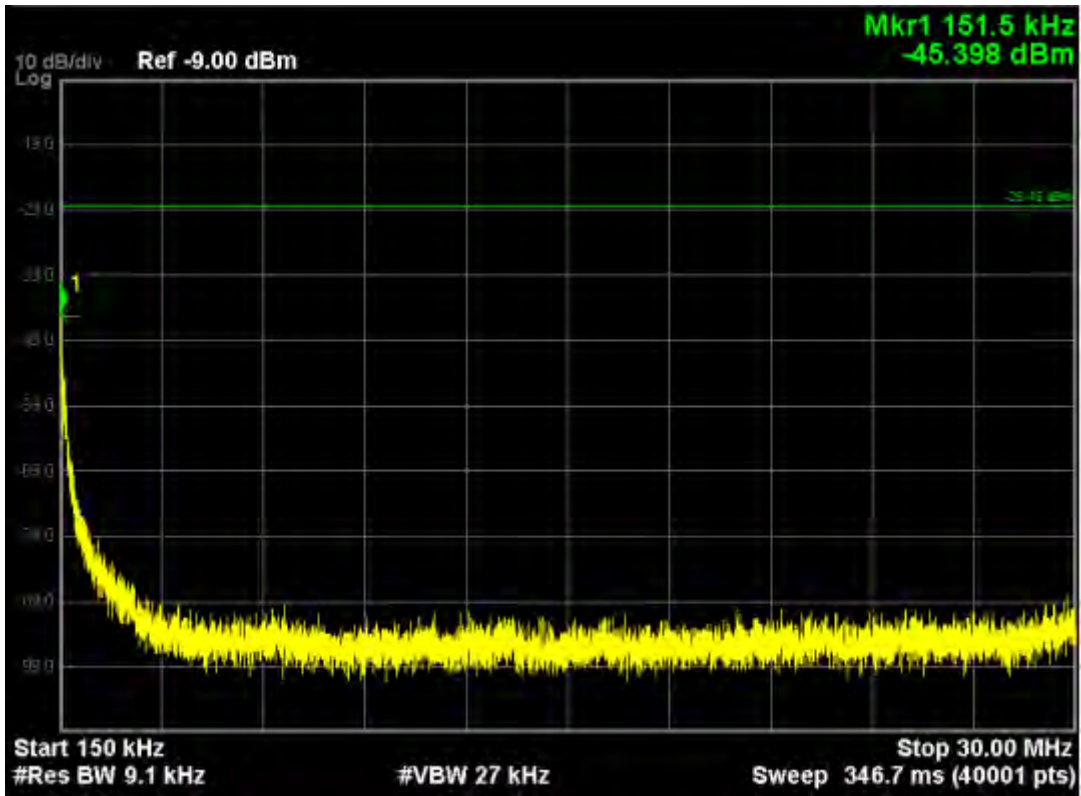



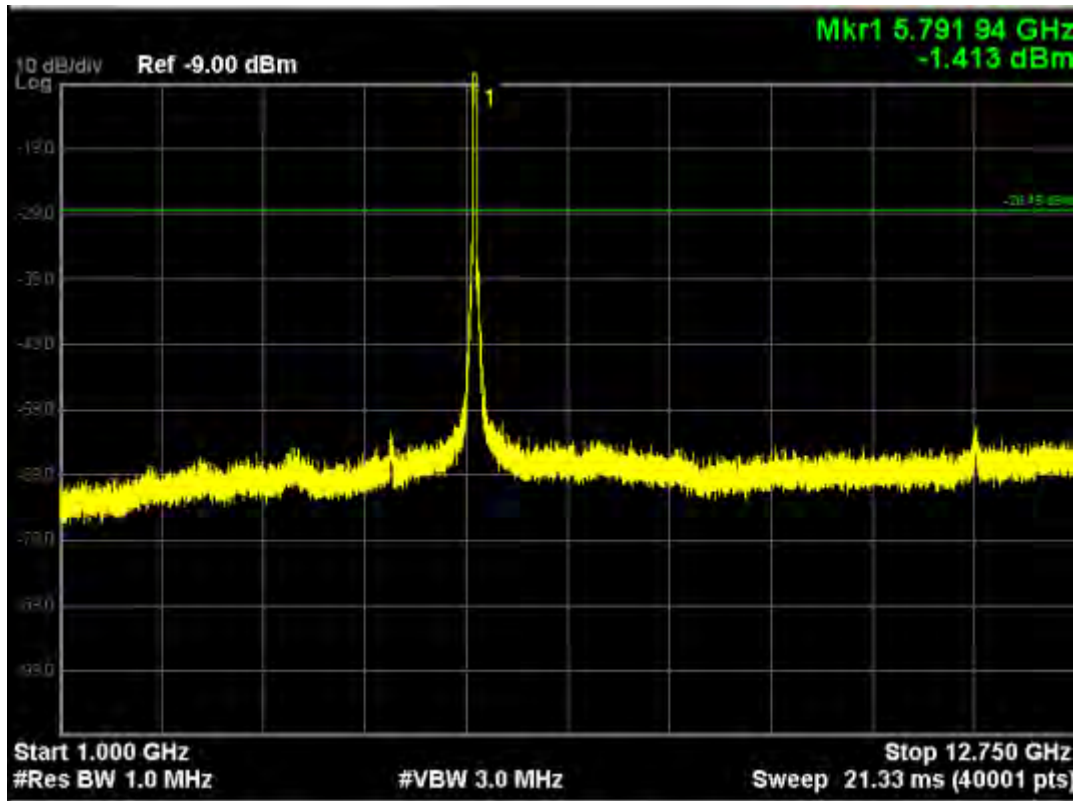


Note: The Mark1 point is carrier.

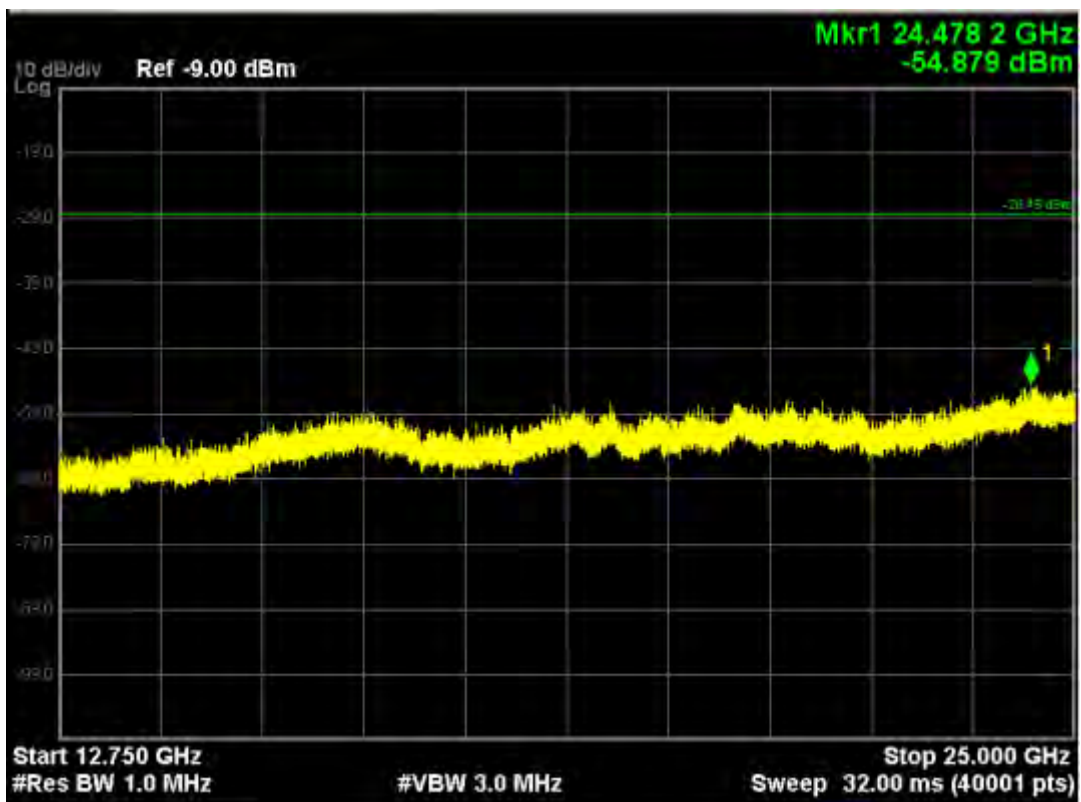


802.11n40, traffic mode; Channel 159(mimo)

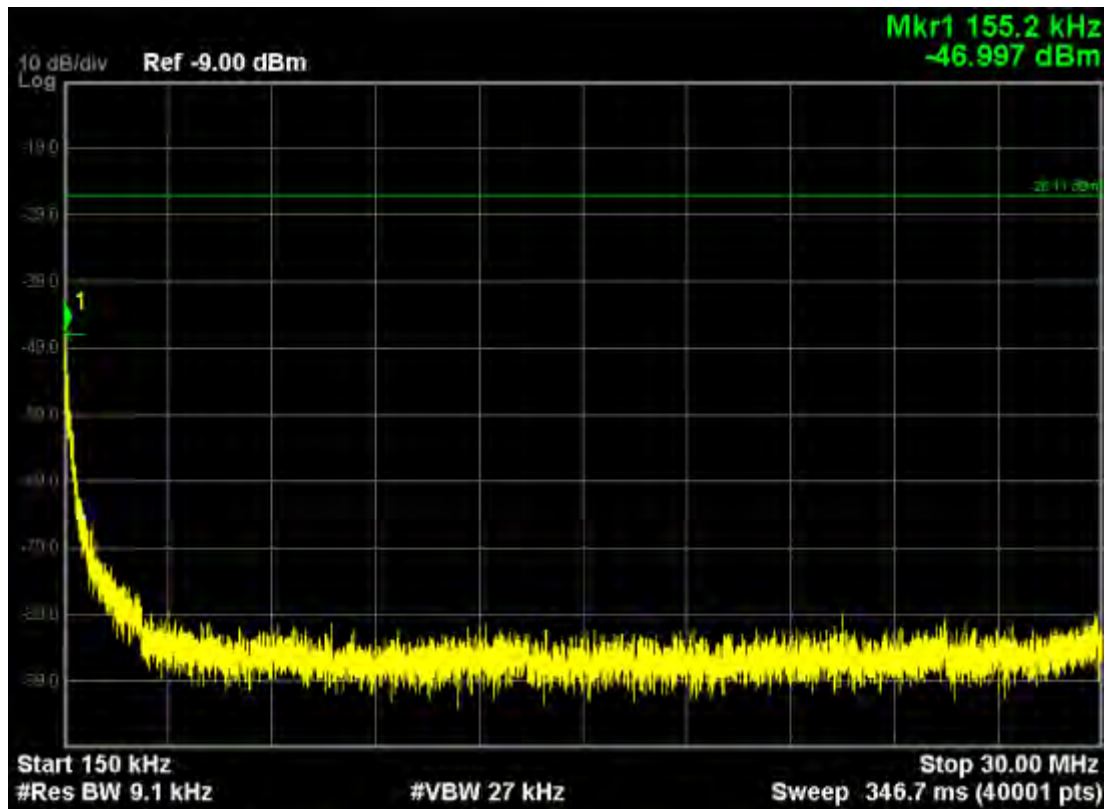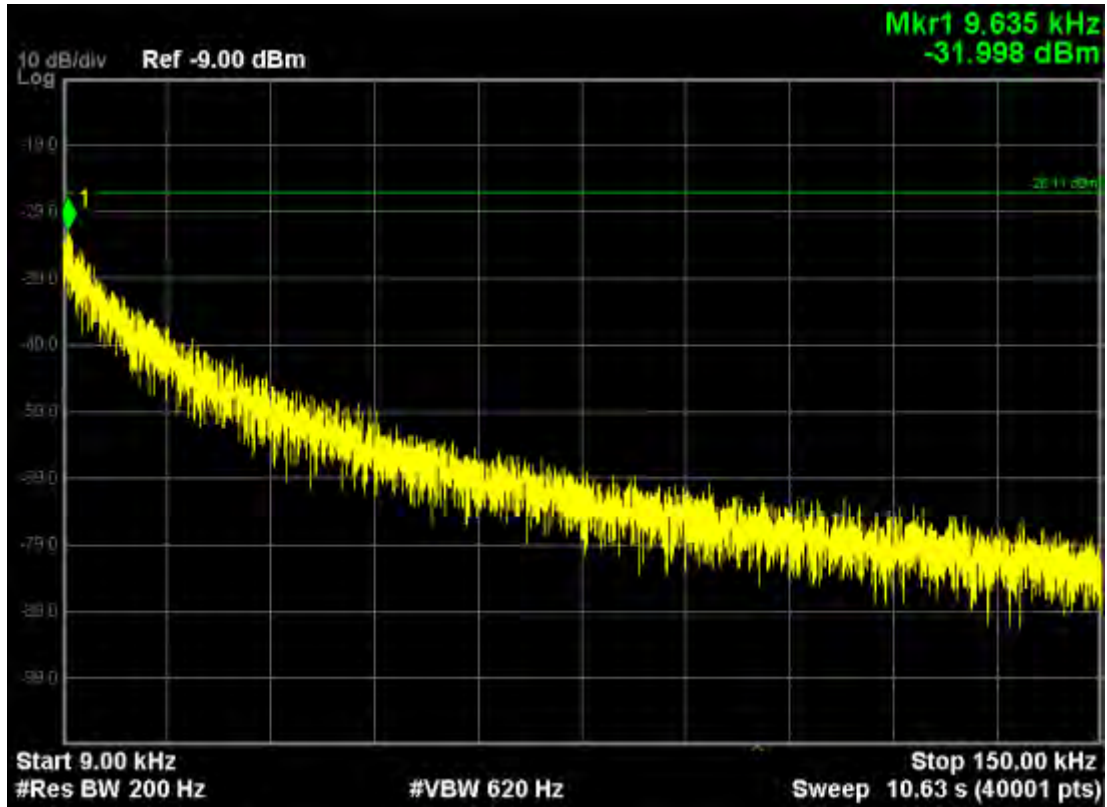


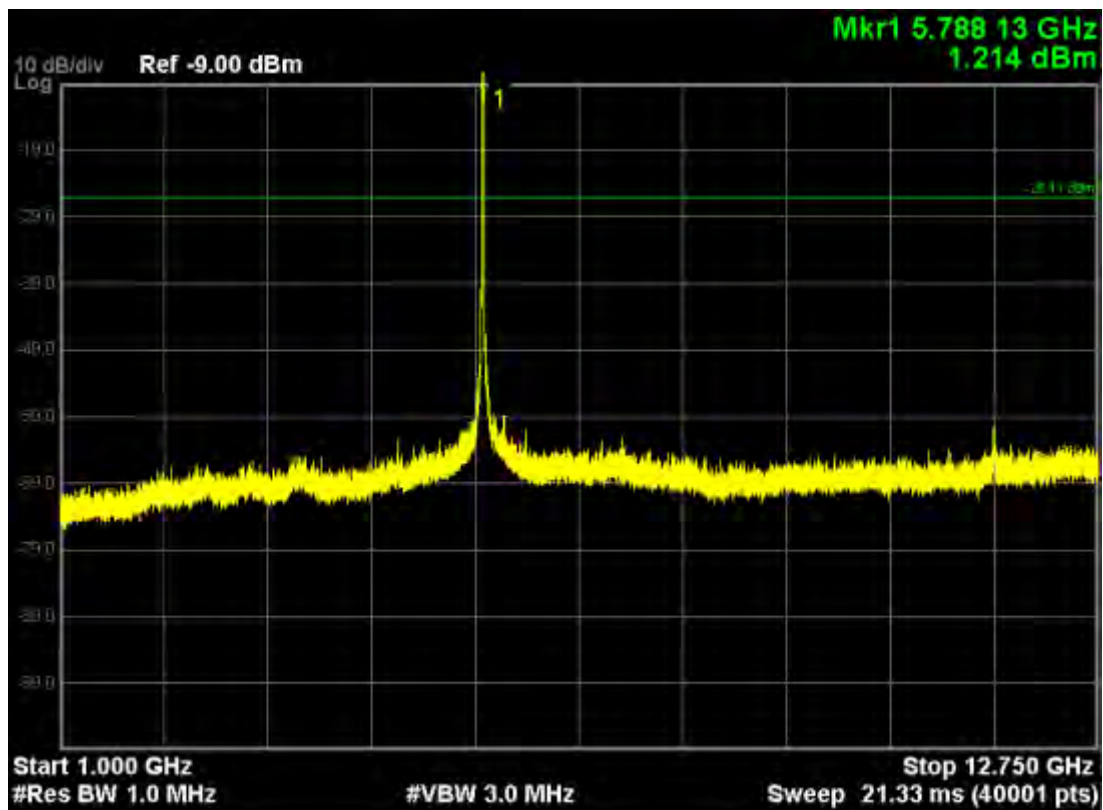
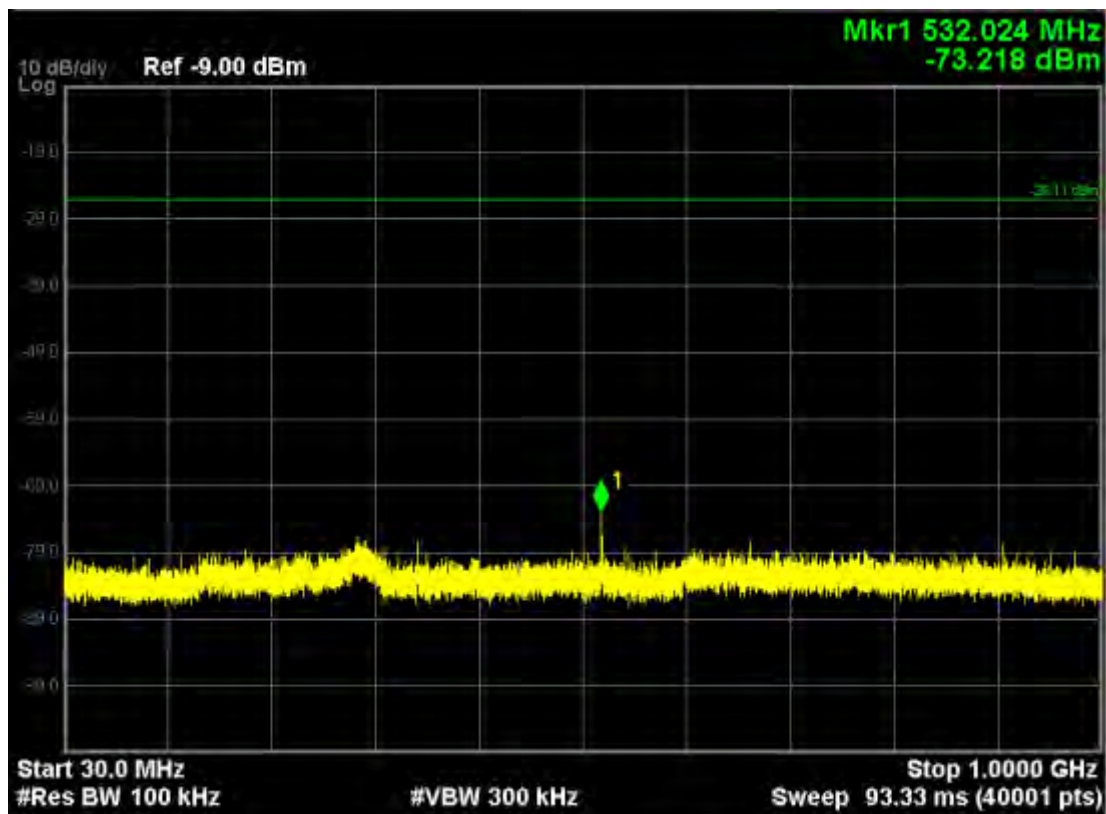



Note: The Mark1 point is carrier.

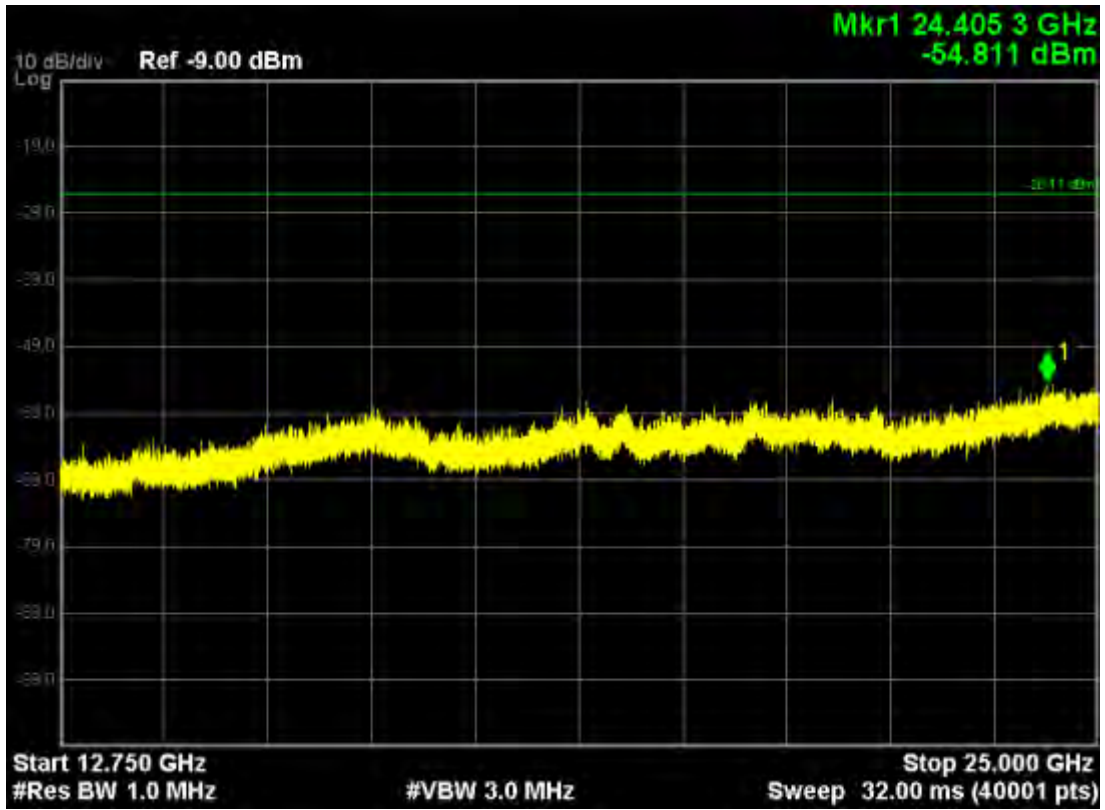


802.11ac (5150MHz-5250MHz)
802.11ac20, traffic mode; Channel 36

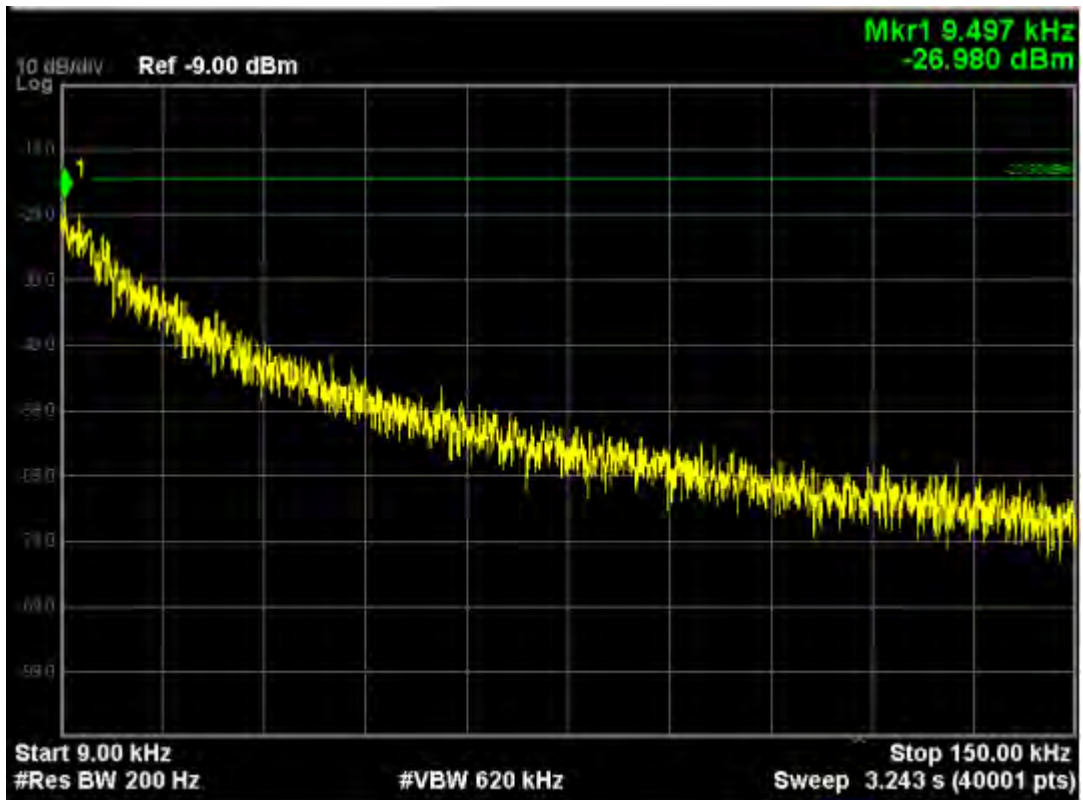

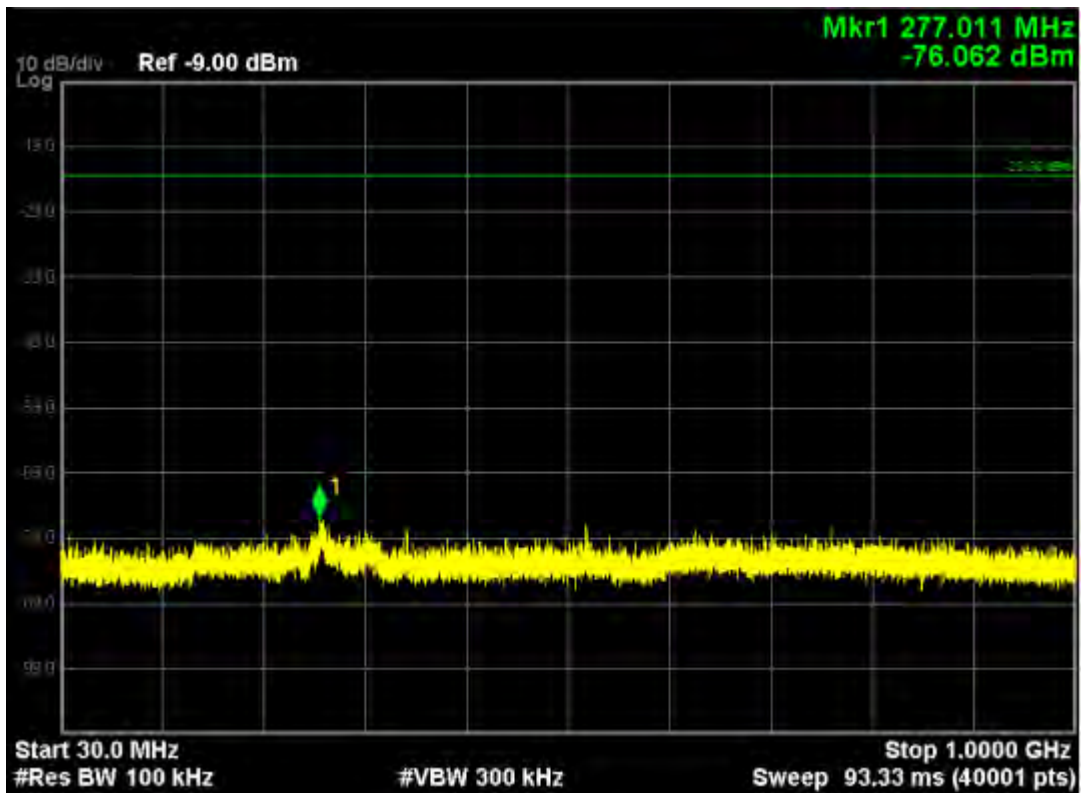
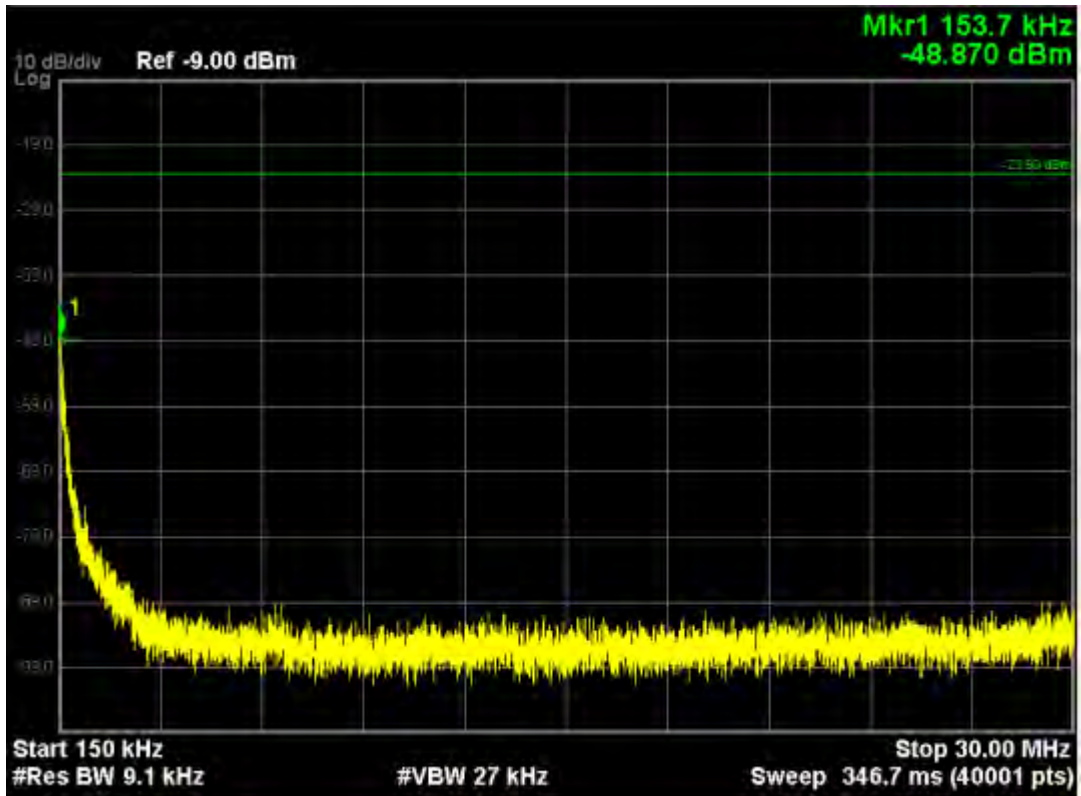



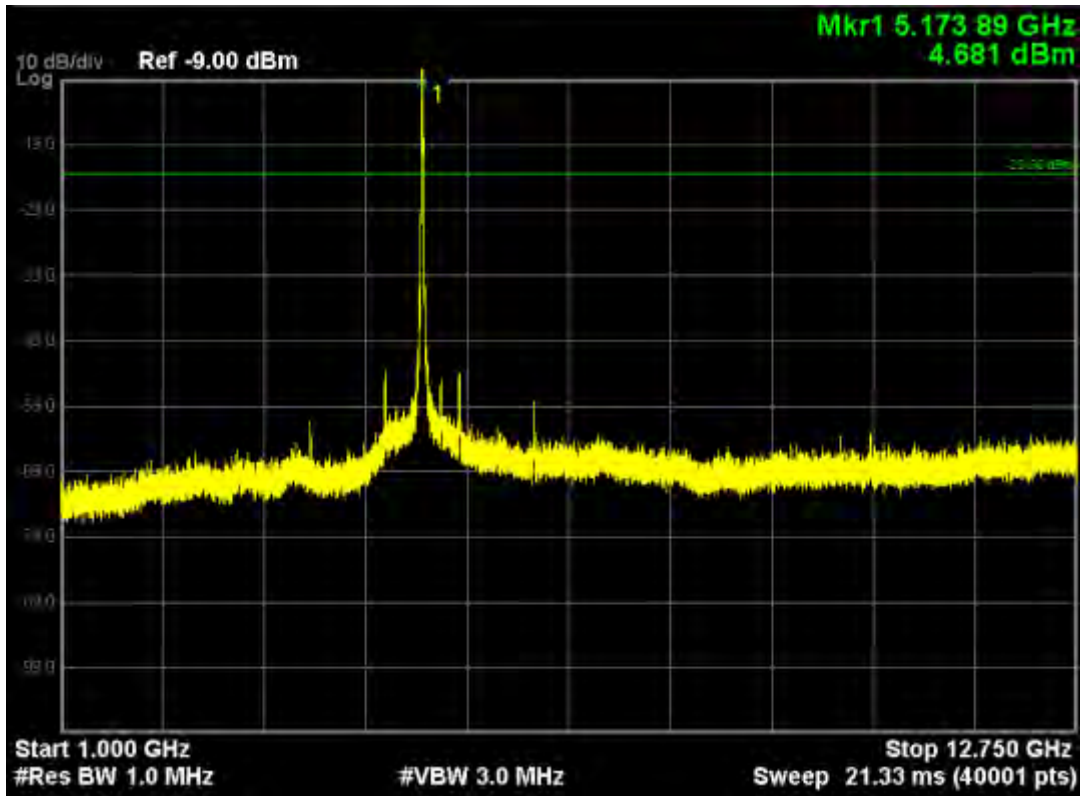


Note: The Mark1 point is carrier.

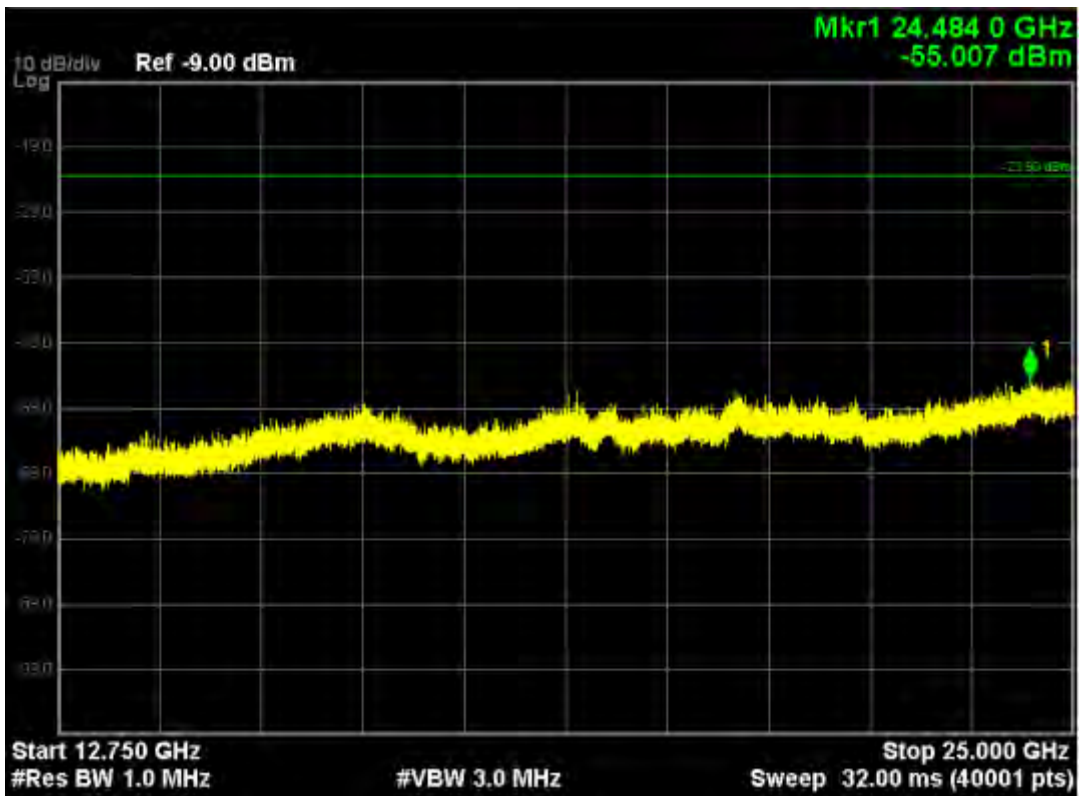


802.11ac20, traffic mode; Channel 36(mimo)

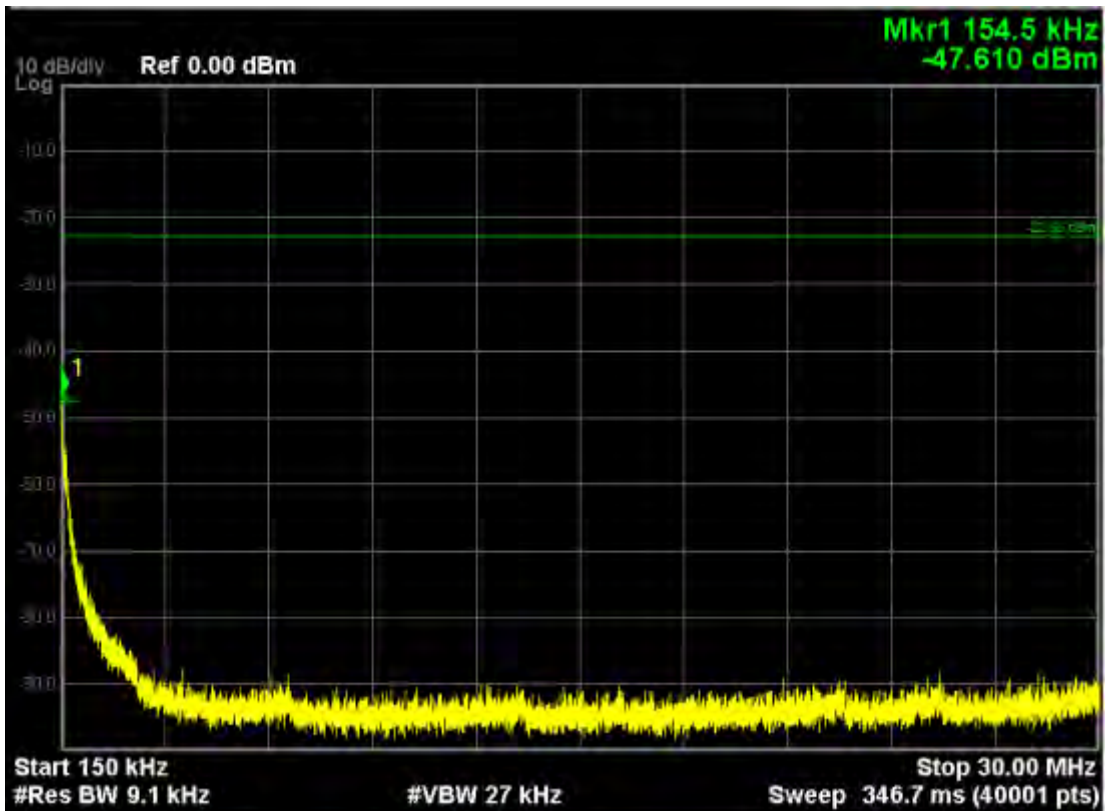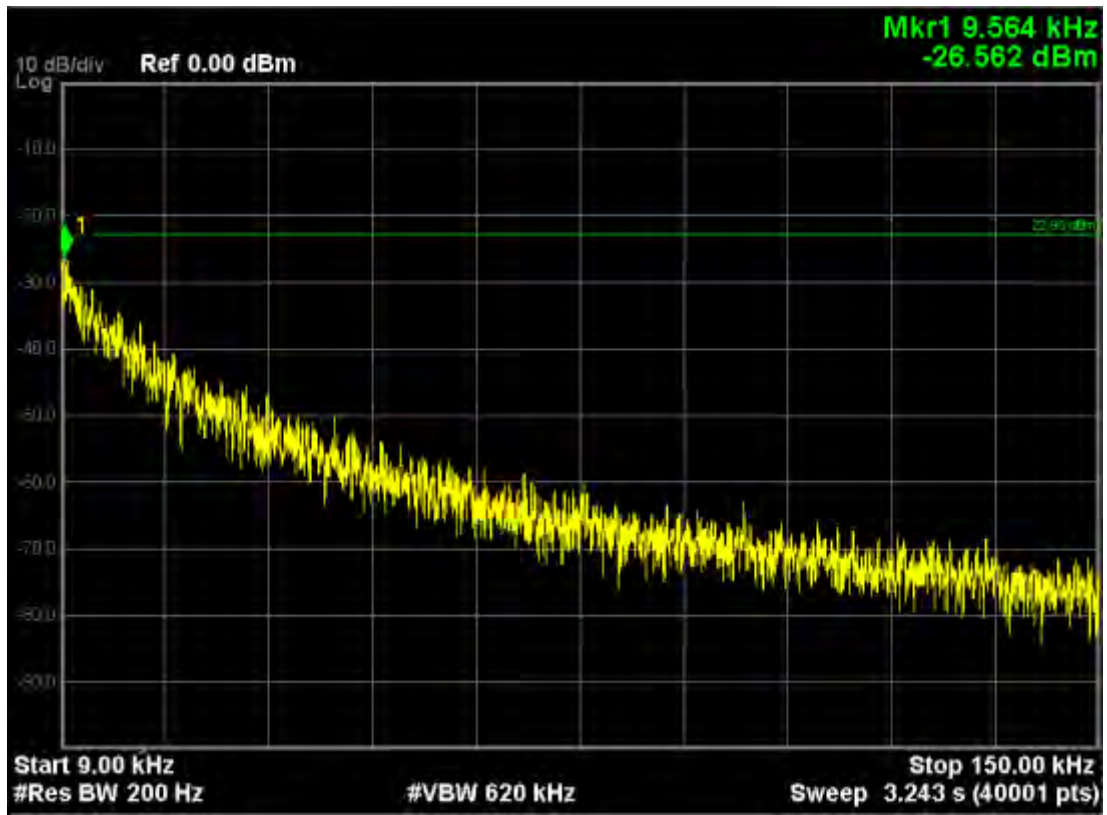


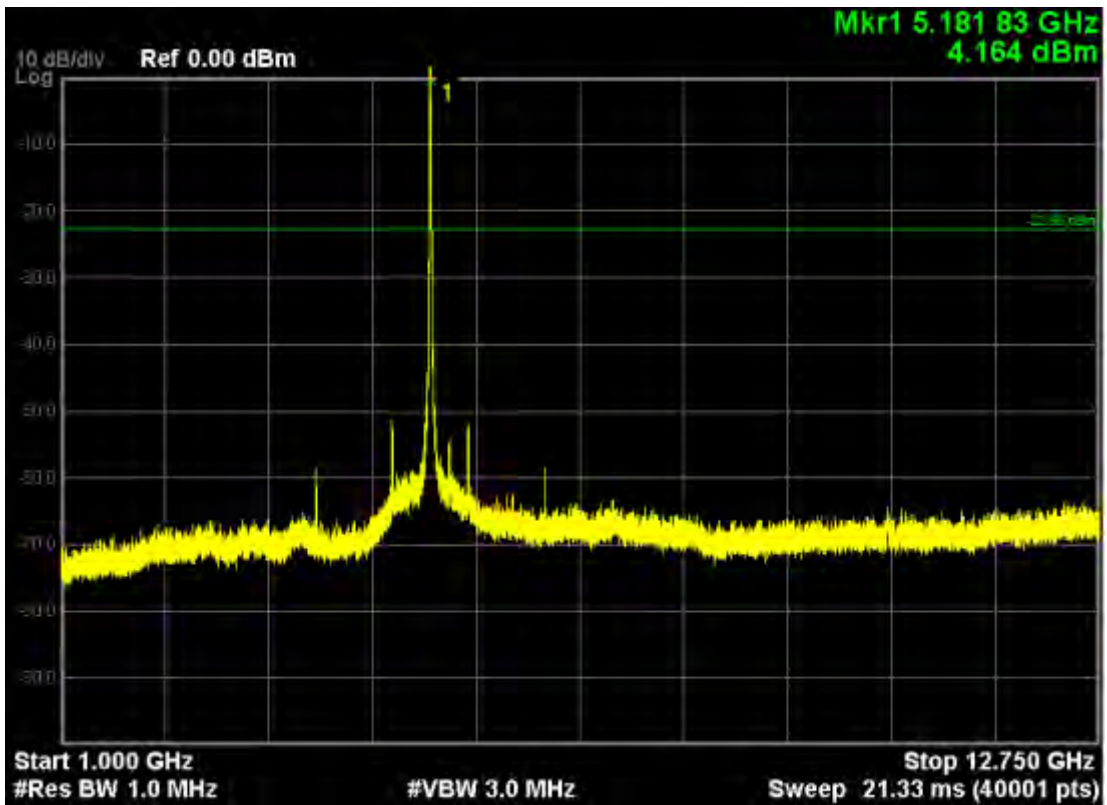
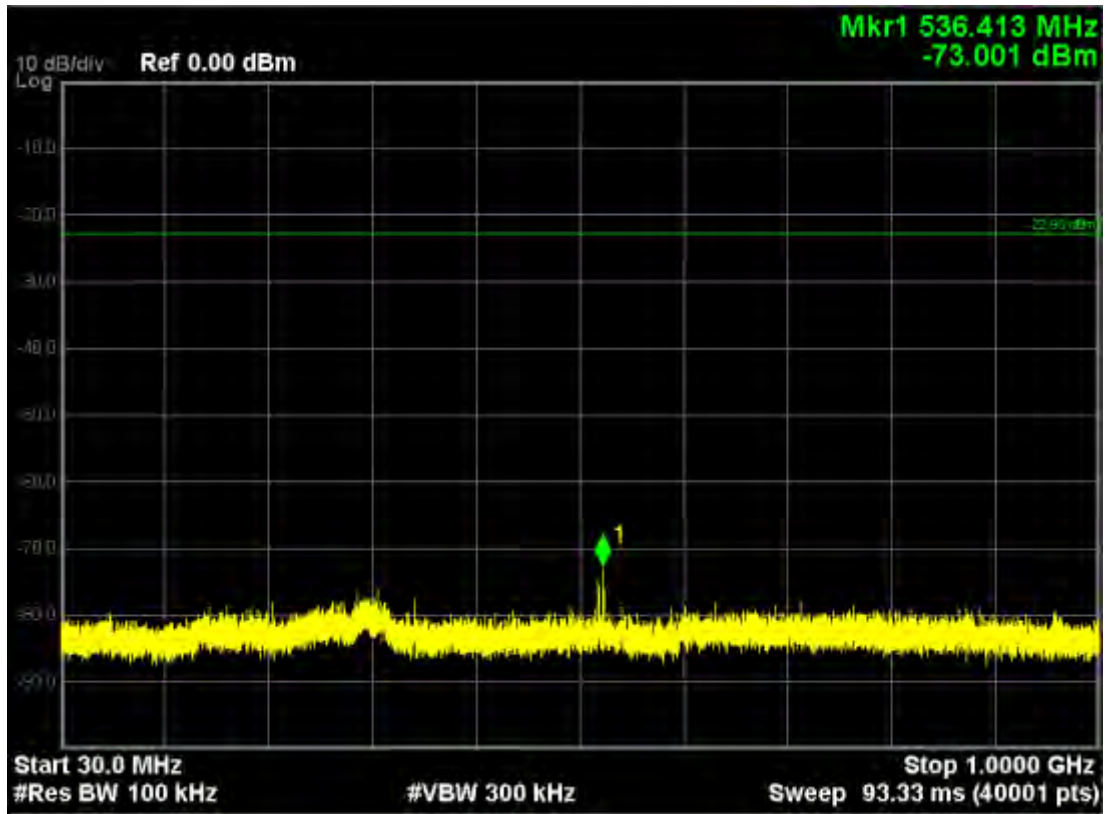



Note: The Mark1 point is carrier.

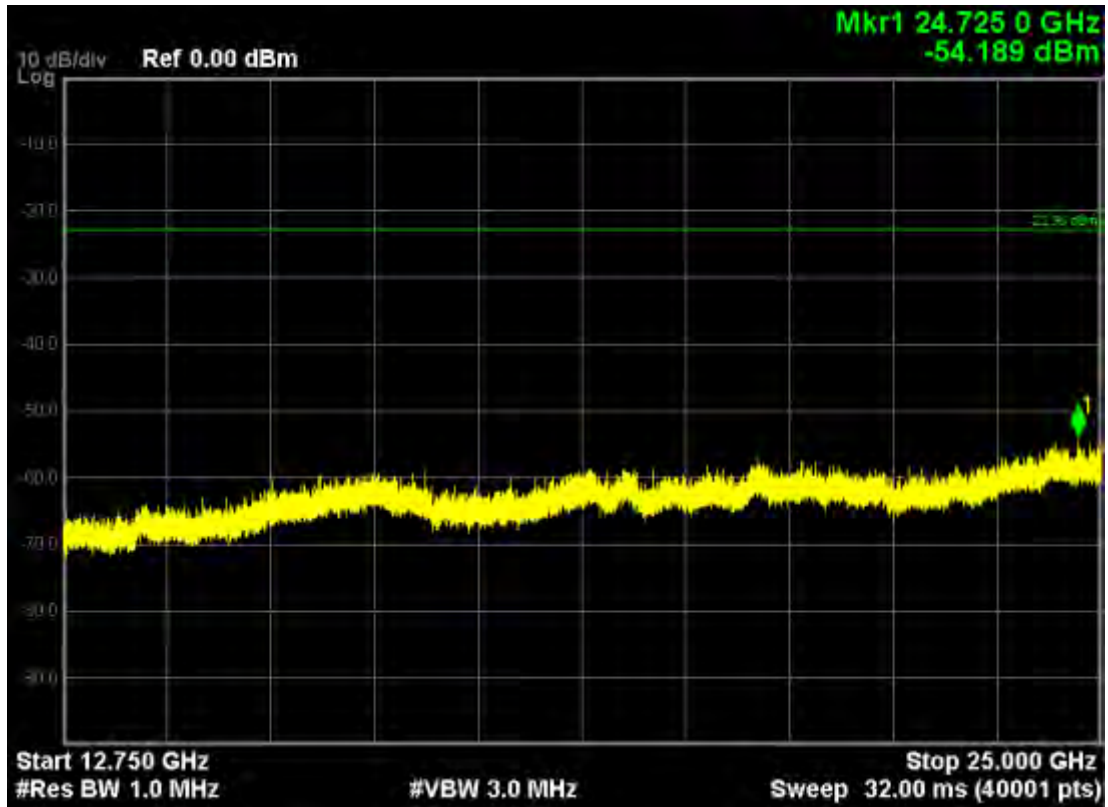


802.11ac20, traffic mode; Channel 48

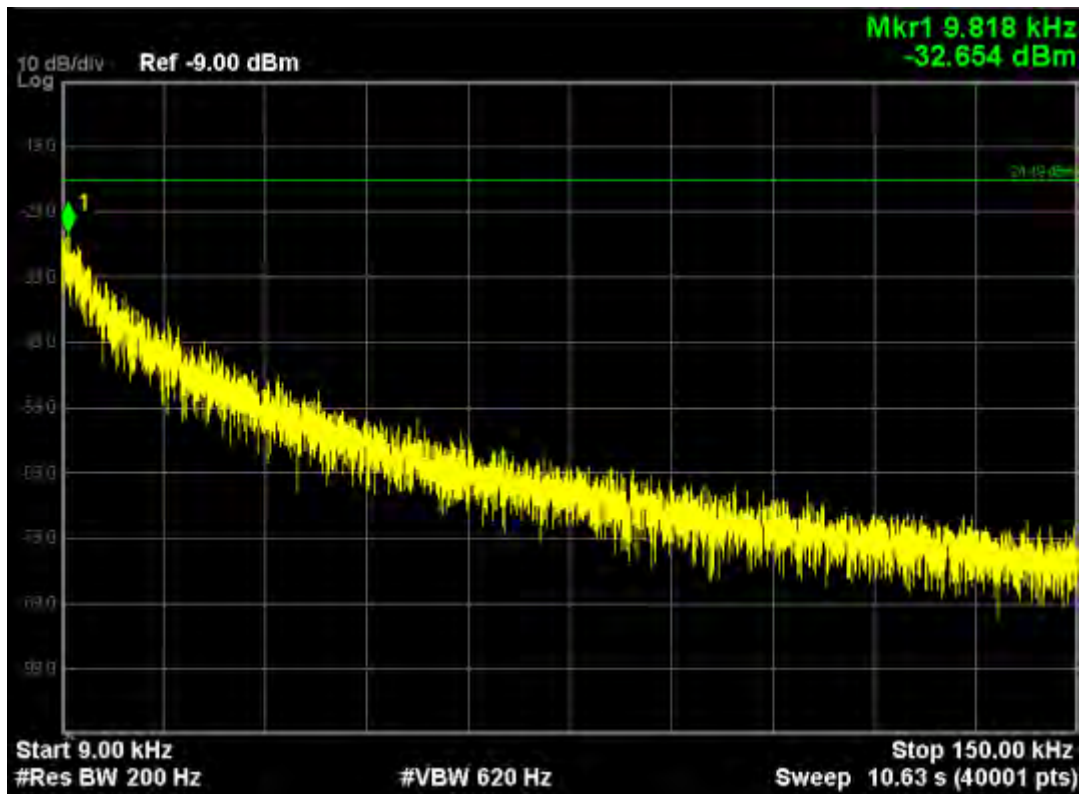

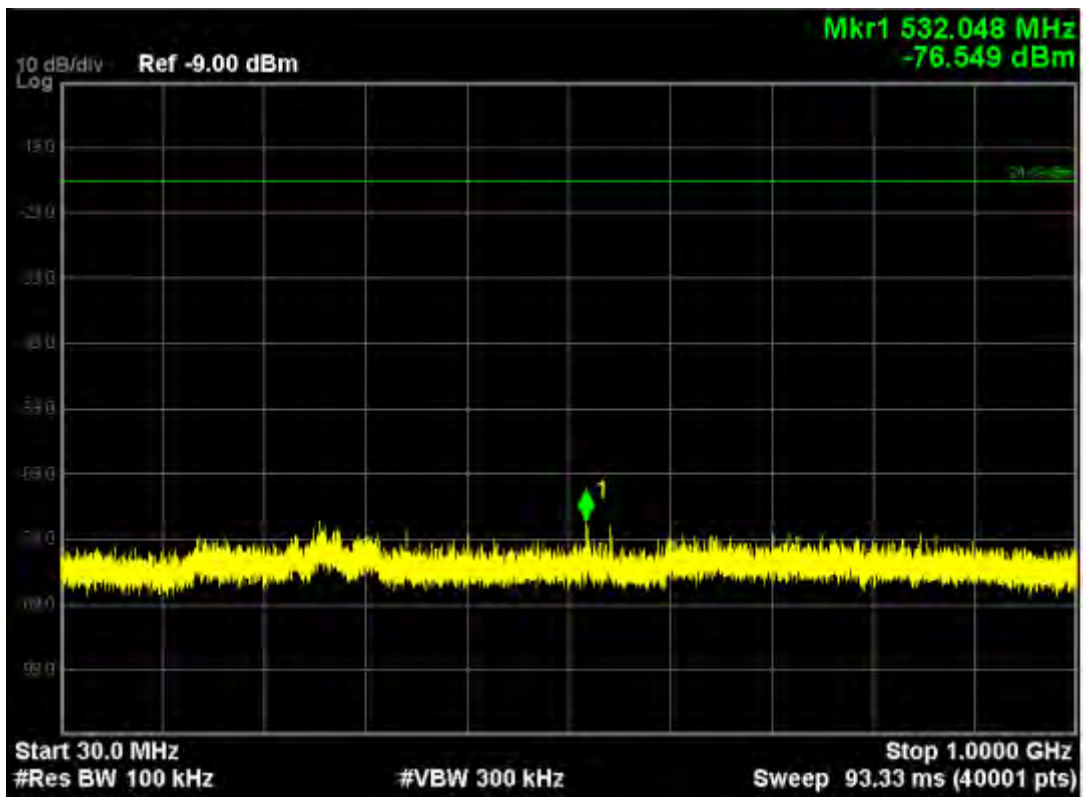
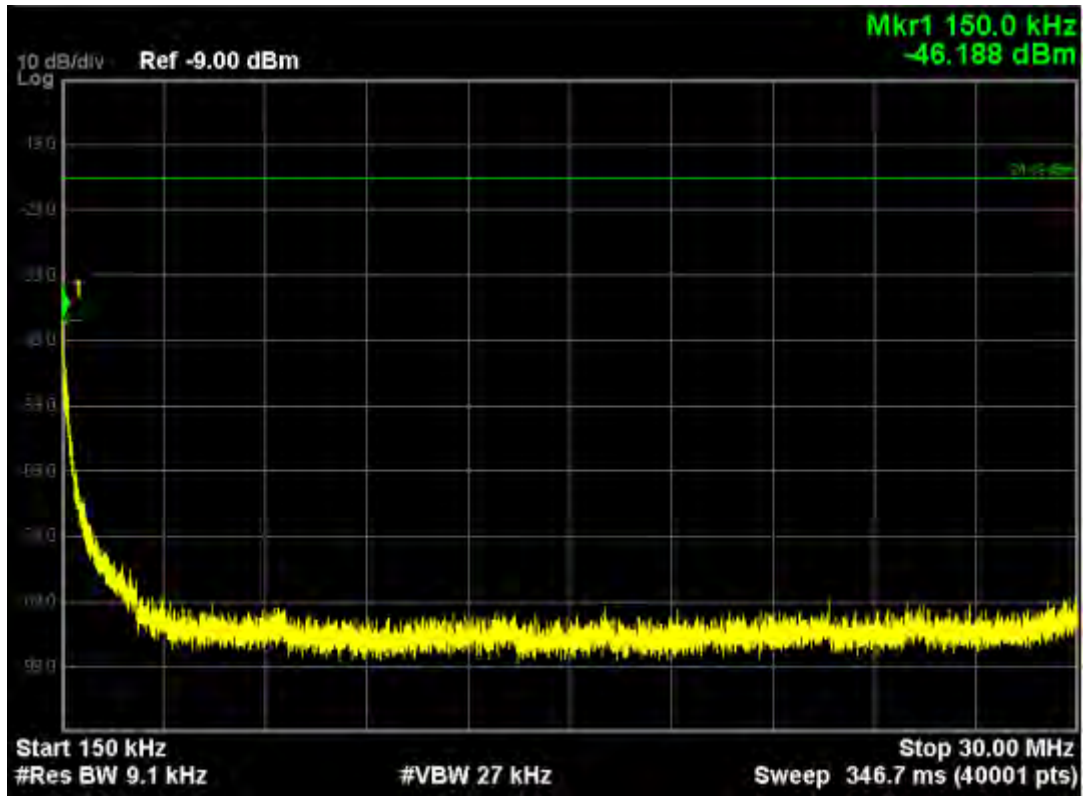



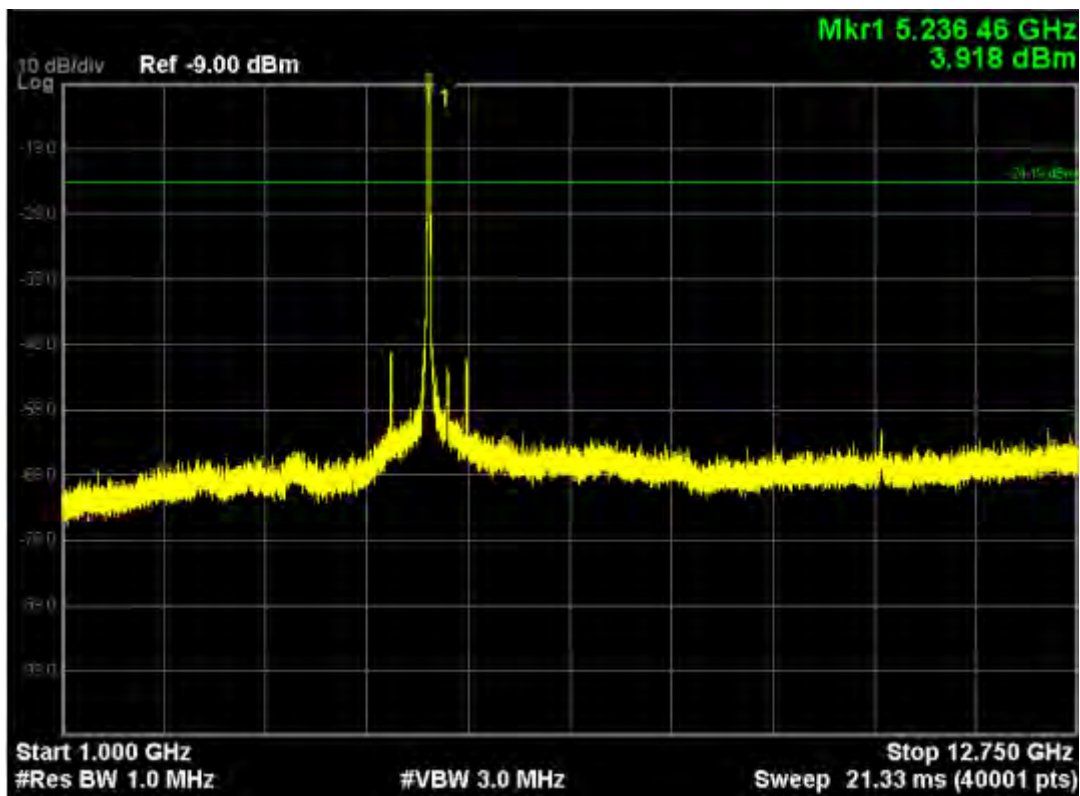


Note: The Mark1 point is carrier.

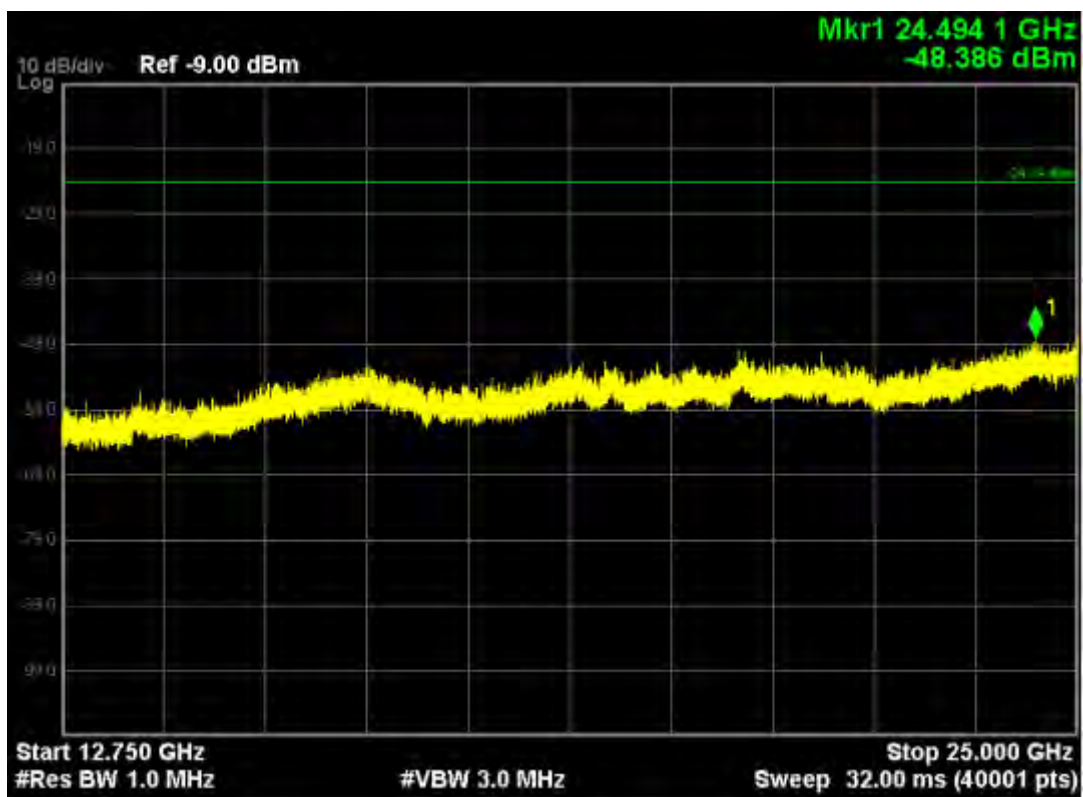


802.11ac20, traffic mode; Channel 48(mimo)

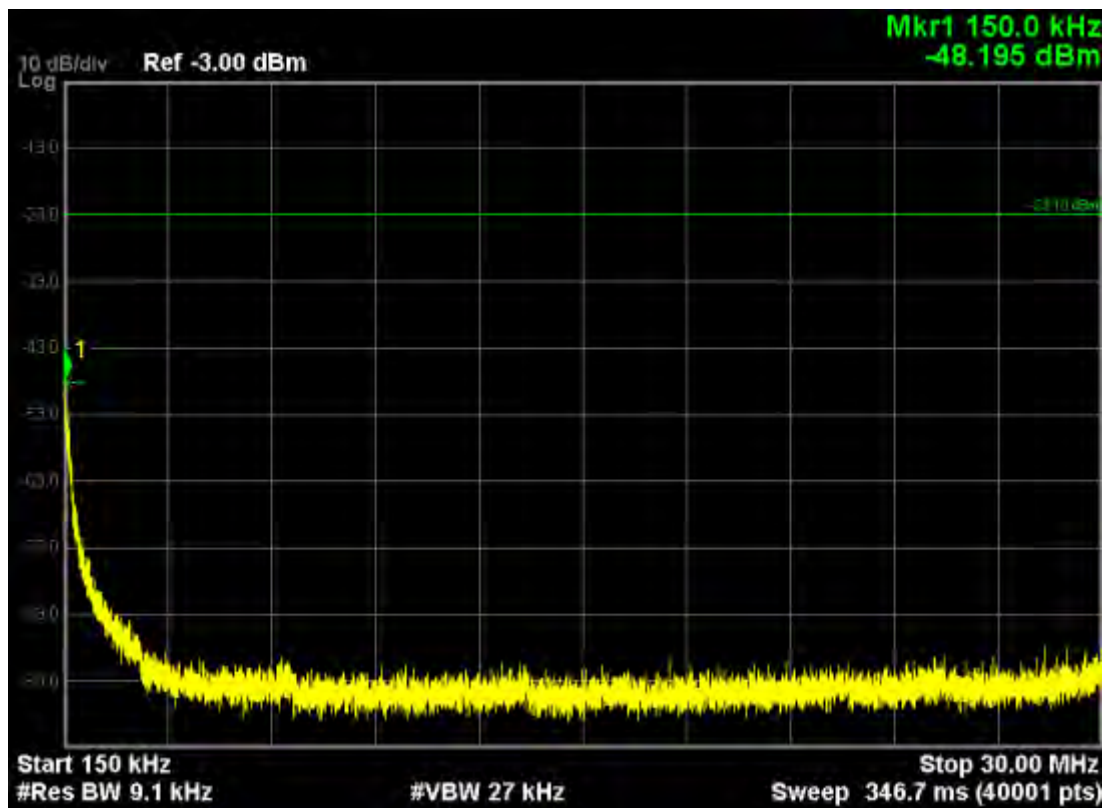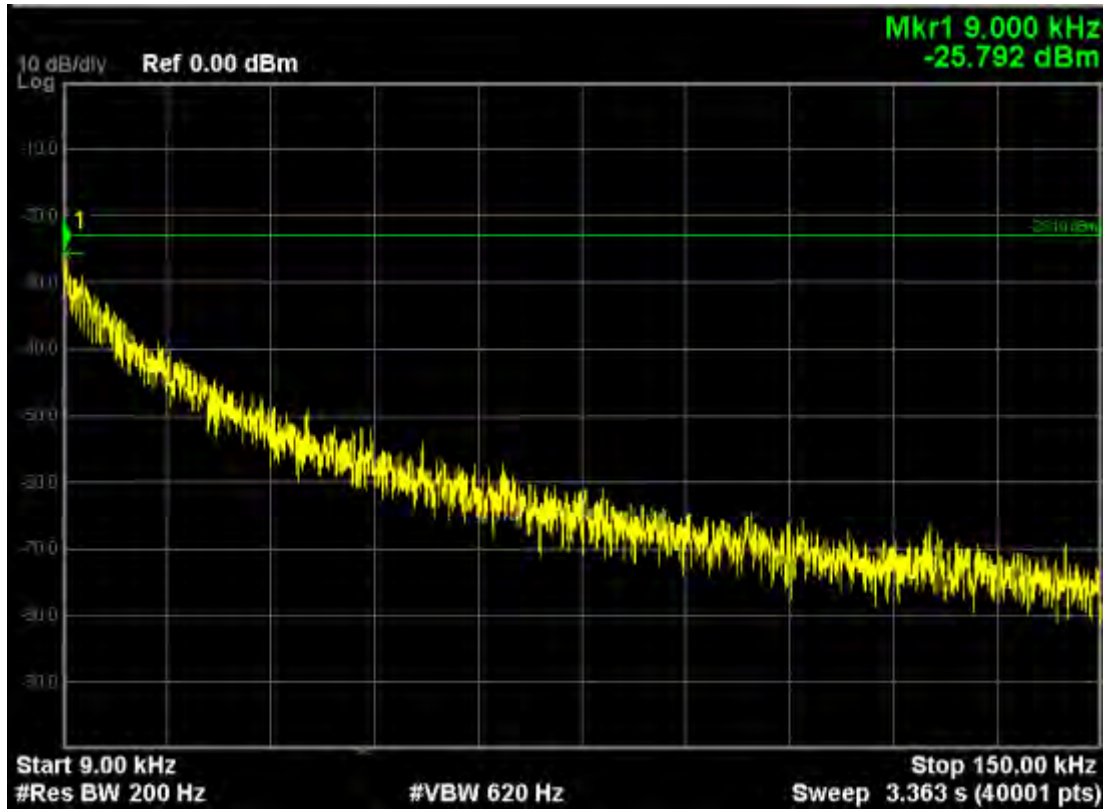


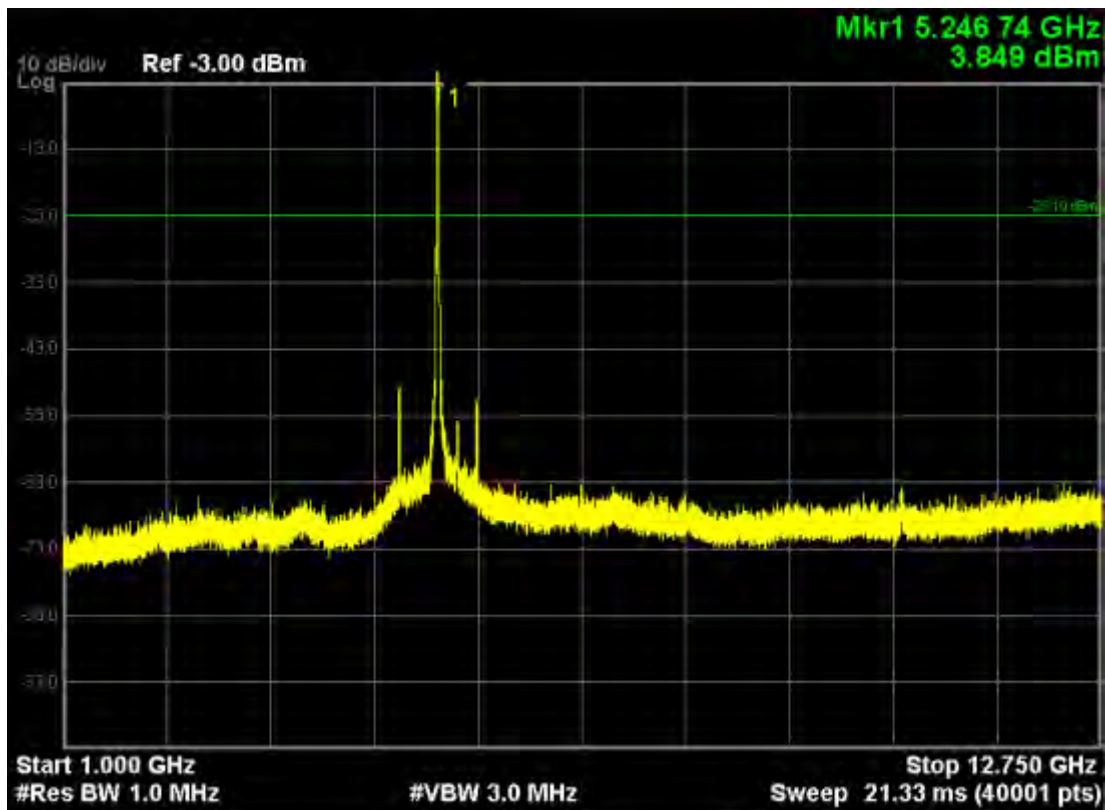
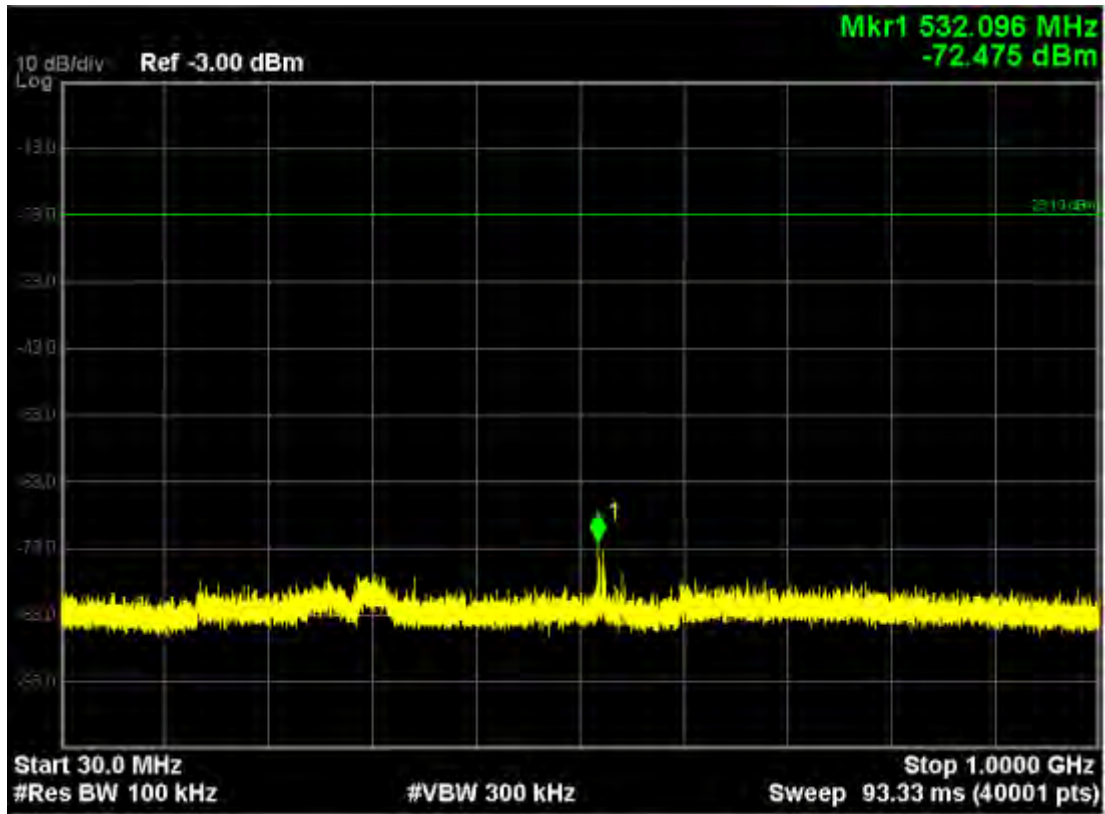



Note: The Mark1 point is carrier.

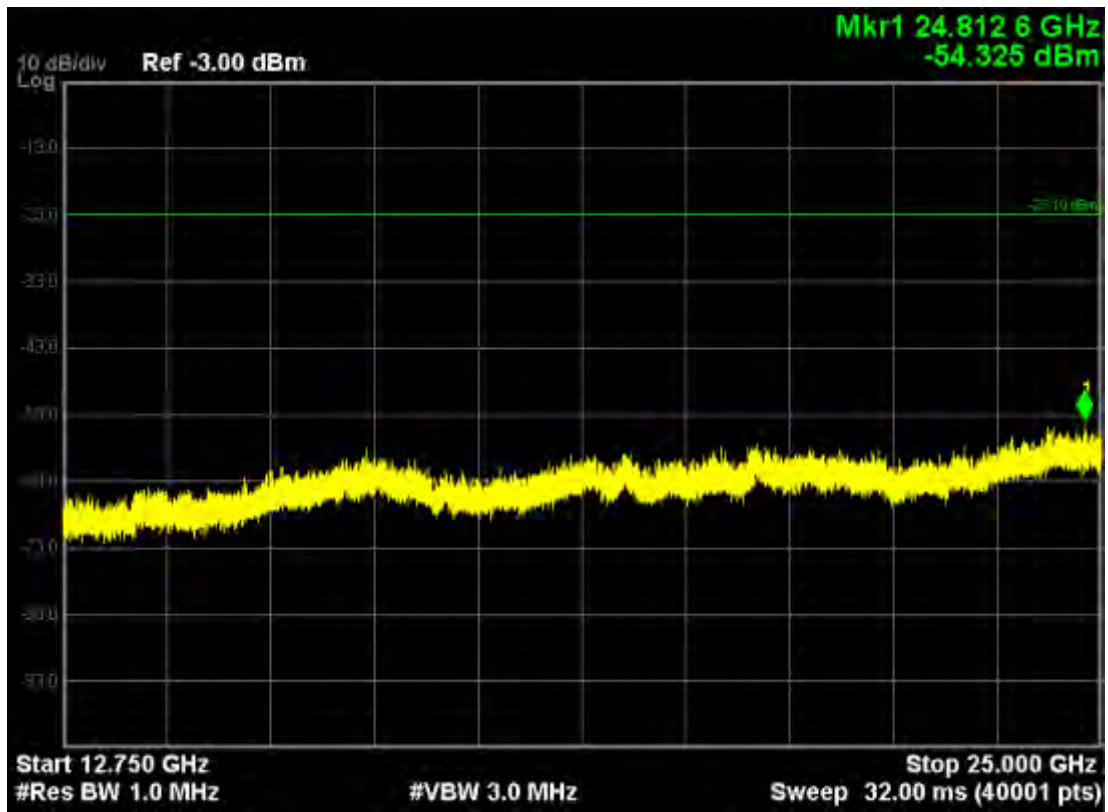


802.11ac40, traffic mode; Channel 38

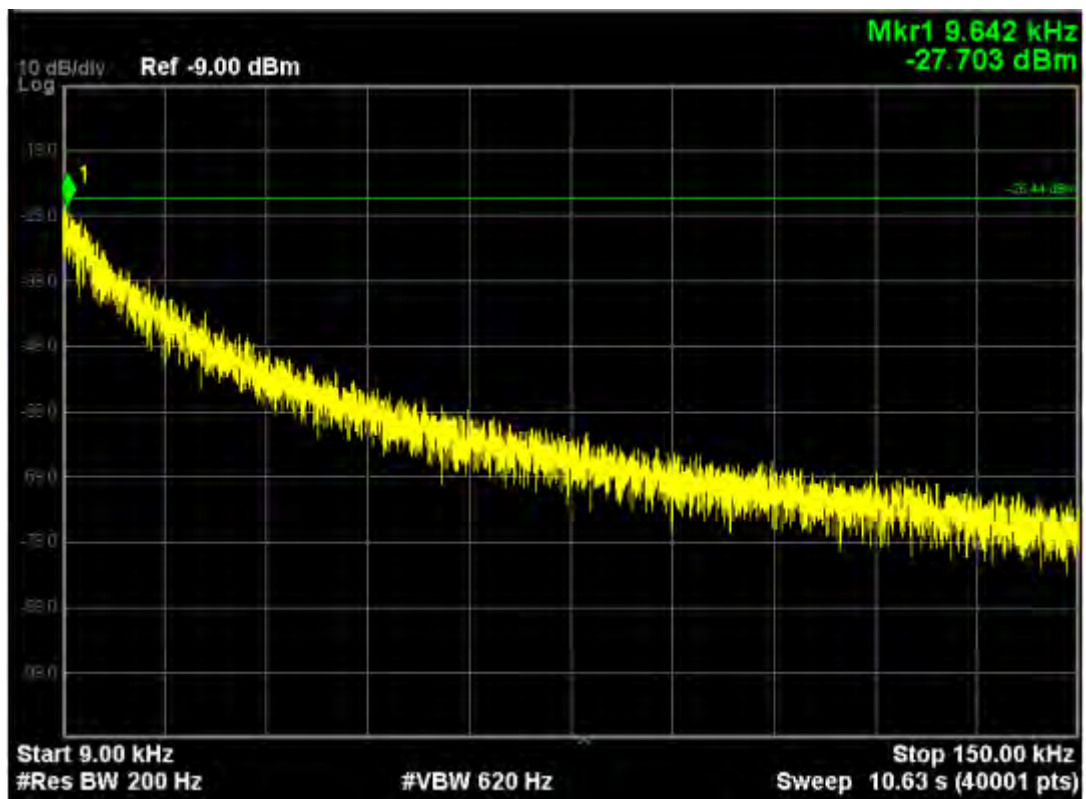

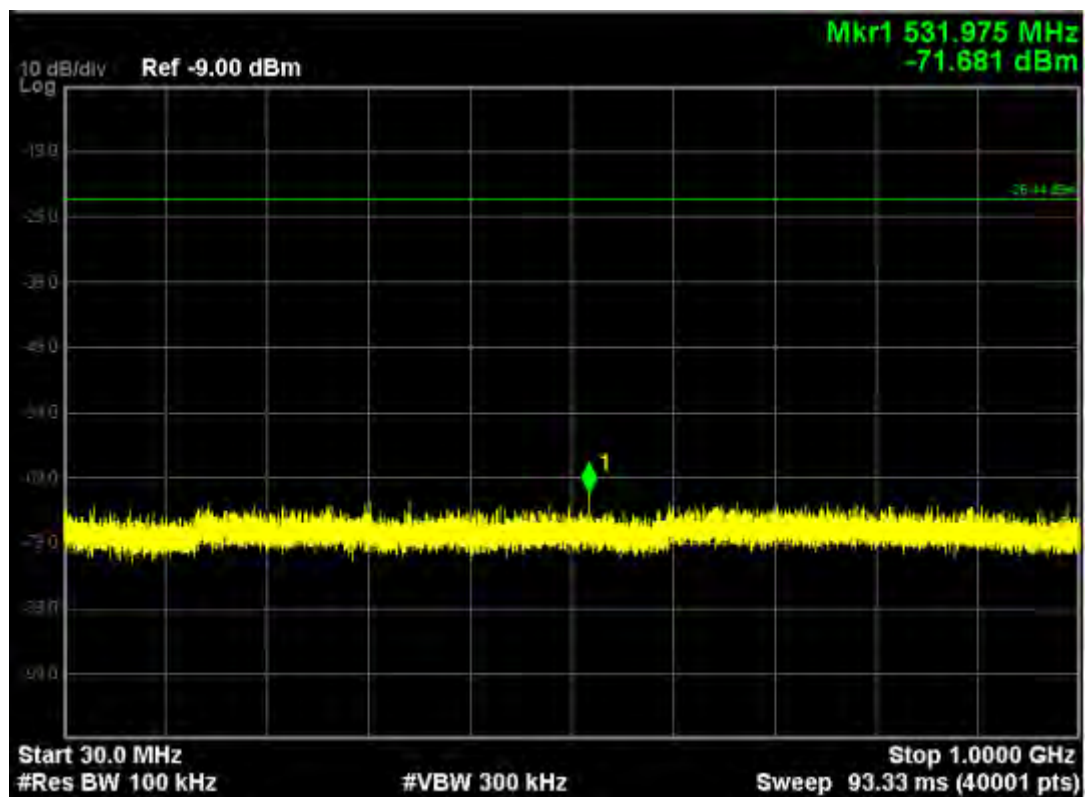
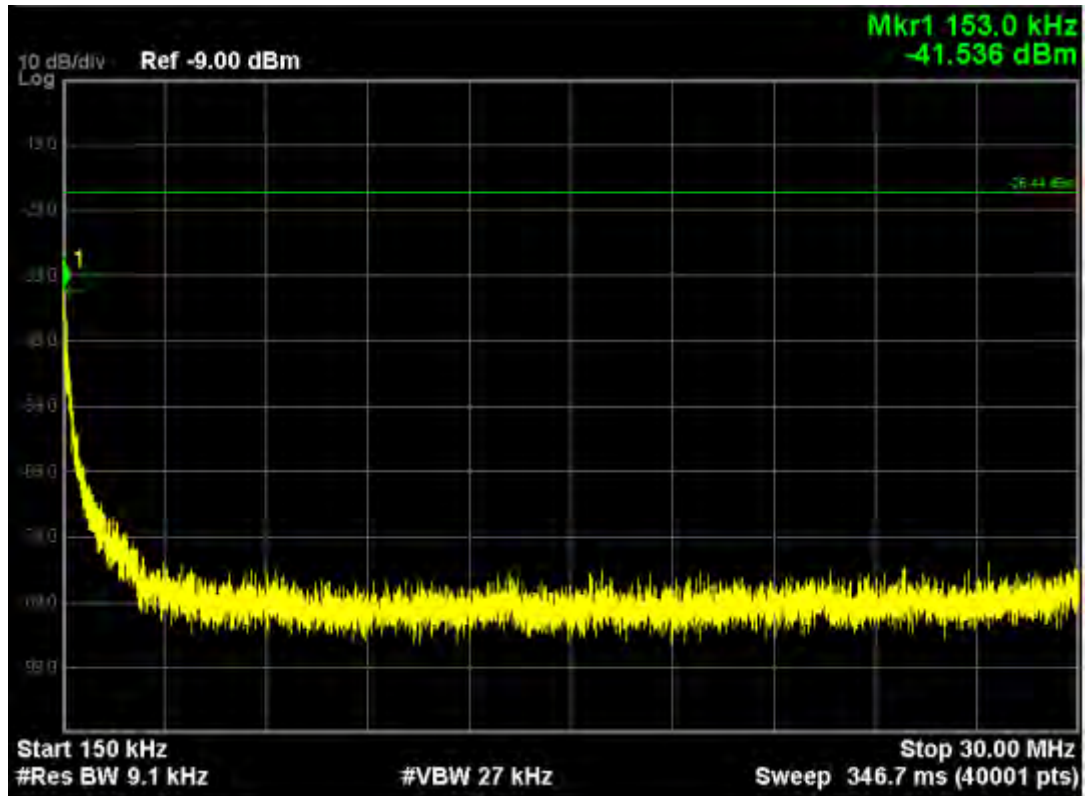



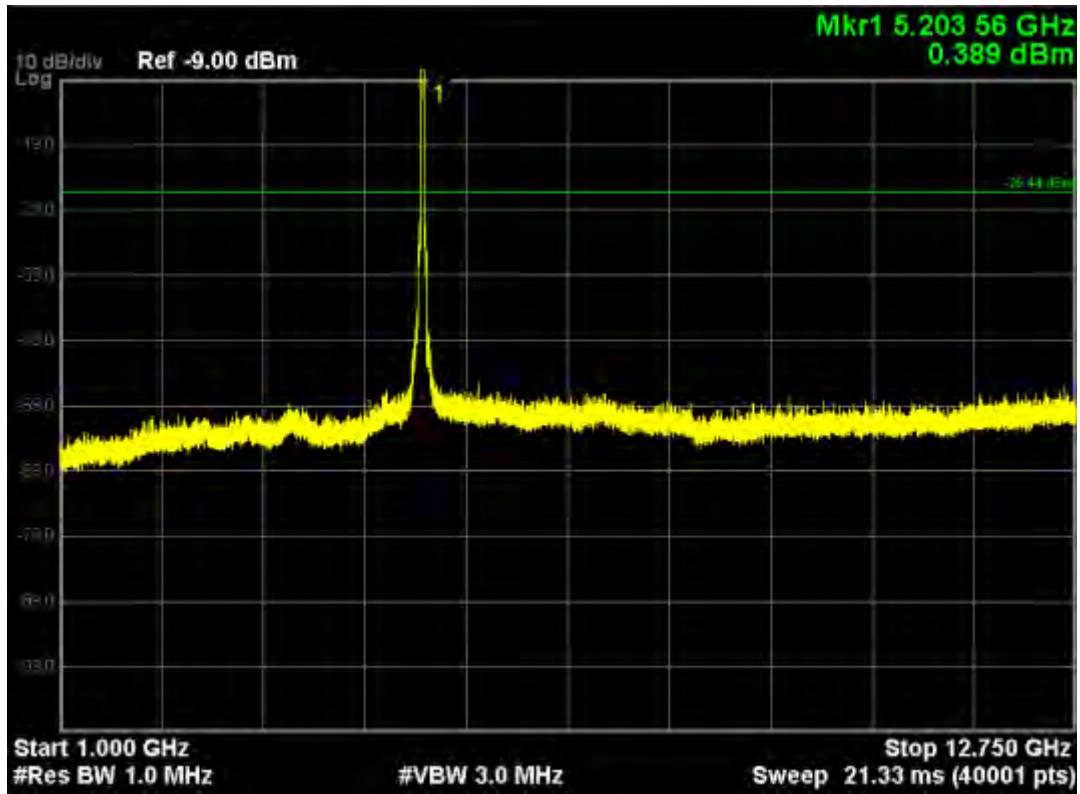


Note: The Mark1 point is carrier.

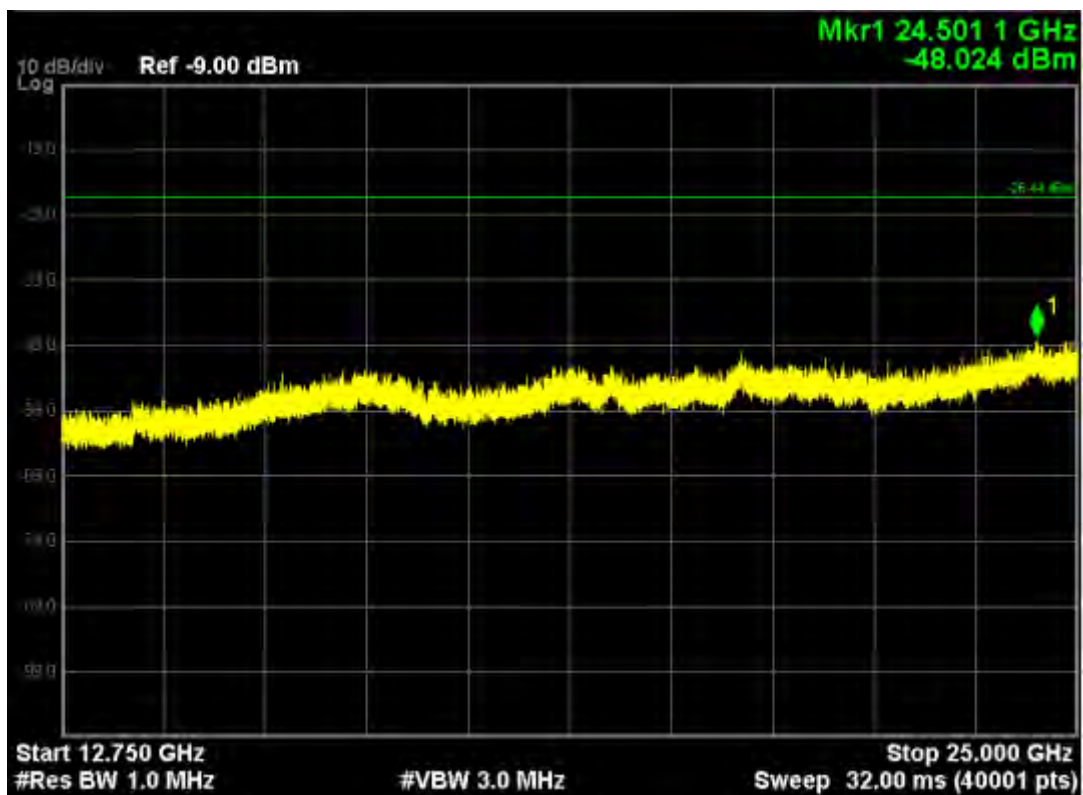


802.11ac40, traffic mode; Channel 38(mimo)

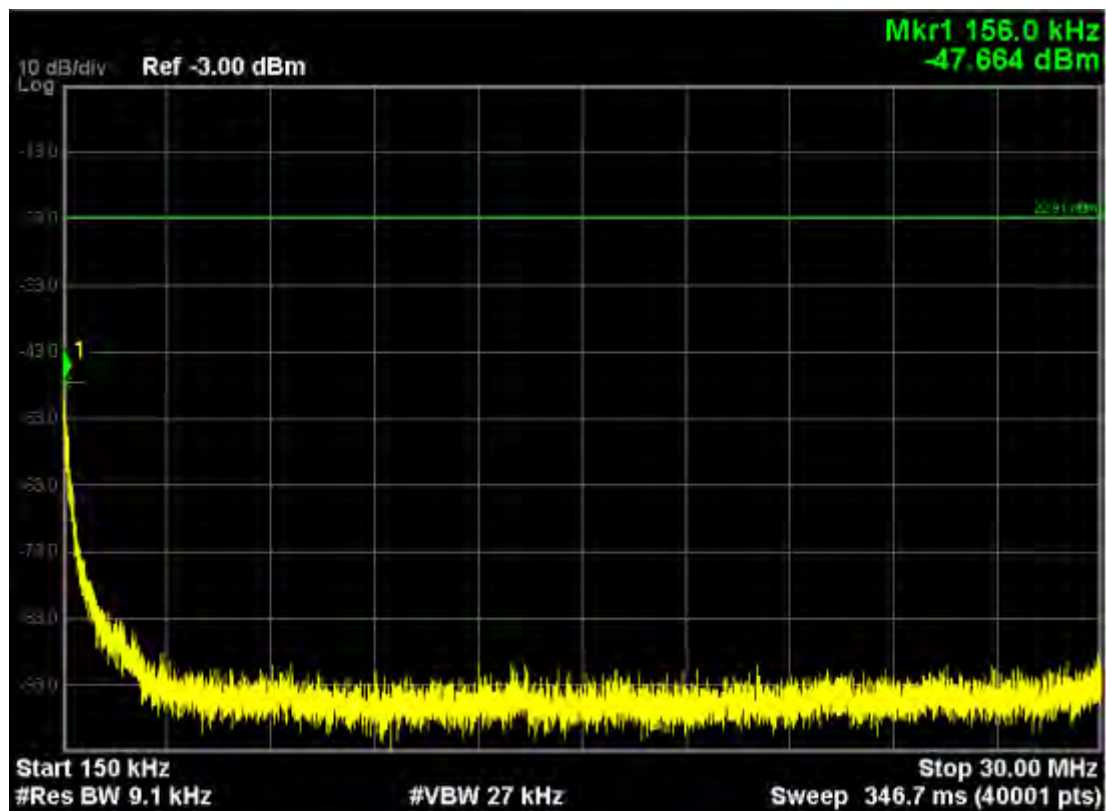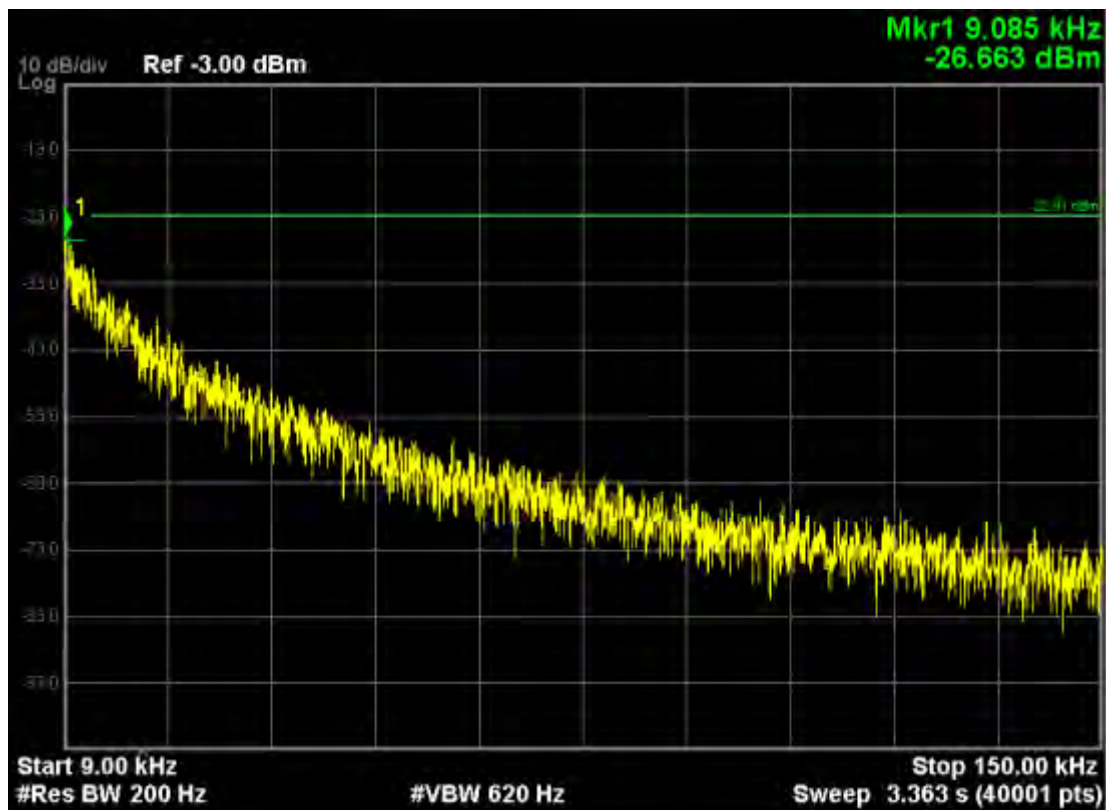


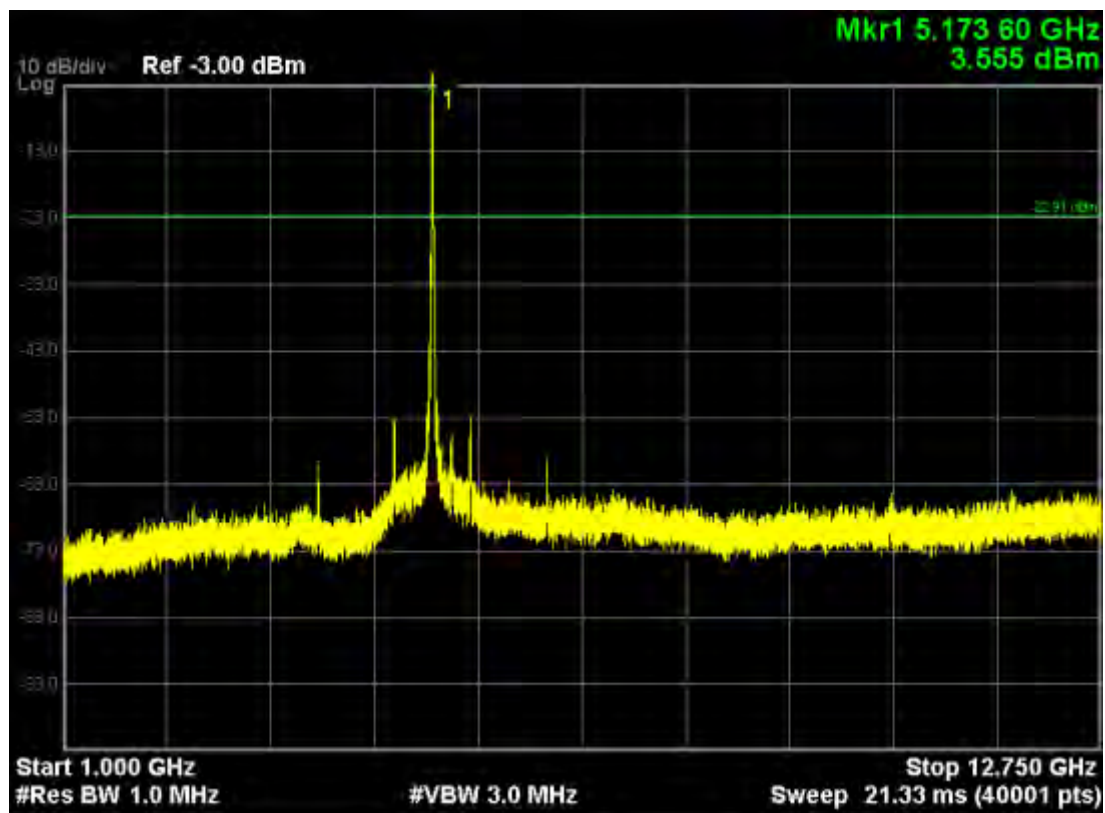
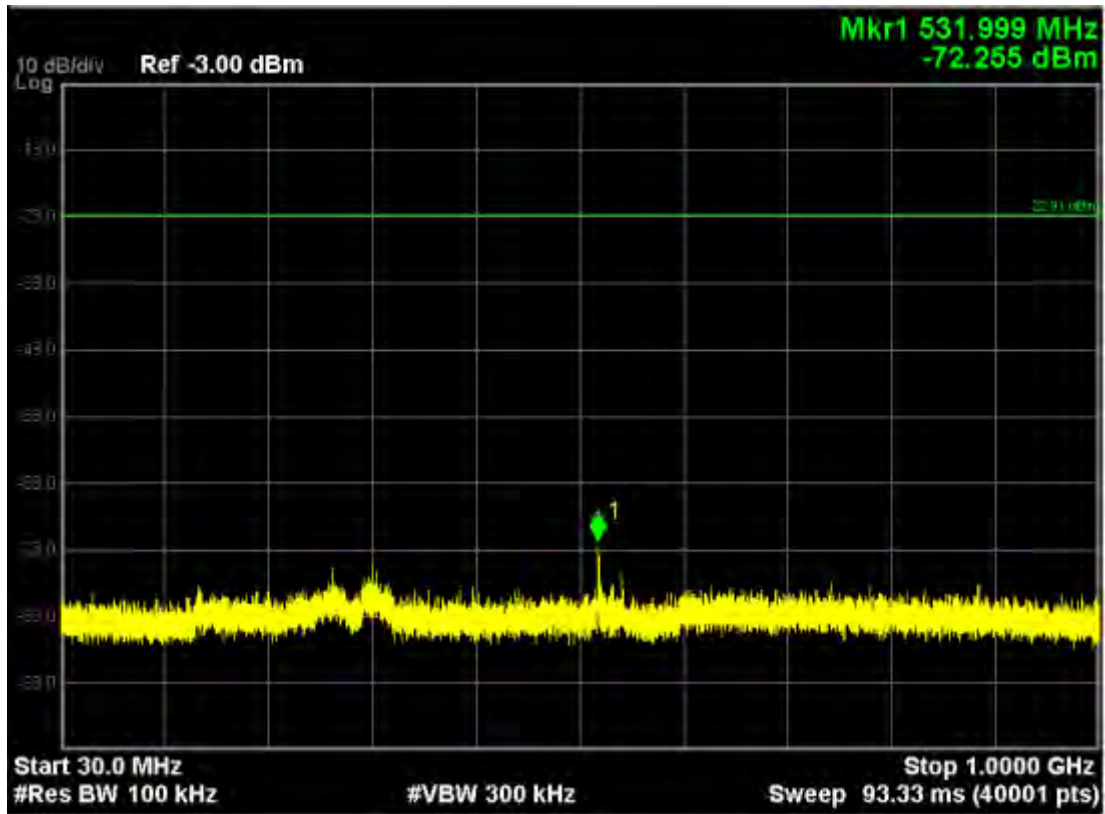



Note: The Mark1 point is carrier.

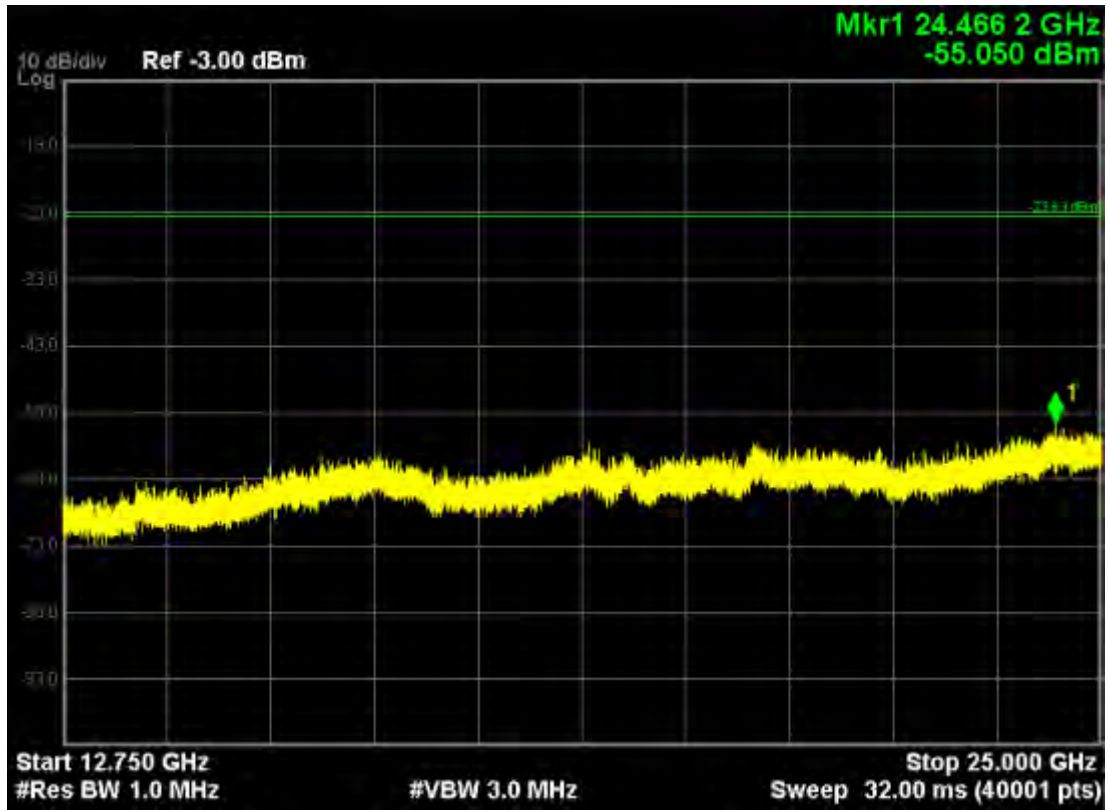

802.11ac40, traffic mode; Channel 46

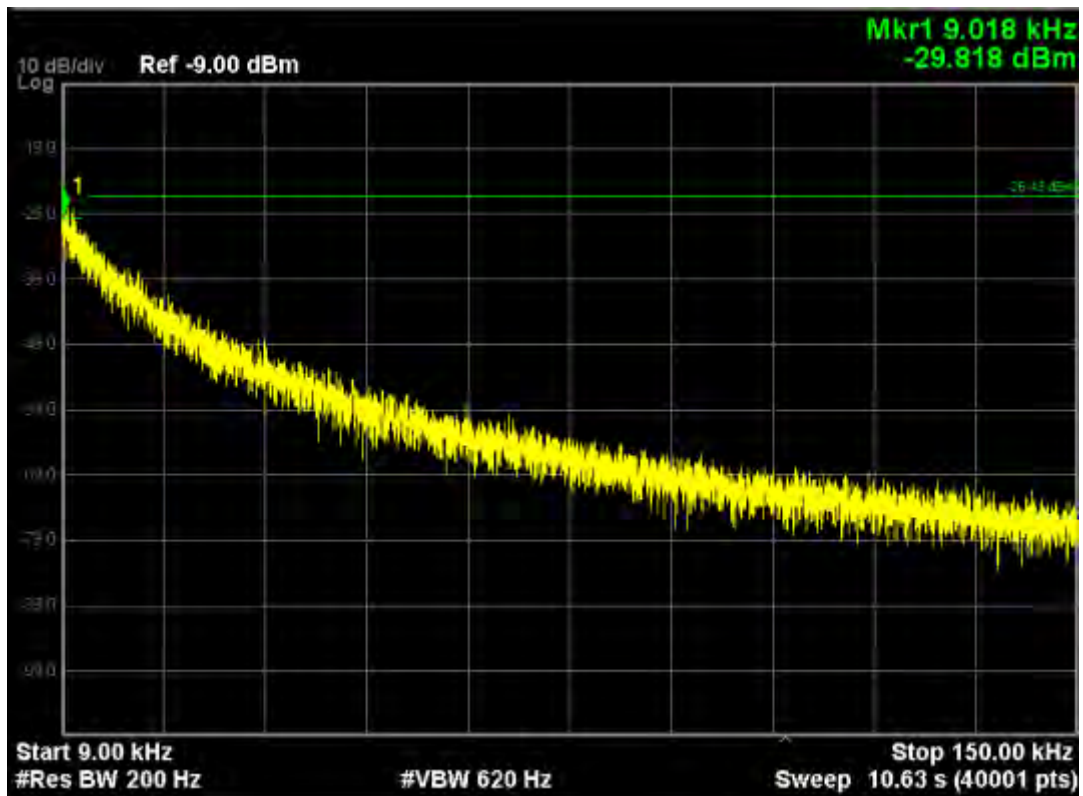

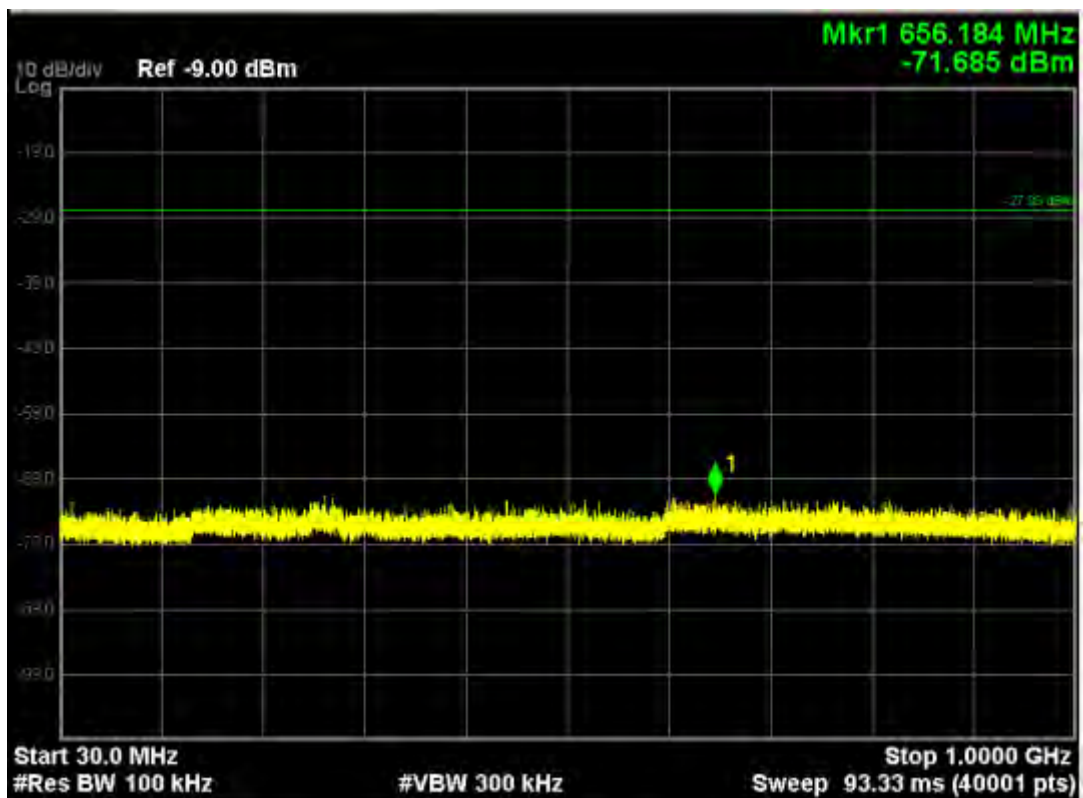
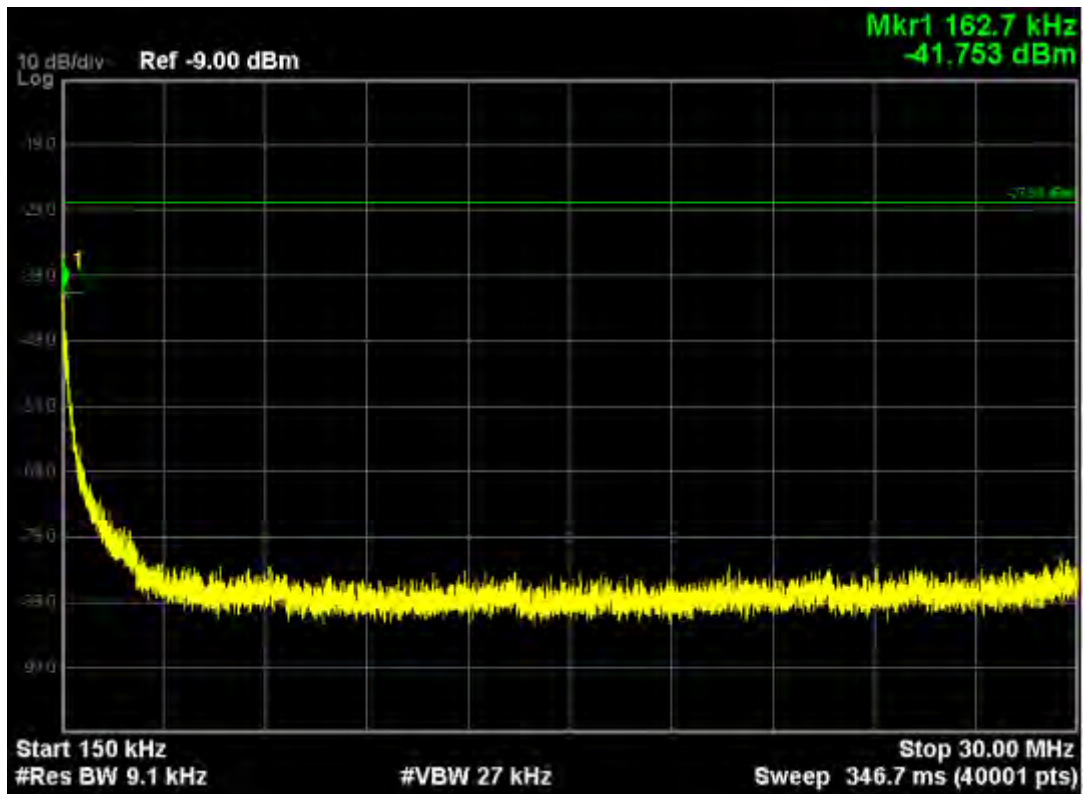



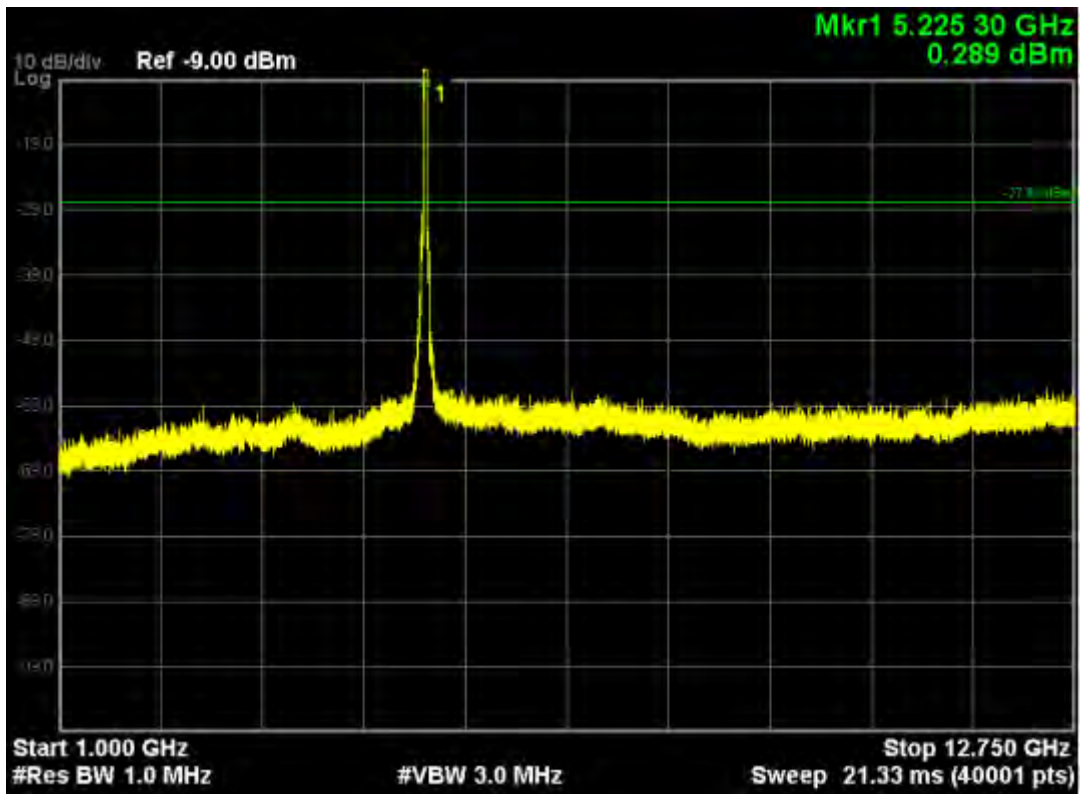


Note: The Mark1 point is carrier.




802.11ac40, traffic mode; Channel 46(mimo)

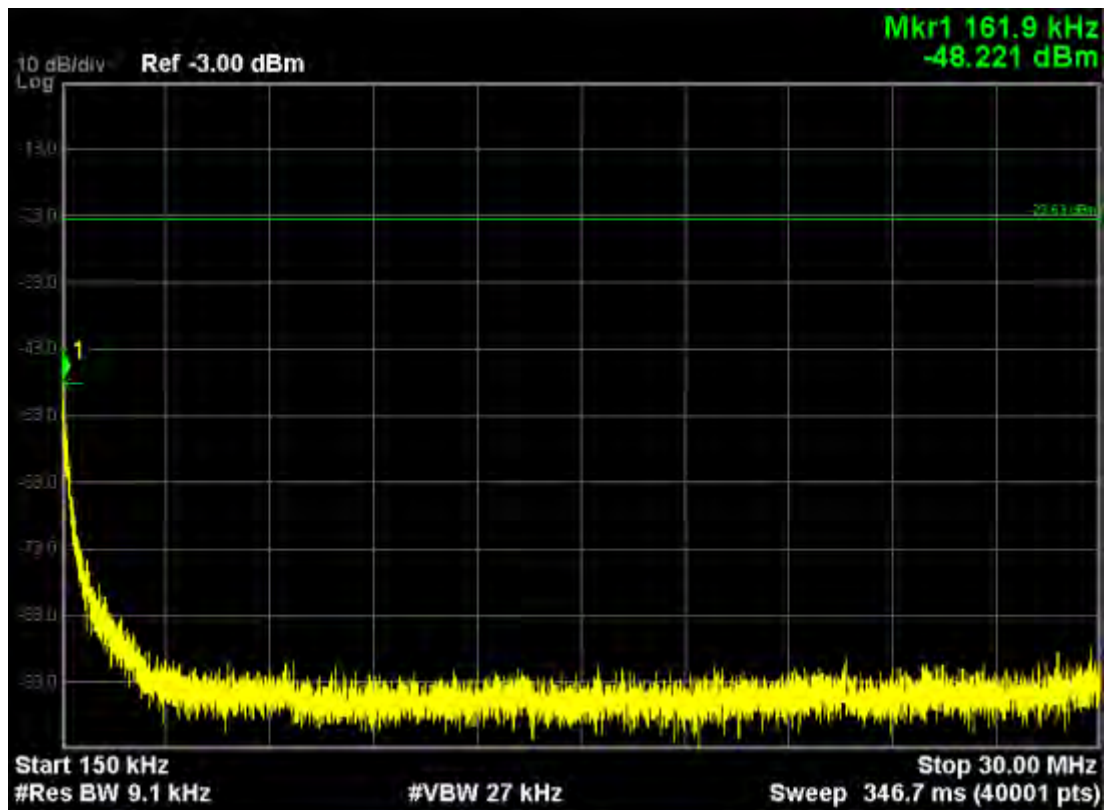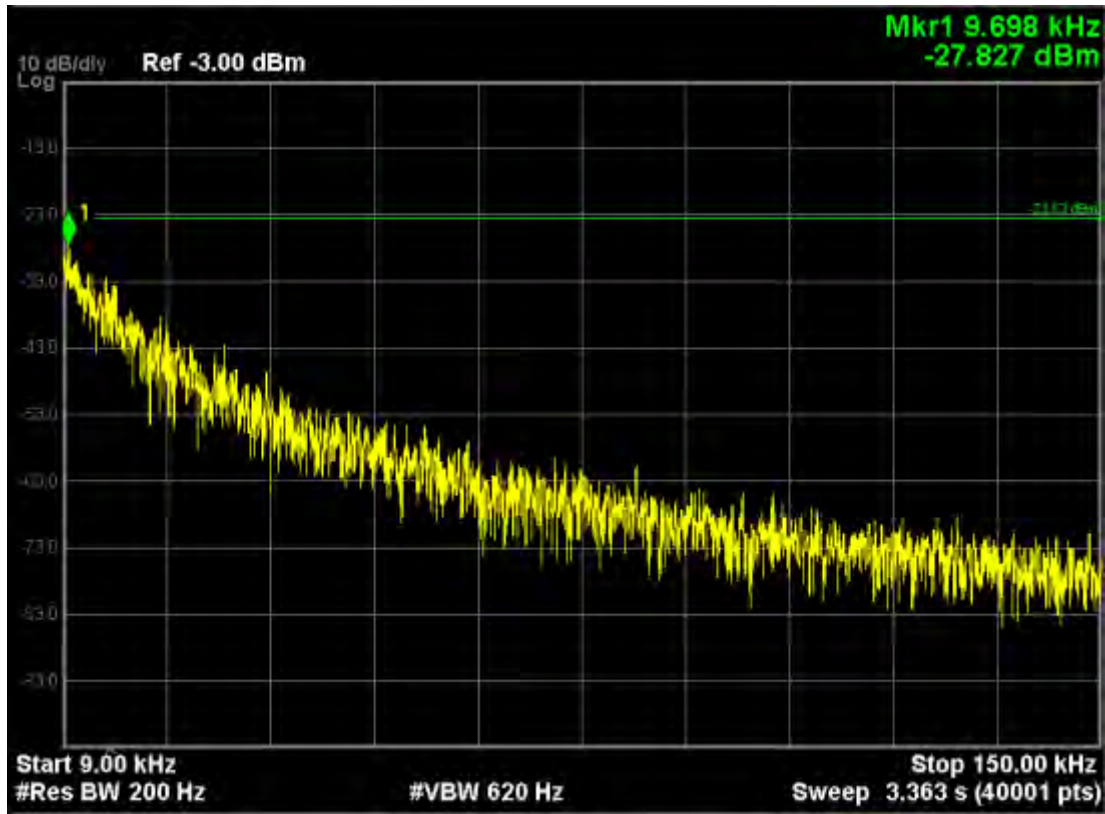


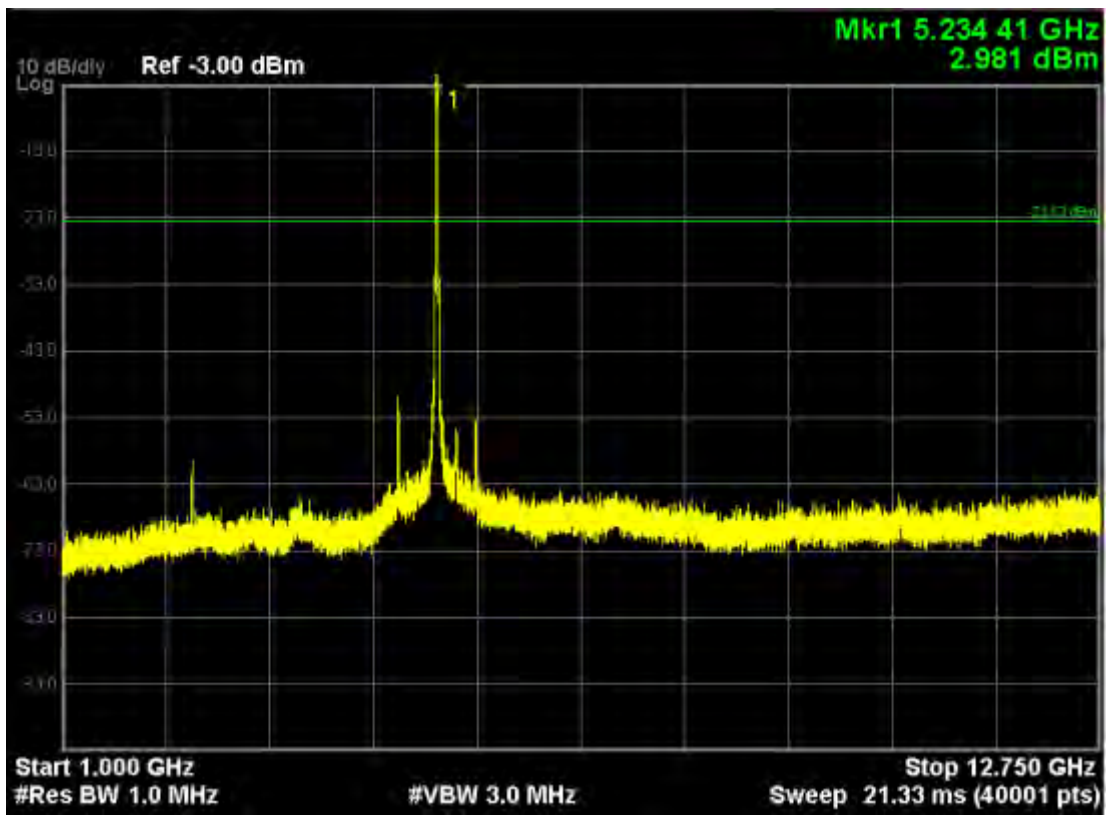
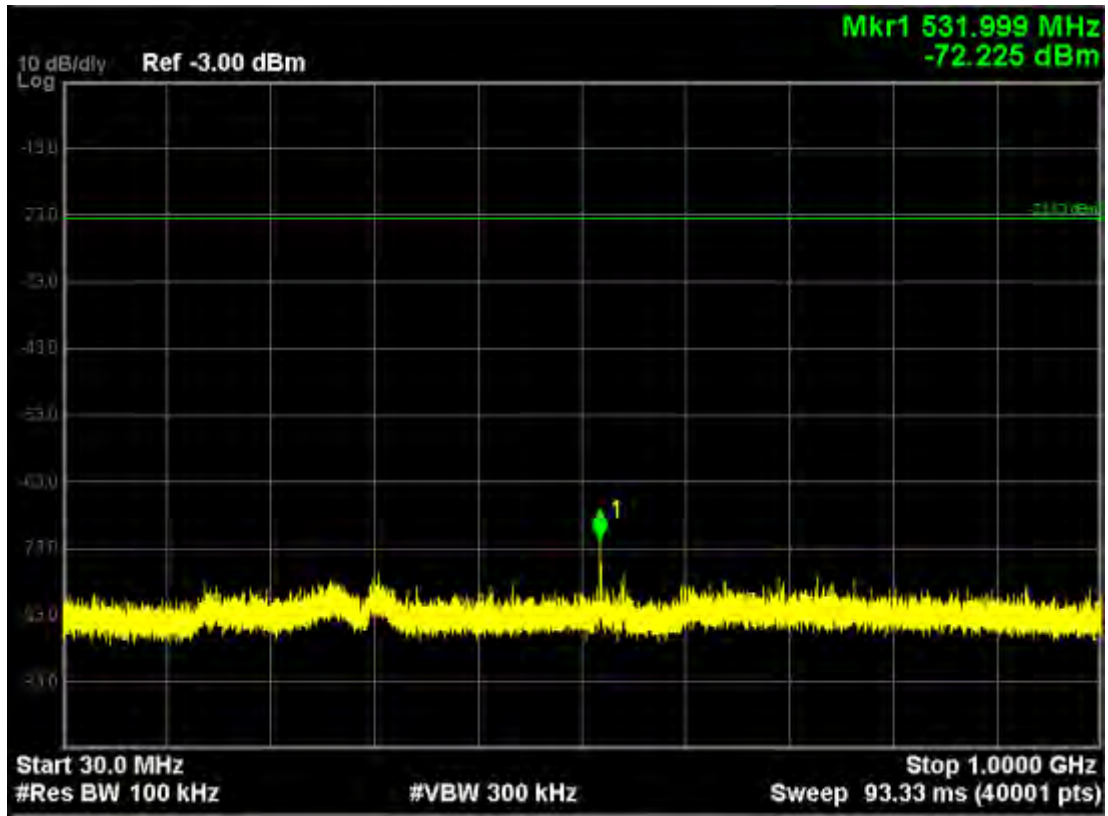



Note: The Mark1 point is carrier.

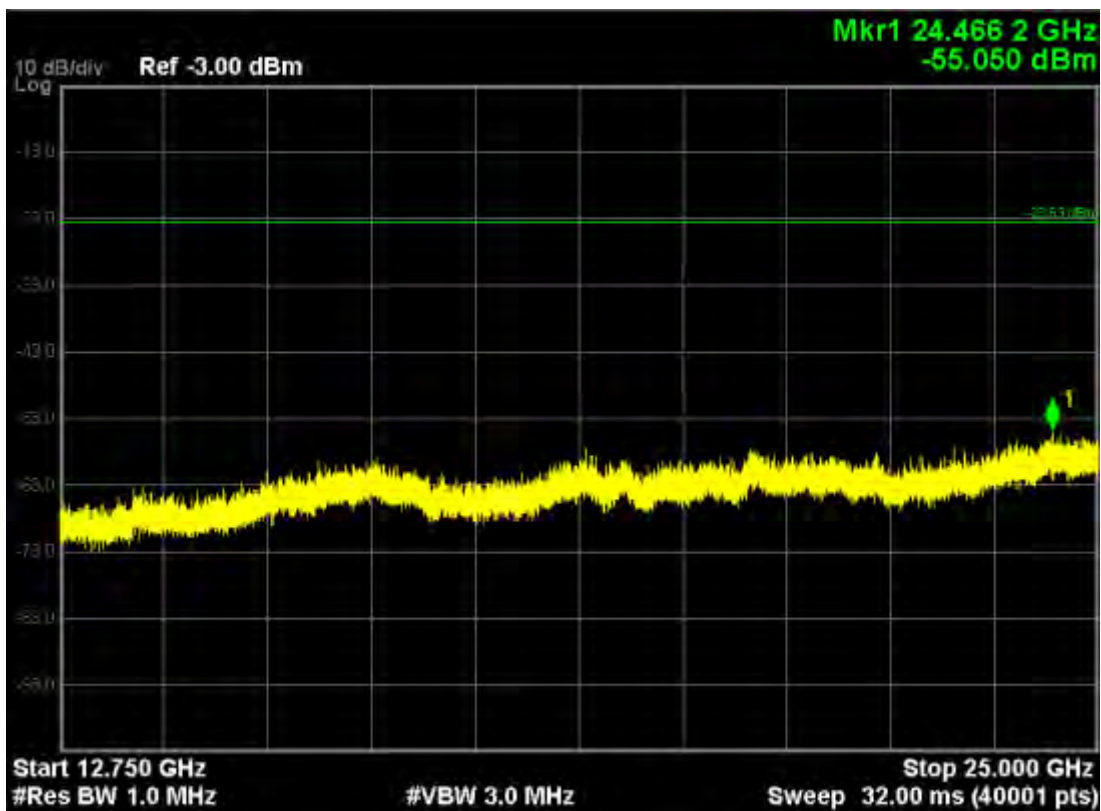


802.11ac80, traffic mode; Channel 42

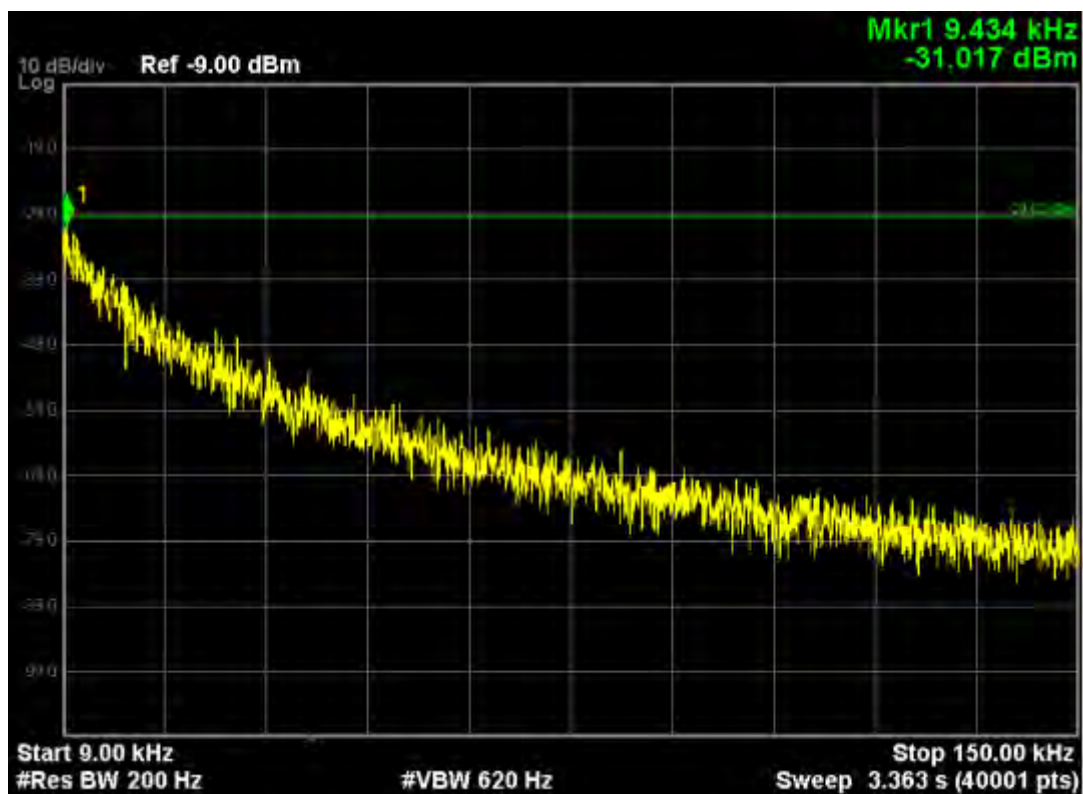

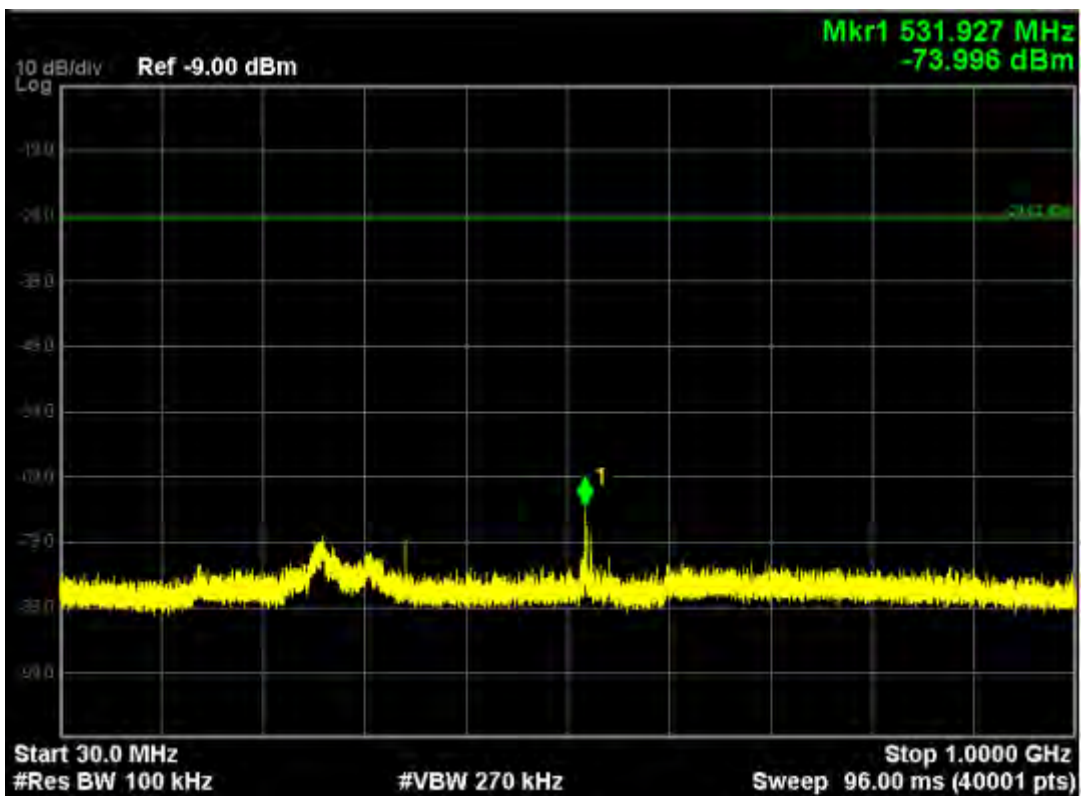
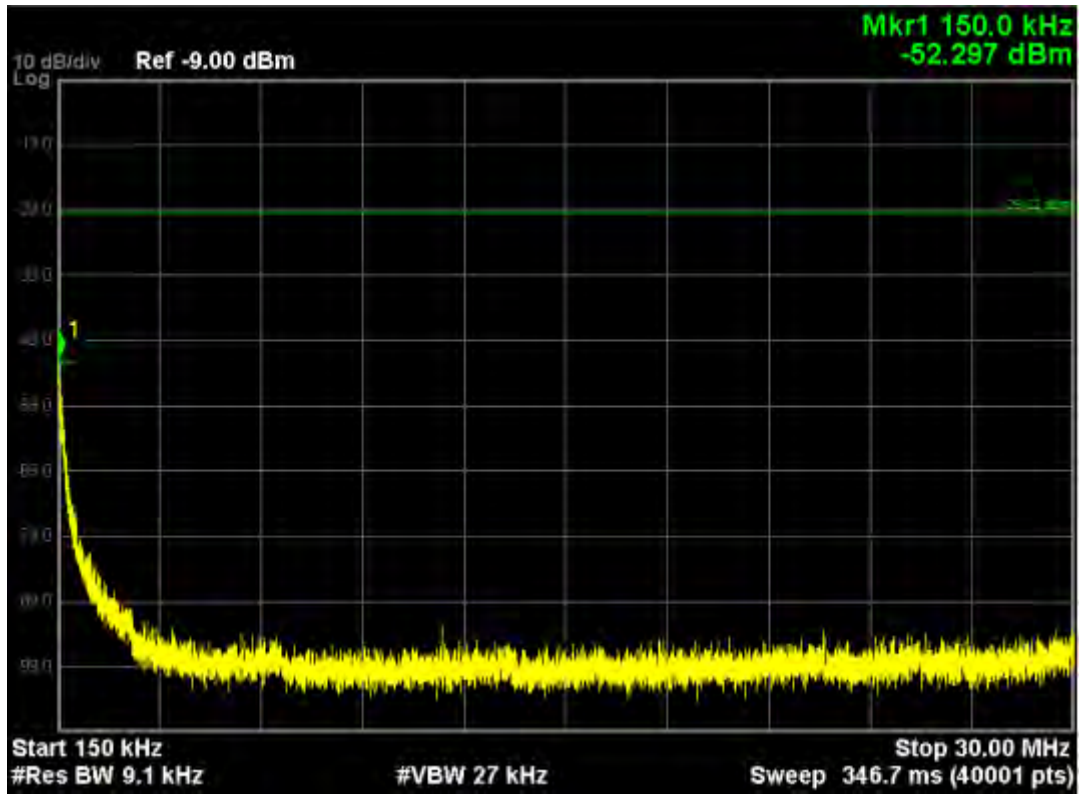



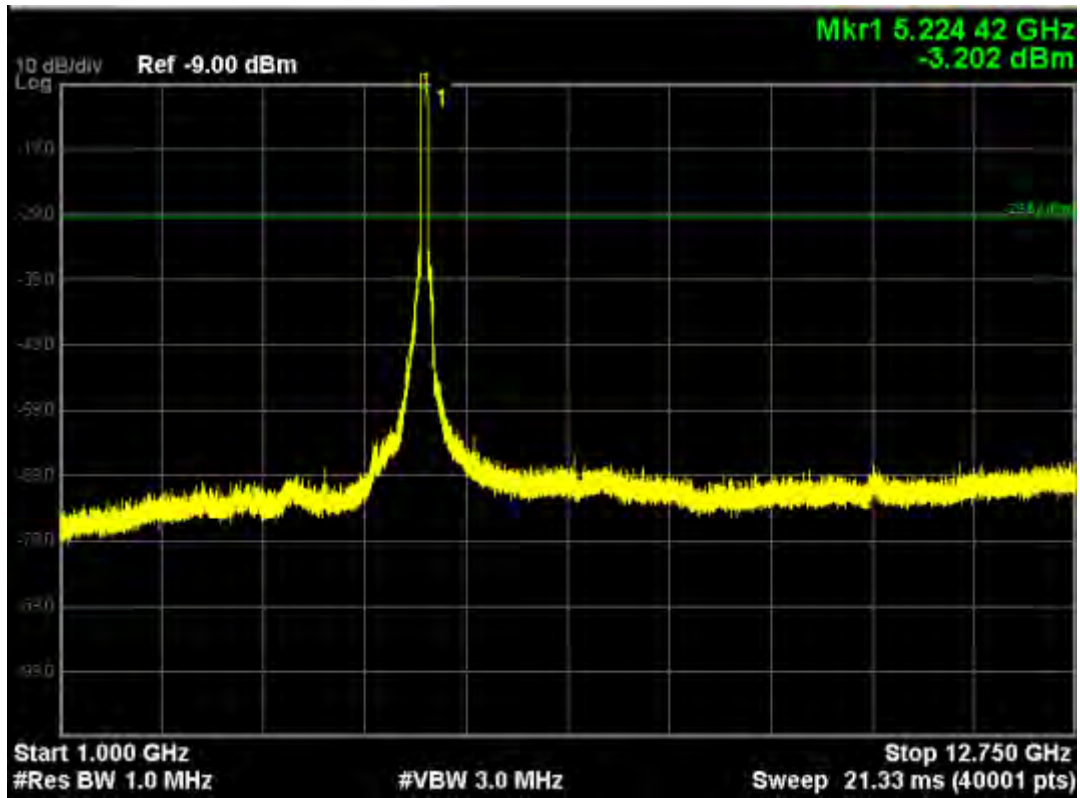


Note: The Mark1 point is carrier.

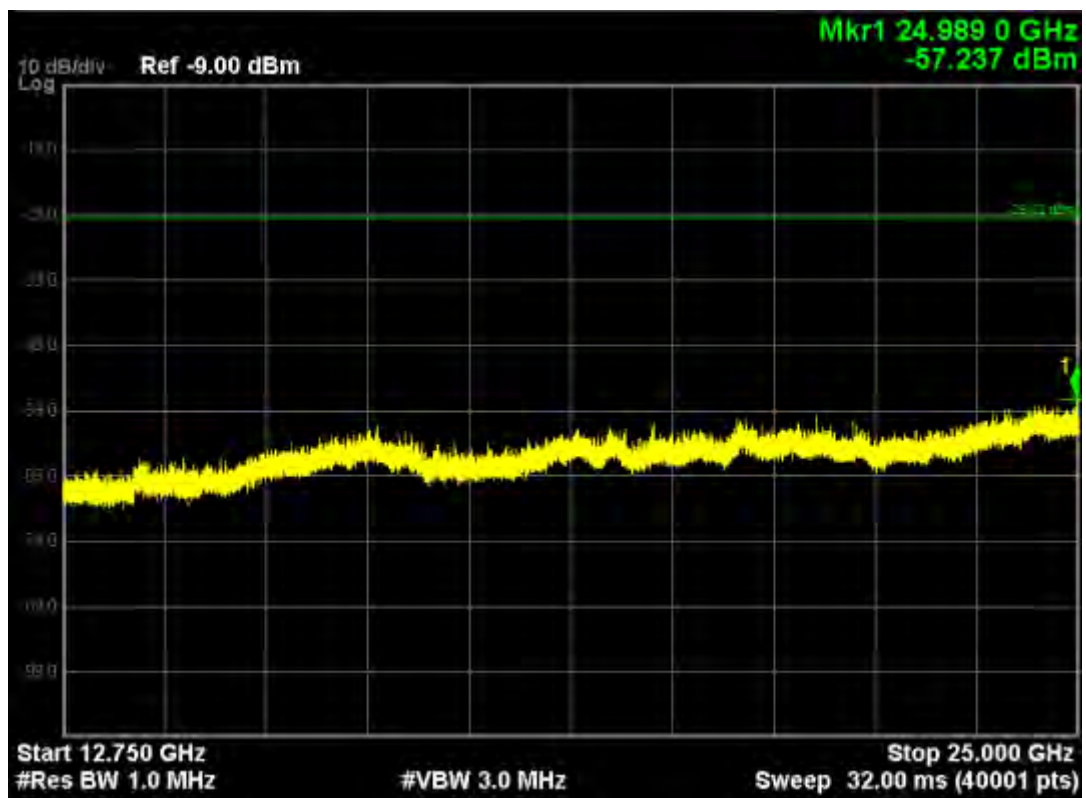


802.11ac80, traffic mode; Channel 42(mimo)

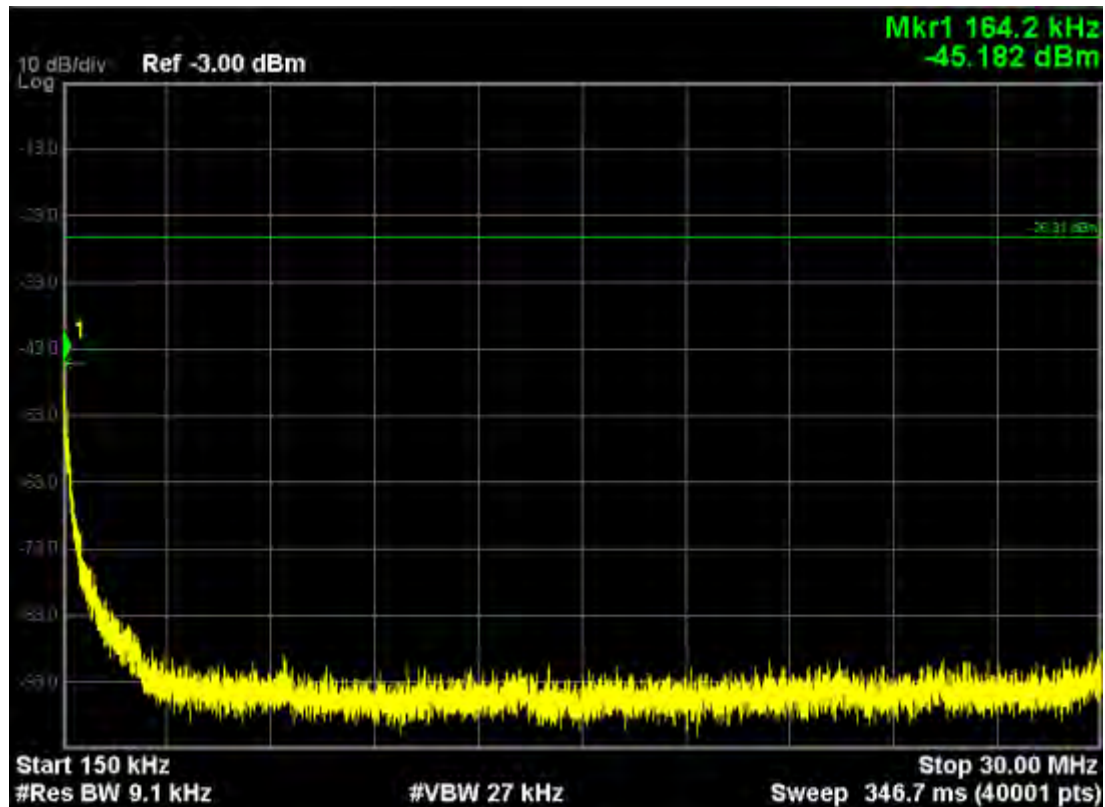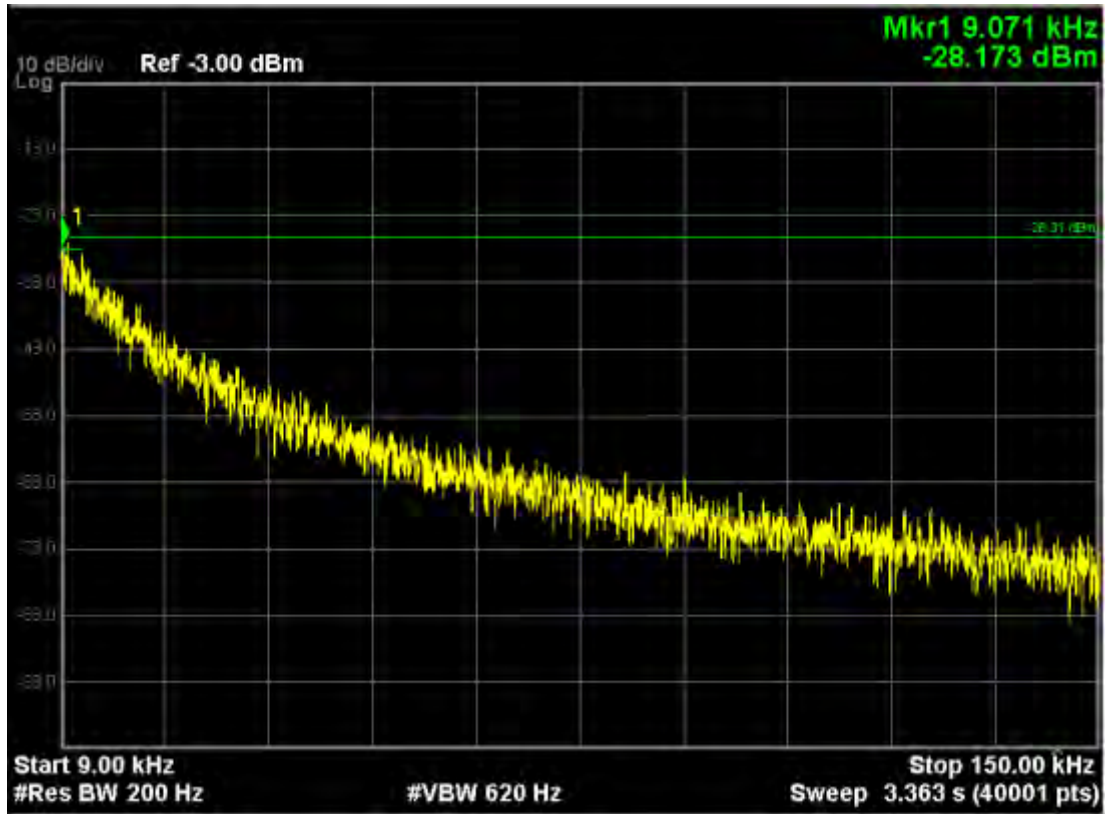


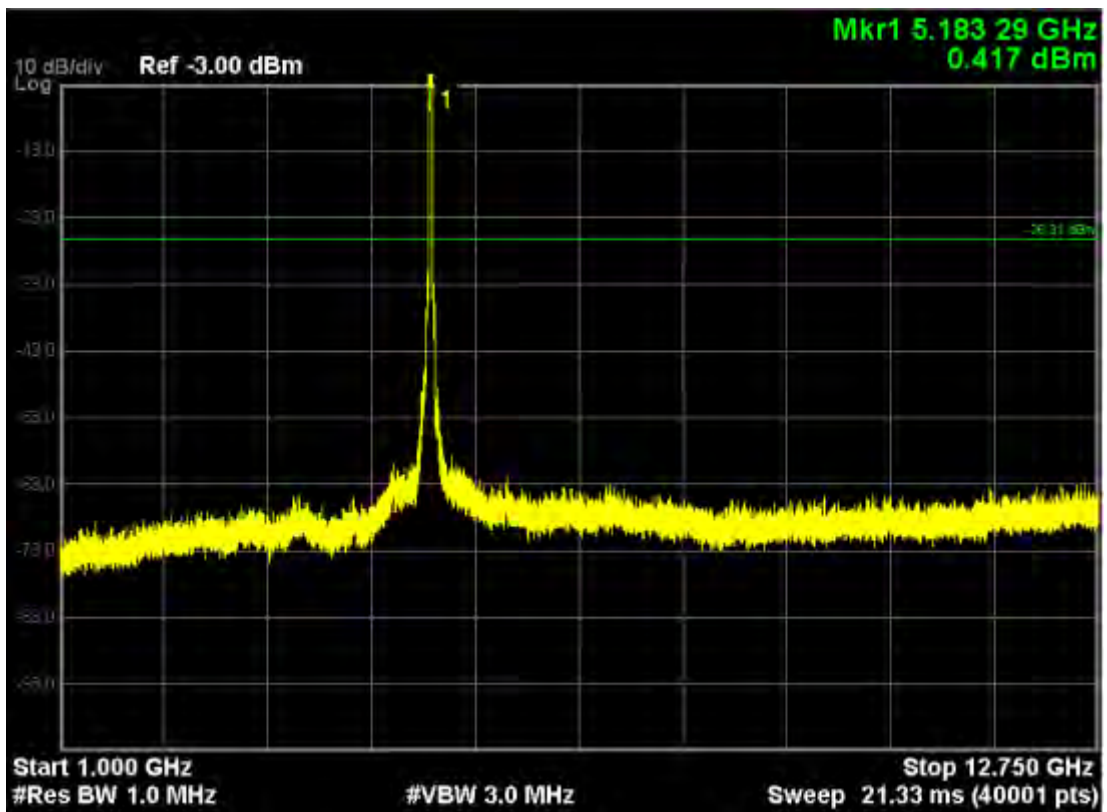
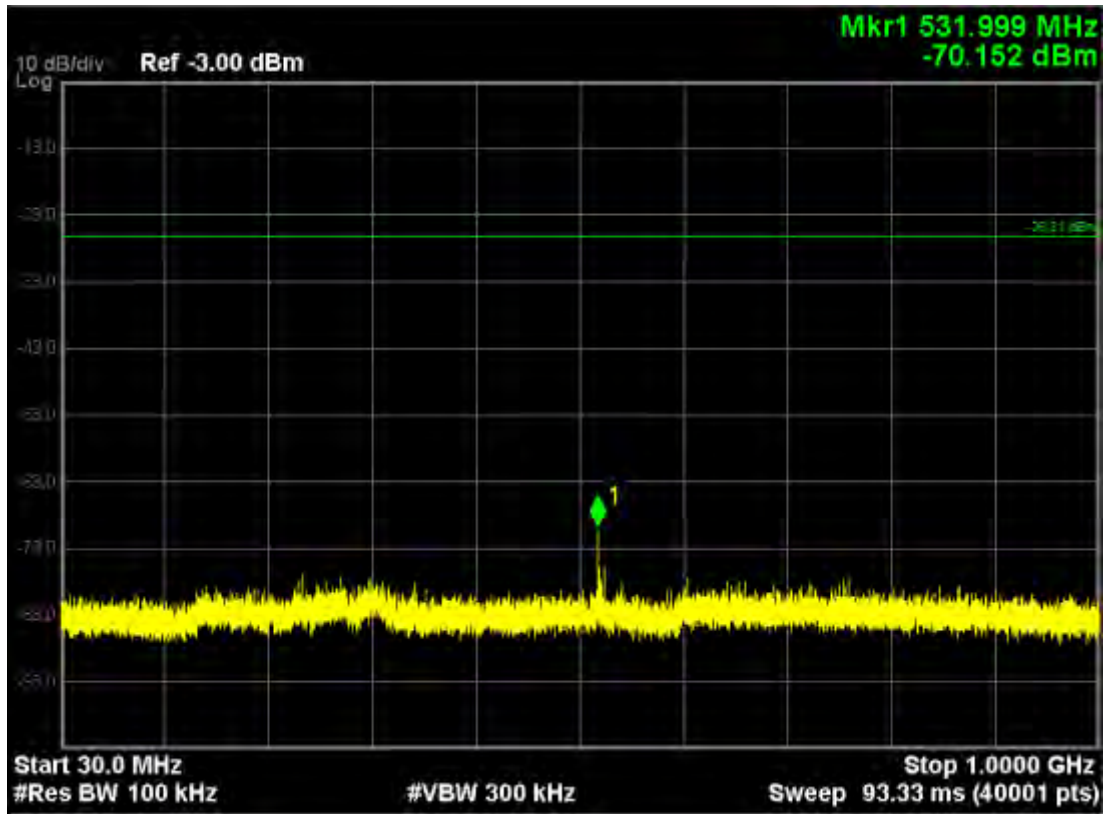



Note: The Mark1 point is carrier.

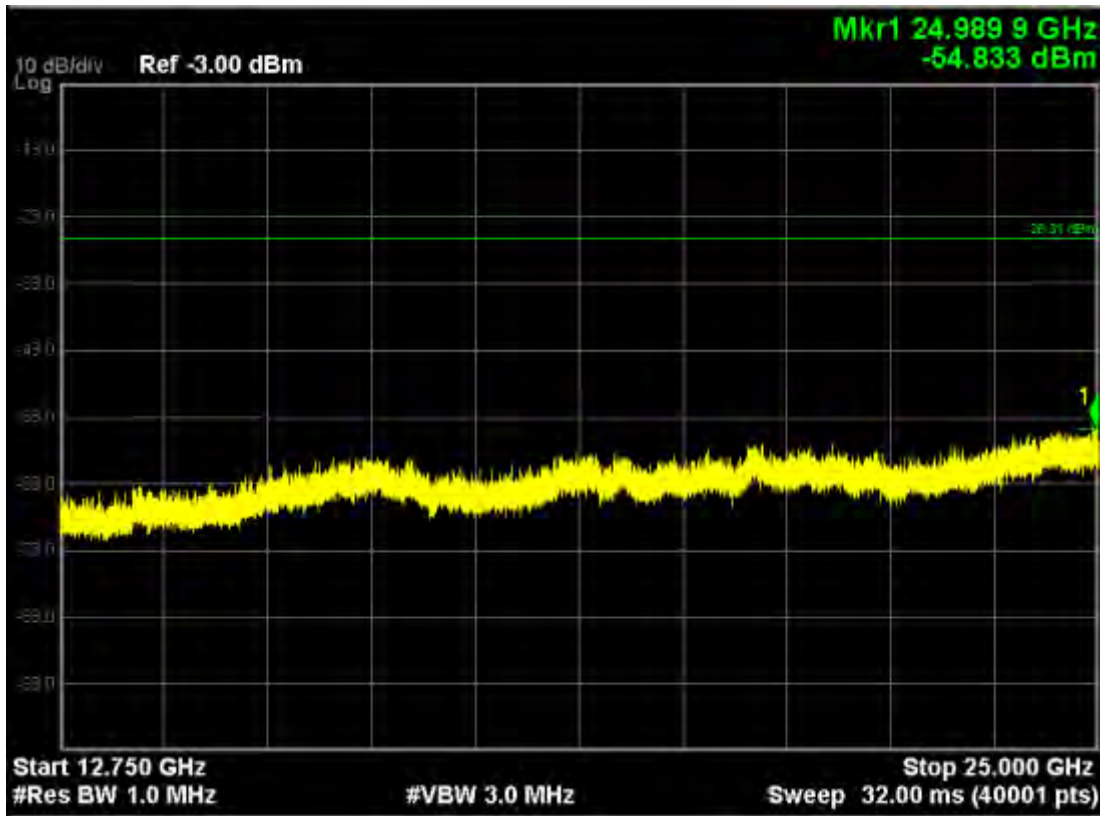


802.11ac (5725MHz-5850MHz)
802.11ac20, traffic mode; Channel 149

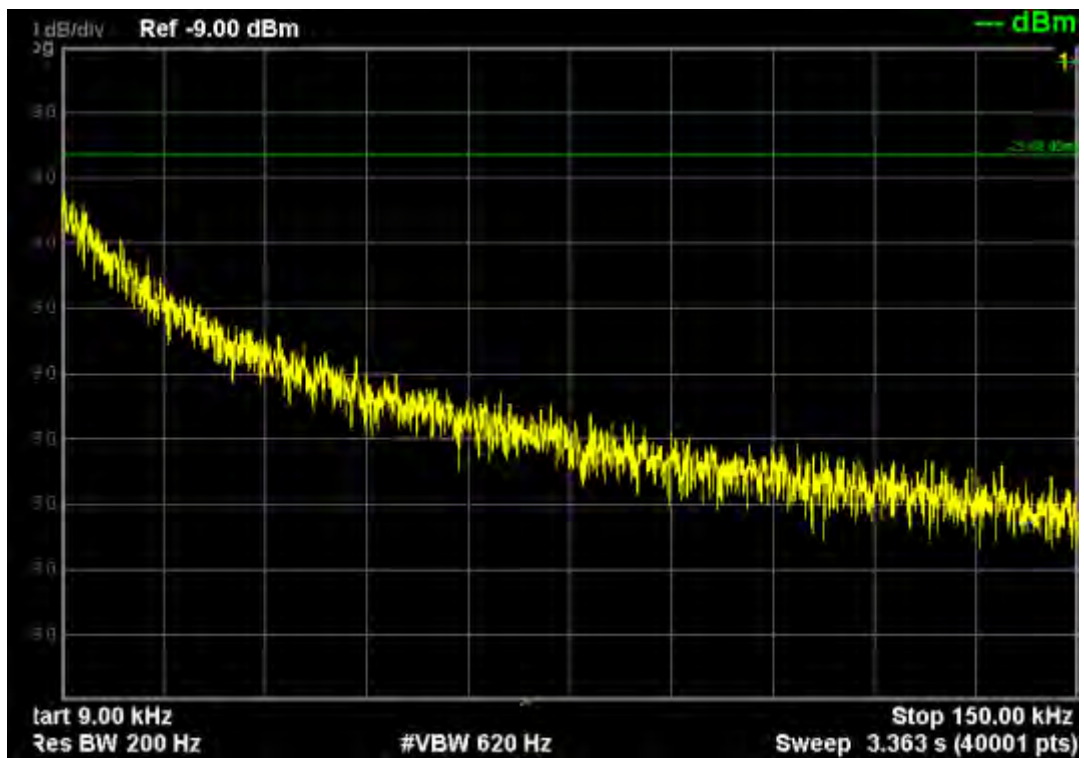

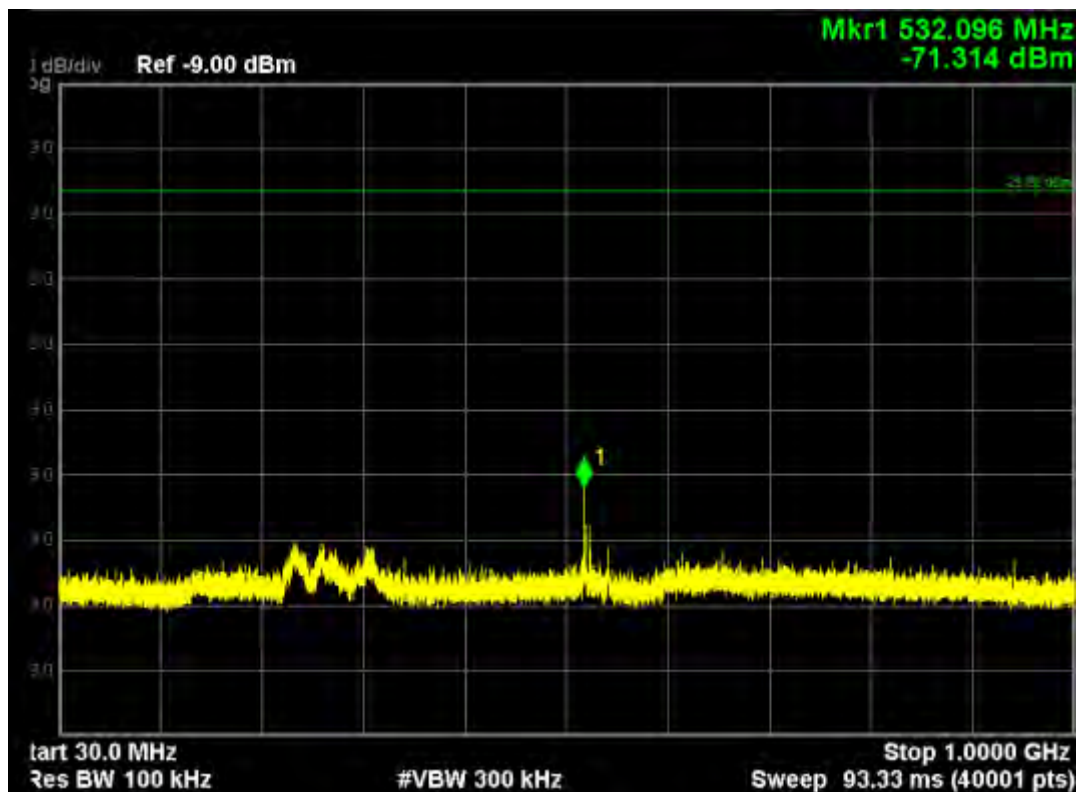
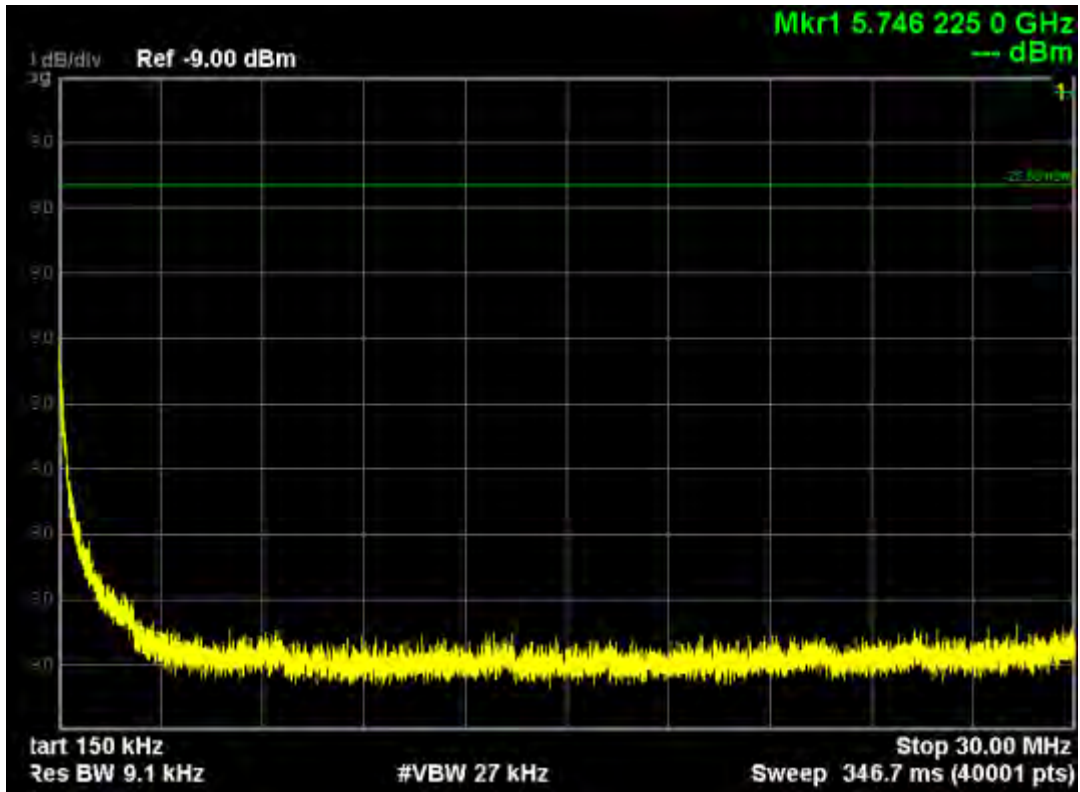



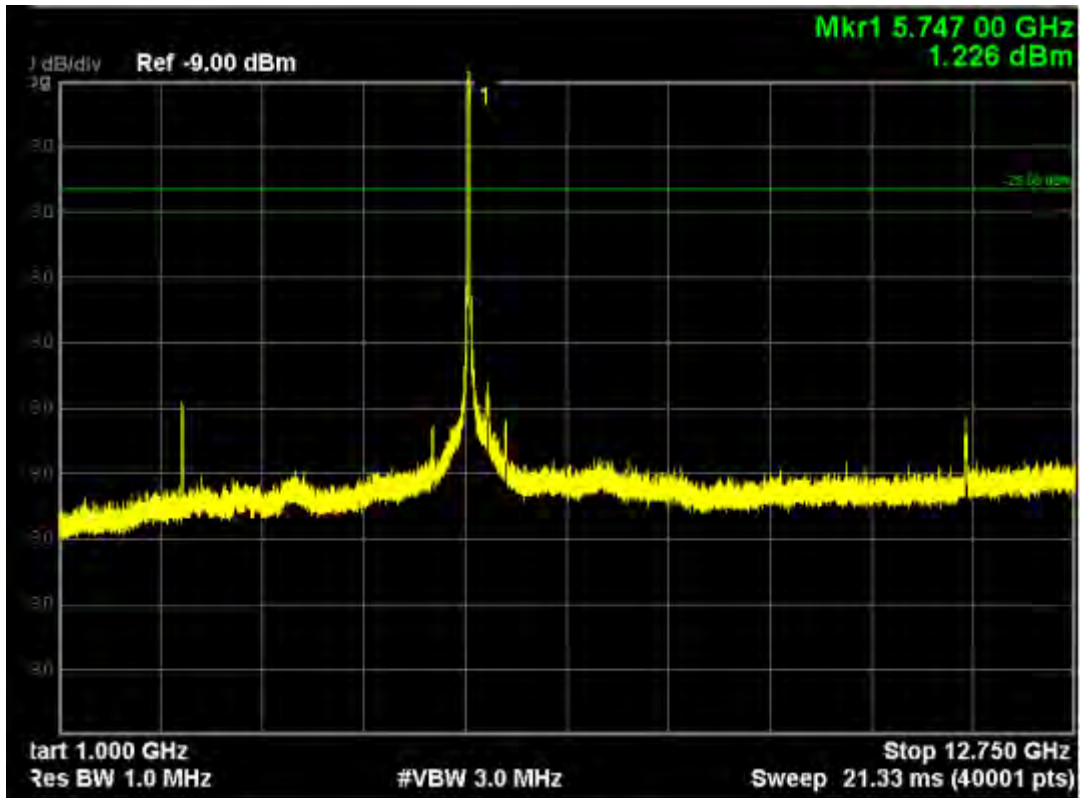


Note: The Mark1 point is carrier.

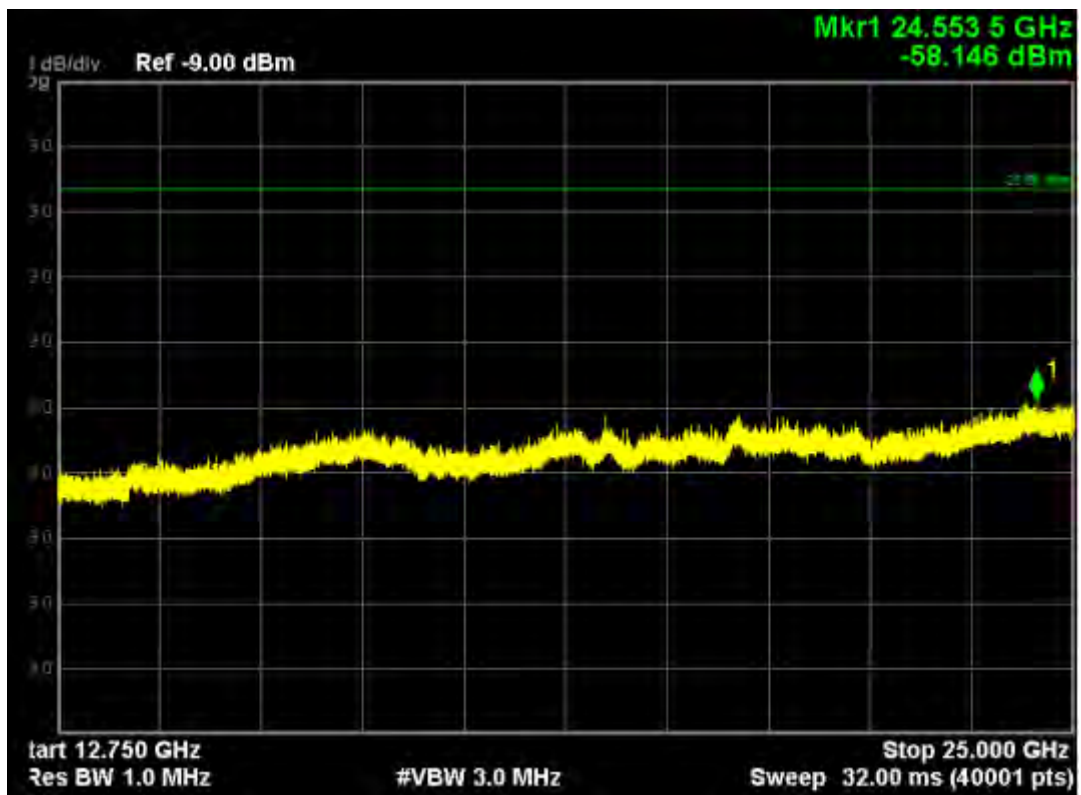


802.11ac20, traffic mode; Channel 149(mimo)

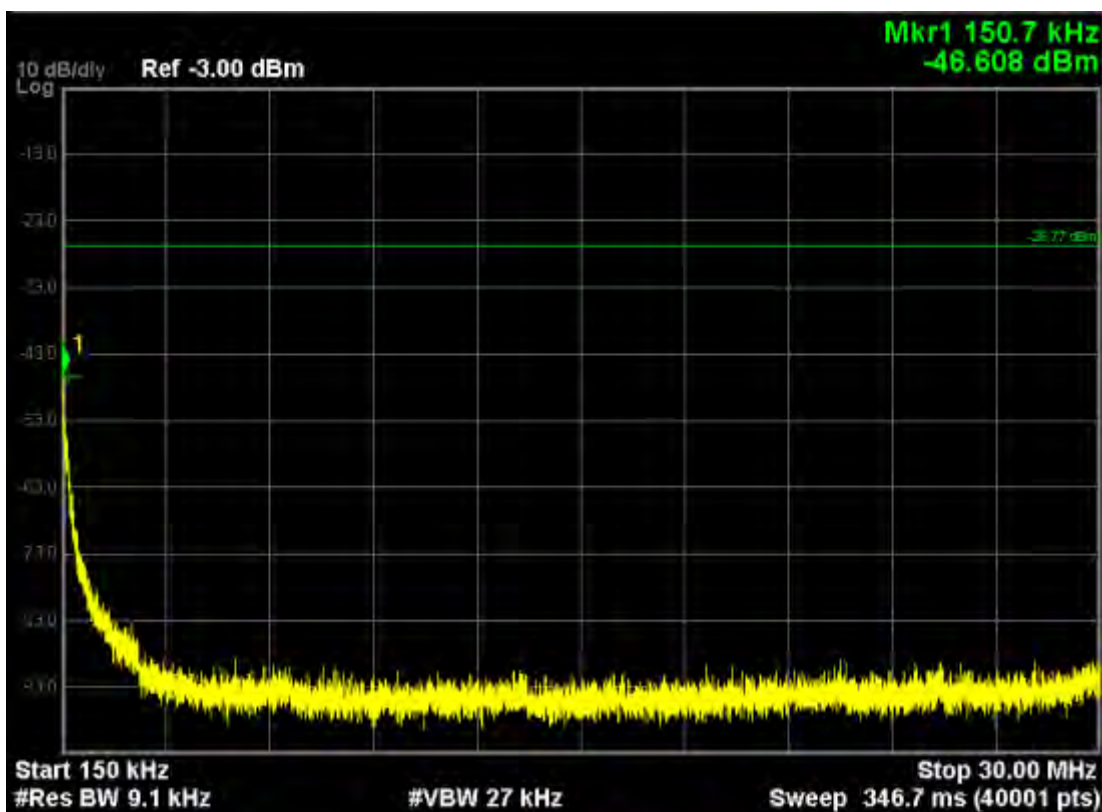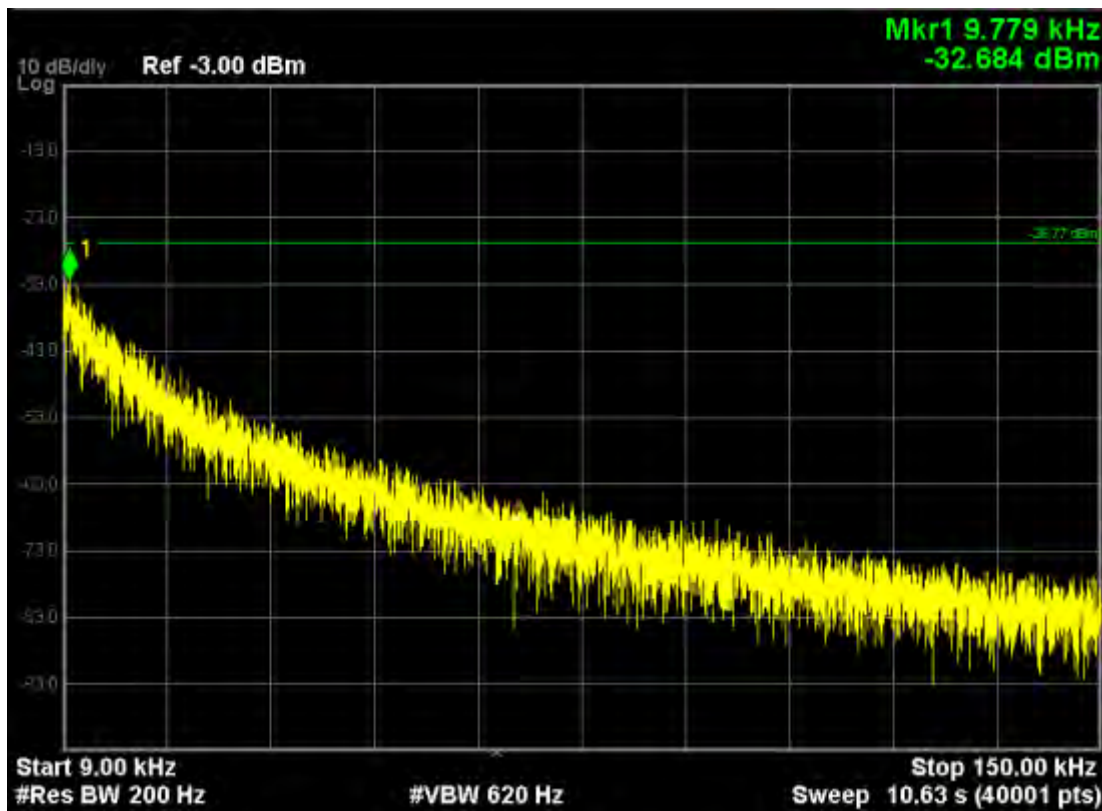


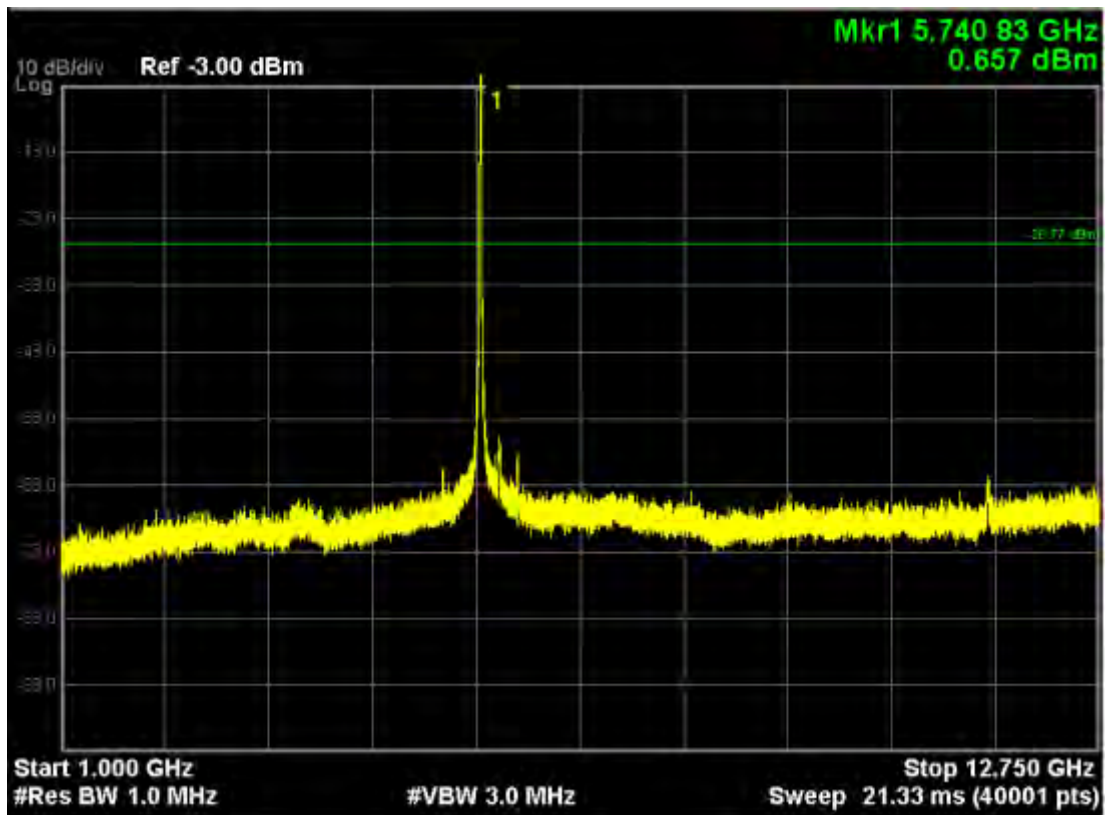
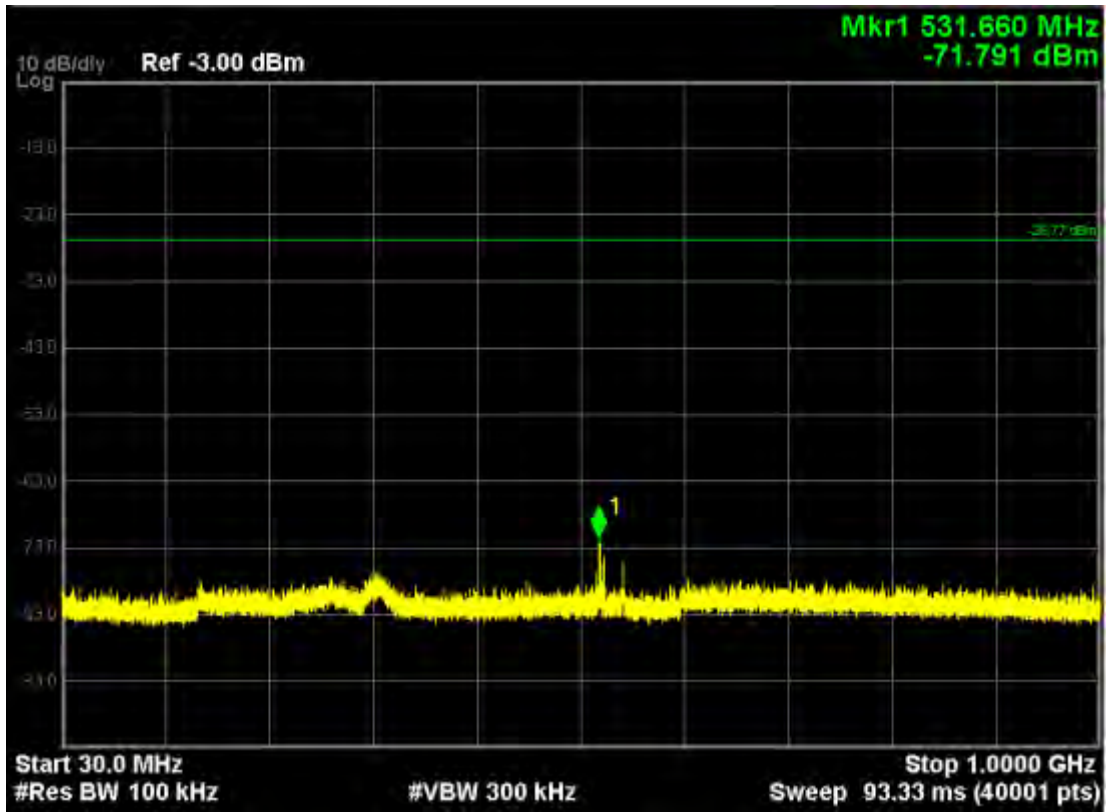



Note: The Mark1 point is carrier.

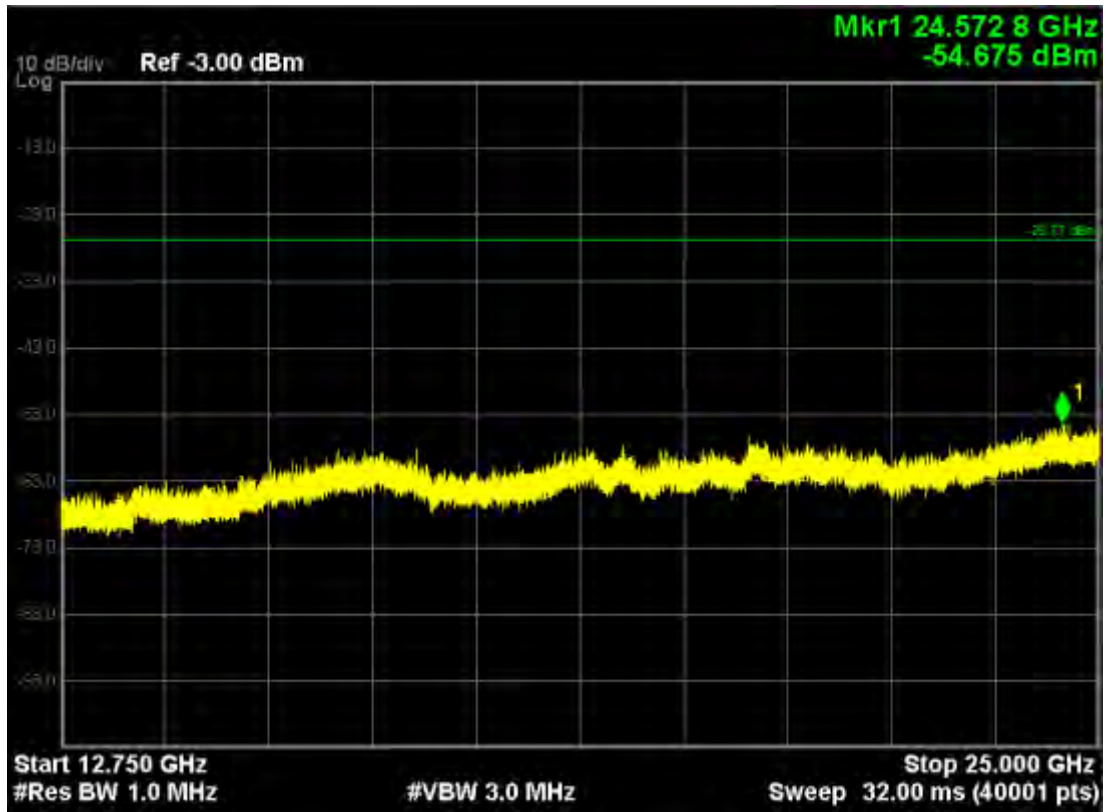


802.11ac20, traffic mode; Channel 157

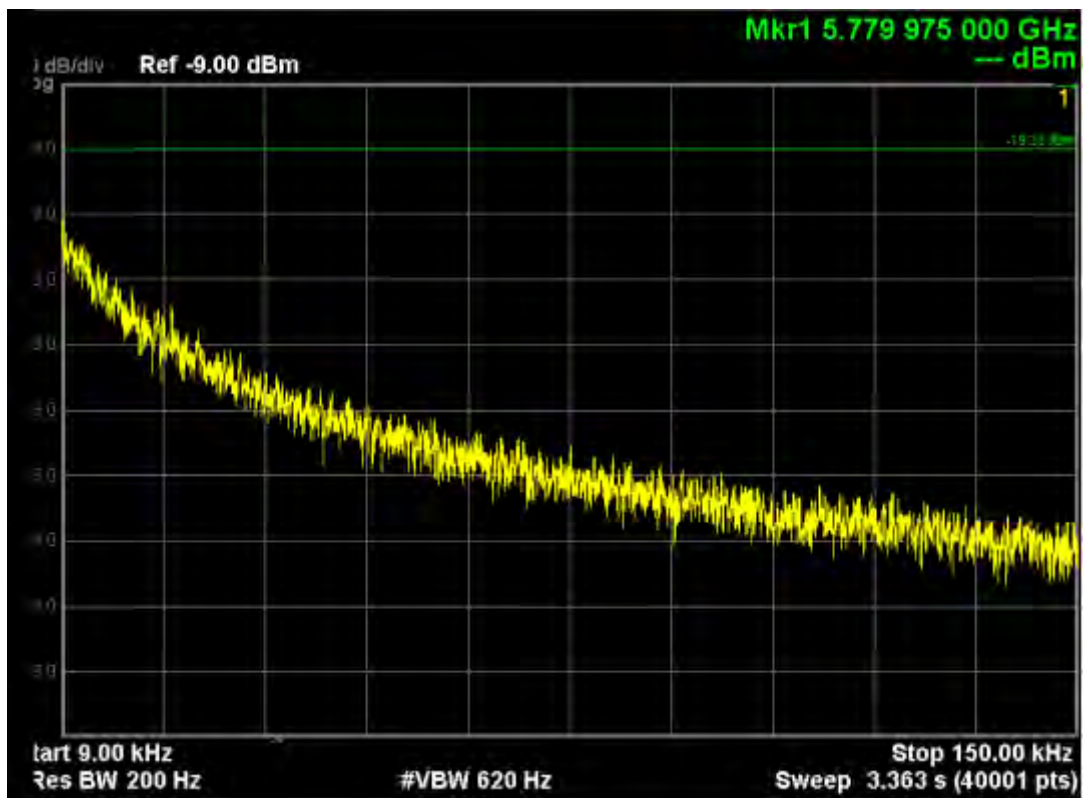

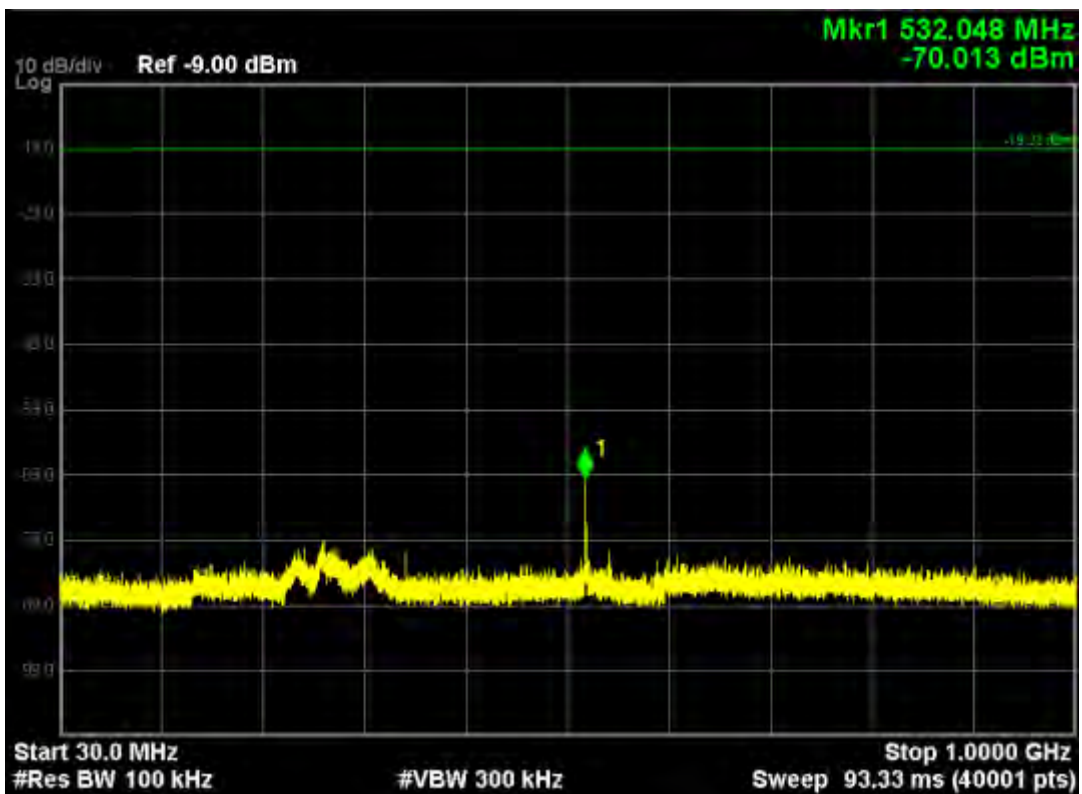
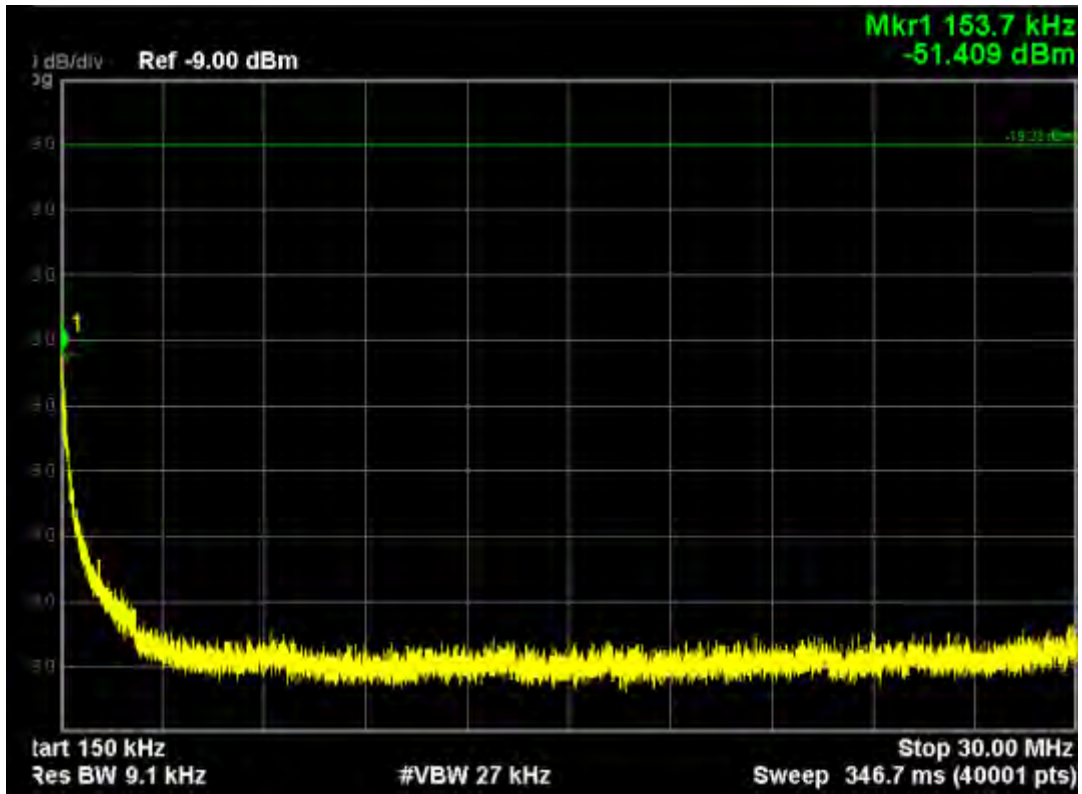



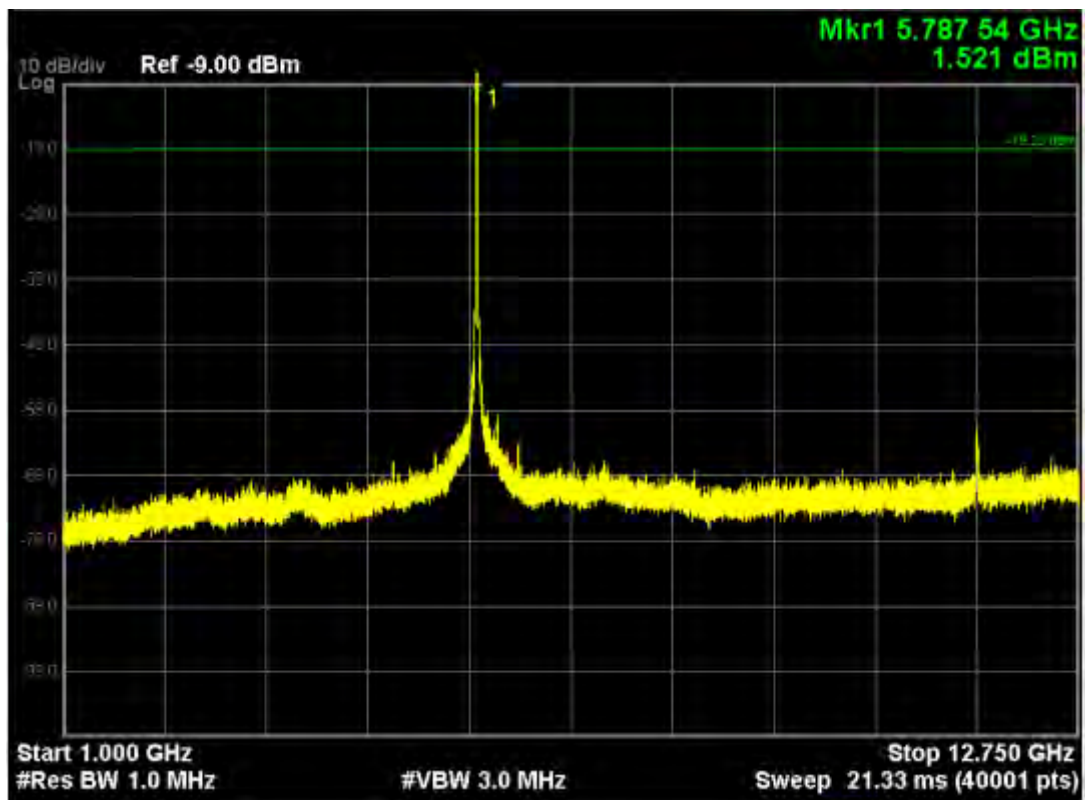


Note: The Mark1 point is carrier.

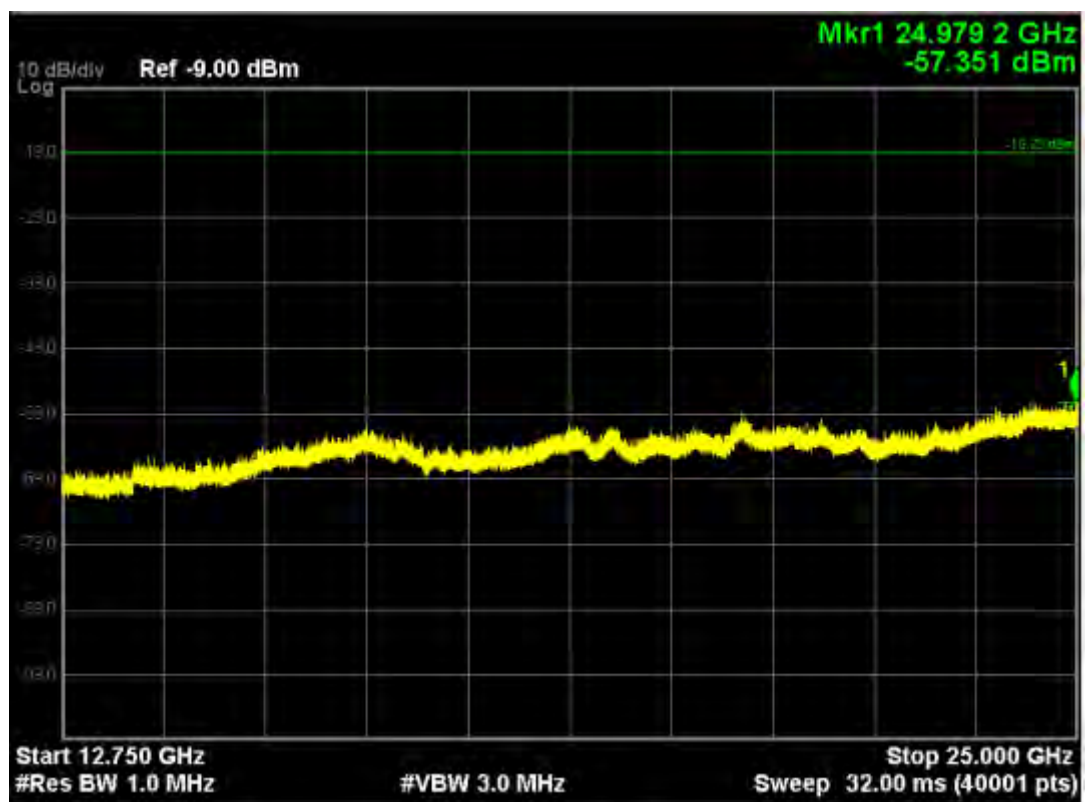


802.11ac20, traffic mode; Channel 157(mimo)

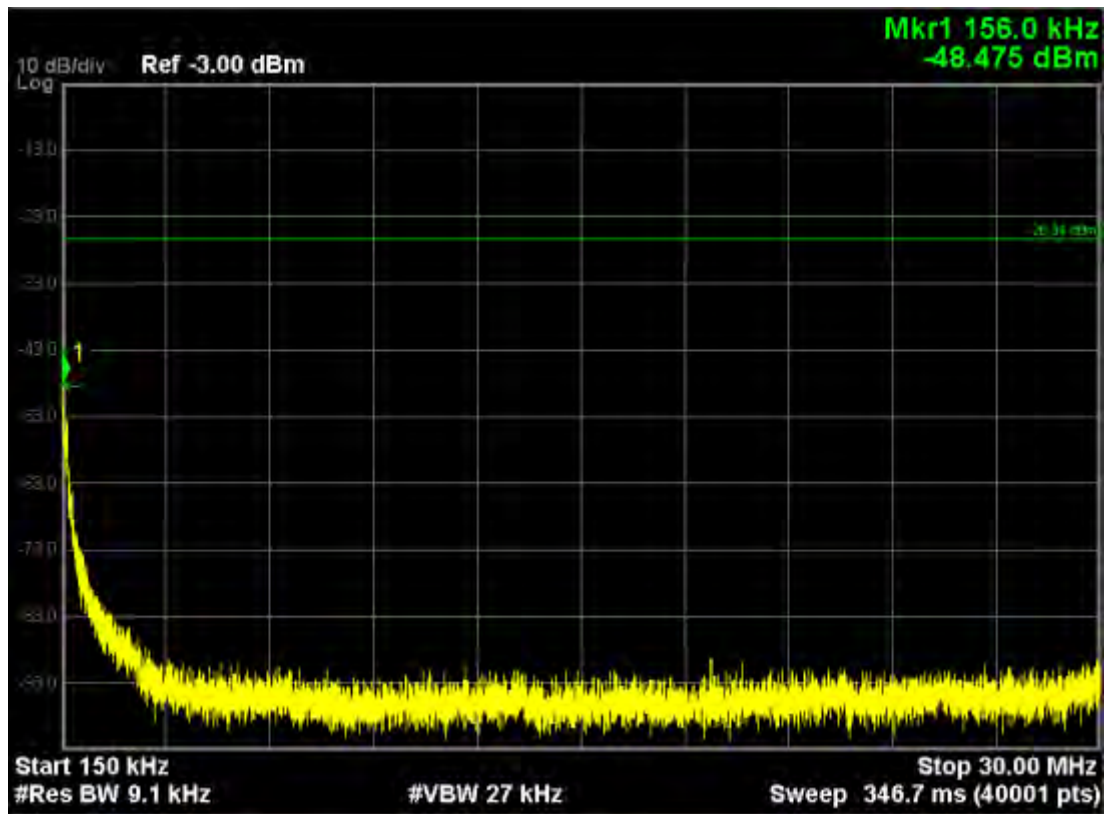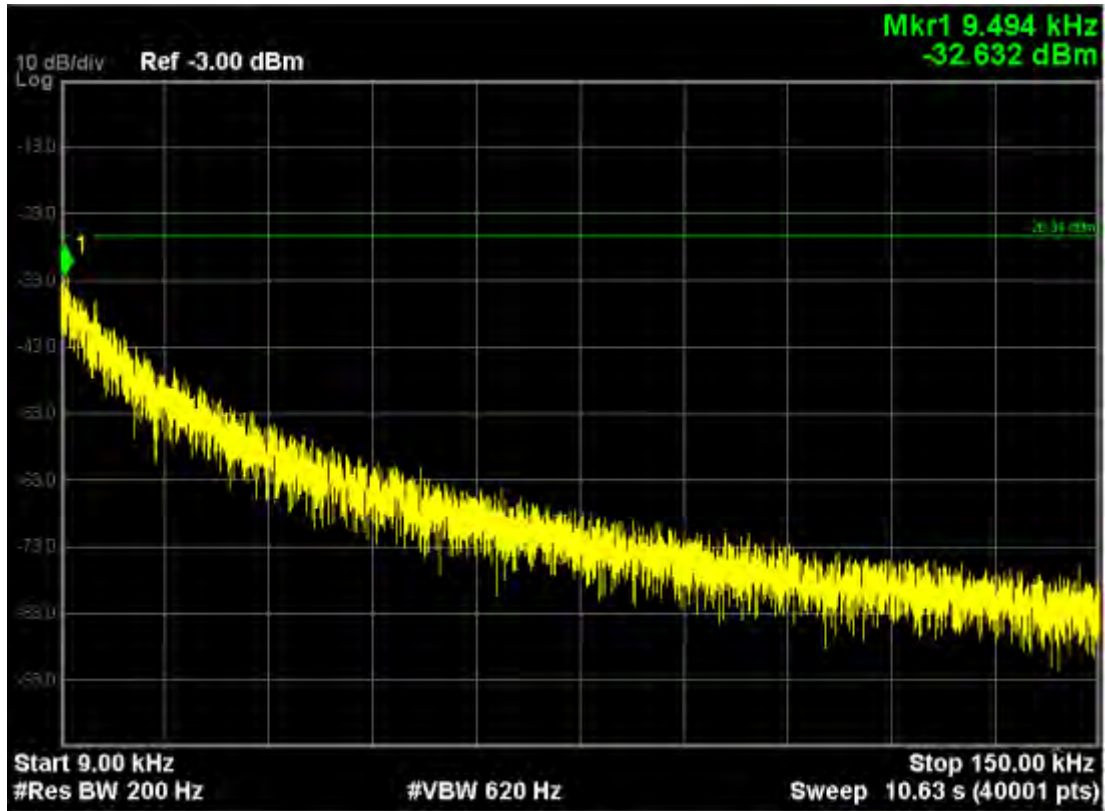


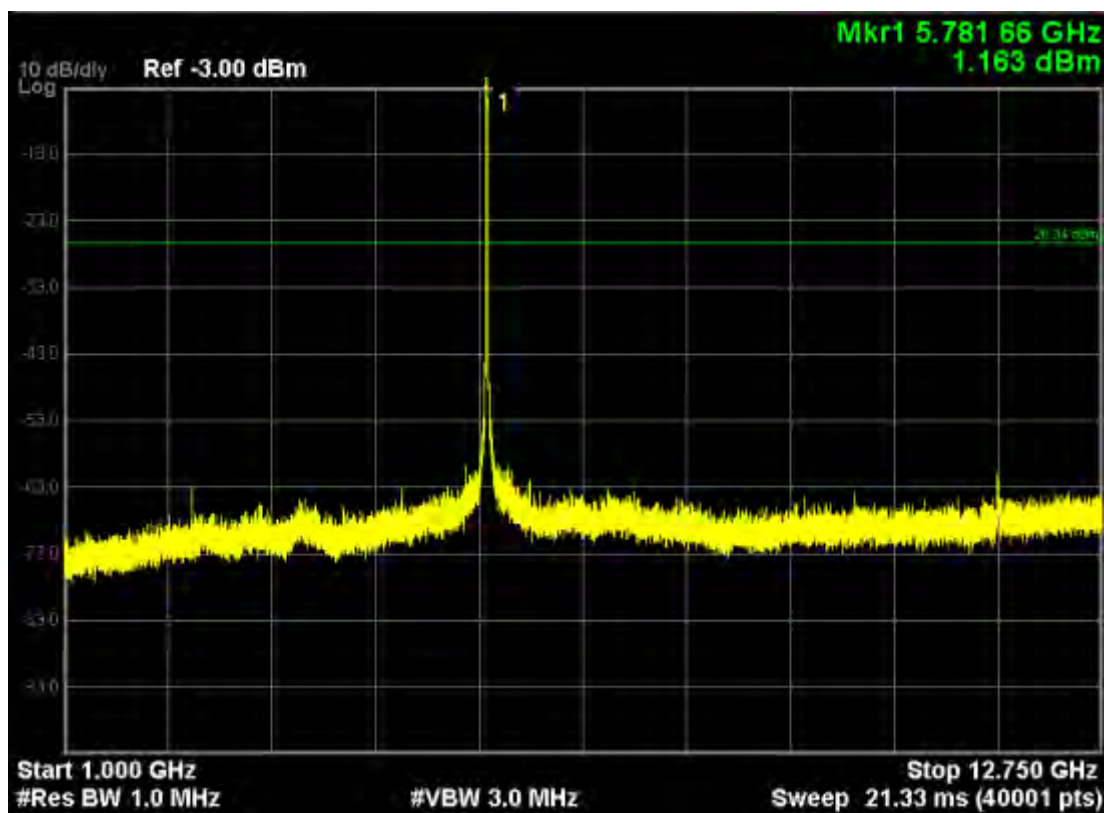
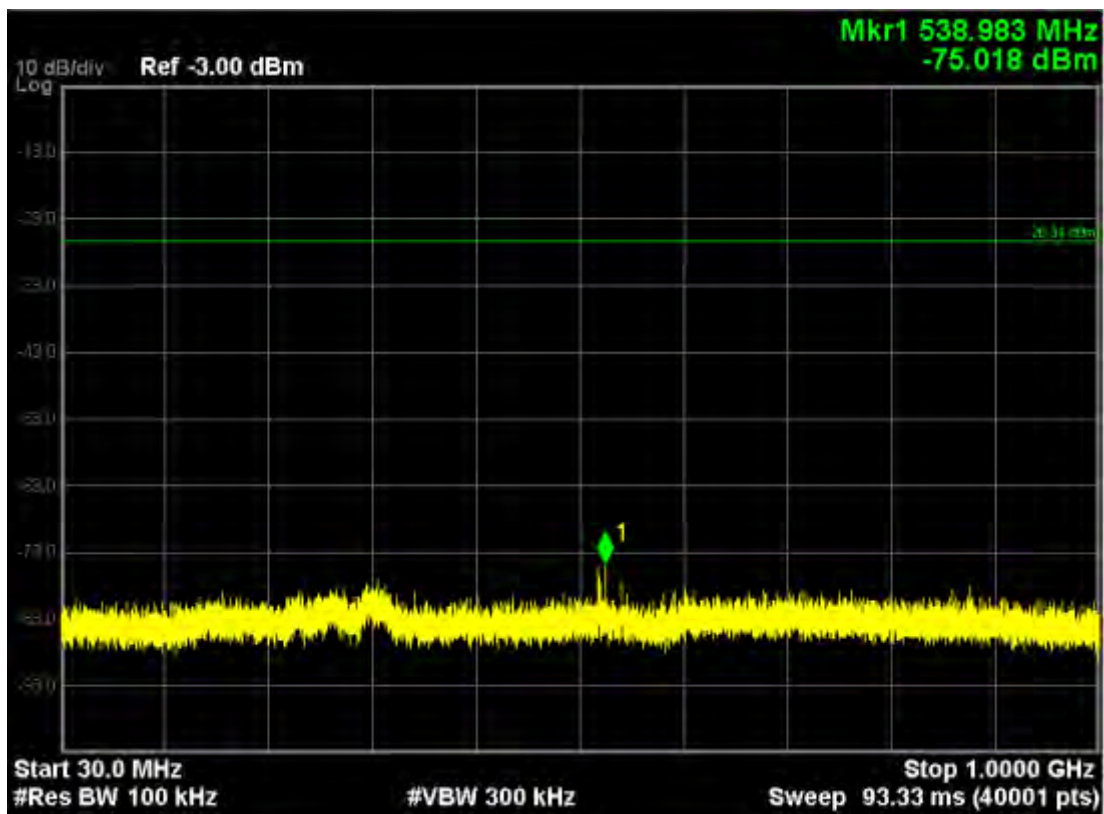



Note: The Mark1 point is carrier.

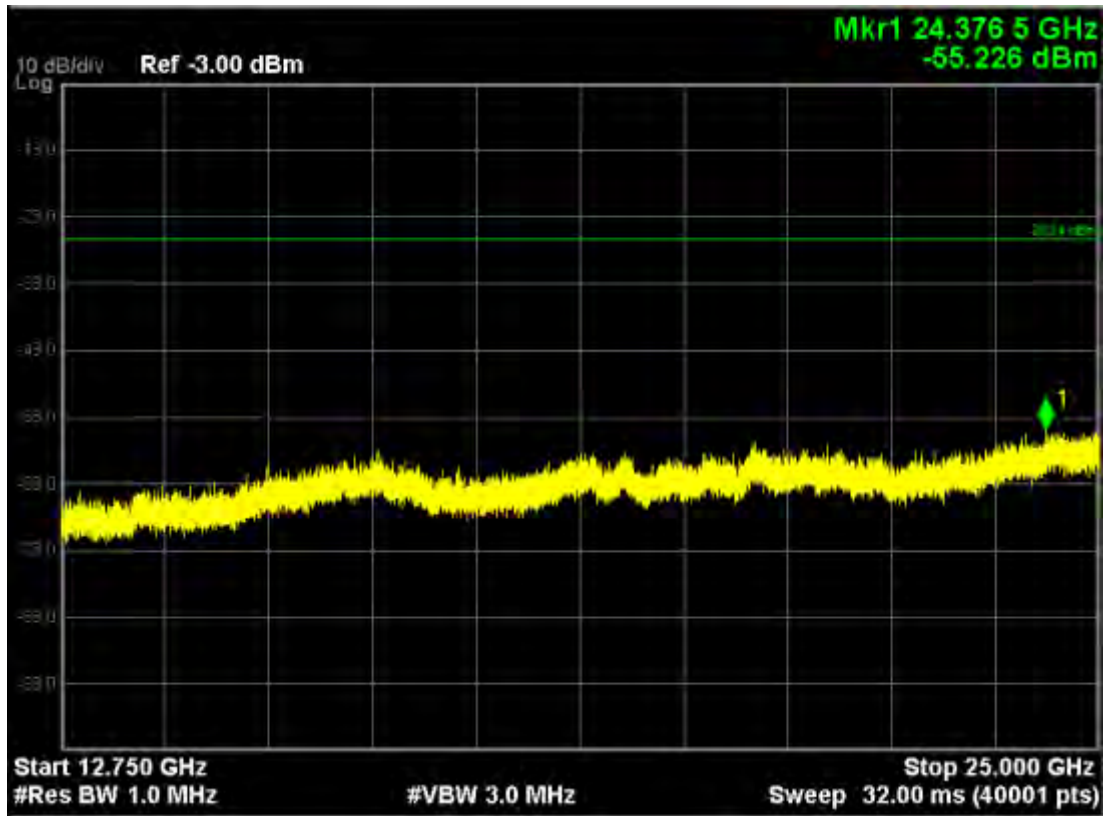


802.11ac20, traffic mode; Channel 165

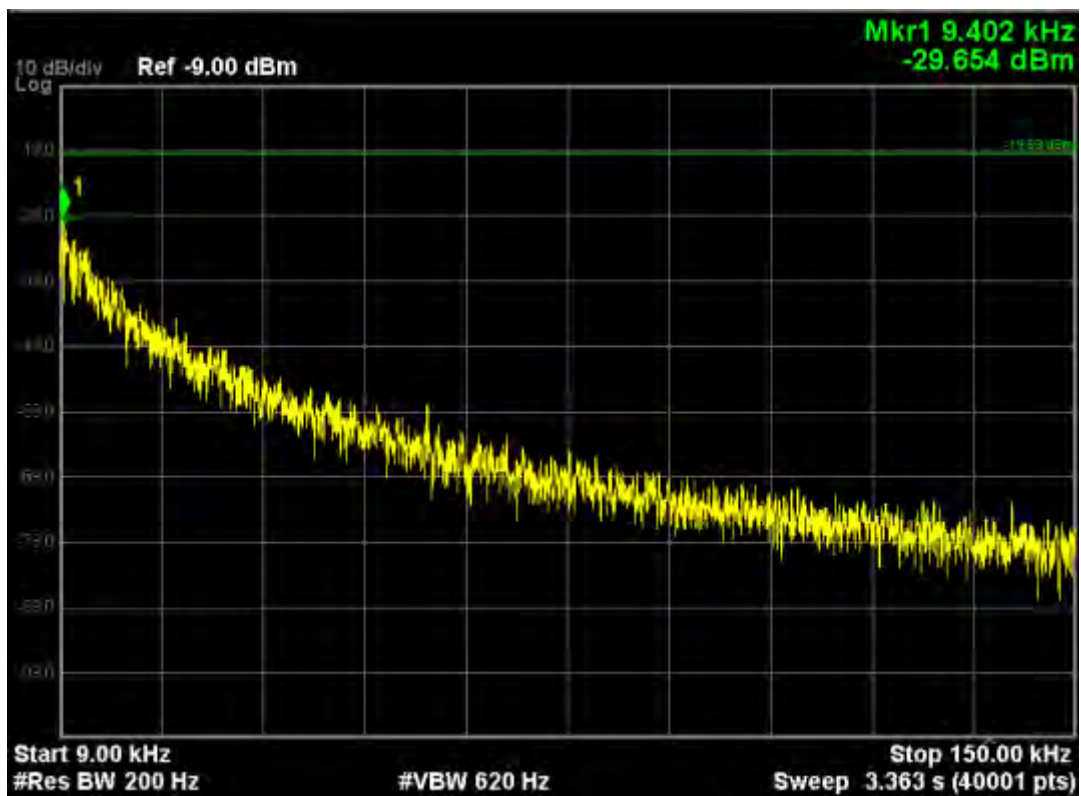

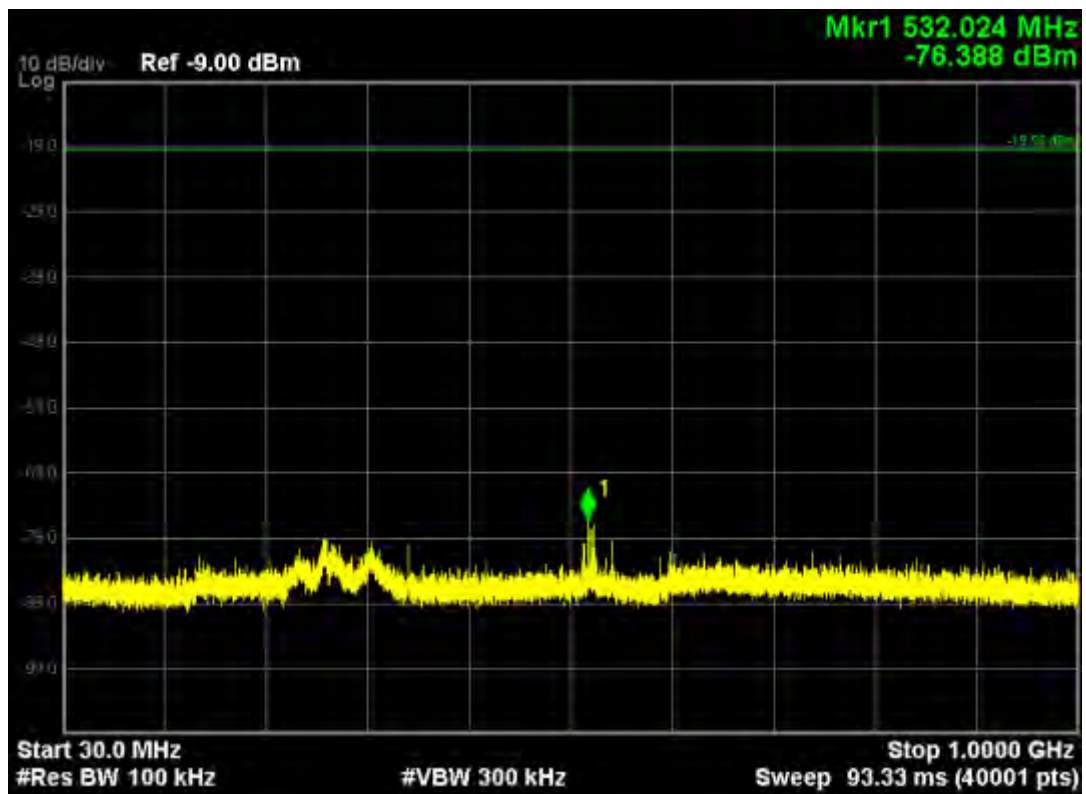
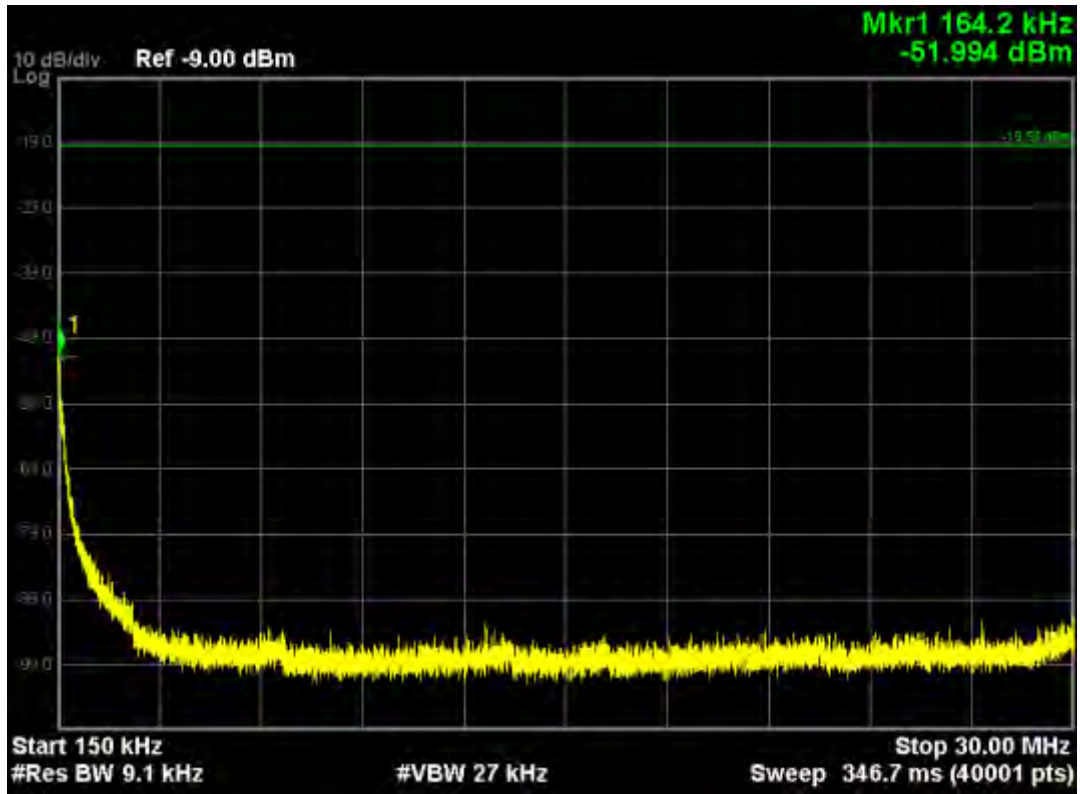



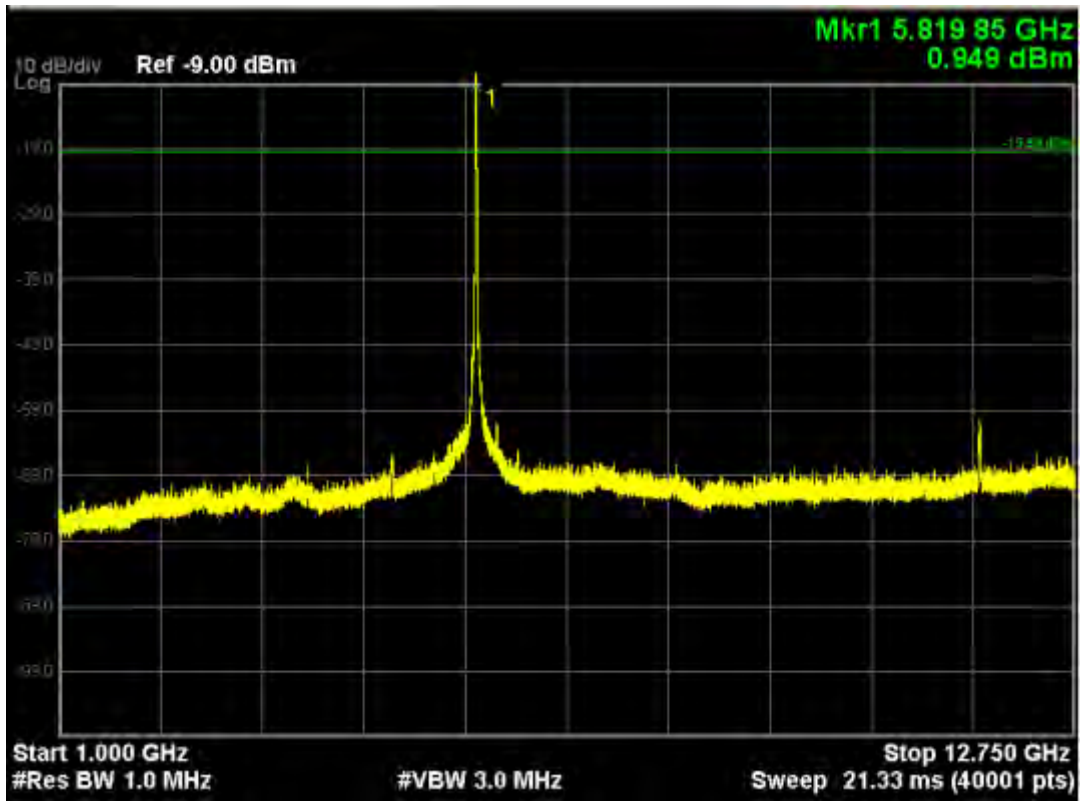


Note: The Mark1 point is carrier.

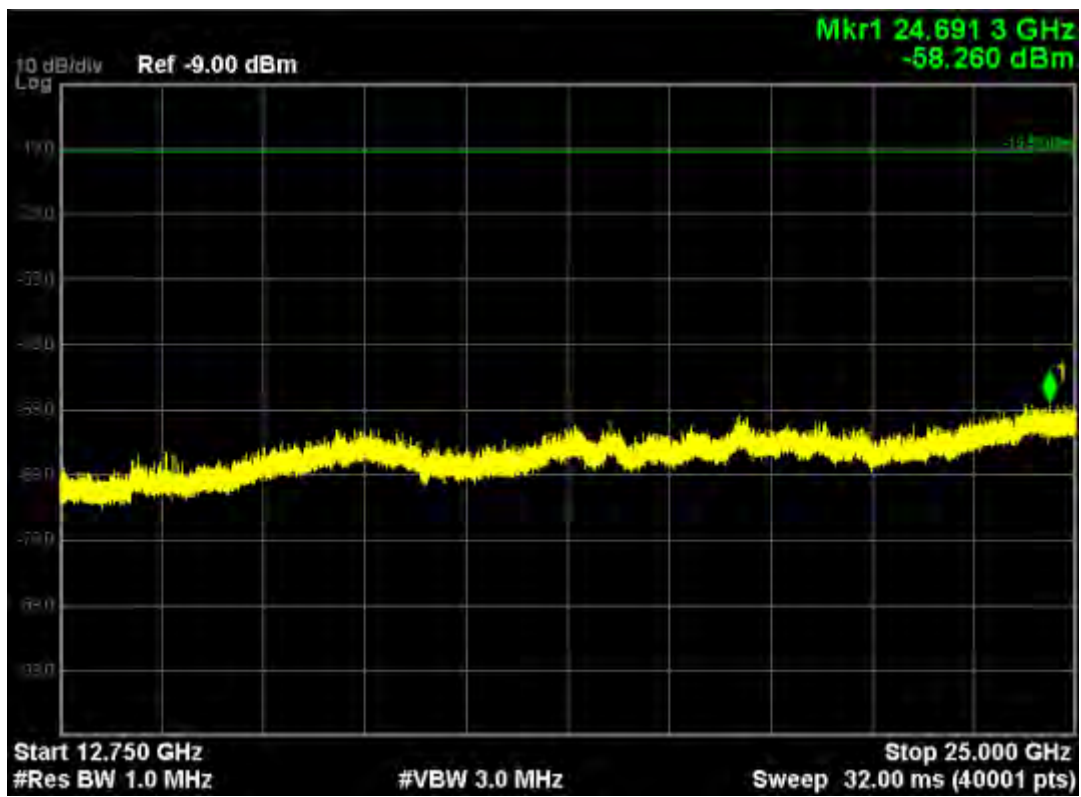


802.11ac20, traffic mode; Channel 165(mimo)

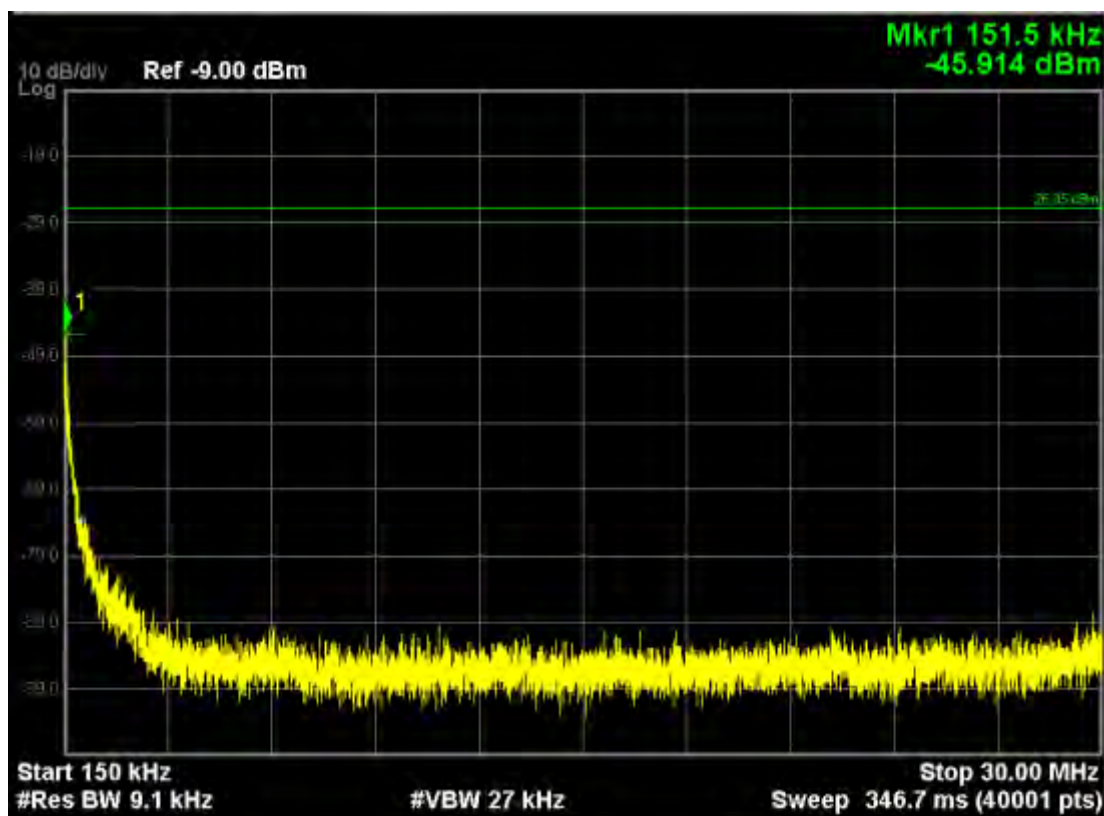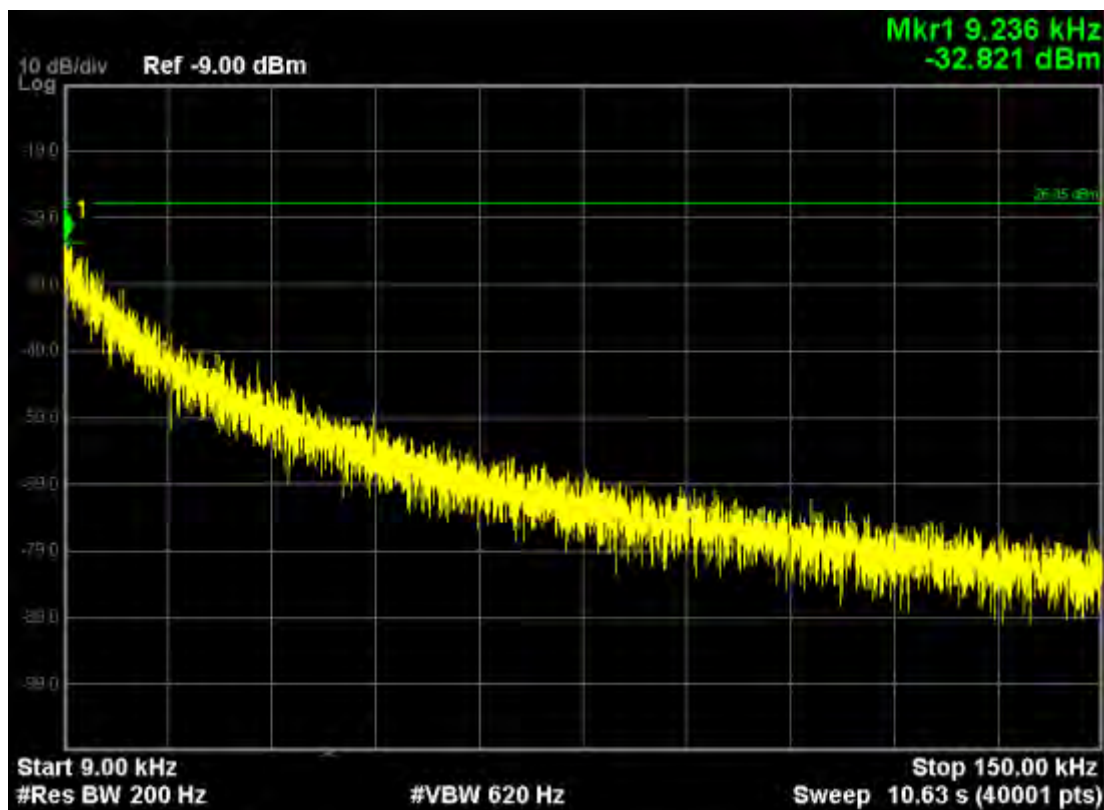


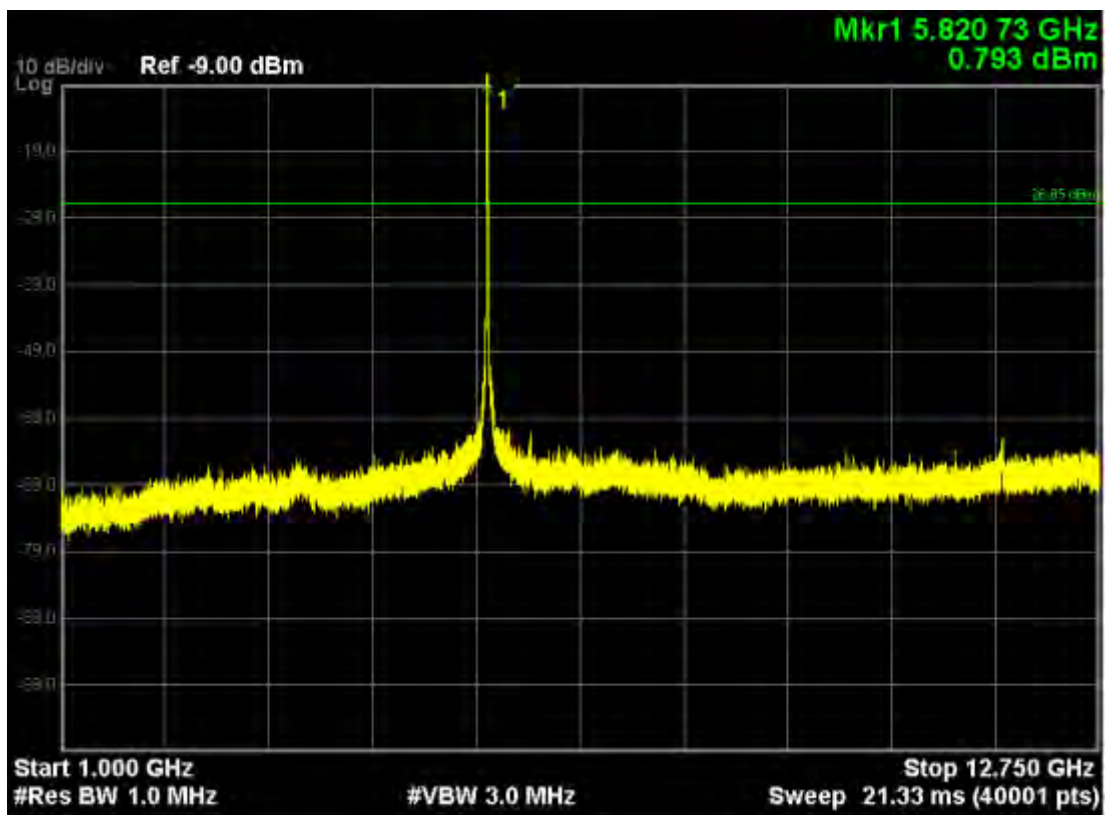
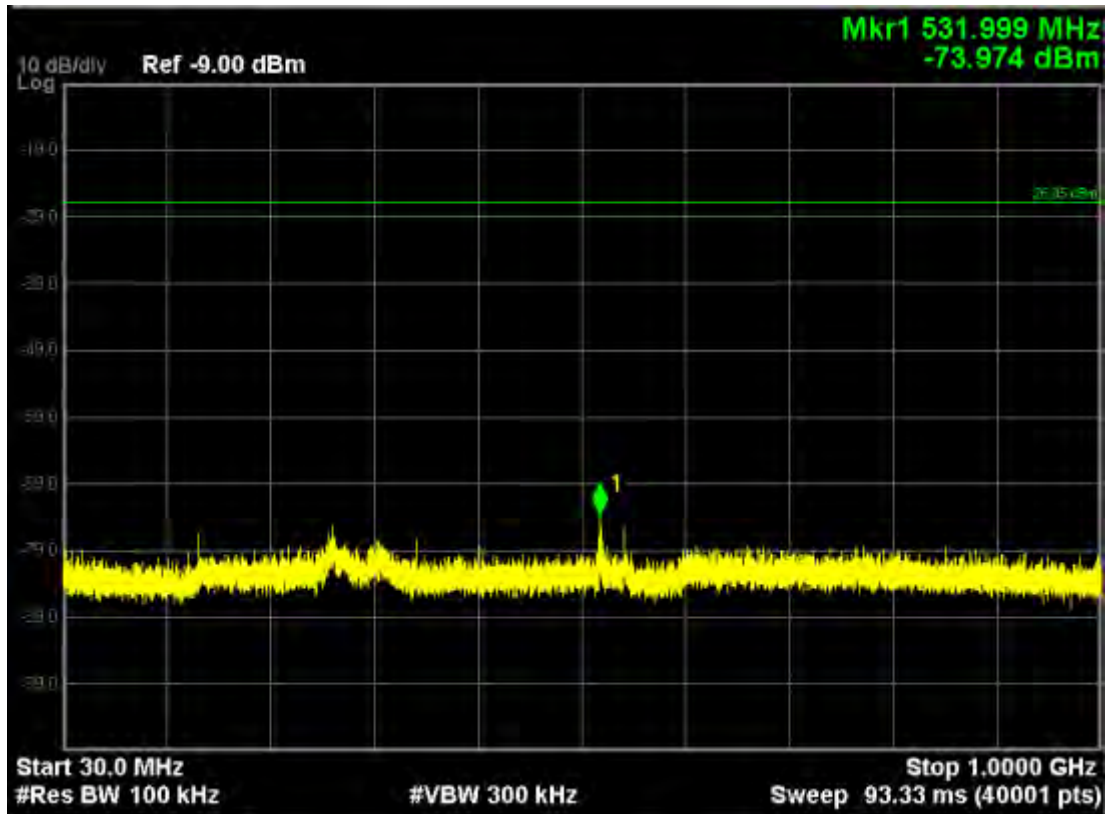



Note: The Mark1 point is carrier.

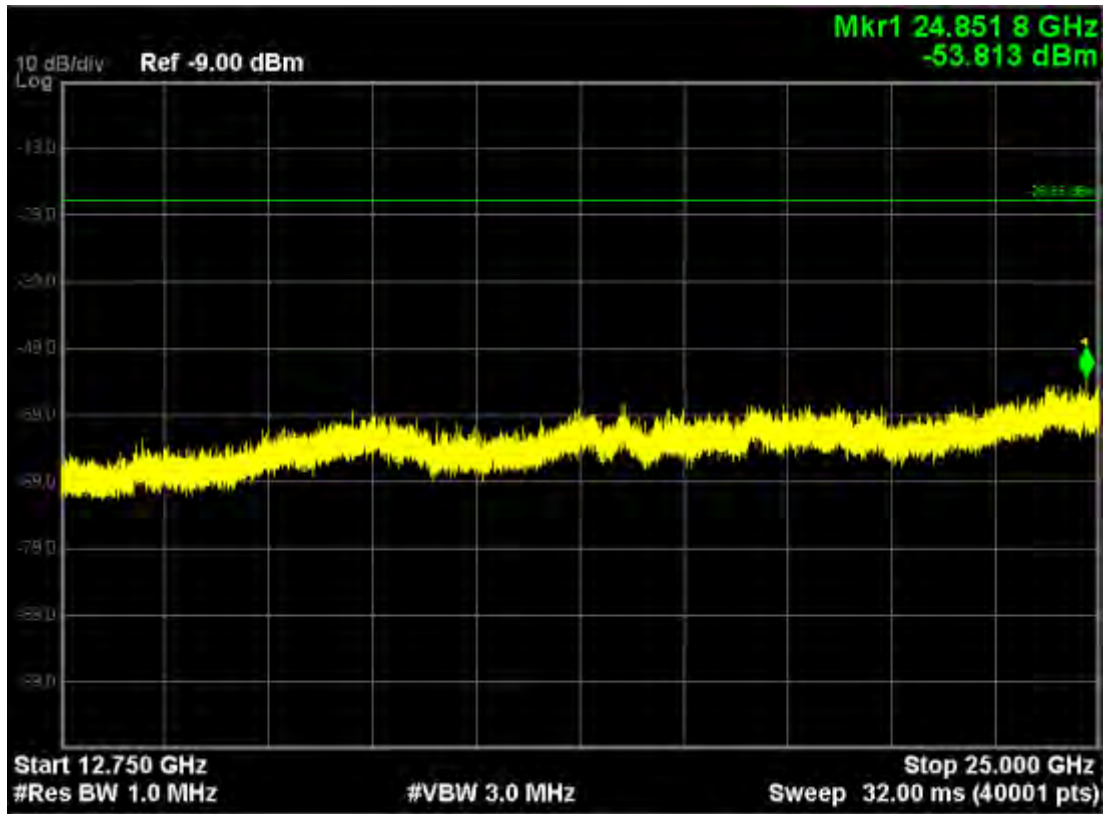


802.11ac40, traffic mode; Channel 151

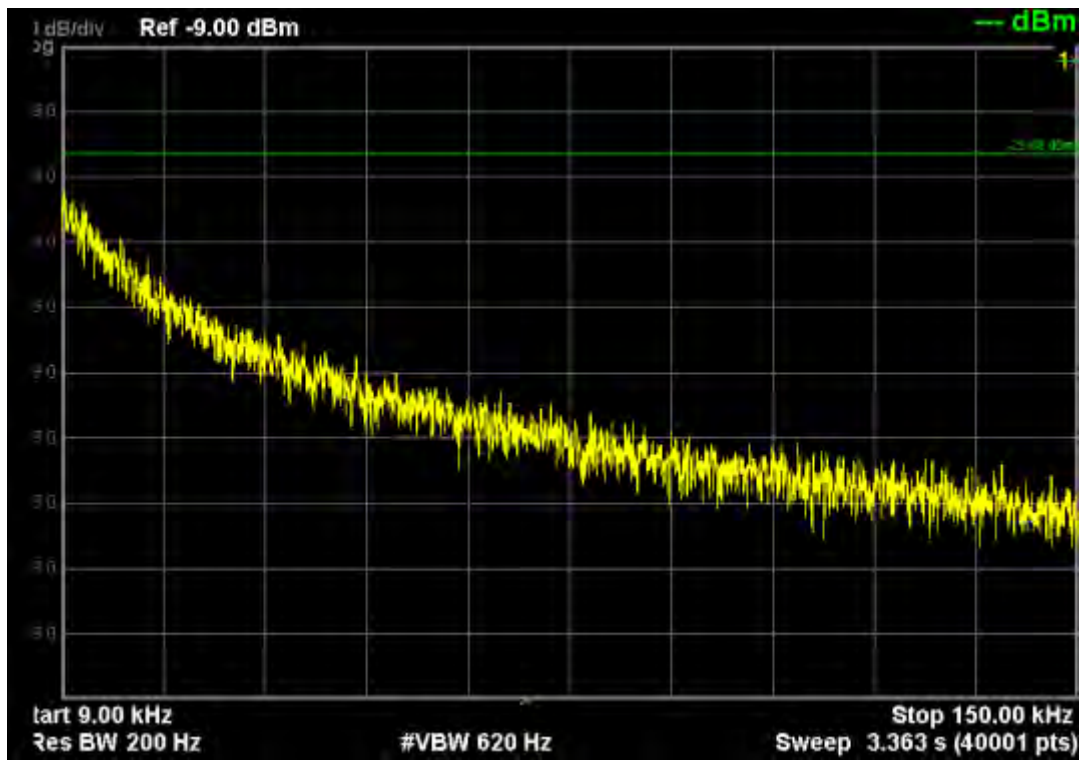

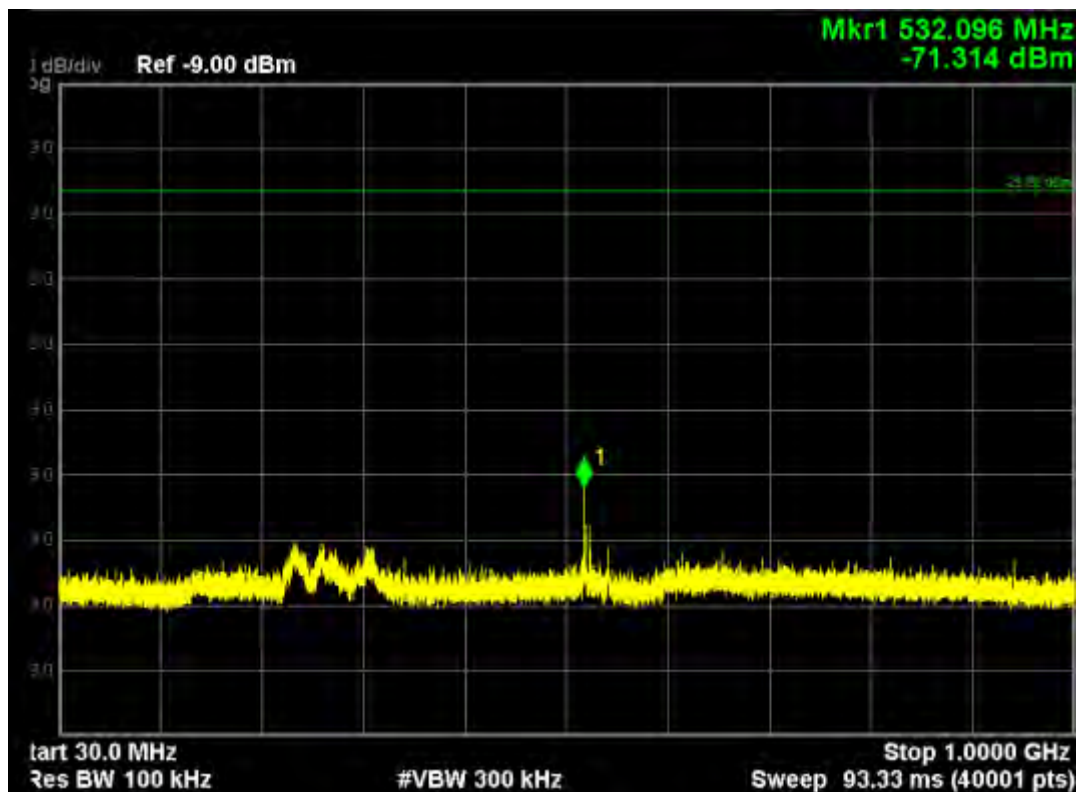
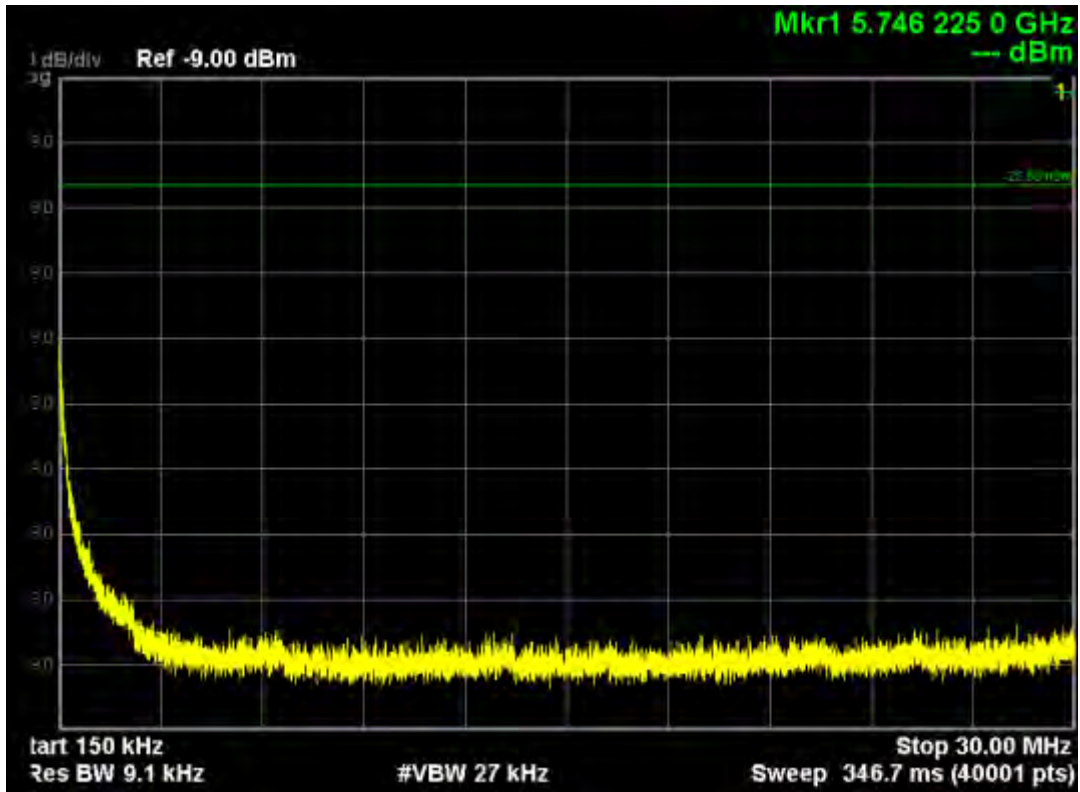



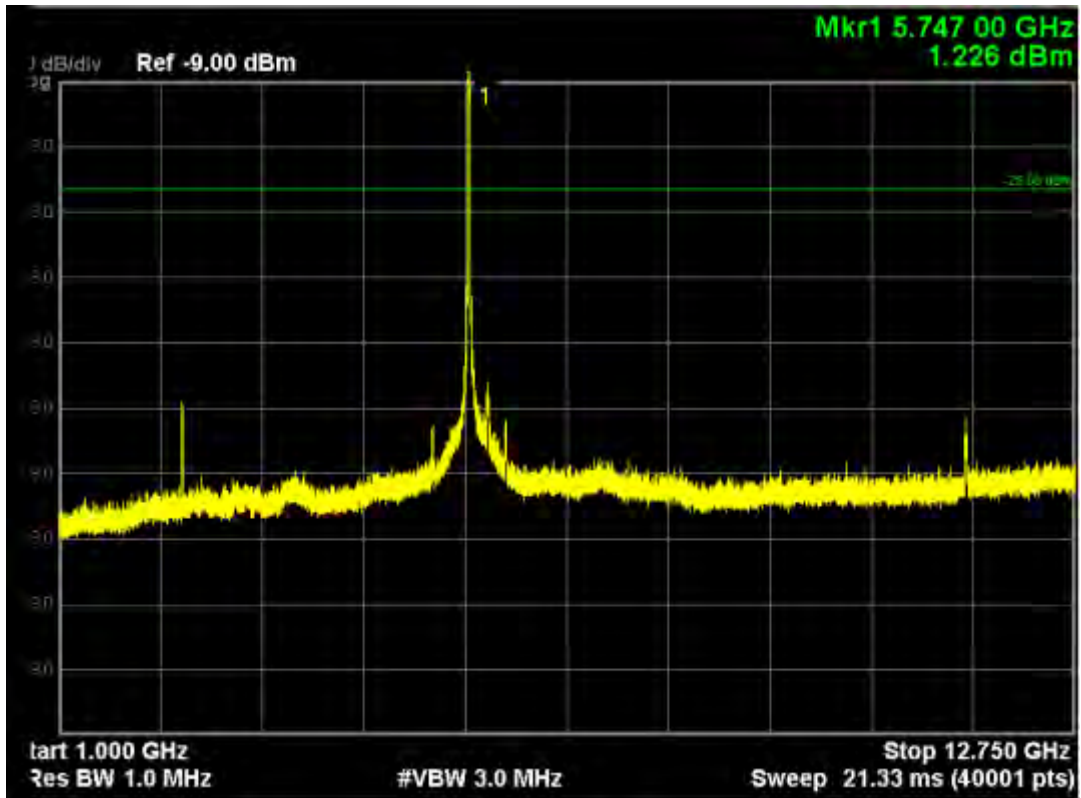


Note: The Mark1 point is carrier.

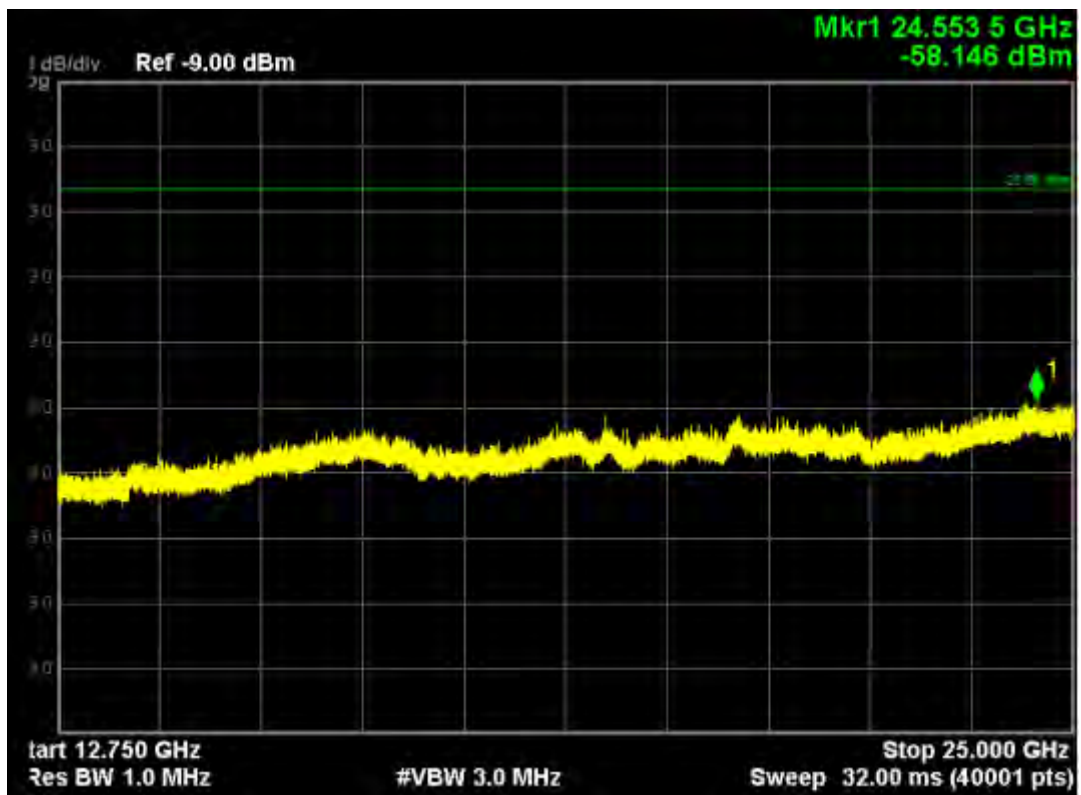


802.11ac40, traffic mode; Channel 151(mimo)

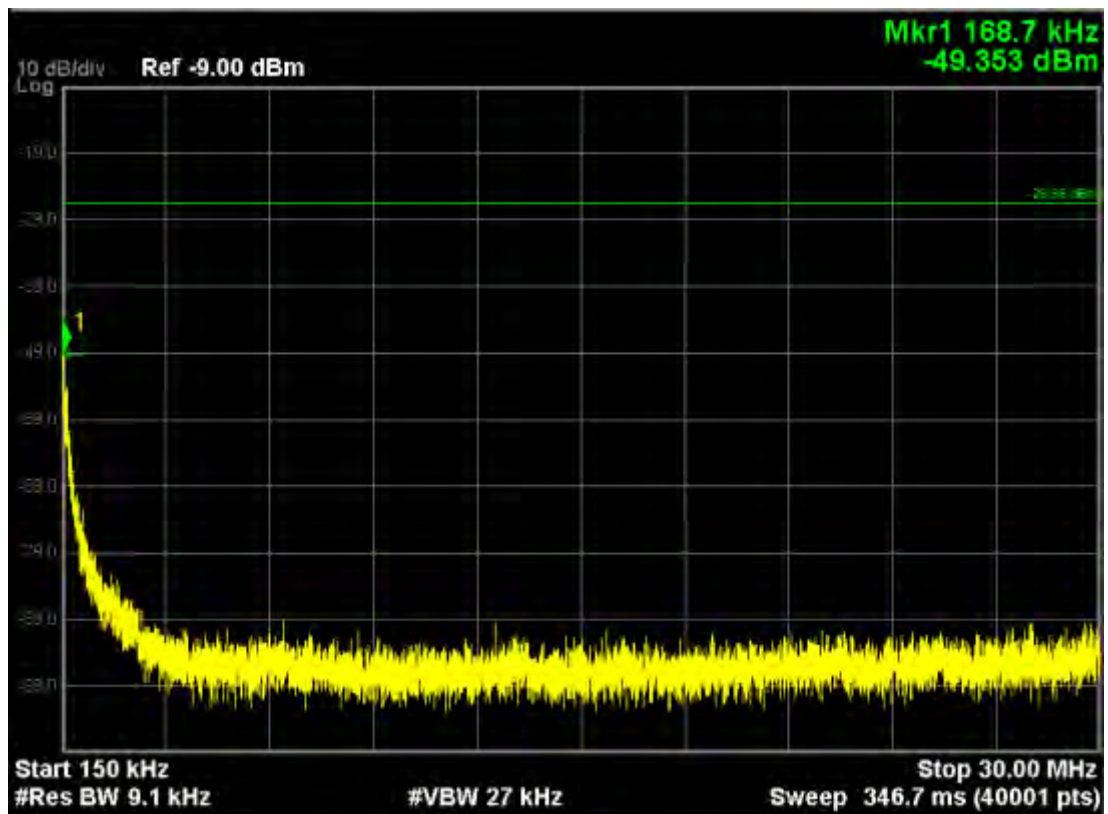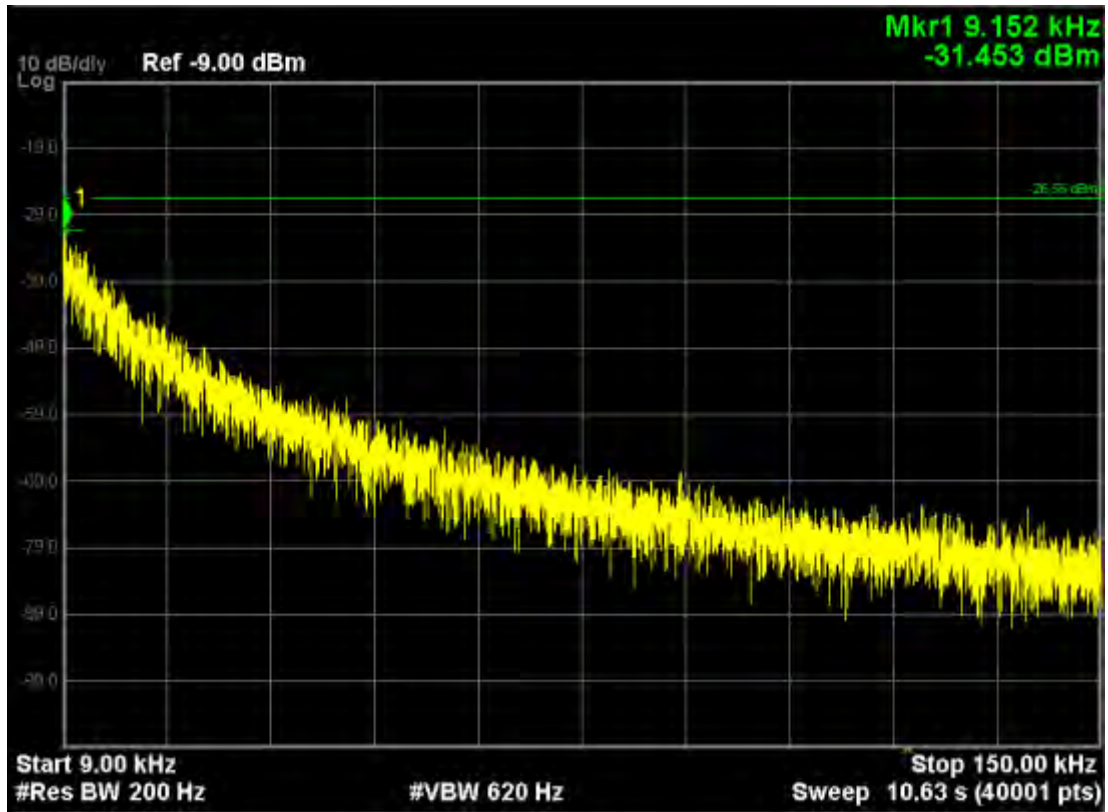


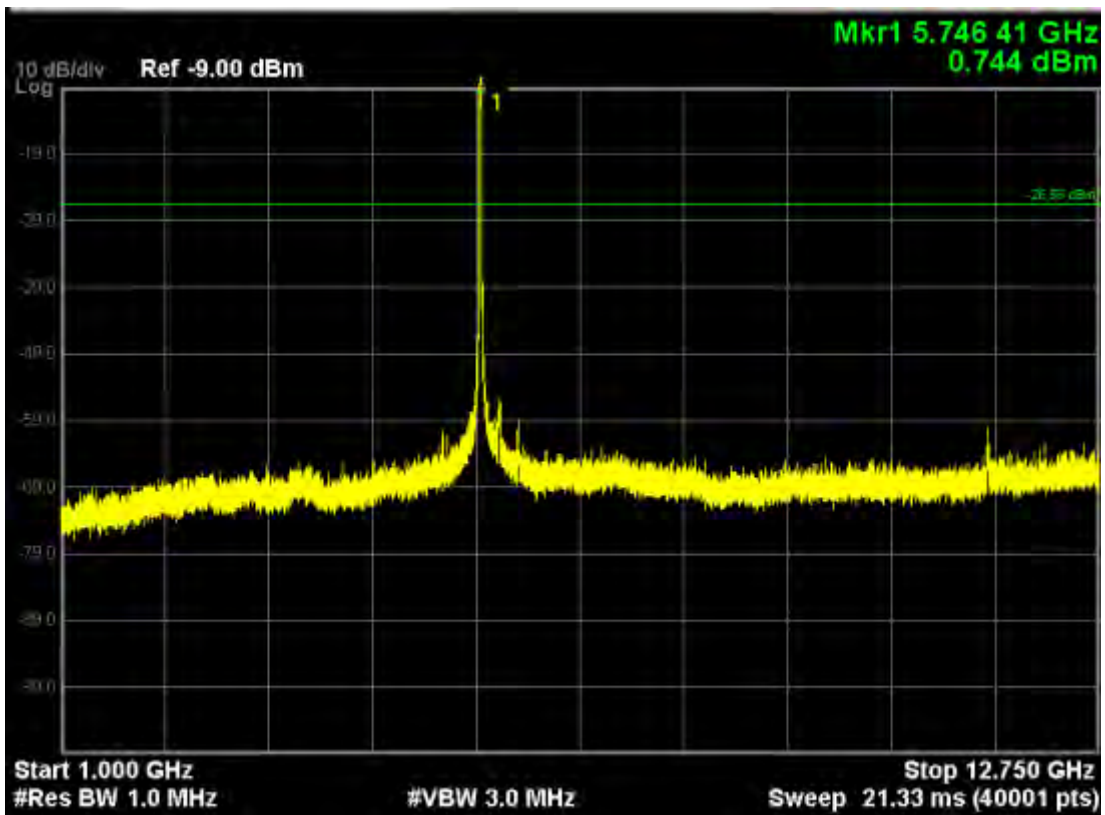
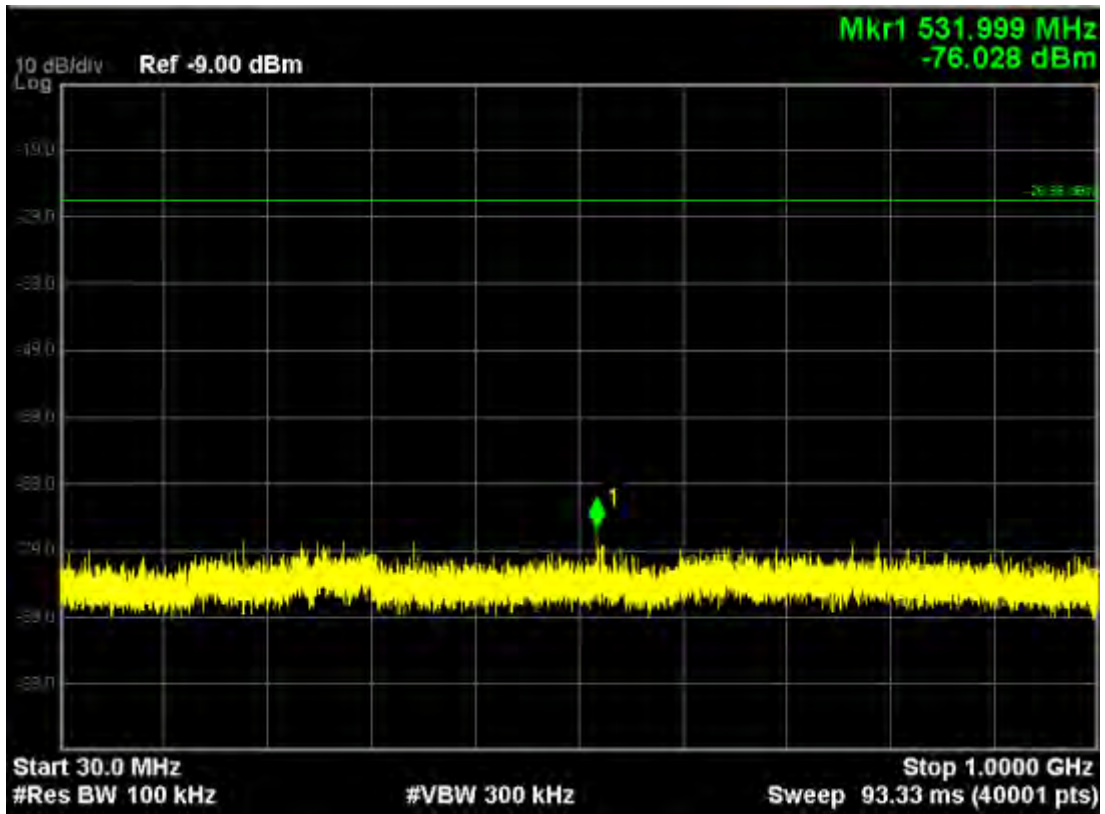



Note: The Mark1 point is carrier.

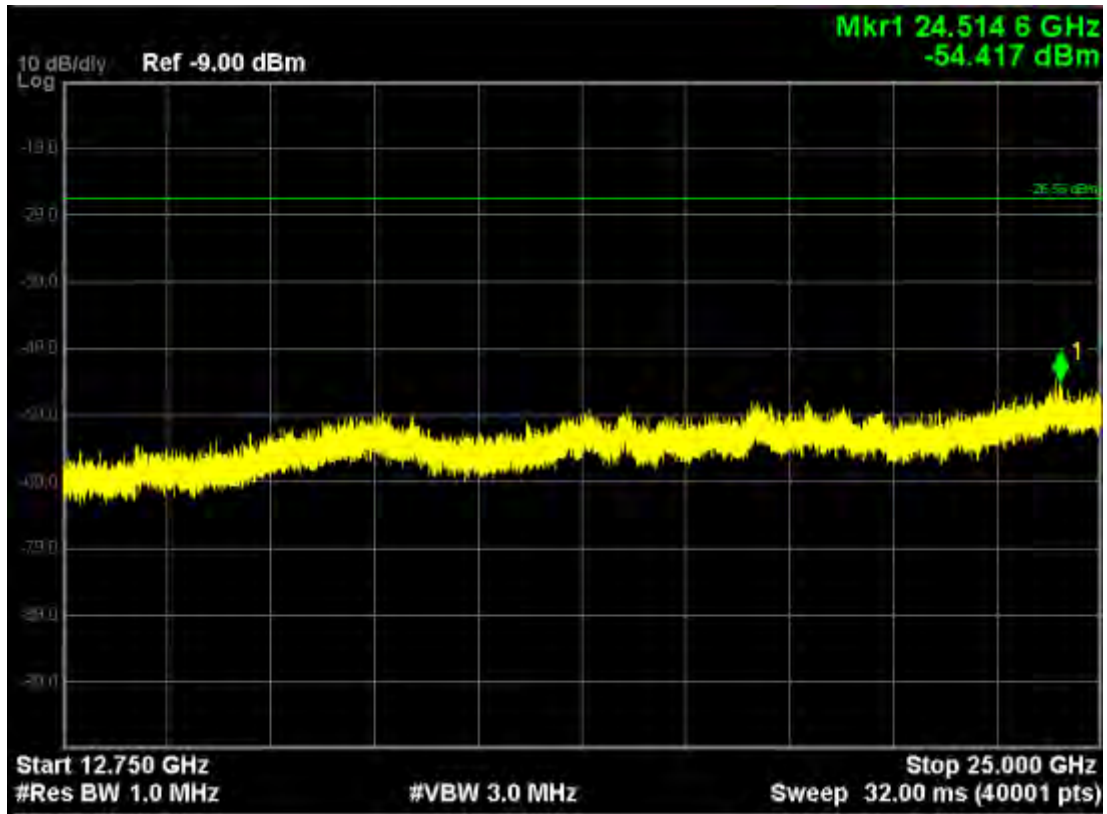


802.11ac40, traffic mode; Channel 159

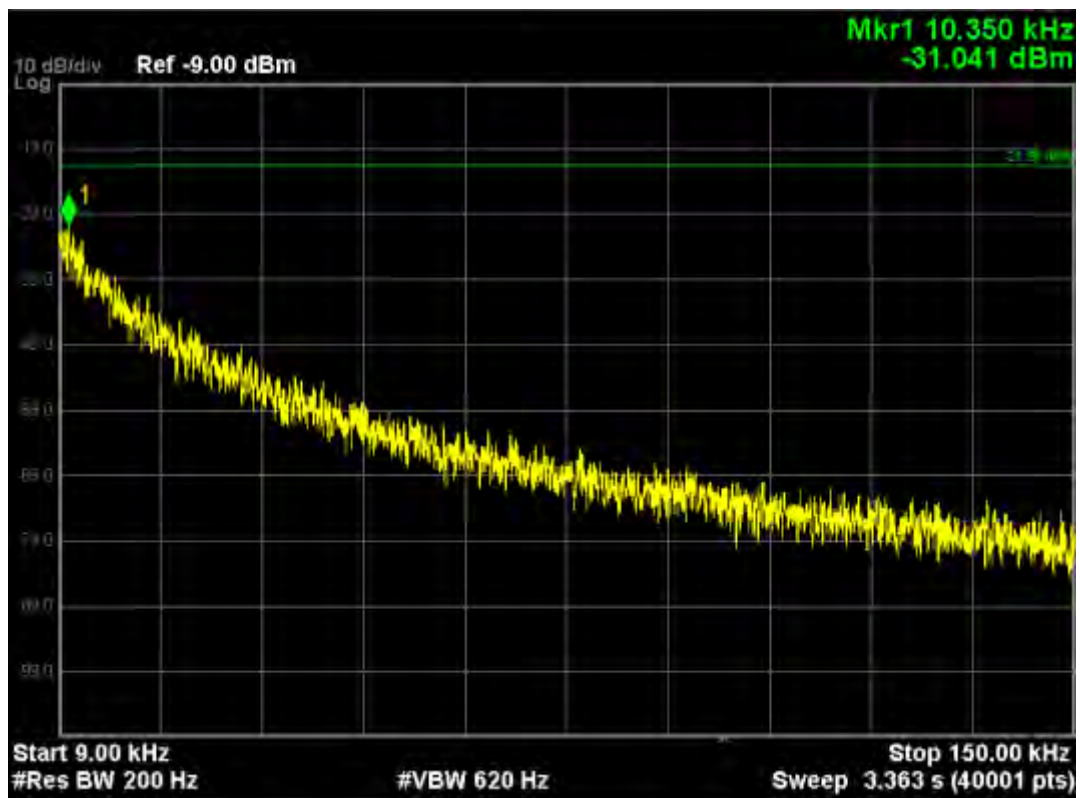

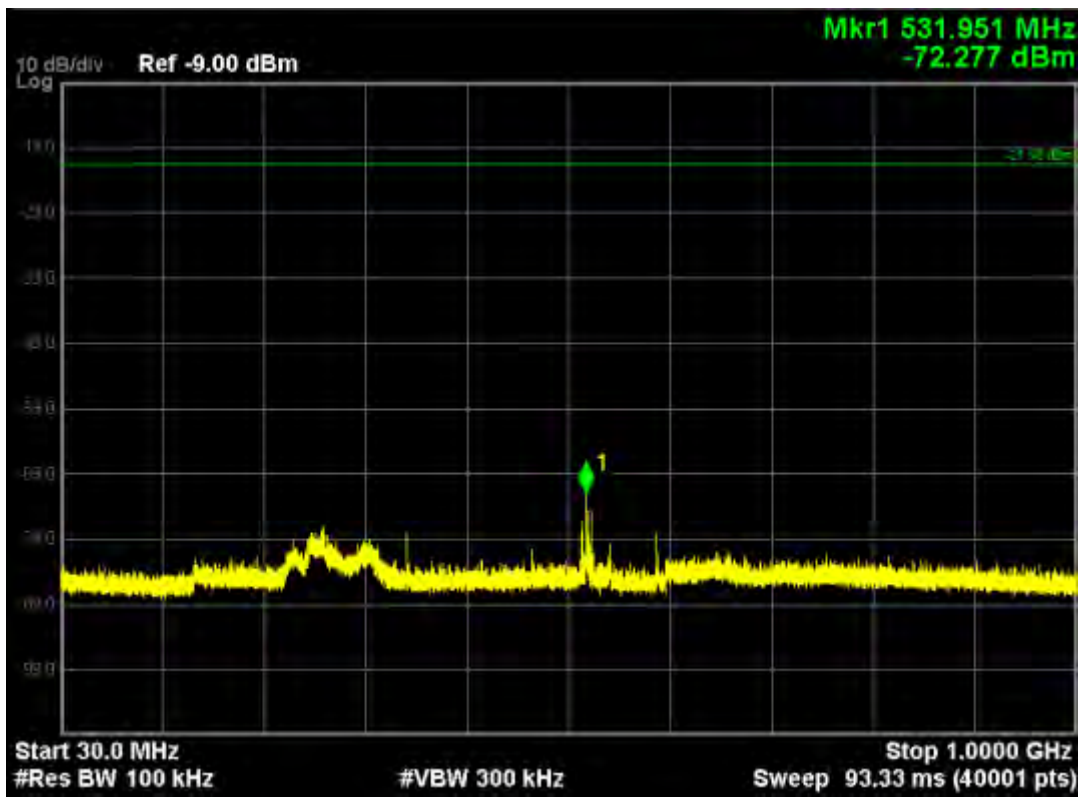
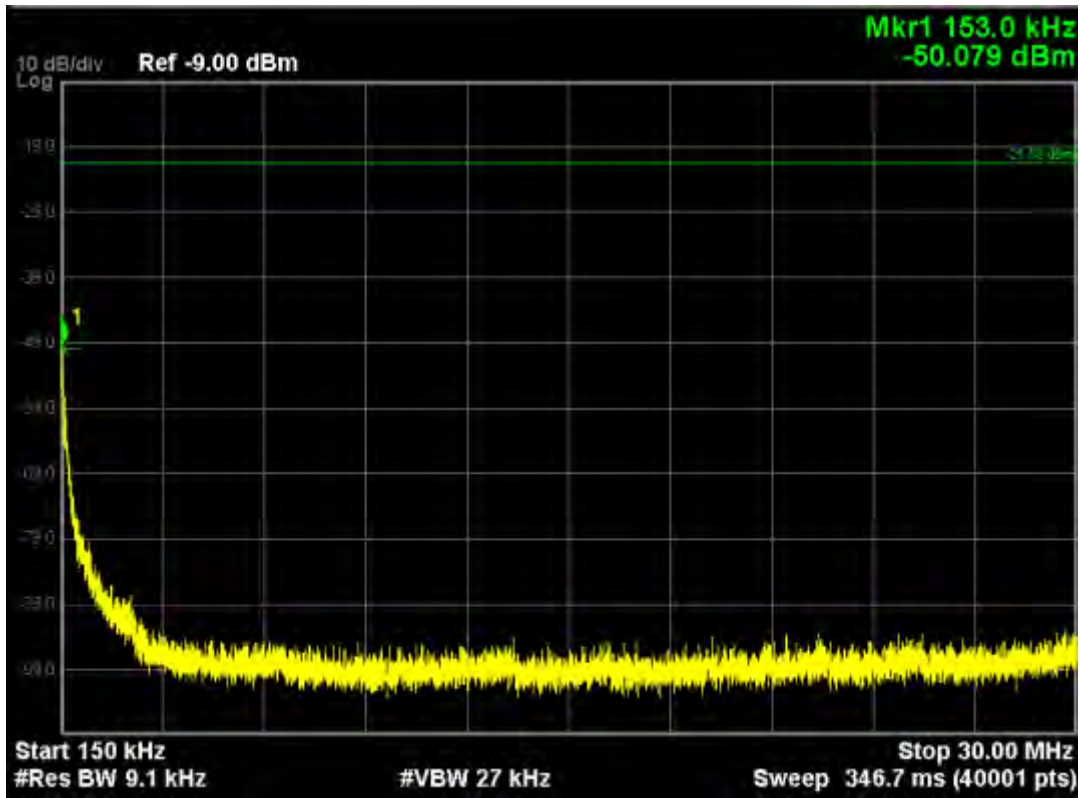



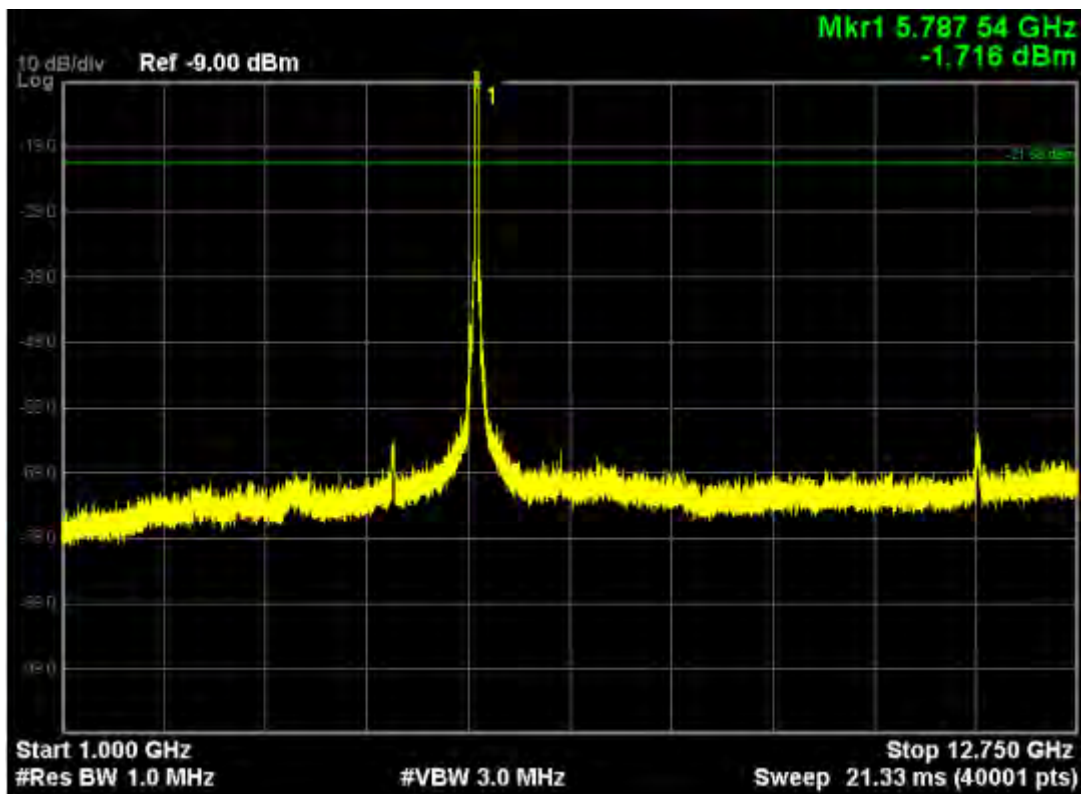


Note: The Mark1 point is carrier.

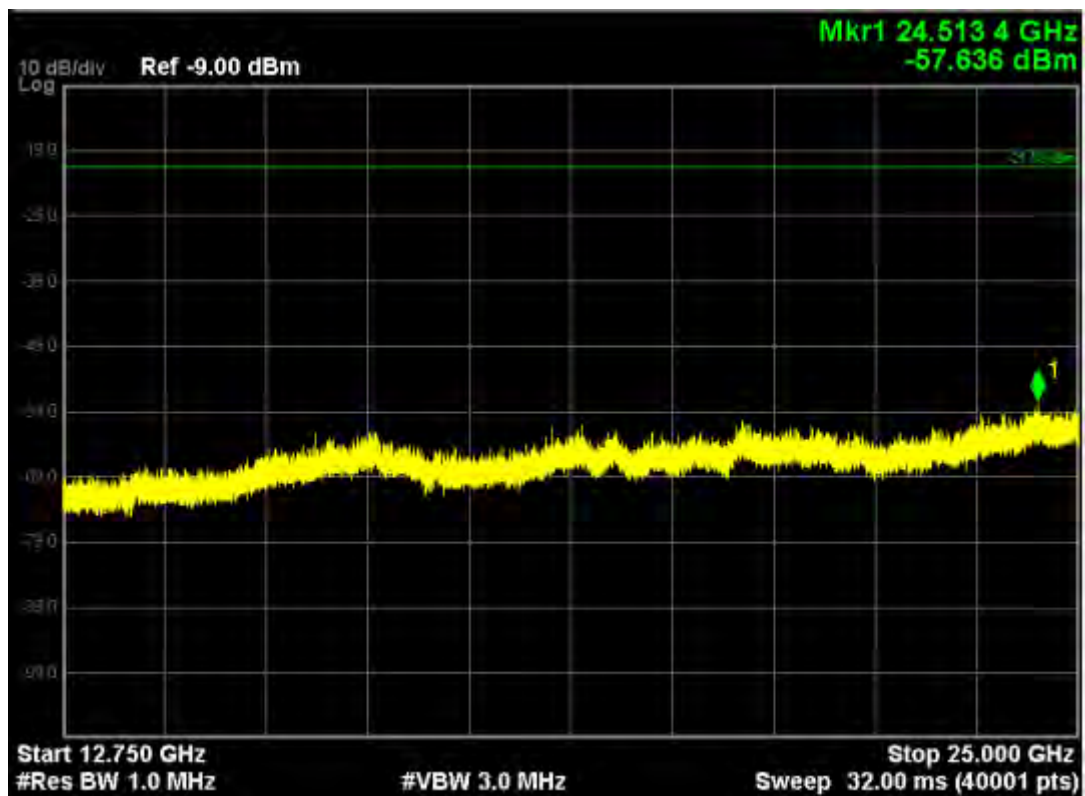


802.11ac40, traffic mode; Channel 159(mimo)

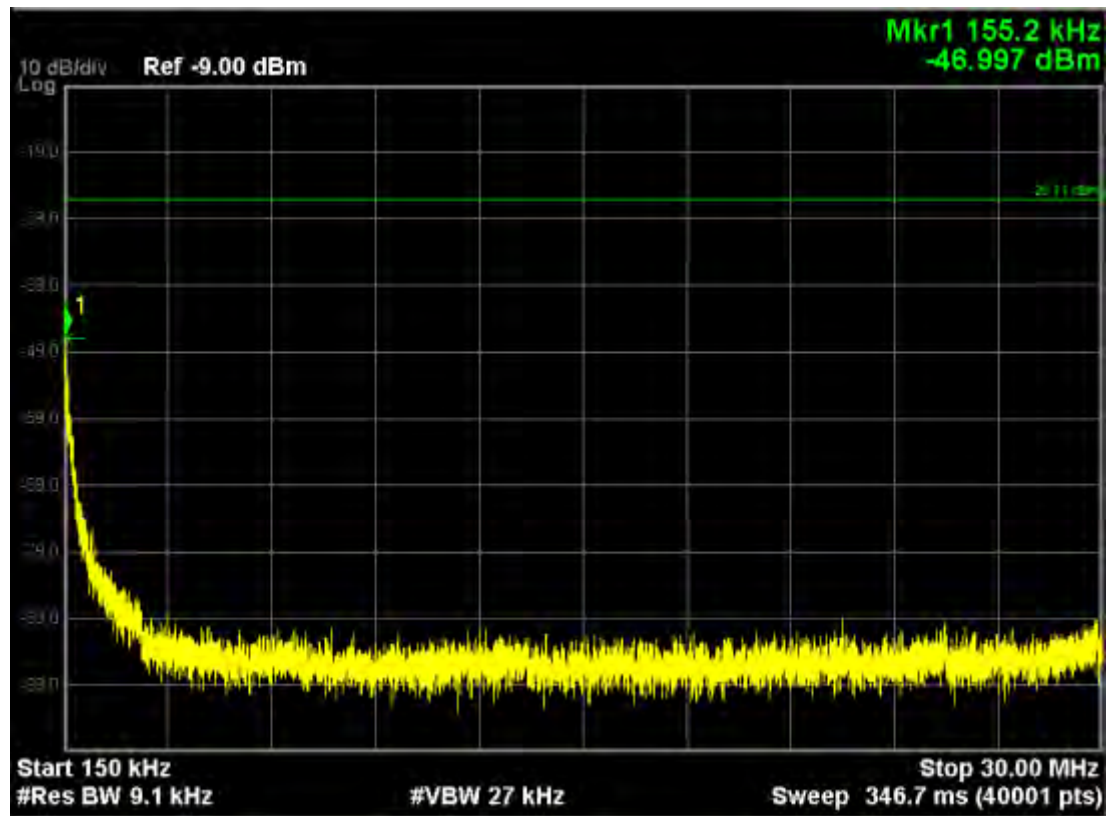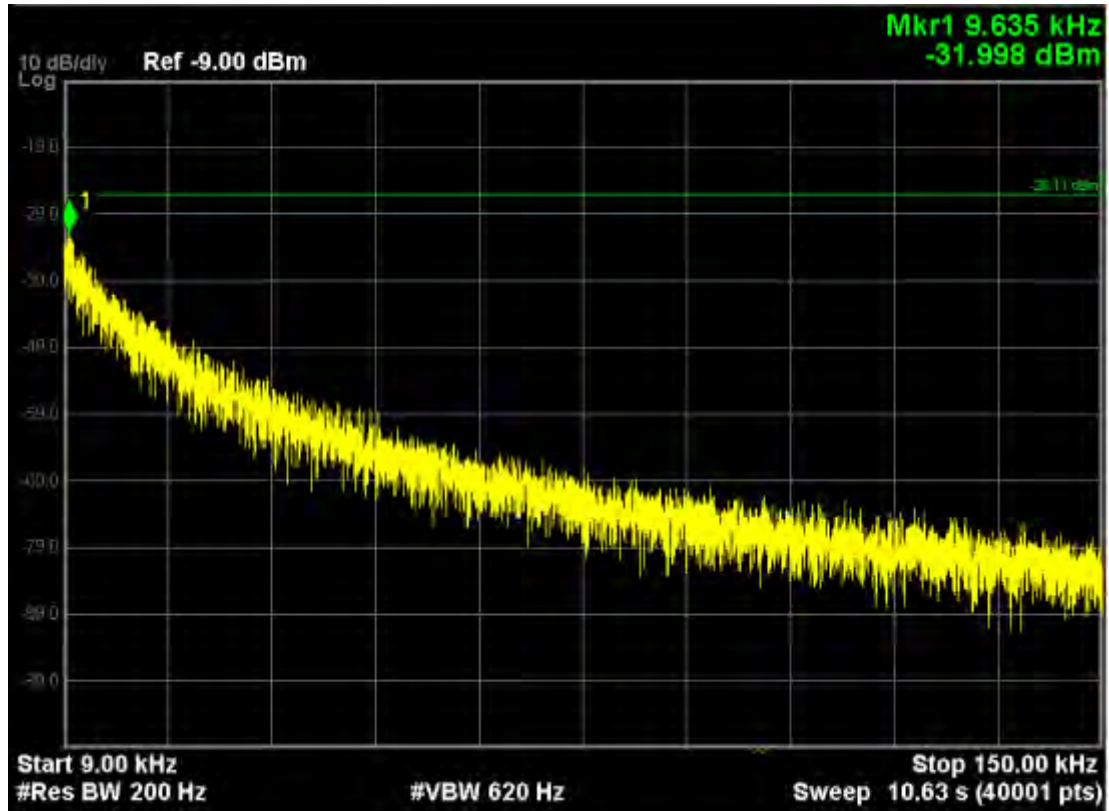


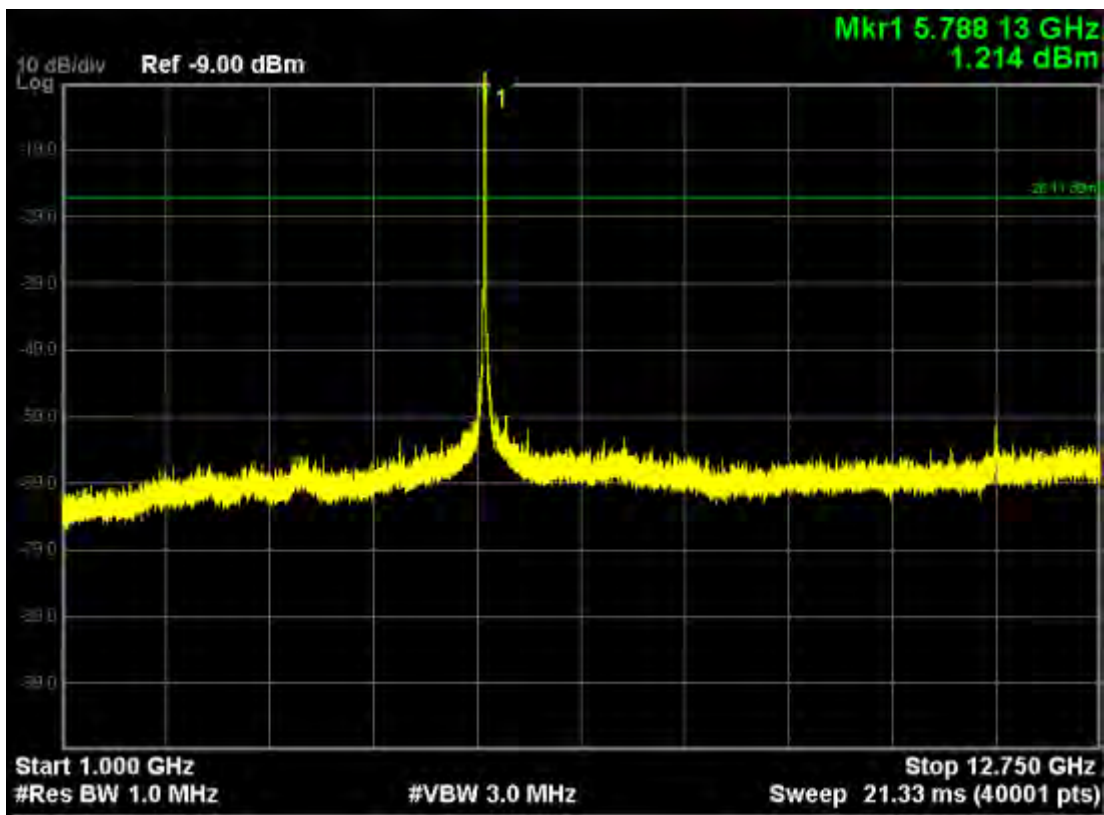
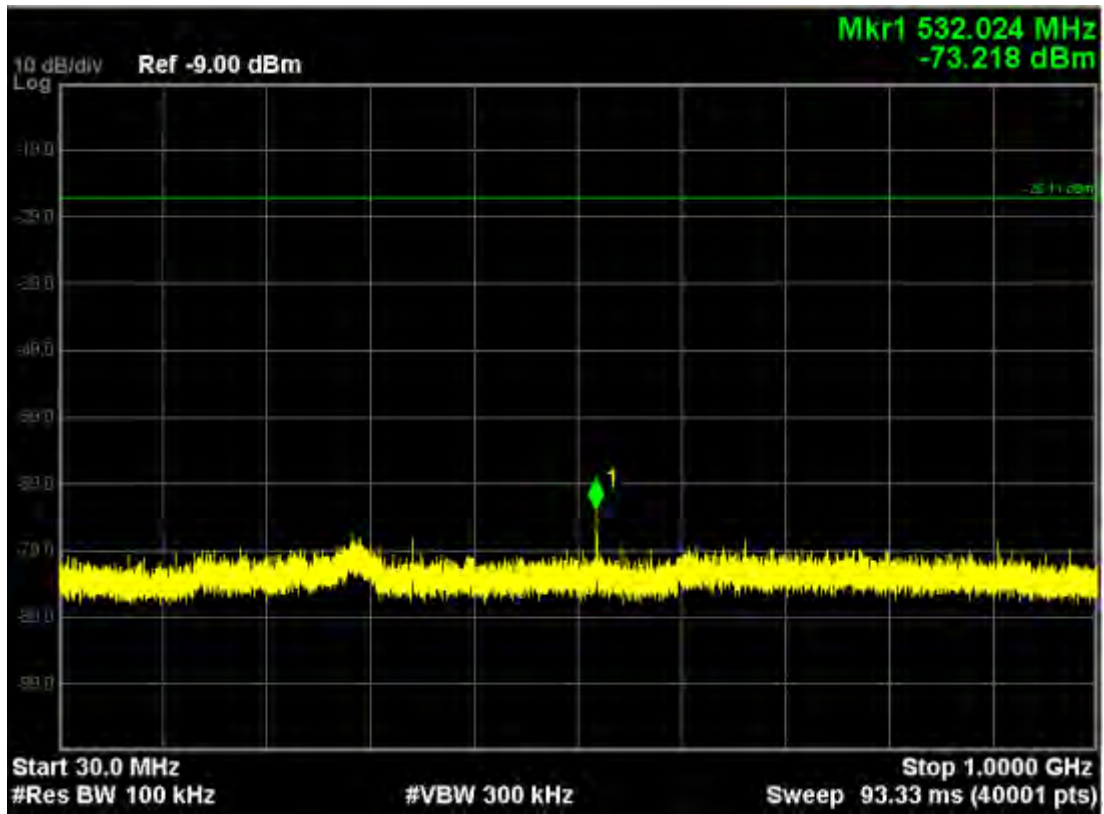



Note: The Mark1 point is carrier.

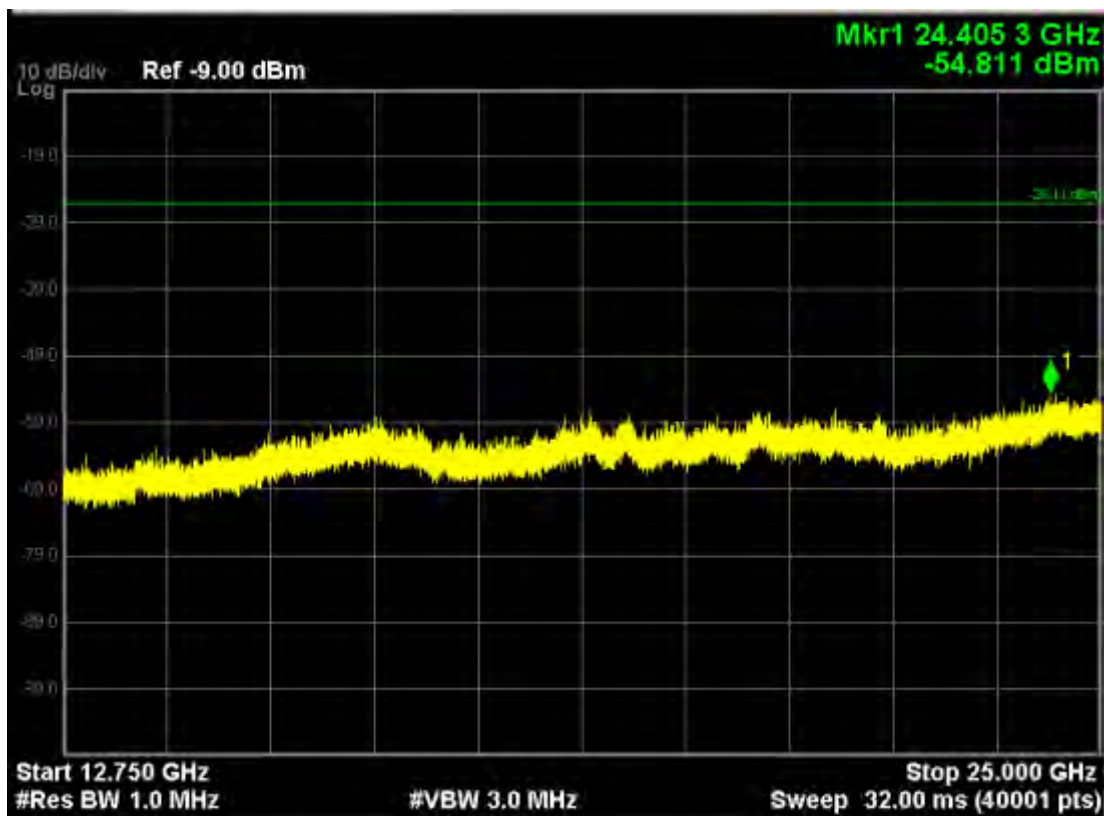


802.11ac80, traffic mode; Channel 155

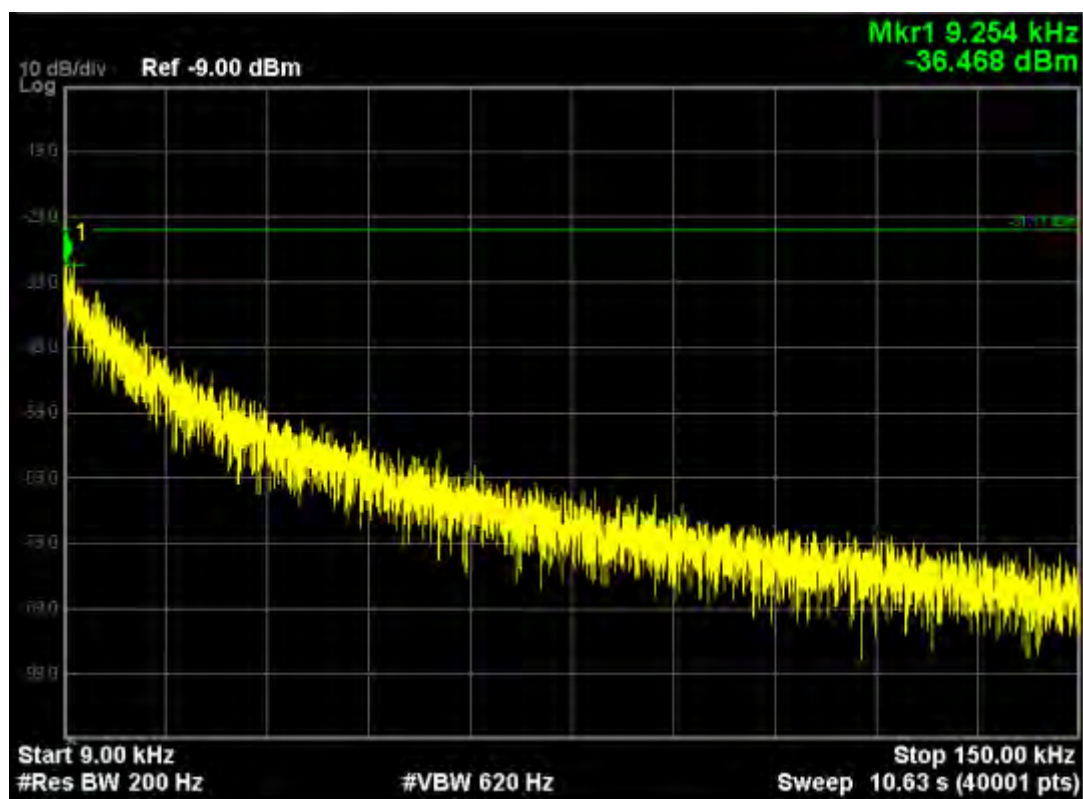

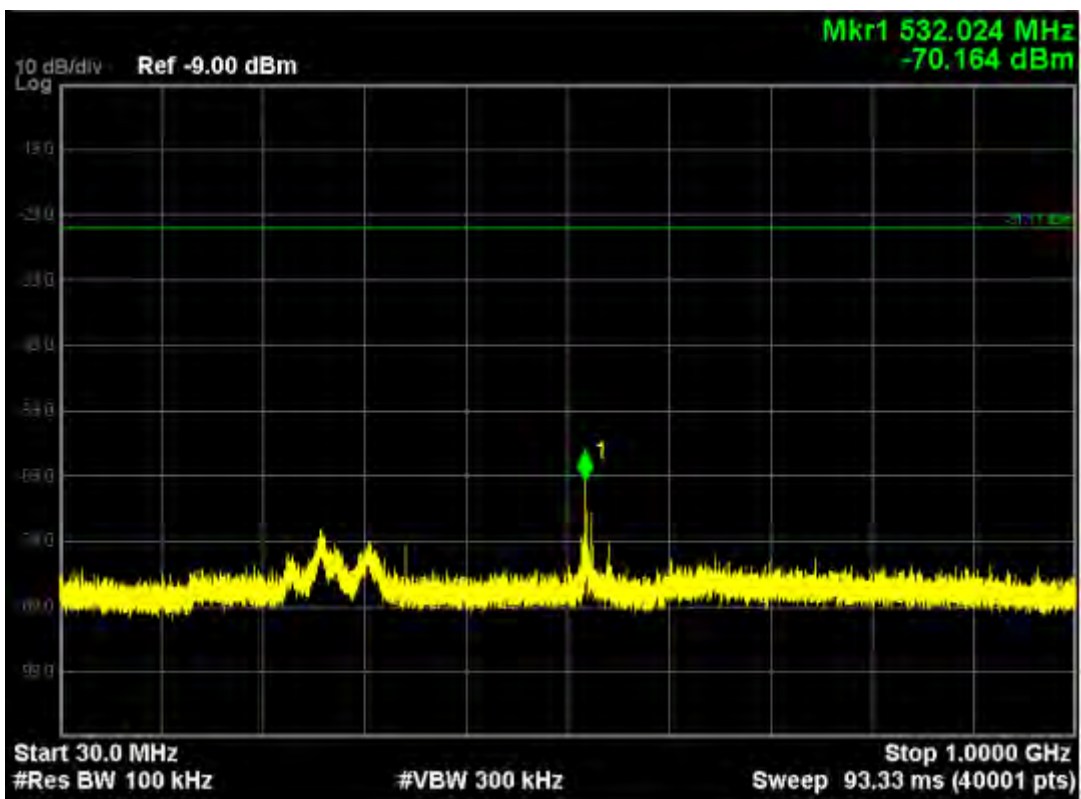
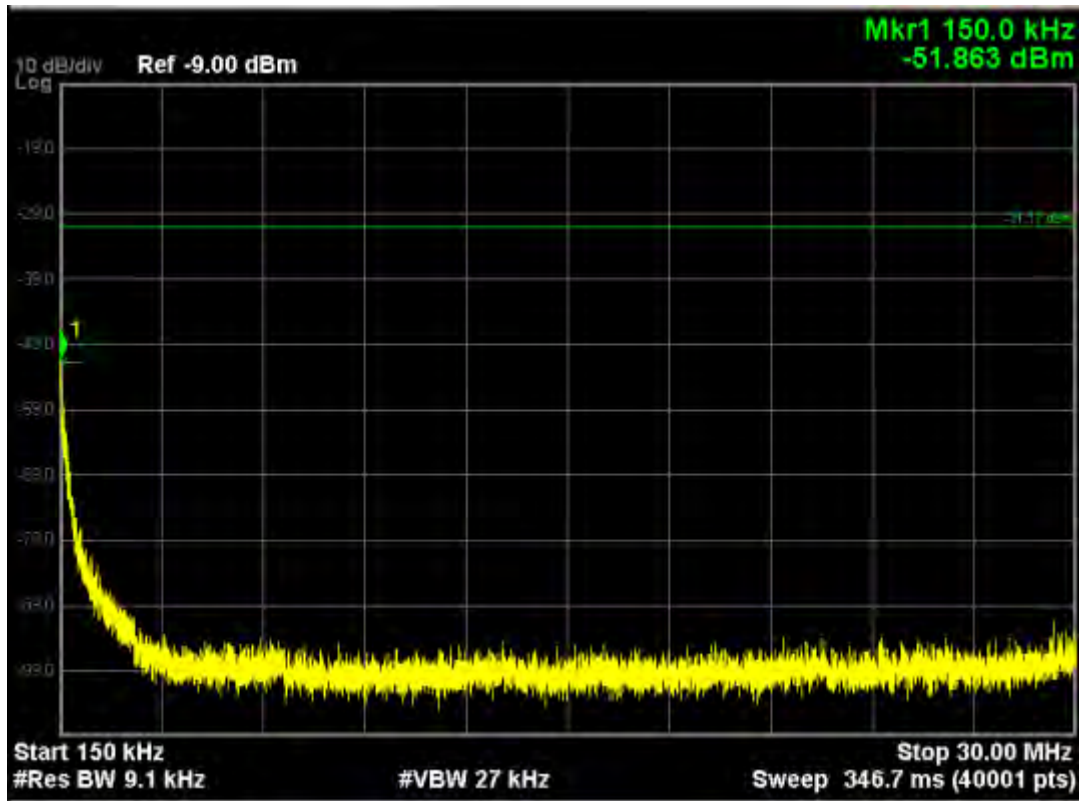



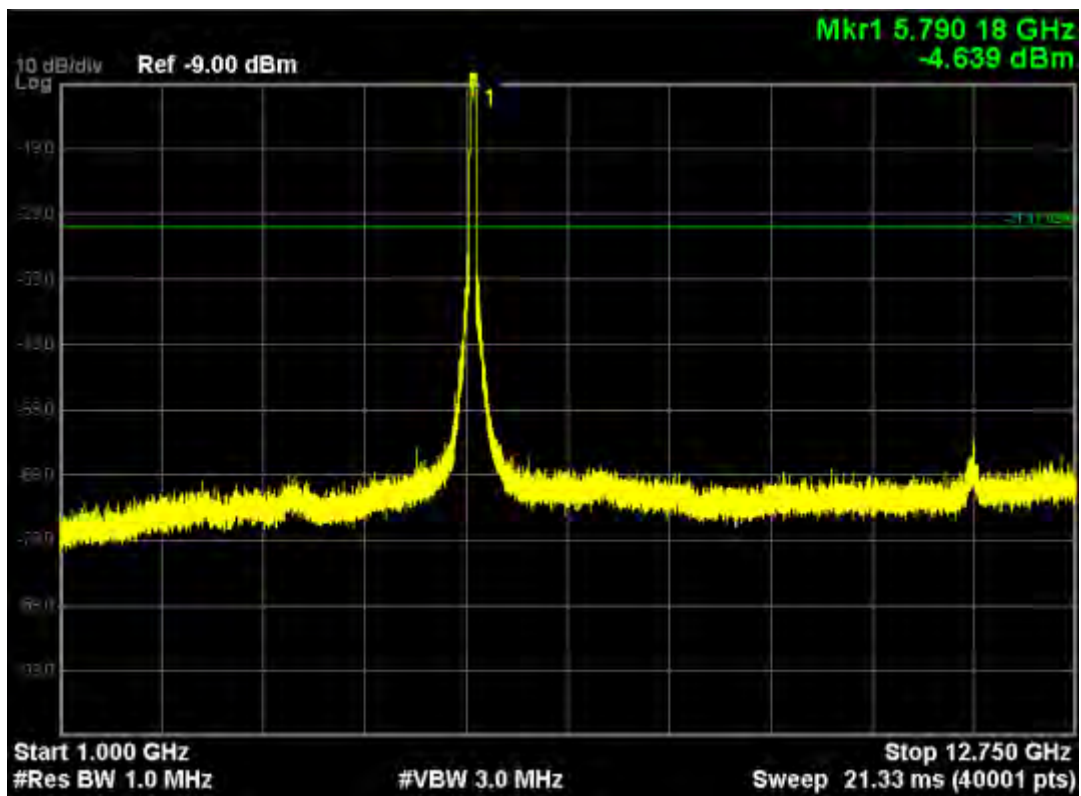


Note: The Mark1 point is carrier.

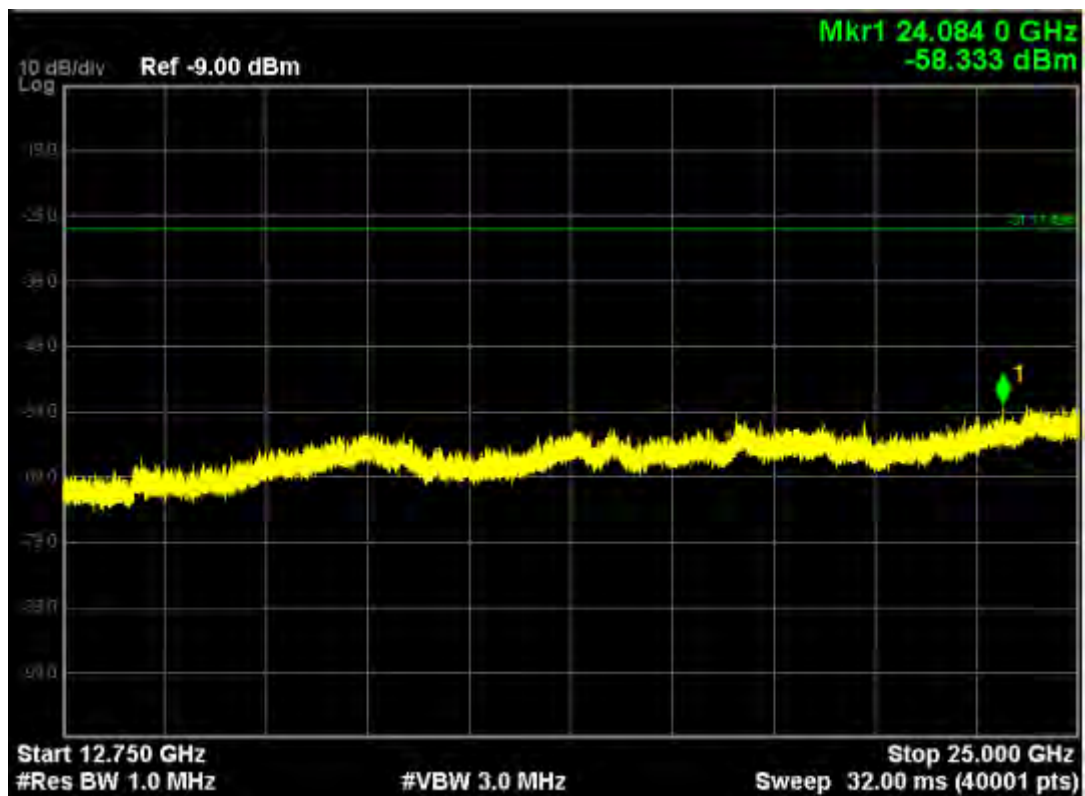


802.11ac80, traffic mode; Channel 155(mimo)

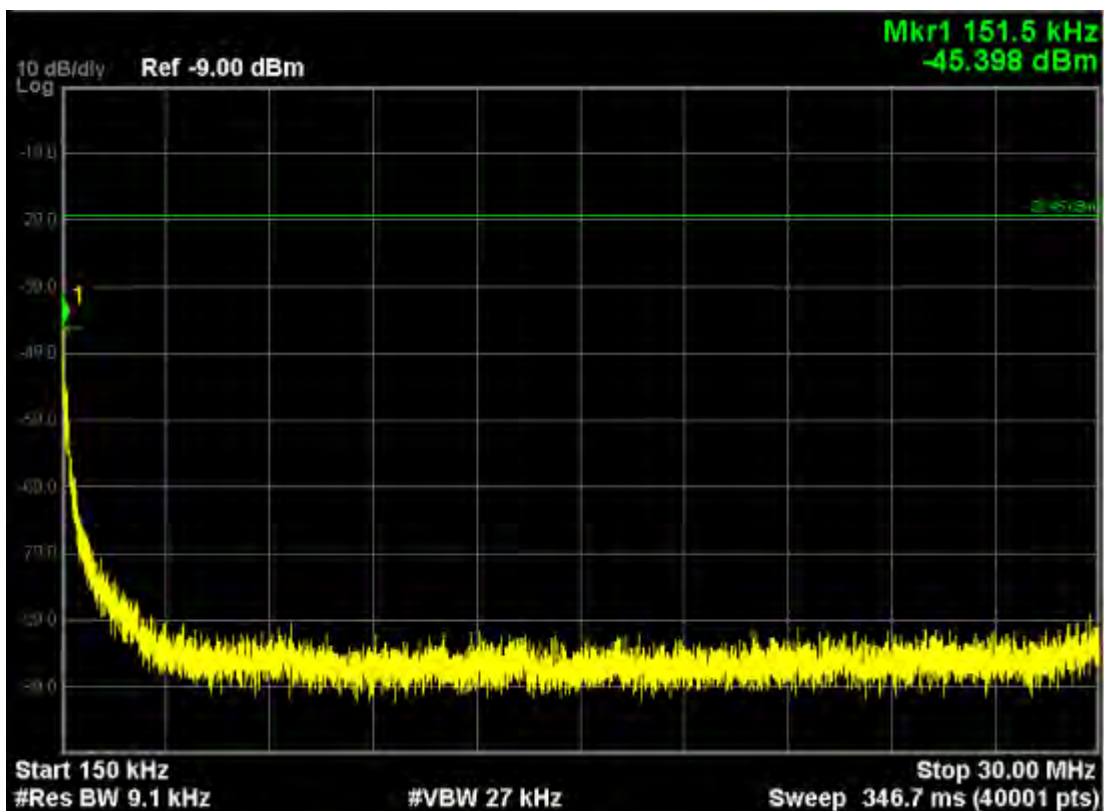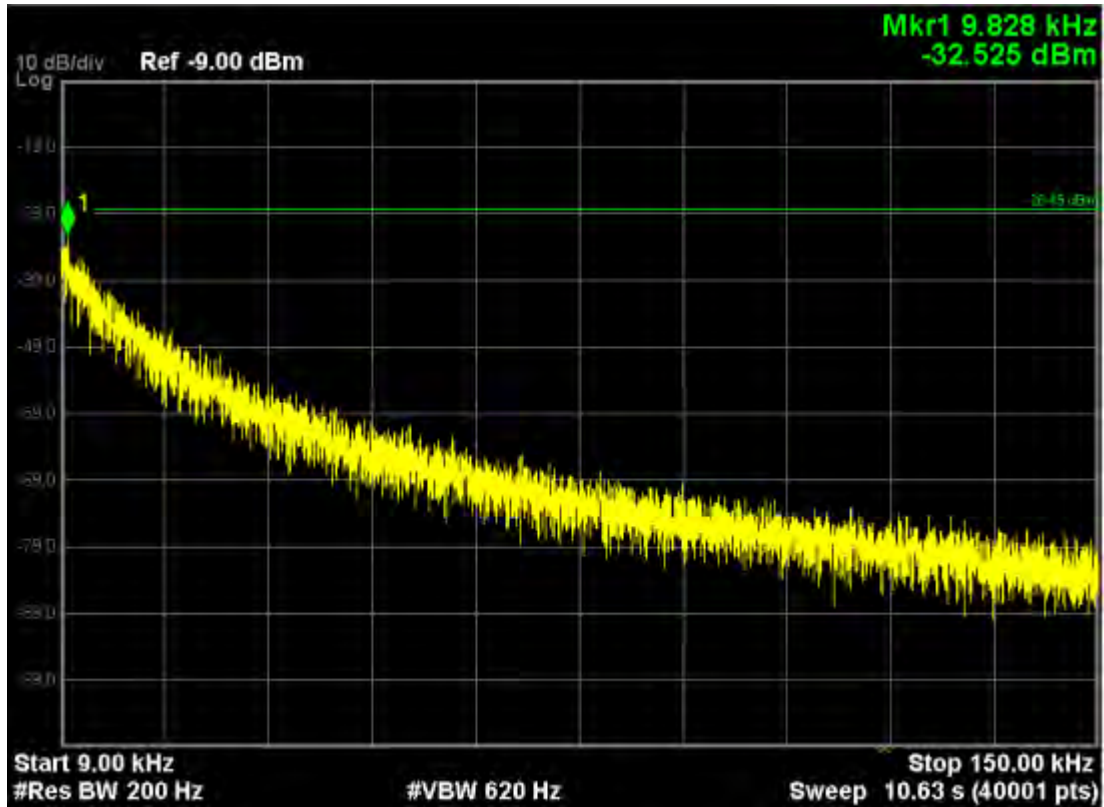

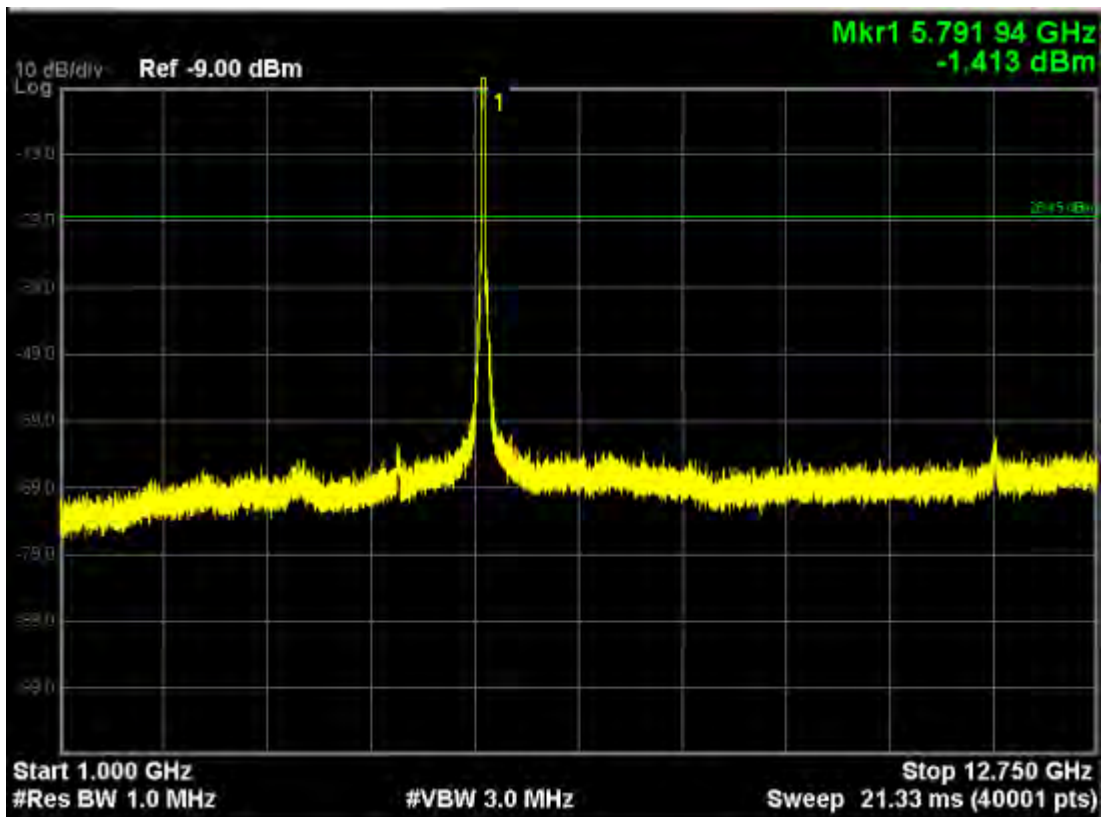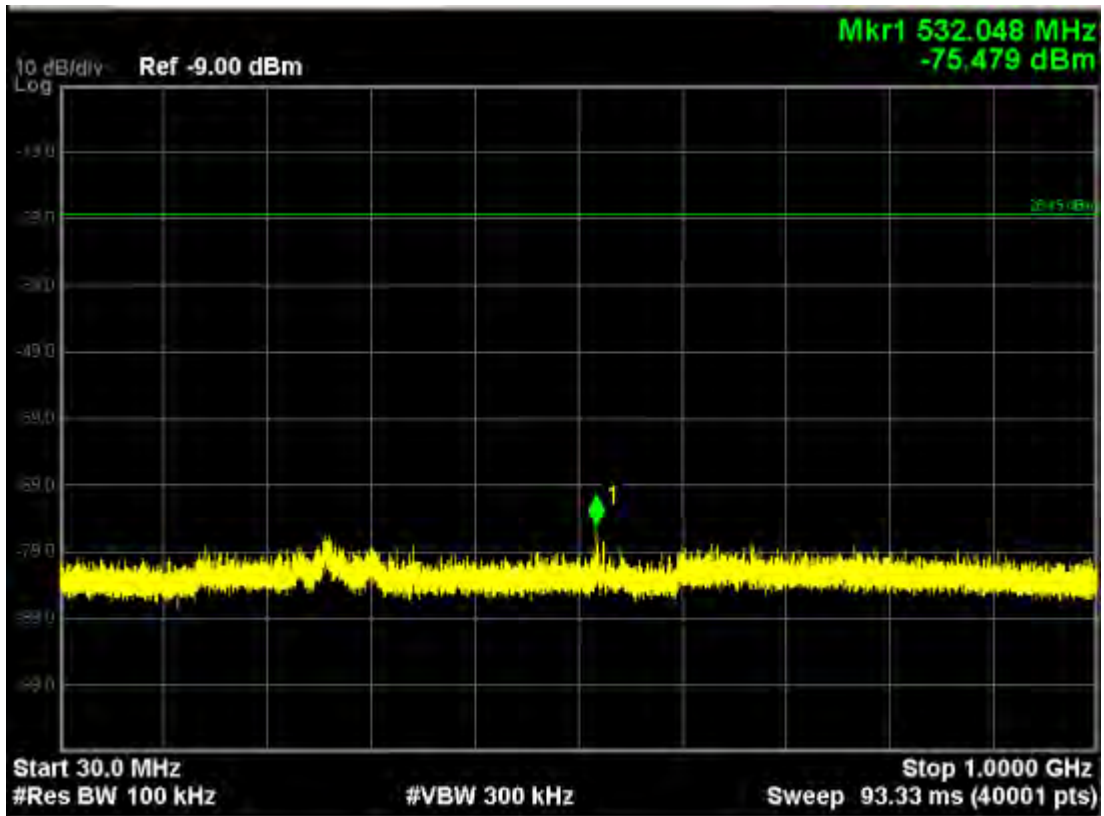


Note: The Mark1 point is carrier.

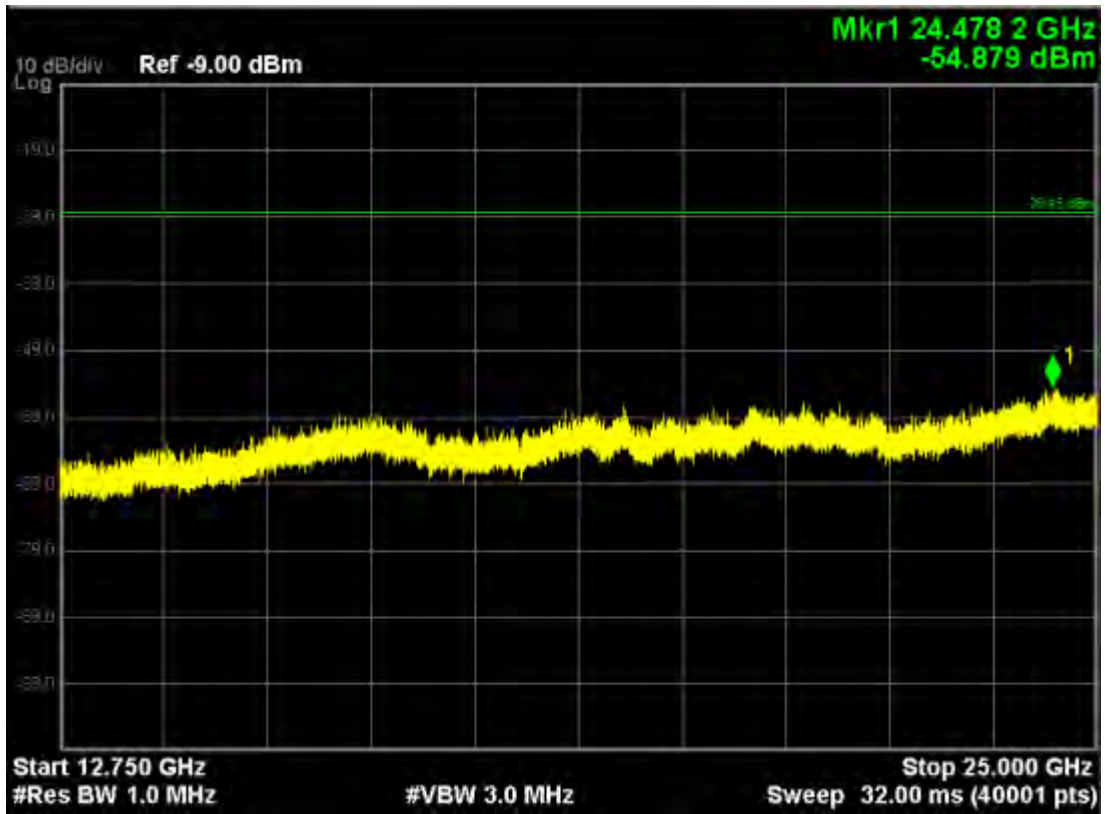

9. BAND EDGE MEASUREMENT

9.1 TEST SETUP

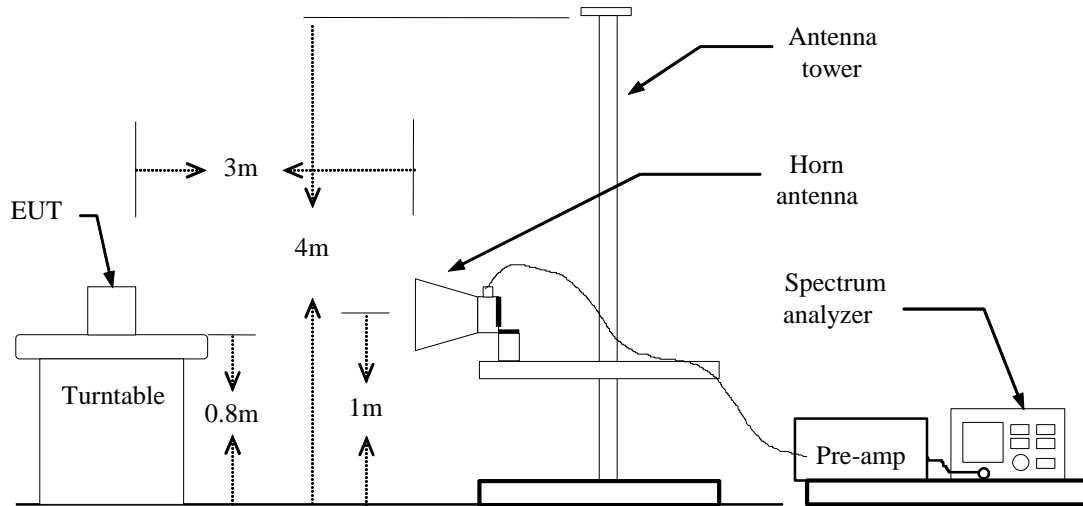

9.2 LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

9.3 TEST PROCEDURE

The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

9.4 RESULTS & PERFORMANCE

Radiated Band Edge:


Antenna 1

WIFI 2.4G

802.11b (Ch1)

Detector mode: Peak

Polarity: Horizontal

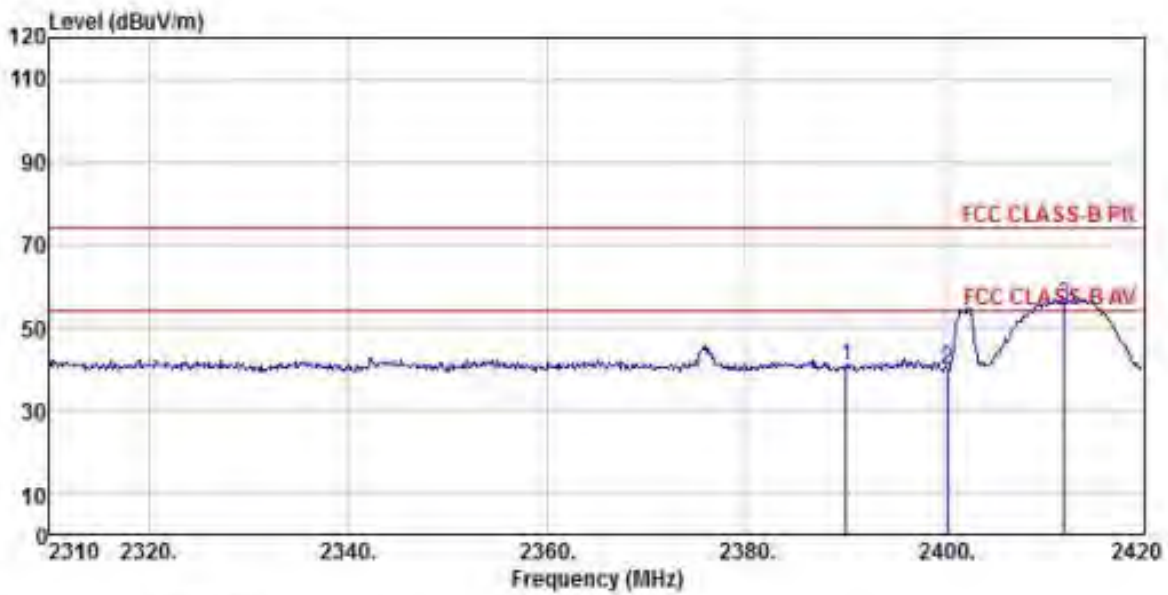

```

Site      : chamber
Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
EUT       :
Model Name : 神画投影仪
Temp/Humi : 19 C / 58 %
Power Rating: 230V/50Hz
Mode      : WIFI 2.4G CH1
Memo      :
  
```


```

ReadAntenna Cable Preamp Limit Over
Freq Level Factor Loss Factor Level Line Limit Remark
  
```

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.08	44.42	27.58	7.13	38.53	40.60	74.00	-33.40	Peak
2	2400.31	43.86	27.58	7.13	38.52	40.05	74.00	-33.95	Peak
3 pp	2412.08	59.34	27.54	7.21	38.52	55.57	74.00	-18.43	Peak

Detector mode: Average

Polarity: Horizontal

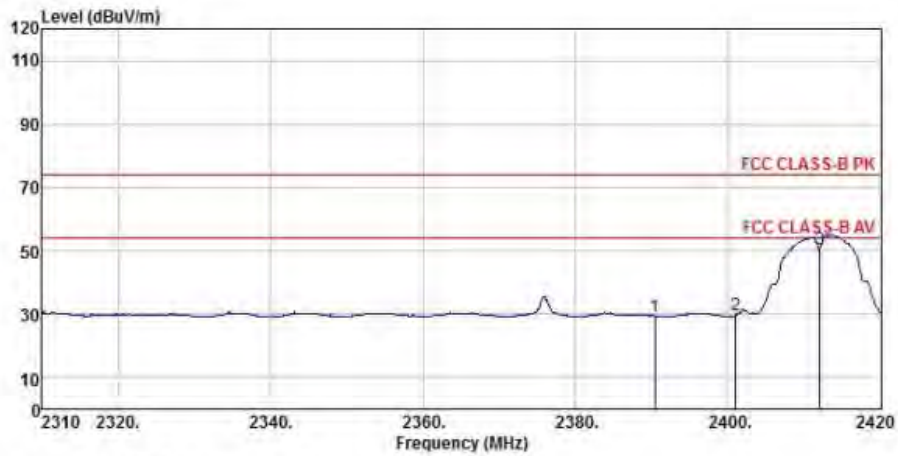


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.41	33.21	27.58	7.13	38.53	29.39	74.00	-44.61 Peak
2	2400.97	33.56	27.58	7.13	38.52	29.75	74.00	-44.25 Peak
3 pp	2412.08	54.19	27.54	7.21	38.52	50.42	74.00	-23.58 Peak

Detector mode: Peak

Polarity: Vertical

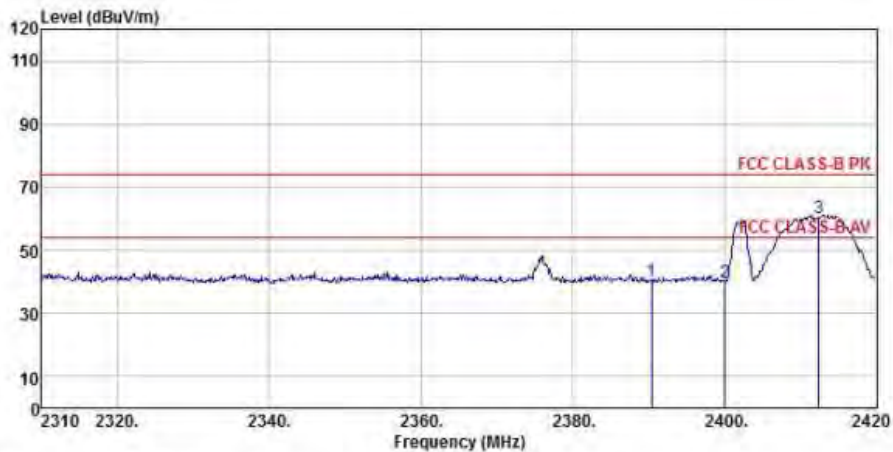


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.41	44.19	27.58	7.13	38.53	40.37	74.00	-33.63 Peak
2	2400.09	43.60	27.58	7.13	38.52	39.79	74.00	-34.21 Peak
3 pp	2412.41	64.13	27.54	7.21	38.52	60.36	74.00	-13.64 Peak

Detector mode: Average

Polarity: Vertical

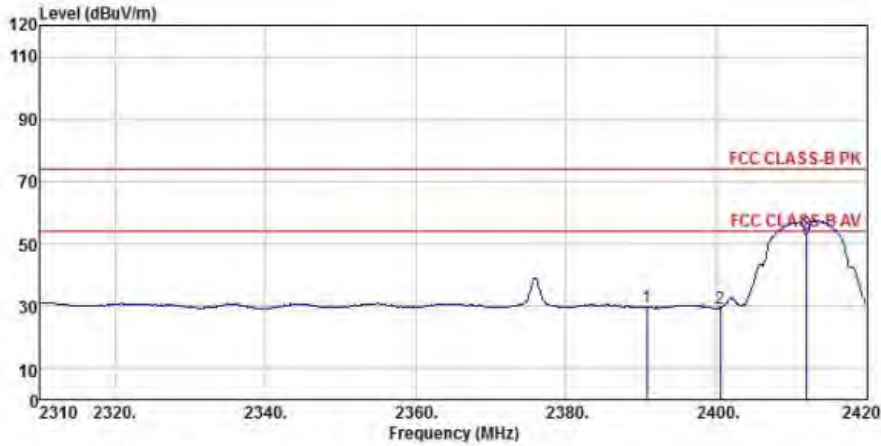


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.74	33.37	27.58	7.13	38.53	29.55	74.00 -44.45 Peak
2	2400.53	33.25	27.58	7.13	38.52	29.44	74.00 -44.56 Peak
3	pp	2412.08	56.71	27.54	7.21	38.52	52.94 74.00 -21.06 Peak

802.11b (Ch11)

Detector mode: Peak

Polarity: Horizontal

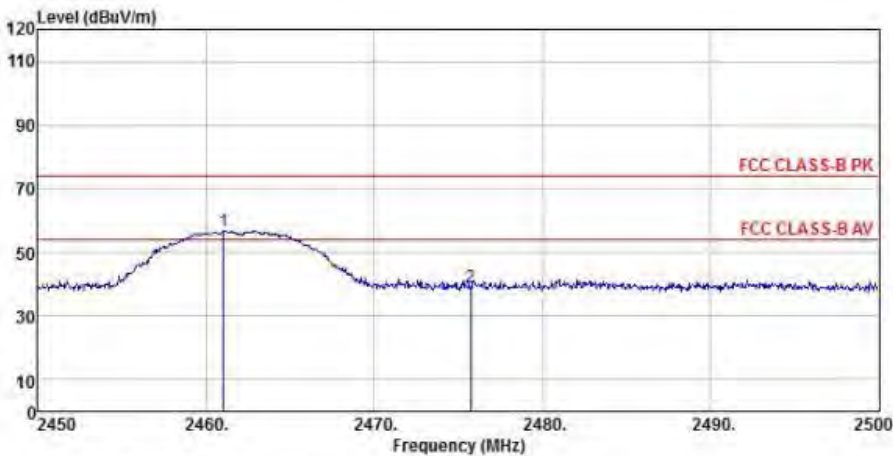


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	pp	2461.05	60.26	27.49	7.39	38.50	56.64 74.00 -17.36 Peak
2		2475.75	42.53	27.52	7.41	38.50	38.96 74.00 -35.04 Peak

Detector mode: Average

Polarity: Horizontal

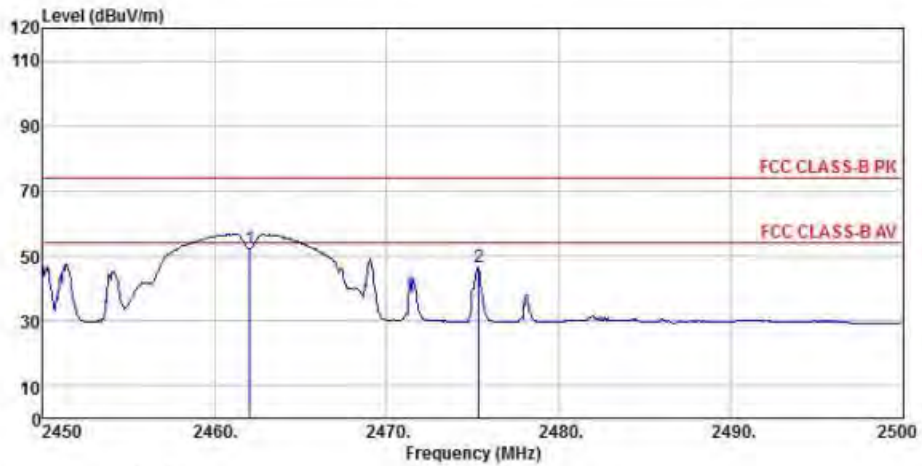


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.05	55.74	27.49	7.39	38.50	52.12	74.00	-21.88 Peak
2 2475.35	50.26	27.52	7.41	38.50	46.69	74.00	-27.31 Peak

Detector mode: Peak

Polarity: Vertical

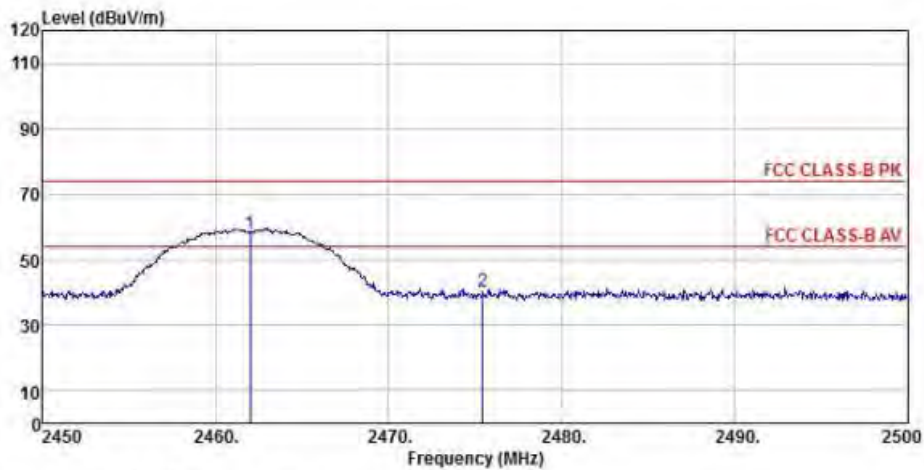


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.00	61.78	27.49	7.39	38.50	58.16	74.00	-15.84 Peak
2 2475.45	43.88	27.52	7.41	38.50	40.31	74.00	-33.69 Peak

Detector mode: Average

Polarity: Vertical

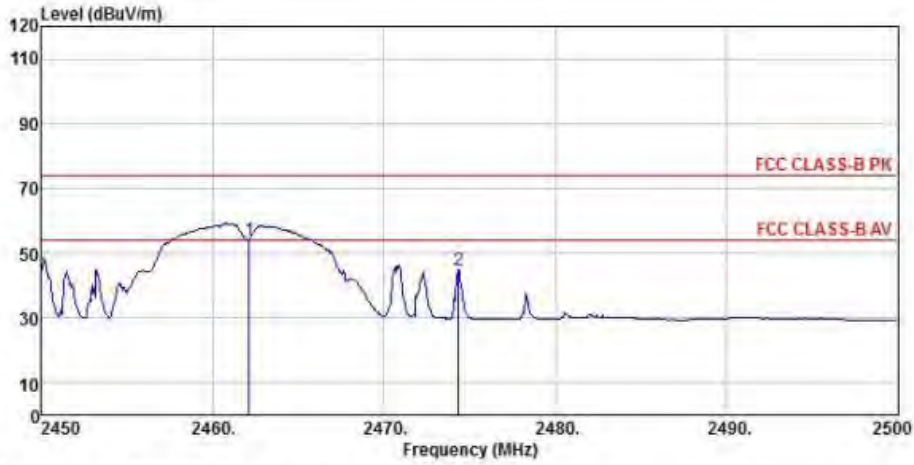

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.10	57.84	27.49	7.39	38.50	54.22	74.00	-19.78 Peak
2 2474.35	48.25	27.52	7.41	38.50	44.68	74.00	-29.32 Peak

802.11g (Ch1)

Detector mode: Peak

Polarity: Horizontal

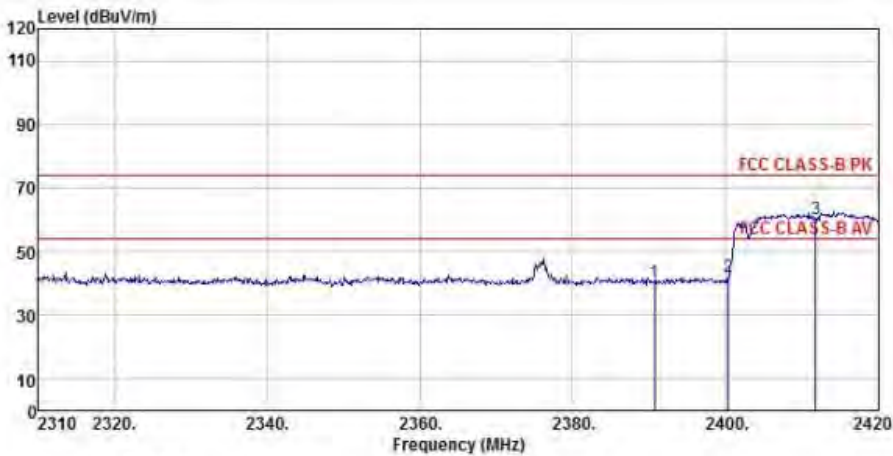


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH1
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.74	44.11	27.58	7.13	38.53	40.29	74.00	-33.71 Peak
2 2400.42	45.90	27.58	7.13	38.52	42.09	74.00	-31.91 Peak
3 pp 2411.86	63.82	27.54	7.21	38.52	60.05	74.00	-13.95 Peak

Detector mode: Average

Polarity: Horizontal

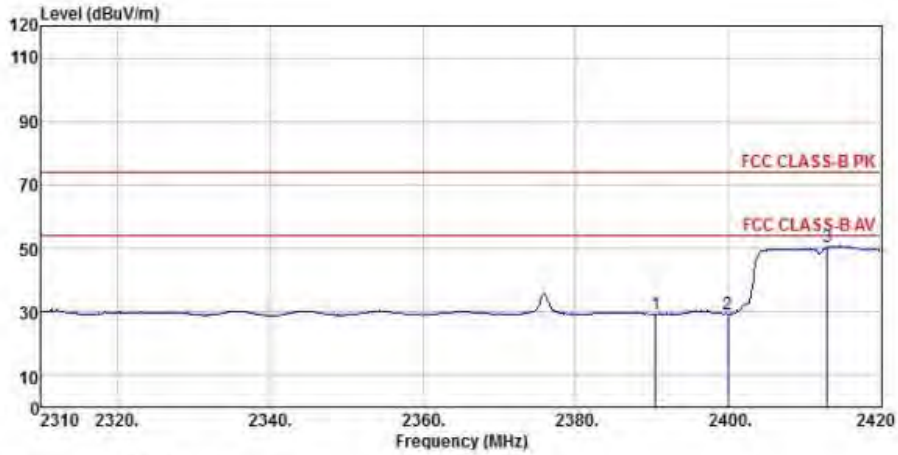


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CHI
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.52	33.11	27.58	7.13	38.53	29.29	74.00	-44.71 Peak
2	2399.98	33.03	27.58	7.13	38.52	29.22	74.00	-44.78 Peak
3 pp	2412.96	54.29	27.54	7.21	38.52	50.52	74.00	-23.48 Peak

Detector mode: Peak

Polarity: Vertical

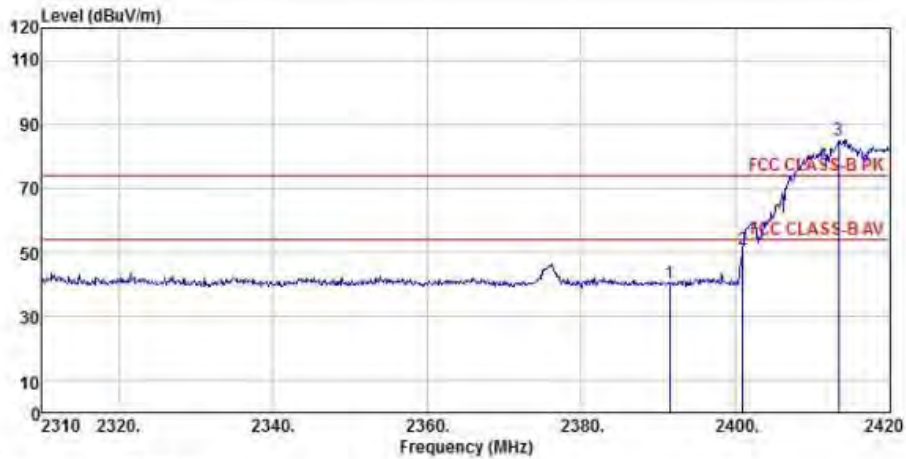


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CHI
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2391.51	44.12	27.58	7.13	38.53	40.30	74.00	-33.70 Peak
2	2400.97	54.89	27.58	7.13	38.52	51.08	74.00	-22.92 Peak
3 pp	2413.40	88.78	27.54	7.21	38.52	85.01	74.00	11.01 Peak

Detector mode: Average

Polarity: Vertical

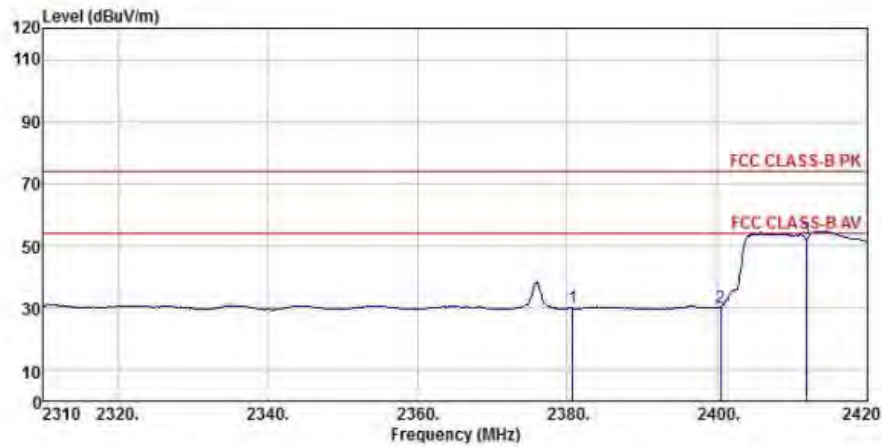

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH1
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2380.73	33.64	27.65	7.16	38.53	29.92	74.00	-44.08 Peak
2 2400.53	33.96	27.58	7.13	38.52	30.15	74.00	-43.85 Peak
3 pp 2411.97	55.95	27.54	7.21	38.52	52.18	74.00	-21.82 Peak

802.11g (Ch11)

Detector mode: Peak

Polarity: Horizontal

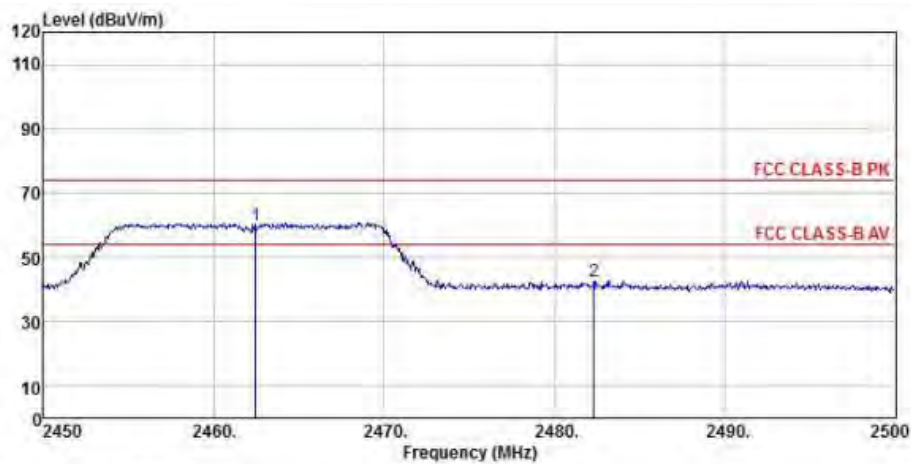


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.45	63.30	27.49	7.39	38.50	59.68	74.00	-14.32 Peak
2 2482.30	46.17	27.52	7.41	38.49	42.61	74.00	-31.39 Peak

Detector mode: Average

Polarity: Horizontal

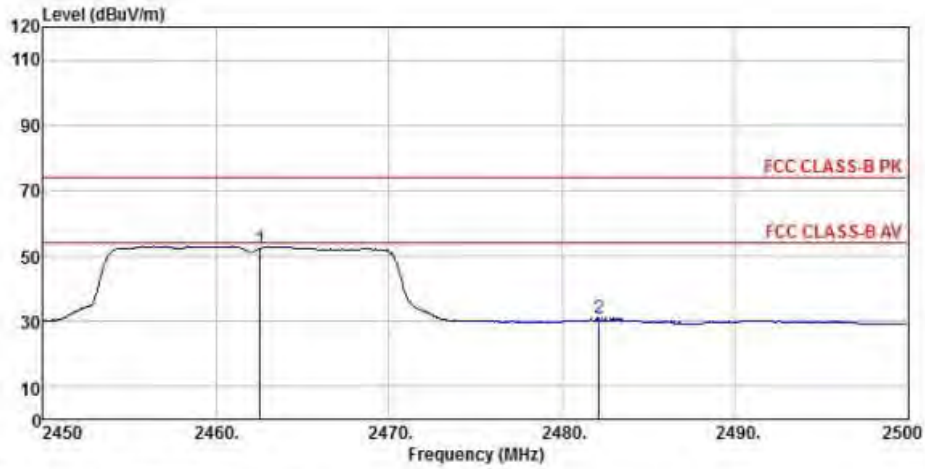


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.55	55.97	27.49	7.39	38.50	52.35	74.00	-21.65 Peak
2 2482.15	34.41	27.52	7.41	38.49	30.85	74.00	-43.15 Peak

Detector mode: Peak

Polarity: Vertical

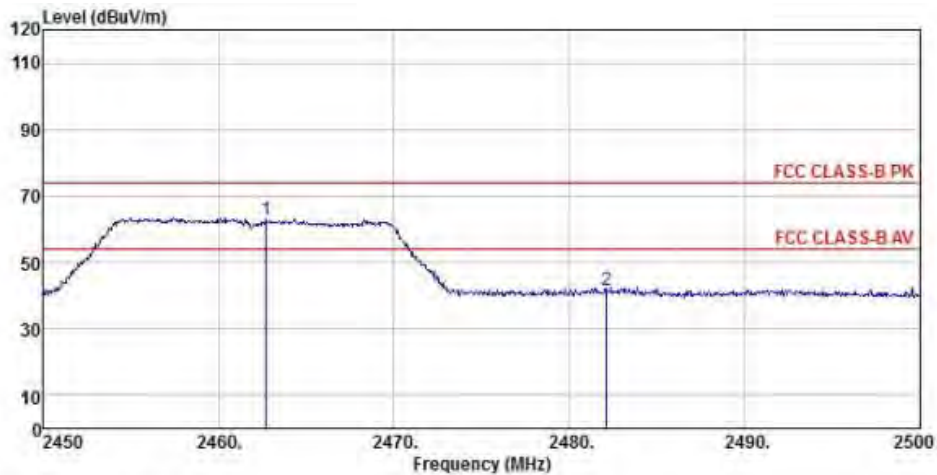


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.70	66.63	27.49	7.39	38.50	63.01	74.00	-10.99 Peak
2 2482.15	45.28	27.52	7.41	38.49	41.72	74.00	-32.28 Peak

Detector mode: Average

Polarity: Vertical

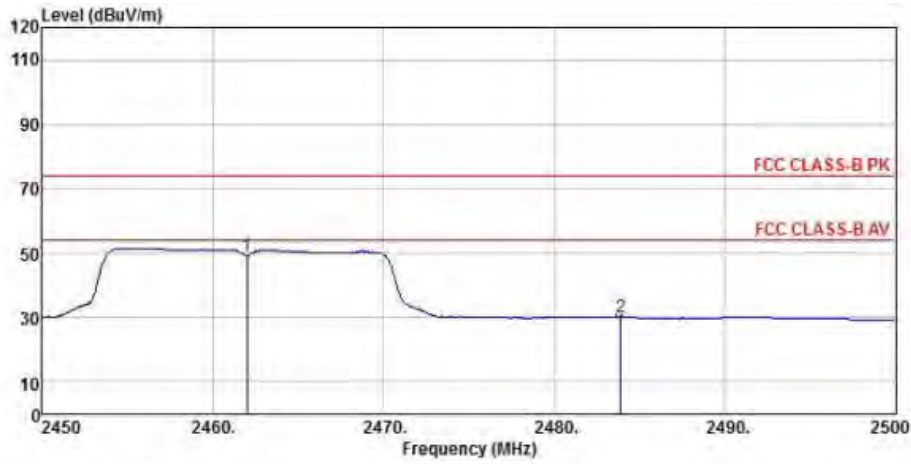

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.00	52.65	27.49	7.39	38.50	49.03	74.00	-24.97 Peak
2 2483.90	33.67	27.52	7.41	38.49	30.11	74.00	-43.89 Peak

802.11n20 (Ch1)

Detector mode: Peak

Polarity: Horizontal

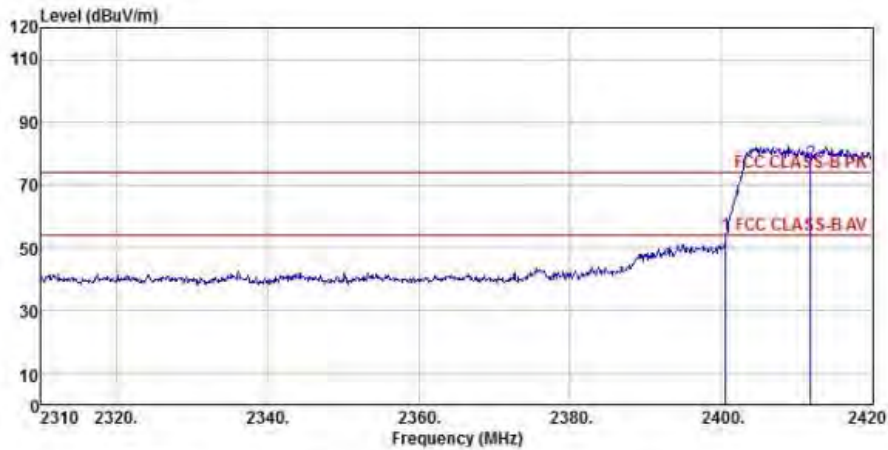


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2400.64	57.97	27.58	7.13	38.52	54.16	74.00	-19.84 Peak
2 pp 2411.86	80.75	27.54	7.21	38.52	76.98	74.00	2.98 Peak

Detector mode: Average

Polarity: Horizontal

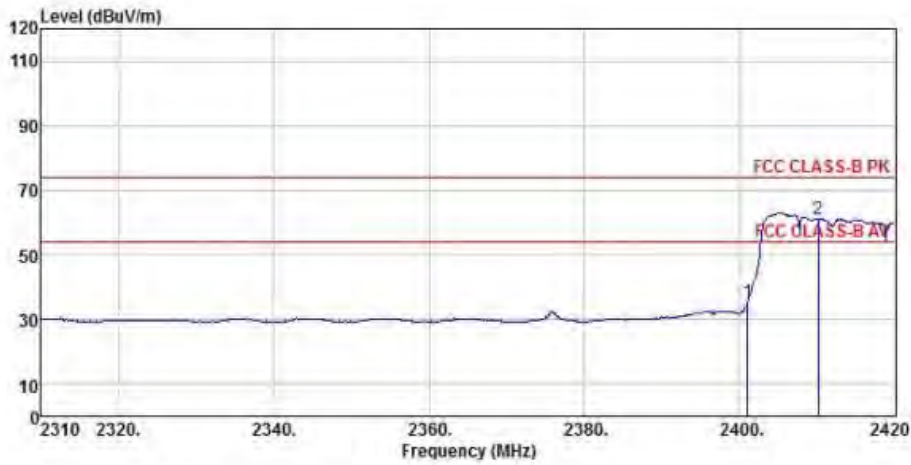


Site : chamber
 Condition : FCC CLASS-B PE 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CHI
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	2400.97	39.06	27.58	7.13	38.52	35.25	74.00 -38.75 Peak
2	pp 2410.10	64.85	27.54	7.21	38.52	61.08	74.00 -12.92 Peak

Detector mode: Peak


Polarity: Vertical

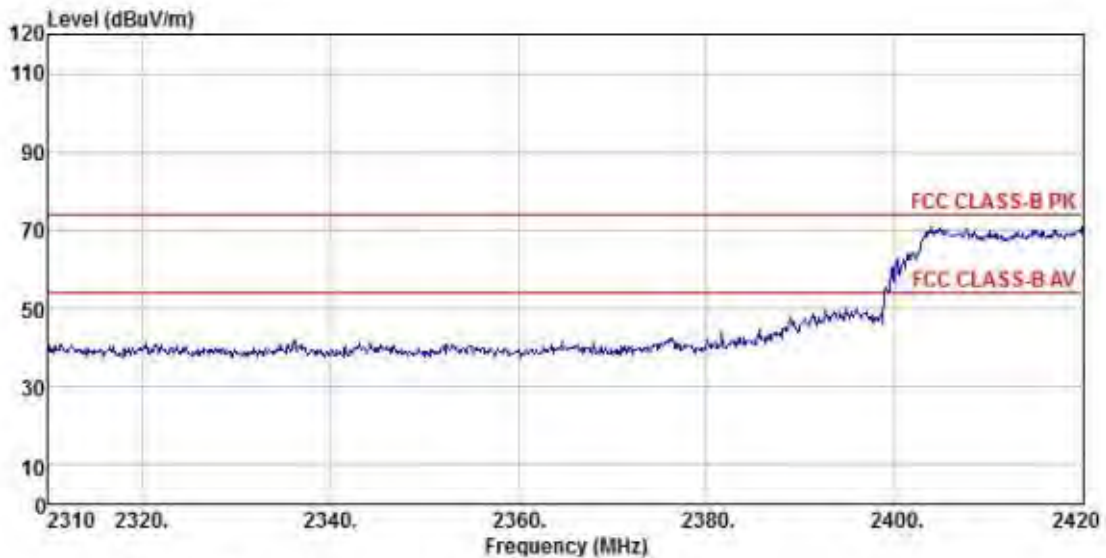

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CHI
 Memo :

Detector mode: Average

Polarity: Vertical

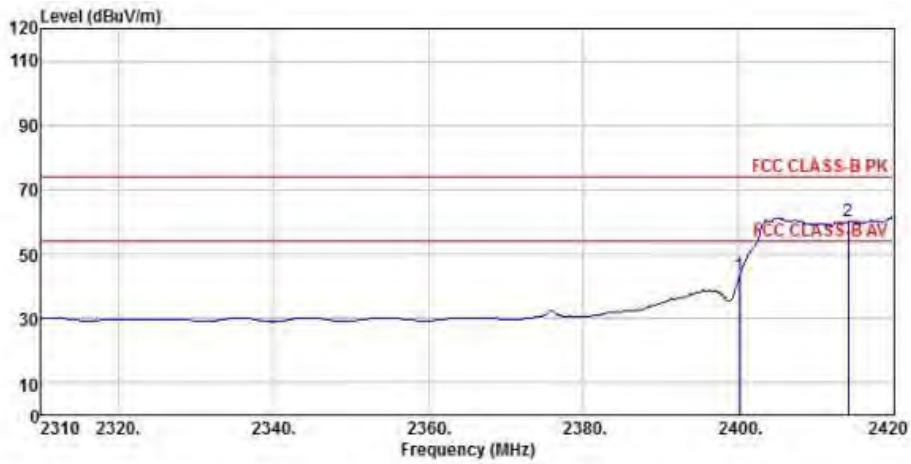


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH1
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2400.20	47.08	27.58	7.13	38.52	43.27	74.00 -30.73 Peak
2	2414.17	64.14	27.54	7.21	38.52	60.37	74.00 -13.63 Peak

802.11n20 (Ch11)

Detector mode: Peak

Polarity: Horizontal

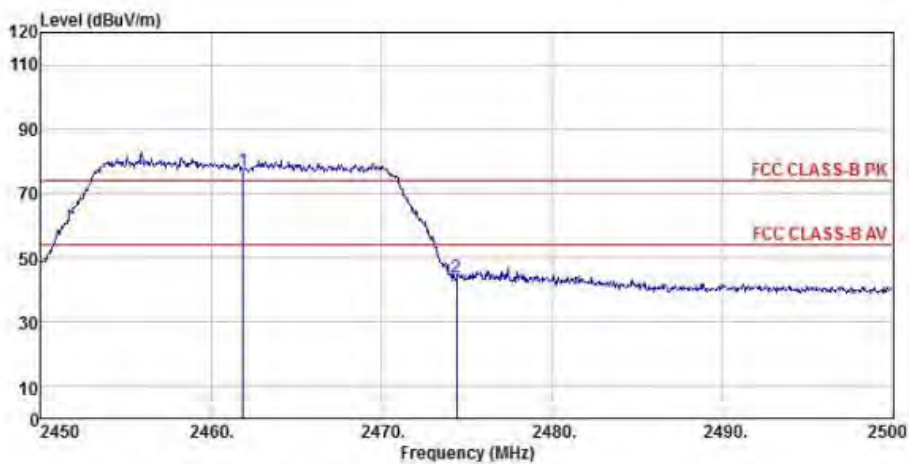


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2461.85	80.76	27.49	7.39	38.50	77.14	74.00 3.14 Peak
2	2474.40	47.19	27.52	7.41	38.50	43.62	74.00 -30.38 Peak

Detector mode: Average

Polarity: Horizontal

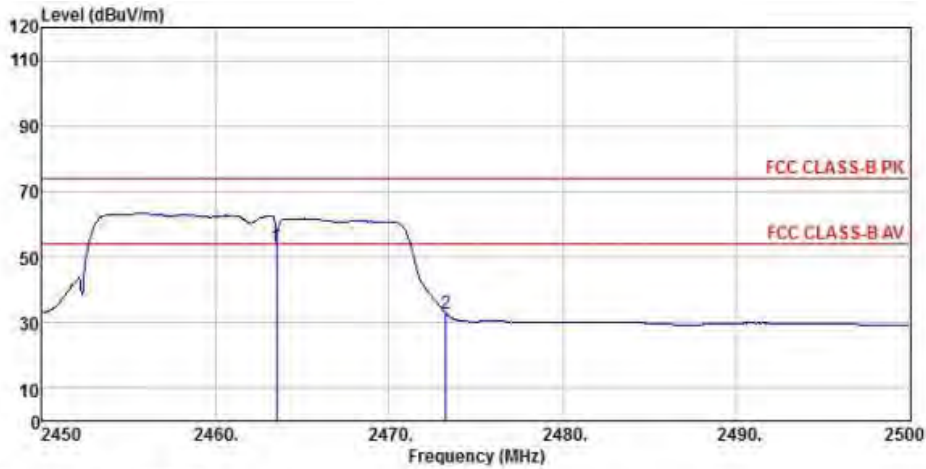


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2463.50	56.69	27.49	7.39	38.50	53.07	74.00	-20.93 Peak
2 2473.25	36.38	27.52	7.41	38.50	32.81	74.00	-41.19 Peak

Detector mode: Peak

Polarity: Vertical

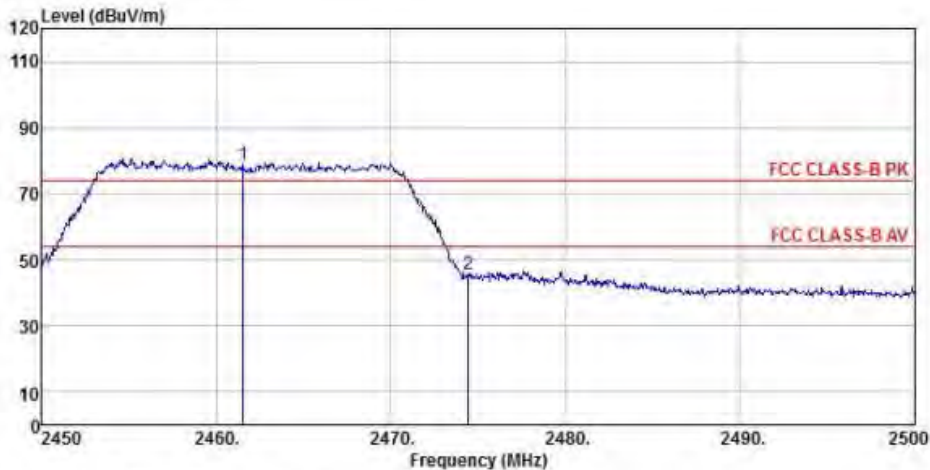


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2461.55	82.51	27.49	7.39	38.50	78.89	74.00	4.89 Peak
2 2474.45	49.03	27.52	7.41	38.50	45.46	74.00	-28.54 Peak

Detector mode: Average

Polarity: Vertical

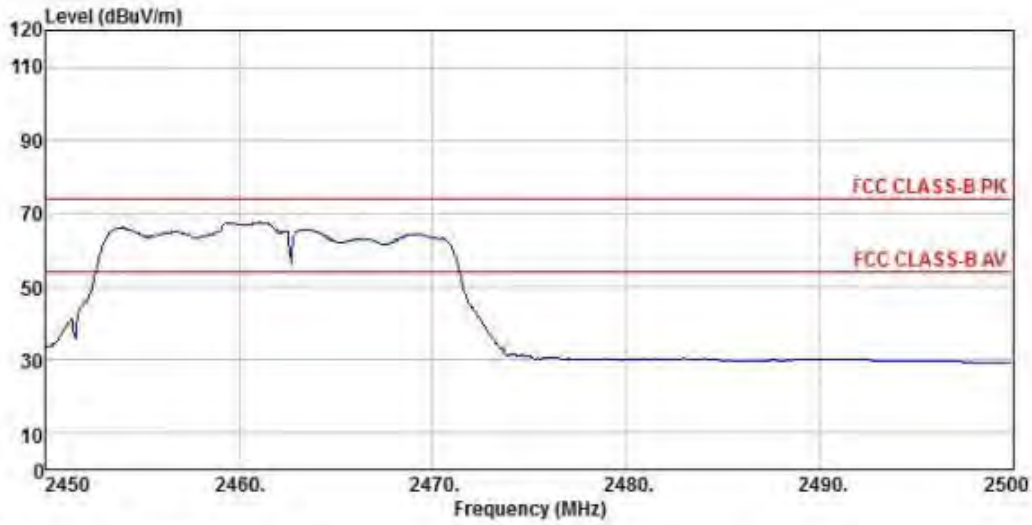


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

WIFI 5G(5150MHz-5250MHz)

802.11a (Ch36)

Detector mode: Peak

Polarity: Horizontal

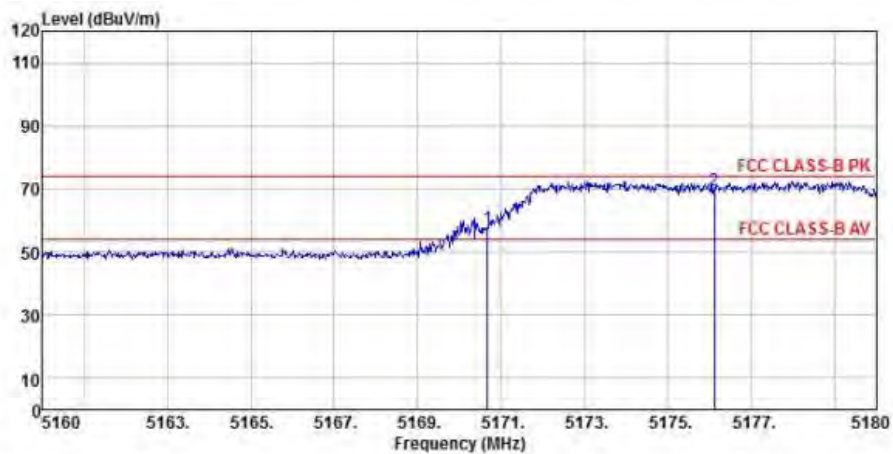


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5170.68	51.20	32.01	10.64	36.28	57.57	74.00	-16.43 Peak
2	pp	5176.12	62.94	32.01	10.64	36.28	69.31	74.00 -4.69 Peak

Detector mode: Average

Polarity: Horizontal

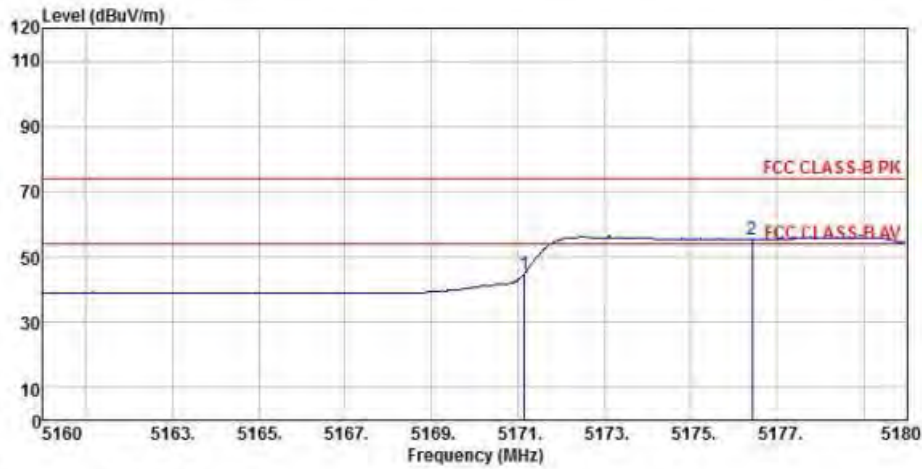


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5171.14	38.36	32.01	10.64	36.28	44.73	74.00	-29.27 Peak
2	pp	5176.42	49.01	32.01	10.64	36.28	55.38	74.00 -18.62 Peak

Detector mode: Peak

Polarity: Vertical

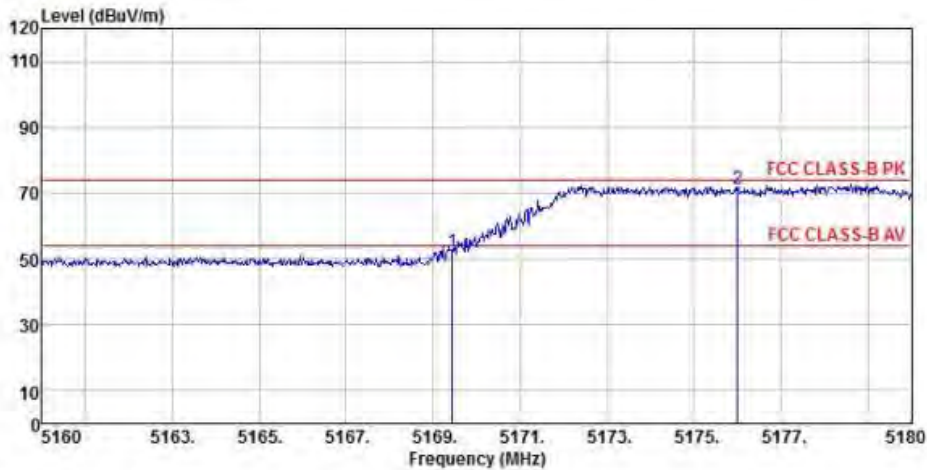


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5169.44	46.02	32.01	10.64	36.28	52.39	74.00	-21.61 Peak
2	pp	5176.00	64.97	32.01	10.64	36.28	71.34	74.00 -2.66 Peak

Detector mode: Average

Polarity: Vertical

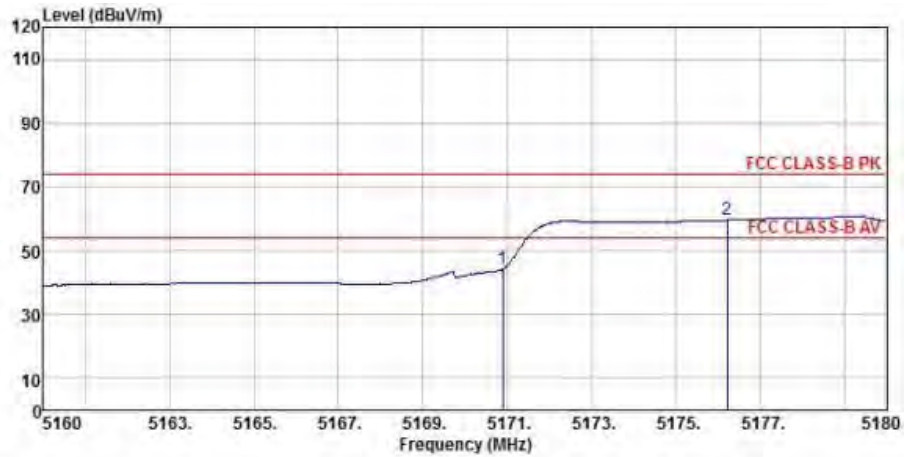


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	5170.90	37.92	32.01	10.64	36.28	44.29	74.00 -29.71 Peak
2	5176.22	53.20	32.01	10.64	36.28	59.57	74.00 -14.43 Peak

802.11a (Ch48)

Detector mode: Peak

Polarity: Horizontal

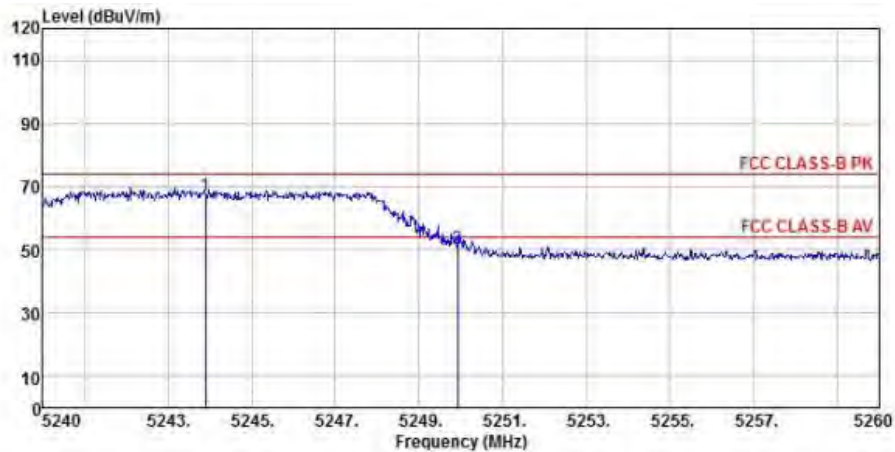


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	5243.90	61.12	31.75	10.79	36.33	67.33	74.00 -6.67 Peak
2	5249.92	44.25	31.75	10.79	36.33	50.46	74.00 -23.54 Peak

Detector mode: Average

Polarity: Horizontal

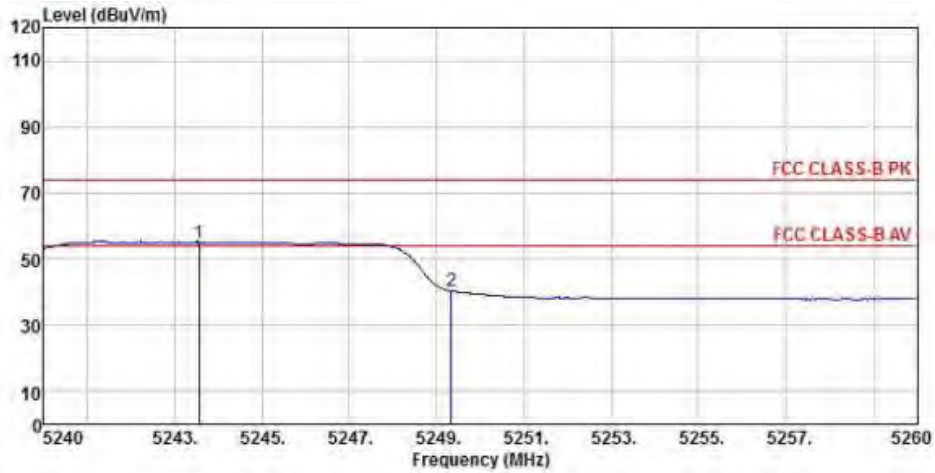


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5243.56	48.72	31.75	10.79	36.33	54.93	74.00	-19.07	Peak
2 5249.34	34.09	31.75	10.79	36.33	40.30	74.00	-33.70	Peak

Detector mode: Peak

Polarity: Vertical

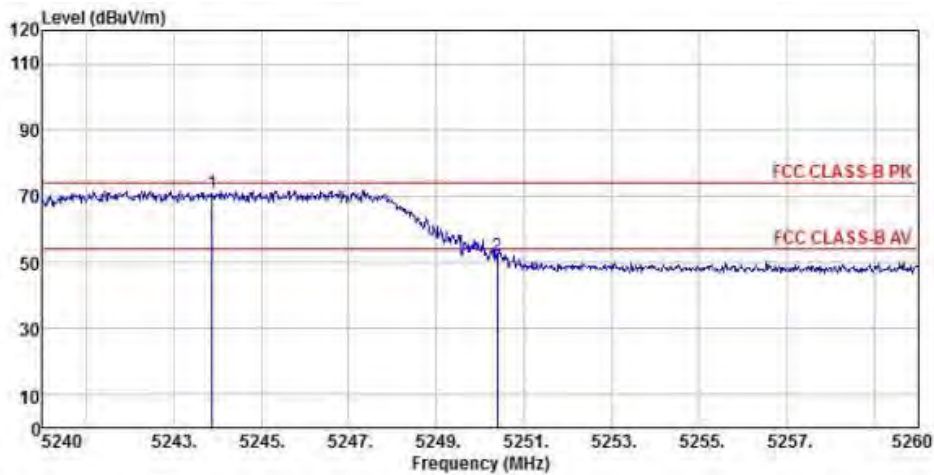


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5243.88	64.64	31.75	10.79	36.33	70.85	74.00	-3.15	Peak
2 5250.40	45.51	31.75	10.79	36.33	51.72	74.00	-22.28	Peak

Detector mode: Average

Polarity: Vertical

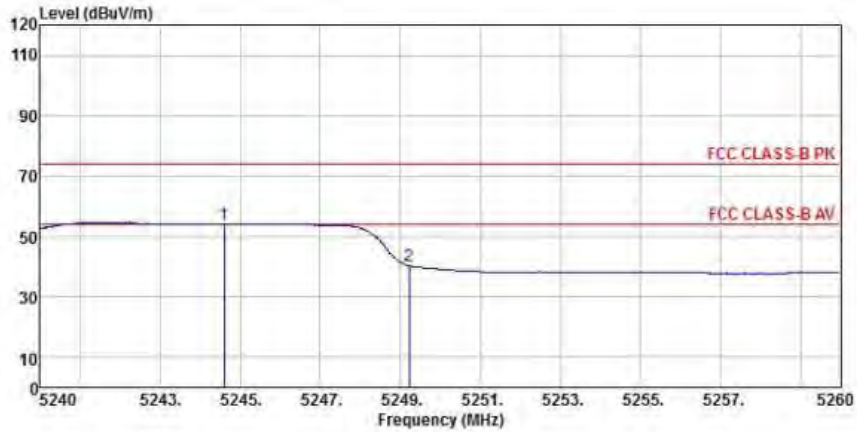


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.60	47.80	31.75	10.79	36.33	54.01	74.00	-19.99 Peak
2 5249.22	34.03	31.75	10.79	36.33	40.24	74.00	-33.76 Peak

802.11n20 (Ch36)

Detector mode: Peak

Polarity: Horizontal

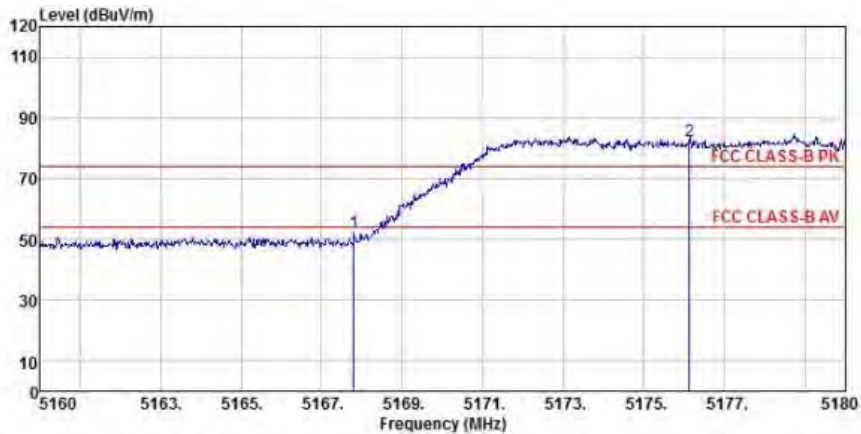


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5167.80	45.79	32.01	10.64	36.28	52.16	74.00	-21.84 Peak
2 pp 5176.14	76.10	32.01	10.64	36.28	82.47	74.00	8.47 Peak

Detector mode: Average

Polarity: Horizontal

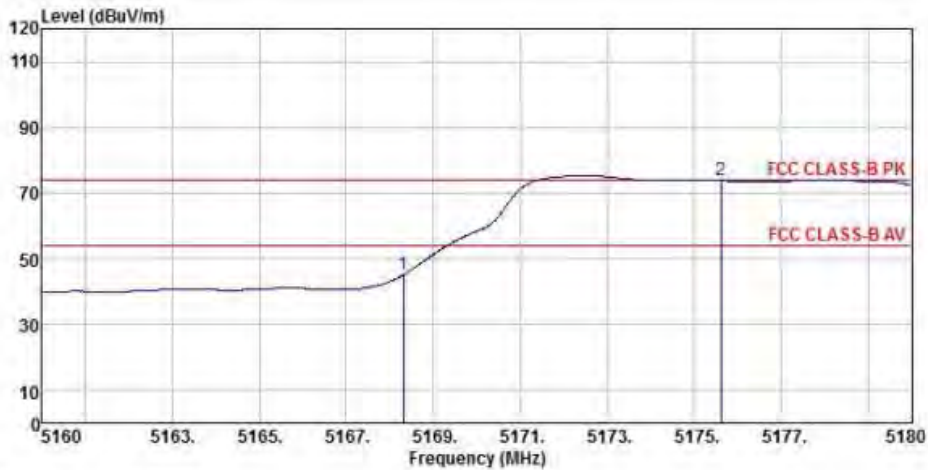


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	5168.32	38.76	32.01	10.64	36.28	45.13	74.00	-28.87 Peak
2	5175.62	67.44	32.01	10.64	36.28	73.81	74.00	-0.19 Peak

Detector mode: Peak

Polarity: Vertical

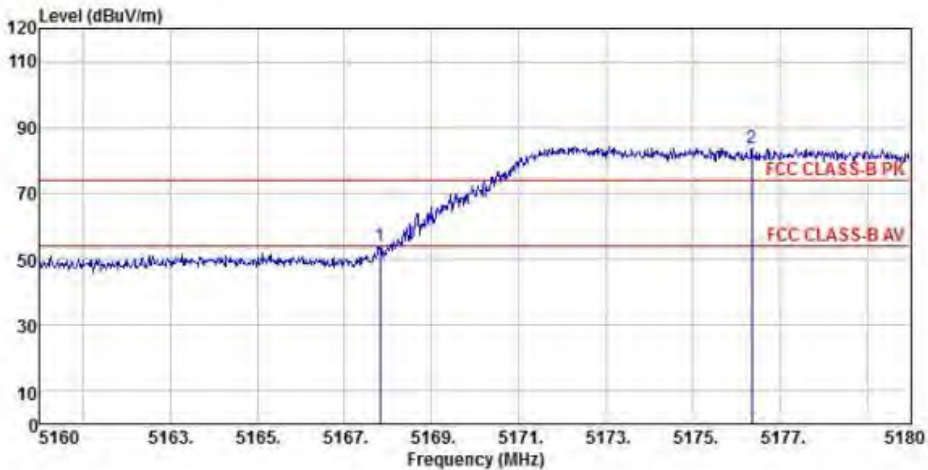


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	5167.82	47.47	32.01	10.64	36.28	53.84	74.00	-20.16 Peak
2	5176.36	77.23	32.01	10.64	36.28	83.60	74.00	9.60 Peak

Detector mode: Average

Polarity: Vertical

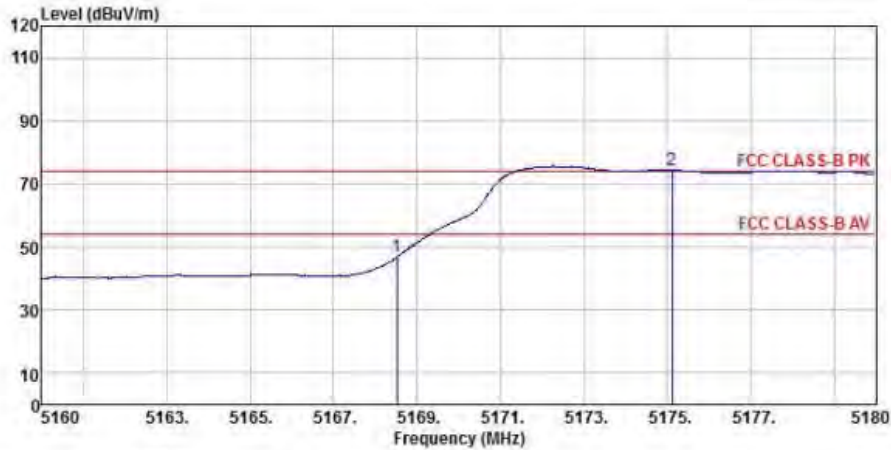


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5168.52	40.40	32.01	10.64	36.28	46.77	74.00	-27.23 Peak
2	pp 5175.12	67.94	32.01	10.64	36.28	74.31	74.00	0.31 Peak

802.11n20 (Ch48)

Detector mode: Peak

Polarity: Horizontal

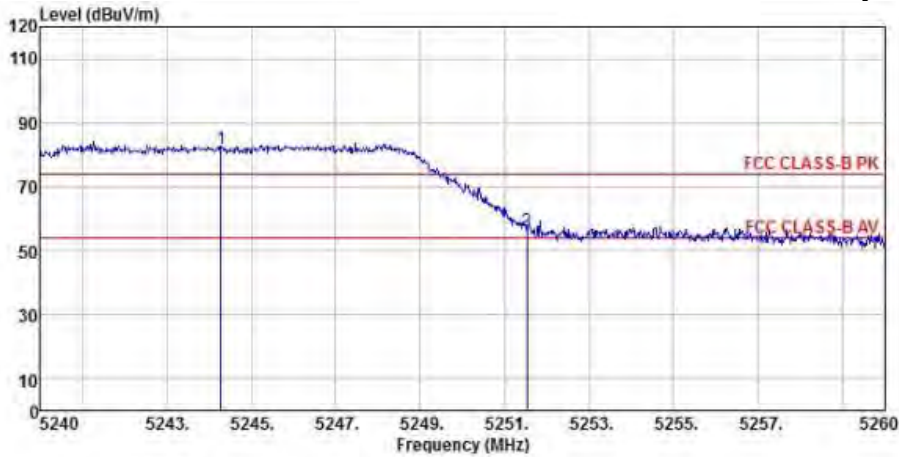


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp 5244.28	75.89	31.75	10.79	36.33	82.10	74.00	8.10 Peak
2	5251.54	49.87	31.75	10.79	36.33	56.08	74.00	-17.92 Peak

Detector mode: Average

Polarity: Horizontal

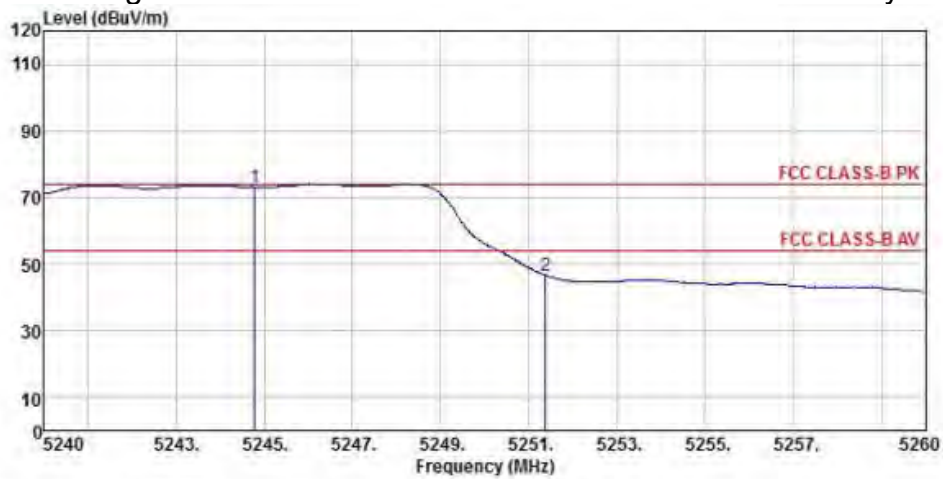


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.78	66.79	31.75	10.79	36.33	73.00	74.00	-1.00 Peak
2 5251.38	40.45	31.75	10.79	36.33	46.66	74.00	-27.34 Peak

Detector mode: Peak

Polarity: Vertical

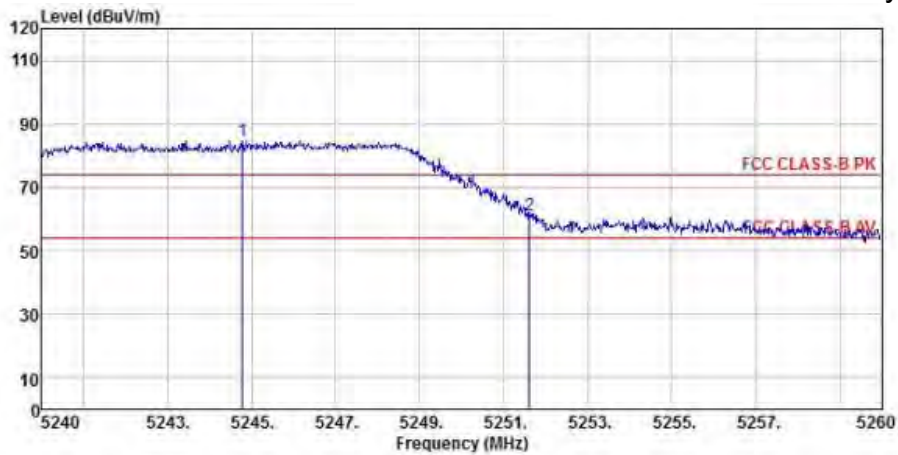


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.78	78.48	31.75	10.79	36.33	84.69	74.00	10.69 Peak
2 5251.62	55.04	31.73	10.79	36.34	61.22	74.00	-12.78 Peak

Detector mode: Average

Polarity: Vertical

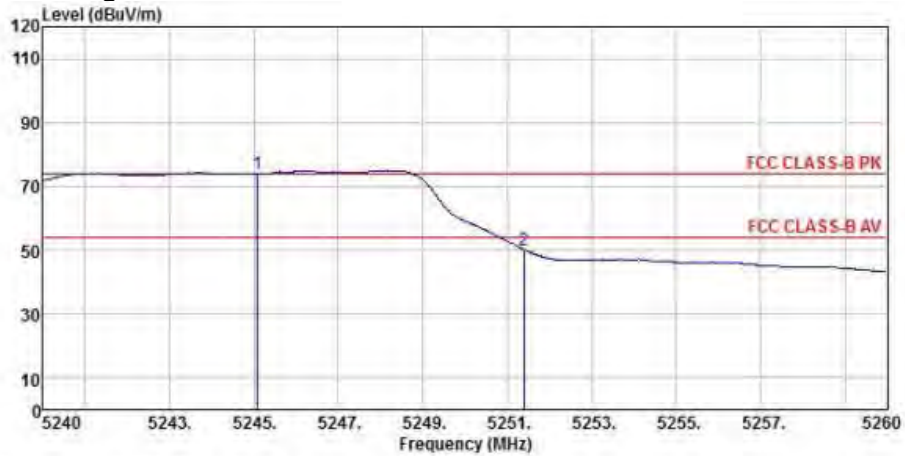


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5245.08	67.66	31.75	10.79	36.33	73.87	74.00	-0.13	Peak
2 5251.40	43.93	31.75	10.79	36.33	50.14	74.00	-23.86	Peak

802.11n40 (Ch38)

Detector mode: Peak

Polarity: Horizontal

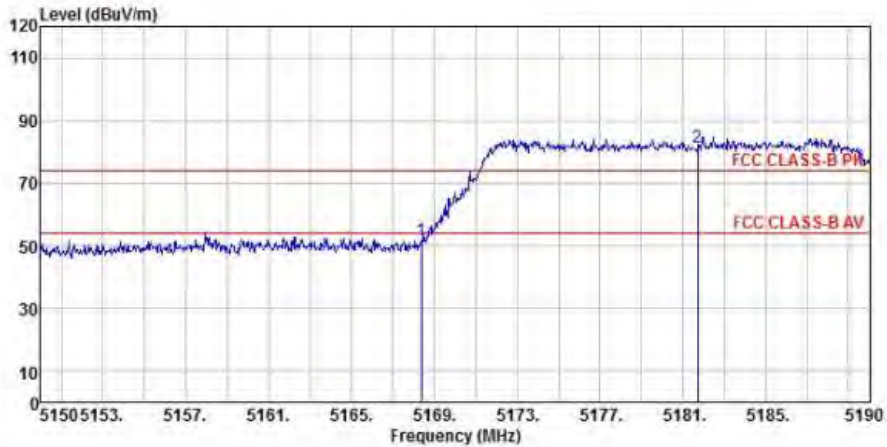


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5168.36	45.41	32.01	10.64	36.28	51.78	74.00	-22.22	Peak
2 pp 5181.72	75.27	31.96	10.64	36.29	81.58	74.00	7.58	Peak

Detector mode: Average

Polarity: Horizontal

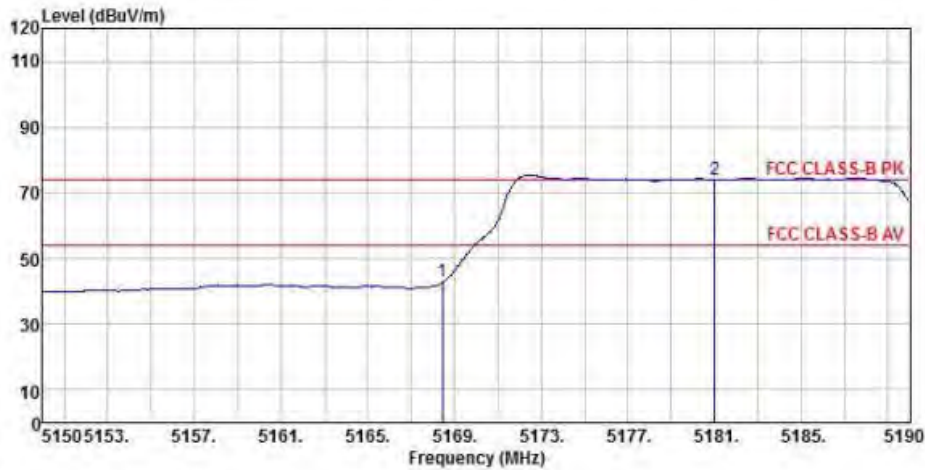


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5168.44	36.37	32.01	10.64	36.28	42.74	74.00	-31.26 Peak
2 pp 5181.00	67.80	31.96	10.64	36.29	74.11	74.00	0.11 Peak

Detector mode: Peak

Polarity: Vertical

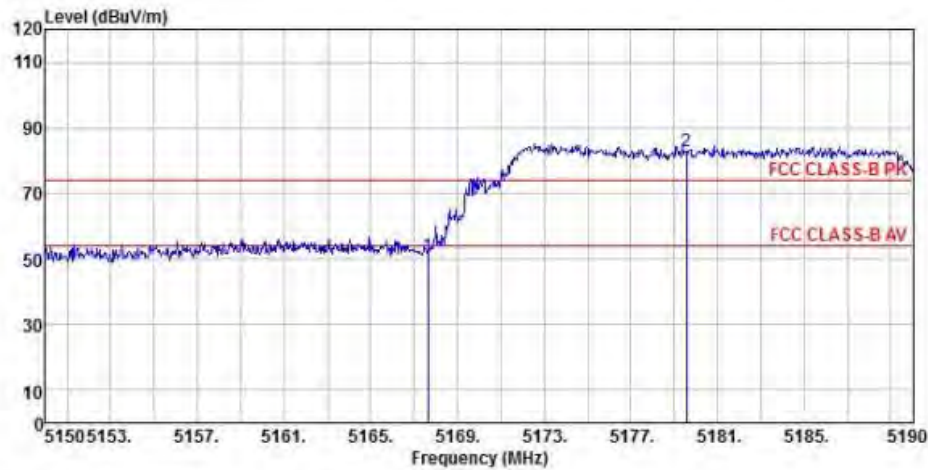


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5167.64	44.73	32.01	10.64	36.28	51.10	74.00	-22.90 Peak
2 pp 5179.56	76.35	32.01	10.64	36.29	82.71	74.00	8.71 Peak

Detector mode: Average

Polarity: Vertical

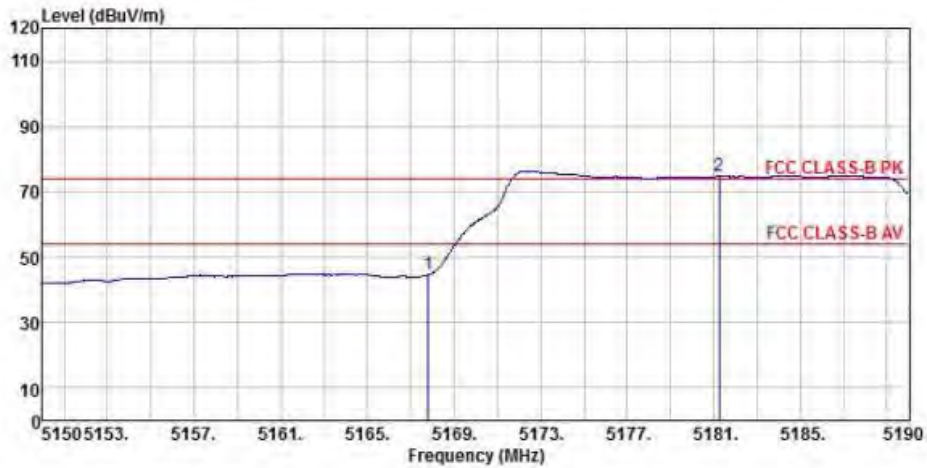


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.80	38.13	32.01	10.64	36.28	44.50	74.00	-29.50 Peak
2	5181.24	68.32	31.96	10.64	36.29	74.63	74.00	0.63 Peak

802.11n40 (Ch46)

Detector mode: Peak

Polarity: Horizontal

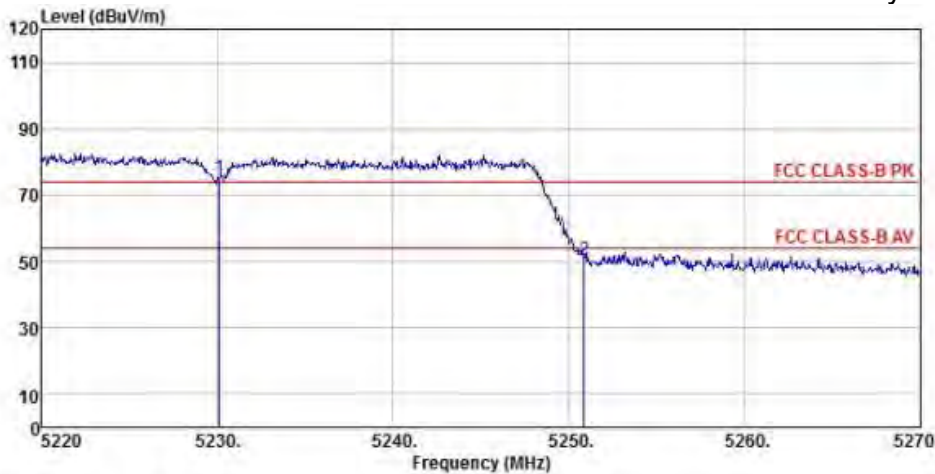


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	pp 5230.10	69.06	31.83	10.74	36.32	75.31	74.00	1.31 Peak
2	5250.90	44.22	31.75	10.79	36.33	50.43	74.00	-23.57 Peak

Detector mode: Average

Polarity: Horizontal

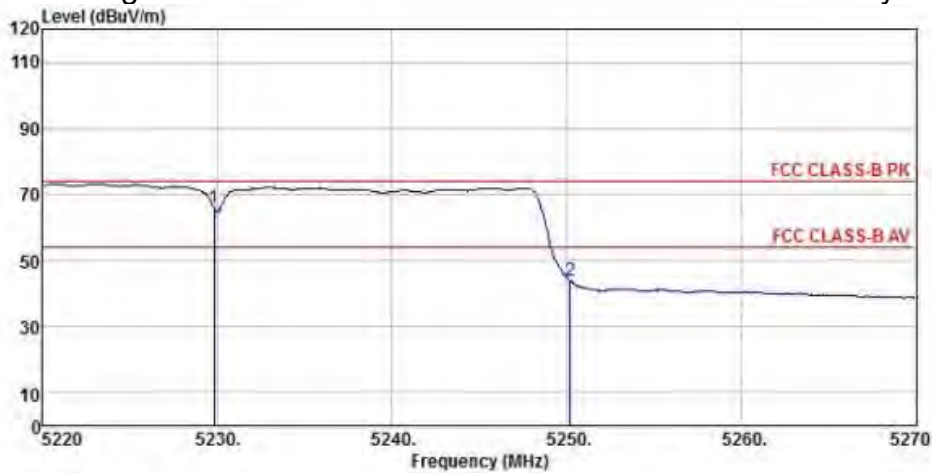


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5229.80	59.73	31.83	10.74	36.32	65.98	74.00	-8.02 Peak
2	5250.20	37.69	31.75	10.79	36.33	43.90	74.00	-30.10 Peak

Detector mode: Peak

Polarity: Vertical

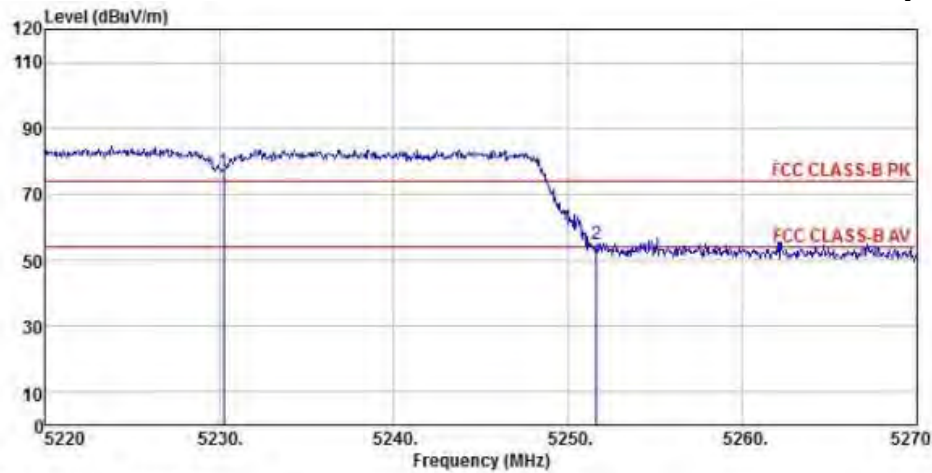


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5230.25	70.95	31.83	10.74	36.32	77.20	74.00	3.20 Peak
2	5251.65	48.72	31.73	10.79	36.34	54.90	74.00	-19.10 Peak

Detector mode: Average

Polarity: Vertical

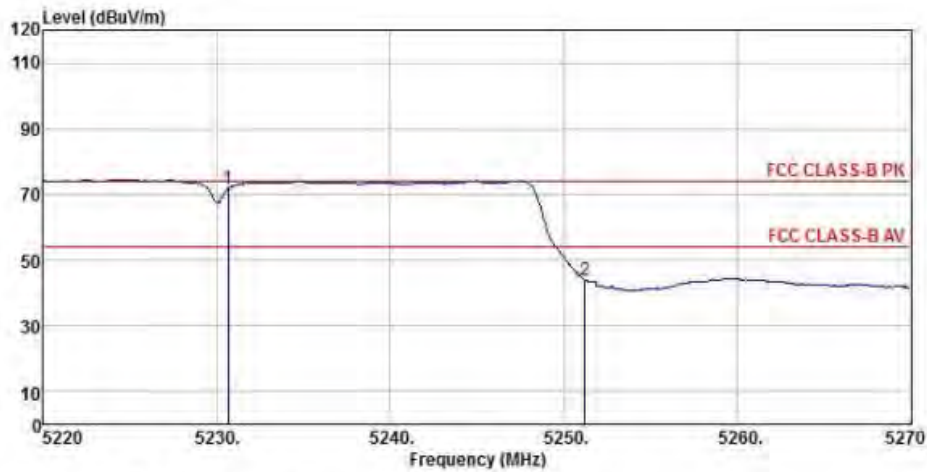

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----


1	pp	5230.65	65.52	31.83	10.74	36.32	71.77	74.00	-2.23	Peak
2		5251.20	37.81	31.75	10.79	36.33	44.02	74.00	-29.98	Peak

WIFI 5G(5725MHz-5850MHz)

802.11a (Ch149)

Detector mode: Peak

Polarity: Horizontal

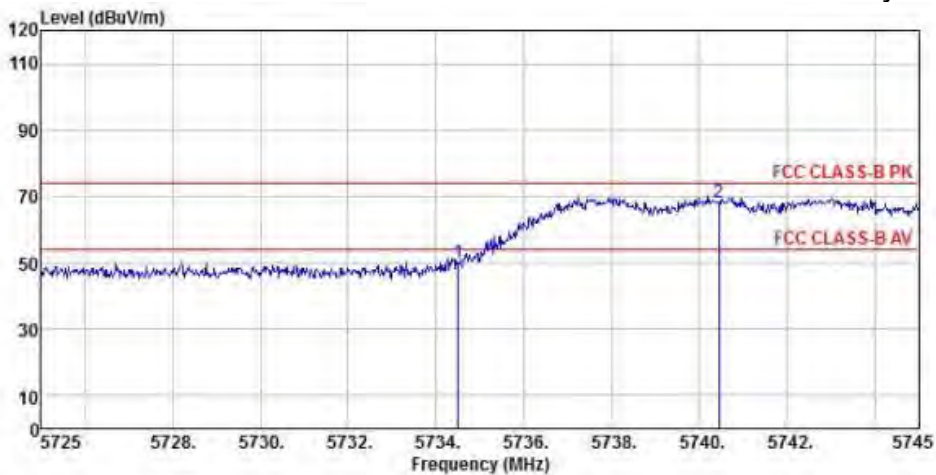

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1		5734.50	43.53	32.34	10.99	36.65	50.21	74.00	-23.79	Peak
2	pp	5740.46	61.59	32.34	10.88	36.65	68.16	74.00	-5.84	Peak

Detector mode: Average

Polarity: Horizontal

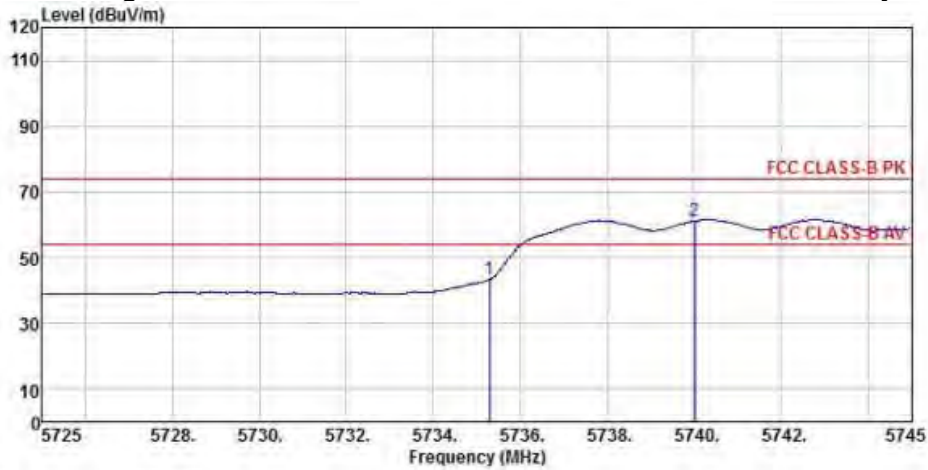


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5735.30	36.82	32.34	10.88	36.65	43.39	74.00	-30.61 Peak
2 pp 5740.02	54.54	32.34	10.88	36.65	61.11	74.00	-12.89 Peak

Detector mode: Peak

Polarity: Vertical

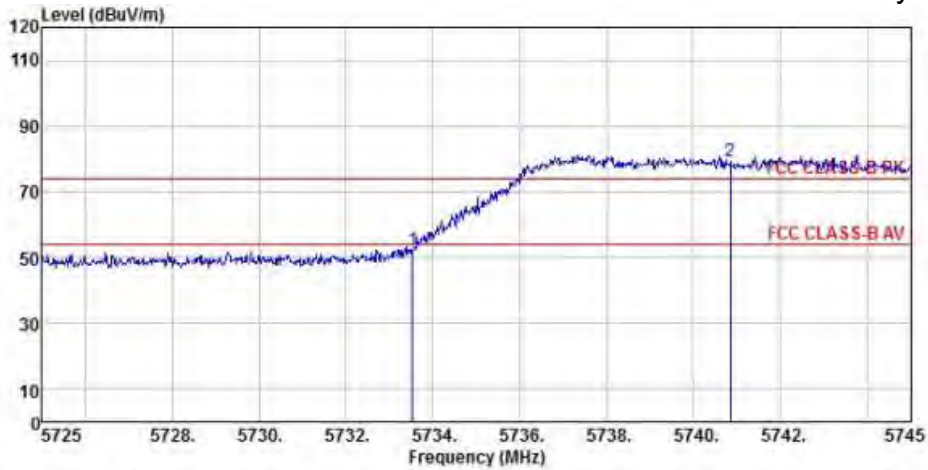


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.54	45.39	32.34	10.99	36.65	52.07	74.00	-21.93 Peak
2 pp 5740.86	72.47	32.34	10.88	36.65	79.04	74.00	5.04 Peak

Detector mode: Average

Polarity: Vertical

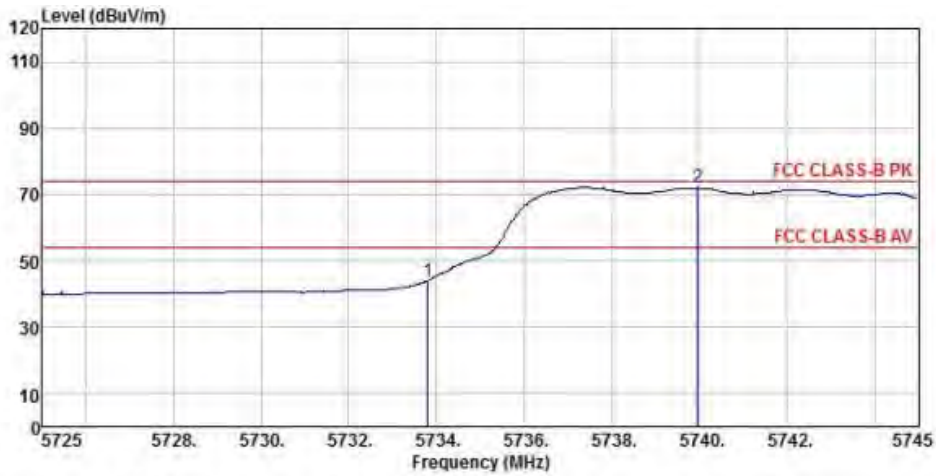

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH149
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.80	37.33	32.34	10.99	36.65	44.01	74.00	-29.99 Peak
2 pp 5739.96	65.45	32.34	10.88	36.65	72.02	74.00	-1.98 Peak

802.11a (Ch165)

Detector mode: Peak

Polarity: Horizontal

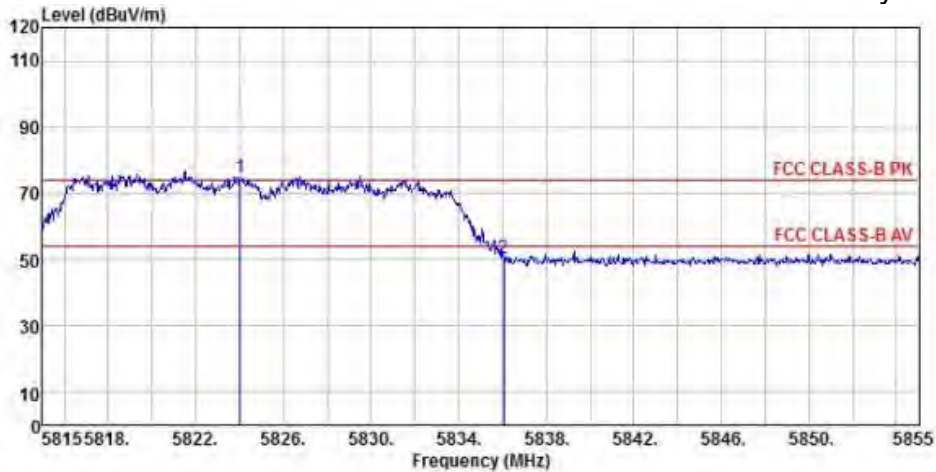


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.04	67.10	32.65	11.65	36.70	74.70	74.00	0.70 Peak
2 5836.04	42.87	32.71	11.65	36.71	50.52	74.00	-23.48 Peak

Detector mode: Average

Polarity: Horizontal

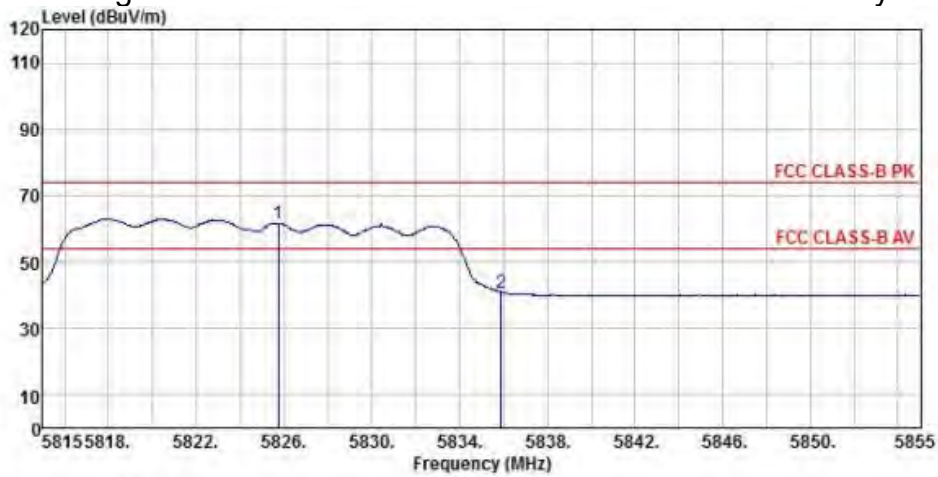


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5825.72	54.04	32.65	11.65	36.70	61.64	74.00	-12.36	Peak
2		5835.88	33.29	32.71	11.65	36.71	40.94	74.00	-33.06	Peak

Detector mode: Peak

Polarity: Vertical

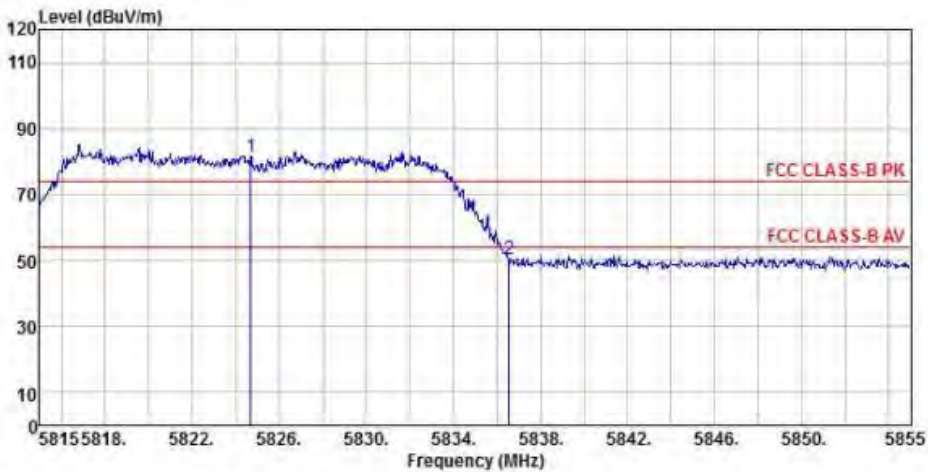


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	5824.68	73.67	32.65	11.65	36.70	81.27	74.00	7.27	Peak
2		5836.56	42.64	32.71	11.72	36.71	50.36	74.00	-23.64	Peak

Detector mode: Average

Polarity: Vertical

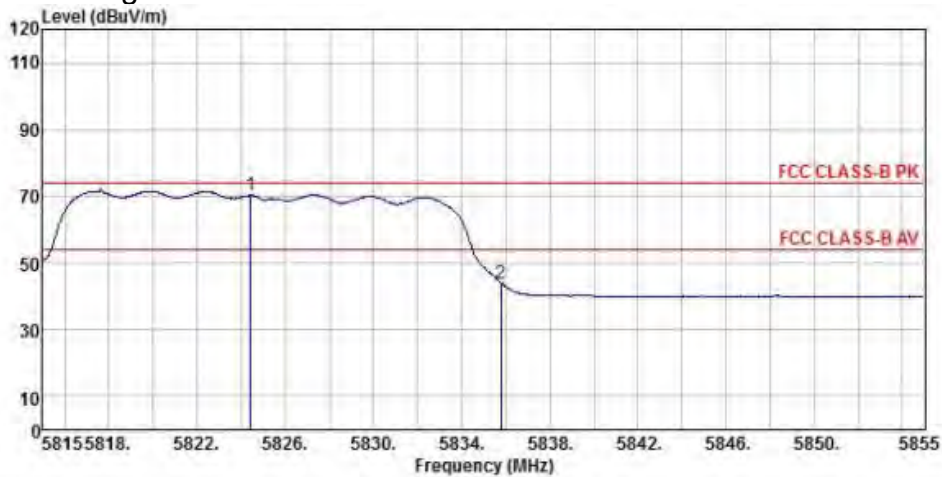

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH165
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Line
MHz	dBuV	dB/m	dB	dB

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.44	62.62	32.65	11.65	36.70	70.22	74.00	-3.78 Peak
2 5835.80	36.28	32.71	11.65	36.71	43.93	74.00	-30.07 Peak

802.11n20 (Ch149)

Detector mode: Peak

Polarity: Horizontal

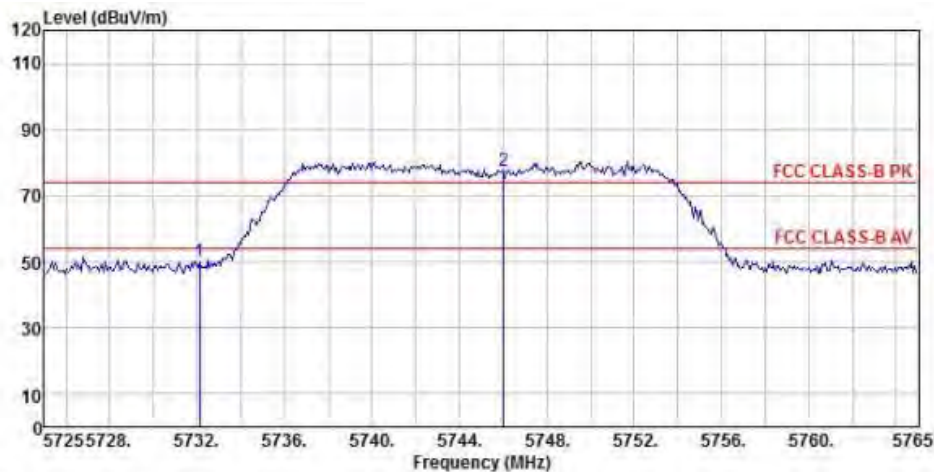


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Line
MHz	dBuV	dB/m	dB	dB

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5732.11	43.35	32.34	10.99	36.65	50.03	74.00	-23.97 Peak
2 pp 5746.02	71.03	32.34	10.88	36.66	77.59	74.00	3.59 Peak

Detector mode: Average

Polarity: Horizontal

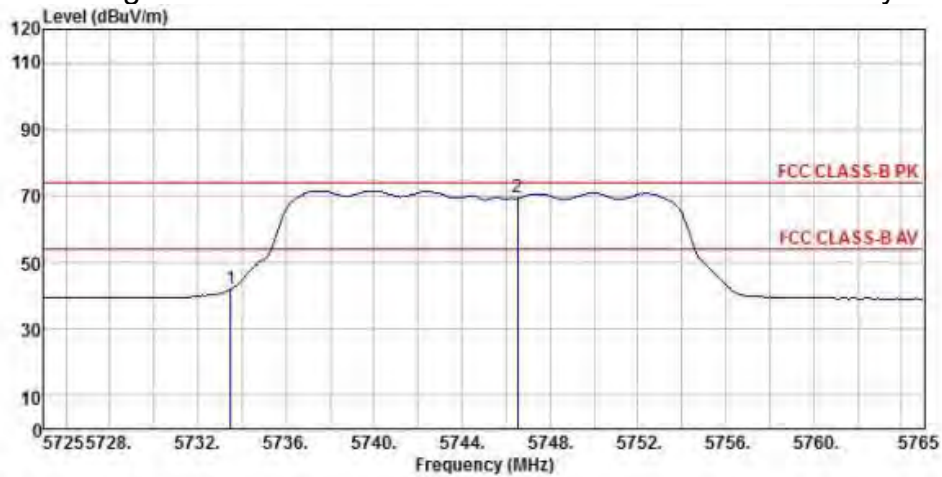


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.48	35.29	32.34	10.99	36.65	41.97	74.00	-32.03 Peak
2 pp 5746.54	62.79	32.34	10.88	36.66	69.35	74.00	-4.65 Peak

Detector mode: Peak

Polarity: Vertical

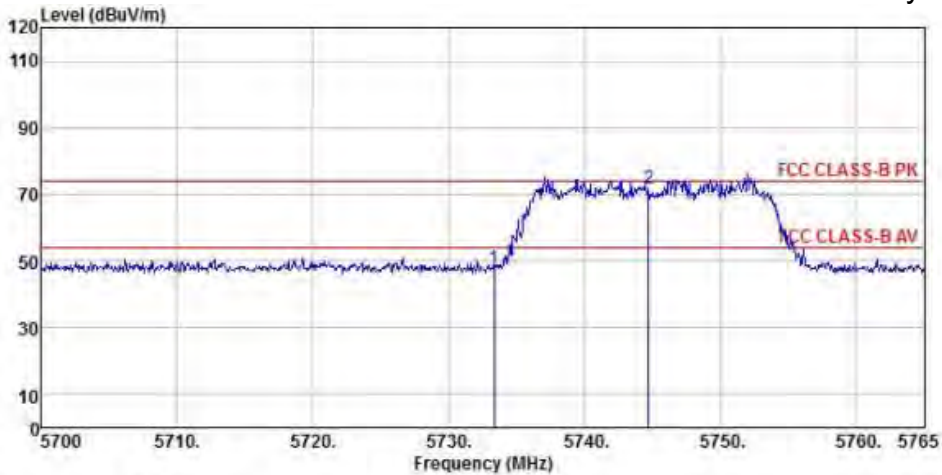


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.35	40.94	32.34	10.99	36.65	47.62	74.00	-26.38 Peak
2 pp 5744.72	64.98	32.34	10.88	36.65	71.55	74.00	-2.45 Peak

Detector mode: Average

Polarity: Vertical

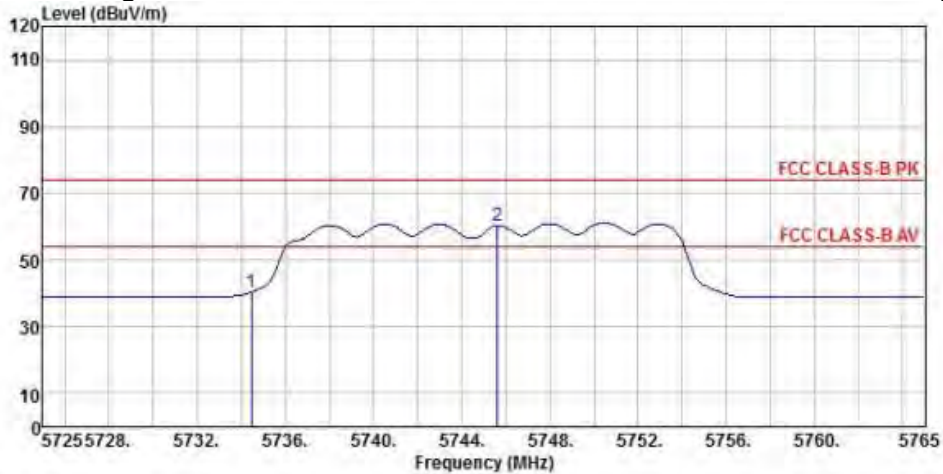


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5734.45	33.68	32.34	10.99	36.65	40.36	74.00	-33.64 Peak
2	5745.63	53.85	32.34	10.88	36.66	60.41	74.00	-13.59 Peak

802.11n20 (Ch165)

Detector mode: Peak

Polarity: Horizontal

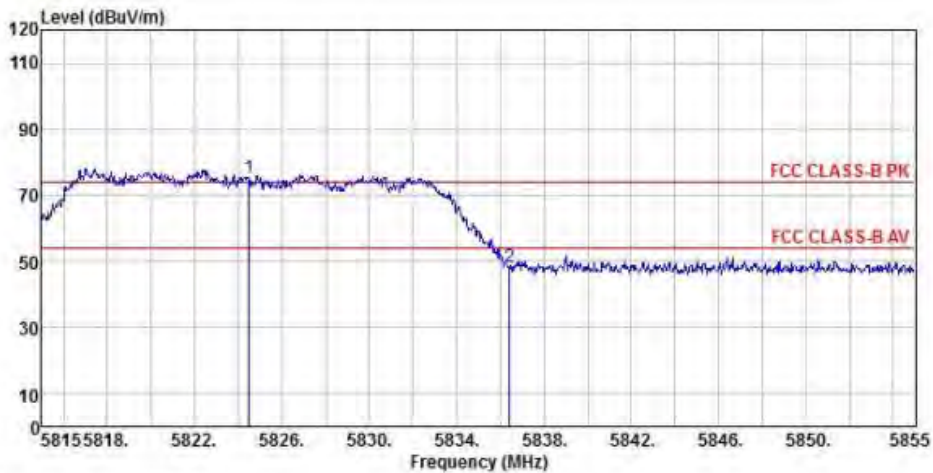


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5824.48	67.50	32.65	11.65	36.70	75.10	74.00	1.10 Peak
2	5836.44	40.48	32.71	11.65	36.71	48.13	74.00	-25.87 Peak

Detector mode: Average

Polarity: Horizontal

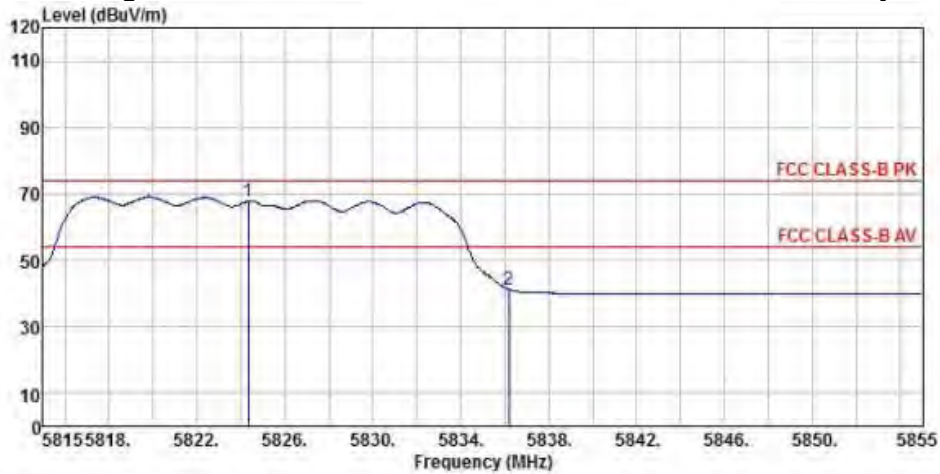


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.32	60.09	32.65	11.65	36.70	67.69	74.00	-6.31 Peak
2 5836.20	33.59	32.71	11.65	36.71	41.24	74.00	-32.76 Peak

Detector mode: Peak

Polarity: Vertical

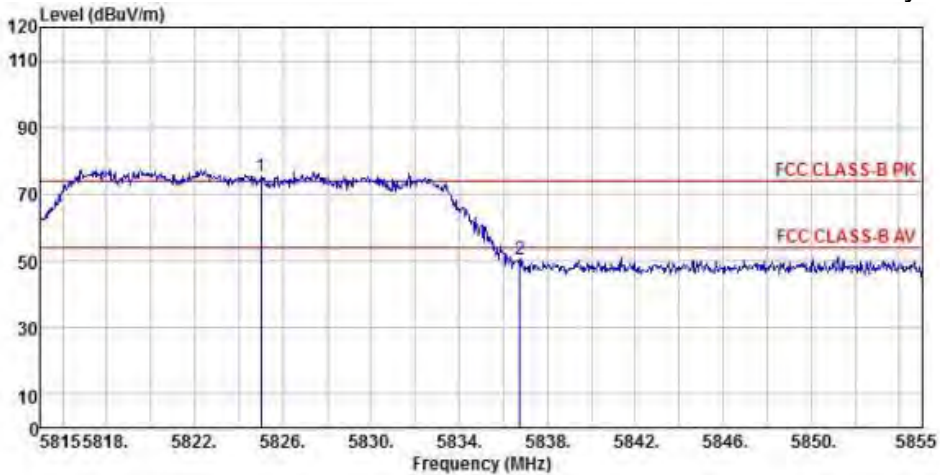


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5825.00	67.82	32.65	11.65	36.70	75.42	74.00	1.42 Peak
2 5836.76	42.62	32.71	11.72	36.71	50.34	74.00	-23.66 Peak

Detector mode: Average

Polarity: Vertical

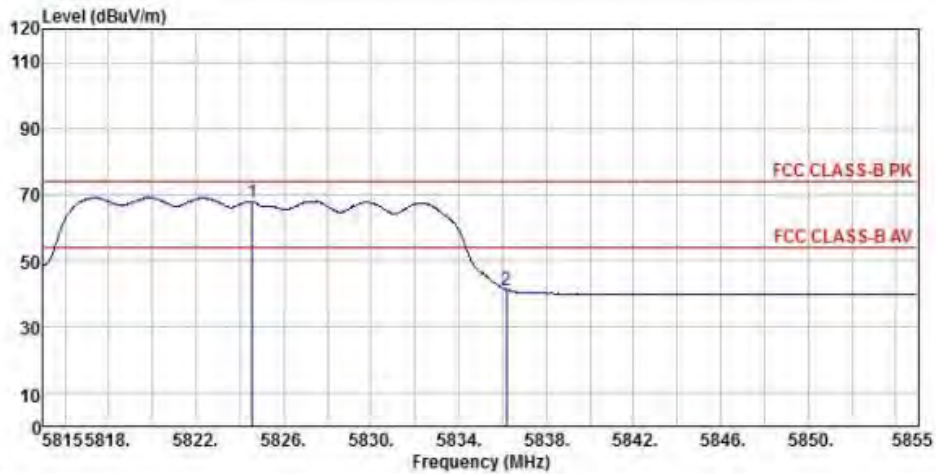

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH165
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.56	60.17	32.65	11.65	36.70	67.77	74.00	-6.23 Peak
2 5836.20	33.55	32.71	11.65	36.71	41.20	74.00	-32.80 Peak

802.11n40 (Ch151)

Detector mode: Peak

Polarity: Horizontal

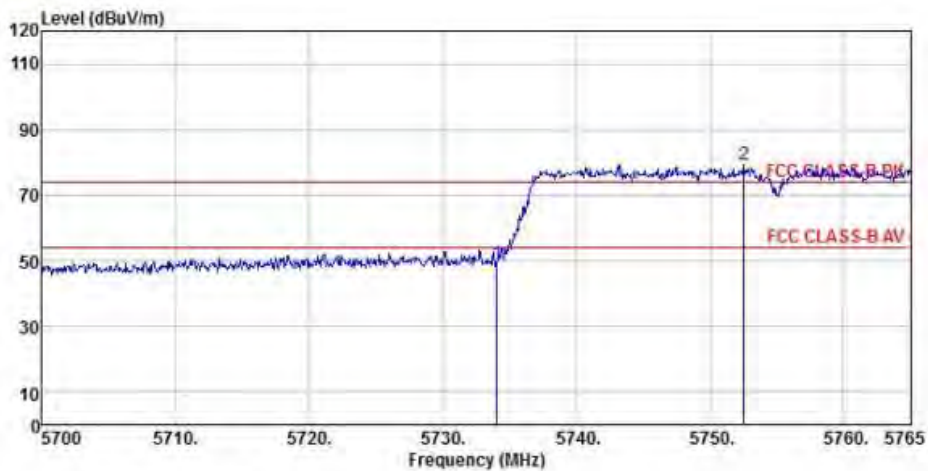


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.06	42.26	32.34	10.99	36.65	48.94	74.00	-25.06 Peak
2 pp 5752.59	72.54	32.40	11.09	36.66	79.37	74.00	5.37 Peak

Detector mode: Average

Polarity: Horizontal

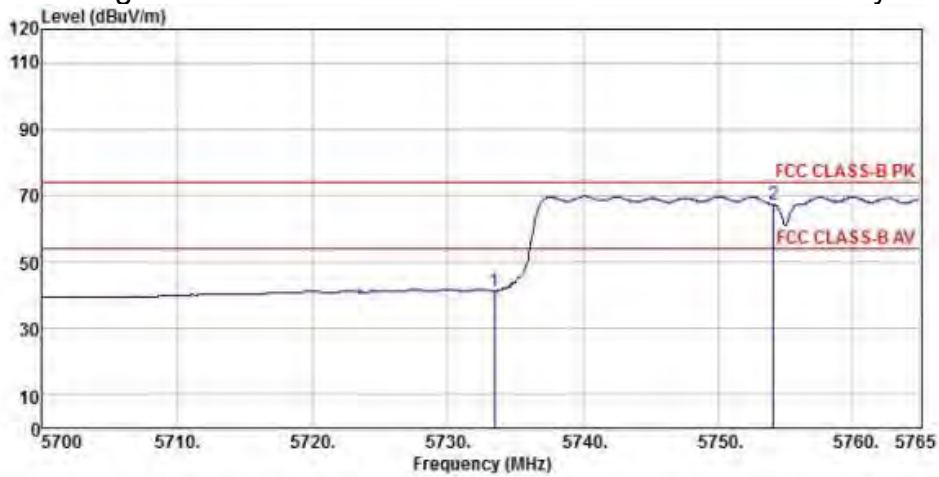


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.48	34.67	32.34	10.99	36.65	41.35	74.00	-32.65 Peak
2 pp 5754.08	60.42	32.40	11.09	36.66	67.25	74.00	-6.75 Peak

Detector mode: Peak

Polarity: Vertical

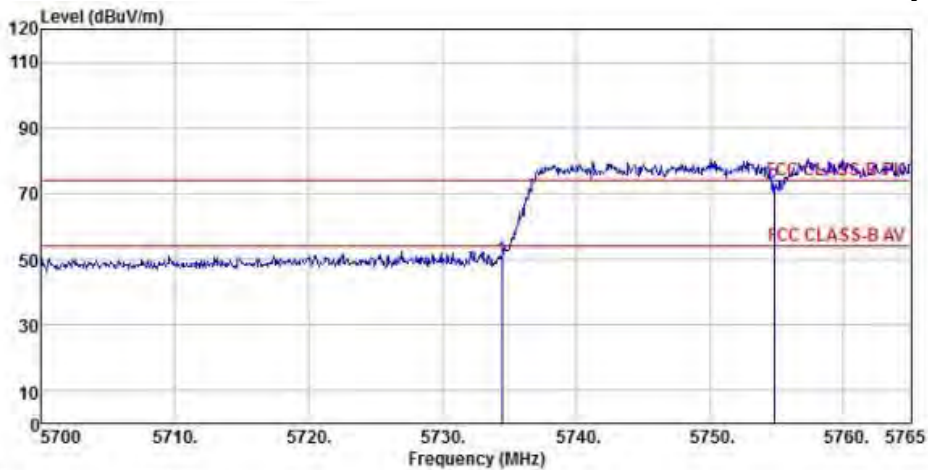


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.45	43.27	32.34	10.99	36.65	49.95	74.00	-24.05 Peak
2 pp 5754.80	65.30	32.40	11.09	36.66	72.13	74.00	-1.87 Peak

Detector mode: Average

Polarity: Vertical

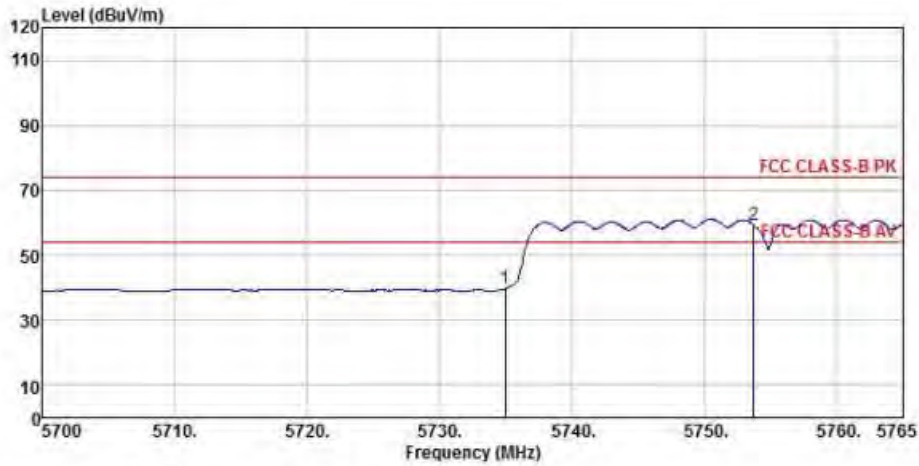


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	
1	5734.97	33.10	32.34	10.88	36.65	39.67	74.00	-34.33	Peak					
2	5753.76	52.36	32.40	11.09	36.66	59.19	74.00	-14.81	Peak					

802.11n40 (Ch159)

Detector mode: Peak

Polarity: Horizontal

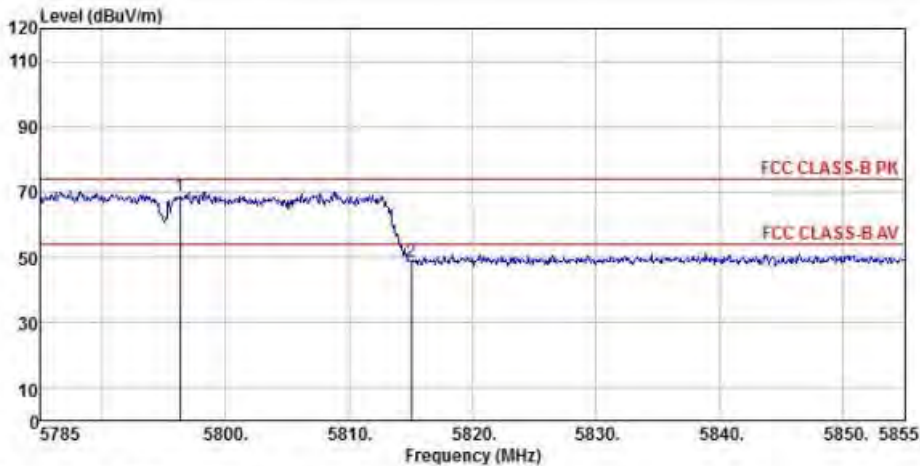


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	
1	5796.27	61.29	32.54	11.51	36.69	68.65	74.00	-5.35	Peak					
2	5815.03	41.25	32.60	11.58	36.70	48.73	74.00	-25.27	Peak					

Detector mode: Average

Polarity: Horizontal

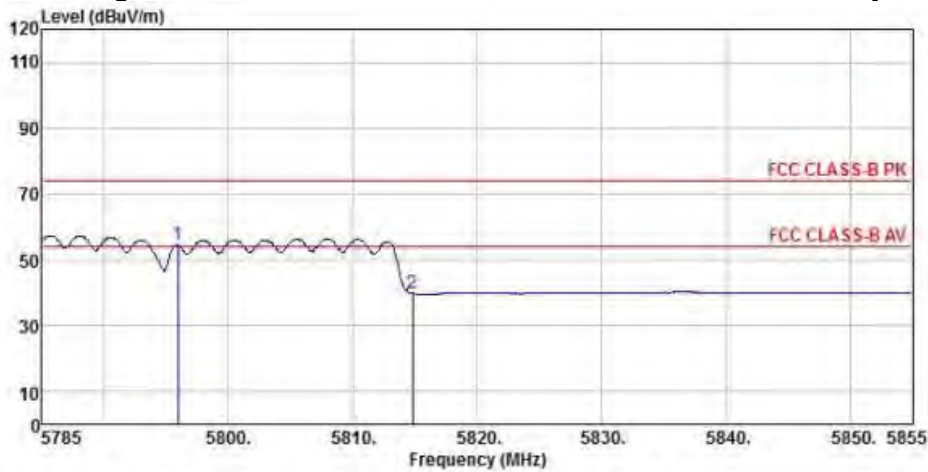

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5795.92	47.05	32.54	11.51	36.69	54.41	74.00	-19.59	Peak
2		5814.82	32.23	32.60	11.58	36.70	39.71	74.00	-34.29	Peak

Detector mode: Peak

Polarity: Vertical

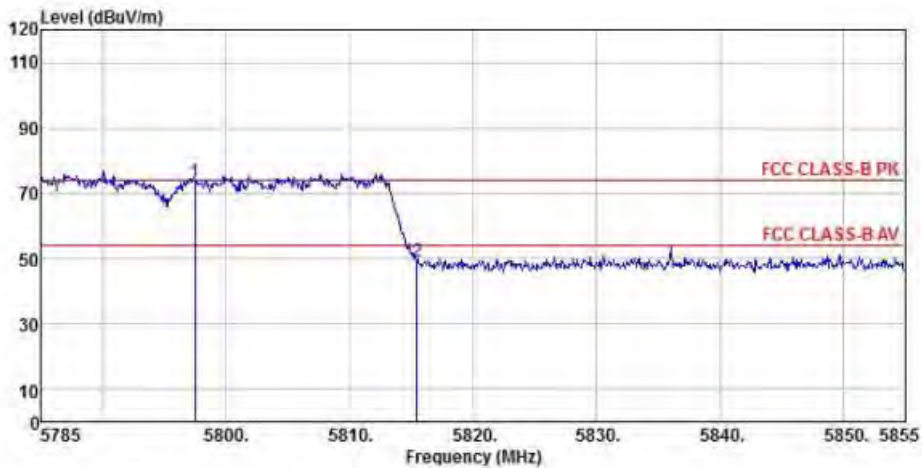

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5797.46	66.06	32.54	11.51	36.69	73.42	74.00	-0.58	Peak
2		5815.45	41.75	32.60	11.58	36.70	49.23	74.00	-24.77	Peak

Detector mode: Average

Polarity: Vertical

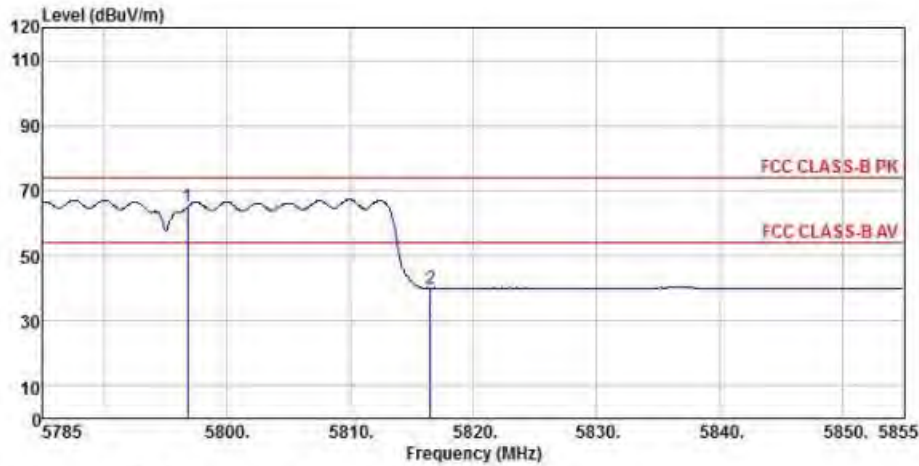

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n 40M CH159
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5796.76	57.66	32.54	11.51	36.69	65.02	74.00	-8.98 Peak
2 5816.50	32.26	32.60	11.58	36.70	39.74	74.00	-34.26 Peak

802.11ac(5150MHz-5250MHz)

802.11ac20 (Ch36)

Detector mode: Peak

Polarity: Horizontal

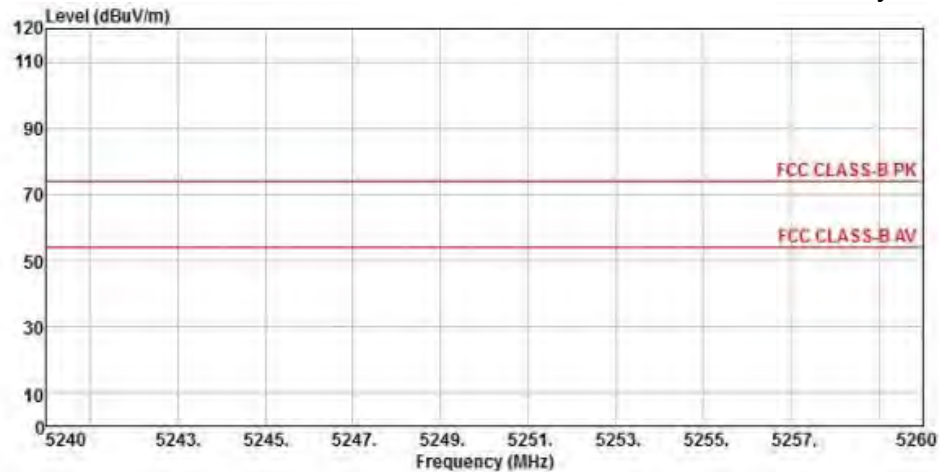


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5166.52	47.02	32.01	10.64	36.28	53.39	74.00	-20.61 Peak
2 pp 5174.32	76.82	32.01	10.64	36.28	83.19	74.00	9.19 Peak

Detector mode: Average

Polarity: Horizontal

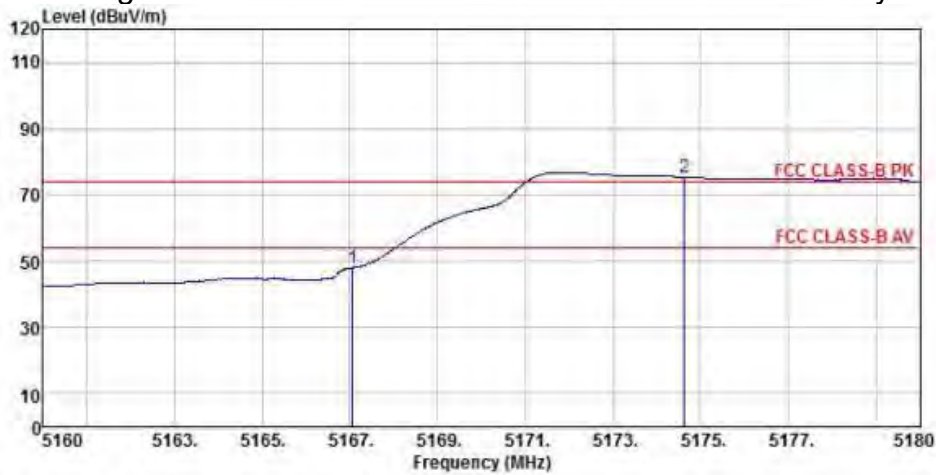


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	5167.06	41.56	32.01	10.64	36.28	47.93	74.00	-26.07	Peak	
2	pp	5174.64	69.05	32.01	10.64	36.28	75.42	74.00	1.42	Peak

Detector mode: Peak

Polarity: Vertical

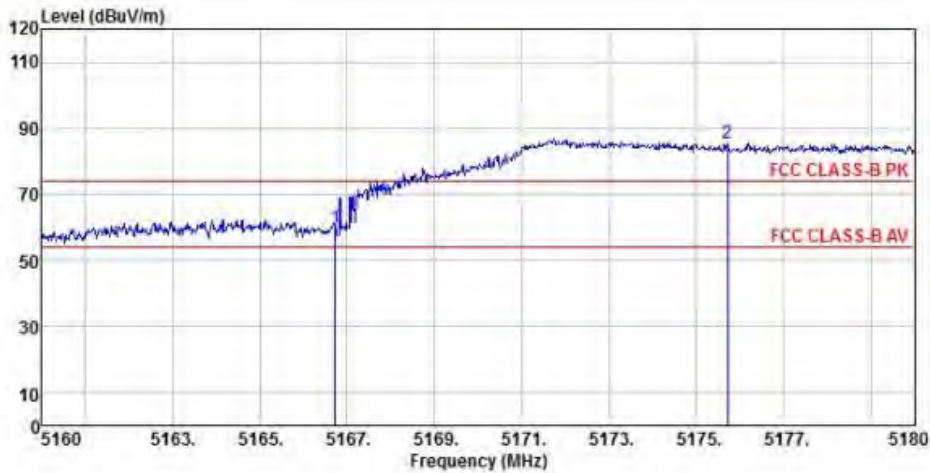


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	5166.72	53.38	32.01	10.64	36.28	59.75	74.00	-14.25	Peak	
2	pp	5175.72	79.14	32.01	10.64	36.28	85.51	74.00	11.51	Peak

Detector mode: Average

Polarity: Vertical

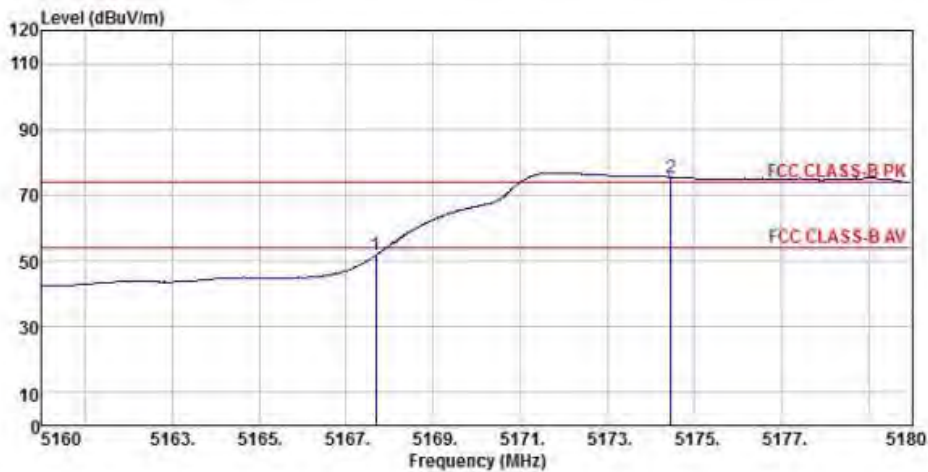


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.68	45.32	32.01	10.64	36.28	51.69	74.00 -22.31 Peak
2	5174.46	69.09	32.01	10.64	36.28	75.46	74.00 1.46 Peak

802.11ac20 (Ch48)

Detector mode: Peak

Polarity: Horizontal

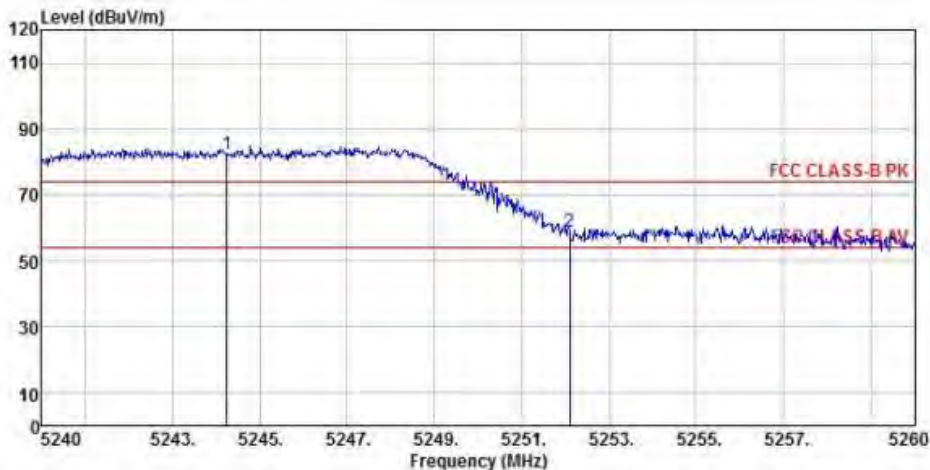


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5244.24	75.97	31.75	10.79	36.33	82.18	74.00 8.18 Peak
2	5252.10	52.85	31.73	10.79	36.34	59.03	74.00 -14.97 Peak

Detector mode: Average

Polarity: Horizontal

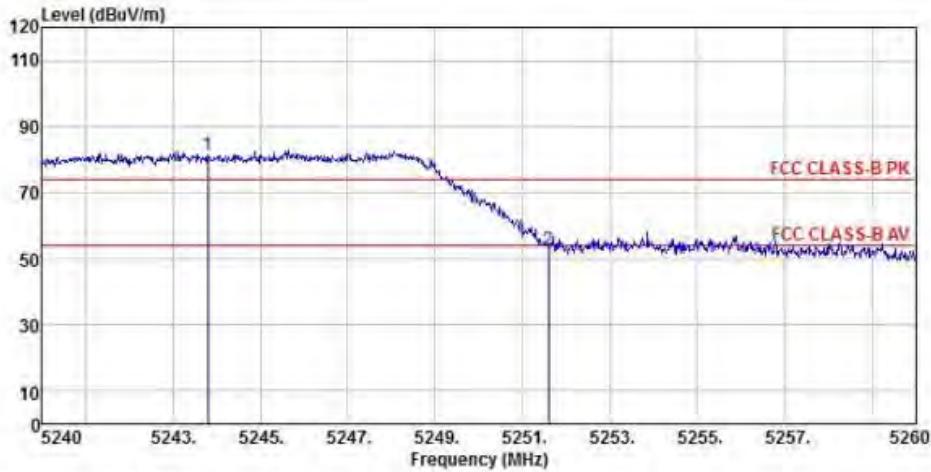


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5243.80	75.42	31.75	10.79	36.33	81.63	74.00	7.63 Peak
2 5251.60	46.66	31.73	10.79	36.34	52.84	74.00	-21.16 Peak

Detector mode: Peak

Polarity: Vertical

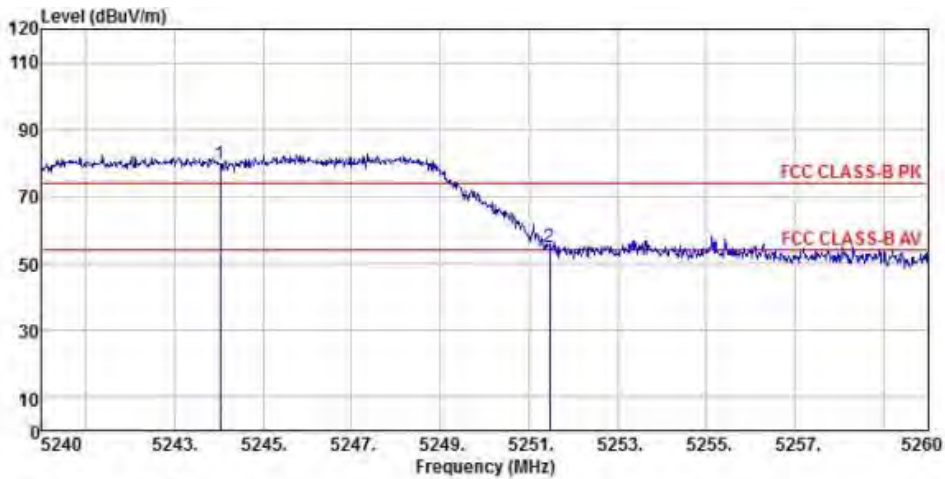


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5244.02	73.49	31.75	10.79	36.33	79.70	74.00	5.70 Peak
2 5251.46	48.58	31.75	10.79	36.33	54.79	74.00	-19.21 Peak

Detector mode: Average

Polarity: Vertical

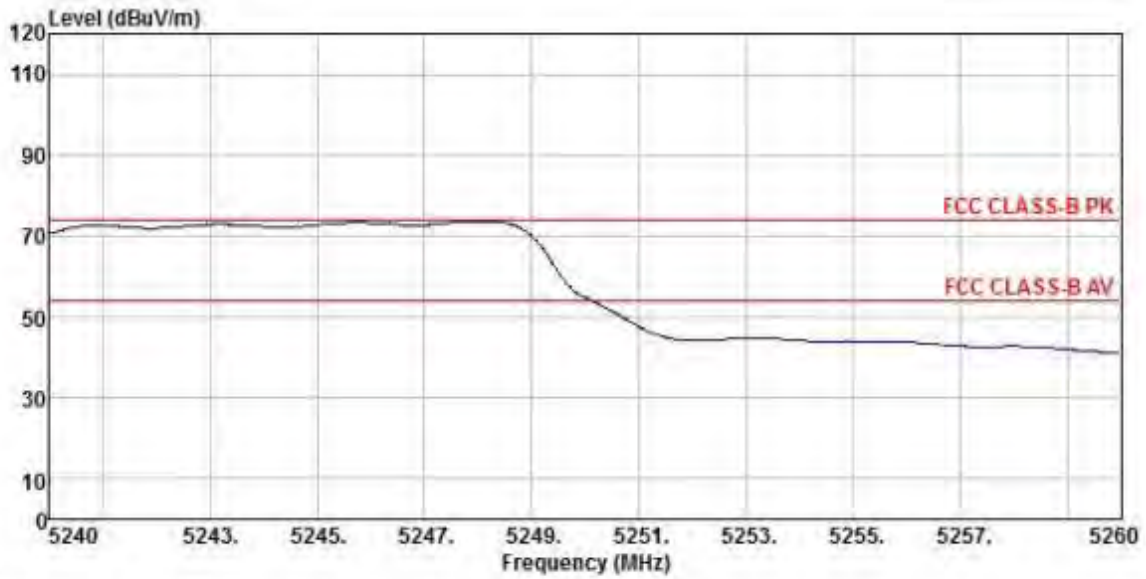


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH48
 Memo :

802.11ac40 (Ch38)

Detector mode: Peak

Polarity: Horizontal

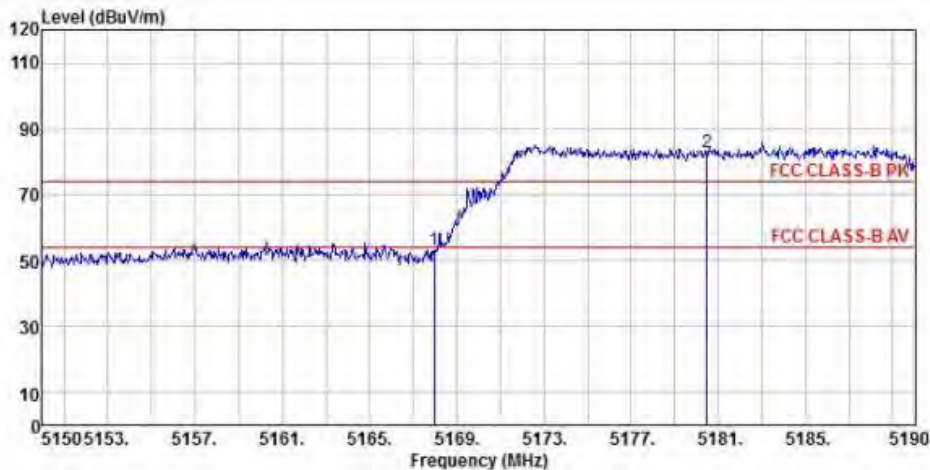


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.96	46.85	32.01	10.64	36.28	53.22	74.00 -20.78 Peak
2	pp	5180.48	76.60	32.01	10.64	36.29	82.96 74.00 8.96 Peak

Detector mode: Average

Polarity: Horizontal

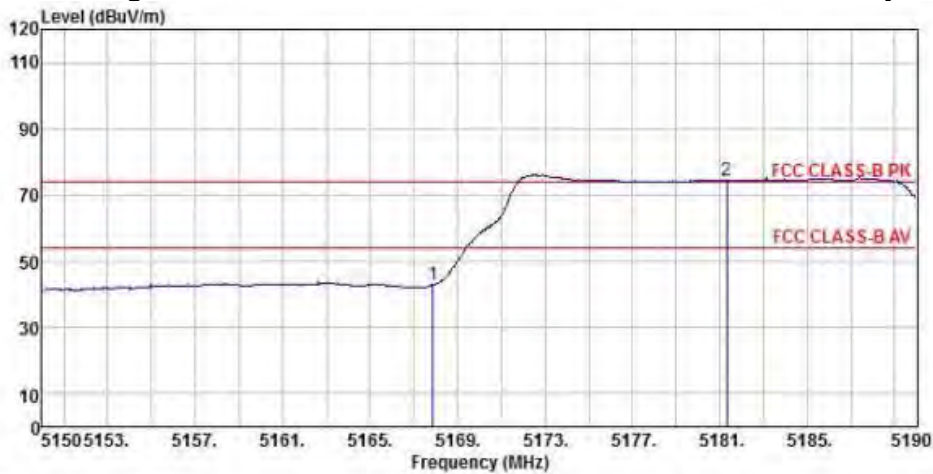


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.88	36.41	32.01	10.64	36.28	42.78	74.00	-31.22 Peak
2	5181.32	68.16	31.96	10.64	36.29	74.47	74.00	0.47 Peak

Detector mode: Peak

Polarity: Vertical

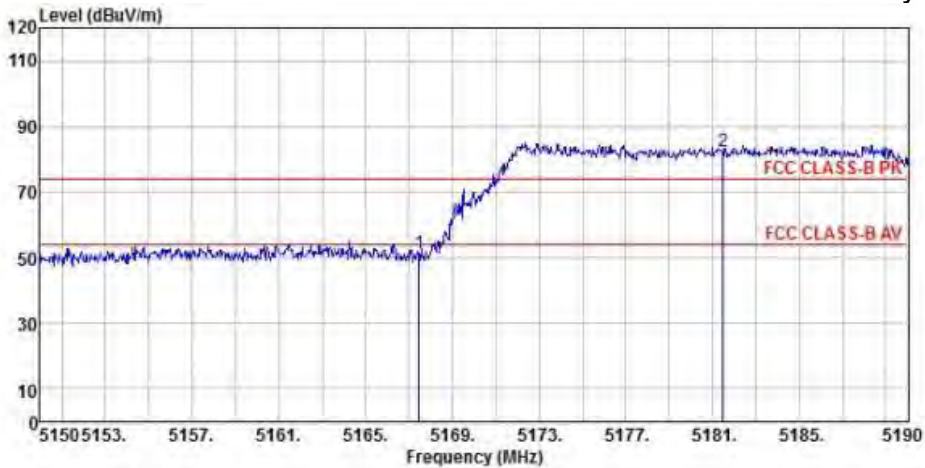


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影机
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.48	45.06	32.01	10.64	36.28	51.43	74.00	-22.57 Peak
2	5181.48	75.91	31.96	10.64	36.29	82.22	74.00	8.22 Peak

Detector mode: Average

Polarity: Vertical

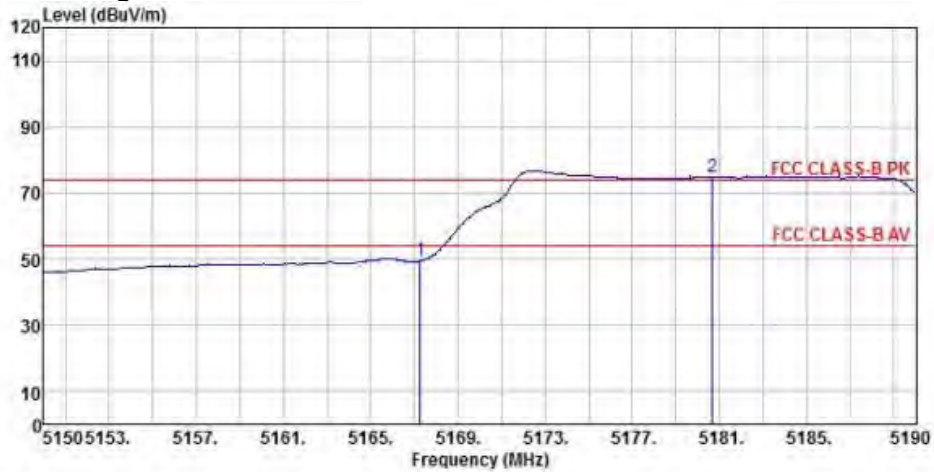


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH38
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	5167.28	43.03	32.01	10.64	36.28	49.40	74.00 -24.60 Peak
2	pp 5180.68	68.34	32.01	10.64	36.29	74.70	74.00 0.70 Peak

802.11ac20 (Ch46)

Detector mode: Peak

Polarity: Horizontal

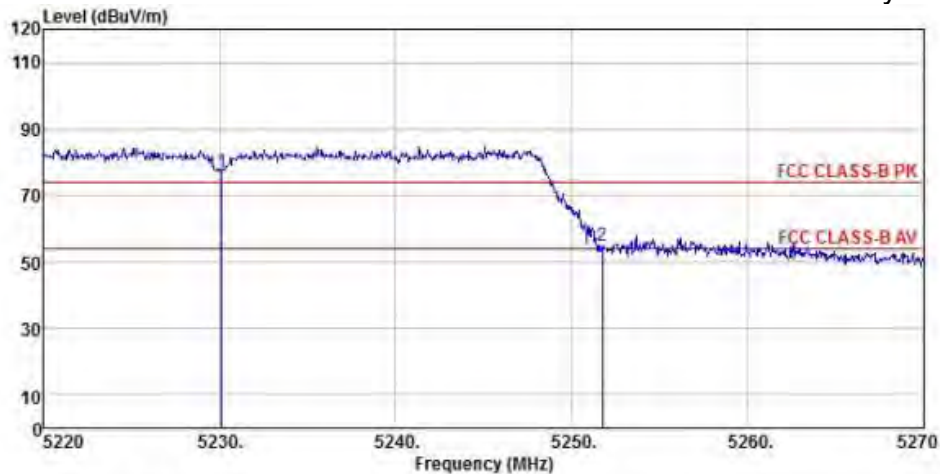


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	pp 5230.10	70.92	31.83	10.74	36.32	77.17	74.00 3.17 Peak
2	5251.75	48.78	31.73	10.79	36.34	54.96	74.00 -19.04 Peak

Detector mode: Average

Polarity: Horizontal

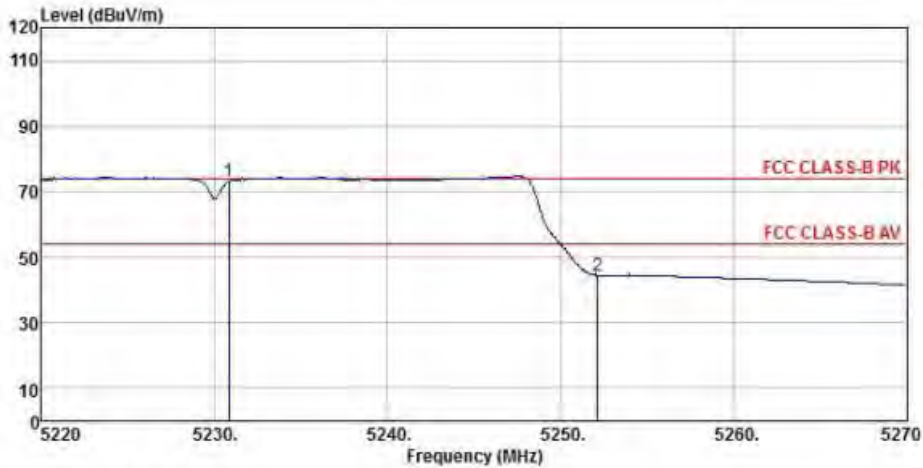

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5230.80	66.83	31.83	10.74	36.32	73.08	74.00	-0.92	Peak
2		5252.15	38.17	31.73	10.79	36.34	44.35	74.00	-29.65	Peak

Detector mode: Peak

Polarity: Vertical

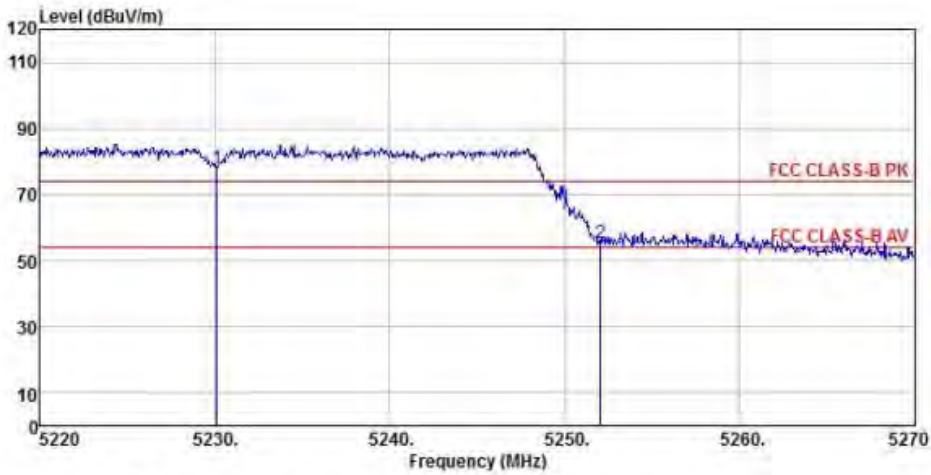

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5230.10	71.82	31.83	10.74	36.32	78.07	74.00	4.07	Peak
2		5252.05	49.09	31.73	10.79	36.34	55.27	74.00	-18.73	Peak

Detector mode: Average

Polarity: Vertical

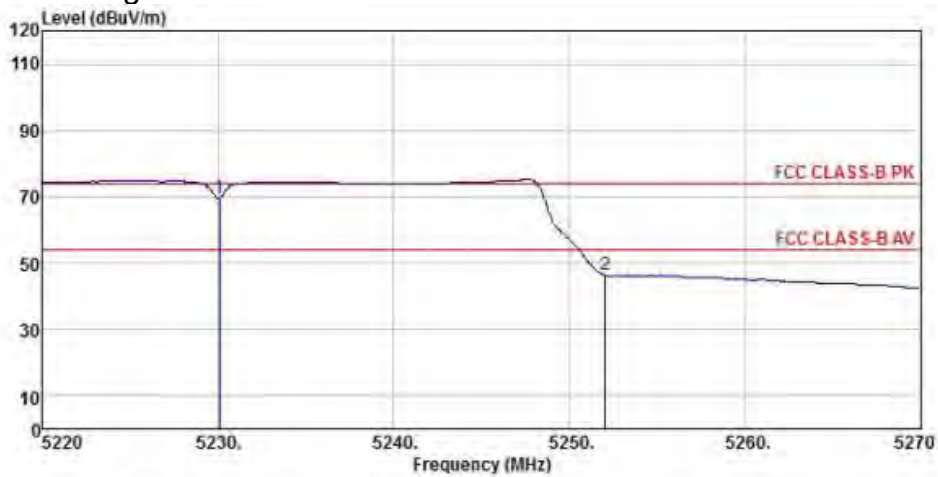

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH46
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5230.05	63.28	31.83	10.74	36.32	69.53	74.00	-4.47	Peak
2		5252.05	40.34	31.73	10.79	36.34	46.52	74.00	-27.48	Peak

802.11ac80 (Ch42)

Detector mode: Peak

Polarity: Horizontal

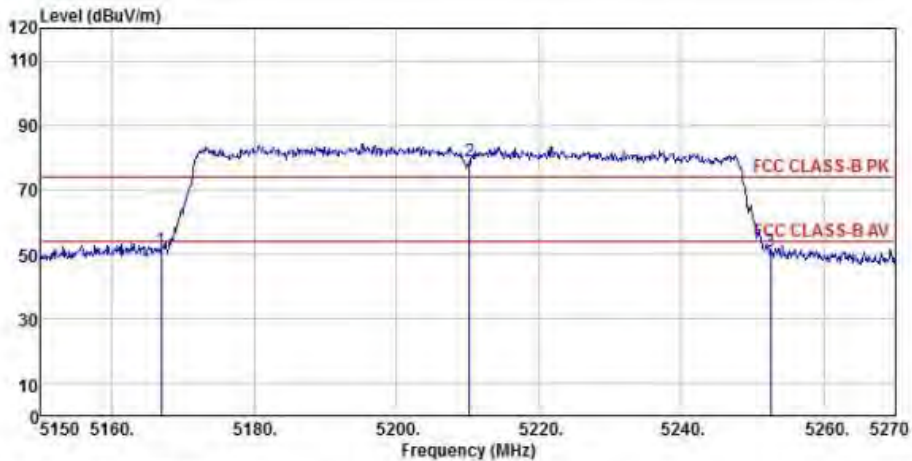

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1		5166.92	44.82	32.01	10.64	36.28	51.19	74.00	-22.81	Peak
2	pp	5210.24	72.75	31.90	10.69	36.31	79.03	74.00	5.03	Peak
3		5252.60	44.65	31.73	10.79	36.34	50.83	74.00	-23.17	Peak

Detector mode: Average

Polarity: Horizontal

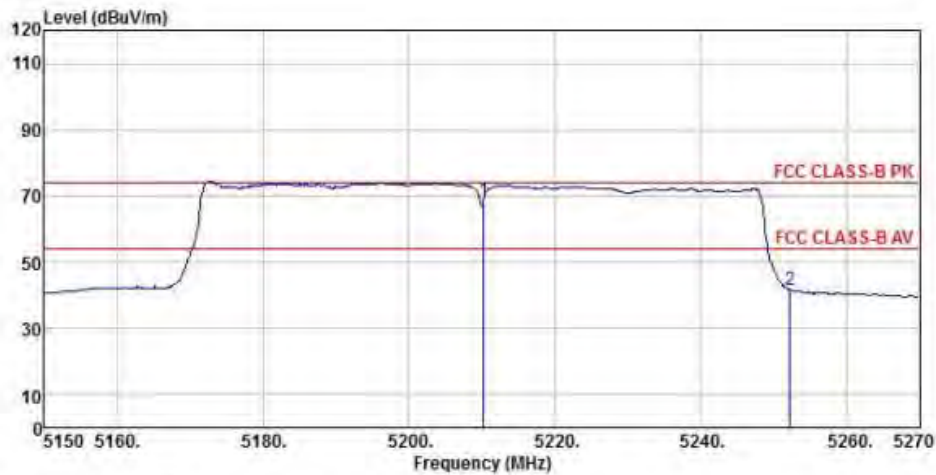


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5210.24	62.15	31.90	10.69	36.31	68.43	74.00	-5.57 Peak
2 5252.24	35.41	31.73	10.79	36.34	41.59	74.00	-32.41 Peak

Detector mode: Peak

Polarity: Vertical

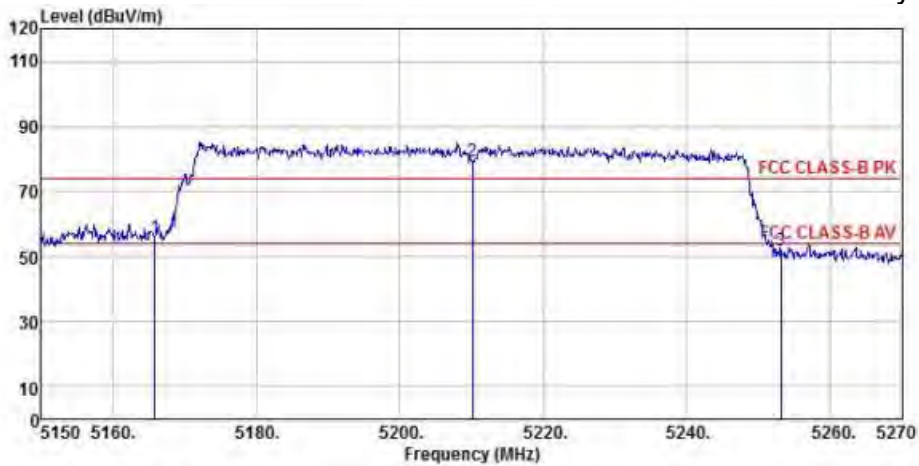


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5165.84	49.59	32.01	10.64	36.28	55.96	74.00	-18.04 Peak
2 pp 5210.12	73.01	31.90	10.69	36.31	79.29	74.00	5.29 Peak
3 5253.20	45.83	31.73	10.79	36.34	52.01	74.00	-21.99 Peak

Detector mode: Average

Polarity: Vertical

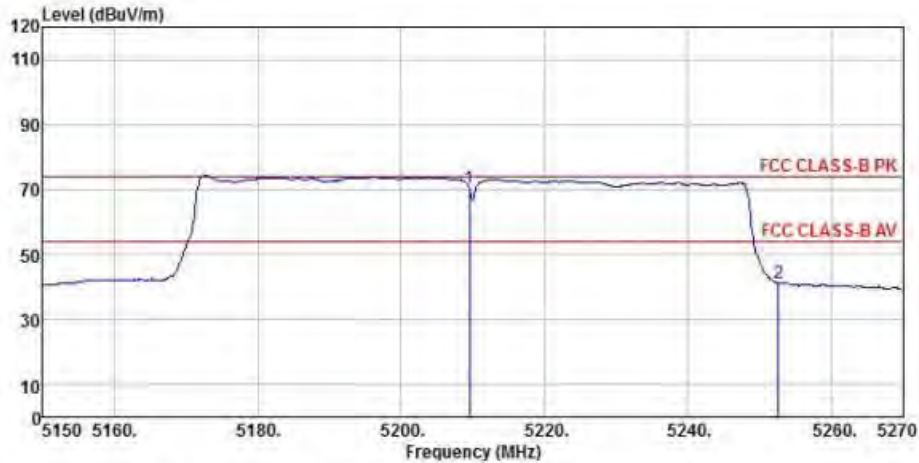

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5209.52	64.09	31.90	10.69	36.31	70.37	74.00	-3.63	Peak
2		5252.72	35.01	31.73	10.79	36.34	41.19	74.00	-32.81	Peak

802.11ac80 (Ch42)

Detector mode: Peak

Polarity: Horizontal

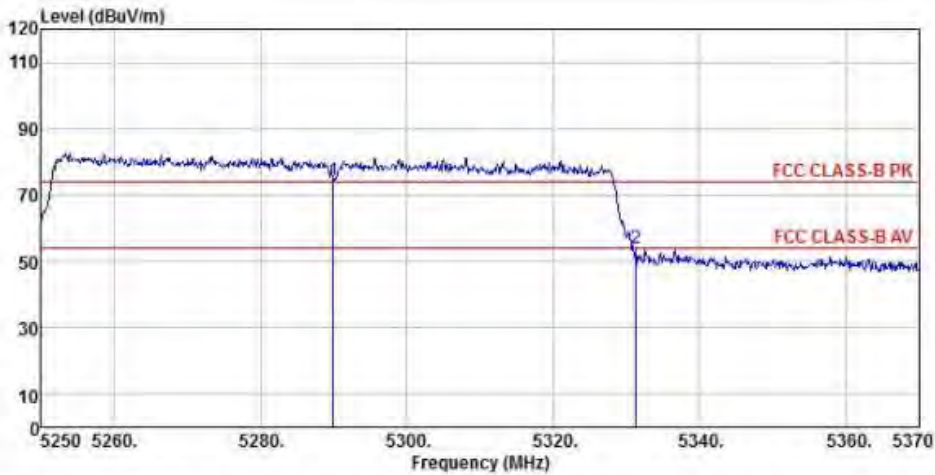

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :


ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
-----	------	------	----	----	--------	--------	----

1	pp	5289.96	68.20	31.69	10.83	36.36	74.36	74.00	0.36	Peak
2		5331.36	47.65	31.75	10.87	36.39	53.88	74.00	-20.12	Peak

Detector mode: Average

Polarity: Horizontal

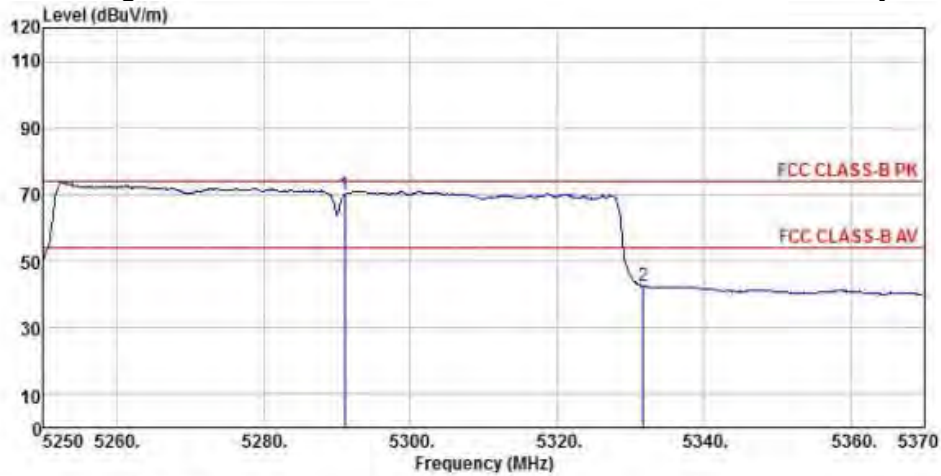


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5291.04	63.83	31.69	10.83	36.36	69.99	74.00	-4.01 Peak
2 5331.72	36.18	31.75	10.87	36.39	42.41	74.00	-31.59 Peak

Detector mode: Peak

Polarity: Vertical

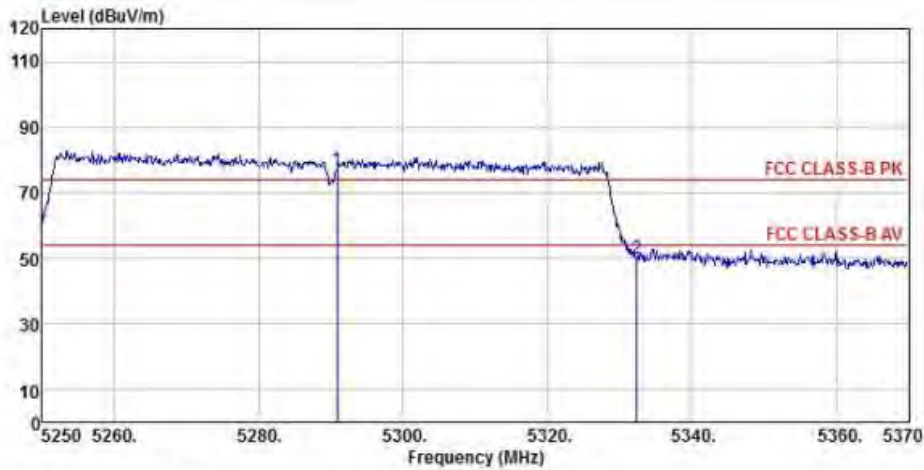


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH58
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5290.80	71.00	31.69	10.83	36.36	77.16	74.00	3.16 Peak
2 5332.32	43.95	31.75	10.87	36.39	50.18	74.00	-23.82 Peak

Detector mode: Average

Polarity: Vertical

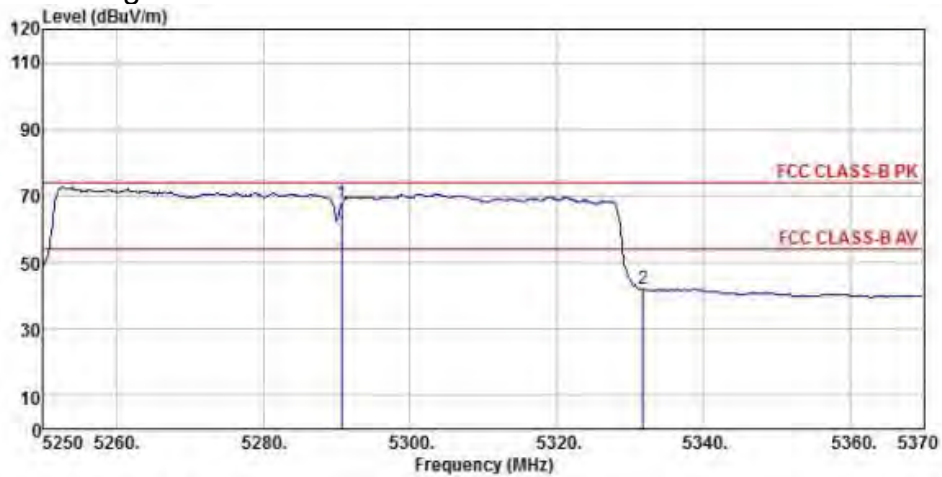

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH42
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor
Level	Line	Limit	Remark	


MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5290.68	61.75	31.69	10.83	36.36	67.91	74.00	-6.09 Peak
2 5331.72	35.73	31.75	10.87	36.39	41.96	74.00	-32.04 Peak

802.11ac(5725MHz-5850MHz)

802.11ac20 (Ch149)

Detector mode: Peak

Polarity: Horizontal

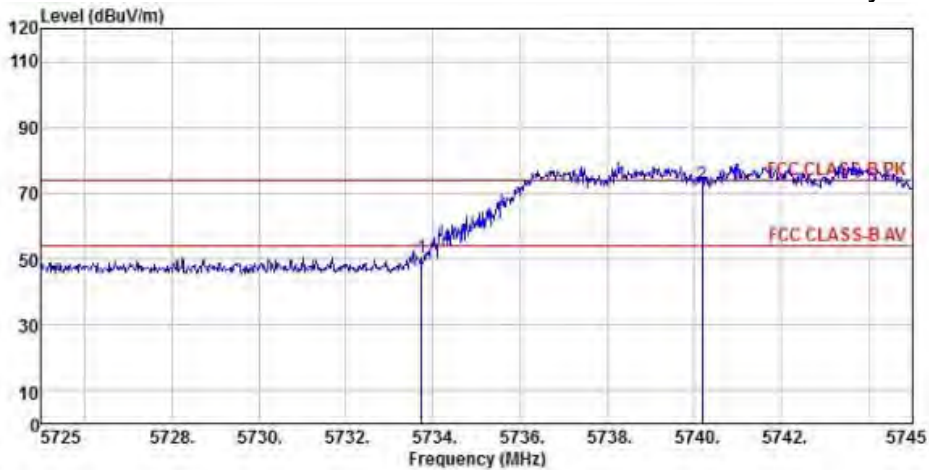


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor
Level	Line	Limit	Remark	

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.74	43.82	32.34	10.99	36.65	50.50	74.00	-23.50 Peak
2 pp 5740.18	66.16	32.34	10.88	36.65	72.73	74.00	-1.27 Peak

Detector mode: Average

Polarity: Horizontal

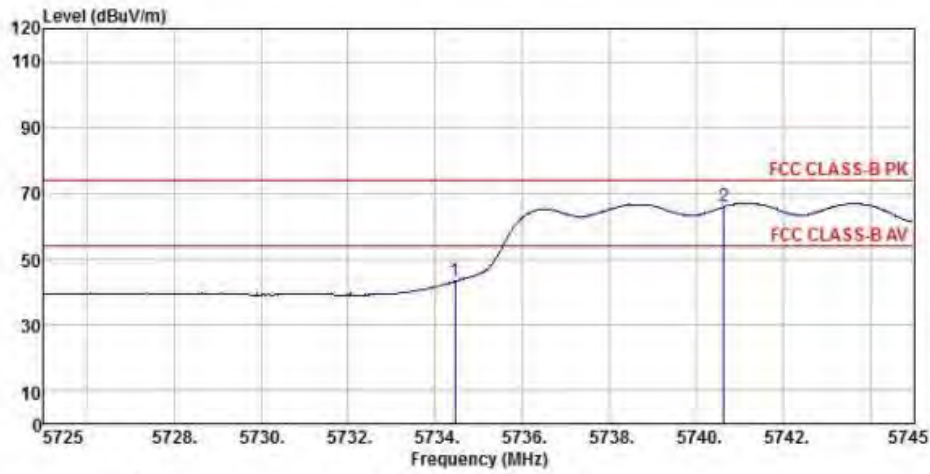


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.46	36.57	32.34	10.99	36.65	43.25	74.00	-30.75 Peak
2 pp 5740.64	59.41	32.34	10.88	36.65	65.98	74.00	-8.02 Peak

Detector mode: Peak

Polarity: Vertical

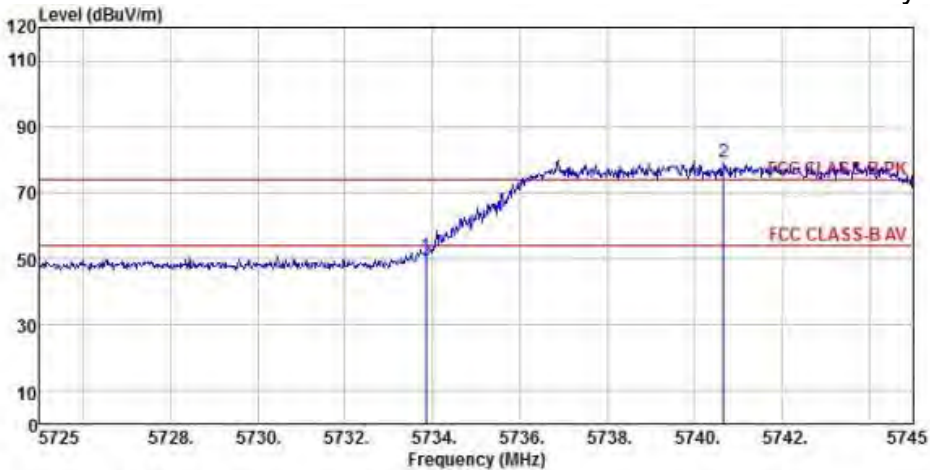


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5733.86	44.19	32.34	10.99	36.65	50.87	74.00	-23.13 Peak
2 pp 5740.68	72.54	32.34	10.88	36.65	79.11	74.00	5.11 Peak

Detector mode: Average

Polarity: Vertical

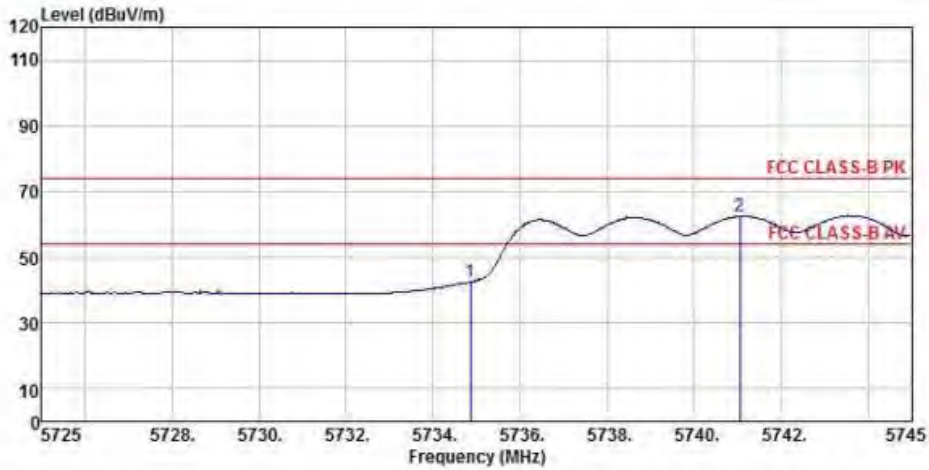

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH149
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5734.86	35.86	32.34	10.88	36.65	42.43	74.00	-31.57 Peak
2 pp 5741.06	55.76	32.34	10.88	36.65	62.33	74.00	-11.67 Peak

802.11ac20 (Ch165)

Detector mode: Peak

Polarity: Horizontal

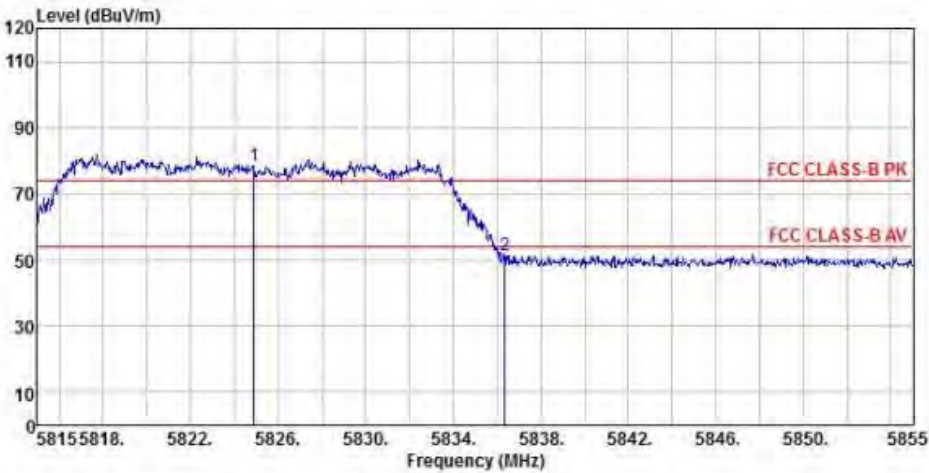


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5824.88	70.90	32.65	11.65	36.70	78.50	74.00	4.50 Peak
2 5836.36	43.68	32.71	11.65	36.71	51.33	74.00	-22.67 Peak

Detector mode: Average

Polarity: Horizontal

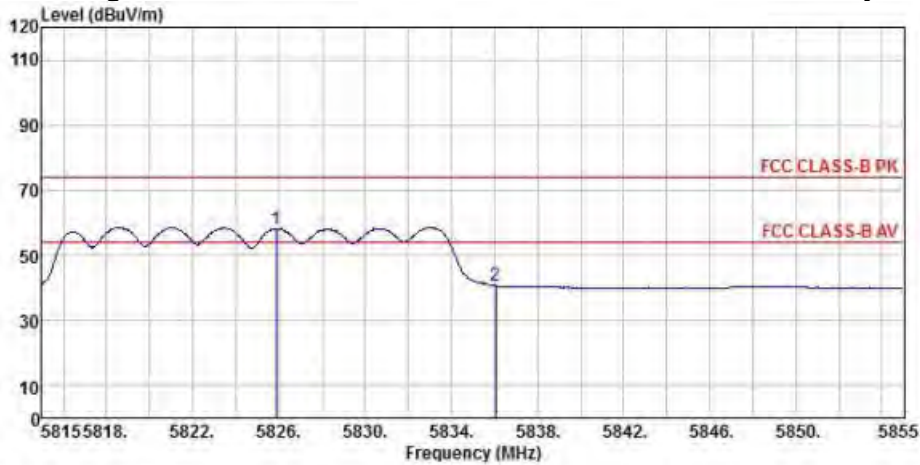


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5825.88	50.53	32.65	11.65	36.71	58.12	74.00	-15.88	Peak
2 5836.04	32.87	32.71	11.65	36.71	40.52	74.00	-33.48	Peak

Detector mode: Peak

Polarity: Vertical

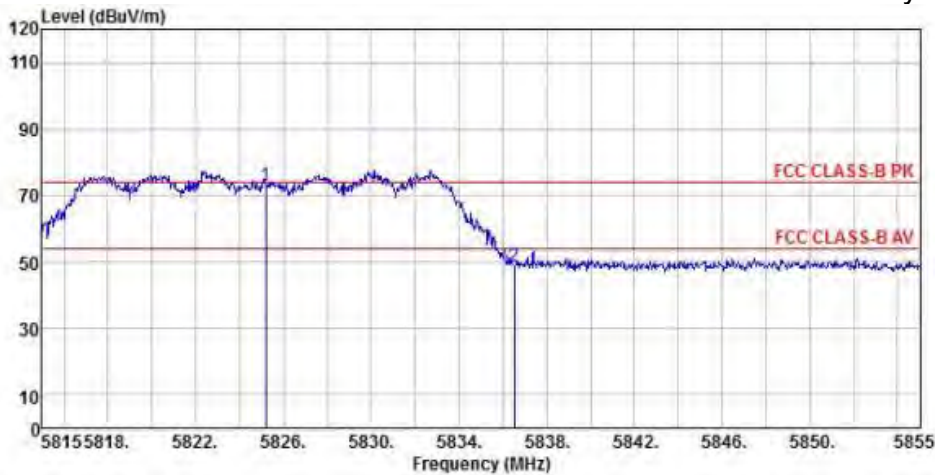


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5825.20	65.45	32.65	11.65	36.70	73.05	74.00	-0.95	Peak
2 5836.52	41.10	32.71	11.72	36.71	48.82	74.00	-25.18	Peak

Detector mode: Average

Polarity: Vertical

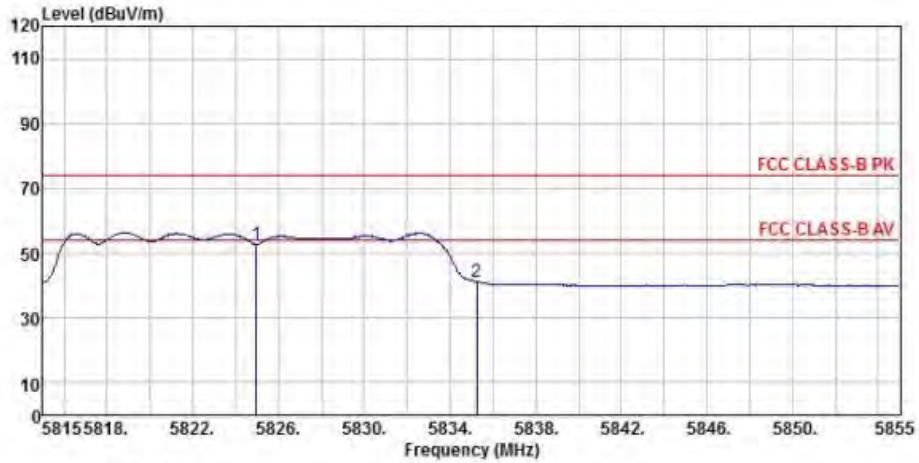


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 20M CH165
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 5824.96	44.97	32.65	11.65	36.70	52.57	74.00	-21.43	Peak
2 5835.24	33.64	32.65	11.65	36.71	41.23	74.00	-32.77	Peak

802.11ac40 (Ch151)

Detector mode: Peak

Polarity: Horizontal

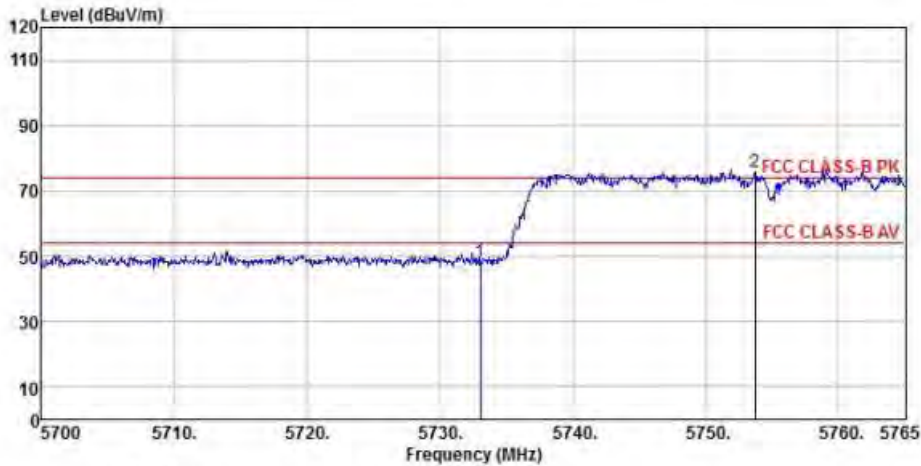


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5733.02	41.41	32.34	10.99	36.65	48.09	74.00	-25.91	Peak
2 pp 5753.69	69.11	32.40	11.09	36.66	75.94	74.00	1.94	Peak

Detector mode: Average

Polarity: Horizontal

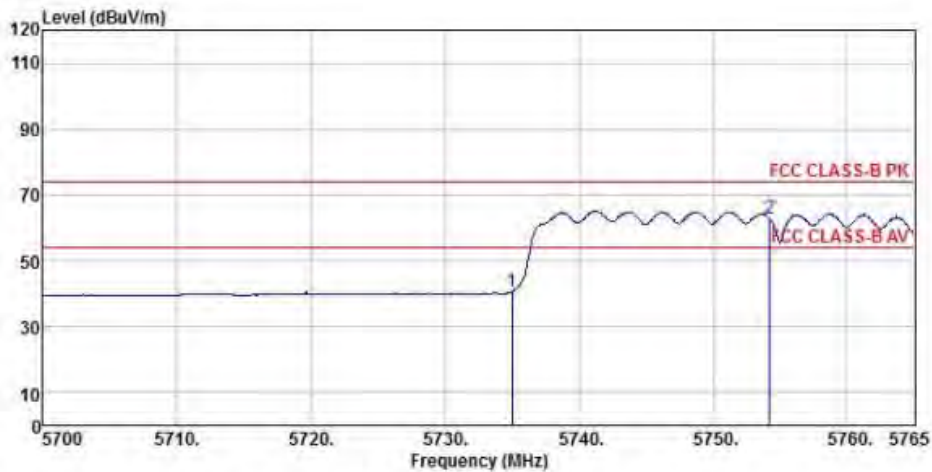


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5734.97	33.97	32.34	10.88	36.65	40.54	74.00	-33.46	Peak
2 pp 5754.21	55.94	32.40	11.09	36.66	62.77	74.00	-11.23	Peak

Detector mode: Peak

Polarity: Vertical

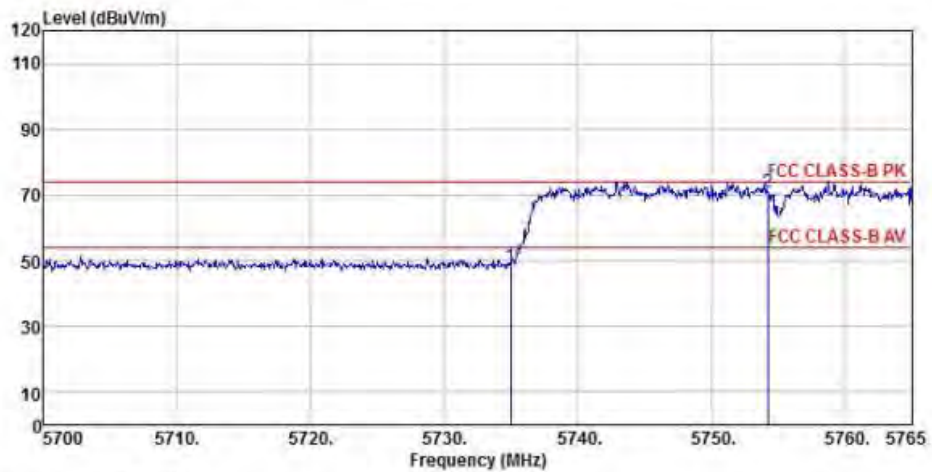


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 5734.97	41.60	32.34	10.88	36.65	48.17	74.00	-25.83	Peak
2 pp 5754.28	63.83	32.40	11.09	36.66	70.66	74.00	-3.34	Peak

Detector mode: Average

Polarity: Vertical

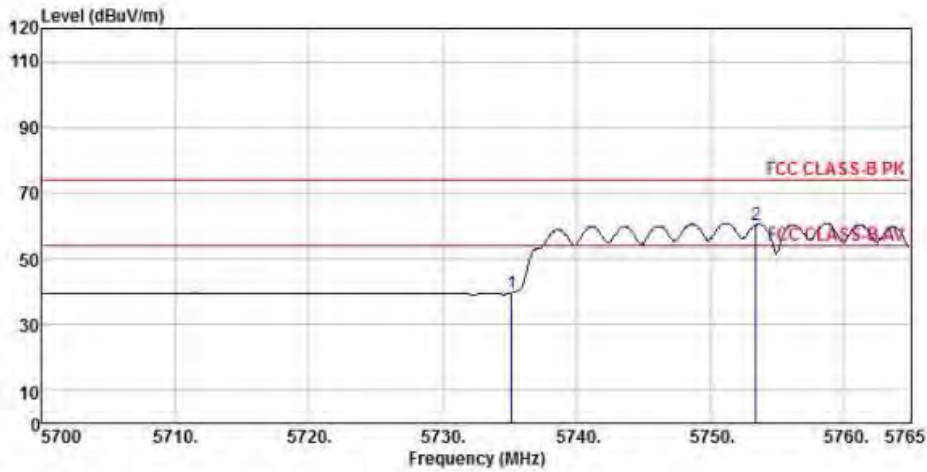

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH151
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5735.17	33.00	32.34	10.88	36.65	39.57	74.00	-34.43 Peak
2 pp 5753.43	53.56	32.40	11.09	36.66	60.39	74.00	-13.61 Peak

802.11ac40 (Ch159)

Detector mode: Peak

Polarity: Horizontal

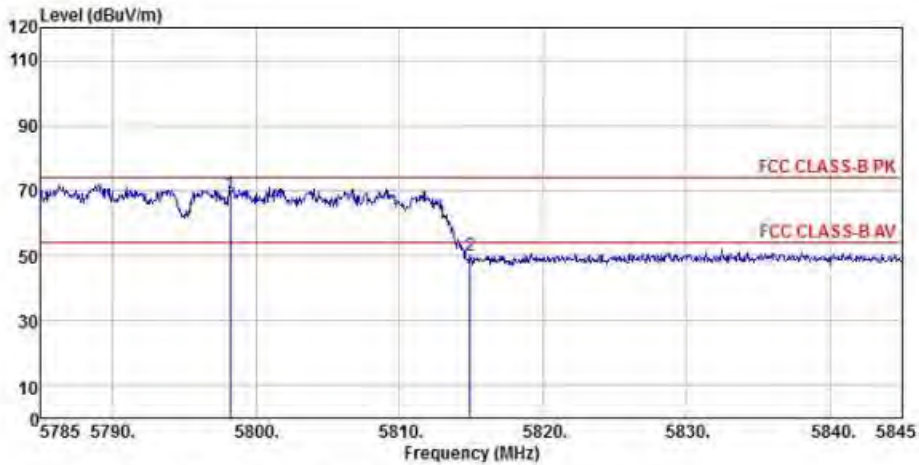


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.20	61.64	32.54	11.51	36.69	69.00	74.00	-5.00 Peak
2 5814.94	42.53	32.60	11.58	36.70	50.01	74.00	-23.99 Peak

Detector mode: Average

Polarity: Horizontal

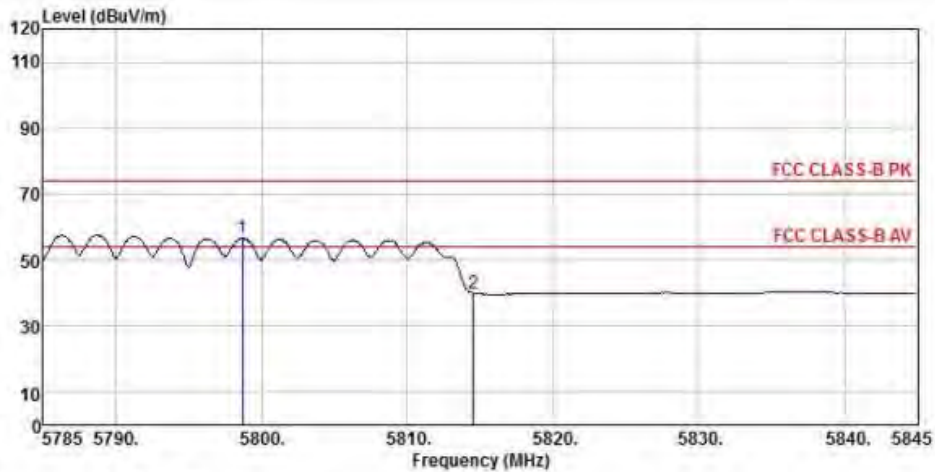


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.68	49.20	32.54	11.51	36.69	56.56	74.00	-17.44 Peak
2 5814.52	32.40	32.60	11.58	36.70	39.88	74.00	-34.12 Peak

Detector mode: Peak

Polarity: Vertical

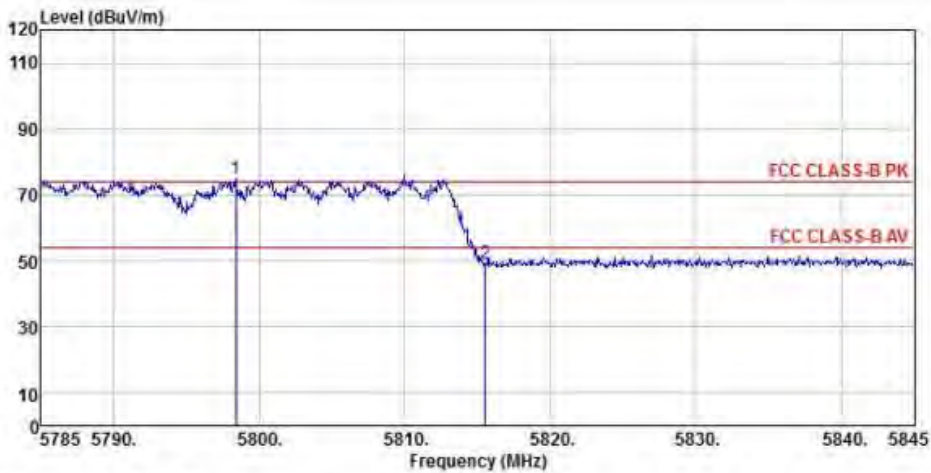


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5798.38	67.55	32.54	11.51	36.69	74.91	74.00	0.91 Peak
2 5815.54	41.87	32.60	11.58	36.70	49.35	74.00	-24.65 Peak

Detector mode: Average

Polarity: Vertical

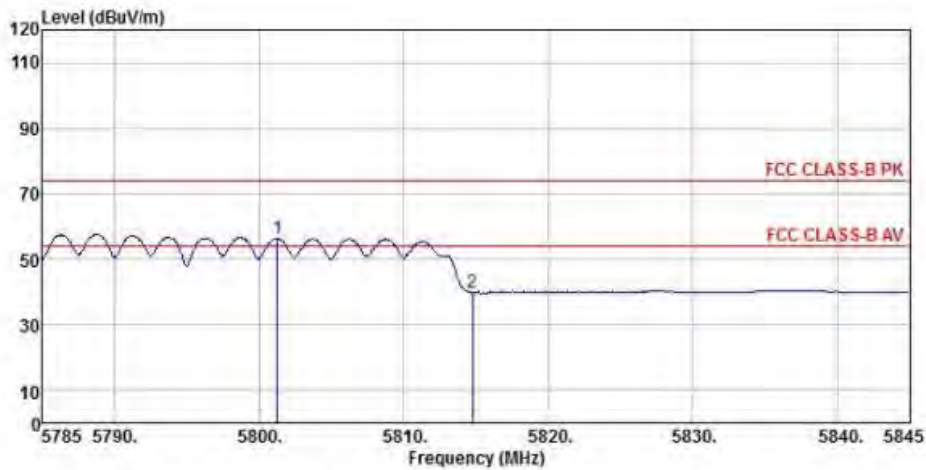

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 40M CH159
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5801.26	48.73	32.60	11.51	36.69	56.15	74.00	-17.85 Peak
2	5814.76	32.29	32.60	11.58	36.70	39.77	74.00	-34.23 Peak

802.11ac80 (Ch155)

Detector mode: Peak

Polarity: Horizontal

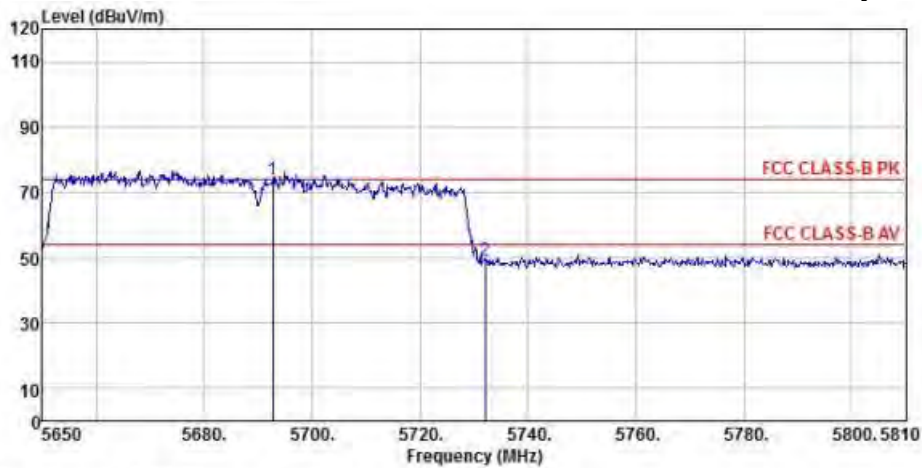


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	5692.72	67.20	32.18	11.21	36.62	73.97	74.00	-0.03 Peak
2	5732.08	42.38	32.34	10.99	36.65	49.06	74.00	-24.94 Peak

Detector mode: Average

Polarity: Horizontal

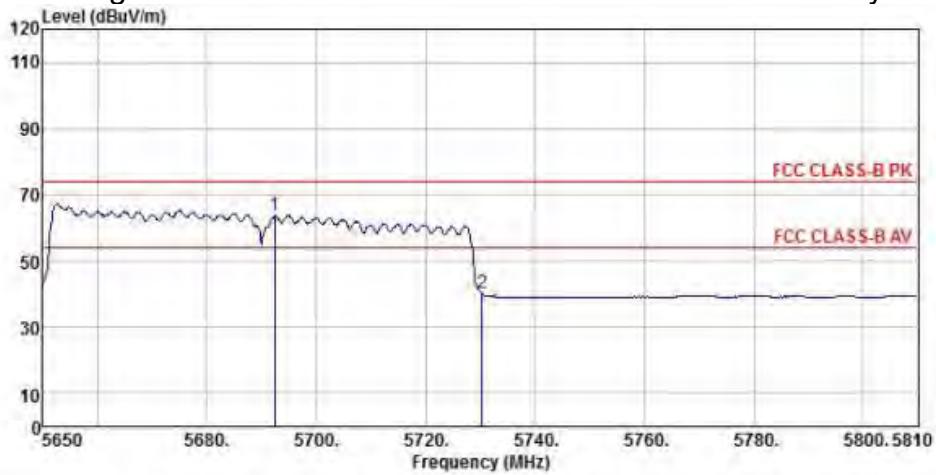


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5692.40	57.03	32.18	11.21	36.62	63.80	74.00	-10.20 Peak
2 5730.32	33.53	32.34	10.99	36.65	40.21	74.00	-33.79 Peak

Detector mode: Peak

Polarity: Vertical

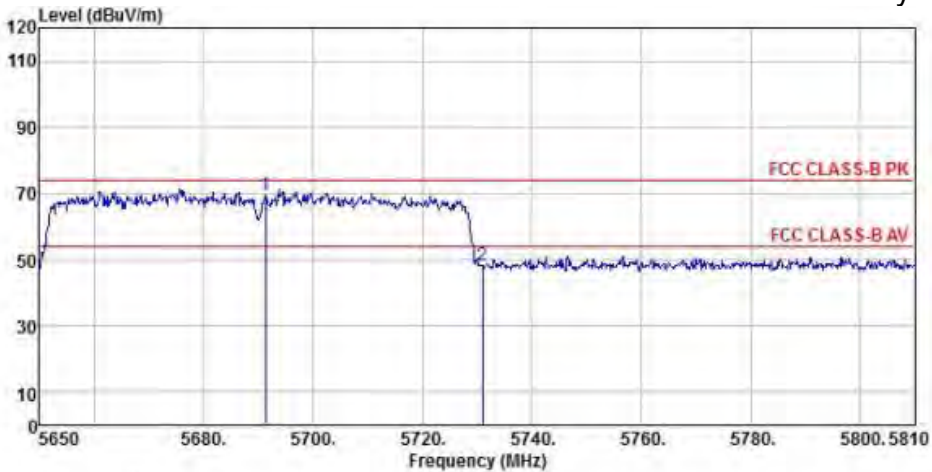


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5691.28	62.87	32.18	11.21	36.62	69.64	74.00	-4.36 Peak
2 5730.96	41.45	32.34	10.99	36.65	48.13	74.00	-25.87 Peak

Detector mode: Average

Polarity: Vertical

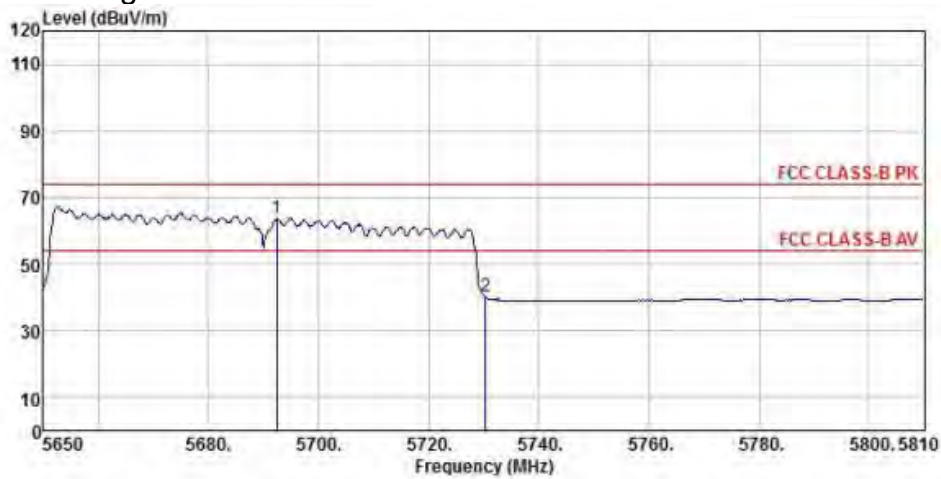

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Line	Limit	Remark		

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5692.40	57.03	32.18	11.21	36.62	63.80	74.00	-10.20 Peak
2 5730.32	33.53	32.34	10.99	36.65	40.21	74.00	-33.79 Peak

802.11ac80 (Ch155)

Detector mode: Peak

Polarity: Horizontal

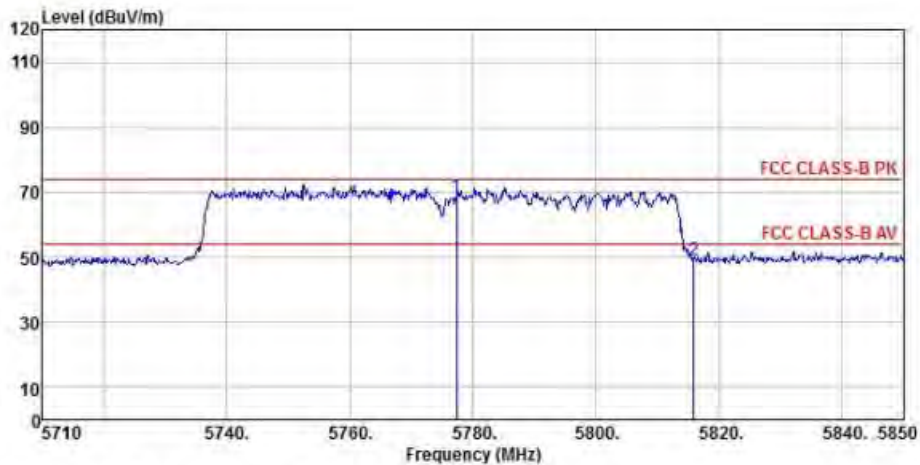


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Line	Limit	Remark		

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5777.34	61.55	32.47	11.30	36.68	68.64	74.00	-5.36 Peak
2 5815.98	41.54	32.60	11.58	36.70	49.02	74.00	-24.98 Peak

Detector mode: Average

Polarity: Horizontal

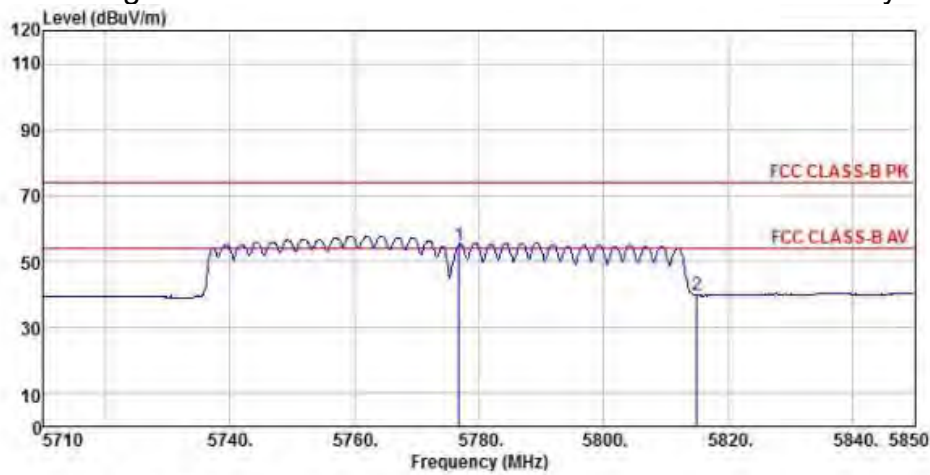


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5776.78	47.96	32.47	11.30	36.67	55.06	74.00	-18.94 Peak
2 5815.00	32.26	32.60	11.58	36.70	39.74	74.00	-34.26 Peak

Detector mode: Peak

Polarity: Vertical

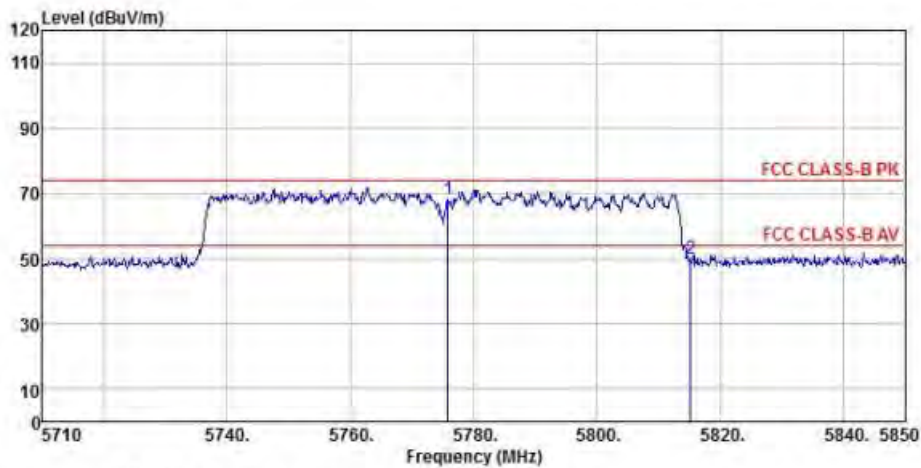


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5775.80	60.91	32.47	11.30	36.67	68.01	74.00	-5.99 Peak
2 5815.28	42.71	32.60	11.58	36.70	50.19	74.00	-23.81 Peak

Detector mode: Average

Polarity: Vertical

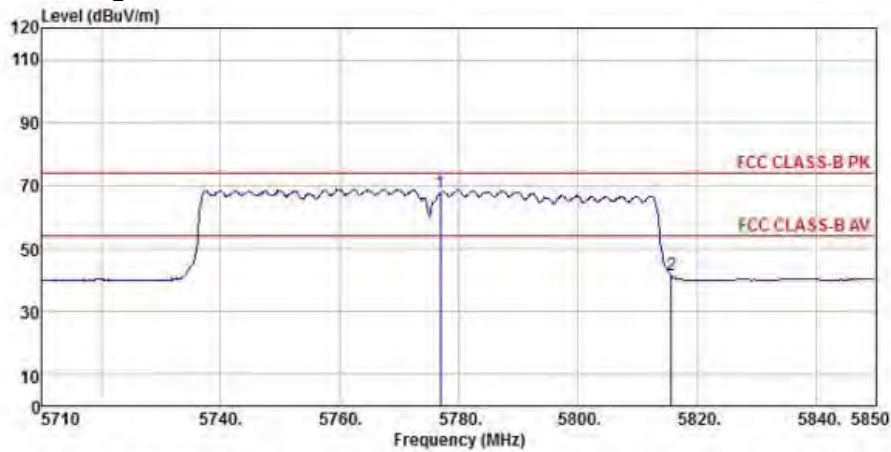

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11ac 80M CH155
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1 pp	5776.92	60.51	32.47	11.30	36.67	67.61	74.00	-6.39 Peak
2	5815.70	33.94	32.60	11.58	36.70	41.42	74.00	-32.58 Peak


Antenna 2& Mimo

WIFI 2.4G

802.11b (Ch1)

Detector mode: Peak

Polarity: Horizontal

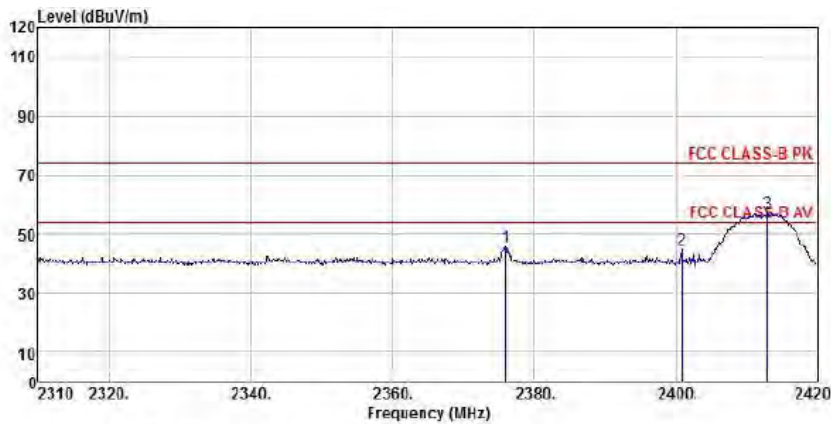


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	2375.89	49.21	27.65	7.16	38.53	45.49	74.00	-28.51 Peak
2	2400.86	48.35	27.58	7.13	38.52	44.54	74.00	-29.46 Peak
3 pp	2412.96	60.83	27.54	7.21	38.52	57.06	74.00	-16.94 Peak

Detector mode: Average

Polarity: Horizontal

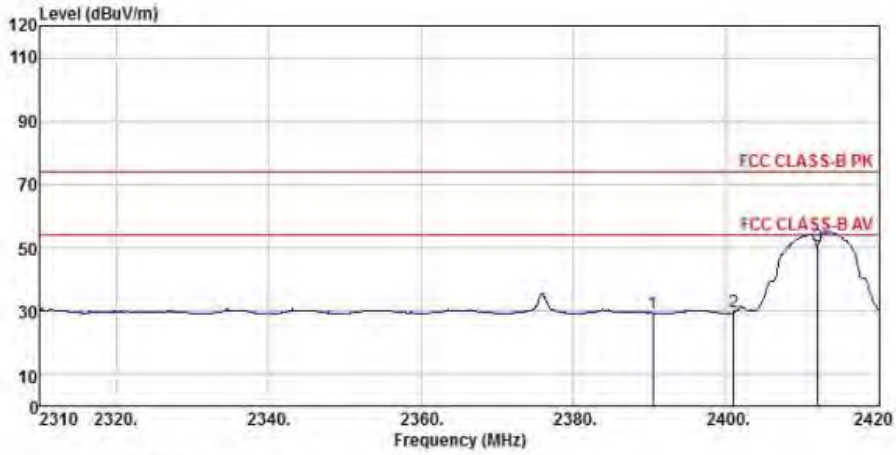


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.41	33.21	27.58	7.13	38.53	29.39	74.00	-44.61 Peak
2	2400.97	33.56	27.58	7.13	38.52	29.75	74.00	-44.25 Peak
3 pp	2412.08	54.19	27.54	7.21	38.52	50.42	74.00	-23.58 Peak

Detector mode: Peak

Polarity: Vertical

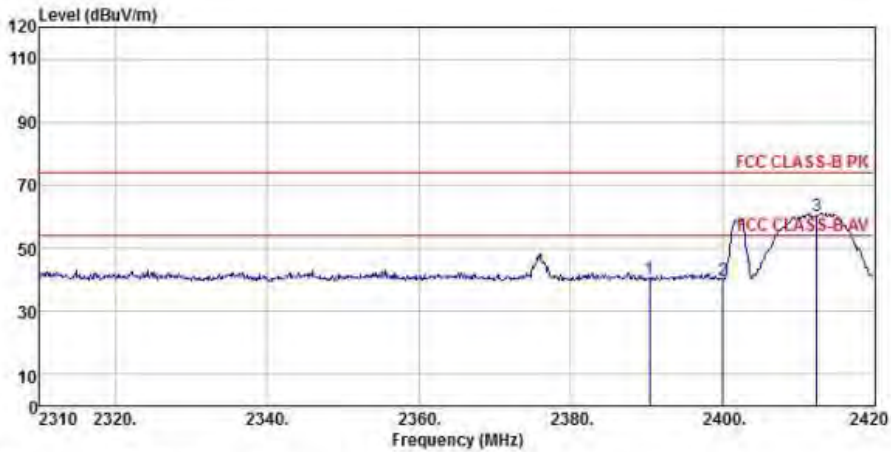


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.41	44.19	27.58	7.13	38.53	40.37	74.00	-33.63 Peak
2	2400.09	43.60	27.58	7.13	38.52	39.79	74.00	-34.21 Peak
3 pp	2412.41	64.13	27.54	7.21	38.52	60.36	74.00	-13.64 Peak

Detector mode: Average

Polarity: Vertical

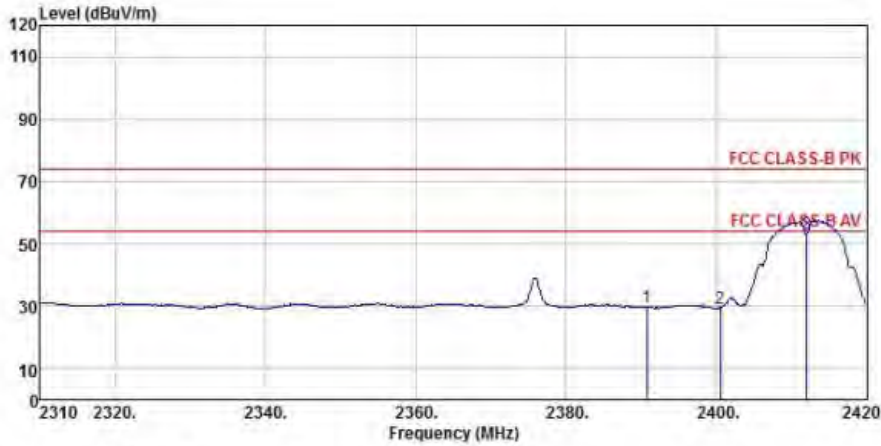


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH1
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.74	33.37	27.58	7.13	38.53	29.55	74.00 -44.45 Peak
2	2400.53	33.25	27.58	7.13	38.52	29.44	74.00 -44.56 Peak
3	pp	2412.08	56.71	27.54	7.21	38.52	52.94 74.00 -21.06 Peak

802.11b (Ch11)

Detector mode: Peak

Polarity: Horizontal

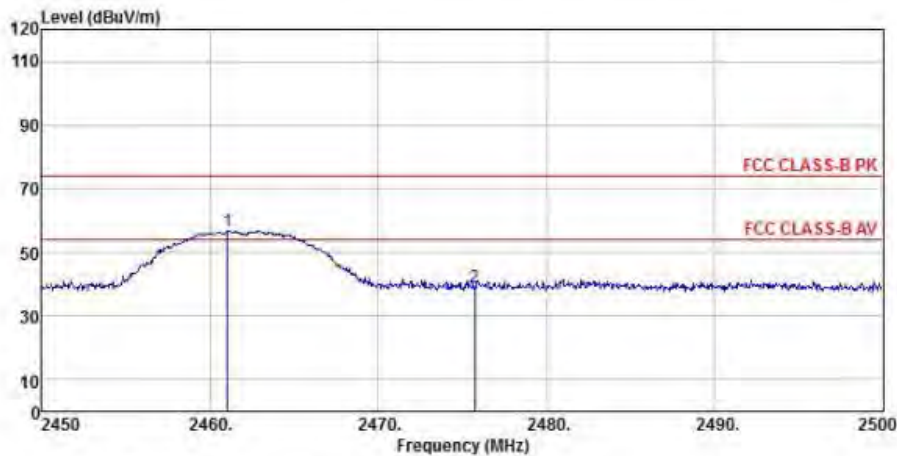


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	pp	2461.05	60.26	27.49	7.39	38.50	56.64 74.00 -17.36 Peak
2		2475.75	42.53	27.52	7.41	38.50	38.96 74.00 -35.04 Peak

Detector mode: Average

Polarity: Horizontal

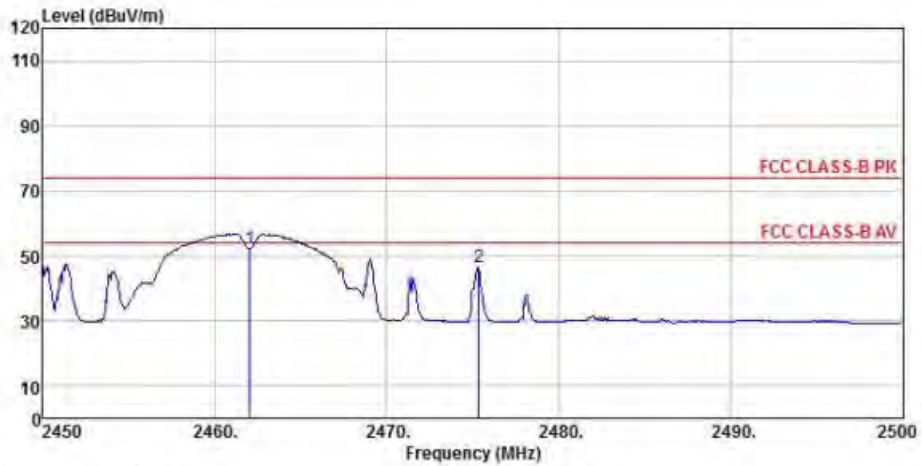


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.05	55.74	27.49	7.39	38.50	52.12	74.00	-21.88 Peak
2 2475.35	50.26	27.52	7.41	38.50	46.69	74.00	-27.31 Peak

Detector mode: Peak

Polarity: Vertical

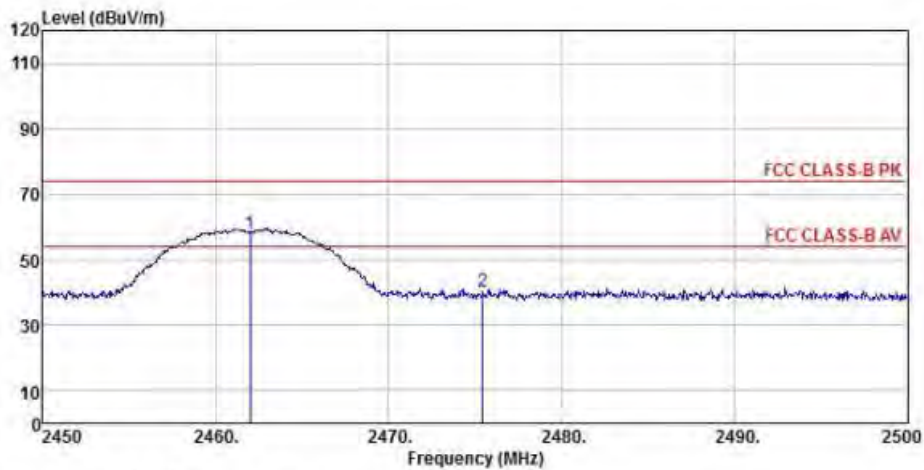


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.00	61.78	27.49	7.39	38.50	58.16	74.00	-15.84 Peak
2 2475.45	43.88	27.52	7.41	38.50	40.31	74.00	-33.69 Peak

Detector mode: Average

Polarity: Vertical

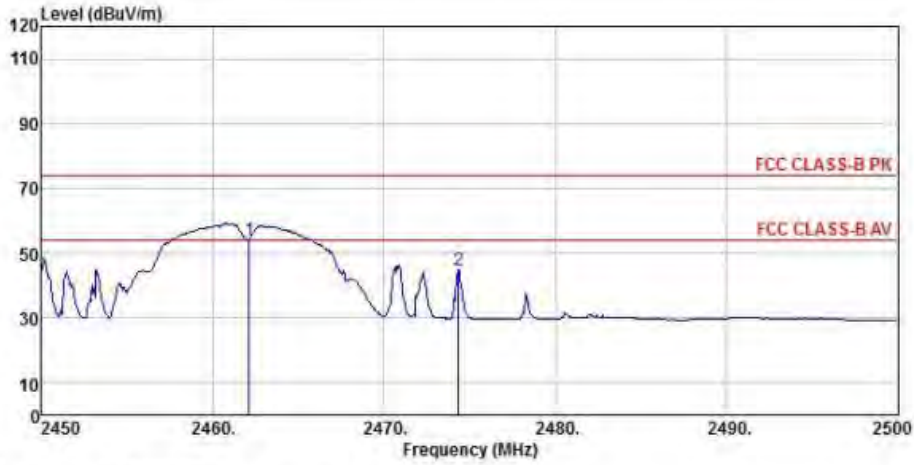

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G CH11
 Memo :


ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.10	57.84	27.49	7.39	38.50	54.22	74.00	-19.78 Peak
2 2474.35	48.25	27.52	7.41	38.50	44.68	74.00	-29.32 Peak

802.11g (Ch1)

Detector mode: Peak

Polarity: Horizontal

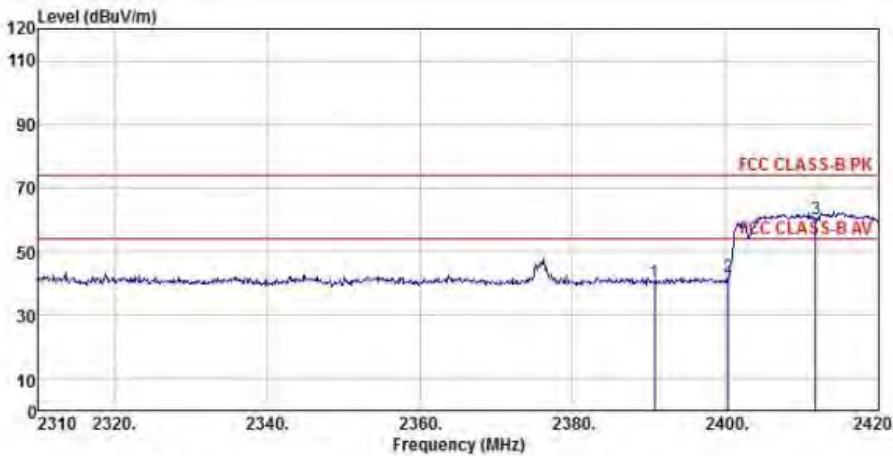


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH1
 Memo :

ReadAntenna Cable Preamp Limit Over
 Freq Level Factor Loss Factor Level Line Limit Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.74	44.11	27.58	7.13	38.53	40.29	74.00	-33.71 Peak
2 2400.42	45.90	27.58	7.13	38.52	42.09	74.00	-31.91 Peak
3 pp 2411.86	63.82	27.54	7.21	38.52	60.05	74.00	-13.95 Peak

Detector mode: Average

Polarity: Horizontal

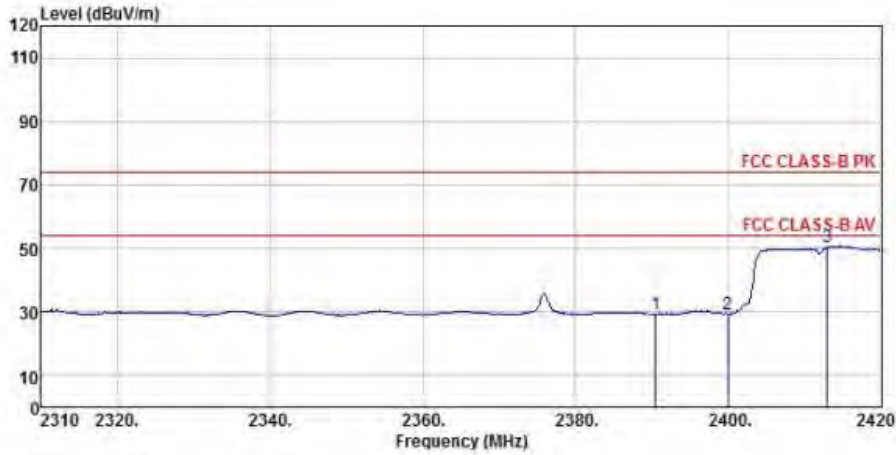


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CHI
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.52	33.11	27.58	7.13	38.53	29.29	74.00	-44.71 Peak
2	2399.98	33.03	27.58	7.13	38.52	29.22	74.00	-44.78 Peak
3 pp	2412.96	54.29	27.54	7.21	38.52	50.52	74.00	-23.48 Peak

Detector mode: Peak

Polarity: Vertical

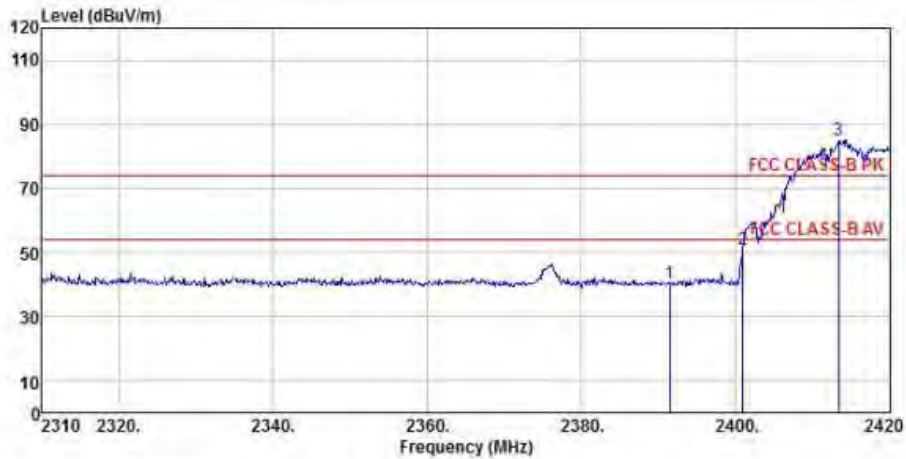


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CHI
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2391.51	44.12	27.58	7.13	38.53	40.30	74.00	-33.70 Peak
2	2400.97	54.89	27.58	7.13	38.52	51.08	74.00	-22.92 Peak
3 pp	2413.40	88.78	27.54	7.21	38.52	85.01	74.00	11.01 Peak

Detector mode: Average

Polarity: Vertical

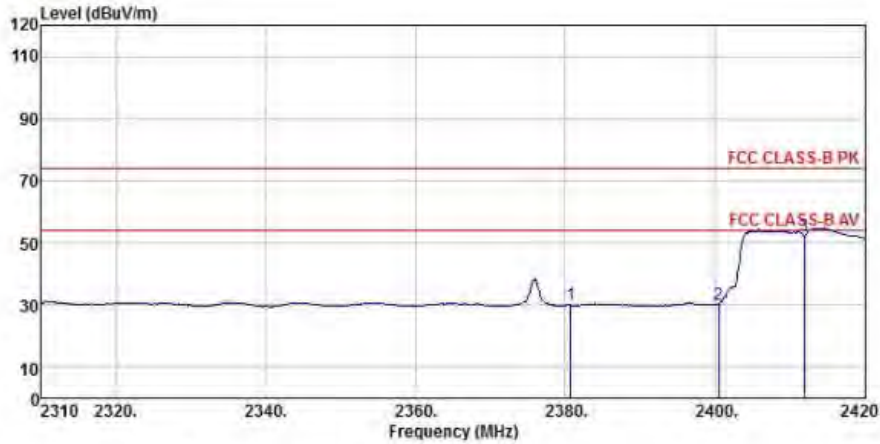

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH1
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2380.73	33.64	27.65	7.16	38.53	29.92	74.00	-44.08 Peak
2 2400.53	33.96	27.58	7.13	38.52	30.15	74.00	-43.85 Peak
3 pp 2411.97	55.95	27.54	7.21	38.52	52.18	74.00	-21.82 Peak

802.11g (Ch11)

Detector mode: Peak

Polarity: Horizontal

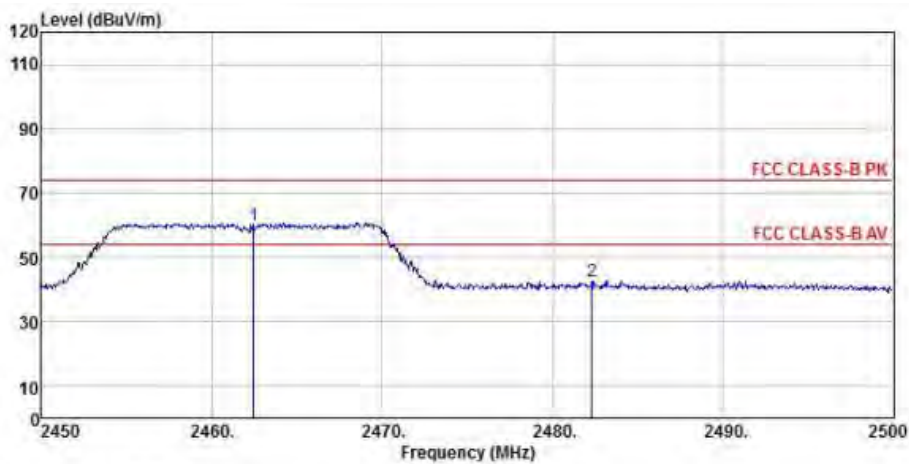


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.45	63.30	27.49	7.39	38.50	59.68	74.00	-14.32 Peak
2 2482.30	46.17	27.52	7.41	38.49	42.61	74.00	-31.39 Peak

Detector mode: Average

Polarity: Horizontal

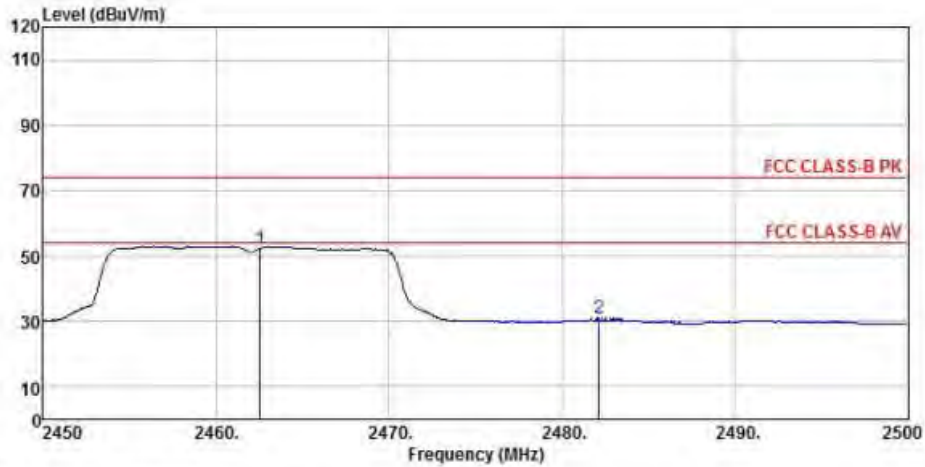


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 2462.55	55.97	27.49	7.39	38.50	52.35	74.00	-21.65 Peak	
2 2482.15	34.41	27.52	7.41	38.49	30.85	74.00	-43.15 Peak	

Detector mode: Peak

Polarity: Vertical

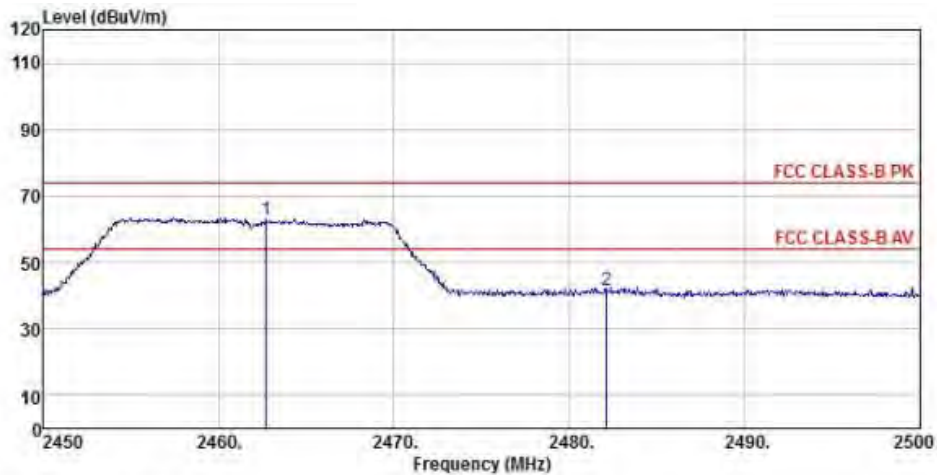


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp 2462.70	66.63	27.49	7.39	38.50	63.01	74.00	-10.99 Peak	
2 2482.15	45.28	27.52	7.41	38.49	41.72	74.00	-32.28 Peak	

Detector mode: Average

Polarity: Vertical

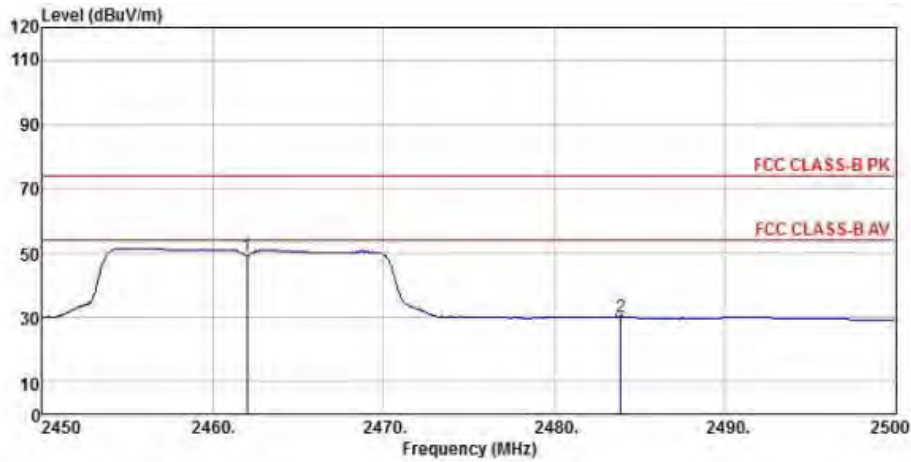

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11g CH11
 Memo :


Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 2462.00	52.65	27.49	7.39	38.50	49.03	74.00	-24.97 Peak
2 2483.90	33.67	27.52	7.41	38.49	30.11	74.00	-43.89 Peak

802.11n20 (Ch1)

Detector mode: Peak

Polarity: Horizontal

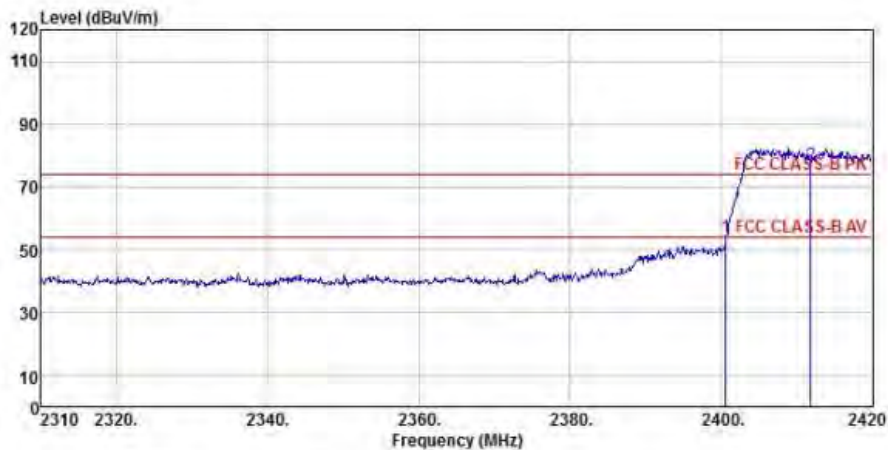


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2400.64	57.97	27.58	7.13	38.52	54.16	74.00	-19.84 Peak
2 pp 2411.86	80.75	27.54	7.21	38.52	76.98	74.00	2.98 Peak

Detector mode: Average

Polarity: Horizontal

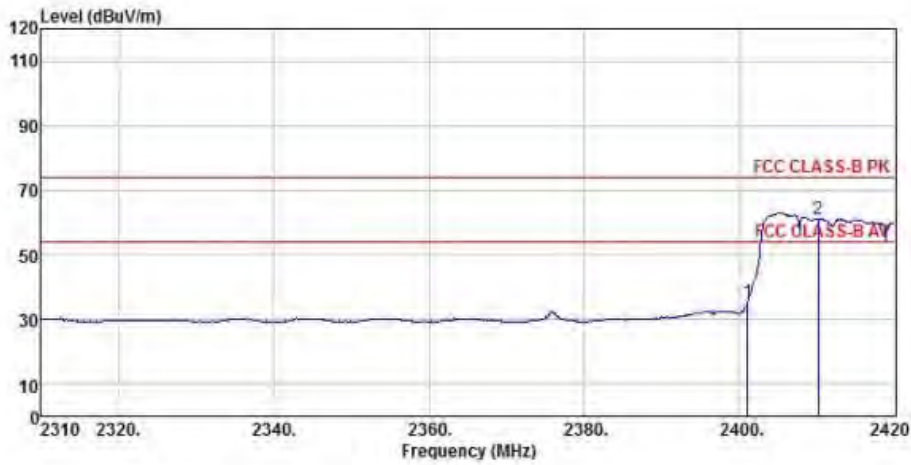


Site : chamber
 Condition : FCC CLASS-B PE 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CHI
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	2400.97	39.06	27.58	7.13	38.52	35.25	74.00 -38.75 Peak
2	pp	2410.10	64.85	27.54	7.21	38.52	61.08 74.00 -12.92 Peak

Detector mode: Peak


Polarity: Vertical

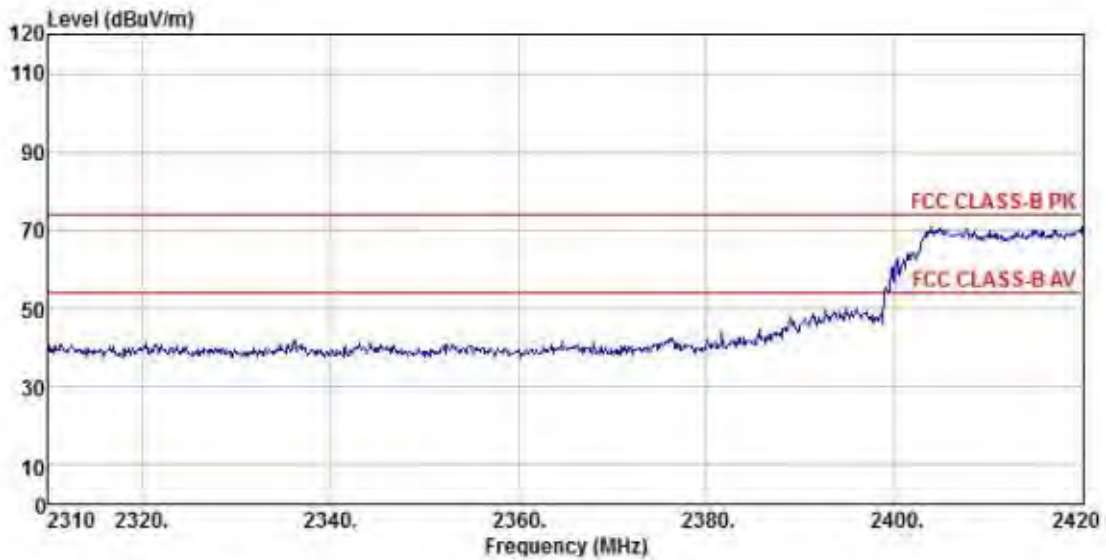

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CHI
 Memo :

Detector mode: Average

Polarity: Vertical

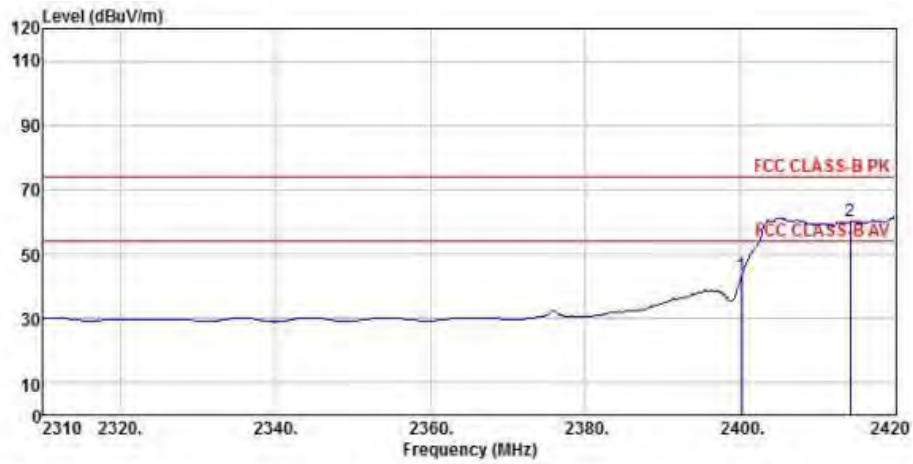


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2400.20	47.08	27.58	7.13	38.52	43.27	74.00 -30.73 Peak
2	pp	2414.17	64.14	27.54	7.21	38.52	60.37 74.00 -13.63 Peak

802.11n20 (Ch1)(mimo)

Detector mode: Peak

Polarity: Horizontal

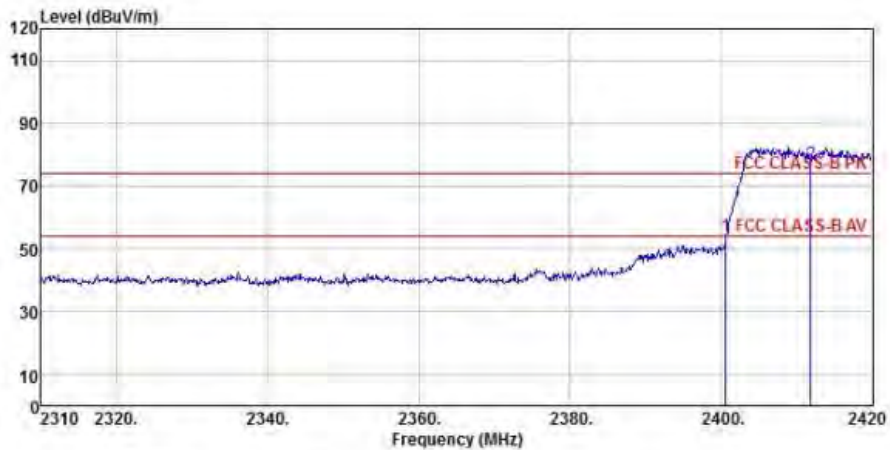


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2400.64	57.97	27.58	7.13	38.52	54.16	74.00 -19.84 Peak
2	pp	2411.86	80.75	27.54	7.21	38.52	76.98 74.00 2.98 Peak

Detector mode: Average

Polarity: Horizontal

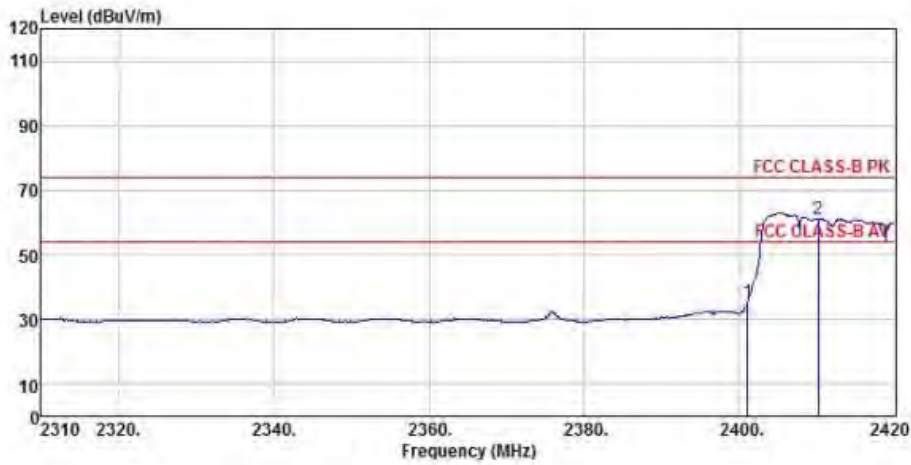


Site : chamber
 Condition : FCC CLASS-B PE 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CHI
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2400.97	39.06	27.58	7.13	38.52	35.25	74.00 -38.75 Peak
2	pp 2410.10	64.85	27.54	7.21	38.52	61.08	74.00 -12.92 Peak

Detector mode: Peak


Polarity: Vertical

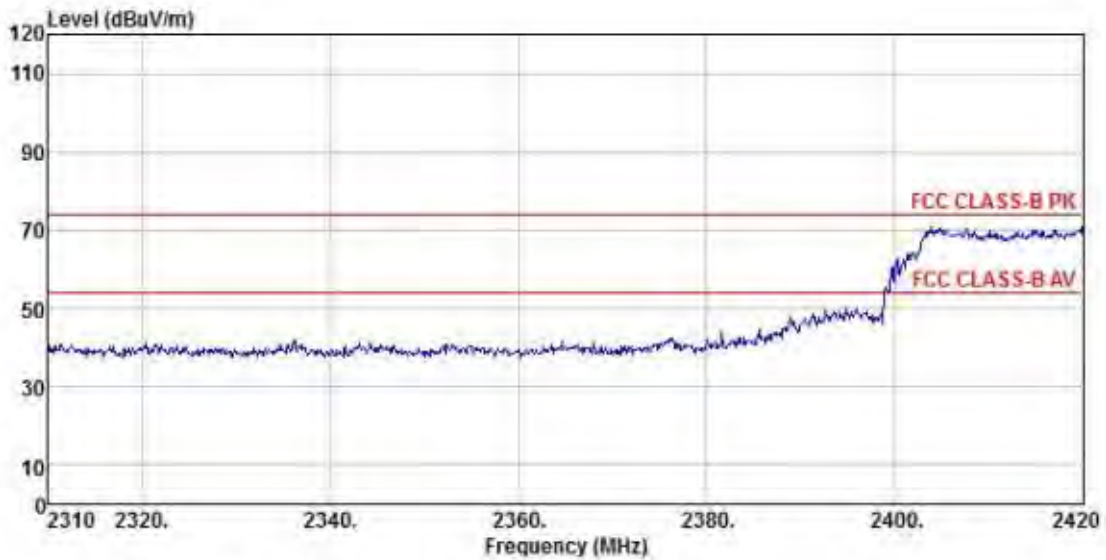

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CHI
 Memo :

Detector mode: Average

Polarity: Vertical

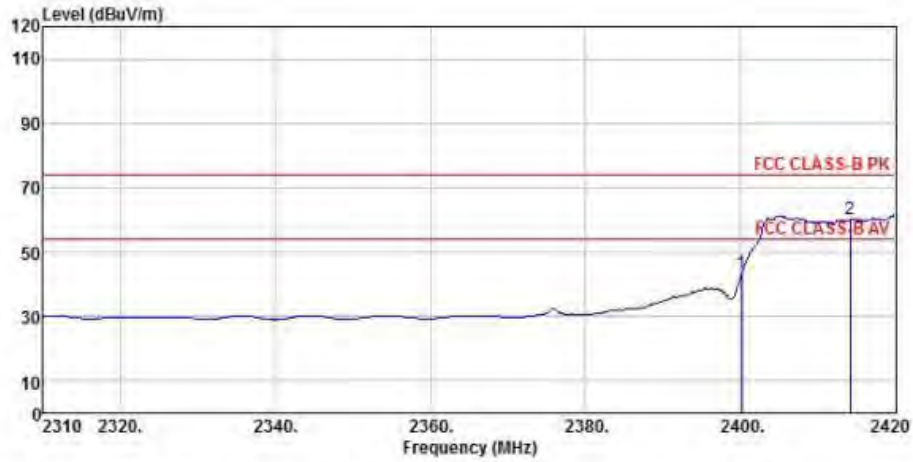


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH1
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2400.20	47.08	27.58	7.13	38.52	43.27	74.00	-30.73 Peak
2	2414.17	64.14	27.54	7.21	38.52	60.37	74.00	-13.63 Peak

802.11n20 (Ch11)

Detector mode: Peak

Polarity: Horizontal

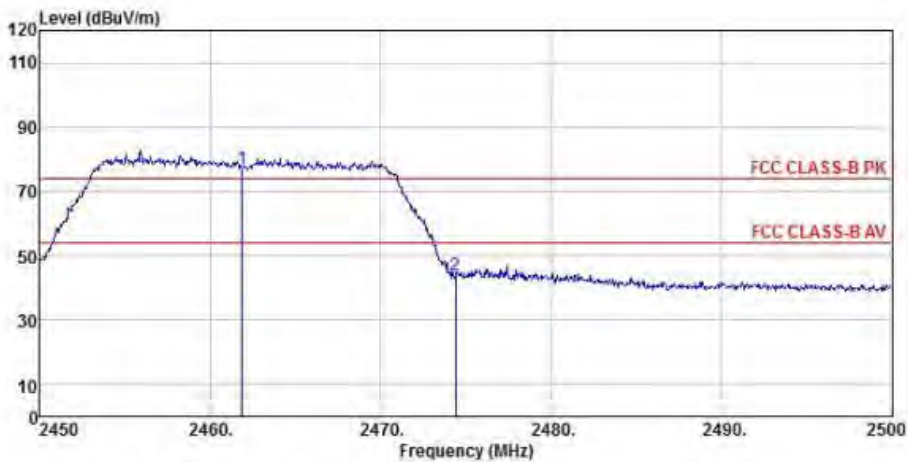


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2461.85	80.76	27.49	7.39	38.50	77.14	74.00	3.14 Peak
2	2474.40	47.19	27.52	7.41	38.50	43.62	74.00	-30.38 Peak

Detector mode: Average

Polarity: Horizontal

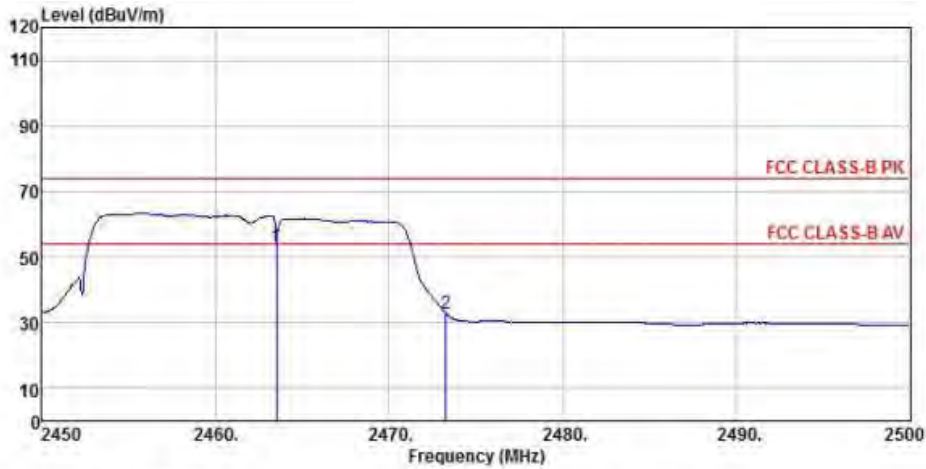


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	2463.50	56.69	27.49	7.39	38.50	53.07	74.00	-20.93	Peak
2		2473.25	36.38	27.52	7.41	38.50	32.81	74.00	-41.19	Peak

Detector mode: Peak

Polarity: Vertical

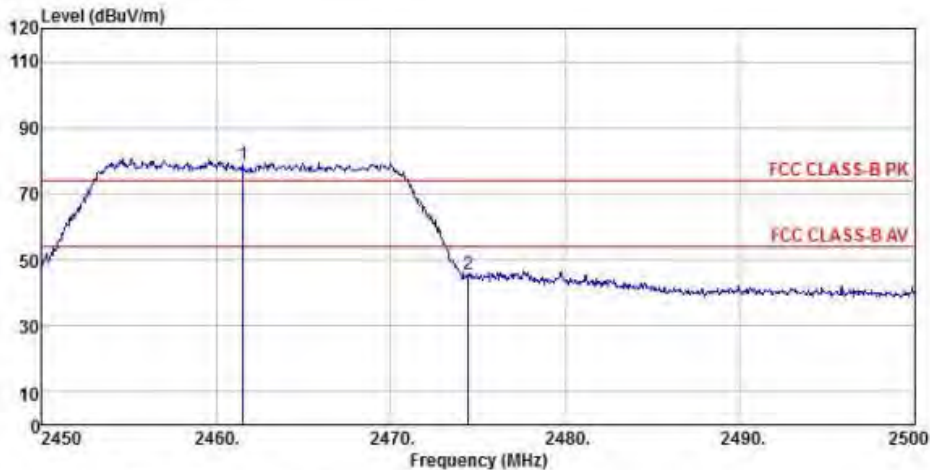


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	2461.55	82.51	27.49	7.39	38.50	78.89	74.00	4.89	Peak
2		2474.45	49.03	27.52	7.41	38.50	45.46	74.00	-28.54	Peak

Detector mode: Average

Polarity: Vertical

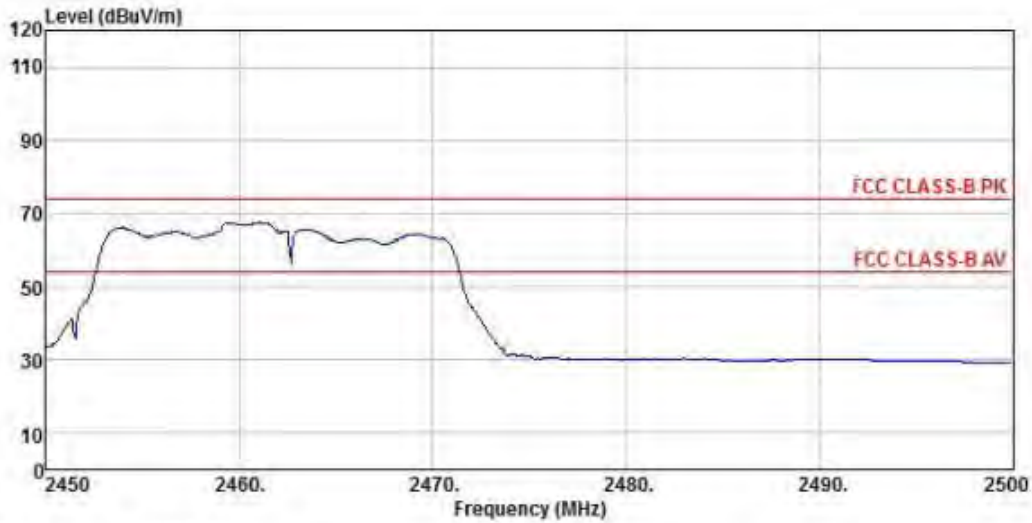


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

802.11n20 (Ch11)(mimo)

Detector mode: Peak

Polarity: Horizontal

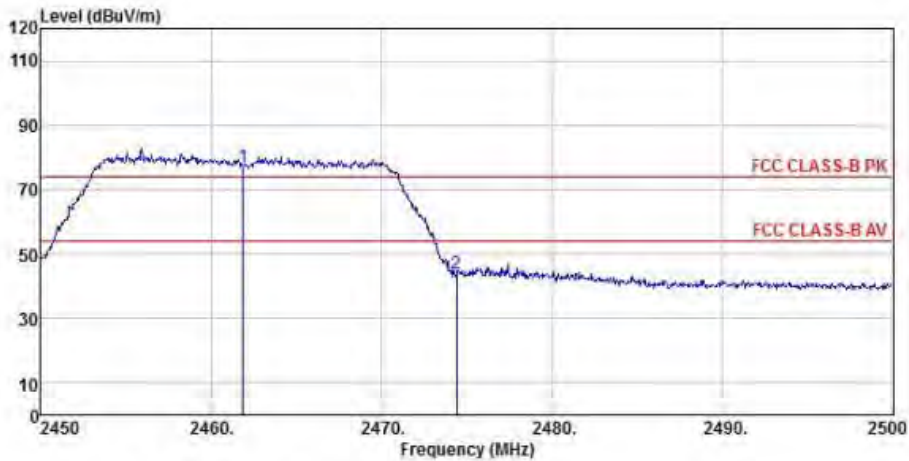


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

	Read	Antenna	Cable	Preamp	Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	pp 2461.85	80.76	27.49	7.39	38.50	77.14	74.00 3.14 Peak
2	2474.40	47.19	27.52	7.41	38.50	43.62	74.00 -30.38 Peak

Detector mode: Average

Polarity: Horizontal

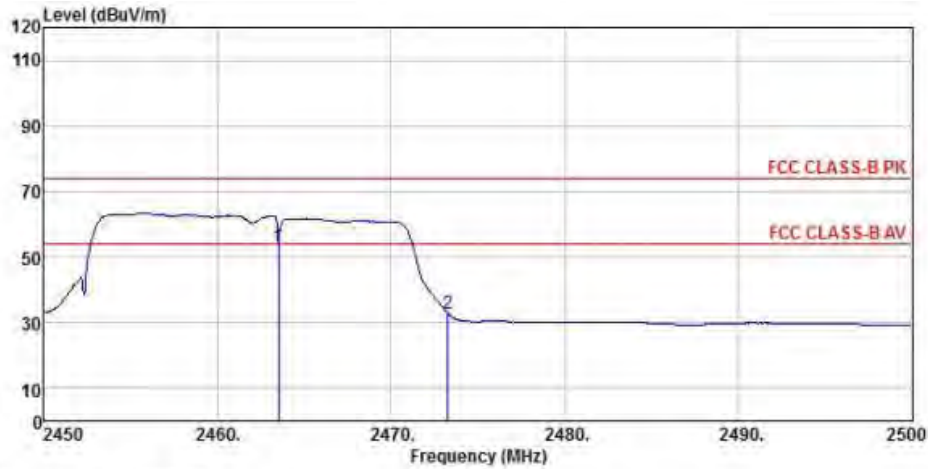


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	2463.50	56.69	27.49	7.39	38.50	53.07	74.00	-20.93	Peak
2		2473.25	36.38	27.52	7.41	38.50	32.81	74.00	-41.19	Peak

Detector mode: Peak

Polarity: Vertical

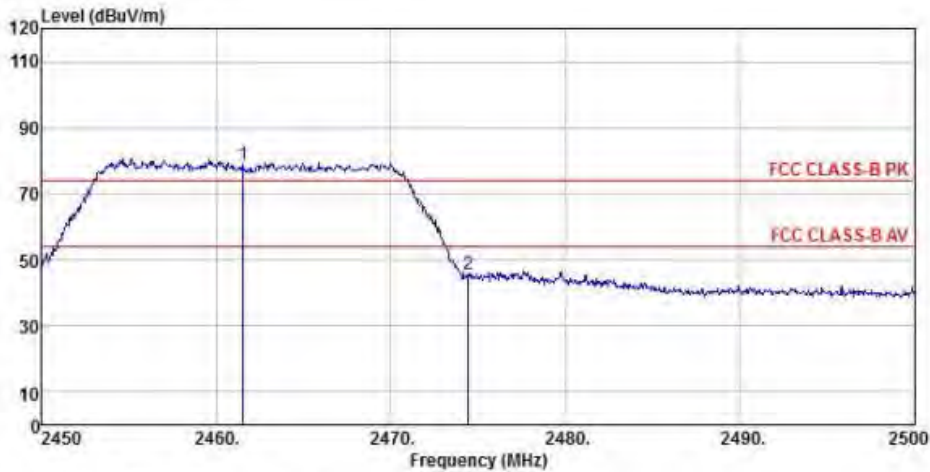


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	

1	pp	2461.55	82.51	27.49	7.39	38.50	78.89	74.00	4.89	Peak
2		2474.45	49.03	27.52	7.41	38.50	45.46	74.00	-28.54	Peak

Detector mode: Average

Polarity: Vertical

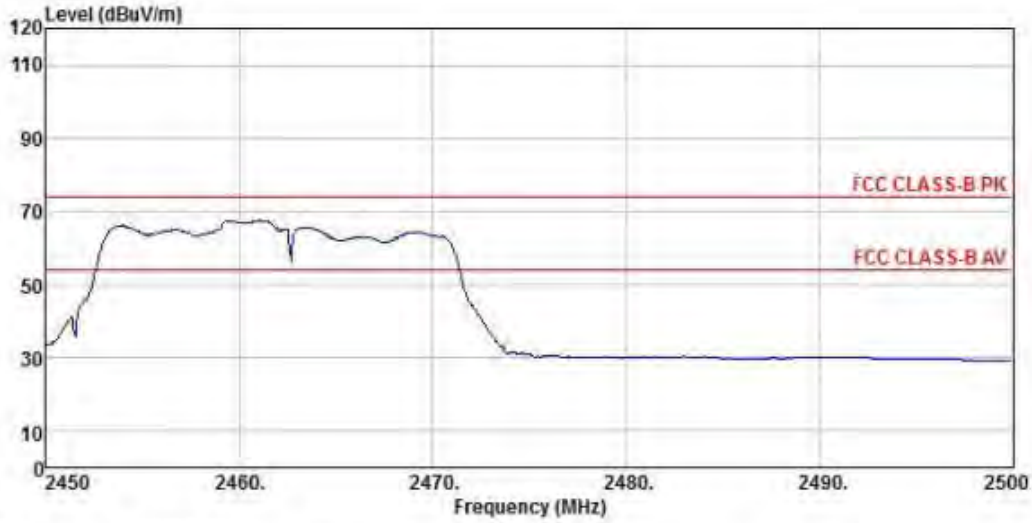


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 2.4G 802.11n CH11
 Memo :

WIFI 5G(5150MHz-5250MHz)

802.11a (Ch36)

Detector mode: Peak

Polarity: Horizontal

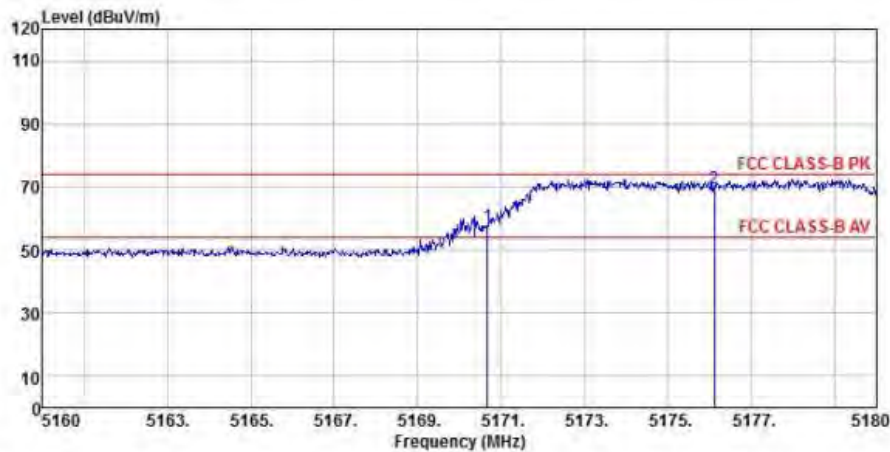


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5170.68	51.20	32.01	10.64	36.28	57.57	74.00	-16.43 Peak
2	pp	5176.12	62.94	32.01	10.64	36.28	69.31	74.00 -4.69 Peak

Detector mode: Average

Polarity: Horizontal

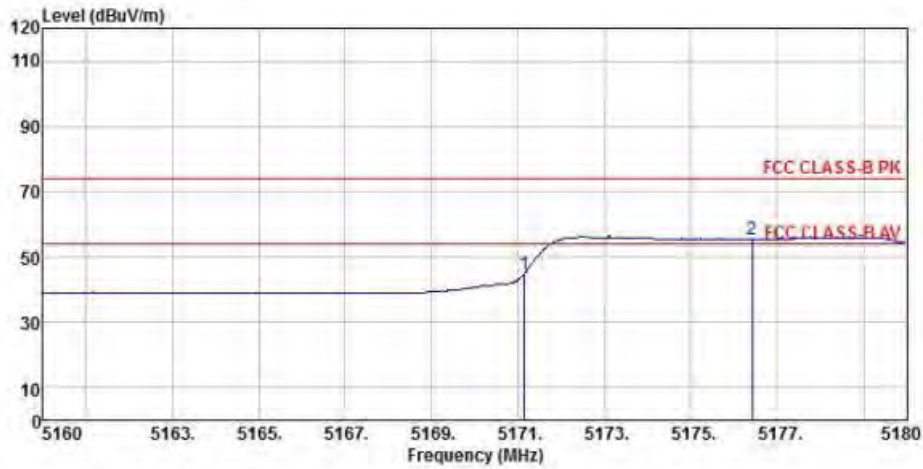


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5171.14	38.36	32.01	10.64	36.28	44.73	74.00	-29.27 Peak
2	pp	5176.42	49.01	32.01	10.64	36.28	55.38	74.00 -18.62 Peak

Detector mode: Peak

Polarity: Vertical

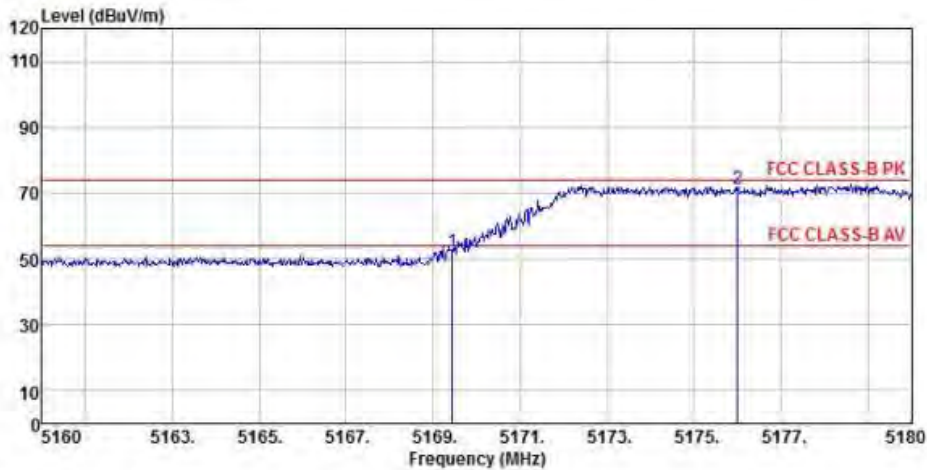


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5169.44	46.02	32.01	10.64	36.28	52.39	74.00	-21.61 Peak
2	pp	5176.00	64.97	32.01	10.64	36.28	71.34	74.00 -2.66 Peak

Detector mode: Average

Polarity: Vertical

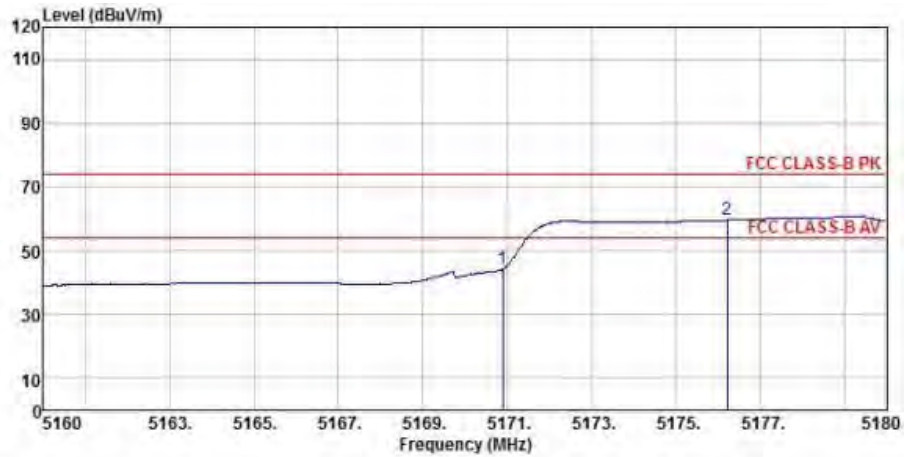


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m			
1	5170.90	37.92	32.01	10.64	36.28	44.29	74.00	-29.71	Peak
2	5176.22	53.20	32.01	10.64	36.28	59.57	74.00	-14.43	Peak

802.11a (Ch48)

Detector mode: Peak

Polarity: Horizontal

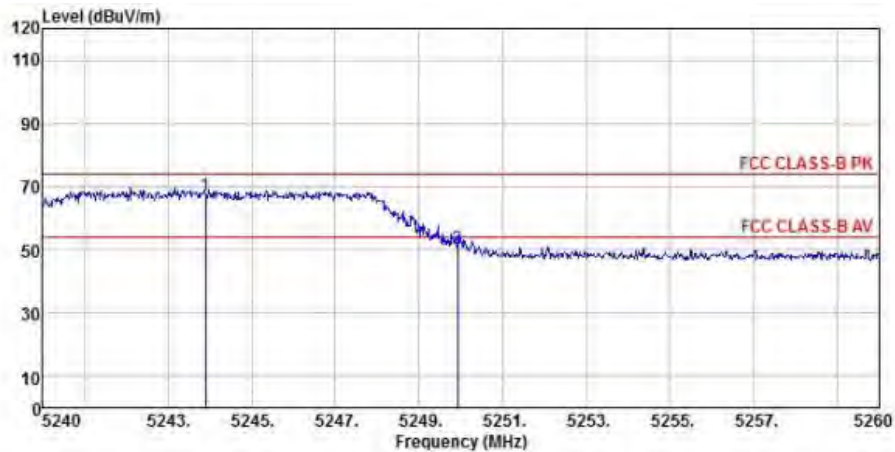


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m			
1	5243.90	61.12	31.75	10.79	36.33	67.33	74.00	-6.67	Peak
2	5249.92	44.25	31.75	10.79	36.33	50.46	74.00	-23.54	Peak

Detector mode: Average

Polarity: Horizontal

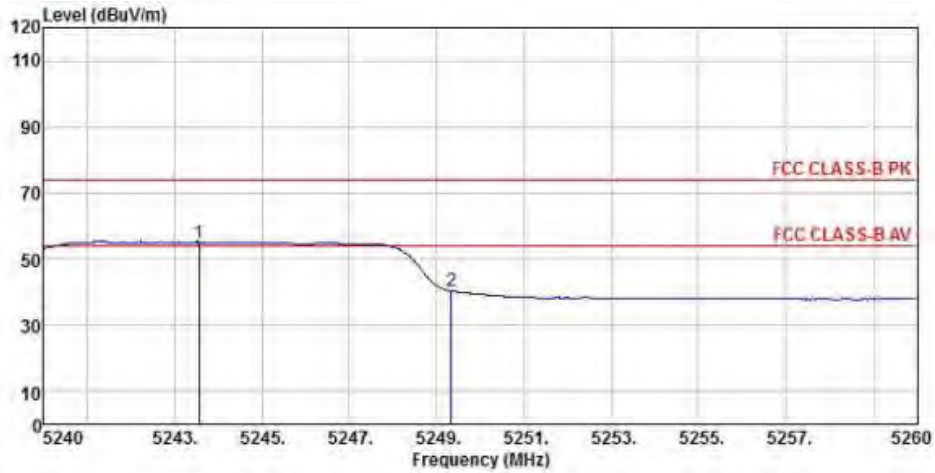


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5243.56	48.72	31.75	10.79	36.33	54.93	74.00	-19.07 Peak
2 5249.34	34.09	31.75	10.79	36.33	40.30	74.00	-33.70 Peak

Detector mode: Peak

Polarity: Vertical

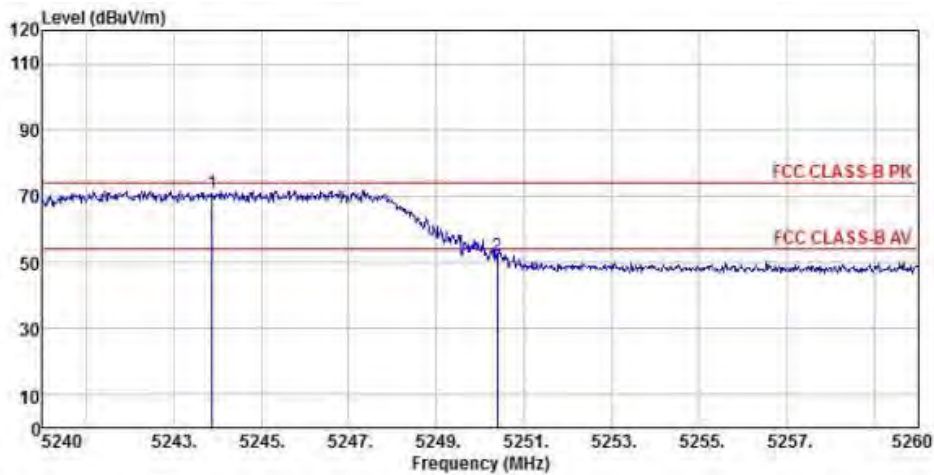


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp 5243.88	64.64	31.75	10.79	36.33	70.85	74.00	-3.15 Peak
2 5250.40	45.51	31.75	10.79	36.33	51.72	74.00	-22.28 Peak

Detector mode: Average

Polarity: Vertical

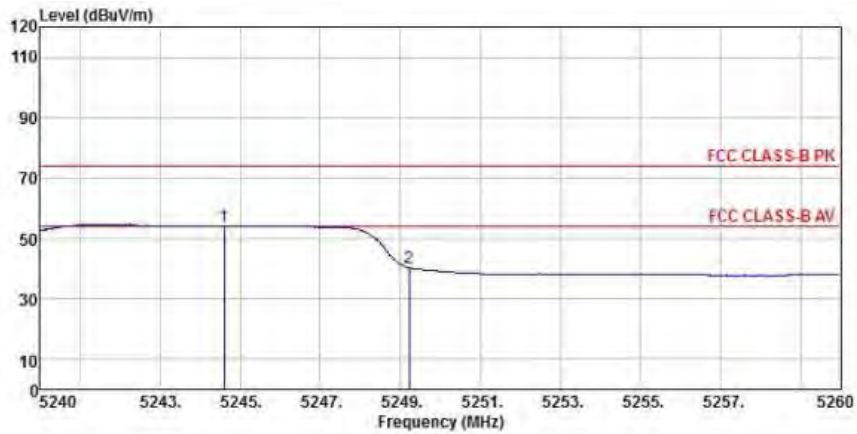


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11a CH48
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1 pp 5244.60	47.80	31.75	10.79	36.33	54.01	74.00 -19.99 Peak
2 5249.22	34.03	31.75	10.79	36.33	40.24	74.00 -33.76 Peak

802.11n20 (Ch36)

Detector mode: Peak

Polarity: Horizontal

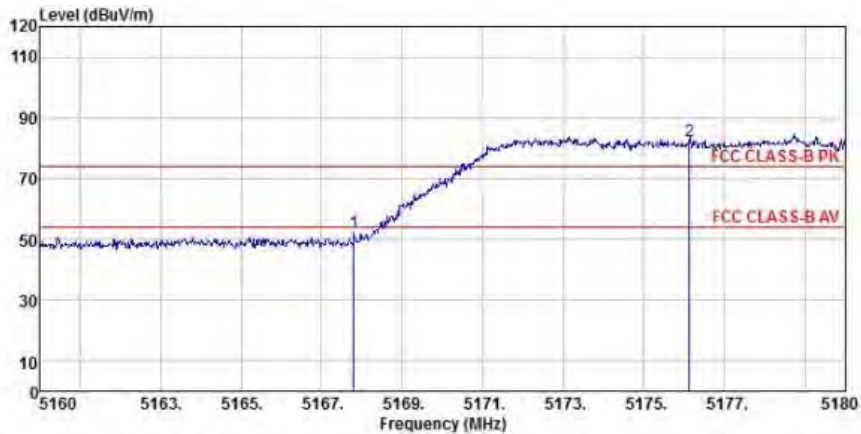


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1 5167.80	45.79	32.01	10.64	36.28	52.16	74.00 -21.84 Peak
2 pp 5176.14	76.10	32.01	10.64	36.28	82.47	74.00 8.47 Peak

Detector mode: Average

Polarity: Horizontal

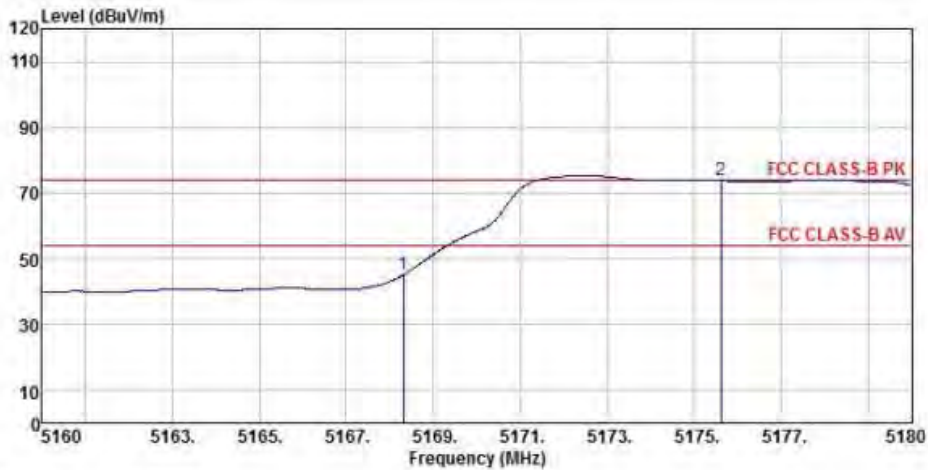


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5168.32	38.76	32.01	10.64	36.28	45.13	74.00	-28.87 Peak
2 pp 5175.62	67.44	32.01	10.64	36.28	73.81	74.00	-0.19 Peak

Detector mode: Peak

Polarity: Vertical

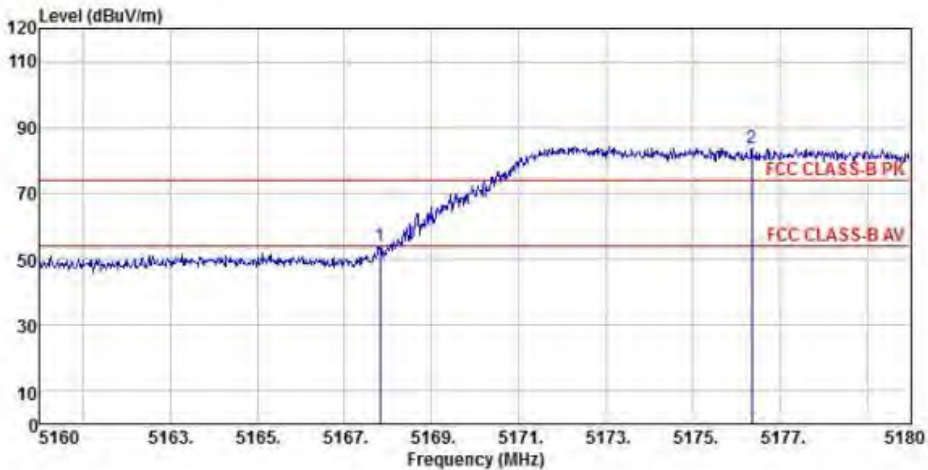


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5167.82	47.47	32.01	10.64	36.28	53.84	74.00	-20.16 Peak
2 pp 5176.36	77.23	32.01	10.64	36.28	83.60	74.00	9.60 Peak

Detector mode: Average

Polarity: Vertical

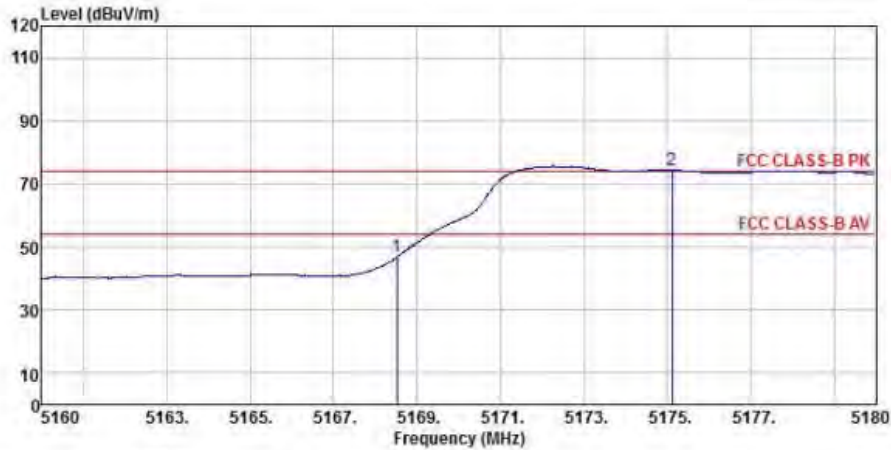


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5168.52	40.40	32.01	10.64	36.28	46.77	74.00	-27.23 Peak
2	pp	5175.12	67.94	32.01	10.64	36.28	74.31	74.00 0.31 Peak

802.11n20 (Ch36)(mimo)

Detector mode: Peak

Polarity: Horizontal

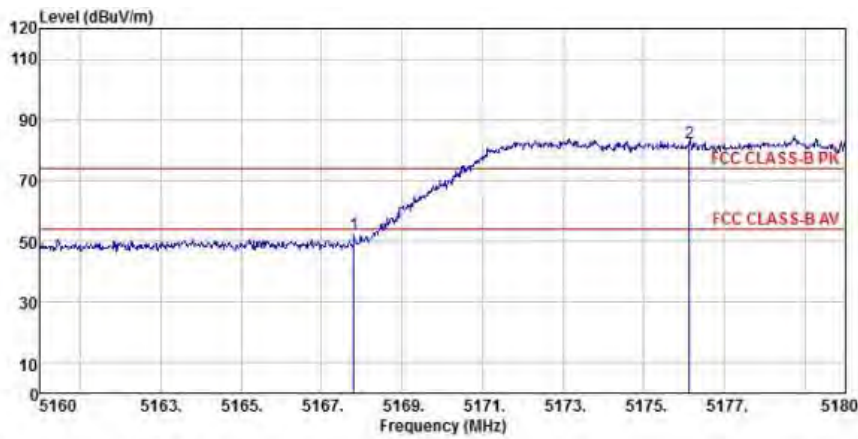


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 °C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5167.80	45.79	32.01	10.64	36.28	52.16	74.00	-21.84 Peak
2	pp	5176.14	76.10	32.01	10.64	36.28	82.47	74.00 8.47 Peak

Detector mode: Average

Polarity: Horizontal

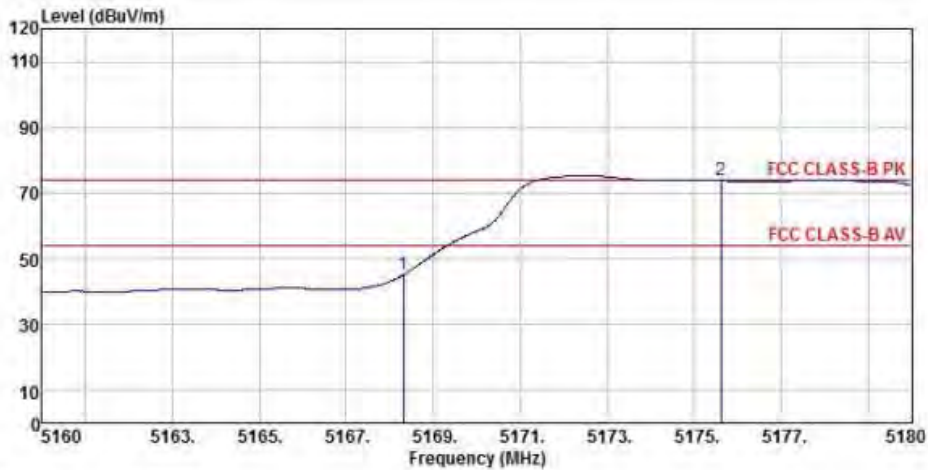


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) HORIZONTAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5168.32	38.76	32.01	10.64	36.28	45.13	74.00	-28.87 Peak
2 pp 5175.62	67.44	32.01	10.64	36.28	73.81	74.00	-0.19 Peak

Detector mode: Peak

Polarity: Vertical

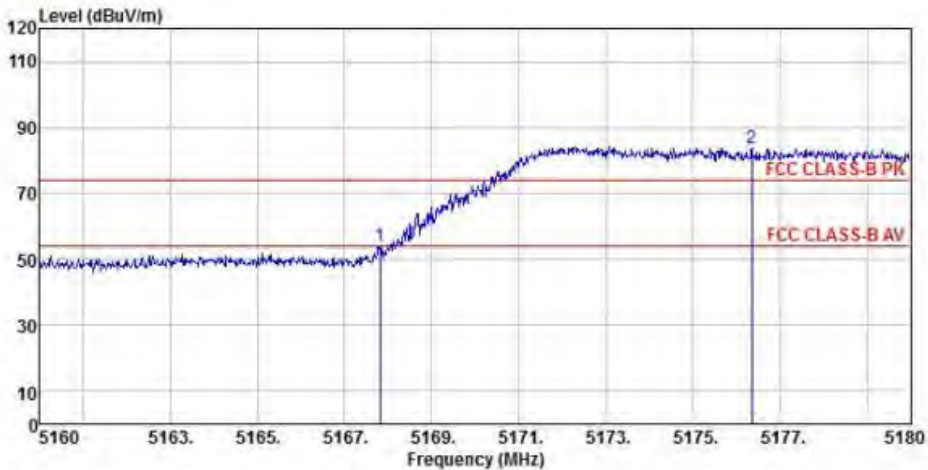

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(942) VERTICAL
 EUT :
 Model Name : 神画投影仪
 Temp/Humi : 19 C / 58 %
 Power Rating: 230V/50Hz
 Mode : WIFI 5G 802.11n CH36
 Memo :

Read	Antenna	Cable	Preamp	Limit	Over
Freq	Level	Factor	Loss	Factor	Level
Line	Limit	Remark			

MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 5167.82	47.47	32.01	10.64	36.28	53.84	74.00	-20.16 Peak
2 pp 5176.36	77.23	32.01	10.64	36.28	83.60	74.00	9.60 Peak