

IC REPORT

Applicant: Global Shopping Network Pty. Ltd.

Address of Applicant: Suite 204,2 Grosvenor Street Bondi Junction NSW 2022
Australia

Manufacturer: Shenzhen Intellink Technology Co.,Ltd

Address of Manufacturer: Rm1609, Design Building Zhenhua Road, Futian District
Shenzhen China

Equipment Under Test (EUT)

Product Name: Keyfinder

Model No.: ORBIT

Trade Mark: HButler

IC: 22536-ORBIT

Applicable standards: RSS-Gen Issue 4: November 2014
RSS-247 Issue 2: Feb 2017

Date of sample receipt: March 03, 2017

Date of Test: March 03-07, 2017

Date of report issued: March 07, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	March 07, 2017	Original

Prepared By:




Date:

March 07, 2017

Project Engineer

Check By:



Date:

March 07, 2017

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
6 TEST INSTRUMENTS LIST.....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT.....	9
7.2 CONDUCTED OUTPUT POWER.....	10
7.3 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH.....	12
7.4 POWER SPECTRAL DENSITY.....	14
7.5 BAND EDGES.....	16
7.5.1 Conducted Emission Method.....	16
7.5.2 Radiated Emission Method.....	17
7.6 SPURIOUS EMISSION.....	19
7.6.1 Conducted Emission Method.....	19
7.6.2 Radiated Emission Method.....	21
8 TEST SETUP PHOTO.....	27
9 EUT CONSTRUCTIONAL DETAILS.....	28

4 Test Summary

Test Item	Section	Result
Antenna requirement	RSS-Gen 8.3	Pass
AC Power Line Conducted Emission	RSS-Gen 8.8	Pass
Conducted Peak Output Power	RSS-247 5.4.d	Pass
Channel Bandwidth	RSS-247 5.2.1	Pass
99% Occupy Bandwidth	RSS-Gen 6.6	Pass
Power Spectral Density	RSS-247 5.2.2	Pass
Band Edge	RSS-247 5.5	Pass
Spurious Emission	RSS-247 5.5 & RSS-Gen 8.9 8.10	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Keyfinder
Model No.:	ORBIT
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	4dBi
Power Supply:	DC3.0V (1 x 3.0V "CR2032" button cell)

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark:</i> New battery is used during all test.	

5.3 Description of Support Units

N/A

5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none">● FCC —Registration No.: 600491 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.
--

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement

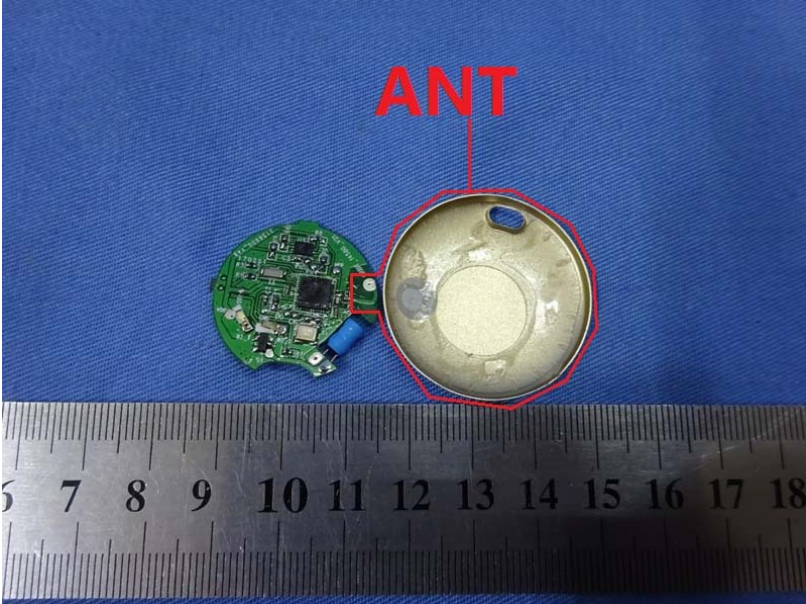Standard requirement:	RSS-Gen 8.3
<p>A transmitter can only be sold or operated with antennas with which it was approved.</p> <p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
EUT Antenna:	
<p><i>The antenna is PCB antenna, the best case gain of the antenna is 4dBi</i></p> 	


7.2 Conducted Output Power

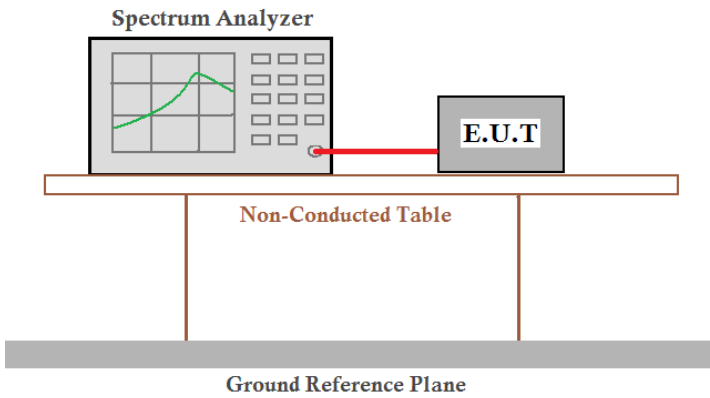Test Requirement:	RSS-247 5.4(d)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-6.82	30.00	Pass
Middle	-6.82		
Highest	-6.96		


Test plot as follows:

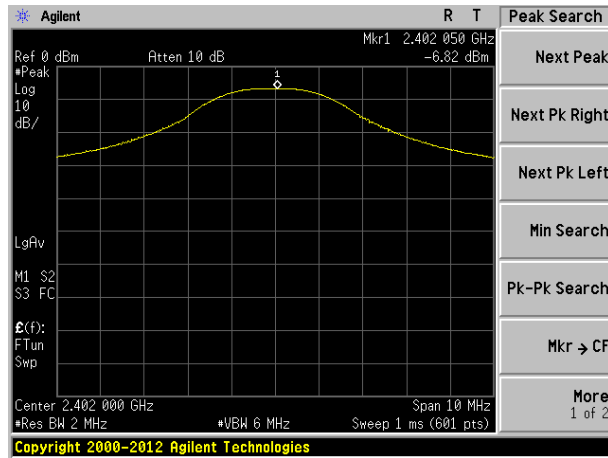

Lowest channel

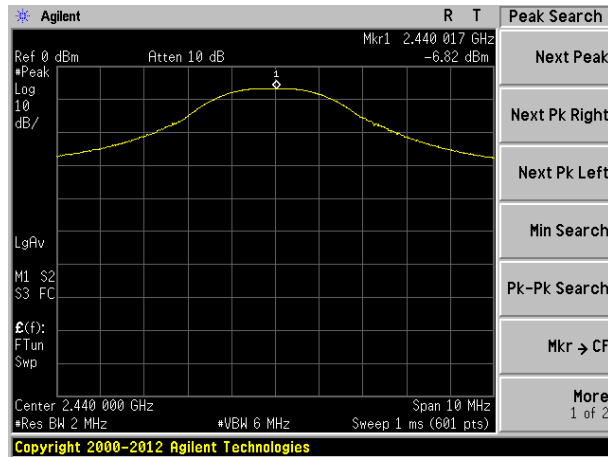


Middle channel

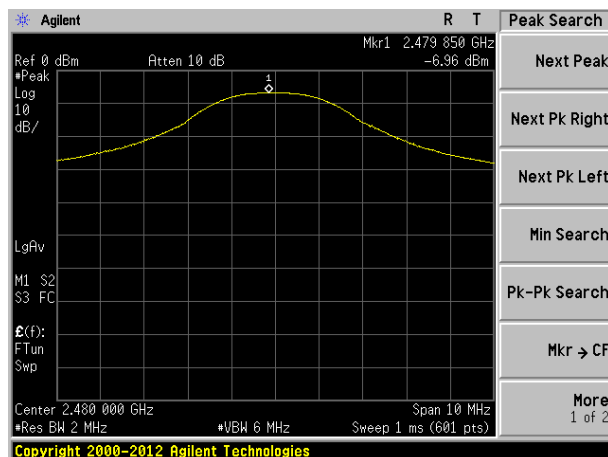

Highest channel

7.3 Channel Bandwidth & 99% Occupancy Bandwidth

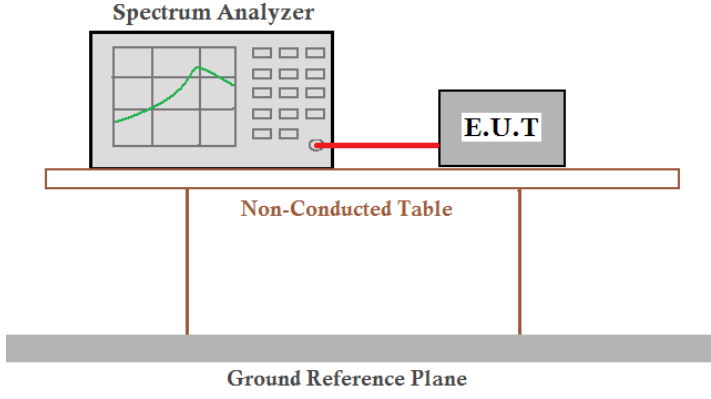
Test Requirement:	RSS-247 5.2.1
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	Channel Bandwidth >500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result
Lowest	724	>500	Pass
Middle	704		
Highest	715		

Test channel	99% Bandwidth (MHz)	Result
Lowest	1.088	Pass
Middle	1.090	
Highest	1.093	


Test plot as follows:

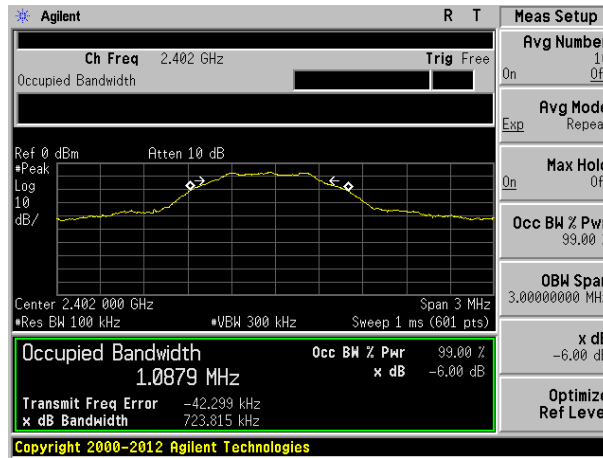

Lowest channel

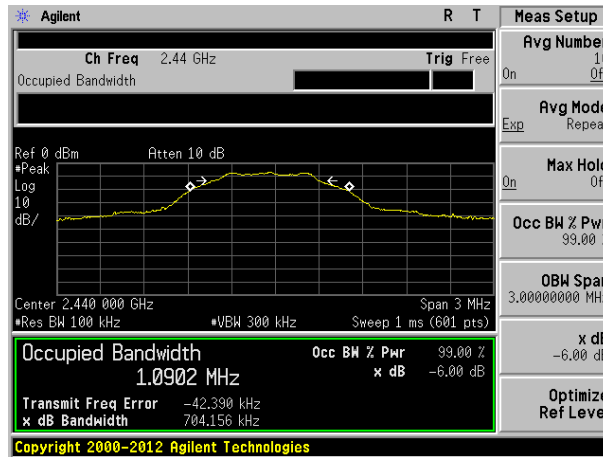


Middle channel

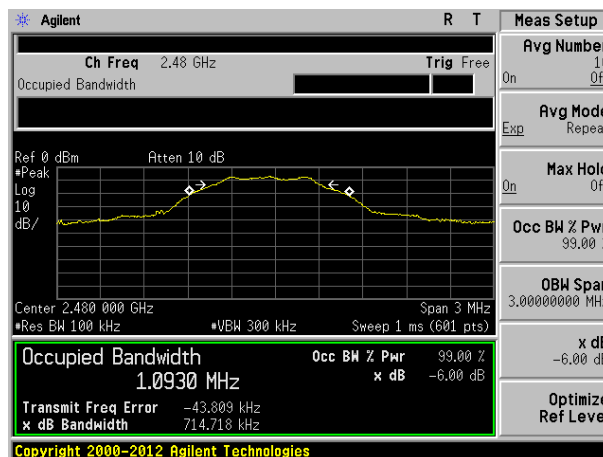

Highest channel


7.4 Power Spectral Density

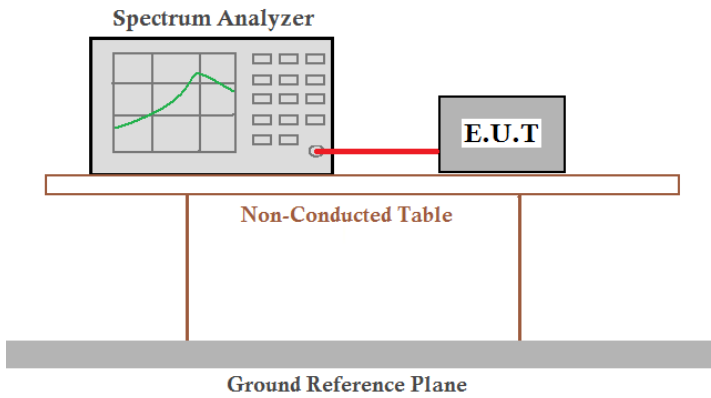Test Requirement:	RSS-247 5.2.2
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-21.38	8.00	Pass
Middle	-21.48		
Highest	-21.67		


Test plot as follows:

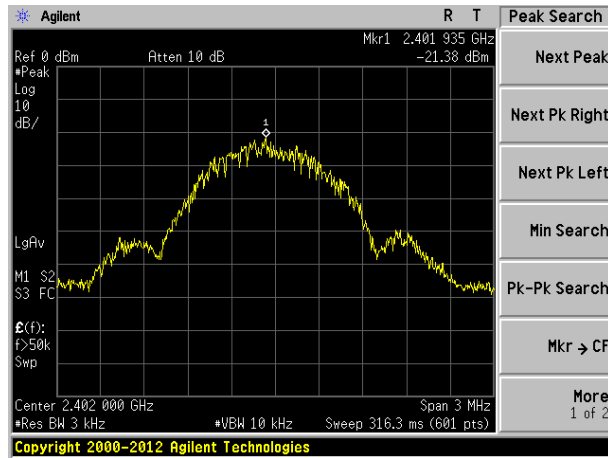

Lowest channel

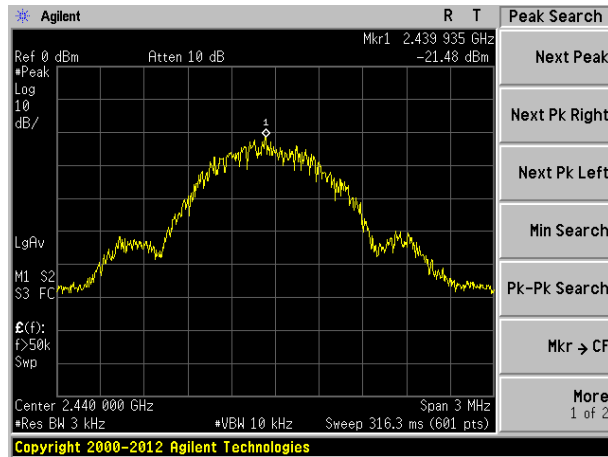


Middle channel

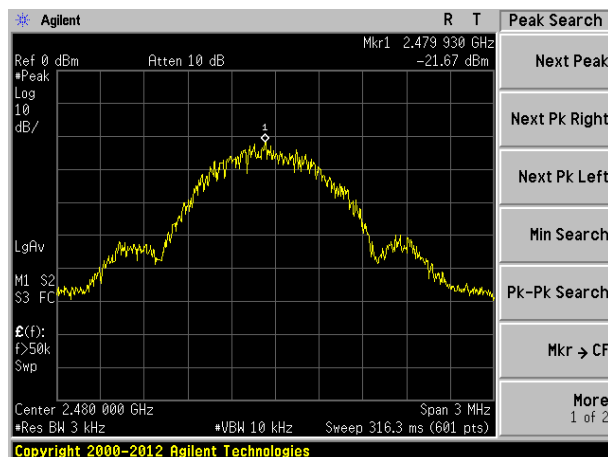


Highest channel

7.5 Band edges


7.5.1 Conducted Emission Method

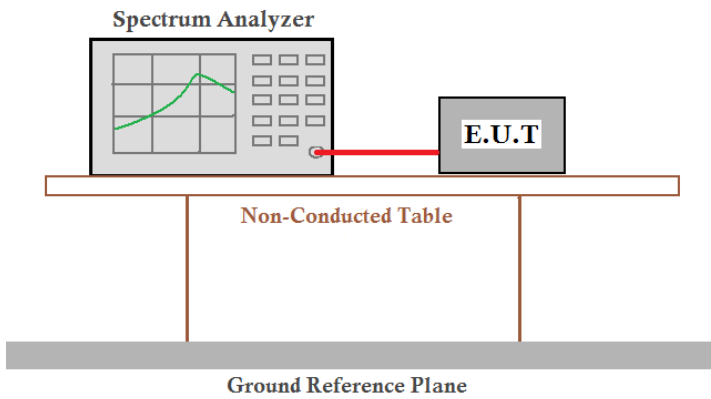Test Requirement:	RSS-247 5.5
Test Method:	ANSI C63.10: 2013 & RSS-Gen
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an Equipment Under Test (E.U.T.). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

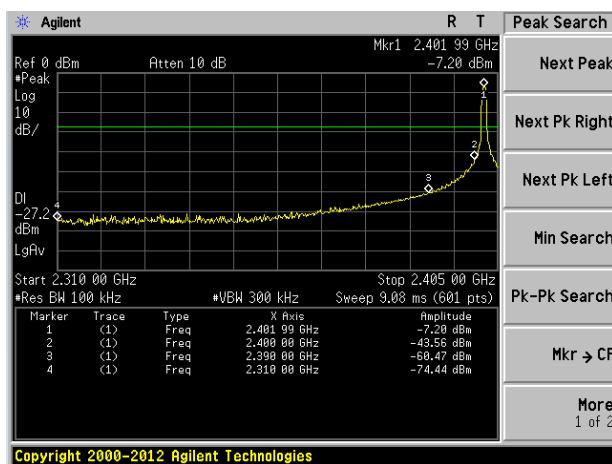

Lowest channel

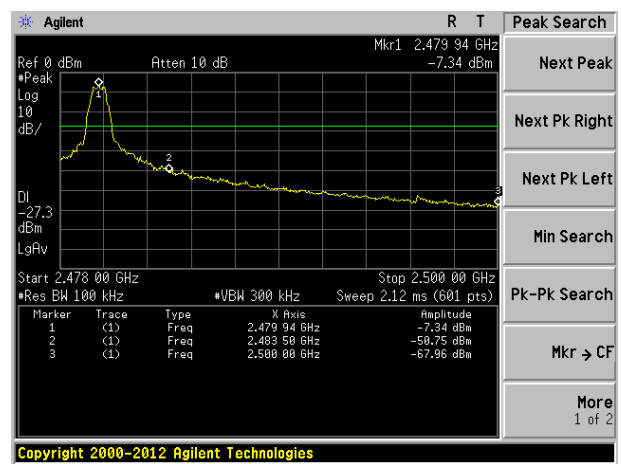

Highest channel

7.5.2 Radiated Emission Method

Test Requirement:	RSS-247 5.5				
Test Method:	ANSI C63.10: 2013 & RSS-Gen 8.9 8.10				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz				Average
					Peak
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	42.17	27.59	5.38	30.18	44.96	74.00	-29.04	Horizontal
2400.00	58.85	27.58	5.39	30.18	61.64	74.00	-12.36	Horizontal
2390.00	42.65	27.59	5.38	30.18	45.44	74.00	-28.56	Vertical
2400.00	60.81	27.58	5.39	30.18	63.60	74.00	-10.40	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.88	27.59	5.38	30.18	35.67	54.00	-18.33	Horizontal
2400.00	44.07	27.58	5.39	30.18	46.86	54.00	-7.14	Horizontal
2390.00	32.77	27.59	5.38	30.18	35.56	54.00	-18.44	Vertical
2400.00	45.65	27.58	5.39	30.18	48.44	54.00	-5.56	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.19	27.53	5.47	29.93	47.26	74.00	-26.74	Horizontal
2500.00	43.49	27.55	5.49	29.93	46.60	74.00	-27.40	Horizontal
2483.50	44.91	27.53	5.47	29.93	47.98	74.00	-26.02	Vertical
2500.00	44.43	27.55	5.49	29.93	47.54	74.00	-26.46	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.70	27.53	5.47	29.93	38.77	54.00	-15.23	Horizontal
2500.00	33.80	27.55	5.49	29.93	36.91	54.00	-17.09	Horizontal
2483.50	36.85	27.53	5.47	29.93	39.92	54.00	-14.08	Vertical
2500.00	33.66	27.55	5.49	29.93	36.77	54.00	-17.23	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


7.6 Spurious Emission

7.6.1 Conducted Emission Method

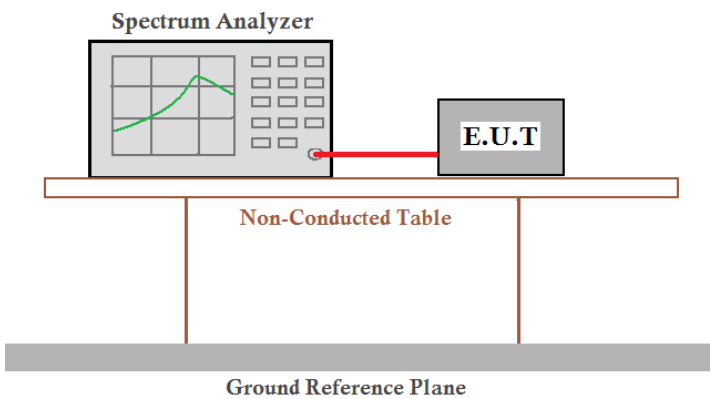Test Requirement:	RSS-247 5.5
Test Method:	ANSI C63.10: 2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

Lowest channel

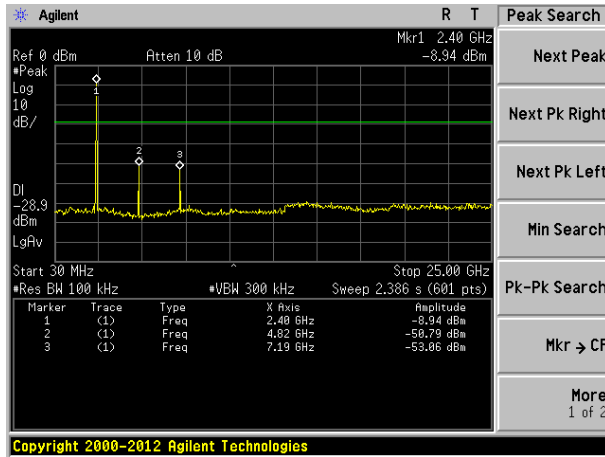


30MHz~25GHz

Middle channel

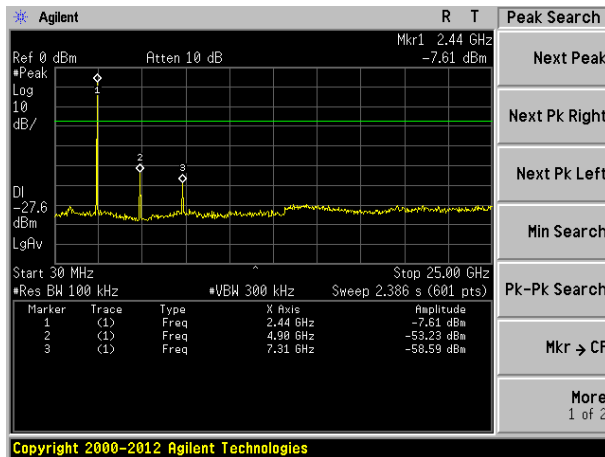


30MHz~25GHz


Highest channel

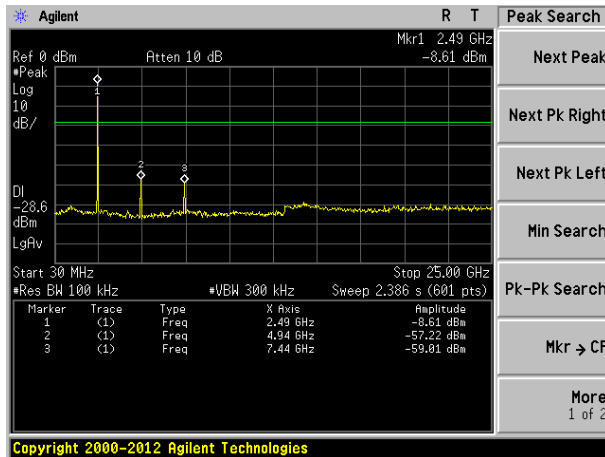

30MHz~25GHz

7.6.2 Radiated Emission Method

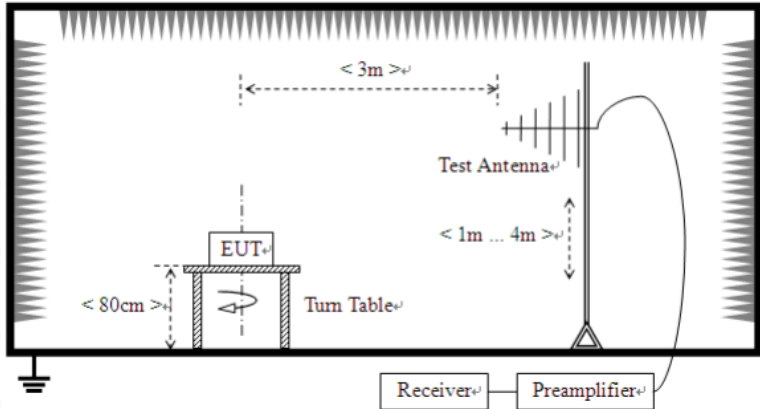Test Requirement:	RSS-247 5.5 & RSS-Gen 8.9 8.10				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
RMS		1MHz	3MHz	Average	
Limit:	Frequency	Limit (dBuV/m @3m)		Value	
	30MHz-88MHz	40.00		Quasi-peak	
	88MHz-216MHz	43.50		Quasi-peak	
	216MHz-960MHz	46.00		Quasi-peak	
	960MHz-1GHz	54.00		Quasi-peak	
	Above 1GHz	54.00		Average	
74.00		Peak			
Test setup:	Below 1GHz				
					
Above 1GHz					

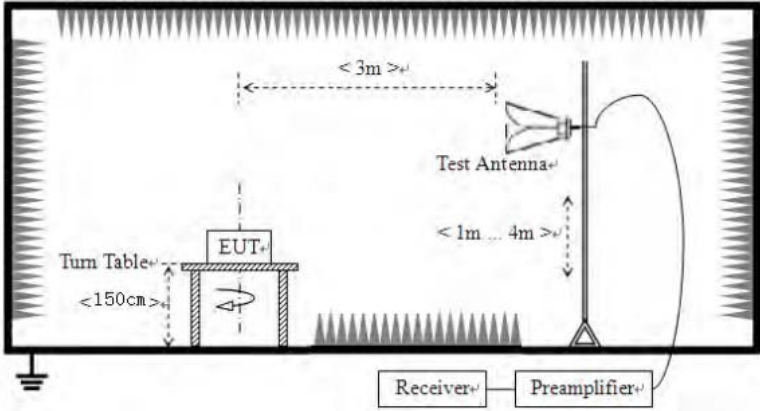	
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.

Measurement Data

■ **Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
167.82	36.08	8.33	1.67	29.33	16.75	43.50	-26.75	Vertical
216.02	31.40	10.78	1.93	29.36	14.75	46.00	-31.25	Vertical
747.48	25.11	20.53	4.27	29.20	20.71	46.00	-25.29	Vertical
796.18	24.59	21.25	4.45	29.20	21.09	46.00	-24.91	Vertical
863.06	23.80	21.86	4.71	29.13	21.24	46.00	-24.76	Vertical
989.54	24.21	22.73	5.19	29.10	23.03	54.00	-30.97	Vertical
506.48	22.94	17.61	3.33	29.30	14.58	46.00	-31.42	Horizontal
574.63	23.64	18.82	3.63	29.30	16.79	46.00	-29.21	Horizontal
647.39	23.52	19.54	3.91	29.25	17.72	46.00	-28.28	Horizontal
739.66	23.01	20.39	4.24	29.20	18.44	46.00	-27.56	Horizontal
869.13	24.30	21.94	4.74	29.13	21.85	46.00	-24.15	Horizontal
975.75	23.69	22.64	5.14	29.10	22.37	54.00	-31.63	Horizontal

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	37.26	31.78	8.60	32.09	45.55	74.00	-28.45	Vertical
7206.00	31.80	36.15	11.65	32.00	47.60	74.00	-26.40	Vertical
9608.00	31.44	37.95	14.14	31.62	51.91	74.00	-22.09	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	41.53	31.78	8.60	32.09	49.82	74.00	-24.18	Horizontal
7206.00	33.55	36.15	11.65	32.00	49.35	74.00	-24.65	Horizontal
9608.00	30.86	37.95	14.14	31.62	51.33	74.00	-22.67	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.08	31.78	8.60	32.09	34.37	54.00	-19.63	Vertical
7206.00	20.49	36.15	11.65	32.00	36.29	54.00	-17.71	Vertical
9608.00	19.57	37.95	14.14	31.62	40.04	54.00	-13.96	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.30	31.78	8.60	32.09	38.59	54.00	-15.41	Horizontal
7206.00	22.66	36.15	11.65	32.00	38.46	54.00	-15.54	Horizontal
9608.00	19.30	37.95	14.14	31.62	39.77	54.00	-14.23	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	37.85	31.85	8.67	32.12	46.25	74.00	-27.75	Vertical
7320.00	32.19	36.37	11.72	31.89	48.39	74.00	-25.61	Vertical
9760.00	31.79	38.35	14.25	31.62	52.77	74.00	-21.23	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	42.24	31.85	8.67	32.12	50.64	74.00	-23.36	Horizontal
7320.00	33.99	36.37	11.72	31.89	50.19	74.00	-23.81	Horizontal
9760.00	31.26	38.35	14.25	31.62	52.24	74.00	-21.76	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	26.57	31.85	8.67	32.12	34.97	54.00	-19.03	Vertical
7320.00	20.82	36.37	11.72	31.89	37.02	54.00	-16.98	Vertical
9760.00	19.87	38.35	14.25	31.62	40.85	54.00	-13.15	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	30.86	31.85	8.67	32.12	39.26	54.00	-14.74	Horizontal
7320.00	23.03	36.37	11.72	31.89	39.23	54.00	-14.77	Horizontal
9760.00	19.64	38.35	14.25	31.62	40.62	54.00	-13.38	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	36.81	31.93	8.73	32.16	45.31	74.00	-28.69	Vertical
7440.00	31.50	36.59	11.79	31.78	48.10	74.00	-25.90	Vertical
9920.00	31.18	38.81	14.38	31.88	52.49	74.00	-21.51	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.00	31.93	8.73	32.16	49.50	74.00	-24.50	Horizontal
7440.00	33.22	36.59	11.79	31.78	49.82	74.00	-24.18	Horizontal
9920.00	30.55	38.81	14.38	31.88	51.86	74.00	-22.14	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	25.79	31.93	8.73	32.16	34.29	54.00	-19.71	Vertical
7440.00	20.29	36.59	11.79	31.78	36.89	54.00	-17.11	Vertical
9920.00	19.40	38.81	14.38	31.88	40.71	54.00	-13.29	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	29.98	31.93	8.73	32.16	38.48	54.00	-15.52	Horizontal
7440.00	22.44	36.59	11.79	31.78	39.04	54.00	-14.96	Horizontal
9920.00	19.09	38.81	14.38	31.88	40.40	54.00	-13.60	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.


8 Test Setup Photo



Radiated Emission

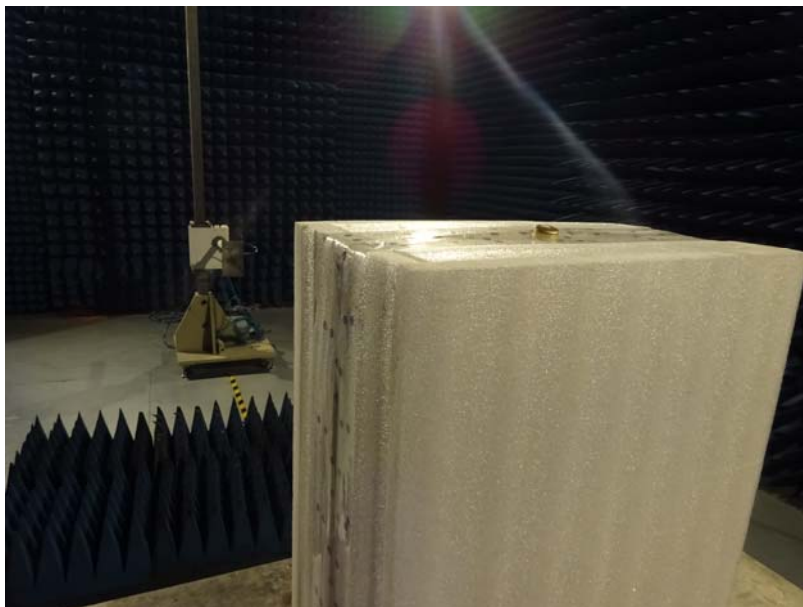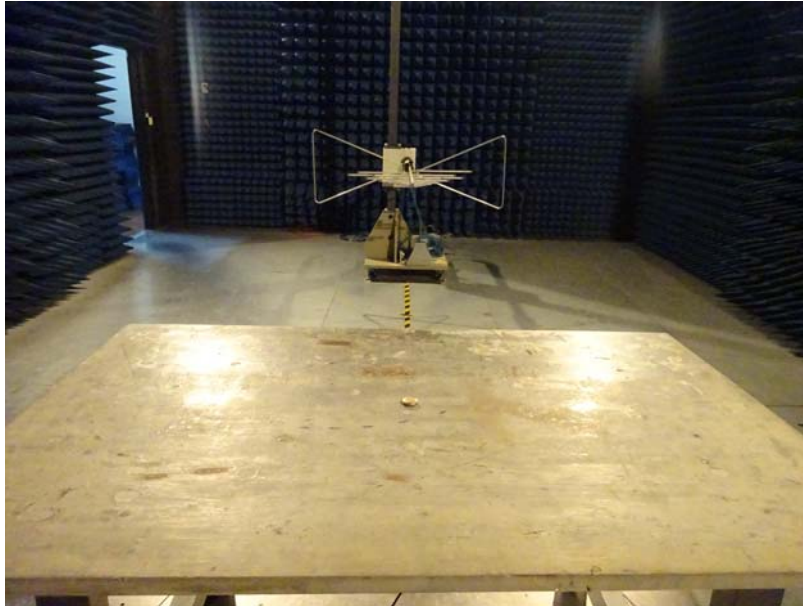




9 EUT Constructional Details




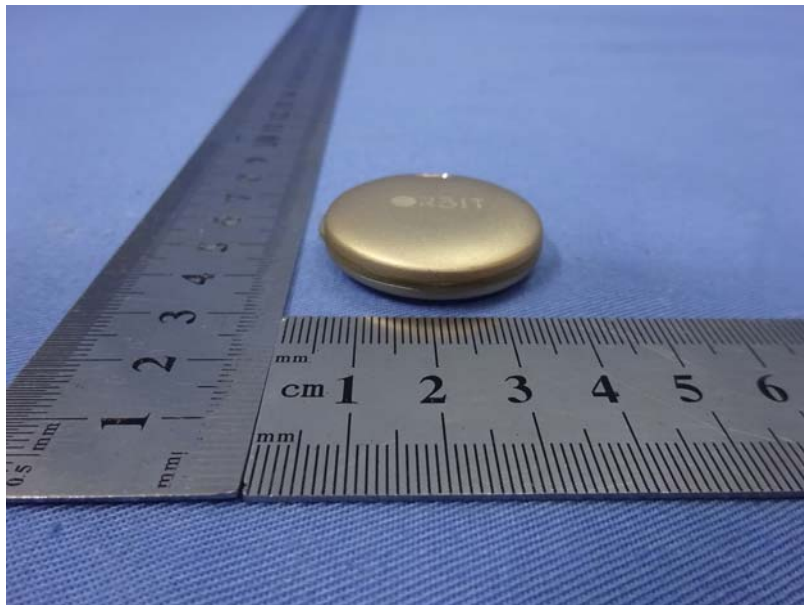

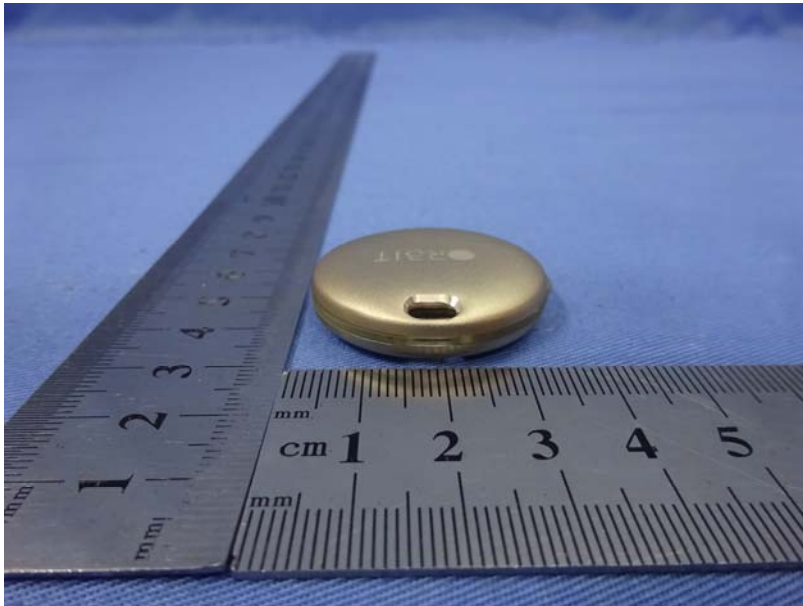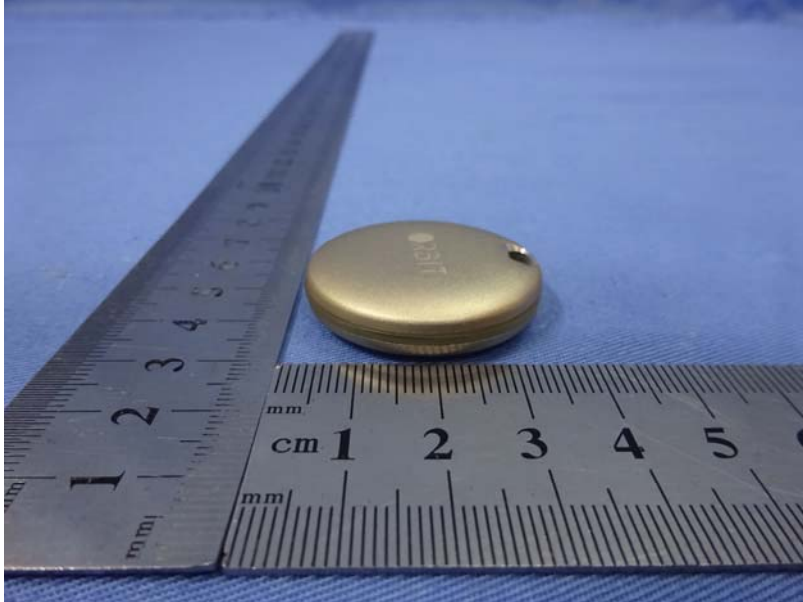

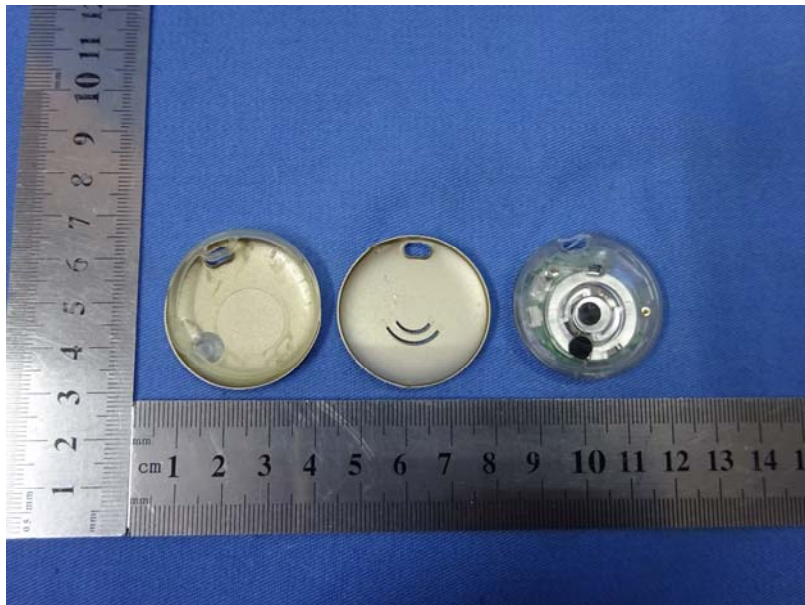

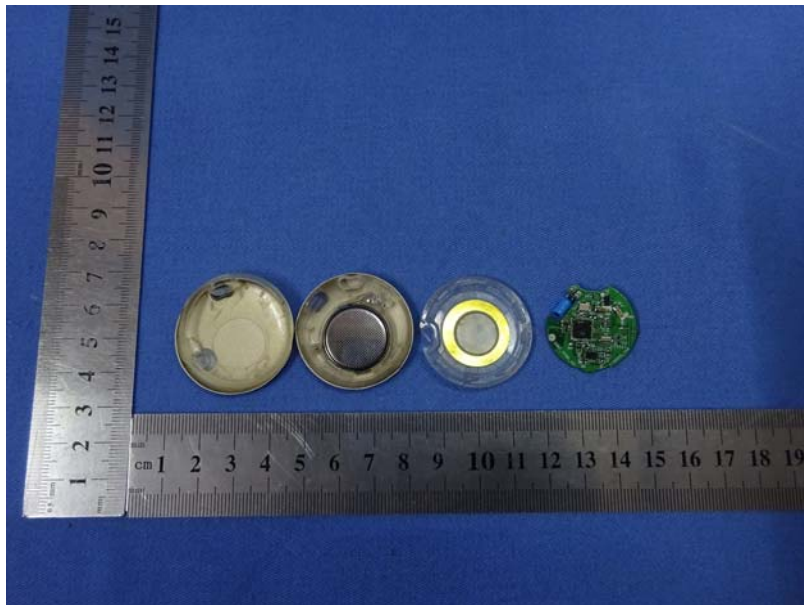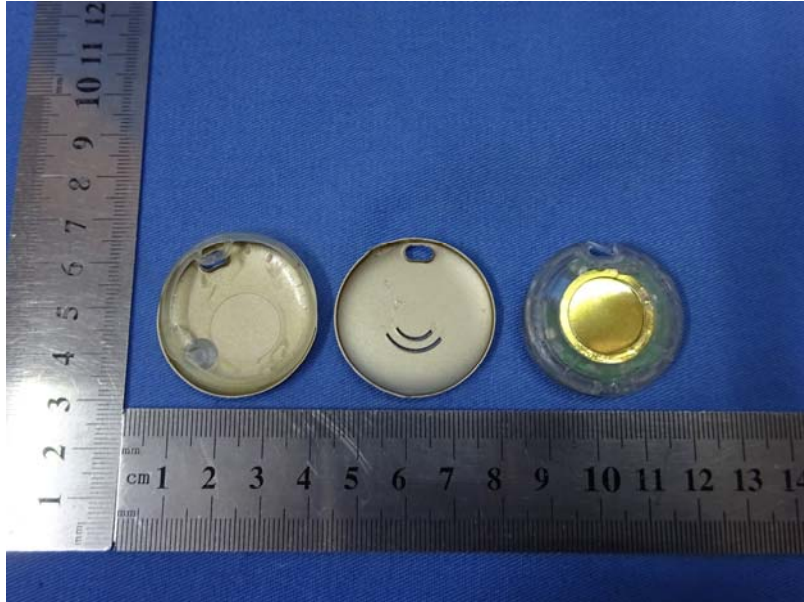

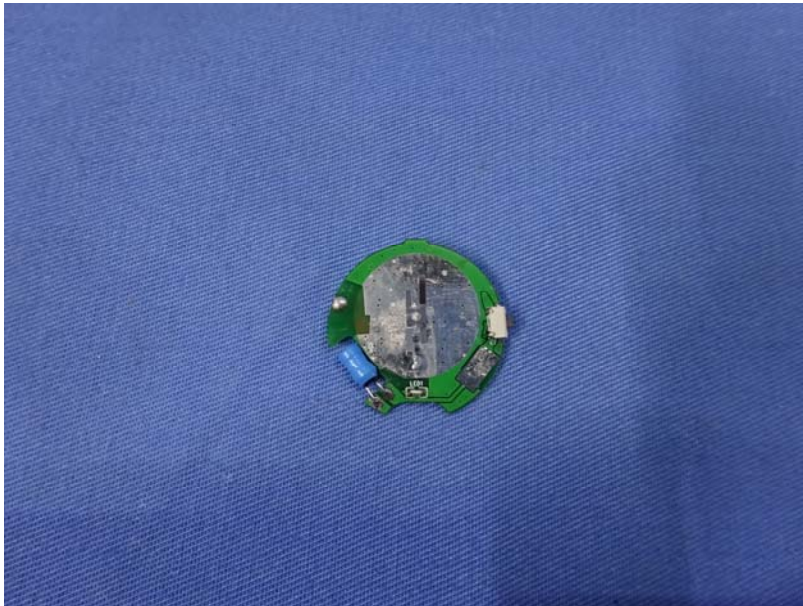

-----End-----