

FCC Test Report

Report No.: AGC05177240303FR01

FCC ID	:	2ALHZT41
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	TWS earbuds
BRAND NAME	:	N/A
MODEL NAME	:	T41 (Series model name please see page 5)
APPLICANT	:	KO-STAR DEVELOPMENT CO.,LTD
DATE OF ISSUE	:	Apr. 07, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 07, 2024	Valid	Initial Release




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	9
2.9 Equipment Modifications	9
2.10 Antenna Requirement	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8 / Measurement Results	21



9. Radiated Spurious Emission	
9.1 Measurement Limit	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Number of Hopping Frequency Measurement	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Result	
11. Time of Occupancy (Dwell Time) Measurement	61
11.1 Provisions Applicable	
11.2 Measurement Procedure	61
11.3 Measurement Setup (Block Diagram of Configuration)	61
11.4 Measurement Result	61
12. Frequency Separation Measurement	65
12.1 Provisions Applicable	
12.2 Measurement Procedure	
12.3 Measurement Setup (Block Diagram of Configuration)	65
12.4 Measurement Result	65
13. AC Power Line Conducted Emission Test	
13.1 Measurement Limit	
13.2 Measurement Setup (Block Diagram of Configuration)	
13.3 Preliminary Procedure of Line Conducted Emission Test	
13.4 Final Procedure of Line Conducted Emission Test	
13.5 Measurement Results	
Appendix I: Photographs of Test Setup	69
Appendix II: Photographs of Test EUT	





1. General Information

KO-STAR DEVELOPMENT CO., LTD
No. 3, Yicun Industrial Area, Xikeng, Henggang Town, Longgang District
Shenzhen, China
SHENZHEN BASSWORLD TECHNOLOGY CO., LTD
No. 3, Yicun Industrial Area, Xikeng, Henggang Town, Longgang District
Shenzhen, China
SHENZHEN BASSWORLD TECHNOLOGY CO., LTD
No. 3, Yicun Industrial Area, Xikeng, Henggang Town, Longgang District
Shenzhen, China
TWS earbuds
N/A
T41
MZX1010, MZX1010-BLK, MZX1010-WHT, MZX1010-SJR, MZX1010-RYL,
MZX1010-BLU, T13, T14, T15, T19, T26, T32, T21, T42, T43, T44, T45, T34, T40,
T20, T50, T51, T50B, T48, T49, K60, K40, K52, K52B, T12, T8, T6, T22, T24,
K80, K30, K50, K51, K50B, K52, K52B, NBC80, NBC90, NB90, NB30, NBC55,
NBC55B, K49, K48, K34, K42
All the same except for the model names.
Mar. 28, 2024
Mar. 28, 2024 to Apr. 07, 2024
No any deviation from the test method
Normal
Pass
AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

TCI Li Prepared By Cici Li Apr. 07, 2024 (Project Engineer) **Reviewed By** Calvin Liu Apr. 07, 2024 (Reviewer) Approved By Max Zhang Apr. 07, 2024 Authorized Officer



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BR ⊠GFSK, EDR ⊠π /4-DQPSK, □8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	Left earbud: -3.094 dBm Right earbud: -3.223 dBm
Hardware Version	V1.0
Software Version	V2.3.3
Antenna Designation	Ceramic Antenna
Antenna Gain	2.78dBi
Power Supply	Charging case: DC 3.7V by battery or DC 5V by adapter Earbuds: DC 3.7V by battery
Note:	

The EUT includes left and right channel earbuds, the schematic diagram is the same, but the PCB Layout is different. The RF output power of each earbud has been tested and recorded in the report. For other test items, due to the higher power, the left earbud has been tested and recorded in this report, which is the worst case.

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2403 MHz		
	:	:		
2400~2483.5MHz	39	2441MHz		
	:	:		
	77	2479 MHz		
	78	2480 MHz		
Note: f = 2402 + 1k MHz, k =	0, …, 78 ; "f "is the operating frequency	(MHz); "k" is the operating channel.		



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2ALHZT41**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity Document Title			
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	2 FCC 47 CFR Part 15 Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20) 76	02	19		 21	64	75
				·					 		
			Ιi						1		
			¦			1			i.		
				L		<u>'i</u>		1	 		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 2.78 dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions	
Temperature range (°C)	15 - 35	
Relative humidity range	20 % - 75 %	
Pressure range (kPa)	86 - 106	
Power supply	DC 3.7V by battery	

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

ltem	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

• A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02			
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08			
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02			



• Te	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable			
1	Xiaomi Phone	Xiaomi	MI 10					
	Test Accessories Come From The Manufacturer							
No	Equipment	Model No	Manufacturer	Specification Information	Cable			

No	b. Equipment	Model No.	Manufacturer	Specification Information	Cable
1					



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Not Applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



5. Description of Test Modes

Summary table of Test Cases				
Test Item	Data Rate / Modulation			
iest tielfi	Bluetooth – BR_EDR (GFSK/π /4-DQPSK)			
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered)) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered) Mode 7: Bluetooth Tx Hopping-1Mbps (Battery powered) Mode 8: Bluetooth Tx Hopping-2Mbps (Battery powered)			
AC Conducted Emission	N/A			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
 - Software Setting Diagram

FCC Assist 1.0.2.2			-	Х
零助(<u>H</u>)				
串口设置	设备[COM8]打开成	动		•
串口 COMB(USB-SERI	AL CH340) - reply data: 04 0E	04 01 01 FC 00		
波特率 115200	return code: 0x0			
	配置数据发送成功!			
数据位 8	 reply data: 04 0E 	04 01 01 FC 00		
校验位 None	✓ return code: 0x0			
停止位 1	■ 配置数据发送成功!			
	reply data: 04 0E	04 01 01 FC 00		
流 控 NoFlow	return code: 0x0			
È	闭 配置数据发送成功! reply data: 04 0E			
	reply data: 04 0E return code: 0x0	04 01 01 FC 00		
BR/EDR BLE	neturn code: 0x0 配置数据发送成功!			
MODE TX	▼ reply data: 04 0E			
Channel 0	return code: 0x0			
	▲ 配置数据发送成功!			
Transmit_Power 10	reply data: 04 0E	04 01 01 FC 00		
Packet_Type 1-DH	✓ return code: 0x0			
Hopping OFF	● 配置数据发送成功!			
	reply data: 04 0E	04 01 01 FC 00		
Data_Types Pn9	Tetain code. oxo			
	配置数据发送成功!			
Send con	reply data: 04 0E return code: 0x0	04 01 01 FC 00		
	return code: 0x0 配置数据发送成功!			
	reply data: 04 0E			
	return code: 0x0			
	配置数据发送成功!			
				/
		清除日志		
		海陸口心		



6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

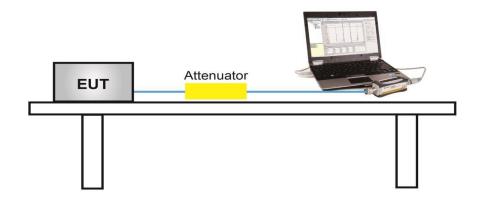



For peak power test setup

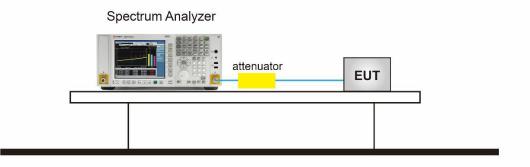


6.4 Measurement Result

Test Data of Conducted Output Power-Left Earbud						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-3.748	≪21	Pass		
GFSK	2441	-4.147	≪21	Pass		
	2480	-4.395	≪21	Pass		
	2402	-3.094	≪21	Pass		
π/4-DQPSK	2441	-3.561	≤21	Pass		
	2480	-3.755	≤21	Pass		


Test Data of Conducted Output Power-Right Earbud						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-3.816	≪21	Pass		
GFSK	2441	-4.181	≤21	Pass		
	2480	-4.434	≤21	Pass		
	2402	-3.223	≤21	Pass		
π/4-DQPSK	2441	-3.782	≤21	Pass		
	2480	-3.993	≤21	Pass		



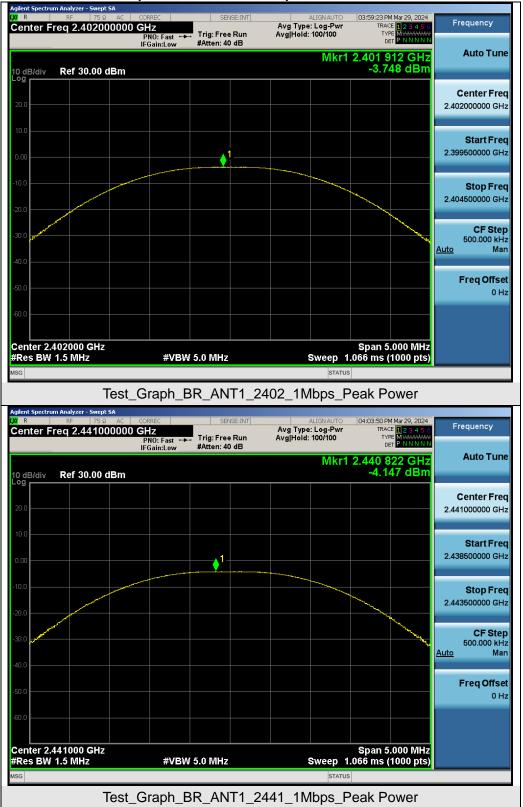

Test Graphs of Conducted Output Power- Left Earbud




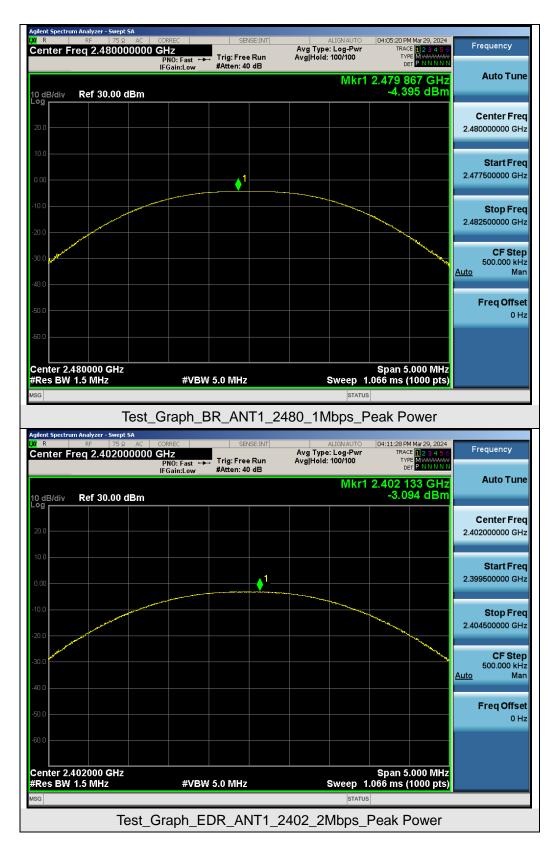








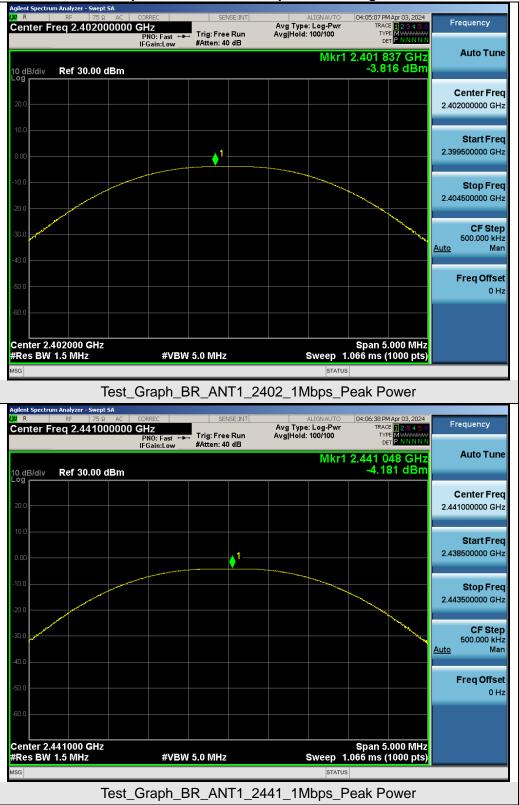


Test Graphs of Conducted Output Power- Right Earbud



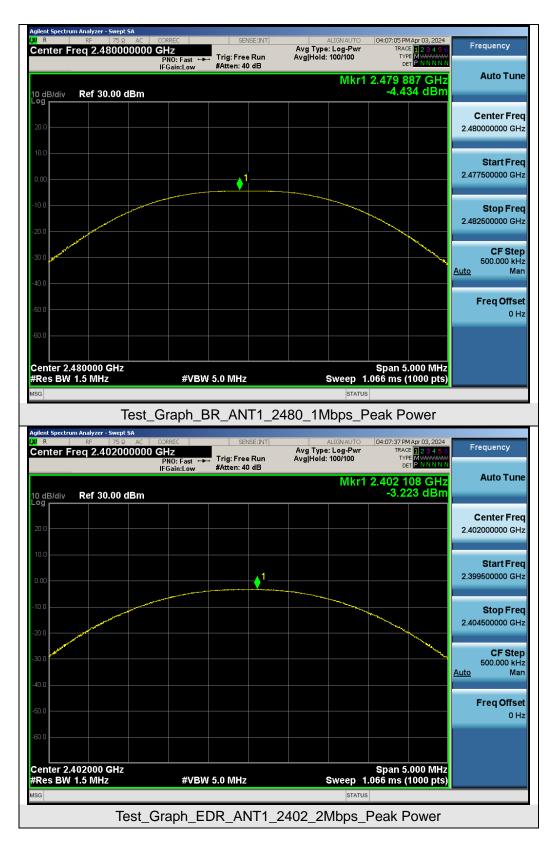



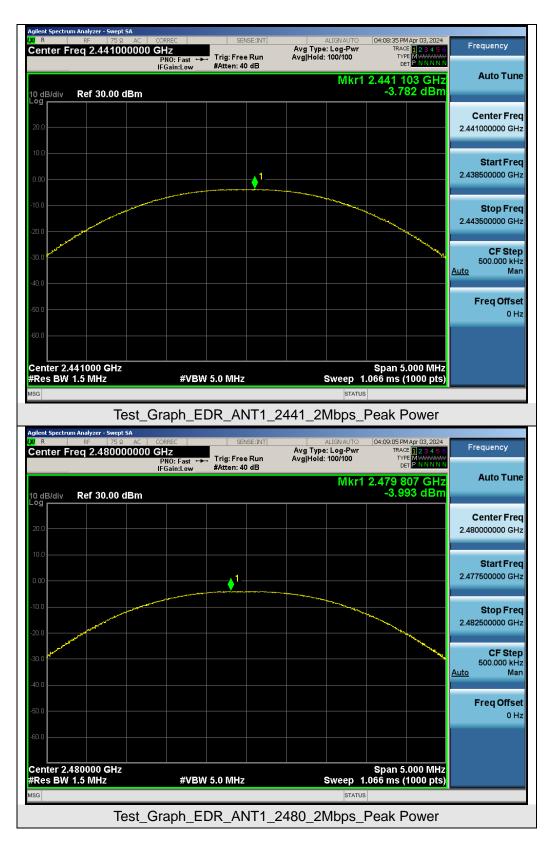



7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW \geq 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize


7.3 Measurement Setup (Block Diagram of Configuration)

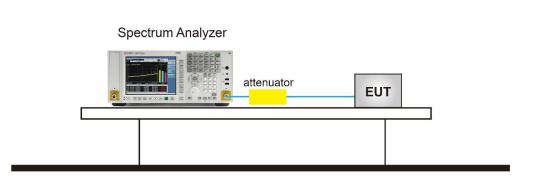



7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
GFSK	2402	0.903	1.018	N/A	Pass	
	2441	0.921	1.033	N/A	Pass	
	2480	0.937	1.055	N/A	Pass	
	2402	1.192	1.311	N/A	Pass	
π /4-DQPSK	2441	1.202	1.322	N/A	Pass	
	2480	1.208	1.324	N/A	Pass	

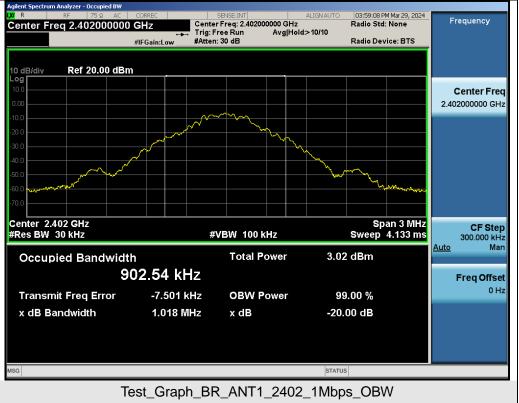


Test Graphs of Occupied Bandwidth and -20 Bandwidth








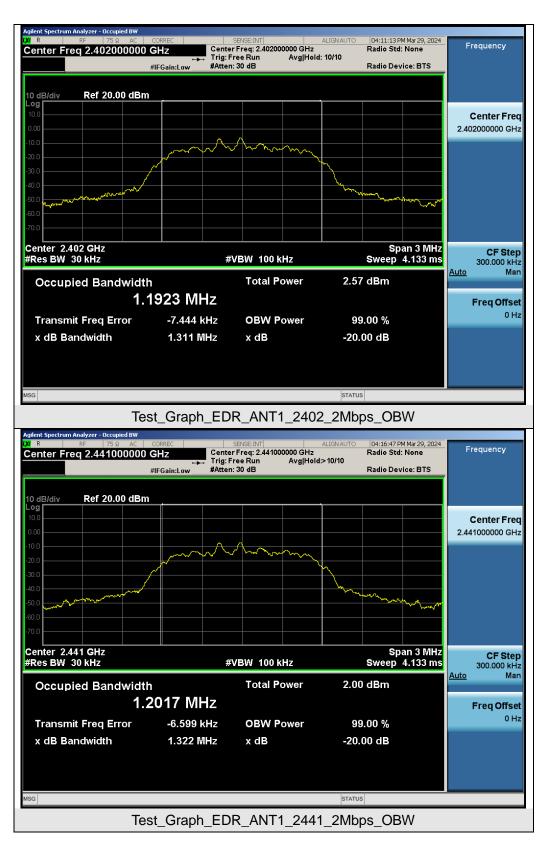



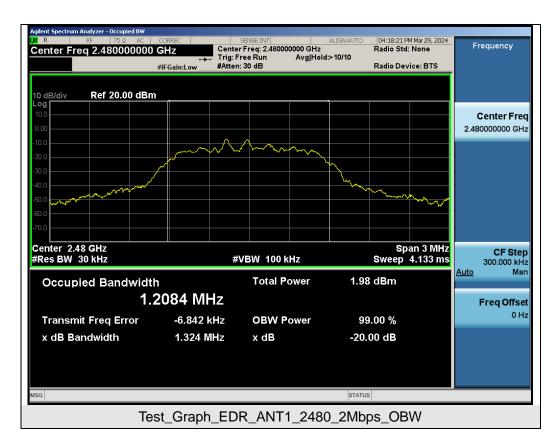



8. Conducted Band Edge and Out-of-Band Emissions

8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

8.3 Measurement Setup (Block Diagram of Configuration)

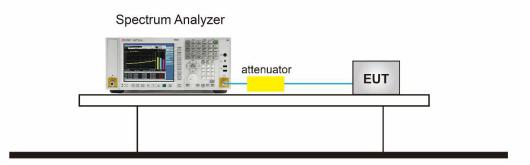




8.4 Measurement Results

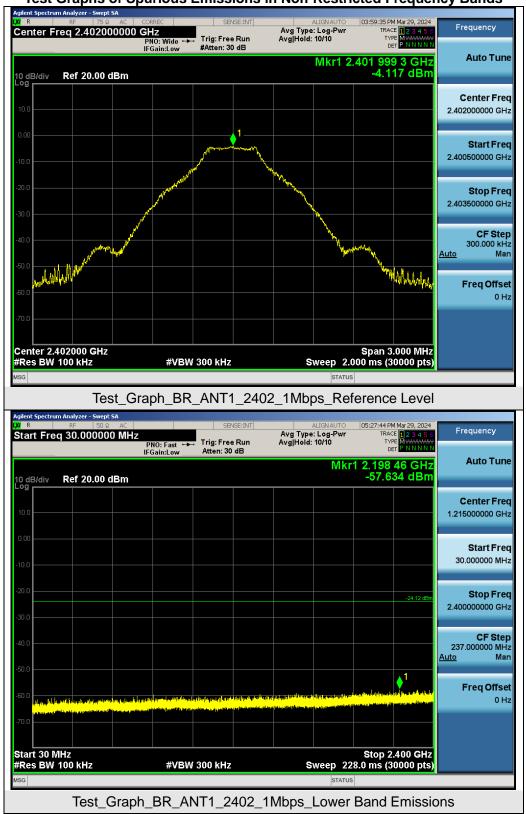


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




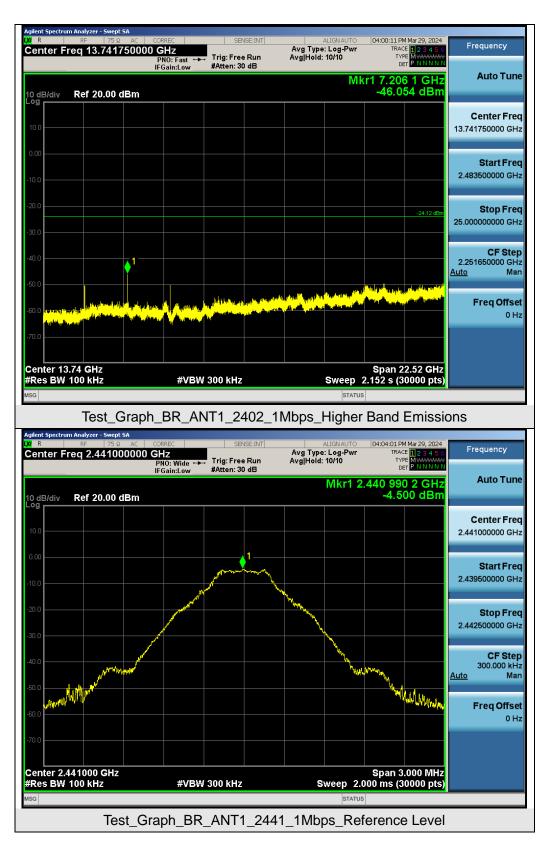




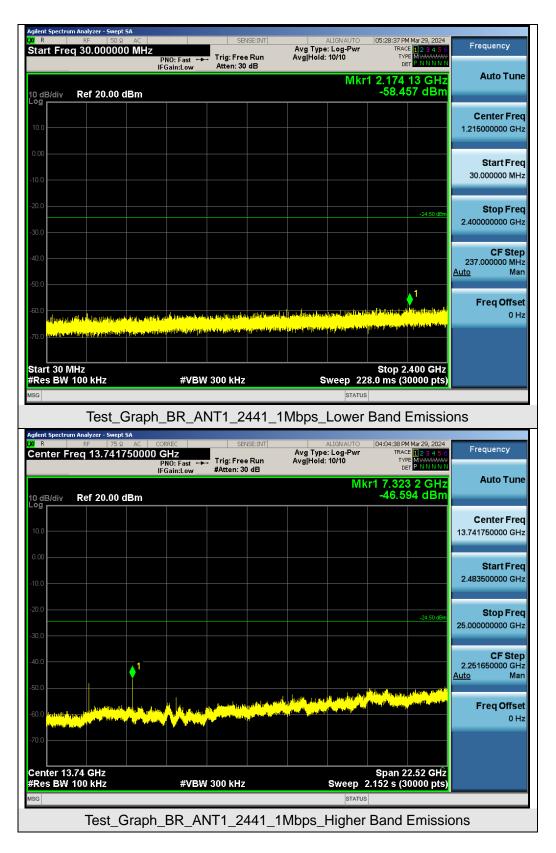




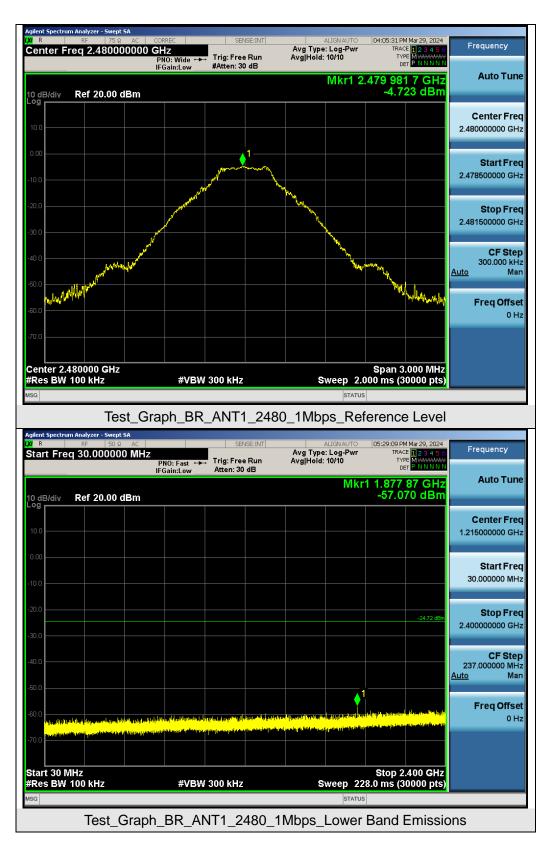




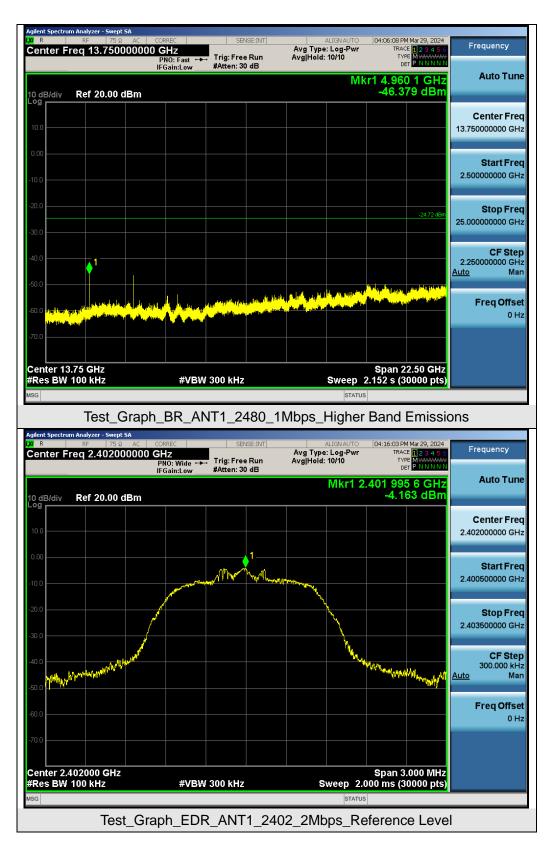




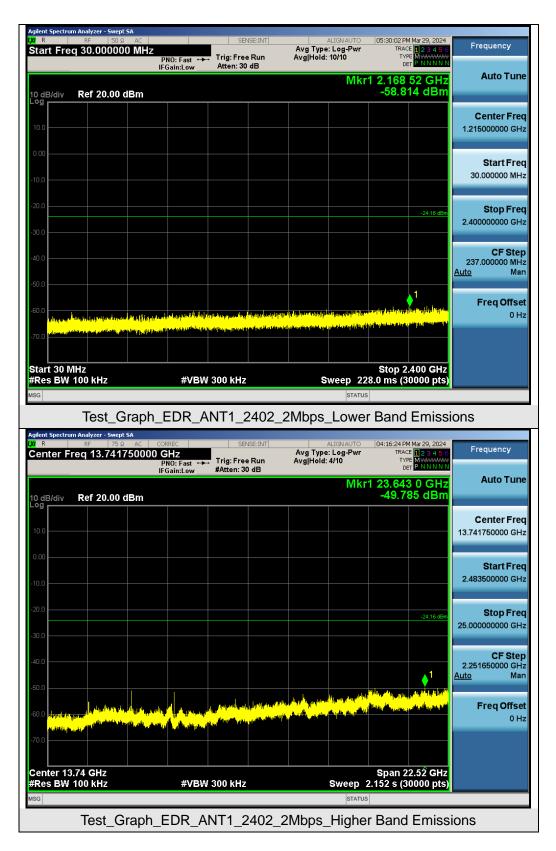




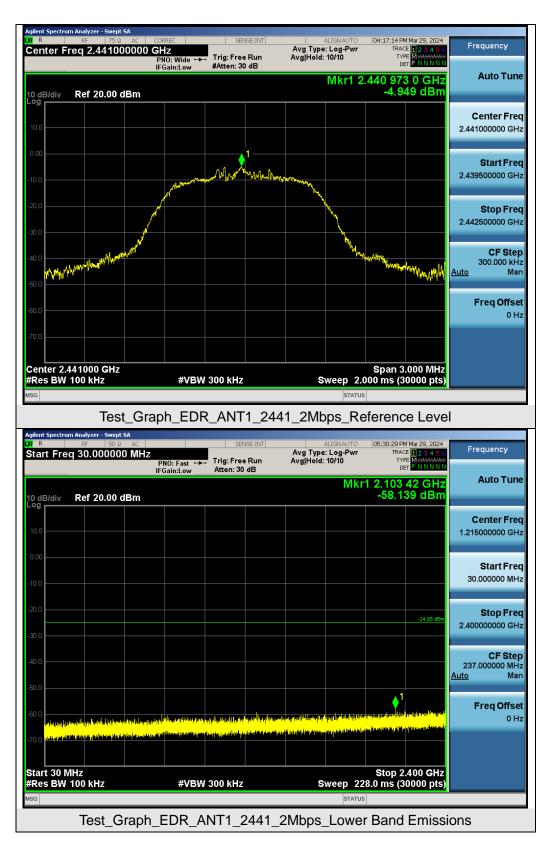




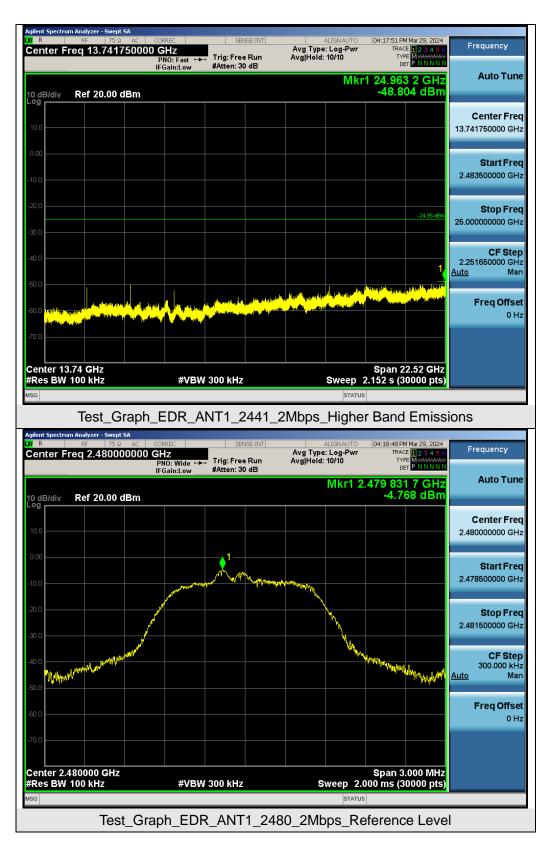



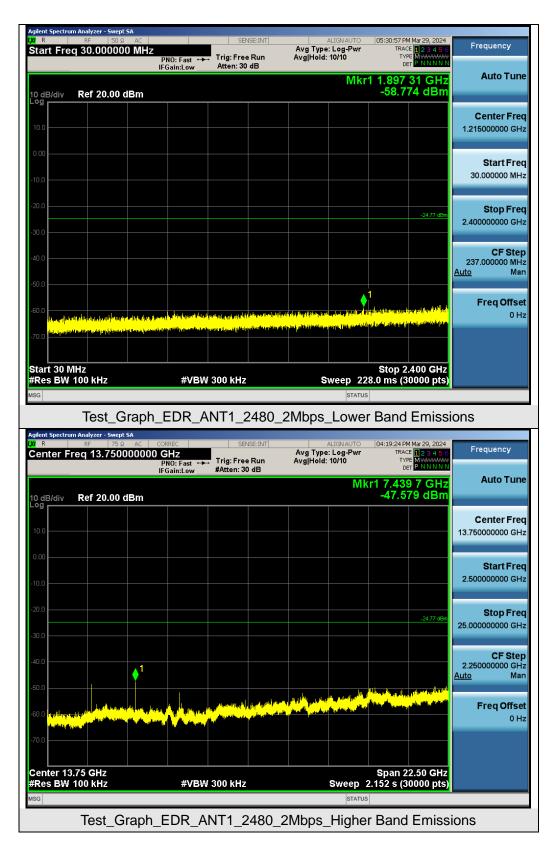




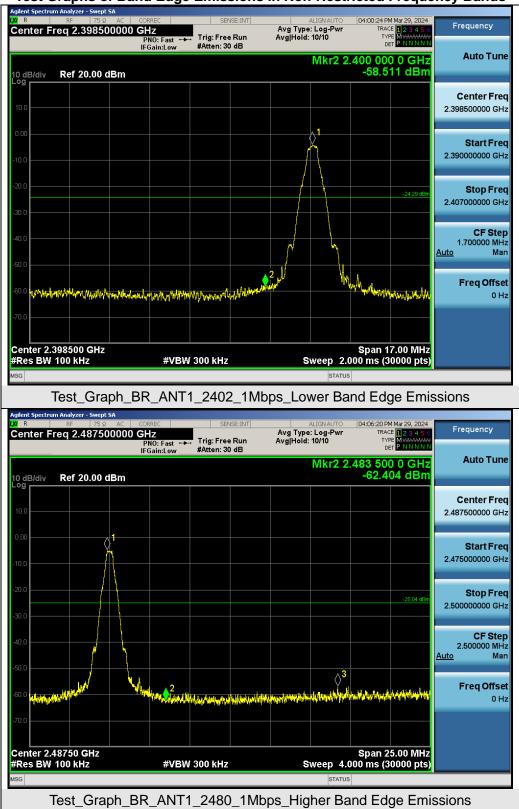


Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




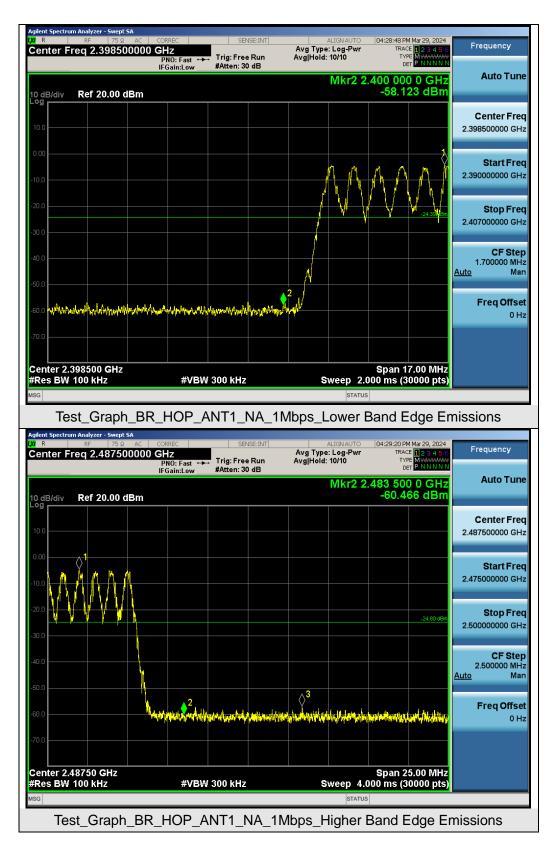



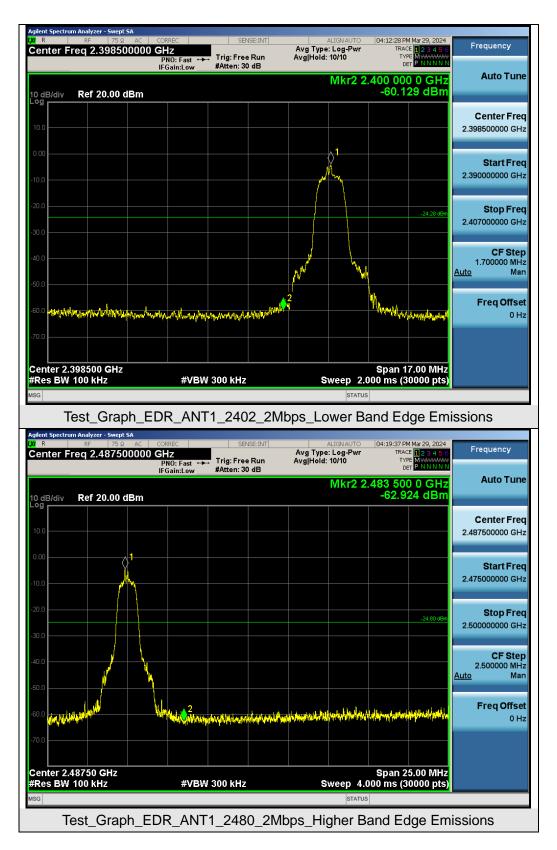



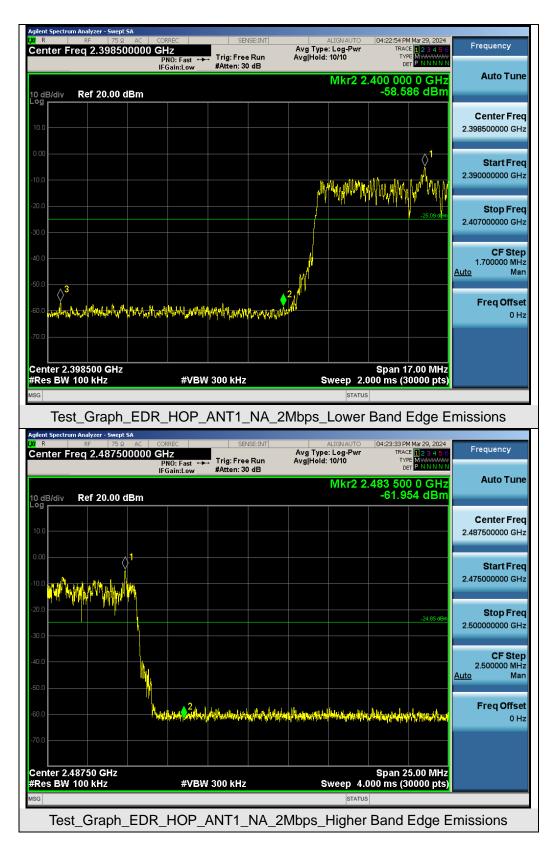



9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

• Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \ge 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




9.3 Measurement Setup (Block Diagram of Configuration)

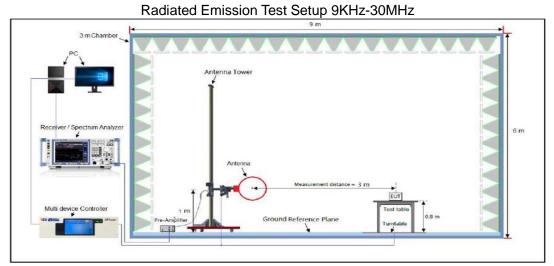

Radiated Emission Test Setup 30MHz-1000MHz

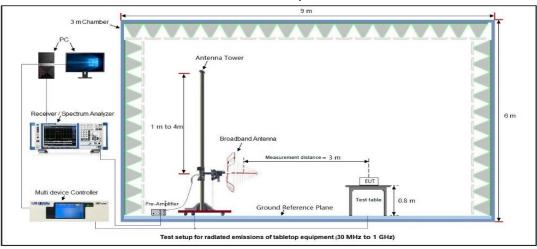

Radiated Emission Test Setup Above 1000MHz

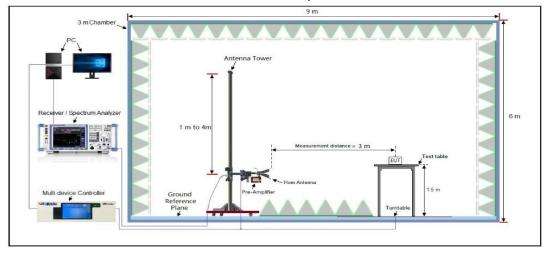

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

		Rad	iatet		lission le	St Results a	t 30MHz-1G	Hz-Left	Earbud	
EUT Name	TWS	earb	uds				Model I	Name	Т	41
Temperature	23.8°	С					Relativ	e Humid	ity 5	9.8%
Pressure	960h	Pa					Test Vo	ltage	C	DC 3.7V by batter
Test Mode	Mode	94					Antenn	a Polari	ty ⊢	lorizontal
72.0	dBuV/m									
32								3		rgin:
parties.	an Anton Konsee	4 ann	nuiveliden	ymhymrha	what we what had a start of the	hin Wenny lither by the second state of the second	nin esenten en e	Nerden A		
		50 Store	n.//w/Ukn 60	1/m/1/4/1/A		WirMinglinghinghinghinghinghinghinghinghinghingh	www.addated.com/www.adday addated.com/www.adday 300	400	500 600	
-8 30.000		50		70		(MHz)		400		700 1000.000
-8 30.000	0 40	50	60	70	eo Readinç	(мн₂) ; Correct	300 Measure-	400	500 600 Over	700 1000.000
-8 30.000	0 40	50 K.	60 Fre	70 29 . 27	eeading Level	(мн₂) g Correct Factor	300 Measure- ment	400 Limit	500 600 Over	700 1000.000
-8 30.000	0 40 No. M	50 k. 39	бо Fre MH	70 eq. z	Reading Level	(мн₂) g Correct Factor dB	300 Measure- ment dBuV/m	400 Limit dBuV/n	500 GOO Over n dB	700 1000.000 - Detector 6 peak
-8 30.000	0 40 No. M	50 k. 39	60 Fre МН 3.16	70 29 27 27 27 27 27 27 27 27 27 27 27 27 27	Reading Level dBuV 6.40	(MH₂) Correct Factor dB 13.54	300 Measure- ment dBuV/m 19.94	400 Limit 40.00	500 600 Over n dB -20.08	700 1000.000 - Detector 6 peak 9 peak
-8 30.000	0 40 No. M 1 2	50 k. 39 113 449	бо Fre МН 3.16 3.714	70 2 1 27 27 27 27 27 27 27 27 27 27 27 27 27	Reading Level dBuV 6.40 6.57	(MH₂) Correct Factor dB 13.54 16.34	300 Measure- ment dBuV/m 19.94 22.91	400 Limit dBuV/n 40.00 43.50	500 600 Over n dB -20.08	700 1000.000 - Detector 6 peak 9 peak 7 peak
-8 30.000	0 40 No. M 1 2 3	50 k. 39 113 449 520	б0 Fre МН 3.16 3.714	70 2 q . 2 x 116 43 58 82	Reading Level dBuV 6.40 6.57 7.06	(мн₂) Correct Factor dB 13.54 16.34 24.77	300 Measure- ment dBuV/m 19.94 22.91 31.83	400 Limit 480 43.50 46.00	500 600 Over n dB -20.08 -14.17	700 1000.000 Petector 6 peak 9 peak 7 peak 5 peak



		Rad	iateo	d Em	issio	n Tes	t Results a	t 30	MHz-1	GH	z- Lef	t Ear	bud		
EUT Name	TWS	S earb	ouds						Mode	el Na	ame		T4	1	
Temperature	23.8	₿℃							Relat	ive	Humi	dity	59	.8%	
Pressure	960	hPa							Test	Volt	age		DC	3.7∖	/ by batter
Test Mode	Moc	le 4							Ante	nna	Polar	ity	Ve	rtical	
72.0	dBuV/m														
													Limit Marg		
															ſ
					╞┛									5	bx
32												e Na 1 d	Work Walt	Man	<u>~</u>
		1 X	ŝ	2			and the second and the second and the second se			, when M	Malluna	and we want			
YUN	under the state of	1	and a started	for which	transformation	Will Handlick Market	al and a set of the set of the second set of the second second second second second second second second second	Mary Harr	Warner .						
-8															
30.00	0 40) 50	60	70	80		(MHz)		3	00	400	500	600 7	00 1	000.000
	0 40) 50	60	70		dina		M			400	500	600 7	00 1	
30.00	0 40 No. N		60 Fre			ding vel	(мн₂) Correct Factor		a easur ment		400 Limit		600 7 Over	00 1	
30.00				eq.	Rea Lev	-	Correct		easur	e-		t I		Dete	
30.00		1k.	Fre	eq. Iz	Rea Lev dB	vel	Correct Factor	d	easur ment	e-	Limit	t m	Over		ector
30.00		1k. 4	F re MH	eq. Iz 17	Rea Lev dB	vel IuV	Correct Factor dB	d 2	easur ment BuV/m	e-	Limit dBuV/	t m I –	Over dB	Dete	ector ak
30.00	No. M 1 2	4 4 64	Fre MF 7.49 4.20	eq. Iz 17 74	Rea Lev dB 6	vel iuv .16 .14	Correct Factor dB 16.97 17.06	d 2 2	easur ment BuV/m 23.13 23.20	e-	Limit dBuV/ 40.00	t m I -	Over dB 16.87 16.80	Dete pe pe	ector ak ak
30.00	No. M	1k. 4 64 143	Fre MH 7.49 4.20 3.32	eq. Iz 17 74 60	Rea Lev dB 6 6	vel .uv .16 .14 .31	Correct Factor dB 16.97 17.06 18.20	d 2 2 2	easur ment BuV/m 23.13 23.20 24.51	e-	Limit dBuV/ 40.00 40.00 43.50	t – m I – I –	Over dB 16.87 16.80 18.99	Dete pe pe	ak ak
30.00	No. M 1 2 3 4	1k. 4 64 143 458	Fre MF 7.49 4.20 3.32 5.90	eq. Iz 17 74 60 57	Rea Lev dB 6 6 5	vel uV .16 .14 .31 .98	Correct Factor dB 16.97 17.06 18.20 25.38	d 2 2 2 3	easur ment BuV/m 23.13 23.20 24.51 31.36	e-	Limit dBuV/ 40.00 40.00 43.50 46.00	t – m l – l –	Over dB 16.87 16.80 18.99 14.64	Dete pe pe pe	ak ak ak ak
30.00	No. M	1k. 4 64 143 458 72	Fre MH 7.49 4.20 3.32	eq. Iz 17 74 60 57 59	Rea Lev dB 6 6 5 5	vel .uv .16 .14 .31	Correct Factor dB 16.97 17.06 18.20		easur ment BuV/m 23.13 23.20 24.51	e-	Limit dBuV/ 40.00 40.00 43.50	t - m l - l - l -	Over dB 16.87 16.80 18.99	Dete pe pe pe pe	ak ak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



		Radiated Em	ission Test	Results at	30MHz-1GH	Iz- Right	Earbud	
EUT Name	TW	S earbuds			Model I	Name	Т4	1
Temperature	23.8	3 ℃			Relative	e Humidi	ity 59	.8%
Pressure	960	hPa			Test Vo	Itage	DC	C 3.7V by batter
Test Mode	Мос	de 4			Antenn	a Polarit	: y Ho	orizontal
72.0	dBuV/m						·	
32	- Ala	un marine and the		3 Martin Martin		sant for the second	Limit: Margiu	
		Country						
-6				(MHz)	300		500 600 70	
-8 30.00) 50 60 70 //k. Freq.	eading Level		300 Measure- ment	400	500 600 70 Over	0 1000.000
-8	00 40 No. N	0 50 60 70 //k. Freq. //Hz	BO Reading Level dBuV	(MHz) Correct Factor dB	300 Measure- ment dBuV/m	400 Limit dBuV/m	500 600 70 Over dB	0 1000.000 Detector
-8	00 40 No. N	0 50 60 70 M.K. Freq. MHz 75.4463	eading Level dBuV 8.80	(MHz) Correct Factor dB 12.96	300 Measure- ment dBuV/m 21.76	400 Limit dBuV/m 40.00	500 600 70 Over dB -18.24	0 1000.000 Detector
-8	00 40 No. N 1 2	0 50 60 70 Mk. Freq. MHz 75.4463 102.3597	Reading Level dBuV 8.80 7.76	(MH≥) Correct Factor dB 12.96 16.22	300 300 Measure- ment dBuV/m 21.76 23.98	400 Limit dBuV/m 40.00 43.50	0ver dB -18.24 -19.52	Detector peak
-8	00 40 No. N 1 2 3	0 50 60 70 Mk. Freq. MHz 75.4463 102.3597 132.2205	m m Reading Level dBuV 8.80 7.76 7.65	(мн₂) Соггесt Factor dB 12.96 16.22 15.67	300 300 Measure- ment dBuV/m 21.76 23.98 23.32	400 Limit dBuV/m 40.00 43.50 43.50	0ver dB -18.24 -19.52 -20.18	Detector peak peak
-8	00 40 No. N 1 2 3 4	0 50 60 70 Mk. Freq. MHz 75.4463 102.3597 132.2205 242.5252	m Reading Level dBuV 8.80 7.76 7.65 6.91	(мн₂) Соггесt Factor dB 12.96 16.22 15.67 15.32	300 300 Measure- ment dBuV/m 21.76 23.98 23.32 22.23	400 Limit dBuV/m 40.00 43.50 43.50 46.00	0ver dB -18.24 -19.52	Detector peak
-8	00 40 No. N 1 2 3	0 50 60 70 Mk. Freq. MHz 75.4463 102.3597 132.2205	m m Reading Level dBuV 8.80 7.76 7.65	(мн₂) Соггесt Factor dB 12.96 16.22 15.67	300 300 Measure- ment dBuV/m 21.76 23.98 23.32	400 Limit dBuV/m 40.00 43.50 43.50	0ver dB -18.24 -19.52 -20.18	Detector peak peak



		Radiated E	mission Tes	t Results at 3	30MHz-1G	Hz-Right	Earbud		
EUT Name	TW	S earbuds			Model	Name	T4	41	
Temperature	e 23.	8 °C			Relativ	/e Humidi	ity 59	9.8%	
Pressure	960	60hPa Test Voltage			Test Voltage DC 3.7V by				
Test Mode	Мо	de 4			Anteni	na Polarit	y Ve	ertical	
72.0) dBuV/m								
-8		Munghan and a start of the star			nykny praktický metroji				
-8	.000 40		90	(MHz)	300	400	500 600 7		
-8		50 60 70		(MHz)		400			
-8	.000 40	50 60 70	Reading	(MHz) Correct	300 Measure-	400	500 600 7		
-8	.000 40	50 60 70 1. K. Freq.	Reading	(мн₂) Correct Factor	300 Measure- ment	400 Limit	500 600 7	700 1000.000	
-8	.000 40	1k. Freq. MHz 39.2991 66.9668	Reading Level	(MHz) Correct Factor dB	300 Measure- ment dBuV/m	400 Limit dBuV/m	500 600 7 Over dB	700 1000.000 Detector	
-8	No. N	50 60 70 M.K. Freq. MHz 39.2991	Reading Level dBuV 6.13	(MHz) Correct Factor dB 16.67	300 Measure- ment dBuV/m 22.80	400 Limit dBuV/m 40.00	500 600 7 Over dB -17.20	700 1000.000 Detector peak	
-8	No.	1k. Freq. MHz 39.2991 66.9668	Reading Level dBuV 6.13 6.32	(MH≥) Correct Factor dB 16.67 17.03	300 Measure- ment dBuV/m 22.80 23.35	400 Limit dBuV/m 40.00 40.00	500 600 7 Over dB -17.20 -16.65	Detector peak peak	
-8	No.	50 60 70 Ak. Freq. MHz 39.2991 66.9668 119.0180	Reading Level dBuV 6.13 6.32 6.63	(мн₂) Correct Factor dB 16.67 17.03 17.53	300 Measure- ment dBuV/m 22.80 23.35 24.16	400 Limit dBuV/m 40.00 40.00 43.50	500 600 7 Over dB -17.20 -16.65 -19.34	Detector peak peak peak	

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



Radiated Emissions	Test Results	Above 1GHz
	,	

EUT Name	TWS earbud	S		Model I	Name	T41	
Temperature	23.8 ℃			Relativ	e Humidity	59.8%	
Pressure	960hPa			Test Vo	oltage	DC 3.7	V by battery
Test Mode	Mode 4			Antenn	a Polarity	Horizor	ntal
						·	
Frequency	Meter Reading	Factor	Emission	Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/r	m)	(dBµV/m)	(dB)	value Type
4804.000	46.52	0.08	46.6		74	-27.4	peak
4804.000	37.68	0.08	37.76	6	54	-16.24	AVG
7206.000	42.13	2.21	44.34	4	74	-29.66	peak
7206.000	32.96	2.21	35.17	7	54	-18.83	AVG
Domorly							
Remark:	ana Fastar I Cable		amplifiar				
	nna Factor + Cable	e Loss – Pre-	amplifier.				
Factor = Ante	nna Factor + Cable			Model I	Name	T41	
Factor = Ante					Name e Humidity	T41 59.8%	
	TWS earbud				e Humidity	59.8%	V by battery
Factor = Ante EUT Name Temperature Pressure	TWS earbud 23.8℃			Relative Test Vo	e Humidity	59.8%	
Factor = Ante EUT Name Temperature Pressure Test Mode	TWS earbud 23.8℃ 960hPa Mode 4	S		Relative Test Vo Antenn	e Humidity bltage ha Polarity	59.8% DC 3.7 Vertica	
Factor = Ante EUT Name Temperature Pressure Test Mode	TWS earbud 23.8℃ 960hPa Mode 4 Meter Reading	S Factor	Emission	Relative Test Vo Antenn	e Humidity oltage na Polarity	59.8% DC 3.7 Vertica Margin	
Factor = Ante	TWS earbud 23.8°C 960hPa Mode 4 Meter Reading (dBµV)	S Factor (dB)	Emission (dBµV/r	Relative Test Vo Antenn	e Humidity oltage ha Polarity Limits (dBµV/m)	59.8% DC 3.7 Vertica Margin (dB)	- Value Type
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	TWS earbuds 23.8 °C 960hPa Mode 4 Meter Reading (dBµV) 46.14	S Factor (dB) 0.08	Emission (dBµV/r 46.22	Relative Test Vo Antenn Level m)	e Humidity bltage ha Polarity Limits (dBµV/m) 74	59.8% DC 3.7 Vertica Margin (dB) -27.78	Value Type
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	TWS earbuds 23.8 °C 960hPa Mode 4 Meter Reading (dBµV) 46.14 37.55	S Factor (dB) 0.08 0.08	Emission (dBµV/r 46.22 37.63	Relative Test Vo Antenn	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54	59.8% DC 3.7 Vertica Margin (dB) -27.78 -16.37	Value Type peak AVG
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 7206.000	TWS earbuds 23.8 °C 960hPa Mode 4 Meter Reading (dBµV) 46.14 37.55 41.64	S Factor (dB) 0.08 0.08 2.21	Emission (dBµV/r 46.22 37.63 43.85	Relative Test Vo Antenn Level m) 2 3 5	e Humidity bltage a Polarity Limits (dBµV/m) 74 54 74	59.8% DC 3.7 Vertica Margin (dB) -27.78 -16.37 -30.15	Value Type peak AVG peak
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	TWS earbuds 23.8 °C 960hPa Mode 4 Meter Reading (dBµV) 46.14 37.55	S Factor (dB) 0.08 0.08	Emission (dBµV/r 46.22 37.63	Relative Test Vo Antenn Level m) 2 3 5	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54	59.8% DC 3.7 Vertica Margin (dB) -27.78 -16.37	Value Type peak AVG
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	TWS earbuds 23.8 °C 960hPa Mode 4 Meter Reading (dBµV) 46.14 37.55 41.64	S Factor (dB) 0.08 0.08 2.21	Emission (dBµV/r 46.22 37.63 43.85	Relative Test Vo Antenn Level m) 2 3 5	e Humidity bltage a Polarity Limits (dBµV/m) 74 54 74	59.8% DC 3.7 Vertica Margin (dB) -27.78 -16.37 -30.15	Value Type peak AVG peak
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	TWS earbuds 23.8 °C 960hPa Mode 4 Meter Reading (dBµV) 46.14 37.55 41.64	S Factor (dB) 0.08 0.08 2.21	Emission (dBµV/r 46.22 37.63 43.85	Relative Test Vo Antenn Level m) 2 3 5	e Humidity bltage a Polarity Limits (dBµV/m) 74 54 74	59.8% DC 3.7 Vertica Margin (dB) -27.78 -16.37 -30.15	Value Type peak AVG peak



EUT Name		TWS earb	uds		Mode	el Name		T41		
Temperatur	е	23.8 ℃			Relat	tive Humi	dity	59.8%)	
Pressure		960hPa			Test	Voltage		DC 3.	7V by batter	у
Test Mode		Mode 5			Ante	nna Polar	ity	Horizo	ontal	
Frequ	ency	Meter Reading	Factor	Emissior	n Level	Limits	I	Margin	Value Typ	
(M⊦	lz)	(dBµV)	(dB)	(dBµV	//m)	(dBµV/m)	(dB)	value ry	Je
4882	000	45.89	0.14	46.0)3	74		·27.97	peak	
4882	000	38.73	0.14	38.8	37	54		15.13	AVG	
7323	000	41.42	2.36	43.7	'8	74		30.22	peak	
7323	000	34.59	2.36	36.9	95	54		·17.05	AVG	
Remark	•									
		Factor + Ca	ble Loss – P	re-amplifier.						
	,									
EUT Name		TWS earb	uds		Mode	el Name		T41		
Temperatur	е	23.8 ℃			Relat	tive Humi	dity	59.8%)	
Pressure		960hPa			Test	Voltage		DC 3.	7V by batter	у
Test Mode		Mode 5			Ante	nna Polar	ity	Vertic	al	
				-						
Frequency		r Reading	Factor	Emission Leve		Limits	Margi	n	Value Type	
(MHz)		dBµV)	(dB)	(dBµV/m)	(0	dBµV/m)	(dB)			
4882.000		45.16	0.14	45.3		74	-28.7		peak	
4882.000		36.85	0.14	36.99		54	-17.0		AVG	
7323.000		40.76	2.36	43.12		74	-30.8		peak	
7323.000	;	33.15	2.36	35.51	_	54	-18.4	9	AVG	
Remark:	I	I		1	1			I		
	enna Fac	tor + Cable I	_oss – Pre-ar	mplifier						
										l



Radiated Emissions Test Results for Above 1GHz

EUT Name	TWS earbuds	6	Model	Name	T41	
Temperature	23.8 ℃		Relati	ve Humidity	59.8%	
Pressure	960hPa		Test V	/oltage	DC 3.7V	' by battery
Test Mode	Mode 6		Anten	na Polarity	Horizont	al
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	46.42	0.22	46.64	74	-27.36	peak
4960.000	38.55	0.22	38.77	54	-15.23	AVG
7440.000	41.63	2.64	44.27	74	-29.73	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG
Remark: Factor = Ante	nna Factor + Cable	e Loss – Pre-	amplifier.			
Factor = Ante	nna Factor + Cable			Name	T41	
Factor = Ante			Model	Name ve Humidity	T41 59.8%	
	TWS earbuds		Model Relati		59.8%	' by battery
Factor = Ante EUT Name Temperature Pressure	TWS earbuds 23.8℃		Model Relati Test V	ve Humidity	59.8%	' by battery
Factor = Ante EUT Name Temperature Pressure Test Mode	TWS earbuds 23.8℃ 960hPa Mode 6		Model Relati Test V	ve Humidity Oltage	59.8% DC 3.7V Vertical	
Factor = Ante EUT Name Temperature Pressure	TWS earbuds 23.8℃ 960hPa	3	Model Relati Test V Anten	ve Humidity /oltage na Polarity	59.8% DC 3.7V	' by battery Value Type
Factor = Ante	TWS earbuds 23.8℃ 960hPa Mode 6 Meter Reading	Factor	Model Relati Test V Anten Emission Level	ve Humidity /oltage na Polarity Limits	59.8% DC 3.7V Vertical	
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz)	TWS earbuds 23.8℃ 960hPa Mode 6 Meter Reading (dBµV)	Factor (dB)	Model Relati Test V Anten Emission Level (dBµV/m)	ve Humidity foltage na Polarity Limits (dBµV/m)	59.8% DC 3.7V Vertical Margin (dB)	- Value Type
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	TWS earbuds 23.8 °C 960hPa Mode 6 Meter Reading (dBµV) 46.29	Factor (dB) 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 46.51	ve Humidity /oltage na Polarity Limits (dBµV/m) 74	59.8% DC 3.7V Vertical Margin (dB) -27.49	Value Type
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	TWS earbuds 23.8°C 960hPa Mode 6 Meter Reading (dBµV) 46.29 38.38	Factor (dB) 0.22 0.22	Model Relati Test V Anten Emission Level (dBµV/m) 46.51 38.6	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	59.8% DC 3.7V Vertical Margin (dB) -27.49 -15.4	– Value Type peak AVG
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	TWS earbuds 23.8 °C 960hPa Mode 6 Meter Reading (dBµV) 46.29 38.38 40.85	Factor (dB) 0.22 0.22 2.64	Model Relati Test V Anten Emission Level (dBµV/m) 46.51 38.6 43.49	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.8% DC 3.7V Vertical Margin (dB) -27.49 -15.4 -30.51	- Value Type peak AVG peak
Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	TWS earbuds 23.8 °C 960hPa Mode 6 Meter Reading (dBµV) 46.29 38.38 40.85	Factor (dB) 0.22 0.22 2.64	Model Relati Test V Anten Emission Level (dBµV/m) 46.51 38.6 43.49	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	59.8% DC 3.7V Vertical Margin (dB) -27.49 -15.4 -30.51	- Value Type peak AVG peak

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	TWS earbuds	Model Name	T41
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

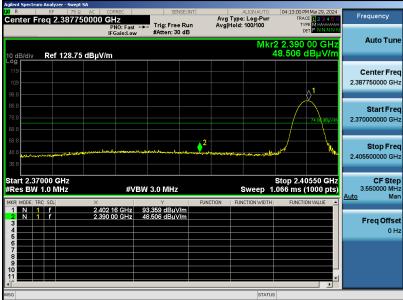

Test Graph for Average Measurement

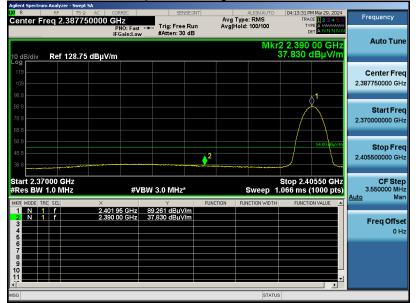


RESULT: Pass




EUT Name	TWS earbuds	Model Name	T41
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

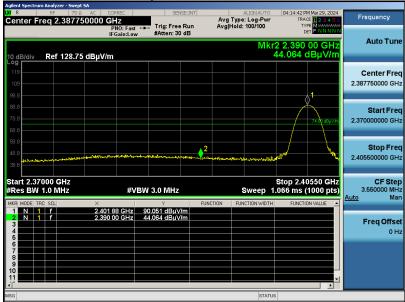

Test Graph for Average Measurement

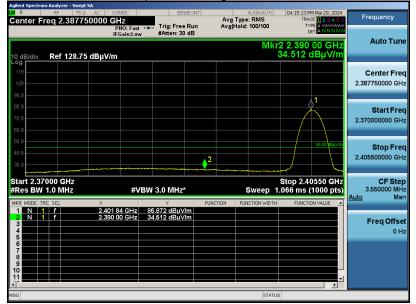


RESULT: Pass




Band Edge Emission Test Results for Restricted Bands

EUT Name	TWS earbuds	Model Name	T41
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

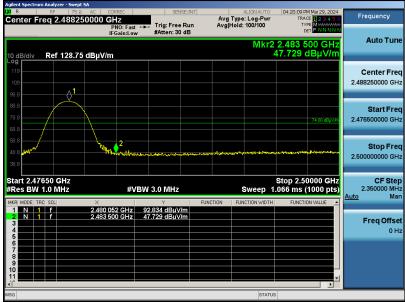

Test Graph for Average Measurement

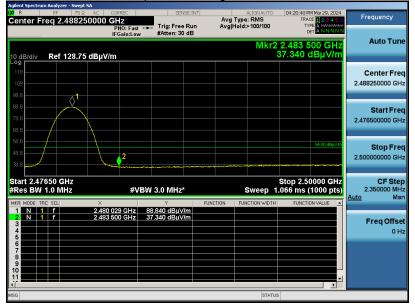


RESULT: Pass




EUT Name	TWS earbuds	Model Name	T41
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

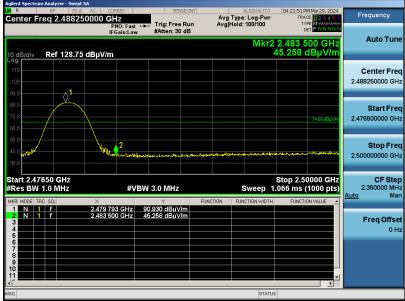

Test Graph for Average Measurement

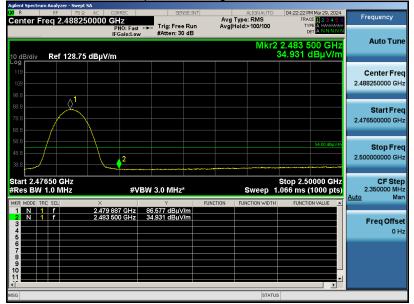

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW \geq RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

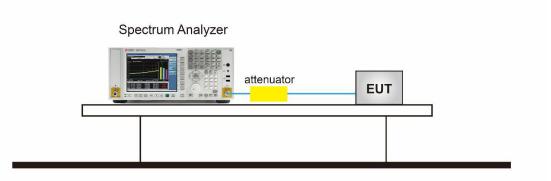

10.4 Measurement Result

Test Data of Number of Hopping Frequency				
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail	
π /4-DQPSK Hopping	79	>=15	Pass	



Agilent Spectrum Analyzer - Swept SA					
LXI R RF 75Ω AC	CORREC	SENSE:INT	ALIGN AUTO	04:23:55 PM Mar 29, 2024	Frequency
Center Freq 2.441750000		: Free Run en: 40 dB	Avg Type: Log-Pwr Avg Hold: 100/100	TRACE 123456 TYPE M WWWW DET P N N N N N	
10 dB/div Ref 30.00 dBm			Mkr	1 2.401 84 GHz -4.104 dBm	Auto Tune
20.0					Center Freq 2.441750000 GHz
10.0 0.00 - • 1					Start Freq 2.400000000 GHz
-10.0	Appl Maria Constraining the	┧┪╢╖┙┙╢║ _{┡┚╵} ┷╓╲	irrinanyuz Ahimuya Jimya	หรุ่นไปหลาใ _{ห้} ร่างใจหลา 	Stop Freq 2.483500000 GHz
-30.0					CF Step 8.350000 MHz <u>Auto</u> Man
-50.0				l,	Freq Offset 0 Hz
Center 2.44175 GHz	#) (B)(#) 0000			Span 83.50 MHz	
#Res BW 200 kHz #VBW 620 kHz Sweep 1.998 ms (1000 pts) MSG STATUS					
Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Number of Hopping					

Test Graphs of Number of Hopping Frequency

Note: The π /4-DQPSK modulation is the worst case and recorded in the report.



11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be \leq channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW \geq RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


11.3 Measurement Setup (Block Diagram of Configuration)

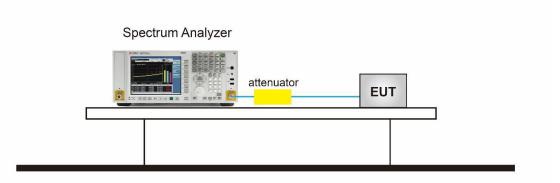

11.4 Measurement Result


Test Data of Dwell Time					
Channel	Time of Pulse for 2DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.890	25.0*4	289.000	400	Pass
2441	2.890	32.0*4	369.920	400	Pass
2480	2.890	27.0*4	312.120	400	Pass



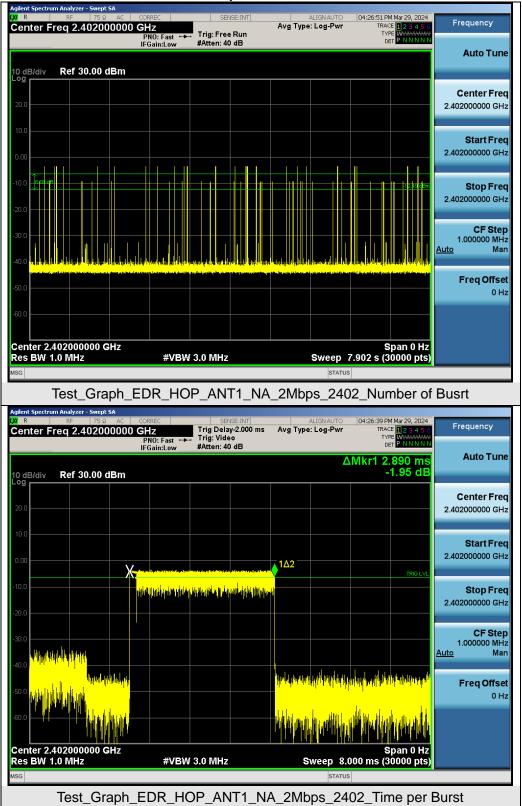


Test Graphs of Dwell Time



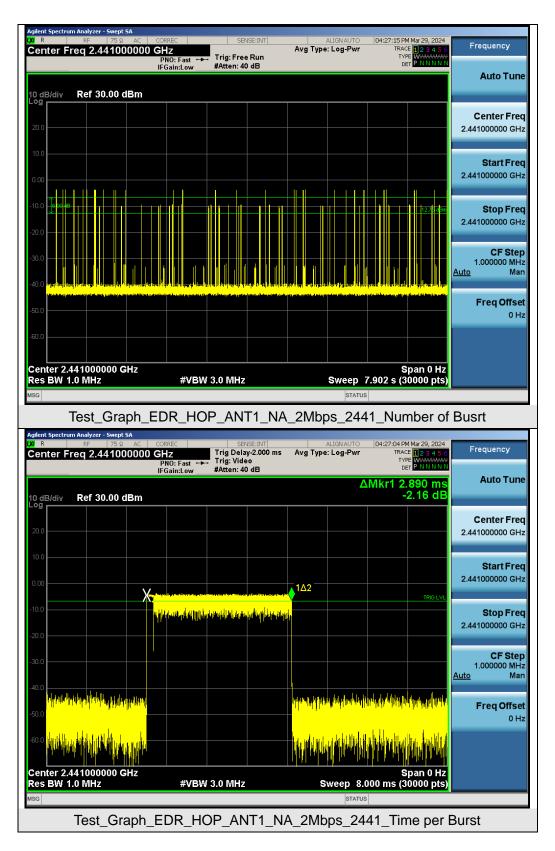



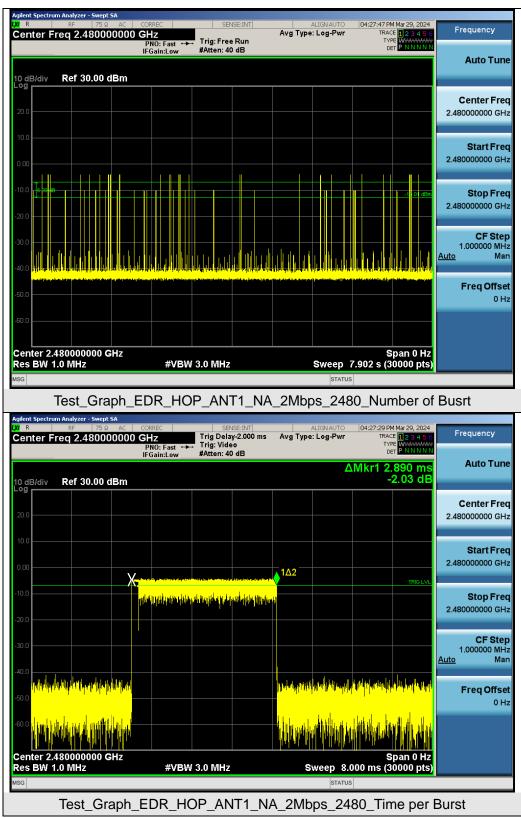

Note: The 8DPSK modulation is the worst case and recorded in the report.



12. Frequency Separation Measurement

12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) \geq RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


12.3 Measurement Setup (Block Diagram of Configuration)

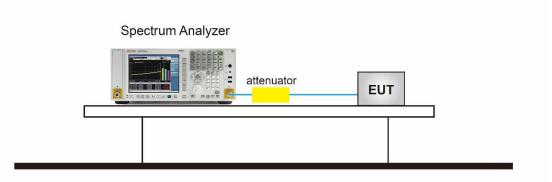

12.4 Measurement Result

Test Data of Frequency Separation				
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail	
π /4-DQPSK Hopping 0.912 0.883 Pass				



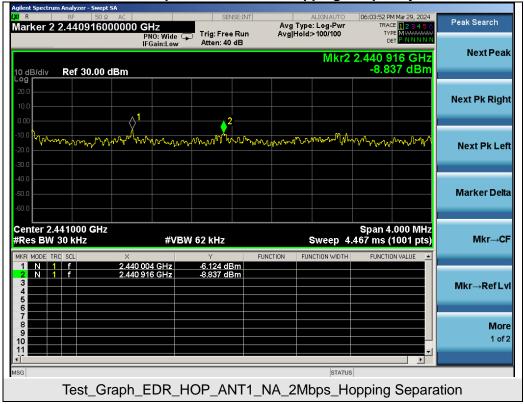

Test Graphs of Number of Hopping Frequency

Note: The π /4-DQPSK modulation is the worst case and recorded in the report.



13. AC Power Line Conducted Emission Test

13.1 Measurement Limit


Frequency	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

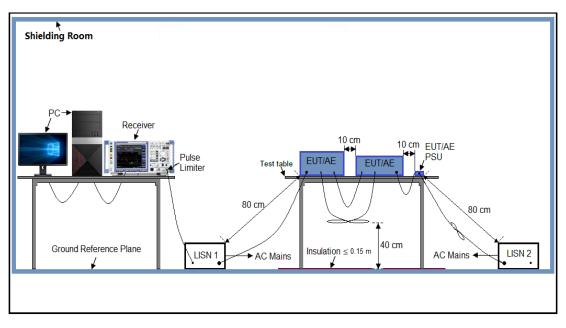



13.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

13.5 Measurement Results

N/A

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC05177240303FR01 Page 69 of 69

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC05177240303AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC05177240303AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.