

*Testing Tomorrow's Technology*

**Application**

**For**

**Title 47 USC Part 2, Subpart J, Paragraph 2.907, 2.1043 Equipment Authorization  
of Certification for an Intentional Radiator per Part 15, Subpart C,  
Paragraphs 15.207 , 15.209 and 15.249**

**For**

**ElectronixIQ LLC  
Model: STINGER 2  
FCC ID: 2ALIF-STR02**

**UST Project: 19-0453  
Issue Date: December 6, 2019**

Total Pages in This Report: 32

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
[www.ustech-lab.com](http://www.ustech-lab.com)**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Consulting Engineer – President

Date: December 6, 2019



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
www.ustech-lab.com**

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## MEASUREMENT TECHNICAL REPORT

**COMPANY NAME:** ElectronixIQ LLC  
3466 Kensington Parc Circle  
Avondale Estates, GA 30002

**MODEL:** STINGER 2

**FCC ID:** 2ALIF-STR02

**DATE:** December 6, 2019

This report concerns (check one): Original  Class II Change

Equipment type: Low Power 2.4 GHz Radio transceiver

Operating Frequency: 2402-2480 MHz

The maximum rated output power for this device is 0 dBm

Type of modulation: DSSS

Data Rate: Bluetooth Specification 4.0

Packet Type: Bluetooth Specification 4.0

FCC Rule	Description of Test	Result
15.249(a)	Field Strength	PASS
15.249 (d)	Out of band emissions	PASS
15.249 (e)	Average Limits	PASS
15.209	Spurious Radiated Emissions	PASS
15.207	Power line Conducted Emissions	N/A

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## Table of Contents

<u>Paragraph Title</u>	<u>Page</u>
<b>1 General Information.....</b>	<b>7</b>
1.1 Purpose of this Report .....	7
1.2 Characterization of Test Sample.....	7
1.3 Product Description .....	7
1.4 Configuration of Tested System.....	7
1.5 Test Facility.....	8
<b>2 Tests and Measurements .....</b>	<b>10</b>
2.1 Test Equipment.....	10
2.2 Modifications to EUT Hardware .....	11
2.3 Number of Measurements for Intentional Radiators (15.31(m)) .....	11
2.4 Frequency Range of Radiated Measurements (Part 15.33).....	11
2.4.1 Intentional Radiator.....	11
2.4.2 Unintentional Radiator .....	12
2.5 Measurement Detector Function and Bandwidth (CFR 15.35) .....	12
2.5.1 Detector Function and Associated Bandwidth .....	12
2.5.2 Corresponding Peak and Average Requirements.....	12
2.5.3 Pulsed Transmitter Averaging.....	12
2.6 Transmitter Duty Cycle (CFR 15.35 (c)).....	13
2.7 EUT Antenna Requirements (CFR 15.203) .....	13
2.8 Restricted Bands of Operation (CFR 15.205) .....	13
2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207).....	13
2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)(c)) (IC RSS 210, A2.9 (a)) .....	14
2.11 Band Edge Measurements – (CFR 15.249 (d)) .....	17
2.12 Occupied Bandwidth (CFR 2.1049).....	23
2.13 Unintentional Radiator, Powerline Emissions (CFR 15.107) .....	27
2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109).....	28
2.15 Measurement Uncertainty .....	32
2.15.1 Conducted Emissions Measurement Uncertainty .....	32
2.15.2 Radiated Emissions Measurement Uncertainty .....	32

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration .....	9
Figure 2.	Band Edge Compliance, Low Channel Delta – Peak.....	18
Figure 3.	Radiated Restricted Band 2310 MHz to 2390 MHz, Peak .....	19
Figure 4.	Band Edge Compliance, High Channel Delta, Peak .....	21
Figure 5.	Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak .....	22
Figure 6.	99% Occupied Bandwidth Low Channel.....	24
Figure 7.	99% Occupied Bandwidth Mid Channel.....	25
Figure 8.	99% Occupied Bandwidth High Channel .....	26
Figure 9.	Unintentional Radiated Emissions, 30 MHz – 1000 MHz (Horizontal) .....	30
Figure 10.	Unintentional Radiated Emissions, 30 MHz – 1000 MHz (Vertical) .....	30

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	8
Table 2.	Test Instruments .....	10
Table 3.	Number of Test Frequencies for Intentional Radiators.....	11
Table 4.	Allowed Antenna(s).....	13
Table 5.	Peak Radiated Fundamental & Harmonic Emissions.....	15
Table 6.	Average Radiated Fundamental & Harmonic Emissions .....	16
Table 7.	Radiated Restricted Band 2310 MHz to 2390 MHz, Peak .....	20
Table 8.	Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak.....	23
Table 9.	Occupied Bandwidth .....	23
Table 10.	Transmitter Power Line Conducted Emissions Test Data, Part 15.107 ...	27
Table 11.	Unintentional Radiator, Peak Radiated Emissions (CFR 15.109) .....	29
Table 12.	Unintentional Radiator, Peak Radiated Emissions (CFR 15.109) .....	31

## List of Attachments

FCC Agency Agreement  
Application Forms  
Letter of Confidentiality  
Test Configuration Photographs  
External Photographs  
Internal Photographs  
Confidential Schematics  
Confidential Theory of Operation  
Confidential Block Diagram  
User Manual  
Sample Label

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## 1 General Information

### 1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 249.

### 1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on October 30, 2019 in good operating condition.

### 1.3 Product Description

The Equipment Under Test (EUT) is the ElectronixIQ model Stinger 2. The EUT is a keyless vehicle security, activation and engagement system with dynamic mobile platform interactivity. The EUT incorporates a Bluetooth Low Energy radio module to allow it to sync with smart phones and other smart devices through the use of an online application (app).

The maximum rated output power for this device is 0 dBm

Type of modulation: DSSS

Data Rate: Bluetooth Specification 4.0

Packet Type: Bluetooth Specification 4.0

### 1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2014 and ANSI C63.4:2013, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* for FCC subpart A Digital equipment Verification requirements and per *ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for FCC subpart C Intentional Radiators.

A list of EUT and Peripherals is found in Table 1. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## 1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally this site has also been fully described and submitted to Industry Canada (ISED), and has been approved under file number 9900A-1.

## 1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.207 and 15.209 as a transmitter.
- b) SDoC under 15.101 as a digital device.

The SDoC requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the SDoC authorization report (Parts 15.107 and 15.109) for the EUT is included herein.


**Table 1. EUT and Peripherals**

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID	CABLES P/D
Keyless interface ElectronixIQ (EUT)	Stinger 2	Engineering Sample	2ALIF-STR02	0.5 m U P
Antenna See antenna details	--	--	--	--

U= Unshielded S= Shielded P= Power D= Data

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

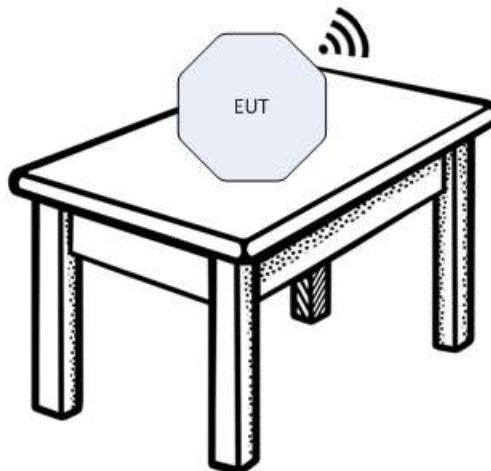

**Figure 1. Block Diagram of Test Configuration**

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## 2 Tests and Measurements

### 2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

**Table 2. Test Instruments**

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	1937A02980	5/07/2020
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT-PACKARD	3008A00480	4/08/2020
LOOP ANTENNA	SAA-200/562	A.H. SYSTEMS	142	1/22/2020
BICONICAL ANTENNA	3110B	EMCO	9306-1708	6/27/2021 2yr cal
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	2/01/2021 2yr cal
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2 yr.
HIGH PASS FILTER	H3R020G2	MICROWAVE CIRCUITS	001DC9528	4/02/2020

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

## 2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

## 2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

**Table 3. Number of Test Frequencies for Intentional Radiators**

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2402 MHz to 2480 MHz, 3 test frequencies were used.

## 2.4 Frequency Range of Radiated Measurements (Part 15.33)

### 2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## 2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

## 2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the parameters outlined following.

### 2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the quasi-peak device are used.

### 2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

### 2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG), the duty cycle factor calculated will be applied.

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## 2.6 Transmitter Duty Cycle (CFR 15.35 (c))

When the radiated emissions limits are expressed in terms of AVERAGE values and pulse operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

## 2.7 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

**Table 4. Allowed Antenna(s)**

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB <sub>i</sub>	TYPE OF CONNECTOR
Antenna	ElectronixIQ	Inverted F PCB trace antenna	None	2.0	trace

## 2.8 Restricted Bands of Operation (CFR 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious emissions cannot exceed the limits of 15.209. Radiated Harmonics and other Spurious Emissions are examined for this requirement; see paragraph 2.1.

## 2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

The EUT is powered from the vehicle's battery supply; therefore, this test is not applicable.

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## **2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)(c)) (IC RSS 210, A2.9 (a))**

Radiated Radio measurements: the EUT was placed into a continuous transmit mode of operation and a preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the product. To obtain the worst case results, the EUT was placed on a table top of a non-conductive table, 80 cm above the ground floor. The EUT was positioned 3 meters away from the receiving antenna during testing (1 meter at frequencies above 6 GHz and if the emissions were less than 6 dB from the noise floor). The EUT was tested in X, Y and Z axes or the position of normal operation to determine the worst case orientation. Radiated measurements below 30 MHz were tested with a RBW = 9 kHz; emissions below 1 GHz were tested with a RBW = 120 kHz and radiated measurements above 1 GHz were measured using a RBW =1 MHz. VBW was set to three times the RBW value.

US Tech Test Report  
 FCC ID:  
 Test Report Number:  
 Issue date:  
 Customer:  
 Model:

FCC Part 15.209/249  
 2ALIF-STR02  
 19-0453  
 December 6, 2019  
 ElectronixIQ  
 STINGER 2

**Table 5. Peak Radiated Fundamental & Harmonic Emissions**

Test: FCC Part 15, Para 15.209, 15.249(a)					Client: ElectronixIQ LLC			
Project: 19-0453					Model: STINGER 2			
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector Mode
<b>Low - Channel</b>								
2402.00	81.82		-3.13	78.69	114.0	3.0m./HORZ	35.3	PK
4804.00	49.30		5.95	55.25	74.0	3.0m./HORZ	18.7	PK
7206.00	49.81	-9.50	14.15	54.46	74.0	3.0m./HORZ	19.5	PK
<b>Mid- Channel</b>								
2440.00	83.91		-3.01	80.90	114.0	3.0m./HORZ	33.1	PK
4880.00	49.47		6.08	55.55	74.0	3.0m./HORZ	18.4	PK
7320.00	49.44	-9.50	15.15	55.09	74.0	3.0m./HORZ	18.9	PK
<b>High- Channel</b>								
2480.00	85.66		-3.68	81.98	114.0	3.0m./HORZ	32.0	PK
4960.00	49.59		6.35	55.94	74.0	3.0m./HORZ	18.1	PK
7440.00	49.66	-9.50	16.53	56.69	74.0	3.0m./HORZ	17.3	PK

Notes:

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. (~) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
4. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.00 MHz:

Magnitude of Measured Frequency	81.82	dBuV
+Antenna Factor + Cable Loss - Amplifier Gain	-3.13	dB/m
Corrected Result	78.69	dBuV/m

Test Date: November 8, 2019

Tested By  
 Signature:



Name: Afzal Fazal

US Tech Test Report  
 FCC ID:  
 Test Report Number:  
 Issue date:  
 Customer:  
 Model:

FCC Part 15.209/249  
 2ALIF-STR02  
 19-0453  
 December 6, 2019  
 ElectronixIQ  
 STINGER 2

**Table 6. Average Radiated Fundamental & Harmonic Emissions**

Test: FCC Part 15, Para 15.209, 15.249(a)					Client: ElectronixIQ LLC			
Project: 19-0453					Model: STINGER 2			
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector Mode
<b>Low - Channel</b>								
2402.00	80.72		-3.13	77.59	94.0	3.0m./HORZ	16.4	AVG
4804.00	28.96		5.95	34.91	54.0	3.0m./HORZ	19.1	AVG
7206.00	28.96	-9.50	14.15	33.61	54.0	3.0m./HORZ	20.4	AVG
<b>Mid- Channel</b>								
2440.00	83.11		-3.01	80.10	94.0	3.0m./HORZ	13.9	AVG
4880.00	29.04		6.08	35.12	54.0	3.0m./HORZ	18.9	AVG
7320.00	28.73	-9.50	15.15	34.38	54.0	3.0m./HORZ	19.6	AVG
<b>High- Channel</b>								
2480.00	84.03		-3.68	80.35	94.0	3.0m./HORZ	13.6	AVG
4960.00	28.27		6.35	34.62	54.0	3.0m./HORZ	19.4	AVG
7440.00	28.25	-9.50	16.53	35.28	54.0	3.0m./HORZ	18.7	AVG

Notes:

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. (~) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
4. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.
5. Duty Cycle factor of -20 dB is added to the additional factor column.

Sample Calculation at 2402.0 MHz:

Magnitude of Measured Frequency	80.72 dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-3.13 dB/m
Corrected Result	77.59 dBuV/m

Test Date: November 8, 2019

Tested By  
 Signature:



Name: Afzal Fazal

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## **2.11 Band Edge Measurements – (CFR 15.249 (d))**

Band Edge measurements are made following the guidelines in FCC KDB Publication No. 558074 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed to demonstrate compliance with the requirement of 15.249(d) that all emissions outside of the band edges be attenuated by at least 50 dB or 15.209 limits, when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge, set the Spectrum Analyzer frequency span set to 2 MHz to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. See figure and calculations following for more detail.

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

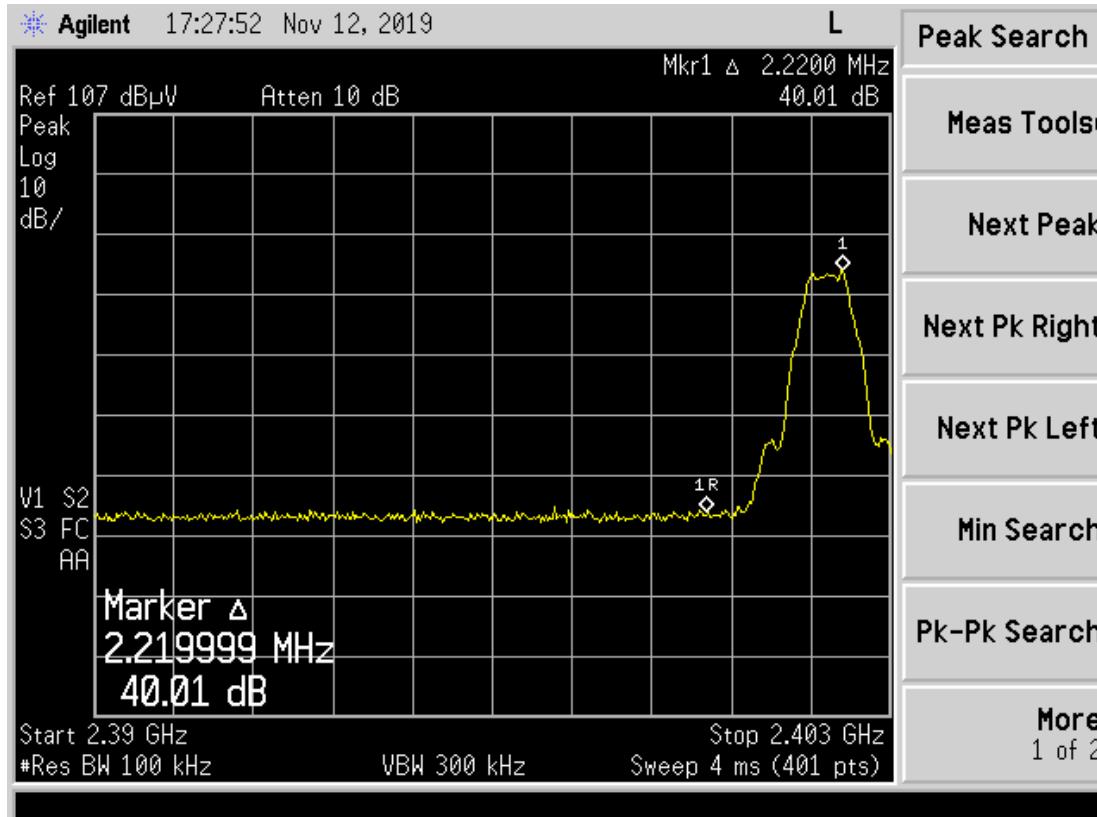


Figure 2. Band Edge Compliance, Low Channel Delta – Peak

Low Channel Corrected Measured Value from Table 5	78.69 dB $\mu$ V
Low Channel Band Edge Delta from Figure 2	-40.01 dB
Calculated Result (PEAK)	38.68 dB $\mu$ V/m
Band Edge Limit (PEAK)	54.00 dB $\mu$ V/m
Calculated Result (PEAK)	-38.68 dB $\mu$ V/m
Band Edge Margin	15.32 dB $\mu$ V/m

Note: Peak meets AVG limit.

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

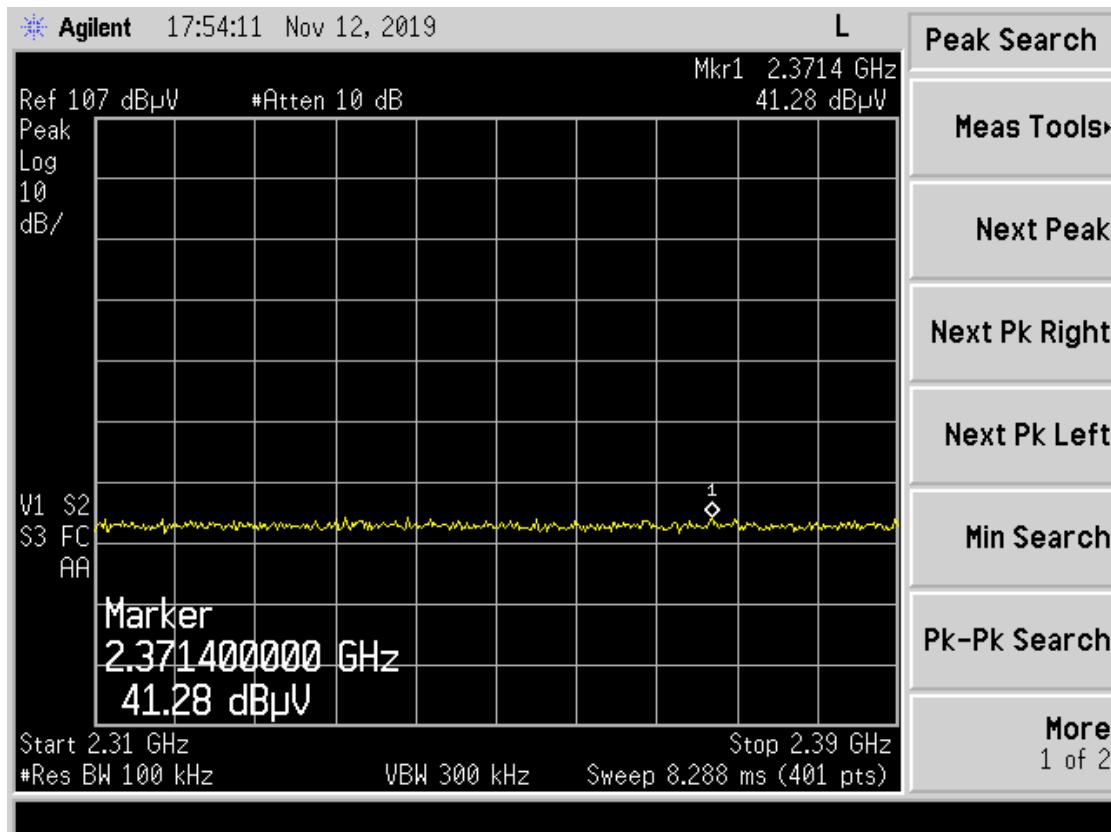


Figure 3. Radiated Restricted Band 2310 MHz to 2390 MHz, Peak

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

**Table 7. Radiated Restricted Band 2310 MHz to 2390 MHz, Peak**

Restricted Band Peak Measurements							
Test: Radiated Emissions				Client: ElectronixIQ LLC			
Project: 19-0453				Model: STINGER 2			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
No emissions seen. Noise floor only.							

Test Date: November 13, 2019

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

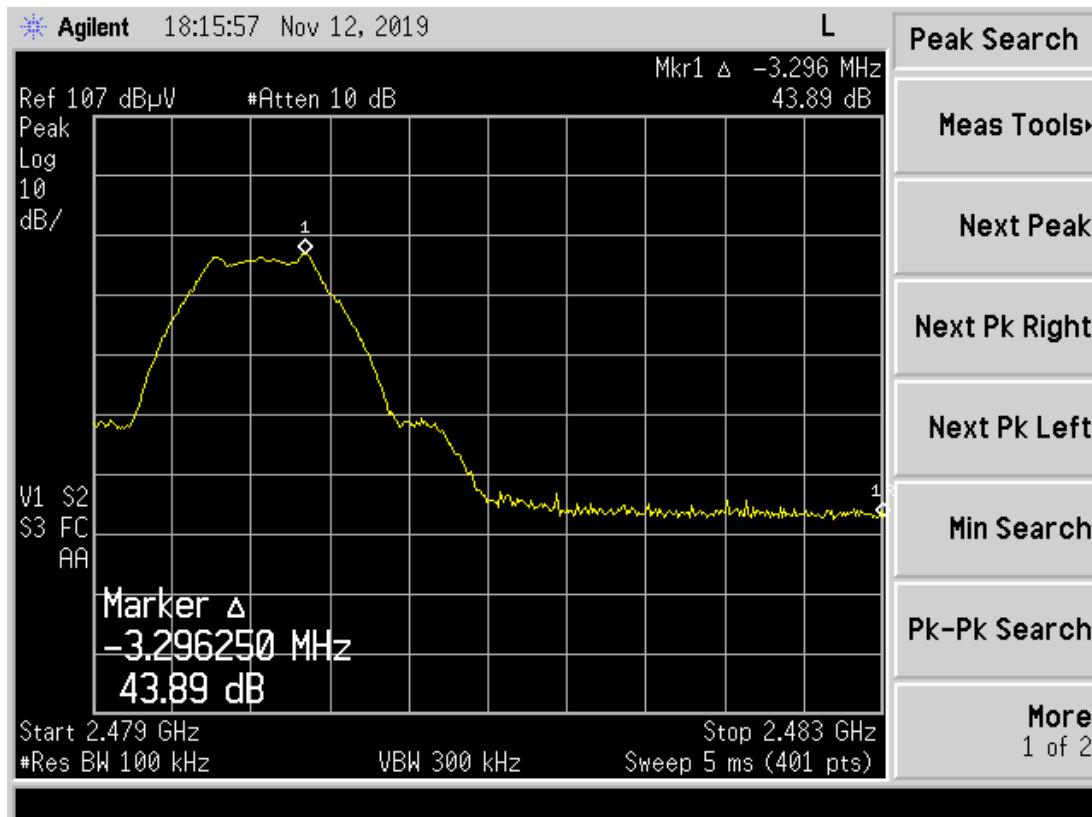


Figure 4. Band Edge Compliance, High Channel Delta, Peak

High Channel Corrected Measured Value from Table 5	81.98	dBuV
High Channel Band Edge Delta from Figure 4	-43.89	dB
Calculated Result (PEAK)	38.09	dBuV/m
Band Edge Limit (AVG)	54.00	dBuV/m
Calculated Result (PEAK)	-38.09	dBuV/m
Band Edge Margin	15.91	dBuV/m

Note: Peak meets AVG limits

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

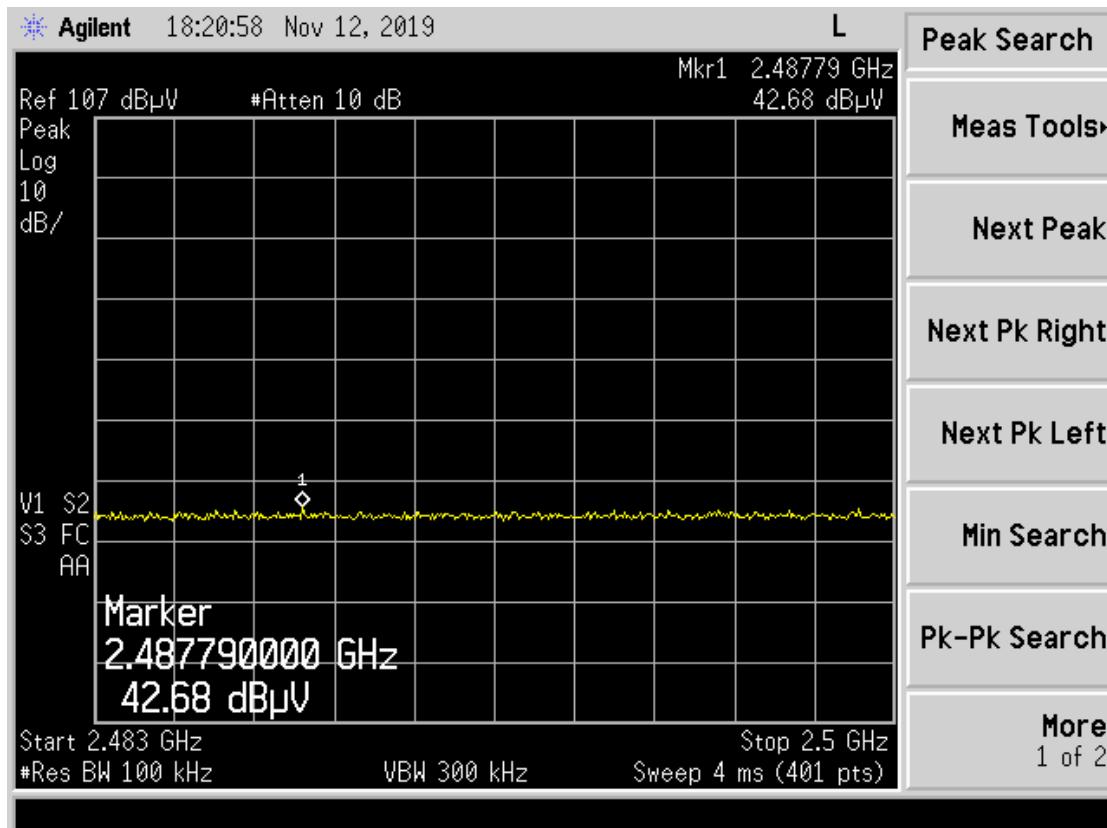


Figure 5. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

**Table 8. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak**

Restricted Band Peak Measurements							
Test: Radiated Emissions				Client: ElectronixIQ LLC			
Project: 19-0453				Model: STINGER 2			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
All emissions were more than 20 dB below the limit.							

Test Date: November 13, 2019

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

## 2.12 Occupied Bandwidth (CFR 2.1049)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

The changes do not affect the emissions bandwidth therefore the originally recorded measurements are presented herein.

**Table 9. Occupied Bandwidth**

Frequency (MHz)	Occupied Bandwidth (MHz)
2402	1.058
2440	1.072
2480	1.083

Test Date: November 13, 2019

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

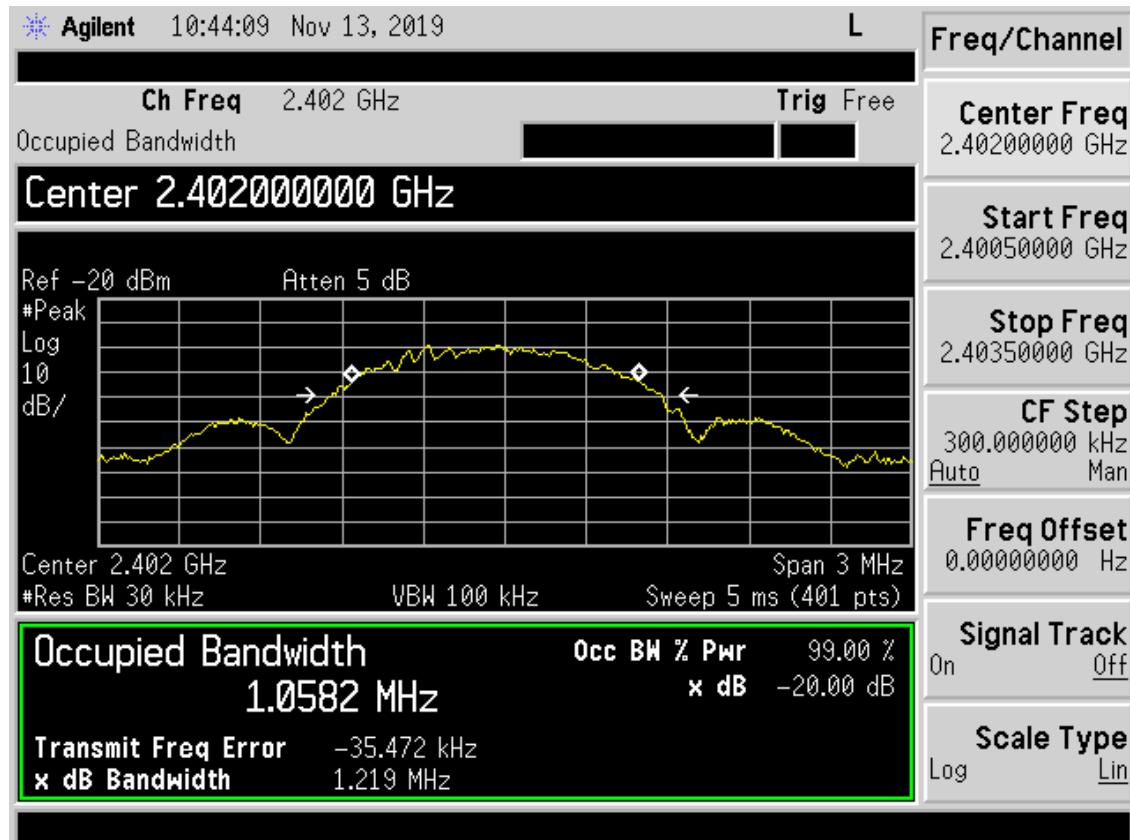


Figure 6. 99% Occupied Bandwidth Low Channel

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

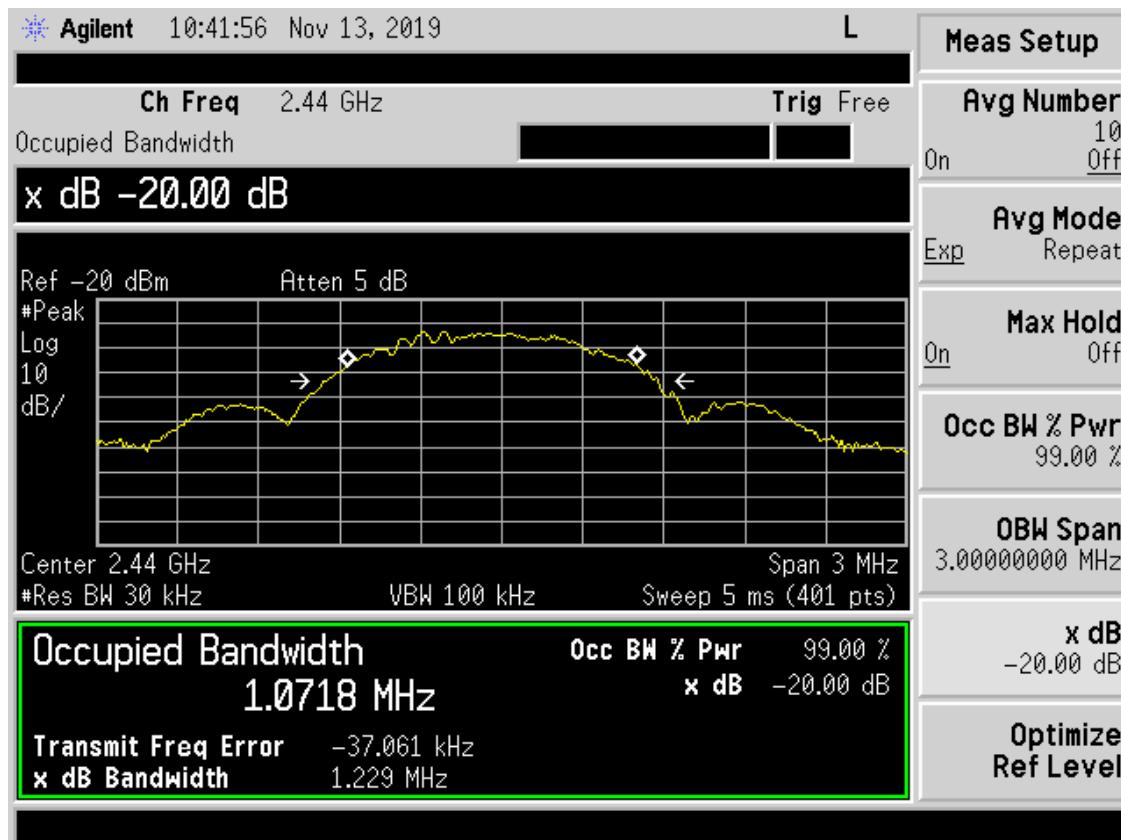


Figure 7. 99% Occupied Bandwidth Mid Channel

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

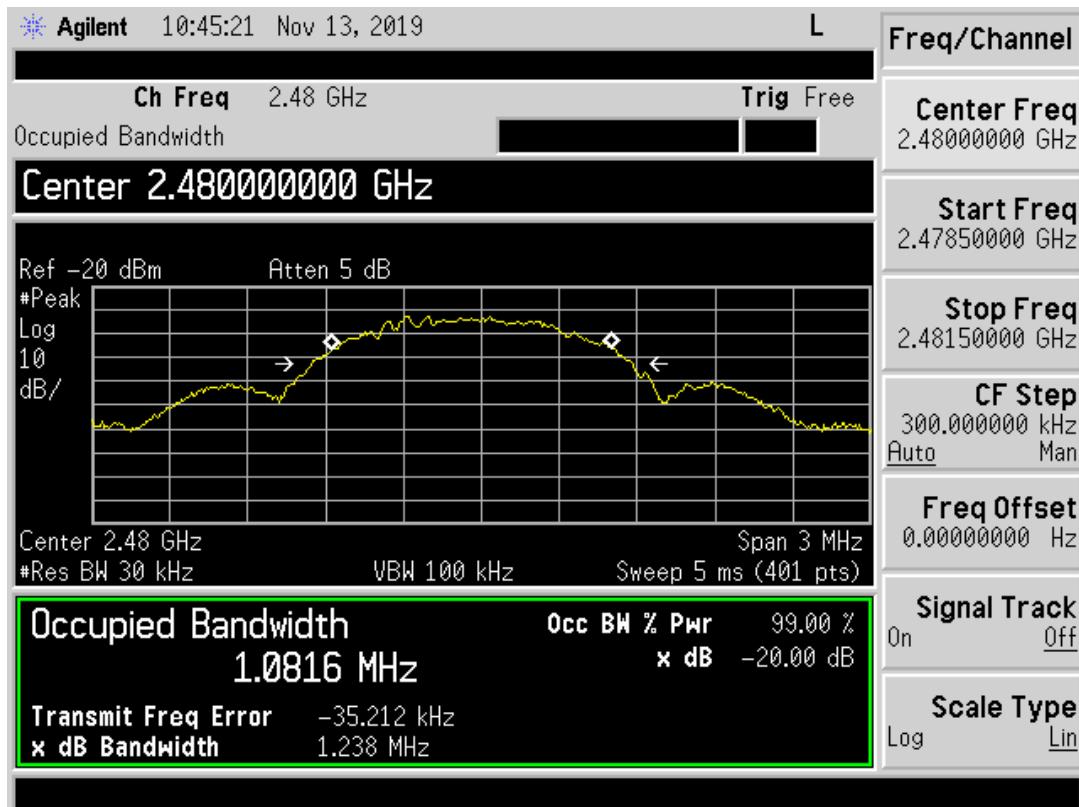


Figure 8. 99% Occupied Bandwidth High Channel

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## 2.13 Unintentional Radiator, Powerline Emissions (CFR 15.107)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.107, per ANSI C63.4:2014, Paragraph 7, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission.

Since the EUT is battery powered, this test was not applied. The EUT is powered by two AA Lithium batteries.

**NOTE: The test data provided in this section is to support the requirement for the digital apparatus.**

**Table 10. Transmitter Power Line Conducted Emissions Test Data, Part 15.107**

9kHz to 30 MHz with Class B Limits						
Test: Radiated Emissions				Client: ElectronixIQ LLC		
Project: 19-0453				Model: STINGER 2		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
The EUT is battery powered; therefore, this test is not applicable.						

SAMPLE CALCULATION: N/A

Test Date: N/A

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## **2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109)**

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 30 MHz to 12.5 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emissions in the range of 30 MHz to 12.5 GHz are more than 20 dB below the limit.

**NOTE: The test data provided in this section is to support the requirement for the digital apparatus.**

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

**Table 11. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109)**

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: ElectronixIQ LLC			
Project: 19-0453				Model: STINGER 2			
Frequency (MHz)	Test Data (dB <sub>UV</sub> )	AF+CA-AMP (dB/m)	Results (dB <sub>UV</sub> /m)	Limits (dB <sub>UV</sub> /m)	Antenna Distance/Polarization	Margin (dB)	Detector PK or QP
30.43	39.30	-11.81	27.49	40.0	3m./VERT	12.5	PK
<b>No other emissions seen. All other emissions were more than 20 dB below the applicable limit.</b>							

Tested from 30 MHz to 1 GHz

SAMPLE CALCULATION at 30.43 MHz:

Magnitude of Measured Frequency	39.30	dB <sub>UV</sub>
+Antenna Factor + Cable Loss+ Amplifier Gain	-11.81	dB/m
Corrected Result	27.49	dB <sub>UV</sub> /m

Test Date: November 12, 2019


Tested By

Signature: Mark Afrozzi


Name: Mark Afrozzi

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

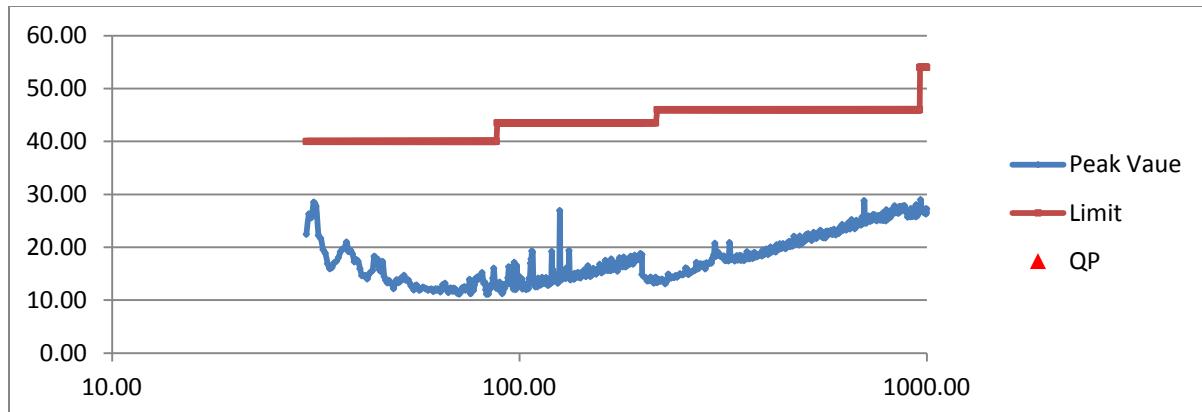

**Figure 9. Unintentional Radiated Emissions, 30 MHz – 1000 MHz (Horizontal)**

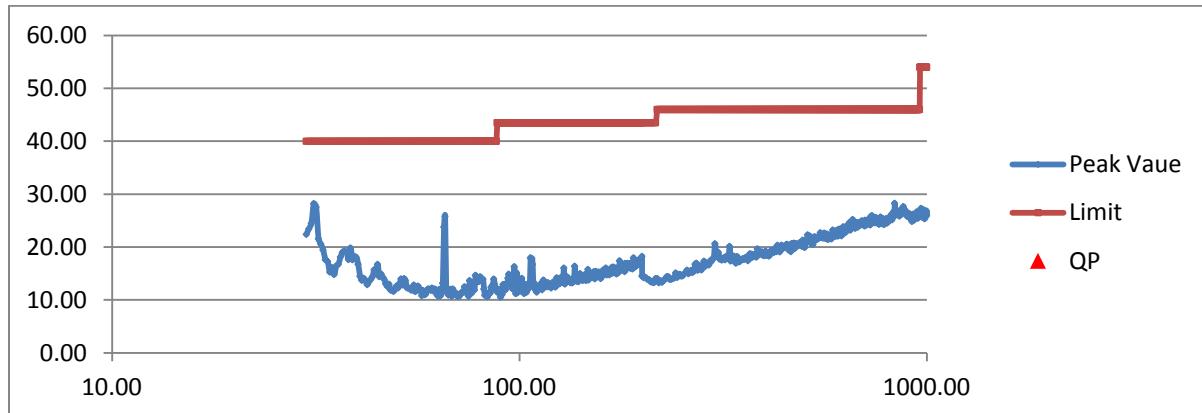

**Figure 10. Unintentional Radiated Emissions, 30 MHz – 1000 MHz (Vertical)**

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

**Table 12. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109)**

1 GHz to 12.5 GHz with Class B Limits							
Test: Radiated Emissions				Client: ElectronixIQ			
Project: 19-0453				Model: STINGER 2			
Frequency (MHz)	Test Data (dB <sub>UV</sub> )	AF+CA-AMP (dB/m)	Results (dB <sub>UV</sub> /m)	Limits (dB <sub>UV</sub> /m)	Antenna Distance/Polarization	Margin (dB)	Detector PK or AVG
No spurious emissions were detected.							

Tested from 1 GHz to 12.5 GHz

SAMPLE CALCULATION at: N/A

Test Date: November 12, 2019

Tested By

Signature:



Name: Afzal Fazal

US Tech Test Report  
FCC ID:  
Test Report Number:  
Issue date:  
Customer:  
Model:

FCC Part 15.209/249  
2ALIF-STR02  
19-0453  
December 6, 2019  
ElectronixIQ  
STINGER 2

## **2.15 Measurement Uncertainty**

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2: 2011. A coverage factor of  $k=2$  was used to give a level of confidence of approximately 95%.

### **2.15.1 Conducted Emissions Measurement Uncertainty**

Measurement Uncertainty (within a 95% confidence level) for this test is  $\pm 2.85$  dB.

This EUT is battery powered; therefore this tested was deemed not applicable.

### **2.15.2 Radiated Emissions Measurement Uncertainty**

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is  $\pm 5.40$  dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm 5.19$  dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm 5.08$  dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

**END REPORT**