



## Test Report

Prepared for: Samtec, Inc.

Model: OSM-1-1313

Description: nMode Smart Modules

Serial Number: N/A

FCC ID: 2ALII-OSM-1-1313  
IC: 22500-OSM11313

To

FCC Part 15.247 DTS

And

IC RSS-247

Date of Issue: May 4, 2017

On the behalf of the applicant:

Samtec, Inc.  
8950 N. Oracle Rd.  
Suite 100  
Oro Valley, AZ 85704

Attention of:

Joel Blumke  
Ph: (520) 777-1059  
E-Mail: [joel.blumke@samtec.com](mailto:joel.blumke@samtec.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1720020

**Kenneth Lee**  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	March 1, 2017	Kenneth Lee	Original Document



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions Engineering Practices .....	6
Peak Output Power .....	8
Radiated Spurious Emissions .....	9
Emissions at Band Edges .....	10
Occupied Bandwidth .....	14
Transmitter Power Spectral Density (PSD).....	17
Test Equipment Utilized .....	19

**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**

**The applicant has been cautioned as to the following**

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



**Standard Test Conditions Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
21.4	41.8	967.9

**EUT Description**

**Model:** OSM-1-1313

**Description:** nMode Smart Modules

**Firmware:** N/A

**Software:** N/A

**Serial Number:** N/A

**Additional Information:** None

**EUT Operation during Tests**

The EUT was powered on and set to transmit at the highest, middle and the lowest channel of operation. The EUT was controlled via a laptop computer using the GUI software provided.

**Accessories:** None

**Cables:** None

**Modifications:** None

**15.203: Antenna Requirement:**

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply



## Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
15.247(b)	Peak Output Power	Pass	
15.247(b)	Conducted Spurious Emissions	N/A	Measurements were done Radiated as the EUT has an Integral Antenna
15.247(d), 15.209(a), 15.205	Radiated Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Emissions At Band Edges	Pass	
15.247(a)(2)	Occupied Bandwidth	Pass	
15.247(e)	Transmitter Power Spectral Density	Pass	
15.207	A/C Powerline Conducted Emissions	N/A	EUT is battery powered



**Peak Output Power**


**Engineer:** Kenneth Lee

**Test Date:** 2/24/2017

**Test Procedure**

The EUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. The emissions were maximized by rotating the turn table 360° while rising the receive antenna from 1 to 4 meters. The peak readings were taken and the result was then compared to the limit.

**Test Setup**



**Transmitter Peak Output Power**

Tuned Frequency (MHz)	Measured Value (dBm)	Specification Limit	Result
2402	-3.177	1 W (30 dBm)	Pass
2442	1.358	1 W (30 dBm)	Pass
2480	2.549	1 W (30 dBm)	Pass





**Radiated Spurious Emissions**

**Engineer:** Kenneth Lee

**Test Date:** 3/1/2017

**Test Procedure**  
**Radiated Spurious Emissions: 30 – 1000 MHz**

The EUT was tested in a semi-anechoic test chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and was raised from 1 to 4 meters to ensure the TX signal levels were maximized.

All emissions from 30 MHz to 1 GHz were examined.

Measured Level includes antenna and receiver cable correction factors.


Correction factors were input into the spectrum analyzer before recording “Measured Level”.

RBW = 100 KHz

VBW = 300 KHz

Detector – Quasi Peak


**Test Setup**



**Test Procedure for**  
**Radiated Spurious Emissions above 1 GHz**

The EUT was tested in a semi anechoic chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Spurious Emissions. The antenna, band reject filter, amplifier and cable correction factors were input into the spectrum analyzer before recording the Measured Level to ensure accurate readings. The spectrum for each tuned frequency was examined to the 10th harmonic.

**Test Setup**



Detector Settings	RBW (MHz)	VBW (MHz)	Span
Peak	1	3	As Necessary
Average	1	3	As Necessary

See Annex A for test data



**Emissions at Band Edges**


**Engineer:** Kenneth Lee

**Test Date:** 2/28/2017

**Test Procedure**

The EUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for band edge and restricted band for both peak and average measurements. The cable and antenna correction factors were input into the analyzer as a reference level offset to ensure accurate readings. For the restricted band the amplifier and band reject filter correction factors were also input to the spectrum analyzer.


**Band Edge Test Setup**



**Band Edge Emissions Summary**


Tuned Frequency (MHz)	Emission Frequency (MHz)	Measured Value (dBc)	Detector	Limit (dBc)	Result
2402	2400	32.49	Peak	-20 dBc	Pass
2480	2483.5	40.46	Peak	-20dBc	Pass

**Restricted Band Test Setup**

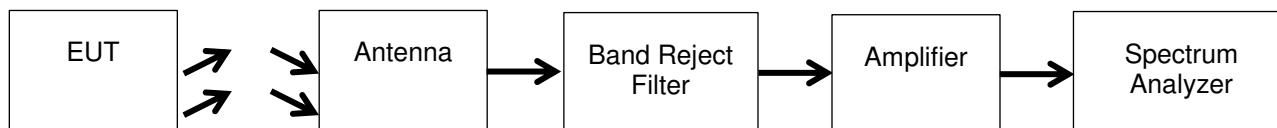




**Band Edge 2400 MHz  
Tuned Freq = 2402 MHz**

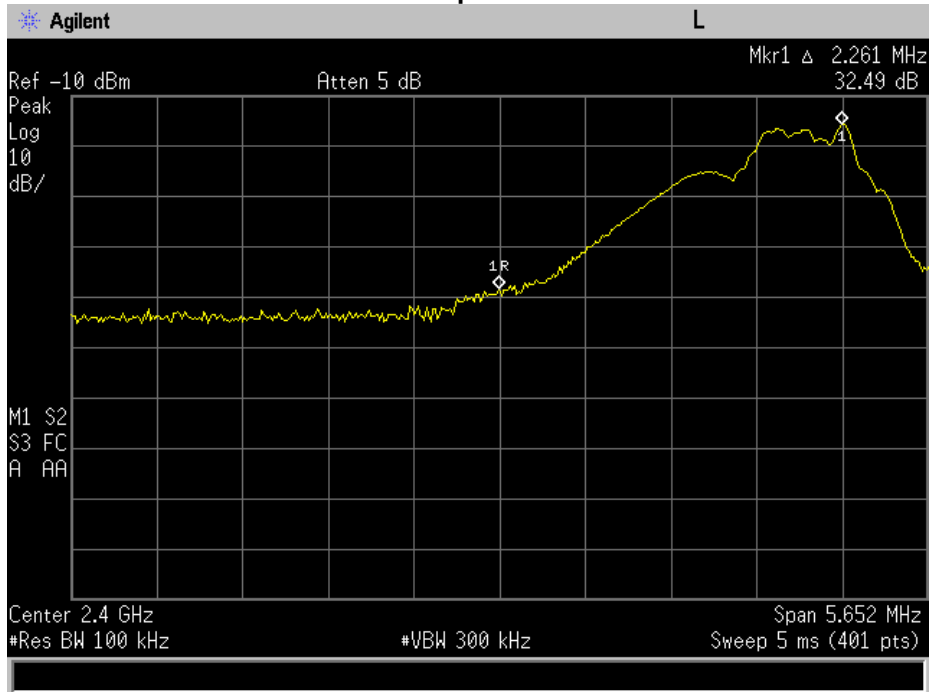


**Band Edge 2483.5 MHz  
Tuned Freq = 2480 MHz**

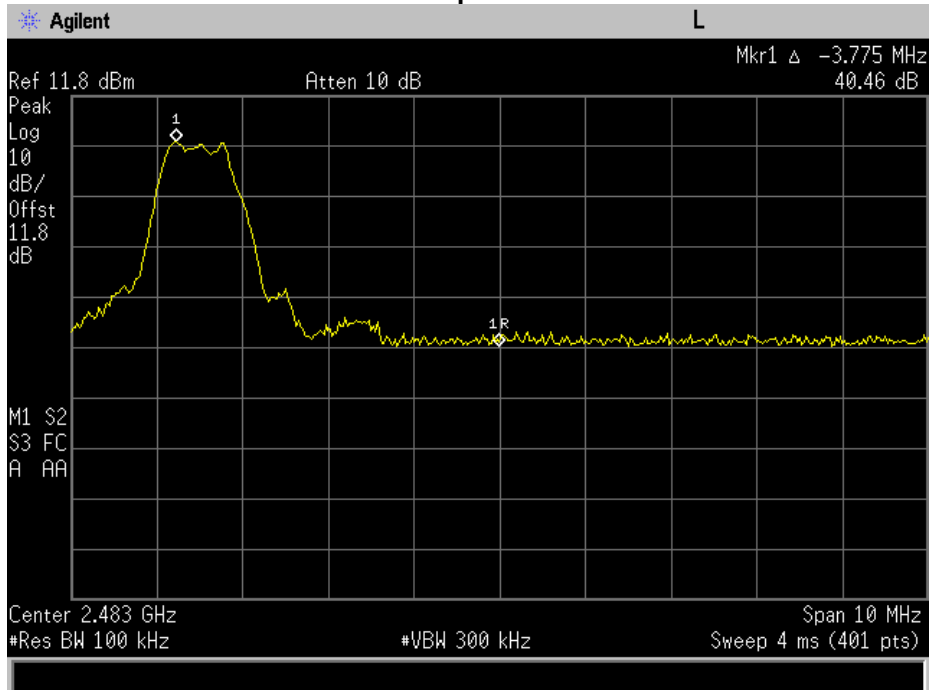




**Restricted Band 2300 – 2390 MHz – Peak**  
**Tuned Freq = 2402 MHz**

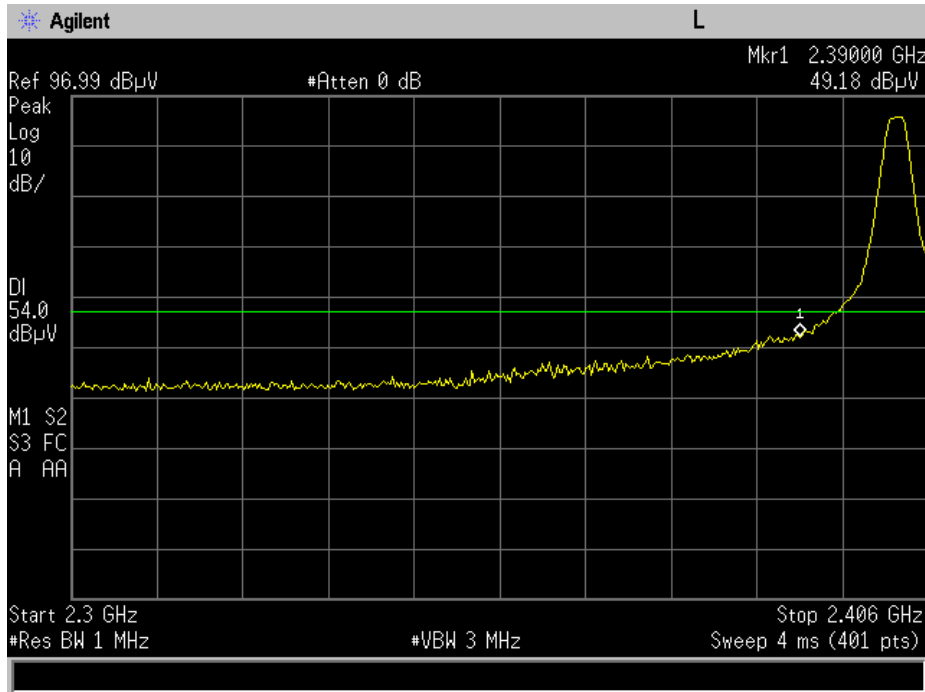


**Restricted Band 2483.5 – 2500 MHz – Peak**  
**Tuned Freq = 2480 MHz**

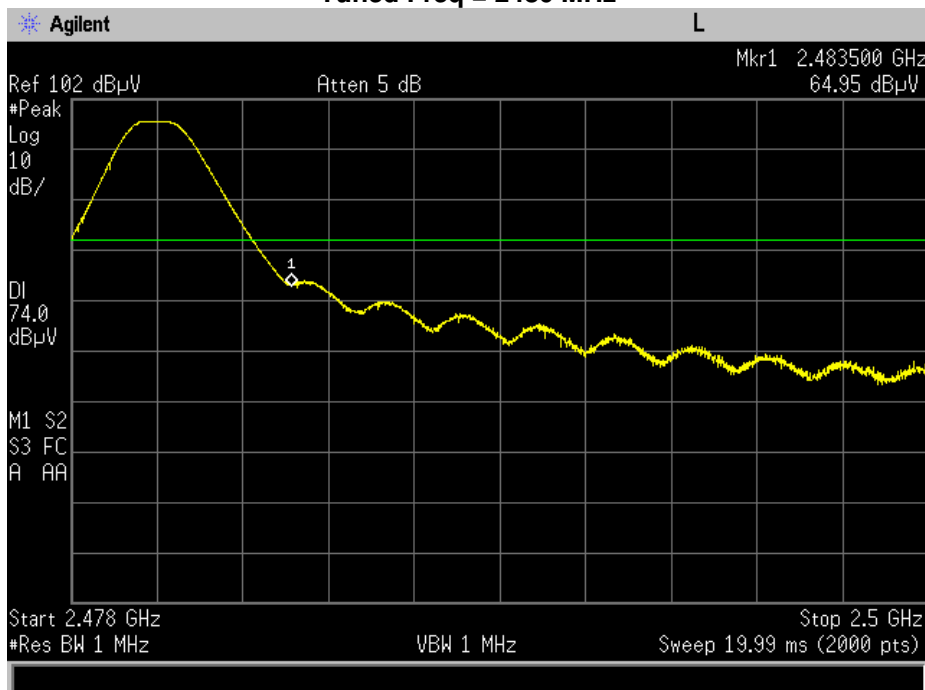




**Restricted Band 2483.5 – 2500 MHz – Avg**  
**Tuned Freq = 2480 MHz**

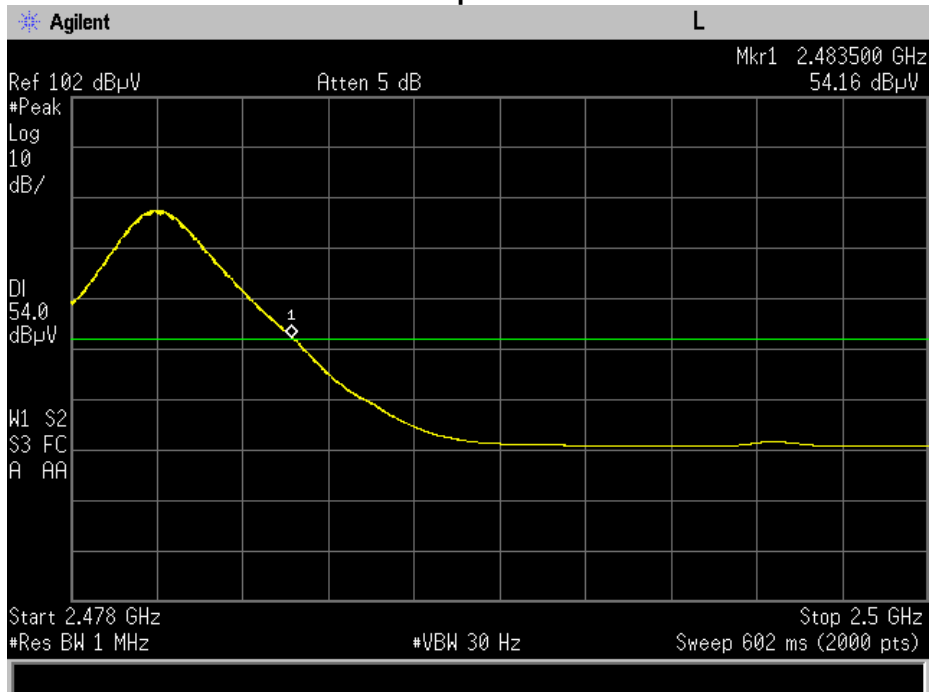

**2483.5 MHz - Avg**

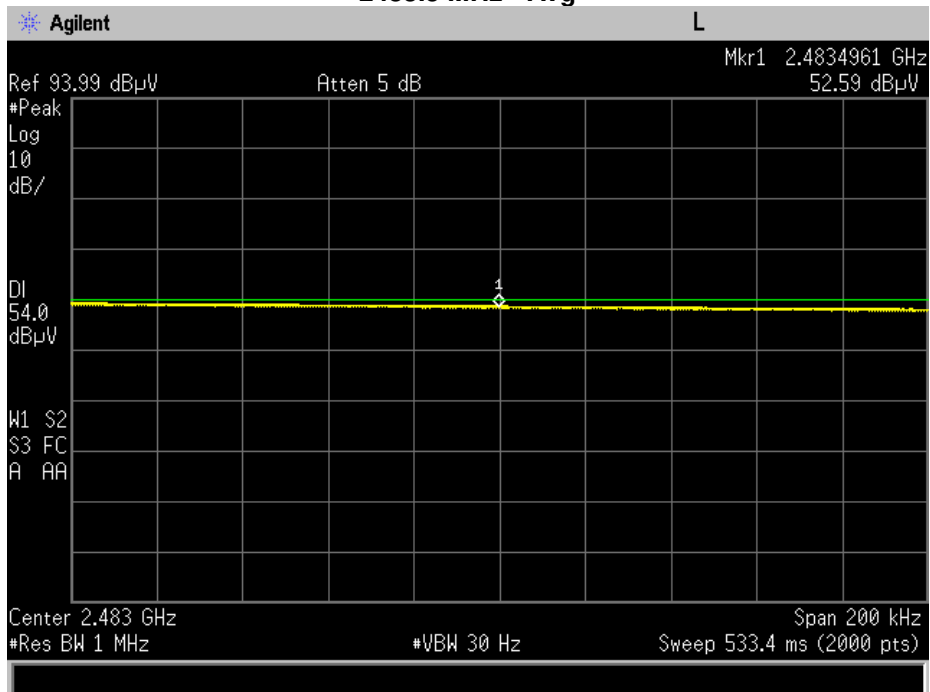



**Occupied Bandwidth**


**Engineer:** Kenneth Lee

**Test Date:** 2/28/2017

**Test Procedure**

The EUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. The emissions were maximized by rotating the turn table 360° while rising the receive antenna from 1 to 4 meters. The Span was set wide enough to capture the entire transmit spectrum and the resolution bandwidth was set to at least 1% of the span. The analyzer was set to max hold and when the entire spectrum was captured the 6dB and 99% bandwidths were measured to verify the bandwidth met the specification.

**Test Setup**



**6 dB Occupied Bandwidth Summary**


Frequency (MHz)	Measured Bandwidth (MHz)	Specification Limit (kHz)	Result
2402	689.329	≥ 500	Pass
2442	805.844	≥ 500	Pass
2480	790.372	≥ 500	Pass

**99% Bandwidth Summary**


Frequency (MHz)	Measured Bandwidth (MHz)	Result
2402	1.8878	Pass
2442	1.0799	Pass
2480	1.0431	Pass



### 6dB and 99% Bandwidth 2402 MHz

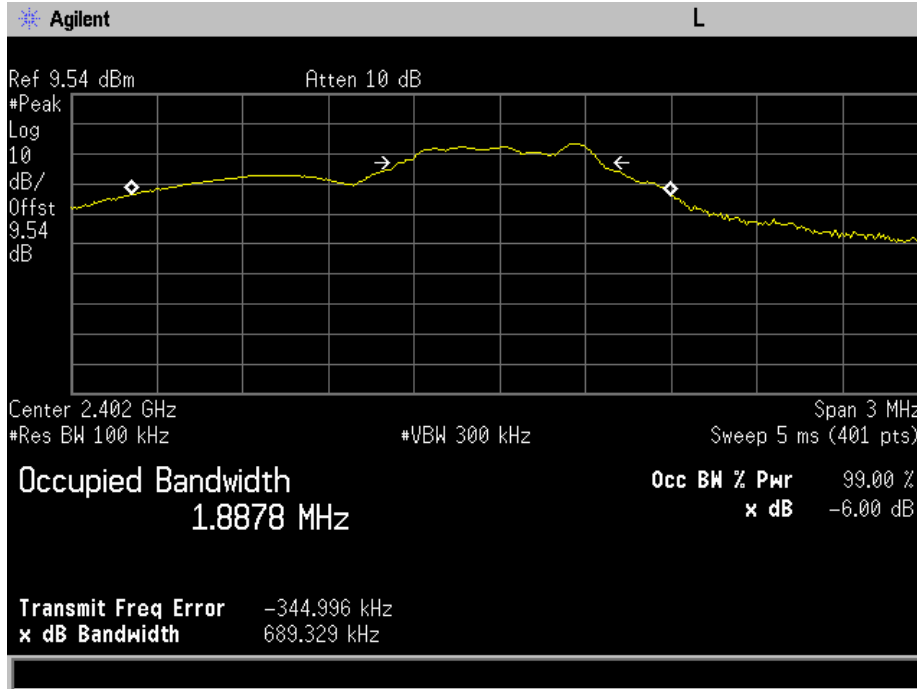


### 6dB and 99% Bandwidth 2442 MHz

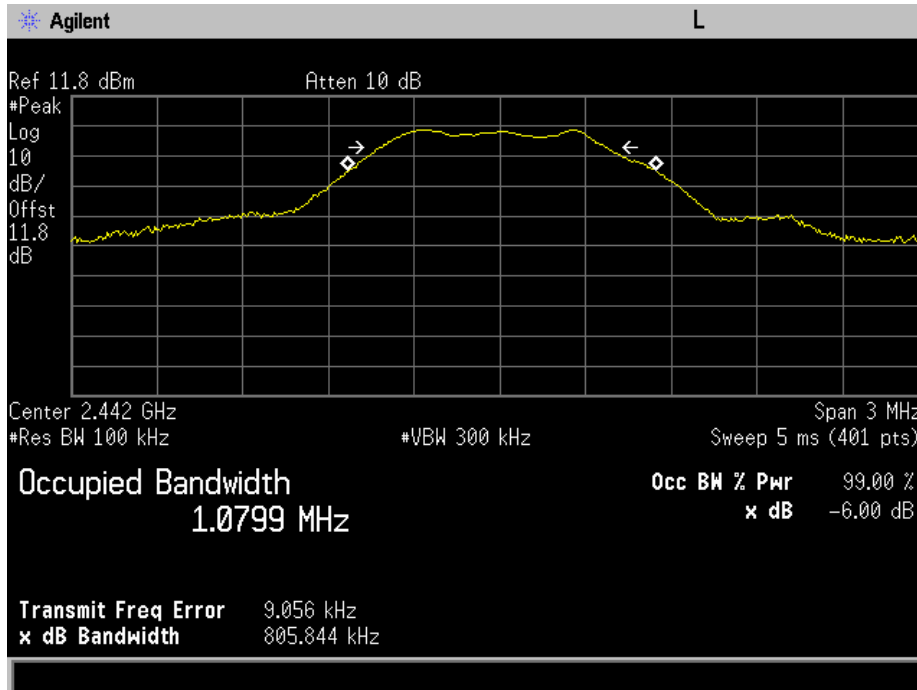



### 6dB and 99% Bandwidth 2480 MHz

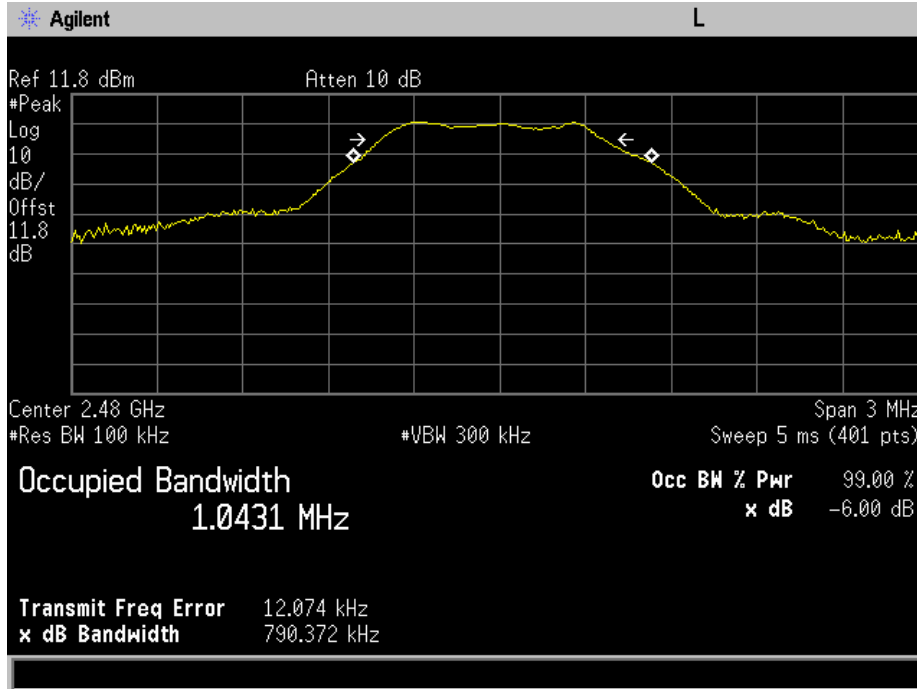





**Transmitter Power Spectral Density (PSD)**


**Engineer:** Kenneth Lee

**Test Date:** 2/28/2017

**Test Procedure**

The EUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. The emissions were maximized by rotating the turn table 360° while rising the receive antenna from 1 to 4 meters. The test was performed per section 11.10 of C63.10:2013 "Procedure for determining PSD for DTS devices".


**Test Setup**



**PSD Summary**


Frequency (MHz)	Measured Data (dBm)	Specification Limit (dBm)	Result
2402	-17.49	8	Pass
2442	-14.08	8	Pass
2480	-11.69	8	Pass

**PSD 2402 MHz**

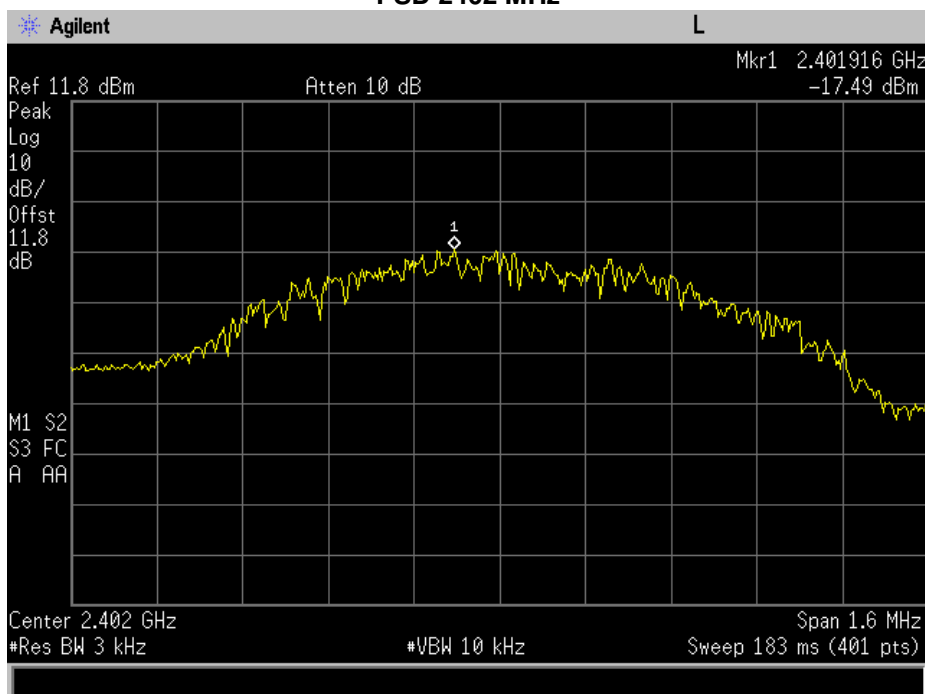




### PSD 2442 MHz

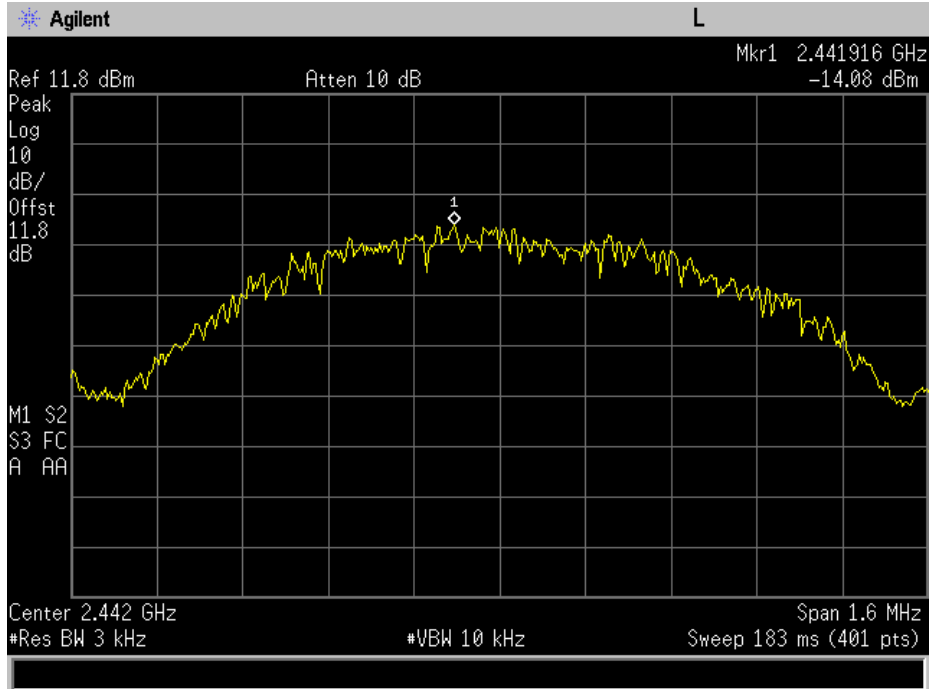

### PSD 2480 MHz

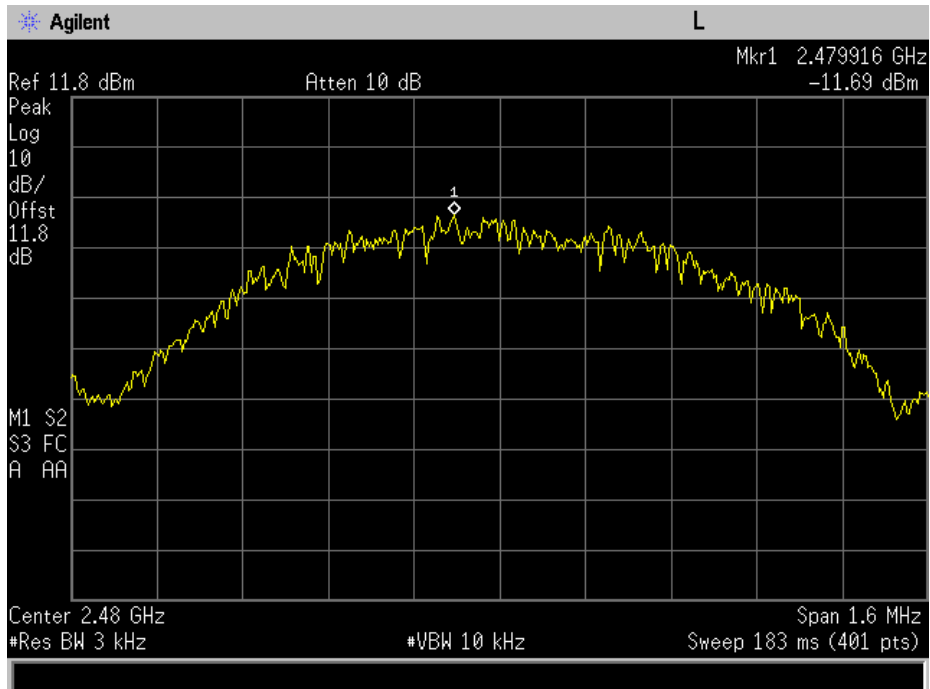



### Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	5/26/16	5/26/17
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	8/3/16	8/3/18
Spectrum Analyzer	Agilent	E4407B	i00331	10/19/16	10/19/17
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	8/15/16	8/15/19
PSA Spectrum Analyzer	Agilent	E4445A	i00471	8/30/16	8/30/17
Preamplifier for 1-18GHz horn antenna	Miteq	AFS44 00101 400 23-10P-44	i00509	N/A	N/A

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT