

802.11ac-VHT40 Power Spectral Density –CDD Mode Ant 3

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)




Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 110 (5550MHz)

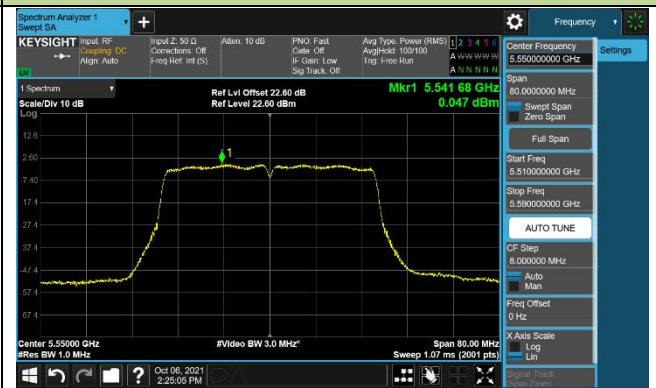


802.11ac-VHT40 Power Spectral Density –CDD Mode Ant 3

Channel 134 (5670MHz)



Channel 142 (5710MHz)

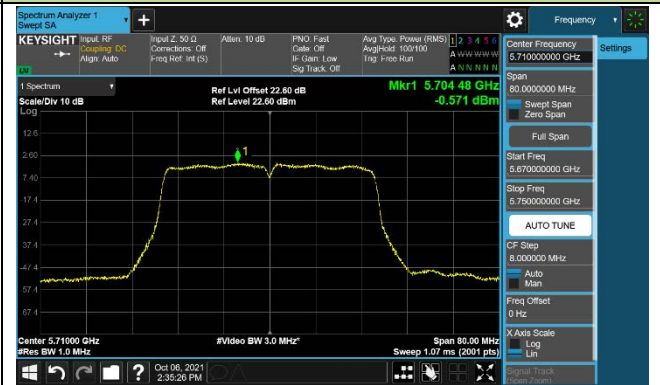

Channel 151 (5755MHz)



Channel 159 (5795MHz)




## 802.11ac-VHT80 Power Spectral Density –CDD Mode Ant 3


Channel 42 (5210MHz)




Channel 58 (5290MHz)

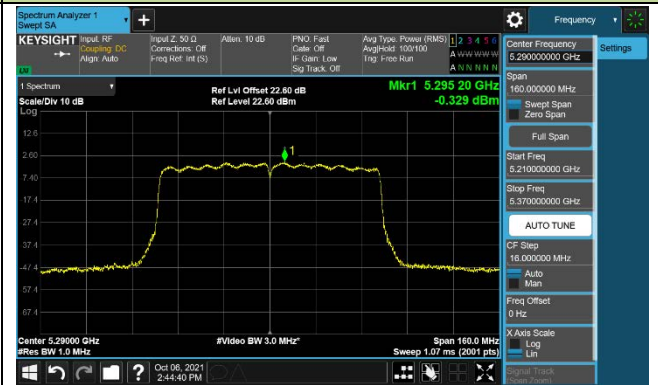

Channel 106 (5530MHz)

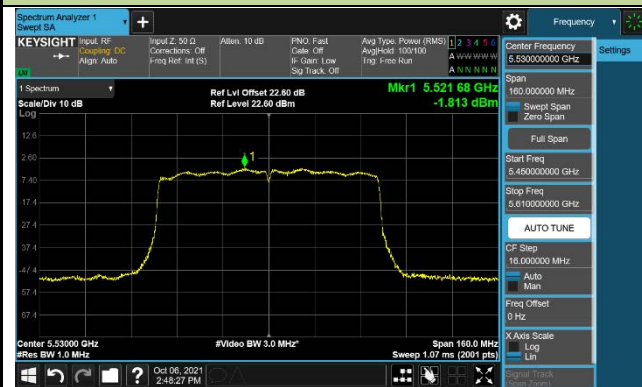


Channel 122 (5610MHz)

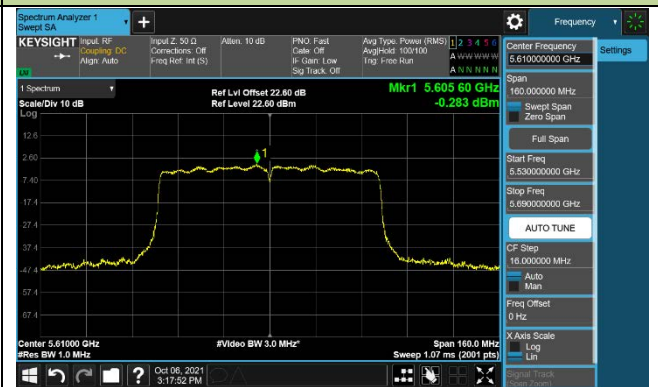

Channel 138 (5690MHz)



Channel 155 (5775MHz)

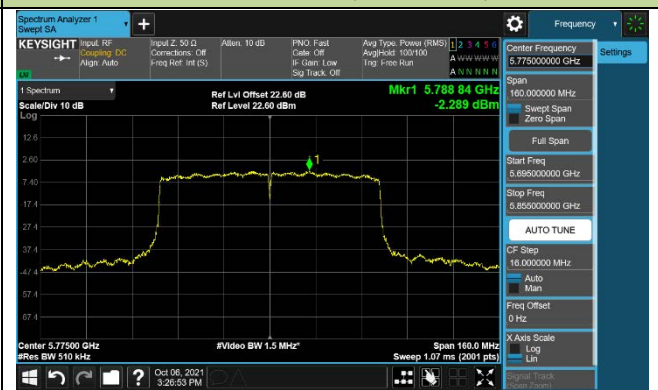

802.11ax-HE20 Power Spectral Density –CDD Mode Ant 3

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



### 802.11ax-HE20 Power Spectral Density –CDD Mode Ant 3


Channel 100 (5500MHz)




Channel 116 (5580MHz)



Channel 140 (5700MHz)

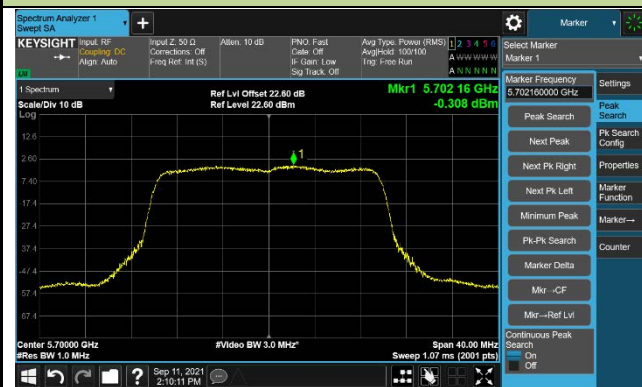

Channel 144 (5720MHz)

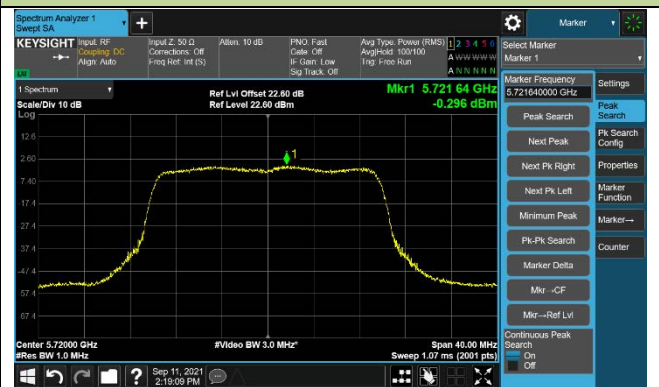

Channel 149 (5745MHz)



Channel 157 (5785MHz)



802.11ax-HE20 Power Spectral Density –CDD Mode Ant 3

Channel 165 (5825MHz)



802.11ax-HE40 Power Spectral Density –CDD Mode Ant 3

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)



Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 110 (5550MHz)



### 802.11ax-HE40 Power Spectral Density –CDD Mode Ant 3

Channel 134 (5670MHz)



Channel 142 (5710MHz)



Channel 151 (5755MHz)



Channel 159 (5795MHz)





802.11ax-HE80 Power Spectral Density –CDD Mode Ant 3

Channel 42 (5210MHz)



Channel 58 (5290MHz)



Channel 106 (5530MHz)



Channel 122 (5610MHz)



Channel 138 (5690MHz)



Channel 155 (5775MHz)



## 802.11a Power Spectral Density – Scan Mode

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)



### 802.11ac-VHT20 Power Spectral Density– Scan Mode

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)



802.11ac-VHT40 Power Spectral Density – Scan Mode

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 151 (5755MHz)



Channel 159 (5795MHz)




802.11ac-VHT80 Power Spectral Density– Scan Mode

Channel 42 (5210MHz)



Channel 155 (5775MHz)

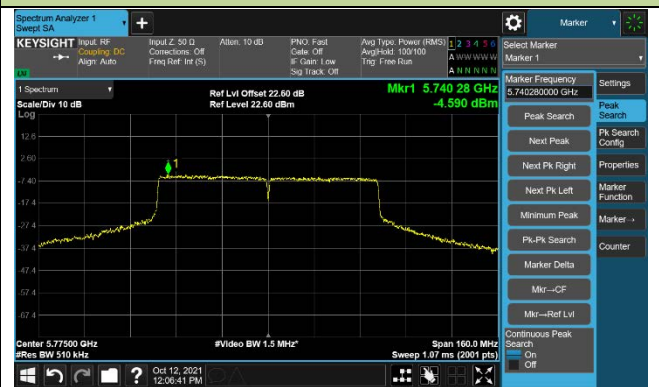

**7.6. Radiated Spurious Emission Measurement**

**7.6.1. Test Limit**

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**7.6.2. Test Procedure Used**

KDB 789033 D02v02r01 – Section G

**7.6.3. Test Setting**

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 7.6.4. Test Setup

Below 1GHz Test Setup:

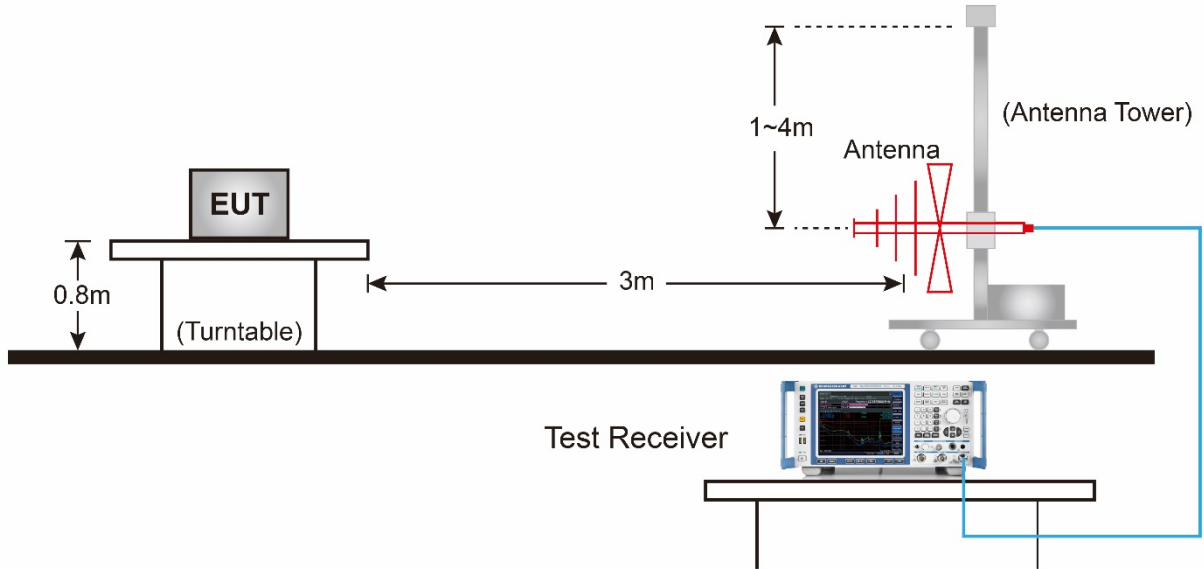


Above 1GHz Test Setup:

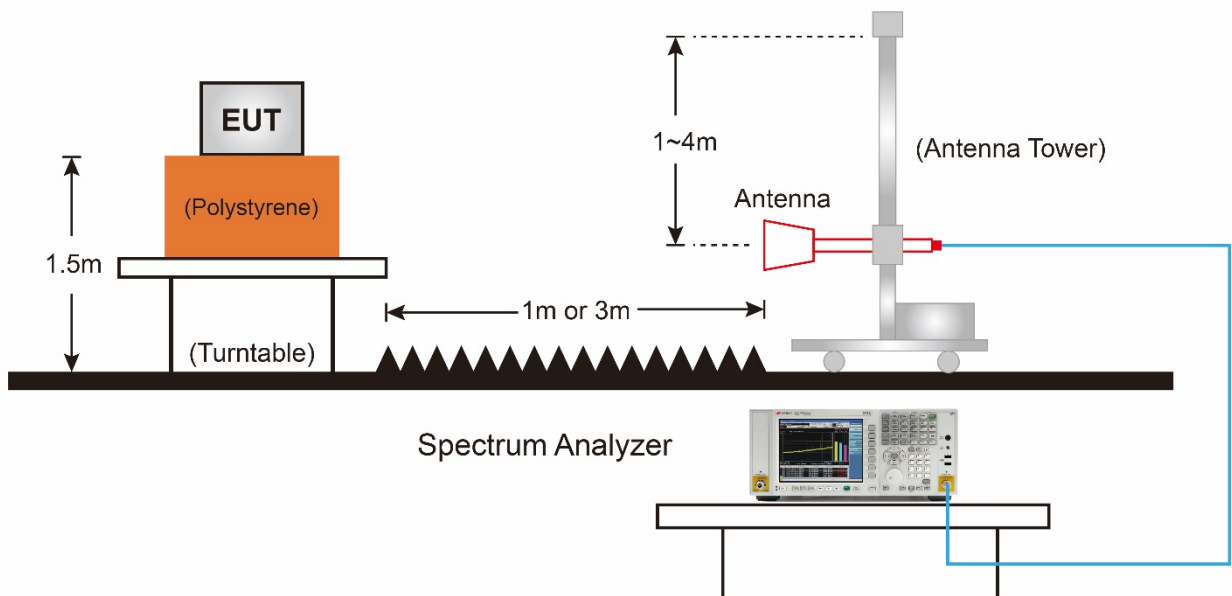

### 7.6.5.Test Result

#### CDD Mode:

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	AC 120V/60Hz

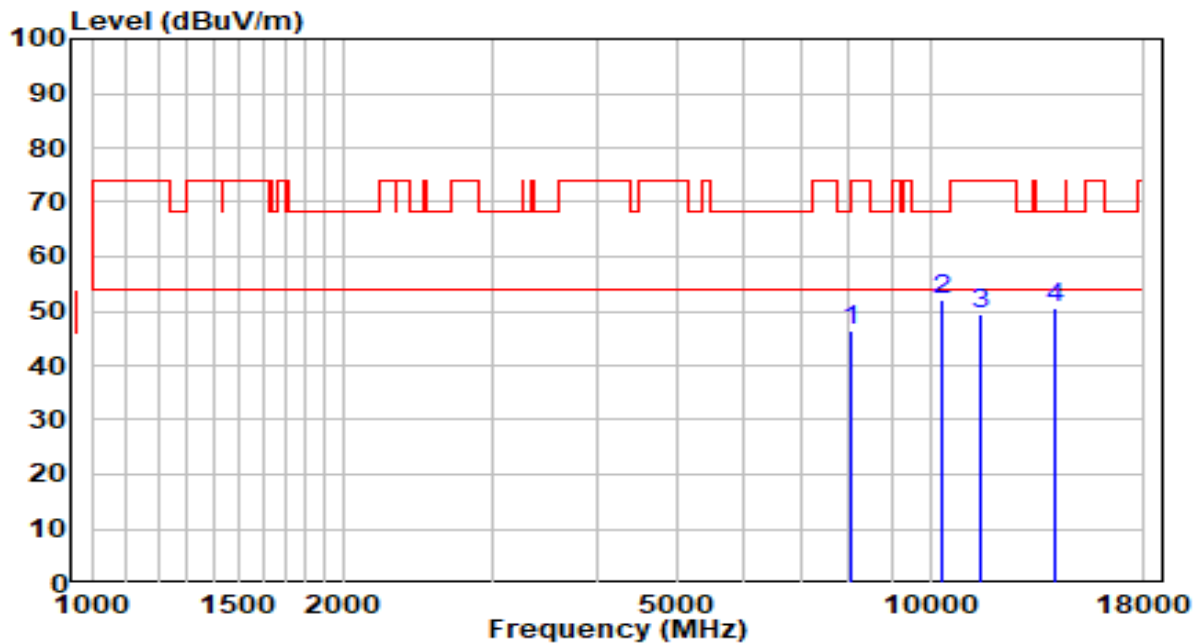


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8072.000	32.85	13.46	46.32	-27.68	74.00	Peak
2	* 10316.000	34.33	17.83	52.16	-16.04	68.20	Peak
3	11523.000	29.32	20.00	49.32	-24.68	74.00	Peak
4	14141.000	28.16	22.43	50.59	-17.61	68.20	Peak

#### Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	AC 120V/60Hz

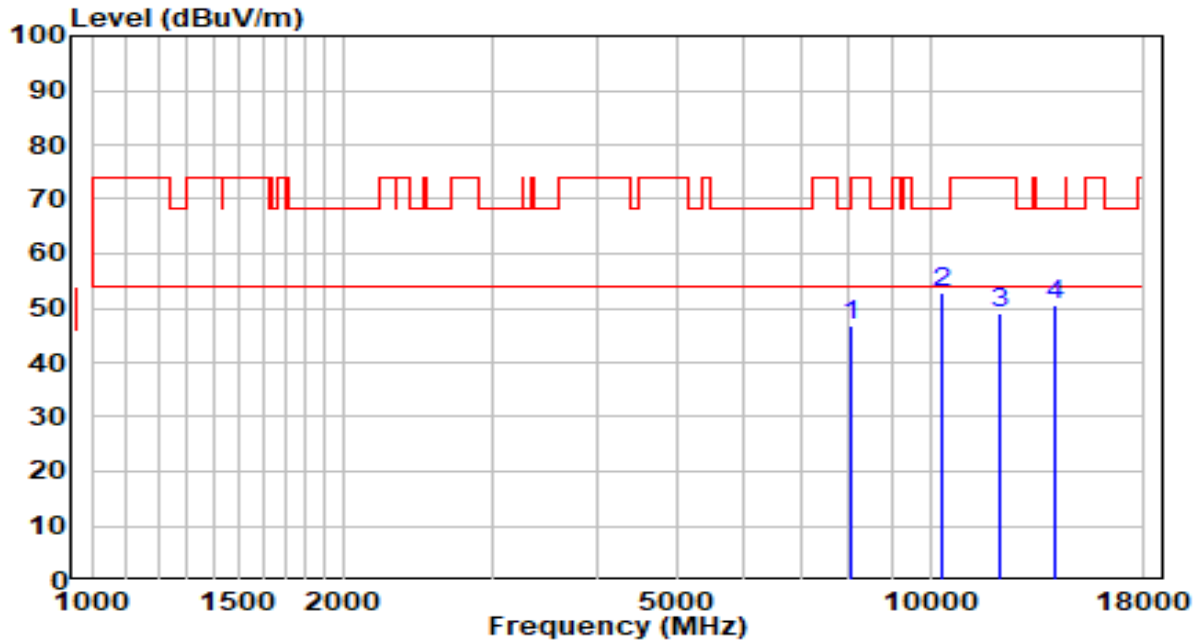


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8072.000	33.16	13.46	46.62	-27.38	74.00	Peak
2	* 10316.000	34.86	17.83	52.69	-15.51	68.20	Peak
3	12126.500	30.42	18.79	49.21	-24.79	74.00	Peak
4	14141.000	28.31	22.43	50.74	-17.46	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5220MHz by 802.11a	Test Voltage	AC 120V/60Hz

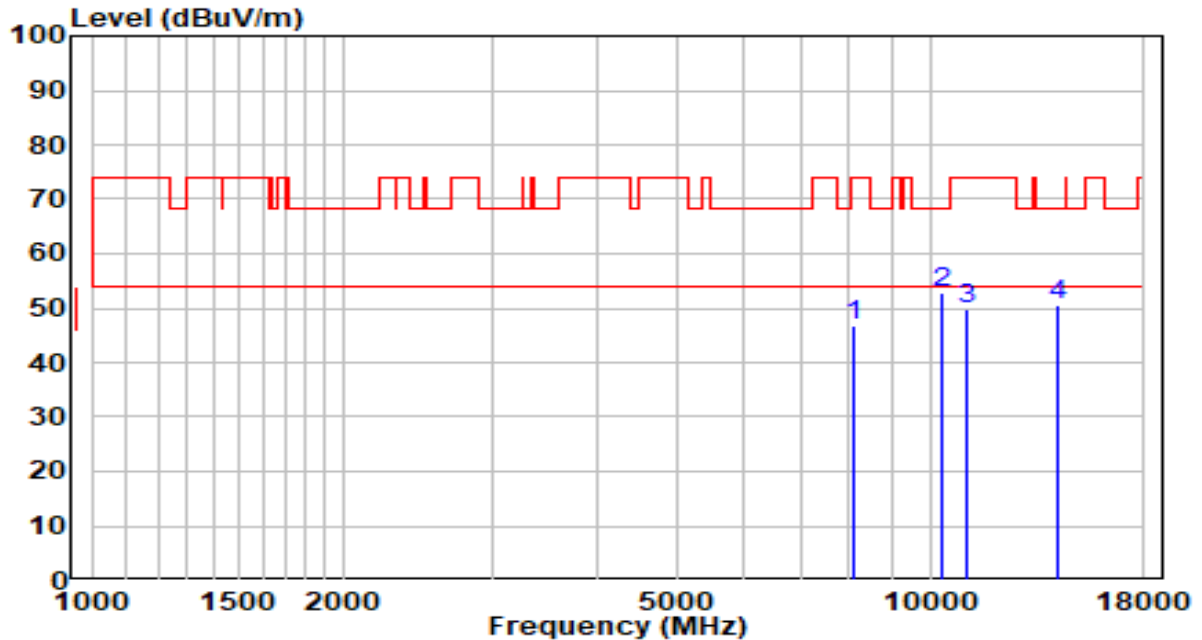


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8106.000	33.34	13.48	46.81	-27.19	74.00	Peak
2	* 10316.000	34.89	17.83	52.72	-15.48	68.20	Peak
3	11047.000	30.30	19.35	49.65	-24.35	74.00	Peak
4	14149.500	28.11	22.43	50.54	-17.66	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5220MHz by 802.11a	Test Voltage	AC 120V/60Hz

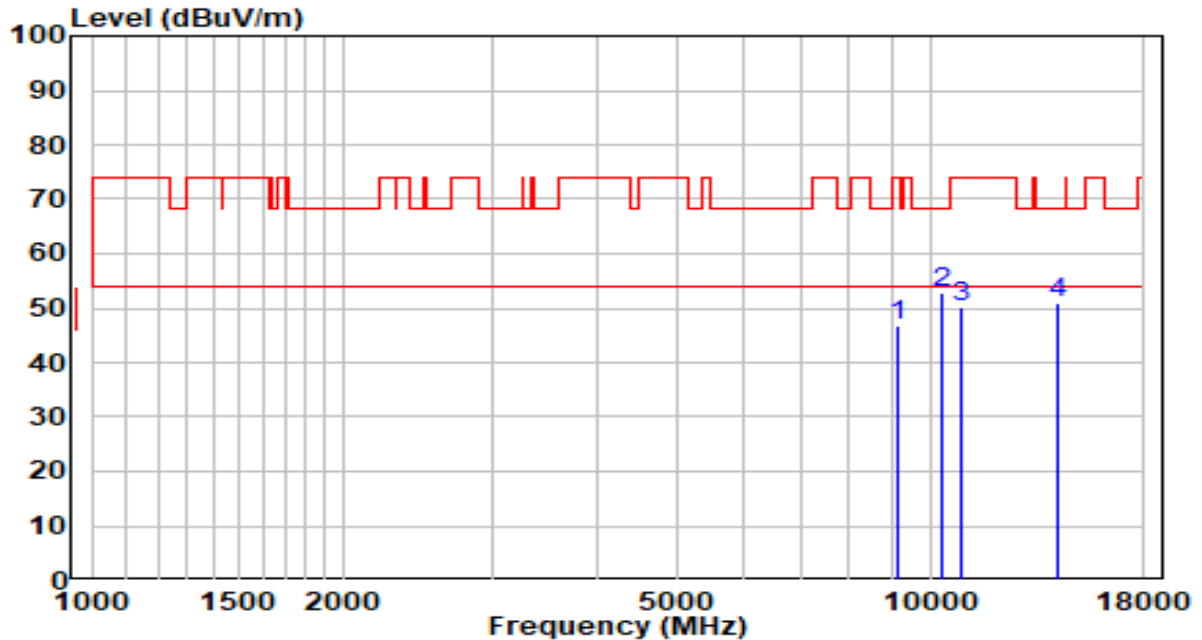


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9160.000	31.74	15.15	46.89	-27.11	74.00	Peak
2	* 10316.000	35.03	17.83	52.86	-15.34	68.20	Peak
3	10919.500	31.15	19.17	50.32	-23.68	74.00	Peak
4	14149.500	28.39	22.43	50.82	-17.38	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5240MHz by 802.11a	Test Voltage	AC 120V/60Hz

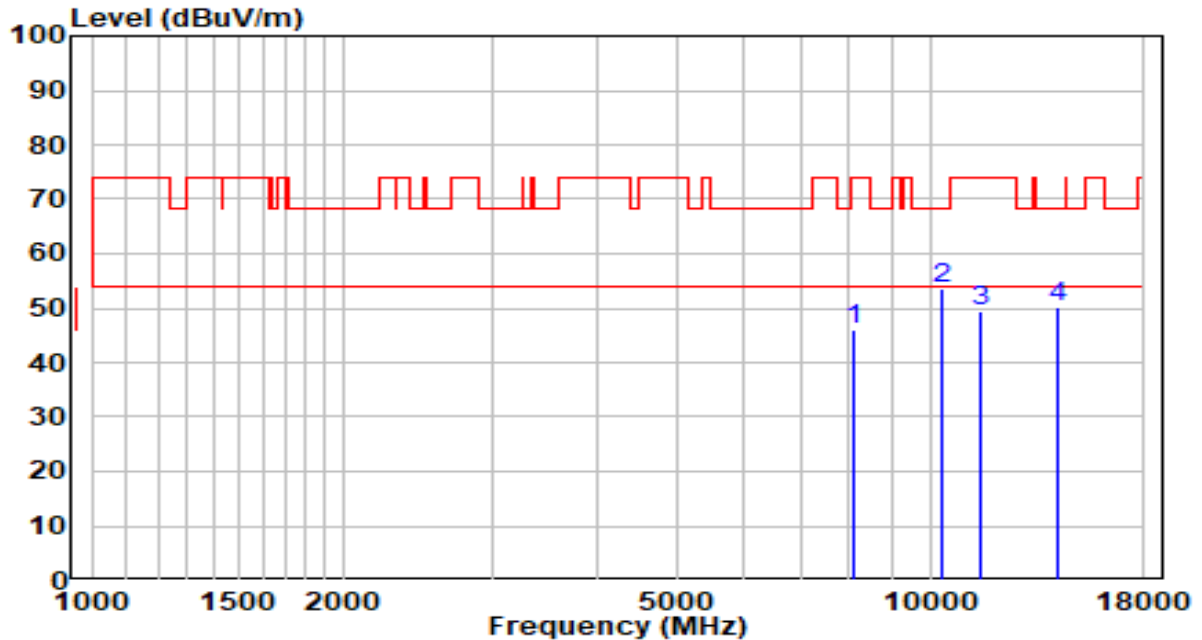


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8106.000	32.51	13.48	45.99	-28.01	74.00	Peak
2	* 10316.000	35.84	17.83	53.67	-14.53	68.20	Peak
3	11472.000	29.49	20.01	49.50	-24.50	74.00	Peak
4	14149.500	27.91	22.43	50.34	-17.86	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5240MHz by 802.11a	Test Voltage	AC 120V/60Hz

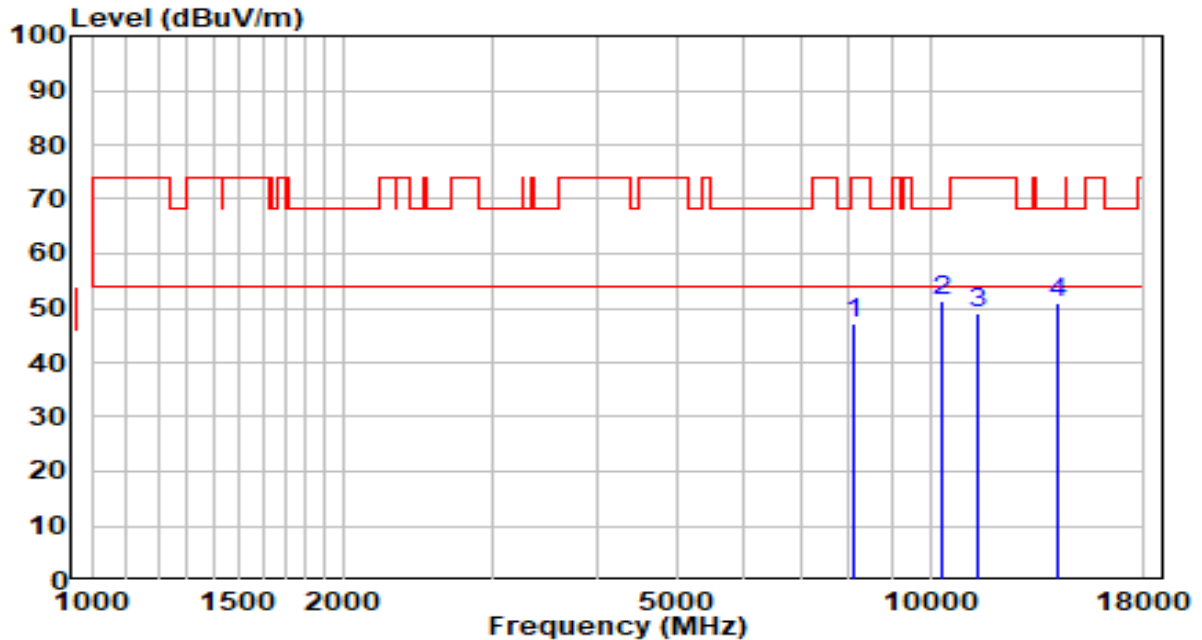


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8080.500	33.74	13.47	47.21	-26.79	74.00	Peak
2	* 10316.000	33.41	17.83	51.24	-16.96	68.20	Peak
3	11395.500	29.17	19.89	49.06	-24.94	74.00	Peak
4	14149.500	28.47	22.43	50.90	-17.30	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5260MHz by 802.11a	Test Voltage	AC 120V/60Hz

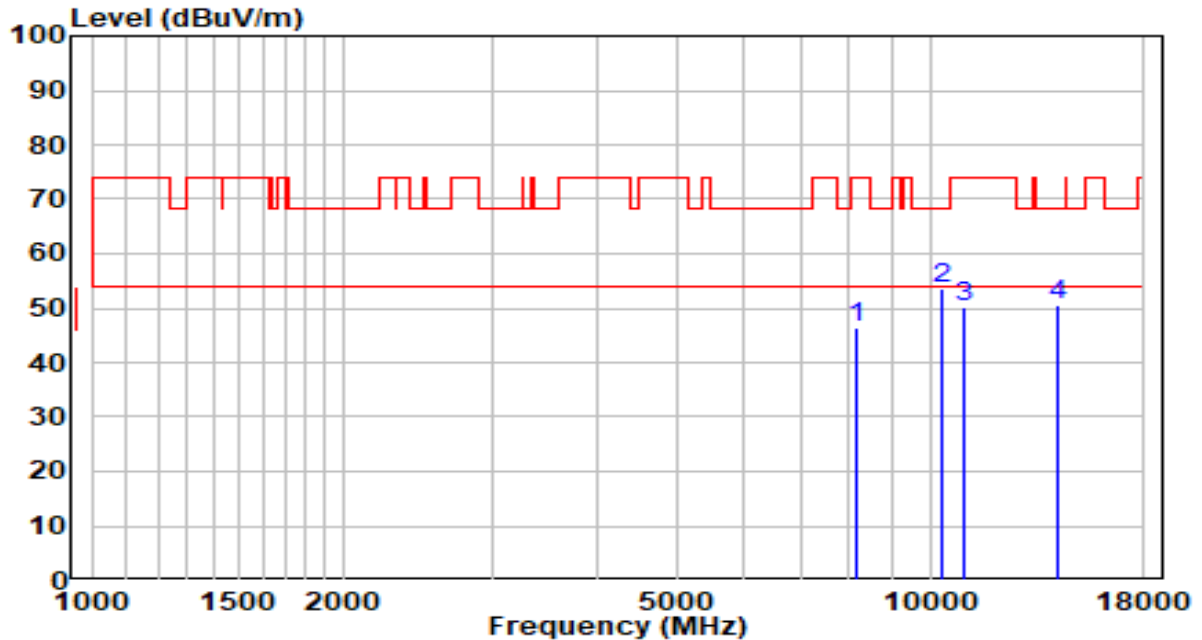


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8157.000	32.78	13.50	46.28	-27.72	74.00	Peak
2	* 10316.000	35.64	17.83	53.47	-14.73	68.20	Peak
3	11013.000	30.88	19.30	50.18	-23.82	74.00	Peak
4	14158.000	28.01	22.43	50.44	-17.76	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5260MHz by 802.11a	Test Voltage	AC 120V/60Hz

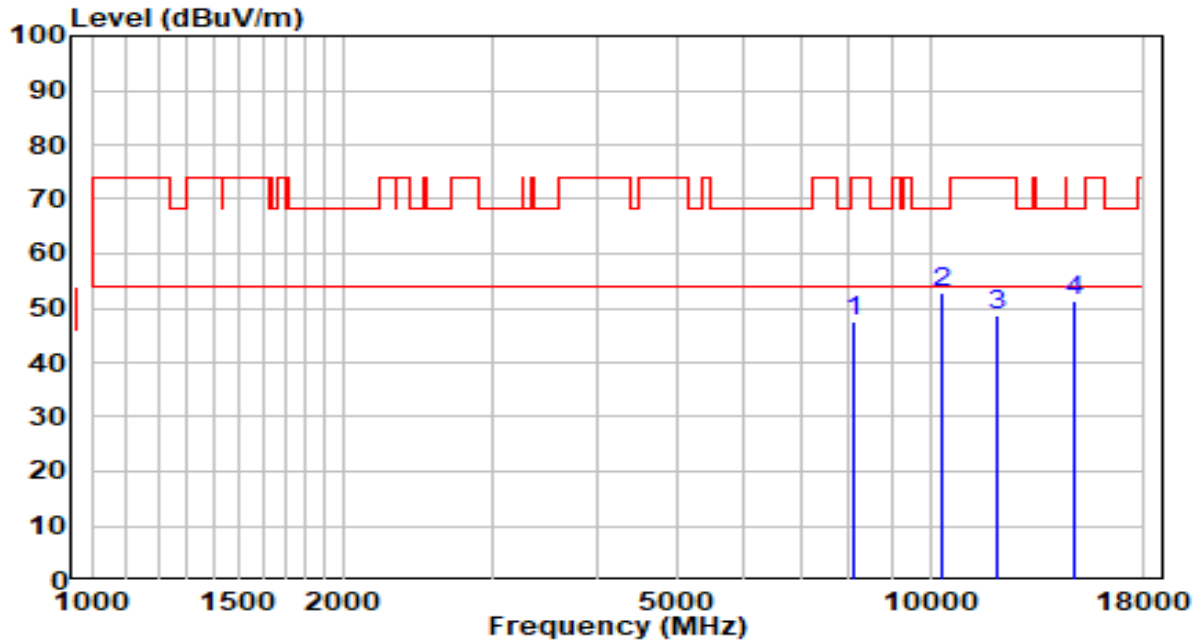


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8080.500	33.94	13.47	47.41	-26.59	74.00	Peak
2	* 10316.000	35.02	17.83	52.85	-15.35	68.20	Peak
3	11982.000	29.75	18.96	48.71	-25.29	74.00	Peak
4	14804.000	29.00	22.23	51.24	-16.96	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5300MHz by 802.11a	Test Voltage	AC 120V/60Hz

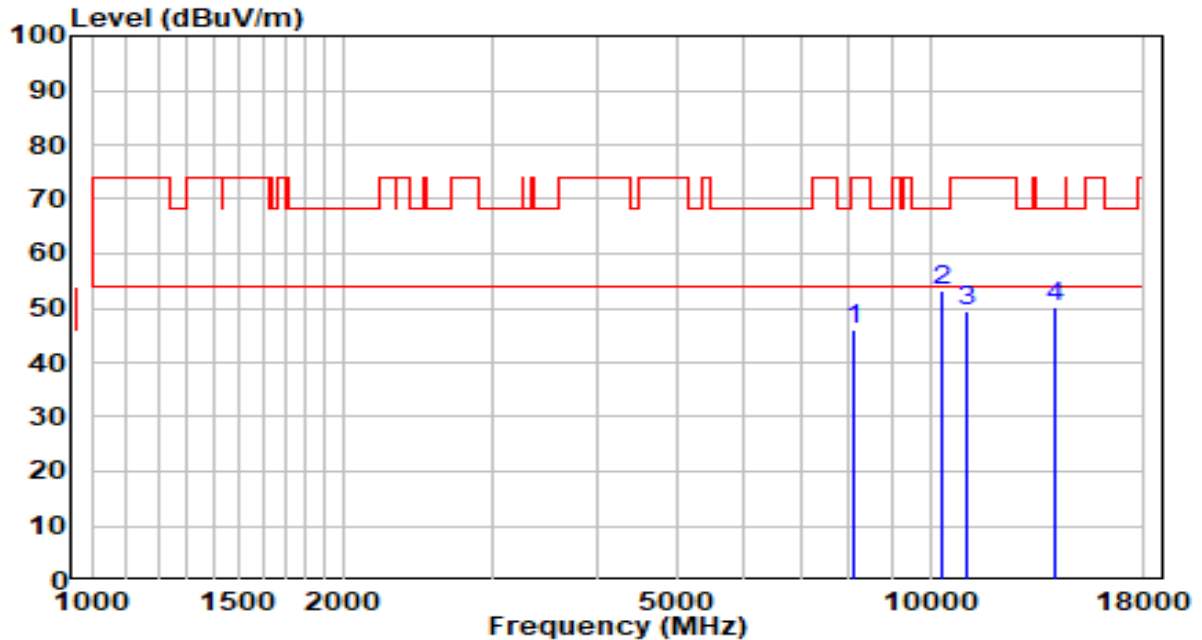


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8106.000	32.54	13.48	46.02	-27.98	74.00	Peak
2	* 10316.000	35.26	17.83	53.09	-15.11	68.20	Peak
3	11047.000	30.02	19.35	49.38	-24.62	74.00	Peak
4	14056.000	27.80	22.42	50.23	-17.97	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5300MHz by 802.11a	Test Voltage	AC 120V/60Hz

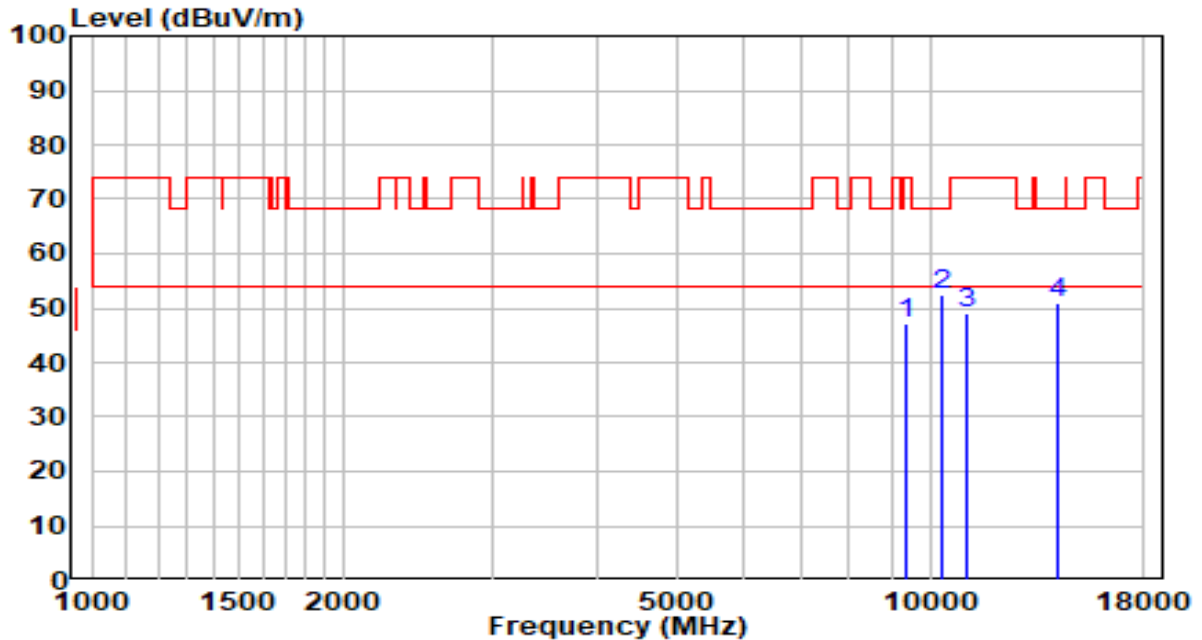


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	31.47	15.52	46.99	-27.01	74.00	Peak
2	* 10316.000	34.67	17.83	52.50	-15.70	68.20	Peak
3	11038.500	29.55	19.34	48.89	-25.11	74.00	Peak
4	14192.000	28.38	22.43	50.81	-17.39	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5320MHz by 802.11a	Test Voltage	AC 120V/60Hz

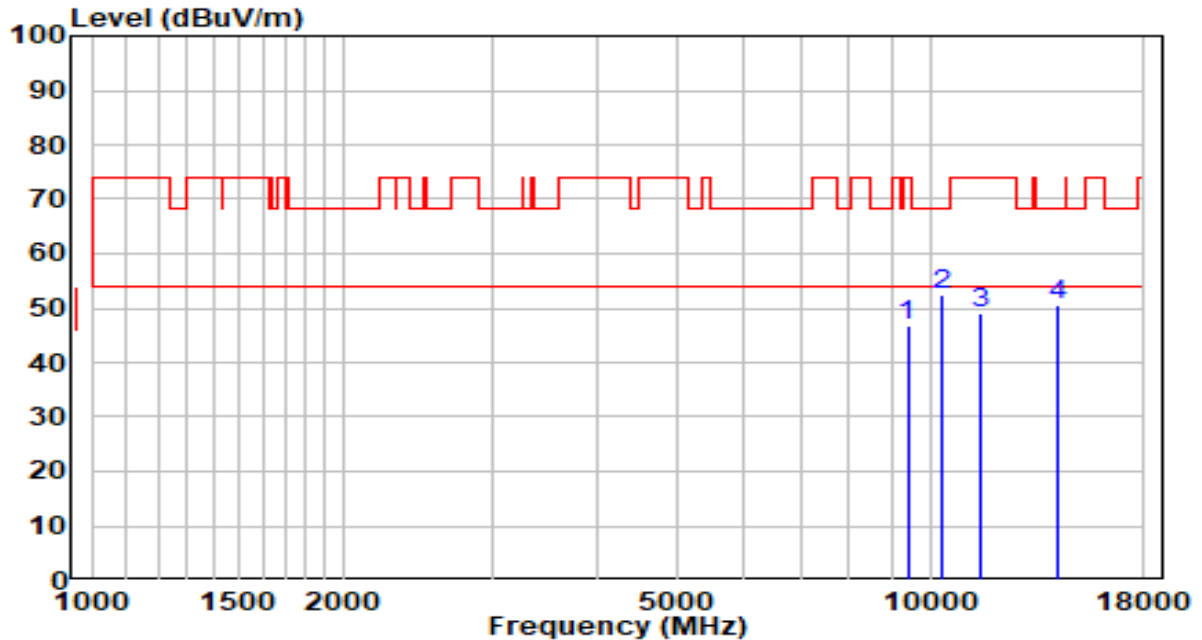


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9398.000	31.20	15.55	46.75	-27.25	74.00	Peak
2	* 10316.000	34.79	17.83	52.63	-15.57	68.20	Peak
3	11489.000	29.08	20.03	49.11	-24.89	74.00	Peak
4	14175.000	28.30	22.43	50.74	-17.46	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5320MHz by 802.11a	Test Voltage	AC 120V/60Hz

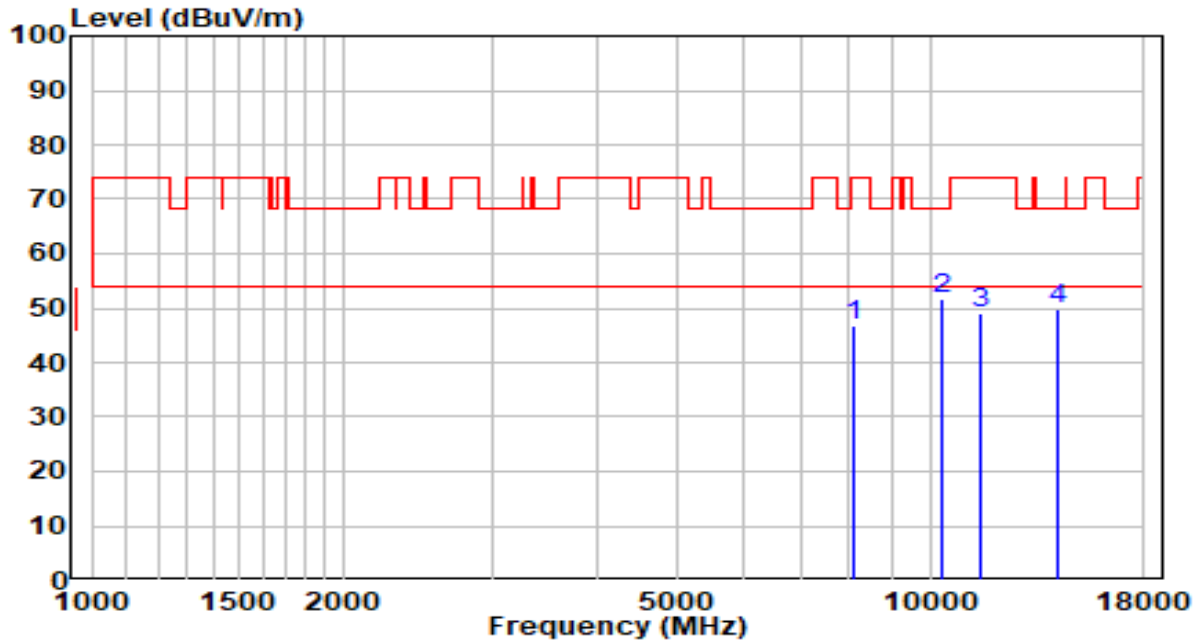


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8131.500	33.22	13.49	46.71	-27.29	74.00	Peak
2	* 10316.000	34.04	17.83	51.87	-16.33	68.20	Peak
3	11480.500	28.96	20.02	48.98	-25.02	74.00	Peak
4	14158.000	27.57	22.43	50.00	-18.20	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5500MHz by 802.11a	Test Voltage	AC 120V/60Hz

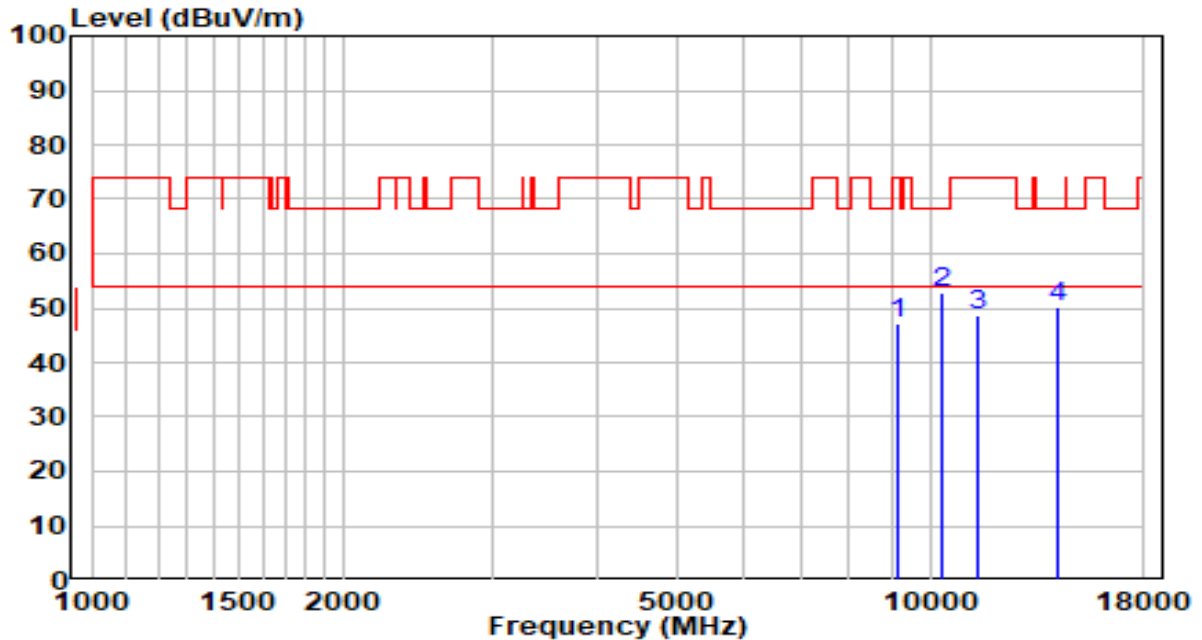


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9160.000	32.03	15.15	47.18	-26.82	74.00	Peak
2	* 10316.000	34.82	17.83	52.65	-15.55	68.20	Peak
3	11404.000	28.86	19.90	48.76	-25.24	74.00	Peak
4	14183.500	27.89	22.43	50.32	-17.88	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5500MHz by 802.11a	Test Voltage	AC 120V/60Hz

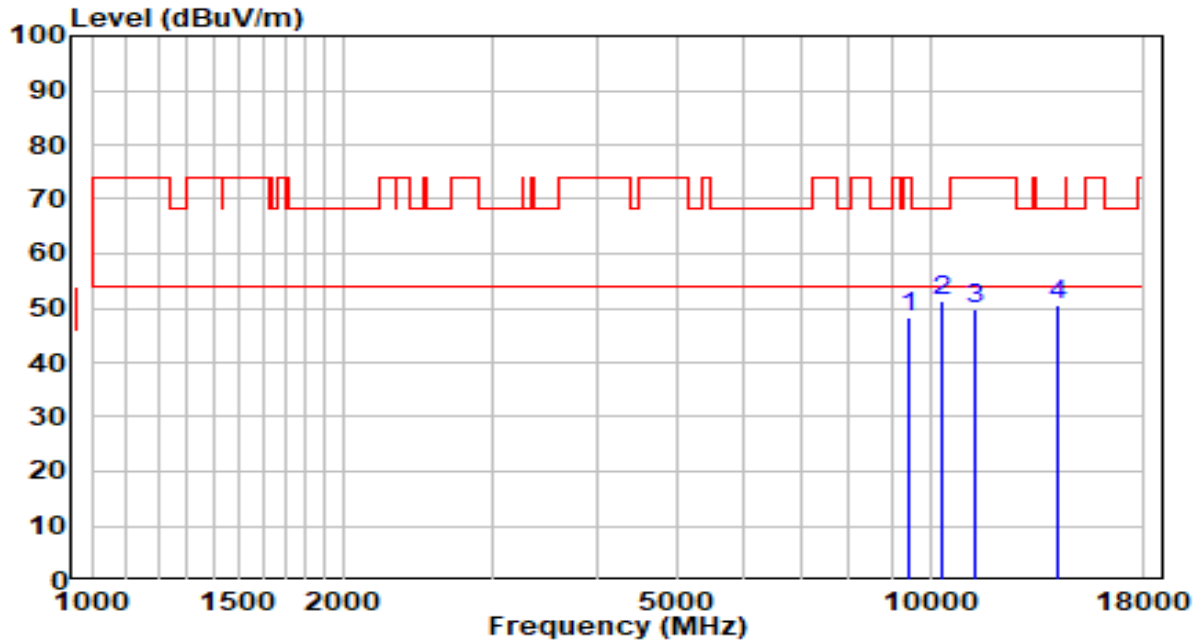


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9466.000	32.64	15.66	48.30	-25.70	74.00	Peak
2	* 10316.000	33.43	17.83	51.26	-16.94	68.20	Peak
3	11293.500	29.94	19.73	49.68	-24.32	74.00	Peak
4	14158.000	28.05	22.43	50.48	-17.72	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5580MHz by 802.11a	Test Voltage	AC 120V/60Hz

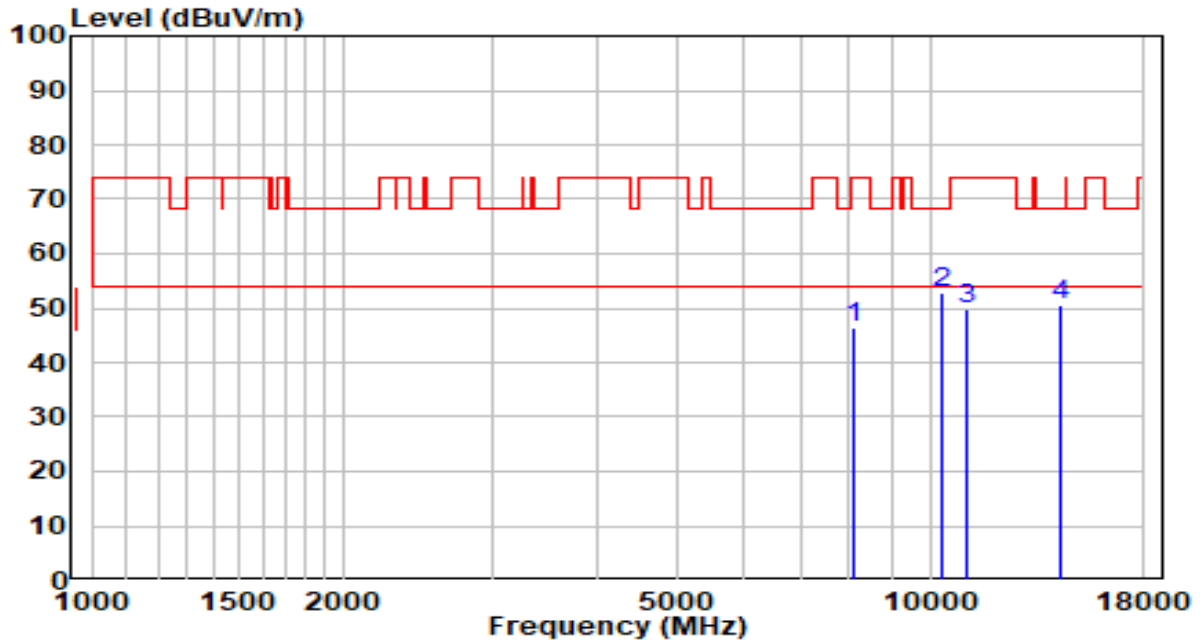


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8089.000	32.95	13.47	46.42	-27.58	74.00	Peak
2	* 10316.000	35.09	17.83	52.92	-15.28	68.20	Peak
3	11047.000	30.29	19.35	49.64	-24.36	74.00	Peak
4	14311.000	28.24	22.44	50.68	-17.52	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5580MHz by 802.11a	Test Voltage	AC 120V/60Hz

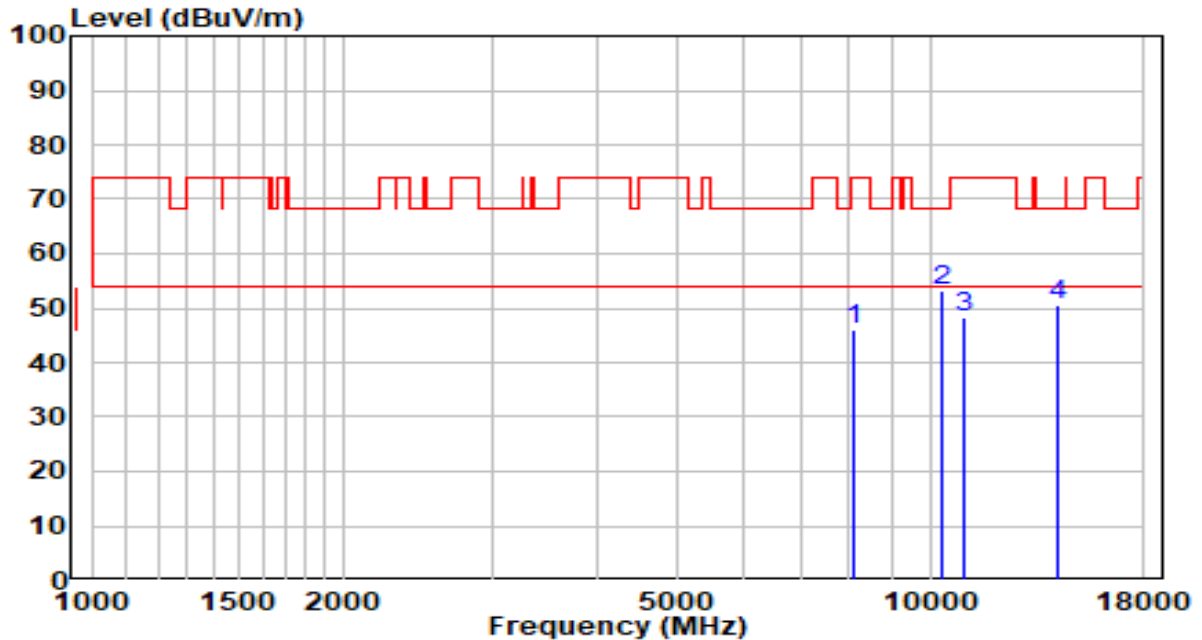


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8106.000	32.69	13.48	46.17	-27.83	74.00	Peak
2	* 10316.000	35.31	17.83	53.14	-15.06	68.20	Peak
3	10979.000	29.21	19.25	48.46	-25.54	74.00	Peak
4	14166.500	28.28	22.43	50.71	-17.49	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5700MHz by 802.11a	Test Voltage	AC 120V/60Hz

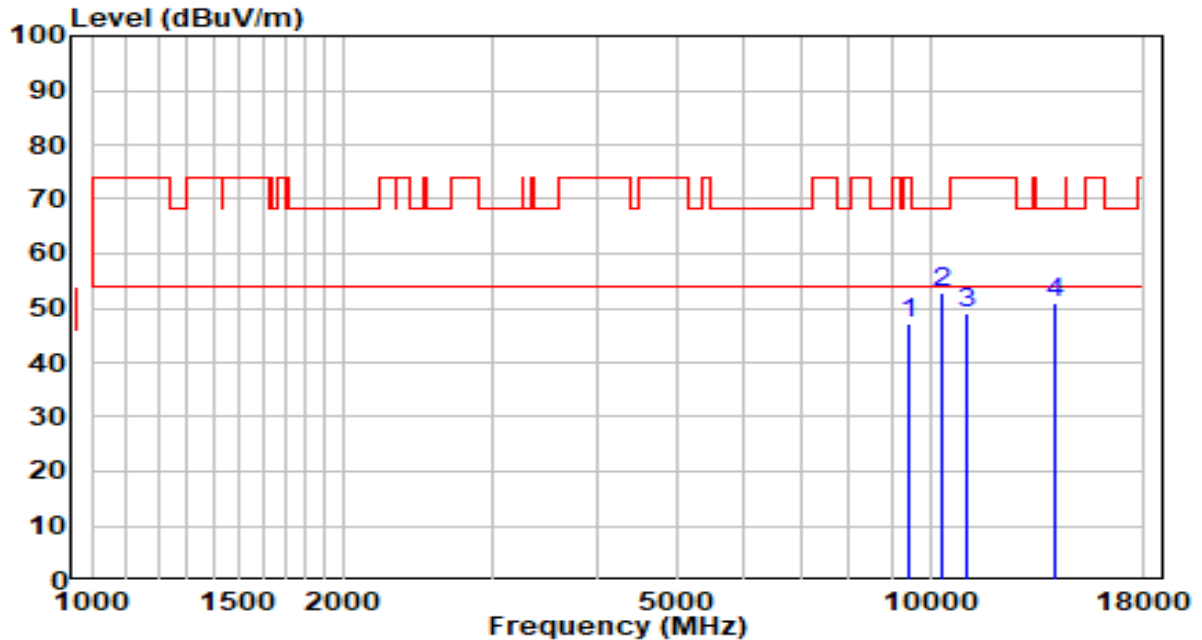


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9432.000	31.40	15.61	47.01	-26.99	74.00	Peak
2	* 10316.000	35.11	17.83	52.94	-15.26	68.20	Peak
3	11030.000	29.86	19.33	49.19	-24.81	74.00	Peak
4	14073.000	28.58	22.43	51.01	-17.19	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5700MHz by 802.11a	Test Voltage	AC 120V/60Hz

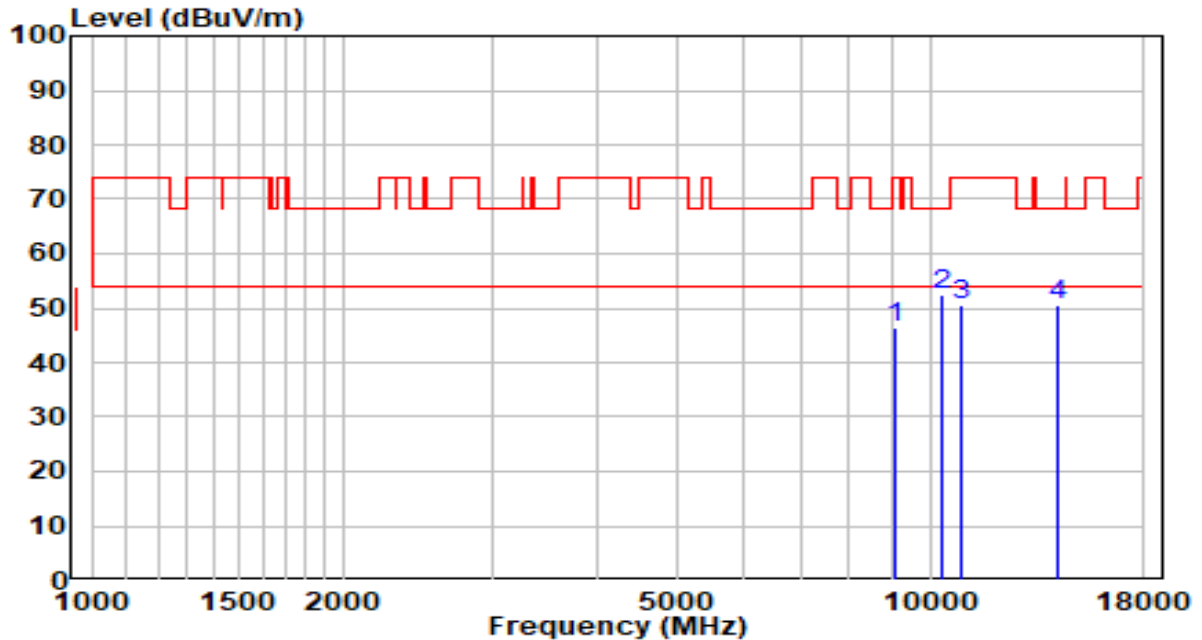


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9092.000	31.44	15.03	46.47	-27.53	74.00	Peak
2	* 10316.000	34.68	17.83	52.51	-15.69	68.20	Peak
3	10928.000	31.33	19.18	50.50	-23.50	74.00	Peak
4	14175.000	28.21	22.43	50.64	-17.56	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5720MHz by 802.11a	Test Voltage	AC 120V/60Hz

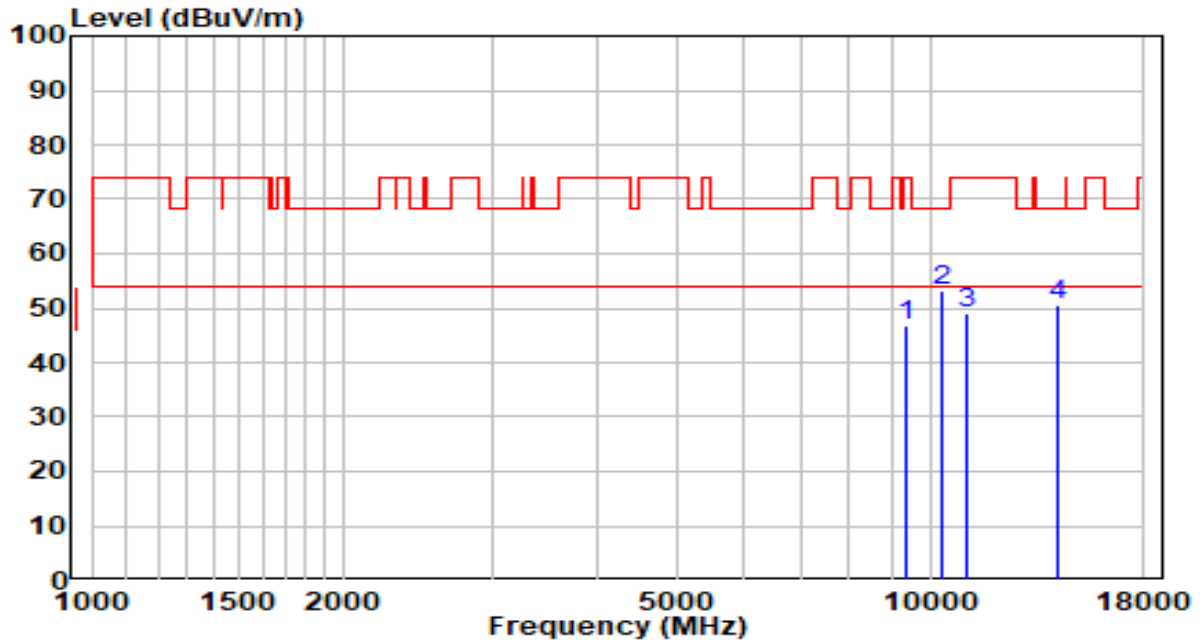


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	31.46	15.49	46.95	-27.05	74.00	Peak
2	* 10316.000	35.47	17.83	53.30	-14.90	68.20	Peak
3	11064.000	29.77	19.38	49.15	-24.85	74.00	Peak
4	14175.000	28.31	22.43	50.74	-17.46	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5720MHz by 802.11a	Test Voltage	AC 120V/60Hz

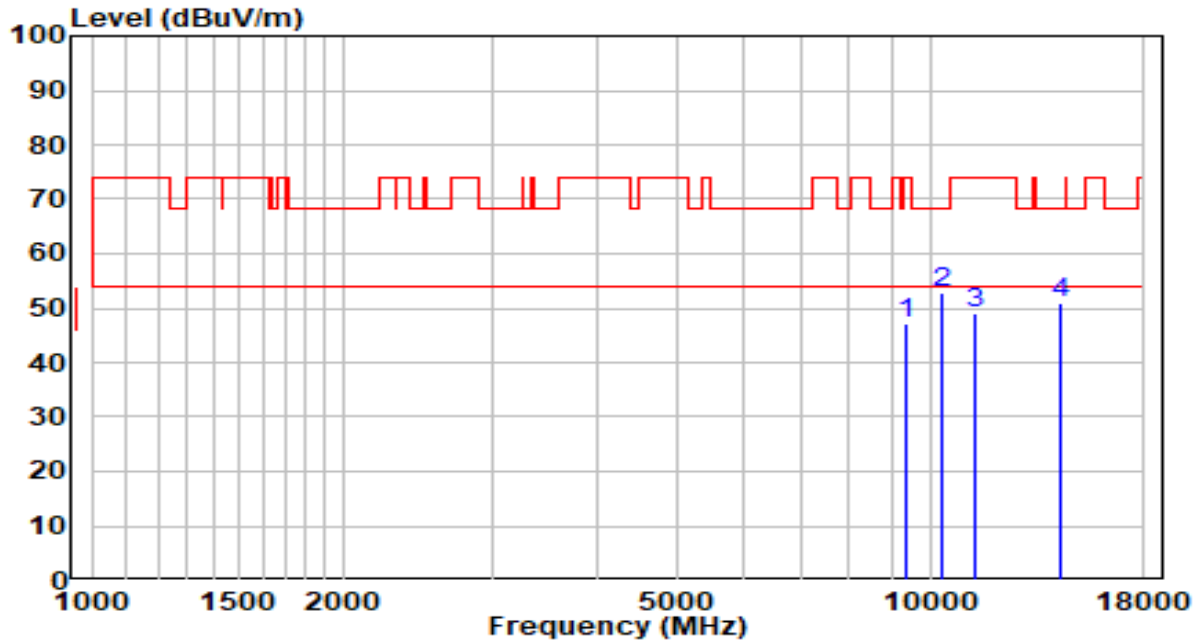


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	31.87	15.46	47.33	-26.67	74.00	Peak
2	* 10316.000	35.07	17.83	52.90	-15.30	68.20	Peak
3	11319.000	29.43	19.77	49.20	-24.80	74.00	Peak
4	14268.500	28.48	22.44	50.92	-17.28	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5745MHz by 802.11a	Test Voltage	AC 120V/60Hz

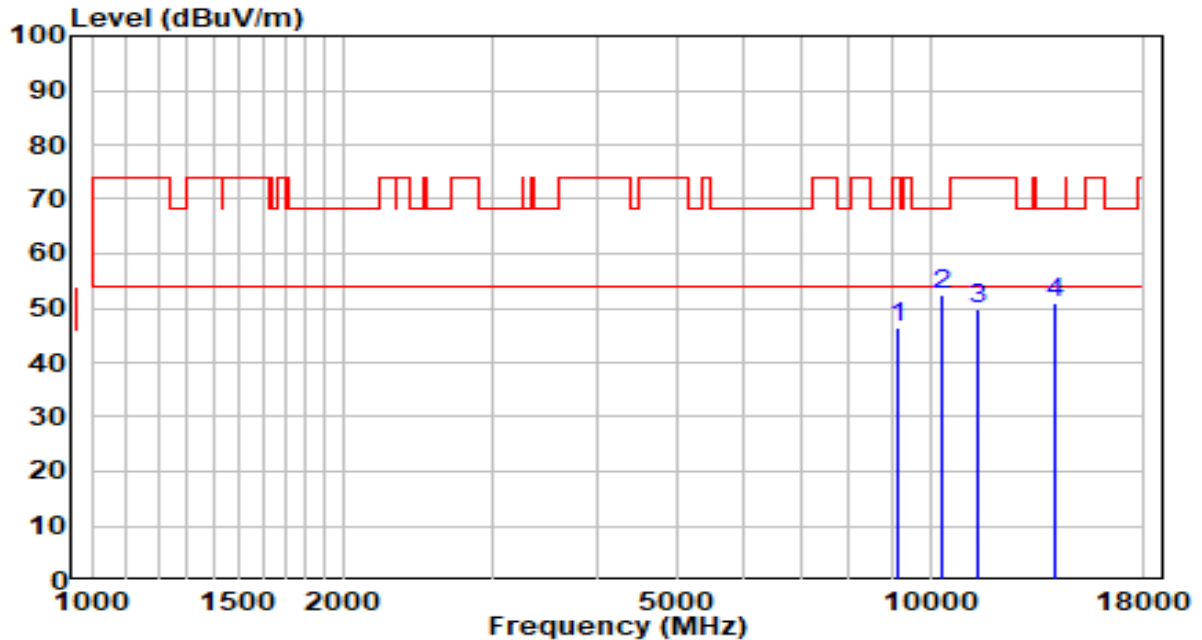


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9126.000	31.45	15.09	46.55	-27.45	74.00	Peak
2	* 10316.000	34.80	17.83	52.63	-15.57	68.20	Peak
3	11429.500	29.82	19.94	49.76	-24.24	74.00	Peak
4	14073.000	28.40	22.43	50.83	-17.37	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5745MHz by 802.11a	Test Voltage	AC 120V/60Hz

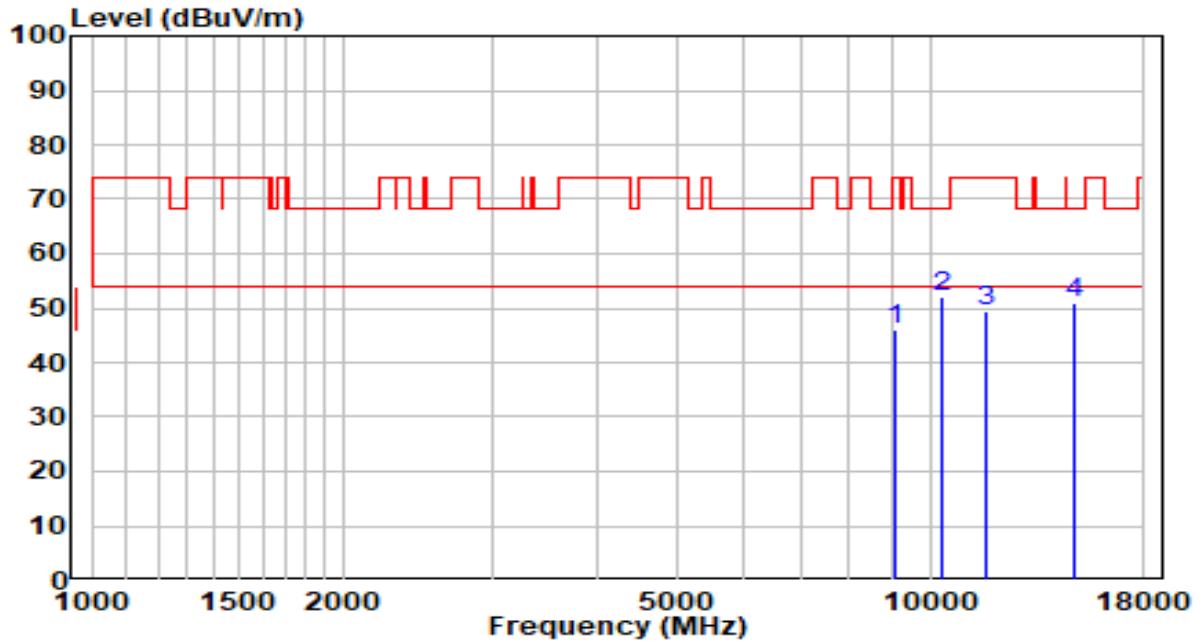


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9066.500	31.20	14.99	46.20	-27.80	74.00	Peak
2	* 10316.000	34.42	17.83	52.25	-15.95	68.20	Peak
3	11642.000	29.56	19.73	49.29	-24.71	74.00	Peak
4	14838.000	28.80	22.21	51.01	-17.19	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5785MHz by 802.11a	Test Voltage	AC 120V/60Hz

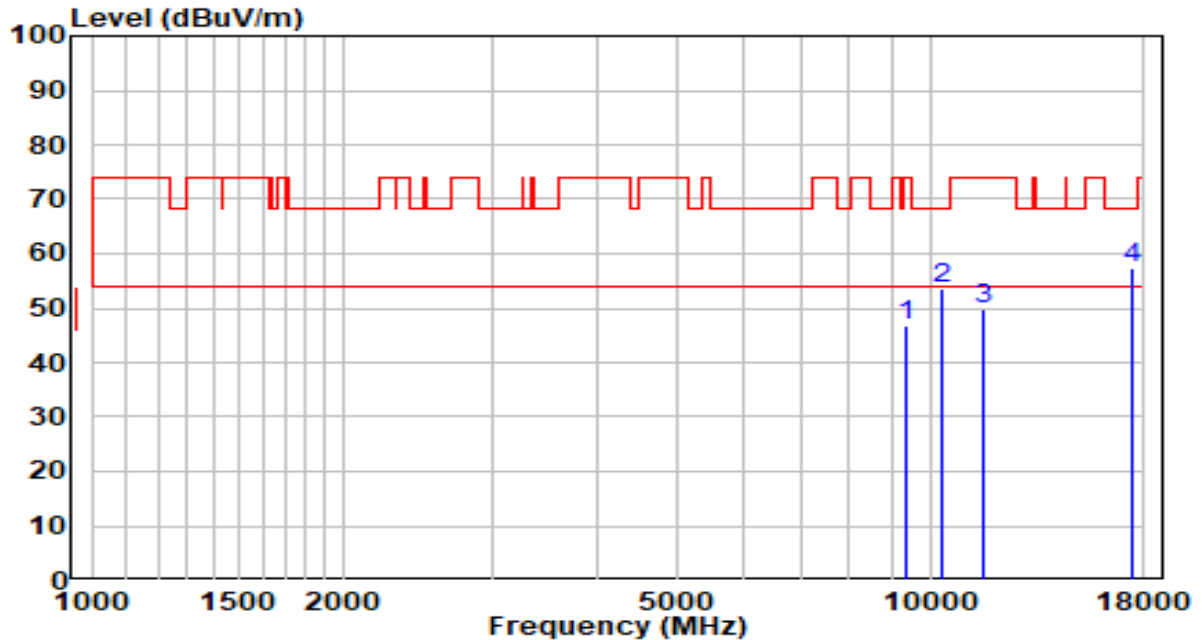


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9355.500	31.50	15.48	46.98	-27.02	74.00	Peak
2	10316.000	35.93	17.83	53.76	-14.44	68.20	Peak
3	11574.000	29.74	19.88	49.62	-24.38	74.00	Peak
4	* 17362.500	30.38	26.92	57.30	-10.90	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5785MHz by 802.11a	Test Voltage	AC 120V/60Hz

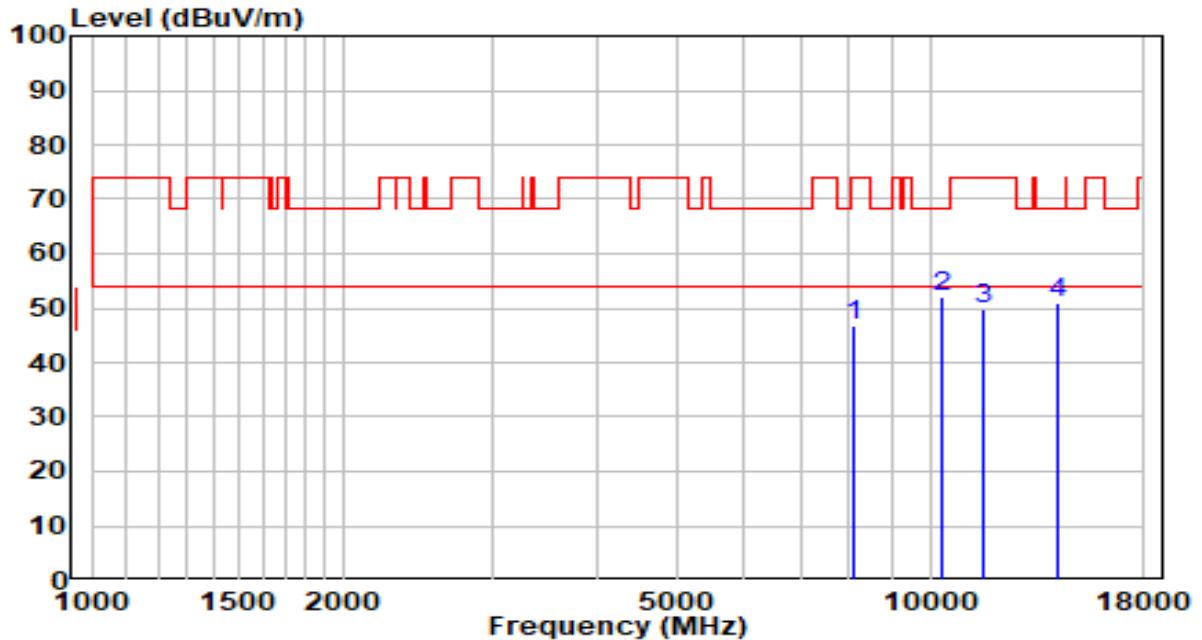


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8080.500	33.47	13.47	46.94	-27.06	74.00	Peak
2	* 10316.000	34.19	17.83	52.02	-16.18	68.20	Peak
3	11565.500	29.88	19.90	49.78	-24.22	74.00	Peak
4	14158.000	28.56	22.43	50.99	-17.21	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5825MHz by 802.11a	Test Voltage	AC 120V/60Hz

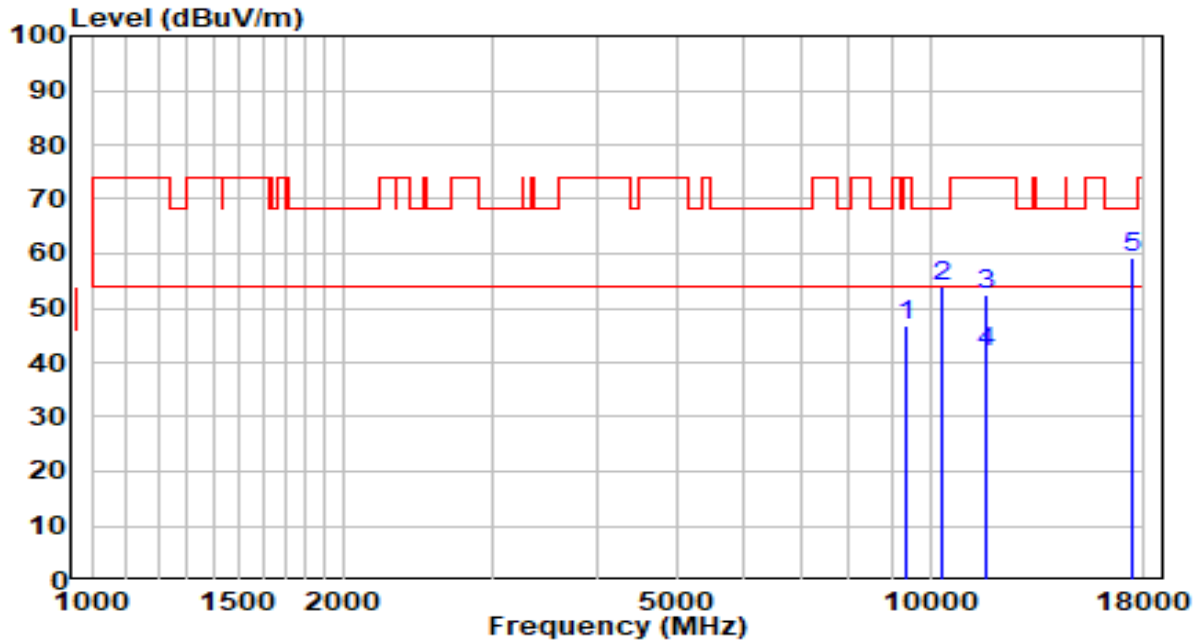


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9338.500	31.52	15.45	46.97	-27.03	74.00	Peak
2	10316.000	36.04	17.83	53.87	-14.33	68.20	Peak
3	11659.000	32.94	19.69	52.63	-21.37	74.00	Peak
4	* 11659.000	22.37	19.69	42.06	-11.94	54.00	Average
5	* 17473.000	31.54	27.66	59.20	-9.00	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5825MHz by 802.11a	Test Voltage	AC 120V/60Hz

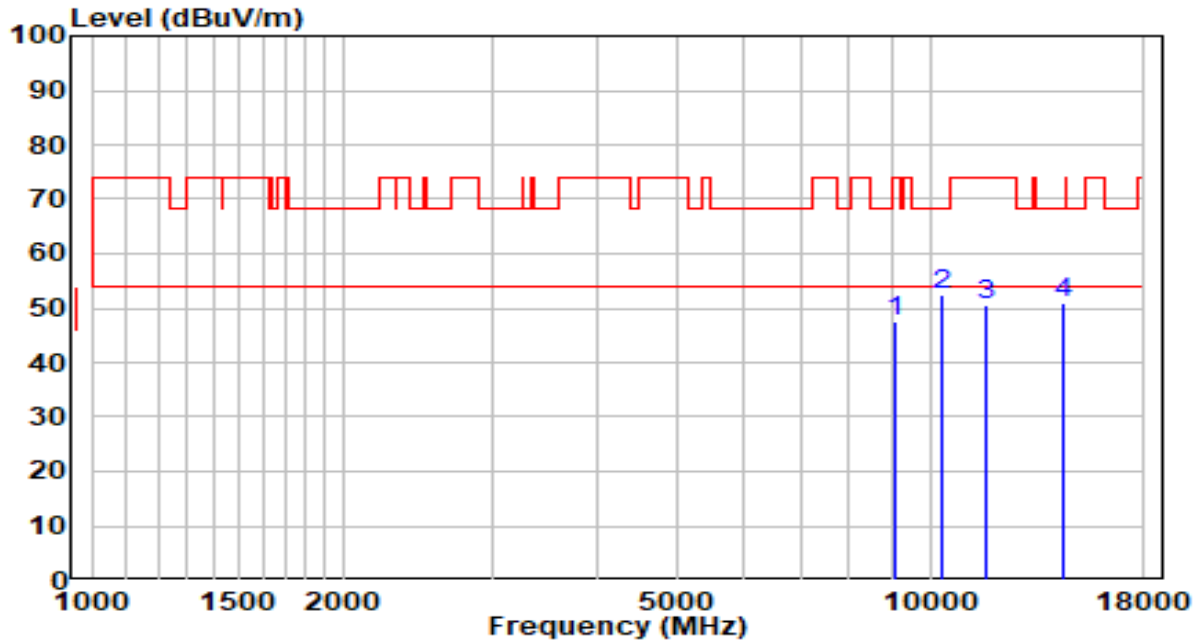


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9083.500	32.65	15.02	47.67	-26.33	74.00	Peak
2	* 10316.000	34.66	17.83	52.49	-15.71	68.20	Peak
3	11650.500	30.90	19.71	50.61	-23.39	74.00	Peak
4	14430.000	28.31	22.45	50.76	-17.44	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

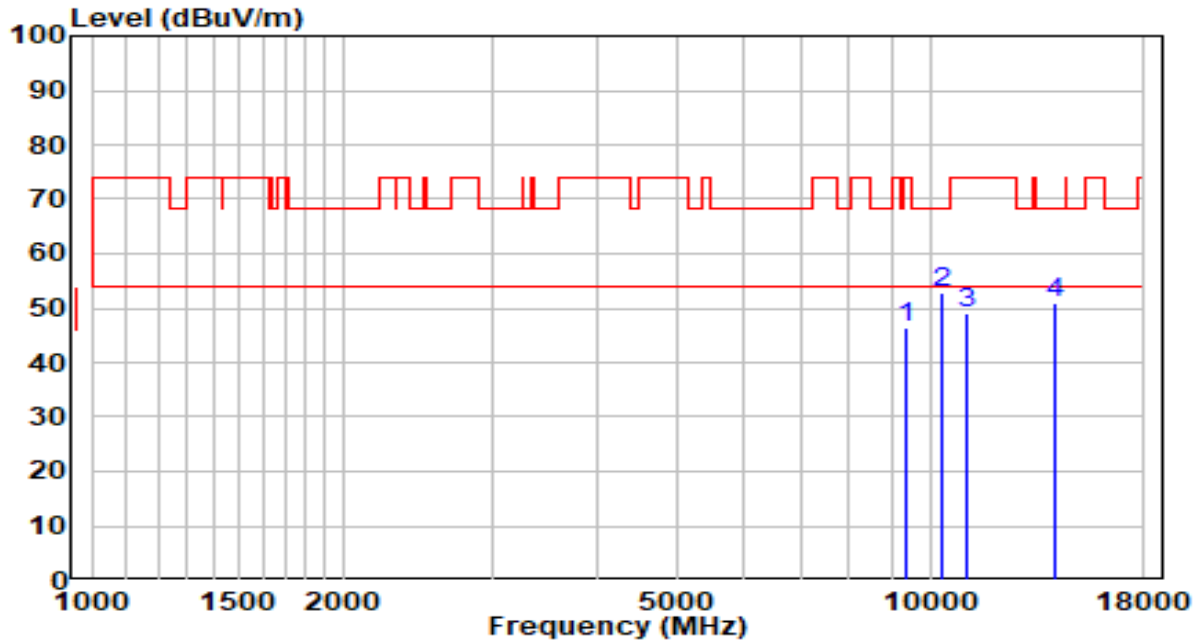


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	9381.000	30.94	15.52	46.46	-27.54	74.00	Peak
2	* 10316.000	35.09	17.83	52.92	-15.28	68.20	Peak
3	11047.000	29.85	19.35	49.21	-24.79	74.00	Peak
4	14141.000	28.35	22.43	50.78	-17.42	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

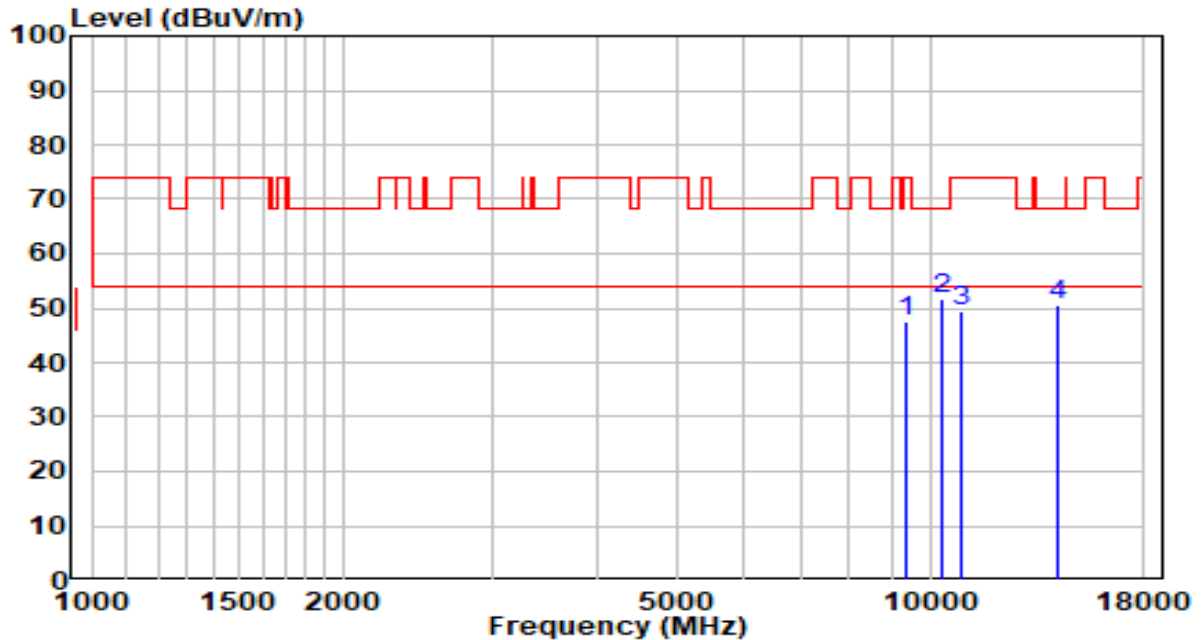


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9338.500	32.18	15.45	47.63	-26.37	74.00	Peak
2	* 10316.000	33.94	17.83	51.77	-16.43	68.20	Peak
3	10928.000	30.37	19.18	49.55	-24.45	74.00	Peak
4	14209.000	28.01	22.43	50.45	-17.75	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5220MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

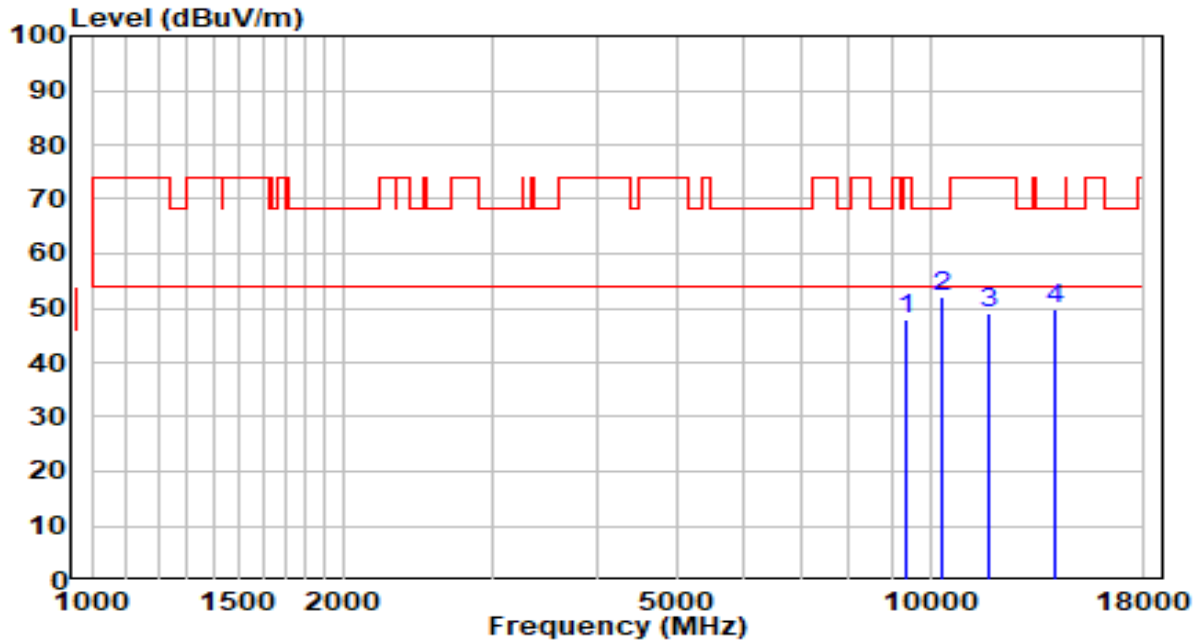


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	32.42	15.49	47.91	-26.09	74.00	Peak
2	* 10316.000	34.32	17.83	52.15	-16.05	68.20	Peak
3	11761.000	29.75	19.46	49.21	-24.79	74.00	Peak
4	14141.000	27.48	22.43	49.91	-18.29	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5220MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

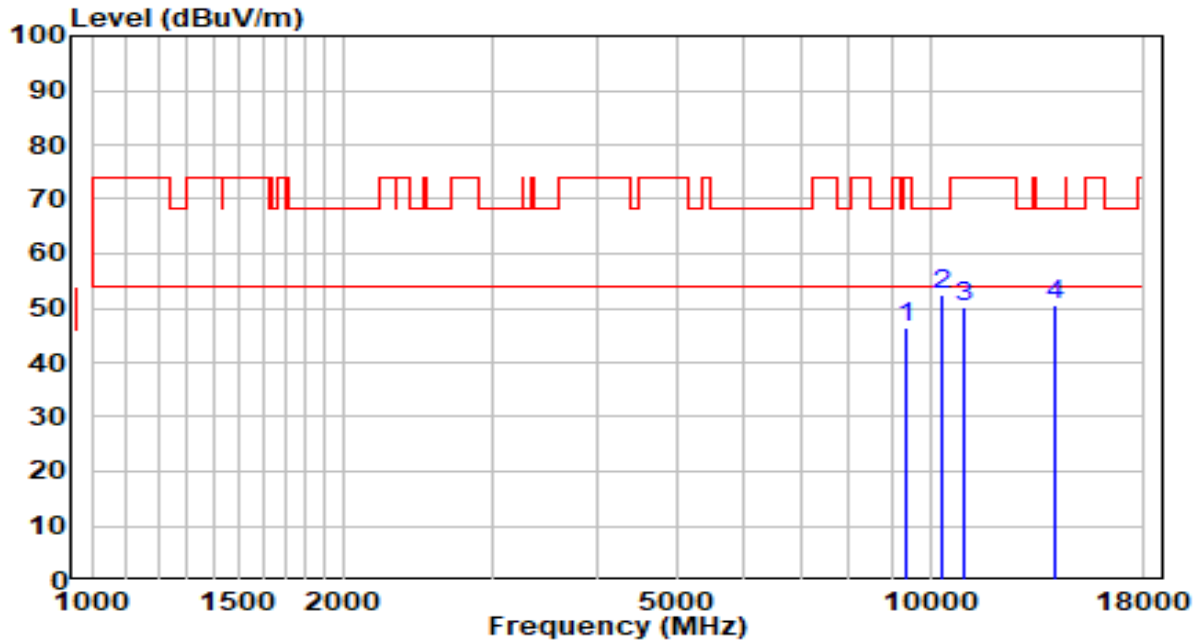


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	31.01	15.52	46.53	-27.47	74.00	Peak
2	* 10316.000	34.77	17.83	52.60	-15.60	68.20	Peak
3	10996.000	30.81	19.27	50.08	-23.92	74.00	Peak
4	14132.500	28.10	22.43	50.53	-17.67	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5240MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

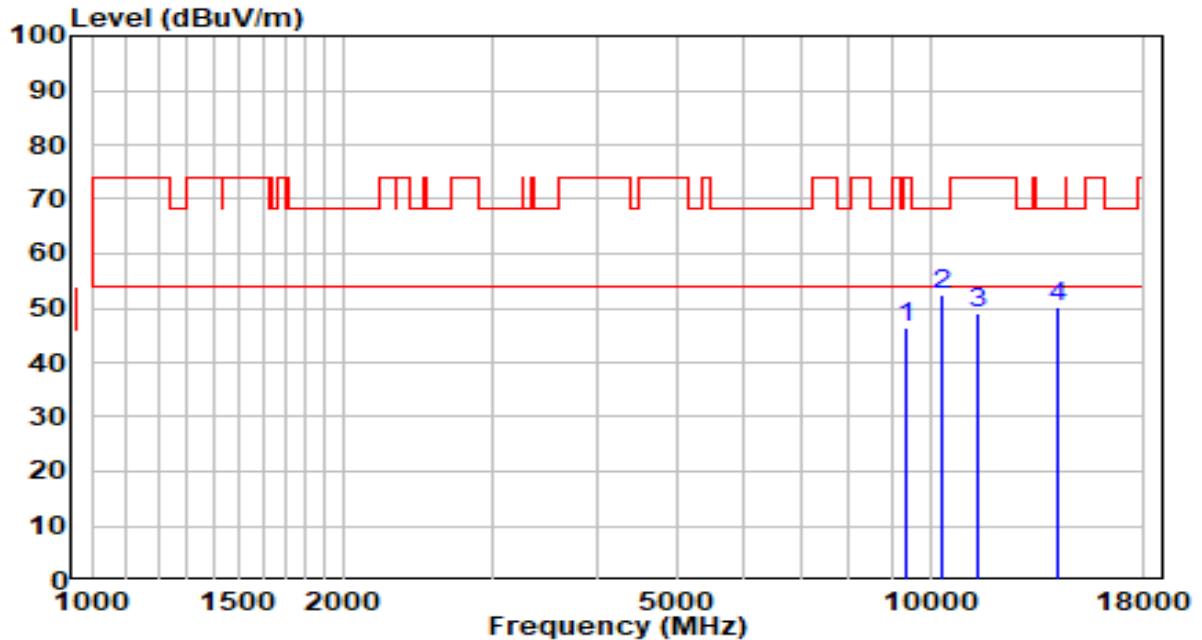


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	30.76	15.52	46.28	-27.72	74.00	Peak
2	* 10316.000	34.76	17.83	52.59	-15.61	68.20	Peak
3	11412.500	29.31	19.92	49.23	-24.77	74.00	Peak
4	14158.000	27.62	22.43	50.05	-18.15	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5240MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

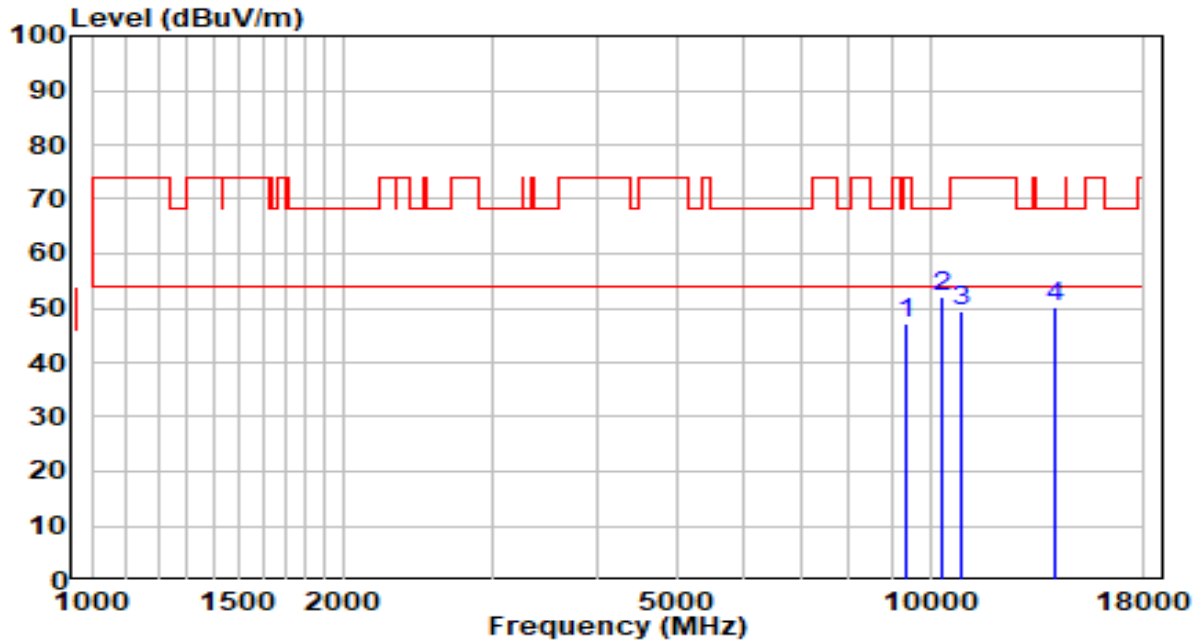


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	31.60	15.46	47.06	-26.94	74.00	Peak
2	* 10316.000	34.13	17.83	51.96	-16.24	68.20	Peak
3	10928.000	30.44	19.18	49.62	-24.38	74.00	Peak
4	14141.000	27.88	22.43	50.31	-17.89	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5260MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

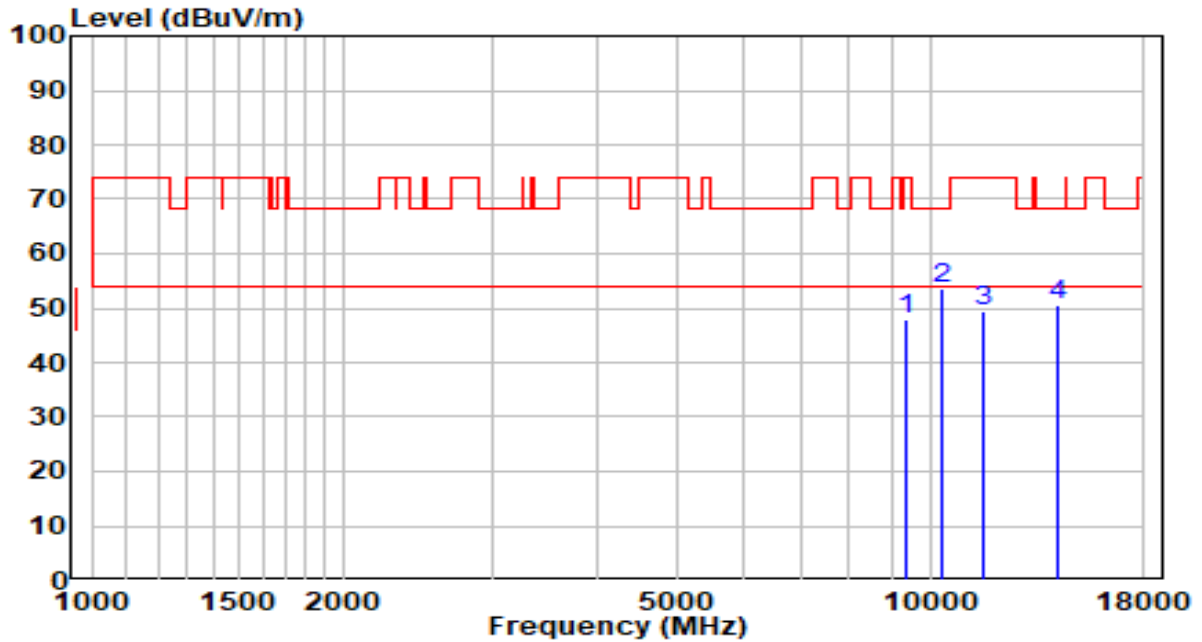


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	32.52	15.52	48.04	-25.96	74.00	Peak
2	* 10316.000	35.76	17.83	53.60	-14.60	68.20	Peak
3	11565.500	29.55	19.90	49.45	-24.55	74.00	Peak
4	14175.000	27.96	22.43	50.39	-17.81	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5260MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

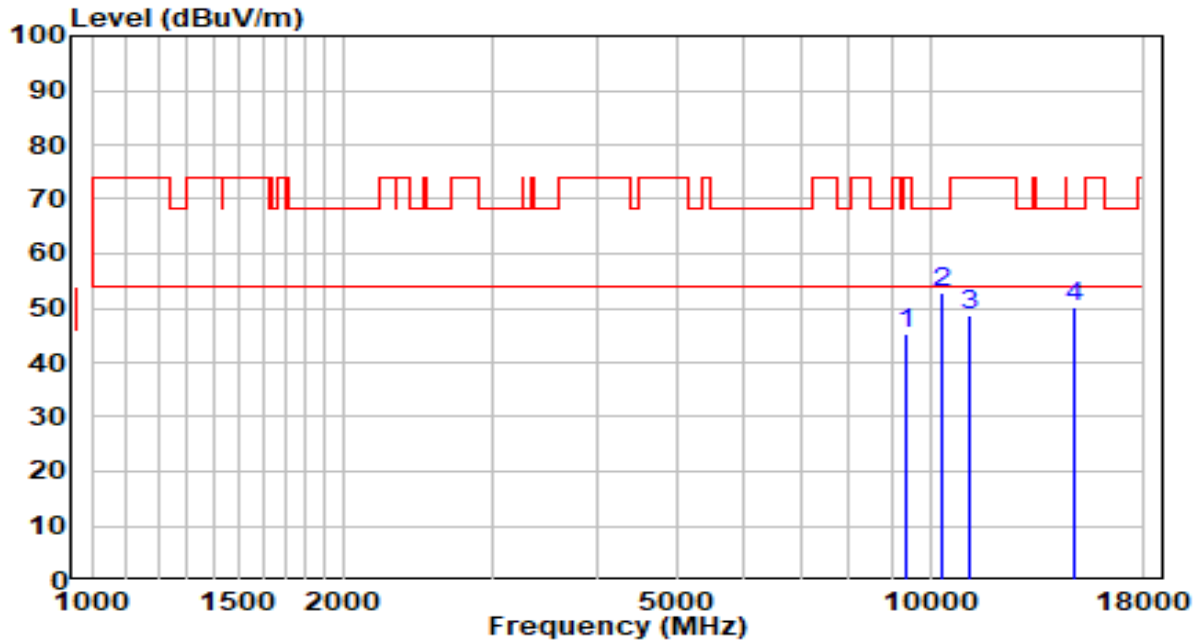


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	29.92	15.49	45.41	-28.59	74.00	Peak
2	* 10316.000	35.12	17.83	52.95	-15.25	68.20	Peak
3	11132.000	29.25	19.48	48.73	-25.27	74.00	Peak
4	14846.500	27.82	22.20	50.03	-18.17	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5300MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

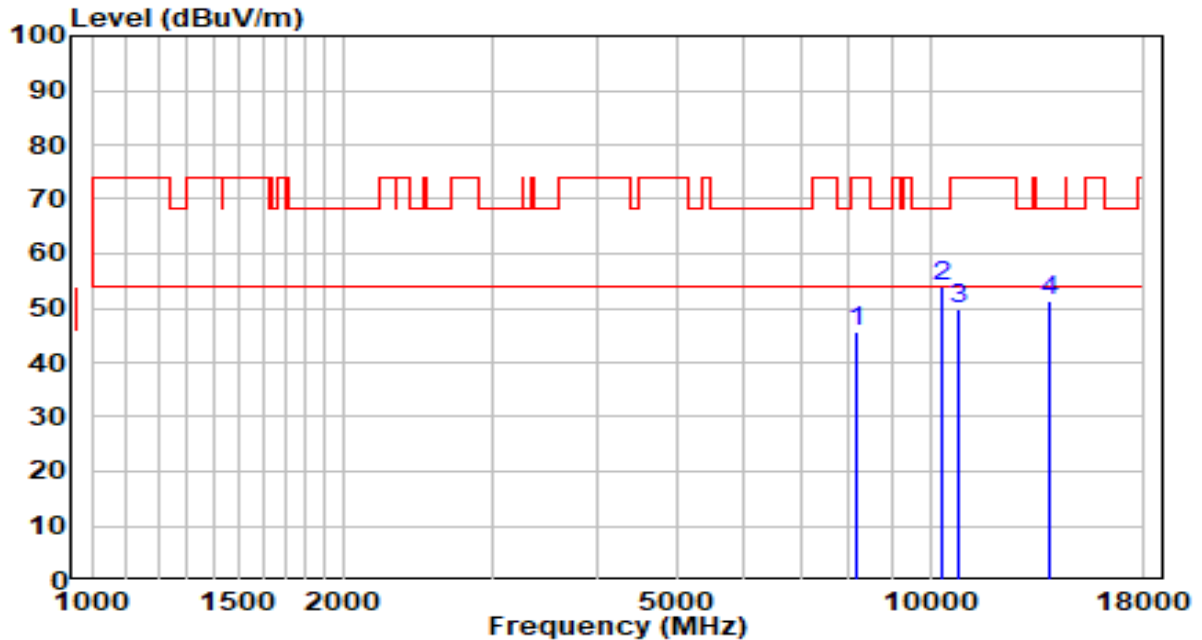


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	8182.500	32.27	13.51	45.79	-28.21	74.00	Peak
2	* 10316.000	36.12	17.83	53.95	-14.25	68.20	Peak
3	10817.500	30.69	19.02	49.71	-24.29	74.00	Peak
4	13860.500	29.03	22.26	51.29	-16.91	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5300MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

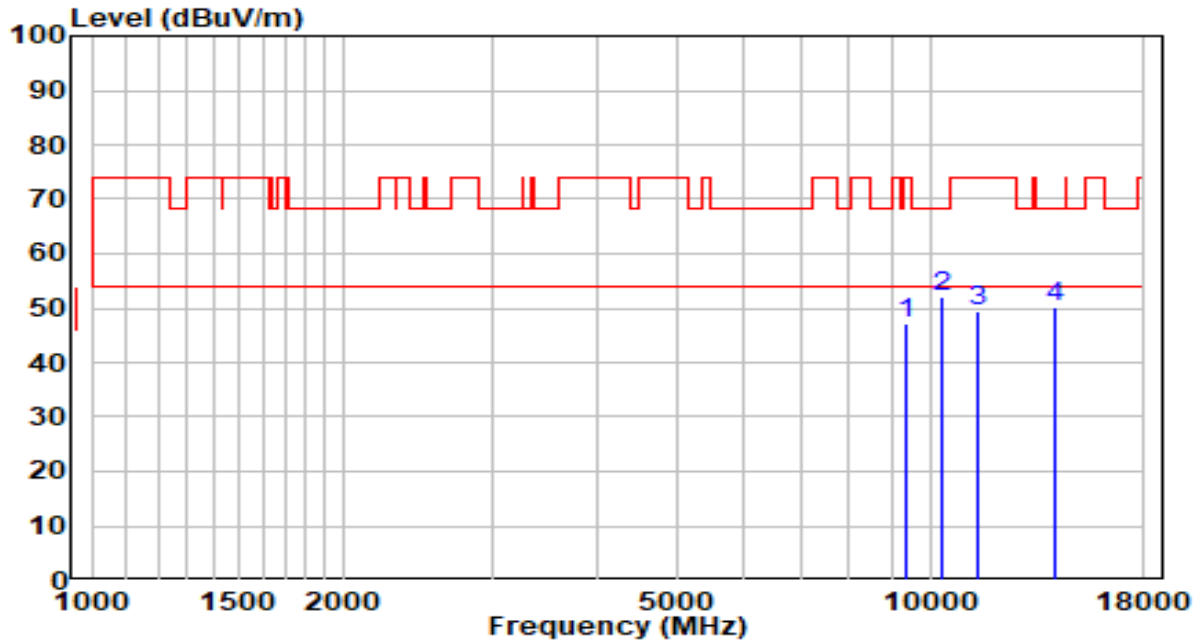


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	31.80	15.53	47.33	-26.67	74.00	Peak
2	* 10316.000	34.26	17.83	52.09	-16.11	68.20	Peak
3	11429.500	29.35	19.94	49.29	-24.71	74.00	Peak
4	14141.000	27.68	22.43	50.11	-18.09	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5320MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

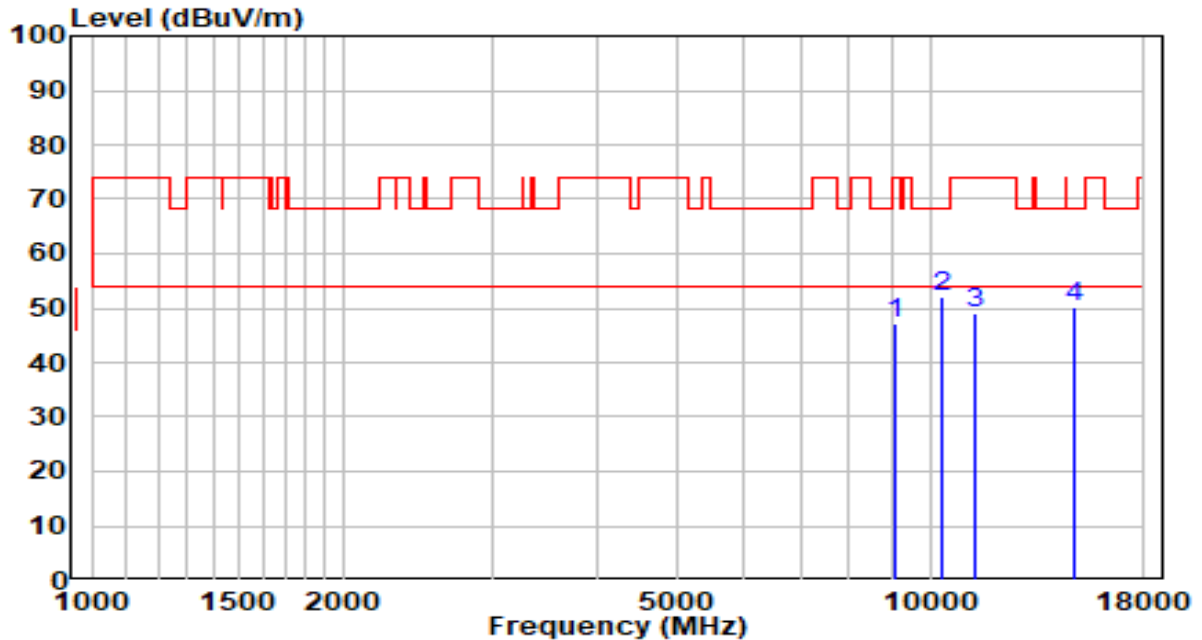


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9092.000	32.09	15.03	47.13	-26.87	74.00	Peak
2	* 10316.000	34.28	17.83	52.11	-16.09	68.20	Peak
3	11293.500	29.21	19.73	48.94	-25.06	74.00	Peak
4	14880.500	28.12	22.18	50.30	-17.90	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5320MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

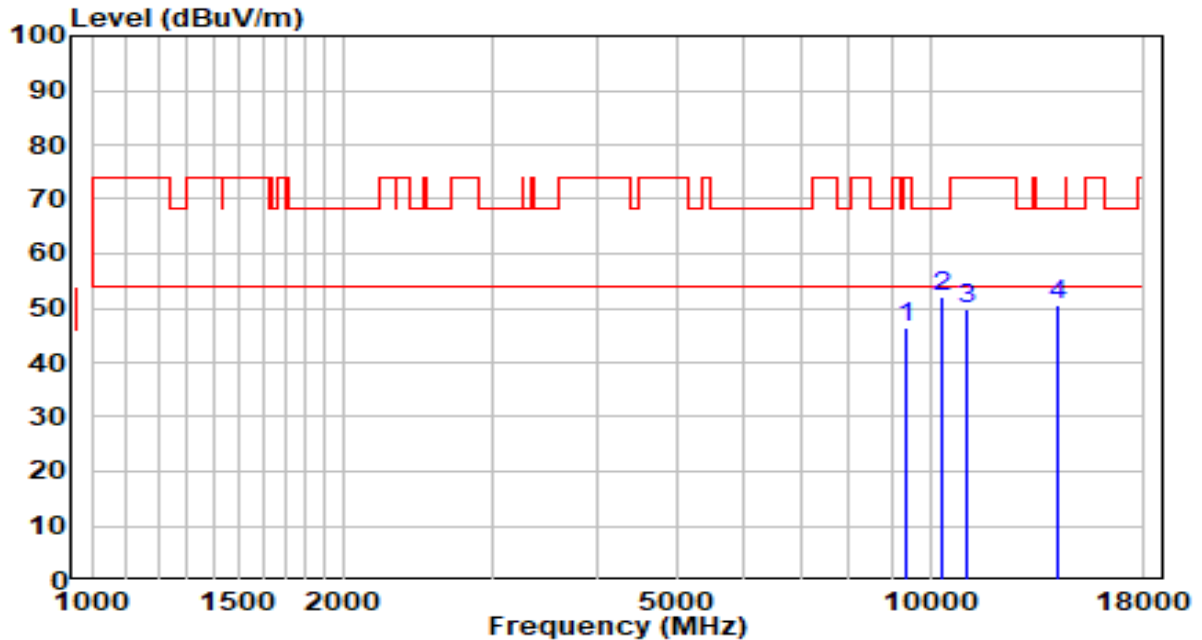


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	30.89	15.53	46.42	-27.58	74.00	Peak
2	* 10316.000	34.31	17.83	52.14	-16.06	68.20	Peak
3	11038.500	30.39	19.34	49.73	-24.27	74.00	Peak
4	14149.500	28.15	22.43	50.58	-17.62	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5500MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

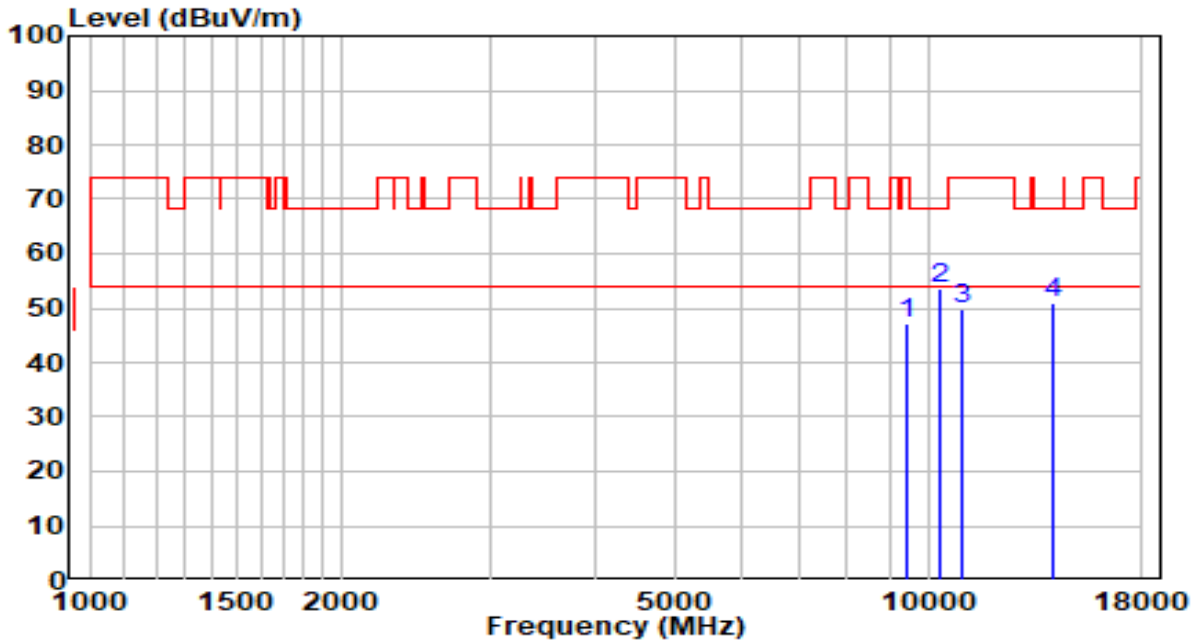


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	9440.500	31.51	15.62	47.13	-26.87	74.00	Peak
2	* 10316.000	35.69	17.83	53.52	-14.68	68.20	Peak
3	10996.000	30.50	19.27	49.77	-24.23	74.00	Peak
4	14141.000	28.49	22.43	50.92	-17.28	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5500MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

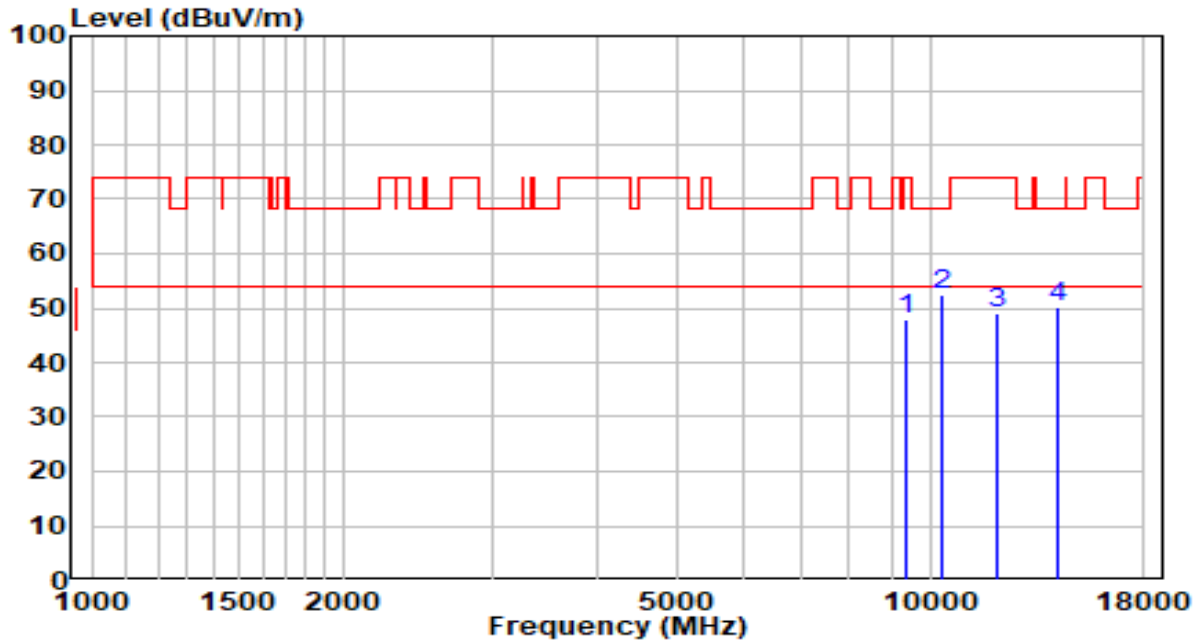


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	32.28	15.46	47.74	-26.26	74.00	Peak
2	* 10316.000	34.70	17.83	52.53	-15.67	68.20	Peak
3	12058.500	30.06	18.86	48.92	-25.08	74.00	Peak
4	14183.500	27.74	22.43	50.17	-18.03	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5580MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

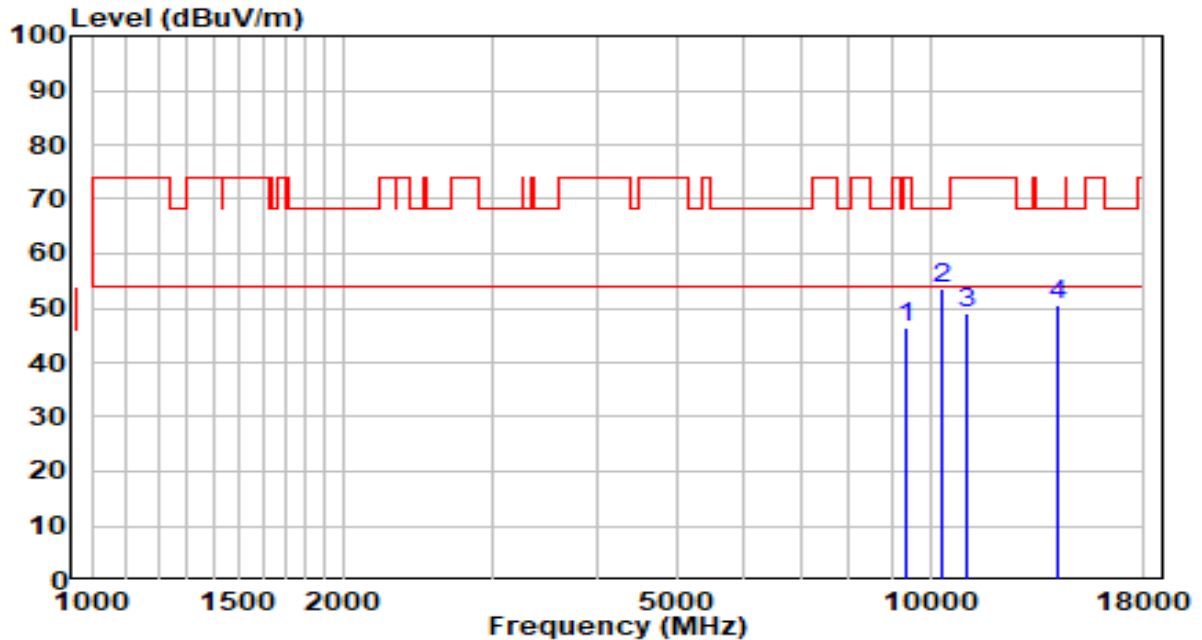


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	30.72	15.52	46.24	-27.76	74.00	Peak
2	* 10316.000	35.68	17.83	53.51	-14.69	68.20	Peak
3	11021.500	29.62	19.31	48.94	-25.06	74.00	Peak
4	14192.000	28.04	22.43	50.48	-17.72	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5580MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

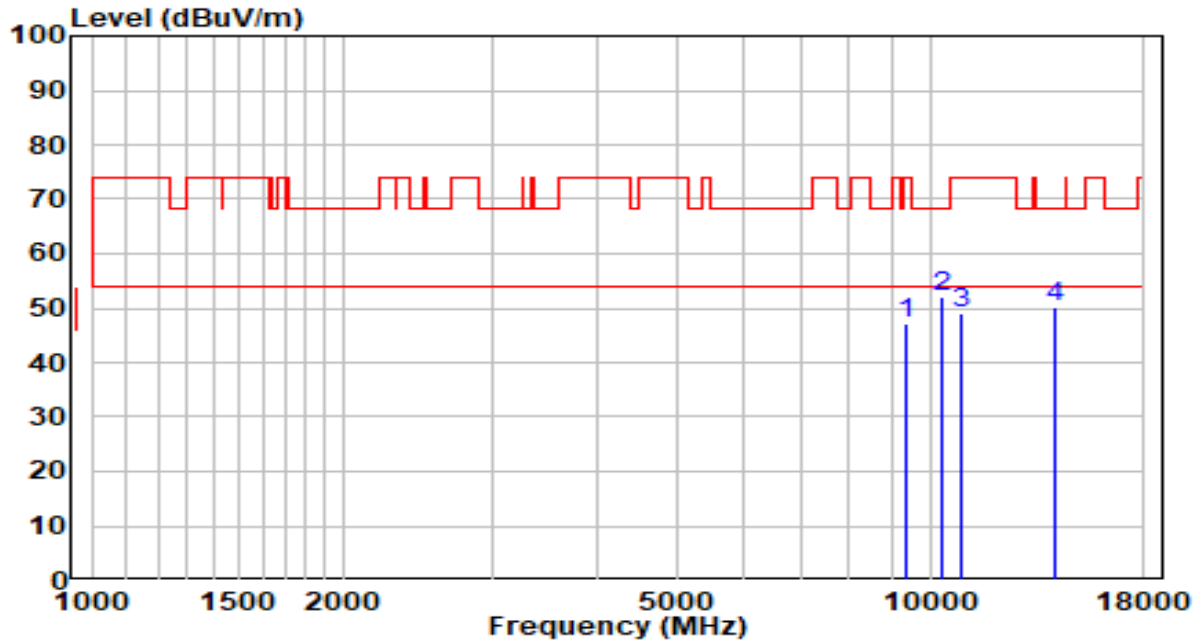


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9372.500	31.61	15.51	47.12	-26.88	74.00	Peak
2	* 10316.000	34.09	17.83	51.92	-16.28	68.20	Peak
3	10919.500	29.83	19.17	48.99	-25.01	74.00	Peak
4	14141.000	27.64	22.43	50.07	-18.13	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5700MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

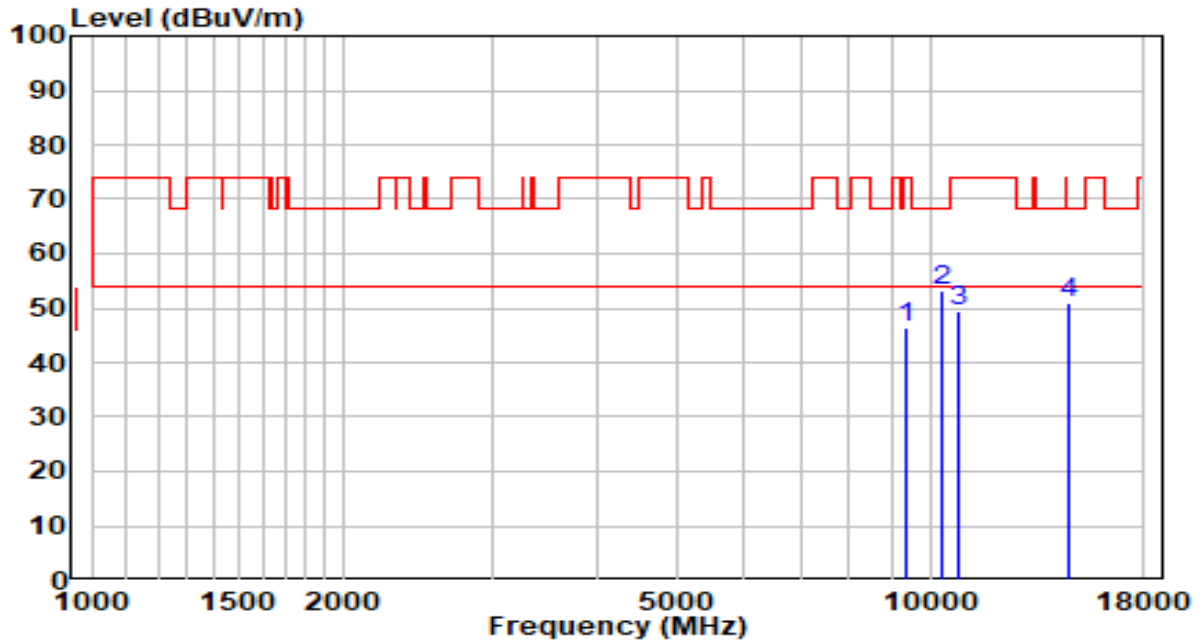


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9355.500	30.78	15.48	46.26	-27.74	74.00	Peak
2	* 10316.000	35.25	17.83	53.08	-15.12	68.20	Peak
3	10834.500	30.27	19.04	49.32	-24.68	74.00	Peak
4	14600.000	28.53	22.38	50.91	-17.29	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5700MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

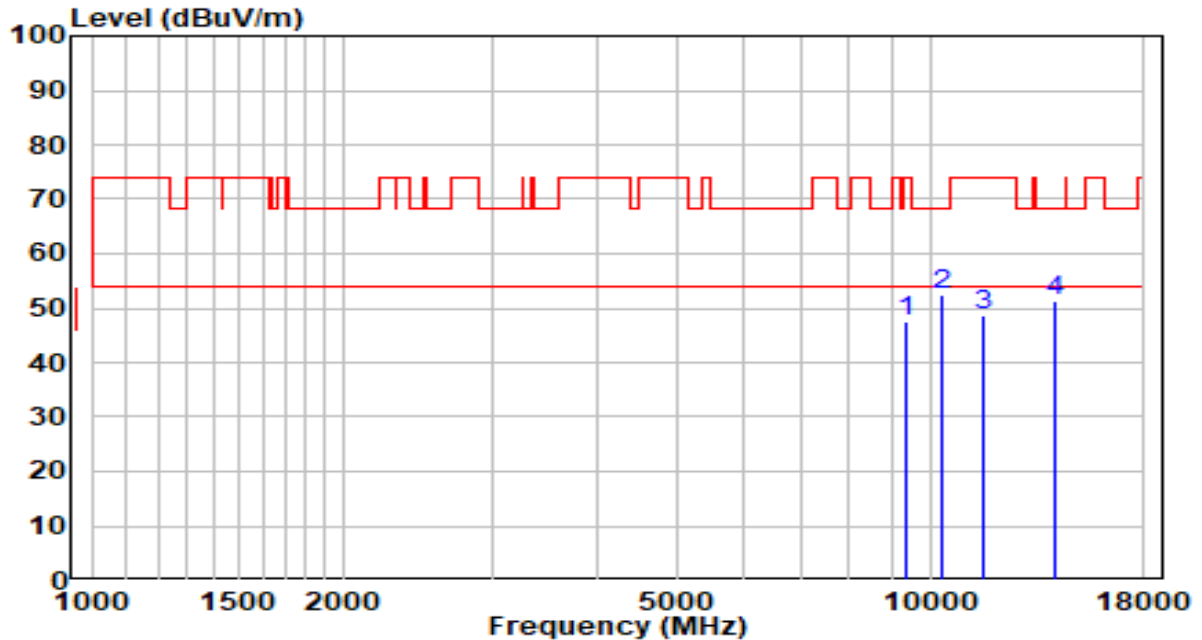


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	32.10	15.49	47.59	-26.41	74.00	Peak
2	* 10316.000	34.70	17.83	52.53	-15.67	68.20	Peak
3	11574.000	28.98	19.88	48.86	-25.14	74.00	Peak
4	14141.000	29.00	22.43	51.43	-16.77	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5720MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

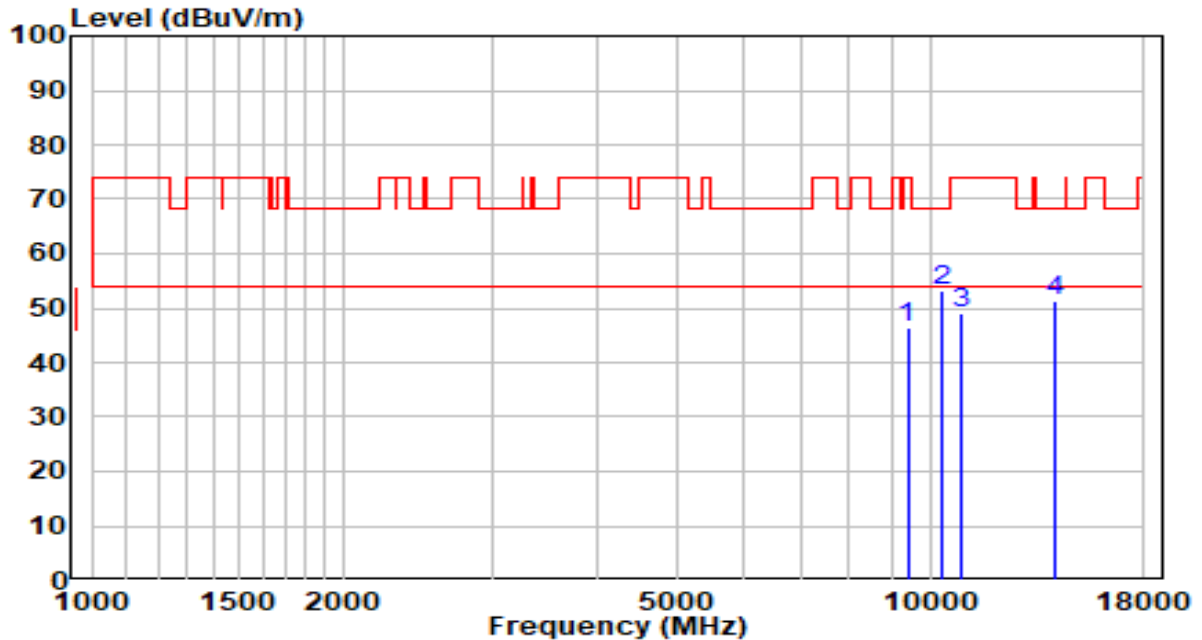


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9398.000	31.01	15.55	46.56	-27.44	74.00	Peak
2	* 10316.000	35.48	17.83	53.31	-14.89	68.20	Peak
3	10928.000	29.70	19.18	48.88	-25.12	74.00	Peak
4	14141.000	28.85	22.43	51.28	-16.92	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5720MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

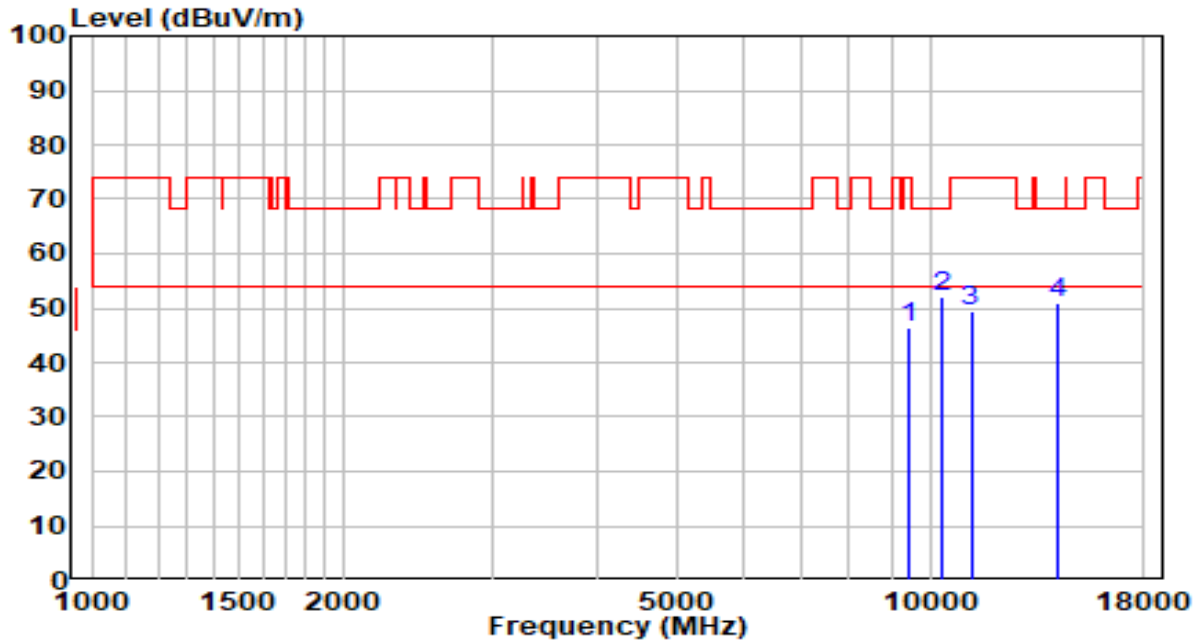


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9432.000	30.87	15.61	46.48	-27.52	74.00	Peak
2	* 10316.000	34.23	17.83	52.06	-16.14	68.20	Peak
3	11183.000	29.90	19.56	49.46	-24.54	74.00	Peak
4	14175.000	28.66	22.43	51.09	-17.11	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5745MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

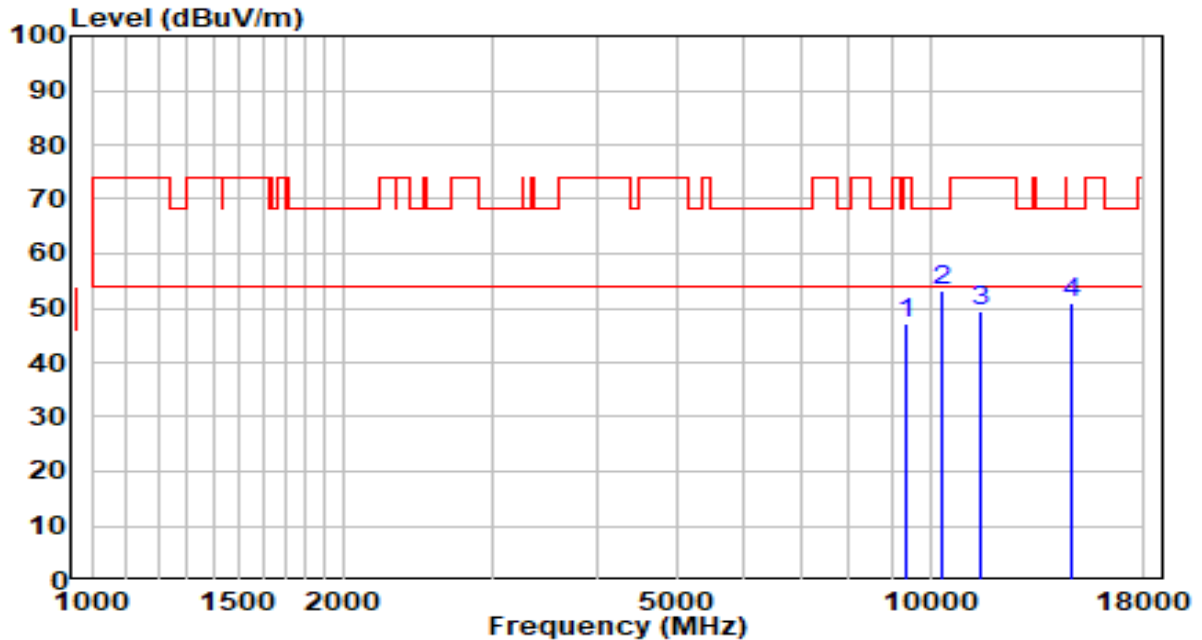


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9372.500	31.77	15.51	47.28	-26.72	74.00	Peak
2	* 10316.000	35.41	17.83	53.24	-14.96	68.20	Peak
3	11514.500	29.26	20.02	49.27	-24.73	74.00	Peak
4	14710.500	28.69	22.30	51.00	-17.20	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5745MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

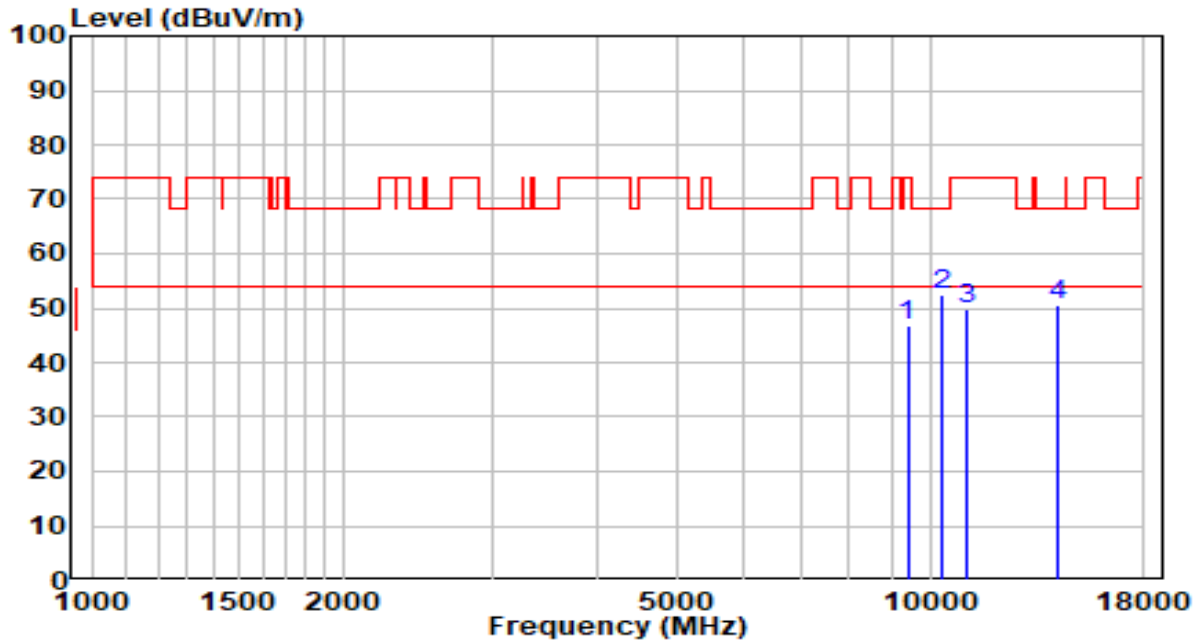


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9398.000	31.08	15.55	46.63	-27.37	74.00	Peak
2	* 10316.000	34.48	17.83	52.31	-15.89	68.20	Peak
3	11072.500	30.28	19.39	49.67	-24.33	74.00	Peak
4	14149.500	28.12	22.43	50.55	-17.65	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5785MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

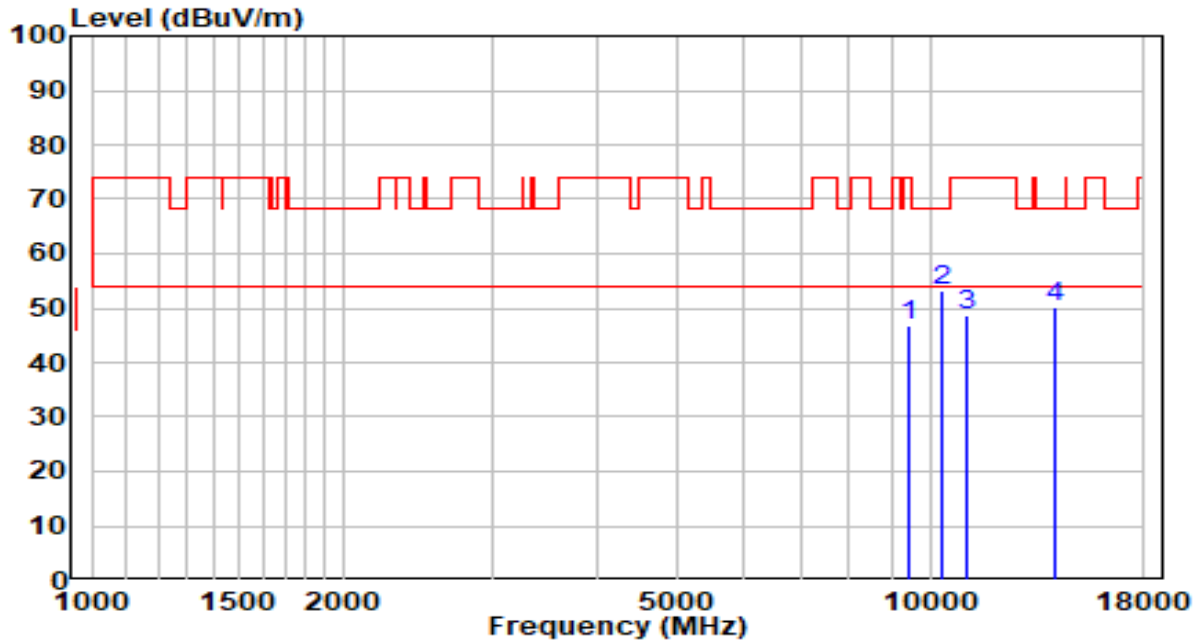


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9432.000	31.09	15.61	46.69	-27.31	74.00	Peak
2	* 10316.000	35.41	17.83	53.24	-14.96	68.20	Peak
3	11030.000	29.50	19.33	48.83	-25.17	74.00	Peak
4	14056.000	27.62	22.42	50.05	-18.15	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5785MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

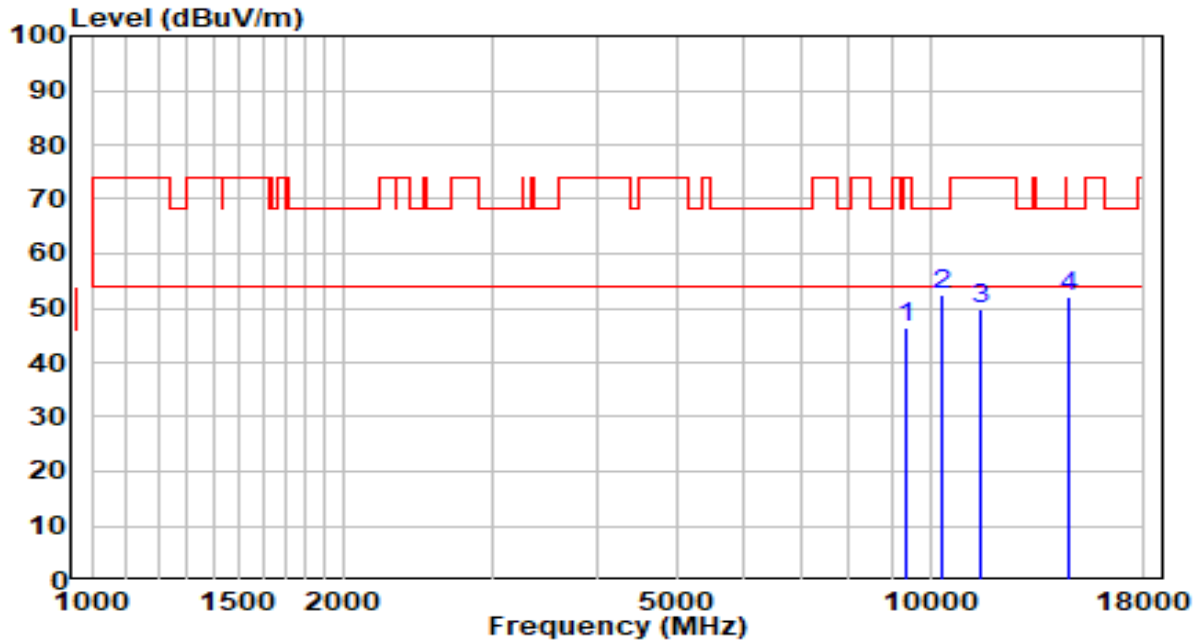


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	30.80	15.53	46.33	-27.67	74.00	Peak
2	* 10316.000	34.60	17.83	52.43	-15.77	68.20	Peak
3	11523.000	29.67	20.00	49.67	-24.33	74.00	Peak
4	14676.500	29.66	22.33	51.99	-16.21	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5825MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

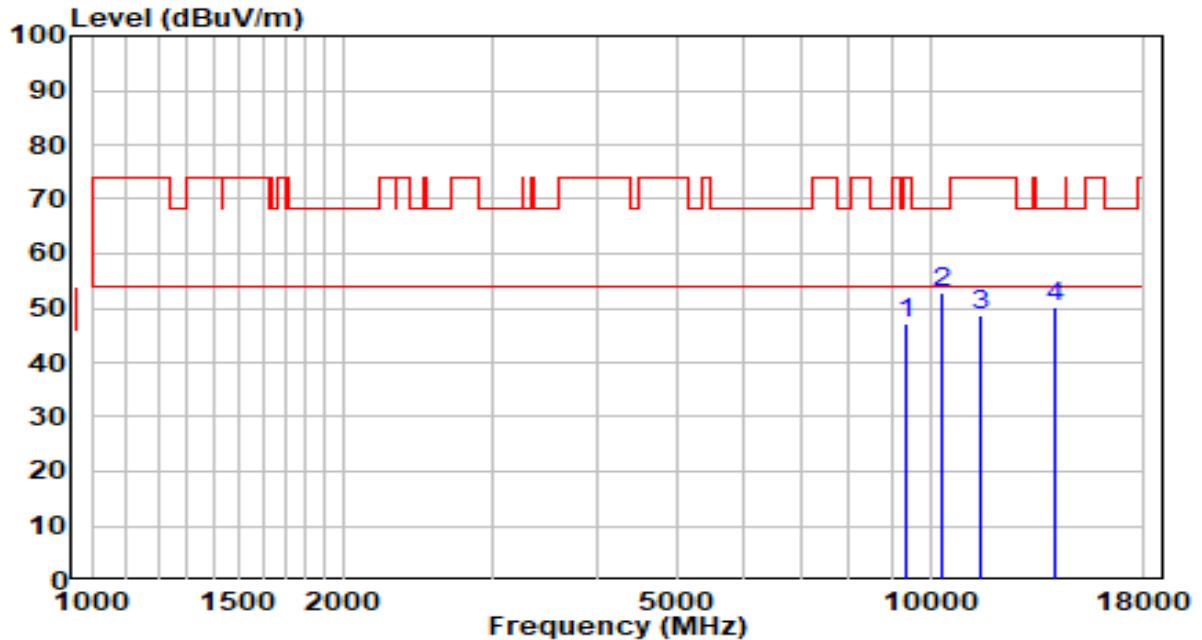


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	9381.000	31.76	15.52	47.28	-26.72	74.00	Peak
2	* 10316.000	35.02	17.83	52.85	-15.35	68.20	Peak
3	11480.500	28.83	20.02	48.85	-25.15	74.00	Peak
4	14141.000	27.92	22.43	50.35	-17.85	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5825MHz by 802.11ac-VHT20	Test Voltage	AC 120V/60Hz

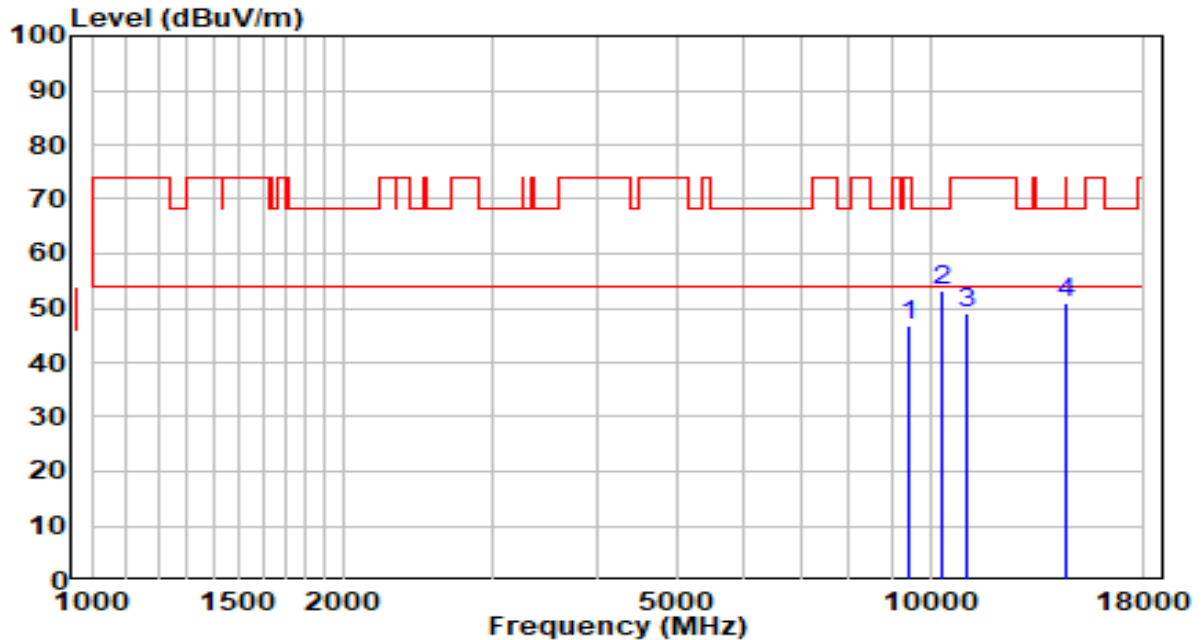


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9466.000	31.18	15.66	46.84	-27.16	74.00	Peak
2	* 10316.000	35.21	17.83	53.04	-15.16	68.20	Peak
3	11055.500	29.55	19.37	48.92	-25.08	74.00	Peak
4	14532.000	28.56	22.43	50.99	-17.21	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

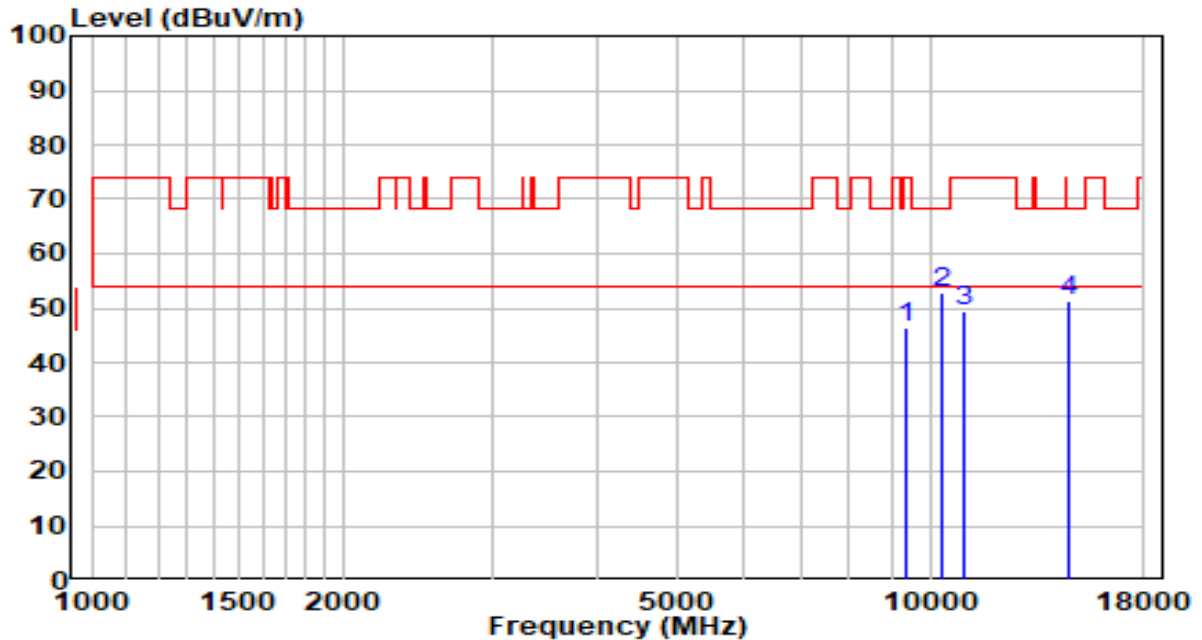


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	30.70	15.53	46.23	-27.77	74.00	Peak
2	* 10316.000	35.10	17.83	52.93	-15.27	68.20	Peak
3	10945.000	30.09	19.20	49.29	-24.71	74.00	Peak
4	14651.000	28.98	22.34	51.32	-16.88	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

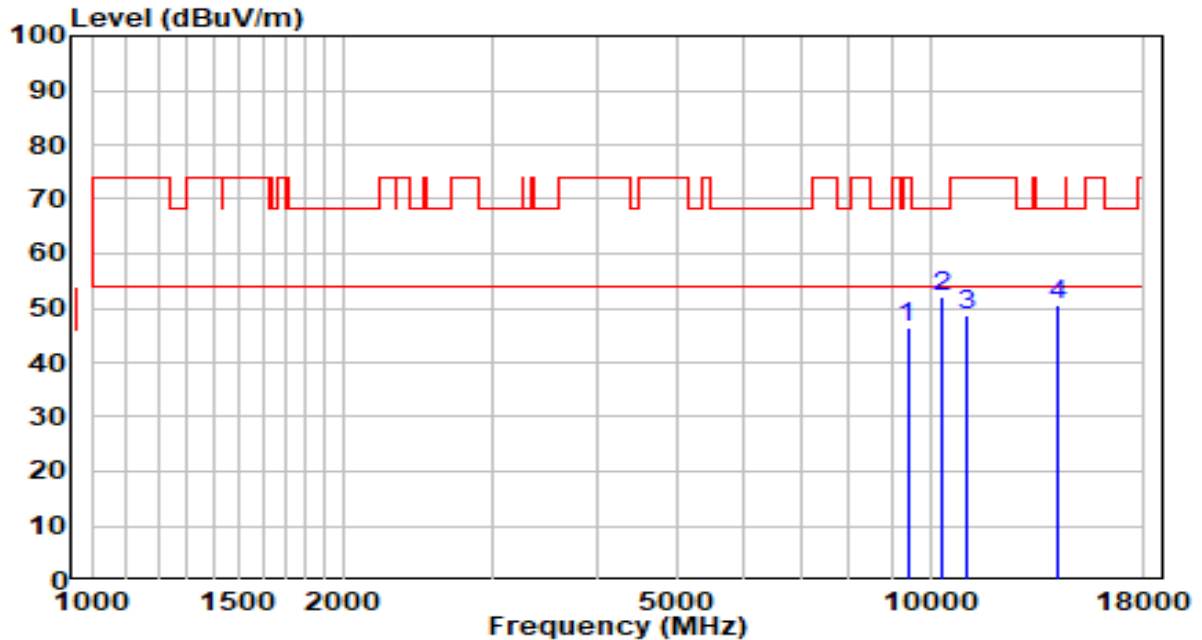


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9398.000	30.92	15.55	46.47	-27.53	74.00	Peak
2	* 10316.000	34.17	17.83	52.00	-16.20	68.20	Peak
3	11030.000	29.21	19.33	48.53	-25.47	74.00	Peak
4	14209.000	28.31	22.43	50.75	-17.45	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5230MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

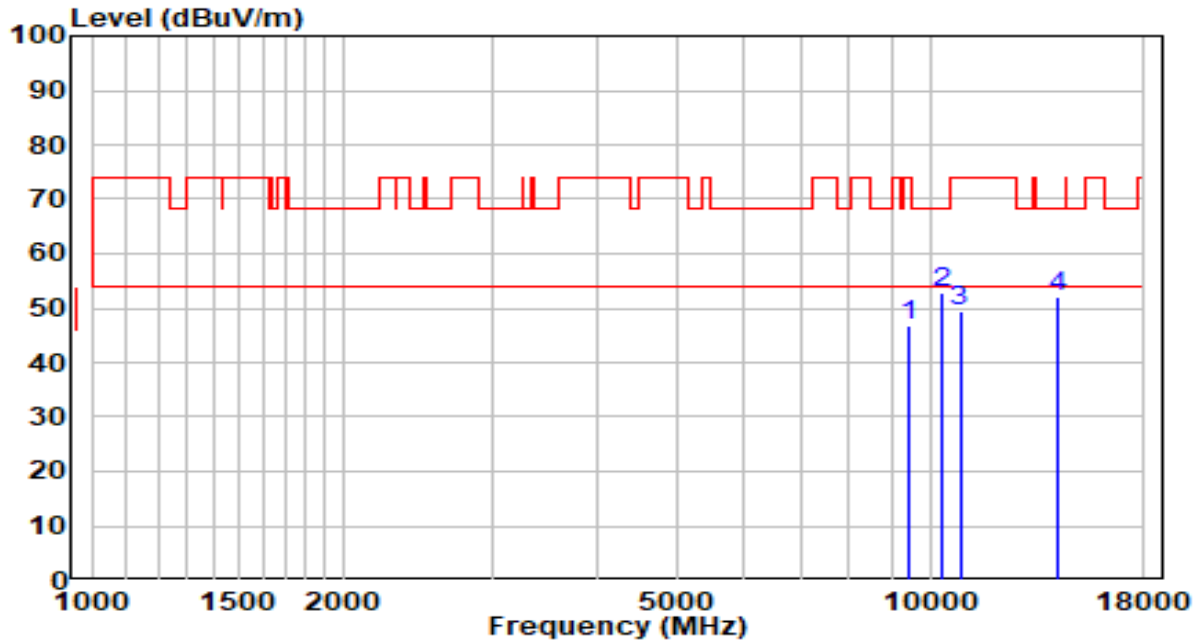


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9432.000	31.04	15.61	46.65	-27.35	74.00	Peak
2	* 10316.000	35.04	17.83	52.87	-15.33	68.20	Peak
3	10851.500	30.27	19.07	49.34	-24.66	74.00	Peak
4	14175.000	29.53	22.43	51.96	-16.24	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5230MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

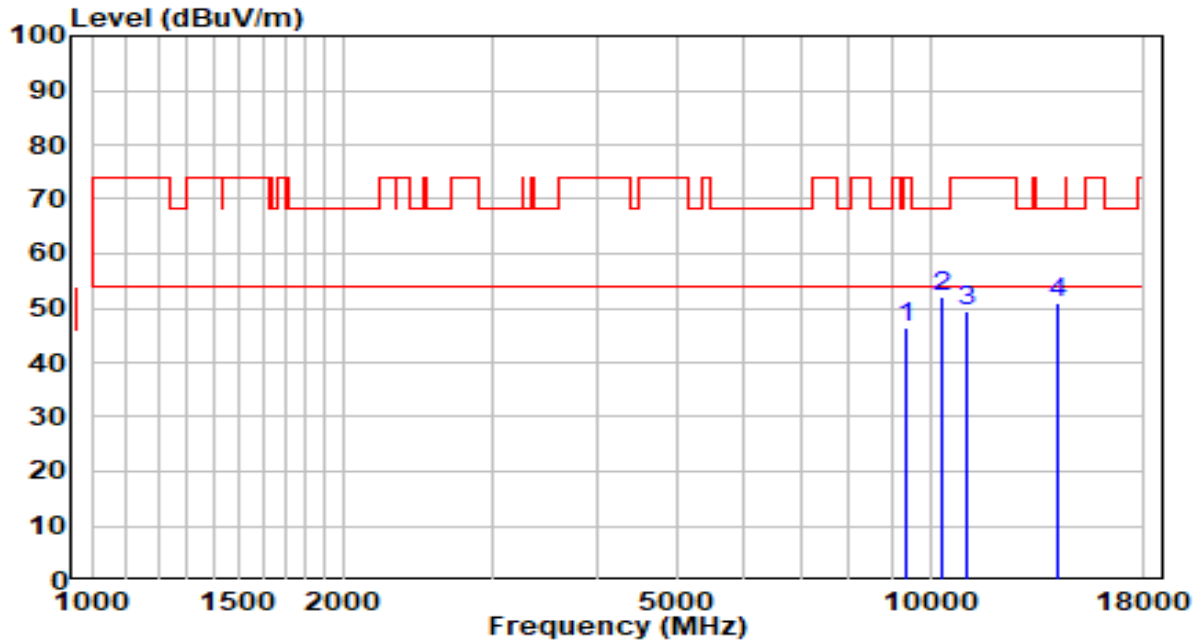


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9372.500	31.09	15.51	46.60	-27.40	74.00	Peak
2	* 10316.000	34.33	17.83	52.16	-16.04	68.20	Peak
3	11030.000	30.00	19.33	49.32	-24.68	74.00	Peak
4	14149.500	28.60	22.43	51.03	-17.17	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5270MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

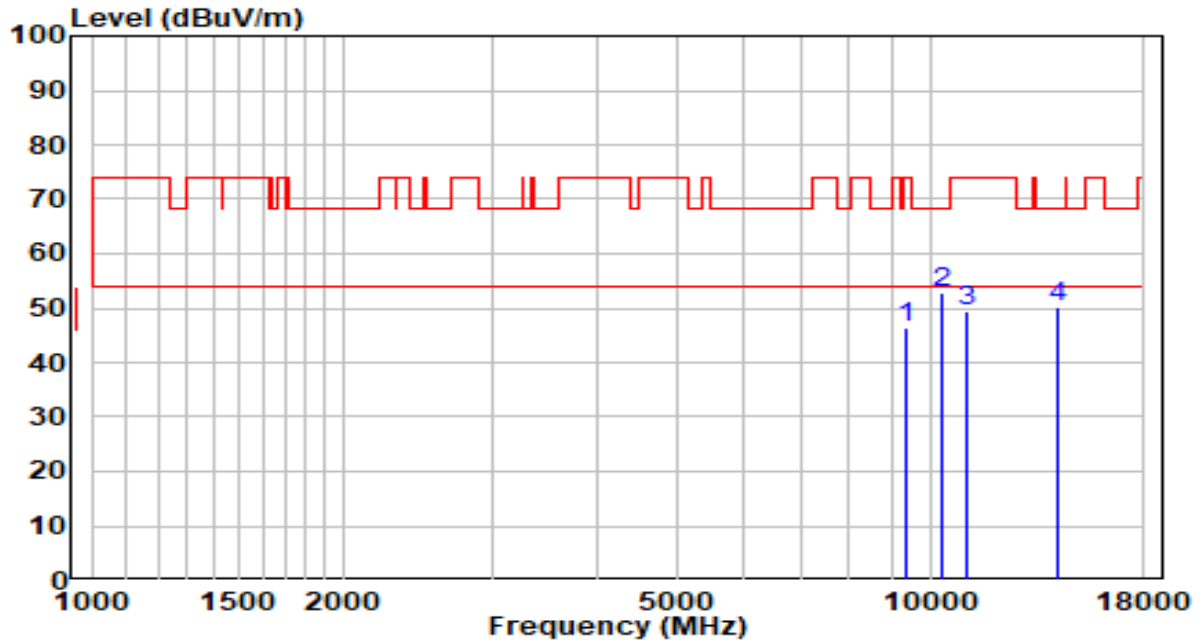


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	30.90	15.53	46.43	-27.57	74.00	Peak
2	* 10316.000	34.99	17.83	52.82	-15.38	68.20	Peak
3	11072.500	30.10	19.39	49.49	-24.51	74.00	Peak
4	14158.000	27.87	22.43	50.30	-17.90	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5270MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

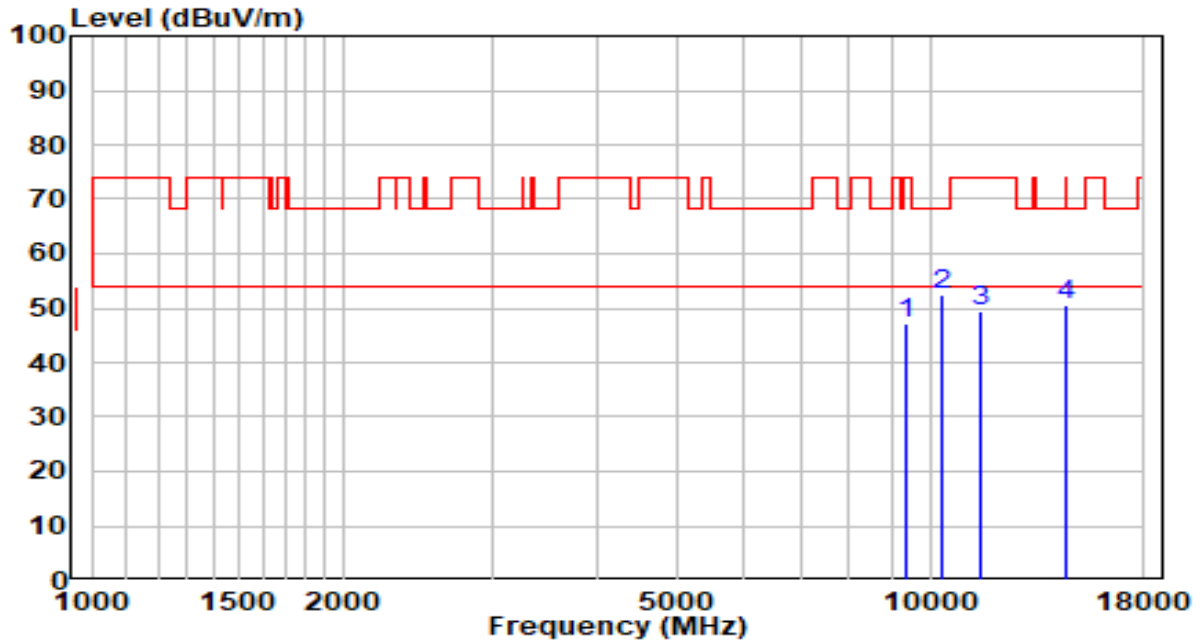


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9372.500	31.54	15.51	47.05	-26.95	74.00	Peak
2	* 10316.000	34.44	17.83	52.27	-15.93	68.20	Peak
3	11480.500	29.23	20.02	49.25	-24.75	74.00	Peak
4	14557.500	28.12	22.41	50.53	-17.67	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5310MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

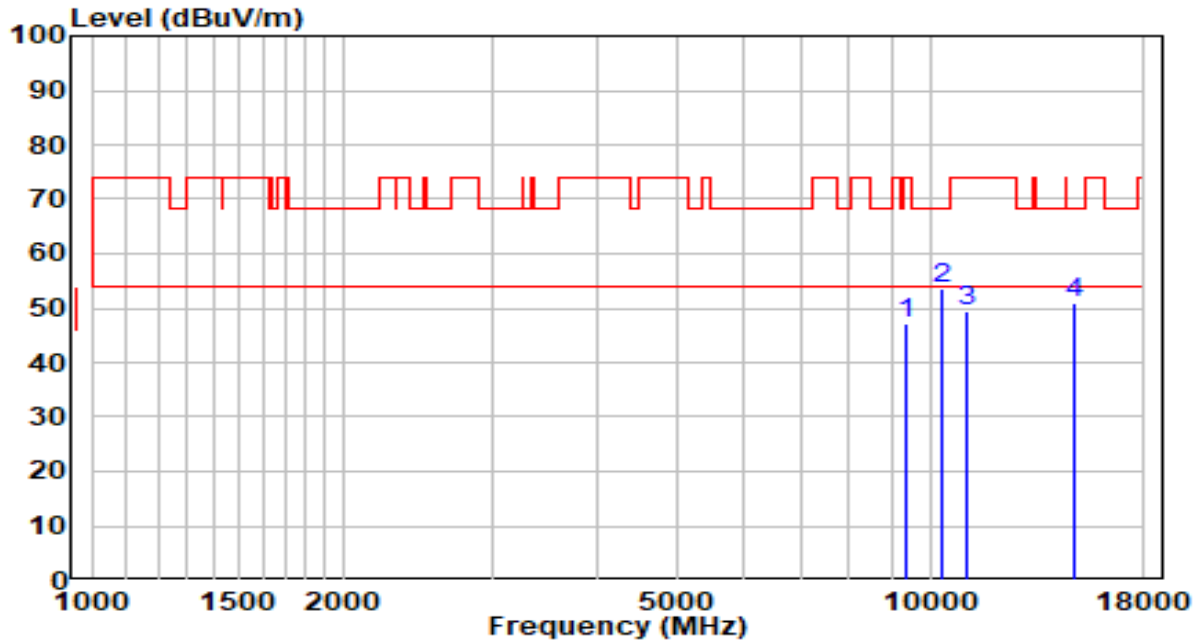


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	31.55	15.49	47.05	-26.95	74.00	Peak
2	* 10316.000	35.77	17.83	53.61	-14.59	68.20	Peak
3	11098.000	29.98	19.43	49.41	-24.59	74.00	Peak
4	14804.000	28.82	22.23	51.05	-17.15	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5310MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

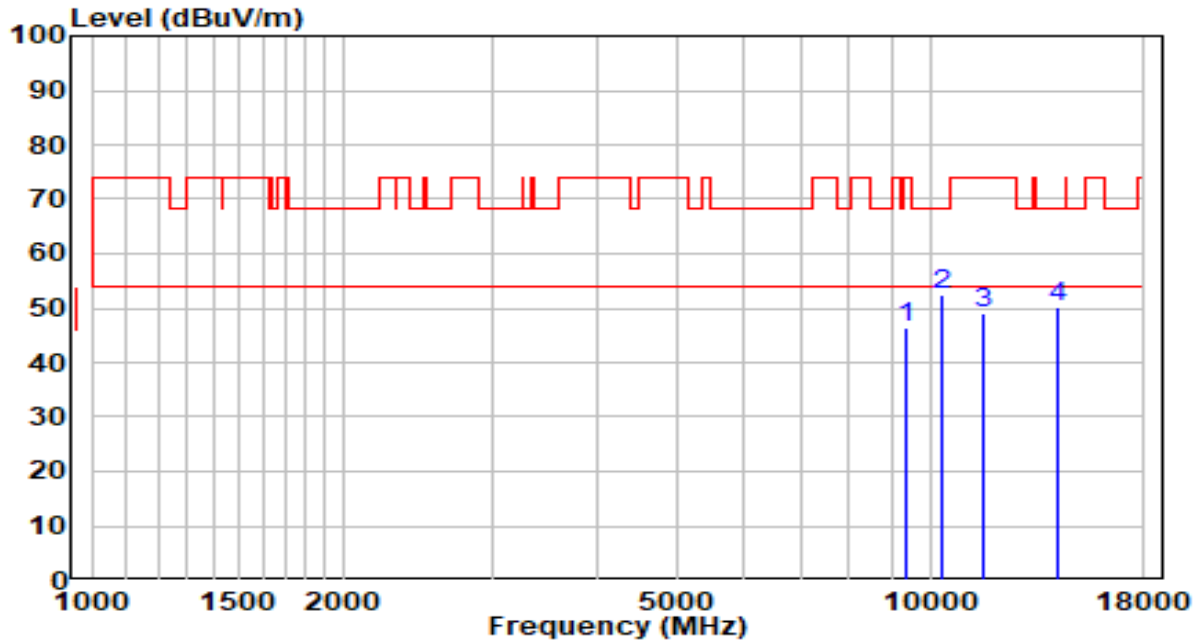


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	30.86	15.52	46.38	-27.62	74.00	Peak
2	* 10316.000	34.68	17.83	52.51	-15.69	68.20	Peak
3	11608.000	29.11	19.81	48.91	-25.09	74.00	Peak
4	14166.500	27.85	22.43	50.28	-17.92	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5510MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

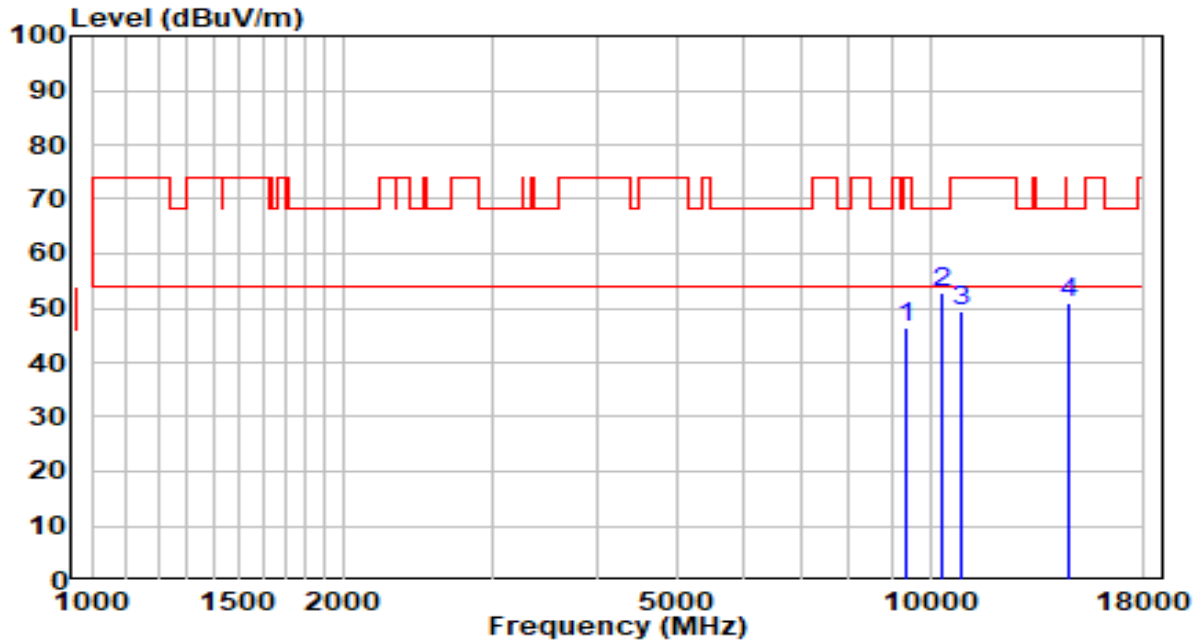


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	31.04	15.49	46.53	-27.47	74.00	Peak
2	* 10316.000	35.03	17.83	52.86	-15.34	68.20	Peak
3	10928.000	30.37	19.18	49.54	-24.46	74.00	Peak
4	14617.000	28.48	22.37	50.85	-17.35	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5510MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

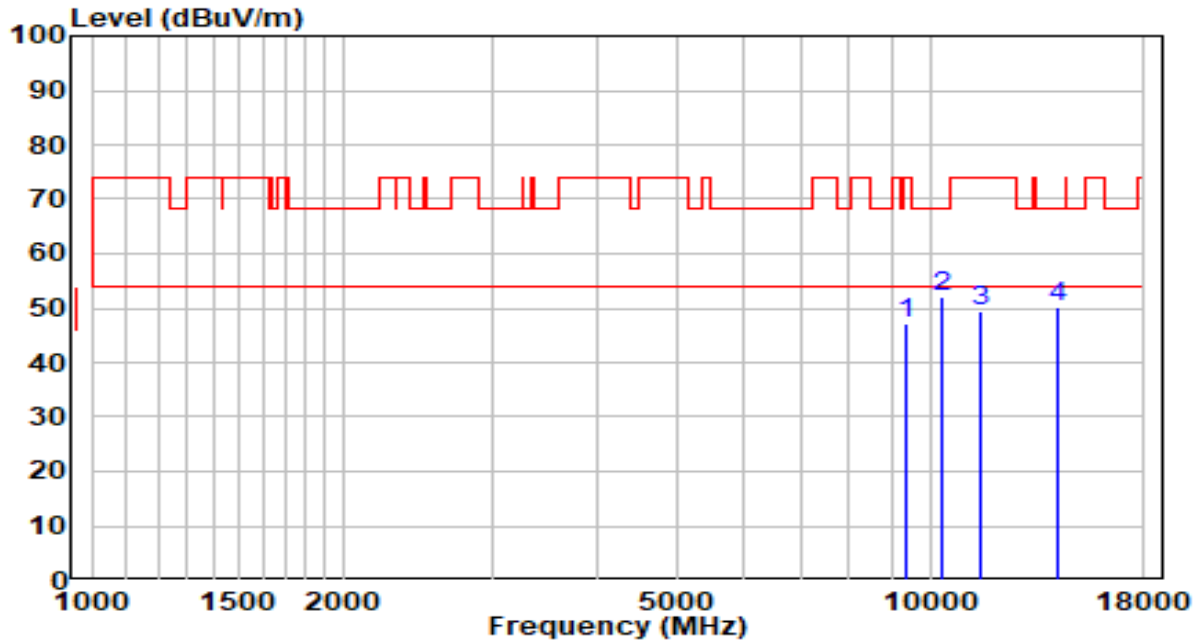


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	31.59	15.46	47.05	-26.95	74.00	Peak
2	* 10316.000	34.31	17.83	52.14	-16.06	68.20	Peak
3	11514.500	29.51	20.02	49.53	-24.47	74.00	Peak
4	14175.000	27.82	22.43	50.25	-17.95	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5550MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

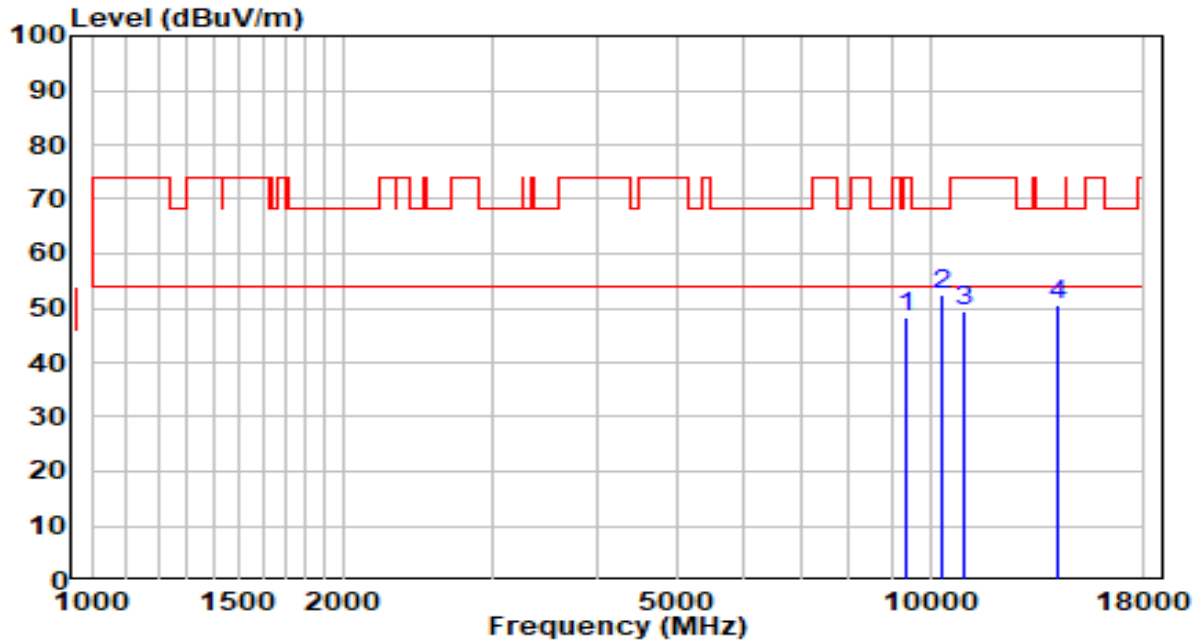


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9364.000	32.98	15.49	48.47	-25.53	74.00	Peak
2	* 10316.000	34.49	17.83	52.32	-15.88	68.20	Peak
3	10962.000	30.22	19.23	49.45	-24.55	74.00	Peak
4	14158.000	28.16	22.43	50.59	-17.61	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5550MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

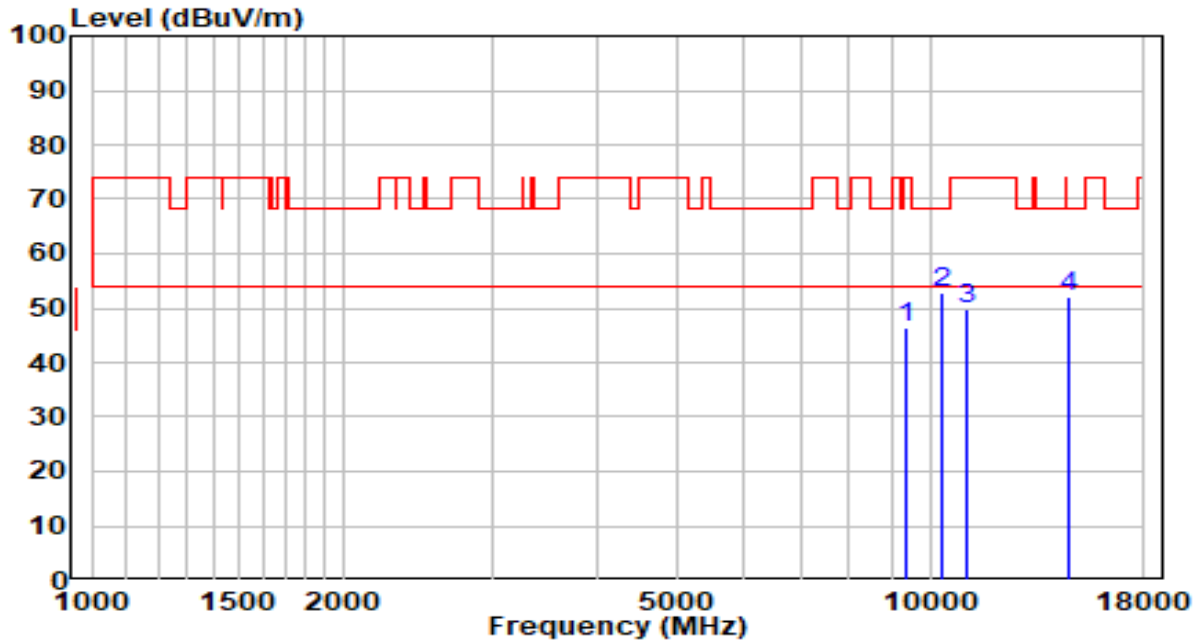


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	31.02	15.46	46.48	-27.52	74.00	Peak
2	* 10316.000	35.02	17.83	52.85	-15.35	68.20	Peak
3	11030.000	30.39	19.33	49.72	-24.28	74.00	Peak
4	14608.500	29.86	22.38	52.24	-15.96	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5670MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

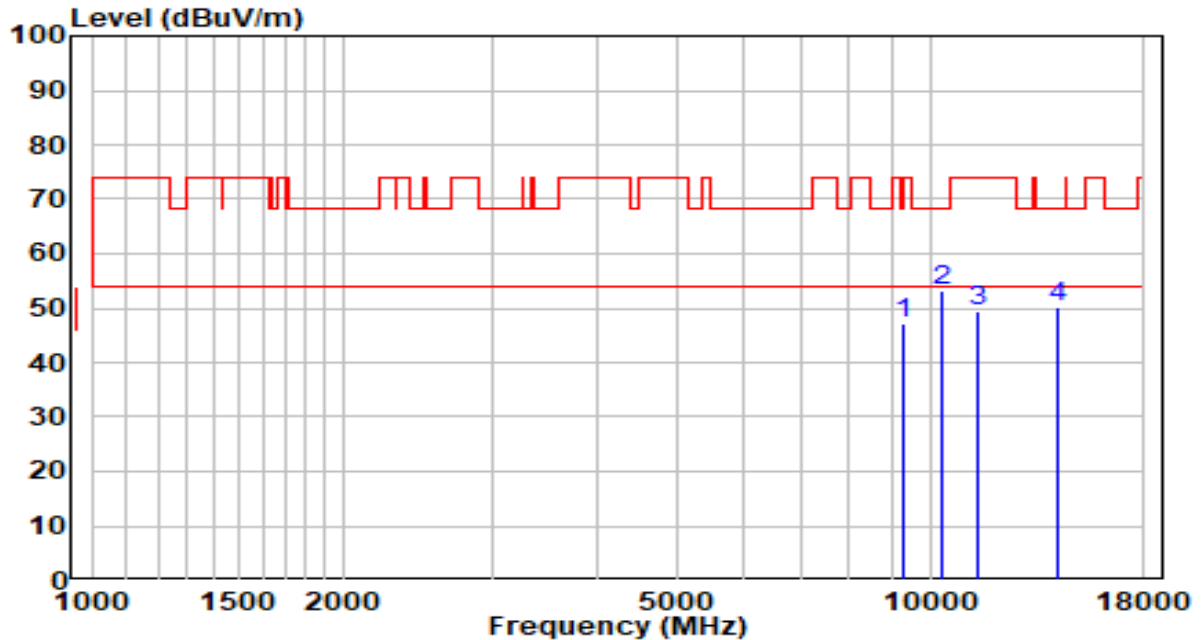


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9321.500	31.73	15.42	47.15	-26.85	74.00	Peak
2	* 10316.000	35.51	17.83	53.34	-14.86	68.20	Peak
3	11438.000	29.34	19.95	49.29	-24.71	74.00	Peak
4	14166.500	27.78	22.43	50.21	-17.99	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5670MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

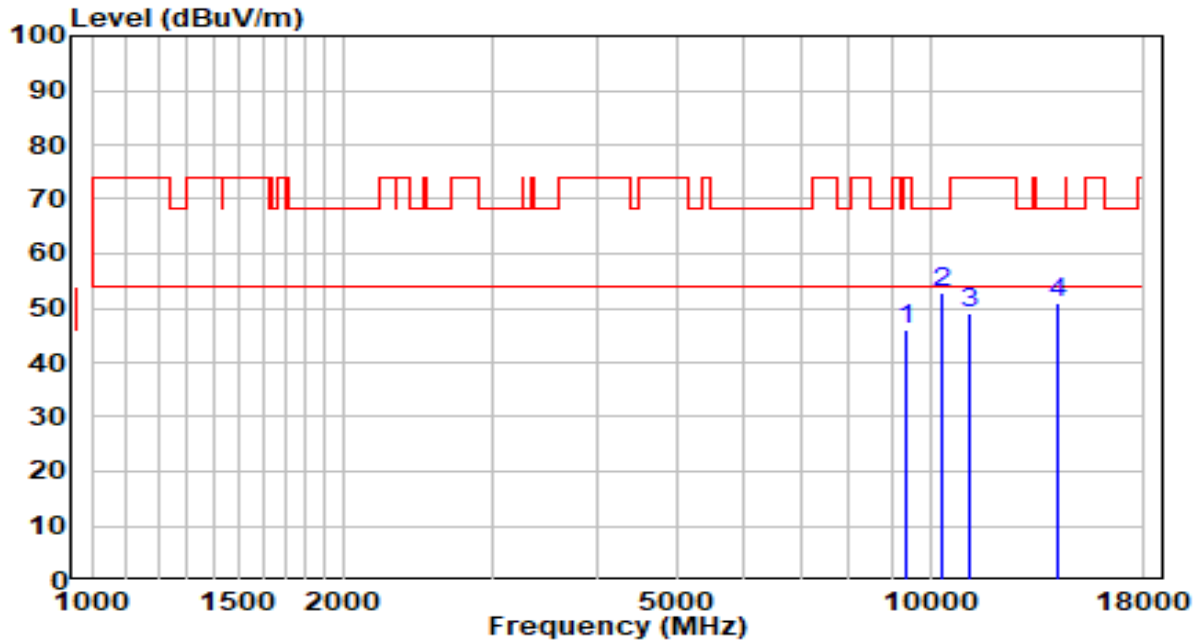


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	30.68	15.53	46.21	-27.79	74.00	Peak
2	* 10316.000	35.05	17.83	52.88	-15.32	68.20	Peak
3	11115.000	29.70	19.46	49.15	-24.85	74.00	Peak
4	14175.000	28.42	22.43	50.85	-17.35	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5710MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

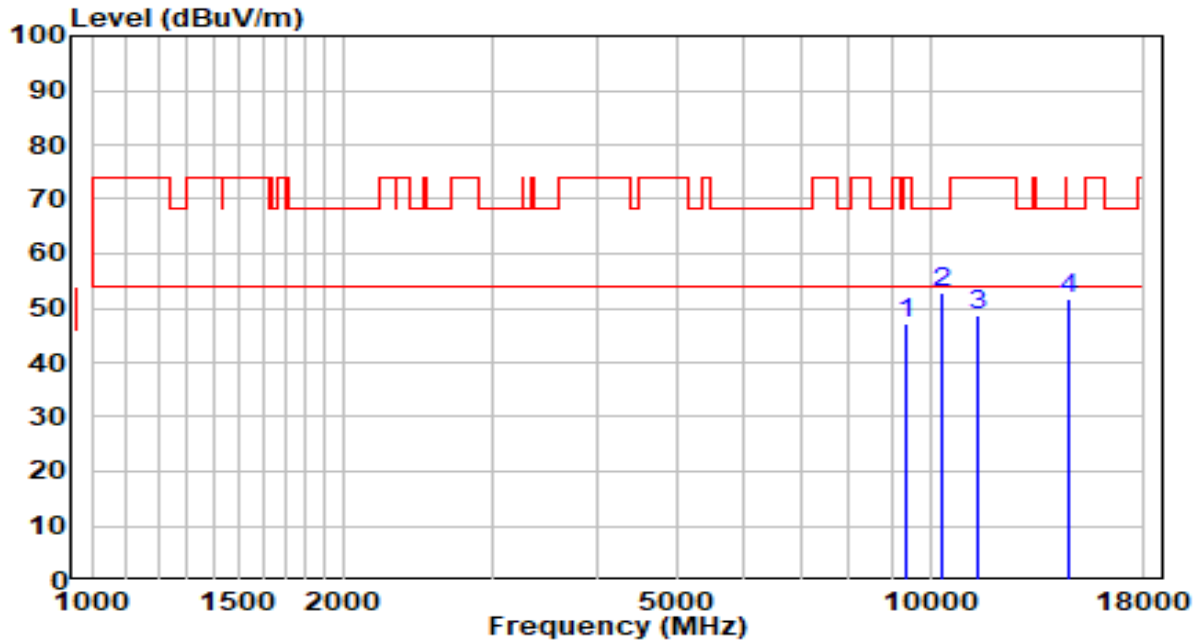


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9338.500	31.67	15.45	47.12	-26.88	74.00	Peak
2	* 10316.000	34.85	17.83	52.68	-15.52	68.20	Peak
3	11395.500	28.97	19.89	48.86	-25.14	74.00	Peak
4	14668.000	29.39	22.33	51.72	-16.48	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5710MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

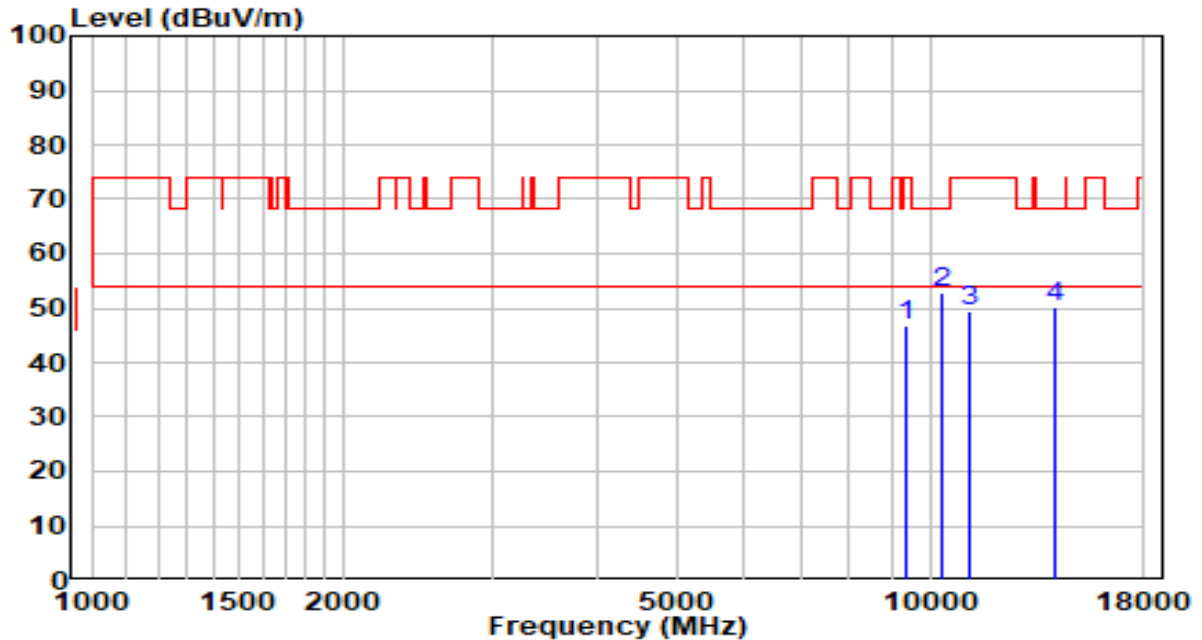


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	31.40	15.53	46.94	-27.06	74.00	Peak
2	* 10316.000	34.87	17.83	52.70	-15.50	68.20	Peak
3	11115.000	29.81	19.46	49.26	-24.74	74.00	Peak
4	14124.000	27.81	22.43	50.24	-17.96	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5755MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

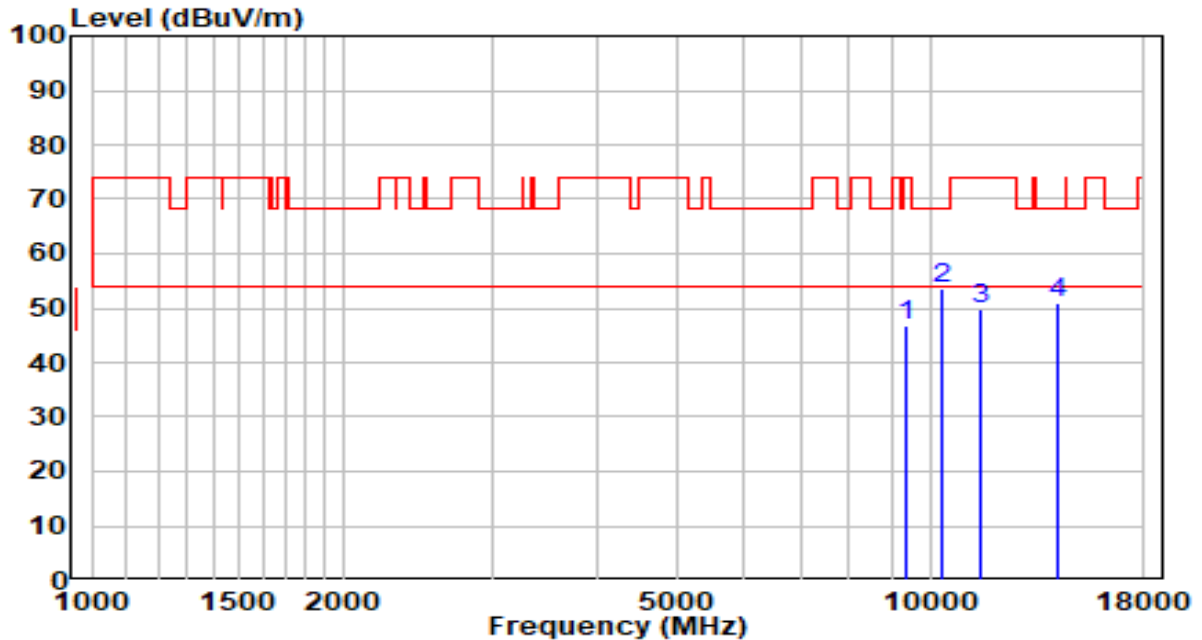


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	31.25	15.53	46.78	-27.22	74.00	Peak
2	* 10316.000	35.61	17.83	53.44	-14.76	68.20	Peak
3	11506.000	29.59	20.04	49.63	-24.37	74.00	Peak
4	14217.500	28.57	22.44	51.01	-17.19	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5755MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

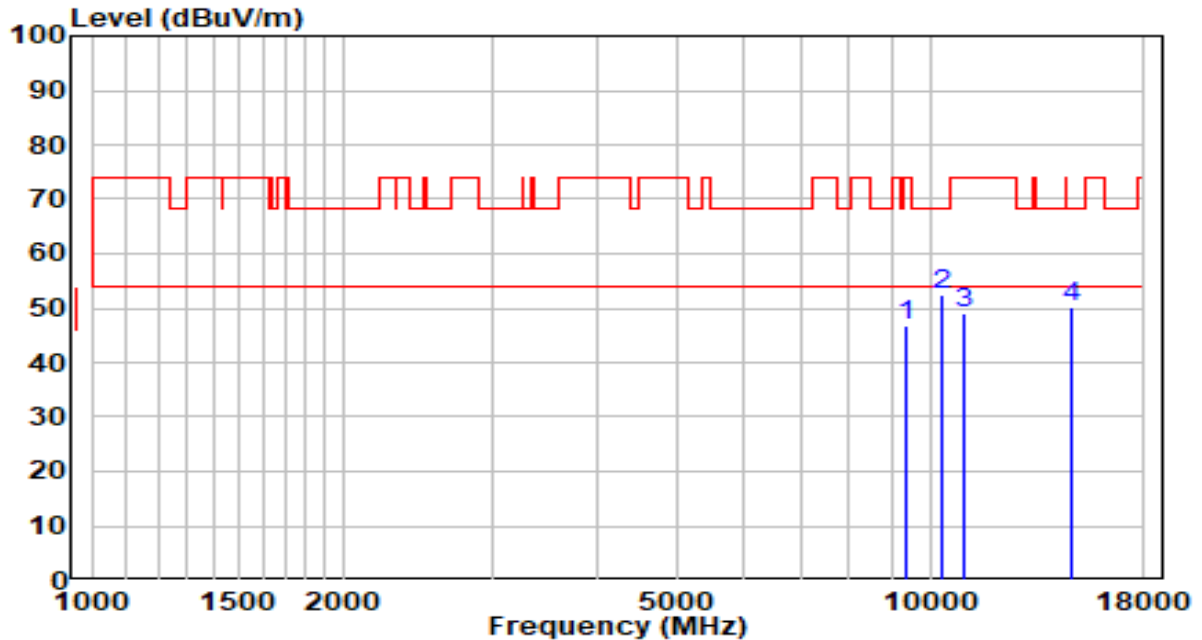


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	31.39	15.53	46.93	-27.07	74.00	Peak
2	* 10316.000	34.54	17.83	52.37	-15.83	68.20	Peak
3	10953.500	29.89	19.21	49.10	-24.90	74.00	Peak
4	14702.000	27.85	22.31	50.16	-18.04	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5795MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

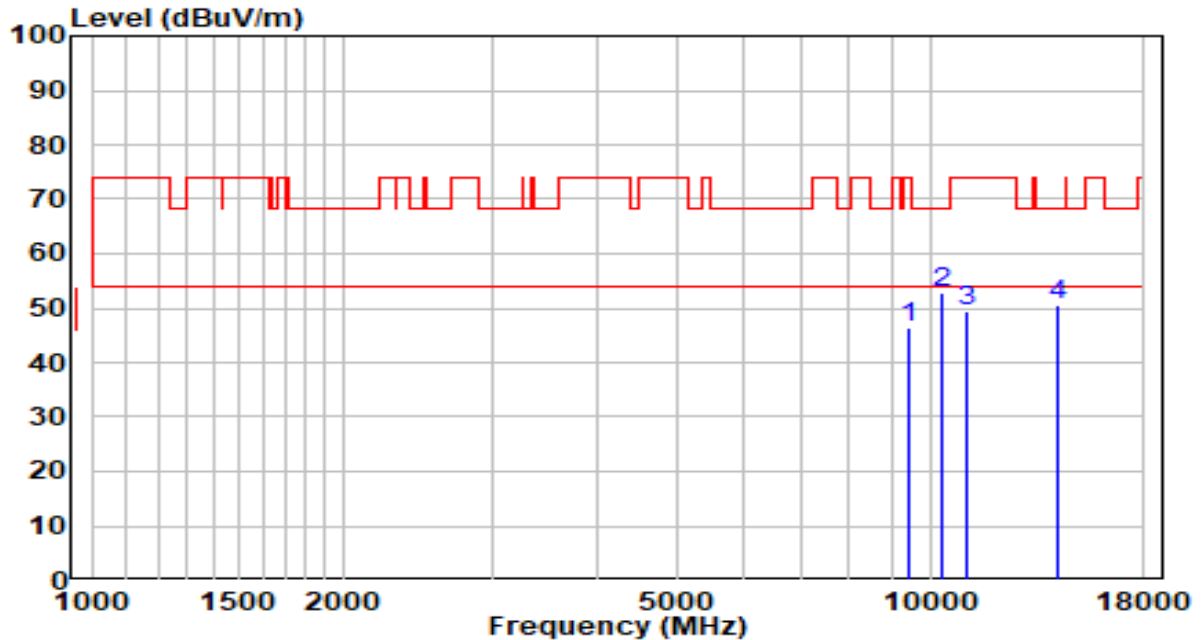


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9432.000	30.81	15.61	46.41	-27.59	74.00	Peak
2	* 10316.000	35.07	17.83	52.90	-15.30	68.20	Peak
3	11064.000	30.11	19.38	49.49	-24.51	74.00	Peak
4	14183.500	28.06	22.43	50.49	-17.71	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5795MHz by 802.11ac-VHT40	Test Voltage	AC 120V/60Hz

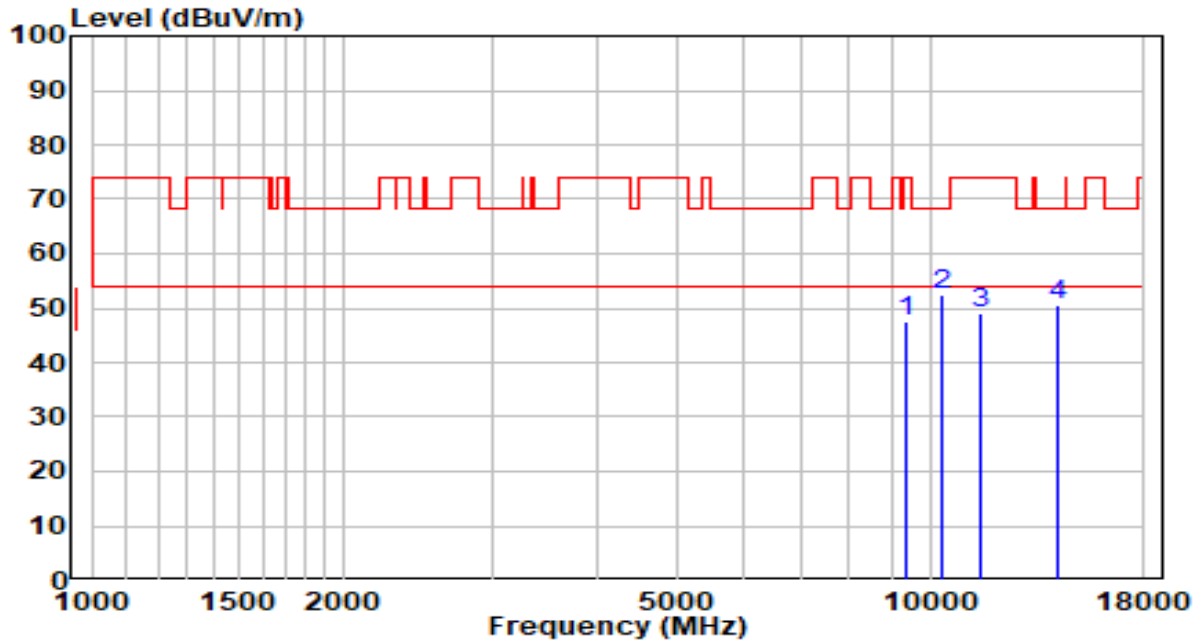


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9355.500	31.97	15.48	47.45	-26.55	74.00	Peak
2	* 10316.000	34.47	17.83	52.30	-15.90	68.20	Peak
3	11489.000	29.17	20.03	49.20	-24.80	74.00	Peak
4	14234.500	28.20	22.44	50.64	-17.56	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

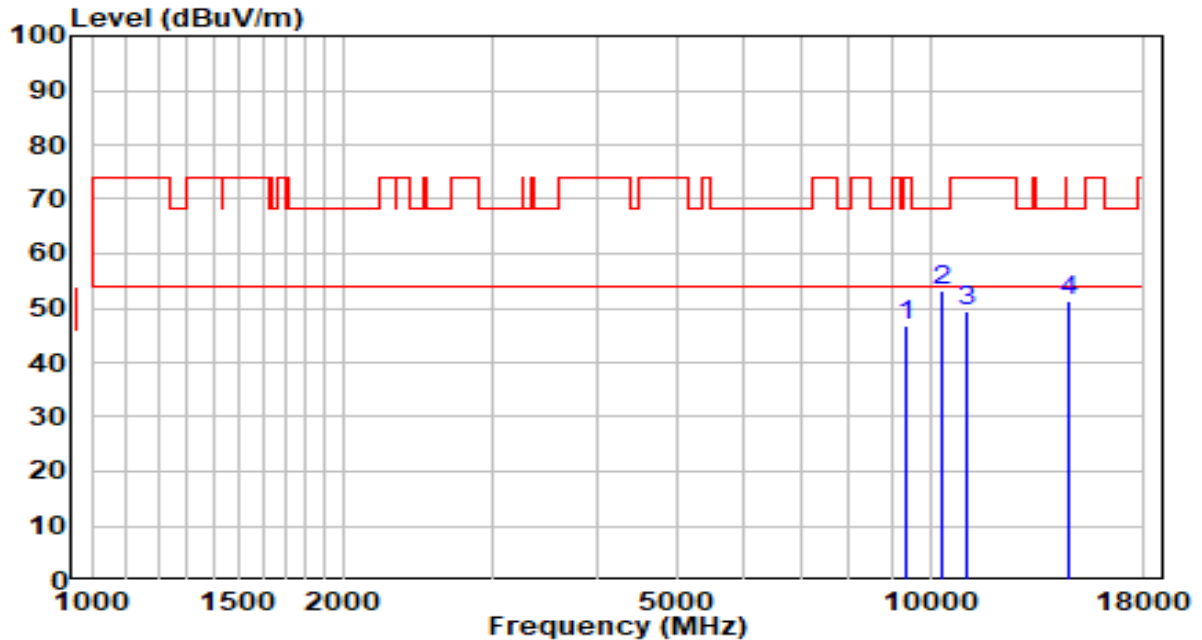


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	31.36	15.52	46.88	-27.12	74.00	Peak
2	* 10316.000	35.54	17.83	53.37	-14.83	68.20	Peak
3	11038.500	30.14	19.34	49.48	-24.52	74.00	Peak
4	14625.500	28.92	22.36	51.28	-16.92	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

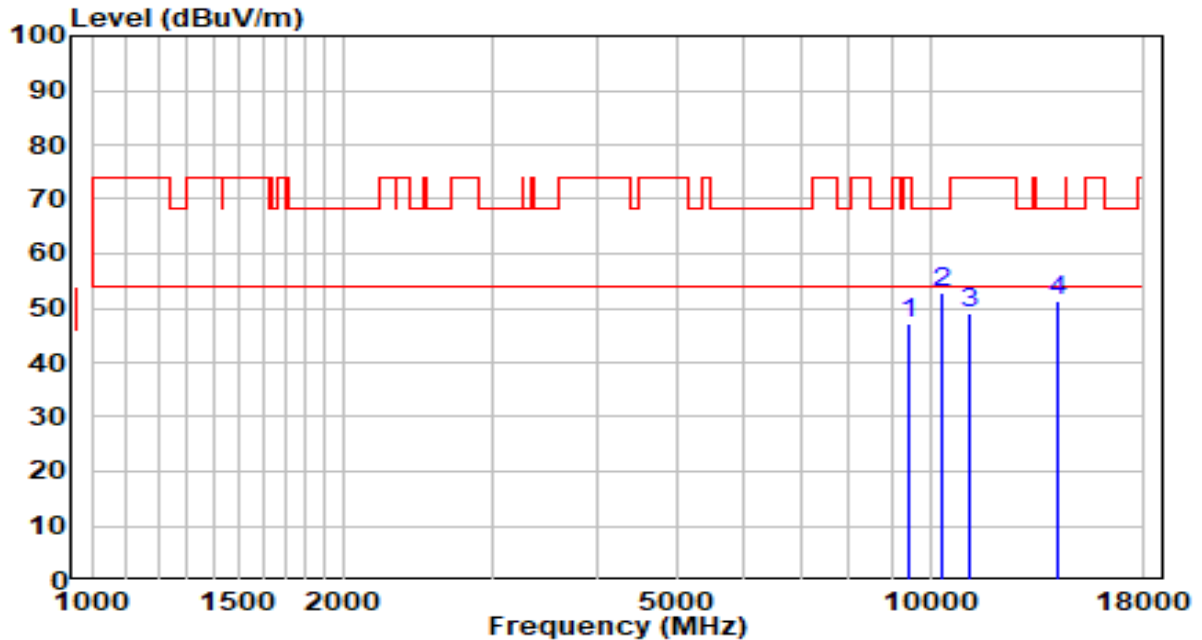


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9415.000	31.56	15.58	47.14	-26.86	74.00	Peak
2	* 10316.000	35.00	17.83	52.83	-15.37	68.20	Peak
3	11140.500	29.68	19.50	49.18	-24.82	74.00	Peak
4	14158.000	28.74	22.43	51.17	-17.03	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5290MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

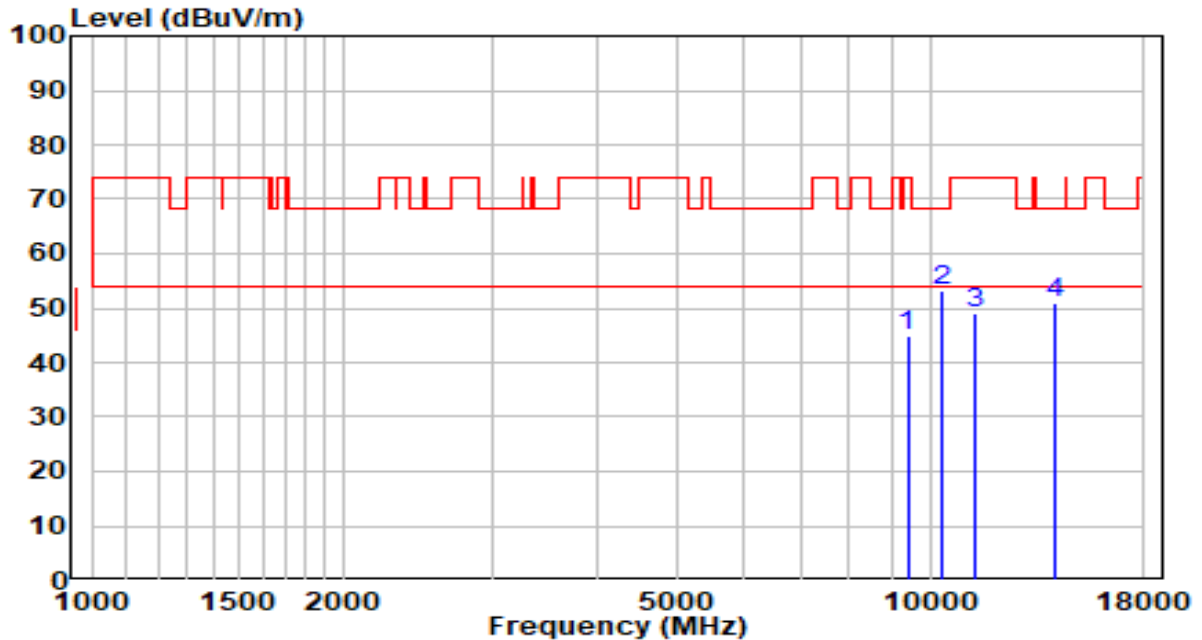


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9398.000	29.40	15.55	44.95	-29.05	74.00	Peak
2	* 10316.000	35.24	17.83	53.07	-15.13	68.20	Peak
3	11310.500	29.13	19.76	48.89	-25.11	74.00	Peak
4	14141.000	28.35	22.43	50.78	-17.42	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5290MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

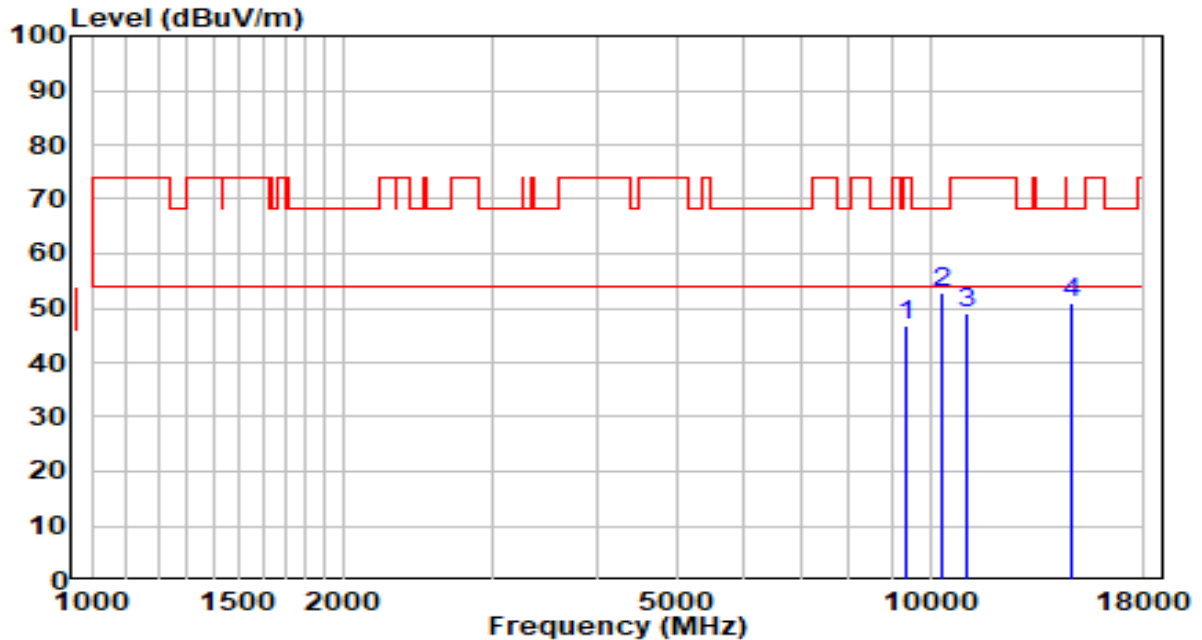


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	31.34	15.46	46.80	-27.20	74.00	Peak
2	* 10316.000	35.01	17.83	52.84	-15.36	68.20	Peak
3	11072.500	29.77	19.39	49.16	-24.84	74.00	Peak
4	14710.500	28.60	22.30	50.90	-17.30	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5530MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

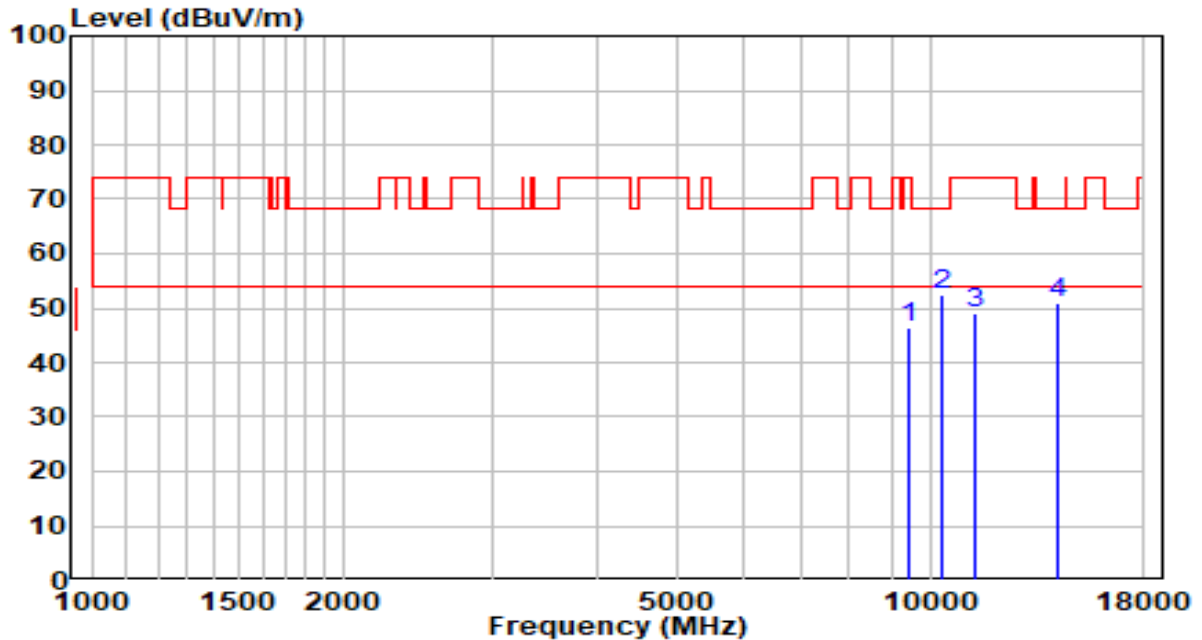


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9449.000	30.69	15.63	46.33	-27.67	74.00	Peak
2	* 10316.000	34.79	17.83	52.62	-15.58	68.20	Peak
3	11276.500	29.32	19.71	49.03	-24.97	74.00	Peak
4	14158.000	28.32	22.43	50.75	-17.45	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5530MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

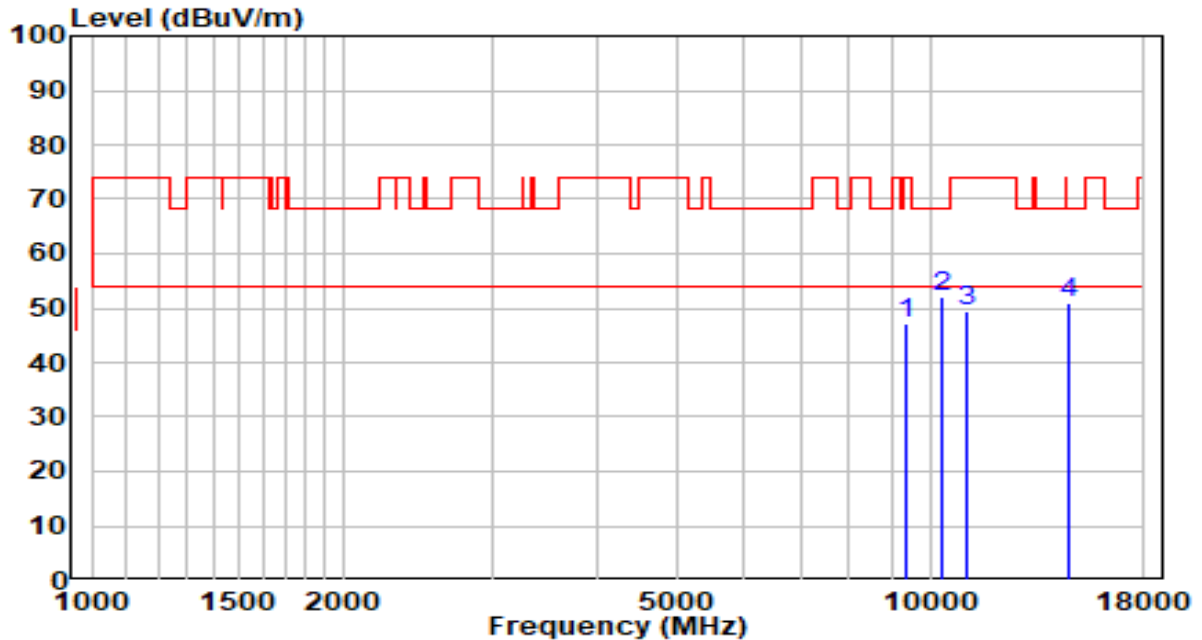


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9338.500	31.83	15.45	47.28	-26.72	74.00	Peak
2	* 10316.000	34.39	17.83	52.22	-15.98	68.20	Peak
3	11055.500	30.00	19.37	49.36	-24.64	74.00	Peak
4	14600.000	28.59	22.38	50.97	-17.23	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5610MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

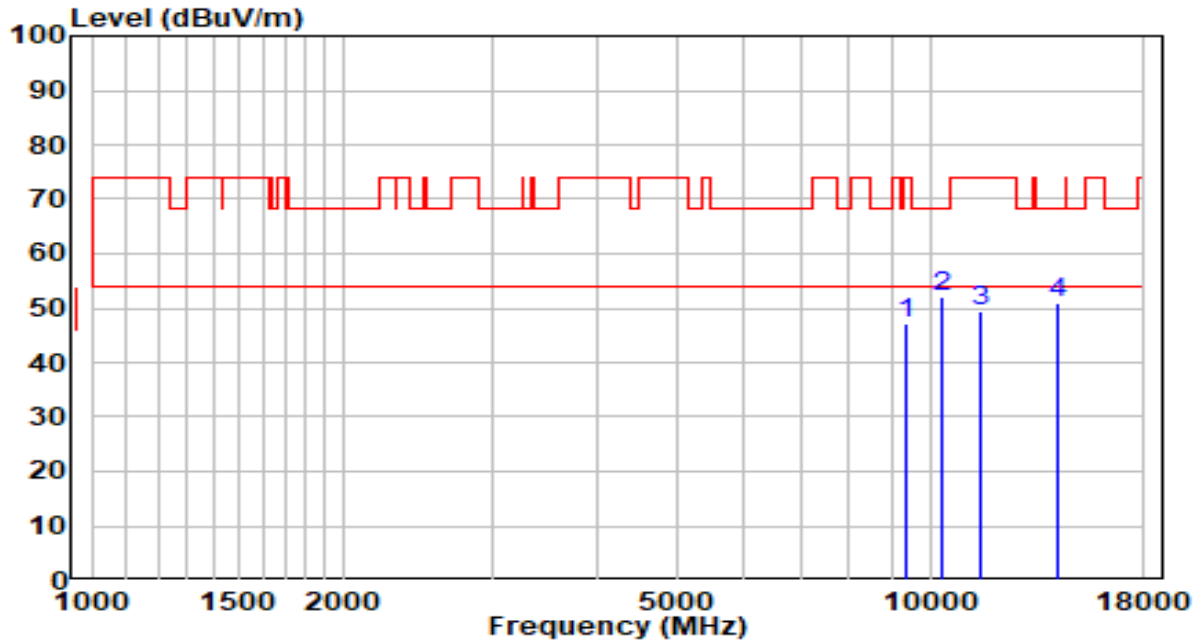


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9381.000	31.49	15.52	47.01	-26.99	74.00	Peak
2	* 10316.000	34.25	17.83	52.08	-16.12	68.20	Peak
3	11514.500	29.38	20.02	49.40	-24.60	74.00	Peak
4	14217.500	28.52	22.44	50.96	-17.24	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5610MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

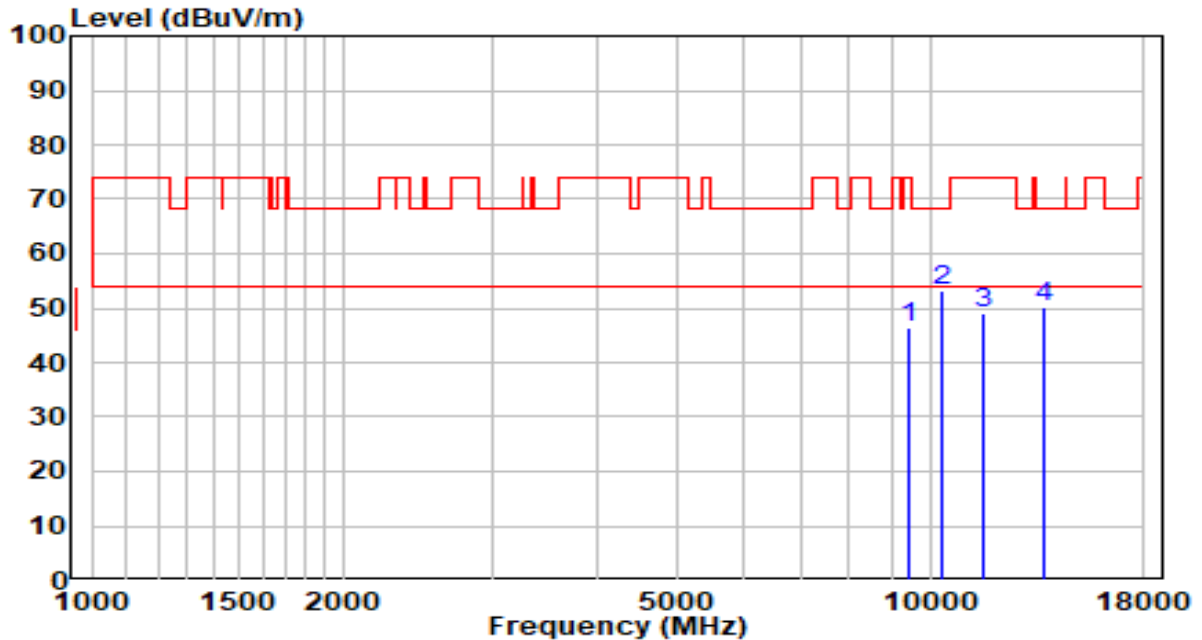


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9440.500	30.82	15.62	46.44	-27.56	74.00	Peak
2	* 10316.000	35.50	17.83	53.33	-14.87	68.20	Peak
3	11531.500	29.03	19.98	49.01	-24.99	74.00	Peak
4	13682.000	27.96	22.06	50.02	-18.18	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5690MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

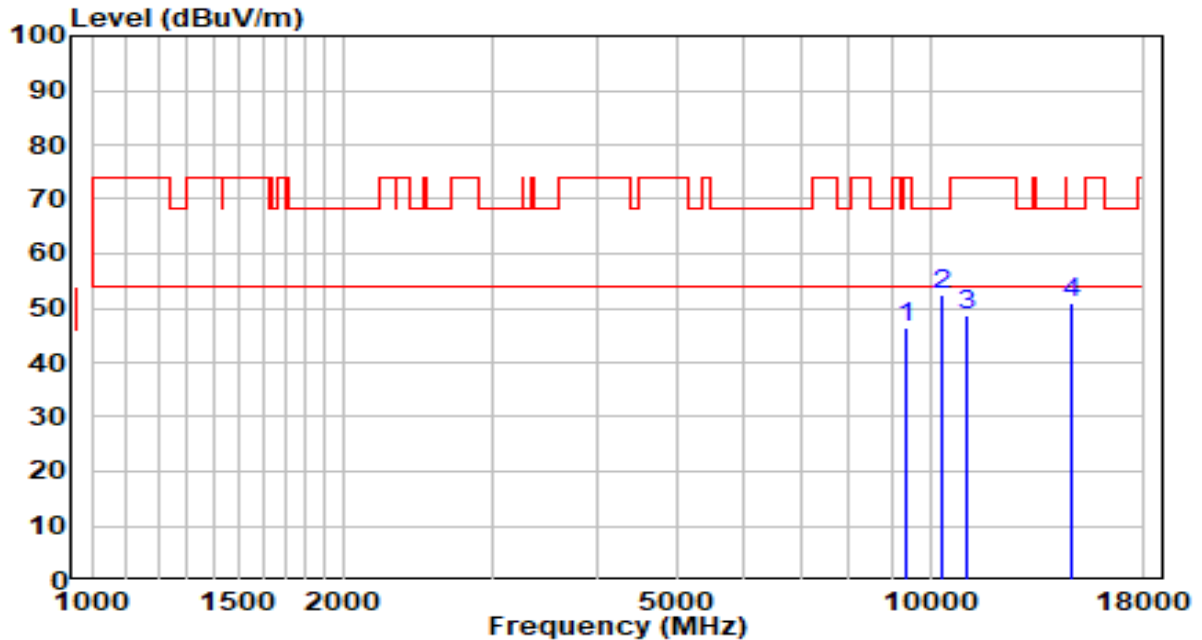


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	30.84	15.53	46.38	-27.62	74.00	Peak
2	* 10316.000	34.80	17.83	52.63	-15.57	68.20	Peak
3	11055.500	29.49	19.37	48.85	-25.15	74.00	Peak
4	14702.000	28.56	22.31	50.87	-17.33	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5690MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

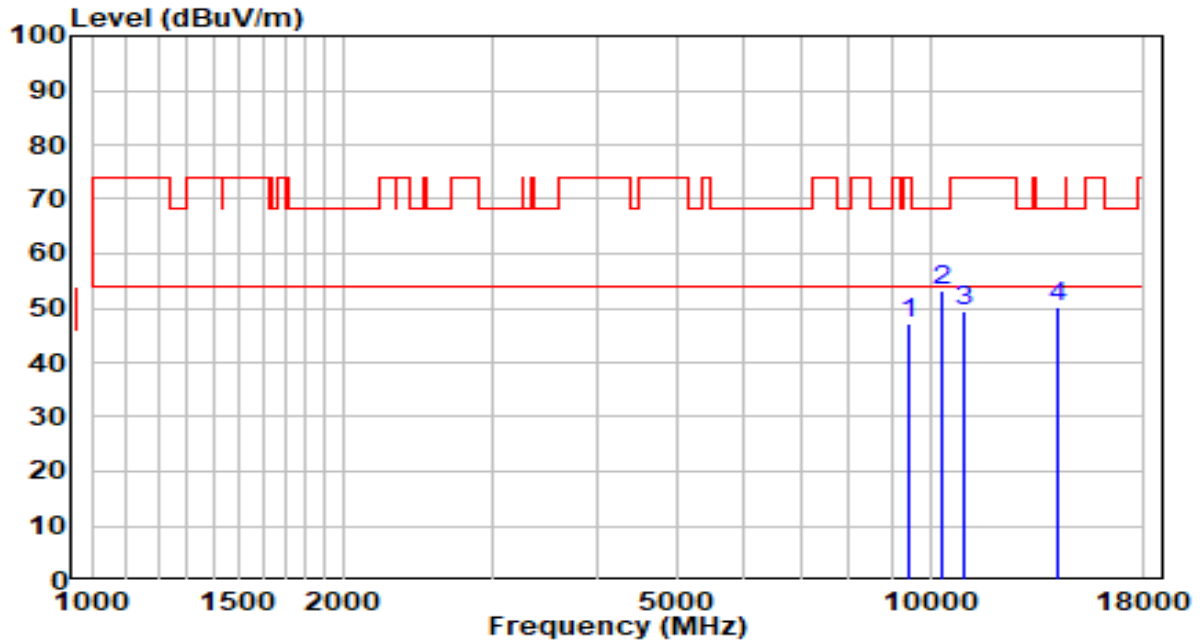


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9423.500	31.56	15.59	47.15	-26.85	74.00	Peak
2	* 10316.000	35.52	17.83	53.35	-14.85	68.20	Peak
3	10945.000	30.19	19.20	49.39	-24.61	74.00	Peak
4	14183.500	27.73	22.43	50.17	-18.03	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5775MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

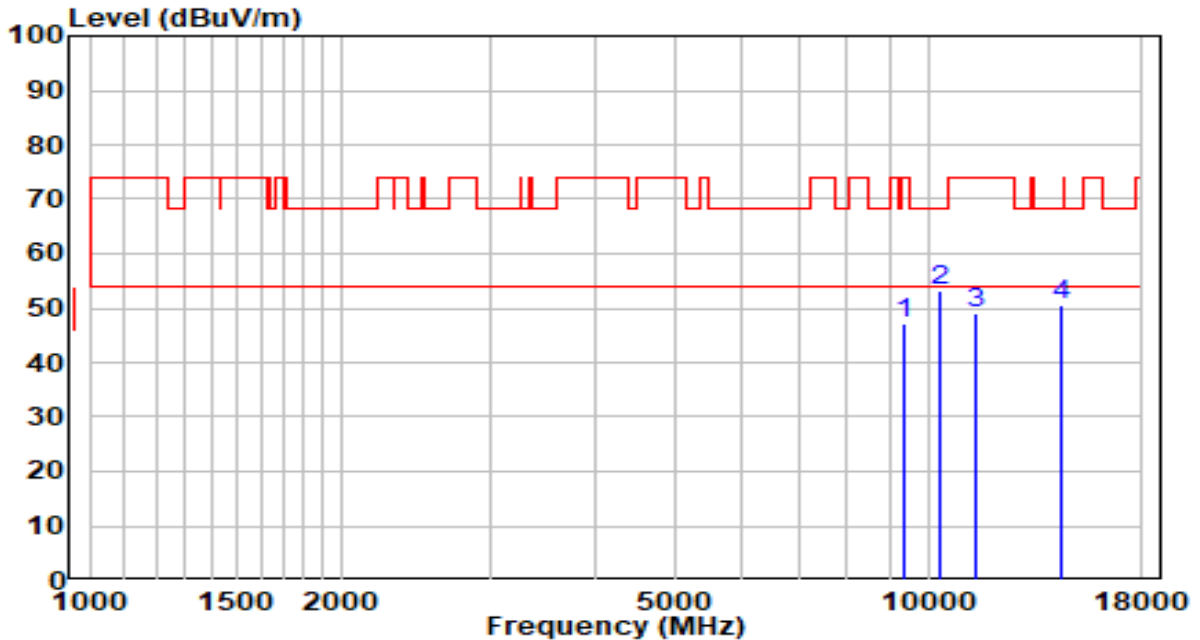


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	9389.500	31.61	15.53	47.14	-26.86	74.00	Peak
2	* 10316.000	35.41	17.83	53.24	-14.96	68.20	Peak
3	11429.500	29.11	19.94	49.05	-24.95	74.00	Peak
4	14413.000	27.98	22.45	50.43	-17.77	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5775MHz by 802.11ac-VHT80	Test Voltage	AC 120V/60Hz

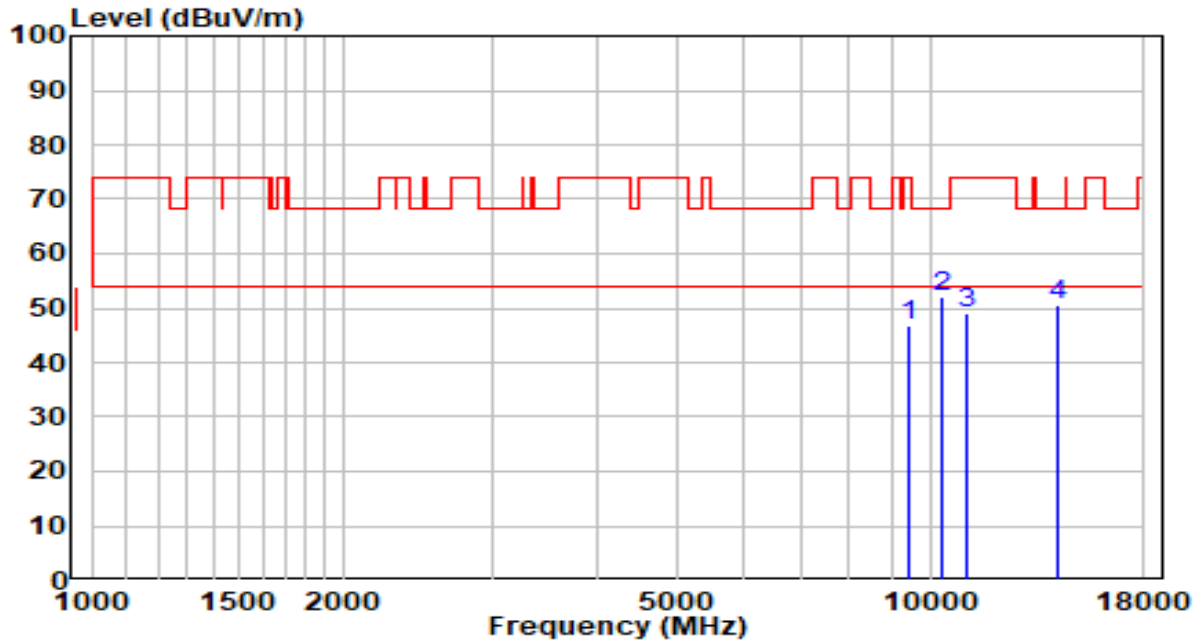


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9423.500	31.19	15.59	46.78	-27.22	74.00	Peak
2	* 10316.000	34.12	17.83	51.95	-16.25	68.20	Peak
3	11089.500	29.55	19.42	48.97	-25.03	74.00	Peak
4	14217.500	28.19	22.44	50.63	-17.57	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5210+5290MHz by 802.11ac-VHT80+80	Test Voltage	AC 120V/60Hz

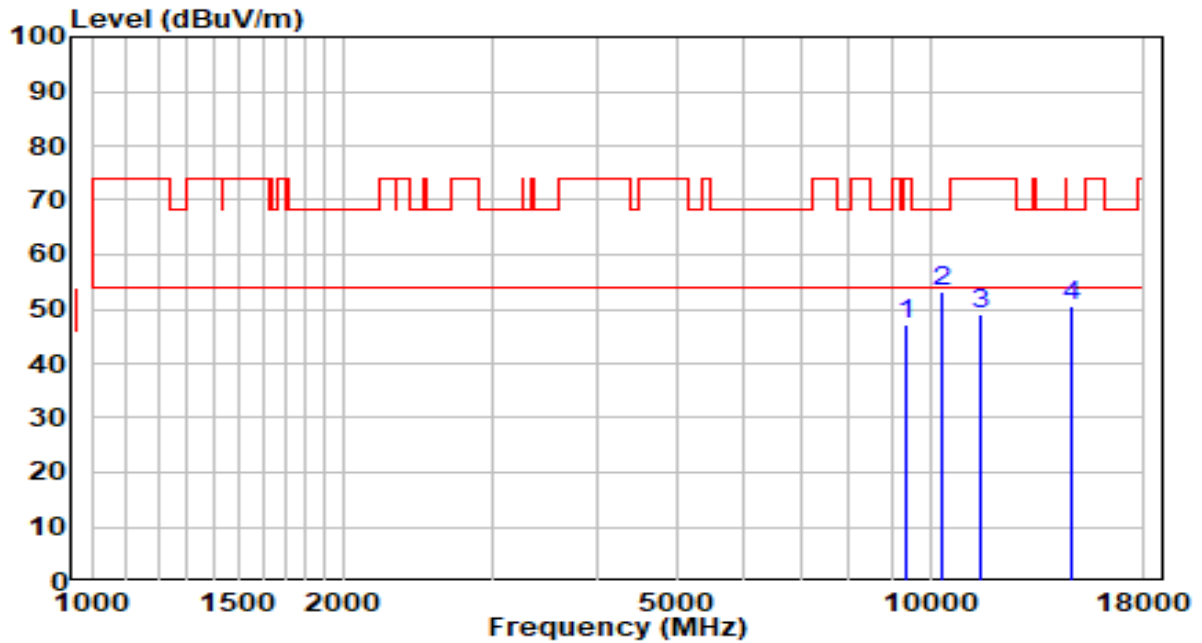


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9347.000	31.75	15.46	47.21	-26.79	74.00	Peak
2	* 10316.000	35.53	17.83	53.36	-14.84	68.20	Peak
3	11489.000	28.98	20.03	49.01	-24.99	74.00	Peak
4	14693.500	28.30	22.31	50.61	-17.59	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5210+5290MHz by 802.11ac-VHT80+80	Test Voltage	AC 120V/60Hz

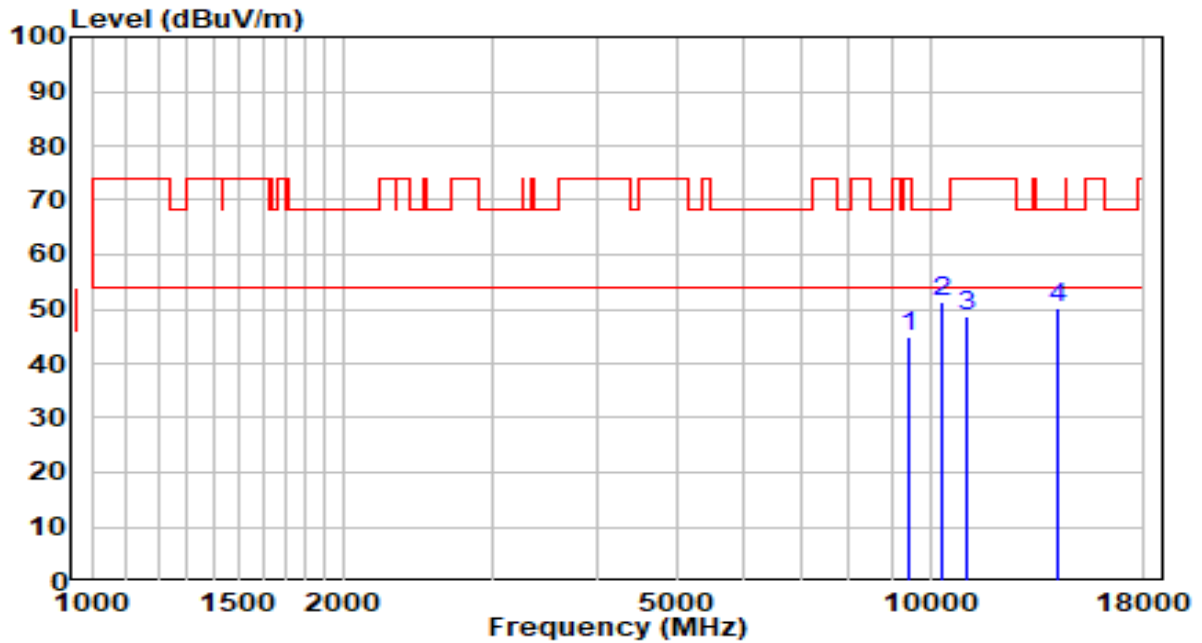


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9415.000	29.47	15.58	45.04	-28.96	74.00	Peak
2	* 10316.000	33.61	17.83	51.44	-16.76	68.20	Peak
3	11030.000	29.36	19.33	48.69	-25.31	74.00	Peak
4	14217.500	27.75	22.44	50.18	-18.02	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5290+5210MHz by 802.11ac-VHT80+80	Test Voltage	AC 120V/60Hz

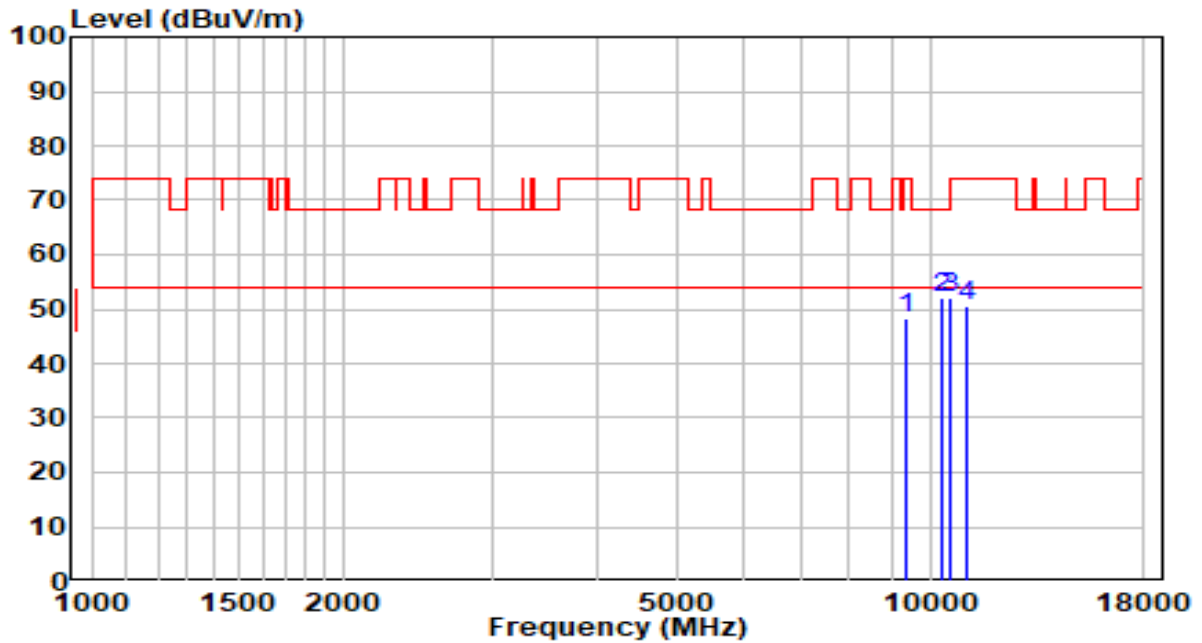


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9355.500	32.95	15.48	48.43	-25.57	74.00	Peak
2	* 10316.000	34.39	17.83	52.22	-15.98	68.20	Peak
3	10579.500	33.38	18.68	52.06	-16.14	68.20	Peak
4	11030.000	31.14	19.33	50.47	-23.53	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5290+5210MHz by 802.11ac-VHT80+80	Test Voltage	AC 120V/60Hz

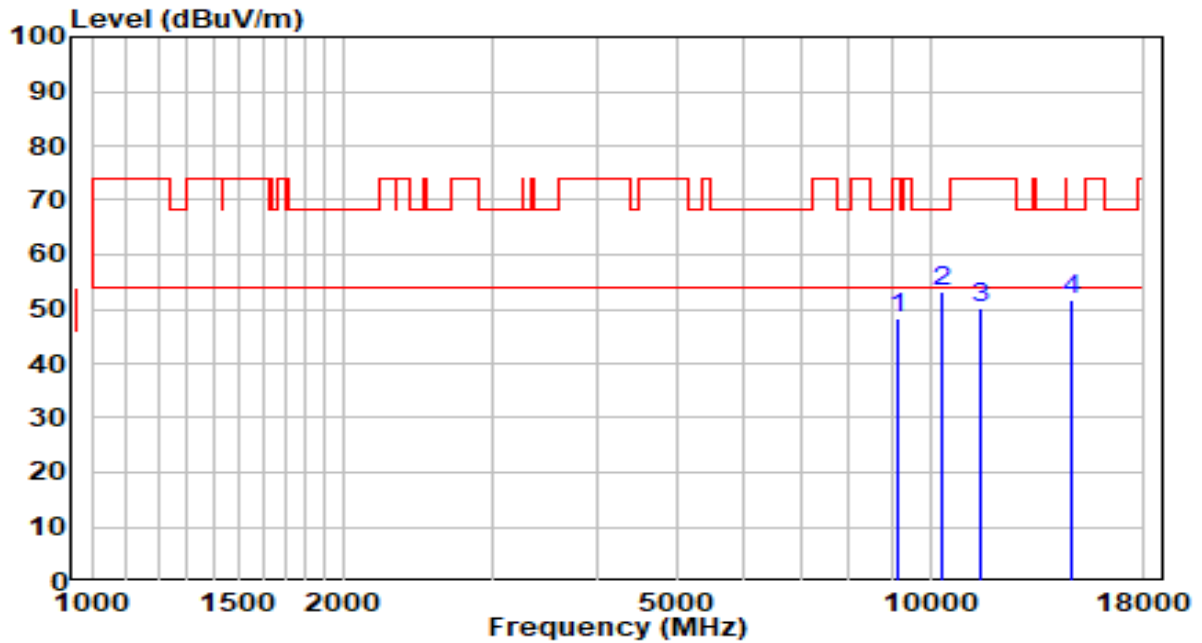


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9143.000	33.01	15.12	48.13	-25.87	74.00	Peak
2	* 10316.000	35.19	17.83	53.02	-15.18	68.20	Peak
3	11497.500	30.05	20.05	50.10	-23.90	74.00	Peak
4	14693.500	29.53	22.31	51.85	-16.35	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5530+5610MHz by 802.11ac-VHT80+80	Test Voltage	AC 120V/60Hz

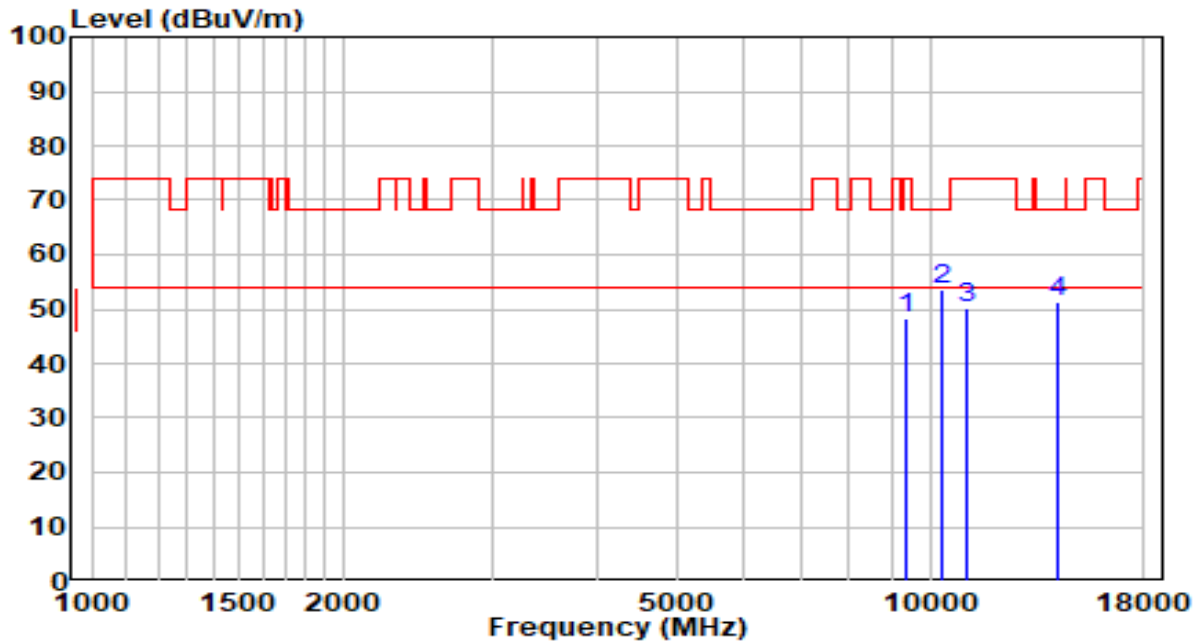


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9389.500	32.77	15.53	48.30	-25.70	74.00	Peak
2	* 10316.000	35.86	17.83	53.69	-14.51	68.20	Peak
3	11055.500	30.97	19.37	50.33	-23.67	74.00	Peak
4	14200.500	28.99	22.43	51.42	-16.78	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	HAN Access Point	Date of Test	2021-11-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23°C/53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	Transmit at 5530+5610MHz by 802.11ac-VHT80+80	Test Voltage	AC 120V/60Hz

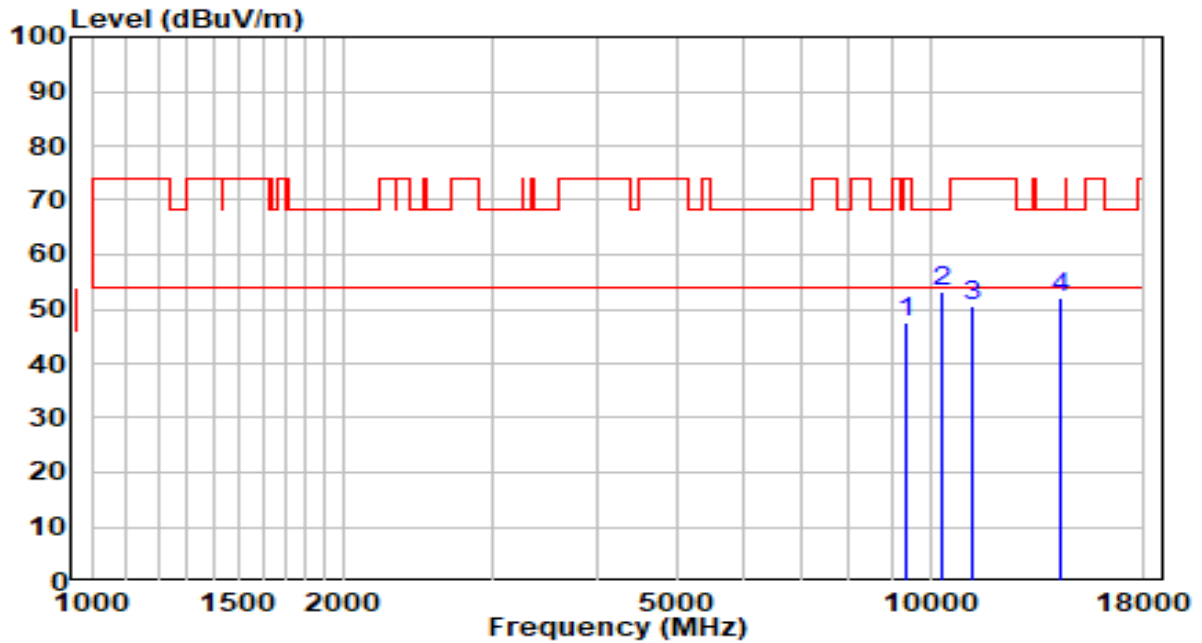

No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	9355.500	31.89	15.48	47.37	-26.63	74.00	Peak
2	* 10316.000	35.56	17.83	53.39	-14.81	68.20	Peak
3	11217.000	30.89	19.61	50.51	-23.49	74.00	Peak
4	14345.000	29.45	22.44	51.89	-16.31	68.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).