



Date: Jul. 19,2021

Page 171 of 189

WIFI MODE

Test Laboratory: AGC Lab 802.11b Low-Touch-Left

DUT: Mobile phone; Type: P60

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.32;

Frequency: 2412 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.79 \text{mho/m}$; $\epsilon r = 39.72 \ \rho = 1000 \ \text{kg/m}^3$;

Phantom section: Left Section

Ambient temperature (°C):22.0, Liquid temperature (°C): 21.7

SATIMO Configuration:

• Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

· Measurement SW: OpenSAR V4_02_35


Configuration/802.11b Low - Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Low - Touch-Left/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm	
Phantom	Left head	
Device Position	Cheek	
Band	2450MHz	
Channels	Low	
Signal	Crest factor: 1.0	

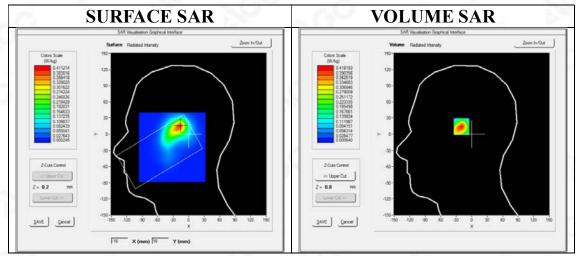



Maximum location: X=-18.00, Y=15.00 SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.188910
SAR 1g (W/Kg)	0.380393





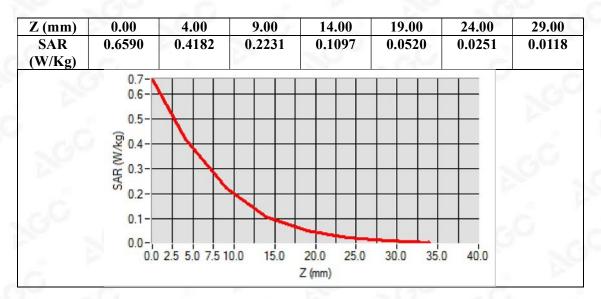

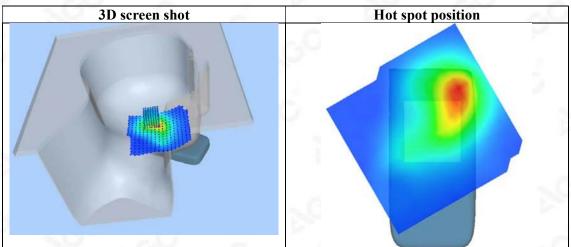



Page 173 of 189

Test Laboratory: AGC Lab

802.11b Low -Body-Worn- Back

Date: Jul. 19,2021

DUT: Mobile phone; Type: P60

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.32; Frequency: 2412 MHz; Medium parameters used: f = 2450 MHz; $\sigma = 1.79 \text{mho/m}$; $\epsilon r = 39.72$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature (°C):22.0, Liquid temperature (°C): 21.7

SATIMO Configuration:

· Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/802.11b Low - Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Low - Body- Back /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	2450MHz
Channels	Low
Signal	Crest factor: 1.0

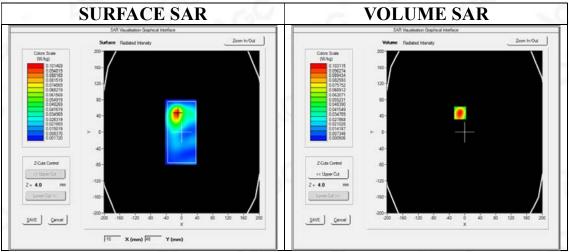



Maximum location: X=-12.00, Y=47.00 SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.049965
SAR 1g (W/Kg)	0.097945





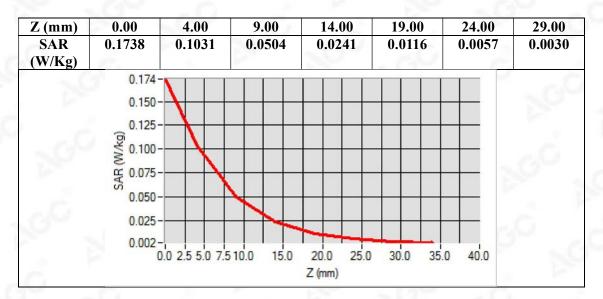

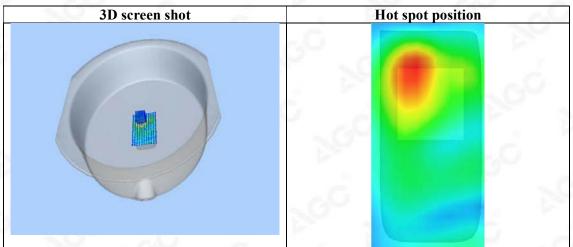



Page 175 of 189

Repeated SAR

Test Laboratory: AGC Lab Date: Jul. 26,2021

WCDMA Band IV High-Body-Towards Phantom (RMC)

DUT: Mobile phone; Type: P60

Communication System: UMTS; Communication System Band: BAND IV UTRA/FDD; Duty Cycle:1: 1; Conv.F=4.48; Frequency:1752.6 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.36 \text{ mho/m}$; $\epsilon = 40.86$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

· Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4 02 35

Configuration/ WCDMA Band IV High-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ WCDMA Band IV High-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete	
Phantom	ELLI	
Device Position	Body Front	
Band	WCDMA Band IV	
Channels	High	
Signal	CDMA (Crest factor: 1.0)	

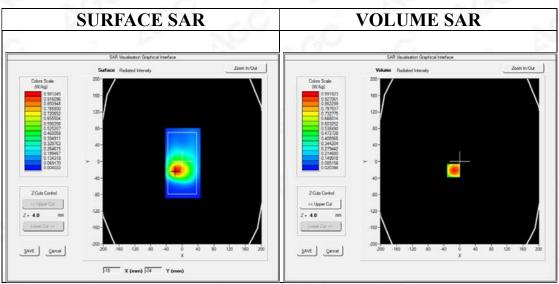

Maximum location: X=-16.00, Y=-22.00

SAR Peak: 1.48 W/kg

SAR 10g (W/Kg)	0.561525	
SAR 1g (W/Kg)	0.952507	

Z (mm) 0.00 4.00	9.00 14.00	19.00 24.00	29.00
------------------	------------	-------------	-------



SAR (W/Kg) 1.4685 0.9918 0.5999 0.3682 0.2266 0.1379 0.0841


15.0

20.0 Z (mm)

0.0 2.5 5.0 7.5 10.0

30.0

35.0

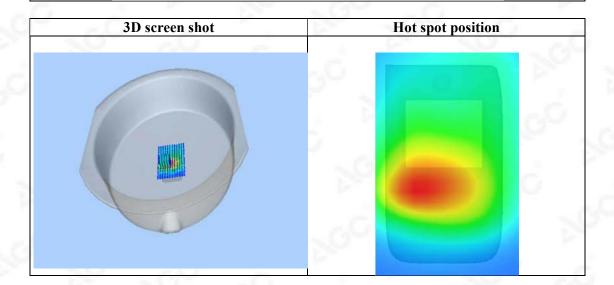



Date: Jul. 21,2021

Page 177 of 189

The test results

Test Laboratory: AGC Lab

LTE Band 7 Mid-Body-Back (1RB#0) DUT: Mobile phone; Type: P60

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.87 Frequency: 2535MHz; Medium parameters used: f =2600 MHz; σ =1.85 mho/m; ϵ r =40.53; ρ = 1000 kg/m³;

Phantom section: Flat Section

Ambient temperature ($^{\circ}$ C): 21.5, Liquid temperature ($^{\circ}$ C): 21.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4_02_35


Configuration/ LTE BAND 7 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

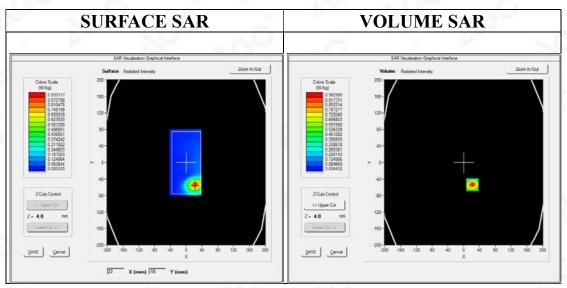


Maximum location: X=22.00, Y=-54.00 SAR Peak: 1.61 W/kg

SAR 10g (W/Kg)	0.446766
SAR 1g (W/Kg)	1.011832





Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.6203	0.9830	0.4993	0.2516	0.1266	0.0632	0.0319
70	1.6- 1.4- 1.2						Nº.
	0.0 SAR (W/kg)						
	0.2	2.5 5.0 7.5 1		20.0 25.0 Z (mm)	30.0 35	.0 40.0	

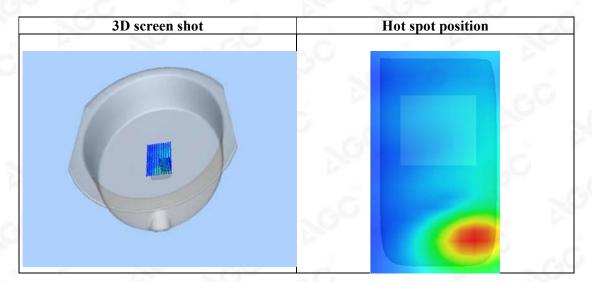



Page 179 of 189

Test Laboratory: AGC Lab Date: Jul. 25,2021

LTE Band 66 Low-Body-Back (1 RB#0) DUT: Mobile phone; Type: P60

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=4.48; Frequency:1720 MHz; Medium parameters used: f = 1800 MHz; $\sigma = 1.33 \text{ mho/m}$; $\epsilon r = 41.26$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature (°C): 21.1, Liquid temperature (°C): 20.9

SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: ELLI39 Phantom

· Measurement SW: OpenSAR V4 02 35


Configuration/ LTE Band 66 Low-Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Low-Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	Low
Signal	OFDM (Crest factor: 1.0)

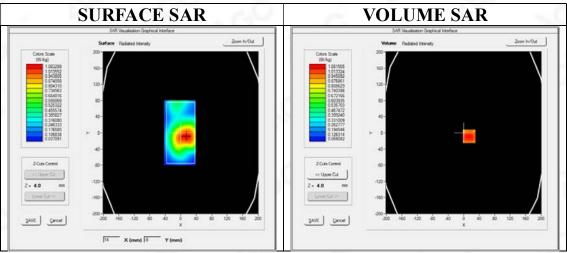



Maximum location: X=14.00, Y=-9.00 SAR Peak: 1.47 W/kg

SAR 10g (W/Kg)	0.690713
SAR 1g (W/Kg)	1.041526





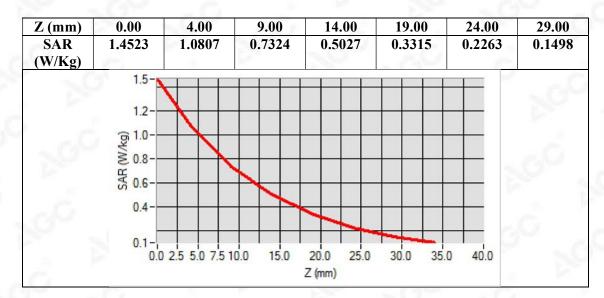

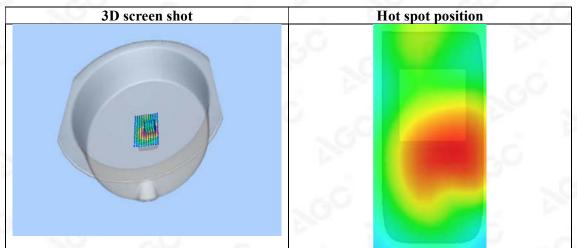




Page 181 of 189

APPENDIX C. TEST SETUP PHOTOGRAPHS

LEFT-CHEEK TOUCH



LEFT-TILT 15^o

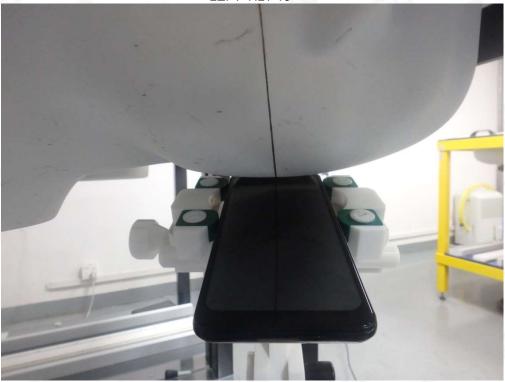




Page 182 of 189








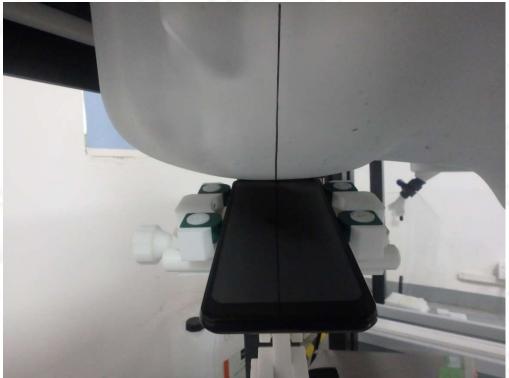




Page 183 of 189











Page 184 of 189





Edge 2(Right) 10mm-Hotspot Mode






Page 185 of 189

Edge 3(Bottom) 10mm-Hotspot Mode





Edge 4(Left) 10mm-Hotspot Mode

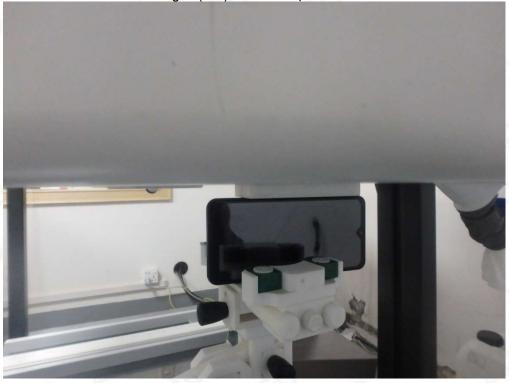



Page 186 of 189



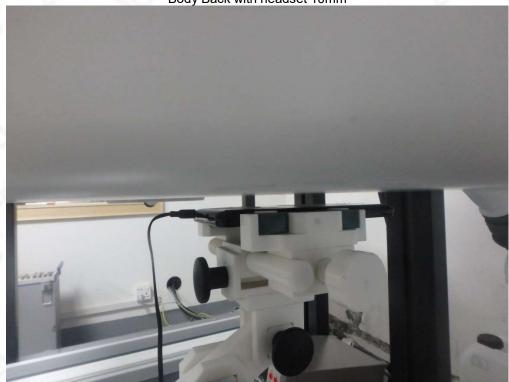




Page 187 of 189


DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013

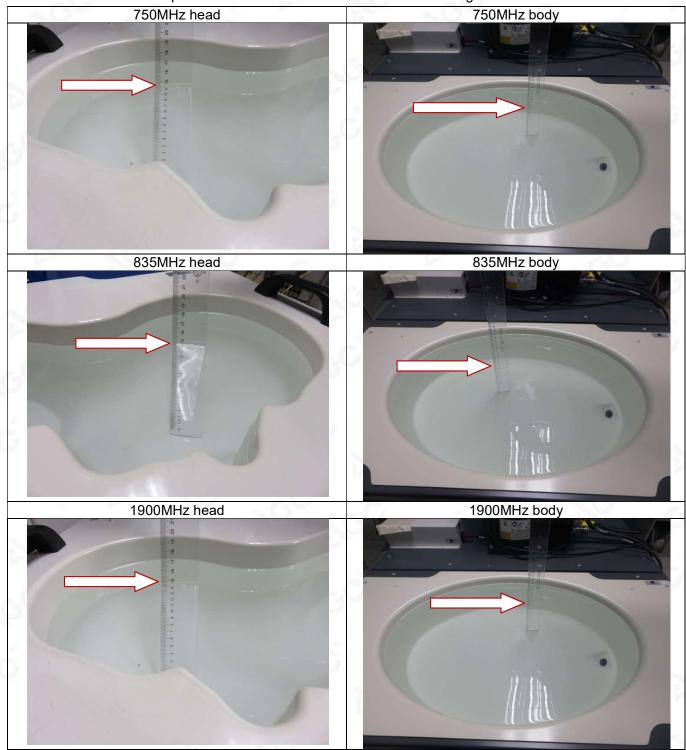



Report No.: AGC10211210705FH01 Page 188 of 189

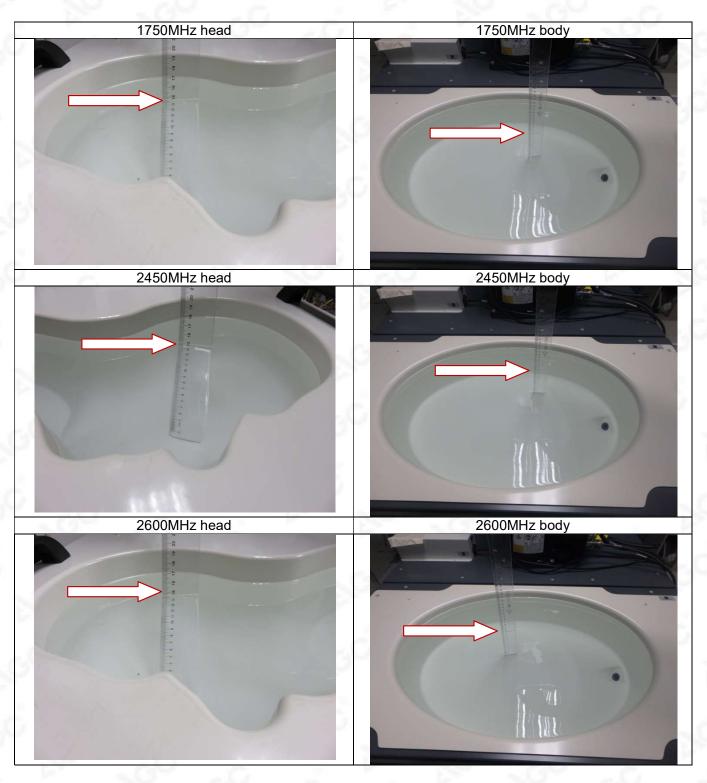



Page 189 of 189

APPENDIX D. CALIBRATION DATA

Refer to Attached files.



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis hat such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or inpart and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplieror other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages

The test results

he test report.