


封面

MOBILE POS TERMINAL

• INSTRUCTION •

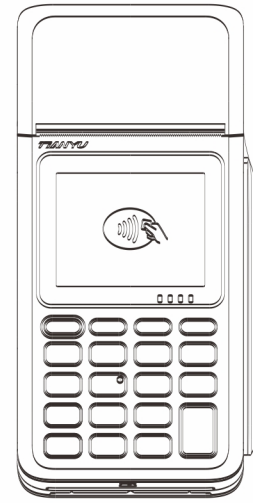

Please read the information below before using the device:

When you take the device out of the box, the battery is not fully charged. When using the device for the first time, please perform a complete charge and discharge.

In order to ensure the charging effect, please use the original power adapter and power/data cable.

The device is equipped with a removable lithium battery. Please turn off before removing the battery.

If you disassemble or tamper with the casing of the device, the product will lose some functions and warranty qualification.

It is only suitable for safe use below 5000 meters above sea level.

Note: Replacement with the wrong battery type may cause explosion hazard. Please be sure to follow the instructions on the battery to dispose of the used battery.

1 ACCESSORIES




The Device



Instruction




Power Adapter



USB Charge Cable

2 DEVICE LAYOUT

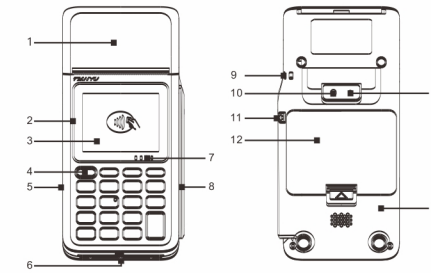


- 1. Paper roll compartment
- 2. NFC
- 3. Screen
- 4. Keypad
- 5. Type-c
- 6. IC card slot
- 7. Status indicators
- 8. Magstripe card slot
- 9. Lanyard hole
- 10. Camera
- 11. Stylus pen
- 12. Battery compartment
- 13. Flashlight
- 14. Beeper

3 POWER CHARGING

It is recommended to charge the battery before turning on and starting to use the device.

1. Insert the TYPE-C connector of the USB data cable into the TYPE-C interface of the device.
2. Insert the other end of the USB data cable into the port at the end of the power adapter.
3. Insert the power plug of the power adapter into the power socket to start power charging.



WARRANTY TERMS

Name of Product: _____

Model of Product: _____

Warranty Terms & Conditions:

1. We will provide you with excellent after-sales service.
2. Damage such as a user due to human factors, the company's repair charge/maintenance fees.
3. Please keep this card, the warranty will be based on it.

CERTIFICATE OF QUALITY

The product has been tested and proved to be qualified for delivery.

Inspector: _____


Inspection Date: _____



4 INSTALL SIM/SAM CARDS

Attentions! Please keep the device power off before operation

1. Lay the device flat and keep it face down
2. Open the back cover and remove the battery
3. Insert the SIM/SAM card in the direction shown in the figure
4. Connect the battery and close the back cover

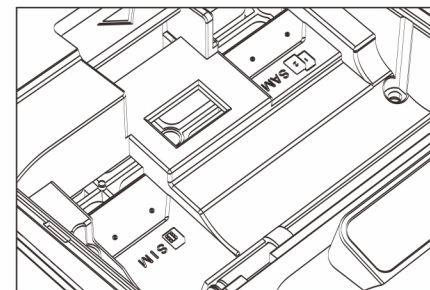

5 INSTALL PRINTER PAPER



1. Open the print compartment cover
2. Insert the printing paper roll as shown in the figure, and leave a few printing paper outside
3. Close the cover of the print compartment, pull the print paper lightly, and confirm that the print paper is installed securely



6 CARD OPERATION

Magstripe Card

Please insert magstripe card into card slot. Turn the magstripe towards the device screen when swiping and swipe the card smoothly and stably. Do not lift the card when swiping.



IC Card
Turn the chip side face up when inserting the IC card.

Contactless Card
Hold the contactless card close to the sensing area when using. The sensing area is around the screen.



Statements

Within one year from the date of purchase, if the product has quality problems during normal use within the scope of specification and operation manual of this device, the company will provide free maintenance based on this warranty card and the purchase invoice.


Copyright

This document is an inseparable part of the product. The copyright of this product its related documents belong to Wuhan Tianyu Information Industry Co., Ltd. No part of this document may be reproduced or transmitted in any form or for any reason without the written authorization or permission of Wuhan Tianyu Information Industry Co., Ltd.

Disclaimer

Due to product updates, some details of this document may be inconsistent with the product. Please refer to the actual product. Tianyu reserves the right to modify this manual without prior notice.

封底



折页示意

材质:100g书写纸; 规格:68*110mm

物料编码:1049800151;物料名称:无线POS终端TP50 说明书/英文通用/HY

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

SAR Statement for Monitor

Specific Absorption Rate (SAR) information:

This POS Terminal meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. ISED RF Exposure Information and Statement the SAR limit of Canada (ISED) is 1.6 W/kg averaged over one gram of tissue. Device types: POS Terminal has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the POS Terminal kept 0mm from the body. To maintain compliance with ISED RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the POS Terminal. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISED RF exposure requirements, and should be avoided.