



FCC PART 15.247

TEST REPORT

For

Wave WiFi, Inc.

4828 NE 12th Ave, Oakland Park, FL 33334, USA

FCC ID: 2ALM9WWR

Report Type: Original Report	Product Type: Rogue PRO's
Report Number: RSZ170310005-00B	
Report Date: 2017-04-10	
Oscar Ye	
Reviewed By: Engineer	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST RESULTS SUMMARY	23
TEST DATA	24
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST DATA	46
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	54

APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST DATA	54
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(e) - POWER SPECTRAL DENSITY	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Wave WiFi, Inc.'s product, model number: *Rogue Wave* (FCC ID: 2ALM9WWR) or the "EUT" in this report was a *Rogue PRO's*, which was measured approximately: 705 mm (L) × 44 mm (W) × 36 mm (H), rated with input voltage: DC 12.0V from RJ45 port.

Adapter Information:

Model: DSA-12PFG-12 FUS 120100

Input: AC100-240V, 50/60Hz, 0.5A

Output: 12V, 1A

Notes: This series products model: Rogue Reach and Rogue Wave PRO, Rogue Wave are identical; they have the identical schematics, only difference among them is model number and material type (metal for Rogue Wave PRO, plastic for Rogue Wave, and fiberglass for Rogue Reach) also size and shape of the casing for aesthetics and mounting purposes. Model Rogue Wave was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1700383-A(Rogue Wave), 1700383-B(Rogue Reach), 1700383-C(Rogue Wave PRO),(Assigned by BACL, Kunshan).The EUT supplied by the applicant was received on 2017-03-10.*

Objective

This report is prepared on behalf of Wave WiFi, Inc. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2ALM9WWR.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		± 3.26 dB
RF conducted test with spectrum		± 0.9 dB
RF Output Power with Power meter		± 0.5 dB
Radiated emission	30MHz~1GHz	± 5.91 dB
	Above 1G	± 4.92 dB
Occupied Bandwidth		± 0.5 kHz
Temperature		± 1.0 °C
Humidity		$\pm 6\%$

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“MT7620QA” was used.

The device was tested with 100% duty cycle and the worst case was performed as below:

802.11b: Data rate: 1 Mbps, Power level: 0

802.11g: Data rate: 6 Mbps, Power level: 0


802.11n-HT20: Data rate: MCS0, Power level: 0

802.11n-HT40: Data rate: MCS0, Power level: 5


Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.

Duty cycle


802.11b mode

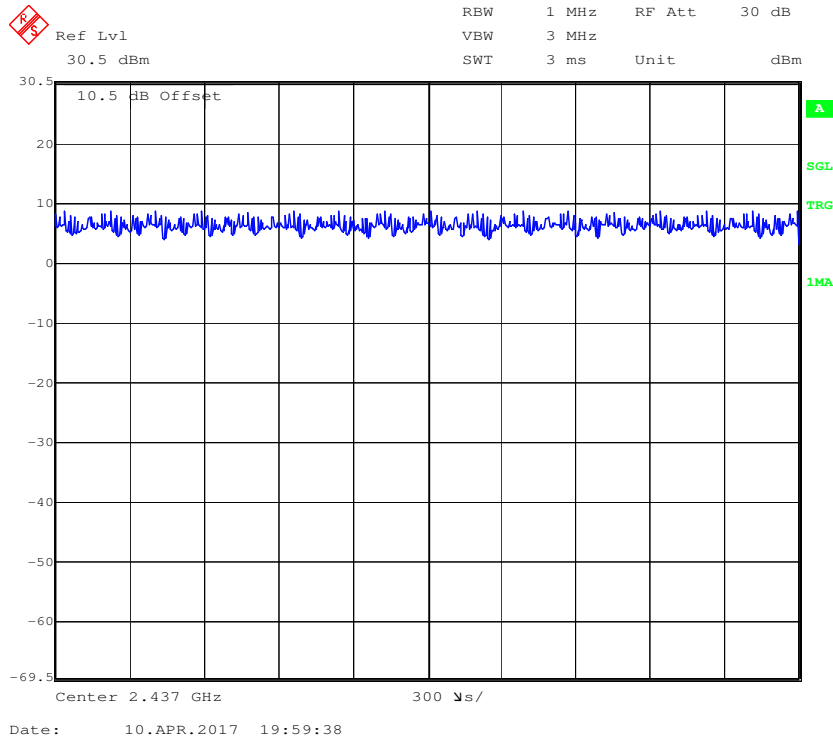


802.11g mode

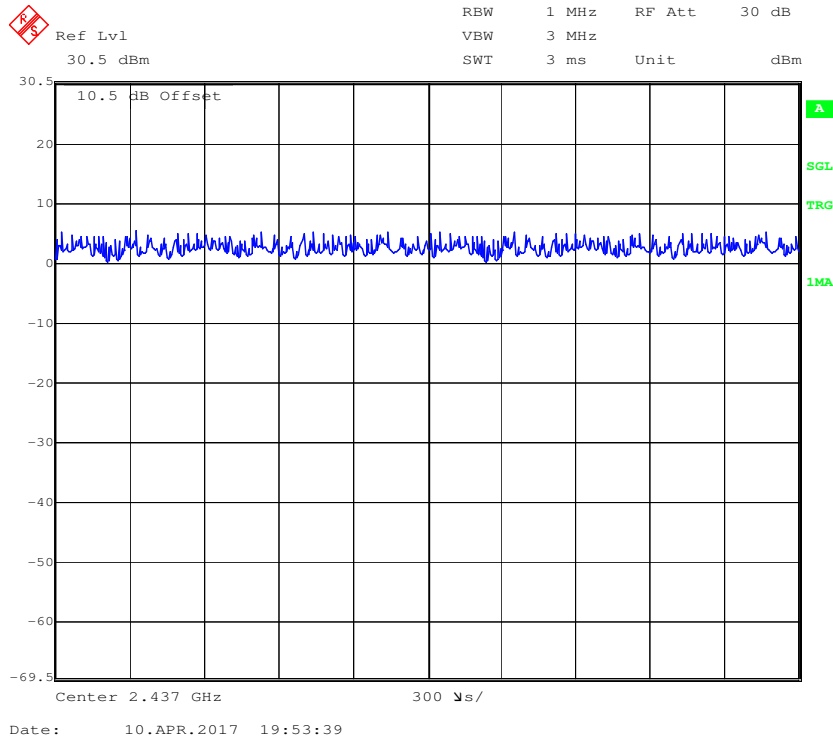

802.11n-HT20 Mode

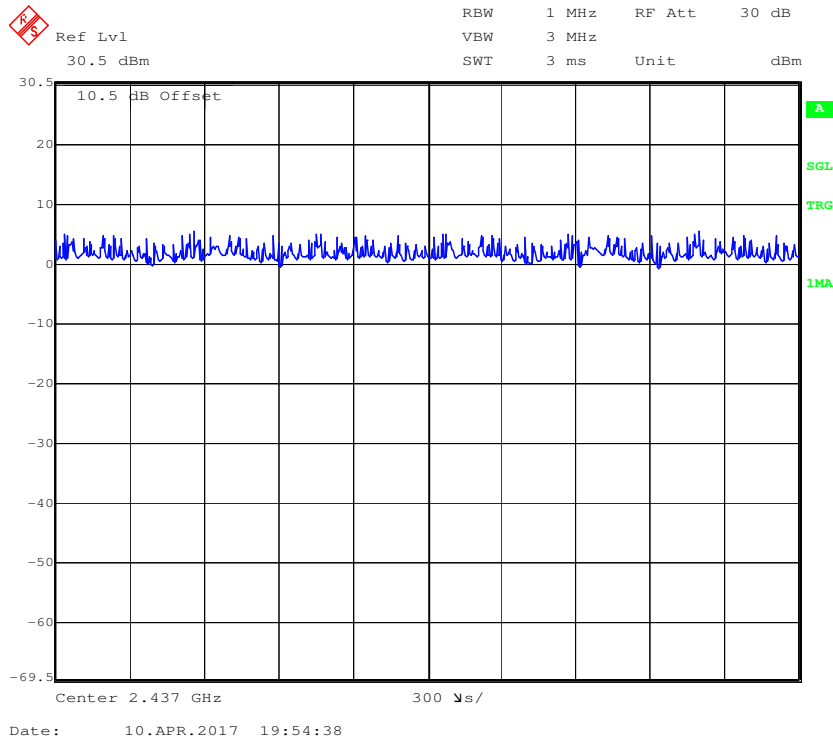

802.11n-HT40 Mode

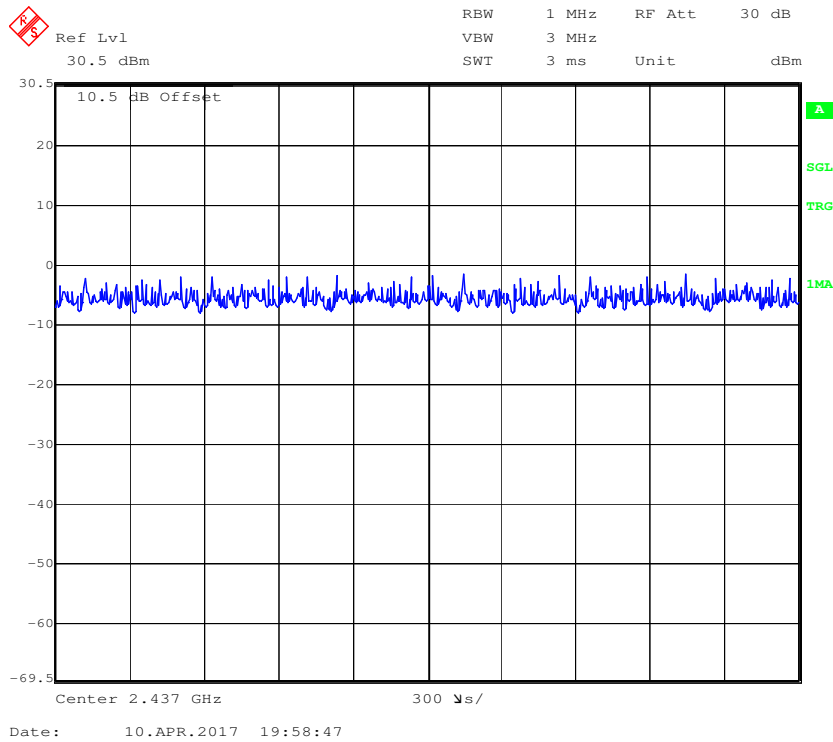

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	10log(1/x)
802.11b	100	-	-	10Hz	0
802.11g	100	-	-	10Hz	0
802.11n-HT20	100	-	-	10Hz	0
802.11n-HT40	100	-	-	10Hz	0

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	E6410	GYXJ3A00 JSD2

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable RJ45 Cable	3.0	EUT	PC
Un-shielding Detachable AC Cable	1.0	Receptacle	LISN
Un-shielding detachable DC to RJ45 Cable	1.2	Adapter	EUT

Block Diagram of Test Setup

For conducted emission

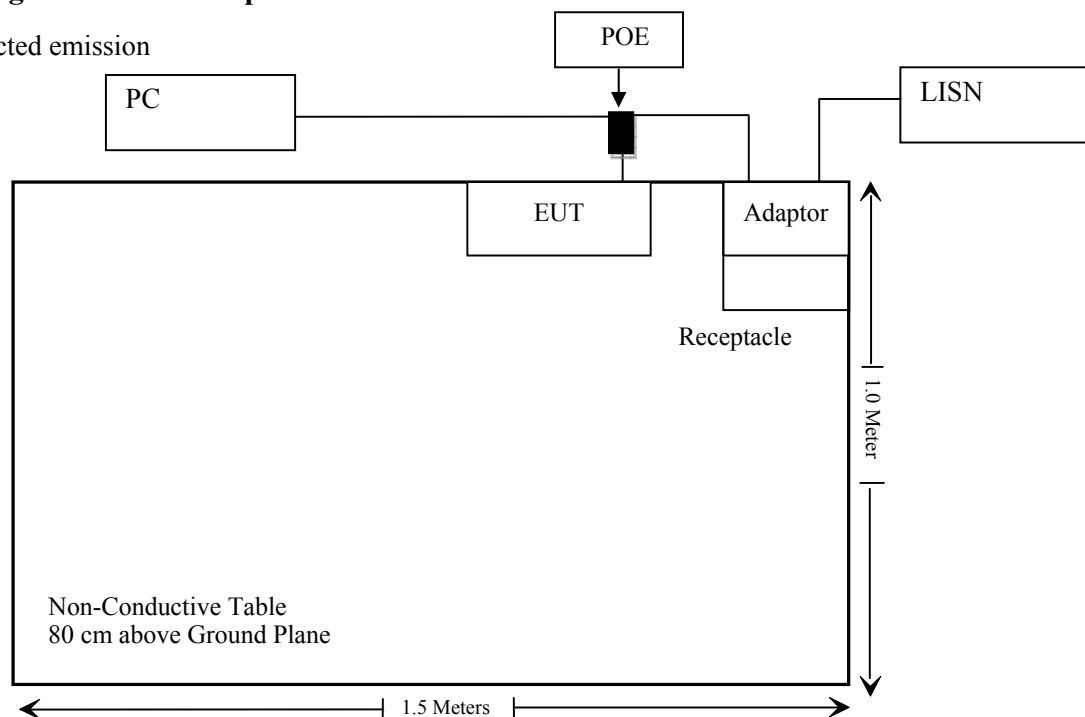

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2016-11-25	2017-11-25
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-10
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2016-06-19	2017-06-18
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2016-09-08	2017-09-08
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
Radiation test					
Sonoma Instrunent	Amplifier	330	171377	2016-12-12	2017-12-12
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-25
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-12
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2016-12-09	2017-12-08
BACL	RF cable	KS-LAB-012	KS-LAB-012	2016-12-15	2017-12-15
WEINSCHL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Agilent	Power Meter	N1912A	MY5000492	2016-11-17	2017-11-16
Agilent	Power Sensor	N1921A	MY54210024	2016-11-17	2017-11-16
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	7.5	5.62	16.50	44.67	20	0.05	1

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an monopole antenna arrangement, which must be professionally installed and the antenna gain is 7.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

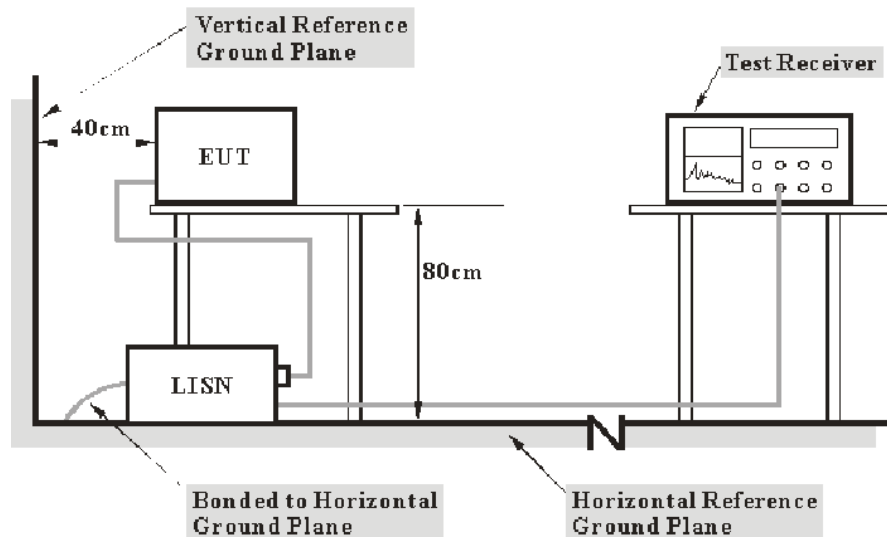

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Layne Li on 2017-03-24.

EUT operation mode: Transmitting

Wi-Fi Mode:

For Rogue Wave PRO :


AC 120 V/60 Hz, Line:

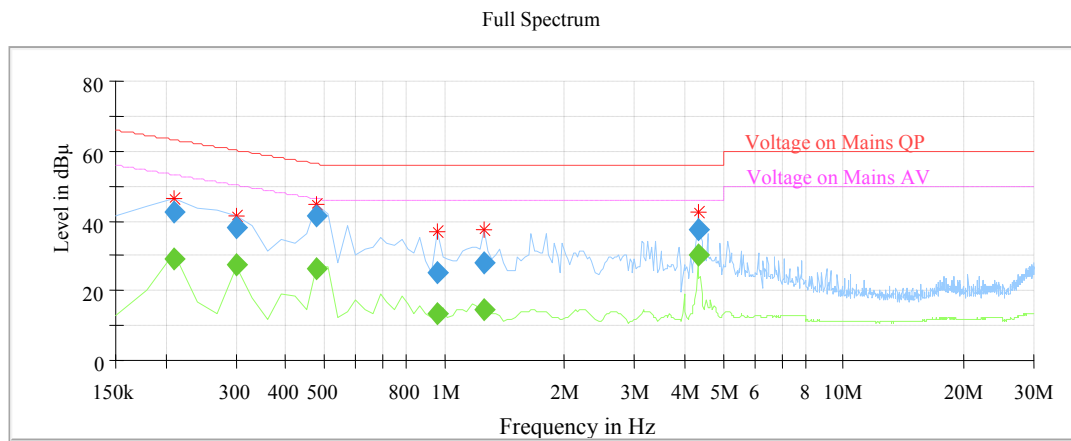

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.210000	---	29.28	9.000	L1	10.0	23.93	53.21	Compliance
0.210000	42.25	---	9.000	L1	10.0	20.96	63.21	Compliance
0.300000	---	27.59	9.000	L1	10.0	22.65	50.24	Compliance
0.300000	37.83	---	9.000	L1	10.0	22.41	60.24	Compliance
0.480000	---	26.29	9.000	L1	10.1	20.05	46.34	Compliance
0.480000	41.36	---	9.000	L1	10.1	14.98	56.34	Compliance
0.960000	---	13.34	9.000	L1	9.9	32.66	46.00	Compliance
0.960000	25.15	---	9.000	L1	9.9	30.85	56.00	Compliance
1.260000	---	14.82	9.000	L1	9.9	31.18	46.00	Compliance
1.260000	28.20	---	9.000	L1	9.9	27.80	56.00	Compliance
4.320000	---	29.96	9.000	L1	9.9	16.04	46.00	Compliance
4.320000	37.25	---	9.000	L1	9.9	18.75	56.00	Compliance

AC 120V/ 60 Hz, Neutral:

Full Spectrum

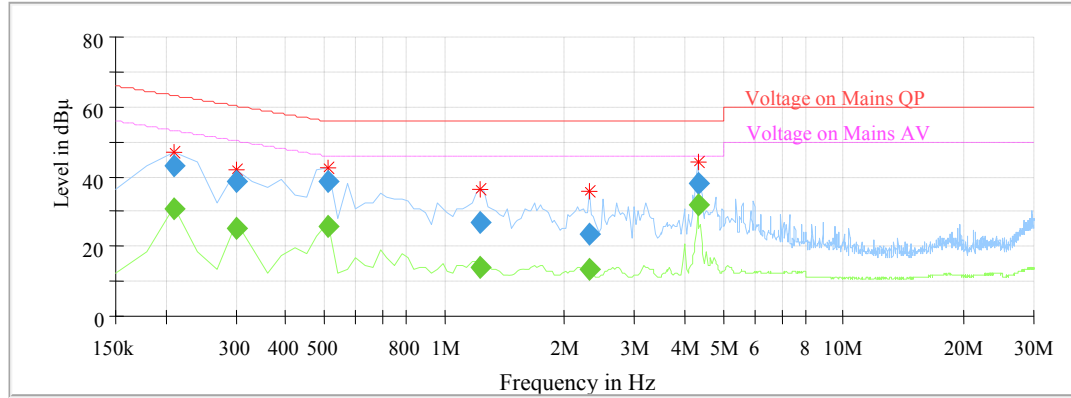


Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.210000	---	30.70	9.000	N	10.1	22.51	53.21	Compliance
0.210000	43.10	---	9.000	N	10.1	20.11	63.21	Compliance
0.300000	---	25.17	9.000	N	10.1	25.07	50.24	Compliance
0.300000	38.59	---	9.000	N	10.1	21.65	60.24	Compliance
0.510000	---	25.80	9.000	N	10.1	20.20	46.00	Compliance
0.510000	38.73	---	9.000	N	10.1	17.27	56.00	Compliance
1.230000	---	13.98	9.000	N	9.9	32.02	46.00	Compliance
1.230000	26.86	---	9.000	N	9.9	29.14	56.00	Compliance
2.310000	---	13.65	9.000	N	9.9	32.35	46.00	Compliance
2.310000	23.25	---	9.000	N	9.9	32.75	56.00	Compliance
4.320000	---	32.09	9.000	N	9.9	13.91	46.00	Compliance
4.320000	37.81	---	9.000	N	9.9	18.19	56.00	Compliance

For Rogue Wave :

AC 120 V/60 Hz, Line:


Full Spectrum

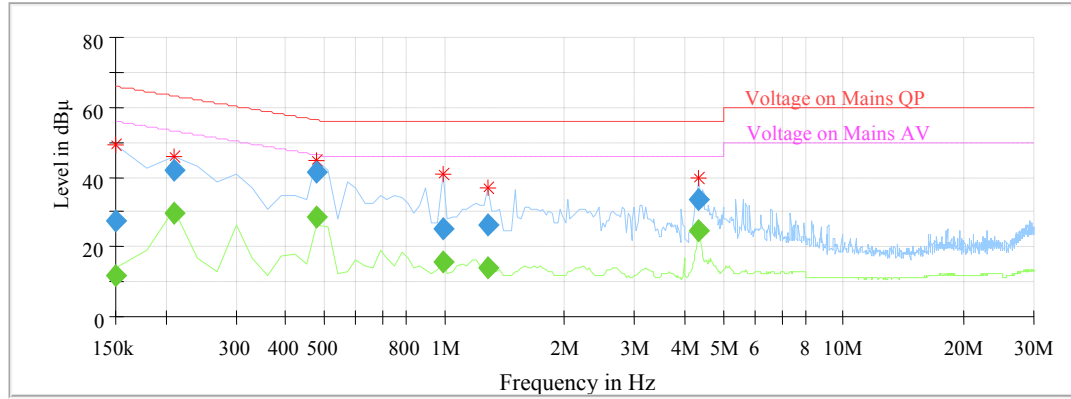

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	---	11.50	9.000	L1	10.1	44.50	56.00	Compliance
0.150000	27.44	---	9.000	L1	10.1	38.56	66.00	Compliance
0.210000	---	29.74	9.000	L1	10.0	23.47	53.21	Compliance
0.210000	41.75	---	9.000	L1	10.0	21.46	63.21	Compliance
0.480000	---	28.68	9.000	L1	10.1	17.66	46.34	Compliance
0.480000	41.32	---	9.000	L1	10.1	15.02	56.34	Compliance
0.990000	---	15.45	9.000	L1	9.9	30.55	46.00	Compliance
0.990000	25.14	---	9.000	L1	9.9	30.86	56.00	Compliance
1.290000	---	14.08	9.000	L1	9.9	31.92	46.00	Compliance
1.290000	26.14	---	9.000	L1	9.9	29.86	56.00	Compliance
4.350000	---	24.64	9.000	L1	9.9	21.36	46.00	Compliance
4.350000	33.73	---	9.000	L1	9.9	22.27	56.00	Compliance

AC 120V/ 60 Hz, Neutral:


Full Spectrum

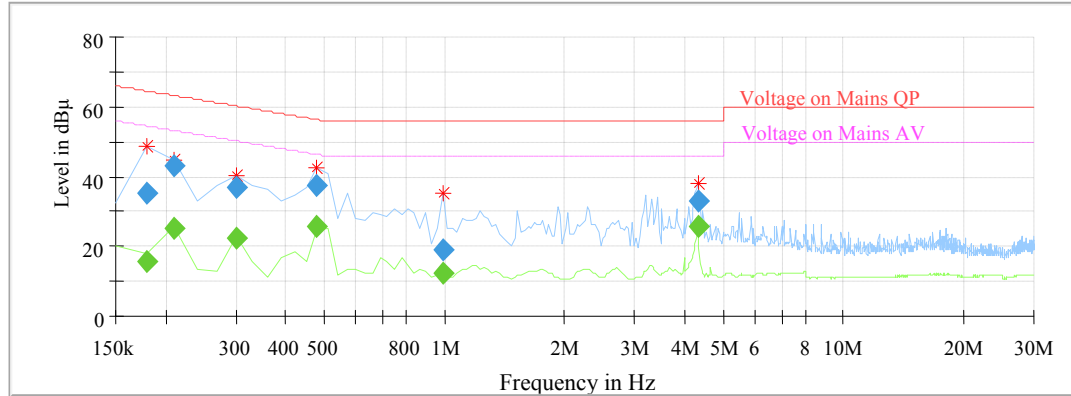

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.180000	---	15.50	9.000	N	10.1	38.99	54.49	Compliance
0.180000	35.05	---	9.000	N	10.1	29.44	64.49	Compliance
0.210000	---	25.39	9.000	N	10.1	27.82	53.21	Compliance
0.210000	42.82	---	9.000	N	10.1	20.39	63.21	Compliance
0.300000	---	22.44	9.000	N	10.1	27.80	50.24	Compliance
0.300000	36.98	---	9.000	N	10.1	23.26	60.24	Compliance
0.480000	---	25.70	9.000	N	10.1	20.64	46.34	Compliance
0.480000	37.52	---	9.000	N	10.1	18.82	56.34	Compliance
0.990000	---	12.24	9.000	N	9.9	33.76	46.00	Compliance
0.990000	18.79	---	9.000	N	9.9	37.21	56.00	Compliance
4.320000	---	25.95	9.000	N	9.9	20.05	46.00	Compliance
4.320000	33.00	---	9.000	N	9.9	23.00	56.00	Compliance

For Rogue Reach :**AC 120 V/60 Hz, Line:**


Full Spectrum

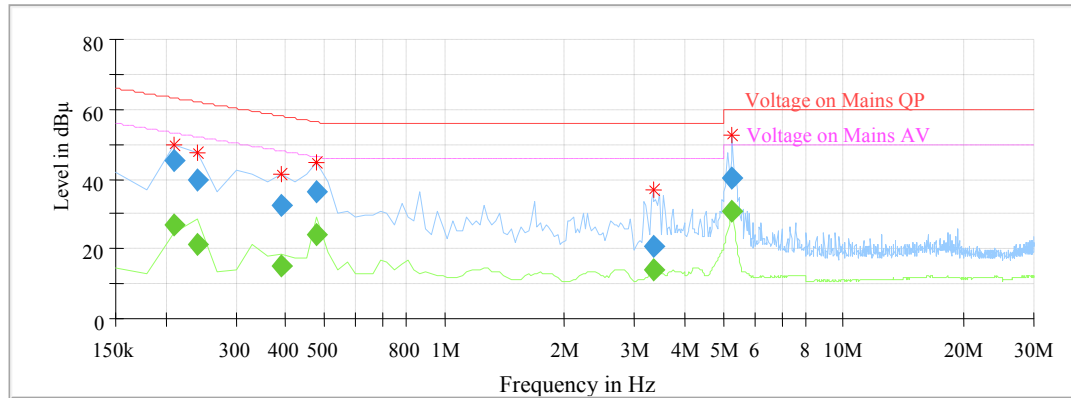

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.210000	---	26.83	9.000	L1	10.0	26.38	53.21	Compliance
0.210000	45.56	---	9.000	L1	10.0	17.65	63.21	Compliance
0.240000	---	21.51	9.000	L1	10.0	30.59	52.10	Compliance
0.240000	39.58	---	9.000	L1	10.0	22.52	62.10	Compliance
0.390000	---	14.99	9.000	L1	10.1	33.07	48.06	Compliance
0.390000	32.66	---	9.000	L1	10.1	25.40	58.06	Compliance
0.480000	---	23.85	9.000	L1	10.1	22.49	46.34	Compliance
0.480000	36.42	---	9.000	L1	10.1	19.92	56.34	Compliance
3.330000	---	13.79	9.000	L1	9.9	32.21	46.00	Compliance
3.330000	20.88	---	9.000	L1	9.9	35.12	56.00	Compliance
5.250000	---	30.90	9.000	L1	9.9	19.10	50.00	Compliance
5.250000	40.26	---	9.000	L1	9.9	19.74	60.00	Compliance

AC 120V/ 60 Hz, Neutral:

Full Spectrum

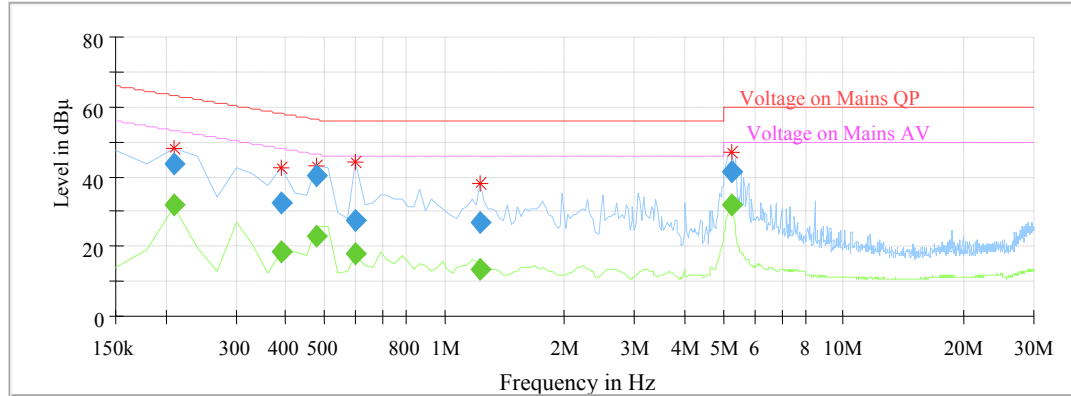



Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.210000	---	32.09	9.000	N	10.1	21.12	53.21	Compliance
0.210000	43.86	---	9.000	N	10.1	19.35	63.21	Compliance
0.390000	---	18.68	9.000	N	10.1	29.38	48.06	Compliance
0.390000	32.67	---	9.000	N	10.1	25.39	58.06	Compliance
0.480000	---	22.85	9.000	N	10.1	23.49	46.34	Compliance
0.480000	40.46	---	9.000	N	10.1	15.88	56.34	Compliance
0.600000	---	17.69	9.000	N	10.0	28.31	46.00	Compliance
0.600000	27.56	---	9.000	N	10.0	28.44	56.00	Compliance
1.230000	---	13.40	9.000	N	9.9	32.60	46.00	Compliance
1.230000	26.92	---	9.000	N	9.9	29.08	56.00	Compliance
5.220000	---	32.03	9.000	N	9.9	17.97	50.00	Compliance
5.220000	41.53	---	9.000	N	9.9	18.47	60.00	Compliance

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

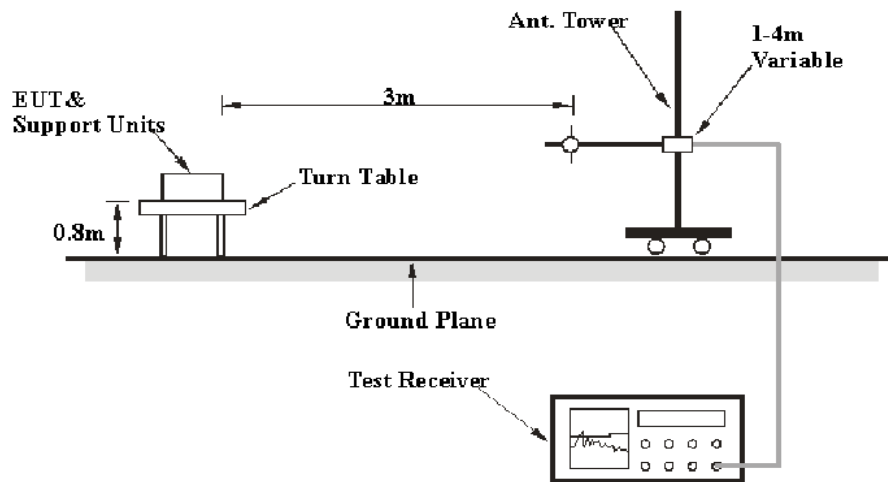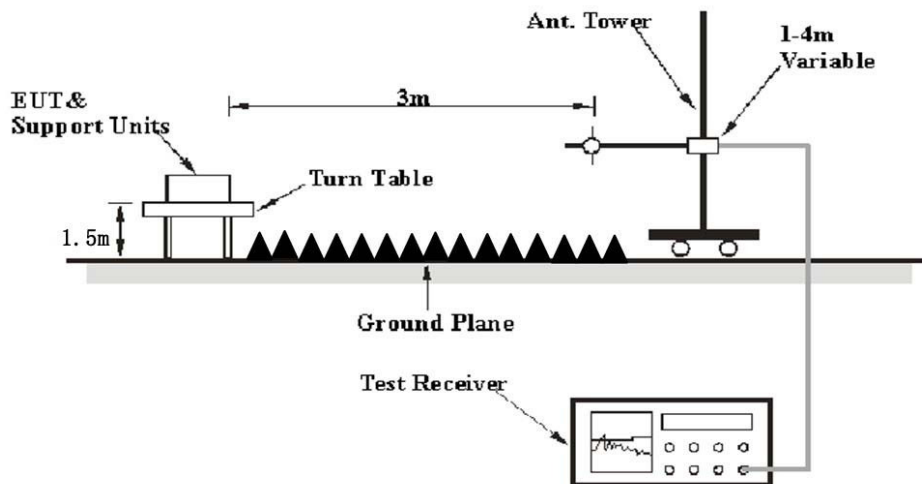EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Ave.
	1MHz	> 1/T ^{Note 2}	/	Ave.

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2017-04-09.

EUT operation mode: Transmitting

30 MHz-25 GHz:

For Rogue Wave PRO :

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	29.38	QP	354	1.1	H	-1.59	27.79	46	18.21
2412.00	99.31	PK	301	1.4	H	-6.19	93.12	/	/
2412.00	95.82	Ave.	301	1.4	H	-6.19	89.63	/	/
2412.00	122.15	PK	29	1.0	V	-6.19	115.96	/	/
2412.00	117.62	Ave.	29	1.0	V	-6.19	111.43	/	/
2330.10	67.33	PK	65	2.4	V	-6.42	60.91	74	13.09
2330.10	51.50	Ave.	65	2.4	V	-6.42	45.08	54	8.92
2347.35	68.04	PK	323	1.4	V	-6.42	61.62	74	12.38
2347.35	51.50	Ave.	323	1.4	V	-6.42	45.08	54	8.92
2485.88	67.98	PK	154	1.4	V	-5.97	62.01	74	11.99
2485.88	53.45	Ave.	154	1.4	V	-5.97	47.48	54	6.52
4824.00	50.20	PK	171	1.1	V	1.6	51.80	74	22.2
4824.00	35.66	Ave.	171	1.1	V	1.6	37.26	54	16.74

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel(2437 MHz)									
837.62	29.51	QP	114	2.1	H	-1.59	27.92	46	18.08
2437.00	98.23	PK	12	2.5	H	-6.19	92.04	/	/
2437.00	94.01	Ave.	12	2.5	H	-6.19	87.82	/	/
2437.00	121.13	PK	41	2.0	V	-6.19	114.94	/	/
2437.00	115.94	Ave.	41	2.0	V	-6.19	109.75	/	/
2335.95	69.99	PK	252	1.9	V	-6.42	63.57	74	10.43
2335.95	52.76	Ave.	252	1.9	V	-6.42	46.34	54	7.66
2337.92	69.39	PK	356	2.3	V	-6.42	62.97	74	11.03
2337.92	54.23	Ave.	356	2.3	V	-6.42	47.81	54	6.19
2486.33	67.84	PK	44	1.0	V	-5.97	61.87	74	12.13
2486.33	53.84	Ave.	44	1.0	V	-5.97	47.87	54	6.13
4874.00	50.71	PK	56	1.3	V	1.83	52.54	74	21.46
4874.00	35.97	Ave.	56	1.3	V	1.83	37.80	54	16.20
High Channel (2462 MHz)									
837.62	29.4	QP	231	1.1	H	-1.59	27.81	46	18.19
2462.00	97.46	PK	62	1.9	H	-5.97	91.49	/	/
2462.00	93.37	Ave.	62	1.9	H	-5.97	87.40	/	/
2462.00	120.23	PK	32	1.1	V	-5.97	114.26	/	/
2462.00	116.51	Ave.	32	1.1	V	-5.97	110.54	/	/
2343.48	67.12	PK	50	1.5	V	-6.42	60.70	74	13.3
2343.48	53.44	Ave.	50	1.5	V	-6.42	47.02	54	6.98
2490.93	66.54	PK	260	2.4	V	-5.97	60.57	74	13.43
2490.93	51.66	Ave.	260	2.4	V	-5.97	45.69	54	8.31
2496.57	67.83	PK	132	2.1	V	-5.97	61.86	74	12.14
2496.57	51.66	Ave.	132	2.1	V	-5.97	45.69	54	8.31
4924.00	50.5	PK	43	1.8	V	1.83	52.33	74	21.67
4924.00	35.63	Ave.	43	1.8	V	1.83	37.46	54	16.54

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	29.54	QP	232	1.5	H	-1.59	27.95	46	18.05
2412.00	98.23	PK	111	2.3	H	-6.19	92.04	/	/
2412.00	91.69	Ave.	111	2.3	H	-6.19	85.50	/	/
2412.00	119.04	PK	212	2.2	V	-6.19	112.85	/	/
2412.00	114.93	Ave.	212	2.2	V	-6.19	108.74	/	/
2331.48	68.09	PK	66	2.2	V	-6.42	61.67	74	12.33
2331.48	51.1	Ave.	66	2.2	V	-6.42	44.68	54	9.32
2339.46	68.9	PK	180	1.9	V	-6.42	62.48	74	11.52
2339.46	52.99	Ave.	180	1.9	V	-6.42	46.57	54	7.43
2489.70	66.22	PK	30	2.1	V	-5.97	60.25	74	13.75
2489.70	53.18	Ave.	30	2.1	V	-5.97	47.21	54	6.79
4824.00	50.19	PK	14	1.3	V	1.6	51.79	74	22.21
4824.00	35.65	Ave.	14	1.3	V	1.6	37.25	54	16.75
Middle Channel(2437 MHz)									
837.62	28.42	QP	141	2.1	H	-1.59	26.83	46	19.17
2437.00	94.14	PK	29	1.8	H	-6.19	87.95	/	/
2437.00	88.91	Ave.	29	1.8	H	-6.19	82.72	/	/
2437.00	118.33	PK	206	2.2	V	-6.19	112.14	/	/
2437.00	112.24	Ave.	206	2.2	V	-6.19	106.05	/	/
2337.94	67.34	PK	303	1.7	V	-6.42	60.92	74	13.08
2337.94	51.18	Ave.	303	1.7	V	-6.42	44.76	54	9.24
2339.13	66.95	PK	331	1.1	V	-6.42	60.53	74	13.47
2339.13	52.78	Ave.	331	1.1	V	-6.42	46.36	54	7.64
2493.22	67.67	PK	0	2.0	V	-5.97	61.70	74	12.30
2493.22	53.89	Ave.	0	2.0	V	-5.97	47.92	54	6.08
4874.00	49.89	PK	80	1.5	V	1.83	51.72	74	22.28
4874.00	35.68	Ave.	80	1.5	V	1.83	37.51	54	16.49

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
837.62	28.85	QP	191	2.5	H	-1.59	27.26	46	18.74
2462.00	95.37	PK	233	2.0	H	-5.97	89.40	/	/
2462.00	90.39	Ave.	233	2.0	H	-5.97	84.42	/	/
2462.00	116.96	PK	51	1.2	V	-5.97	110.99	/	/
2462.00	108.13	Ave.	51	1.2	V	-5.97	102.16	/	/
2335.57	69.26	PK	346	1.5	V	-6.42	62.84	74	11.16
2335.57	52.66	Ave.	346	1.5	V	-6.42	46.24	54	7.76
2485.71	69.76	PK	124	1.6	V	-5.97	63.79	74	10.21
2485.71	51.45	Ave.	124	1.6	V	-5.97	45.48	54	8.52
2492.30	67.87	PK	347	1.7	V	-5.97	61.90	74	12.10
2492.30	50.35	Ave.	347	1.7	V	-5.97	44.38	54	9.62
4924.00	49.18	PK	165	1.9	V	1.83	51.01	74	22.99
4924.00	33.97	Ave.	165	1.9	V	1.83	35.80	54	18.20

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	29.28	QP	322	2.5	H	-1.59	27.69	46	18.31
2412.00	93.01	PK	338	2.0	H	-6.19	86.82	/	/
2412.00	81.92	Ave.	338	2.0	H	-6.19	75.73	/	/
2412.00	113.56	PK	120	1.1	V	-6.19	107.37	/	/
2412.00	102.76	Ave.	120	1.1	V	-6.19	96.57	/	/
2339.32	68.67	PK	265	1.3	V	-6.42	62.25	74	11.75
2339.32	51.75	Ave.	265	1.3	V	-6.42	45.33	54	8.67
2360.98	67.51	PK	30	1.0	V	-6.19	61.32	74	12.68
2360.98	52.62	Ave.	30	1.0	V	-6.19	46.43	54	7.57
2485.74	66.91	PK	105	2.4	V	-5.97	60.94	74	13.06
2485.74	51.97	Ave.	105	2.4	V	-5.97	46.00	54	8.00
4824.00	50.43	PK	92	2.3	V	1.6	52.03	74	21.97
4824.00	35.66	Ave.	92	2.3	V	1.6	37.26	54	16.74
Middle Channel(2437 MHz)									
837.62	27.83	QP	14	1.6	H	-1.59	26.24	46	19.76
2437.00	92.72	PK	117	1.4	H	-6.19	86.53	/	/
2437.00	80.98	Ave.	117	1.4	H	-6.19	74.79	/	/
2437.00	113.65	PK	280	1.5	V	-6.19	107.46	/	/
2437.00	101.25	Ave.	280	1.5	V	-6.19	95.06	/	/
2336.30	66.56	PK	298	2.4	V	-6.42	60.14	74	13.86
2336.30	52.02	Ave.	298	2.4	V	-6.42	45.60	54	8.40
2338.29	67.61	PK	296	1.9	V	-6.42	61.19	74	12.81
2338.29	52.94	Ave.	296	1.9	V	-6.42	46.52	54	7.48
2491.83	66.37	PK	185	1.8	V	-5.97	60.40	74	13.60
2491.83	51.53	Ave.	185	1.8	V	-5.97	45.56	54	8.44
4874.00	49.71	PK	58	2.0	V	1.83	51.54	74	22.46
4874.00	35.63	Ave.	58	2.0	V	1.83	37.46	54	16.54

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
837.62	29.09	QP	267	2.5	H	-1.59	27.50	46	18.50
2462.00	91.94	PK	274	1.6	H	-5.97	85.97	/	/
2462.00	80.50	Ave.	274	1.6	H	-5.97	74.53	/	/
2462.00	113.20	PK	335	1.9	V	-5.97	107.23	/	/
2462.00	102.04	Ave.	335	1.9	V	-5.97	96.07	/	/
2341.81	66.32	PK	154	2.2	V	-6.42	59.90	74	14.10
2341.81	50.90	Ave.	154	2.2	V	-6.42	44.48	54	9.52
2486.10	68.19	PK	8	1.5	V	-5.97	62.22	74	11.78
2486.10	51.73	Ave.	8	1.5	V	-5.97	45.76	54	8.24
2492.06	65.72	PK	257	2.0	V	-5.97	59.75	74	14.25
2492.06	50.13	Ave.	257	2.0	V	-5.97	44.16	54	9.84
4924.00	49.10	PK	227	2.5	V	1.83	50.93	74	23.07
4924.00	33.97	Ave.	227	2.5	V	1.83	35.80	54	18.20

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
837.62	28.98	QP	223	1.1	H	-1.59	27.39	46	18.61
2422.00	89.27	PK	228	2.4	H	-6.19	83.08	/	/
2422.00	75.81	Ave.	228	2.4	H	-6.19	69.62	/	/
2422.00	113.43	PK	272	1.0	V	-6.19	107.24	/	/
2422.00	101.28	Ave.	272	1.0	V	-6.19	95.09	/	/
2331.55	66.19	PK	71	2.2	V	-6.42	59.77	74	14.23
2331.55	51.22	Ave.	71	2.2	V	-6.42	44.80	54	9.20
2359.54	66.27	PK	279	2.1	V	-6.19	60.08	74	13.92
2359.54	51.54	Ave.	279	2.1	V	-6.19	45.35	54	8.65
2490.60	66.95	PK	141	2.0	V	-5.97	60.98	74	13.02
2490.60	52.57	Ave.	141	2.0	V	-5.97	46.60	54	7.40
4844.00	50.4	PK	357	1.1	V	1.6	52.00	74	22.00
4844.00	35.88	Ave.	357	1.1	V	1.6	37.48	54	16.52
Middle Channel(2437 MHz)									
837.62	29.26	QP	177	2.2	H	-1.59	27.67	46	18.33
2437.00	90.12	PK	95	1.4	H	-6.19	83.93	/	/
2437.00	77.68	Ave.	95	1.4	H	-6.19	71.49	/	/
2437.00	112.67	PK	305	2.0	V	-6.19	106.48	/	/
2437.00	99.51	Ave.	305	2.0	V	-6.19	93.32	/	/
2341.82	69.28	PK	118	2.3	V	-6.42	62.86	74	11.14
2341.82	52.1	Ave.	118	2.3	V	-6.42	45.68	54	8.32
2351.15	66.8	PK	15	1.0	V	-6.19	60.61	74	13.39
2351.15	51.3	Ave.	15	1.0	V	-6.19	45.11	54	8.89
2492.13	68.9	PK	172	2.0	V	-5.97	62.93	74	11.07
2492.13	52.71	Ave.	172	2.0	V	-5.97	46.74	54	7.26
4874.00	50.28	PK	268	1.8	V	1.83	52.11	74	21.89
4874.00	35.97	Ave.	268	1.8	V	1.83	37.80	54	16.20

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
837.62	29.56	QP	143	2.0	H	-1.59	27.97	46	18.03
2452.00	91.15	PK	338	1.6	H	-5.97	85.18	/	/
2452.00	81.96	Ave.	338	1.6	H	-5.97	75.99	/	/
2452.00	110.13	PK	74	2.4	V	-5.97	104.16	/	/
2452.00	97.91	Ave.	74	2.4	V	-5.97	91.94	/	/
2338.63	67.94	PK	102	1.3	V	-6.42	61.52	74	12.48
2338.63	53.42	Ave.	102	1.3	V	-6.42	47.00	54	7.00
2358.84	67.87	PK	224	1.4	V	-6.19	61.68	74	12.32
2358.84	51.95	Ave.	224	1.4	V	-6.19	45.76	54	8.24
2490.28	67.29	PK	346	2.4	V	-5.97	61.32	74	12.68
2490.28	52.2	Ave.	346	2.4	V	-5.97	46.23	54	7.77
4904.00	49.97	PK	76	1.9	V	1.83	51.80	74	22.20
4904.00	34.04	Ave.	76	1.9	V	1.83	35.87	54	18.13

For Rogue Wave :

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	28.39	QP	31	2.1	H	-1.59	26.80	46	19.20
2412.00	100.03	PK	337	2.2	H	-6.19	93.84	/	/
2412.00	95.54	Ave.	337	2.2	H	-6.19	89.35	/	/
2412.00	121.22	PK	39	2.0	V	-6.19	115.03	/	/
2412.00	115.87	Ave.	39	2.0	V	-6.19	109.68	/	/
2336.71	68.84	PK	254	2.5	H	-6.42	62.42	74	11.58
2336.71	51.96	Ave.	254	2.5	H	-6.42	45.54	54	8.46
2354.69	66.25	PK	12	2.1	H	-6.19	60.06	74	13.94
2354.69	53.68	Ave.	12	2.1	H	-6.19	47.49	54	6.51
2495.21	69.73	PK	287	1.1	H	-5.97	63.76	74	10.24
2495.21	53.29	Ave.	287	1.1	H	-5.97	47.32	54	6.68
4824.00	46.98	PK	48	2.0	V	1.6	48.58	74	25.42
4824.00	36.33	Ave.	48	2.0	V	1.6	37.93	54	16.07

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel(2437 MHz)									
837.62	28.52	QP	130	1.9	H	-1.59	26.93	46	19.07
2437.00	100.2	PK	189	2.5	H	-6.19	94.01	/	/
2437.00	95.74	Ave.	189	2.5	H	-6.19	89.55	/	/
2437.00	121.48	PK	132	2.5	V	-6.19	115.29	/	/
2437.00	115.71	Ave.	132	2.5	V	-6.19	109.52	/	/
2332.81	67.79	PK	339	2.4	V	-6.42	61.37	74	12.63
2332.81	52.02	Ave.	339	2.4	V	-6.42	45.60	54	8.40
2335.44	70.66	PK	131	1.6	V	-6.42	64.24	74	9.76
2335.44	52.08	Ave.	131	1.6	V	-6.42	45.66	54	8.34
2493.49	69.48	PK	347	1.7	V	-5.97	63.51	74	10.49
2493.49	52.24	Ave.	347	1.7	V	-5.97	46.27	54	7.73
4874.00	53.02	PK	46	1.8	V	1.83	54.85	74	19.15
4874.00	37.2	Ave.	46	1.8	V	1.83	39.03	54	14.97
High Channel (2462 MHz)									
837.62	28.78	QP	36	1.9	H	-1.59	27.19	46	18.81
2462.00	99.16	PK	50	2.5	H	-5.97	93.19	/	/
2462.00	96.61	Ave.	50	2.5	H	-5.97	90.64	/	/
2462.00	120.08	PK	193	2.4	V	-5.97	114.11	/	/
2462.00	114.63	Ave.	193	2.4	V	-5.97	108.66	/	/
2337.61	68.53	PK	5	1.1	V	-6.42	62.11	74	11.89
2337.61	52.57	Ave.	5	1.1	V	-6.42	46.15	54	7.85
2482.47	69.73	PK	207	1.2	V	-5.97	63.76	74	10.24
2482.47	51.34	Ave.	207	1.2	V	-5.97	45.37	54	8.63
2493.06	64.49	PK	22	1.7	V	-5.97	58.52	74	15.48
2493.06	53.34	Ave.	22	1.7	V	-5.97	47.37	54	6.63
4924.00	49.26	PK	328	2.1	V	1.83	51.09	74	22.91
4924.00	34.39	Ave.	328	2.1	V	1.83	36.22	54	17.78

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	29.06	QP	2	1.9	H	-1.59	27.47	46	18.53
2412.00	98.23	PK	111	2.3	H	-6.19	92.04	/	/
2412.00	91.69	Ave.	111	2.3	H	-6.19	85.50	/	/
2412.00	119.04	PK	212	2.2	V	-6.19	112.85	/	/
2412.00	114.93	Ave.	212	2.2	V	-6.19	108.74	/	/
2336.39	65.75	PK	201	2.0	V	-6.42	59.33	74	14.67
2336.39	53.59	Ave.	201	2.0	V	-6.42	47.17	54	6.83
2341.77	69.19	PK	189	1.4	V	-6.42	62.77	74	11.23
2341.77	52.7	Ave.	189	1.4	V	-6.42	46.28	54	7.72
2490.96	66.59	PK	162	1.5	V	-5.97	60.62	74	13.38
2490.96	50.57	Ave.	162	1.5	V	-5.97	44.60	54	9.40
4824.00	47.45	PK	216	2.1	V	1.6	49.05	74	24.95
4824.00	36.97	Ave.	216	2.1	V	1.6	38.57	54	15.43
Middle Channel(2437 MHz)									
837.62	28.84	QP	315	2.0	H	-1.59	27.25	46	18.75
2437.00	97.48	PK	355	1.7	H	-6.19	91.29	/	/
2437.00	95.20	Ave.	355	1.7	H	-6.19	89.01	/	/
2437.00	116.92	PK	149	1.9	V	-6.19	110.73	/	/
2437.00	110.25	Ave.	149	1.9	V	-6.19	104.06	/	/
2335.12	67.45	PK	128	1.5	V	-6.42	61.03	74	12.97
2335.12	53.22	Ave.	128	1.5	V	-6.42	46.80	54	7.20
2341.36	67.19	PK	215	2.2	V	-6.42	60.77	74	13.23
2341.36	51.48	Ave.	215	2.2	V	-6.42	45.06	54	8.94
2494.95	67.82	PK	203	1.9	V	-5.97	61.85	74	12.15
2494.95	50.91	Ave.	203	1.9	V	-5.97	44.94	54	9.06
4874.00	51.28	PK	201	2.0	V	1.83	53.11	74	20.89
4874.00	36.85	Ave.	201	2.0	V	1.83	38.68	54	15.32

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
837.62	29.32	QP	360	1.5	H	-1.59	27.73	46	18.27
2462.00	97.5	PK	274	2.5	H	-5.97	91.53	/	/
2462.00	92.56	Ave.	274	2.5	H	-5.97	86.59	/	/
2462.00	117.51	PK	119	1.8	V	-5.97	111.54	/	/
2462.00	110.95	Ave.	119	1.8	V	-5.97	104.98	/	/
2342.60	69.11	PK	132	1.7	V	-6.42	62.69	74	11.31
2342.60	52.7	Ave.	132	1.7	V	-6.42	46.28	54	7.72
2481.98	67.31	PK	45	1.2	V	-5.97	61.34	74	12.66
2481.98	50.06	Ave.	45	1.2	V	-5.97	44.09	54	9.91
2496.15	66.81	PK	59	2.0	V	-5.97	60.84	74	13.16
2496.15	51.49	Ave.	59	2.0	V	-5.97	45.52	54	8.48
4924.00	48.08	PK	360	1.1	V	1.83	49.91	74	24.09
4924.00	37.39	Ave.	360	1.1	V	1.83	39.22	54	14.78

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	27.84	QP	215	2.4	H	-1.59	26.25	46	19.75
2412.00	98.12	PK	8	1.8	H	-6.19	91.93	/	/
2412.00	95.25	Ave.	8	1.8	H	-6.19	89.06	/	/
2412.00	118	PK	183	1.5	V	-6.19	111.81	/	/
2412.00	111.43	Ave.	183	1.5	V	-6.19	105.24	/	/
2331.89	69.12	PK	214	1.8	V	-6.42	62.70	74	11.30
2331.89	51.59	Ave.	214	1.8	V	-6.42	45.17	54	8.83
2339.35	67.09	PK	184	2.0	V	-6.42	60.67	74	13.33
2339.35	53.28	Ave.	184	2.0	V	-6.42	46.86	54	7.14
2492.25	69.41	PK	86	2.3	V	-5.97	63.44	74	10.56
2492.25	53.73	Ave.	86	2.3	V	-5.97	47.76	54	6.24
4824.00	49.27	PK	35	2.2	V	1.6	50.87	74	23.13
4824.00	37.86	Ave.	35	2.2	V	1.6	39.46	54	14.54
Middle Channel(2437 MHz)									
837.62	28.88	QP	6	2.5	H	-1.59	27.29	46	18.71
2437.00	97.37	PK	304	2.4	H	-6.19	91.18	/	/
2437.00	95.63	Ave.	304	2.4	H	-6.19	89.44	/	/
2437.00	116.69	PK	173	1.5	V	-6.19	110.50	/	/
2437.00	111.03	Ave.	173	1.5	V	-6.19	104.84	/	/
2334.81	69.57	PK	100	2.3	V	-6.42	63.15	74	10.85
2334.81	50.61	Ave.	100	2.3	V	-6.42	44.19	54	9.81
2342.96	67.64	PK	207	1.8	V	-6.42	61.22	74	12.78
2342.96	49.82	Ave.	207	1.8	V	-6.42	43.40	54	10.60
2484.99	65.98	PK	107	2.5	V	-5.97	60.01	74	13.99
2484.99	51.84	Ave.	107	2.5	V	-5.97	45.87	54	8.13
4874.00	49.95	PK	112	2.0	V	1.83	51.78	74	22.22
4874.00	39.46	Ave.	112	2.0	V	1.83	41.29	54	12.71

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
837.62	27.6	QP	113	2.4	H	-1.59	26.01	46	19.99
2462.00	95.99	PK	301	1.6	H	-5.97	90.02	/	/
2462.00	92.7	Ave.	301	1.6	H	-5.97	86.73	/	/
2462.00	115.56	PK	35	2.1	V	-5.97	109.59	/	/
2462.00	109.95	Ave.	35	2.1	V	-5.97	103.98	/	/
2379.89	67.95	PK	83	2.4	V	-6.19	61.76	74	12.24
2379.89	51.38	Ave.	83	2.4	V	-6.19	45.19	54	8.81
2484.06	68.57	PK	287	2.2	V	-5.97	62.60	74	11.40
2484.06	51.66	Ave.	287	2.2	V	-5.97	45.69	54	8.31
2492.95	69.07	PK	327	2.2	V	-5.97	63.10	74	10.90
2492.95	53.82	Ave.	327	2.2	V	-5.97	47.85	54	6.15
4924.00	49.97	PK	223	1.2	V	1.83	51.80	74	22.20
4924.00	33.55	Ave.	223	1.2	V	1.83	35.38	54	18.62

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
837.62	27.92	QP	243	2.2	H	-1.59	26.33	46	19.67
2422.00	94.63	PK	80	1.1	H	-6.19	88.44	/	/
2422.00	92.1	Ave.	80	1.1	H	-6.19	85.91	/	/
2422.00	115.62	PK	269	2.3	V	-6.19	109.43	/	/
2422.00	109.6	Ave.	269	2.3	V	-6.19	103.41	/	/
2335.80	67.26	PK	83	1.8	V	-6.42	60.84	74	13.16
2335.80	53.03	Ave.	83	1.8	V	-6.42	46.61	54	7.39
2339.50	66.25	PK	273	2.3	V	-6.42	59.83	74	14.17
2339.50	52.78	Ave.	273	2.3	V	-6.42	46.36	54	7.64
2488.29	67.89	PK	341	1.3	V	-5.97	61.92	74	12.08
2488.29	52.4	Ave.	341	1.3	V	-5.97	46.43	54	7.57
4844.00	46.16	PK	355	2.1	V	1.6	47.76	74	26.24
4844.00	36.14	Ave.	355	2.1	V	1.6	37.74	54	16.26
Middle Channel(2437 MHz)									
837.62	29.23	QP	11	2.0	H	-1.59	27.64	46	18.36
2437.00	96.82	PK	89	2.5	H	-6.19	90.63	/	/
2437.00	94.19	Ave.	89	2.5	H	-6.19	88.00	/	/
2437.00	116.4	PK	352	1.0	V	-6.19	110.21	/	/
2437.00	110.6	Ave.	352	1.0	V	-6.19	104.41	/	/
2335.37	67.87	PK	51	1.8	V	-6.42	61.45	74	12.55
2335.37	52.92	Ave.	51	1.8	V	-6.42	46.50	54	7.50
2342.78	68.9	PK	104	1.4	V	-6.42	62.48	74	11.52
2342.78	52.34	Ave.	104	1.4	V	-6.42	45.92	54	8.08
2491.75	67.93	PK	120	1.8	V	-5.97	61.96	74	12.04
2491.75	52.05	Ave.	120	1.8	V	-5.97	46.08	54	7.92
4874.00	53.69	PK	63	1.2	V	1.83	55.52	74	18.48
4874.00	38.77	Ave.	63	1.2	V	1.83	40.60	54	13.40

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
837.62	28.66	QP	24	2.0	H	-1.59	27.07	46	18.93
2452.00	97.86	PK	99	1.6	H	-5.97	91.89	/	/
2452.00	93.87	Ave.	99	1.6	H	-5.97	87.90	/	/
2452.00	115.81	PK	84	2.4	V	-5.97	109.84	/	/
2452.00	112.82	Ave.	84	2.4	V	-5.97	106.85	/	/
2337.04	65.92	PK	291	2.2	V	-6.42	59.50	74	14.50
2337.04	50.75	Ave.	291	2.2	V	-6.42	44.33	54	9.67
2482.10	65.81	PK	19	1.4	V	-5.97	59.84	74	14.16
2482.10	51.26	Ave.	19	1.4	V	-5.97	45.29	54	8.71
2494.90	67.72	PK	114	1.1	V	-5.97	61.75	74	12.25
2494.90	50.93	Ave.	114	1.1	V	-5.97	44.96	54	9.04
4904.00	48.50	PK	284	1.4	V	1.83	50.33	74	23.67
4904.00	37.13	Ave.	284	1.4	V	1.83	38.96	54	15.04

For Rogue Reach :

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	29.28	QP	31	1.6	H	-1.59	27.69	46	18.31
2412.00	95.72	PK	63	2.4	H	-6.19	89.53		
2412.00	95.69	Ave.	63	2.4	H	-6.19	89.50	/	/
2412.00	120.34	PK	333	1.3	V	-6.19	114.15	/	/
2412.00	113.51	Ave.	333	1.3	V	-6.19	107.32	/	/
2341.93	69.65	PK	127	1.7	V	-6.42	63.23	74	10.77
2341.93	52.55	Ave.	127	1.7	V	-6.42	46.13	54	7.87
2337.64	67.69	PK	120	1.0	V	-6.42	61.27	74	12.73
2337.64	53.82	Ave.	120	1.0	V	-6.42	47.40	54	6.60
2494.49	68.52	PK	133	1.1	V	-5.97	62.55	74	11.45
2494.49	52.96	Ave.	133	1.1	V	-5.97	46.99	54	7.01
4824.00	53.11	PK	308	1.6	V	1.6	54.71	74	19.29
4824.00	38.88	Ave.	308	1.6	V	1.6	40.48	54	13.52

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel(2437 MHz)									
837.62	28.54	QP	340	1.6	H	-1.59	26.95	46	19.05
2437.00	98.59	PK	228	2.1	H	-6.19	92.40	/	/
2437.00	94.48	Ave.	228	2.1	H	-6.19	88.29	/	/
2437.00	121	PK	33	1.3	V	-6.19	114.81	/	/
2437.00	111.15	Ave.	33	1.3	V	-6.19	104.96	/	/
2335.86	69.17	PK	294	2.3	V	-6.42	62.75	74	11.25
2335.86	52.95	Ave.	294	2.3	V	-6.42	46.53	54	7.47
2338.53	70.26	PK	58	2.5	V	-6.42	63.84	74	10.16
2338.53	52.3	Ave.	58	2.5	V	-6.42	45.88	54	8.12
2486.89	69.67	PK	330	2.0	V	-5.97	63.70	74	10.30
2486.89	52.78	Ave.	330	2.0	V	-5.97	46.81	54	7.19
4874.00	51.8	PK	200	1.1	V	1.83	53.63	74	20.37
4874.00	37.37	Ave.	200	1.1	V	1.83	39.20	54	14.80
High Channel (2462 MHz)									
837.62	29.1	QP	12	1.2	H	-1.59	27.51	46	18.49
2462.00	96.25	PK	208	2.0	H	-5.97	90.28	/	/
2462.00	91.71	Ave.	208	2.0	H	-5.97	85.74	/	/
2462.00	121.91	PK	43	1.4	V	-5.97	115.94	/	/
2462.00	111.06	Ave.	43	1.4	V	-5.97	105.09	/	/
2336.43	67.77	PK	336	1.8	V	-6.42	61.35	74	12.65
2336.43	53.49	Ave.	336	1.8	V	-6.42	47.07	54	6.93
2482.57	70.21	PK	134	2.1	V	-5.97	64.24	74	9.76
2482.57	51.22	Ave.	134	2.1	V	-5.97	45.25	54	8.75
2490.25	68.97	PK	319	1.8	V	-5.97	63.00	74	11.00
2490.25	53.48	Ave.	319	1.8	V	-5.97	47.51	54	6.49
4924.00	49.05	PK	20	1.9	V	1.83	50.88	74	23.12
4924.00	38.07	Ave.	20	1.9	V	1.83	39.90	54	14.10

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	27.71	QP	89	1.5	H	-1.59	26.12	46	19.88
2412.00	96.51	PK	321	1.9	H	-6.19	90.32	/	/
2412.00	94.02	Ave.	321	1.9	H	-6.19	87.83	/	/
2412.00	117.93	PK	101	2.2	V	-6.19	111.74	/	/
2412.00	109.88	Ave.	101	2.2	V	-6.19	103.69	/	/
2343.93	71.63	PK	169	1.7	V	-6.42	65.21	74	8.79
2343.93	54.55	Ave.	169	1.7	V	-6.42	48.13	54	5.87
2333.91	66.95	PK	315	1.7	V	-6.42	60.53	74	13.47
2333.91	53.31	Ave.	315	1.7	V	-6.42	46.89	54	7.11
2487.98	66.64	PK	313	2.3	V	-5.97	60.67	74	13.33
2487.98	53.12	Ave.	313	2.3	V	-5.97	47.15	54	6.85
4824.00	47.52	PK	336	1.9	V	1.6	49.12	74	24.88
4824.00	34.1	Ave.	336	1.9	V	1.6	35.70	54	18.30
Middle Channel(2437 MHz)									
837.62	29.01	QP	342	1.9	H	-1.59	27.42	46	18.58
2437.00	99.2	PK	145	2.0	H	-6.19	93.01	/	/
2437.00	96.2	Ave.	145	2.0	H	-6.19	90.01	/	/
2437.00	117	PK	122	1.3	V	-6.19	110.81	/	/
2437.00	111.92	Ave.	122	1.3	V	-6.19	105.73	/	/
2338.26	69.4	PK	354	2.2	V	-6.42	62.98	74	11.02
2338.26	55.59	Ave.	354	2.2	V	-6.42	49.17	54	4.83
2341.67	69.28	PK	288	1.2	V	-6.42	62.86	74	11.14
2341.67	54.43	Ave.	288	1.2	V	-6.42	48.01	54	5.99
2493.74	65.9	PK	211	2.0	V	-5.97	59.93	74	14.07
2493.74	54.31	Ave.	211	2.0	V	-5.97	48.34	54	5.66
4874.00	51.69	PK	71	1.6	V	1.83	53.52	74	20.48
4874.00	36.12	Ave.	71	1.6	V	1.83	37.95	54	16.05

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
837.62	29.52	QP	117	1.4	H	-1.59	27.93	46	18.07
2462.00	97.7	PK	123	2.4	H	-5.97	91.73	/	/
2462.00	93.5	Ave.	123	2.4	H	-5.97	87.53	/	/
2462.00	117.45	PK	219	1.3	V	-5.97	111.48	/	/
2462.00	111.4	Ave.	219	1.3	V	-5.97	105.43	/	/
2334.96	70.42	PK	78	1.3	V	-6.42	64.00	74	10.00
2334.96	54.34	Ave.	78	1.3	V	-6.42	47.92	54	6.08
2486.79	66.93	PK	204	1.3	V	-5.97	60.96	74	13.04
2486.79	51.74	Ave.	204	1.3	V	-5.97	45.77	54	8.23
2490.73	68.54	PK	252	2.1	V	-5.97	62.57	74	11.43
2490.73	51.21	Ave.	252	2.1	V	-5.97	45.24	54	8.76
4924.00	46.53	PK	112	1.7	V	1.83	48.36	74	25.64
4924.00	35.26	Ave.	112	1.7	V	1.83	37.09	54	16.91

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
837.62	28.33	QP	5	1.5	H	-1.59	26.74	46	19.26
2412.00	98.24	PK	313	1.6	H	-6.19	92.05	/	/
2412.00	95.02	Ave.	313	1.6	H	-6.19	88.83	/	/
2412.00	119.31	PK	222	1.7	V	-6.19	113.12	/	/
2412.00	111.03	Ave.	222	1.7	V	-6.19	104.84	/	/
2339.70	68.81	PK	359	2.4	V	-6.42	62.39	74	11.61
2339.70	53.08	Ave.	359	2.4	V	-6.42	46.66	54	7.34
2330.30	69.37	PK	198	1.3	V	-6.42	62.95	74	11.05
2330.30	52.82	Ave.	198	1.3	V	-6.42	46.40	54	7.60
2488.51	68.86	PK	182	2.5	V	-5.97	62.89	74	11.11
2488.51	51.16	Ave.	182	2.5	V	-5.97	45.19	54	8.81
4824.00	49	PK	57	1.1	V	1.6	50.60	74	23.40
4824.00	34.9	Ave.	57	1.1	V	1.6	36.50	54	17.50
Middle Channel(2437 MHz)									
837.62	29.56	QP	289	2.4	H	-1.59	27.97	46	18.03
2437.00	95.9	PK	253	1.3	H	-6.19	89.71	/	/
2437.00	92.77	Ave.	253	1.3	H	-6.19	86.58	/	/
2437.00	116.99	PK	299	1.6	V	-6.19	110.80	/	/
2437.00	111.27	Ave.	299	1.6	V	-6.19	105.08	/	/
2337.74	67.71	PK	78	1.1	V	-6.42	61.29	74	12.71
2337.74	53.39	Ave.	78	1.1	V	-6.42	46.97	54	7.03
2343.02	70.44	PK	98	2.0	V	-6.42	64.02	74	9.98
2343.02	52.58	Ave.	98	2.0	V	-6.42	46.16	54	7.84
2485.75	65.57	PK	345	1.6	V	-5.97	59.60	74	14.40
2485.75	53.89	Ave.	345	1.6	V	-5.97	47.92	54	6.08
4874.00	53.32	PK	12	1.9	V	1.83	55.15	74	18.85
4874.00	39.88	Ave.	12	1.9	V	1.83	41.71	54	12.29

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
837.62	29.52	QP	316	1.4	H	-1.59	27.93	46	18.07
2462.00	98.02	PK	355	2.2	H	-5.97	92.05	/	/
2462.00	94.25	Ave.	355	2.2	H	-5.97	88.28	/	/
2462.00	118.5	PK	81	2.5	V	-5.97	112.53	/	/
2462.00	113.87	Ave.	81	2.5	V	-5.97	107.90	/	/
2341.36	69.27	PK	328	2.3	V	-6.42	62.85	74	11.15
2341.36	52.41	Ave.	328	2.3	V	-6.42	45.99	54	8.01
2483.20	67.12	PK	166	1.5	V	-5.97	61.15	74	12.85
2483.20	54.77	Ave.	166	1.5	V	-5.97	48.80	54	5.20
2485.93	69.76	PK	254	2.4	V	-5.97	63.79	74	10.21
2485.93	51.89	Ave.	254	2.4	V	-5.97	45.92	54	8.08
4924.00	45.99	PK	305	1.1	V	1.83	47.82	74	26.18
4924.00	35.61	Ave.	305	1.1	V	1.83	37.44	54	16.56

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
837.62	29.22	QP	226	1.2	H	-1.59	27.63	46	18.37
2422.00	98.21	PK	23	1.4	H	-6.19	92.02	/	/
2422.00	91.32	Ave.	23	1.4	H	-6.19	85.13	/	/
2422.00	116.09	PK	213	1.4	V	-6.19	109.90	/	/
2422.00	111.78	Ave.	213	1.4	V	-6.19	105.59	/	/
2339.09	67.78	PK	191	2.4	V	-6.42	61.36	74	12.64
2339.09	53.71	Ave.	191	2.4	V	-6.42	47.29	54	6.71
2341.71	68.98	PK	273	1.7	V	-6.42	62.56	74	11.44
2341.71	54.88	Ave.	273	1.7	V	-6.42	48.46	54	5.54
2491.90	65.64	PK	265	2.3	V	-5.97	59.67	74	14.33
2491.90	52.51	Ave.	265	2.3	V	-5.97	46.54	54	7.46
4844.00	49.57	PK	18	1.7	V	1.6	51.17	74	22.83
4844.00	35.31	Ave.	18	1.7	V	1.6	36.91	54	17.09
Middle Channel(2437 MHz)									
837.62	29.02	QP	61	2.1	H	-1.59	27.43	46	18.57
2437.00	97.81	PK	351	1.8	H	-6.19	91.62	/	/
2437.00	92.88	Ave.	351	1.8	H	-6.19	86.69	/	/
2437.00	118.93	PK	263	2.4	V	-6.19	112.74	/	/
2437.00	112.34	Ave.	263	2.4	V	-6.19	106.15	/	/
2339.02	70.04	PK	65	2.3	V	-6.42	63.62	74	10.38
2339.02	53.2	Ave.	65	2.3	V	-6.42	46.78	54	7.22
2342.58	66.98	PK	230	2.0	V	-6.42	60.56	74	13.44
2342.58	51.85	Ave.	230	2.0	V	-6.42	45.43	54	8.57
2493.11	68.49	PK	330	1.5	V	-5.97	62.52	74	11.48
2493.11	53.02	Ave.	330	1.5	V	-5.97	47.05	54	6.95
4874.00	52.11	PK	105	2.4	V	1.83	53.94	74	20.06
4874.00	37.2	Ave.	105	2.4	V	1.83	39.03	54	14.97

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
837.62	29.13	QP	18	2.1	H	-1.59	27.54	46	18.46
2452.00	92.63	PK	180	1.4	H	-5.97	86.66	/	/
2452.00	95.41	Ave.	180	1.4	H	-5.97	89.44	/	/
2452.00	116.66	PK	192	1.6	V	-5.97	110.69	/	/
2452.00	111.26	Ave.	192	1.6	V	-5.97	105.29	/	/
2337.09	66.39	PK	295	2.3	V	-6.42	59.97	74	14.03
2337.09	53.64	Ave.	295	2.3	V	-6.42	47.22	54	6.78
2487.74	69.42	PK	72	1.5	V	-5.97	63.45	74	10.55
2487.74	52.21	Ave.	72	1.5	V	-5.97	46.24	54	7.76
2489.78	68.06	PK	45	1.4	V	-5.97	62.09	74	11.91
2489.78	51.54	Ave.	45	1.4	V	-5.97	45.57	54	8.43
4904.00	49.54	PK	312	2.2	V	1.83	51.37	74	22.63
4904.00	38.66	Ave.	312	2.2	V	1.83	40.49	54	13.51

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	103.0 kPa


The testing was performed by Poboo Li on 2017-04-07.

Test Result: Compliance. Please refer to following table and plots.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	10.1	≥ 500
Middle	2437	10.1	≥ 500
High	2462	10.1	≥ 500
802.11g mode			
Low	2412	16.51	≥ 500
Middle	2437	16.51	≥ 500
High	2462	16.51	≥ 500
802.11n-HT20 mode			
Low	2412	17.31	≥ 500
Middle	2437	17.31	≥ 500
High	2462	17.31	≥ 500
802.11n-HT40 mode			
Low	2422	35.91	≥ 500
Middle	2437	36.07	≥ 500
High	2452	36.23	≥ 500


802.11b Low Channel

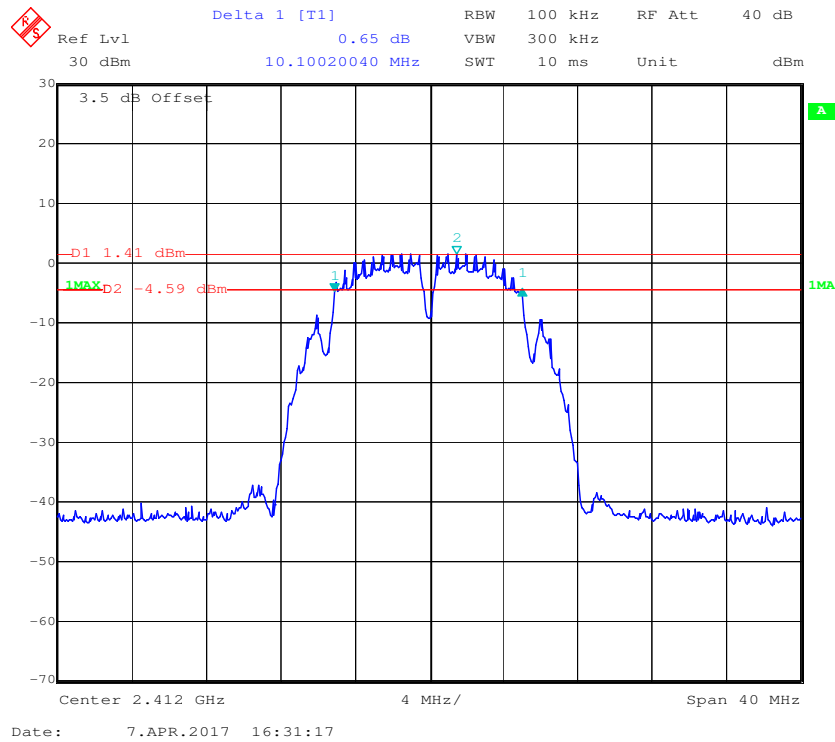


802.11b Middle Channel

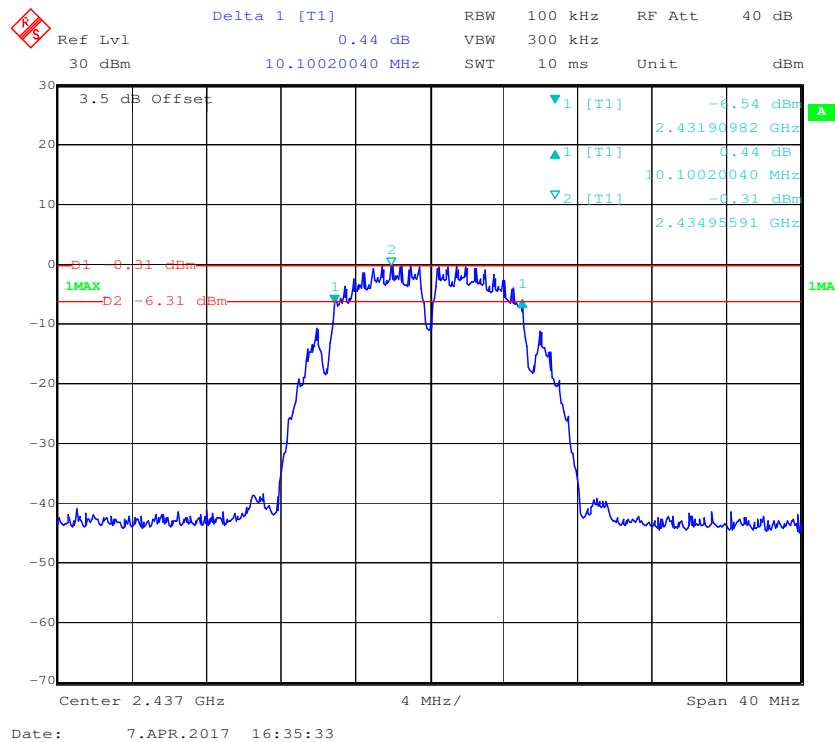


802.11b High Channel

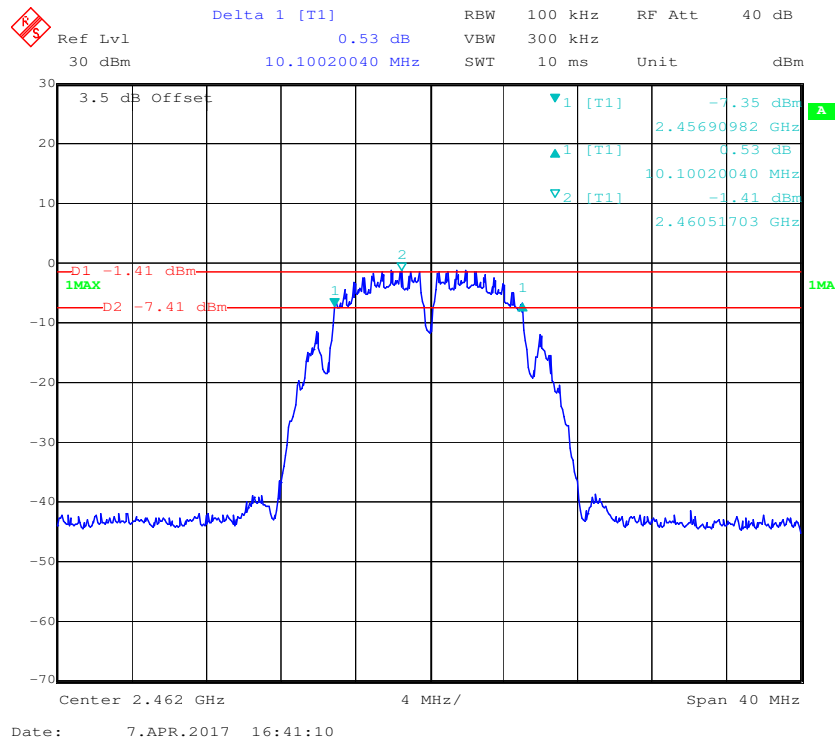


802.11g Low Channel

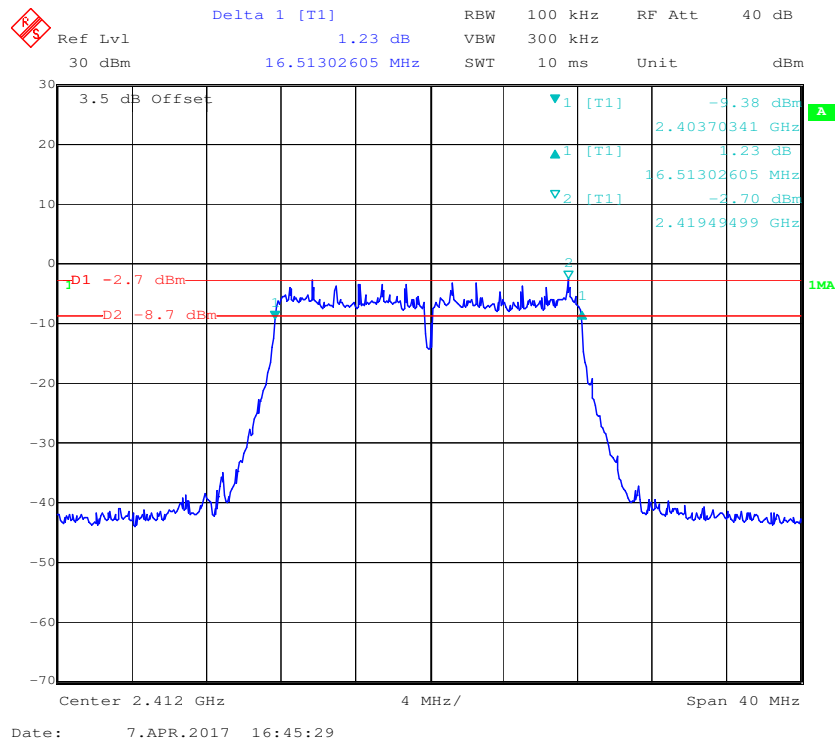


802.11g Middle Channel

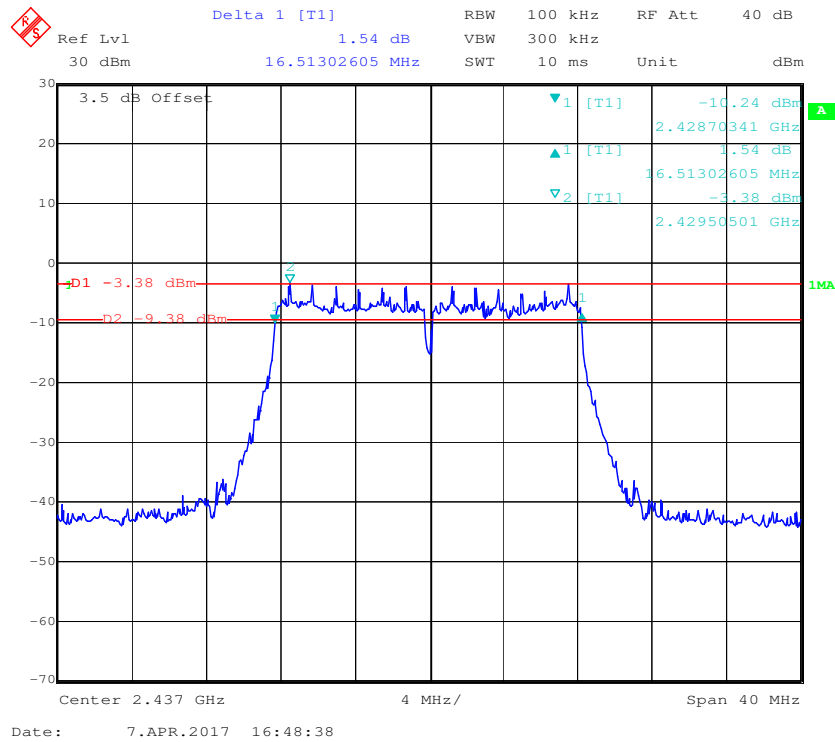


802.11g High Channel

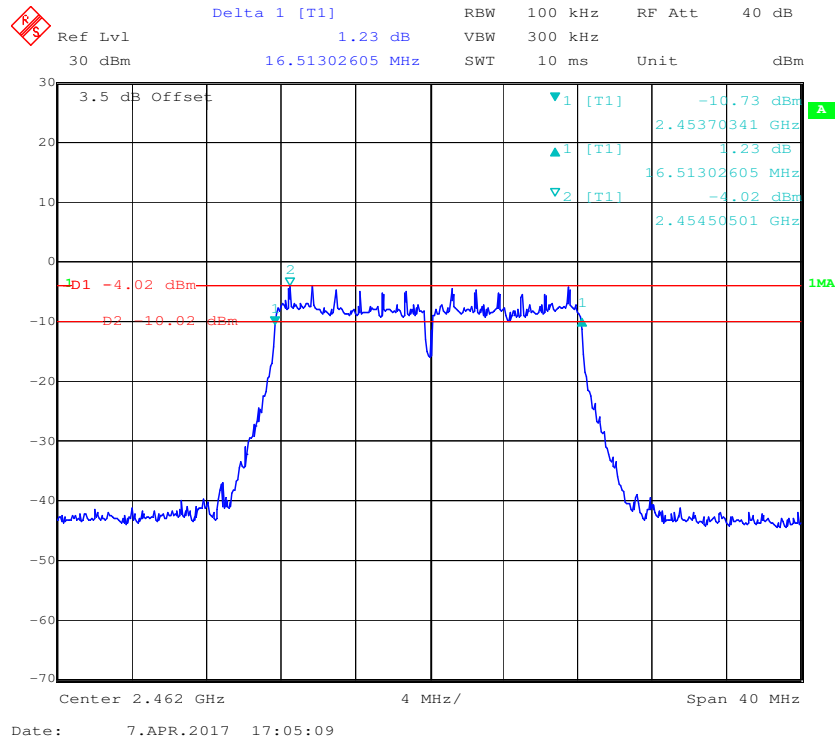


802.11n-HT20 Low Channel

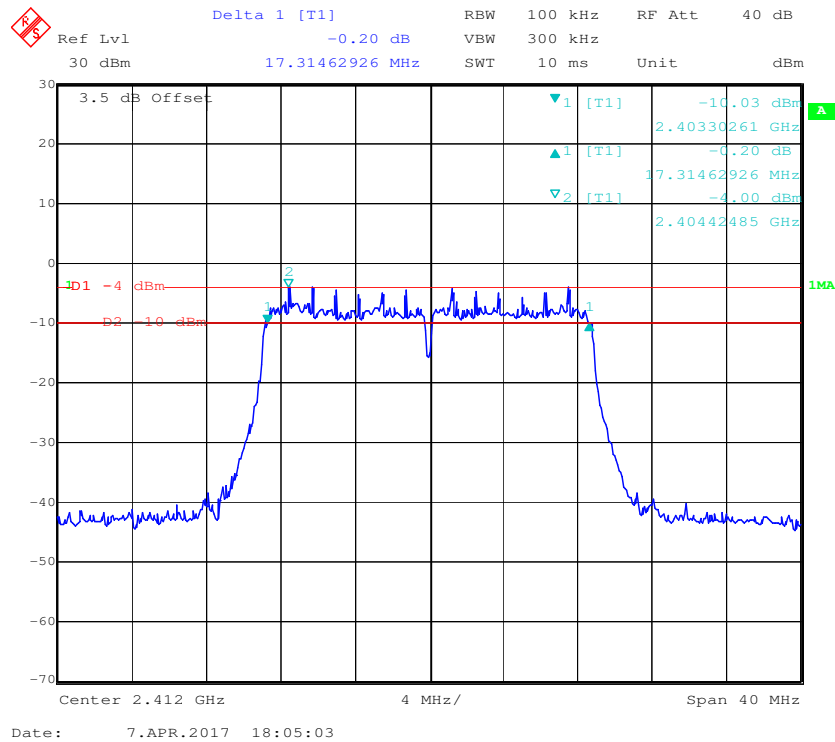


802.11n-HT20 Middle Channel

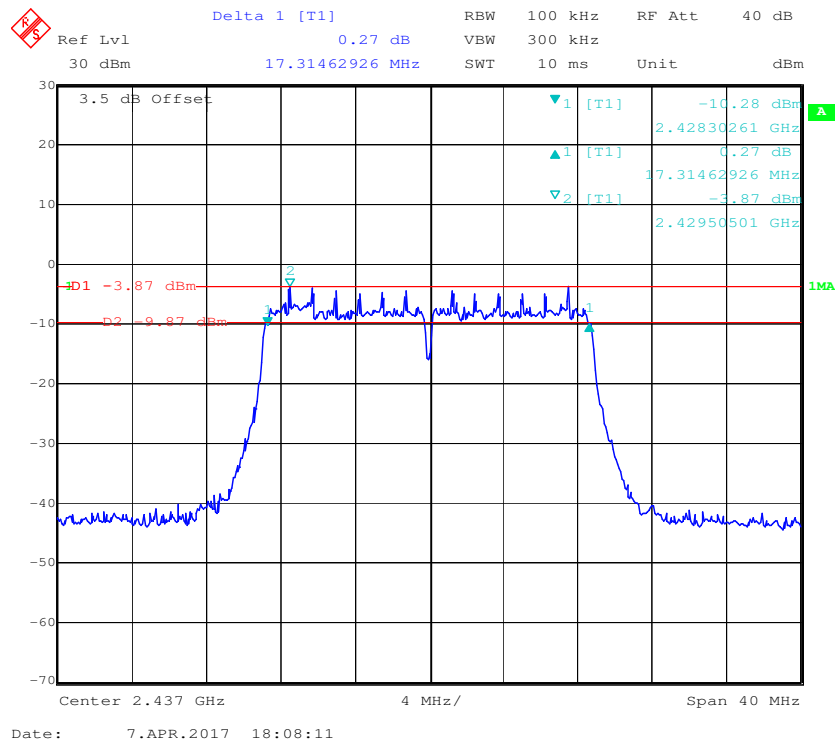


802.11n-HT20 High Channel

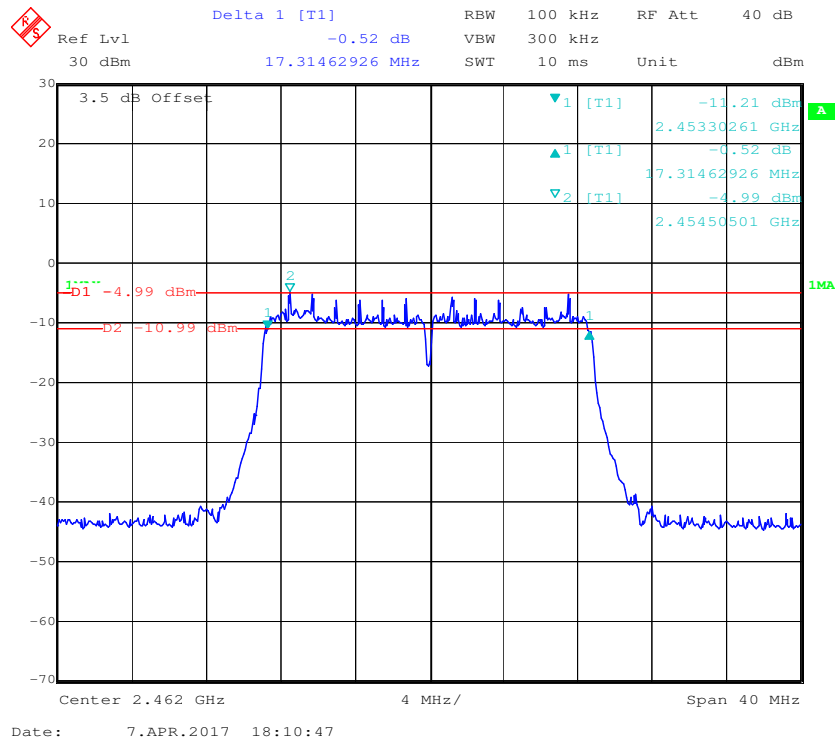


802.11n-HT40 Low Channel

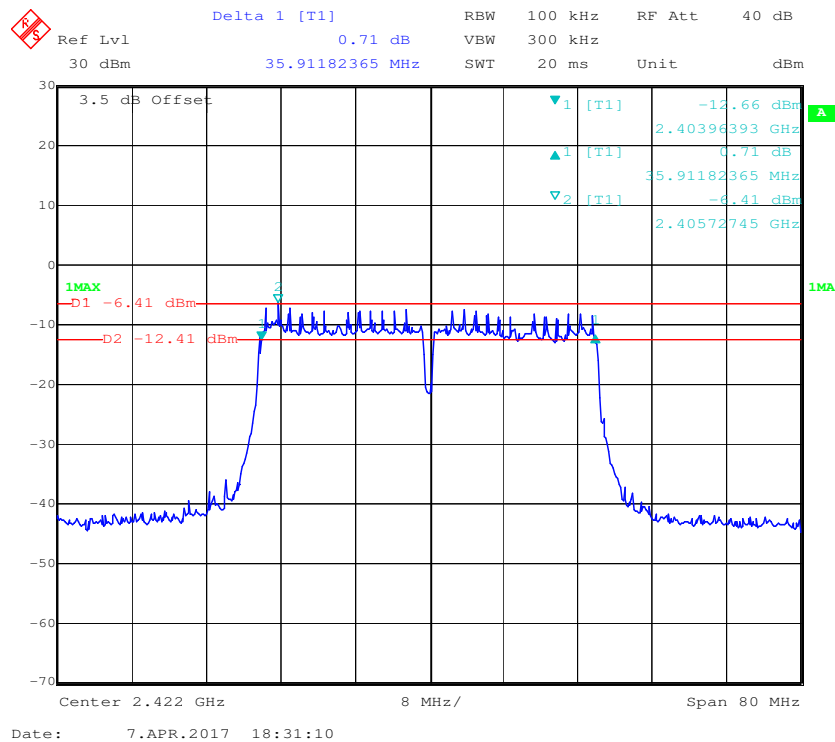

802.11n-HT40 Middle Channel

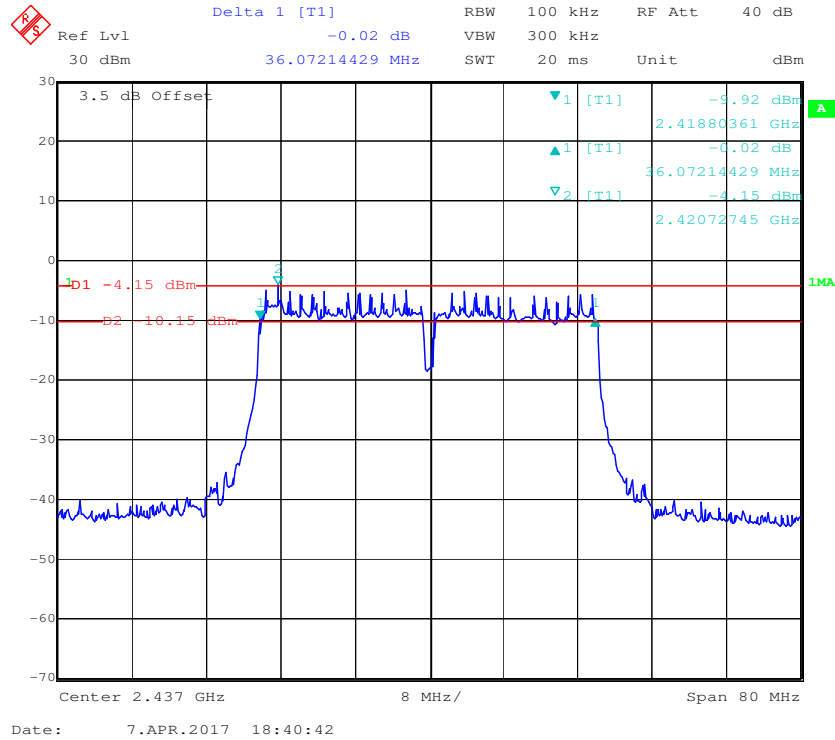

802.11n-HT40 High Channel

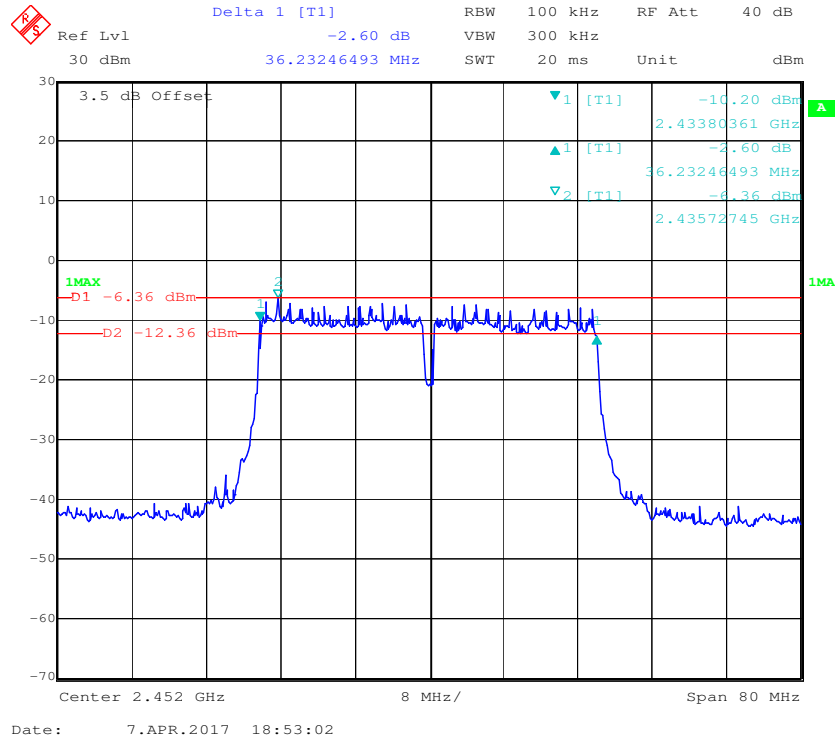


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	46 %
ATM Pressure:	101.0 kPa

The testing was performed by Poboo Li on 2017-04-07.

Test Result: Compliance. Please refer to following table and plots.

EUT operation mode: Transmitting

Wi-Fi mode

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)
802.11b			
Low	2412	15.45	28.5
Middle	2437	13.97	28.5
High	2462	13.16	28.5
802.11g			
Low	2412	15.67	28.5
Middle	2437	14.76	28.5
High	2462	14.01	28.5
802.11n HT20			
Low	2412	14.75	28.5
Middle	2437	14.80	28.5
High	2462	13.50	28.5
802.11n HT40			
Low	2422	15.77	28.5
Middle	2437	16.25	28.5
High	2452	15.59	28.5


Note: antenna gain is 7.5 dBi, so the limit was reduced 1.5dB

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**


Temperature:	28 °C
Relative Humidity:	50 %
ATM Pressure:	103.0 kPa

The testing was performed by Poboo Li on 2017-04-07.


Test Result: Compliance. Please refer to the following plots.

EUT operation mode: Transmitting


802.11b: Band Edge, Left Side

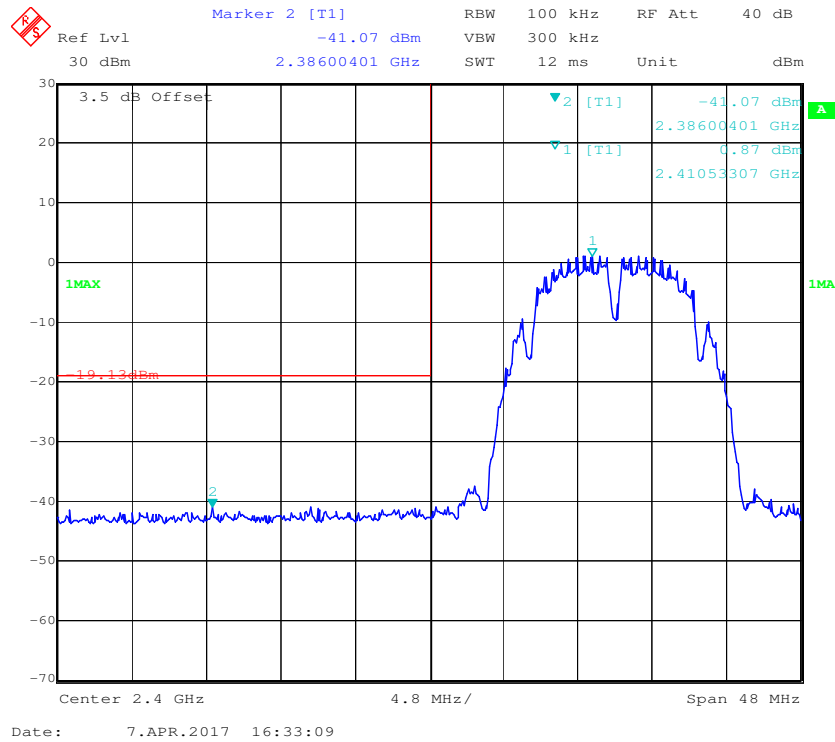


802.11b: Band Edge, Right Side

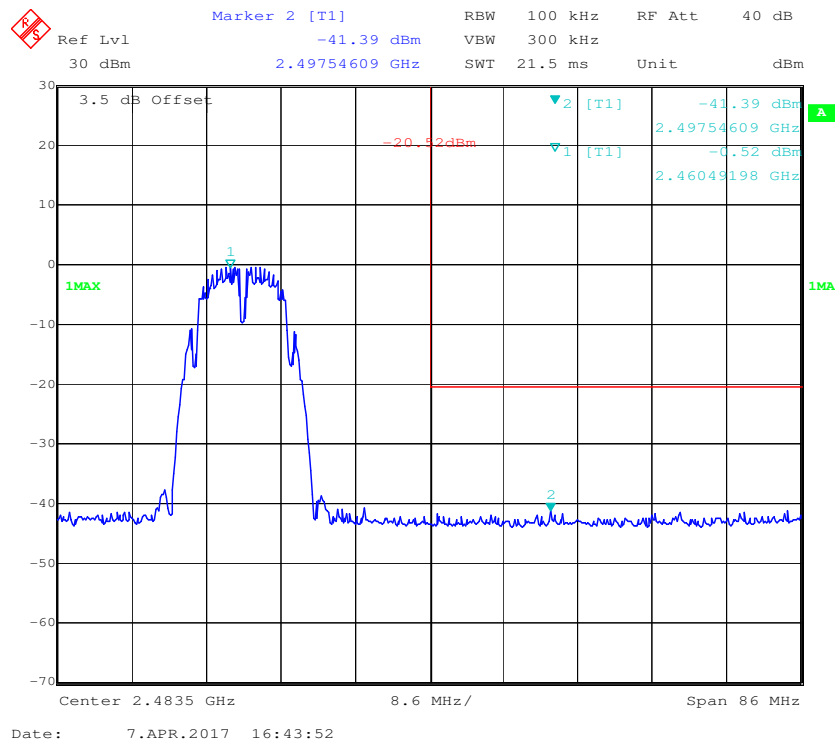


802.11g: Band Edge, Left Side

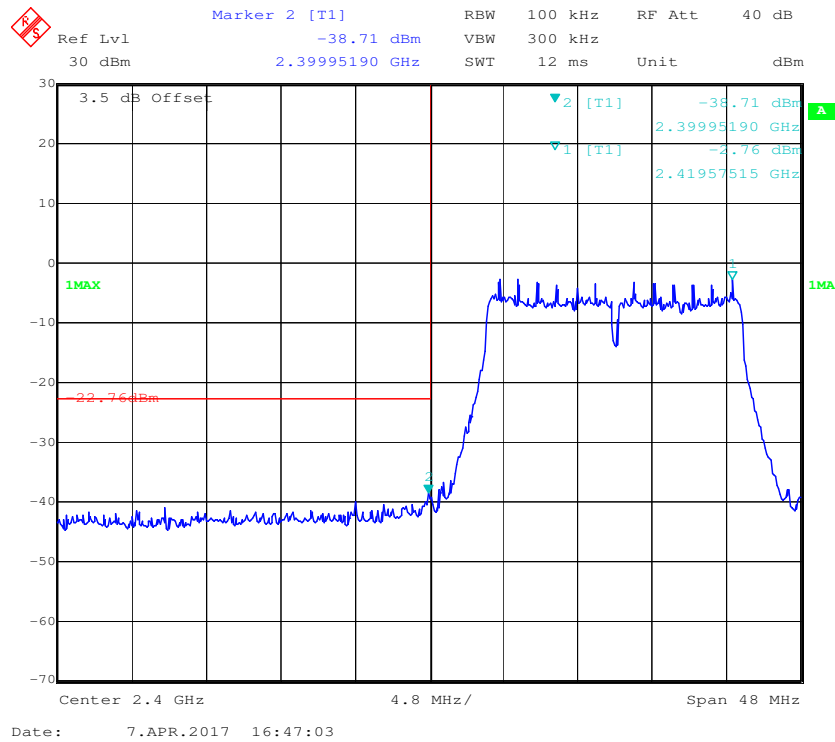


802.11g: Band Edge, Right Side

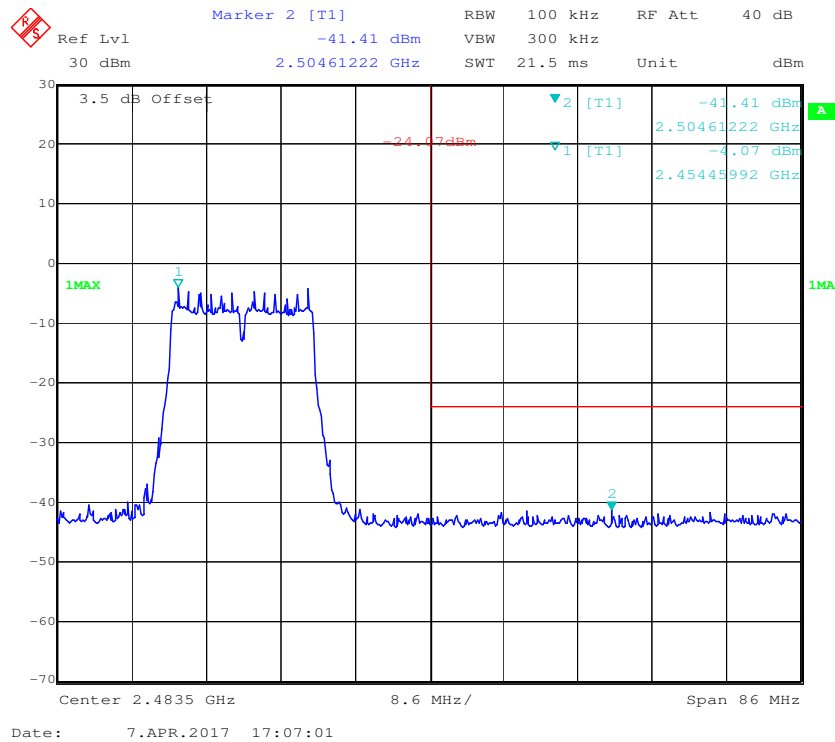


802.11n-HT20: Band Edge, Left Side

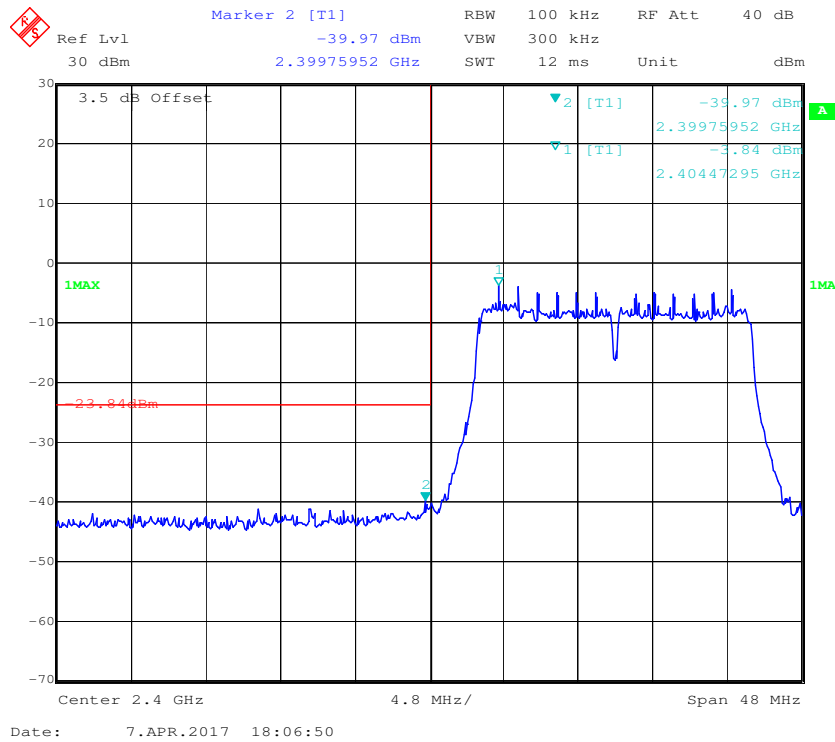


802.11n-HT20: Band Edge, Right Side

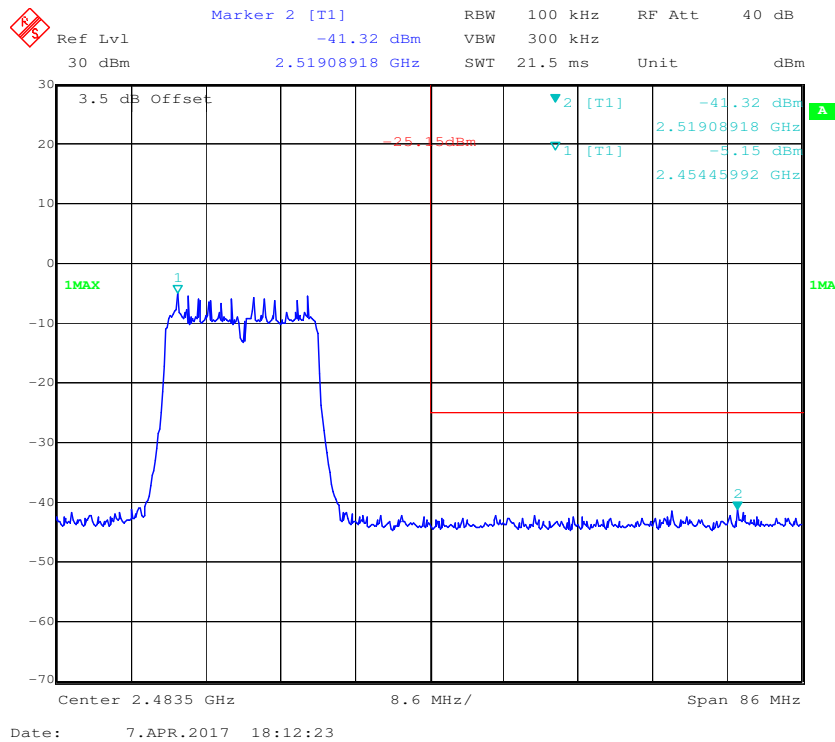

802.11n-HT40: Band Edge, Left Side

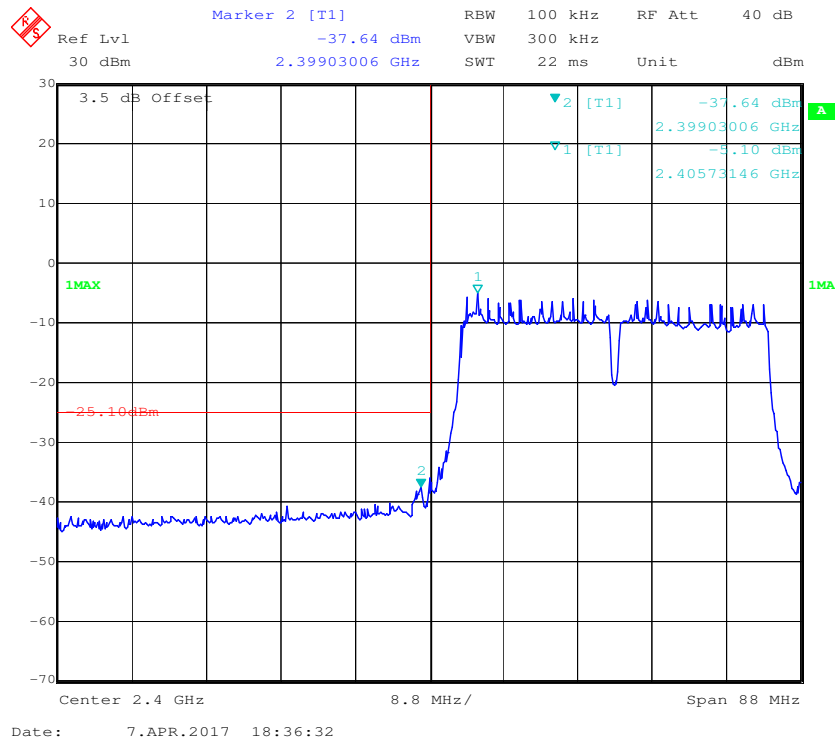

802.11n-HT40: Band Edge, Right Side

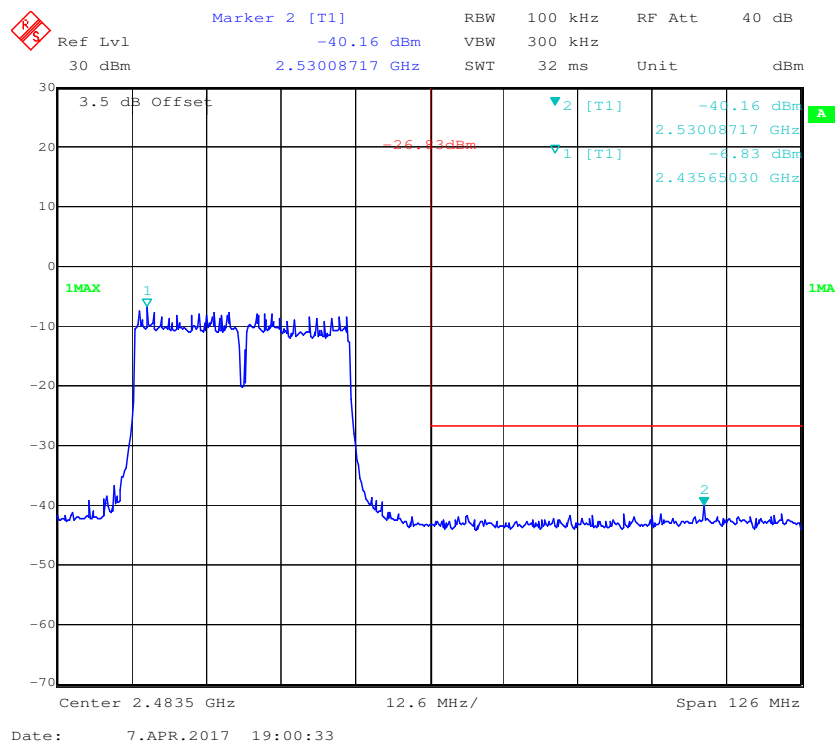


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	28 °C
Relative Humidity:	50 %
ATM Pressure:	103.0 kPa

The testing was performed by Poboo Li on 2017-04-07.


Test Result: Compliance. Please refer to following table and plots.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-15.4	≤ 6.5
Middle	2437	-14.88	≤ 6.5
High	2462	-15.04	≤ 6.5
802.11g mode			
Low	2412	-17.97	≤ 6.5
Middle	2437	-18.46	≤ 6.5
High	2462	-18.91	≤ 6.5
802.11n-HT20 mode			
Low	2412	-18.96	≤ 6.5
Middle	2437	-18.56	≤ 6.5
High	2462	-19.87	≤ 6.5
802.11n-HT40 mode			
Low	2422	-19.98	≤ 6.5
Middle	2437	-18.53	≤ 6.5
High	2452	-22.67	≤ 6.5

Note: antenna gain is 7.5 dBi, so the limit was reduced 1.5dB


Power Spectral Density, 802.11b Low Channel

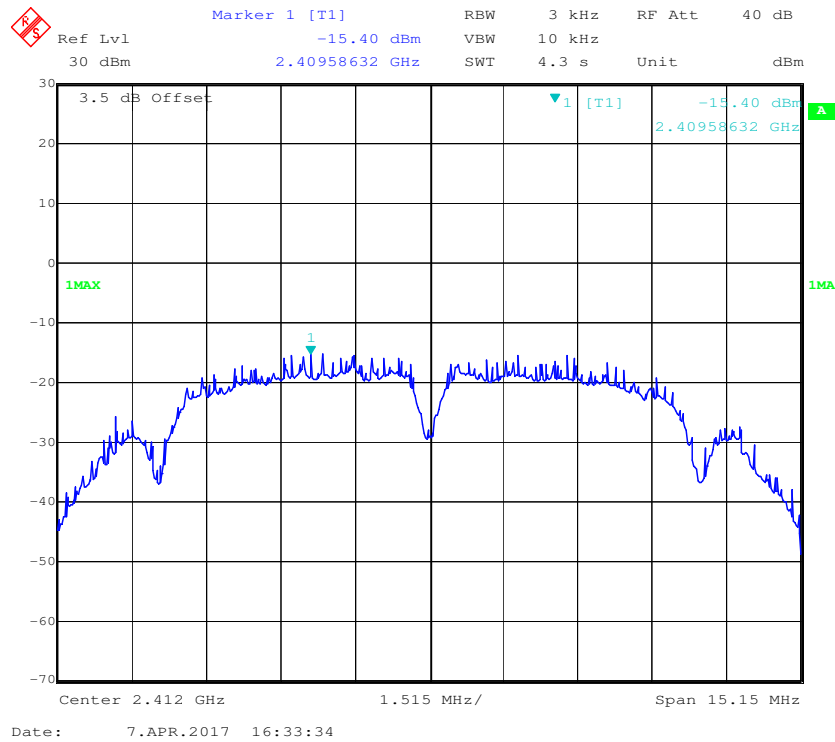


Power Spectral Density, 802.11b Middle Channel


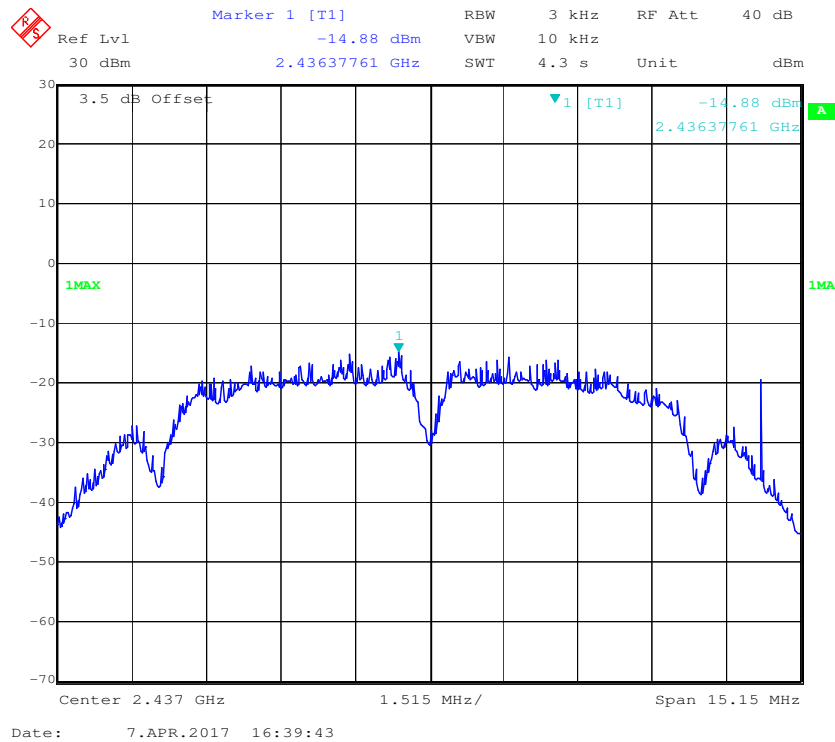


Power Spectral Density, 802.11b High Channel

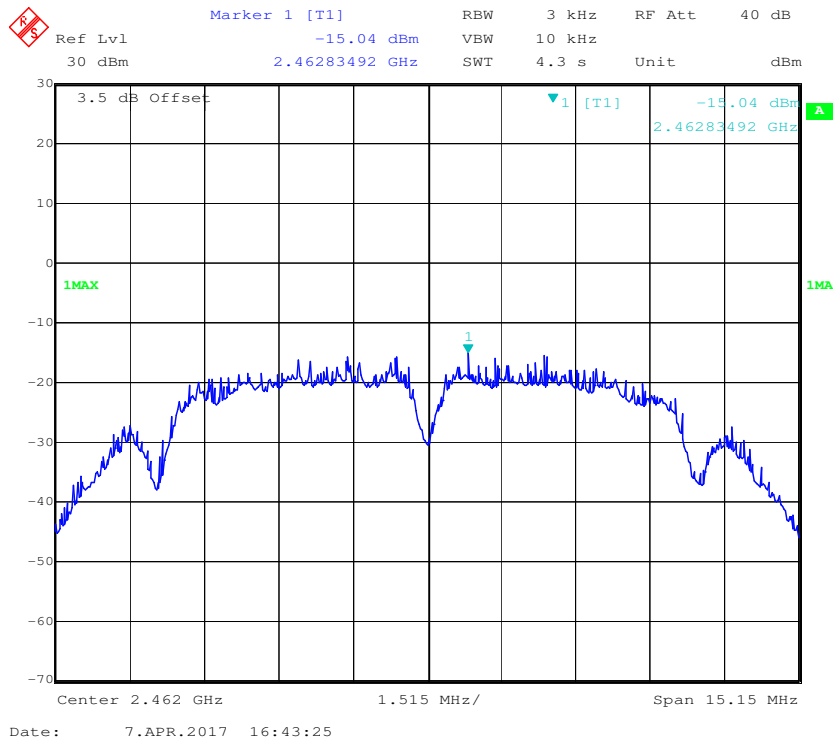


Power Spectral Density, 802.11g Low Channel

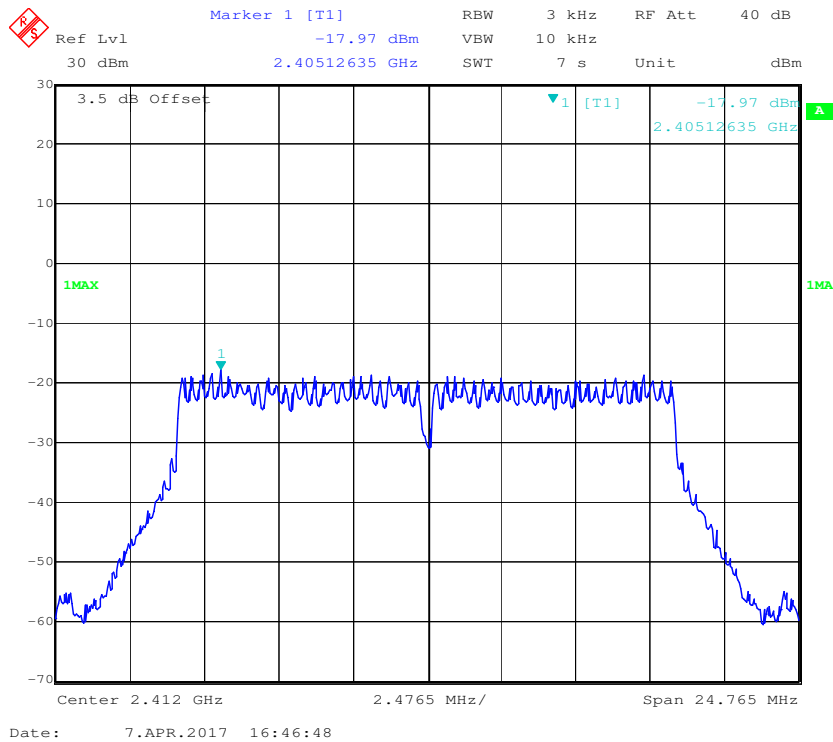


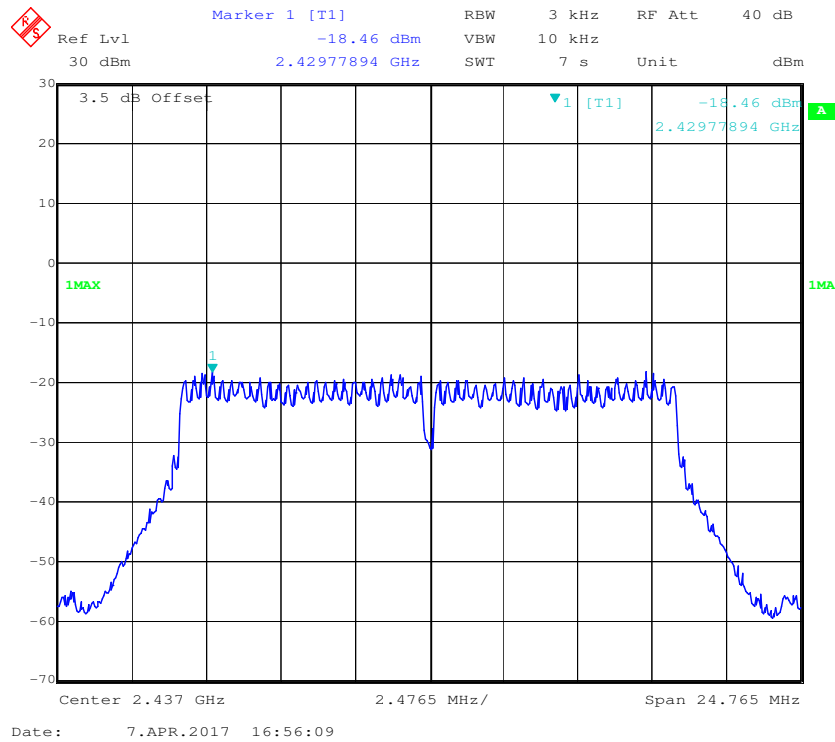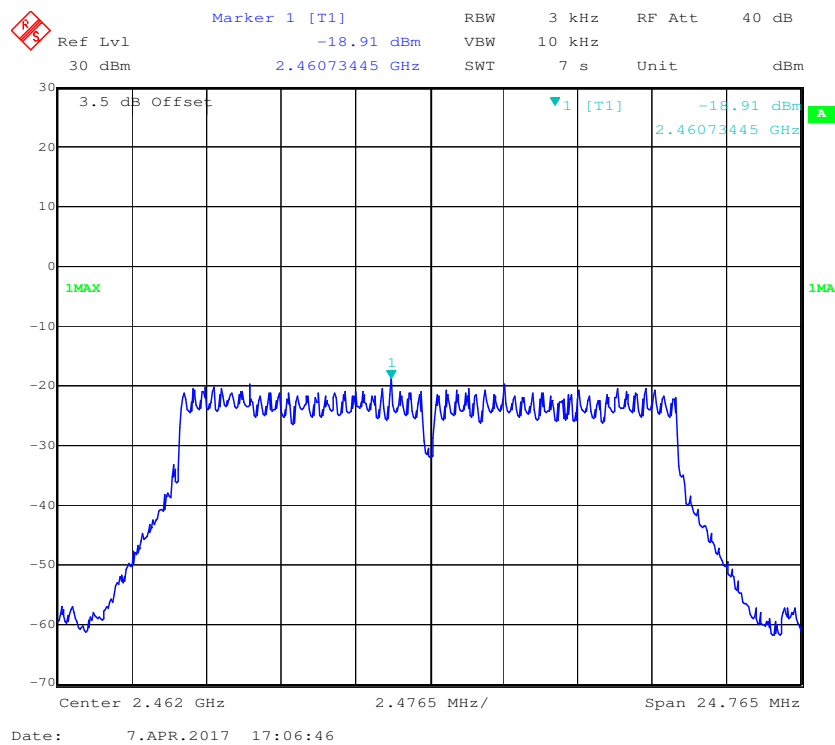Power Spectral Density, 802.11g Middle Channel**Power Spectral Density, 802.11g High Channel**


Power Spectral Density, 802.11n-HT20 Low Channel

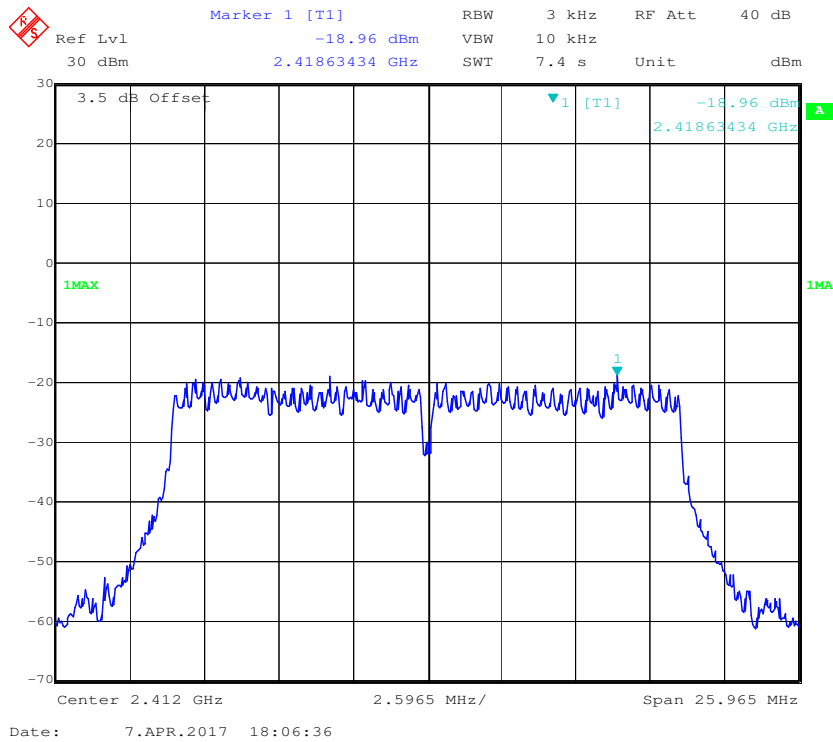


Power Spectral Density, 802.11n-HT20 Middle Channel

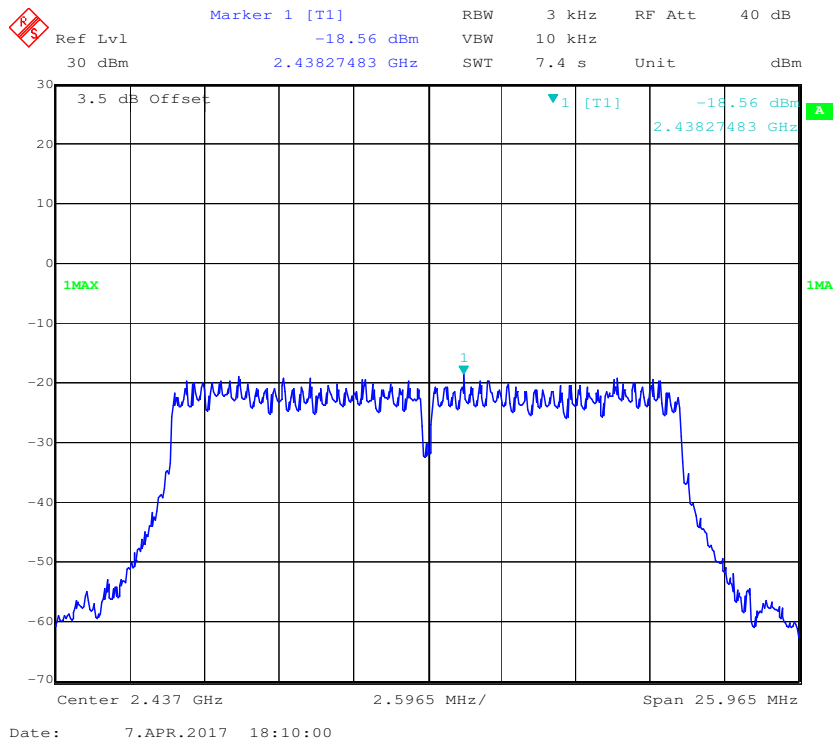


Power Spectral Density, 802.11n-HT20 High Channel

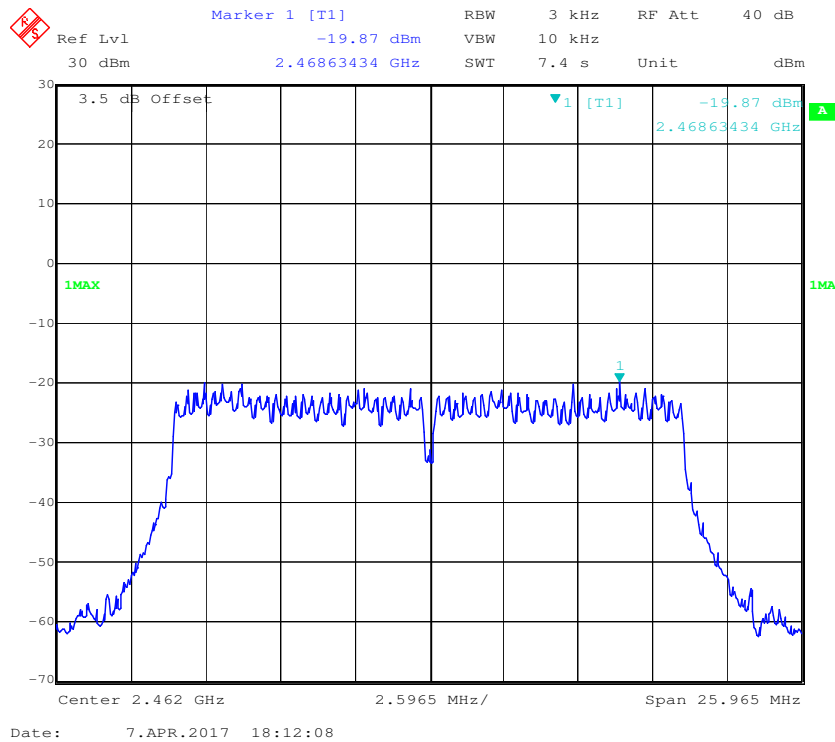


Power Spectral Density, 802.11n-HT40 Low Channel

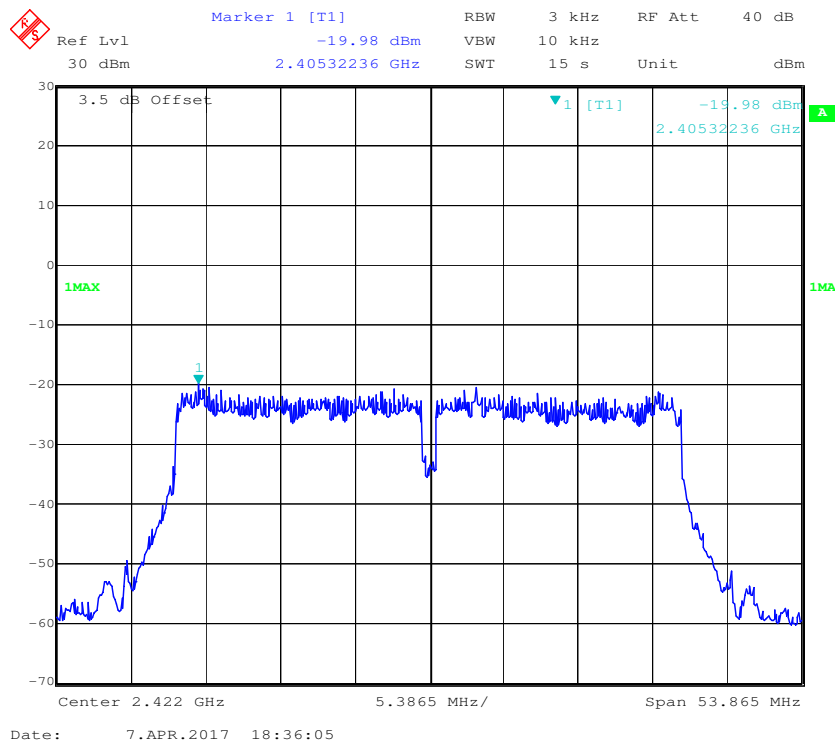

Power Spectral Density, 802.11n-HT40 Middle Channel

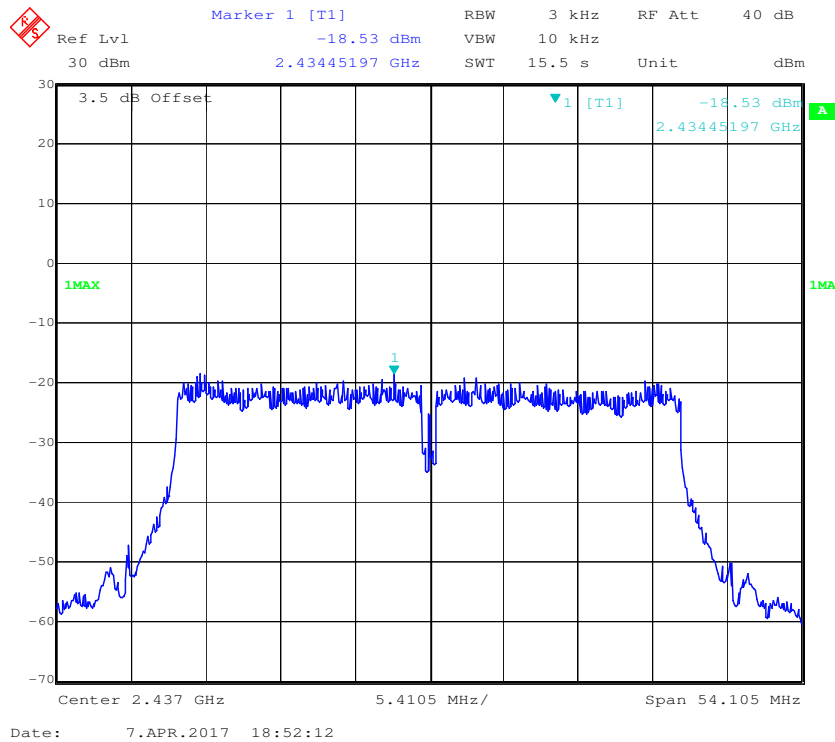

Power Spectral Density, 802.11n-HT40 High Channel

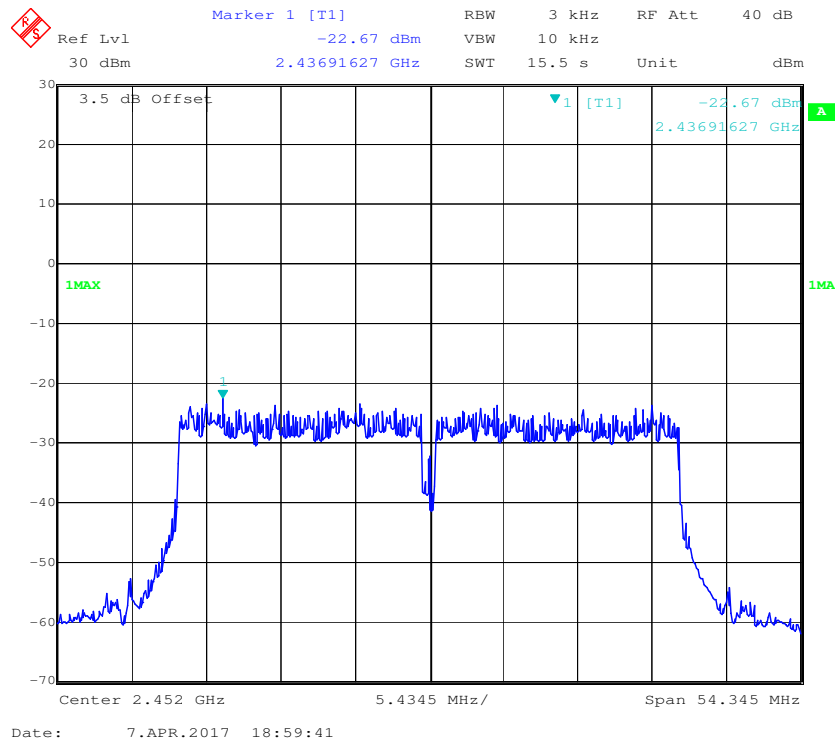

***** END OF REPORT *****