

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B
RSS-210 issue 10 Annex A, ICES-003 Issue 7:2020

FOR:

Phytech Ltd.

NG sensor Dendrometer,

NG sensor Dendrometer with Arm

Model: NGPS001

FCC ID: 2ALN6300

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Periodic operation requirements at NG sensors Dendrometer and NG sensor Dendrometer with Arm	7
7.2	Field strength of emissions at NG sensor Dendrometer.....	10
7.3	Field strength of emissions at NG sensor Dendrometer with Arm.....	18
7.4	Occupied bandwidth test at NG sensors Dendrometer and NG sensor Dendrometer with Arm.....	26
7.5	Antenna requirements.....	28
8	Emissions tests according to 47CFR part 15 subpart B and ICES-003 requirements.....	29
8.1	Radiated emission measurements at NG sensor Dendrometer	29
8.2	Radiated emission measurements at NG sensor Dendrometer with Arm	34
9	APPENDIX A Test equipment and ancillaries used for tests.....	39
10	APPENDIX B Test equipment correction factors.....	40
11	APPENDIX C Measurement uncertainties	46
12	APPENDIX D Test laboratory description	47
13	APPENDIX E Specification references.....	48
14	APPENDIX F Manufacturer's declaration about periodic operation	49
15	APPENDIX G Abbreviations and acronyms	50

1 Applicant information

Client name: Phytech Ltd.
Address: 23 HaMelacha street, Park Afek, Rosh Haayin 4809900, Israel
Telephone: +972 3947 8050
Fax: +972 3947 8010
E-mail: eitanp@phytech.com
Contact name: Mr. Eitan Peleg

2 Equipment under test attributes

Product name: NG sensor Dendrometer,
NG sensor Dendrometer with Arm
Product type: Transceiver
Model(s): NGPS001
Serial number: 101
Hardware version: 300
Software release: A.2.22.3
Receipt date 07-Oct-21

3 Manufacturer information

Manufacturer name: Phytech Ltd.
Address: 23 HaMelacha street, Park Afek, Rosh Haayin 4809900, Israel
Telephone: +972 3947 8050
Fax: +972 3947 8010
E-Mail: eitanp@phytech.com
Contact name: Mr. Eitan Peleg

4 Test details

Project ID: 44399
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 17-Oct-21
Test completed: 18-Oct-21
Test specification(s): FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B
RSS-210 issue 10 Annex A, ICES-003 Issue 7:2020

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(a) / RSS-210, Section A1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2/ ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. I. Zilberstein, test engineer, EMC & Radio	17-Oct-21 – 18-Oct-21	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	28-Feb-22	
Approved by:	Mr. S. Samokha, technical manager, EMC & Radio	30-Mar-22	


6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The Phytech 300 plant sensor is part of an advanced AG IoT platform for optimized Irrigation management. It is an upgraded version of the previous, 102 plant sensor and performs as part of Phytech's New Generation. The Phytech plant sensor (300 sensor) measures and transmits data to the hub. The hub organizes the data and then sends it to a Phytech datalogger. Finally, the data is sent to the Phytech cloud for analysis and processing. The outcome is a simple color scheme that aids the grower to decide online when and how much to irrigate.

6.2 Test configuration

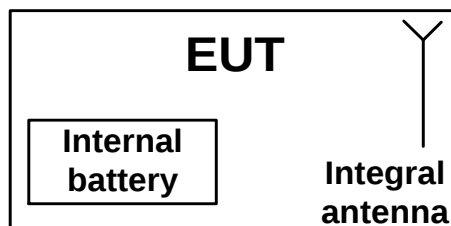

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Operating frequency		433.92 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector				
		Field strength at 3 m distance			69.82 dB(μ V/m)	
Is transmitter output power variable?		X	No			
		Yes	continuous variable			
			stepped variable with stepsize			
			dB			
			dBm			
		minimum RF power				
		maximum RF power				
		dBm				
Antenna connection						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector	
				X	without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Integrated on board		Phytech		300		
				Gain		
				-20 dBi		
Transmitter aggregate data rate/s		800 bps				
Type of modulation		FSK				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
X	Battery	Nominal rated voltage	3.0 VDC	Battery type	Alkaline 2X4A	
	DC	Nominal rated voltage	VDC			
	AC mains	Nominal rated voltage	VAC	Frequency		
Common power source for transmitter and receiver				X	yes	
					no	



Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	18-Oct-21		
Temperature: 24.7 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements at NG sensors Dendrometer and NG sensor Dendrometer with Arm

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in * Provided in Appendix F.

7.1.2.5 Plot 7.1.1.

7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test






Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	18-Oct-21		
Temperature: 24.7 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration*	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration*	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	NA	NA
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	NA	NA

* Provided in Appendix F.

Plot 7.1.1 Transmitter shut down test result

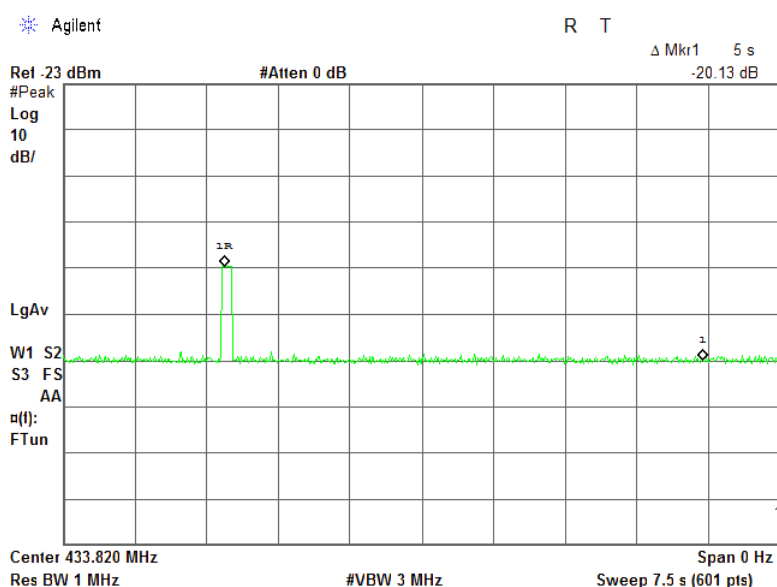



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Oct-21			
Temperature: 24.7 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Plot 7.1.2 Polling / supervision transmission duration

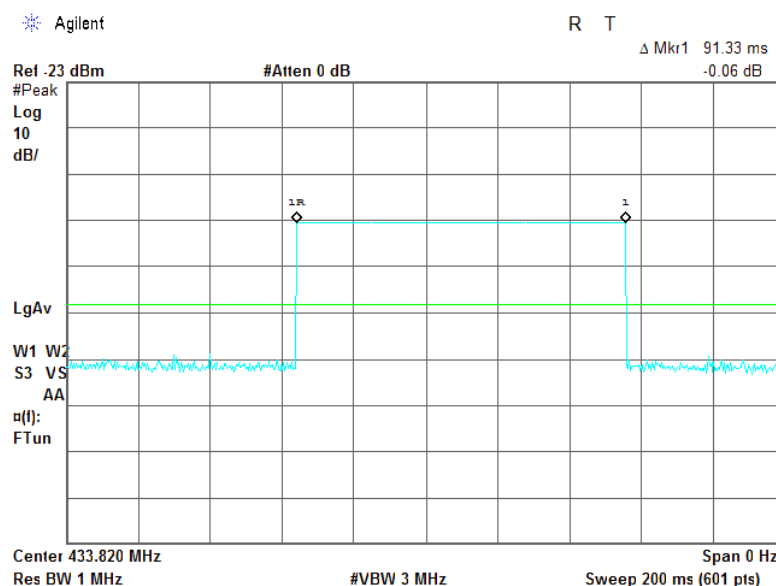


Table 7.1.2 Total duration of polling / supervision transmissions

Duration, ms	Repetition period, min	Maximum number of transmissions within 1 hour	Total duration within 1 hour, ms
91.33	120	1	91.33

Reference numbers of test equipment used

HL 3818	HL 5587	HL 5838					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

7.2 Field strength of emissions at NG sensor Dendrometer

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.82	100.8	80.8

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	80.8	60.8
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) - \text{within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.


7.2.2.3 The worst test results (the lowest margins), recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins), recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

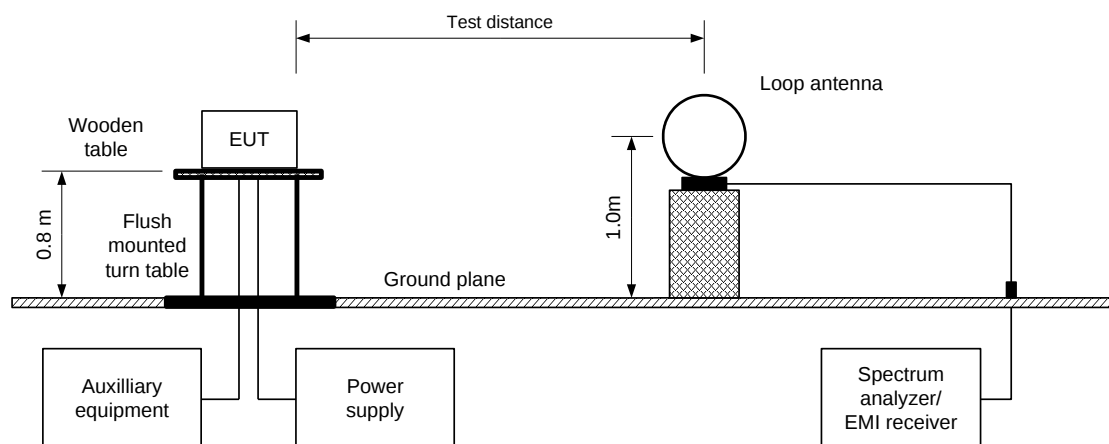Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


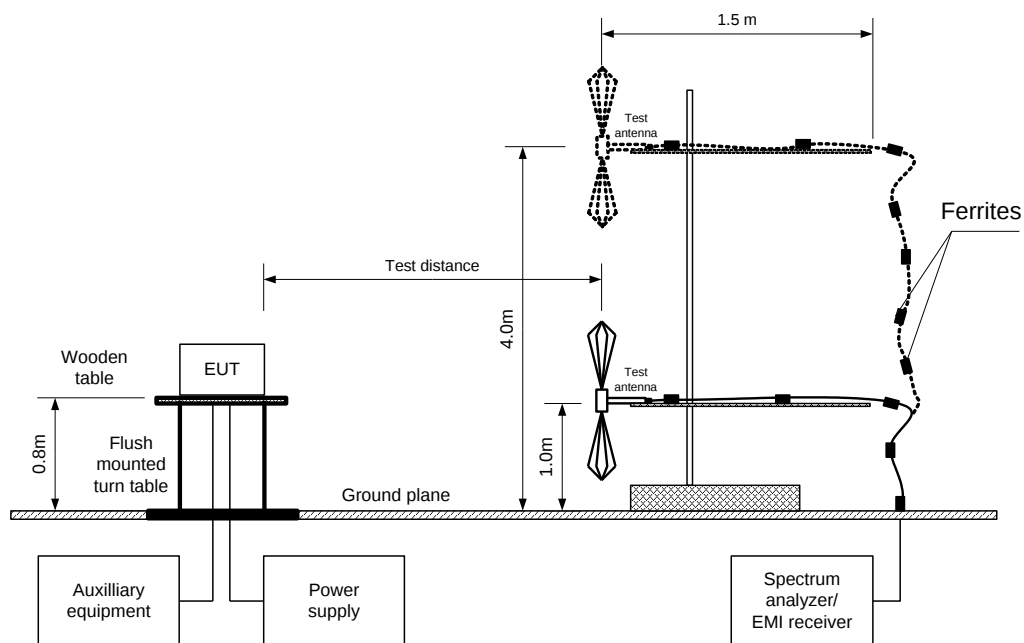


Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz



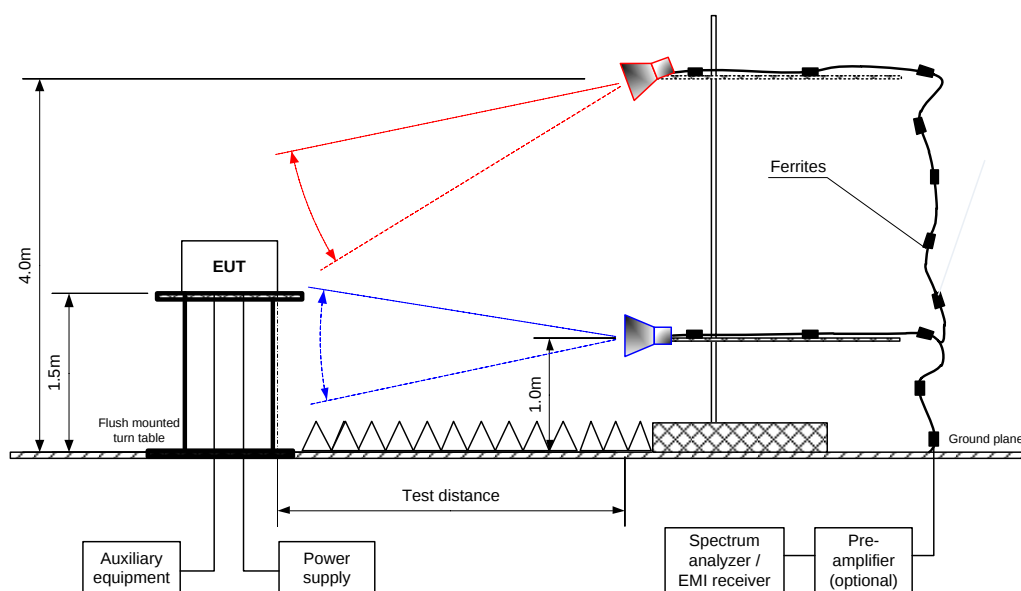

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
EUT POSITION: Typical
MODULATION: FSK
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
INVESTIGATED FREQUENCY RANGE: 0.009 - 5000 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

Double ended guide (above 1000 MHz)											
F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
433.82	H	1.0	0	67.60	100.8	-33.20	67.60	67.60	80.8	-13.2	Pass
Spurious emissions											
No emissions were found											Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(μV/m)-Limit, dB(μV/m)

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical
 MODULATION: FSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconical (30 MHz – 200 MHz)
 Log periodic (200 MHz – 1000 MHz)
 Biconilog (30 MHz – 1000 MHz)

Emissions (30 MHz – 2000 MHz)								
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								
								Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4360	HL 4933	HL 5288	HL 5902	HL 4339	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3


MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical

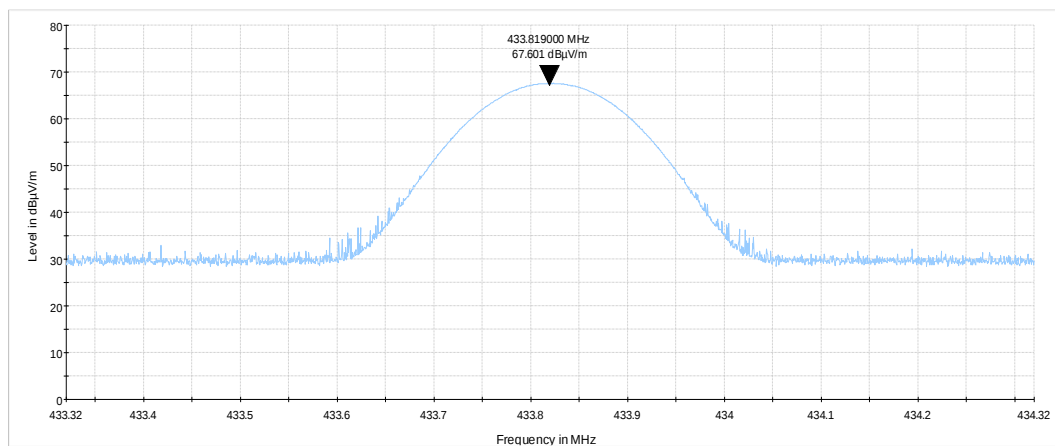**Plot 7.2.2 Radiated emission measurements from 9 kHz to 30 MHz**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical

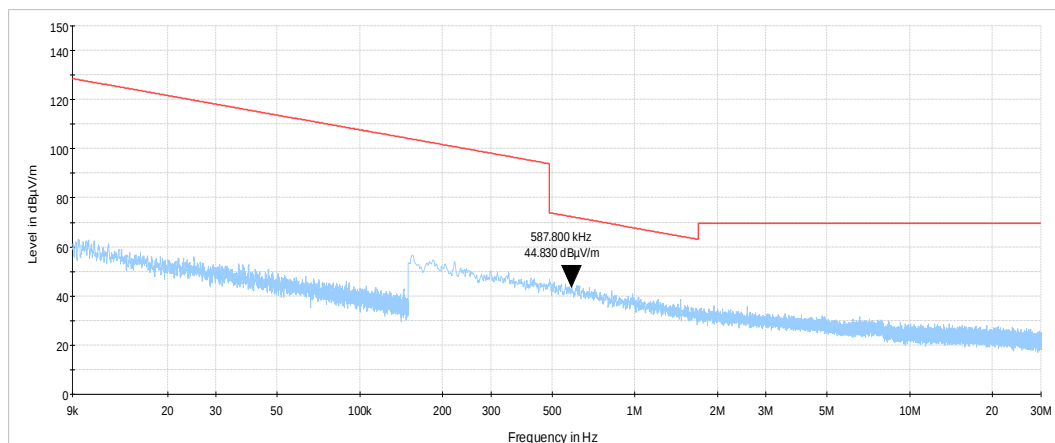




Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1013 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.3 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical

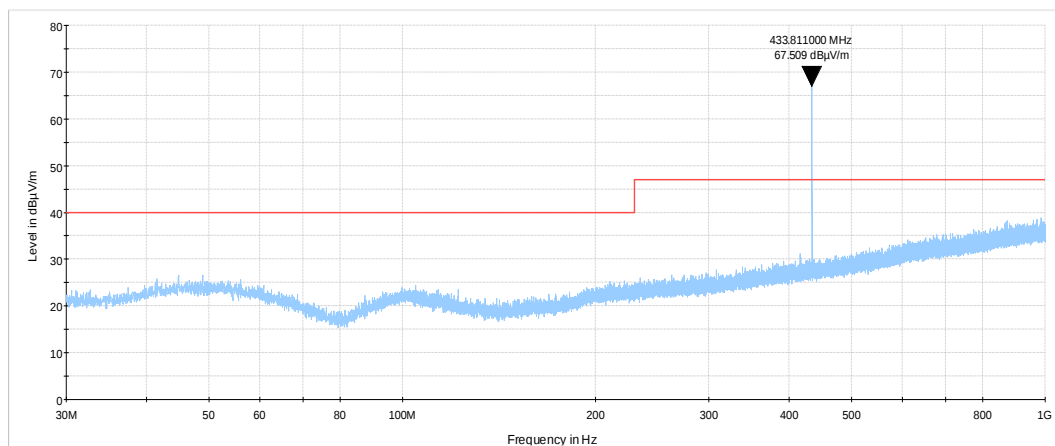

Plot 7.2.4 Radiated emission measurements from 1000 to 5000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical

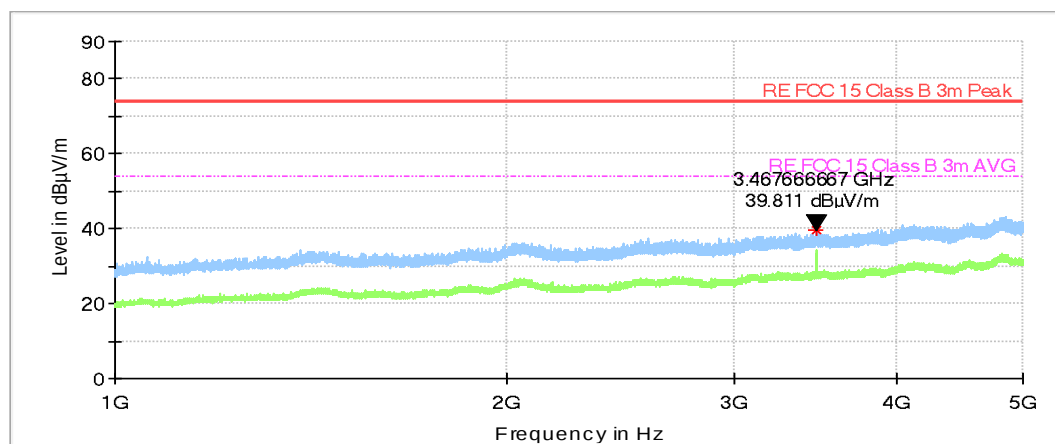



Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Oct-21		
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

7.3 Field strength of emissions at NG sensor Dendrometer with Arm

7.3.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.3.1 and Table 7.3.2.

Table 7.3.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.82	100.8	80.8

Table 7.3.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	80.8	60.8
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) - \text{within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins), recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 7.3.3, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins), recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

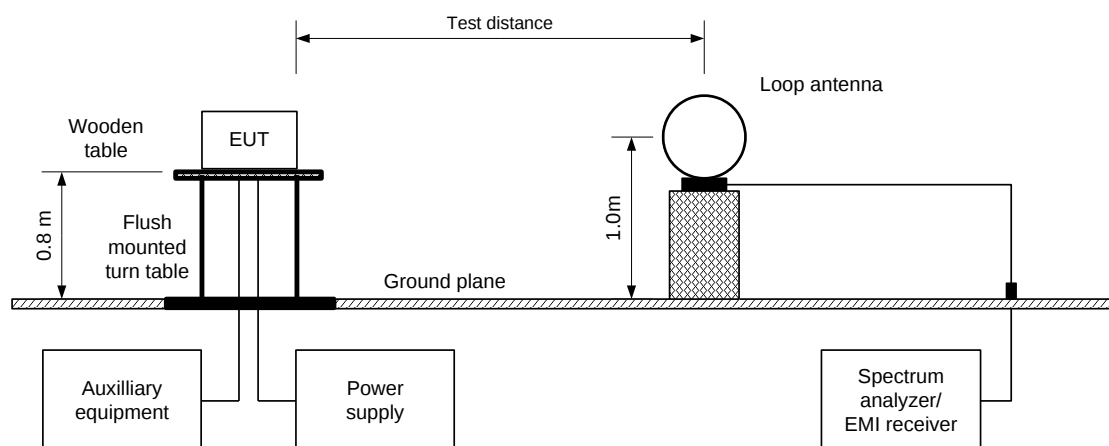



Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	
Test procedure:		ANSI C63.10 sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Figure 7.3.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


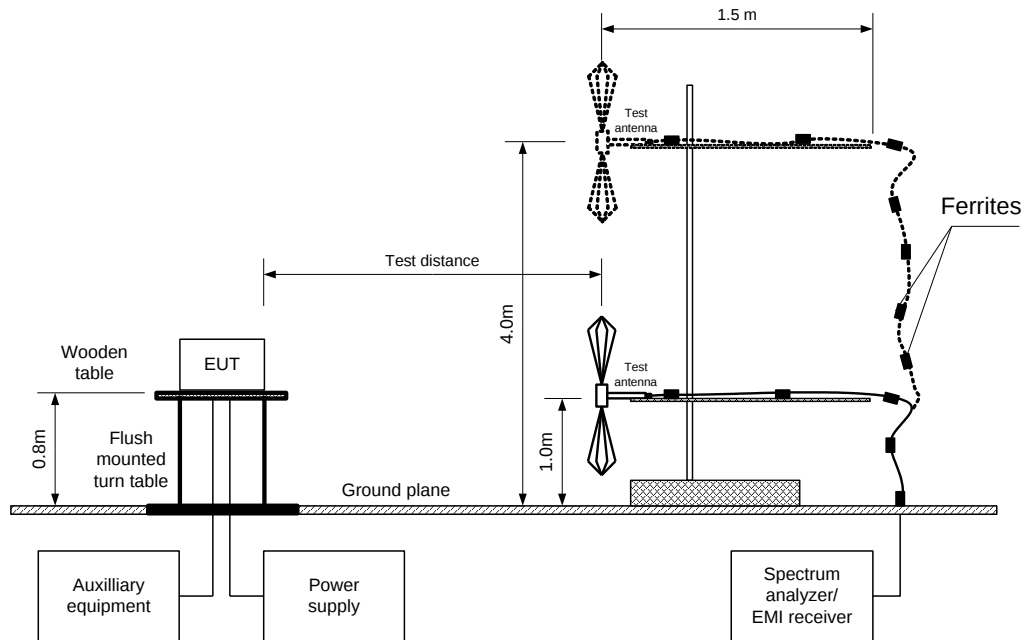


Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz



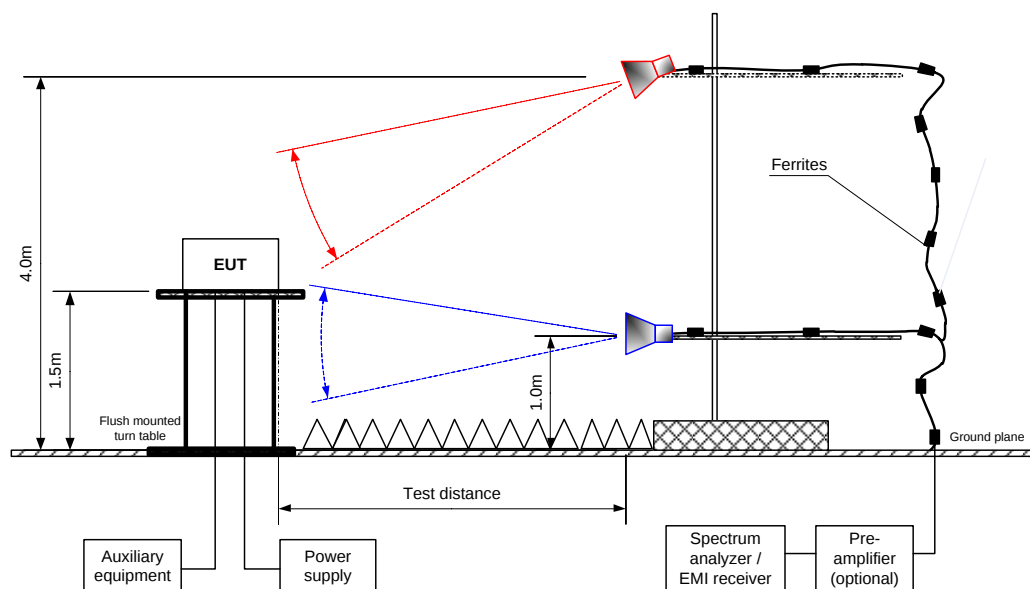

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Table 7.3.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
 EUT POSITION: Typical
 MODULATION: FSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 - 5000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 1.0 MHz (above 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
433.82	H	1.0	0	69.82	100.8	-30.98	69.82	69.82	80.8	-10.98	Pass
Spurious emissions											
No emissions were found											Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m)

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Table 7.3.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
EUT POSITION: Typical
MODULATION: FSK
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconical (30 MHz – 200 MHz)
Log periodic (200 MHz – 1000 MHz)
Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4360	HL 4933	HL 5288	HL 5902		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Table 7.3.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.3.7 Restricted bands according to RSS-Gen, Table 3


MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Plot 7.3.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical

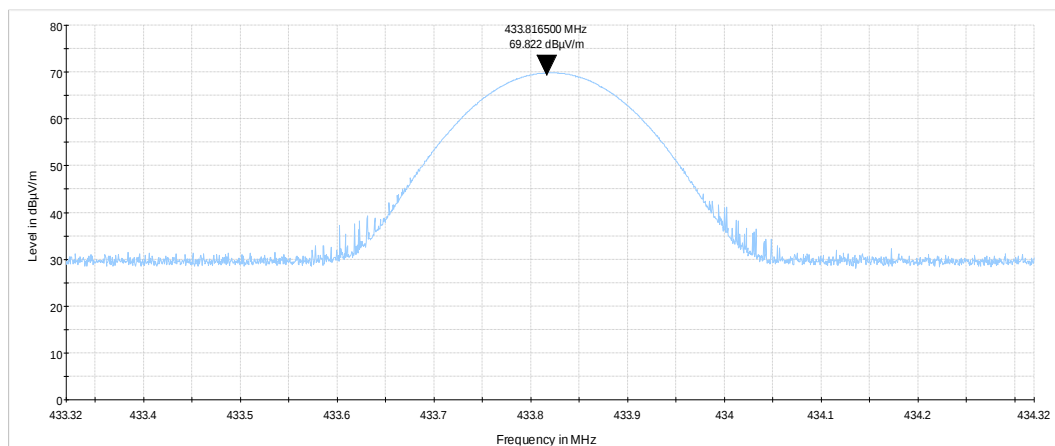**Plot 7.3.2 Radiated emission measurements from 9 kHz to 30 MHz**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical

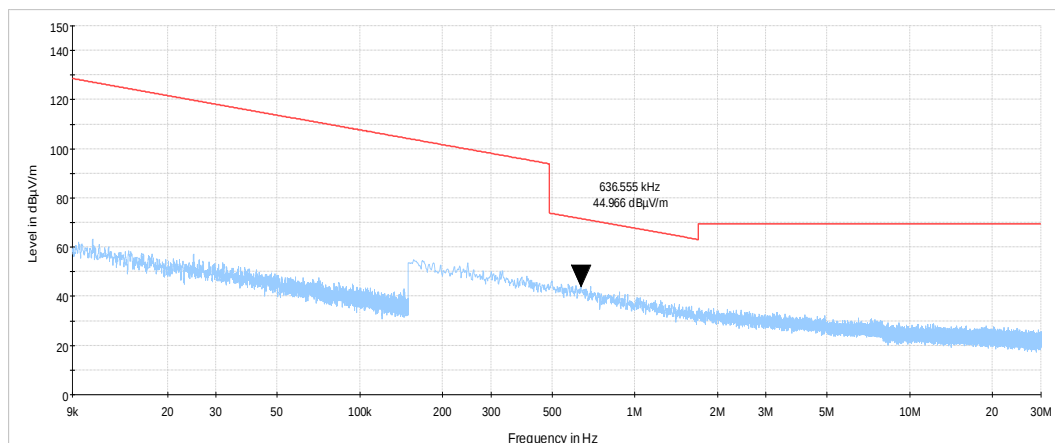




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			


Plot 7.3.3 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical

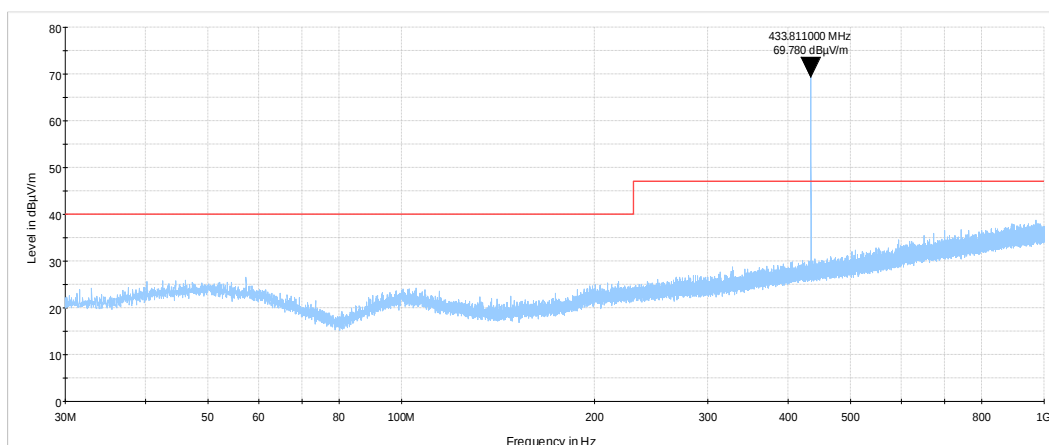

Plot 7.3.4 Radiated emission measurements from 1000 to 5000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical

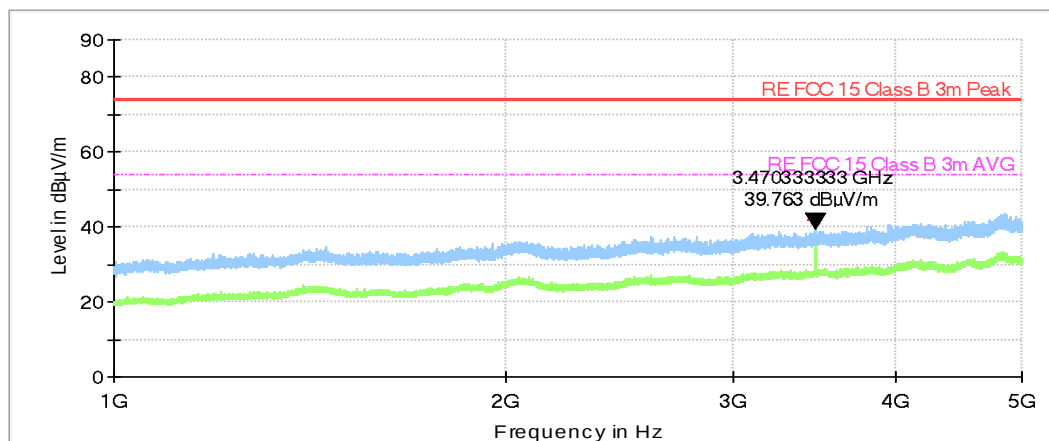



Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7.4 Occupied bandwidth test at NG sensors Dendrometer and NG sensor Dendrometer with Arm

7.4.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.4.1. The test results are provided in Table 7.4.2 and associated plots.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was set to transmit modulated carrier.

7.4.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and associated plot.

Figure 7.4.1 Occupied bandwidth test setup





Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.4.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 200 Hz
 VIDEO BANDWIDTH: 1 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: FSK
 BIT RATE: 2400.0 kbps
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.82	8.125	0.25	1054.55	-1046.425	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99%


Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.82	8.017	0.25	1054.55	-1046.533	Pass

Reference numbers of test equipment used

HL 3818	HL 5587							
---------	---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.4.1 Occupied bandwidth test result

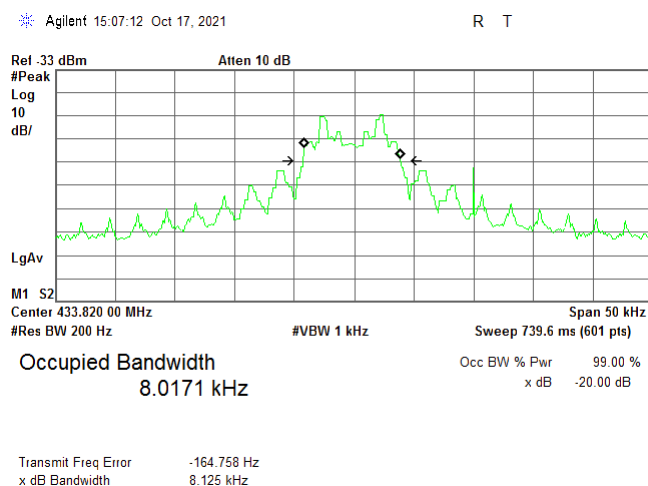



Test specification: FCC Part 15, Section 203 / RSS-Gen, Section 6.8, Antenna requirements			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Oct-21			
Temperature: 26 °C	Relative Humidity: 47 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

7.5 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

8 Emissions tests according to 47CFR part 15 subpart B and ICES-003 requirements

8.1 Radiated emission measurements at NG sensor Dendrometer

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission limits

FCC part 15

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – standard defined and test distance respectively in meters.

ICES-003

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	30.0	40.0	40.0	50.0
88 - 216	33.1	43.5	43.5	54.0
216 - 230	35.6	46.0	46.4	56.9
230 - 960	37.0	47.0	47.0	57.0
960 - 1000	43.5	54.0	49.5	60.0
Above 1000	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	Peak	Average	Peak	Average
	74.0	54.0	80.0	60.0

*The more stringent limit applies at transition frequencies

8.1.2 Test procedure


8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.


8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.

Test specification:		FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

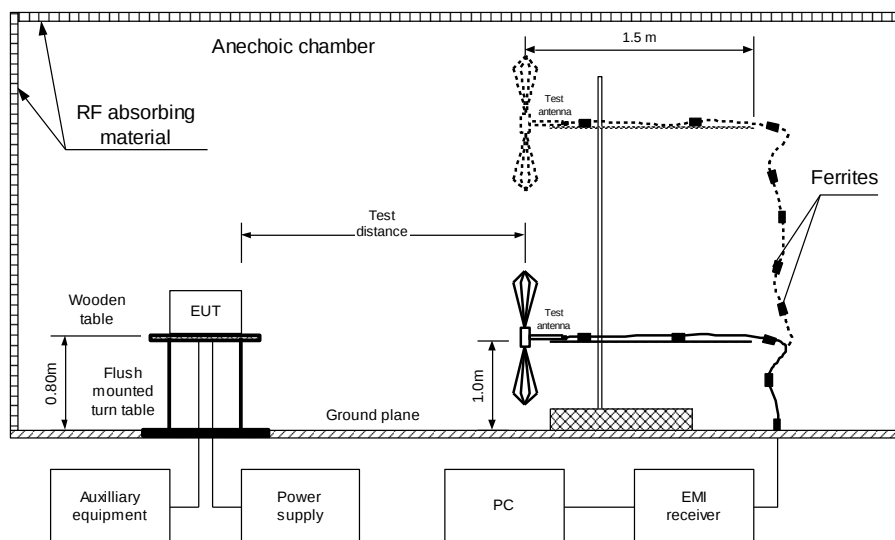


Photograph 8.1.1 Setup for final radiated emission measurements, general view

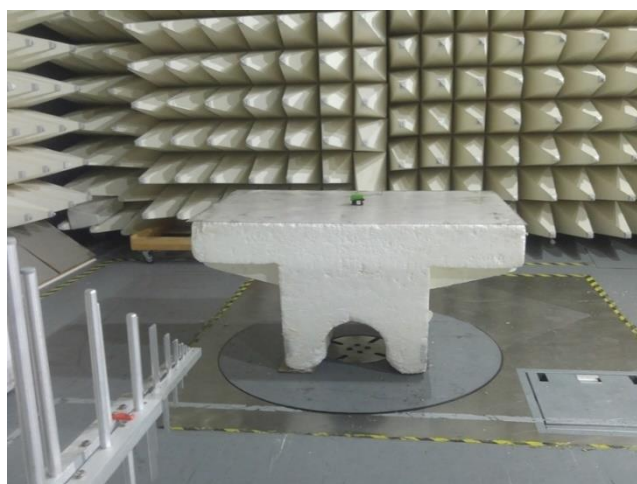

Test specification:		FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Photograph 8.1.2 Setup for radiated emission measurements above 1 GHz, general view

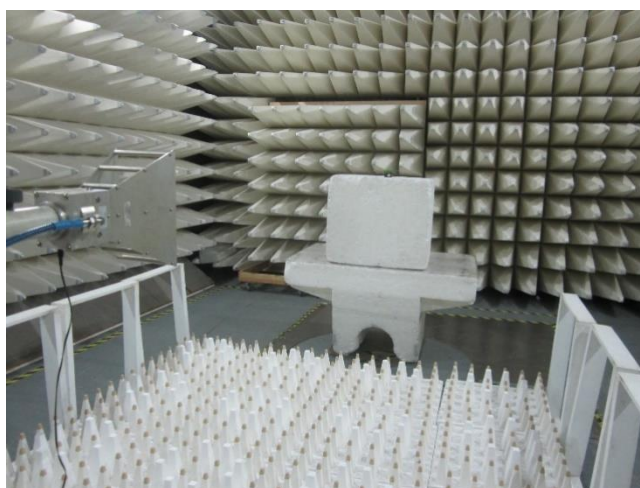

Photograph 8.1.3 Setup for final radiated emission measurements, EUT cabling





HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 2500 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Peak				Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3903	HL 4360	HL 4933	HL 5288	HL 5902	HL 4339		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.




Test specification:		FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Oct-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

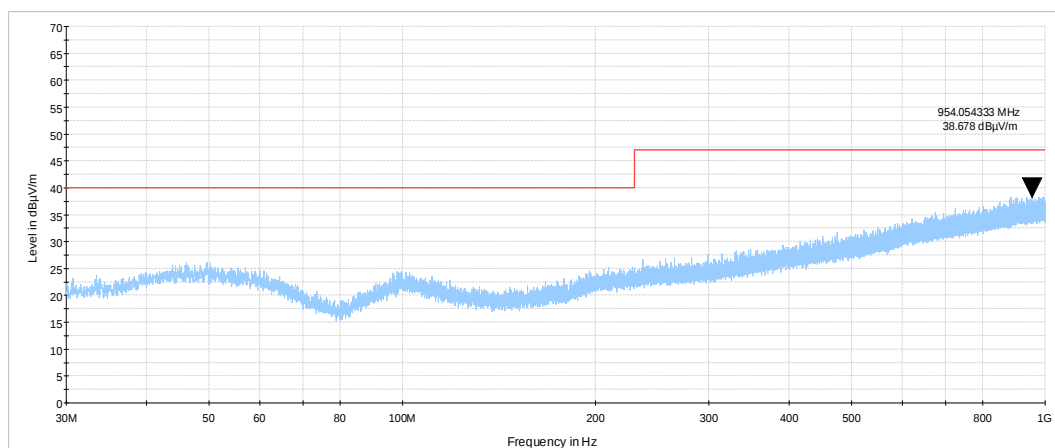**Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

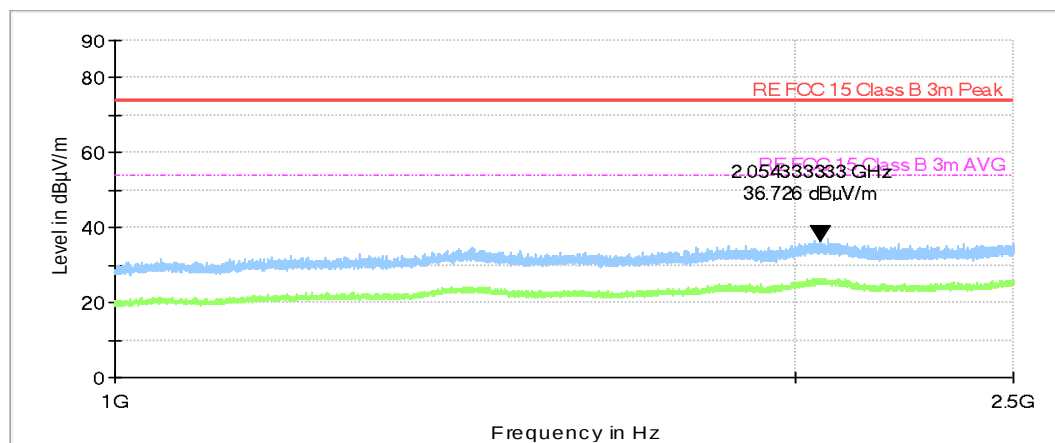



Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

8.2 Radiated emission measurements at NG sensor Dendrometer with Arm

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission limits

FCC part 15

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – standard defined and test distance respectively in meters.

ICES-003

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	30.0	40.0	40.0	50.0
88 - 216	33.1	43.5	43.5	54.0
216 - 230	35.6	46.0	46.4	56.9
230 - 960	37.0	47.0	47.0	57.0
960 - 1000	43.5	54.0	49.5	60.0
Above 1000	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	Peak	Average	Peak	Average
	74.0	54.0	80.0	60.0

*The more stringent limit applies at transition frequencies

8.2.2 Test procedure

8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photographs, energized and the performance check was conducted.


8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.2.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.




Test specification:		FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Oct-21			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

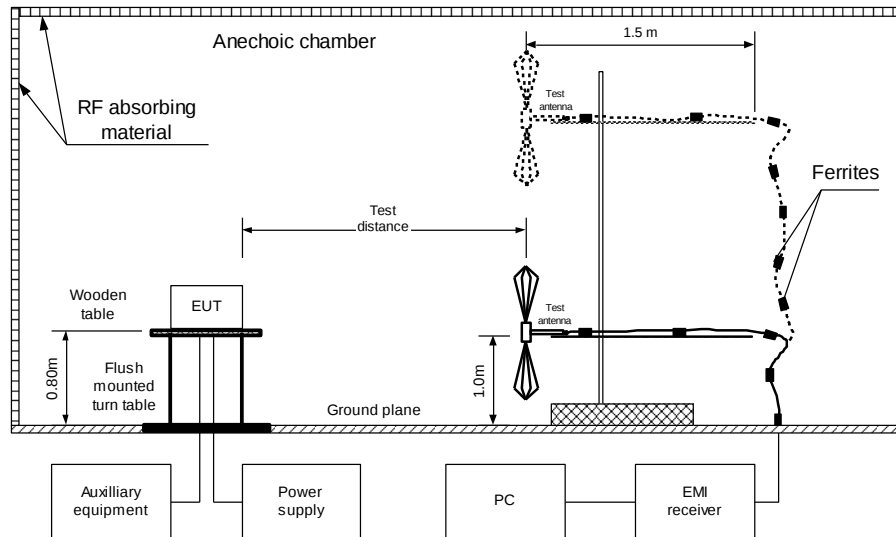


Photograph 8.2.1 Setup for final radiated emission measurements, general view

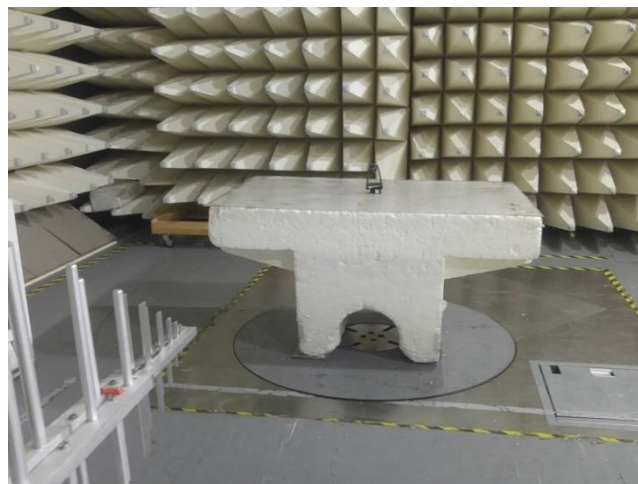



Test specification:		FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Photograph 8.2.2 Setup for radiated emission measurements above 1 GHz, general view

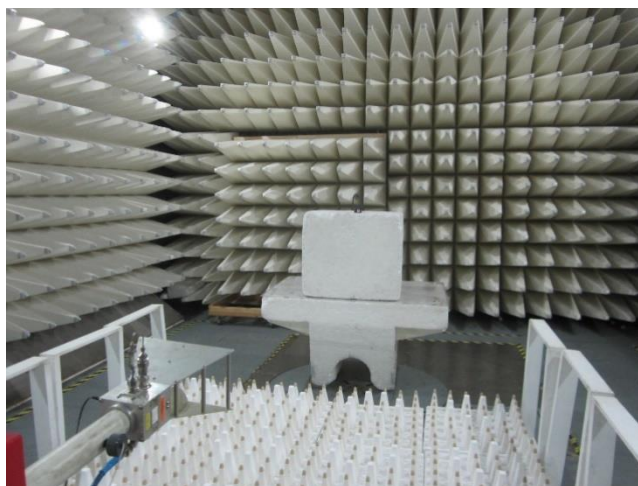

Photograph 8.2.3 Setup for final radiated emission measurements, EUT cabling





HERMON LABORATORIES

Report ID: PHYRAD_FCC.44399.docx

Date of Issue: 30-Mar-22

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Oct-21			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 2500 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3903	HL 4360	HL 4933	HL 5288	HL 5902	HL 4339		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.




Test specification:		FCC Part 15, Section 109 / RSS-Gen, Section 7.2.3 / ICES-003, 3.2.2, Class B, Radiated emission	
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5	
Test mode:		Verdict: PASS	
Date(s):			
17-Oct-21			
Temperature: 25 °C	Relative Humidity: 47 %	Air Pressure: 1012 hPa	Power: 3 VDC
Remarks:			

Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

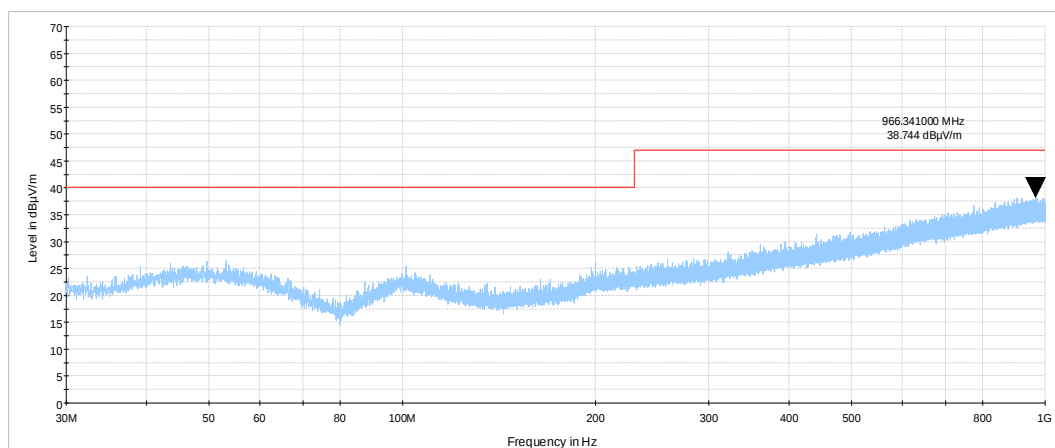**Plot 8.2.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

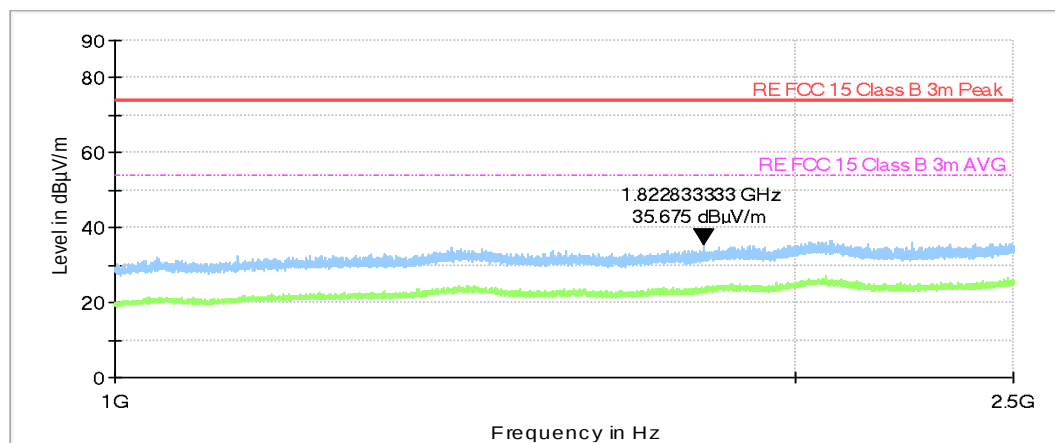

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	28-Feb-21	28-Feb-22
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY48250288	02-Aug-21	02-Aug-22
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	06-Apr-21	06-Apr-22
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM5011 5-02	001	15-Jun-21	15-Jun-23
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	19-Jan-21	19-Jan-22
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	26-Jan-21	26-Jan-22
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5587	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/N-type	Mini Circuits	CBL-6FT-SMNM+	NA	26-Oct-20	26-Oct-21
5838	Set near field probes	COM-POWER CORPORATION	PS-400	151724	05-Jul-20	05-Jul-22
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	01-Dec-20	01-Dec-21

10 APPENDIX B Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Measured antenna factor, dBS/m
0.009	-32.5
0.010	-33.4
0.020	-37.9
0.050	-40.6
0.075	-41.0
0.100	-41.2
0.150	-41.2
0.250	-41.2
0.500	-41.3
0.750	-41.3
1.000	-41.4
2.000	-41.4
3.000	-41.4
4.000	-41.5
5.000	-41.5
10.000	-41.8
15.000	-42.2
20.000	-42.9
25.000	-43.9
30.000	-45.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Trilog antenna
Model ALX-8000E, Frankonia, S/N 00809, HL 5288, 30-1000 MHz

Frequency, MHz	Antenna factor, dB/m		
	Vert Up	Vert Down	Delta
30	-51.19	-51.28	0.09
35	-44.03	-44.12	0.09
40	-43.07	-43.12	0.05
45	-39.61	-39.79	0.18
50	-37.84	-38.14	0.3
60	-34.93	-34.9	0.03
70	-29.76	-29.66	0.1
80	-27.69	-27.82	0.13
90	-29.05	-29.07	0.02
100	-31.19	-31.19	0
120	-31.61	-31.6	0.01
140	-28.13	-28.06	0.07
160	-27.71	-27.75	0.04
180	-26.19	-26.15	0.04
200	-28.2	-28.15	0.05
250	-27.45	-27.47	0.02
300	-29.61	-29.63	0.02
400	-31.77	-31.78	0.01
500	-32.81	-32.81	0
600	-33.64	-33.61	0.03
700	-34.21	-34.21	0
800	-35.66	-35.66	0
900	-36.99	-36.91	0.08
1000	-38	-37.91	0.09

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Active Horn Antenna,
Com-Power Corporation, model: AHA-118, s/n 701046, HL 4933

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



Cable loss
RF Cable, Mini Circuits, 18 GHz, 1.8 m, SMA/N-type
CBL-6FT-SMNM+, S/N NA
HL 5587

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	-0.01	8750	2.64
10	0.01	9000	2.67
30	0.07	9250	2.71
50	0.13	9500	2.75
100	0.20	9750	2.79
250	0.34	10000	2.82
500	0.51	10250	2.87
750	0.63	10500	2.90
1000	0.74	10750	2.96
1250	0.84	11000	2.99
1500	0.93	11250	3.02
1750	1.01	11500	3.08
2000	1.09	11750	3.12
2250	1.16	12000	3.15
2500	1.24	12250	3.20
2750	1.31	12500	3.23
3000	1.38	12750	3.28
3250	1.45	13000	3.31
3500	1.51	13250	3.35
3750	1.58	13500	3.38
4000	1.64	13750	3.42
4250	1.70	14000	3.46
4500	1.76	14250	3.49
4750	1.80	14500	3.53
5000	1.85	14750	3.57
5250	1.92	15000	3.62
5500	1.97	15250	3.66
5750	2.03	15500	3.70
6000	2.09	15750	3.75
6250	2.15	16000	3.78
6500	2.20	16250	3.82
6750	2.26	16500	3.86
7000	2.30	16750	3.89
7250	2.36	17000	3.91
7500	2.40	17250	3.95
7750	2.46	17500	3.98
8000	2.52	17750	4.02
8250	2.55	18000	4.07
8500	2.60		

Cable loss
RF cable, 18 GHz, 6.0m, N-type, Huber-Suhner, S/N 511435/126EA,
SF126EA/11N/11N/6000, HL 5902

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.00	4800	3.24	10000	4.82	15200	6.08
1	0.01	4900	3.30	10100	4.85	15300	6.11
10	0.07	5000	3.32	10200	4.87	15400	6.12
30	0.18	5100	3.37	10300	4.91	15500	6.14
50	0.25	5200	3.40	10400	4.93	15600	6.15
100	0.41	5300	3.42	10500	4.95	15700	6.18
200	0.56	5400	3.46	10600	4.99	15800	6.20
300	0.68	5500	3.50	10700	5.01	15900	6.23
400	0.76	5600	3.53	10800	5.03	16000	6.22
500	0.87	5700	3.56	10900	5.06	16100	6.26
600	1.03	5800	3.58	11000	5.08	16200	6.29
700	1.14	5900	3.63	11100	5.12	16300	6.30
800	1.23	6000	3.67	11200	5.13	16400	6.33
900	1.34	6100	3.69	11300	5.16	16500	6.35
1000	1.43	6200	3.73	11400	5.18	16600	6.37
1100	1.51	6300	3.76	11500	5.22	16700	6.40
1200	1.59	6400	3.80	11600	5.24	16800	6.43
1300	1.66	6500	3.81	11700	5.25	16900	6.46
1400	1.73	6600	3.83	11800	5.28	17000	6.47
1500	1.78	6700	3.87	11900	5.32	17100	6.49
1600	1.82	6800	3.91	12000	5.33	17200	6.51
1700	1.87	6900	3.91	12100	5.35	17300	6.53
1800	1.89	7000	3.93	12200	5.38	17400	6.56
1900	1.95	7100	3.95	12300	5.39	17500	6.60
2000	1.99	7200	3.98	12400	5.43	17600	6.62
2100	2.02	7300	4.02	12500	5.46	17700	6.60
2200	2.06	7400	4.04	12600	5.48	17800	6.63
2300	2.11	7500	4.07	12700	5.50	17900	6.64
2400	2.16	7600	4.11	12800	5.52	18000	6.66
2500	2.21	7700	4.15	12900	5.57		
2600	2.29	7800	4.17	13000	5.57		
2700	2.32	7900	4.20	13100	5.60		
2800	2.38	8000	4.22	13200	5.61		
2900	2.44	8100	4.26	13300	5.64		
3000	2.47	8200	4.30	13400	5.67		
3100	2.53	8300	4.32	13500	5.70		
3200	2.57	8400	4.35	13600	5.71		
3300	2.61	8500	4.39	13700	5.73		
3400	2.67	8600	4.43	13800	5.74		
3500	2.71	8700	4.45	13900	5.80		
3600	2.76	8800	4.47	14000	5.82		
3700	2.80	8900	4.49	14100	5.85		
3800	2.85	9000	4.53	14200	5.86		
3900	2.89	9100	4.55	14300	5.87		
4000	2.93	9200	4.57	14400	5.92		
4100	2.98	9300	4.61	14500	5.93		
4200	3.01	9400	4.64	14600	5.95		
4300	3.05	9500	4.68	14700	5.97		
4400	3.10	9600	4.70	14800	6.01		
4500	3.12	9700	4.73	14900	6.04		
4600	3.18	9800	4.78	15000	6.04		
4700	3.21	9900	4.80	15100	6.08		

11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers for OATS are R-10808 for RE measurements below 1 GHz, G-20112 for RE measurements above 1 GHz, R-11082 for anechoic chamber for RE measurements below 1 GHz, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

13 APPENDIX E

Specification references

FCC 47CFR part 15: 2020

ANSI C63.10: 2013

ANSI C63.4: 2014

RSS-210 Issue 10: 2019

RSS-Gen Issue 5 with Am.1,
Am.2: 2021

ICES-003 Issue 7:2020

Radio Frequency Devices

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Licence-Exempt Radio Apparatus:Category I Equipment

General Requirements for Compliance of Radio Apparatus

Information Technology Equipment (Including Digital Apparatus)

14 APPENDIX F Manufacturer's declaration about periodic operation



March 24, 2022

To: Hermon Laboratories

Attention: Mr. Sergey Samokha

Manufacturer's Declaration

We, Phytech Ltd. located in 23 HaMelacha street, Park Afek, Rosh Haayin 4809900, Israel, declare under our sole responsibility that the product NGPS001 is operate on 433.92 MHz and designed to comply and satisfy periodic operational requirements.

NGPS001 does not allow continuous transmitting (such as voice, video and radio control).

The NGPS001 is a sensor that is part of an advanced AG IoT platform for optimized Irrigation management and will send automatically its synchronization message to hub in a certain interval (once in 120 minutes).

Eitan Peleg, CTO
Phytech Ltd.



15 APPENDIX G Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT