



# Maximum Permissible Exposure

FCC ID : 2ALND-WPCWCTXCF02  
Equipment : Wireless Power  
Brand Name : INPAQ  
Model Name : WPC-W-C-TX-CF-002  
Applicant/  
Manufacturer : INPAQ Technology Co., Ltd.  
No. 11, Ke-Yi St., Chunan, Miaoli 350 Taiwan R.O.C.  
Standard : 47 CFR Part 2.1091

The product was received on May 02, 2018, and testing was started from May 24, 2018 and completed on May 24, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in KDB 680106 D01 RF Exposure Wireless Charging Apps v03 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of United States government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Allen Lin

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>HISTORY OF THIS TEST REPORT .....</b>	<b>3</b>
<b>1 HUMAN EXPOSURE ASSESSMENT .....</b>	<b>4</b>
1.1 Maximum Permissible Exposure .....	4
1.2 Testing Location Information .....	5
1.3 Support Equipment.....	5
1.4 The Worst Condition.....	6
<b>2 TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>8</b>
<b>Appendix A. Test Photos</b>	
<b>Photographs of EUT V01</b>	



# 1 Human Exposure Assessment

## 1.1 Maximum Permissible Exposure

### 1.1.1 Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	F/300	6
1500-100,000	-	-	5	6
Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F/1500	30
1500-100,000	-	-	1.0	30
Note 1: f = frequency in MHz ; *Plane-wave equivalent power density				
Note 2: For the applicable limit, see FCC 1.1310				

### 1.1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v02 - Part 2 Section 2.109

## 1.2 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test site Designation No. TW1190 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Tim	21.7°C / 62%	24/May/2018

## 1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Load	-	-	-
2	Notebook	DELL	E5410	DoC
3	Adapter for NB	DELL	HA65NM130	DoC
4	Test jig	-	-	-

Note: Support equipment No.1 & 4 was provided by customer.


### 1.4 The Worst Condition

Ancillary Equipment	Charging Condition	Worst Charging Condition
Fixture Load	Charging Mode	Charging Mode

#### 1.4.1 Test Method

Test Method
<input checked="" type="checkbox"/> Performed aggregate both leakage E-field and H-field at surrounding the device from all simultaneous transmitting coils.
<input checked="" type="checkbox"/> During testing, the EUT was placed on a non-conductive table top and the ancillary equipment (e.g., mobile phone) was placed on the EUT for charging. Maximum E-field and H-field measurements were tested 15cm & 20cm from each side of the EUT. Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.

#### 1.4.2 Test Setup

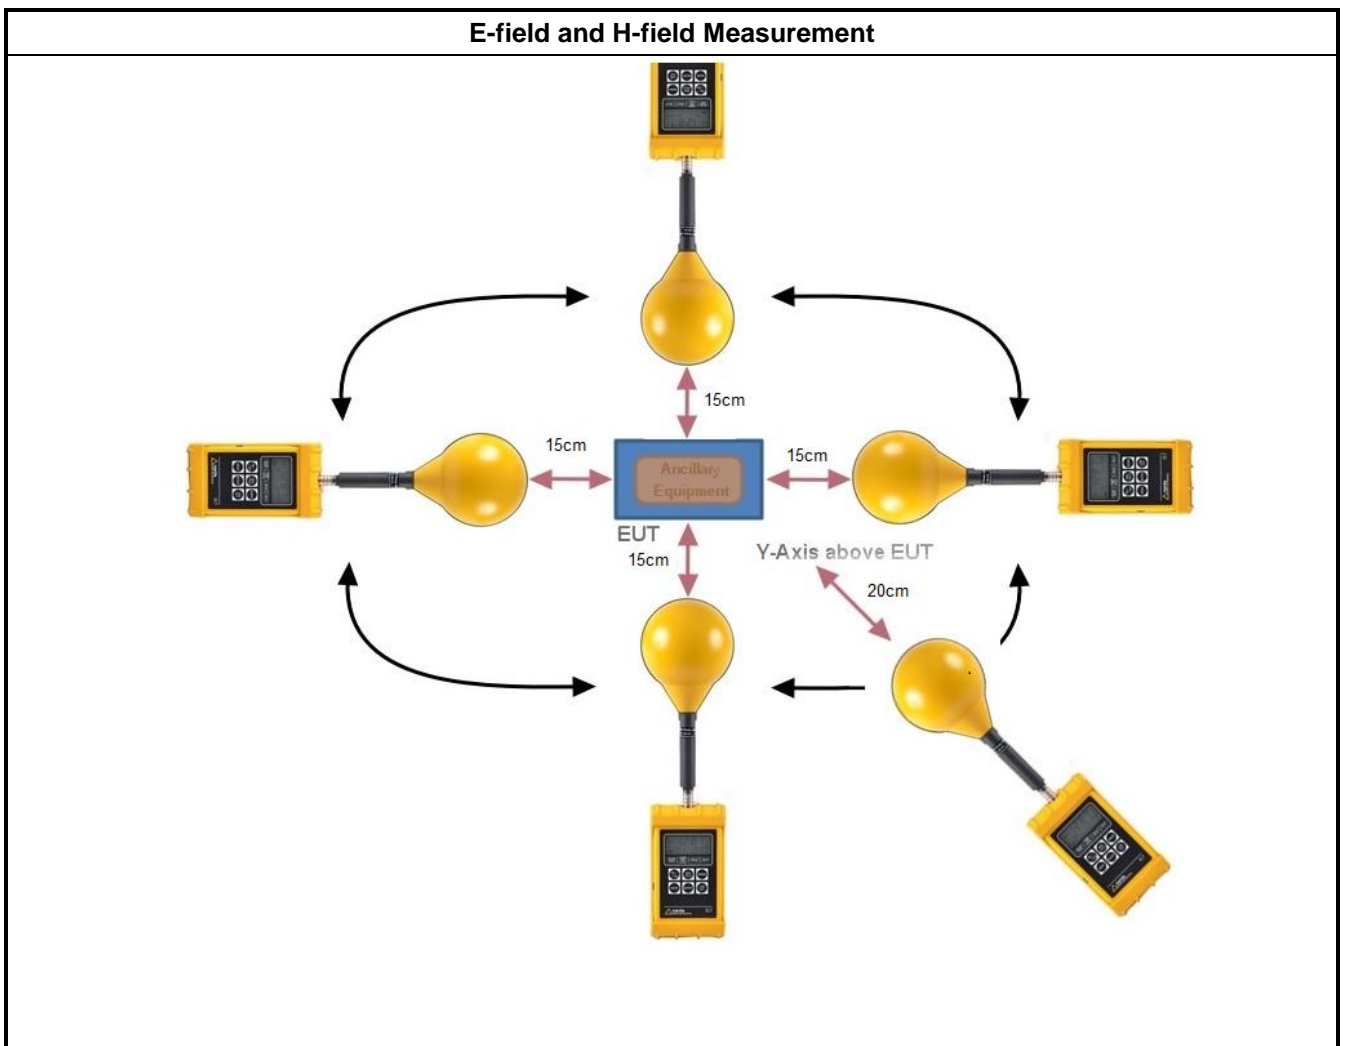



1.4.3 Result of Maximum Permissible Exposure

Maximum Permissible Exposure				
Charging Condition	Separation	Probe from EUT Side	E-field (V/m)	H-field Limit (A/m)
Operating	15cm	Left	0.36	0.001
Operating	15cm	Right	0.37	0.001
Operating	15cm	Top	0.36	0.001
Operating	15cm	Bottom	0.38	0.001
Operating	20cm	Y-axis above EUT	0.33	0.001
<b>Limit</b>			614	1.63
<b>Margin Limit (%)</b>			0.06%	0.06%



## 2 Test Equipment and Calibration Data

### Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Probe EF	Narda Safety Test Solutions GmbH	0391 E-Field	D-0667	0.1MHz ~ 3GHz	09/Jun/2016	08/Jun/2018
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	E-0847	0.1MHz ~ 3GHz	09/Jun/2016	08/Jun/2018