

Report on the Radio Testing

For

ViCentra BV

on

Kaleido Insulin Pump

Report no. TRA-032498-02-45-00A

14th December 2017

RF915 4.0

Report Number: TRA-032498-02-45-00A
Issue: A

REPORT ON THE RADIO TESTING OF A
ViCentra BV
Kaleido Insulin Pump
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247 & IC RSS-247

TEST DATE: From 6-10-2017 to 23-10-2017

Written by: A Wong

A. L. Y. Wong
Radio Test Engineer

Approved by:

J. Charters
Department Manager (Radio)

Date: 14th December 2017

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF915 4.0

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	14th December 2017	Original

2 Summary

TEST REPORT NUMBER: TRA-032498-02-45-00A

WORKS ORDER NUMBER: TRA-032498-02

PURPOSE OF TEST: USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.

TEST SPECIFICATION(S): 47CFR15.247 & RSS-247

EQUIPMENT UNDER TEST (EUT): Kaleido Insulin Pump

FCC IDENTIFIER: 2ALNZ300099

EUT SERIAL NUMBER: TRA-032498-S85

MANUFACTURER/AGENT: ViCentra BV

ADDRESS: Kanaalweg 17B2
Utrecht
3526 KL
Netherlands

CLIENT CONTACT: John Tullett
☎ +31 (0) 88 3232 871
✉ john.tullett@vicentra.com

ORDER NUMBER: PO:PF2441

TEST DATE: From 6-10-2017 to 23-10-2017

TESTED BY: P. Darragh & A. L. Y. Wong
Element

2.1 Test Summary

Test Method and Description		Requirement Clause		Applicable to this equipment	Result / Note
		RSS	47CFR15		
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		Gen, 8.10	15.205	<input checked="" type="checkbox"/>	PASS
AC power line conducted emissions		Gen, 8.8	15.207	<input checked="" type="checkbox"/>	PASS
Occupied bandwidth		247, 5.2 (1)	15.247(a)(2)	<input checked="" type="checkbox"/>	PASS
Conducted carrier power	Peak	247, 5.4 (4)	15.247(b)(3)	<input checked="" type="checkbox"/>	PASS
	Max.			<input type="checkbox"/>	
Conducted / radiated RF power out-of-band		247, 5.5	15.247(d)	<input checked="" type="checkbox"/>	PASS
Power spectral density, conducted		247, 5.2 (2)	15.247(e)	<input checked="" type="checkbox"/>	PASS
Calculation of duty correction		-	15.35(c)	<input checked="" type="checkbox"/>	PASS

Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction.....	8
5	Test Specifications.....	9
5.1	Normative References.....	9
5.2	Deviations from Test Standards.....	9
6	Glossary of Terms.....	10
7	Equipment Under Test.....	11
7.1	EUT Identification.....	11
7.2	System Equipment.....	11
7.3	EUT Mode of Operation.....	11
7.3.1	Transmission.....	11
7.3.2	Reception.....	11
7.4	EUT Radio Parameters.....	12
7.4.1	General.....	12
7.4.2	Antennas.....	12
7.4.3	Product specific declarations.....	13
7.5	EUT Description.....	13
8	Modifications.....	14
9	EUT Test Setup.....	15
9.1	Block Diagram.....	15
9.2	General Set-up Photograph.....	16
10	General Technical Parameters.....	17
10.1	Normal Conditions.....	17
10.2	Varying Test Conditions.....	17
11	Radiated emissions.....	18
11.1	Definitions.....	18
11.2	Test Parameters.....	18
11.3	Test Limit.....	18
11.4	Test Method.....	19
11.5	Test Set-up Photograph.....	20
11.6	Test Equipment.....	20
11.7	Test Results.....	21
12	AC power-line conducted emissions.....	31
12.1	Definition.....	31
12.2	Test Parameters.....	31
12.3	Test Limit.....	31
12.4	Test Method.....	32
12.5	Test Set-up Photograph.....	33
12.6	Test Equipment.....	33
12.7	Test Results.....	34
13	Occupied Bandwidth.....	36
13.1	Definition.....	36
13.2	Test Parameters.....	36
13.3	Test Method.....	36
13.4	Test Equipment.....	37
13.5	Test Results.....	37
14	Maximum peak conducted output power.....	41
14.1	Definition.....	41
14.2	Test Parameters.....	41
14.3	Test Method.....	41
14.4	Test Equipment.....	42
14.5	Test Results.....	42
15	Out-of-band and conducted spurious emissions.....	43
15.1	Definition.....	43
15.2	Test Parameters.....	43
15.3	Test Method.....	43
15.4	Test Equipment.....	44
15.5	Test Results.....	44
16	Power spectral density.....	50
16.1	Definition.....	50

16.2	Test Parameters.....	50
16.3	Test Method	50
16.4	Test Equipment.....	51
16.5	Test Results	52
17	Measurement Uncertainty	54
18	RF Exposure	55

4 Introduction

This report TRA-032498-02-45-00A presents the results of the Radio testing on a ViCentra BV, Kaleido Insulin Pump to specification 47CFR15 Radio Frequency Devices and RSS-247 Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.

The testing was carried out for ViCentra BV by Element, at the address(es) detailed below.

<input checked="" type="checkbox"/>	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input type="checkbox"/>	Element Skelmersdale Unit 1 Pendle Place Skemersdale West Lancashire WN8 9PN UK
-------------------------------------	---	--------------------------	---

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

Element Hull	3483A
Element North West	3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: Kaleido Insulin Pump
- Serial Number: TRA-032498-S85
- Model Number: 5060431041350
- Software Revision: Compliance test with RF power setting the same as production version
- Build Level / Revision Number: Production

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

Laptop Computer & USB communicator / controller box

7.3 EUT Mode of Operation

7.3.1 Transmission

The mode of operation for transmitter tests was as follows...
Using the provided laptop computer and USB communicator / controller box, required data rates, power settings and channels was set to be tested, whilst the EUT was connected via a USB cable.

7.3.2 Reception

Receiver test was not carried out.

7.4 EUT Radio Parameters

7.4.1 General

Frequency of operation:	2400-2480 MHz
Modulation type(s):	Bluetooth
Occupied channel bandwidth(s):	1-2 MHz
Channel spacing:	2 MHz
ITU emission designator(s):	1M2DXF
Declared output power(s):	+4 dBm
Warning against use of alternative antennas in user manual (yes/no):	Yes
Nominal Supply Voltage:	3.6 V
Frequency stability:	+/- 40 ppm
Location of notice for license exempt use:	Label & user manual
Method of prevention of use on non-US / non-Canadian frequencies:	Secure Firmware
Duty cycle:	< 10 %

7.4.2 Antennas

Type:	Printed on PCB (Copper Trace)
Frequency range:	2400-2480 MHz
Impedance:	50 Ω
Polarisation:	In the plane of PCB
Beam width:	Not applicable
Connector type:	N / A
Length:	32 mm (straightened length)
Weight:	Negligible
Environmental limits:	-20 to 55 °C
Mounting:	N / A

7.4.3 Product specific declarations

Multiple antenna configuration(s), e.g. MIMO:	No
Fixed pt-pt operations (yes/no):	No
Installation manual advice on pt-pt operational restrictions (yes/no):	N / A
Fixed pt-mpt operations (yes/no):	No
Simultaneous tx (yes/no):	N / A

7.5 EUT Description

The EUT is a body-worn programmable insulin pump using BTLE to communicate with the handset.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup

9.1 Block Diagram

The following diagram shows basic EUT interconnections.

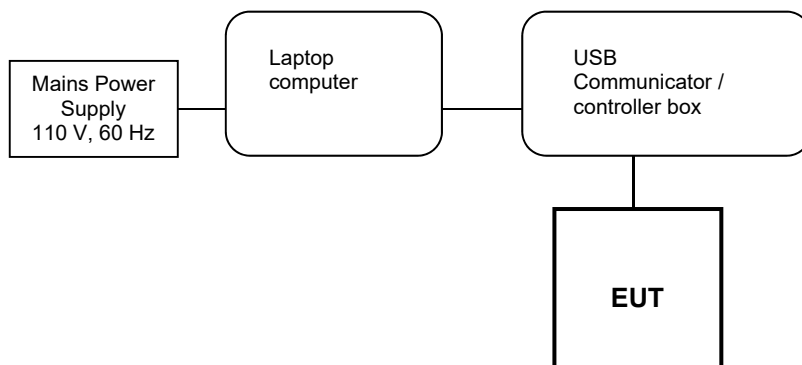

9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



10 General Technical Parameters

10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 3.8 V dc from a rechargeable battery.

10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
<input type="checkbox"/>	Mains		85 % and 115 %
<input type="checkbox"/>	Battery	New battery	N / A
<input checked="" type="checkbox"/>	Rechargeable Li-Ion Battery via USB	3.8 V d.c.	3.6 - 4.2V

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Laboratory 2
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels / Frequencies Measured:	Low / Mid / High (2402 / 2440 / 2480 MHz)
EUT Channel Bandwidths:	1 MHz for 1 Mbps / 2 MHz for 2 Mbps
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 20 °C	+15 °C to +35 °C (as declared)
Humidity: 43 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.8 V d.c.	3.6 – 4.2 V (as declared)

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (µV/m at 3 m)</i>
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB μ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB μ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup

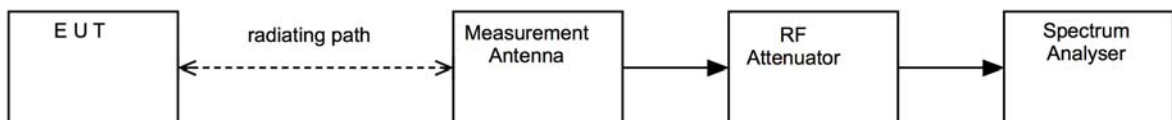

11.5 Test Set-up Photograph




11.6 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU50	R&S	Spectrum Analyser	U544	27/04/2018
310	Sonoma	Pre-Amp (9kHz – 1GHz)	REF927	30/06/2018
8449B	Agilent	Pre-Amp (1 – 26.5GHz)	REF913	02/02/2018
Cable	AtlanTec	Short SMA RF Cable	REF2165	09/12/2017
Bandstop filter	Unknown	2.4 GHz ISM bandstop filter	REF2158	Cal before use
Cable	Teleydyne	K-Type RF coaxial cable	REF2184	27/03/2018
Cable	Teleydyne	K-Type RF coaxial cable	REF2185	27/03/2018
3115	EMCO	Horn Antenna	RFG129	09/02/2018
3146	EMCO	Log Periodic Antenna	RFG191	17/05/2019
Antenna	Q-Par	Horn Antenna	RFG630	24/11/2017
3109	EMCO	Biconical Antenna	RFG095	17/05/2019

11.7 Test Results

Power Setting: +4 dBm; Channel: 2402 MHz; Data Rate: 1 Mbps										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Any	No significant emission within 10 dBm of limit									

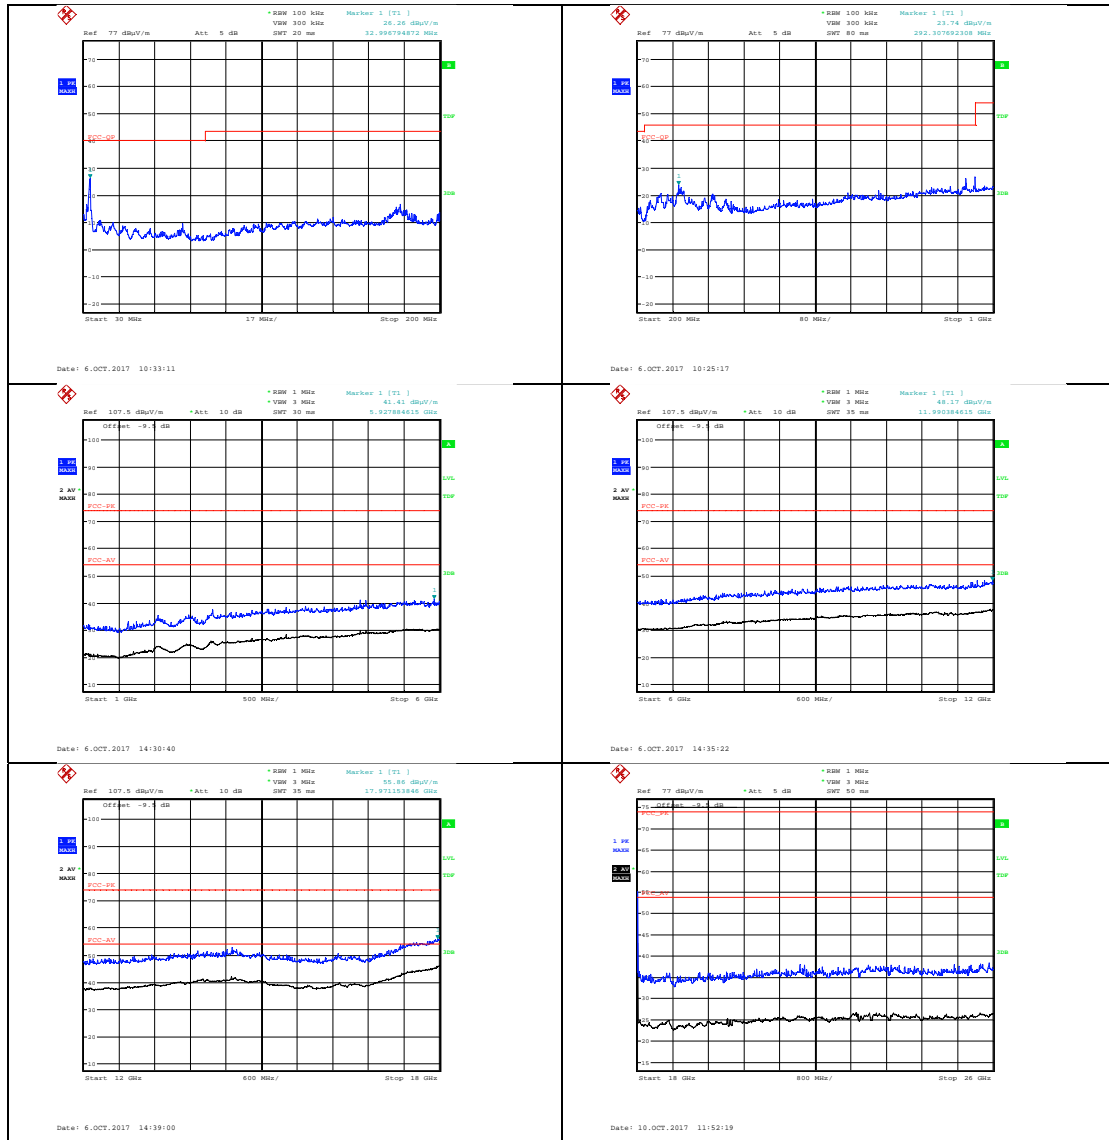


Lower Band Edge: Bluetooth LE 1 M bps

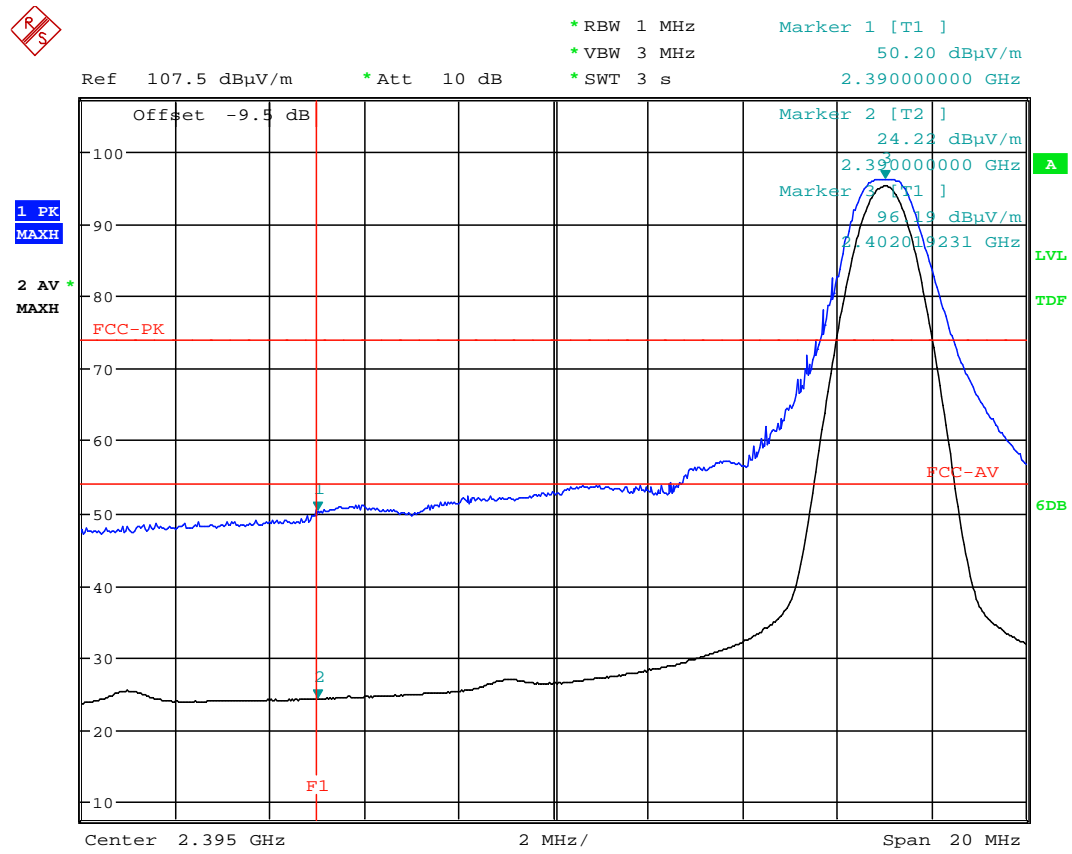

Date: 6.OCT.2017 14:16:54


Power Setting: +4 dBm; Channel: 2440 MHz; Data Rate: 1 Mbps

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Any										No significant emission within 10 dBm of limit

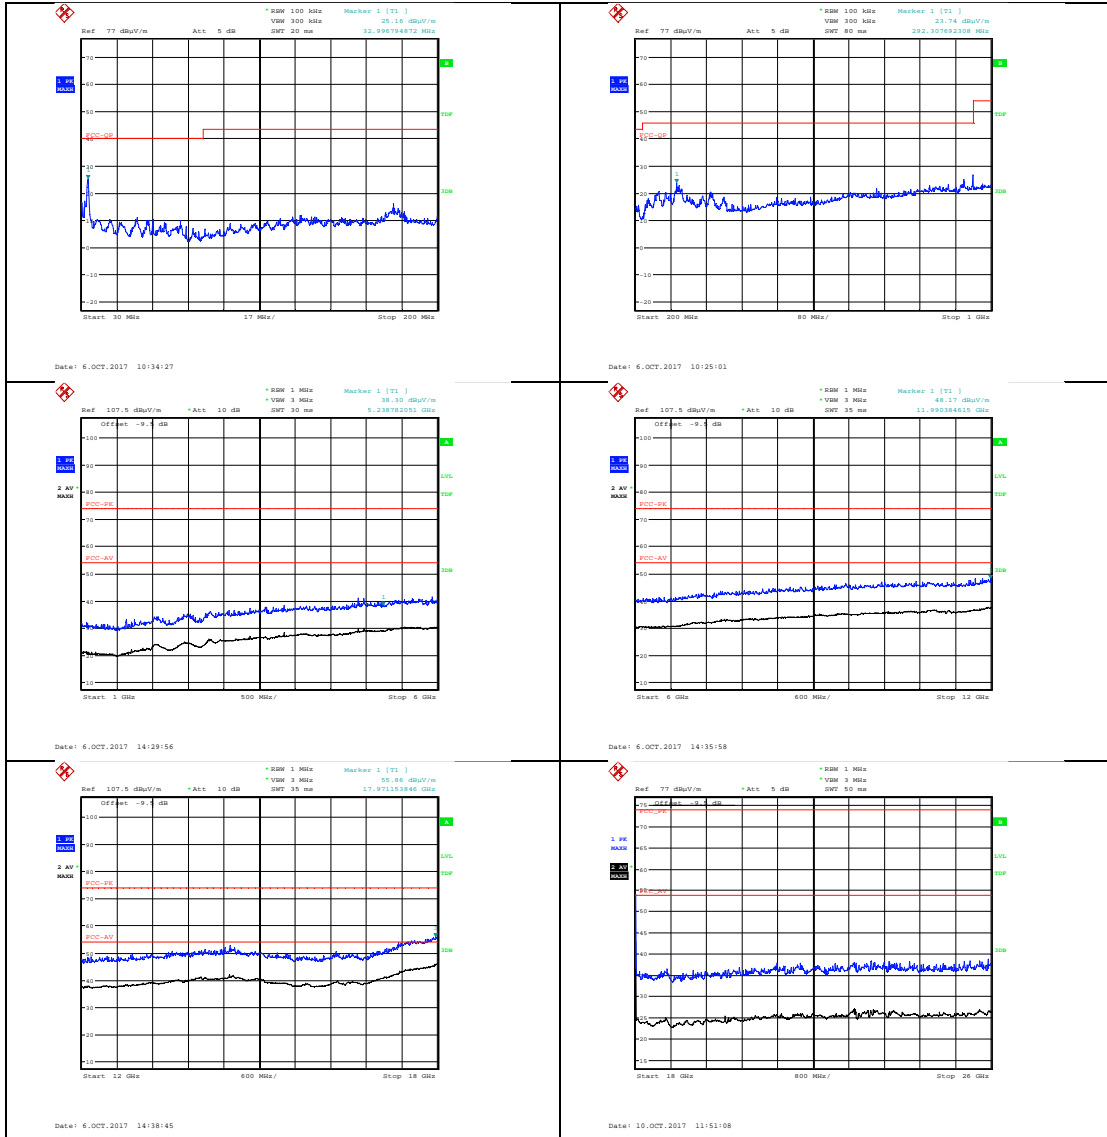


Power Setting: +4 dBm; Channel: 2480 MHz; Data Rate: 1 Mbps

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Any										No significant emission within 10 dBm of limit
										FCC

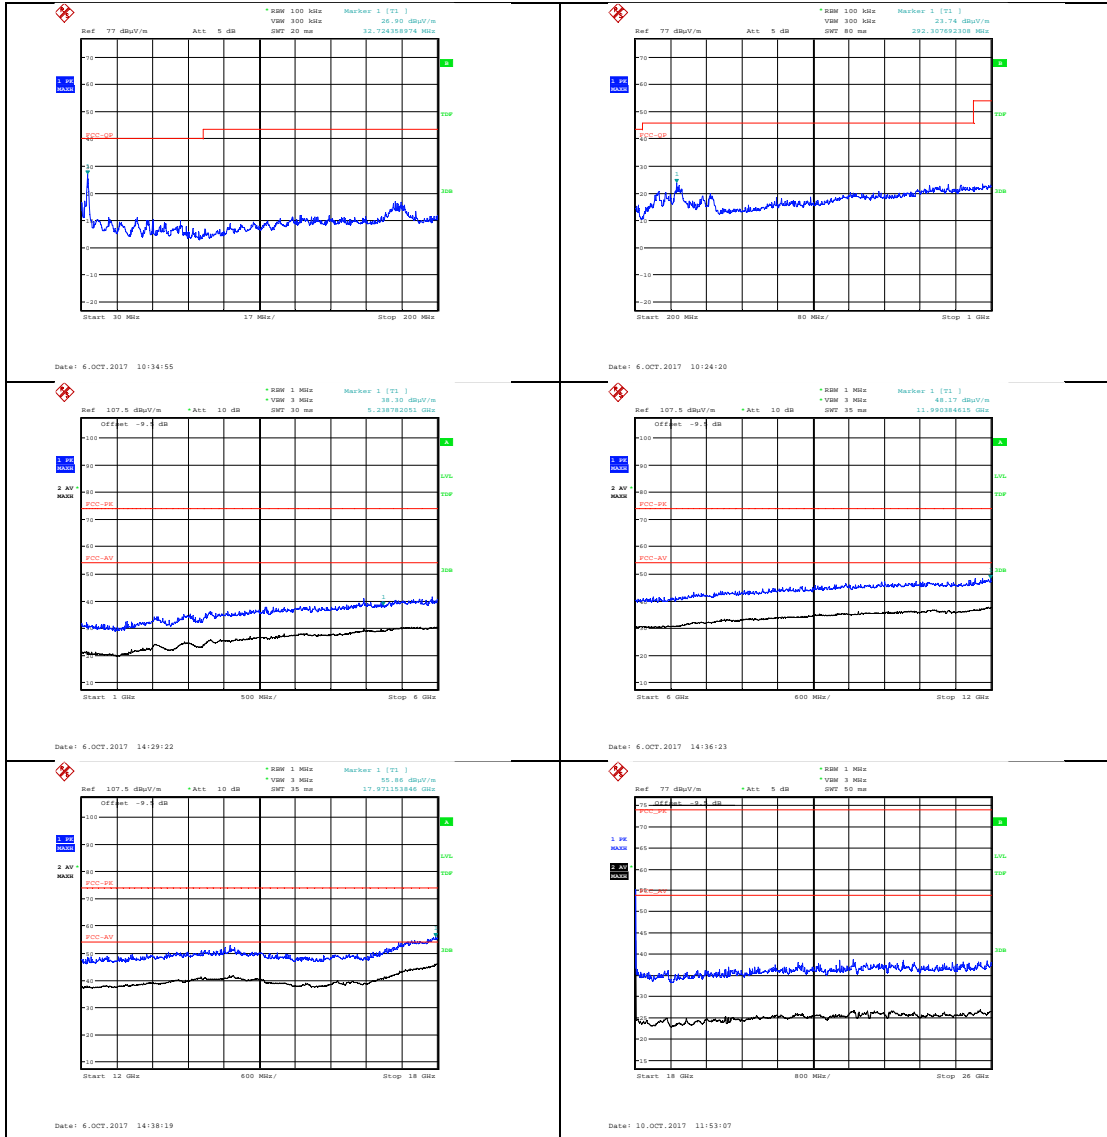


Upper Band Edge: Bluetooth LE 1 Mbps

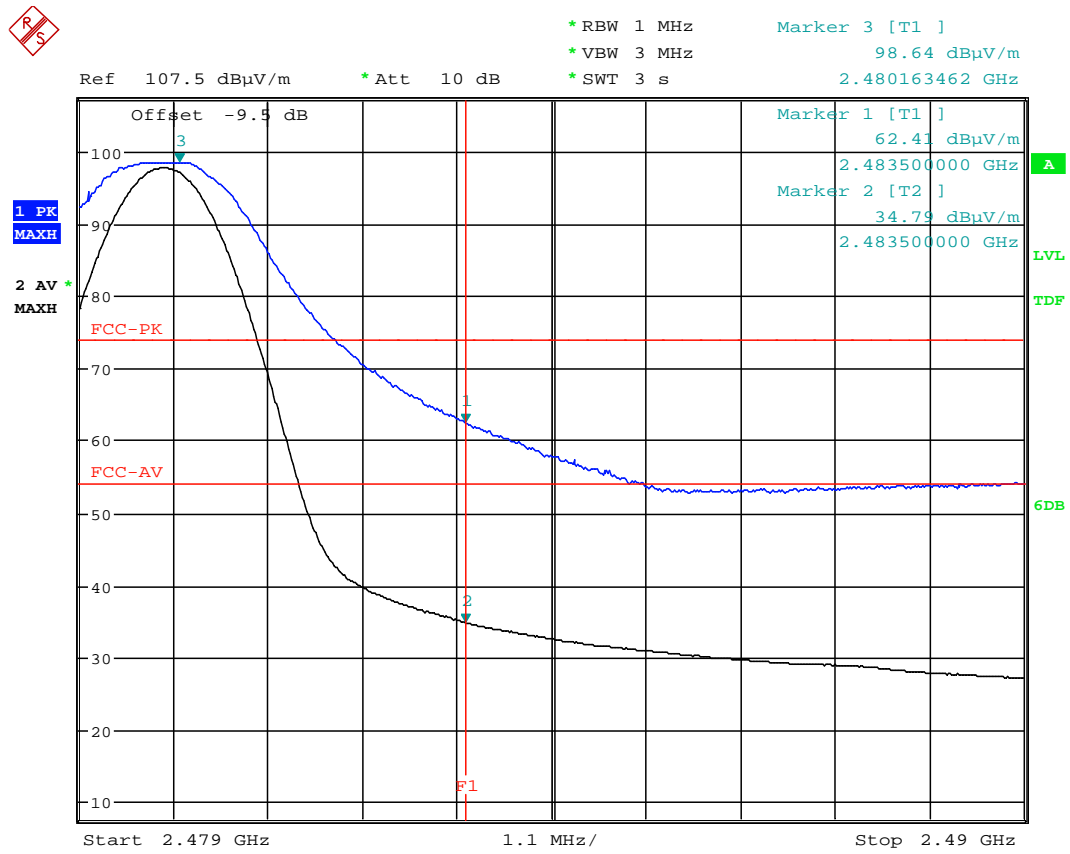


Date: 6.OCT.2017 14:19:26

Power Setting: +4 dBm; Channel: 2402 MHz; Data Rate: 2 Mbps

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Any		No significant emission within 10 dBm of limit								

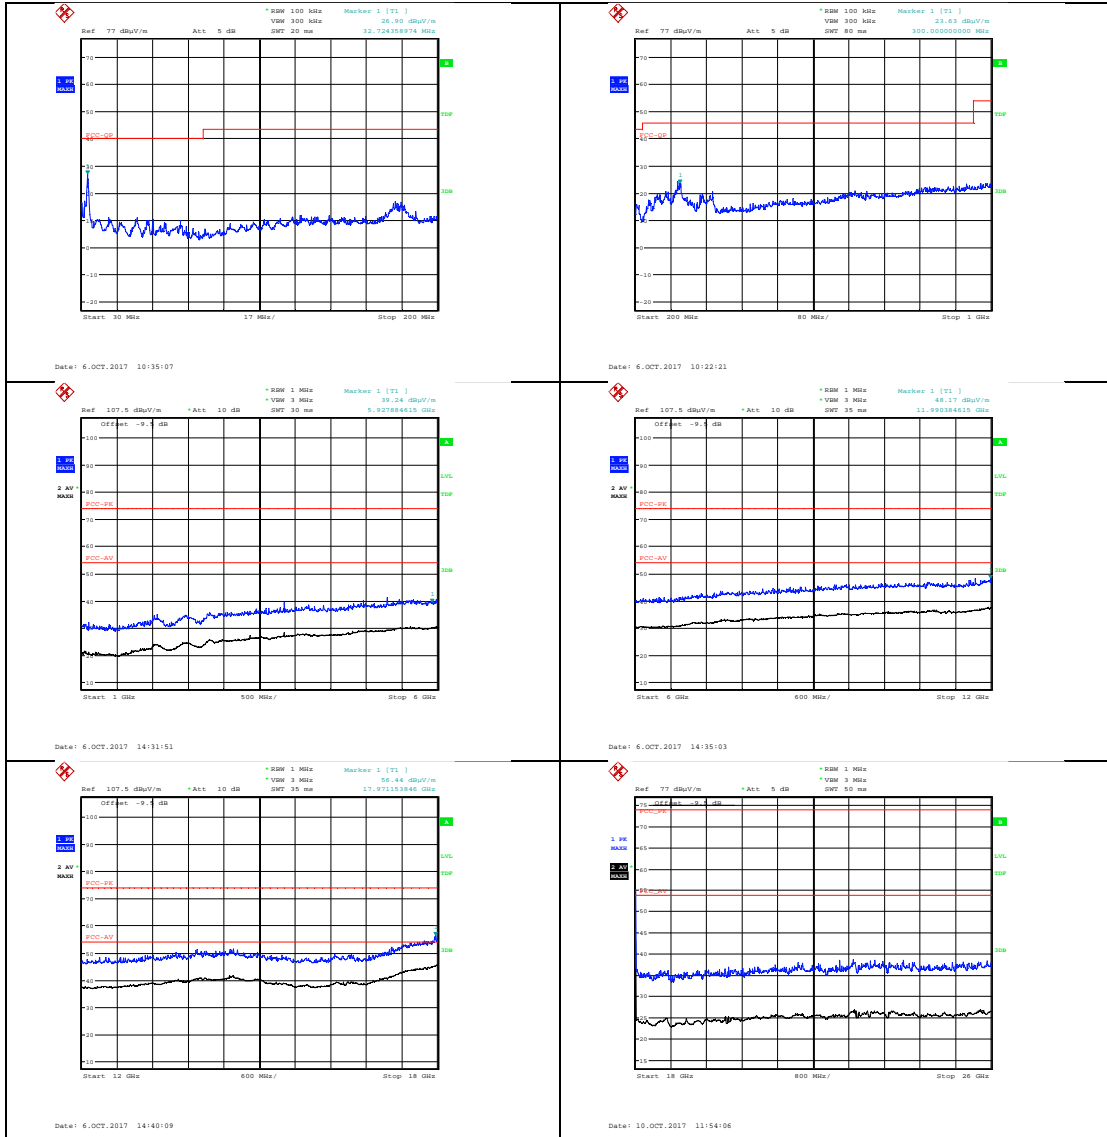


Power Setting: +4 dBm; Channel: 2440 MHz; Data Rate: 2 Mbps										
Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Any	No significant emission within 10 dBm of limit									FCC

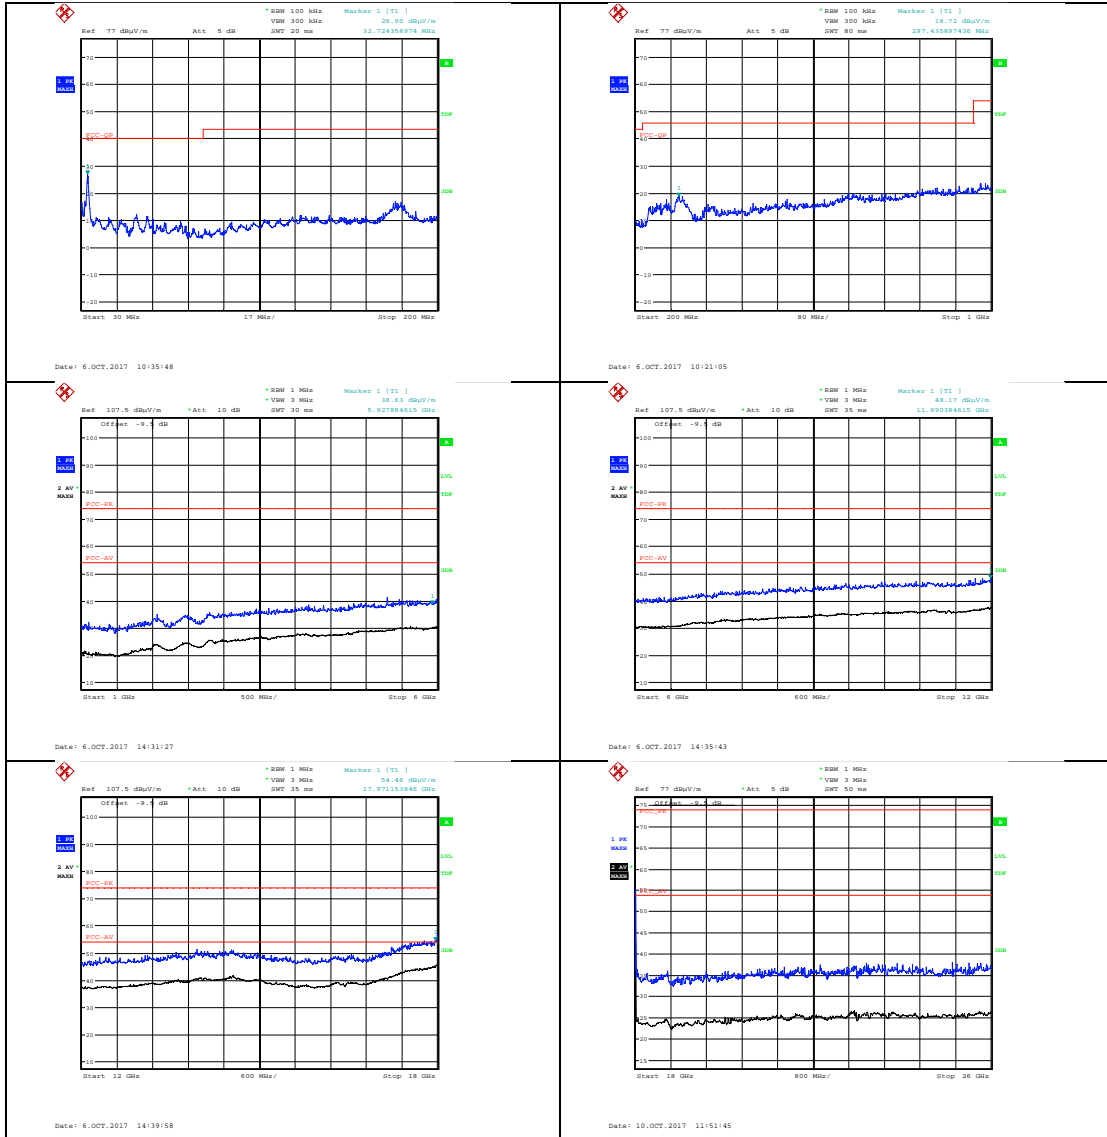


Power Setting: +4 dBm; Channel: 2480 MHz; Data Rate: 2 Mbps

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Any		No significant emission within 10 dBm of limit								FCC

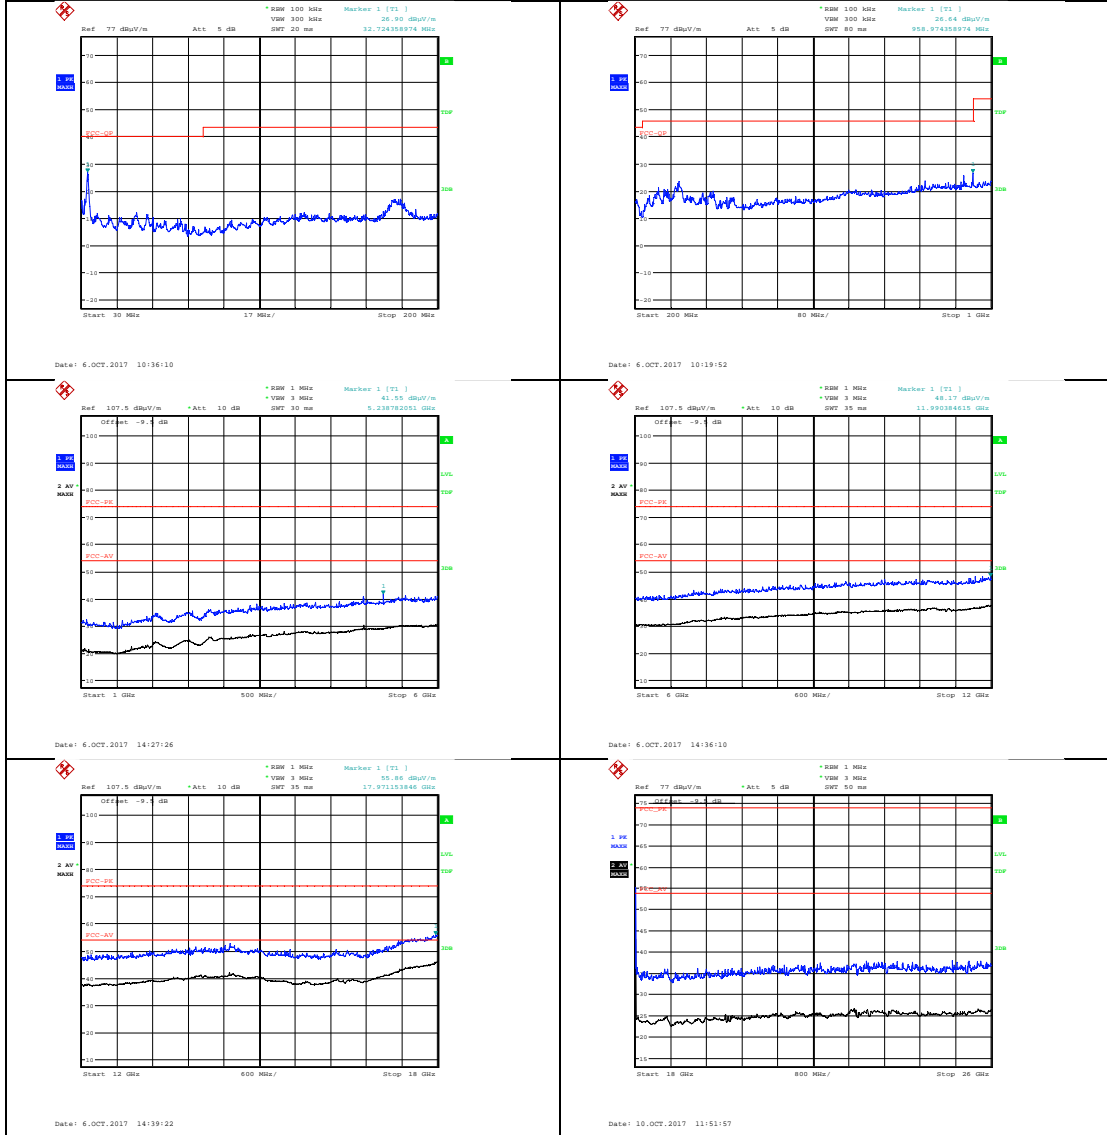

Upper Band Edge: Bluetooth LE 2 Mbps

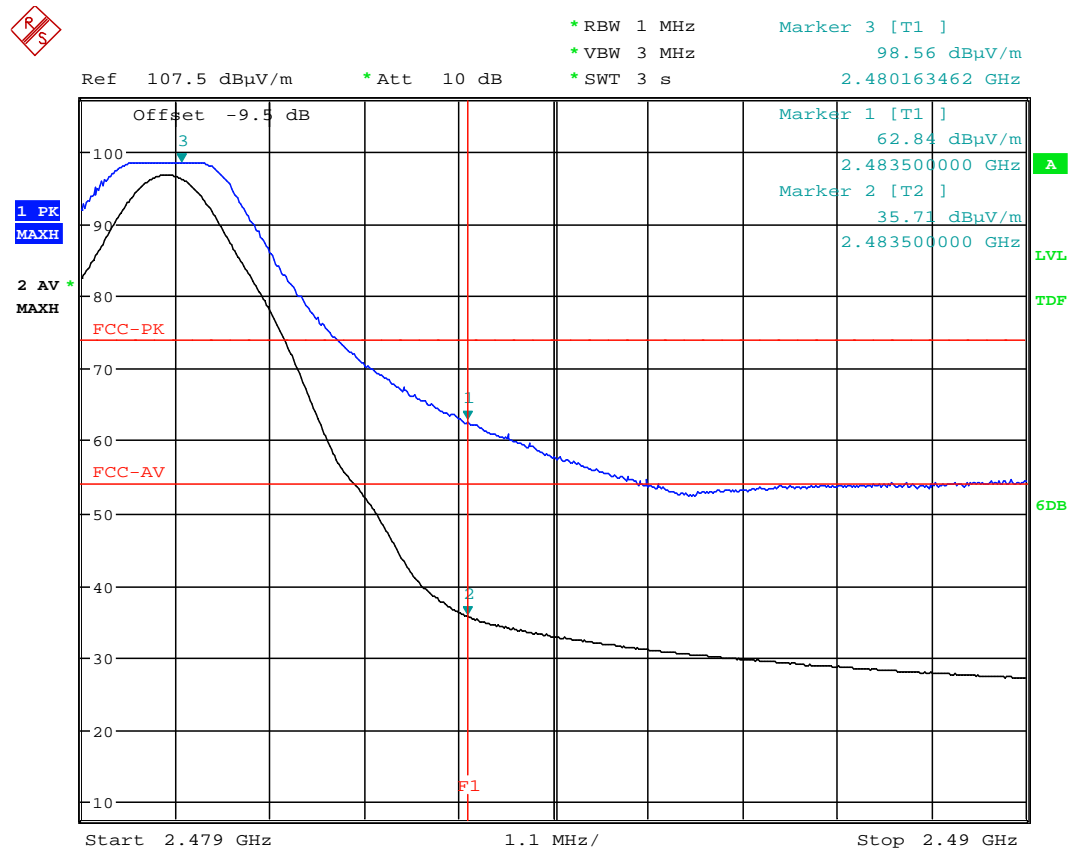

Date: 6.OCT.2017 14:20:12

12 AC power-line conducted emissions

12.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

12.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Hull Lab 5
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Channels / Frequencies Measured:	EUT communicating with Insulin Pump over BTLE link.
EUT Channel Bandwidths:	1.5 MHz
EUT Modulation:	BTLE
Deviations From Standard:	None
Measurement BW:	9 kHz
Measurement Detectors:	Quasi-Peak and Average

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 110 V ac	110 V ac ±10 % (charging mode)

12.3 Test Limit

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3.

Table 3 – AC Power Line Conducted Emission Limits

Frequency (MHz)	Conducted limit (dBµV)	
	Quasi-Peak	Average**
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

*The level decreases linearly with the logarithm of the frequency.

**A linear average detector is required.


12.4 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit and receive modes.

Figure ii Test Setup

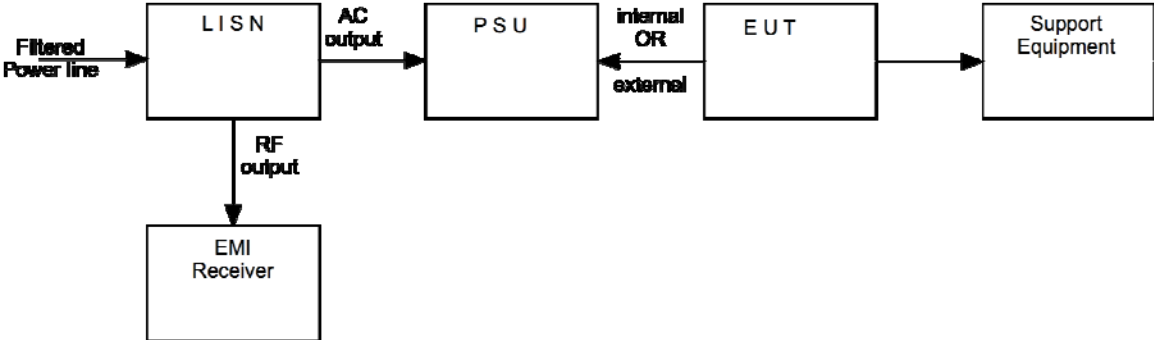

12.5 Test Set-up Photograph




12.6 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
LISN	R&S	ESH3-Z5	H189	7/8/2018
Pulse Limiter	R&S	ESH3-Z2	H674	6/4/2018
RF Chamber (Line Conducted Site)	Belling Lee	Lab 5	H705	N / A
Analyser/Receiver	R&S	ESCI 7	H715	11/10/2017
Vertical Ground Reference Plane	Element	2.5m x 2m	H737	N / A

12.7 Test Results

Conducted Emissions Test Data – Kaleido Pump

The pump was under charging mode. It is not designed to be worn on body to pump insulin whilst charging the battery, thus testing for normal operation was not carried out.

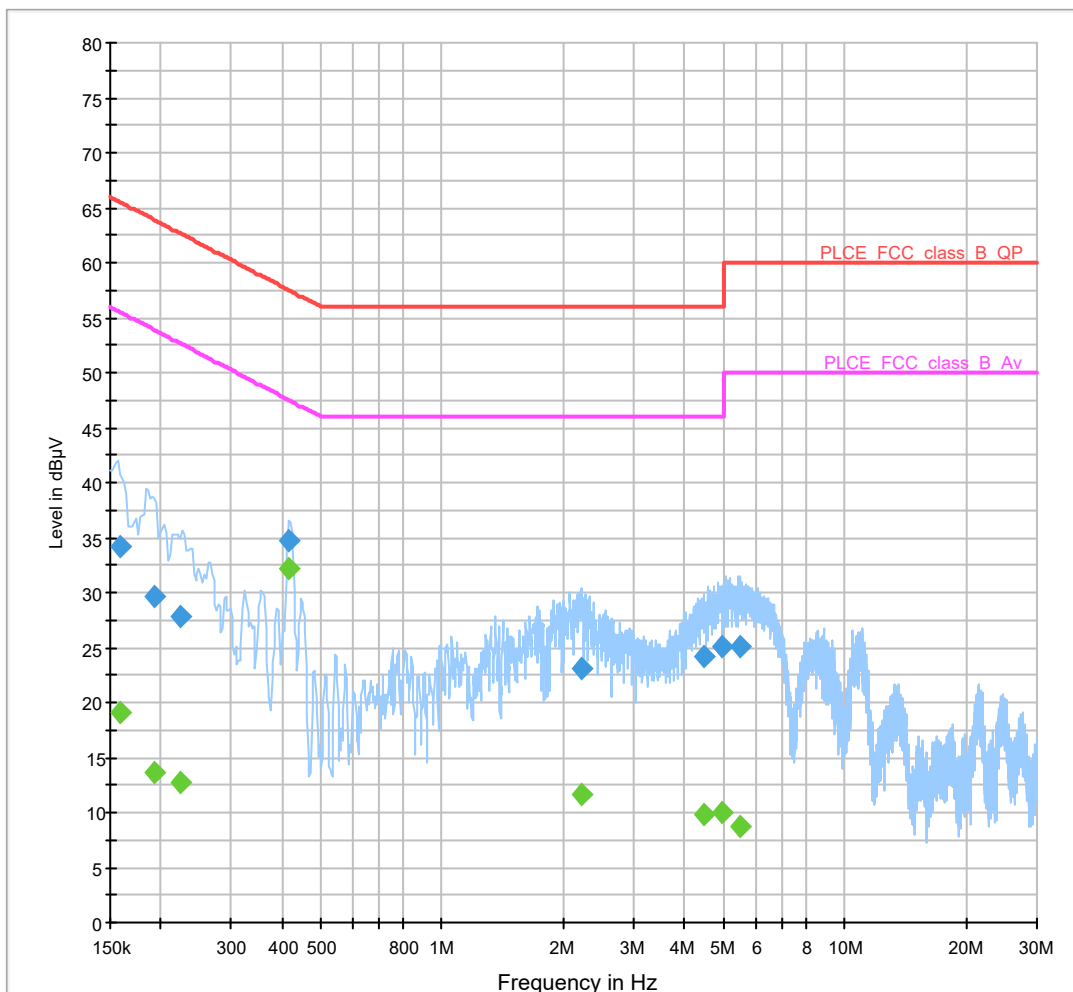

The above plot is generated from a combined live and neutral Peak hold preview scan. The Blue markers above are a maximised Quasi-peak detector, the Green markers above are the maximised Average detector required for the formal assessment; the above emissions are listed in table format below.

The above plot shows a number of formal average measurement between 150 kHz and 300 kHz and between 4 MHz and 6 MHz that are significantly below the preview peak hold. These emissions were manually investigated for a minimum time period of 60 seconds. During this time period the emissions were found to occur at several intervals in a 15 second period and therefore considered a fluctuating spurious emissions in nature as per the guidelines in CISPR16-2-3 and therefore deemed a pass result.

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.158000	34.2	15000.0	9.000	GND	L1	0.3	31.4	65.6
0.192725	29.7	15000.0	9.000	GND	L1	0.3	34.2	63.9
0.223525	27.9	15000.0	9.000	GND	L1	0.3	34.8	62.7
0.416675	34.8	15000.0	9.000	GND	N	0.2	22.7	57.5
2.212025	23.0	15000.0	9.000	GND	N	0.3	33.0	56.0
4.494550	24.1	15000.0	9.000	GND	L1	0.6	31.9	56.0
4.962950	25.1	15000.0	9.000	GND	L1	0.6	30.9	56.0
5.520500	25.2	15000.0	9.000	GND	L1	0.7	34.8	60.0

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.158000	19.1	15000.0	9.000	GND	L1	0.3	36.4	55.6
0.192725	13.7	15000.0	9.000	GND	L1	0.3	40.2	53.9
0.223525	12.8	15000.0	9.000	GND	L1	0.3	39.9	52.7
0.416675	32.1	15000.0	9.000	GND	N	0.2	15.4	47.5
2.212025	11.7	15000.0	9.000	GND	N	0.3	34.3	46.0
4.494550	9.9	15000.0	9.000	GND	L1	0.6	36.1	46.0
4.962950	10.1	15000.0	9.000	GND	L1	0.6	35.9	46.0
5.520500	8.7	15000.0	9.000	GND	L1	0.7	41.3	50.0

This test measures conducted noise that may be present on an EUT's power supply cable. This test ensures the protection of broadcast and telecommunication services used in the vicinity of the EUT.

The test setup used complies with all the dimension requirements set out in ANSI C63.4:2014. Reference is made to company procedure RTP1029 and RTP1002. Measurement instrumentation used meets the requirements of CISPR16-1-1:2010 or CISPR 16-1-2:2006 as appropriate, and uncertainties of CISPR 16-4-2:2011. Expanded laboratory uncertainties U_{lab} are less than or equal to CISPR 16-4-2:2011 U_{cispr} Table 1. Therefore no compensation is required to the actual measured level in determining compliance with the applied limit.

An initial scan is carried out in order to establish a frequency list that is attributable to the EUT, using automated R&S EMC32 measurement software. Receiver/analyser scan speed and bandwidth adjustments where applicable are in accordance with the reference standard, appropriate to the intercepted signal being resolved. Any emissions measurements that fall within 20 dB μ V of the Average or Quasi-Peak limit line

13 Occupied Bandwidth

13.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

13.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Screen Room 2
Test Standard and Clause:	IC: ANSI C63.10-2013, Clause 6.9 FCC: ANSI C63.10-2013, Clause 11.8
EUT Channels / Frequencies Measured:	Low / Mid / High
EUT Channel Bandwidths:	1 MHz
EUT Test Modulations:	GFSK
Deviations From Standard:	None
Measurement BW: (IC requirement: 1% to 5% OBW; FCC requirement: 100 kHz)	100 kHz (FCC setting)
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Span: (requirement 2 to 5 times OBW)	2.5 / 4.5 / 8.5 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 19 °C	+15 °C to +35 °C (as declared)
Humidity: 46 %RH	20%RH to 75%RH (as declared)
Supply: 3.8 V d.c.	3.6 – 4.2 V (as declared)


Test Limits

The minimum -6 dB bandwidth shall be at least 500 kHz.

13.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser. The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iii Test Setup

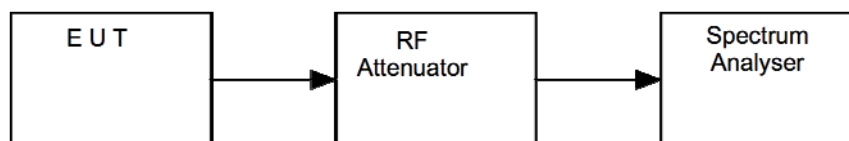


13.4 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Last Cal Calibration	Calibration Period	Due For Calibration
Spectrum Analyser	R&S	FSU26	REF909	08/05/2017	12	08/05/2018


13.5 Test Results

FCC 15.247 Results:


Modulation: GFSK ; Data rate: 1Mbit/s; Power setting: +4dBm				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	6dB Bandwidth (kHz)	Result
2402	2401.743	2402.265	522	PASS
2440	2439.736	2440.263	527	PASS
2480	2479.739	2480.259	520	PASS

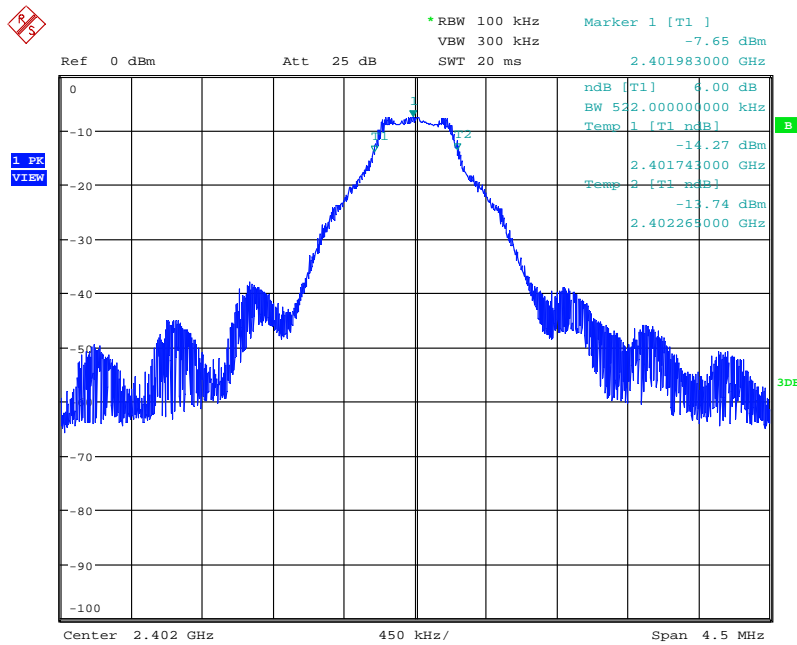

Date: 12.OCT.2017 12:45:48

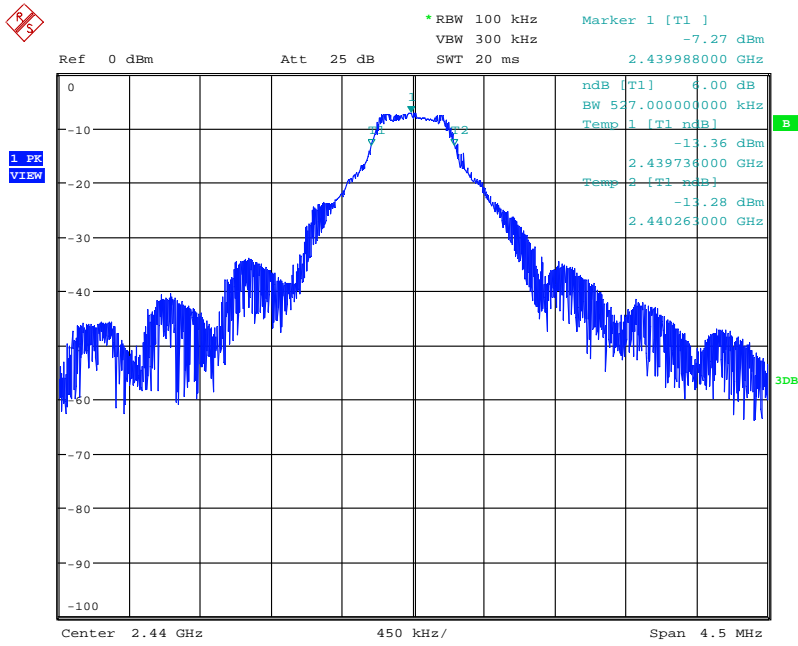


Date: 12.OCT.2017 12:47:42

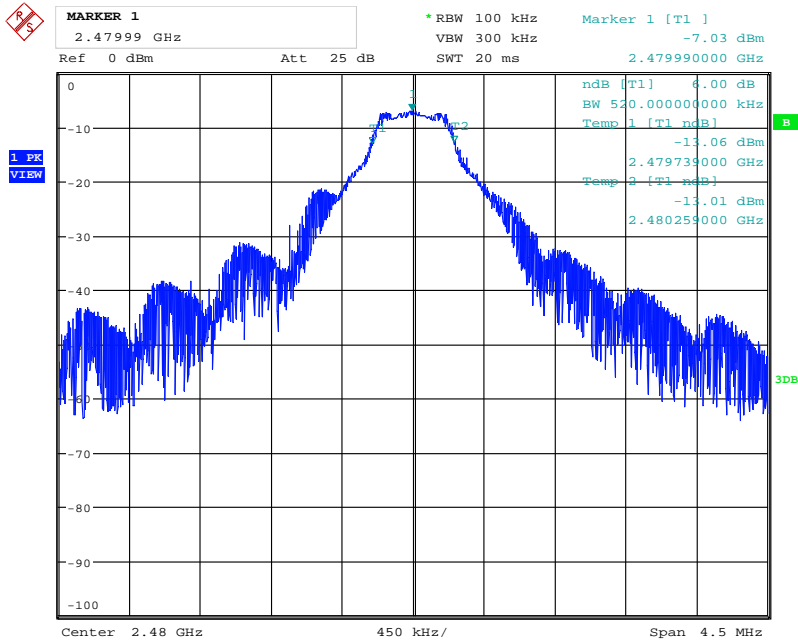


Date: 12.OCT.2017 12:44:20


Modulation: GFSK ; Data rate: 2Mbit/s; Power setting: +4dBm				
Channel Frequency (MHz)	F _L (MHz)	F _H (MHz)	6dB Bandwidth (kHz)	Result
2402	2401.585	2402.366	781	PASS
2440	2439.650	2440.355	705	PASS
2480	2479.598	2480.394	796	PASS

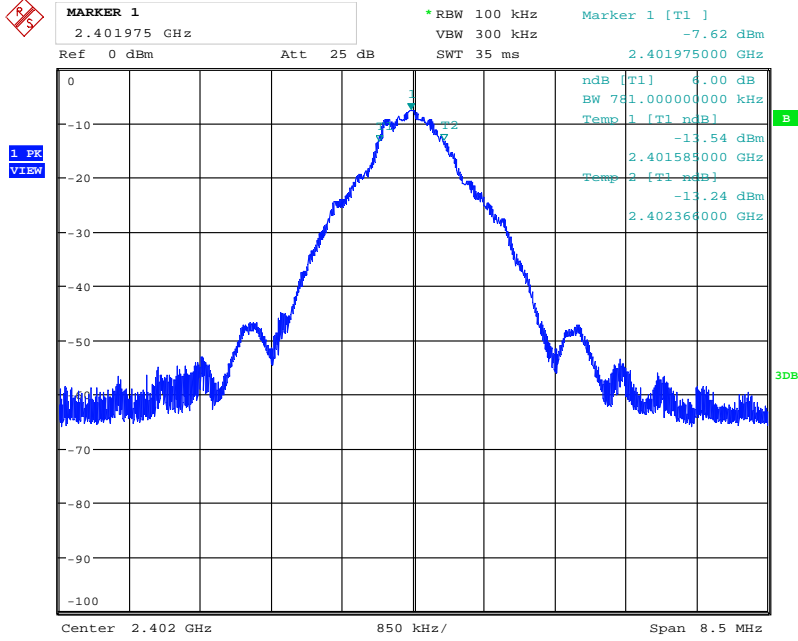

Date: 12.OCT.2017 13:11:29

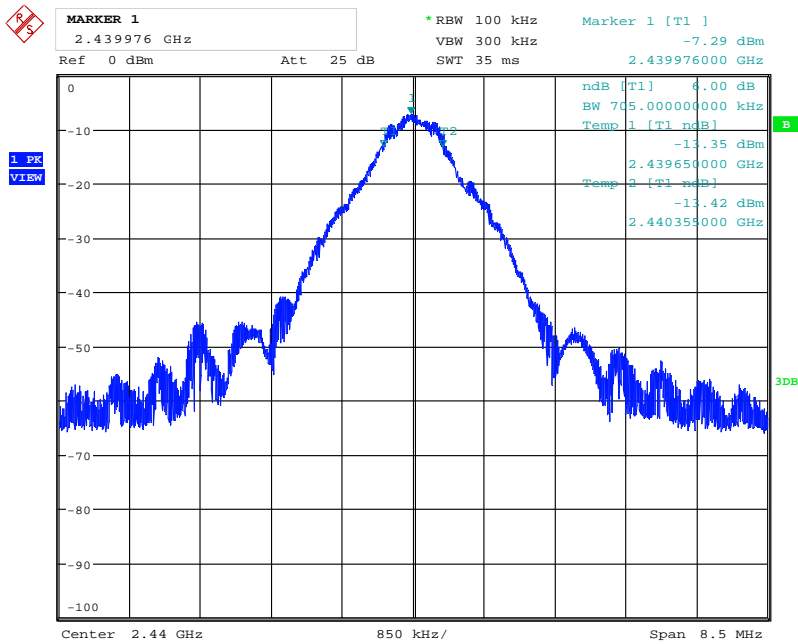

Date: 12.OCT.2017 13:09:26

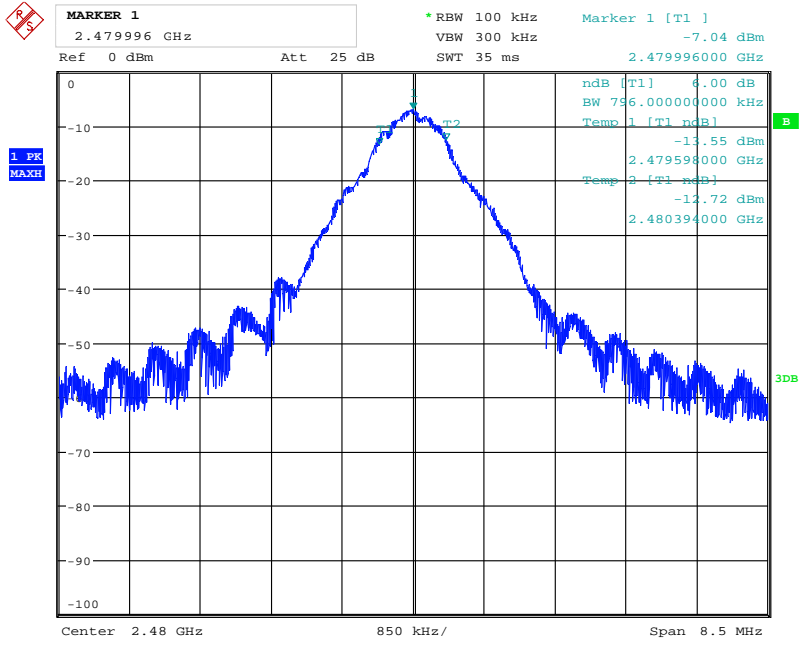

Date: 12.OCT.2017 13:07:39

14 Maximum peak conducted output power

14.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

14.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Screen Room 2
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.9.1
EUT Channels / Frequencies Measured:	Low / Mid / High
EUT Channel Bandwidths:	Nominally 1 MHz
Deviations From Standard:	None
Measurement BW:	3 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	N/A Normally battery powered, but for test powered via 5V USB

Environmental Conditions (Normal Environment)

Temperature: 19 °C	+15 °C to +35 °C (as declared)
Humidity: 47 %RH	20%RH to 75%RH (as declared)

Test Limits


For systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

14.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iv Test Setup

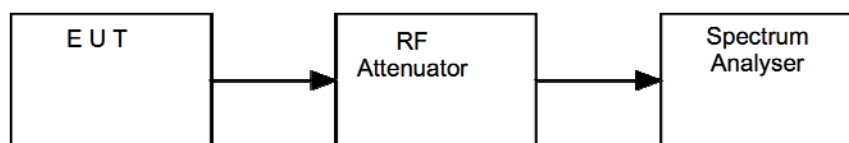

14.4 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Last Cal Calibration	Calibration Period	Due For Calibration
Spectrum Analyser	R&S	FSU26	REF909	08/05/2017	12	08/05/2018

14.5 Test Results

Modulation: GFSK ; Data rate: 1 Mbit/s; Power setting: +4 dBm				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (mW)	Result
2402	2.82	Included	1.9	PASS
2440	3.17	Included	2.1	PASS
2480	3.37	included	2.2	PASS

Modulation:GFSK ; Data rate: 2 Mbit/s; Power setting: +4 dBm				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (mW)	Result
2402	2.81	included	1.9	PASS
2440	3.18	included	2.1	PASS
2480	3.39	included	2.2	PASS

15 Out-of-band and conducted spurious emissions

15.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

15.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Lab 1
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.11
EUT Channels / Frequencies Measured:	2402, 2440, 2480 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 26.5 GHz

Environmental Conditions (Normal Environment)

Temperature: 22-3 °C	+15 °C to +35 °C (as declared)
Humidity: 48 %RH	20%RH to 75%RH (as declared)
Supply: 3.8 V d.c.	3.6 – 4.2 V (as declared)


Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

15.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser. The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure v Test Setup

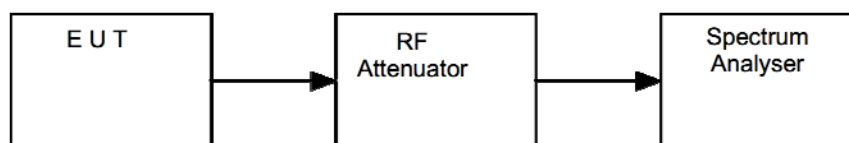

15.4 Test Equipment



<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	Agilent	N9030A	REF2167	17/08/2017	12	17/08/2018
Signal Generator	Agilent	PSG E8257D	REF2168	09/11/2016	12	09/11/2017



15.5 Test Results



<i>Modulation: GFSK ; Data rate: 1 Mbit/s; Power setting: +4 dBm</i>						
<i>Channel Frequency (MHz)</i>	<i>Emission Frequency (MHz)</i>	<i>Analyzer Level (dBm)</i>	<i>Emission Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
No emissions within 20 dB of limit						



<i>Modulation: GFSK ; Data rate: 2 Mbit/s; Power setting: +4 dBm</i>						
<i>Channel Frequency (MHz)</i>	<i>Emission Frequency (MHz)</i>	<i>Analyzer Level (dBm)</i>	<i>Emission Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
2402	9608	-33.7	-33.7	-17.4	16.3	PASS
2402	4804	-37.1	-37.1	-17.4	19.7	PASS


Worst case plots follow:

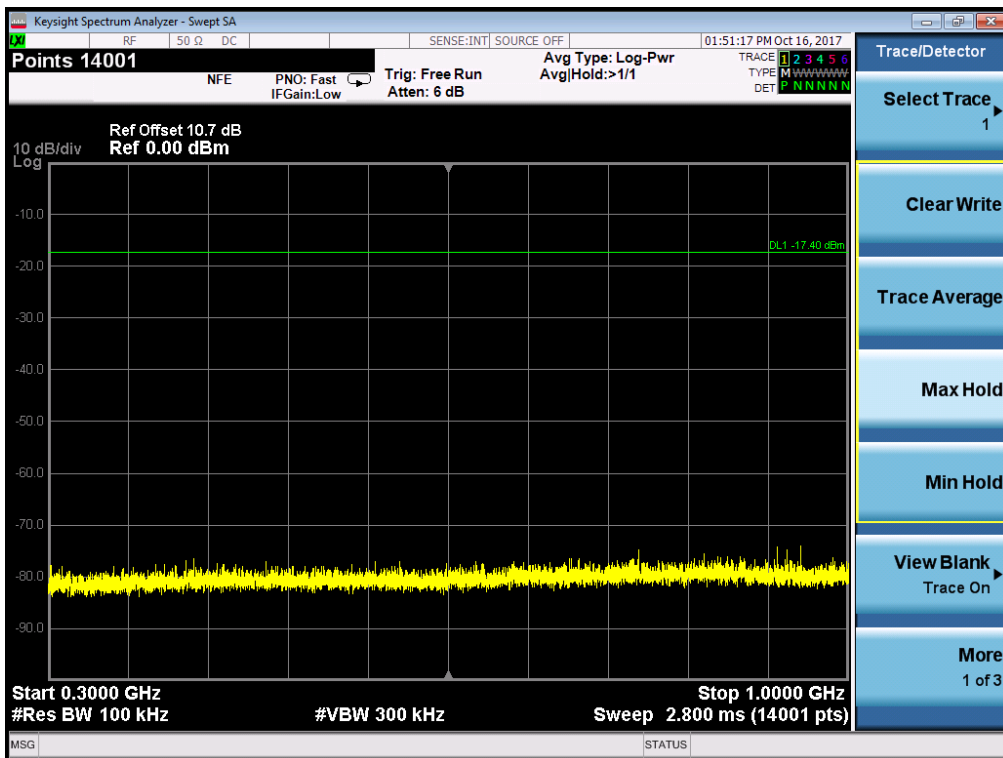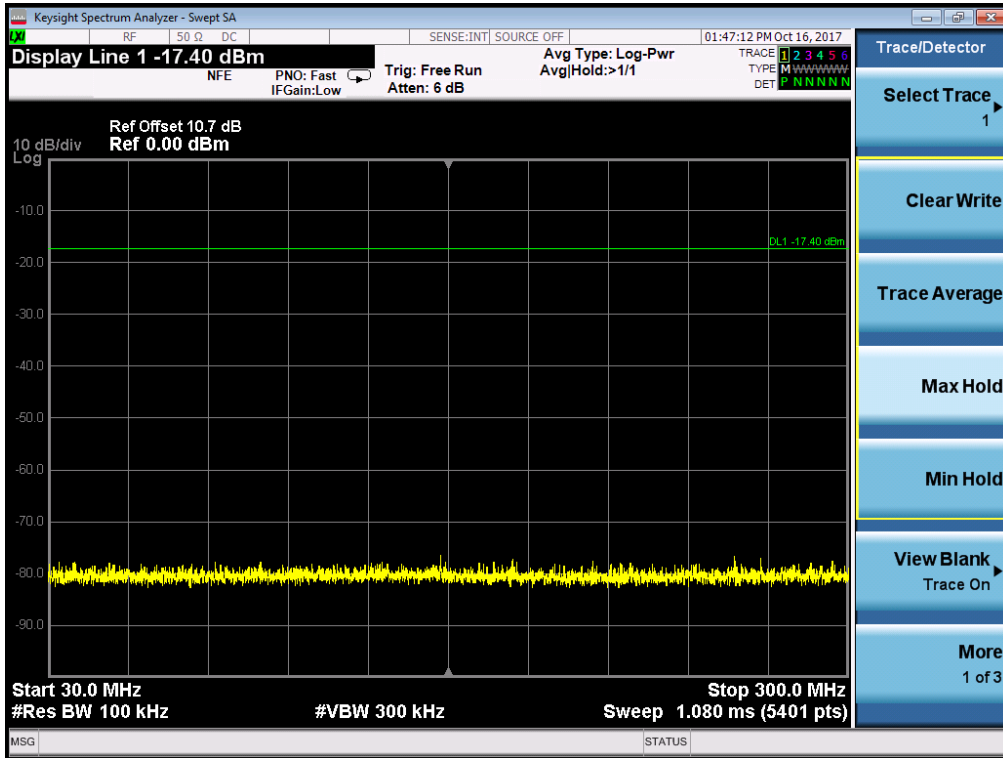

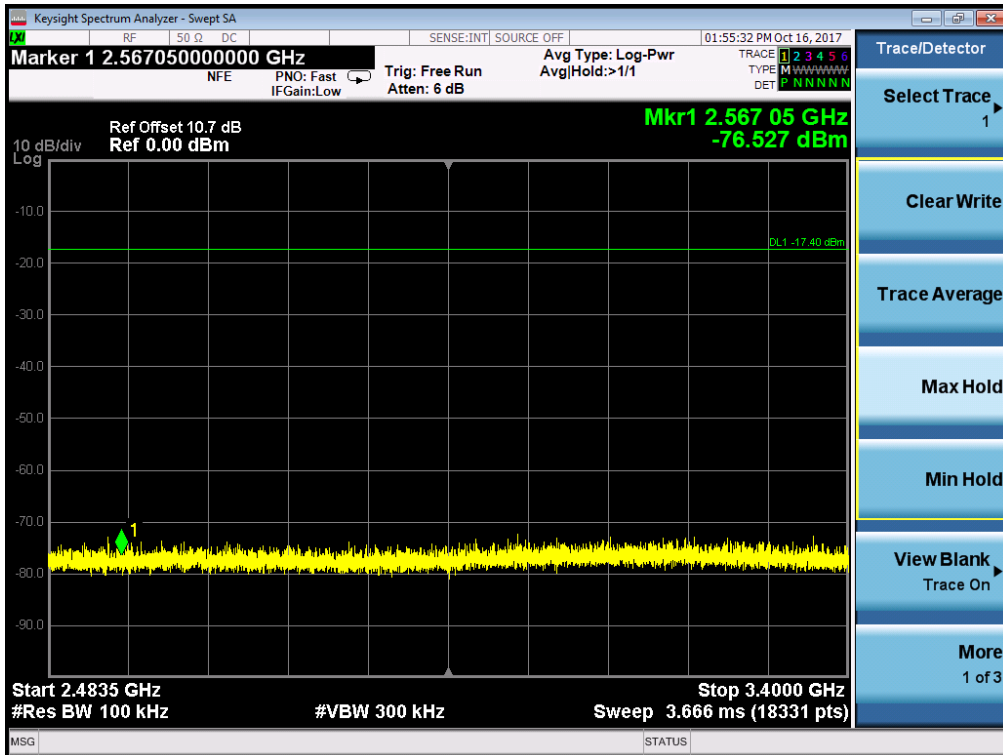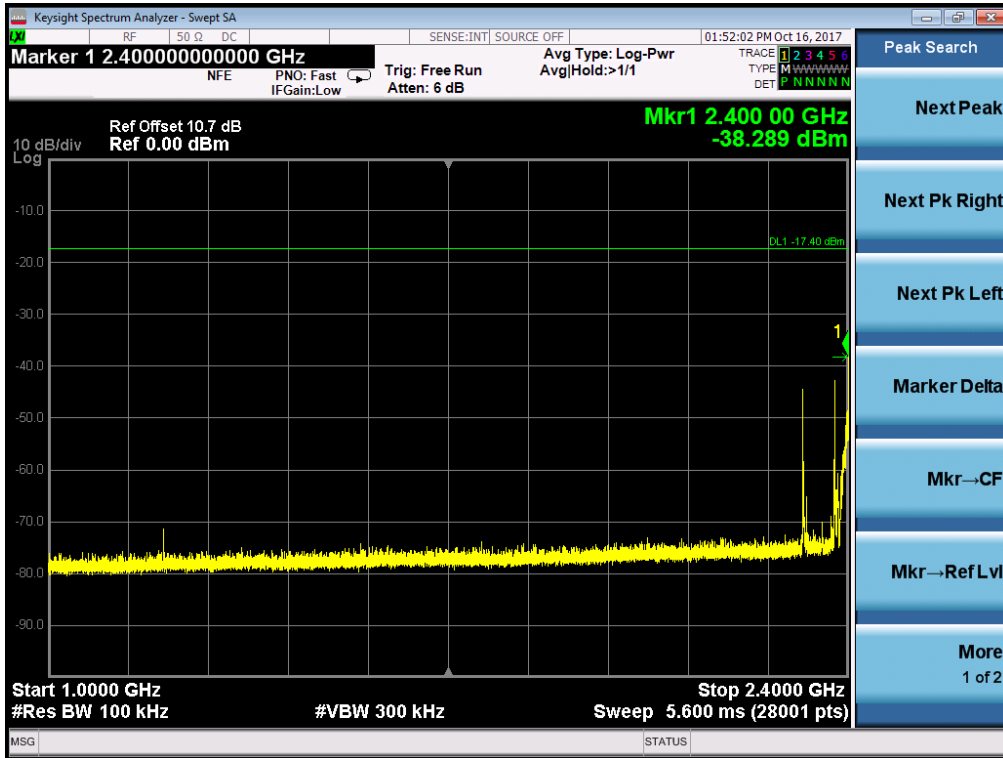

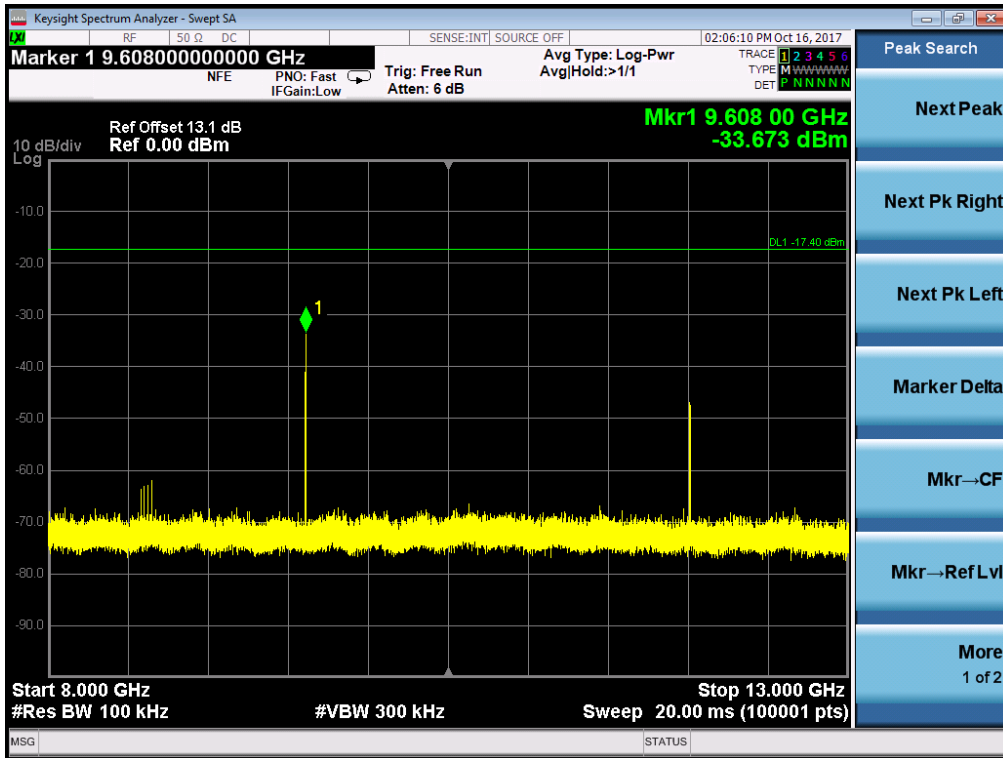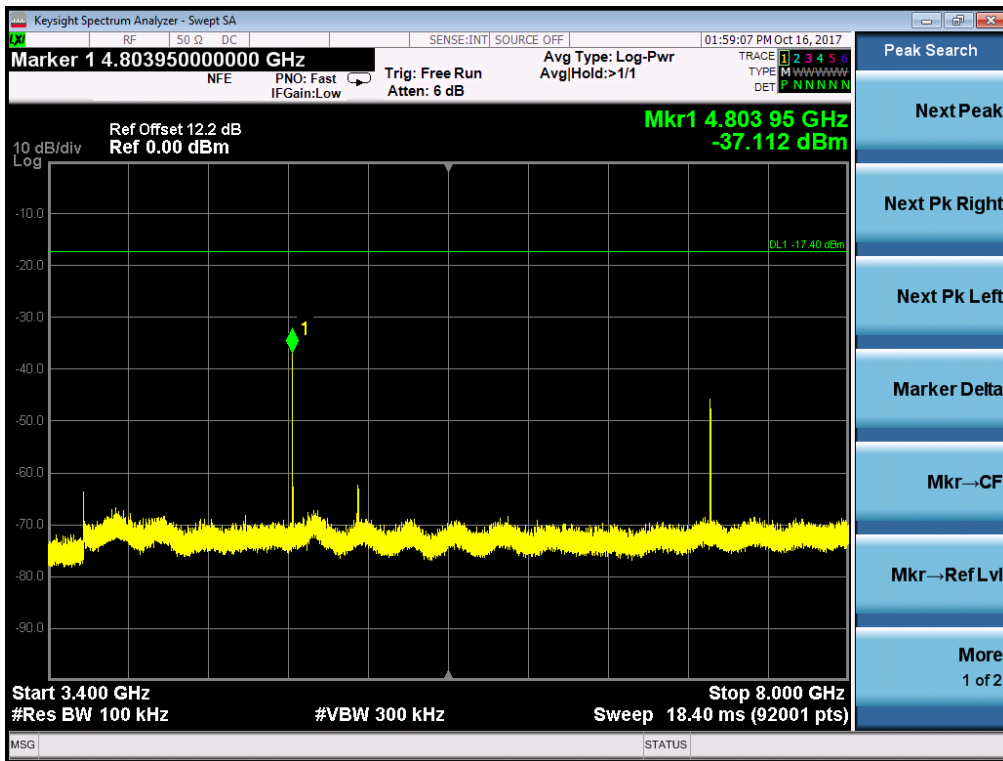

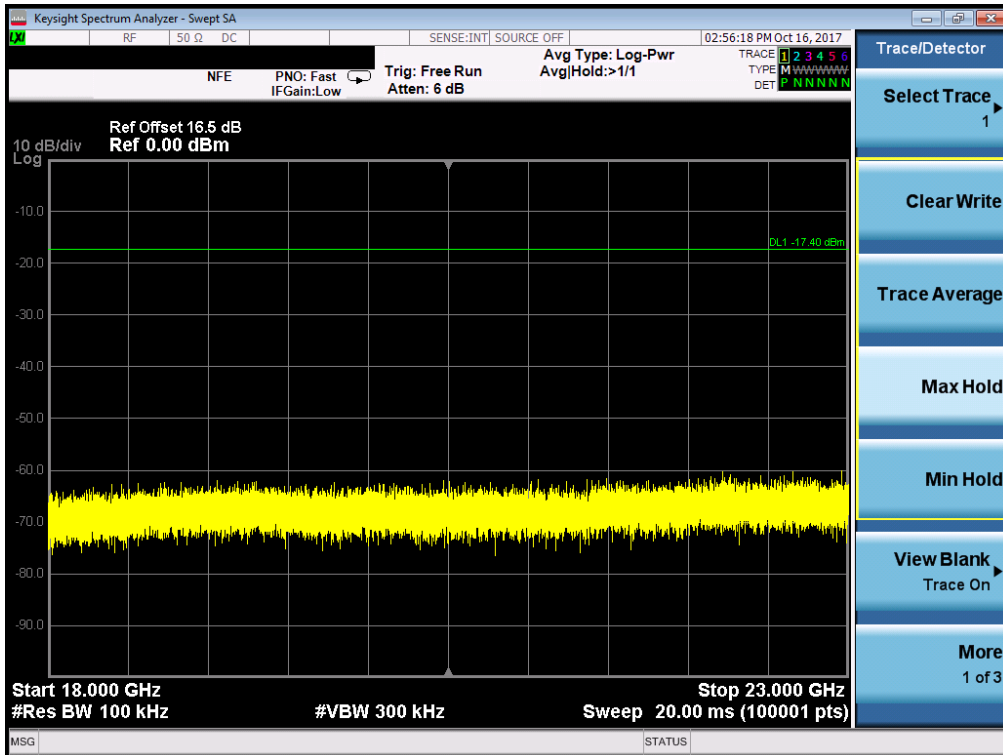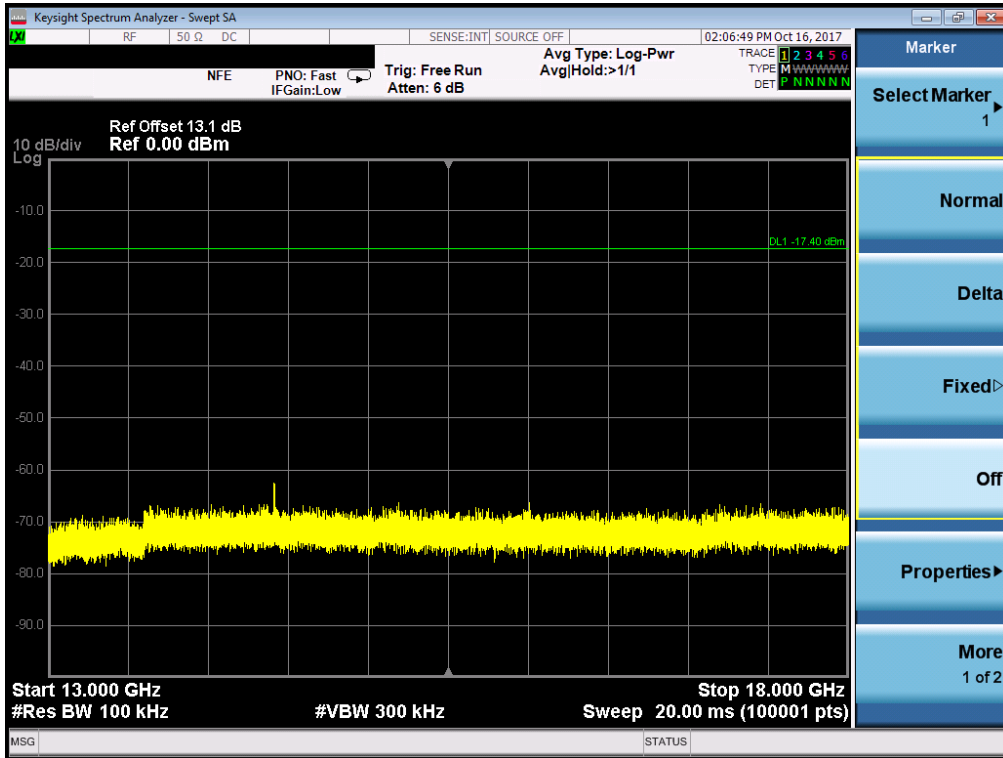

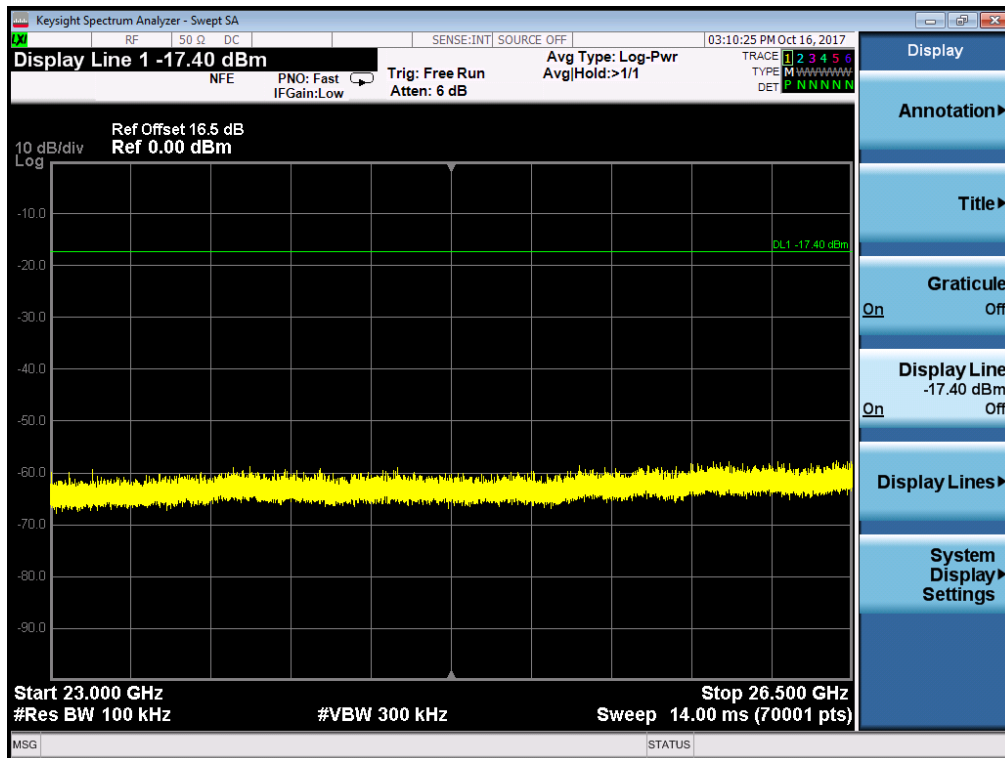

16 Power spectral density

16.1 Definition

The power per unit bandwidth.

16.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Screen Room 2
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Channels / Frequencies Measured:	Low / Mid / High
EUT Channel Bandwidths:	Nominally 1 MHz DTS bandwidth < 800 kHz
Deviations From Standard:	None
Measurement BW:	3 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 kHz
Measurement Span: (requirement 1.5 times Channel BW)	1.2 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 19 °C	+15 °C to +35 °C (as declared)
Humidity: 48 %RH	20%RH to 75%RH (as declared)
Supply: 3.8 V d.c.	3.6 – 4.2 V (as declared)

Test Limits


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

16.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure vi Test Setup

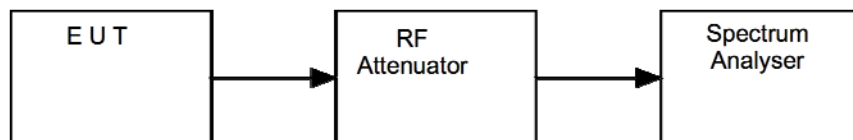


16.4 Test Equipment


<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU26	REF909	08/05/2017	12	08/05/2018

16.5 Test Results

Modulation:GFSK; Data rate: 1 Mbit/s; Power setting: +4 dBm				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
2402	-7.96	included	-7.96	PASS
2440	-6.72	Included	-6.72	PASS
2480	-6.78	Included	-6.78	PASS

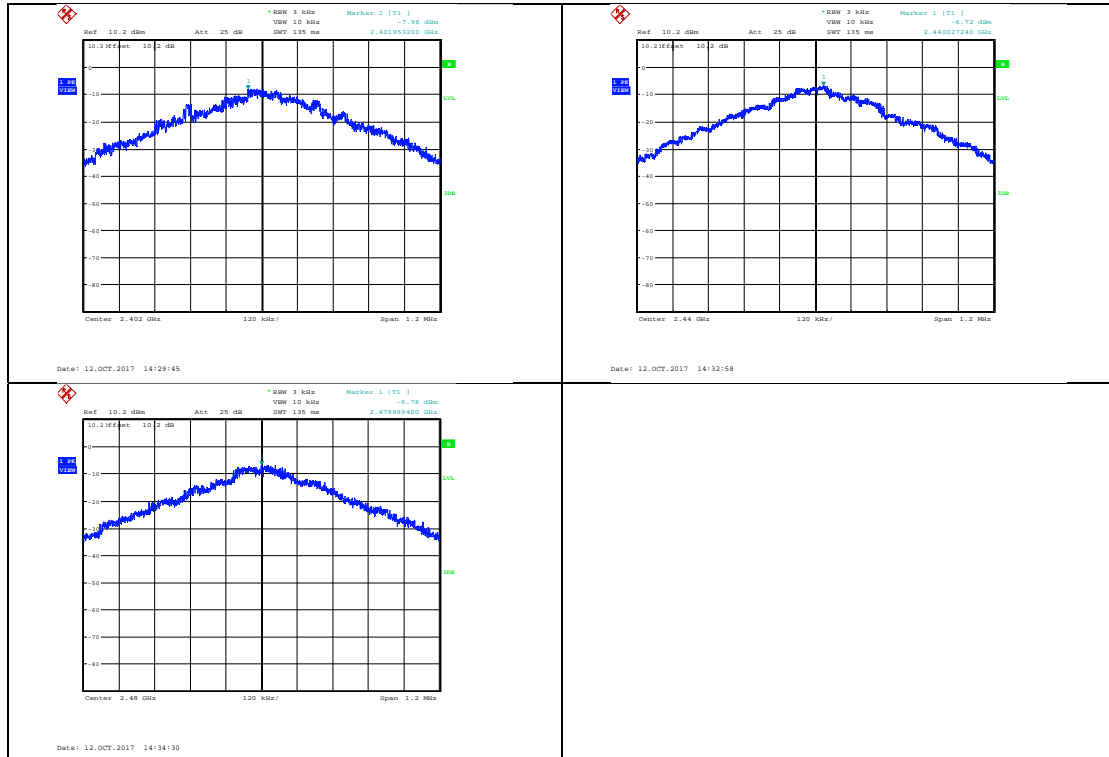

Modulation:GFSK; Data rate: 2 Mbit/s; Power setting: +4 dBm				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
2402	-9.44	included	-9.44	PASS
2440	-10.23	Included	-10.23	PASS
2480	-8.84	Included	-8.84	PASS

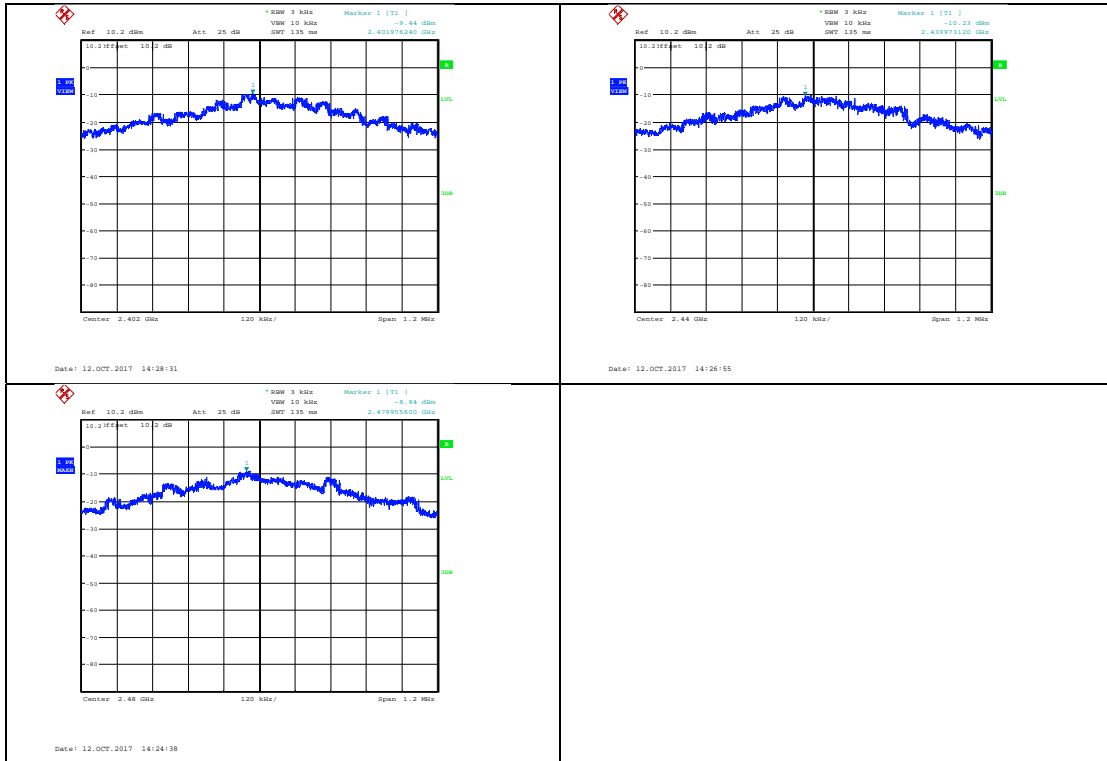

17 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**

Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[2] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

[3] Occupied bandwidth

Uncertainty in test result = **15.5 %**

[4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08 dB**

[5] Conducted / radiated RF power out-of-band

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**

Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**

Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

Uncertainty in test result (18 GHz to 26 GHz) = **3.2 dB**

Uncertainty in test result (26 GHz to 40 GHz) = **3.3 dB**

Uncertainty in test result (40 GHz to 50 GHz) = **3.5 dB**

Uncertainty in test result (50 GHz to 75 GHz) = **3.6 dB**

[6] Power spectral density

Uncertainty in test result (Spectrum Analyser) = **2.48 dB**

18 RF Exposure

KDB 447498

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

The SAR Test Exclusion Threshold for operation in the 2400 – 2483.5 MHz band will be determined as follows

SAR Exclusion Threshold (SARET)

SAR Exclusion Threshold = Step 1 + Step 2

Step 1

$$NT = [(MP/TSDA) * \sqrt{fGHz}]$$

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)
 MP = Max Power of channel (mW) (inc tune up)
 TSDA = Min Test separation Distance or 50mm (whichever is lower) = 5mm (in this case)

We can transpose this formula to allow us to find the maximum power of a channel allowed and compare this to the measured maximum power.

$$= [(NT \times TSDA) / \sqrt{fGHz}]$$

For Distances Greater than 50 mm Step 2 applies

Step 2

$$(TSDB - 50mm) * 10\}$$

Where:

TSDB = Min Test separation Distance (mm) = 50

Note: Step 2 is not required here as the TSDA is 5mm.

Operating Frequency 2.405 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 5) / \sqrt{2.402}] \\ \text{SARET} &= 9.68 \text{ mW} \end{aligned}$$

Operating Frequency 2.440 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 5) / \sqrt{2.440}] \\ \text{SARET} &= 9.60 \text{ mW} \end{aligned}$$

Operating Frequency 2.480 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 5) / \sqrt{2.480}] \\ \text{SARET} &= 9.53 \text{ mW} \end{aligned}$$

Channel Frequency (MHz)	Max. Output Power (mW)	SAR Exclusion Threshold (mW)	SAR Evaluation
2402	1.9	9.68	Not Required
2440	2.1	9.60	Not Required
2480	2.2	9.53	Not Required

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.