


承认书项目表

NO.	内容 (Contents)	页数 (Number of Page)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	1	5
6	增益测试 (Gain Test)	1	6
7	包装图 (Packaging figure)	1	7
8	材料描述和 rohs 测试报告 (Material description and rohs test report)	20	8-end
9			
10	-	-	-
11	-	-	-
12	-	-	-

1 2 3 4 5 6 7 8

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

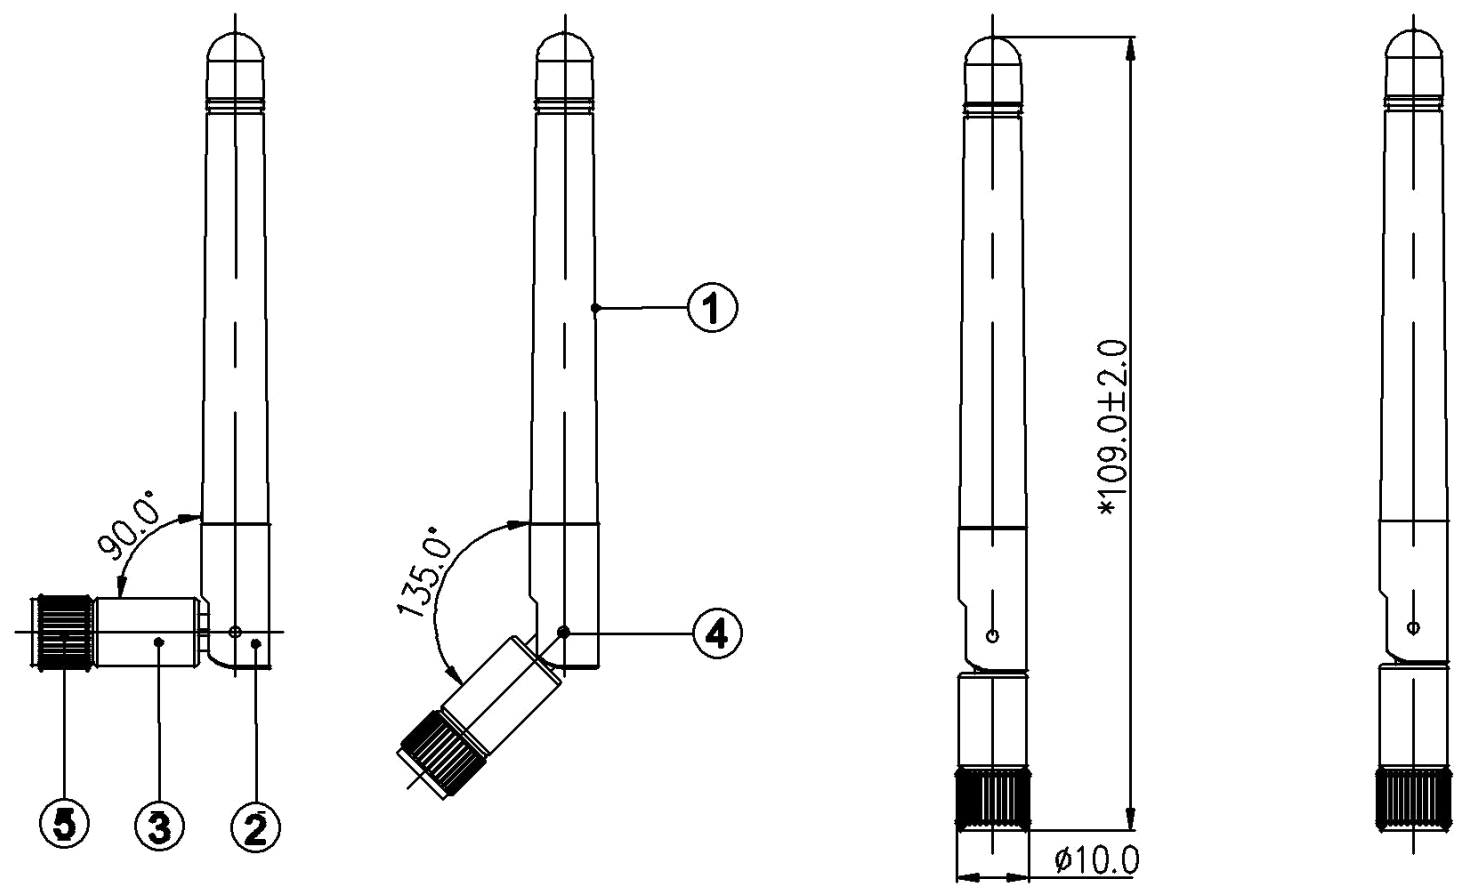

5	R-SMA260-ZC8MNANT	SMA	Cu	Eleetrodepositlon
4	R-AN01-1213Z	Pin	POM	Black
3	R-NB2400-01	Body3	PA+ABS	Black
2	R-NB2400-02	Body2	PA+ABS	Black
1	R-NB2400-03	Body1	TPE	Black
No.	Part Number	Description	Material	Finish

东莞市创捷电子有限公司

Tel :86-0769-33691210
Fax:86-0769-82381572

TITLE:2.4GHz 5GHz Antenna

PART NO.: NB2450-A011B DWG NAME:NB2450-A011B.DWG

APPROVED BY	CHECKED BY	DESIDNED BY		Tolerance	
jeff 2011-11-18	leon 2011-11-18	YD 2011-11-18		UNITS: mm	X.XX
				SCALE: 1/1	
			REVISION: A		


E
D
C
B
A

E
D
C
B
A

1 2 3 4 5 6 7 8

电性测试报告


Test Reports

Sample Photo	
	
A. Electrical Characteristics	
Frequency	2400 ~ 2500 MHz 4900 ~ 5900 MHz
S.W.R.	≤ 2.5 @ 2400 ~ 2500 MHz ≤ 2.5 @ 4900 ~ 5900 MHz
Antenna Gain	3.0 ± 0.7 dBi @ 2450 MHz 3.0 ± 0.7 dBi @ 5500 MHz
Polarization	Linear
Impedance	50 Ohm
B. Material & Mechanical Characteristics	
Material of Radiator	CU
Material of Plastic	Body: TPE Hinge: PA+ABS Holder: PA + ABS
Cable Type	RG-178
Connector Type	SMA Male Reverse
Connector Pull Test	≥ 5 Kg
Connector Torque Test	200 ~ 500 g.cm
C. Environmental	
Operation Temperature	- 40 °C ~ + 65 °C
Storage Temperature	- 40 °C ~ + 80 °C


S 参数测试

S Parameter Test

Agilent E5071C

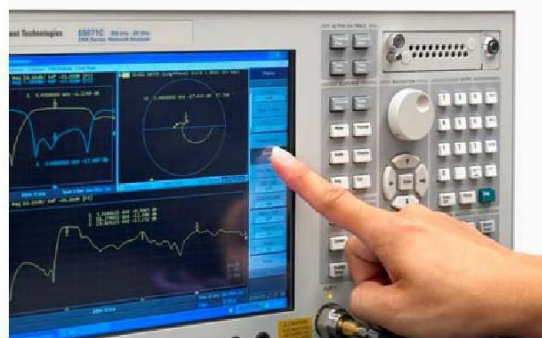

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

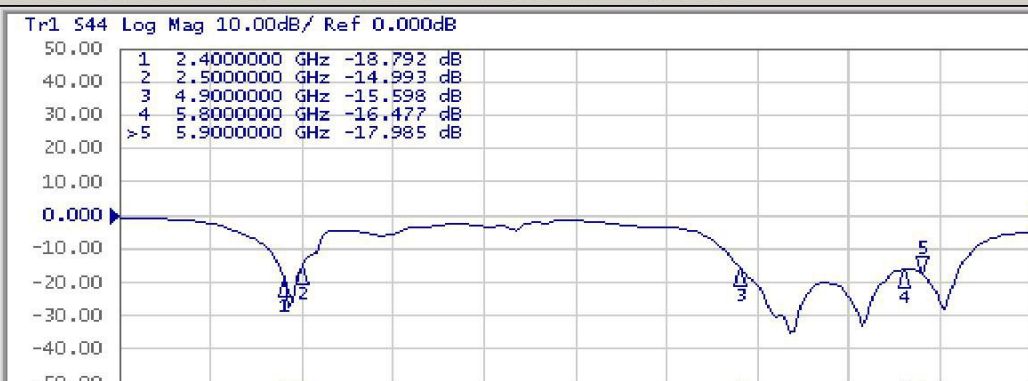

1 Start 1.5 GHz IFBW 70 kHz Stop 6.5 GHz Off

Hold Stop ExtRef Ready Svc 2011-02-10 14:31

Trigger

Hold

Single

Continuous

Hold All Channels

Continuous Disp Channels

Trigger Source Internal

Trigger Event On Sweep

Restart

Trigger

增益测试

Gain Test

*Antenna
Radiation
Pattern
VS
Gain*

