

ISED CABid: ES1909

Test Report No:  
 NIE: 67776RRF.007

## Test Report

USA FCC Part 15.225, 15.209

CANADA RSS-210, RSS-Gen

(*) Identification of item tested	Destination Operation Panel
(*) Trademark	KONE
(*) Model and /or type reference	KSP 1068 -L
Other identification of the product	HW version: Ver A SW version: OS 1.2.00_20210219 Contains a module already type approved by FCC and ISED: FCC ID: 2ALQBOFACCL IC: 4228A-OFACCL Kone part number (KM51566501V000-KM51566509V000) Kone Reference Number: 51836023D16
(*) Features	Radar, RFID High Frequency, BT/BLE
Applicant	KONE CORPORATION Keilasatama 3 - 02150 ESPOO - FINLAND
Test method requested, standard	USA FCC Part 15.225 (10–1–19 Edition): Operation within the band 13.110 -14.010. USA FCC Part 15.209 (10–1–19 Edition): Radiated emission limits, general requirements. CANADA RSS-210 Issue 10 (December 2019). CANADA RSS-Gen Issue 5 (March 2019). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López EMC Consumer & RF Lab. Manager
Date of issue	2021-10-06
Report template No	FDT08_23 (*) "Data provided by the client"

## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty.....	3
Data provided by the client .....	3
Usage of samples .....	4
Test sample description.....	5
Identification of the client .....	6
Testing period and place .....	6
Document history.....	6
Environmental conditions .....	6
Remarks and comments.....	7
Testing verdicts.....	8
Summary .....	8
Appendix A: Test results.....	9

## Competences and guarantees

---

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model KSP 1068 -L is a Destination Operation Panel for lift applications located at landing.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Reception
67776/023	Destination Operation Panel	KSP 1068 -L	--	2021/03/25

Auxiliary elements used with the Sample S/01:

Control Nº	Description	Model	Serial Nº	Reception
67776/022	KSP 1068-H device	KM51566501V000	A00AZ210600003	2021/03/25
67776/032	DVT Card	--	--	2021/03/25

Sample S/01 has undergone the test(s): The Conducted tests indicated in the Appendix A.

- Sample S/02 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Reception
67776/005	Destination Operation Panel	KSP 1068 -L	A00AZ210600001	2021/03/08

Auxiliary elements used with the Sample S/02:

Control Nº	Description	Model	Serial Nº	Reception
67776/001	Samples Table	--	--	2021/03/08
67776/002	Switch	WS-C3560CX-12PC-S	FOC2206Y43S	2021/03/08
67776/003	Power cord	--	--	2021/03/08
67776/018	DVT Card	--	--	2021/03/08

Sample S/02 has undergone the test(s): The Radiated tests indicated in the Appendix A.

Access module information:

- Legic RFID antenna: KM51566509V000
- Access board: KM51598313G01
- Legic BT / RFID component: Legic SM-63x0

Access module (-L) FCC ID: 2ALQBOFACCL

Access module (-L) IC: 4228A-OFACCL

## Test sample description

Ports..... :	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>
	RJ-45/PoE, Ethernet port	30m	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	PE		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	X2, AUX: RS485		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	X3, AUX: Relay input		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	XU1, AUX, USB 1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	XU2, AUX, USB 2		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supplementary information to the ports..... :	PE connected				
Rated power supply .....	Voltage and Frequency				
	<input checked="" type="checkbox"/> DC: 48V; PoE+(802.3at)				
Rated Power .....	25W				
Clock frequencies .....	See attachment. KSP 10xx DOP internal Frequencies				
Other parameters..... :	-				
Software version .....	OS 1.2.00_20210219				
Hardware version..... :	Ver A				
Dimensions in cm (W x H x D)..... :	-				
Mounting position..... :	<input type="checkbox"/> Table top equipment <input checked="" type="checkbox"/> Wall/Ceiling mounted equipment <input type="checkbox"/> Floor standing equipment <input type="checkbox"/> Hand-held equipment <input type="checkbox"/> Other:				
Modules/parts .....	Module/parts of test item	Type	Manufacturer		
	Radar FCC ID UXS-SMR-3X3 / Radar IC ID: 6902A-SMR3X3	SMR-333	InnoSenT		
	FCC ID: 2ALQBOFACCL / IC: 4228A-OFACCL / KSP Access module		KONE Corporation		
Accessories (not part of the test item) .....	Description	Type	Manufacturer		
	DOP WALL MOUNT KM51566508V000		Kone		
	POE+ power switch CISCO 3560CX-8		Cisco		
	Ethernet cables		Harting		
	-				
Documents as provided by the applicant..... :	Description	File name	Issue date		
	KSP 1028 KSP 1068 DOP Technical description V11	--	2020-11-30		
	Setup configuration for OMNIKEY 5127CK MINI_setu	--	2020-08-07		
	KSP 1068 DOP internal Frequencies	--	2021-01-04		

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

KONE CORPORATION  
Myllykatu 3 - 05800, HYVINKÄÄ - FINLAND

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-03-24
Date (finish)	2021-05-13

## Document history

Report number	Date	Description
67776RRF.007	2021-10-06	First release.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

## Remarks and comments

---

The tests have been performed by the technical personnel: Pablo Redondo, Alfonso Gutiérrez, Verónica García.

Used instrumentation:

### Conducted Measurements:

	Last Calibration	Due Calibration
1. Shielded Room ETS LINDGREN S101	N/A	N/A
2. Climatic Chamber BINDER MK 56	2021/03	2022/03
3. DC Power Supply AGILENT TECHNOLOGIES, N5770A	N/A	N/A
4. Digital Multimeter FLUKE 179	2020/10	2021/10
5. Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2020/03	2022/03

### Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N/A	N/A
2. Shielded Room ETS LINDGREN S101	N/A	N/A
3. Active Loop Antenna HEWLETT PACKARD 11966A	2020/07	2022/07
4. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2020/12	2022/12
5. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2020/04	2023/04
6. Preamplifier G>40dB 10MHz-6GHz, BONN ELEKTRONIK, BLNA 0160-01N	2021/03	2022/03

## Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

## Summary

FCC PART 15 PARAGRAPH / RSS-247			
Requirement – Test case		Verdict	Remark
FCC 15.225 (a) / RSS-210 B.6 (a)(i)	Field strength of emissions within the band 13.553 MHz -13.567 MHz	P	
FCC 15.225 (b) / RSS-210 B.6 (a)(ii)	Field strength of emissions within the band 13.410 - 13.553 MHz and 13.567 – 13.710 MHz	P	
FCC 15.225 (c) / RSS-210 B.6 (a)(iii)	Field strength of emissions within the band 13.110 - 13.410 MHz and 13.710 – 14.010 MHz	P	
FCC 15.225 (d) / RSS-210 B.6 (a)(iv)	Field strength of emissions outside of the band 13.110 MHz -14.010 MHz	P	
FCC 15.225 (e) / RSS-210 B.6 (b)	Frequency tolerance of the carrier signal	P	
<u>Supplementary information and remarks:</u>			
None.			



## Appendix A: Test results

## INDEX

TEST CONDITIONS .....	11
Occupied Bandwidth .....	13
15.225 (a) / RSS-210 B.6 (a)(i) Field strength of emissions within the band 13.553 MHz - 13.567 MHz .....	14
15.225 (b) / RSS-210 B.6 (a)(ii) Field strength of emissions within the band 13.410 MHz -13.553 MHz and 13.567 MHz -13.710 MHz .....	15
15.225 (c) / RSS-210 B.6 (a)(iii) Field strength of emissions within the band 13.110 MHz -13.410 MHz and 13.710 MHz - 14.010 MHz .....	17
15.225 (d) / RSS-210 B.6 (a)(iv) Field strength of emissions outside of the band 13.110 MHz - 14.010 MHz .....	19
15.225 (e) / RSS-210 B.6 (b) Frequency tolerance of the carrier signal .....	22

## TEST CONDITIONS

(\*) Data provided by the Applicant.

### POWER SUPPLY (\*):

Vnominal: 48 Vdc

Type of Power Supply: PoE+(802.3at) and DC external power supply.

### ANTENNA (\*):

Type of Antenna: Dedicated fixed antenna.

Maximum Declared Antenna Gain: +2 dBi


### TEST FREQUENCY (\*):

Nominal Operating Frequency: 13.56 MHz

### CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.

For frequency stability test the EUT was placed inside a climatic chamber and connected to a frequency meter using a low loss cable. An external DC power supply was connected to the EUT for voltage variation test.

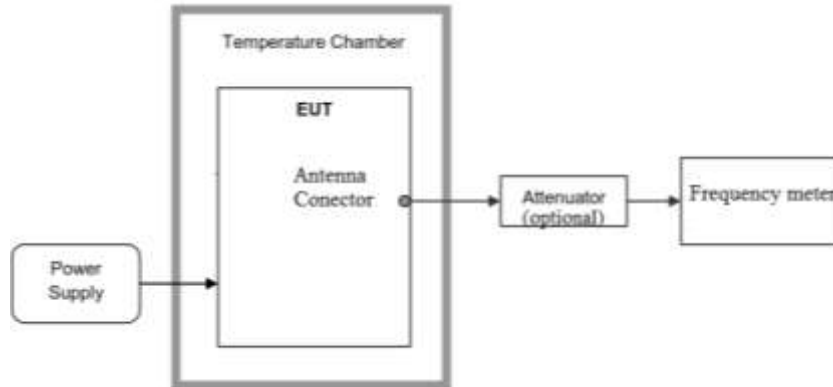

### RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Loop antenna for the range between 9 kHz to 30 MHz and Bilog antenna for the range between 30 MHz to 200 MHz) is situated at a distance of 3 m.


For radiated emissions in the range 9 kHz to 30 MHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 40 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and in the range between 30 MHz and 200 MHz the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


In the range between 9 kHz and 30 MHz the measurements were made in the three different orientation planes of the loop antenna to determine the maximum received field.

In the range between 30 MHz and 200 MHz the measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup 9 kHz to 30 MHz:

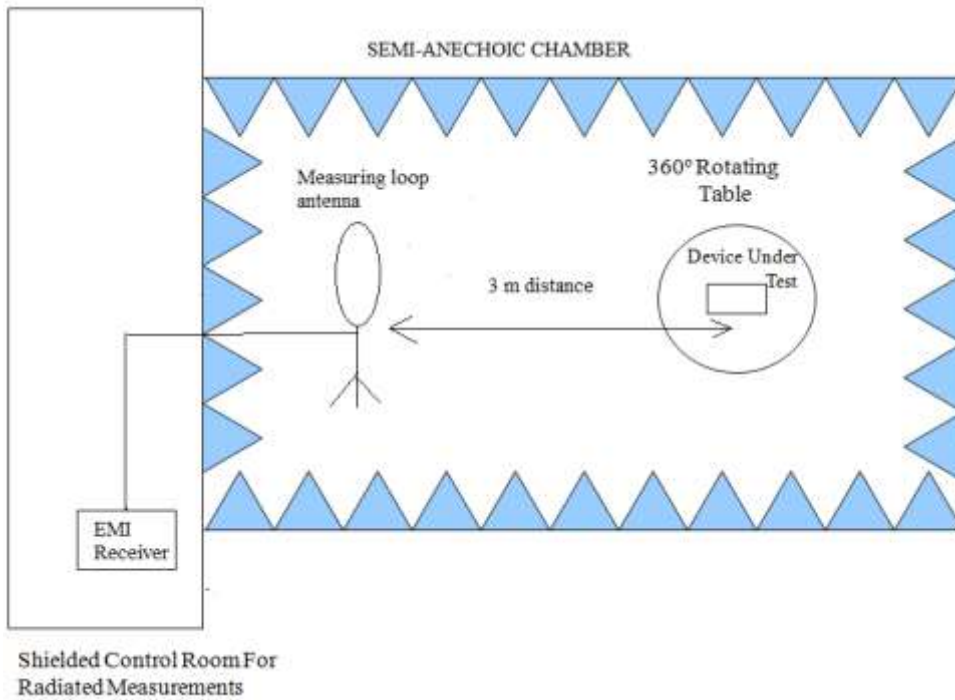

Radiated measurements setup 30 MHz to 200 MHz:

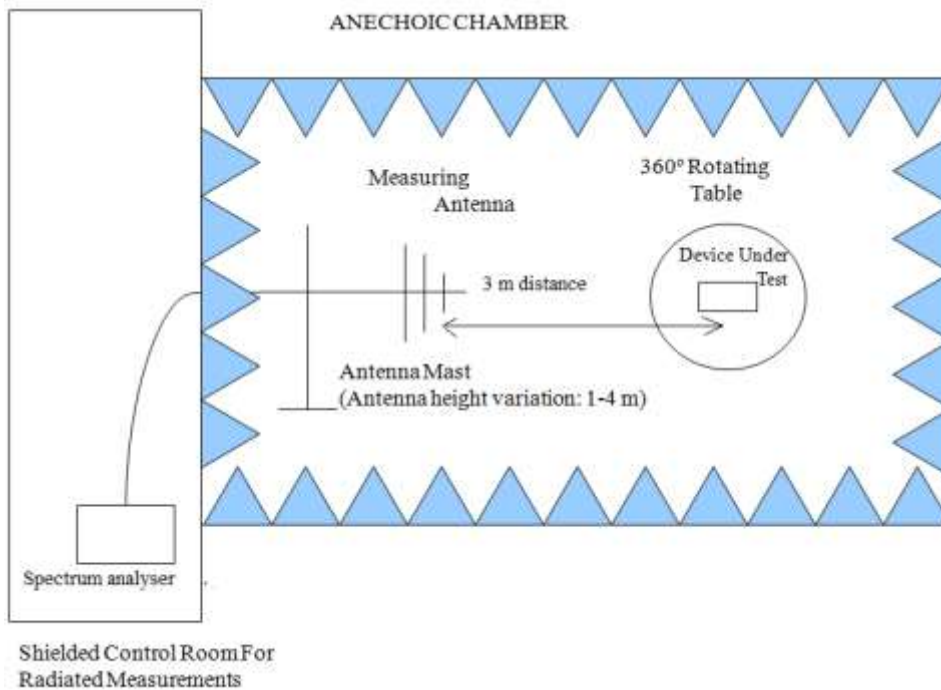


## Occupied Bandwidth

**RESULTS:**

99 % Occupied Bandwidth and 20 dB Bandwidth.

Operation mode	99% Occupied Bandwidth (kHz)	20 dB Bandwidth (kHz)
NFC	1594.6	485.1
Measurement uncertainty (kHz)	<±6.18	

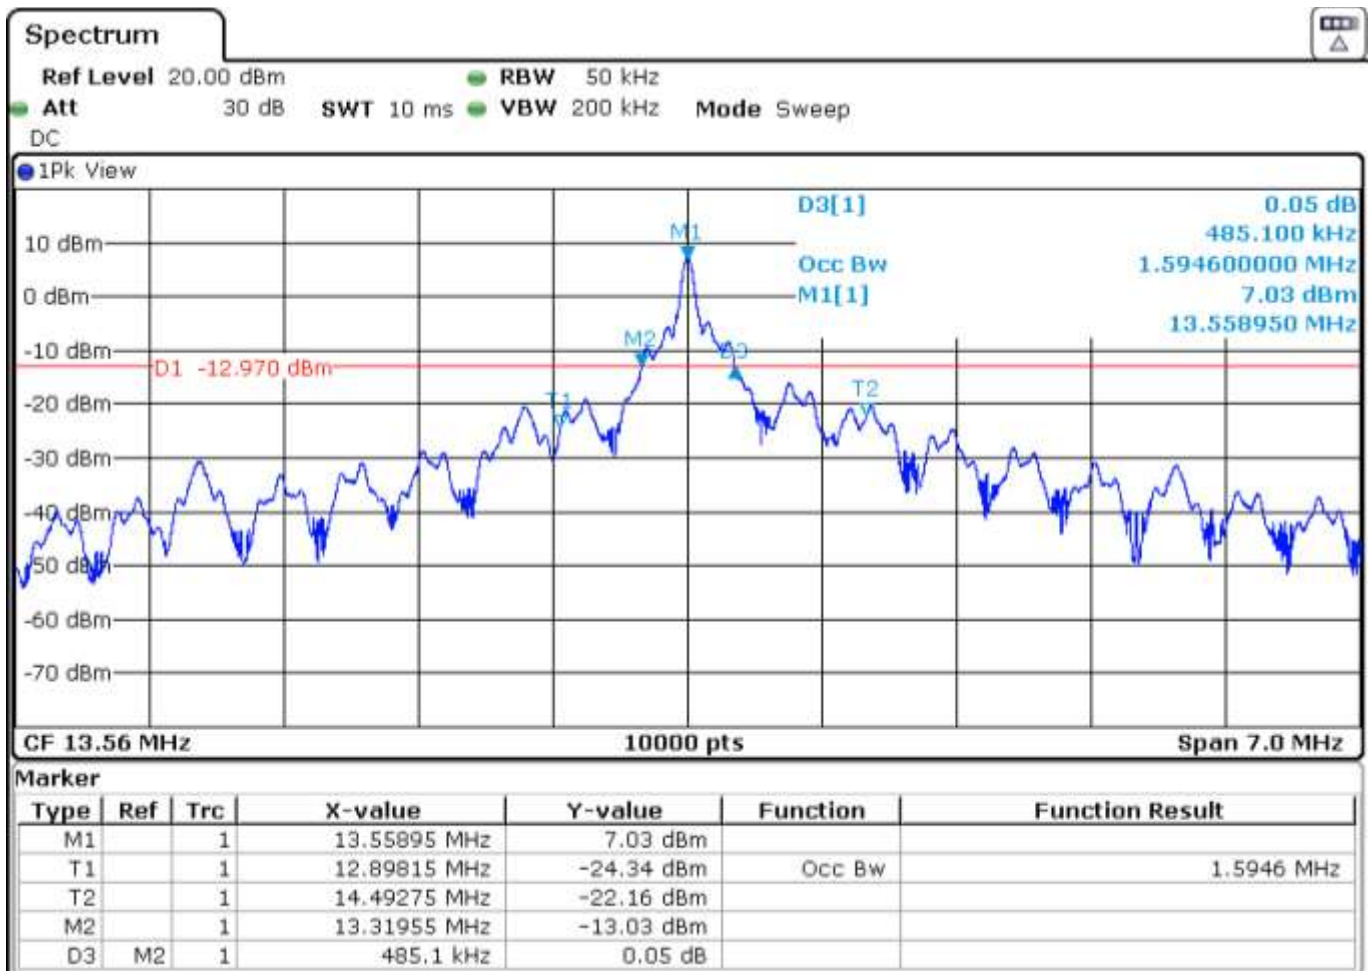

Verdict: PASS


## 15.225 (a) / RSS-210 B.6 (a)(i) Field Strength of Emissions within the band 13.553 MHz - 13.567 MHz

**SPECIFICATION:**

The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter (84 dBµV/m) at 30 meters.

**RESULTS:**

Measurement distance: 3 meters.

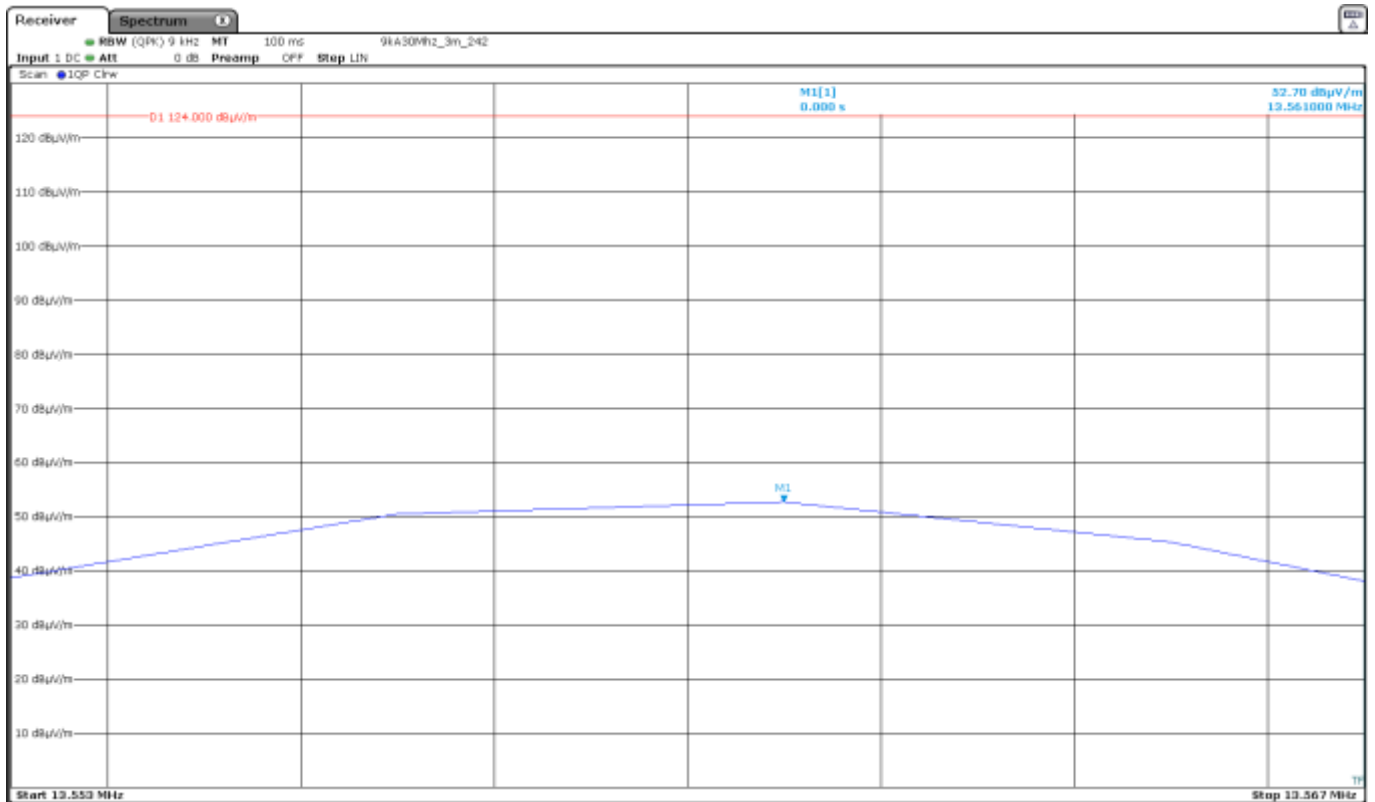

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.561	52.7	12.7
Measurement uncertainty (dB)	±3.04	

Verdict: PASS

## 15.225 (b) / RSS-210 B.6 (a)(ii) Field Strength of Emissions within the band 13.410 MHz -13.553 MHz and 13.567 MHz -13.710 MHz


### SPECIFICATION:

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (50.47 dB $\mu$ V/m) at 30 meters.

### RESULTS:

Measurement distance: 3 meters.

- Band 13.410 - 13.553 MHz:**

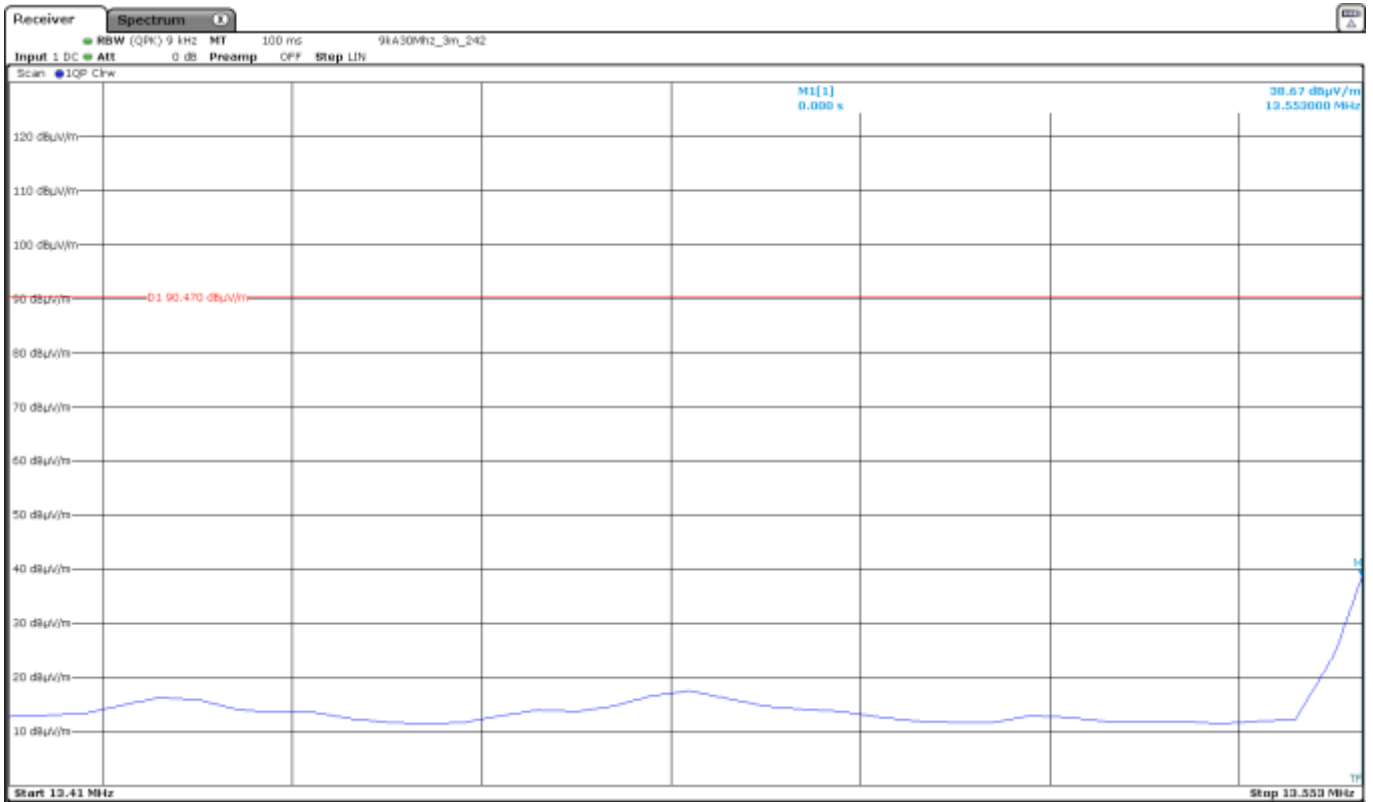


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dB $\mu$ V/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dB $\mu$ V/m) extrapolated to 30 m (40 dB/decade)
13.553	38.67	-1.33
Measurement uncertainty (dB)	$\leq \pm 3.04$	

Verdict: PASS

• **Band 13.567 - 13.710 MHz:**

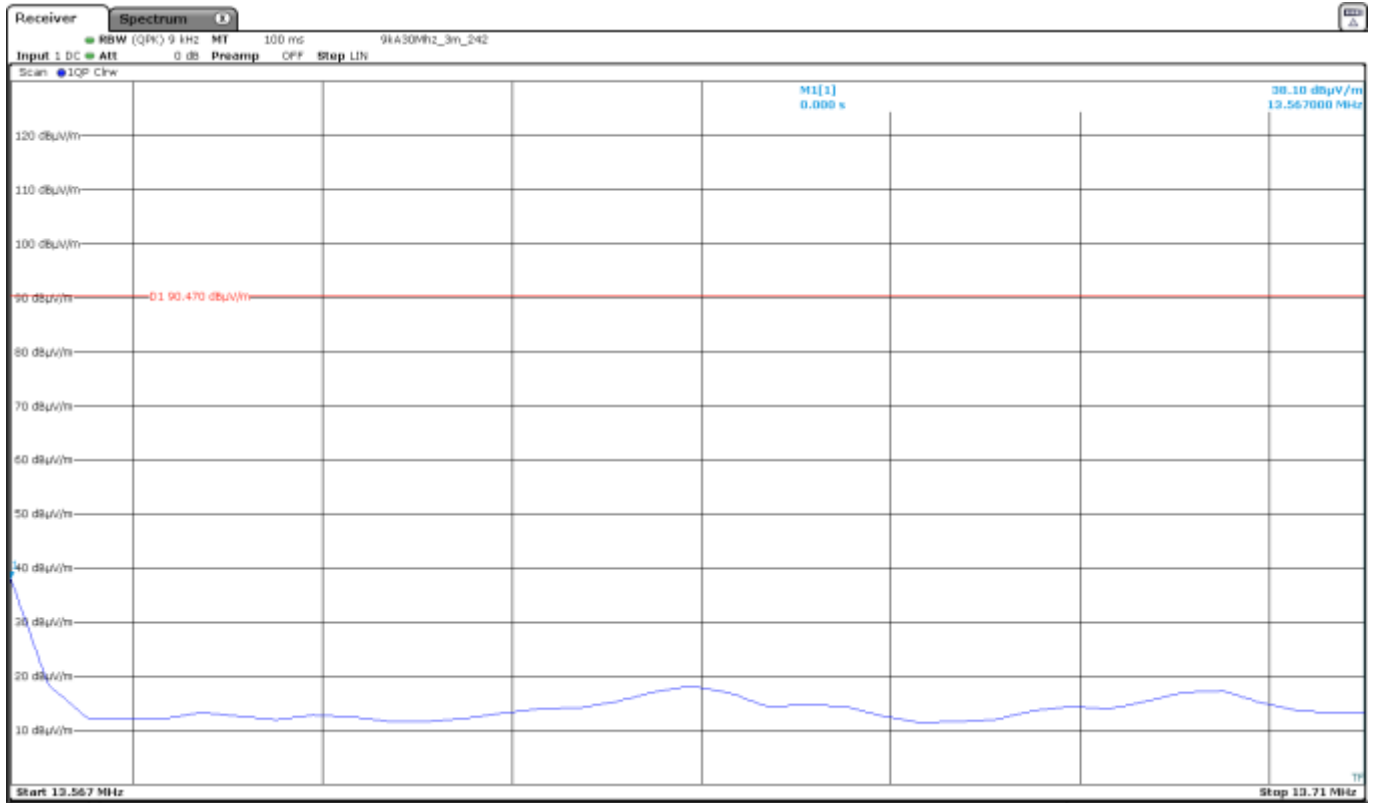

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.567	38.1	-1.9
Measurement uncertainty (dB)	<±3.04	

Verdict: PASS



## 15.225 (c) / RSS-210 B.6 (a)(iii) Field Strength of Emissions within the band 13.110 MHz -13.410 MHz and 13.710 MHz - 14.010 MHz


**SPECIFICATION:**

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter (40.51 dB $\mu$ V/m) at 30 meters.

**RESULTS:**

Measurement distance: 3 meters.

- Band 13.110 - 13.410 MHz:**

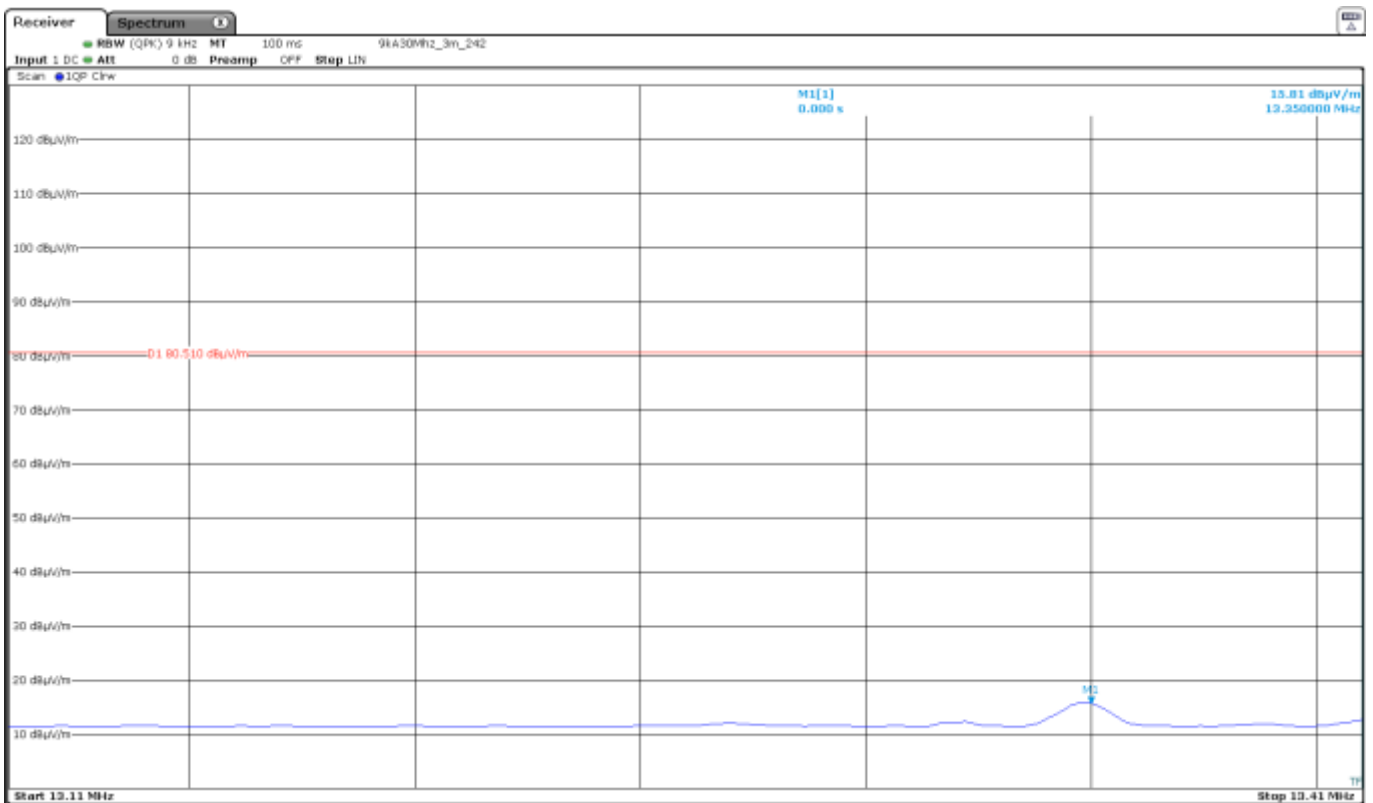


The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dB $\mu$ V/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dB $\mu$ V/m) extrapolated to 30 m (40 dB/decade)
13.350	15.81	-24.19
Measurement uncertainty (dB)	$\pm 3.04$	

Verdict: PASS

• **Band 13.710 - 14.010 MHz:**

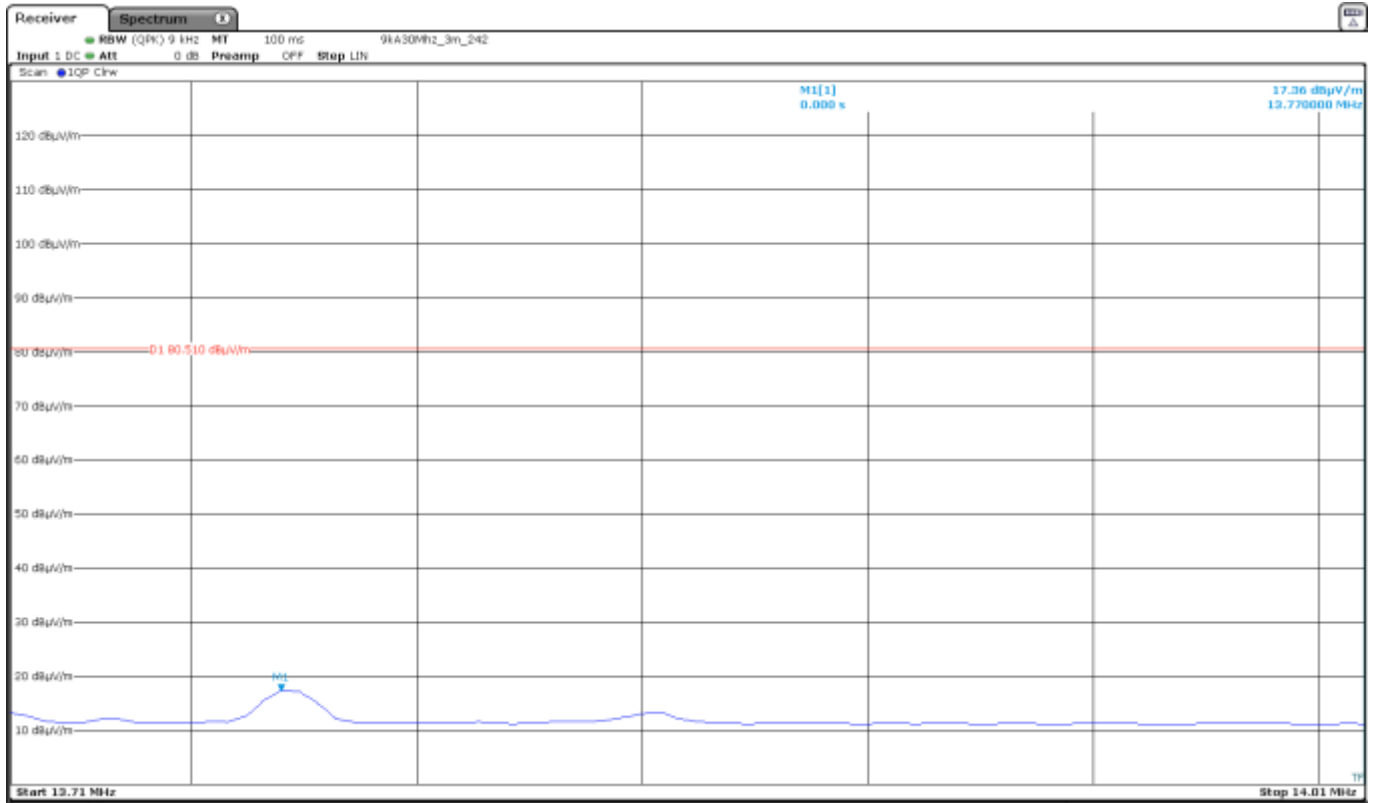

The limit shown in the above plot is extrapolated to 3 meters.

Frequency (MHz)	Maximum field strength (dBµV/m) measured at 3 m (quasi-peak detector)	Maximum field strength (dBµV/m) extrapolated to 30 m (40 dB/decade)
13.770	17.36	-22.64
Measurement uncertainty (dB)	±3.04	

Verdict: PASS

## 15.225 (d) / RSS-210 B.6 (a)(iv) Field Strength of Emissions outside of the band 13.110 MHz - 14.010 MHz

### SPECIFICATION:

Field strength of any emissions appearing outside of the band 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in 15.209/RSS-Gen:

Frequency Range (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	29.54	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

### RESULTS:


All tests were performed in a semi-anechoic chamber at a distance of 3 m.

The spectrum was inspected from 9 kHz to 200 MHz searching for spurious signals.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifier gain.

### Frequency range 9 kHz - 30 MHz:

No spurious frequencies detected at less than 20 dB below the limit.

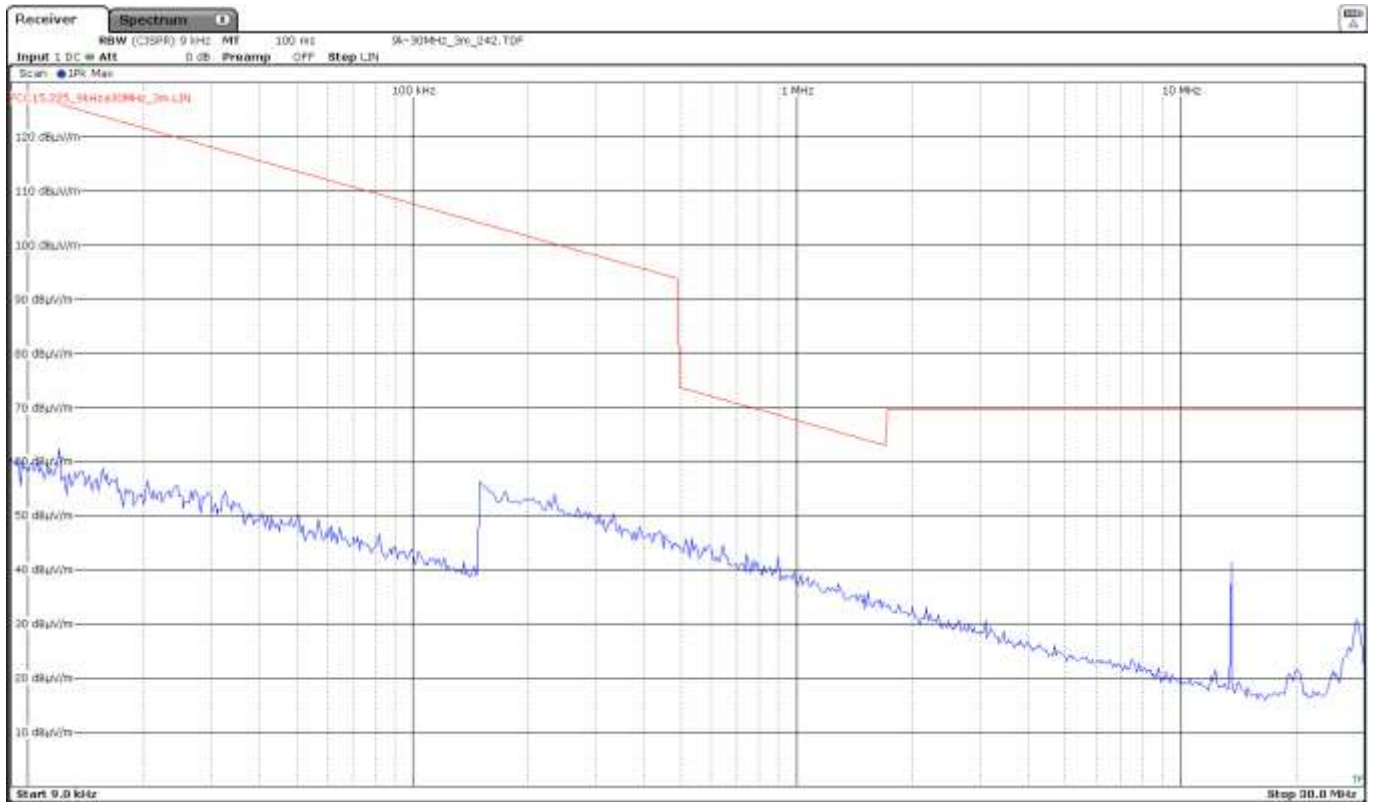

The limits shown in this plot are extrapolated to 3 m. The highest peak is the carrier frequency.


Resolution bandwidth:  
200 Hz for 9 kHz ≤ f ≤ 150 kHz  
9 kHz for 150 kHz ≤ f ≤ 30 MHz

Measurement Uncertainty (dB) <math>\pm 3.04</math>

**Frequency range 30 - 200 MHz:**

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level (dB $\mu$ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
40.6902	32.0	V	Quasi Peak	< $\pm$ 5.07
45.2632	29.3	V	Quasi Peak	< $\pm$ 5.07
67.8392	26.0	V	Quasi Peak	< $\pm$ 5.07
125.0045	26.9	H	Quasi Peak	< $\pm$ 5.07
181.1555	23.5	V	Quasi Peak	< $\pm$ 5.07
193.2028	24.2	V	Quasi Peak	< $\pm$ 5.07

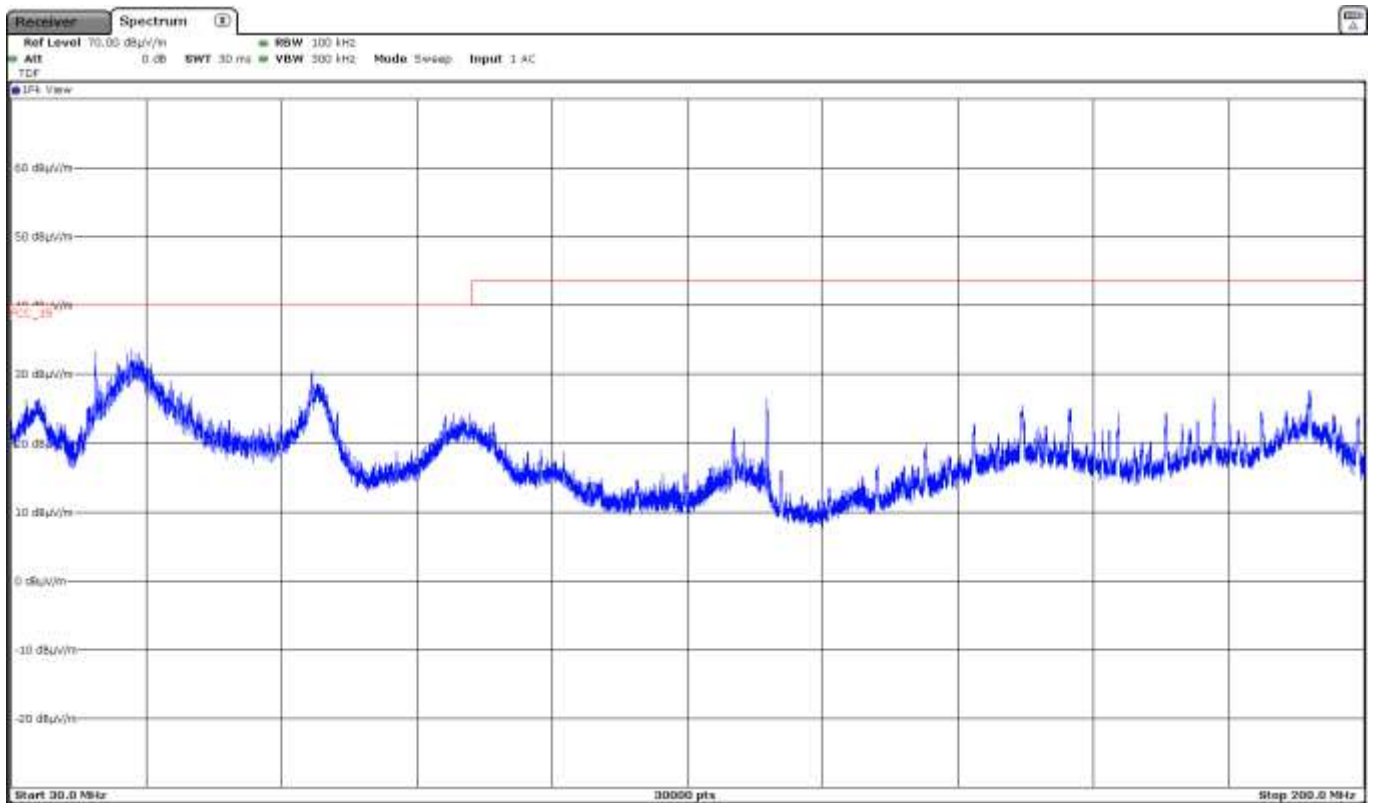

This plot shows the results of the scan using peak detector.

Verdict: PASS

## 15.225 (e) / RSS-210 B.6 (b) Frequency Tolerance of the Carrier Signal

### SPECIFICATION:

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

### RESULTS:

Nominal Operating Frequency: 13.56 MHz.

- **Frequency Stability over Temperature Variations:**

Temperature (°C)	Frequency Error (kHz)	Frequency Error (%)
+50	0.231000	0.001704
+40	0.204000	0.001504
+30	0.166500	0.001228
+20	0.117000	0.000863
+10	0.054000	0.000398
0	-0.010500	-0.000077
-10	-0.031500	-0.000232
-20	-0.018000	-0.000133

- **Frequency Stability over Voltage Variations:**

DC Voltage	Voltage (V)	Temperature (°C)	Frequency Error (kHz)	Frequency Error (%)
Vmax	56	+20	0.064500	0.000476
Vmin	42	+20	0.091500	0.000675

Verdict: PASS