

ISED CABid: ES1909

Test Report No:
 NIE: 67776RRF.014

Partial Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	Destination Operation Panel
(*) Trademark	KONE
(*) Model and /or type reference	KSP 1028 -L
Other identification of the product	HW version: Ver A SW version: OS 1.2.00_20210219 FCC ID UXS-SMR-3X3 / Radar, FCC ID: 2ALQBOFACCL / RFID, BT/BTLE IC: 6902A-SMR3X3 / Radar, IC: 4228A-OFACCL / RFID, BT/BTLE Kone part number (KM51566502V000-KM51566509V000) Kone Reference Number: 51836023D13
(*) Features	Radar, RFID High Frequency, BT/BLE
Applicant	KONE CORPORATION Keilasatama 3 - 02150 ESPOO - FINLAND
Test method requested, standard	USA FCC Part 15.247 (10-1-20) Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-20) Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (March 2019) Amendment 1. Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	Rafael López EMC Consumer & RF Lab. Manager
Date of issue	2021-10-06
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions.....	3
Uncertainty.....	3
Data provided by the client	3
Usage of samples	3
Test sample description.....	4
Identification of the client	6
Testing period and place	6
Document history.....	6
Environmental conditions	6
Remarks and comments.....	7
Testing verdicts.....	8
Summary	8
Appendix A: Test results. Bluetooth Low Energy	9

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with the appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model KSP 1028 -L is a Destination Operation Panel for lift applications located at landing.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
67776/007	Destination Operation Panel	KSP 1028-L	A00AZ2110600001	2021/03/08

Auxiliary elements used with the Sample S/01:

Control Nº	Description	Model	Serial Nº	Date of reception
67776/001	Samples Table	--	--	2021/03/08
67776/002	Switch	WS-C3560CX-12PC-S	FOC2206Y43S	2021/03/08
67776/003	Feeding Cable	--	--	2021/03/08

Sample S/01 has undergone the test(s): The tests indicated in the Appendix A. The element under test contained a chipset LEGIC RFID ANTENNA (KSP 10XX-L).

Access module information:

- Legic RFID antenna: KM51566509V000
- Access board: KM51598313G01
- Legic BT / RFID component: Legic SM-63x0

Access module (-L) FCC ID: 2ALQBOFACCL

Access module (-L) IC: 4228A-OFACCL

Test sample description

Ports..... :	Port name and description		Cable			
			Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾
	RJ-45/PoE, Ethernet port		30m	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	PE			<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	X2, AUX: RS485			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	X3, AUX: Relay input			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	XU1, AUX, USB 1			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
XU2, AUX, USB 2			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Supplementary information to the ports..... :	PE connected					
Rated power supply	Voltage and Frequency					
	<input checked="" type="checkbox"/>	DC: 48V; PoE+(802.3at)				
Rated Power	14W					
Clock frequencies.....	See attachment. KSP 10x DOP internal Frequencies					
Other parameters	-					
Software version	OS 1.2.00_20210219					
Hardware version	Ver A					
Dimensions in cm (W x H x D)	-					
Mounting position	<input type="checkbox"/>	Table top equipment				
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment				
	<input type="checkbox"/>	Floor standing equipment				
	<input type="checkbox"/>	Hand-held equipment				
	<input type="checkbox"/>	Other:				
Modules/parts..... :	Module/parts of test item		Type	Manufacturer		
	Radar		SMR-333	InnoSenT		
	FCC ID UXS-SMR-3X3 / Radar, IC: 6902A-SMR3X3 / Radar, FCC ID: 2ALQBOFACCL / IC: 4228A-OFACCL / KSP Access module			KONE Corporation		
	-					
Accessories (not part of the test item)	Description		Type	Manufacturer		
	DOP WALL MOUNT KM51566508V000			Kone		
	POE+ power switch CISCO 3560CX-8			Cisco		
	Ethernet cables			Harting		
	-					
Documents as provided by the applicant..... :	Description		File name	Issue date		
	KSP 1028 KSP 1068 DOP Technical description V11		--	2020-11-30		
	Setup configuration for OMNIKEY 5127CK MINI_setu		--	2020-08-07		
	KSP 1068 DOP internal Frequencies		--	2021-01-04		

⁽³⁾ Only for Medical Equipment

Identification of the client

KONE CORPORATION
Myllykatu 3 - 05800, HYVINKÄÄ - FINLAND

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-03-25
Date (finish)	2021-03-26

Document history

Report number	Date	Description
67776RRF.014	2021-10-06	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Cristina Calle, Alfonso Gutiérrez and Pablo Redondo.

Used instrumentation:

Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N/A	N/A
2. Shielded Room ETS LINDGREN S101	N/A	N/A
3. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2020/04	2023/04
4. Preamplifier G>40dB 10MHz-6GHz, BONN ELEKTRONIK, BLNA 0160-01N	2021/03	2022/03
5. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2020/12	2022/12
6. Digital Multimeter FLUKE 175	2020/11	2021/11
7. Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2019/11	2022/11
8. Horn Antenna 18-40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2020/05	2023/05
9. RF Preamplifier, 40 dB ,1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2020/05	2021/05
10. Low Noise Amplifier G>30dB, 18 - 40 GHz BONN ELEKTRONIK BLMA 1840-1M	N/A	N/A
11. Spectrum Analyzer ROHDE AND SCHWARZ FSW50	2020/07	2022/07

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

Bluetooth Low Energy

FCC PART 15 PARAGRAPH/ RSS-247			
Requirement – Test case		Verdict	Remark
FCC 15.247 (a)(2) / RSS-247 5.2. (a)	6 dB Bandwidth	N/M	(1)
FCC 15.247 (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain	N/M	(1)
FCC 15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	N/M	(1)
FCC 15.247 (e) / RSS-247 5.2. (b)	Power spectral density	N/M	(1)
FCC 15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	
<u>Supplementary information and remarks:</u>			
(1) Test not performed.			

Appendix A: Test results. Bluetooth Low Energy

INDEX

TEST CONDITIONS	11
FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated (Transmitter).....	11

TEST CONDITIONS

(*) Data provided by the Applicant.

POWER SUPPLY (*):

Vnominal: 48 Vdc
Type of Power Supply: PoE+(802.3af)

ANTENNA (*):

Type of Antenna: PCB.
Maximum Declared Antenna Gain: +2 dBi

TEST FREQUENCIES (*):

Low Channel: 2402 MHz
Middle Channel: 2440 MHz
High Channel: 2480 MHz

RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth / video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

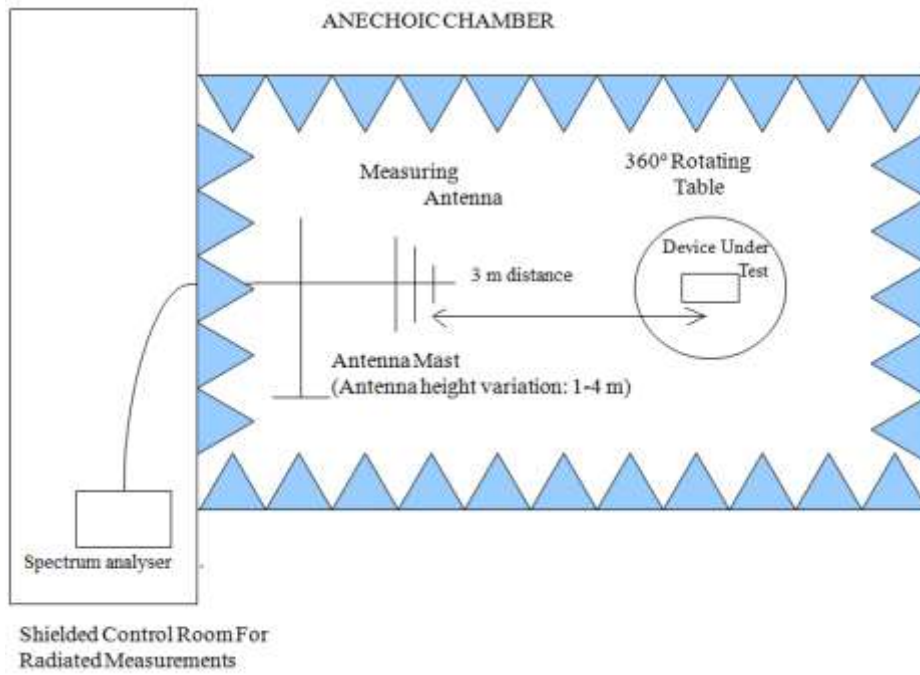

Radiated measurements setup from 1 GHz to 17 GHz:

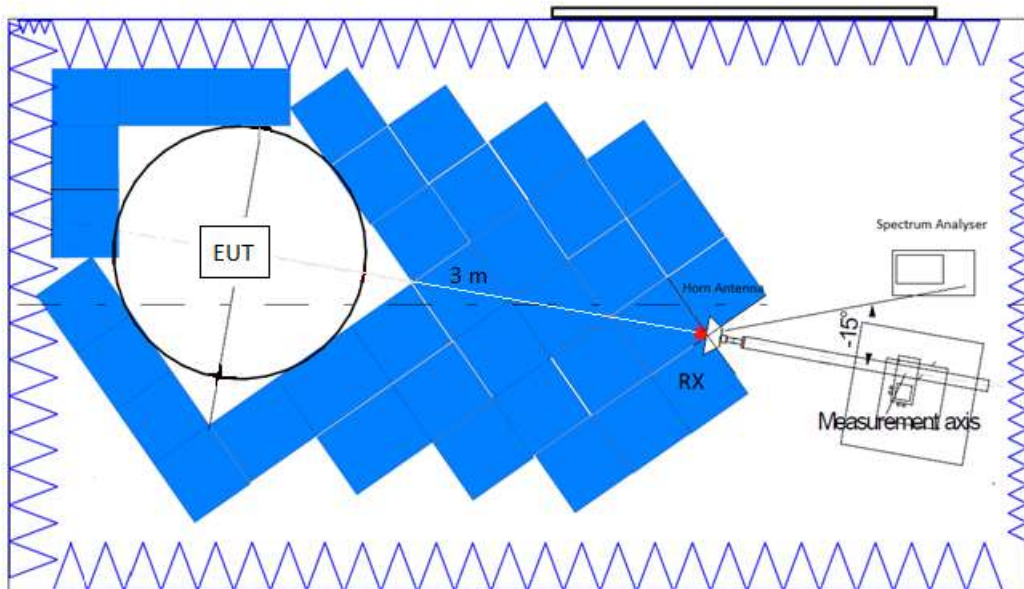

Radiated measurements setup $f > 17$ GHz:

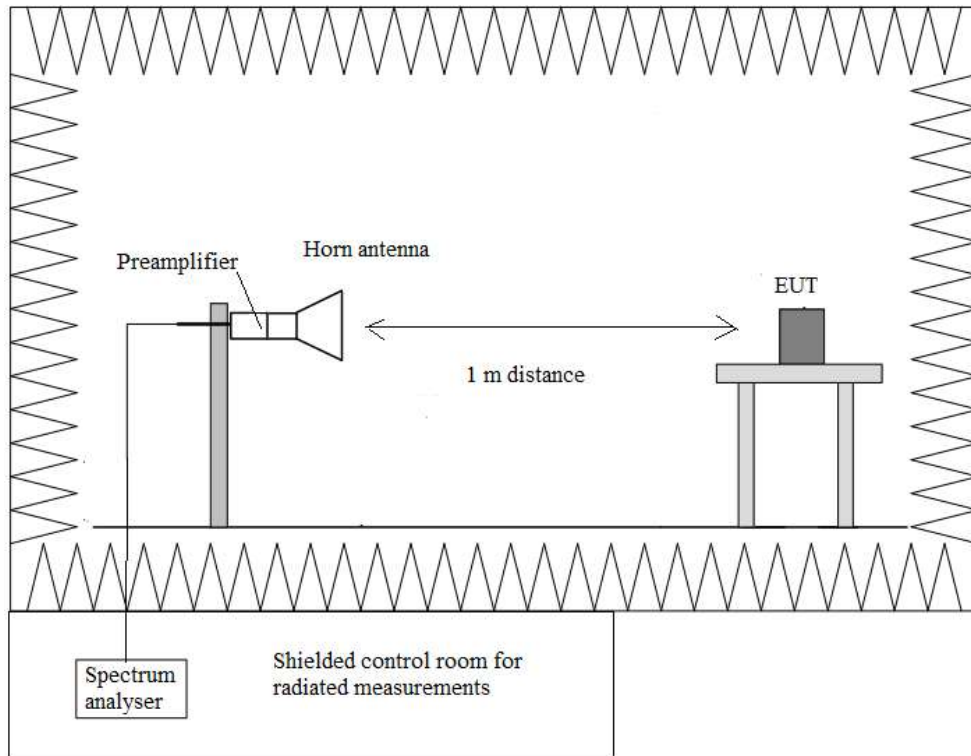

FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)

SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 10000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz:

The spurious frequencies do not depend on the operating channel.

Spurious frequencies detected at less than 20 dB below the limit:

Spurious Frequency (MHz)	Emission Level (dBµV/m)	Polarization	Detector
39.312000	31.92	V	Quasi-Peak
49.739500	32.40	V	Quasi-Peak
125.011500	25.98	V	Quasi-Peak
374.980500	31.57	V	Quasi-Peak
480.031500	32.44	V	Quasi-Peak
716.808500	31.89	V	Quasi-Peak

Measurement Uncertainty (dB) $< \pm 4.99$

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dBµV/m at 3 m) are measured with average detector for checking compliance with the average limit.

- LOW CHANNEL. Spurious frequencies closest to the limit:

Spurious Frequency (GHz)	Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
4.8035	40.67	V	Peak	$< \pm 4.98$

- MIDDLE CHANNEL. Spurious frequencies closest to the limit:

Spurious Frequency (GHz)	Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
7.319	53.30	V	Peak	$< \pm 4.98$


- HIGH CHANNEL. Spurious frequencies closest to the limit:

Spurious Frequency (GHz)	Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
7.4395	51.46	V	Peak	$< \pm 4.98$

Measurement Uncertainty (dB): 1-17 GHz $< \pm 4.98$
 17-26 GHz $< \pm 5.08$

Verdict: PASS


FREQUENCY RANGE 30 MHz - 1 GHz:

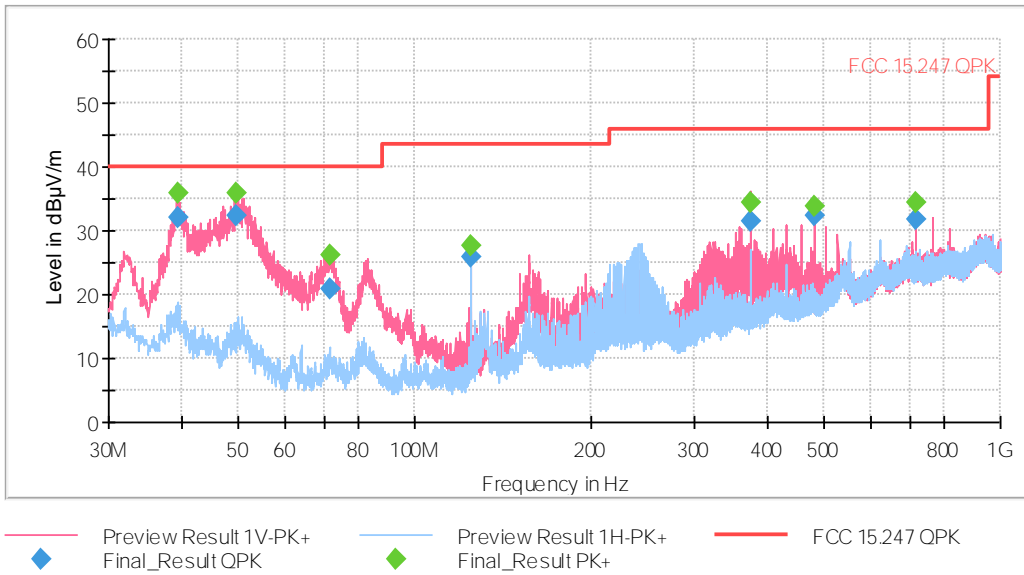

This plot is valid for the Low, Middle and High Channels.


FREQUENCY RANGE 1 - 3 GHz:

- Low Channel:

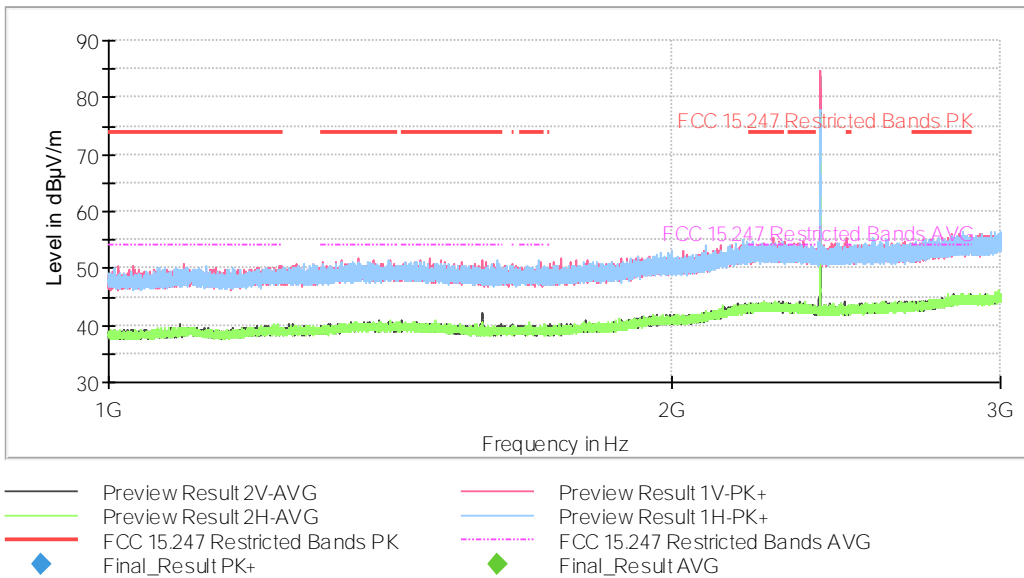

The peak above the limit is the carrier frequency.


- Middle Channel:

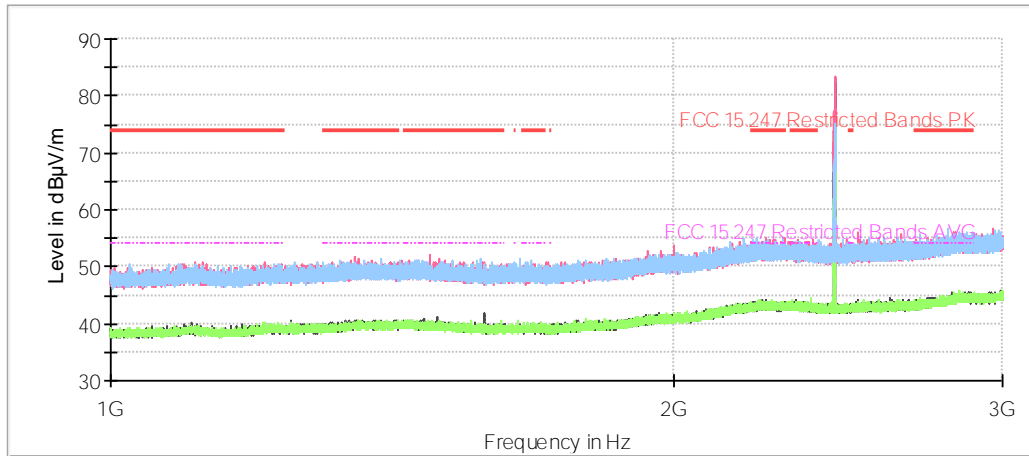

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands PK
- FCC 15.247 Restricted Bands AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG

The peak above the limit is the carrier frequency.

- High Channel:

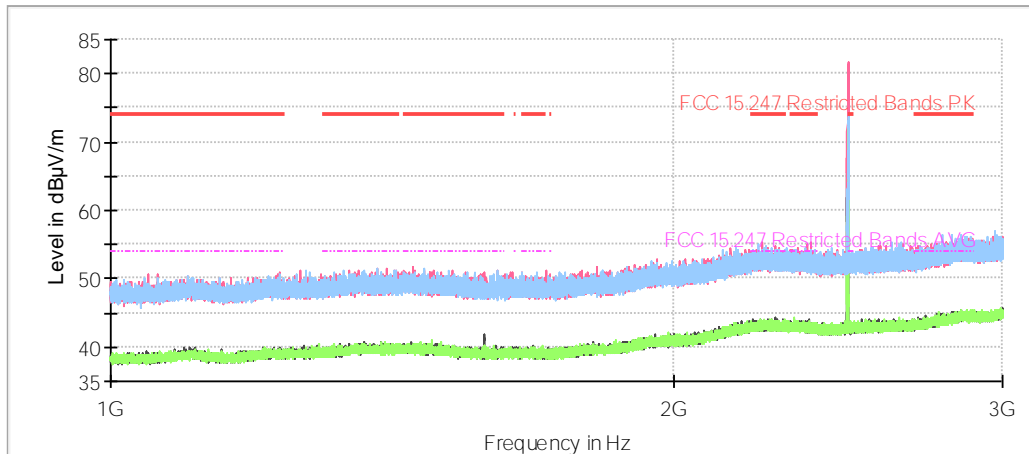


- Preview Result 2V-AVG
- Preview Result 2H-AVG
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands PK
- FCC 15.247 Restricted Bands AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG


The peak above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz:


- Low Channel:

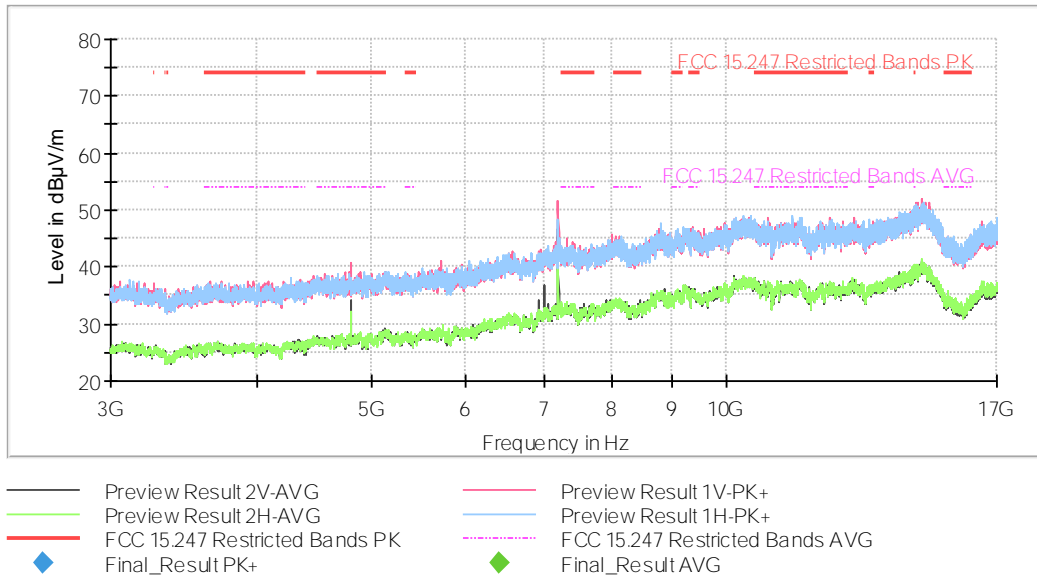

- Middle Channel:

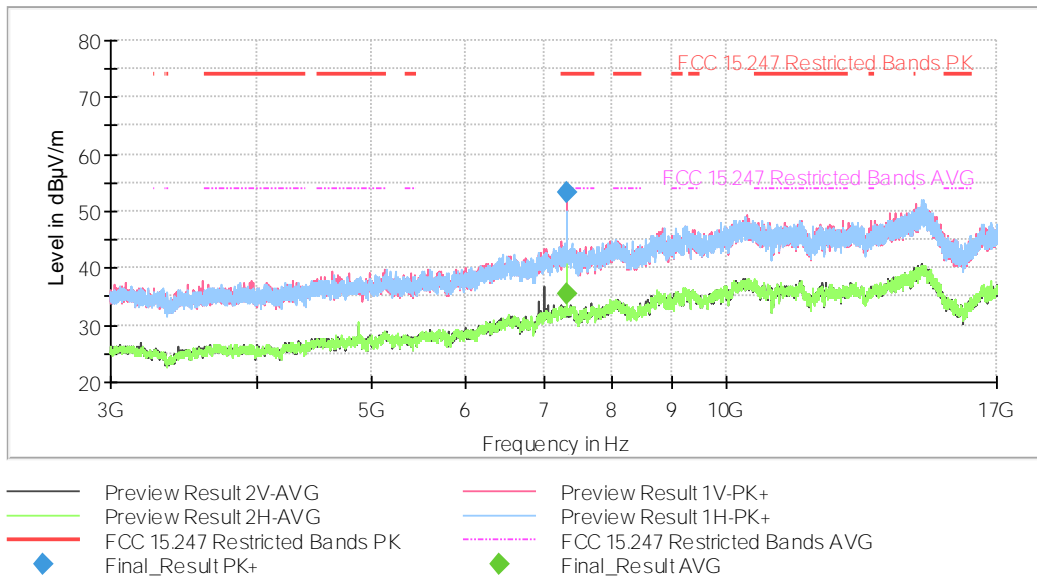


- High Channel:

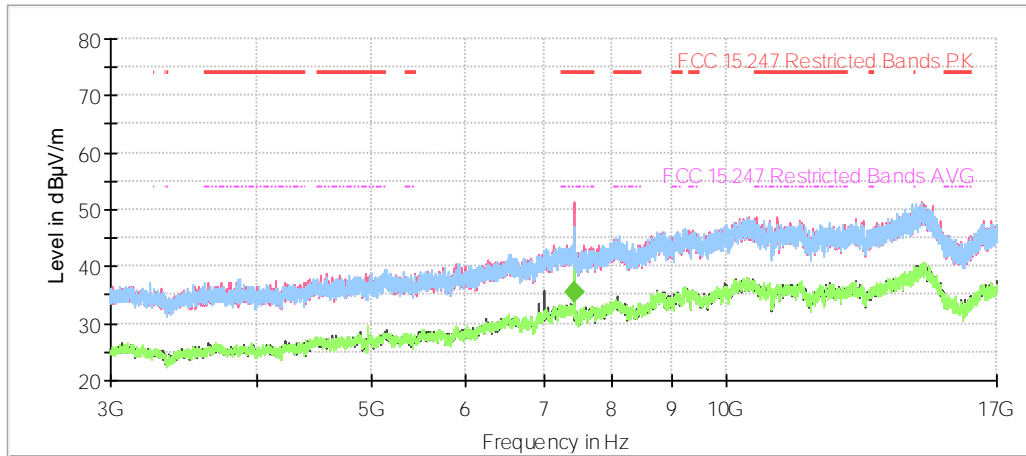

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands PK
- FCC 15.247 Restricted Bands AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG

FREQUENCY RANGE 17 - 26 GHz:

This plot is valid for the Low, Middle and High Channels and all the modulation modes.

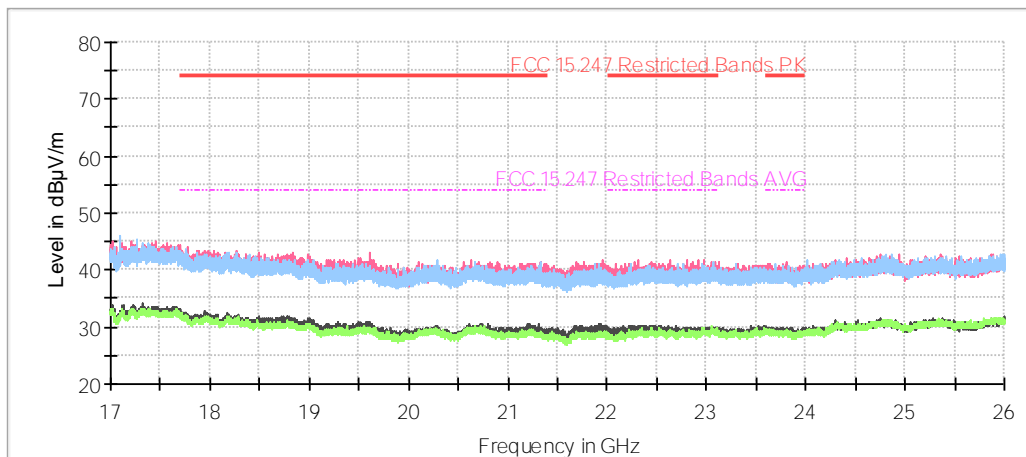


- Preview Result 2V-AVG
- Preview Result 2H-AVG
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands PK
- FCC 15.247 Restricted Bands AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG

RESTRICTED BAND 2.31-2.39 GHz:


- Low Channel:

Full Spectrum

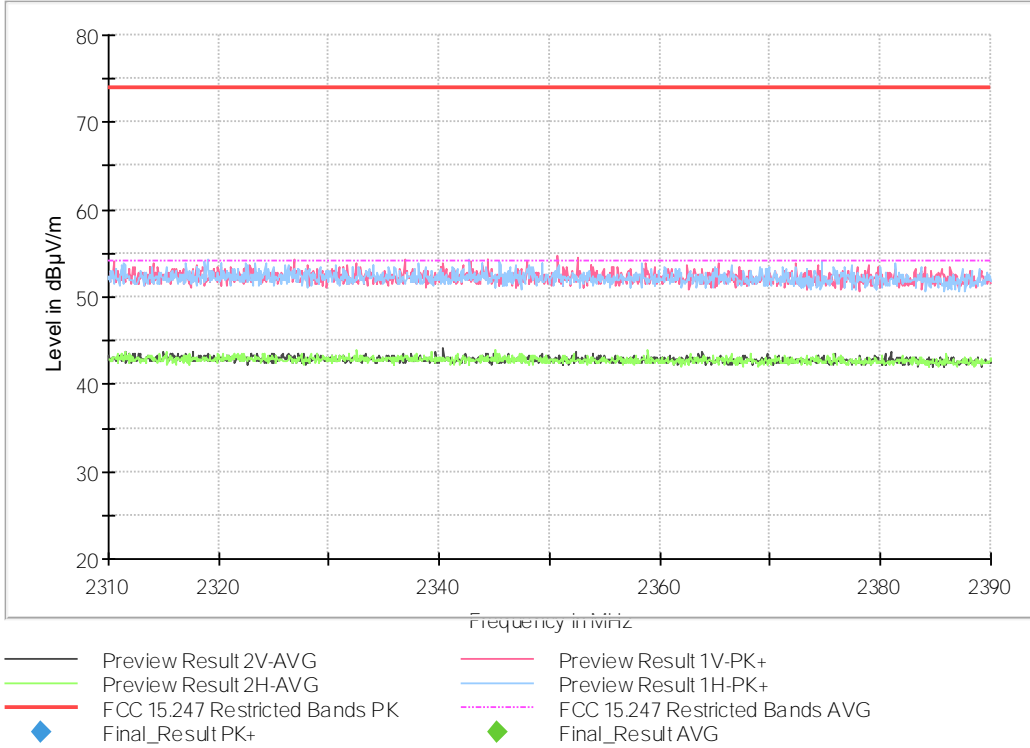


- Middle Channel:

Full Spectrum

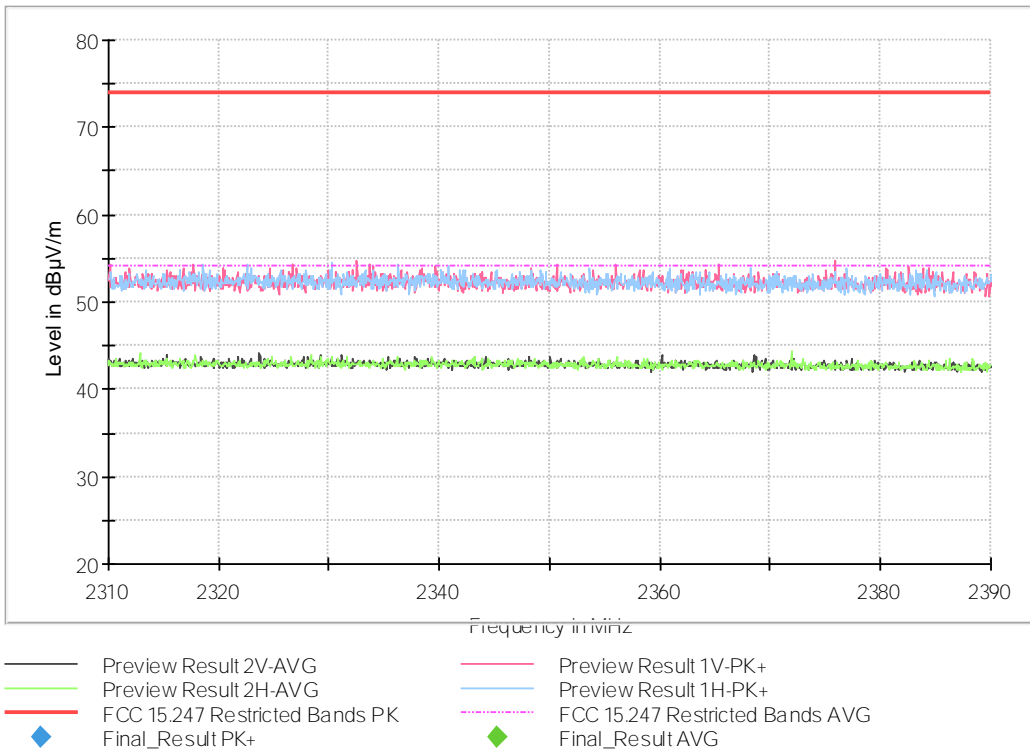

- High Channel:


Full Spectrum

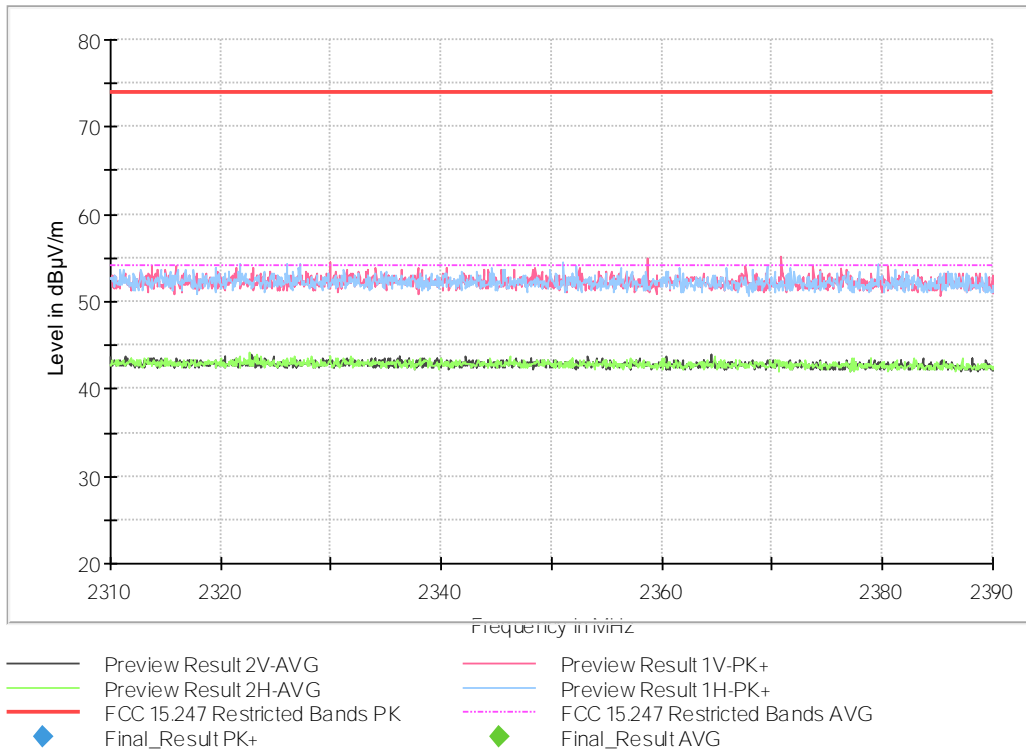

RESTRICTED BAND 2.4835-2.5 GHz:


- Low Channel:

Full Spectrum

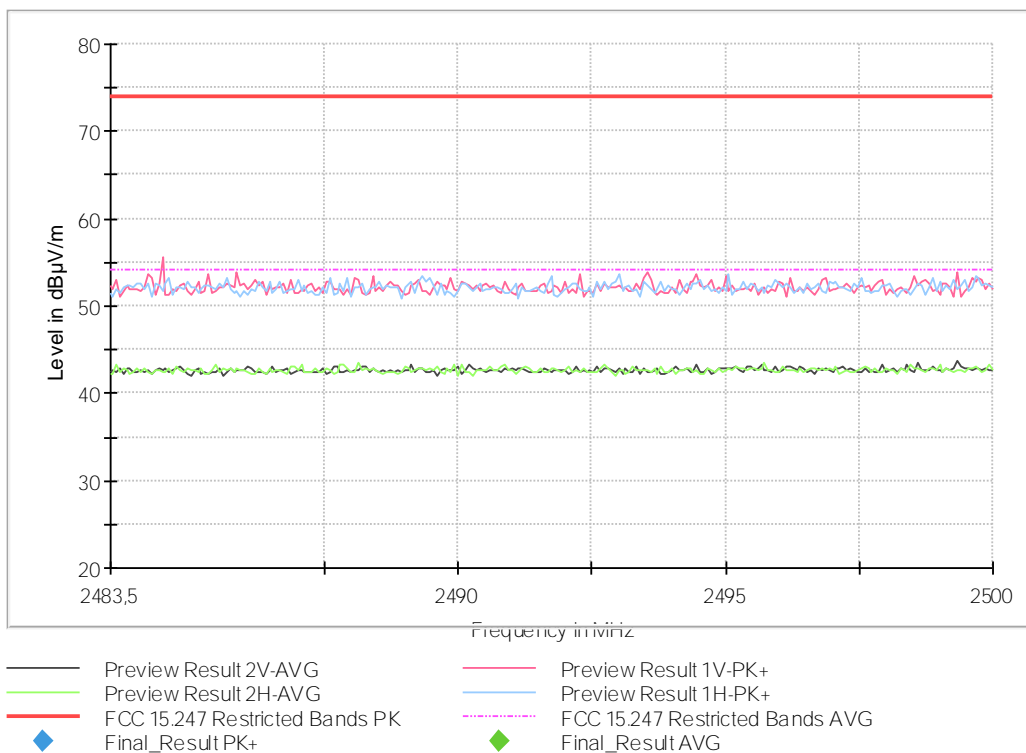

- Middle Channel:

Full Spectrum

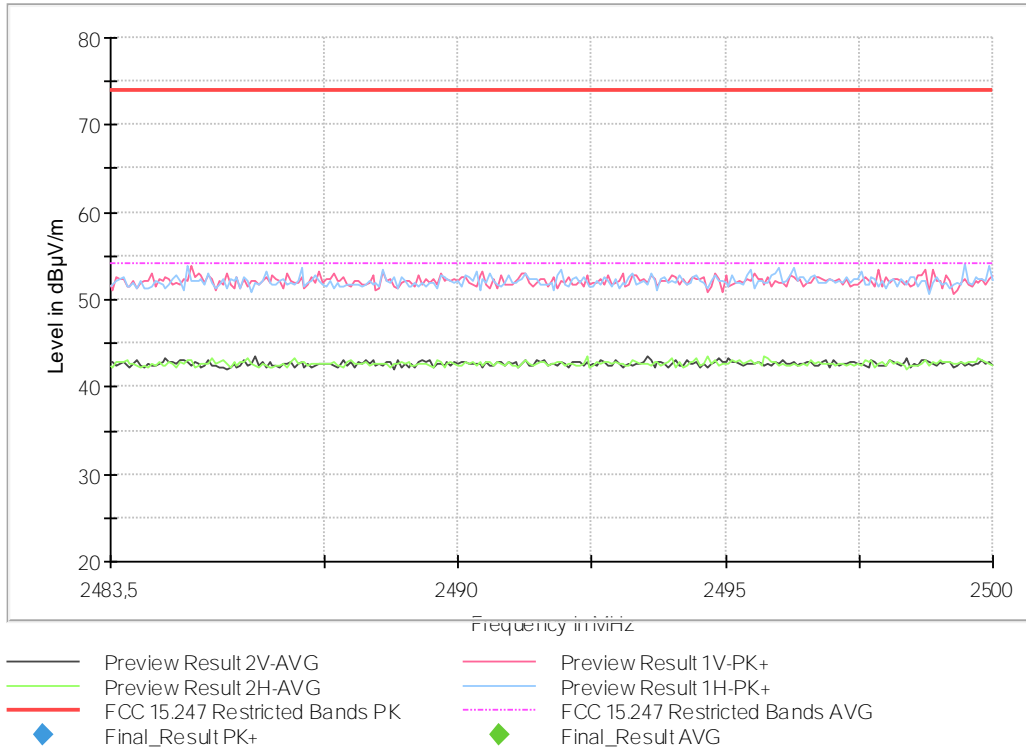

- High Channel:

Full Spectrum

