

FCC TEST REPORT(Bluetooth)

for

MET INDUSTRIAL LTD

Bluetooth Digital Music System with CD

Model Number: JBS-600,JBS-600XXXXX
(where XXXXX denote any printable characters in the
ASCII Standard Character Table to represent variances in
cosmetics or buyers)

FCC ID: 2ALR7JBS-600

Prepared for : MET INDUSTRIAL LTD
Address : RM D, 26/F, KINGS TOWER, 111 KING LAM STREET,
LAI CHI KOK, HONG KONG

Prepared by : Guangdong Keyway Testing Technology Co., Ltd.
Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China



Tel: 86-769-8718 2258
Fax: 86-769-8718 1058

Report No. : 17KWE055451F
Date of Test : May . 4-15, 2017
Date of Report : May . 16, 2017

TABLE OF CONTENTS

	Page
Test Report Declaration	4
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Product Function.....	5
2.2. Description of Device (EUT).....	5
2.3. Independent Operation Modes.....	5
2.4. TEST SITES.....	6
2.5. List of Test and Measurement Instruments.....	7
3. TEST SET-UP AND OPERATION MODES	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software.....	8
3.4. Special Accessories and Auxiliary Equipment.....	8
3.5. Countermeasures to Achieve EMC Compliance.....	8
4. EMISSION TEST RESULTS	9
4.1. Conducted Emission at the Mains Terminals Test.....	9
4.2. Radiated Emission Test.....	14
5. BAND EDGE COMPLIANCE TEST	23
5.1. Limits.....	23
5.2. Test setup.....	23
5.3. TEST Procedure.....	24
6. 6DB OCCUPY BANDWIDTH	30
6.1. Limits.....	30
6.2. TEST PROCEDURE.....	30
7. OUTPUT POWER TEST	33
7.1. Limits.....	33
7.2. Test setup.....	33
7.3. Test result.....	33
8. POWER SPECTRAL DENSITY TEST	34
8.1. Limits.....	34
8.2. Test setup.....	34
8.3. Test result.....	34
9. ANTENNA REQUIREMENTS	37
9.1. Limits.....	37
9.2. Result.....	37
10. PHOTOGRAPHS OF TEST SET-UP	38
11. PHOTOGRAPHS OF THE EUT	40

Guangdong Keyway Testing Technology Co., Ltd.

Applicant:	MET INDUSTRIAL LTD		
Address:	RM D, 26/F, KINGS TOWER, 111 KING LAM STREET, LAI CHI KOK, HONG KONG		
Manufacturer:	Aierson (HK) Technology Co., Limited		
Address:	Unit 04, 7/F, Bright Way Tower, No.33 Mong Kok Road, Kowloon, Hong Kong		
E.U.T:	Bluetooth Digital Music System with CD		
Model Number:	JBS-600, JBS-600XXXXX		
Trade Name:	JENSEN	Serial No.:	-----
Date of Receipt:	May . 3, 2017	Date of Test:	May . 4-15, 2017
Test Specification:	FCC Part 15, Subpart C Section 15.247: 2016 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r05		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
		Issue Date: May . 16, 2017	
Tested by:	Reviewed by:	Approved by:	
			
Keven Wu / Engineer	Mark Li / Supervisor	Andy Gao / Supervisor	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Guangdong Keyway Testing Technology Co., Ltd.</i>			

1.TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
6dB&99% Bandwidth	15.247(a)(2)	PASS
Power density	15.247(e)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

2. GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Bluetooth Digital Music System with CD
Model No.:	JBS-600
Operation Frequency:	BT: 2402MHz~2480MHz
Channel numbers:	BT: 40 Channels
Modulation technology:	BT: GFSK
Antenna Type:	PCB Antenna
Antenna gain:	1dBi
Power supply:	AC 120V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work BT mode, and Test Mode as below:

Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

Remark: According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup"

2.4. TEST SITES

2.4.1. Test Facilities

Lab Qualifications : Certified by Industry Canada
Registration No.: 9868A
Date of registration: December 8, 2011

Certificated by FCC, USA
Registration No.: 370994
Date of registration: February 21, 2012

Certificated by CNAS China
Registration No.: CNAS L5783
Date of registration: August 8, 2012

2.5. List of Test and Measurement Instruments

2.5.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,17	Apr. 27,18
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,17	Apr. 27,18
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,17	Apr. 27,18
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,17	Apr. 27,18

2.5.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,17	Apr. 27,18
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,17	Apr. 27,18
Power Splitter	Weinschel	1506A	NW425	Apr. 27,17	Apr. 27,18
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,17	Apr. 27,18
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,17	Apr. 27,18
Spectrum Analyzer	R&S	FSV40	132.1.3008K39-100967	Apr. 27,17	Apr. 27,18
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,17	Apr. 27,18
Signal Amplifier	SONOMA	310	187016	Apr. 27,17	Apr. 27,18
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,17	Apr. 27,18
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,17	Apr. 27,18
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,17	Apr. 27,18
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,17	Apr. 27,18
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 27,17	Apr. 27,18
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,17	Apr. 27,18
High Pass filter	Micro	HPM50111	324216	Apr. 27,17	Apr. 27,18
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,17	Apr. 27,18
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,17	Apr. 27,18
Filter	COM-MW	ZBSF-MET60080-60-X2	KW037	Apr. 27,17	Apr. 27,18
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,17	Apr. 27,18
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,17	Apr. 27,18
Splitter	Agilent	11636B	0025164	Apr. 27,17	Apr. 27,18
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 22,17	Apr. 22,18
Power Meter	Anritsu	ML2495A	1204003	Apr. 24,17	Apr. 24,18
Power Sensor	Anritsu	MA2411B	1126150	Apr. 24,17	Apr. 24,18

3. TEST SET-UP AND OPERATION MODES


3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators

Conducted Emission:



3.3. Test Operation Mode and Test Software

Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

3.4. Special Accessories and Auxiliary Equipment

None.

3.5. Countermeasures to Achieve EMC Compliance

N/A.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test


4.1.1. Limit 15.207 limits

Frequency MHz	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE: 1.The lower limit shall apply at the transition frequencies.
2.The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.


4.1.2. Test Setup

- 1.The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the center so as to form a bundle no longer than 0.4 m.
- 2.The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.
- 3.The frequency range from 150 kHz to 30 MHz was investigated.
- 4.The bandwidth of the test receiver was set at 9 kHz.
- 5.Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

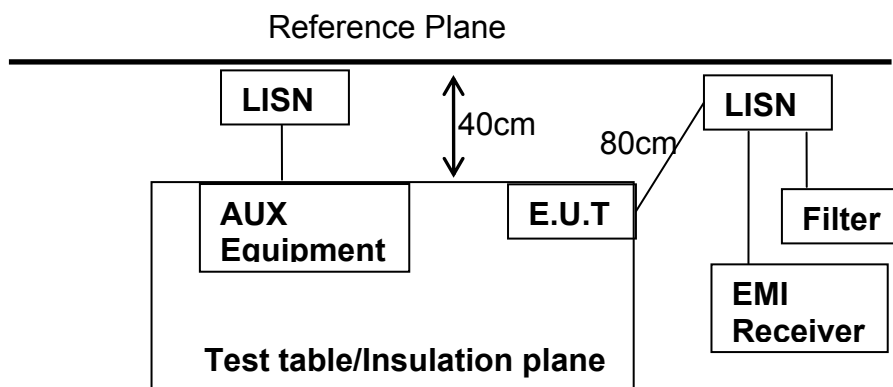


Remark: E.U.T. :Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height: 0.8m.

Test block




EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

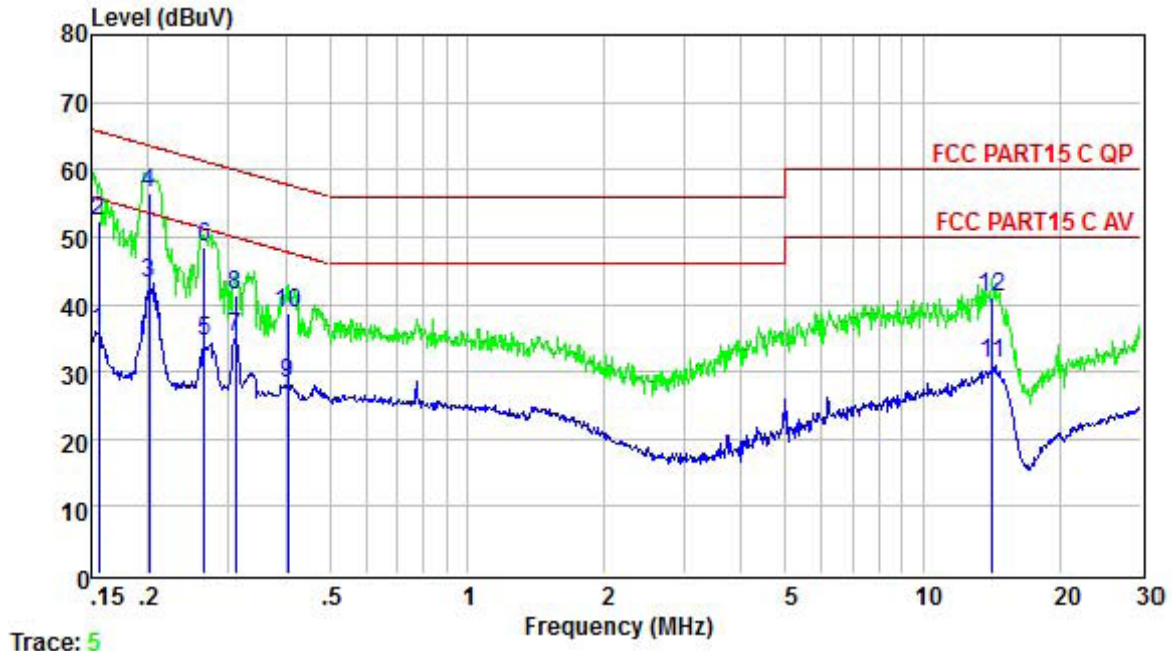


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.156	36.05	55.69	-19.64	Average
2	0.156	52.49	65.69	-13.20	QP
3	0.201	43.26	53.58	-10.32	Average
4	0.201	56.40	63.58	-7.18	QP
5	0.266	34.49	51.25	-16.76	Average
6	0.266	48.57	61.25	-12.68	QP
7	0.310	35.00	49.97	-14.97	Average
8	0.310	41.29	59.97	-18.68	QP
9	0.404	28.27	47.77	-19.50	Average
10	0.404	38.79	57.77	-18.98	QP
11	14.213	31.14	50.00	-18.86	Average
12	14.213	41.08	60.00	-18.92	QP

EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

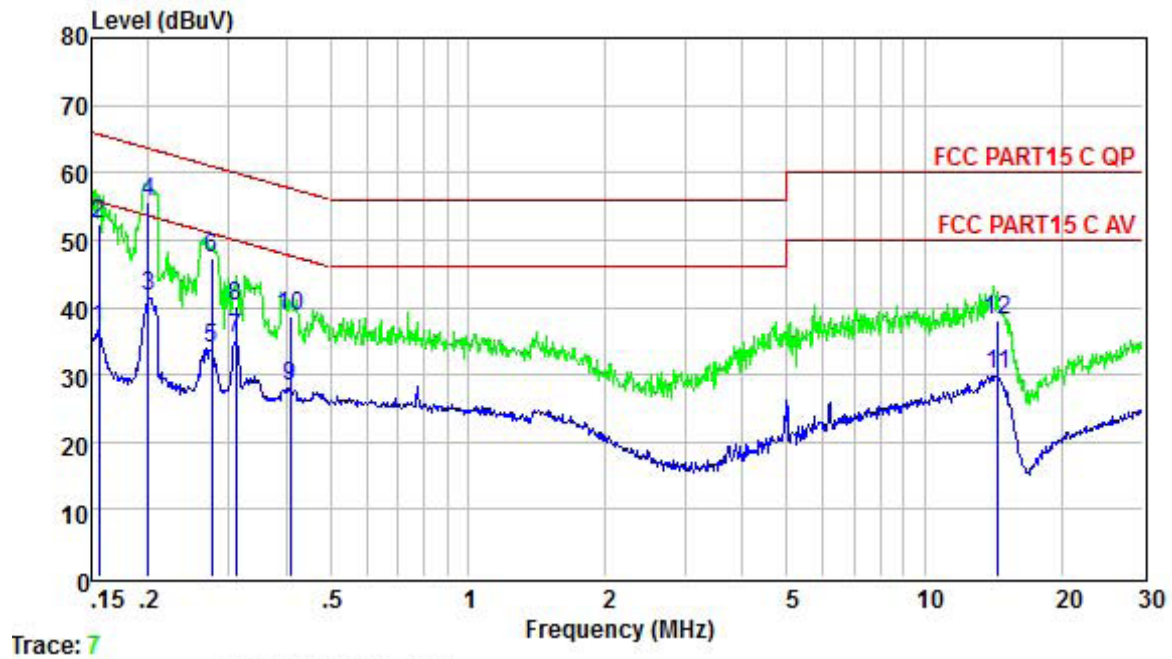

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.156	36.90	55.69	-18.79	Average
2	0.156	52.22	65.69	-13.47	QP
3	0.200	41.76	53.62	-11.86	Average
4	0.200	55.70	63.62	-7.92	QP
5	0.274	33.96	50.98	-17.02	Average
6	0.274	47.21	60.98	-13.77	QP
7	0.310	35.47	49.97	-14.50	Average
8	0.310	40.08	59.97	-19.89	QP
9	0.408	28.37	47.68	-19.31	Average
10	0.408	38.59	57.68	-19.09	QP
11	14.517	30.07	50.00	-19.93	Average
12	14.517	38.17	60.00	-21.83	QP


EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 240V/50Hz	Test Mode :	Mode 4

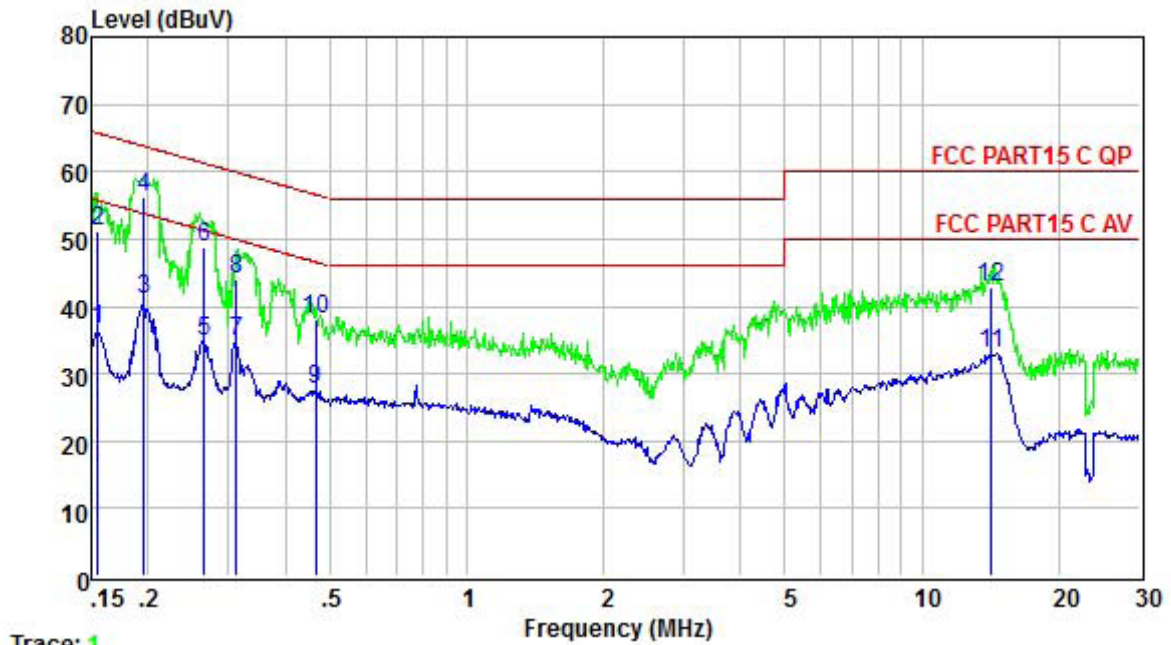

Trace: 1

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.155	36.63	55.74	-19.11	Average
2	0.155	51.05	65.74	-14.69	QP
3	0.195	40.92	53.80	-12.88	Average
4	0.195	56.20	63.80	-7.60	QP
5	0.266	34.73	51.25	-16.52	Average
6	0.266	48.86	61.25	-12.39	QP
7	0.312	34.93	49.93	-15.00	Average
8	0.312	44.15	59.93	-15.78	QP
9	0.466	27.57	46.58	-19.01	Average
10	0.466	38.02	56.58	-18.56	QP
11	14.213	33.01	50.00	-16.99	Average
12	14.213	42.68	60.00	-17.32	QP

EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 240V/50Hz	Test Mode :	Mode 4

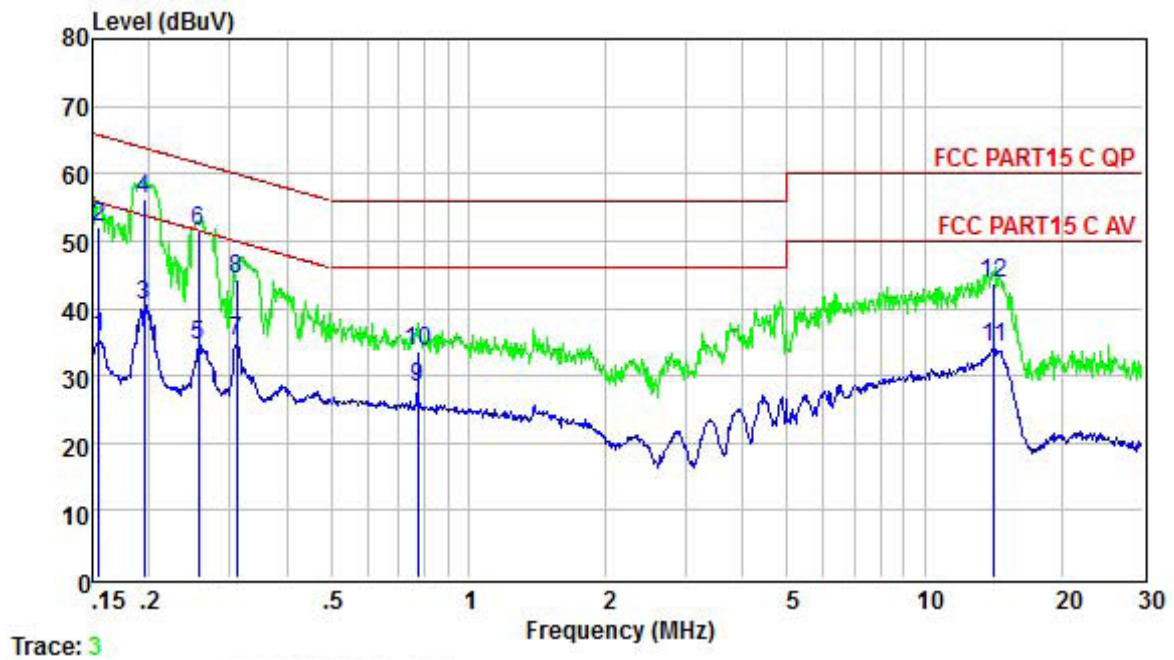

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.155	35.57	55.74	-20.17	Average
2	0.155	52.06	65.74	-13.68	QP
3	0.194	40.58	53.84	-13.26	Average
4	0.194	56.10	63.84	-7.74	QP
5	0.256	34.50	51.56	-17.06	Average
6	0.256	51.48	61.56	-10.08	QP
7	0.310	35.21	49.97	-14.76	Average
8	0.310	44.26	59.97	-15.71	QP
9	0.775	28.24	46.00	-17.76	Average
10	0.775	33.53	56.00	-22.47	QP
11	14.213	34.11	50.00	-15.89	Average
12	14.213	43.59	60.00	-16.41	QP

4.2. Radiated Emission Test

4.2.1. Limit 15.209 limits

Frequency MHZ	Distance Meters	Filed Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0dB(μV)/m(Peak) 54.0dB(μV)/m(Average)	

4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.009-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the table was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. And no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.


3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.


5. For Both PK and AV value above 1GHz, PK detector is used.

6. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).


Radiated Emission Test-Up Frequency Below 30MHz

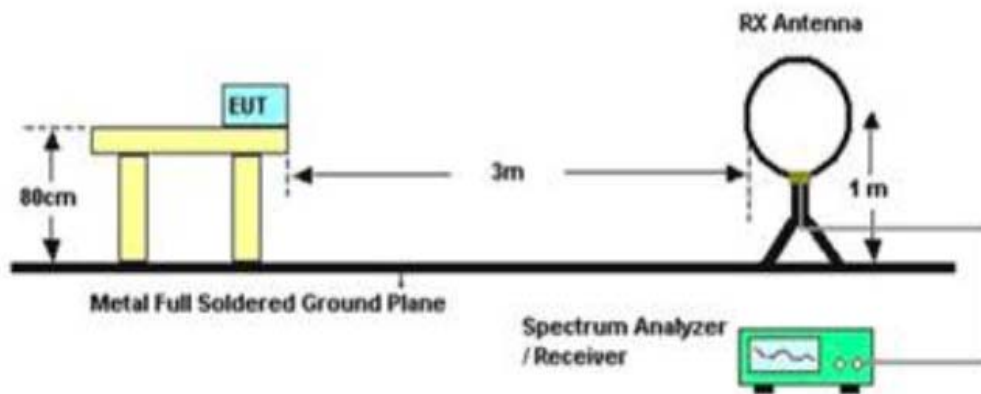

30MHz- 1GHz

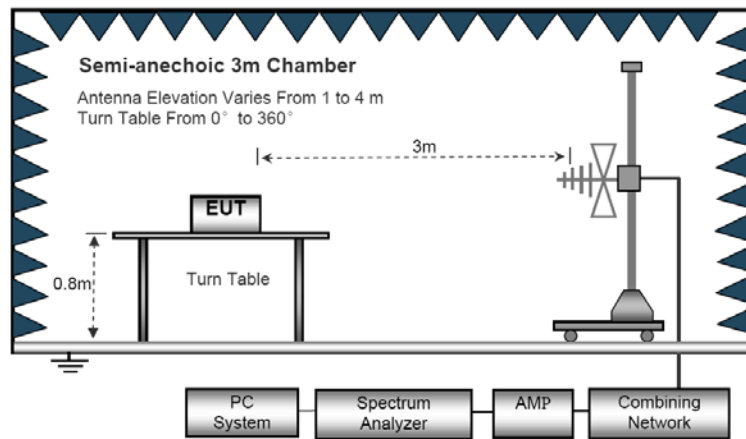

Above 1GHz

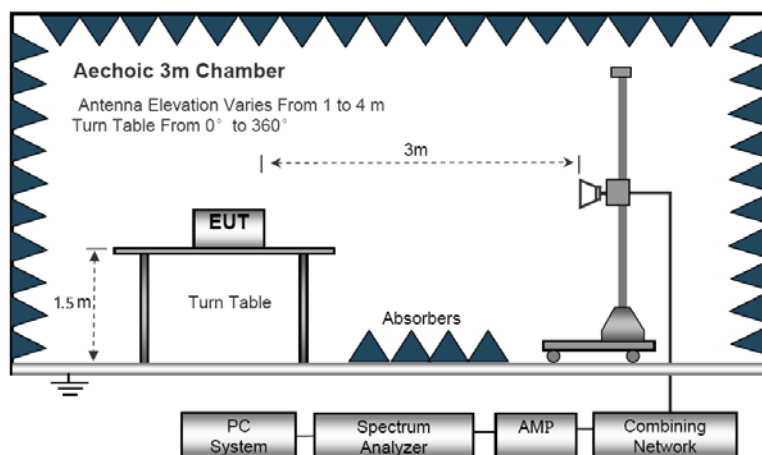

Below 30MHz

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


Below 1GHz			
EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	Mode 1-GFSK
Test Voltage :	AC 120V/60Hz		

Vertical

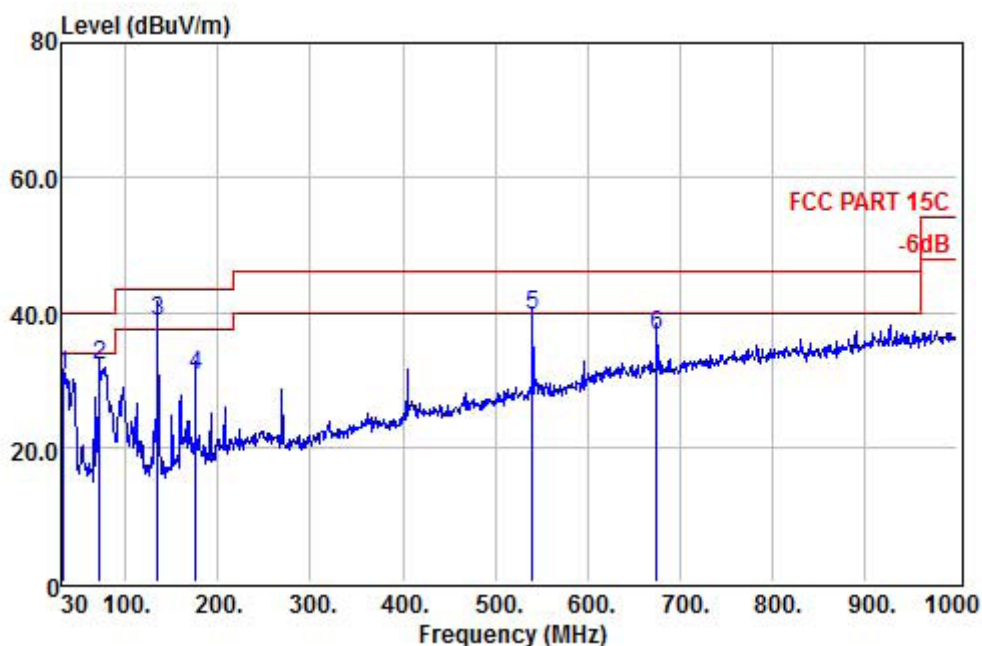

	Read Freq	Read Level	CableAntenna Loss	Antenna Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	32.91	12.30	1.23	17.08	30.61	40.00	-9.39	QP
2	71.71	22.73	1.66	7.59	31.98	40.00	-8.02	QP
3 !	134.76	27.39	2.80	8.35	38.54	43.50	-4.96	QP
4	175.50	17.31	3.06	10.27	30.64	43.50	-12.86	QP
5	540.22	15.87	4.40	19.38	39.65	46.00	-6.35	QP
6	675.05	9.40	5.08	22.00	36.48	46.00	-9.52	QP


Horizontal

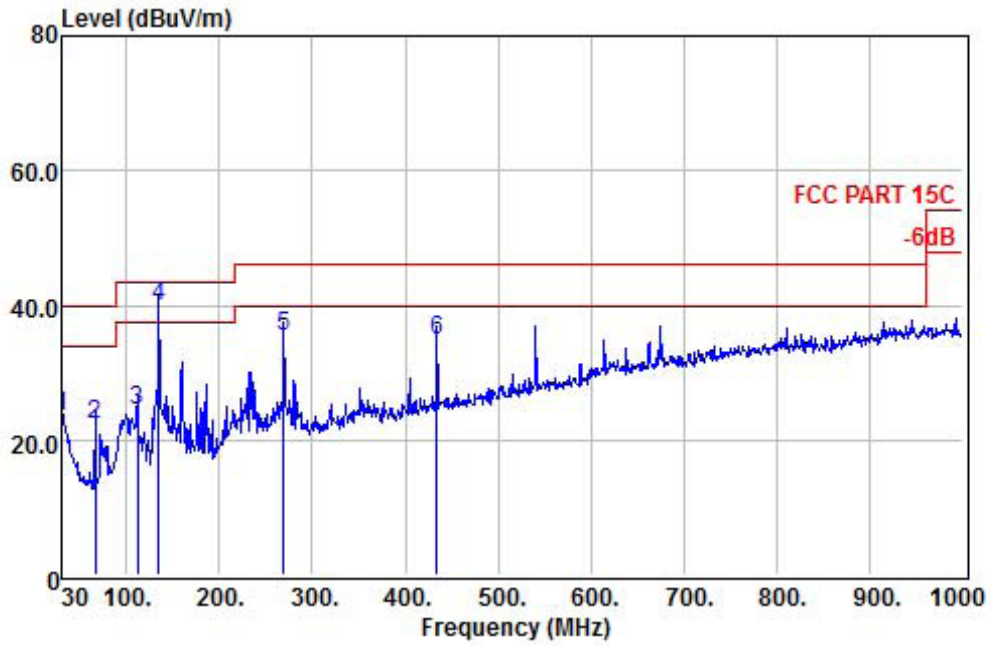

	Read Freq	Read Level	CableAntenna Loss	Antenna Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	30.00	3.36	1.20	18.80	23.36	40.00	-16.64 QP
2	65.89	13.40	1.62	7.42	22.44	40.00	-17.56 QP
3	111.48	12.80	2.44	9.18	24.42	43.50	-19.08 QP
4 !	134.76	28.60	2.80	8.35	39.75	43.50	-3.75 QP
5	269.59	19.57	2.89	12.98	35.44	46.00	-10.56 QP
6	434.49	13.69	3.83	17.29	34.81	46.00	-11.19 QP


Below 1GHz			
EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	Mode 1-GFSK
Test Voltage :	AC 240V/50Hz		

Vertical

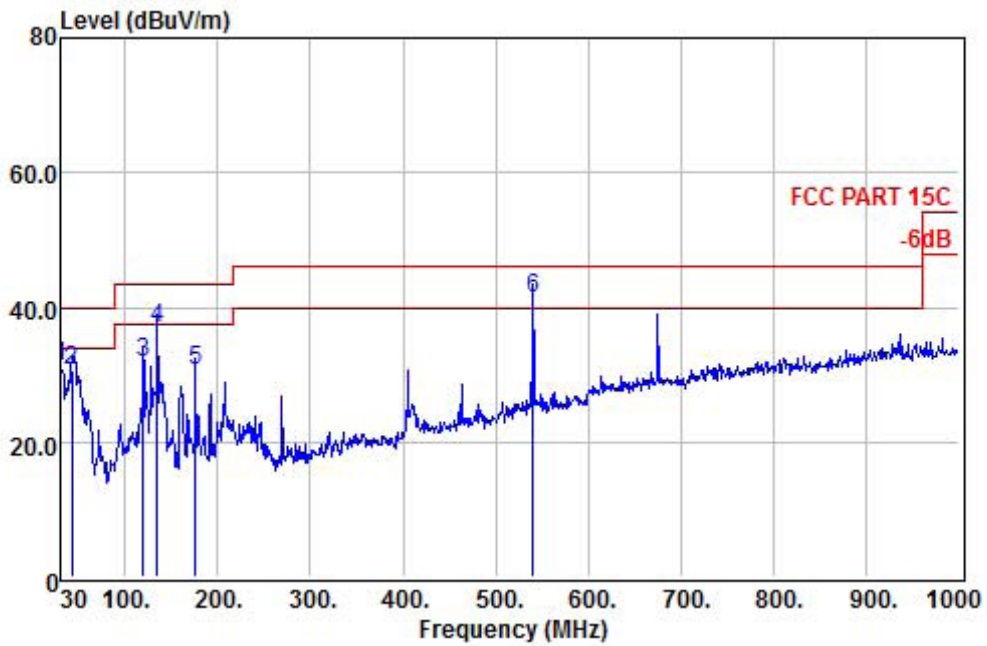

	Read Freq	Read Level	CableAntenna Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.00	11.22	1.20	18.80	31.22	40.00	-8.78	QP
2	42.61	17.47	1.36	11.83	30.66	40.00	-9.34	QP
3	119.24	20.70	2.51	8.56	31.77	43.50	-11.73	QP
4	134.76	25.85	2.80	8.35	37.00	43.50	-6.50	QP
5	175.50	17.22	3.06	10.27	30.55	43.50	-12.95	QP
6 !	540.22	17.61	4.40	19.38	41.39	46.00	-4.61	QP

Horizontal

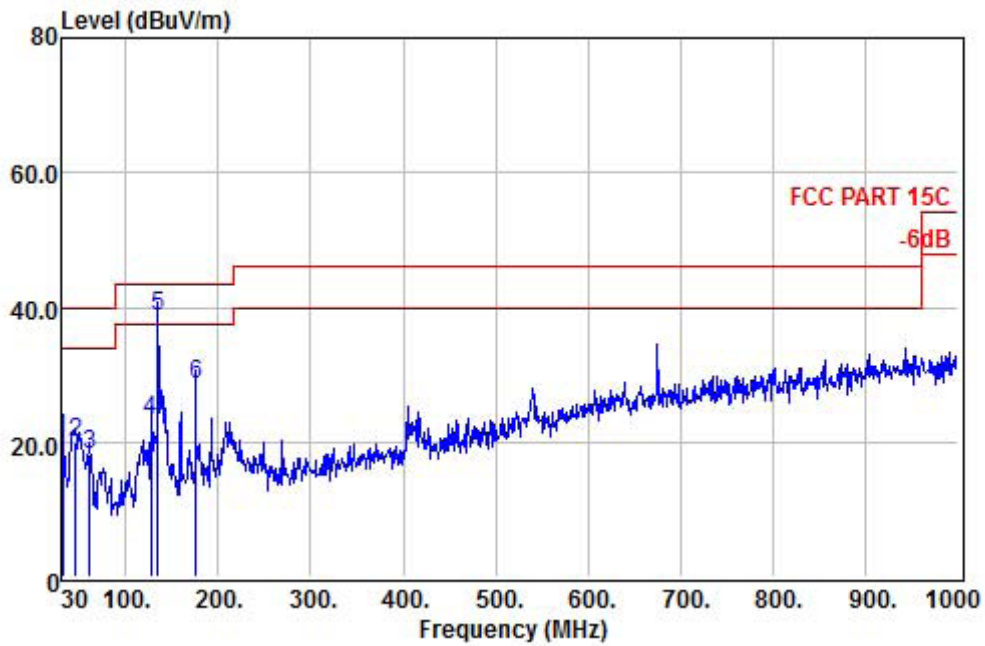

	Read Freq	Read Level	CableAntenna Loss	Antenna Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	31.94	1.72	1.22	17.66	20.60	40.00	-19.40 QP
2	45.52	7.96	1.42	10.64	20.02	40.00	-19.98 QP
3	61.04	9.11	1.62	7.32	18.05	40.00	-21.95 QP
4	127.00	12.12	2.66	8.36	23.14	43.50	-20.36 QP
5 !	134.76	27.60	2.80	8.35	38.75	43.50	-4.75 QP
6	175.50	15.28	3.06	10.27	28.61	43.50	-14.89 QP

NOTE: Absolute Level= Reading Level+ antenna Factor+ cable loss
 Over Limit= Absolute Level – Limit;
 Mode 1 is the worst mode. Only worst case is presented in the report .

Above 1GHz			
EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	25 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	1Mbps
Test Voltage :	AC 120V/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
TX-2402									
4804	29.47	32.15	11.47	27.49	45.60	54	-8.40	Average	Vertical
4804	39.71	32.15	11.47	27.49	55.84	74	-18.16	peak	Vertical
7206	31.53	25.14	18.04	27.94	46.77	54	-7.23	Average	Vertical
7206	41.45	25.14	18.04	27.94	56.69	74	-17.31	peak	Vertical
17100	29.63	24.76	21.42	30.14	45.67	54	-8.33	Average	Vertical
17100	40.14	24.76	21.42	30.14	56.18	74	-17.82	peak	Vertical
4804	30.24	32.94	11.54	27.49	47.23	54	-6.77	Average	Horizontal
4804	40.21	32.94	11.54	27.49	57.20	74	-16.80	peak	Horizontal
7206	30.46	25.28	18.04	27.94	45.84	54	-8.16	Average	Horizontal
7206	41.58	25.28	18.04	27.94	56.96	74	-17.04	peak	Horizontal
17100	28.47	24.76	21.42	30.14	44.51	54	-9.49	Average	Horizontal
17100	39.69	24.76	21.42	30.14	55.73	74	-18.27	peak	Horizontal
TX-2440									
4880	30.25	32.11	12.15	27.53	46.98	54	-7.02	Average	Vertical
4880	40.49	32.11	12.15	27.53	57.22	74	-16.78	peak	Vertical
7320	30.58	24.33	18.09	27.96	45.04	54	-8.96	Average	Vertical
7320	41.78	24.33	18.09	27.96	56.24	74	-17.76	peak	Vertical
17245	30.86	23.92	23.76	29.64	48.90	54	-5.10	Average	Vertical
17245	40.65	23.92	23.76	29.64	58.69	74	-15.31	peak	Vertical
4880	31.89	32.11	12.15	27.53	48.62	54	-5.38	Average	Horizontal
4880	41.94	32.11	12.15	27.53	58.67	74	-15.33	peak	Horizontal
7320	30.71	24.33	18.09	27.96	45.17	54	-8.83	Average	Horizontal
7320	40.62	24.33	18.09	27.96	55.08	74	-18.92	peak	Horizontal
17245	29.67	23.92	23.76	29.64	47.71	54	-6.29	Average	Horizontal
17245	39.76	23.92	23.76	29.64	57.80	74	-16.20	peak	Horizontal
TX-2480									
4960	31.47	31.32	12.31	27.58	47.52	54	-6.48	Average	Vertical
4960	40.51	31.32	12.31	27.58	56.56	74	-17.44	peak	Vertical
7440	30.84	24.38	18.16	27.99	45.39	54	-8.61	Average	Vertical
7440	40.42	24.38	18.16	27.99	54.97	74	-19.03	peak	Vertical
17384	28.35	23.61	22.67	29.85	44.78	54	-9.22	Average	Vertical
17384	40.54	23.61	22.67	29.85	56.97	74	-17.03	peak	Vertical
4960	32.52	31.32	12.31	27.58	48.57	54	-5.43	Average	Horizontal
4960	43.28	31.32	12.31	27.58	59.33	74	-14.67	peak	Horizontal
7440	30.42	24.38	18.16	27.99	44.97	54	-9.03	Average	Horizontal
7440	40.46	24.38	18.16	27.99	55.01	74	-18.99	peak	Horizontal
17384	28.71	23.61	22.67	29.85	45.14	54	-8.86	Average	Horizontal
17384	39.45	23.61	22.67	29.85	55.88	74	-18.12	peak	Horizontal

NOTE:1.Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor.

2.Over Limit= Absolute Level – Limit.

3.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

4.EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)

5. BAND EDGE COMPLIANCE TEST

5.1. Limits


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 30dB below the fundamental emissions, or comply with 15.209 limits.

5.2. Test setup

For Conducted Test



For Radiated emission Test

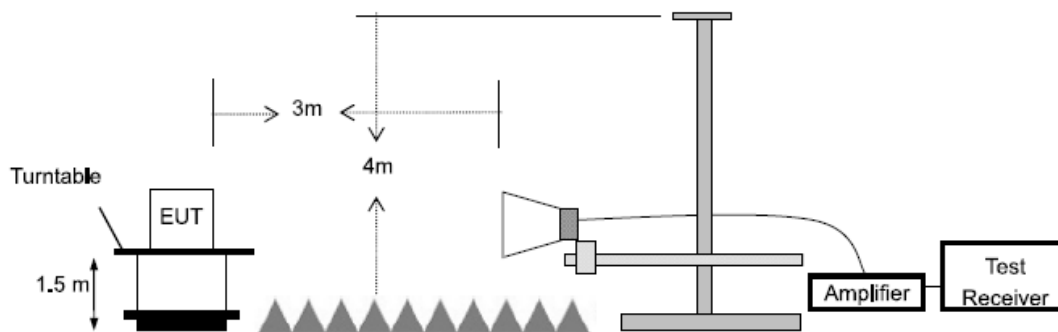


5.3. TEST Procedure

For Conducted Test		
1.	The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.	
2.	The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.	
EMI Test receiver	Setting	
Attenuation	Auto	
RBW	100KHz	
VBW	300KHz	
Detector	Peak	
trace	Max hold	
For Radiated emission Test		
1.	The EUT was placed on a styrofoam table which is 1.5m above ground plane.	
2.	The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maxium peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limits for the emissions in the unrestricted band next to the band edge.	
3.	The measurements were performed at the lower end of the 2.4GHz band.	
4.	Use the following spectrum analyzer settings	
EMI Test receiver	Setting	
Attenuation	Auto	Auto
RBW	1MHz	1MHz
VBW	3MHz	10Hz
Detector	Peak	Average
trace	Max hold	Max hold

For radiated Bandedge test as follows:


EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2402
Test Voltage :	AC 120V/60Hz		

Vertical

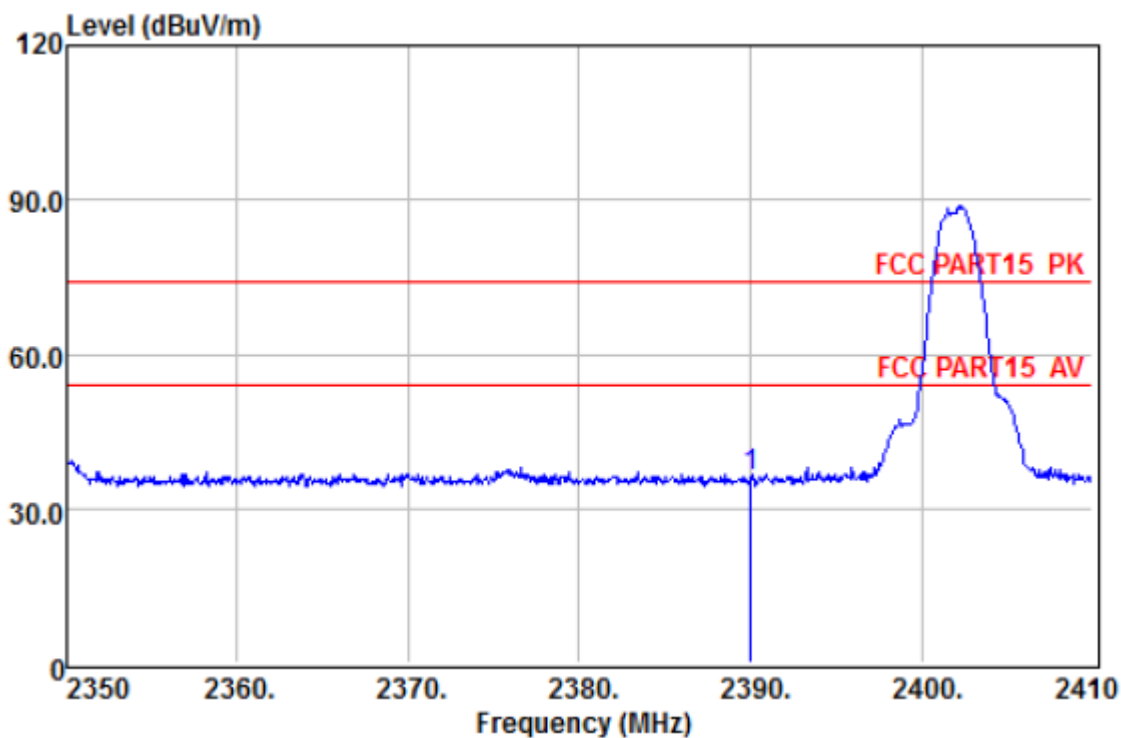

	Preamp	Read	CableAntenna		Limit	Over	
	Freq	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dB	dB	dB/m	dBuV/m	dBuV/m	dB
1	2390.00	26.32	26.61	7.34	28.72	36.35	74.00 -37.65 Peak

Horizontal

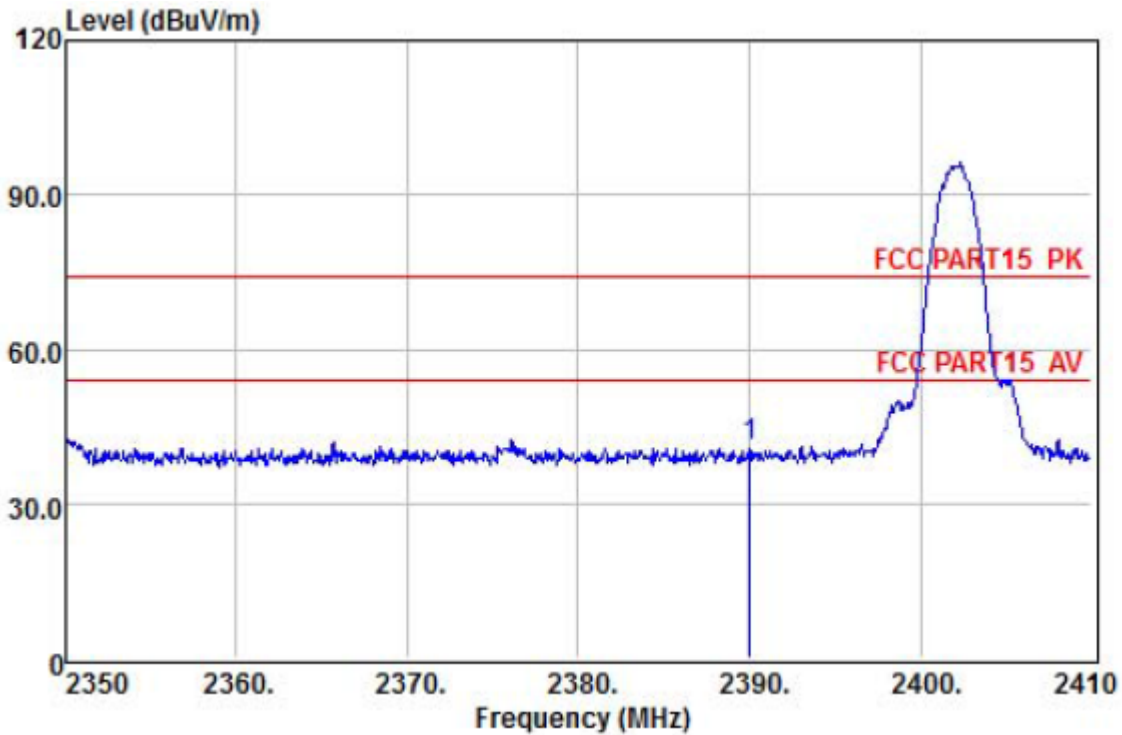


	Read Freq	Preamp Level	Preamp Factor	Cable Loss	Antenna Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2390.00	31.26	26.32	7.34	28.72	41.00	74.00	-33.00	Peak

NOTE: 1.Absolute Level= Reading Level+antenna Factor+cable loss-preamp factor,
 Over Limit= Absolute Level – Limit;
 2.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.
 3.If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.


EUT :	Bluetooth Digital Music System with CD	Model Name :	JBS-600
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2480
Test Voltage :	AC 120V/60Hz		

Vertical

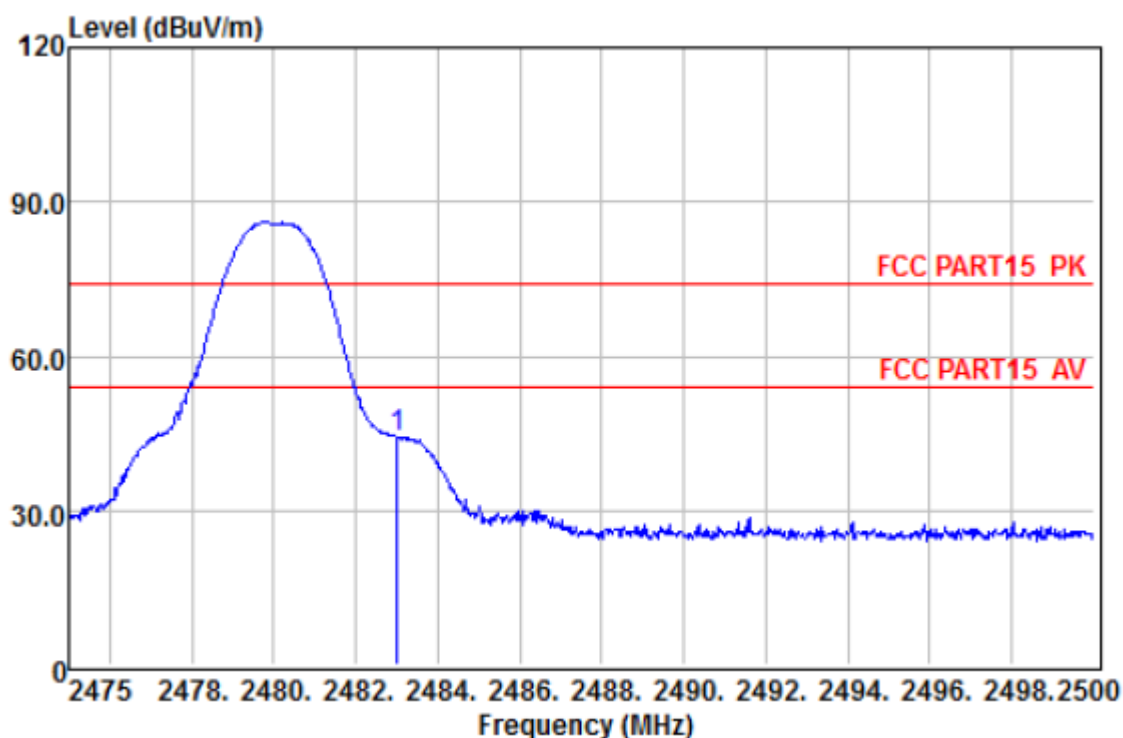

	Preamp Freq	Preamp Factor	Read Level	Cable Loss	Antenna Factor	Level	Limit	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2483.00	26.34	34.28	7.57	28.79	44.30	74.00	-29.70	Peak

Horizontal

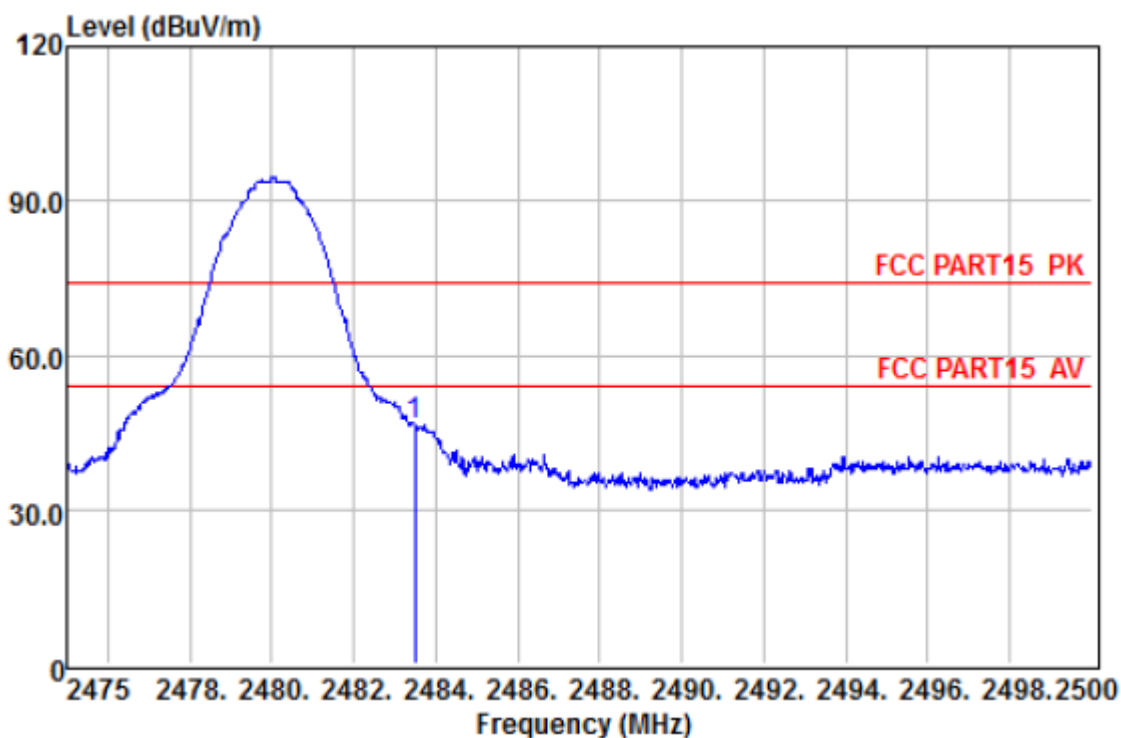


	Preamp Freq	Read Factor	CableAntenna Level	Loss Factor	Antenna Factor	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dB	
1	2483.50	26.34	36.28	7.57	28.79	46.30	74.00	-27.70 Peak

NOTE: 1.Absolute Level= Reading Level+antenna Factor+cable loss-preamp factor,
 Over Limit= Absolute Level – Limit;
 2.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.
 3.If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.


conduction band-edge

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
Left-band	46.15	20	Pass
Right-band	52.10	20	Pass

Left Side

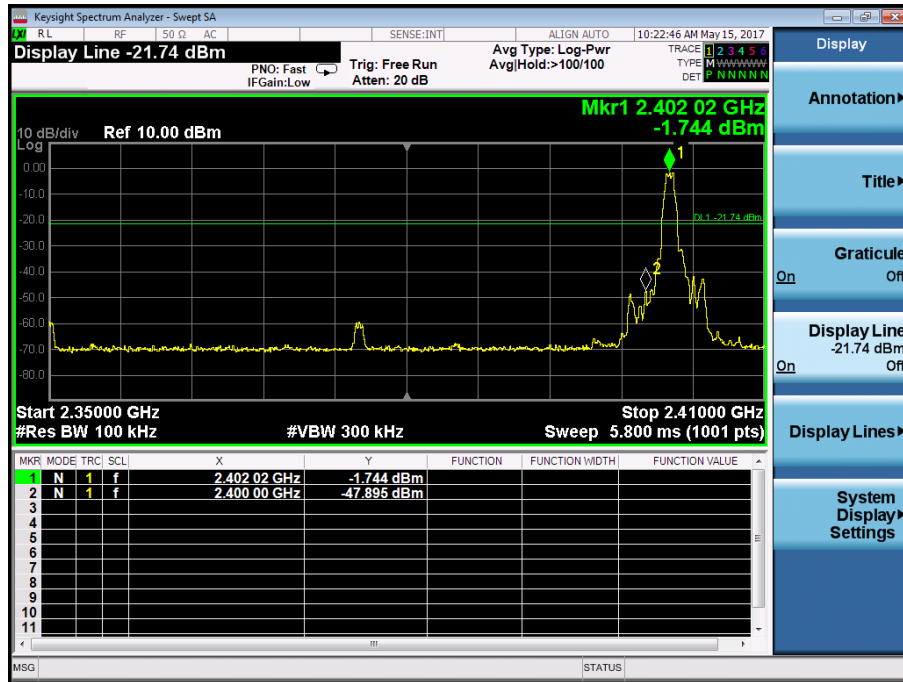

Right Side

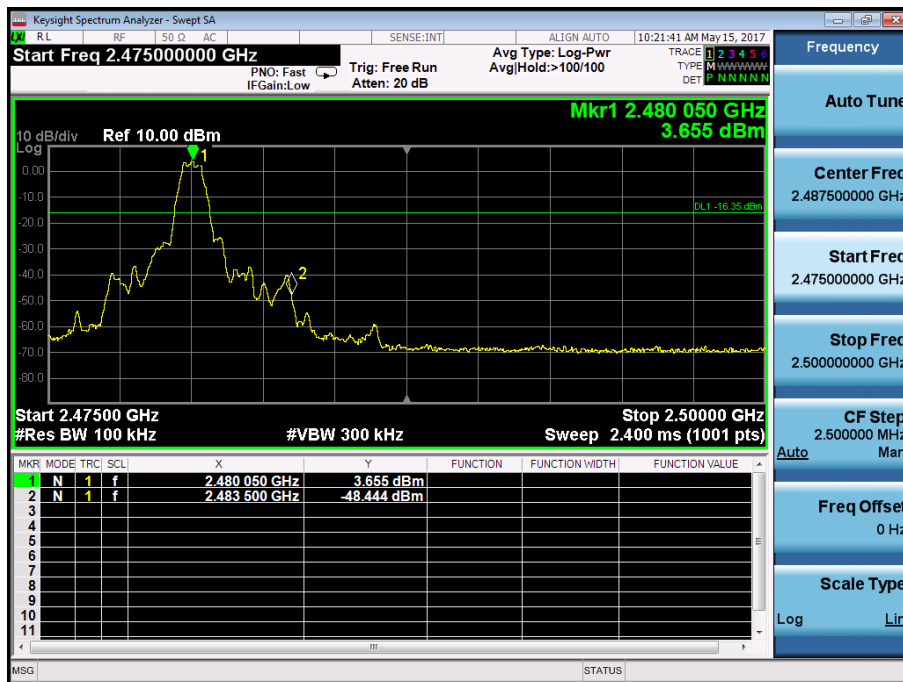

6. 6DB OCCUPY BANDWIDTH

6.1. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz



6.2. TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test data:

Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
2402	0.715	500	Pass
2440	0.717	500	Pass
2480	0.725	500	Pass

Test plot as follows:

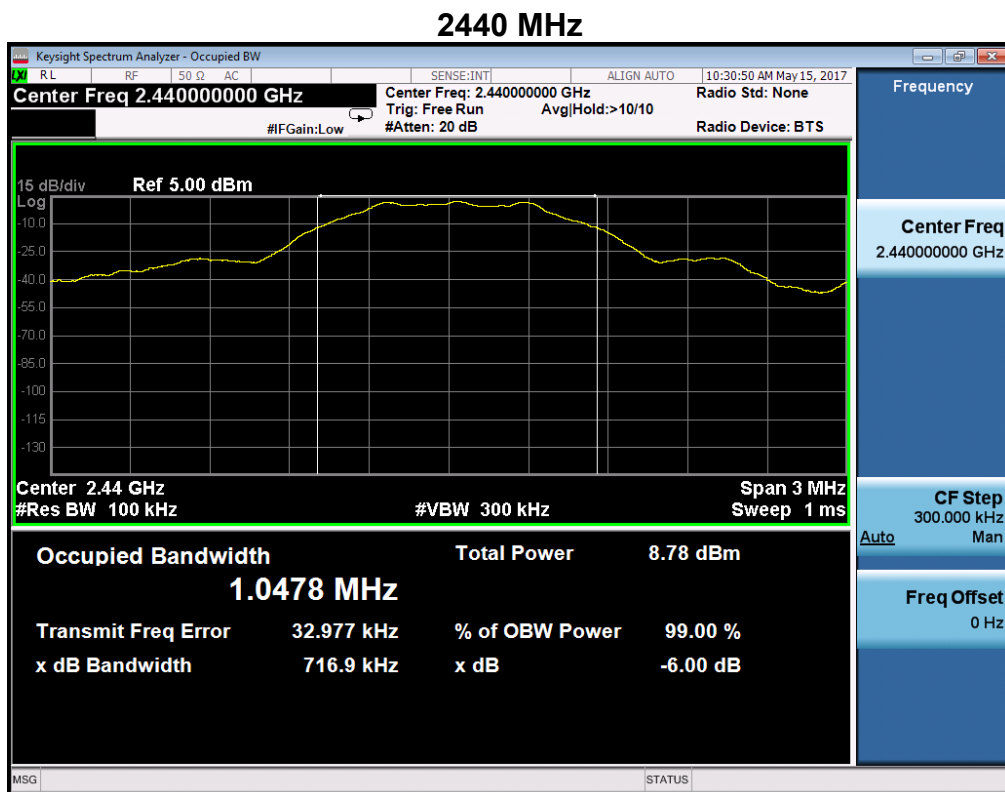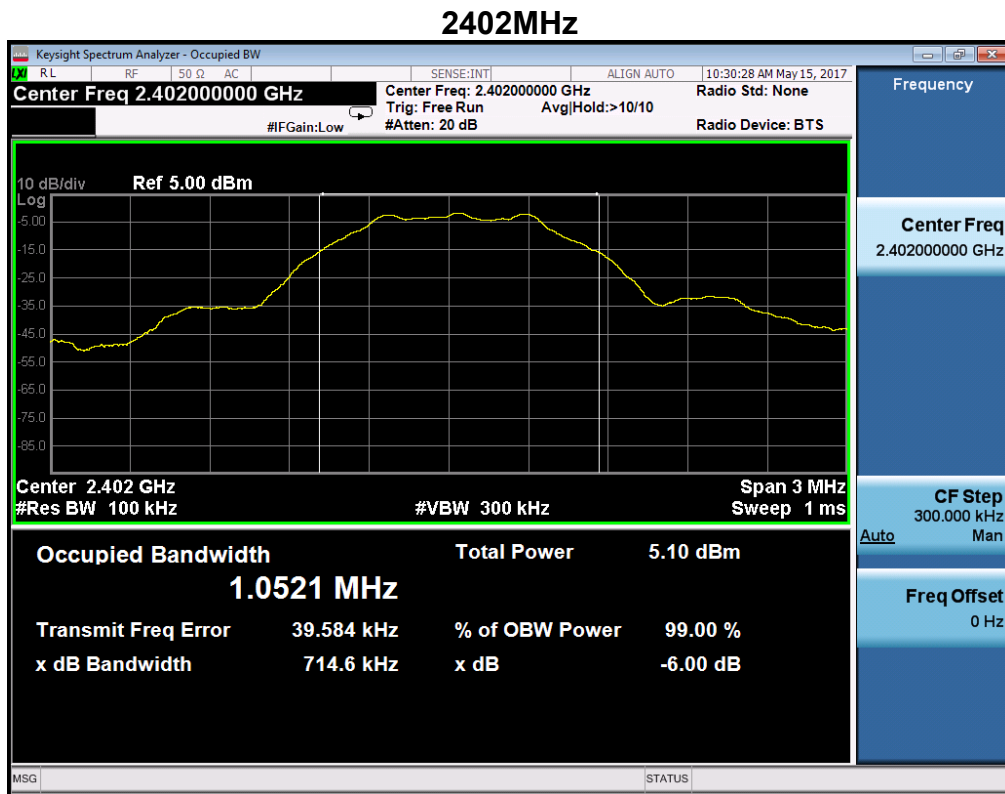

2480 MHz

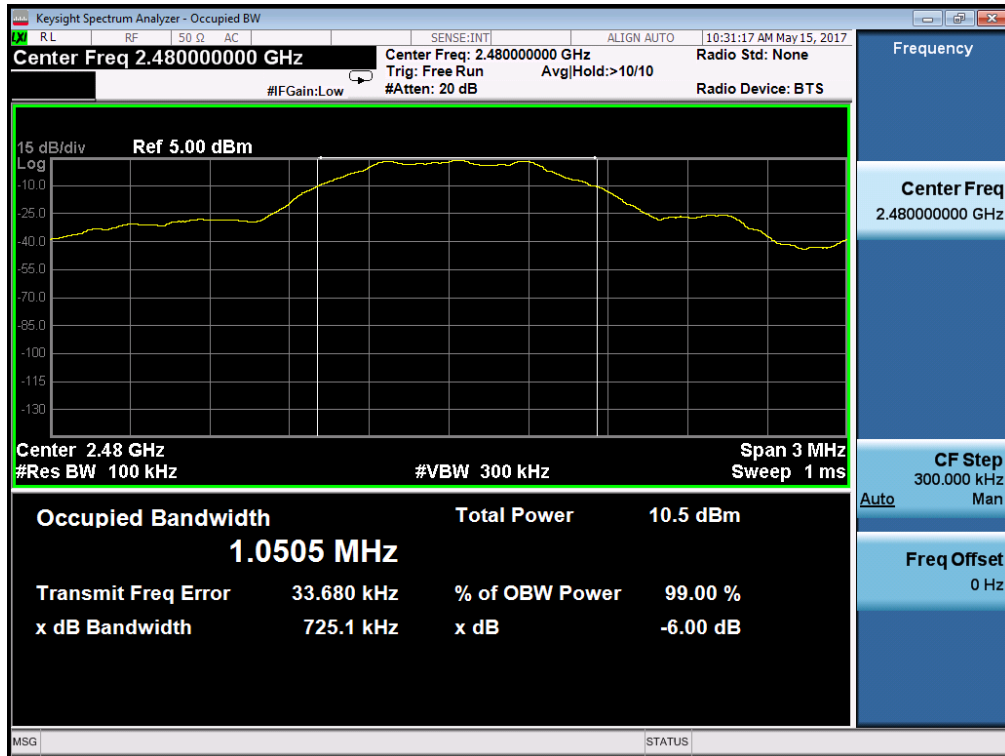

7. OUTPUT POWER TEST

7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The output Power shall not exceed 1W (30dBm)

7.2. Test setup

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.



7.3. Test result

Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)
2402	1.539	30
2440	2.344	30
2480	3.975	30


8. POWER SPECTRAL DENSITY TEST

8.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

8.2. Test setup


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




8.3. Test result

Channel Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402	-16.817	8	Pass
2440	-12.978	8	Pass
2480	-13.169	8	Pass


TX CH00

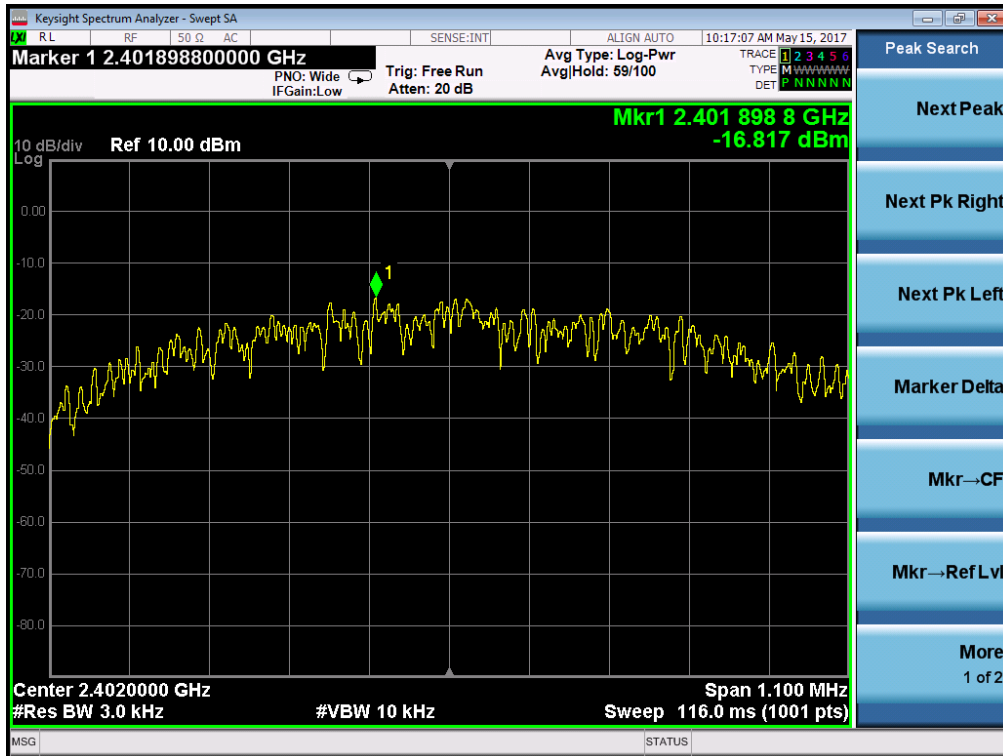

TX CH 19

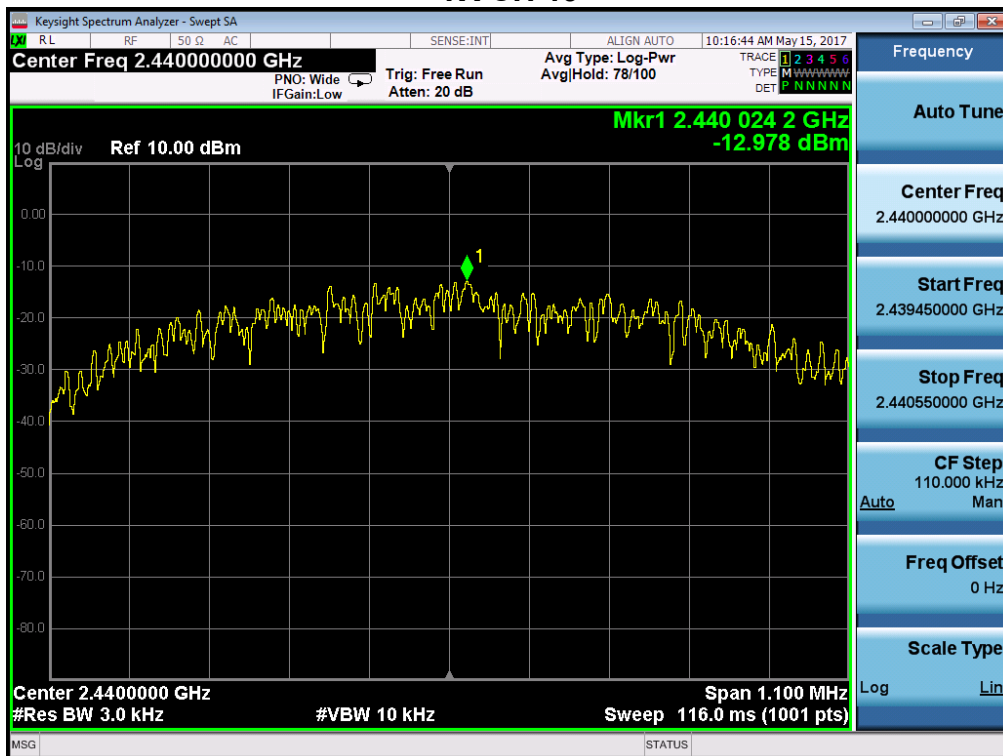

TX CH39

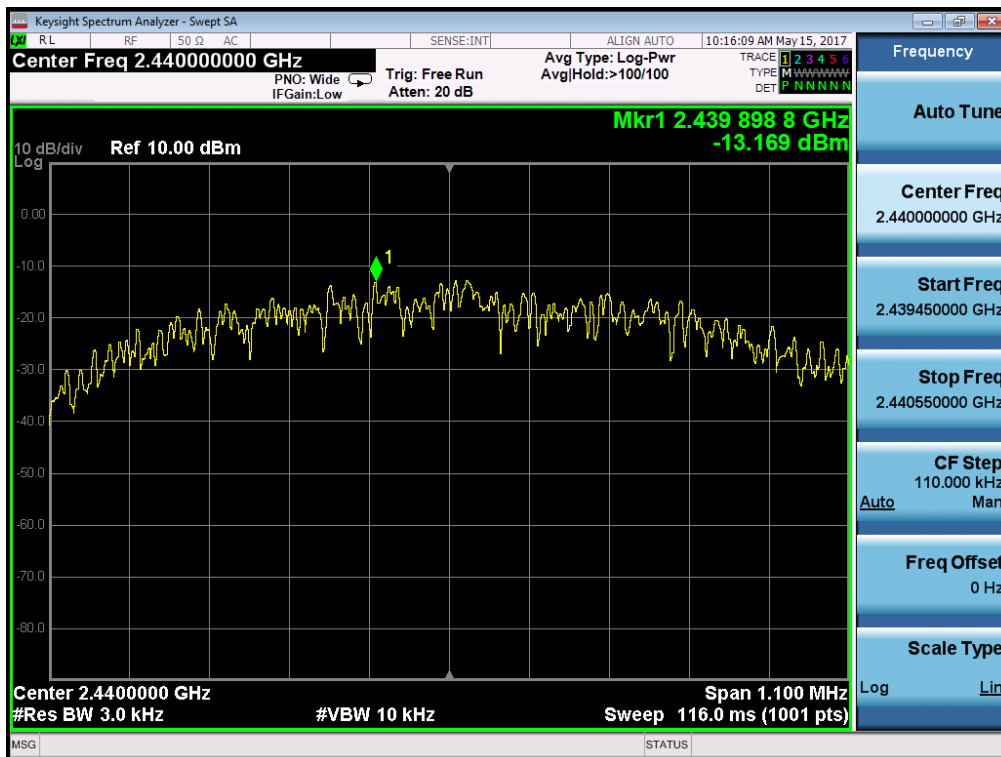

9. ANTENNA REQUIREMENTS

9.1. Limits


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2. Result



The antennas used for this product is ceramic antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1dBi.

10.PHOTOGRAPHS OF TEST SET-UP


Conducted Emission

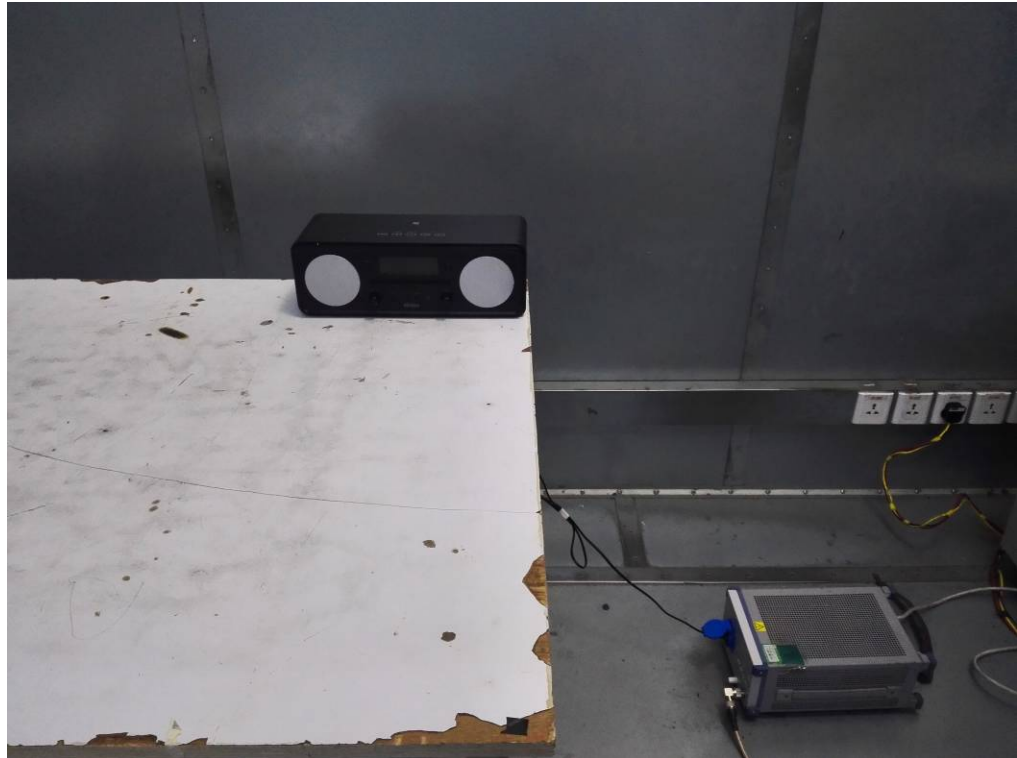

Radiated Emission Test

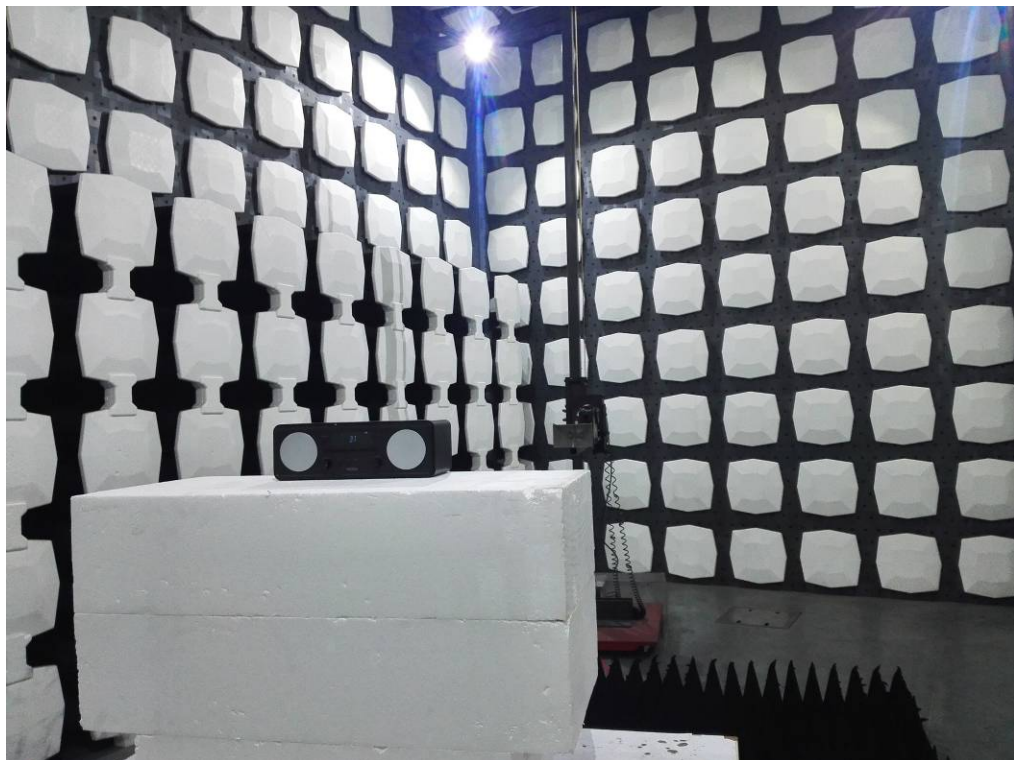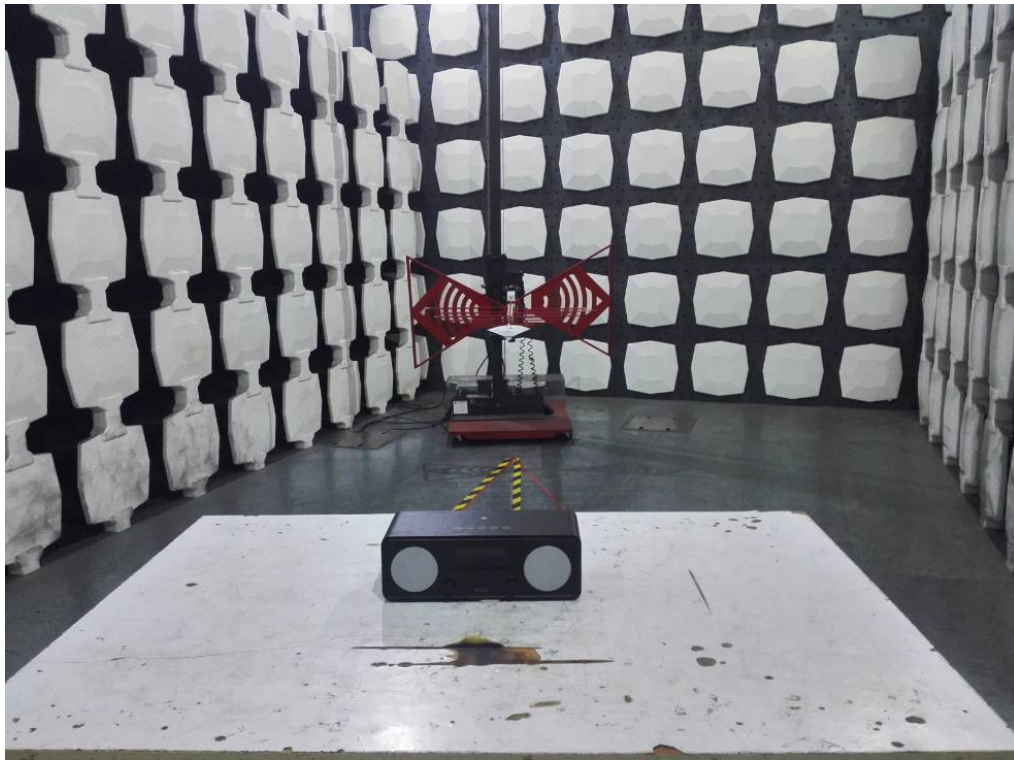

11. PHOTOGRAPHS OF THE EUT

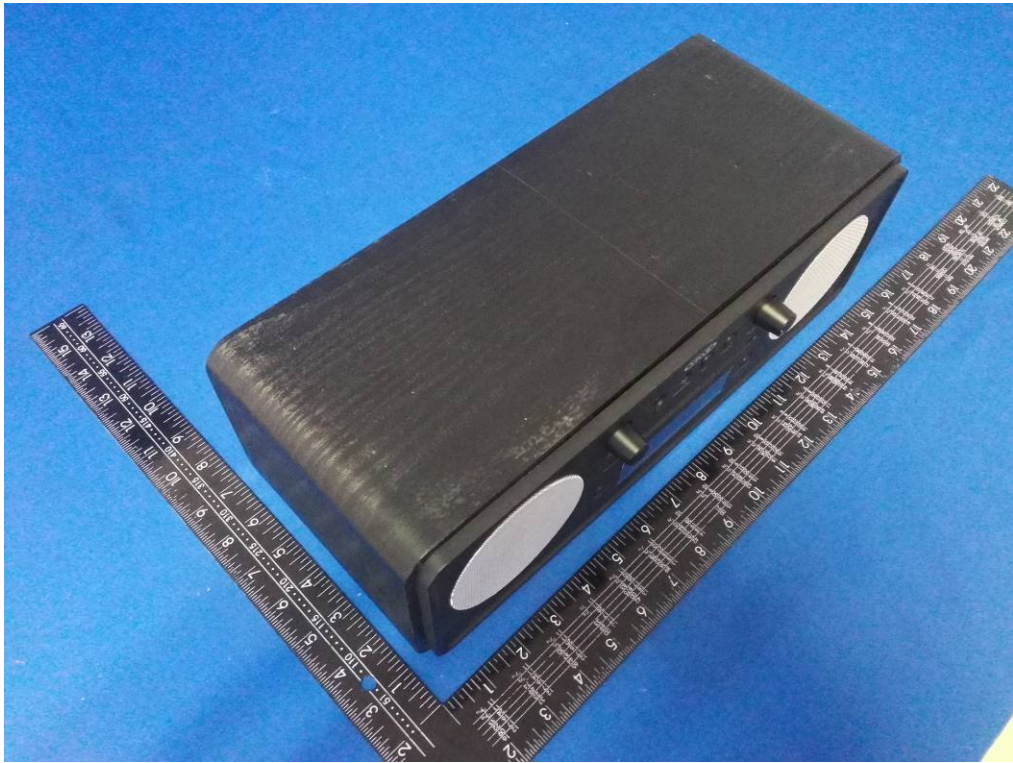

*** the end of report ***