

TEST REPORT

Reference No...... : WTS17S0990450E
FCC ID : 2ALR9-KDL-BT1713
Applicant..... : SHENZHEN G-KINDLY ELECTRONIC CO., LTD
Address..... : 4F, No. 8 Fifth Road, Loucun First Industry Zone, GongMing Town,
GuangMing New District, Shenzhen, China
Manufacturer : SHENZHEN G-KINDLY ELECTRONIC CO., LTD
Address..... : 4F, No. 8 Fifth Road, Loucun First Industry Zone, GongMing Town,
GuangMing New District, Shenzhen, China
Product Name..... : WIRELESS SPEAKER
Model No...... : KDL-BT1713 , BB742 , BB743 , BB744 , GG392
Standards..... : FCC CFR47 Part 15.247:2016
Date of Receipt sample : 2017-09-14
Date of Test : 2017-09-15 to 2017-09-21
Date of Issue..... : 2017-09-21
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Robin Zhou

Robin Zhou / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

1 Laboratories Introduction

Waltek Services Test Group Ltd. is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen (CNAS Registration No. L3110, A2LA Certificate Number: 4243.01) and have branches in Foshan (CNAS Registration No. L6478), Dongguan (CNAS Registration No. L9950), Zhongshan, Suzhou (CNAS Registration No. L7754), Ningbo and Hong Kong, Our test capability covered four large fields: safety test. Electronic Magnetic Compatibility(EMC), reliability and energy performance, Chemical test. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Waltek Services (Shenzhen) Co., Ltd.

A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	CNAS (Registration No.: L3110) A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2 Contents

	Page
COVER PAGE	1
1 LABORATORIES INTRODUCTION	2
2 CONTENTS	3
3 REVISION HISTORY	5
4 GENERAL INFORMATION	6
4.1 GENERAL DESCRIPTION OF E.U.T.....	6
4.2 DETAILS OF E.U.T.....	6
4.3 CHANNEL LIST.....	7
4.4 TEST MODE.....	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST.....	8
5.2 MEASUREMENT UNCERTAINTY.....	9
5.3 TEST EQUIPMENT CALIBRATION.....	9
6 TEST SUMMARY	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION.....	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION.....	11
7.4 CONDUCTED EMISSION TEST RESULT.....	12
8 RADIATED SPURIOUS EMISSIONS	14
8.1 EUT OPERATION.....	14
8.2 TEST SETUP.....	15
8.3 SPECTRUM ANALYZER SETUP.....	16
8.4 TEST PROCEDURE.....	17
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
8.6 SUMMARY OF TEST RESULTS.....	18
9 CONDUCTED SPURIOUS EMISSIONS	21
9.1 TEST PROCEDURE.....	21
9.2 TEST RESULT.....	22
10 BAND EDGE MEASUREMENT	32
10.1 TEST PROCEDURE.....	32
10.2 TEST RESULT.....	33
11 BANDWIDTH MEASUREMENT	39
11.1 TEST PROCEDURE.....	39
11.2 TEST RESULT.....	39
12 MAXIMUM PEAK OUTPUT POWER	45
12.1 TEST PROCEDURE.....	45
12.2 TEST RESULT.....	45
13 HOPPING CHANNEL SEPARATION	51
13.1 TEST PROCEDURE.....	51
13.2 TEST RESULT.....	51
14 NUMBER OF HOPPING FREQUENCY	57
14.1 TEST PROCEDURE.....	57
14.2 TEST RESULT.....	57

15	DWELL TIME	59
15.1	TEST PROCEDURE.....	59
15.2	TEST RESULT	59
16	ANTENNA REQUIREMENT	65
17	FCC ID: 2ALR9-KDL-BT1713 SAR EVALUATION.....	66
17.1	REQUIREMENTS.....	66
17.2	THE PROCEDURES / LIMIT	66
17.3	RESULT: COMPLIANCE	66
18	PHOTOGRAPHS-MODEL KDL-BT1713TEST SETUP	67
18.1	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP.....	67
18.2	PHOTOGRAPH - SPURIOUS EMISSIONS RADIATED TEST SETUP.....	67
19	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	69
19.1	MODEL KDL-BT1713–EXTERNAL PHOTOS.....	69
19.2	MODEL KDL-BT1713 – INTERNAL PHOTOS	74

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S0990450E	2017-09-14	2017-09-15 to 2017-09-21	2017-09-21	original	-	valid

4 General Information

4.1 General Description of E.U.T

Product Name	: WIRELESS SPEAKER
Model No.	: KDL-BT1713 , BB742 , BB743 , BB744 , GG392
Model Description	: Only the color, model names and brand names are different for different market requirement. The model KDL-BT1713 is the tested sample.
Hardware Version	: V1.0
Software Version	: V1.2

4.2 Details of E.U.T

Operation Frequency	: 2402~2480MHz
Max. RF output power	: 0.21dBm
Type of Modulation	: GFSK,Pi/4 DQPSK,8DPSK
Antenna installation	: PCB Printed Antenna
Antenna Gain	: 0dBi
Technical Data	: DC 3.7V, 1800mA by Lithium Battery; Charging: DC 5V by USB from PC

4.3 Channel List

Bluetooth Classic mode

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Charging +Transmitting	2402MHz	2441MHz	2480MHz

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-04-29	2017-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-04-09	2018-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-04-09	2018-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-04-09	2018-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2017-04-13	2018-04-12
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-13	2018-04-12
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Confidence interval : 95%. Confidence factor:k=2	

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	Pass
Conducted Spurious emissions	15.247(d)	Pass
Band edge	15.247(d) 15.205(a)	Pass
Conduct Emission	15.207	Pass
Bandwidth	15.247(a)(1)	Pass
Maximum Peak Output Power	15.247(b)(1)	Pass
Frequency Separation	15.247(a)(1)	Pass
Number of Hopping Frequency	15.247(a)(1)(iii)	Pass
Dwell time	15.247(a)(1)(iii)	Pass
Antenna Requirement	15.203	Pass
SAR Evaluation	1.1307(b)(1)	Pass
Note: Pass=Compliance; Fail=Not Compliance; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207
 Test Method: ANSI C63.10:2013
 Test Result: PASS
 Frequency Range: 150kHz to 30MHz
 Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	5	60
5 to 30	60	50

7.1 E.U.T. Operation

Operating Environment :


Temperature: 22.8 °C
 Humidity: 52.6 % RH
 Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in Charging + Transmitting mode, the worst test data (GFSK modulation Low channel) were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

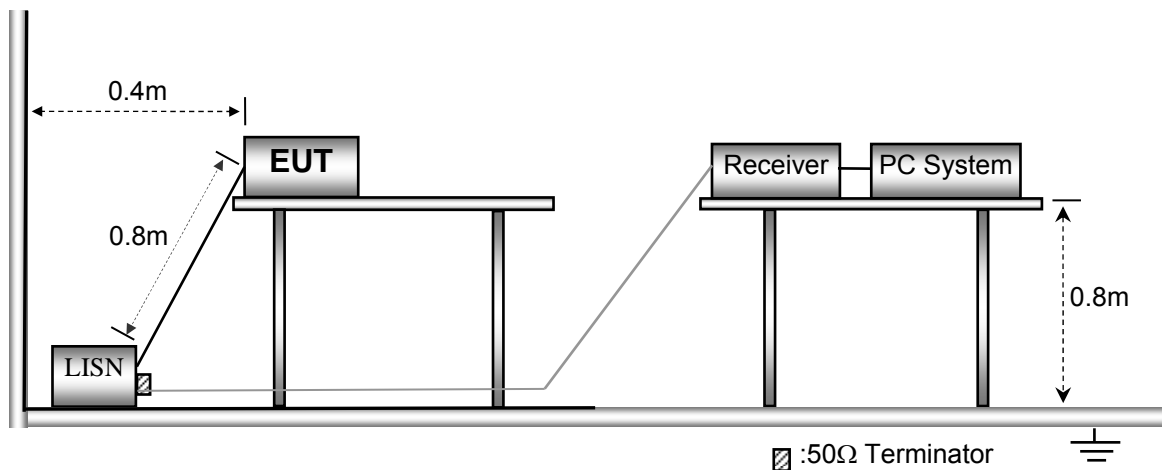


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


Remark: only the worst data (GFSK modulation Low channel mode) were reported

Live line:

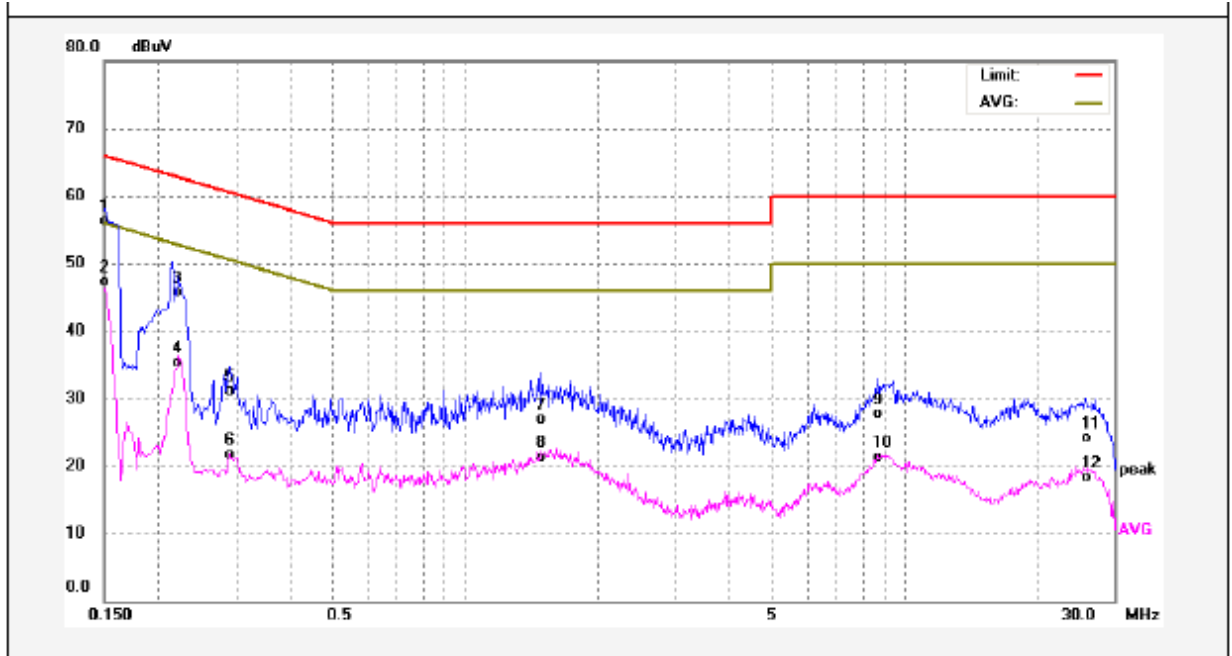

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	46.22	10.06	56.28	65.99	-9.71	QP	
2	0.1500	37.32	10.06	47.38	55.99	-8.61	AVG	
3	0.2220	35.66	9.96	45.62	62.74	-17.12	QP	
4	0.2220	25.42	9.96	35.38	52.74	-17.36	AVG	
5	0.2900	21.18	9.99	31.17	60.52	-29.35	QP	
6	0.2900	11.79	9.99	21.78	50.52	-28.74	AVG	
7	1.4940	16.83	10.16	26.99	56.00	-29.01	QP	
8	1.4940	11.08	10.16	21.24	46.00	-24.76	AVG	
9	8.7020	17.47	10.33	27.80	60.00	-32.20	QP	
10	8.7020	11.07	10.33	21.40	50.00	-28.60	AVG	
11	25.8620	13.49	10.58	24.07	60.00	-35.93	QP	
12	25.8620	7.66	10.58	18.24	50.00	-31.76	AVG	

Neutral line:

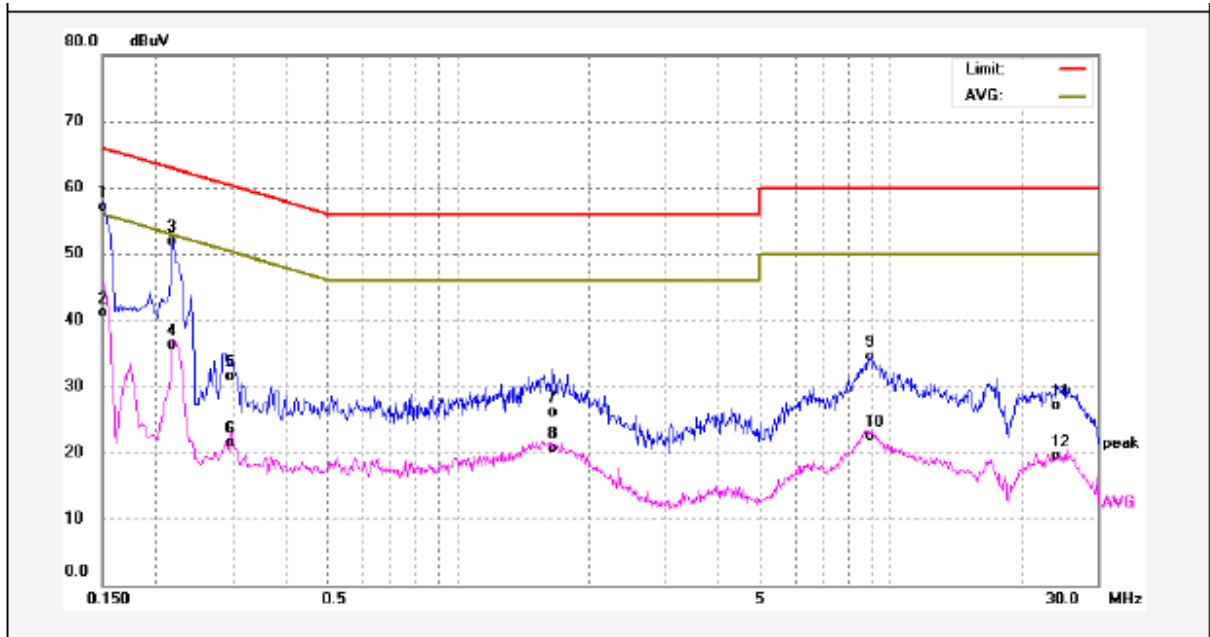

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	47.03	10.06	57.09	65.99	-8.90	QP	
2	0.1500	31.06	10.06	41.12	55.99	-14.87	AVG	
3	0.2180	41.91	9.95	51.86	62.89	-11.03	QP	
4	0.2180	26.29	9.95	36.24	52.89	-16.65	AVG	
5	0.2980	21.45	9.98	31.43	60.30	-28.87	QP	
6	0.2980	11.57	9.98	21.55	50.30	-28.75	AVG	
7	1.6540	15.84	10.17	26.01	56.00	-29.99	QP	
8	1.6540	10.50	10.17	20.67	46.00	-25.33	AVG	
9	9.0380	24.12	10.34	34.46	60.00	-25.54	QP	
10	9.0380	12.23	10.34	22.57	50.00	-27.43	AVG	
11	24.2620	16.51	10.55	27.06	60.00	-32.94	QP	
12	24.2620	8.98	10.55	19.53	50.00	-30.47	AVG	

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in Charging + Transmitting mode, the worst test data (GFSK modulation) were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

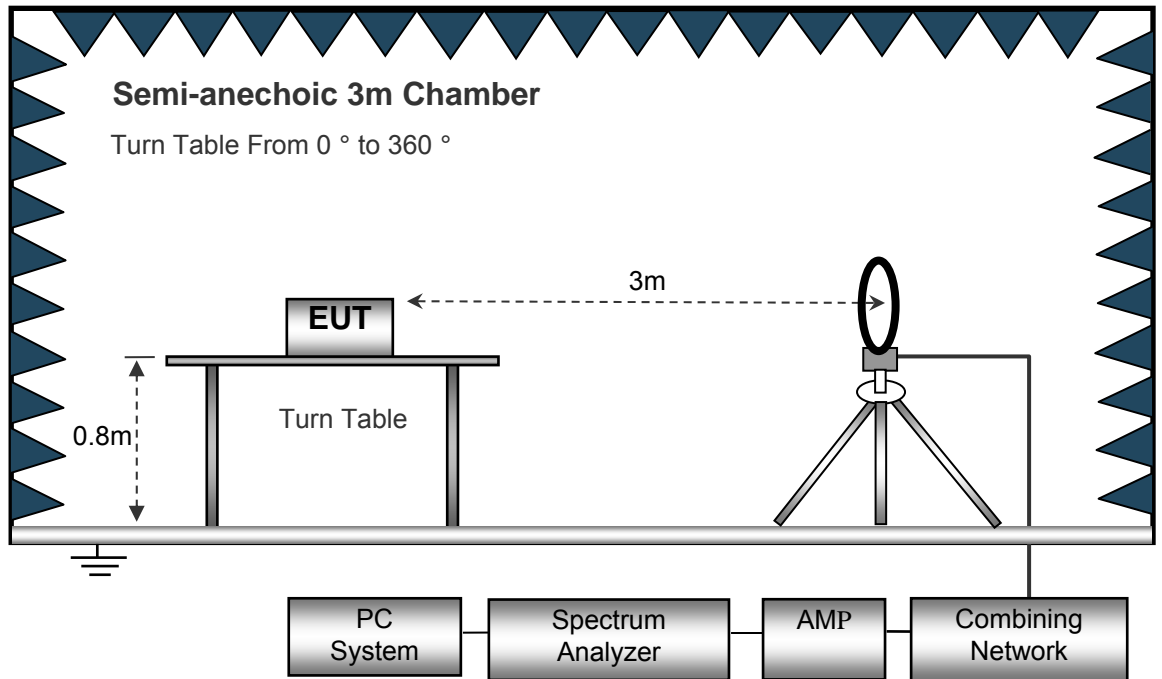

The test setup for emission measurement from 30 MHz to 1 GHz.

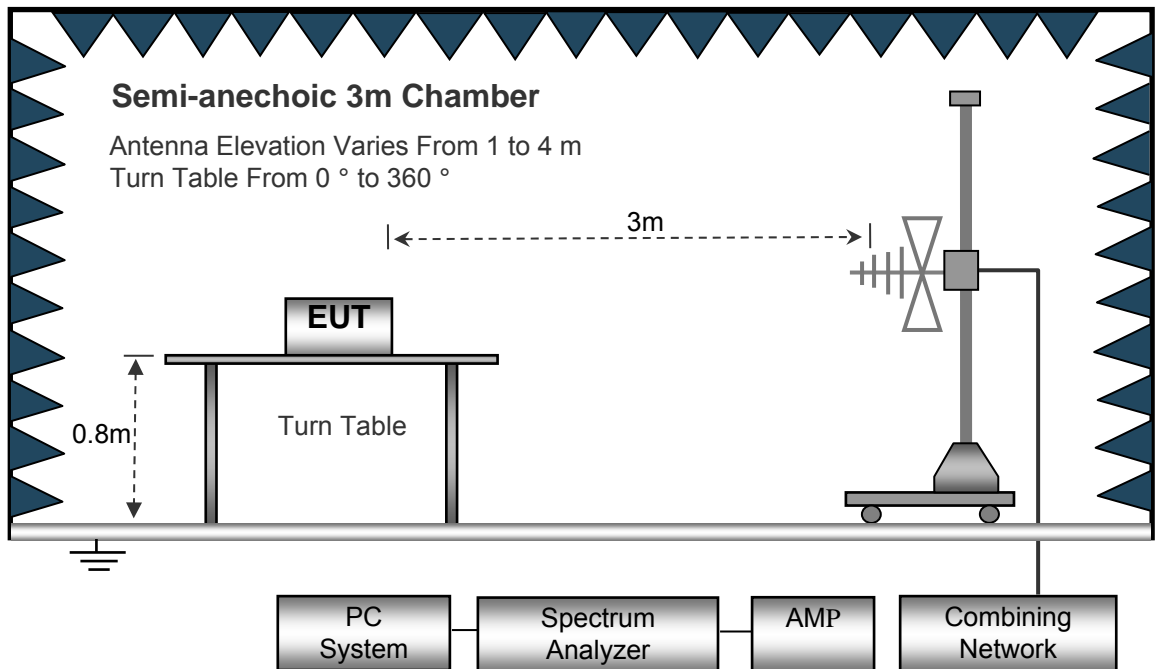

The test setup for emission measurement above 1 GHz.

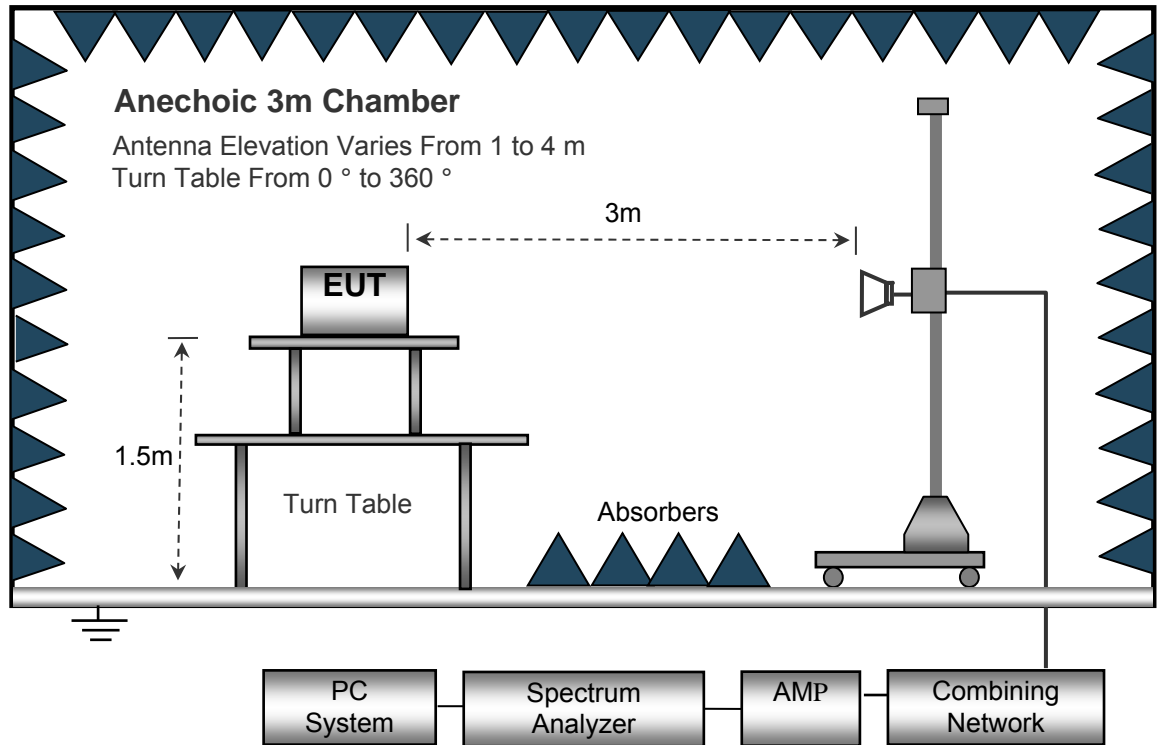

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9 KHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
36.64	44.38	QP	226	1.6	H	-13.35	31.03	40.00	-8.97
36.64	43.51	QP	90	1.2	V	-13.35	30.16	40.00	-9.84
4804.00	56.17	PK	36	1.8	V	-1.06	55.11	74.00	-18.89
4804.00	43.29	Ave	36	1.8	V	-1.06	42.23	54.00	-11.77
7206.00	54.06	PK	18	1.9	H	1.33	55.39	74.00	-18.61
7206.00	44.18	Ave	18	1.9	H	1.33	45.51	54.00	-8.49
2327.44	46.45	PK	207	1.8	V	-13.19	33.26	74.00	-40.74
2327.44	39.99	Ave	207	1.8	V	-13.19	26.80	54.00	-27.20
2373.75	43.61	PK	68	1.5	H	-13.14	30.47	74.00	-43.53
2373.75	38.99	Ave	68	1.5	H	-13.14	25.85	54.00	-28.15
2488.48	44.69	PK	148	1.8	V	-13.08	31.61	74.00	-42.39
2488.48	37.52	Ave	148	1.8	V	-13.08	24.44	54.00	-29.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel									
36.64	43.34	QP	275	1.7	H	-13.35	29.99	40.00	-10.01
36.64	44.96	QP	299	1.4	V	-13.35	31.61	40.00	-8.39
4882.00	55.65	PK	11	1.7	V	-0.62	55.03	74.00	-18.97
4882.00	44.40	Ave	11	1.7	V	-0.62	43.78	54.00	-10.22
7323.00	53.83	PK	3	1.9	H	2.21	56.04	74.00	-17.96
7323.00	44.32	Ave	3	1.9	H	2.21	46.53	54.00	-7.47
2310.13	46.04	PK	119	1.9	V	-13.19	32.85	74.00	-41.15
2310.13	37.48	Ave	119	1.9	V	-13.19	24.29	54.00	-29.71
2388.07	43.64	PK	349	1.9	H	-13.14	30.50	74.00	-43.50
2388.07	36.41	Ave	349	1.9	H	-13.14	23.27	54.00	-30.73
2499.82	44.18	PK	330	1.3	V	-13.08	31.10	74.00	-42.90
2499.82	38.54	Ave	330	1.3	V	-13.08	25.46	54.00	-28.54

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel									
36.64	44.75	QP	354	1.7	H	-13.35	31.40	40.00	-8.60
36.64	43.83	QP	316	1.6	V	-13.35	30.48	40.00	-9.52
4960.00	54.18	PK	217	1.0	V	-0.24	53.94	74.00	-20.06
4960.00	43.77	Ave	217	1.0	V	-0.24	43.53	54.00	-10.47
7440.00	54.11	PK	318	1.7	H	2.84	56.95	74.00	-17.05
7440.00	43.72	Ave	318	1.7	H	2.84	46.56	54.00	-7.44
2320.28	46.74	PK	326	1.1	V	-13.19	33.55	74.00	-40.45
2320.28	37.43	Ave	326	1.1	V	-13.19	24.24	54.00	-29.76
2364.09	44.28	PK	185	1.0	H	-13.14	31.14	74.00	-42.86
2364.09	38.77	Ave	185	1.0	H	-13.14	25.63	54.00	-28.37
2497.47	42.33	PK	336	1.2	V	-13.08	29.25	74.00	-44.75
2497.47	37.63	Ave	336	1.2	V	-13.08	24.55	54.00	-29.45

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

9.2 Test Result


9 KHz - 30MHz



GFSK

Low Channel

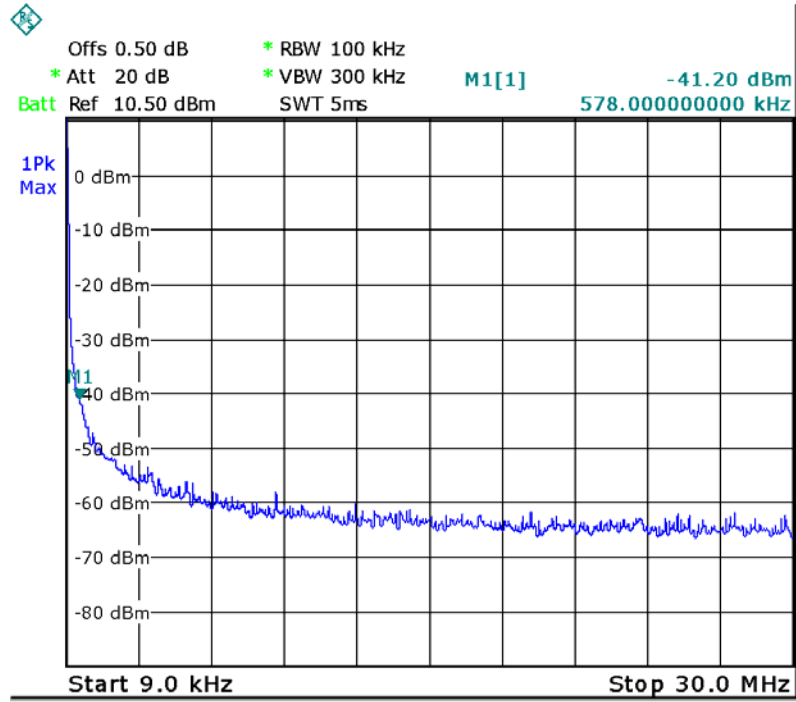


Middle Channel

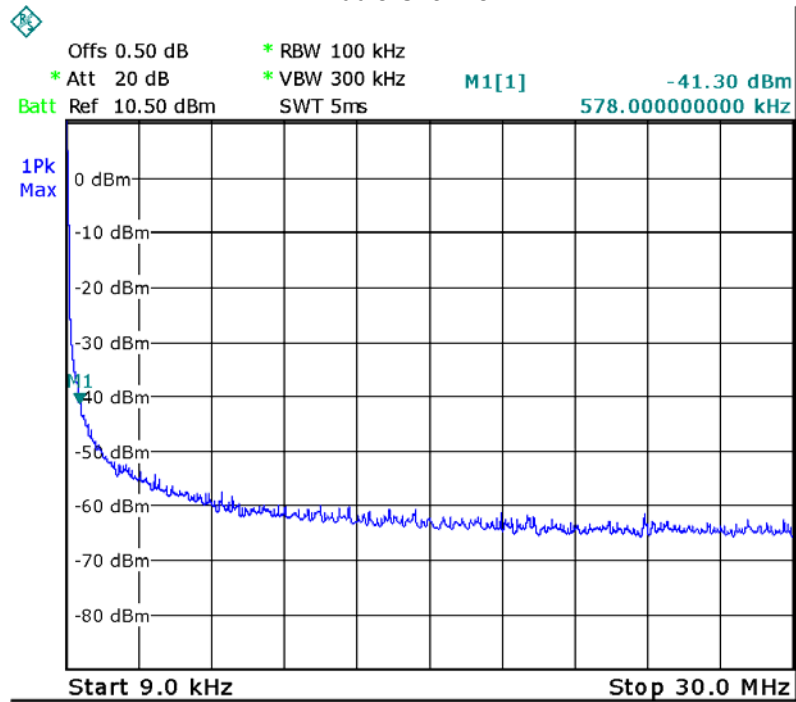


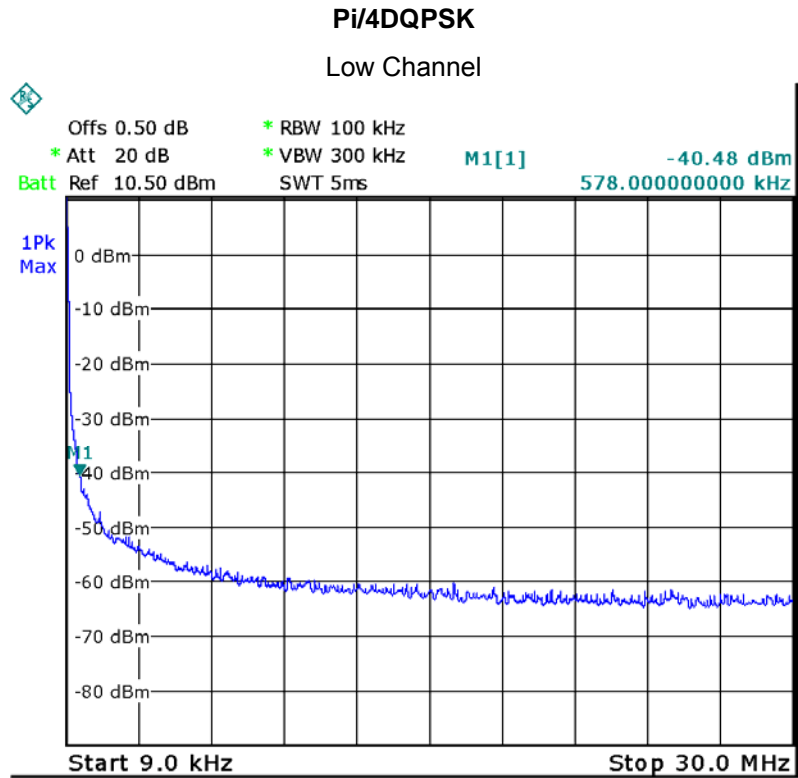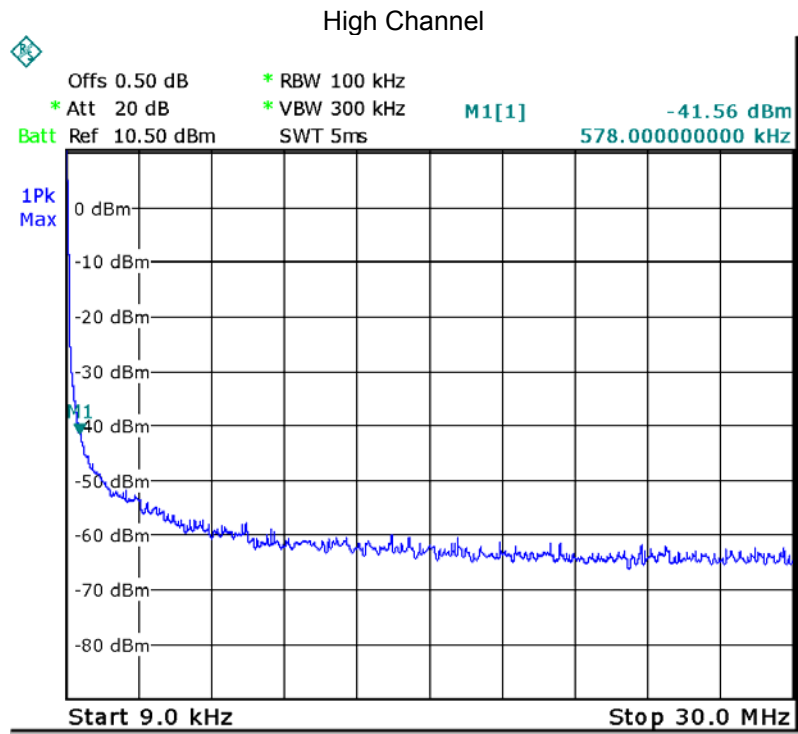

Middle Channel

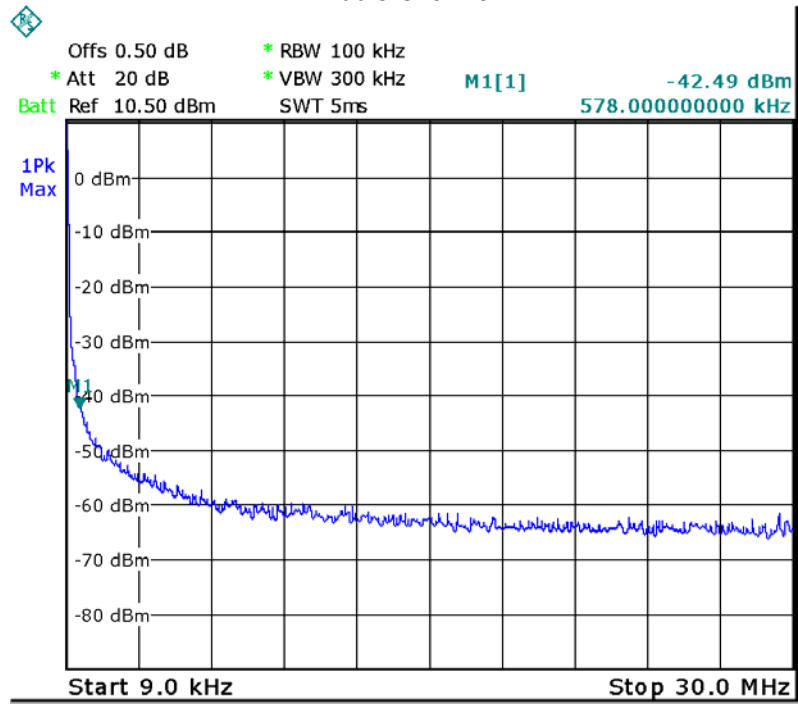


High Channel

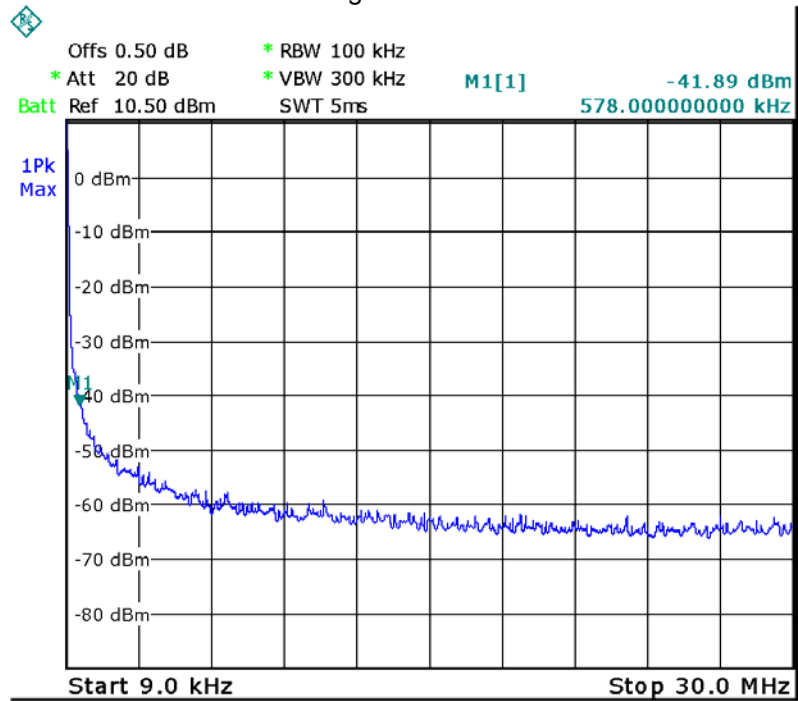



8DPSK

Low Channel

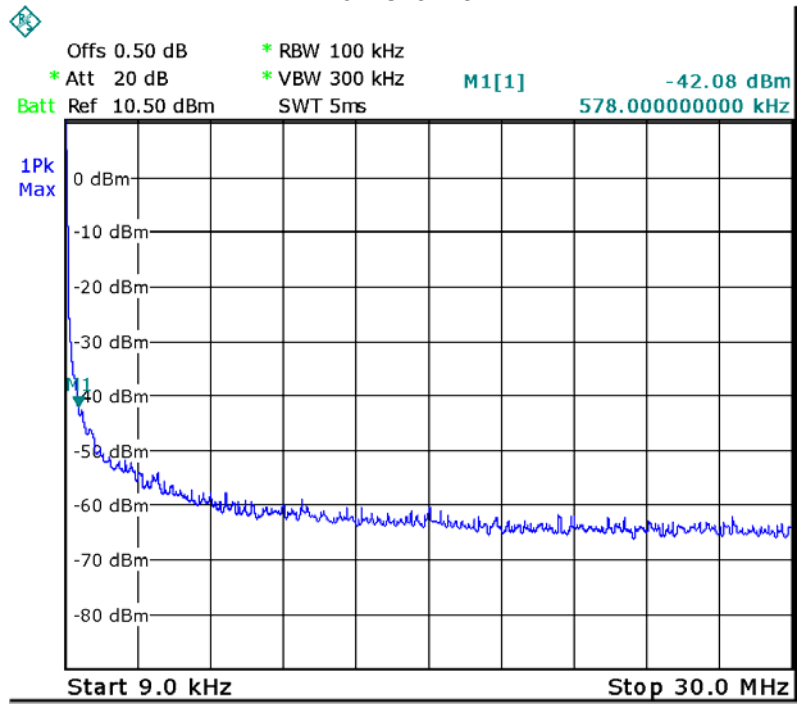

Middle Channel

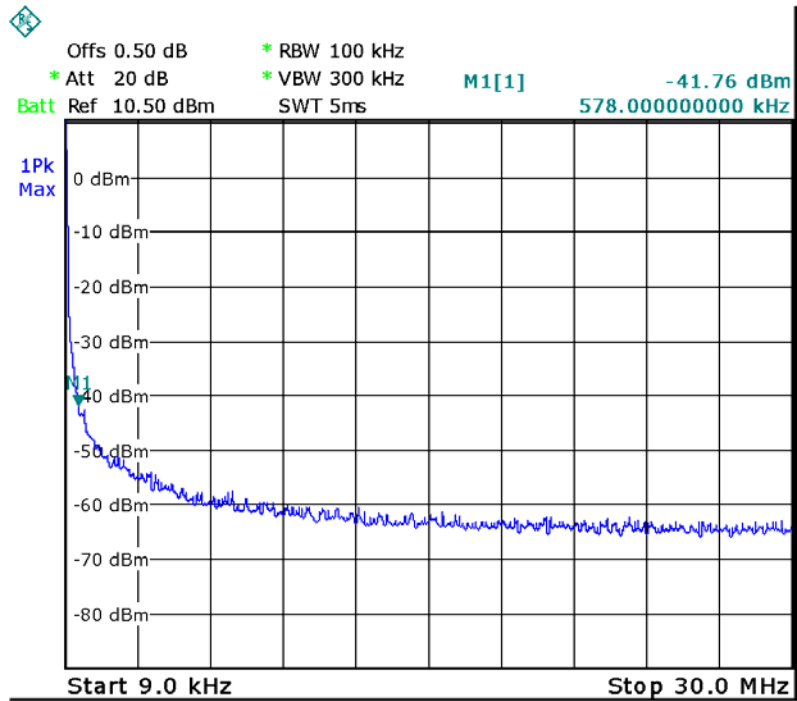

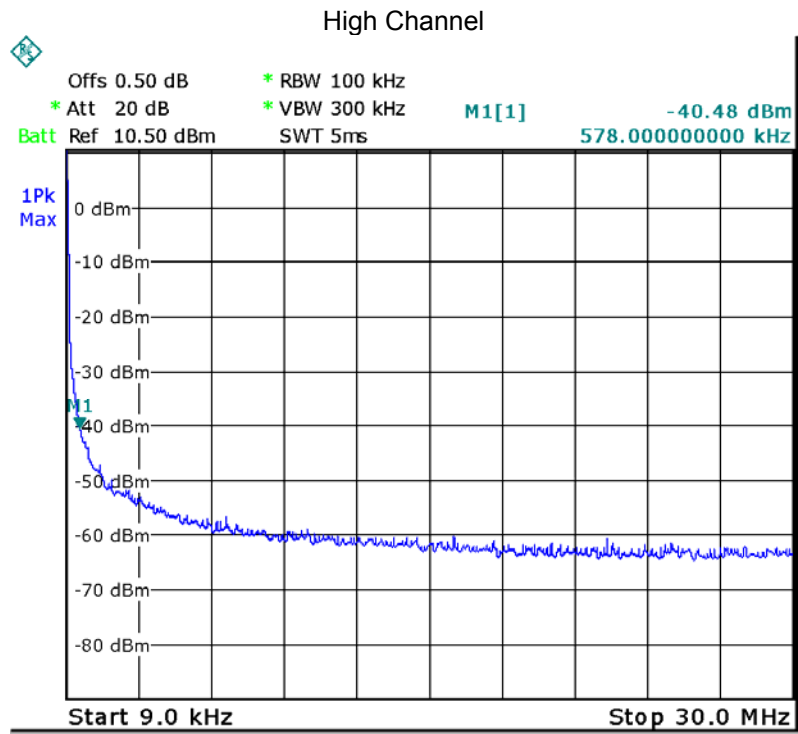

30MHz – 25GHz
GFSK Low Channel

Fundamental



GFSK Middle Channel

Fundamental



GFSK High Channel

Fundamental



Pi/4 DQPSK Low Channel

Fundamental



Pi/4 DQPSK Middle Channel

Fundamental



Pi/4 DQPSK High Channel

Fundamental



8DPSK Low Channel

Fundamental



8DPSK Middle Channel

Fundamental



8DPSK High Channel

Fundamental



10 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

10.2 Test Result


GFSK Transmitting Band edge-left side




GFSK Hopping Band edge-left side

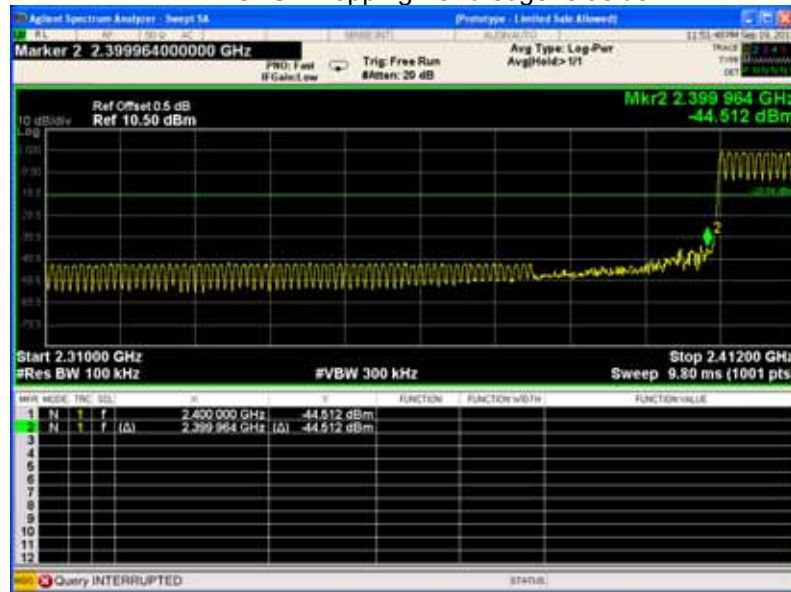


GFSK Transmitting Band edge-right side

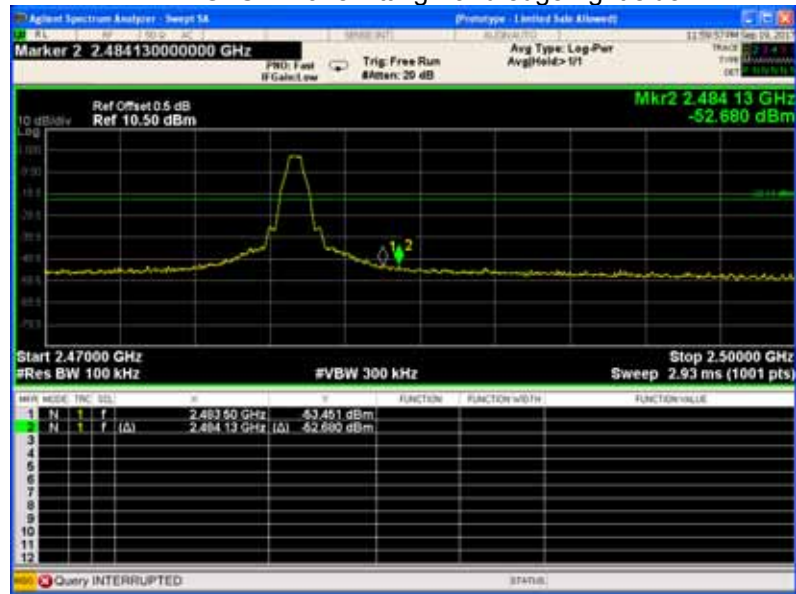

GFSK Hopping Band edge-right side

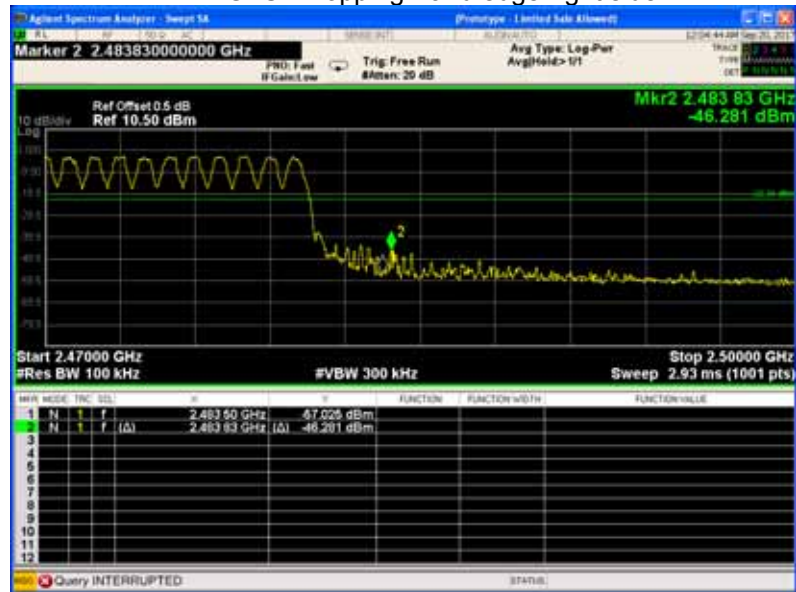


Pi/4 DQPSK Transmitting Band edge-left side

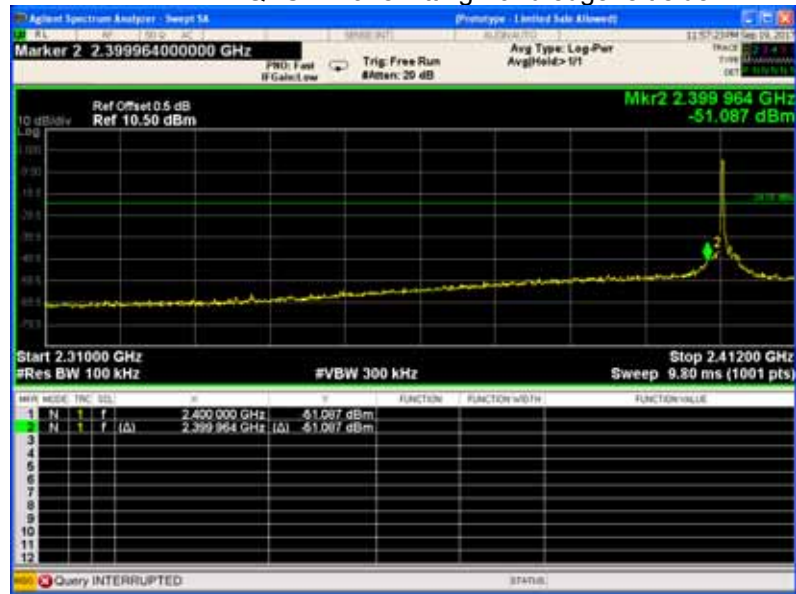


Pi/4 DQPSK Hopping Band edge-left side



Pi/4 DQPSK Transmitting Band edge-right side

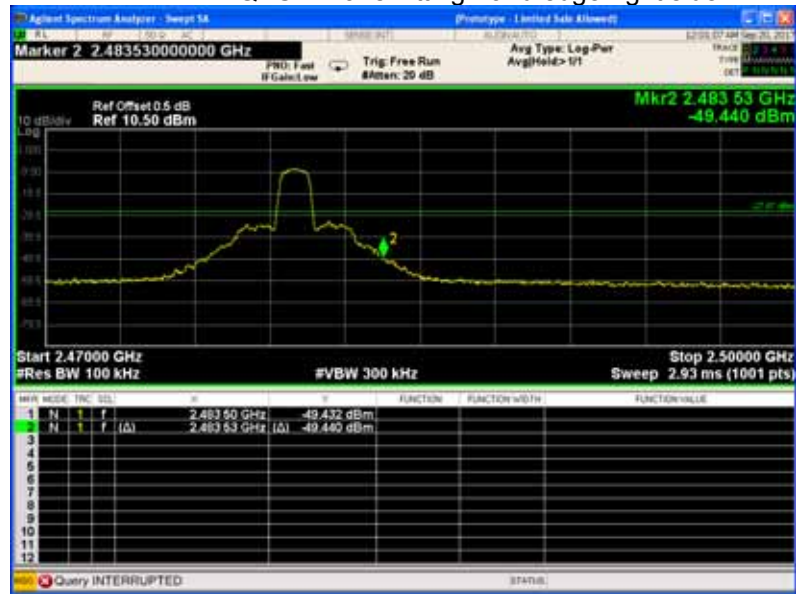


Pi/4 DQPSK Hopping Band edge-right side

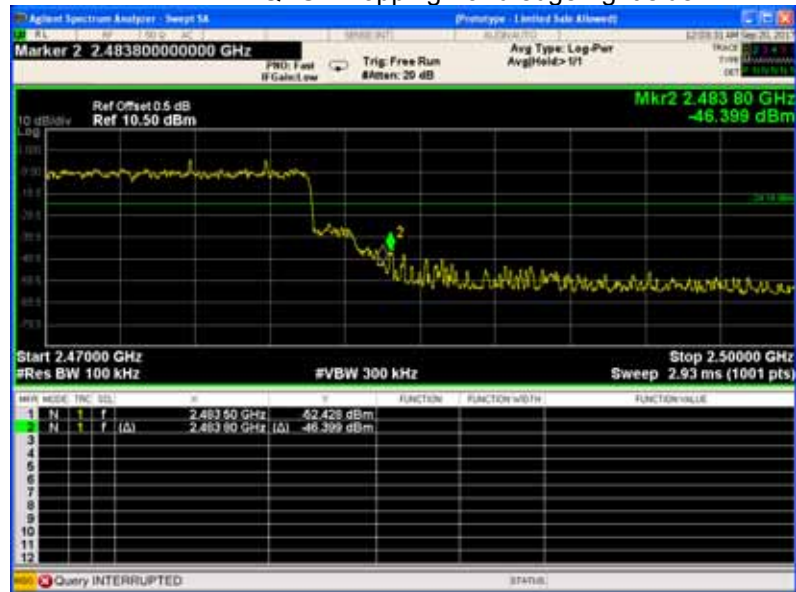

8DPSK Transmitting Band edge-left side




8DPSK Hopping Band edge-left side

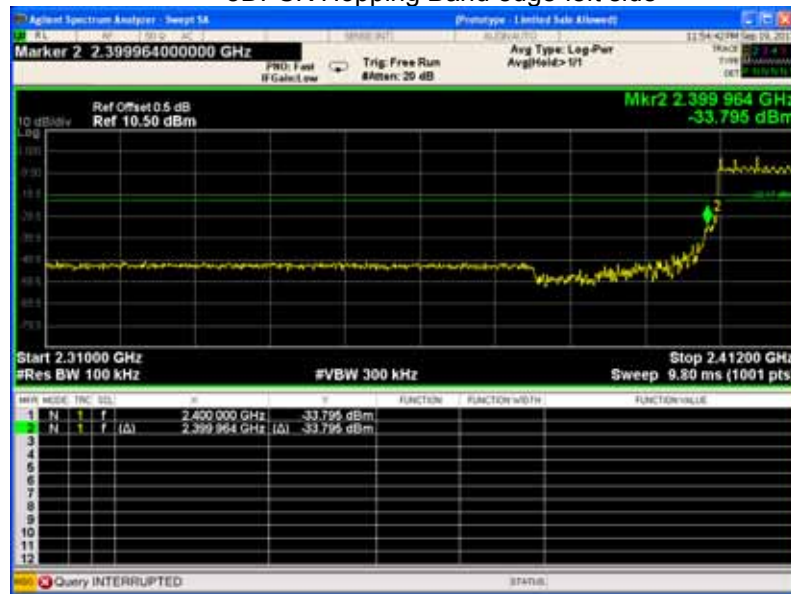

8DPSK Transmitting Band edge-right side



8DPSK Hopping Band edge-right side

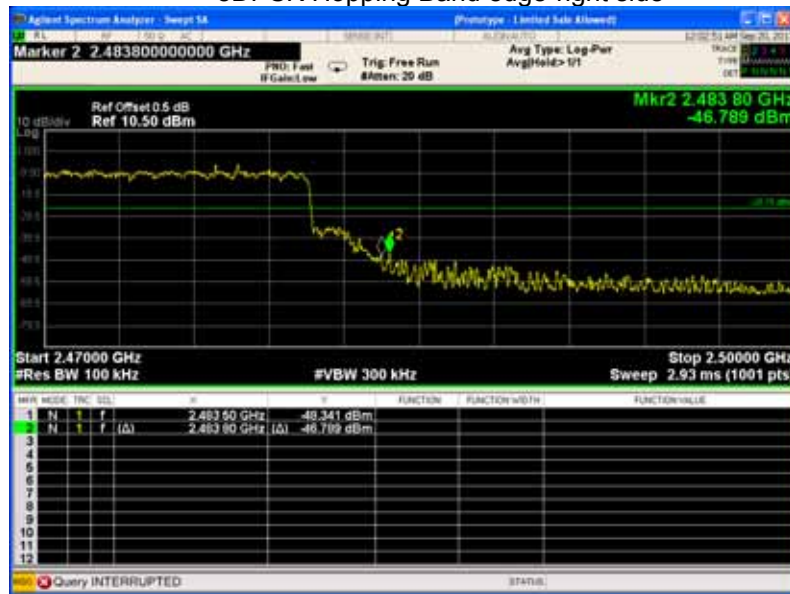

11 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10:2013

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

11.2 Test Result

Modulation	Test Channel	20dB Bandwidth(MHz)	99% Bandwidth(MHz)
GFSK	Low	1.104	0.970
GFSK	Middle	1.105	0.977
GFSK	High	1.105	0.976
Pi/4 DQPSK	Low	1.377	1.254
Pi/4 DQPSK	Middle	1.375	1.244
Pi/4 DQPSK	High	1.376	1.248
8DPSK	Low	1.363	1.274
8DPSK	Middle	1.359	1.265
8DPSK	High	1.357	1.267

Test plots
GFSK Low Channel



GFSK Middle Channel




GFSK High Channel



Pi/4 DQPSK Low Channel



Pi/4 DQPSK Middle Channel

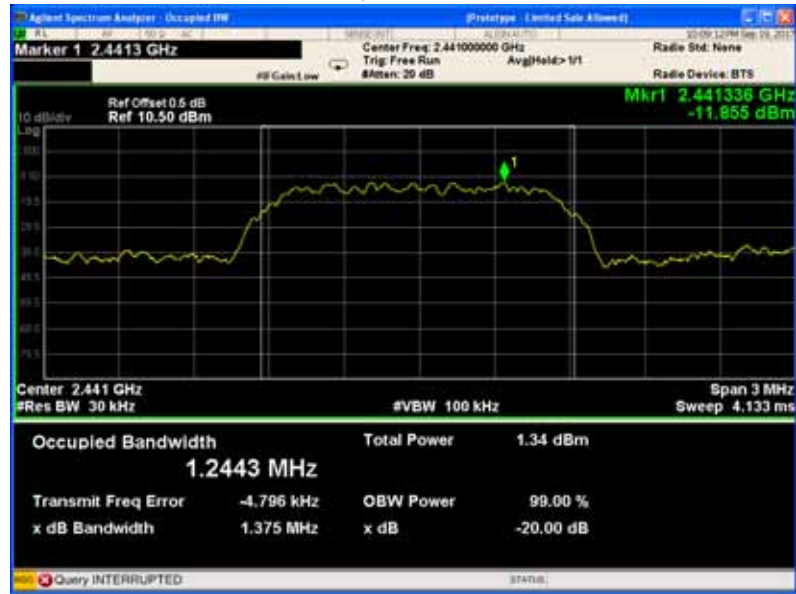

Pi/4 DQPSK High Channel




8DPSK Low Channel



8DPSK Middle Channel



8DPSK High Channel

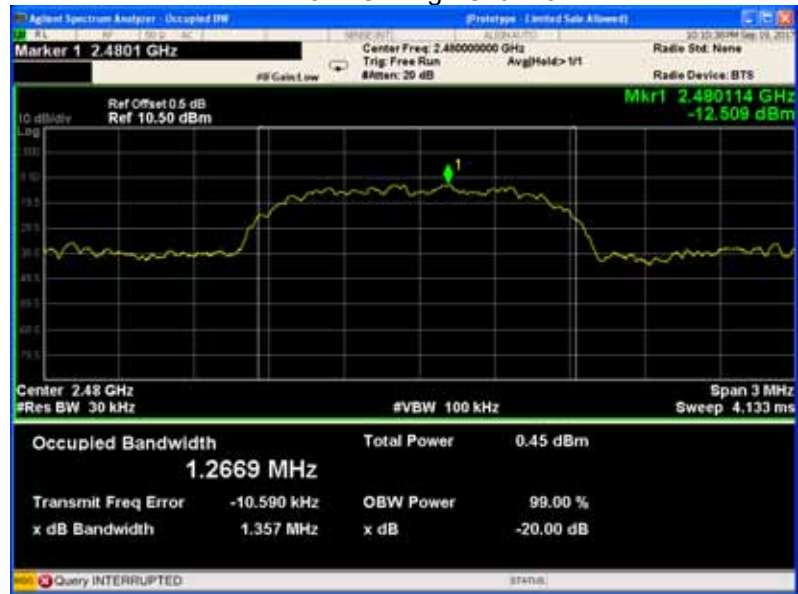

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode:	Test in fixing frequency transmitting mode.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	0.21	30
GFSK	Middle	-0.70	30
GFSK	High	-1.67	30
Pi/4 DQPSK	Low	-1.54	21
Pi/4 DQPSK	Middle	-2.50	21
Pi/4 DQPSK	High	-3.47	21
8DPSK	Low	-0.97	21
8DPSK	Middle	-1.88	21
8DPSK	High	-2.86	21

Test plots

GFSK Low Channel

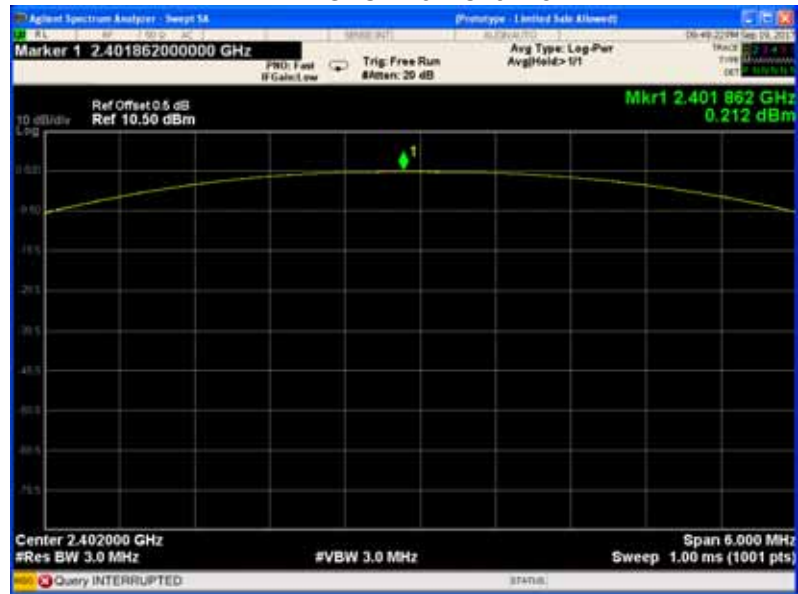

GFSK Middle Channel

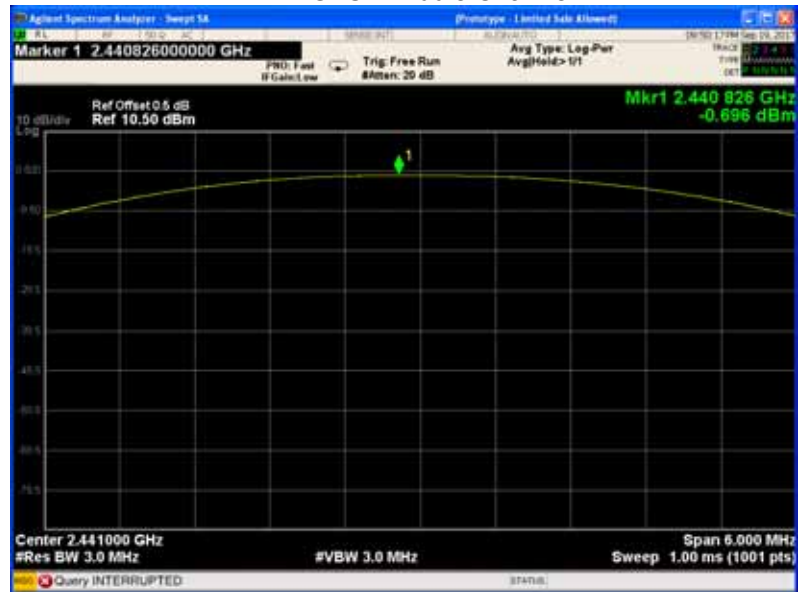


GFSK High Channel



Pi/4 DQPSK Low Channel




Pi/4 DQPSK Middle Channel

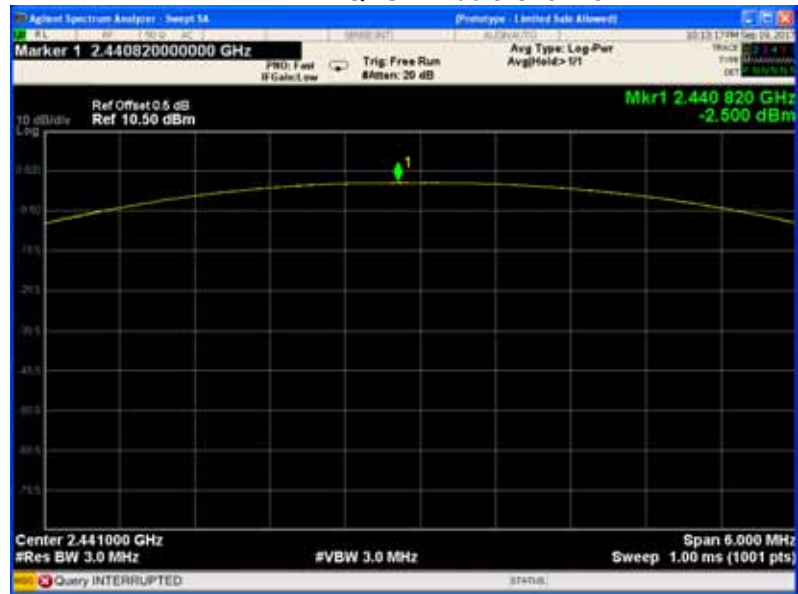

Pi/4 DQPSK High Channel




8DPSK Low Channel

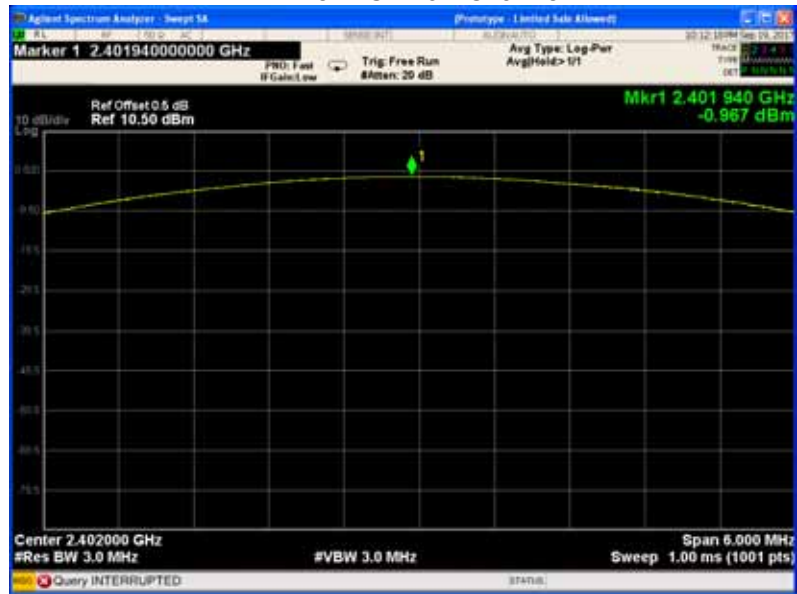

8DPSK Middle Channel



8DPSK High Channel

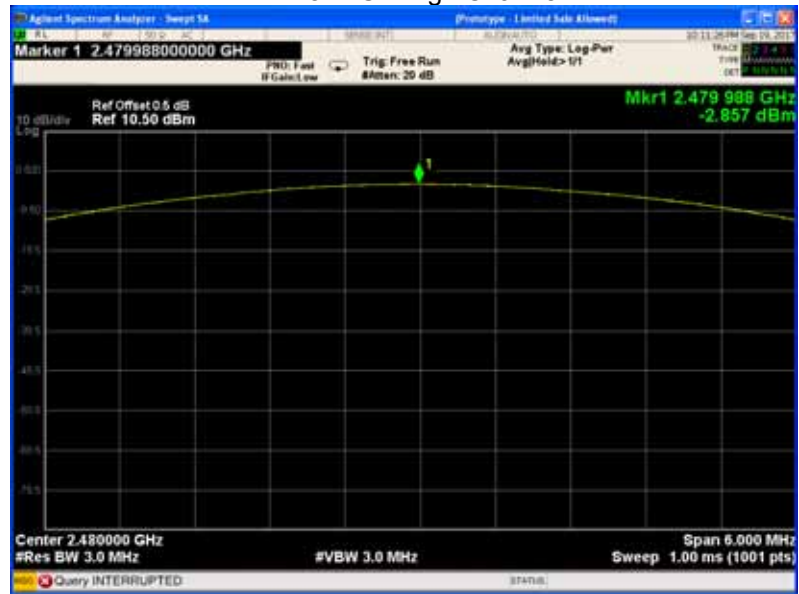

13 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

13.2 Test Result

Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
Pi/4 DQPSK	Low	1.000	PASS
Pi/4 DQPSK	Middle	1.000	PASS
Pi/4 DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS

Test plots

GFSK Low Channel



GFSK Middle Channel



GFSK High Channel



Pi/4 DQPSK Low Channel




Pi/4 DQPSK Middle Channel




Pi/4 DQPSK High Channel




8DPSK Low Channel

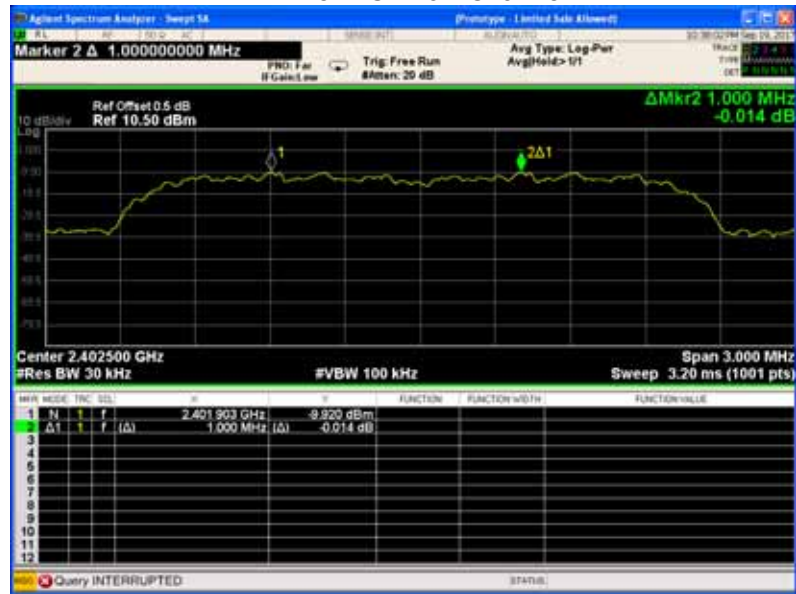

8DPSK Middle Channel

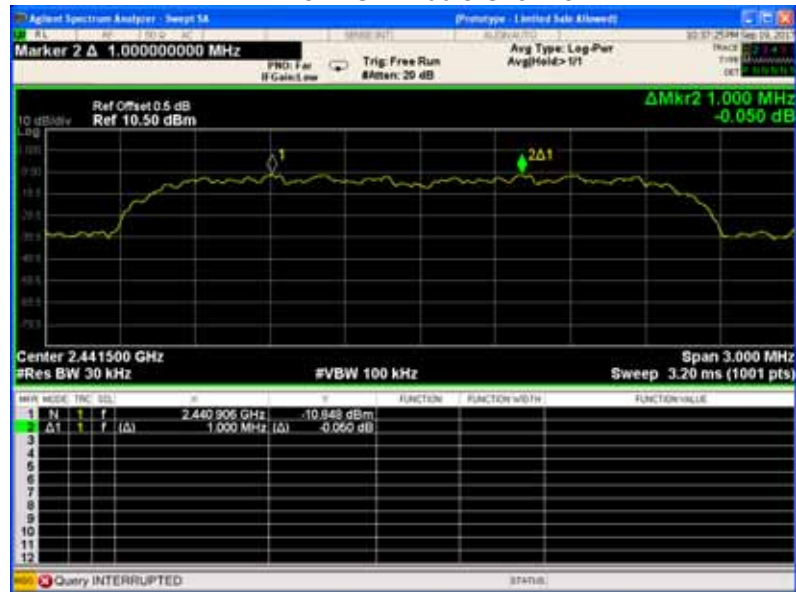

8DPSK High Channel

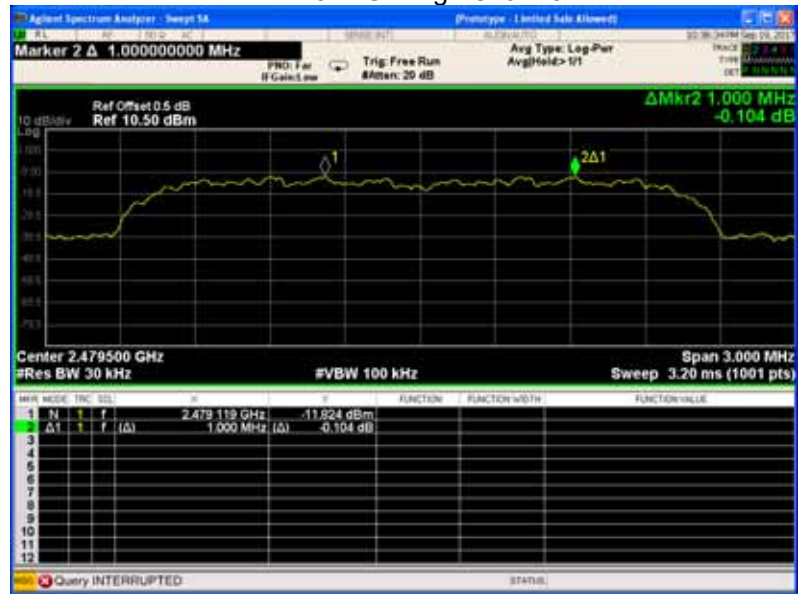

14 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 KHz. VBW = 300 KHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

14.2 Test Result


Test Plots:

79 Channels in total


GFSK

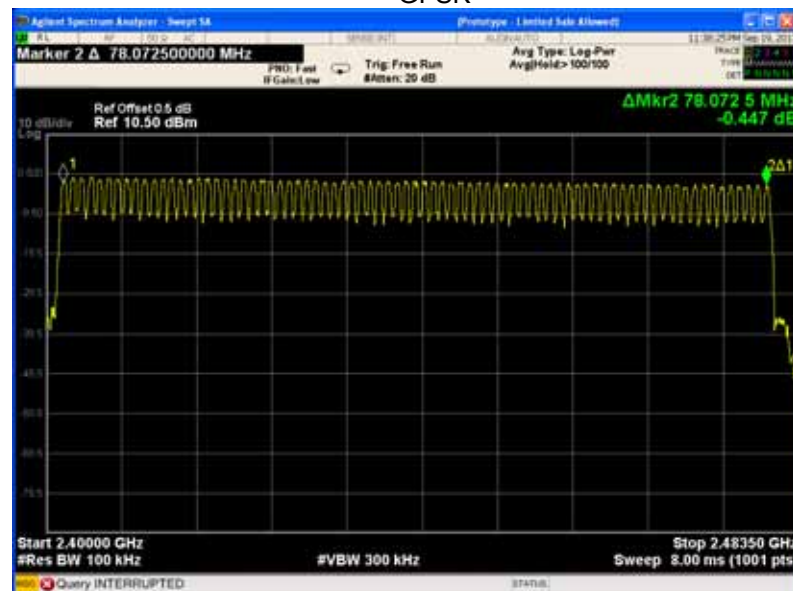

Pi/4 DQPSK

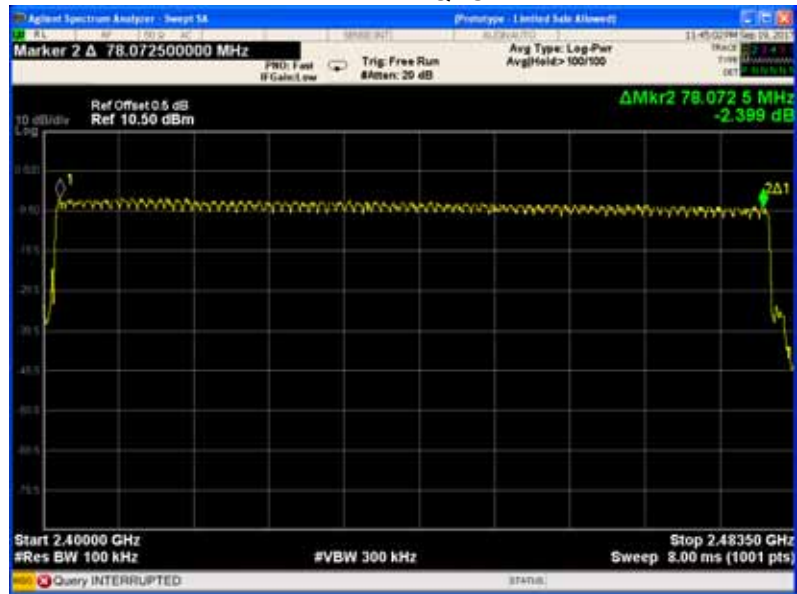

8DPSK

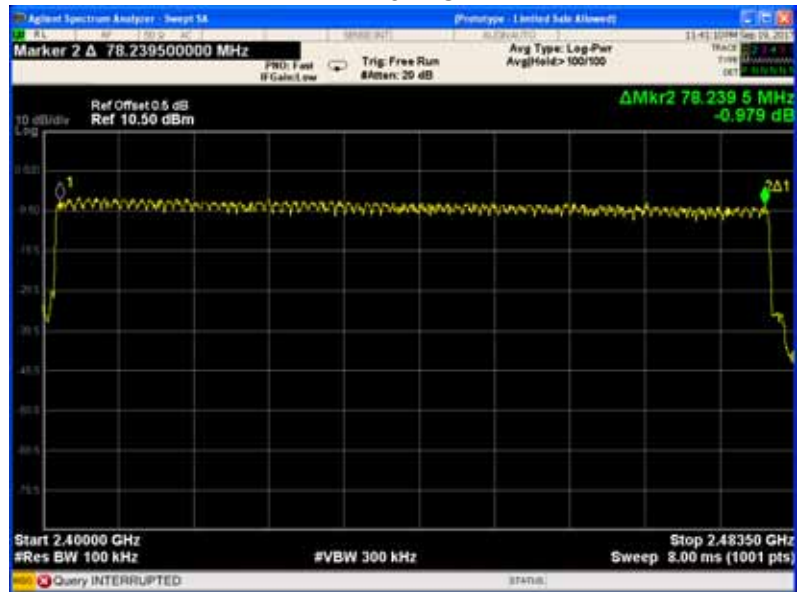

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	


Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.920	0.311	0.4
		middle	2.920	0.311	0.4
		High	2.920	0.311	0.4
Pi/4DQPSK	2DH5	Low	2.920	0.311	0.4
		middle	2.920	0.311	0.4
		High	2.920	0.311	0.4
8DPSK	3DH5	Low	2.920	0.311	0.4
		middle	2.920	0.311	0.4
		High	2.920	0.311	0.4

Remark: Only the worst-case is recorded.


Test Plots
GFSK DH5 Low Channel

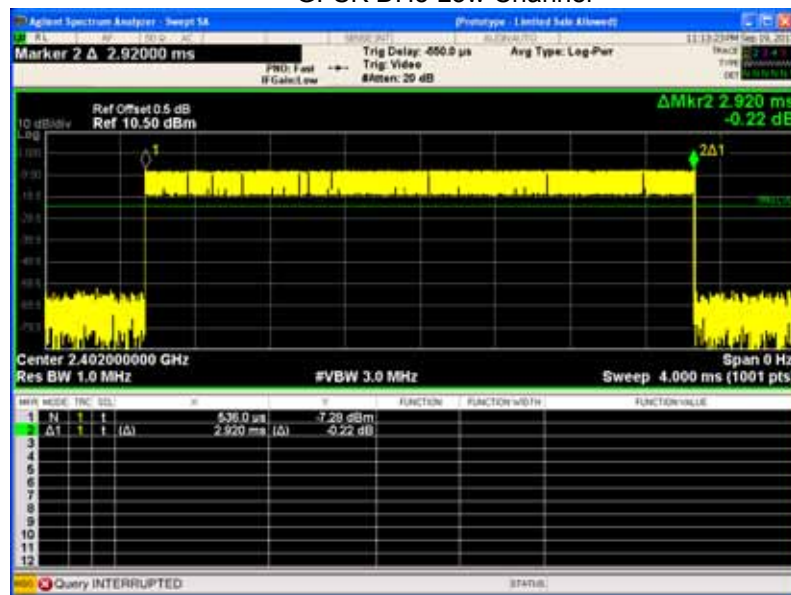


GFSK DH5 Middle Channel

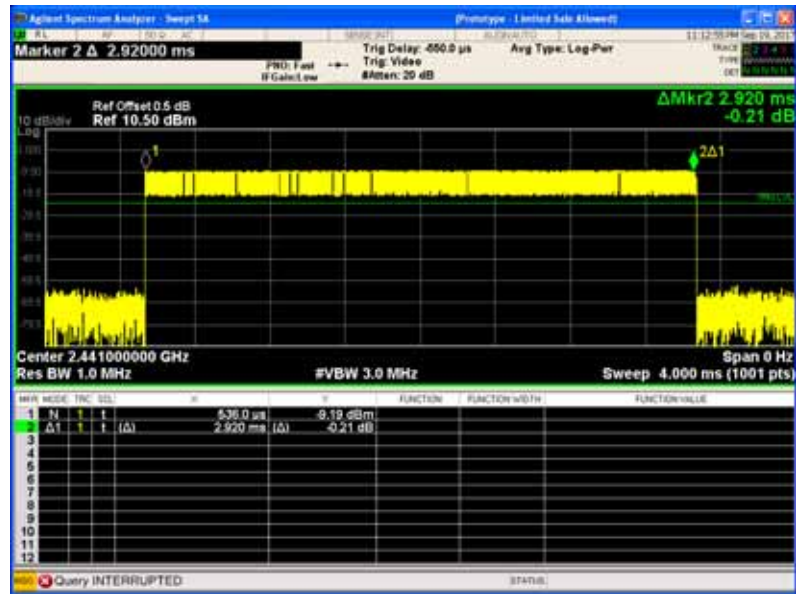


GFSK DH5 High Channel

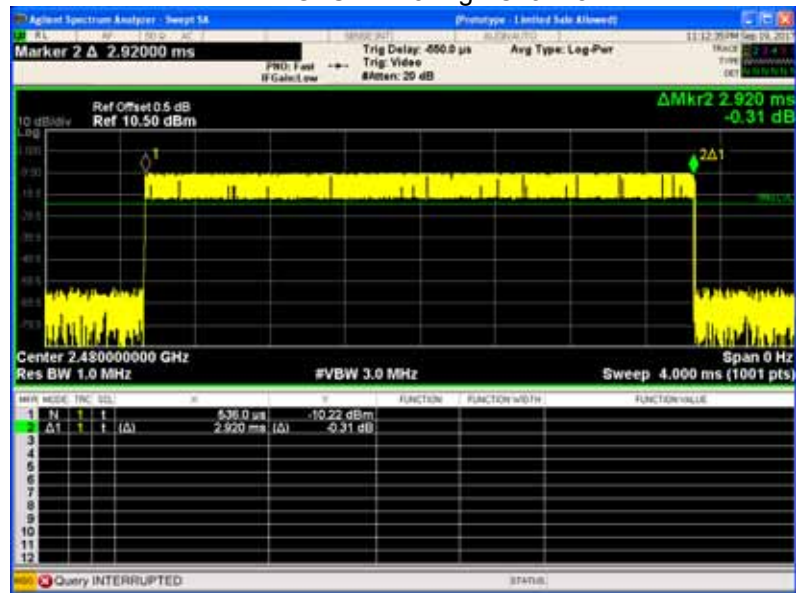


Pi/4DQPSK 2DH5 Low Channel

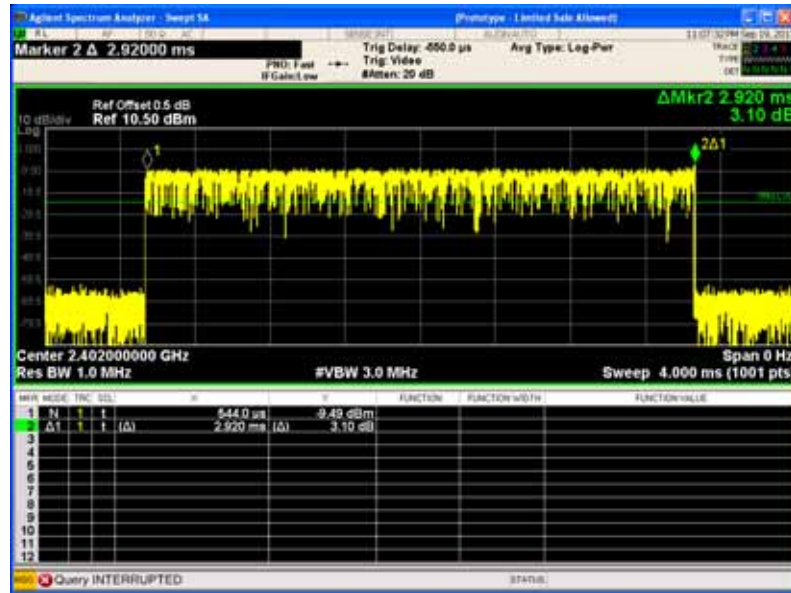


Pi/4DQPSK 2DH5 Middle Channel

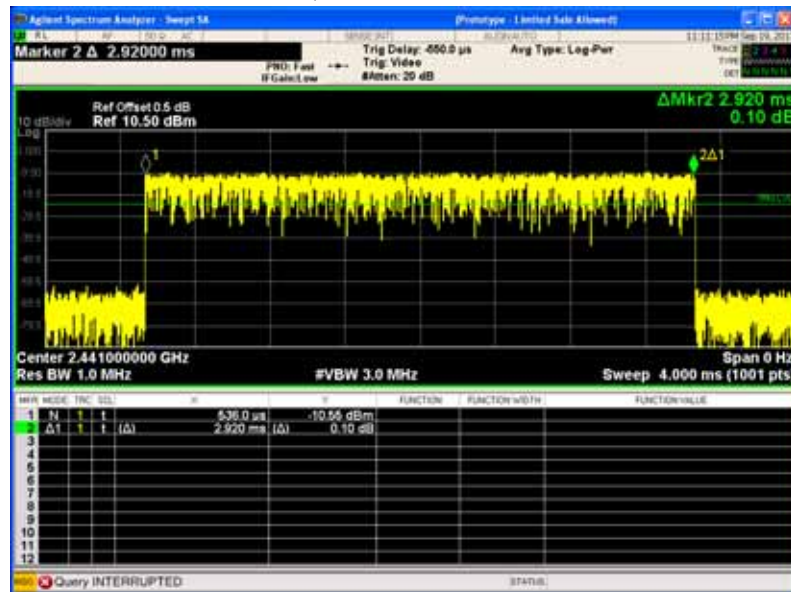


Pi/4DQPSK 2DH5 High Channel

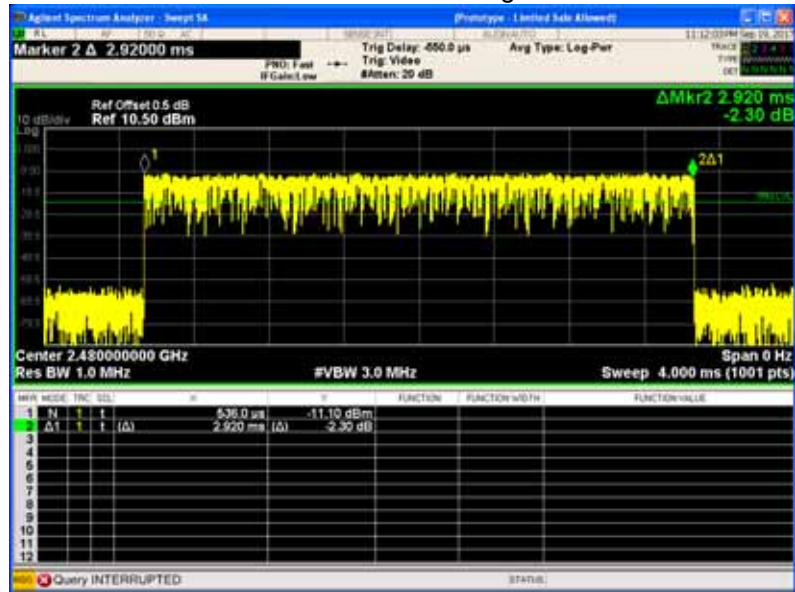


8DPSK 3DH5 Low Channel

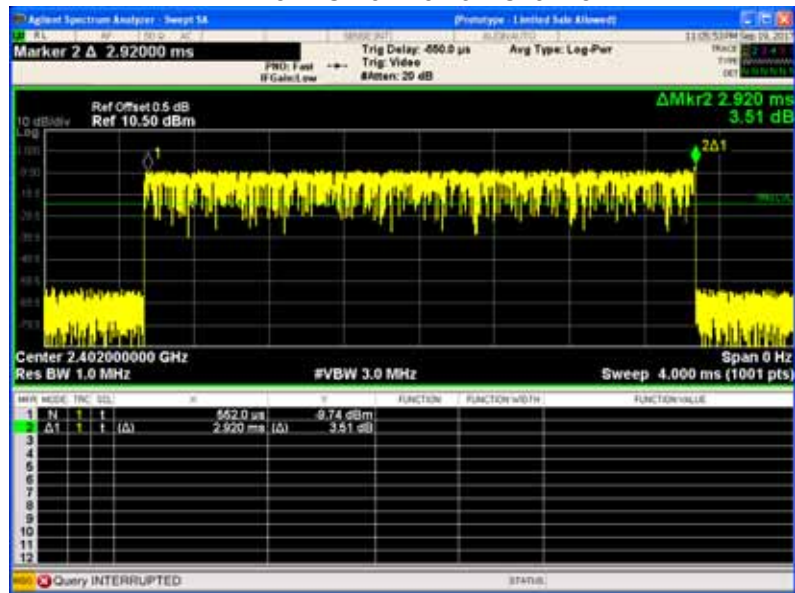

8DPSK 3DH5 Middle Channel

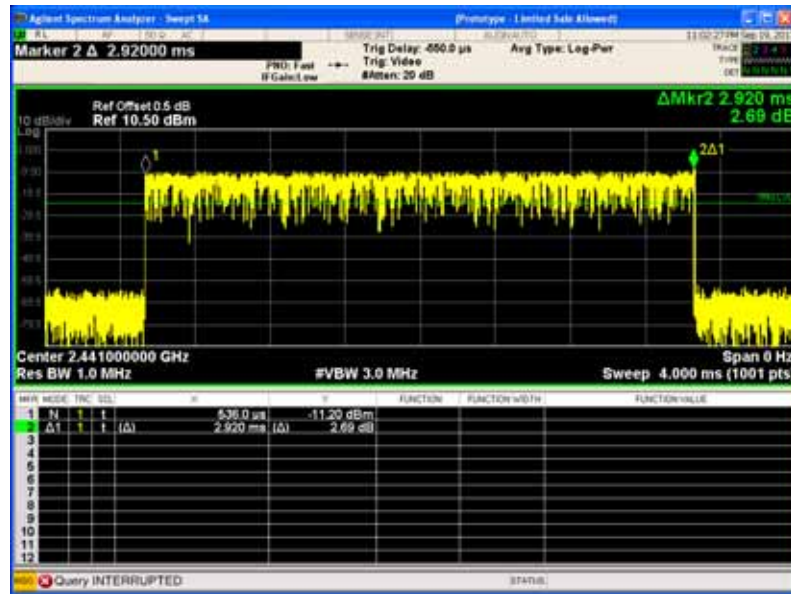

8DPSK 3DH5 High Channel

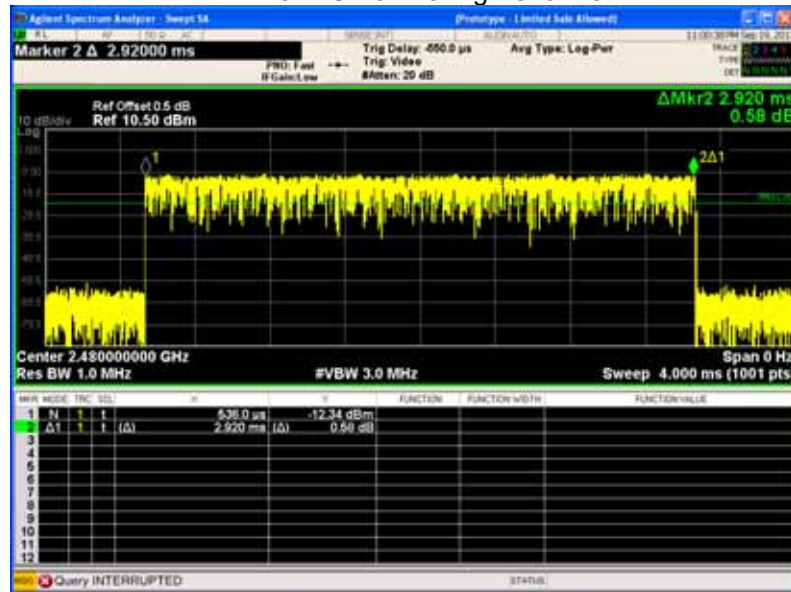

16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one PCB Printed Antenna, the gain is 0dBi. meets the requirements of FCC 15.203.



17 FCC ID: 2ALR9-KDL-BT1713 SAR Evaluation

Test Requirement: FCC Part 1.1307

Evaluation Method FCC Part2.1093 & KDB 447498 D01 General RF Exposure Guidance v06

17.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances 50 mm are determined by:

$$\left[\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot [f(\text{GHz})]$$
 3.0 for 1-g SAR and 7.5 for 10-g extremity SAR where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

17.2 The procedures / limit

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds Calculation Value	SAR Test Exclusion Thresholds Limit	Result
0.21	1.05	1.05	5	0.331	3.0	Compliance

Remark: Max. duty factor is 100%

Low Chanel: $f=2402\text{MHz}=2.402\text{GHz}$, so $f(\text{GHz})=1.550$

High Chanel: $f=2480\text{MHz}=2.480\text{GHz}$, so $f(\text{GHz})=1.575$

17.3 Result: Compliance

No SAR measurement is required.


18 Photographs-Model KDL-BT1713 Test Setup

18.1 Photograph – Conducted Emission Test Setup




18.2 Photograph - Spurious Emissions Radiated Test Setup


For 9KHz to 30MHz

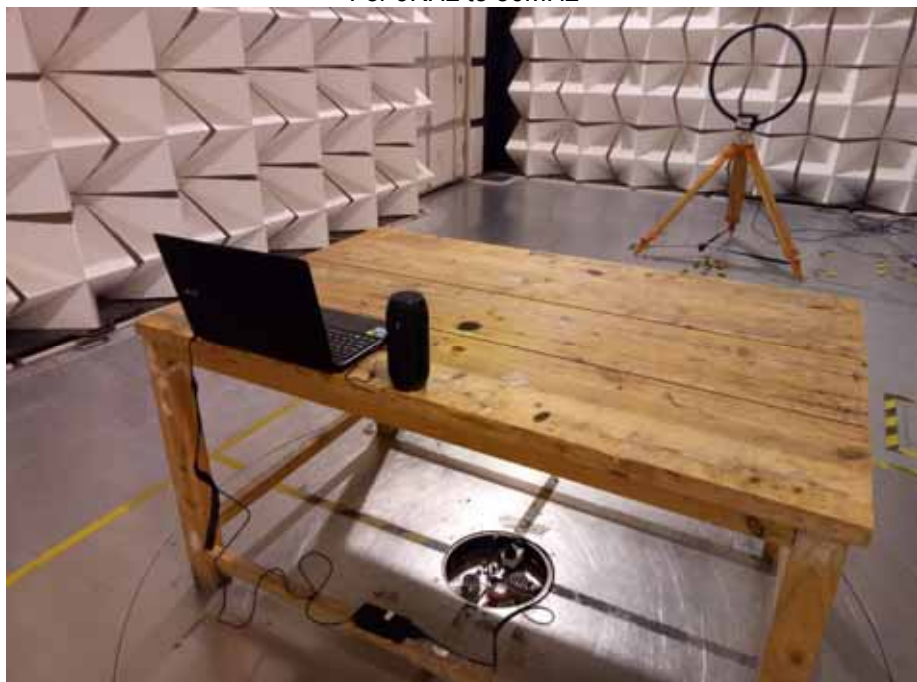

For 30MHz-1000MHz

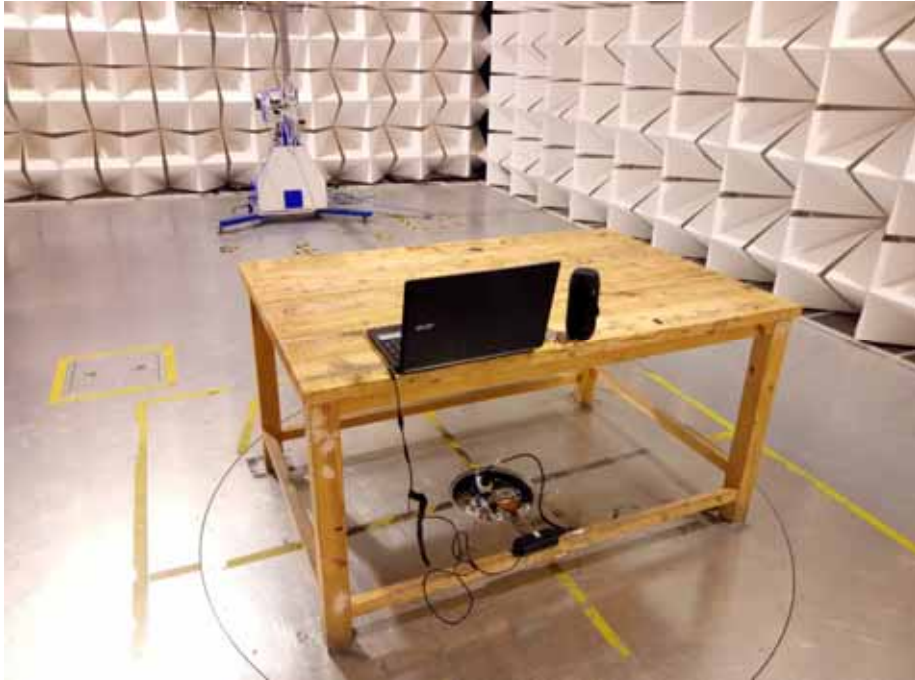



For Above 1GHz

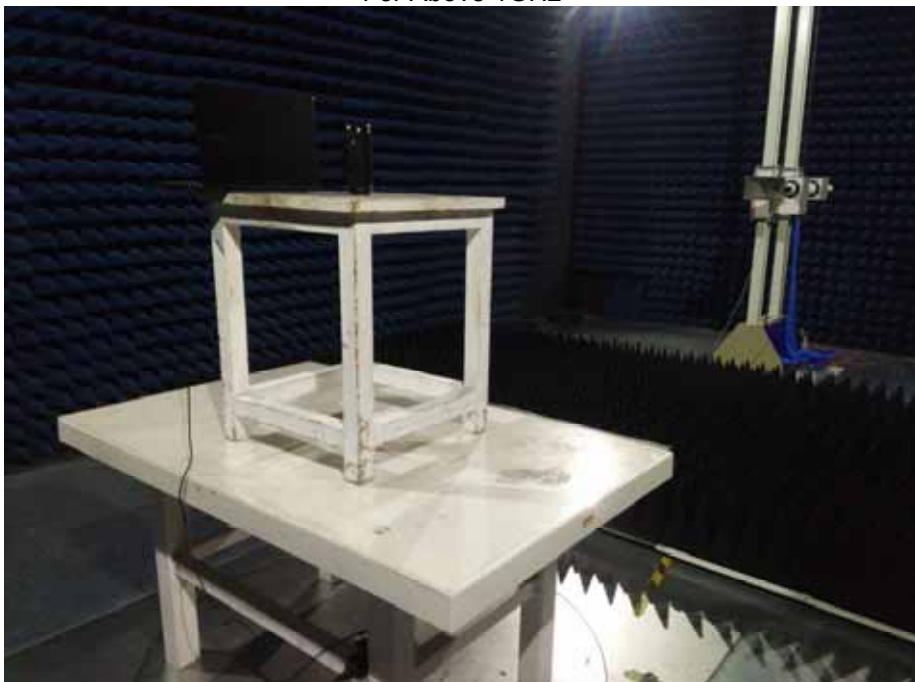

19 Photographs - Constructional Details

19.1 Model KDL-BT1713-External Photos

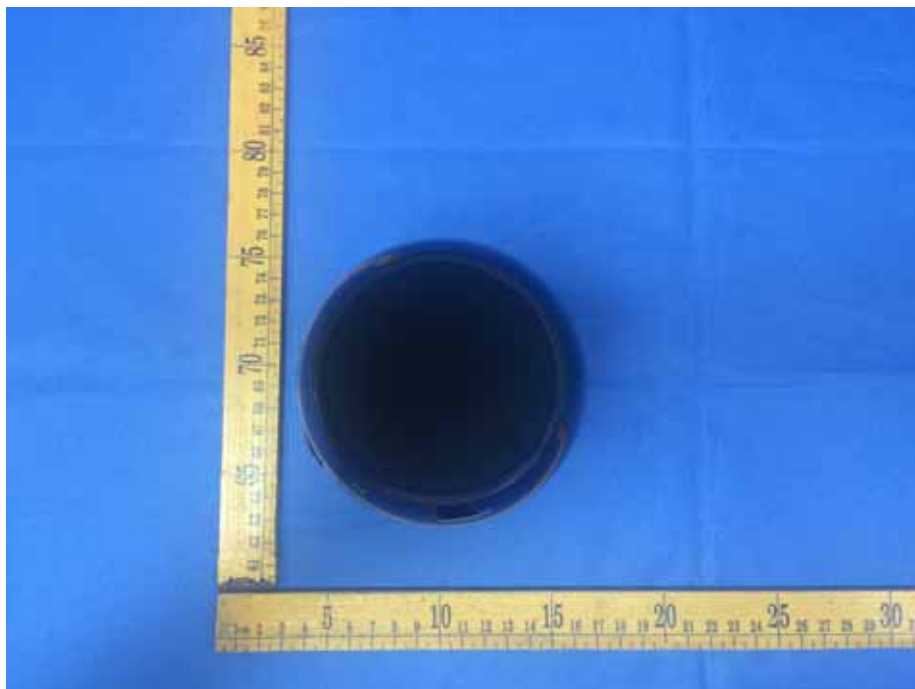

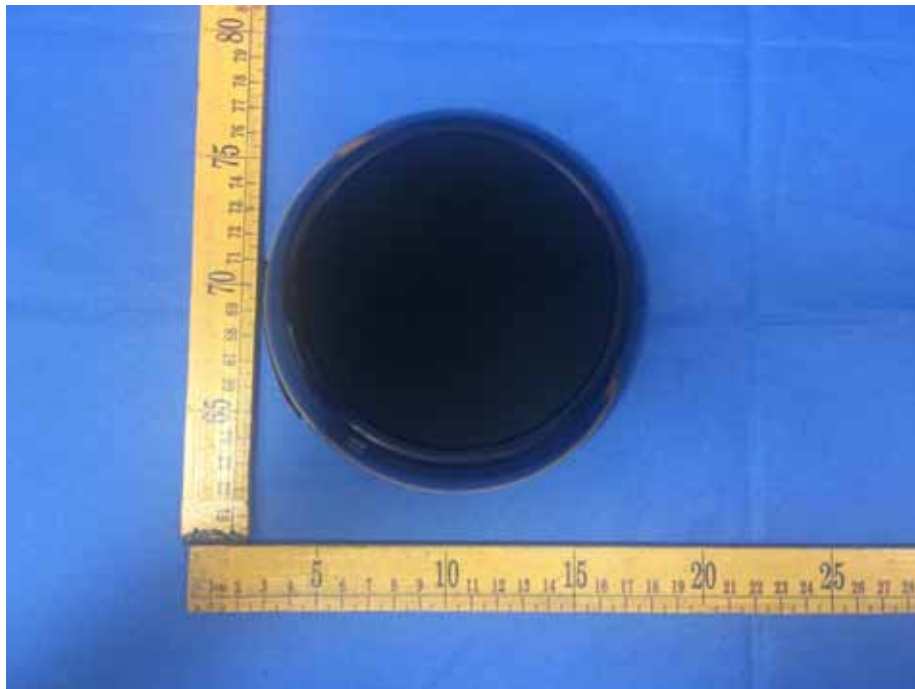













19.2 Model KDL-BT1713 – Internal Photos



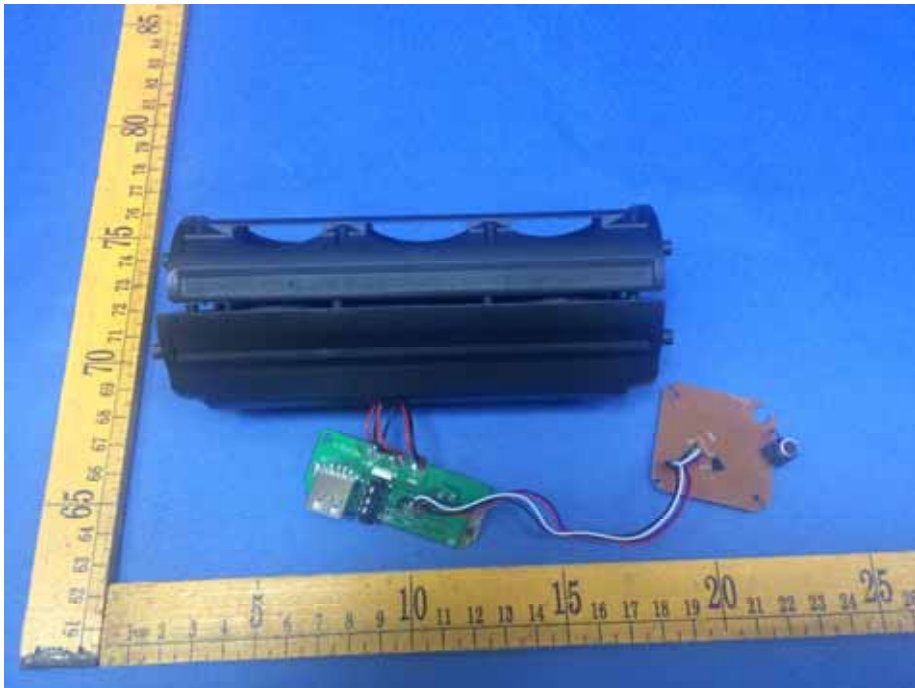

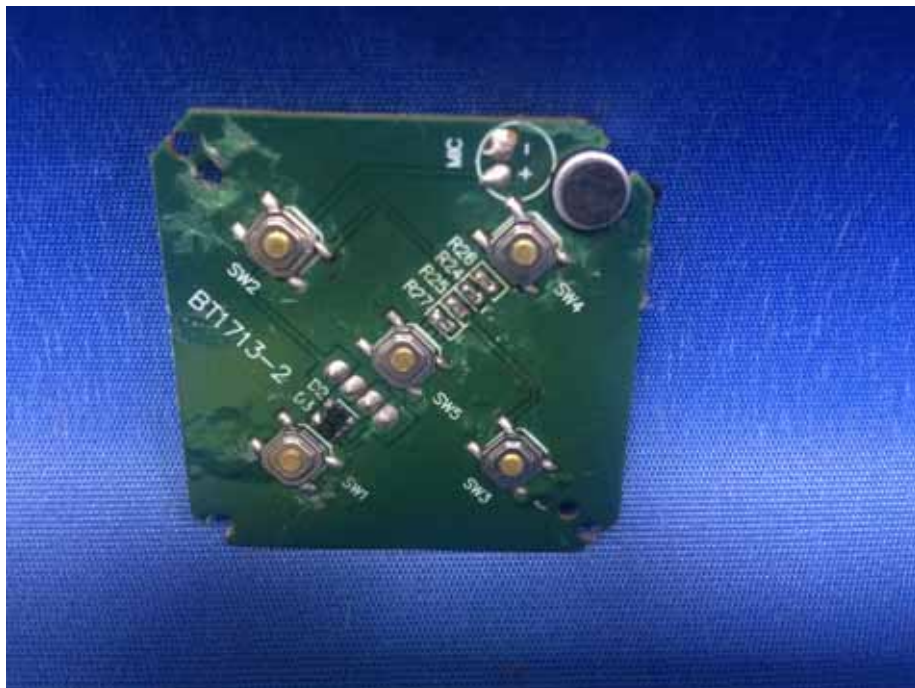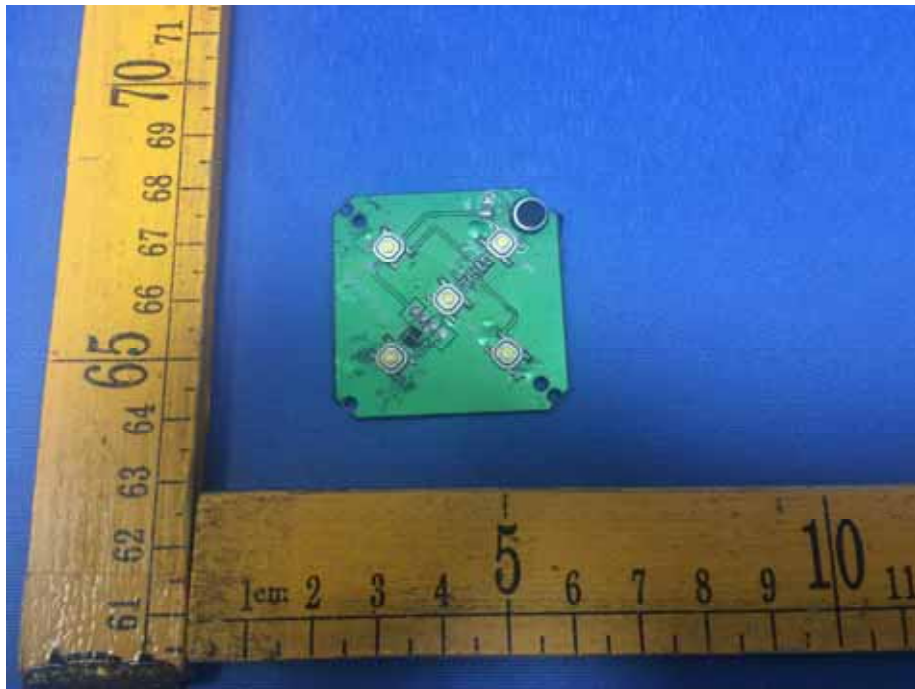

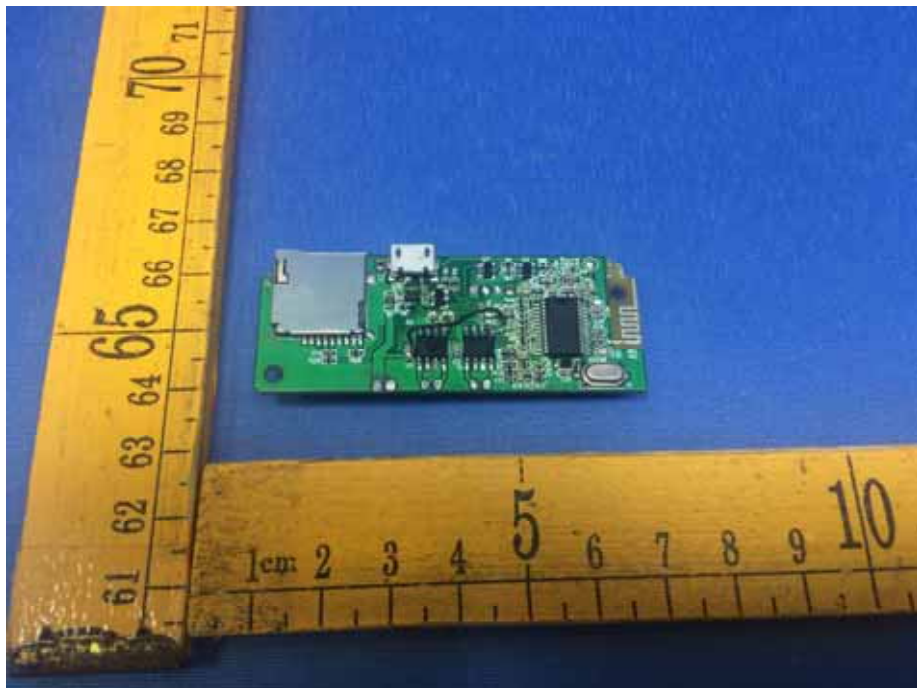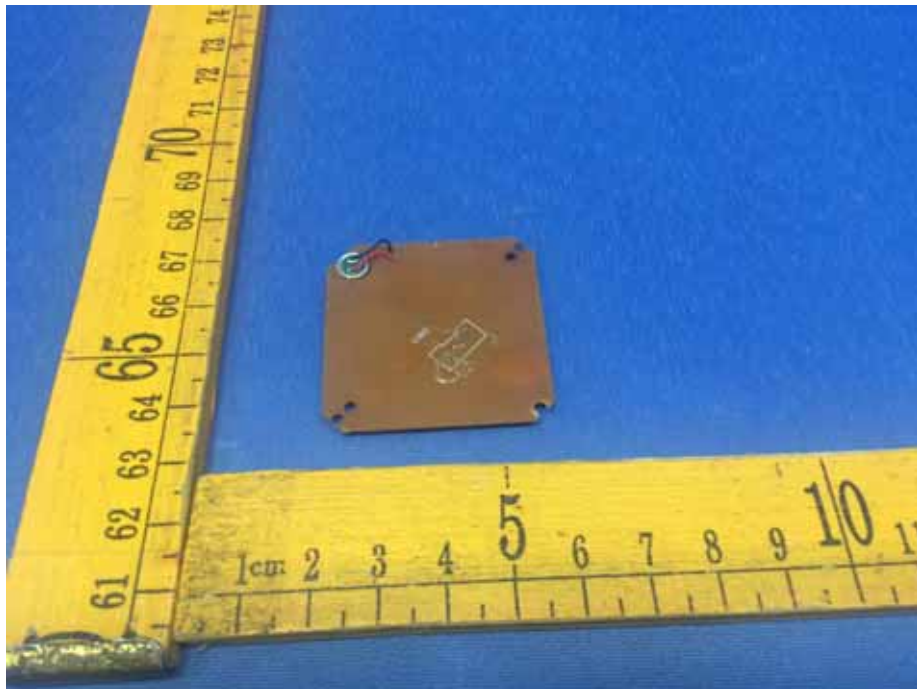

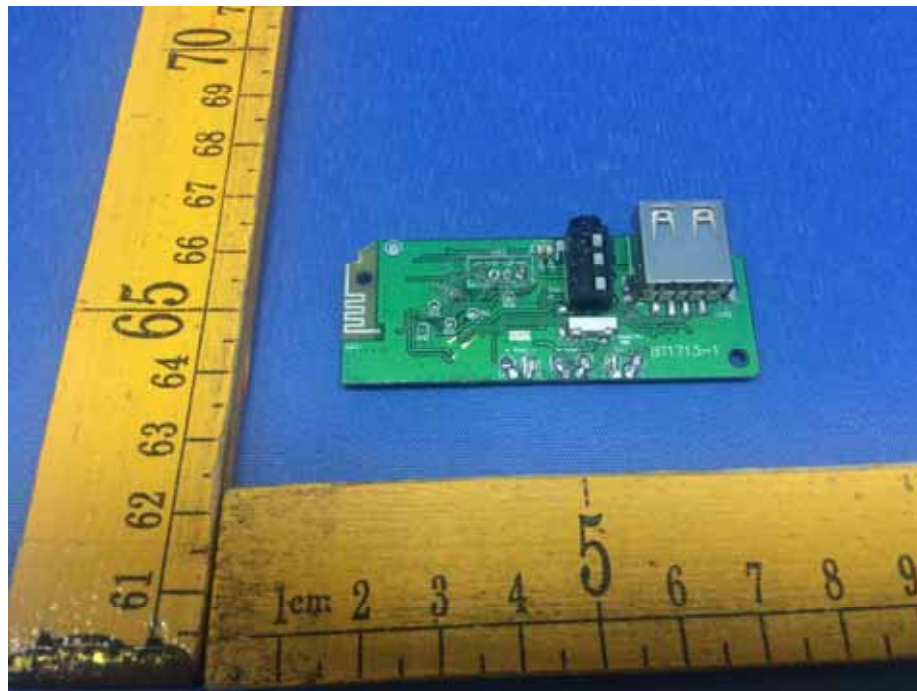



====End of Report====