

TEST REPORT

Reference No. : WTS18S01102182W
FCC ID..... : 2ALR9-KDL-BT1731
Applicant : SHENZHEN G-KINDLY ELECTRONIC CO., LTD
Address : 4F, No.8 Fifth Road, Loucun First Industry Zone, GongMing Town,
GuangMing New District, ShenZhen, Guangdong Province, China
Manufacturer : The same as above
Address : The same as above
Product : Wireless speaker
Model(s)..... : KDL-BT1731, BB141, BB142, BB1648, BB1649, BB1650, BIG-9925
Standards : FCC CFR47 Part 15 Section 15.247: 2018
Date of Receipt sample.... : 2018-01-30
Date of Test..... : 2018-02-01 to 2018-03-05
Date of Issue : 2018-03-05
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Test site/Test location:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

Jack Wen

Jack Wen / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
2.1 TEST FACILITY.....	3
3 CONTENTS.....	4
4 REVISION HISTORY.....	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.....	7
5.2 DETAILS OF E.U.T.....	7
5.3 CHANNEL LIST.....	7
5.4 TEST MODE.....	8
5.5 DESCRIPTION OF SUPPORT UNITS.....	8
6 EQUIPMENT USED DURING TEST.....	9
6.1 EQUIPMENTS LIST.....	9
6.2 MEASUREMENT UNCERTAINTY.....	10
6.3 TEST EQUIPMENT CALIBRATION.....	10
6.4 SUBCONTRACTED.....	10
7 TEST SUMMARY.....	11
8 CONDUCTED EMISSION.....	12
8.1 E.U.T. OPERATION.....	12
8.2 EUT SETUP.....	12
8.3 MEASUREMENT DESCRIPTION.....	12
8.4 CONDUCTED EMISSION TEST RESULT.....	13
9 RADIATED EMISSIONS.....	15
9.1 EUT OPERATION.....	15
9.2 TEST SETUP.....	16
9.3 SPECTRUM ANALYZER SETUP.....	17
9.4 TEST PROCEDURE.....	18
9.5 SUMMARY OF TEST RESULTS.....	19
10 CONDUCTED SPURIOUS EMISSIONS.....	22
10.1 TEST PROCEDURE.....	22
10.2 TEST RESULT.....	23
11 BAND EDGE MEASUREMENT.....	32
11.1 TEST PROCEDURE.....	32
11.2 TEST RESULT:.....	33
12 BANDWIDTH MEASUREMENT.....	39
12.1 TEST PROCEDURE:.....	39
12.2 TEST RESULT:.....	39
13 MAXIMUM PEAK OUTPUT POWER.....	44
13.1 TEST PROCEDURE:.....	44
13.2 TEST RESULT:.....	44
14 HOPPING CHANNEL SEPARATION.....	50
14.1 TEST PROCEDURE:.....	50

14.2	TEST RESULT:	50
15	NUMBER OF HOPPING FREQUENCY	56
15.1	TEST PROCEDURE:.....	56
15.2	TEST RESULT:	56
16	DWELL TIME	58
16.1	TEST PROCEDURE:.....	58
16.2	TEST RESULT:	58
17	ANTENNA REQUIREMENT	64
18	PHOTOGRAPHS -TEST SETUP PHOTOS	65
18.1	PHOTOGRAPH-CONDUCTED EMISSIONS TEST SETUP	65
18.2	PHOTOGRAPH-RADIATED EMISSIONS	65
19	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	68
19.1	EXTERNAL PHOTOS	68
19.2	INTERNAL PHOTOS	72

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S01102182W	2018-01-30	2018-02-01 to 2018-03-05	2018-03-05	original	-	Valid

5 General Information

5.1 General Description of E.U.T

Product	:Wireless speaker
Model(s)	: KDL-BT1731, BB141, BB142, BB1648, BB1649, BB1650, BIG-9925
Model difference	: Only the model names are different. The model: KDL-BT1731 is the test sample.
Operation Frequency	: 2402-2480MHz, 79(EDR) Channels in total
Bluetooth Version	: 4.1
The Lowest Oscillator	: 26MHz
Antenna Gain	: 0dBi
Hardware version	: V1.0
Software version	: V1.2
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Antenna installation	: PCB Printed Antenna

5.2 Details of E.U.T

Ratings	DC 3.7V, 300mAh, power by battery Charging by USB port DC 5V
----------------	---

5.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

5.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.
The product was full-charged when was testing.

Table 1 Tests Carried Out Under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests Carried Out Under FCC part 15.207 and 15.209

Test Item	Test Mode
Radiated Emissions	Continuous Transmitting
Conducted Emissions	Continuous Transmitting

5.5 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Adapter power	Dongguan Aohai Power Technology Co., Ltd.	QC18-US	-

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-09-14	2018-09-13
2	Amplifier	Agilent	8447D	2944A10178	2017-10-17	2018-10-16
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	2017-04-09	2018-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-04-09	2018-04-08
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-09-14	2018-09-13
6	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
7	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions(Above18GHz)						
1	Spectrum Analyzer	R&S	FSV-40	101544	2017-02-17	2018-02-16
2	Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2018-01-06	2019-01-05
3	Amplifier	COM-MV	ZLNA-18-40G-021	1608001	2018-02-16	2019-02-15
4	Cable	Top	18-40GHz	-	2018-02-16	2019-02-15
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-09	2018-04-08
3	Amplifier	ANRITSU	MH648A	M43381	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date

1.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
2.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11
3.	Coaxial Cable	Top	10Hz-30GHz	-	2017-09-12	2018-09-11
4.	Antenna Connector*	Realacc	45RSm	-	2017-09-12	2018-09-11

“*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., L TD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6.4 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

N/A

7 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	C
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	C
Conducted Spurious Emissions	15.247(d)	C
Band edge	15.247(d) 15.205(a)	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
RF exposure	1.1307(b)(1)	C
Antenna Requirement	15.203	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment :


Temperature:	22.8 °C
Humidity:	52.6 % RH
Voltage:	AC 120V/60Hz
Atmospheric Pressure:	101.2kPa

EUT Operation :

Refer to Section 5.4.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

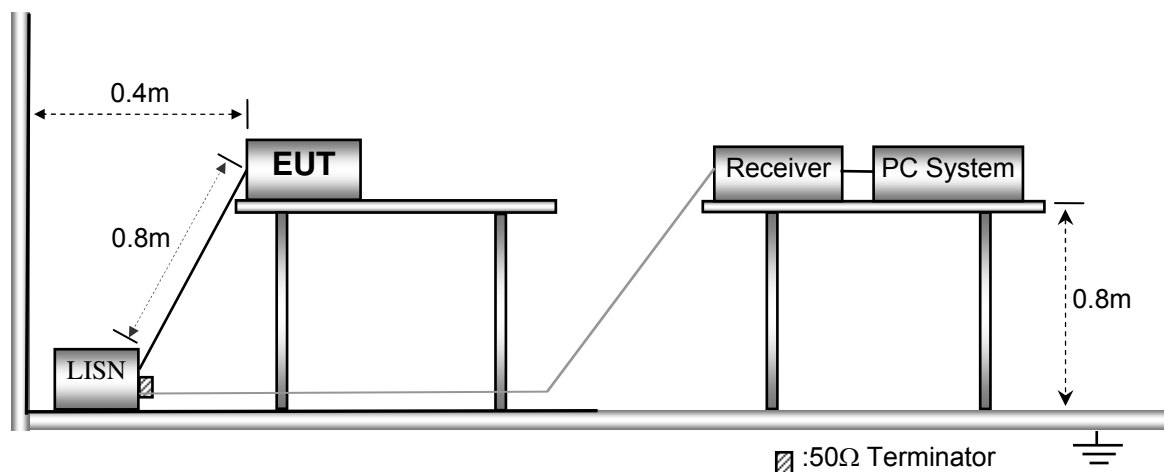

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

Only the worst case(GFSK mode Low channel) were record in the report as below.


An initial pre-scan was performed on the live and neutral lines.

Live line:

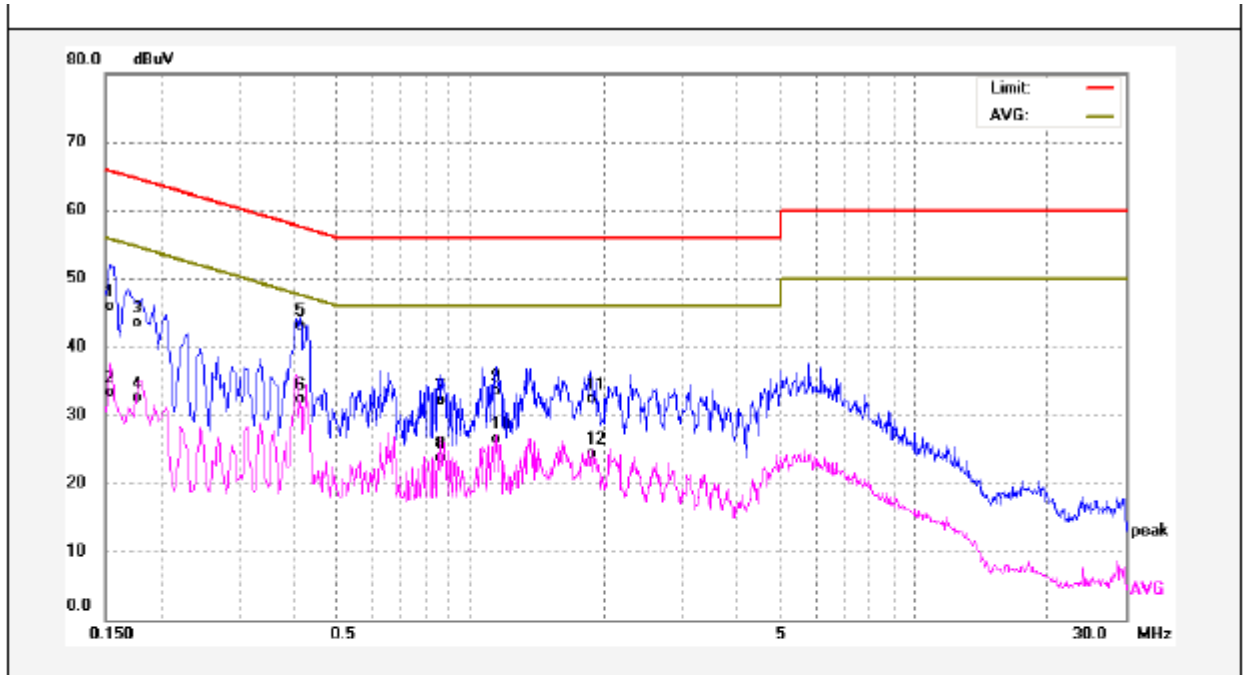

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	35.95	10.02	45.97	65.78	-19.81	QP	
2	0.1539	23.27	10.02	33.29	55.78	-22.49	AVG	
3	0.1779	33.66	9.87	43.53	64.58	-21.05	QP	
4	0.1779	22.69	9.87	32.56	54.58	-22.02	AVG	
5	0.4140	33.05	10.04	43.09	57.57	-14.48	QP	
6	0.4140	22.36	10.04	32.40	47.57	-15.17	AVG	
7	0.8540	22.12	10.07	32.19	56.00	-23.81	QP	
8	0.8540	13.65	10.07	23.72	46.00	-22.28	AVG	
9	1.1420	23.24	10.32	33.56	56.00	-22.44	QP	
10	1.1420	16.17	10.32	26.49	46.00	-19.51	AVG	
11	1.8620	22.09	10.19	32.28	56.00	-23.72	QP	
12	1.8620	14.02	10.19	24.21	46.00	-21.79	AVG	

Neutral line:

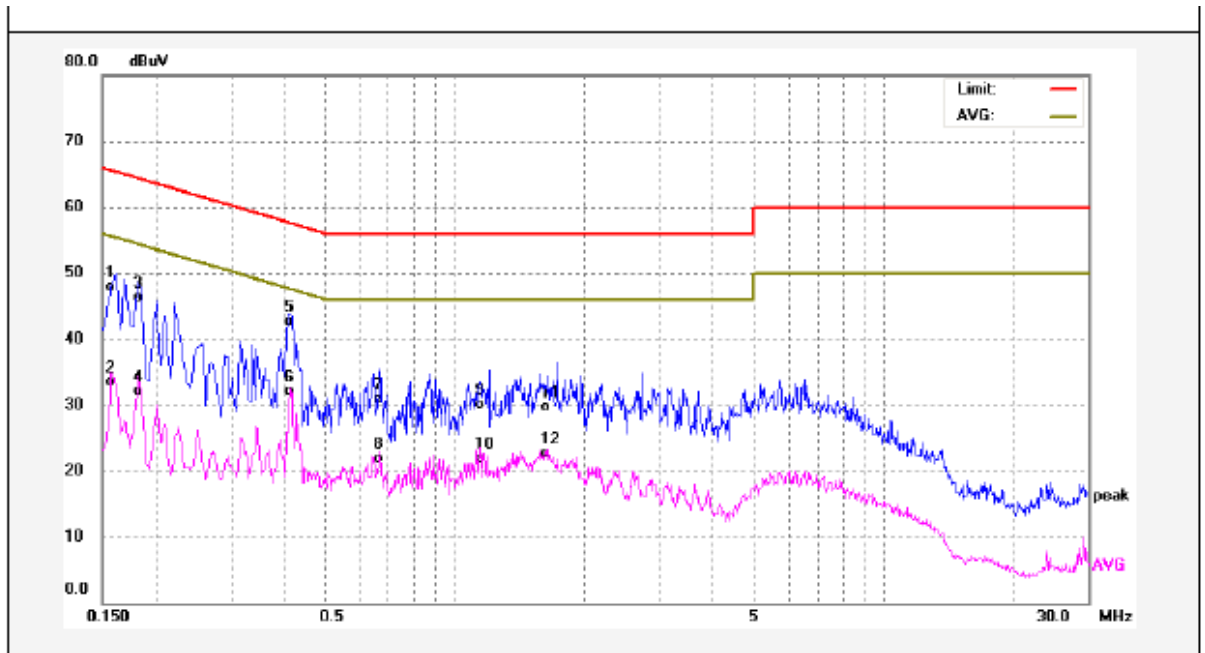

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	38.01	9.98	47.99	65.56	-17.57	QP	
2	0.1580	23.47	9.98	33.45	55.56	-22.11	AVG	
3	0.1819	36.50	9.88	46.38	64.39	-18.01	QP	
4	0.1819	22.30	9.88	32.18	54.39	-22.21	AVG	
5	0.4140	32.60	10.04	42.64	57.57	-14.93	QP	
6	0.4140	22.11	10.04	32.15	47.57	-15.42	AVG	
7	0.6660	20.87	10.09	30.96	56.00	-25.04	QP	
8	0.6660	11.76	10.09	21.85	46.00	-24.15	AVG	
9	1.1420	19.69	10.32	30.01	56.00	-25.99	QP	
10	1.1420	11.59	10.32	21.91	46.00	-24.09	AVG	
11	1.6380	19.56	10.16	29.72	56.00	-26.28	QP	
12	1.6380	12.54	10.16	22.70	46.00	-23.30	AVG	

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

Refer to Section 5.4.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

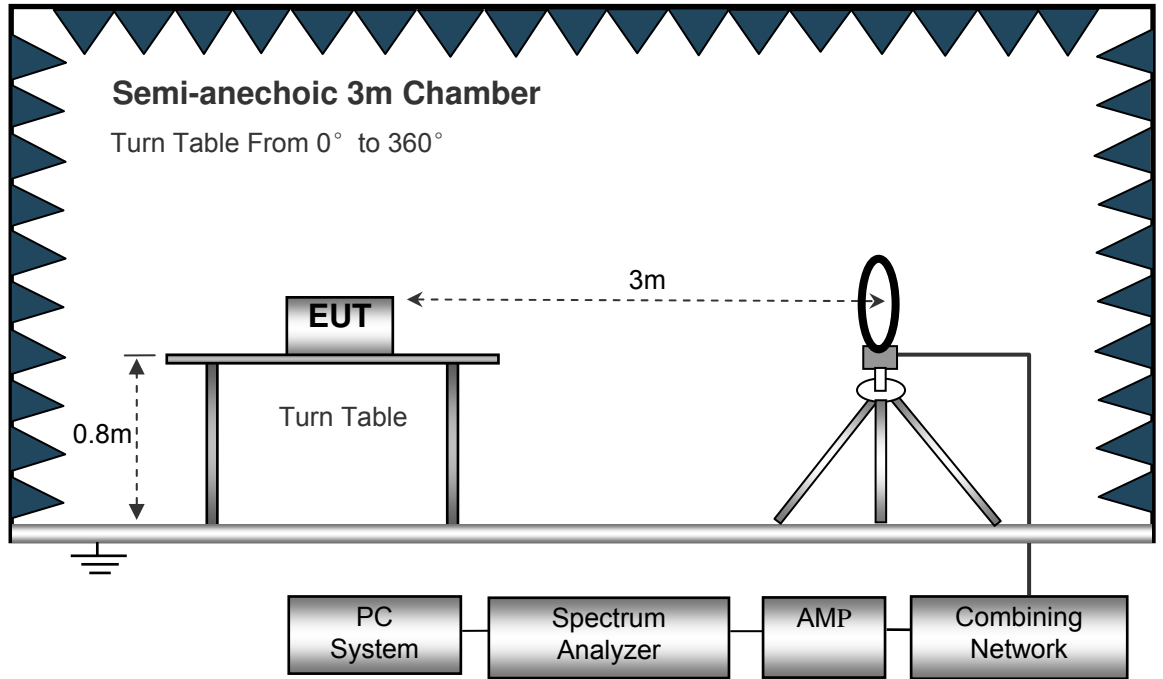

The test setup for emission measurement from 30 MHz to 1 GHz.

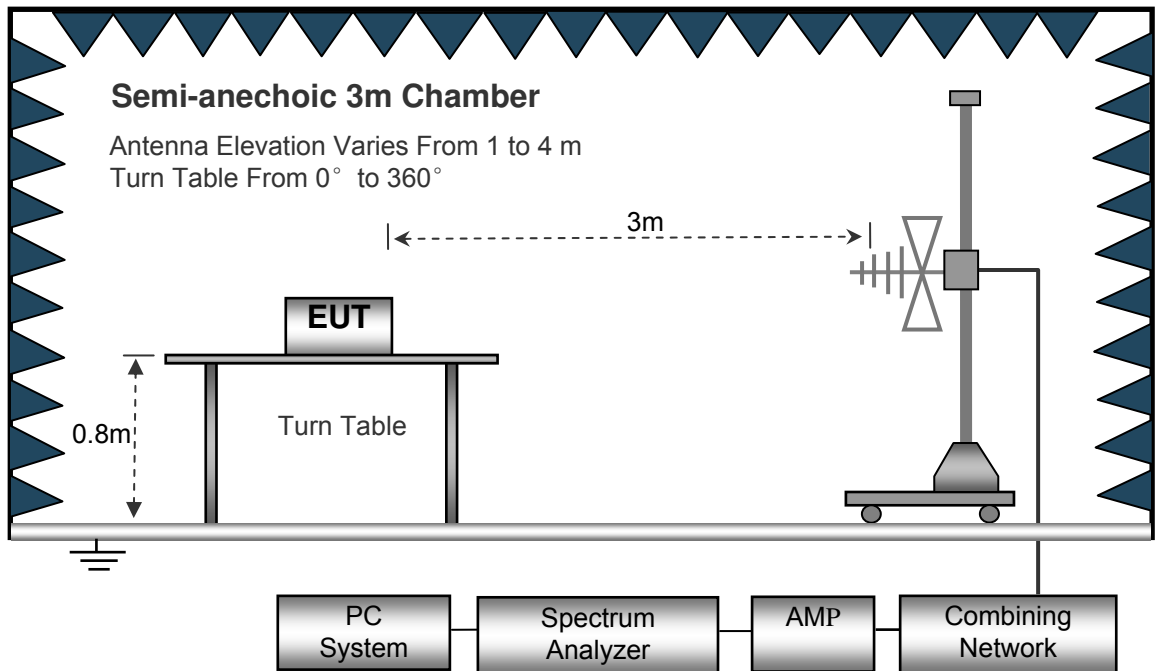

The test setup for emission measurement above 1 GHz.

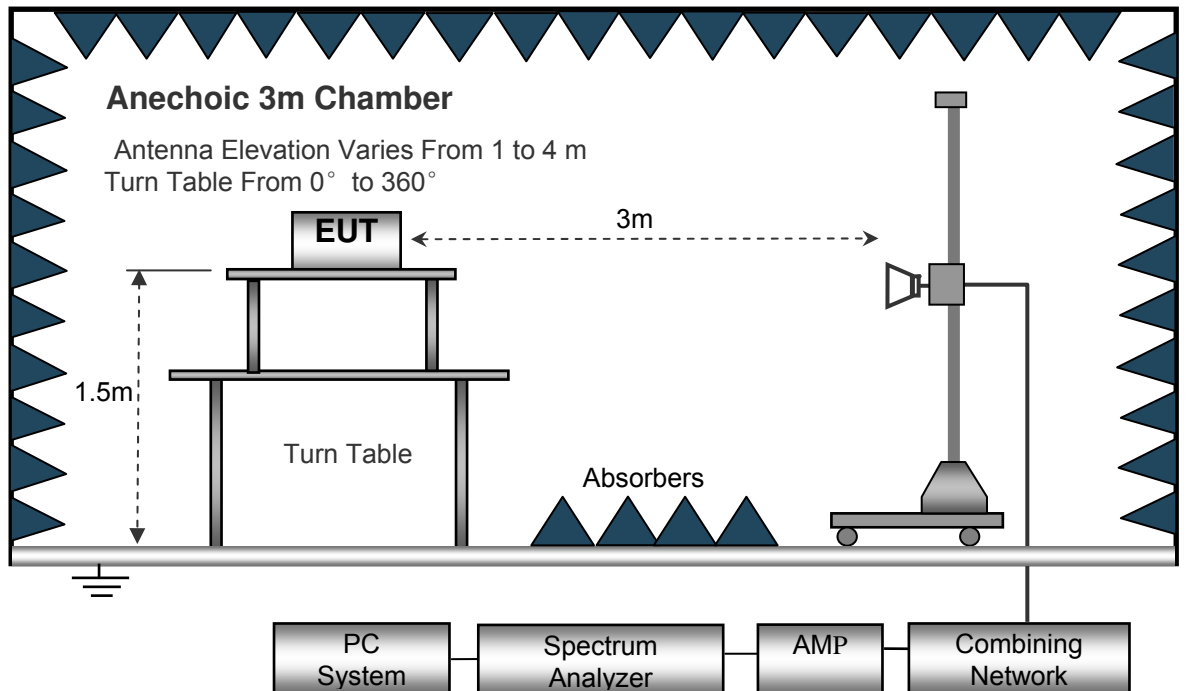

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

9.5 Summary of Test Results

Only the worst case GFSK mode were record in the report.

Test Frequency: 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Only the worst case GFSK mode were record in the report.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
256.05	15.88	QP	17	1.8	H	10.54	26.42	39.44	-13.02
256.05	15.49	QP	260	1.4	V	10.54	26.03	39.44	-13.41
4804.00	46.09	PK	243	1.8	V	-1.08	45.01	74.00	-28.99
4804.00	41.65	Ave	243	1.8	V	-1.08	40.57	54.00	-13.43
7206.00	54.20	PK	214	1.3	H	1.34	55.54	74.00	-18.46
7206.00	40.06	Ave	214	1.3	H	1.34	41.40	54.00	-12.60
2330.46	48.50	PK	335	1.3	V	-13.20	35.30	74.00	-38.70
2330.46	37.55	Ave	335	1.3	V	-13.20	24.35	54.00	-29.65
2375.38	50.92	PK	47	1.7	H	-13.12	37.80	74.00	-36.20
2375.38	36.07	Ave	47	1.7	H	-13.12	22.95	54.00	-31.05
2486.62	49.33	PK	29	1.1	V	-13.02	36.31	74.00	-37.69
2486.62	38.93	Ave	29	1.1	V	-13.02	25.91	54.00	-28.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2441MHz									
256.05	15.52	QP	248	1.3	H	10.54	26.06	39.44	-13.38
256.05	15.29	QP	223	1.5	V	10.54	25.83	39.44	-13.61
4882.00	41.78	PK	178	1.6	V	-0.62	41.16	74.00	-32.84
4882.00	40.48	Ave	178	1.6	V	-0.62	39.86	54.00	-14.14
7323.00	50.52	PK	34	1.5	H	2.21	52.73	74.00	-21.27
7323.00	42.24	Ave	34	1.5	H	2.21	44.45	54.00	-9.55
2335.16	46.77	PK	108	1.2	V	-13.19	33.58	74.00	-40.42
2335.16	38.78	Ave	108	1.2	V	-13.19	25.59	54.00	-28.41
2369.44	45.39	PK	218	1.1	H	-13.14	32.25	74.00	-41.75
2369.44	37.96	Ave	218	1.1	H	-13.14	24.82	54.00	-29.18
2493.56	47.08	PK	334	1.6	V	-13.08	34.00	74.00	-40.00
2493.56	37.09	Ave	334	1.6	V	-13.08	24.01	54.00	-29.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
256.05	20.59	QP	174	1.7	H	10.54	31.13	39.44	-8.31
256.05	19.65	QP	106	1.1	V	10.54	30.19	39.44	-9.25
4960.00	54.39	PK	228	1.7	V	-0.24	54.15	74.00	-19.85
4960.00	42.81	Ave	228	1.7	V	-0.24	42.57	54.00	-11.43
7440.00	54.63	PK	83	1.5	H	2.84	57.47	74.00	-16.53
7440.00	42.71	Ave	83	1.5	H	2.84	45.55	54.00	-8.45
2331.39	46.83	PK	266	1.8	V	-13.19	33.64	74.00	-40.36
2331.39	37.27	Ave	266	1.8	V	-13.19	24.08	54.00	-29.92
2375.62	42.25	PK	9	1.7	H	-13.14	29.11	74.00	-44.89
2375.62	37.91	Ave	9	1.7	H	-13.14	24.77	54.00	-29.23
2486.53	44.13	PK	54	2.0	V	-13.08	31.05	74.00	-42.95
2486.53	38.43	Ave	54	2.0	V	-13.08	25.35	54.00	-28.65

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017
Test Result: PASS
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 1MHz, VBW = 3MHz, Sweep = auto


Detector function = peak, Trace = max hold

10.2 Test Result


GFSK
Low Channel

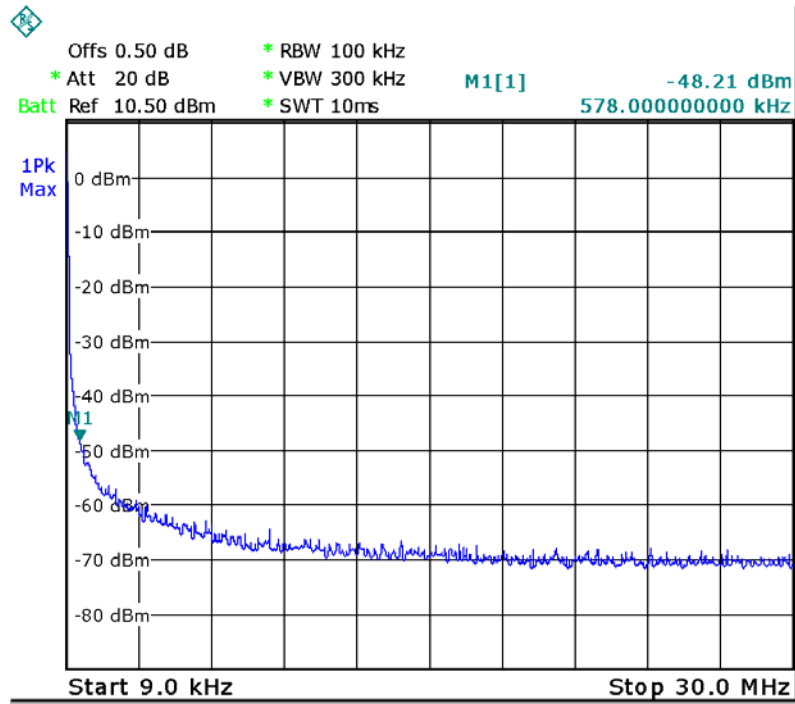

Middle Channel

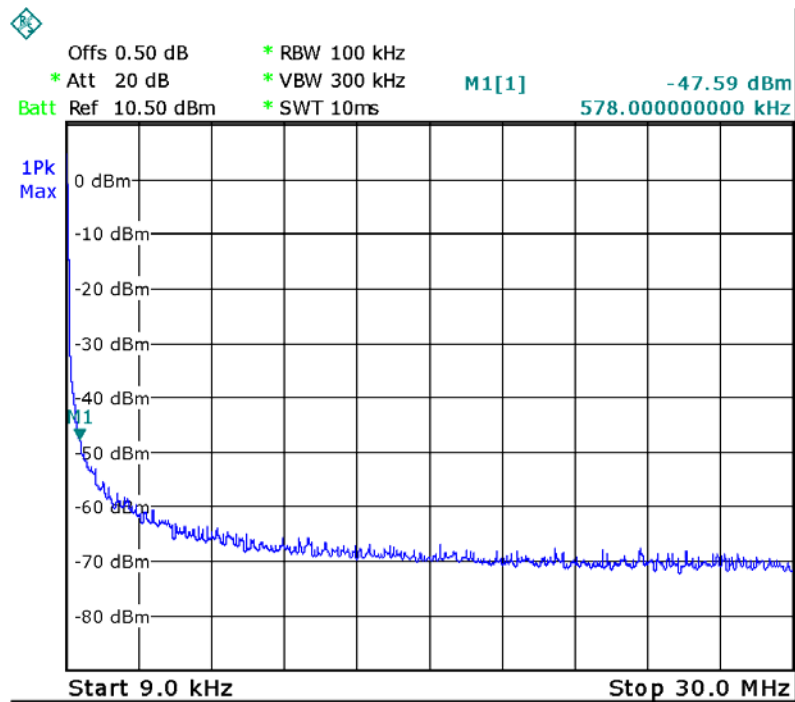

High Channel

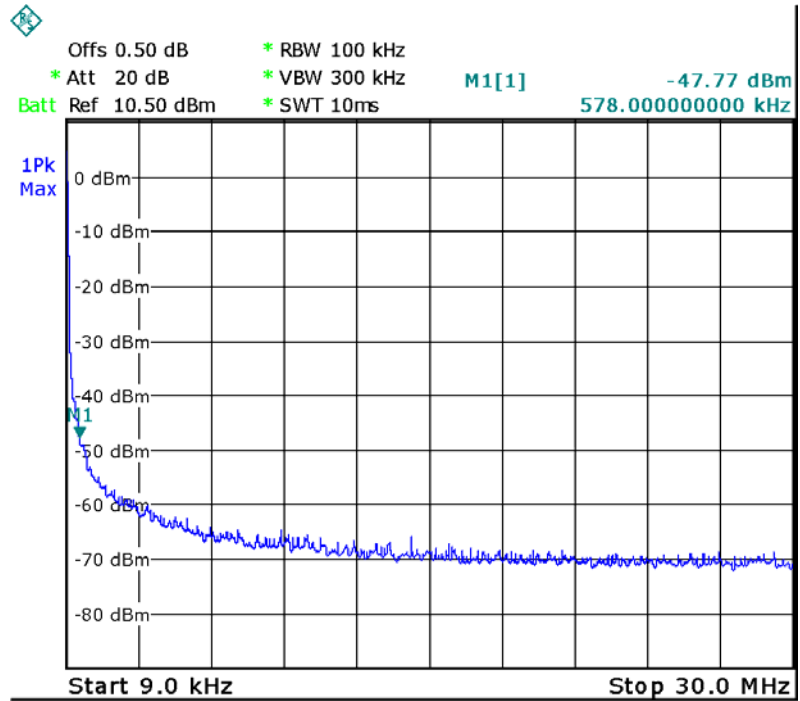


GFSK Low Channel

Fundamental




Middle Channel

Fundamental

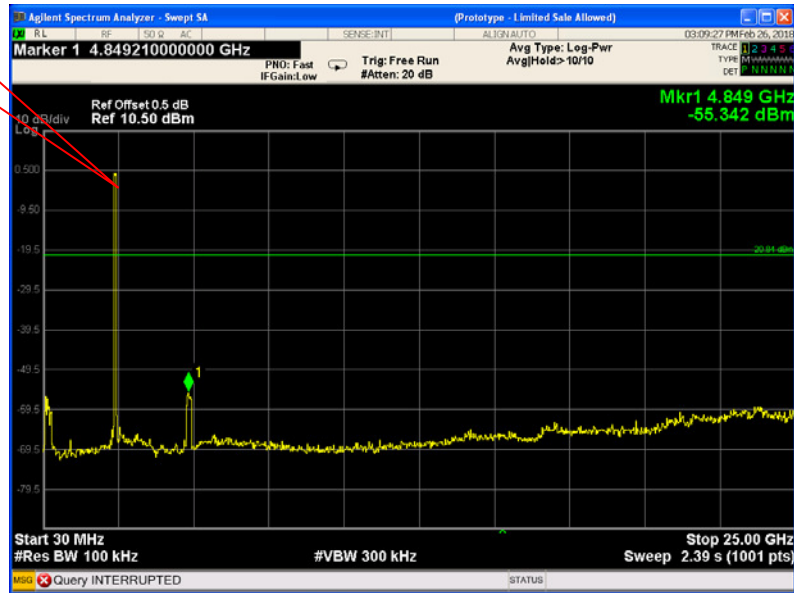


High Channel


Fundamental

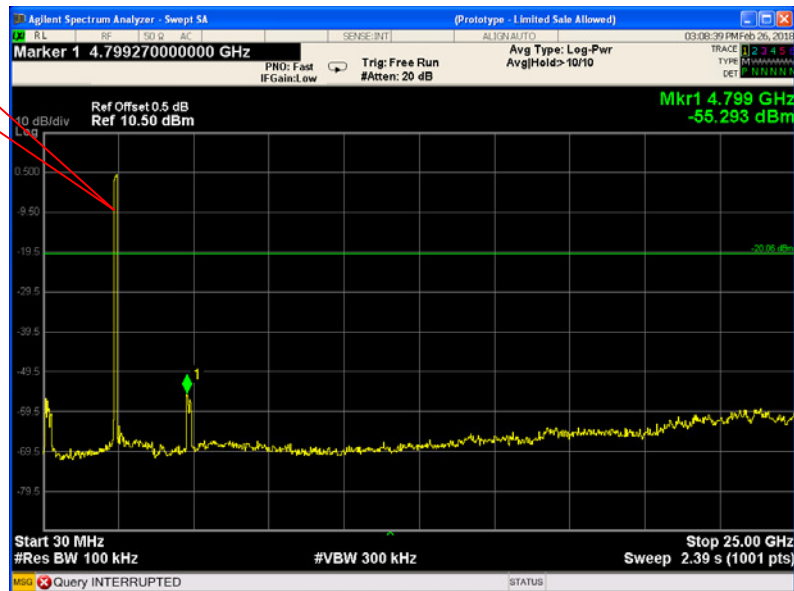


Pi/4DQPSK
Low Channel

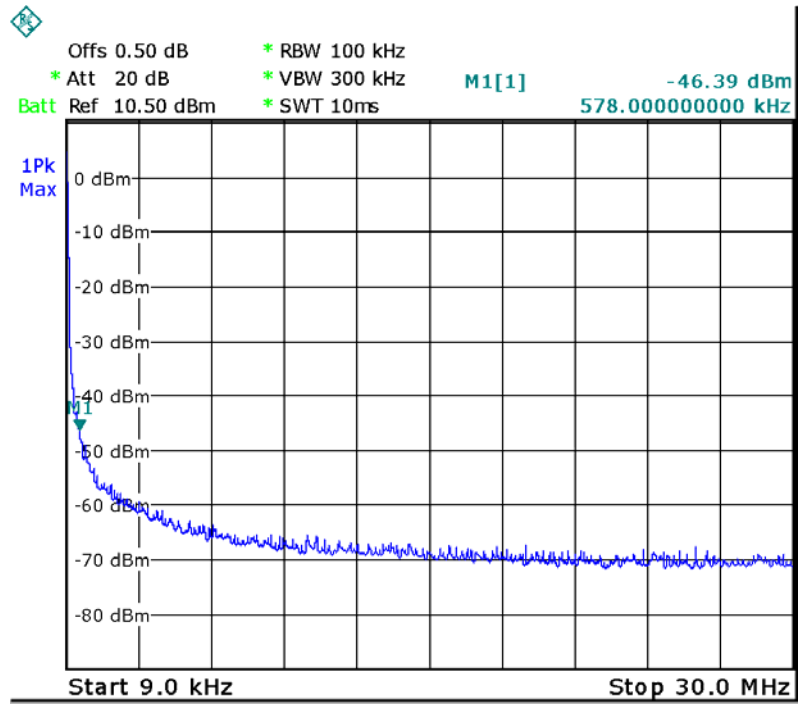

Middle Channel

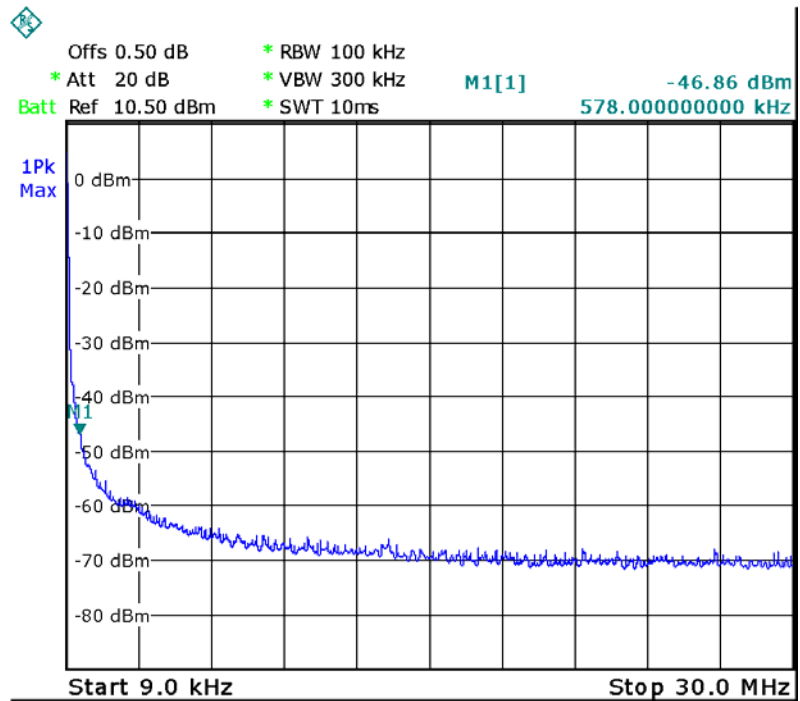


High Channel

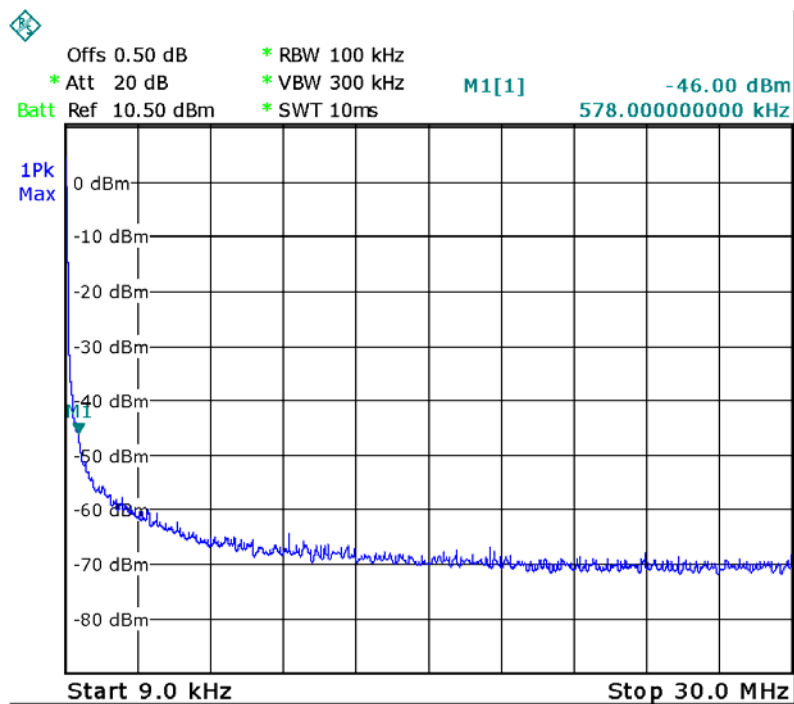

Pi/4DQPSK

Low Channel

Fundamental

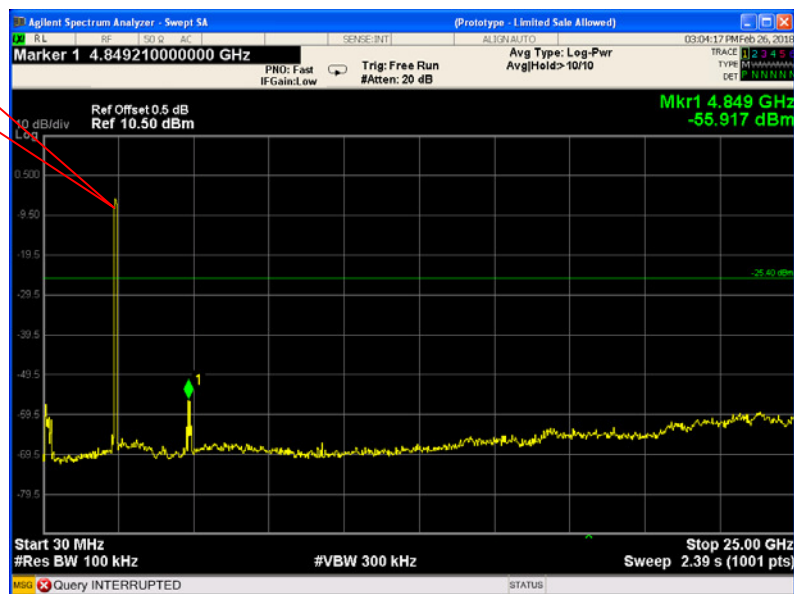

Middle Channel

Fundamental




High Channel


Fundamental




8DPSK
Low Channel

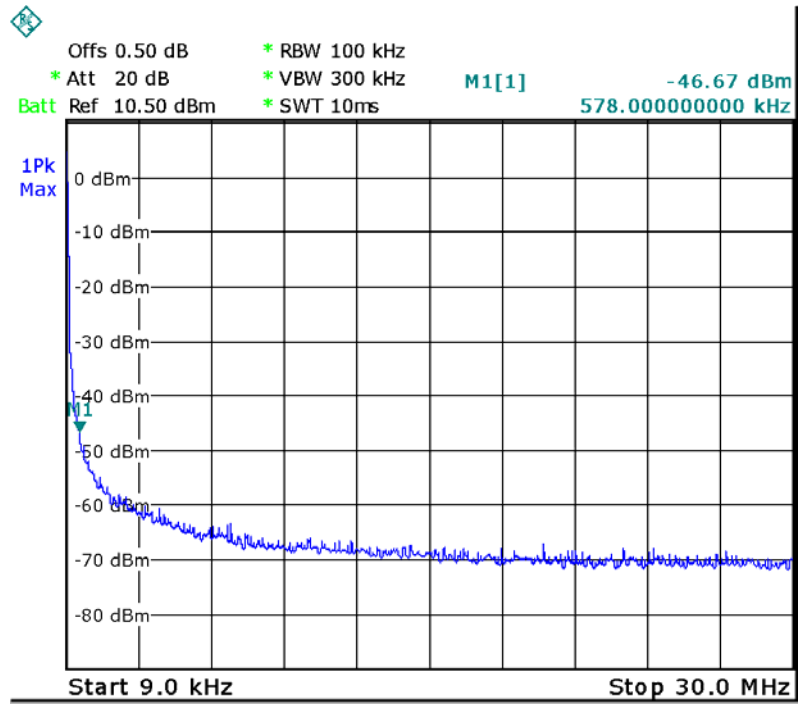

Middle Channel

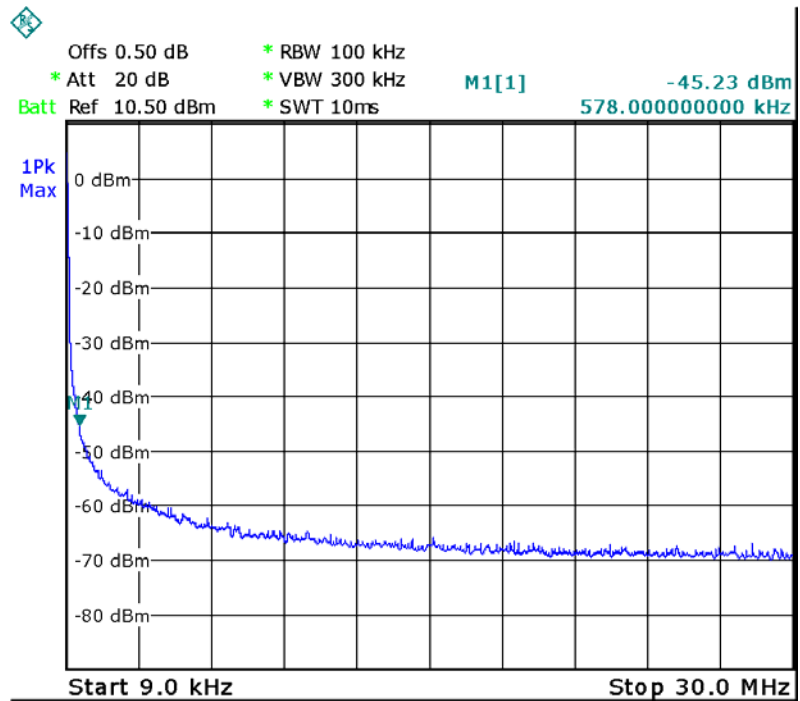


High Channel

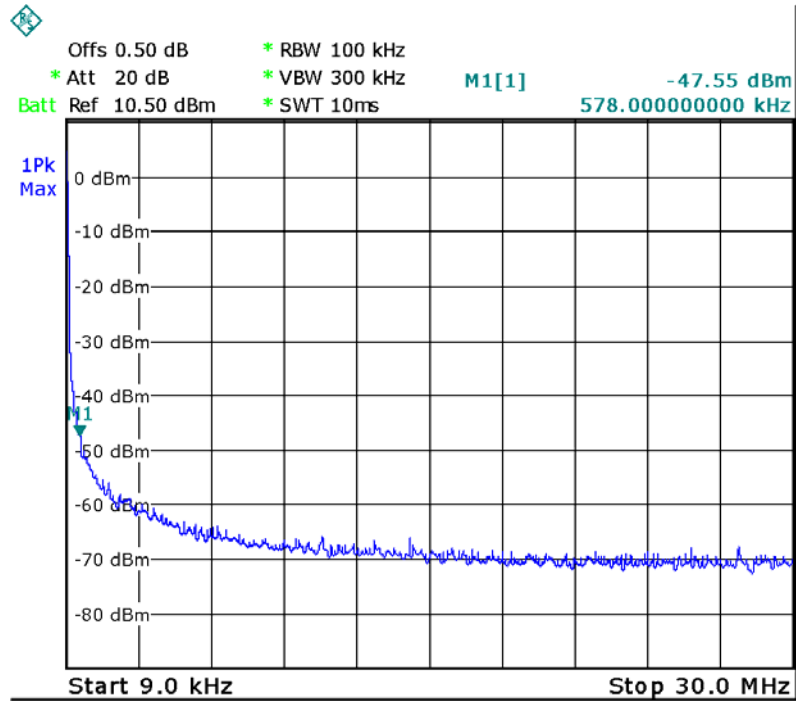

8DPSK


Low Channel

Fundamental

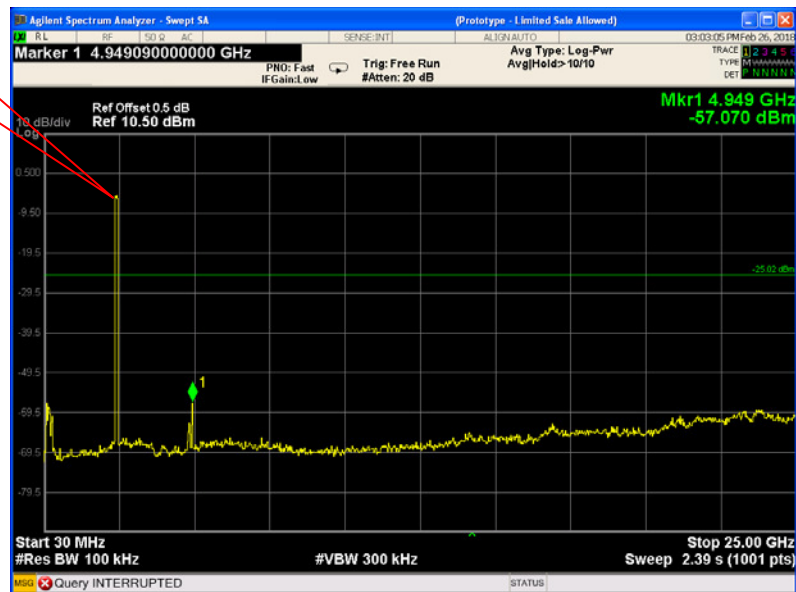

Middle Channel

Fundamental

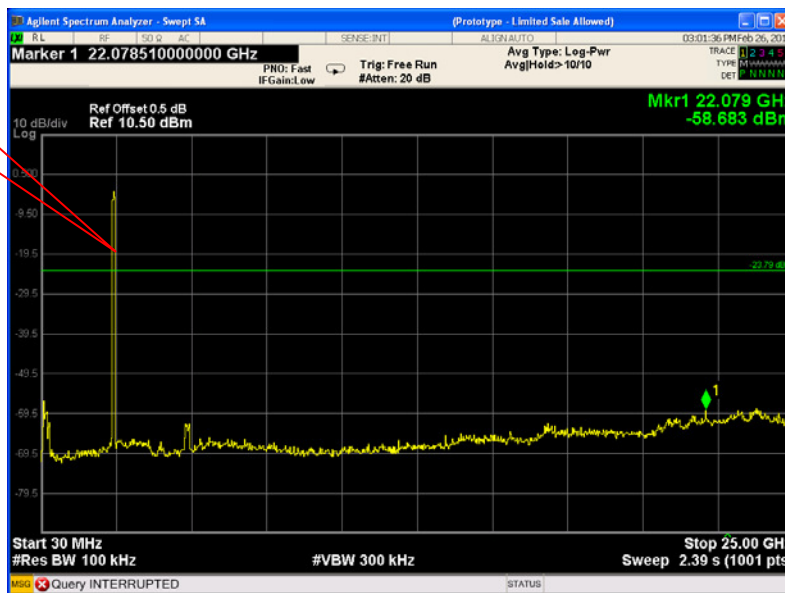

High Channel

Fundamental



11 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

11.2 Test Result:


Test plots

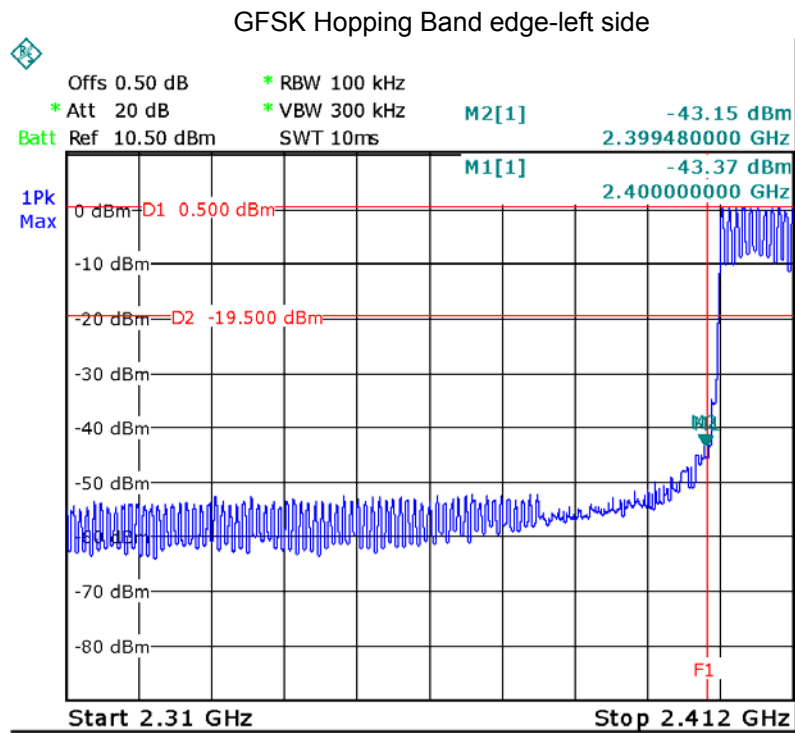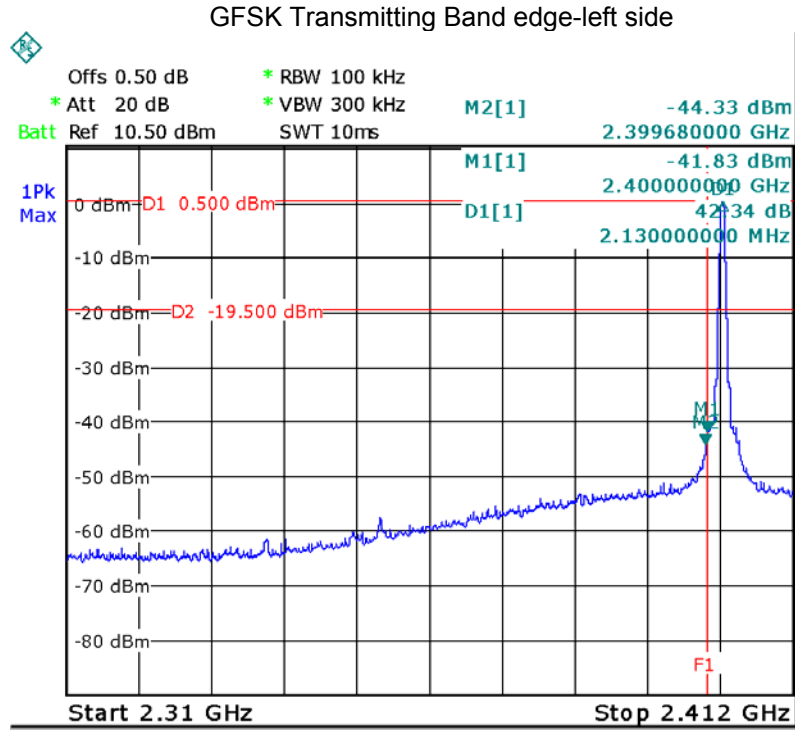


GFSK Transmitting Band edge-right side

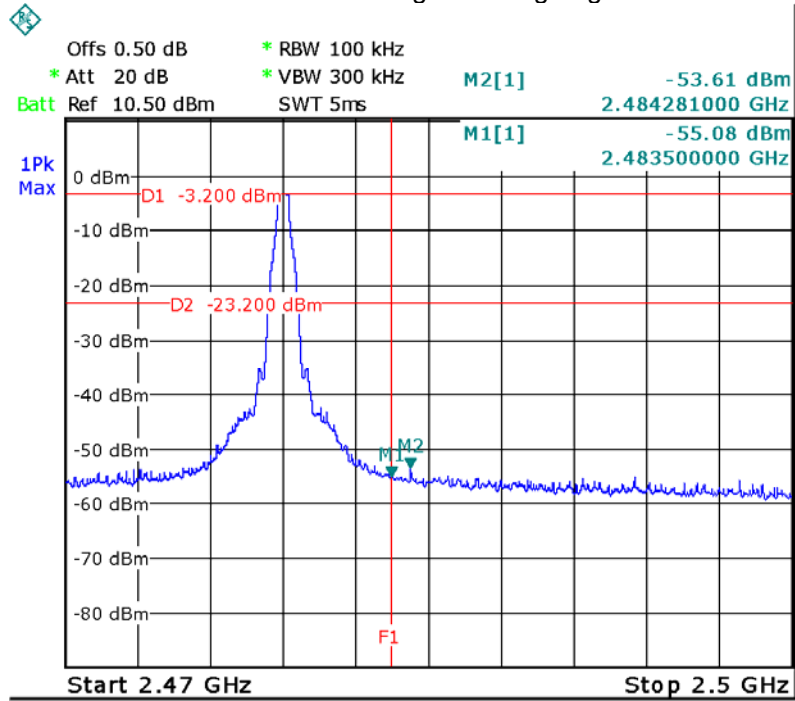


GFSK Hopping Band edge-right side

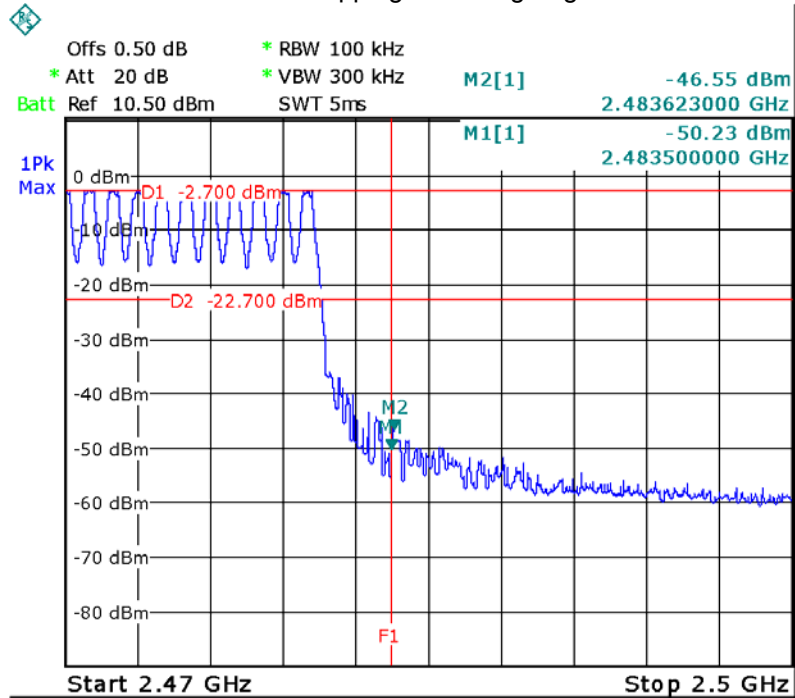


Pi/4 DQPSK Transmitting Band edge-left side

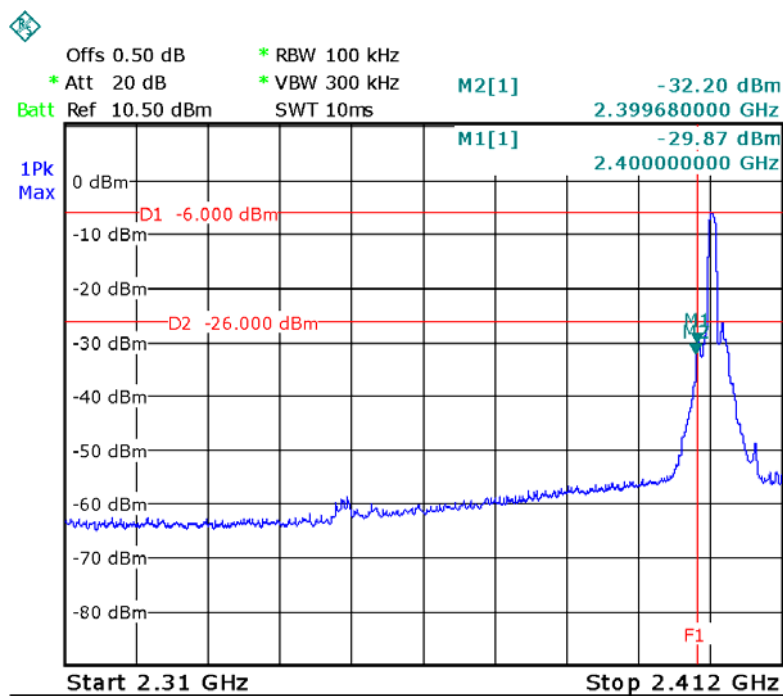


Pi/4 DQPSK Hopping Band edge-left side

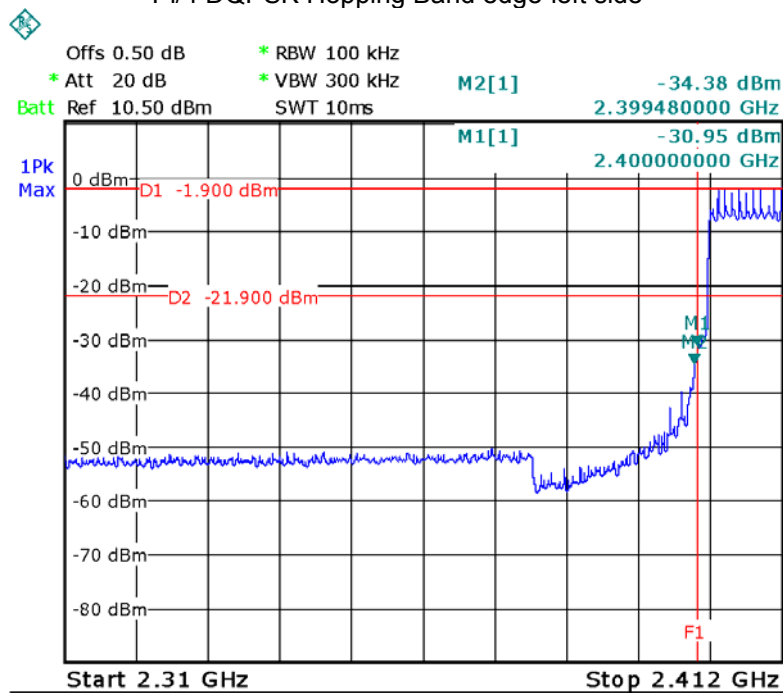


Pi/4 DQPSK Transmitting Band edge-right side

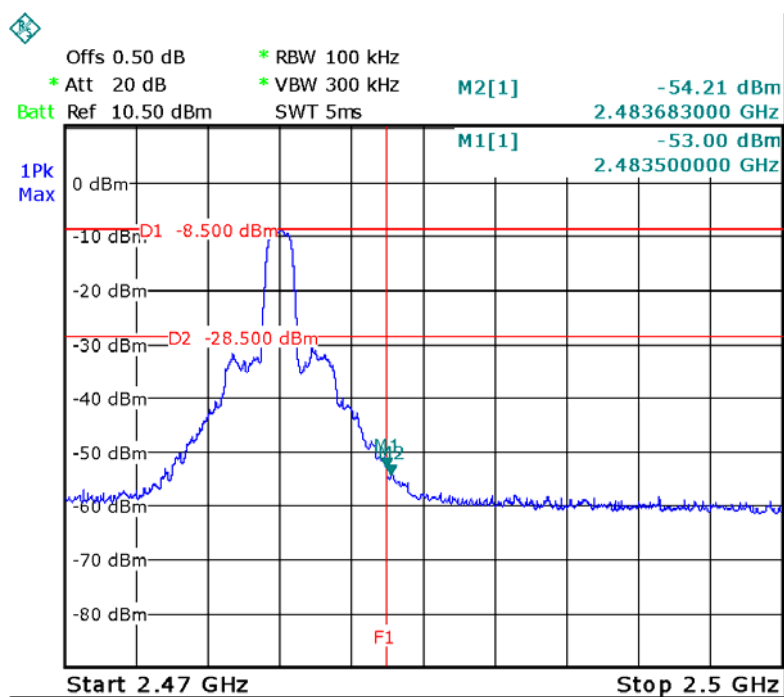


Pi/4 DQPSK Hopping Band edge-right side

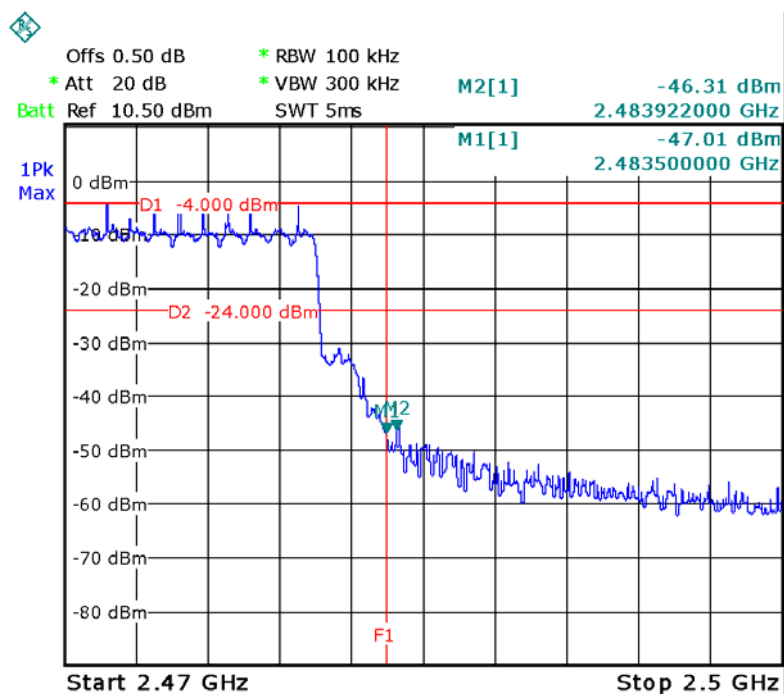


8DPSK Transmitting Band edge-left side

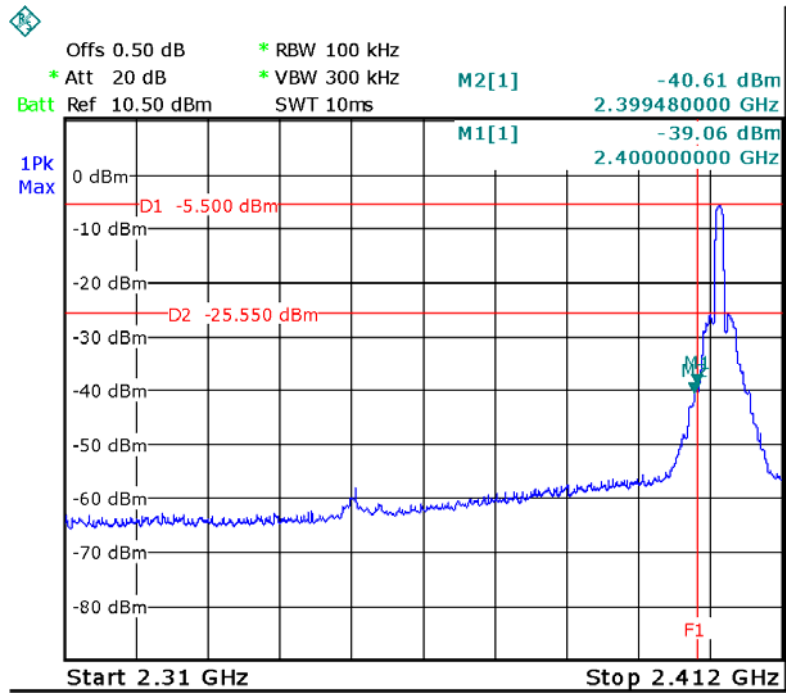


8DPSK Hopping Band edge-left side

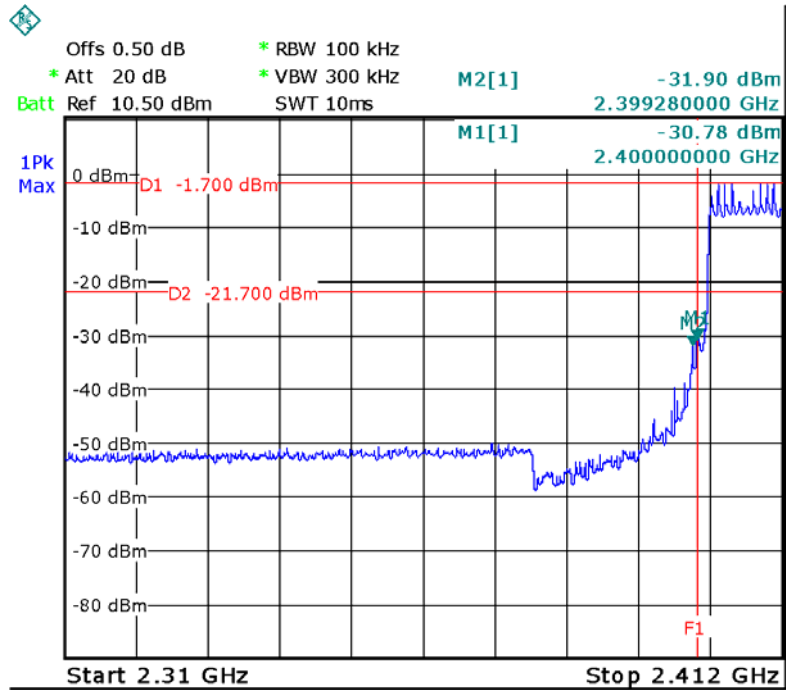

8DPSK Transmitting Band edge-right side

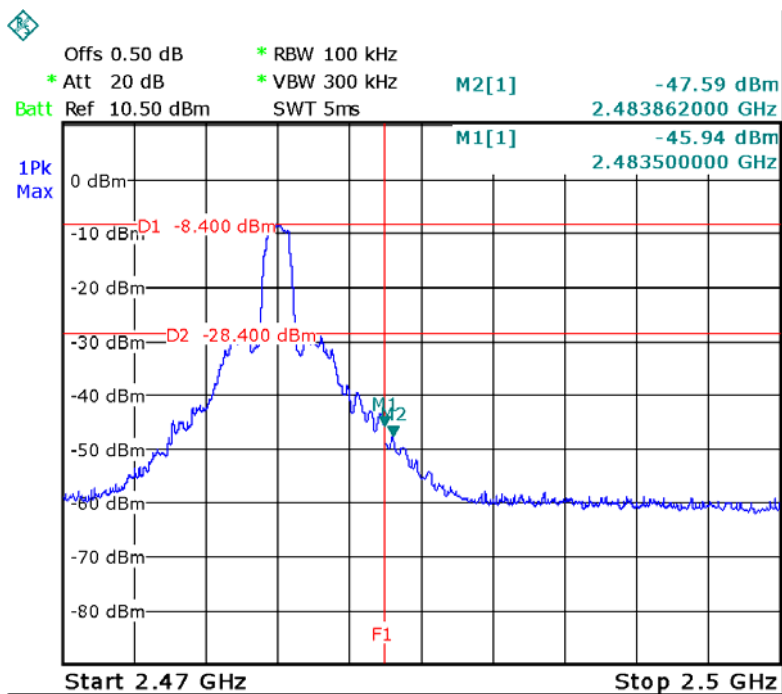

8DPSK Hopping Band edge-right side

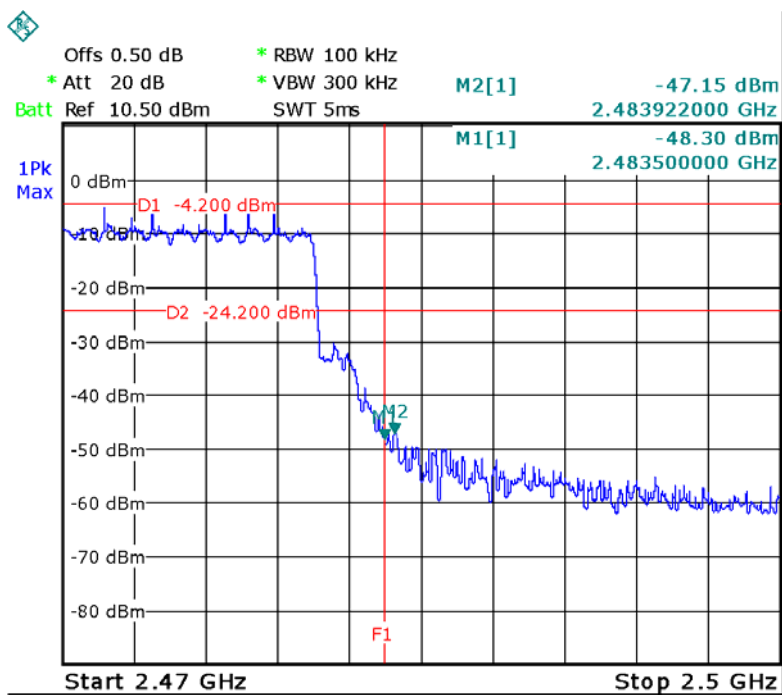

12 Bandwidth Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10: 2013
Test Mode:	Test in fixing operating frequency at low, Middle, high channel.

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

12.2 Test Result:


Modulation	Test Channel	20 dB Bandwidth	99% Bandwidth
GFSK	Low	1.090MHz	0.982MHz
GFSK	Middle	1.090MHz	0.982MHz
GFSK	High	1.090MHz	0.988MHz
Pi/4 DQPSK	Low	1.383MHz	1.317MHz
Pi/4 DQPSK	Middle	1.383MHz	1.275MHz
Pi/4 DQPSK	High	1.383MHz	1.281MHz
8DPSK	Low	1.371MHz	1.407MHz
8DPSK	Middle	1.371MHz	1.335MHz
8DPSK	High	1.371MHz	1.401MHz

Test result plot as follows:


Modulation: GFSK Low Channel

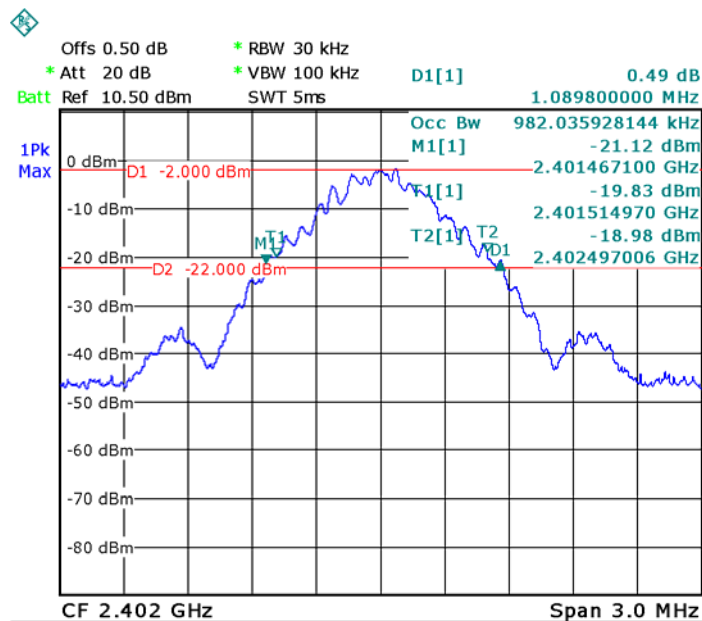

Middle Channel

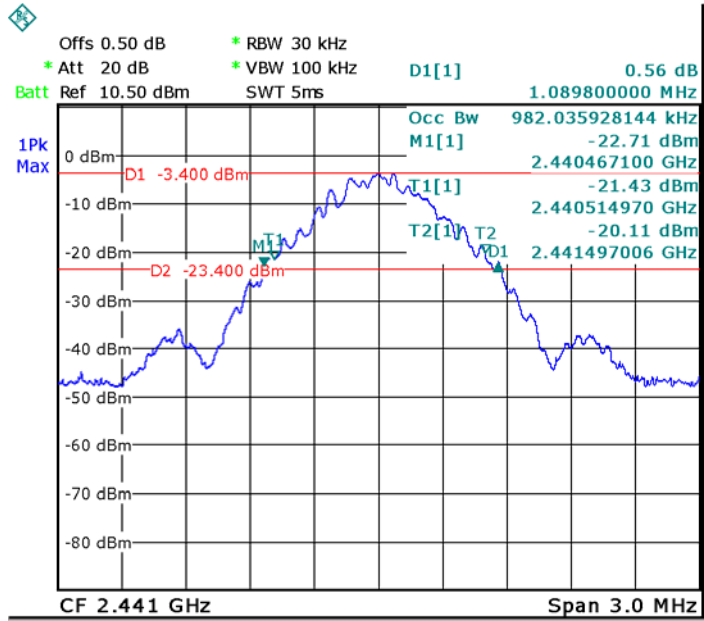


High Channel

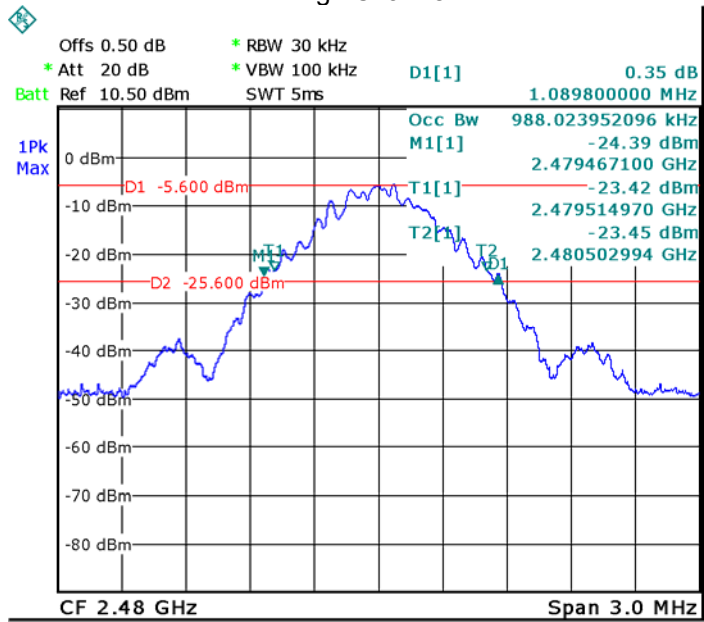



Modulation: Pi/4 DQPSK

Low Channel

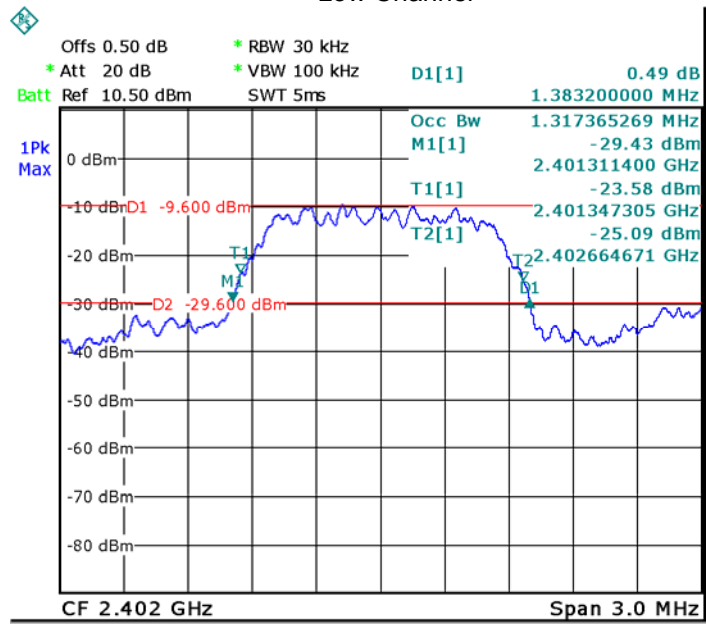


Middle Channel

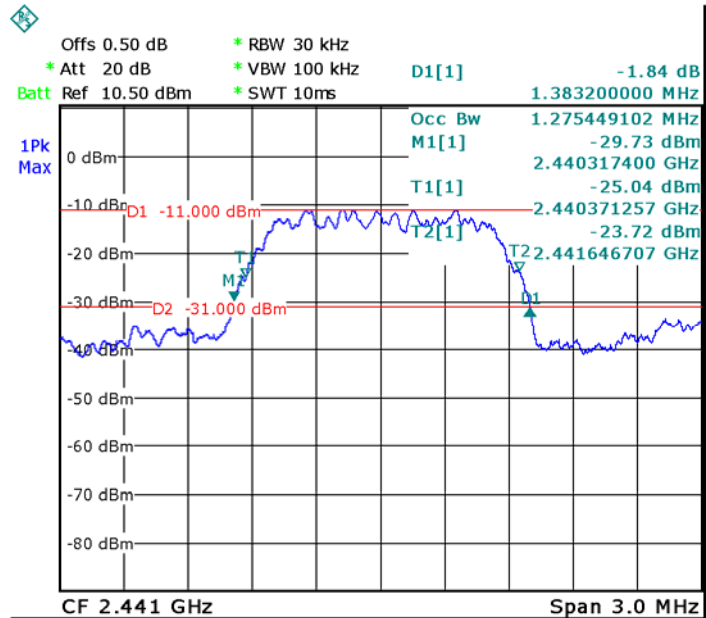


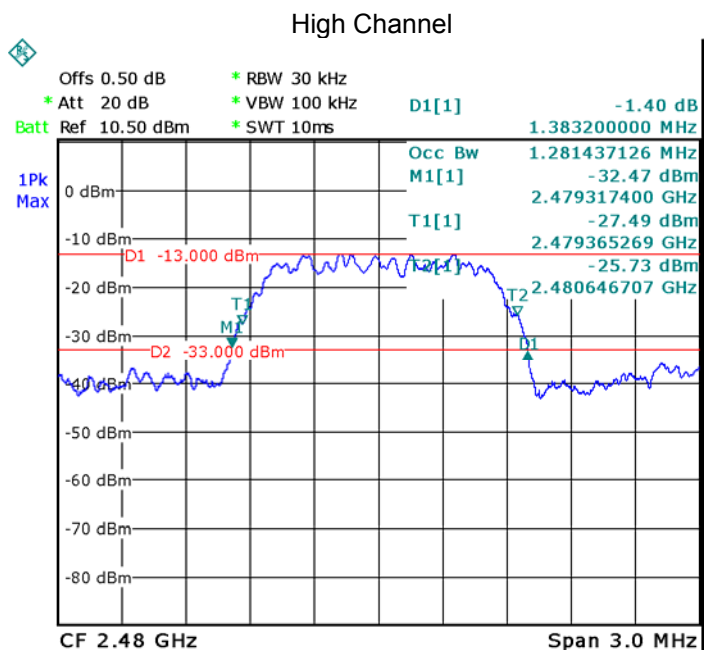


Modulation: 8DPSK

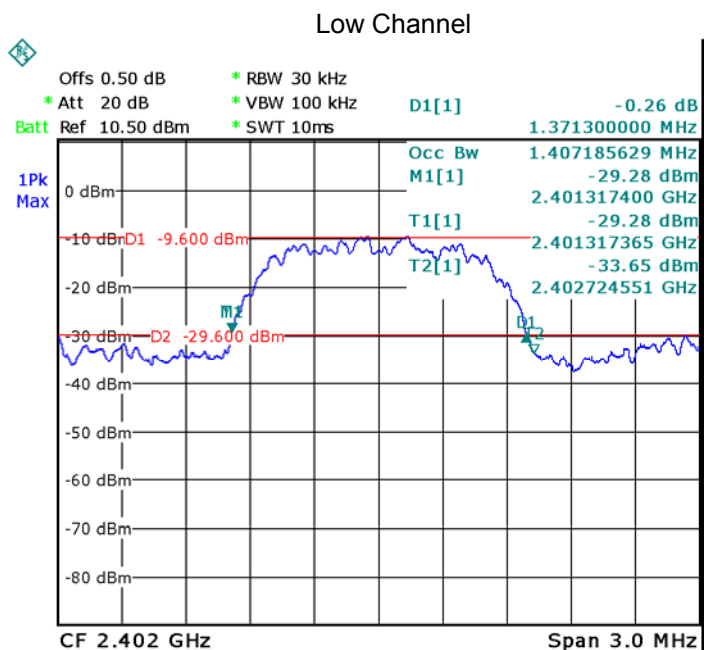

Middle Channel

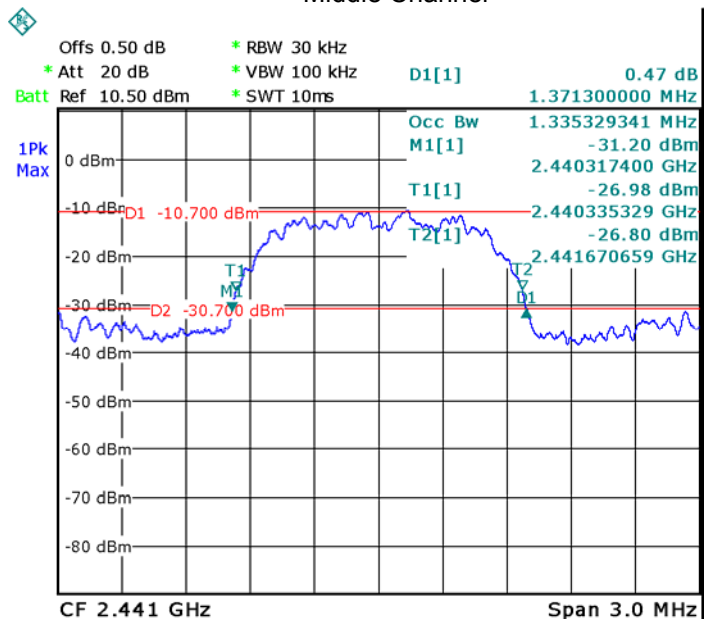

High Channel

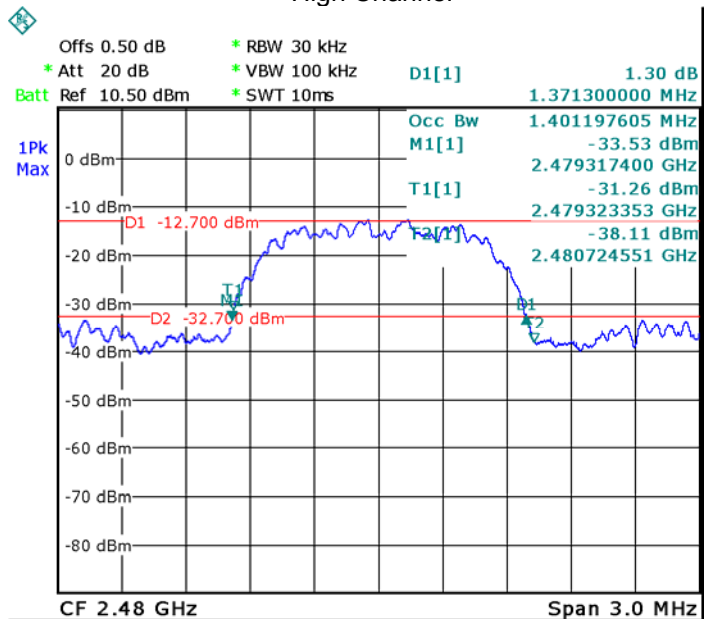

13 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


13.2 Test Result:

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	1.04	-0.37	-2.31	20.97
Pi/4 DQPSK	2Mbps	-0.73	-1.61	-3.64	20.97
8DPSK	3Mbps	-0.46	-1.25	-3.17	20.97


Test result plot as follows:

Modulation: GFSK


Low Channel

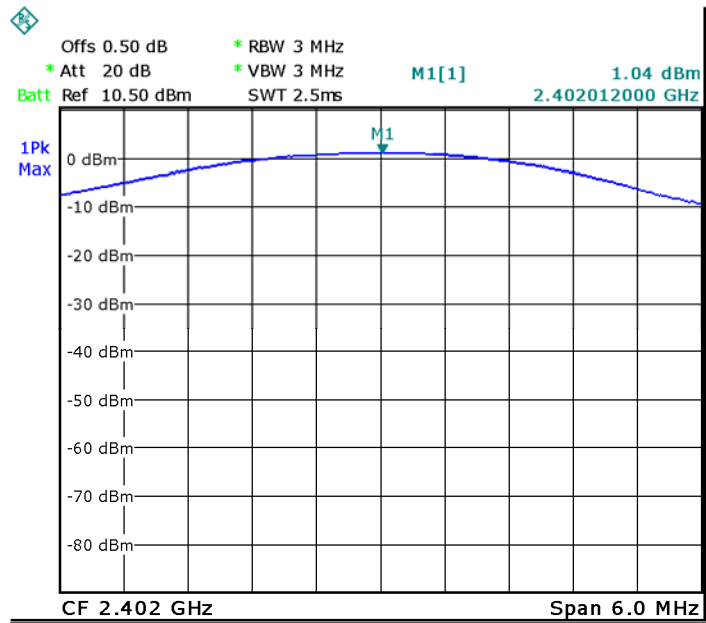

Middle Channel

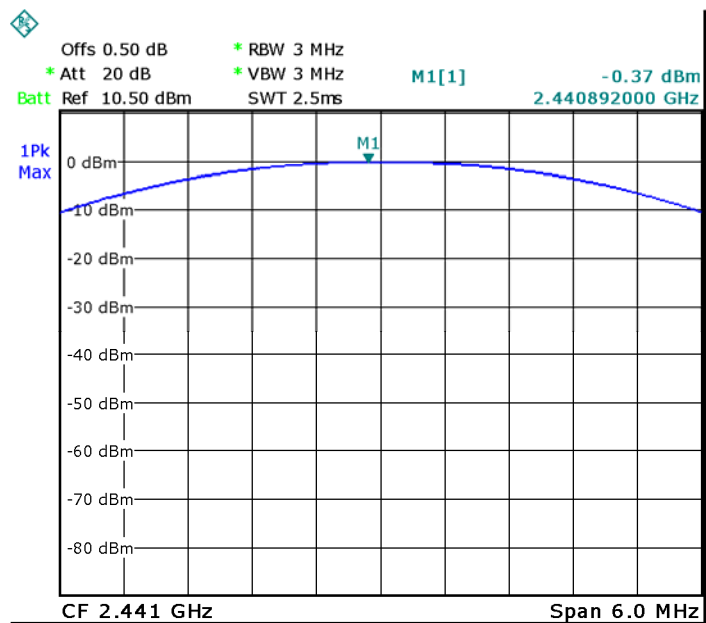


High Channel

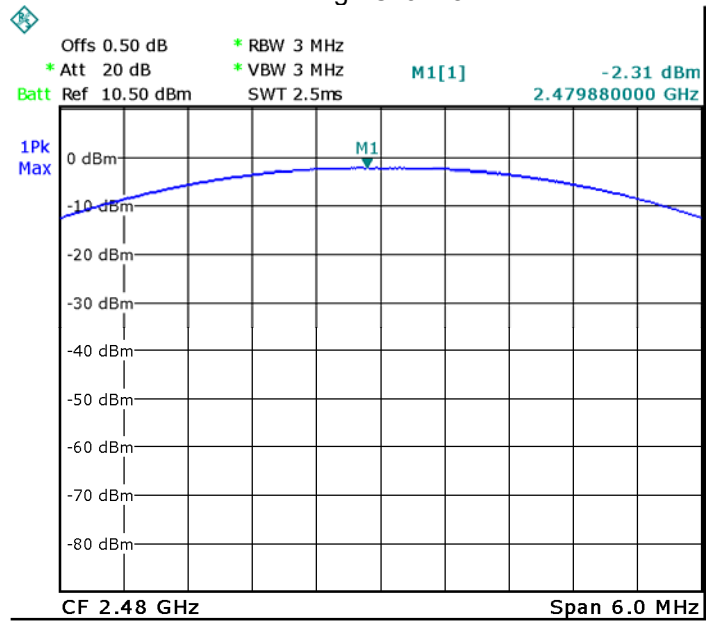


Modulation: Pi/4 DQPSK Low Channel


Low Channel

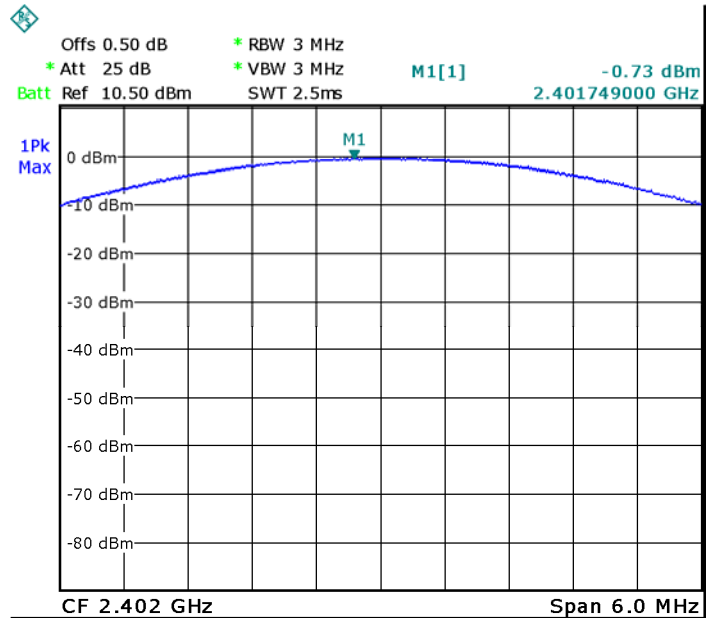

Middle Channel

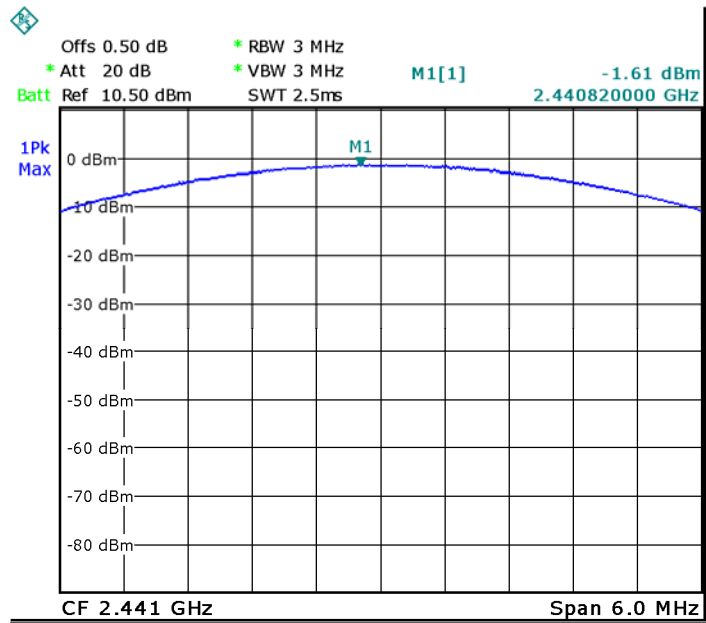


High Channel

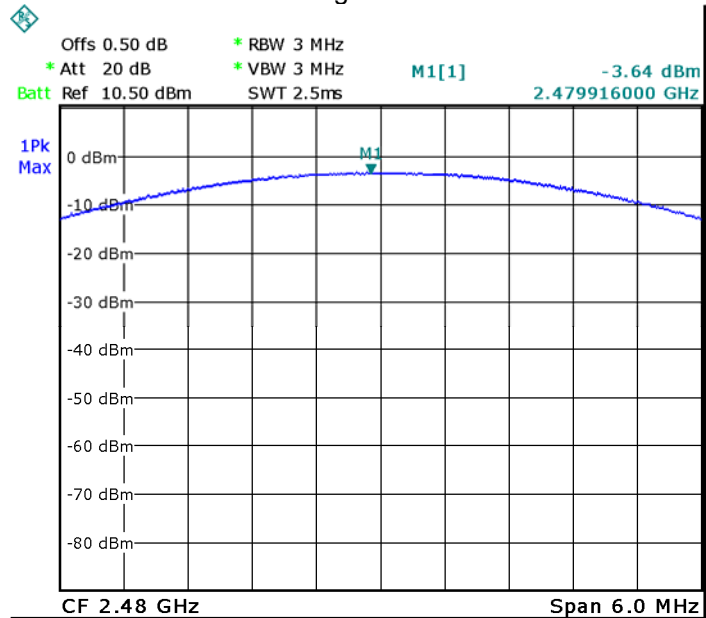



Modulation: 8DPSK Low Channel

Low Channel

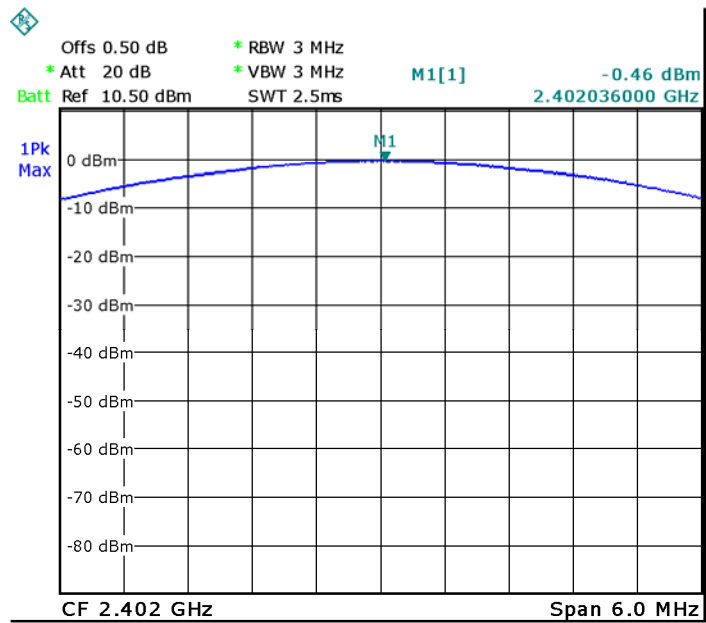

Middle Channel

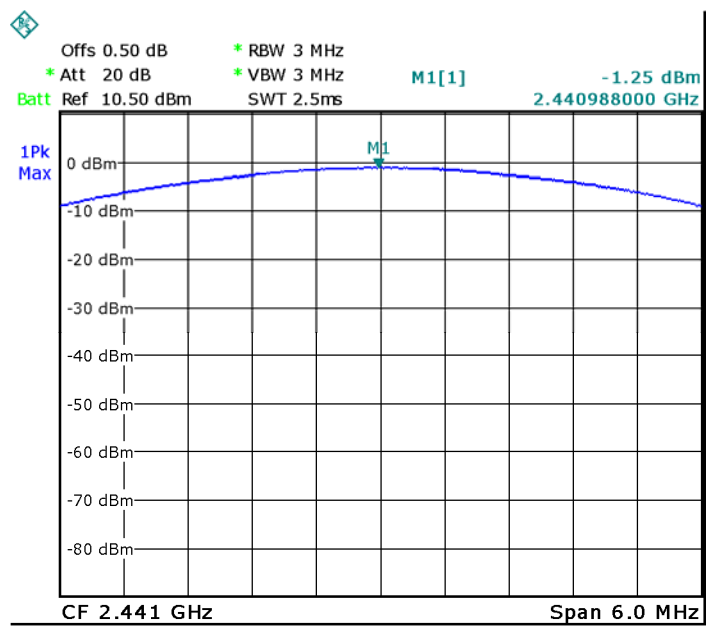

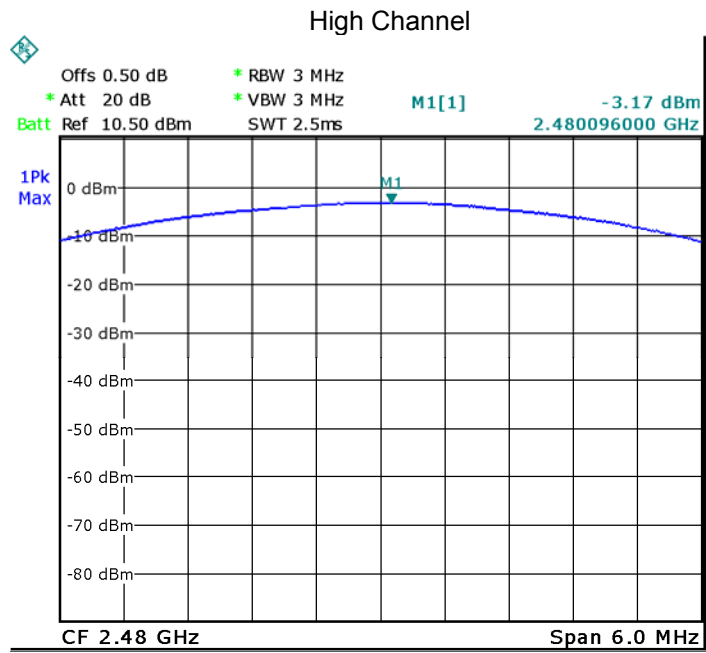

14 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


14.2 Test Result:

Test result plot as follows:


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1 MHz	PASS
GFSK	Middle	1 MHz	PASS
GFSK	High	1 MHz	PASS
Pi/4 DQPSK	Low	1 MHz	PASS
Pi/4 DQPSK	Middle	1 MHz	PASS
Pi/4 DQPSK	High	1 MHz	PASS
8DPSK	Low	1 MHz	PASS
8DPSK	Middle	1 MHz	PASS
8DPSK	High	1 MHz	PASS



Test plots



GFSK Low Channel

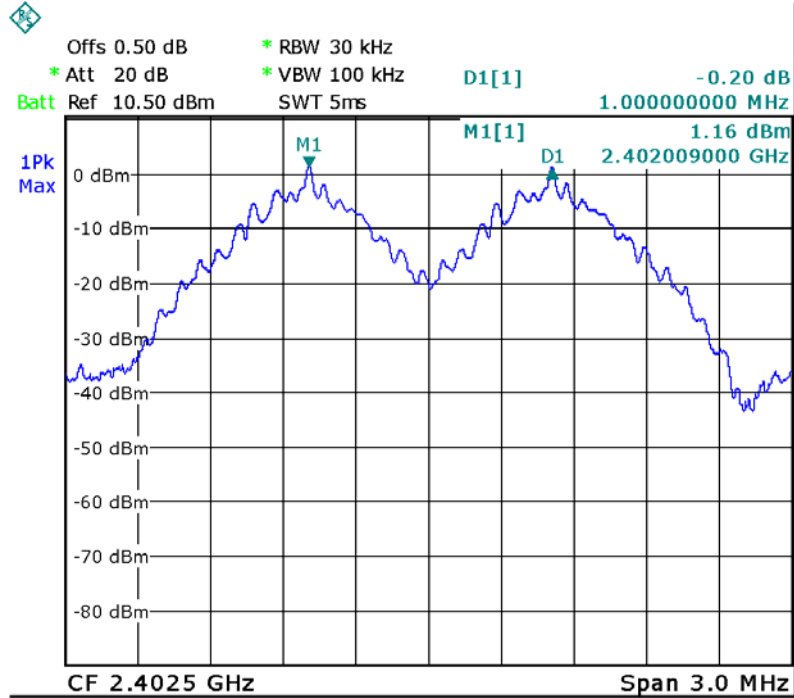


GFSK Middle Channel

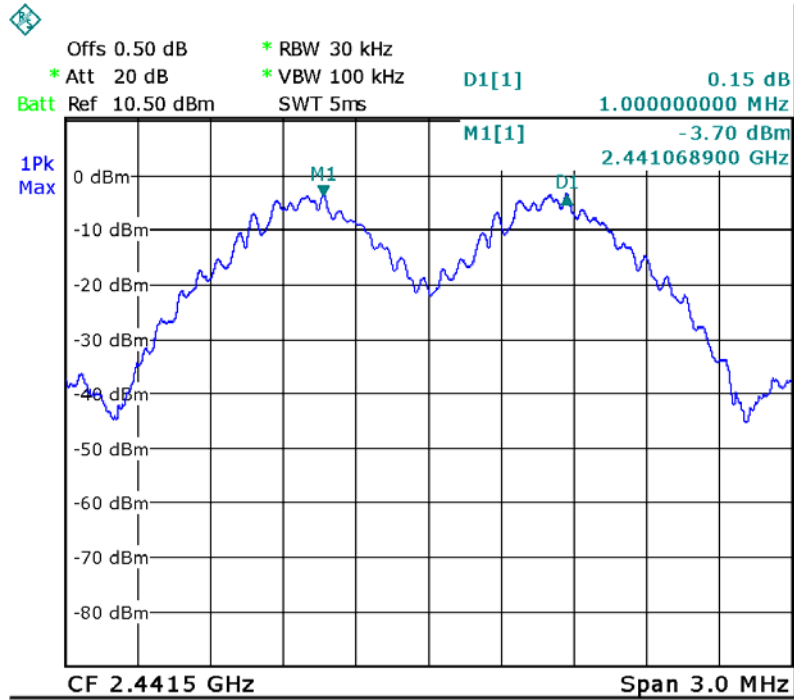

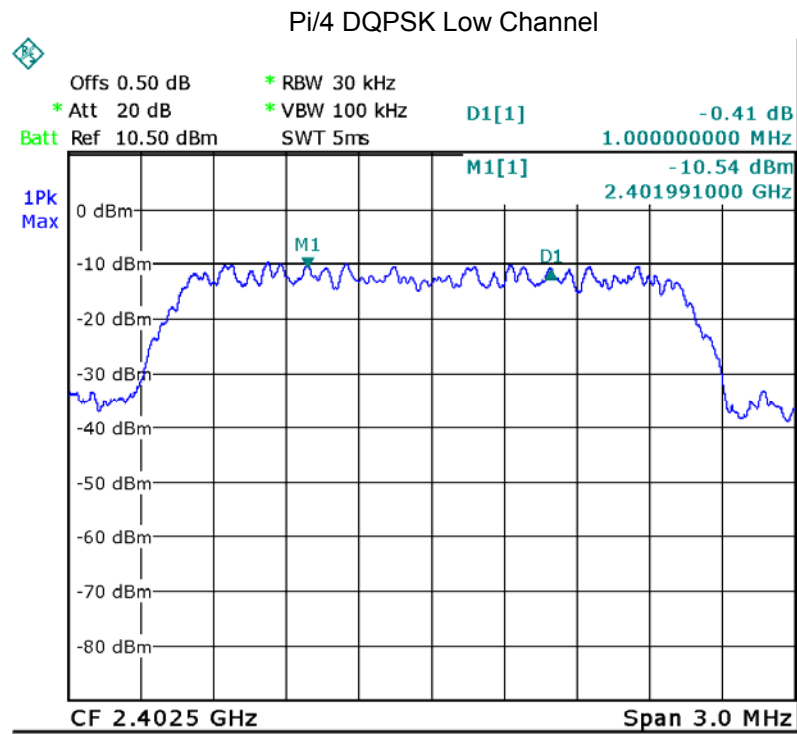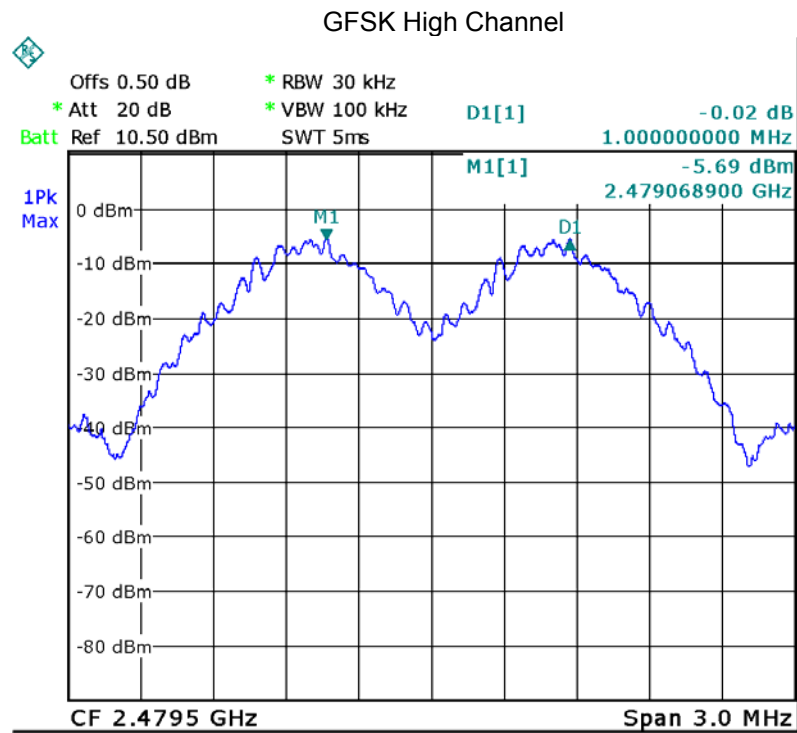


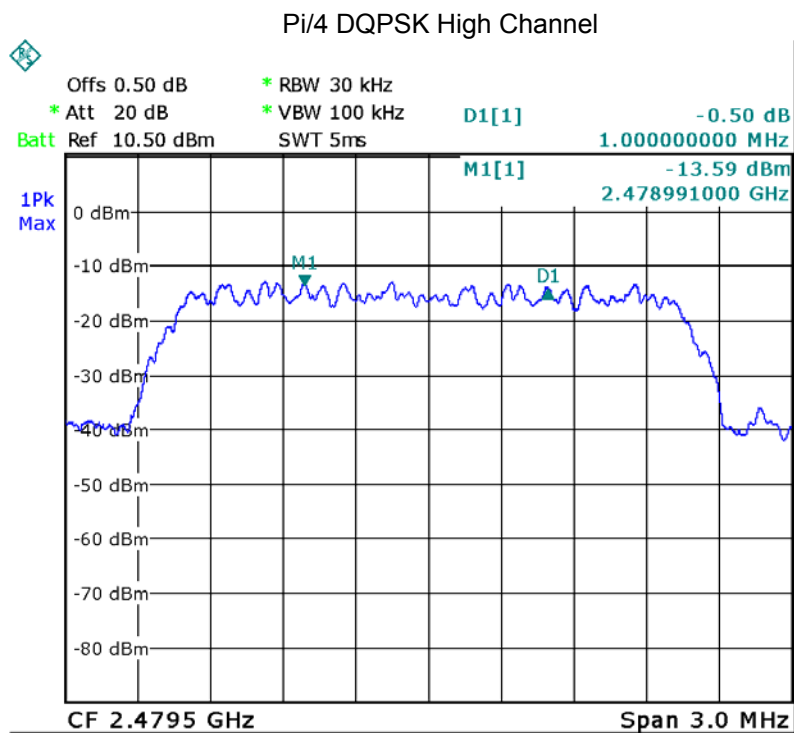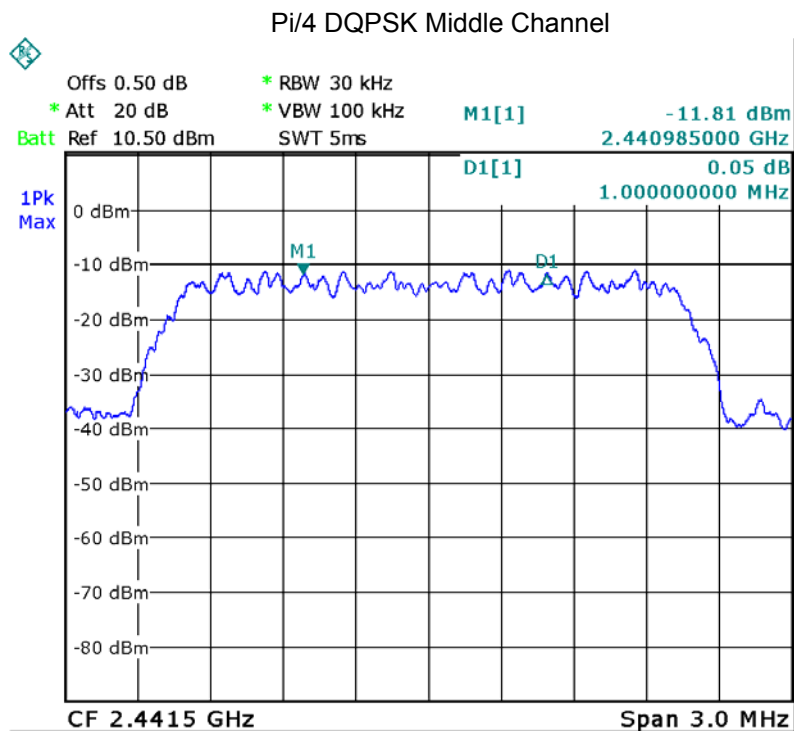


8DPSK Low Channel

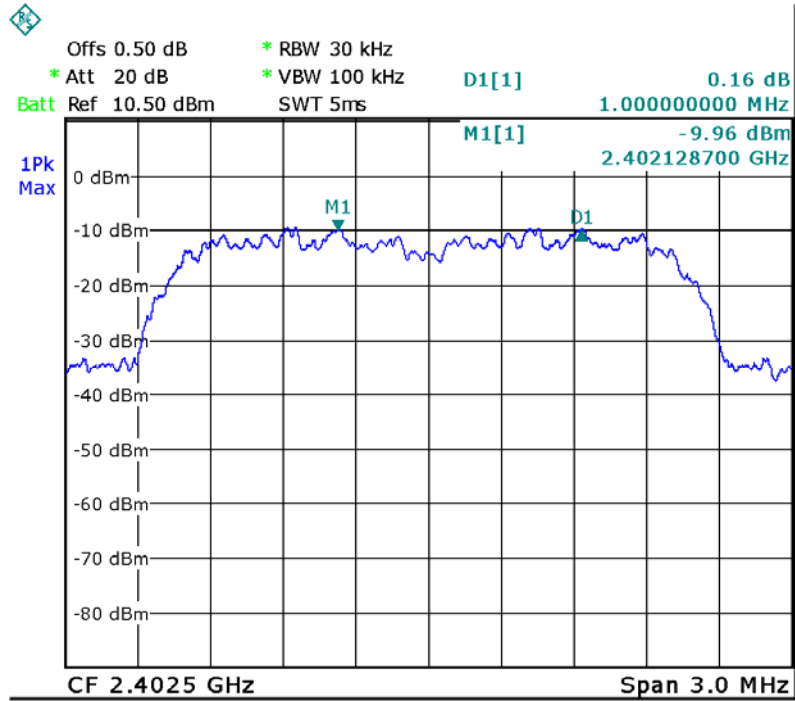

8DPSK Middle Channel

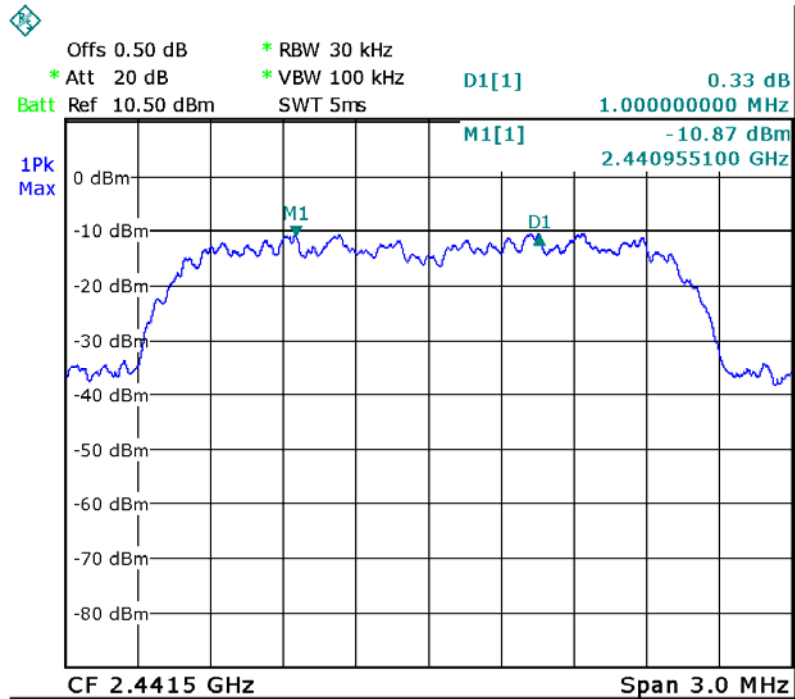

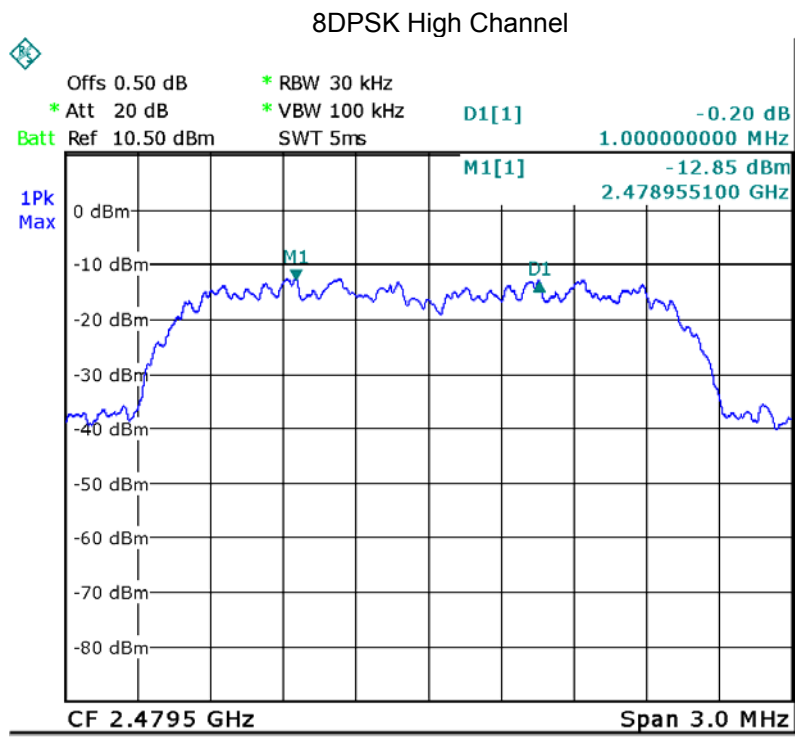

15 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

15.2 Test Result:


Total Channels are 79 Channels.

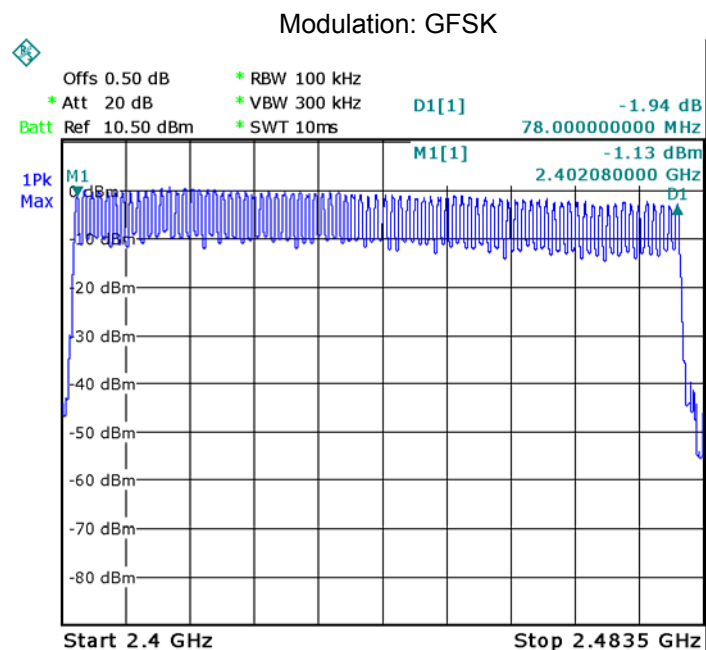

Modulation: Pi/4 DQPSK

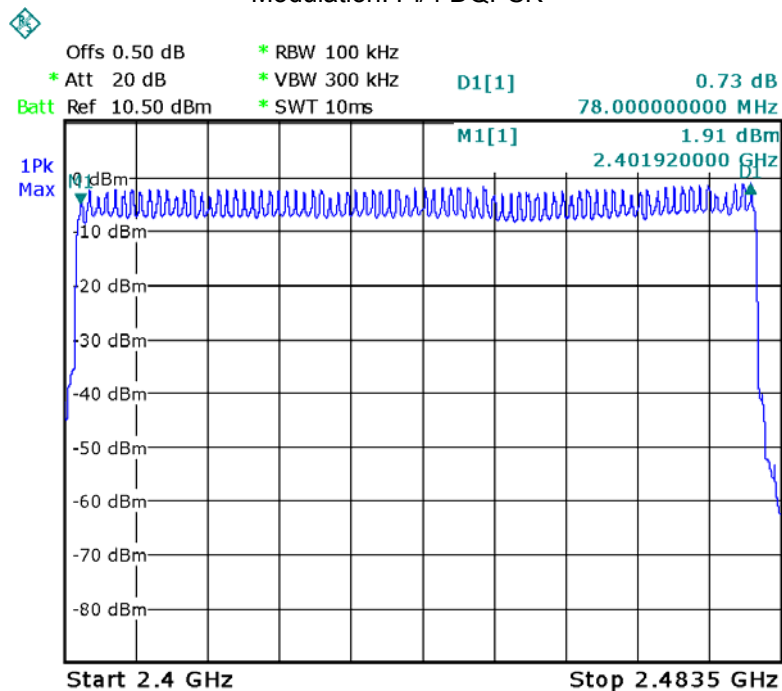

Modulation: 8DPSK

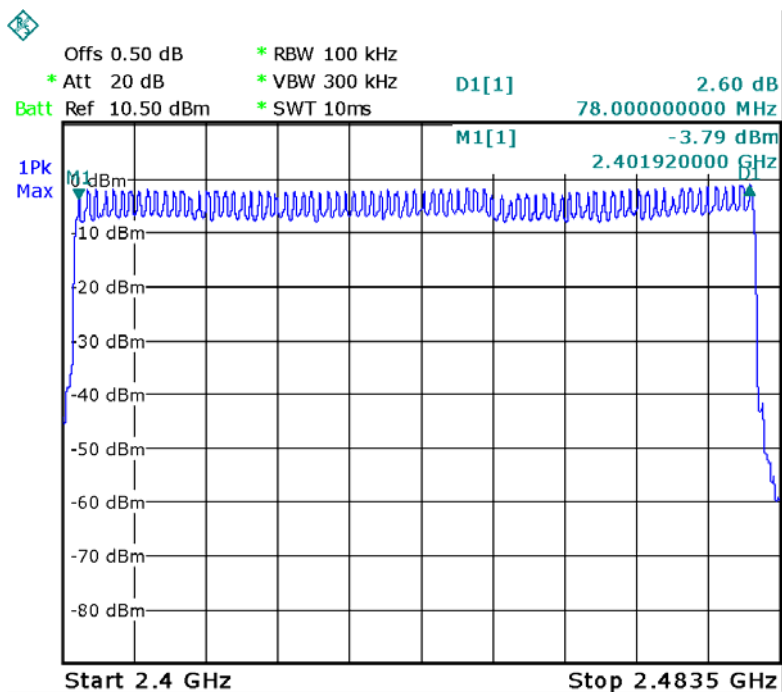

16 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

16.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

16.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.912	0.311	0.4
		middle	2.912	0.311	0.4
		High	2.912	0.311	0.4
Pi/4DQPSK	DH5	Low	2.912	0.311	0.4
		middle	2.912	0.311	0.4
		High	2.912	0.311	0.4
8DPSK	DH5	Low	2.912	0.311	0.4
		middle	2.912	0.311	0.4
		High	2.912	0.311	0.4


Modulation: GFSK

Data Packet:


DH5.Low channel

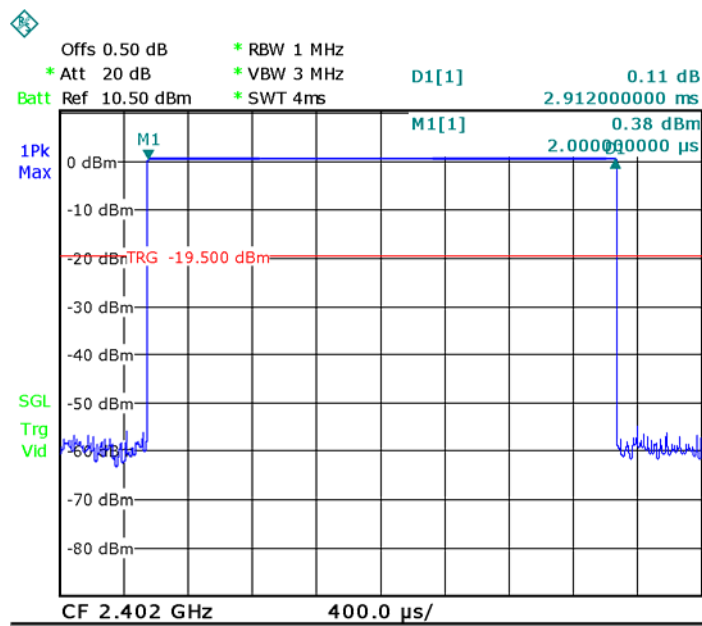

Data Packet:
DH5.Middle channel

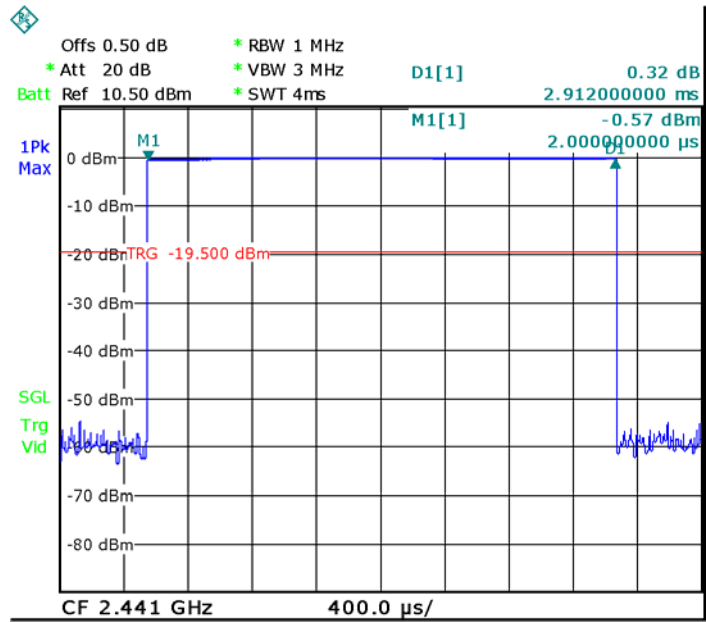


Data Packet:
DH5.High channel

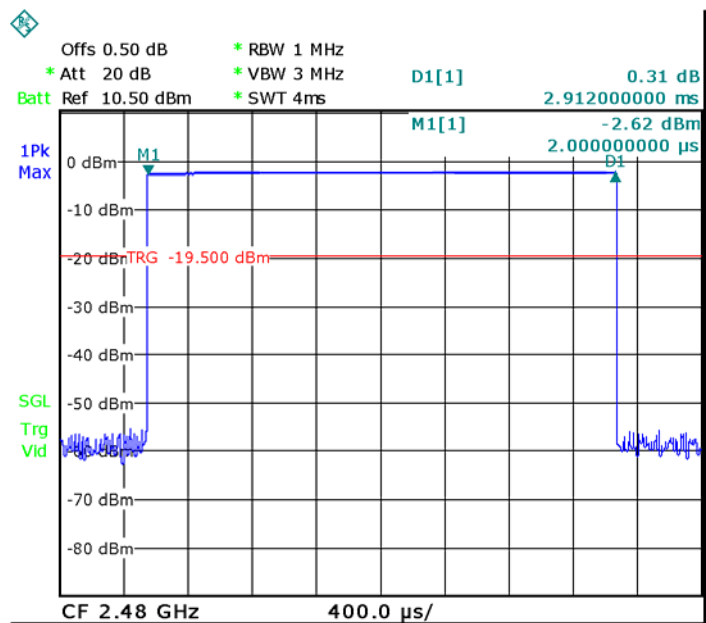

Modulation: Pi/4DQPSK


Data Packet:

2DH5 Low channel

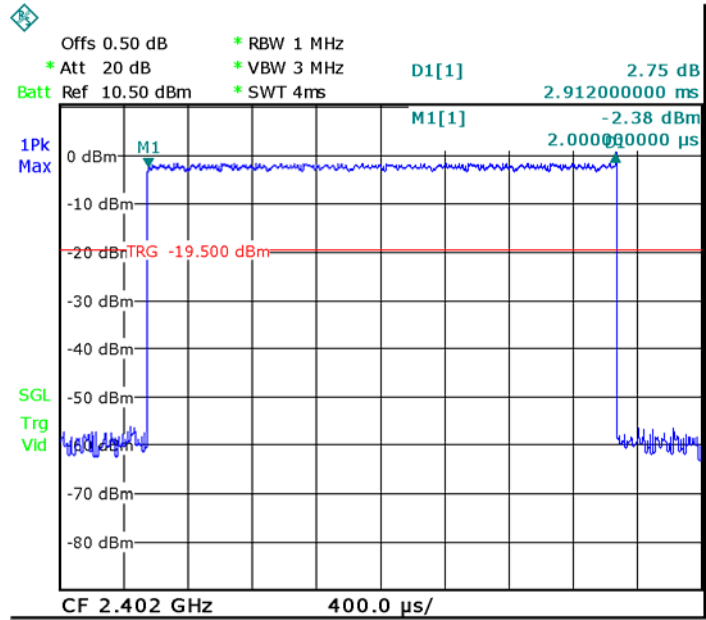


Data Packet:


2DH5.Middle channel

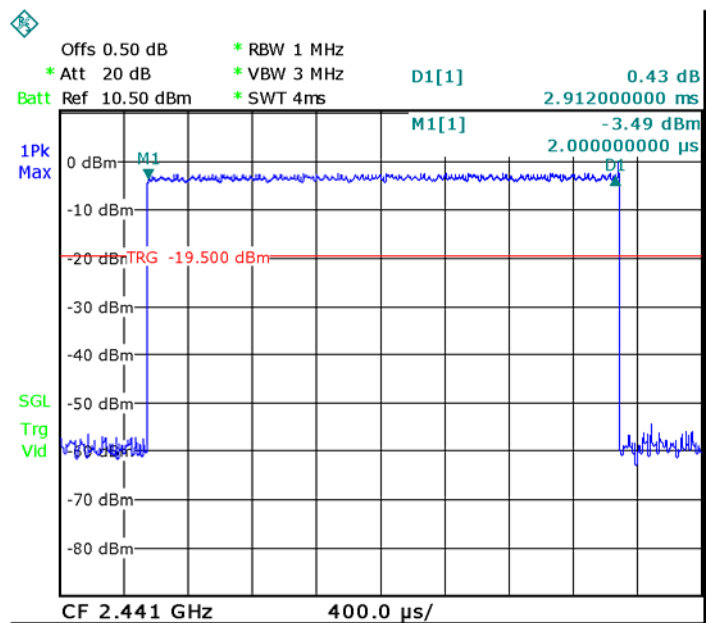


Data Packet:
2DH5,High channel

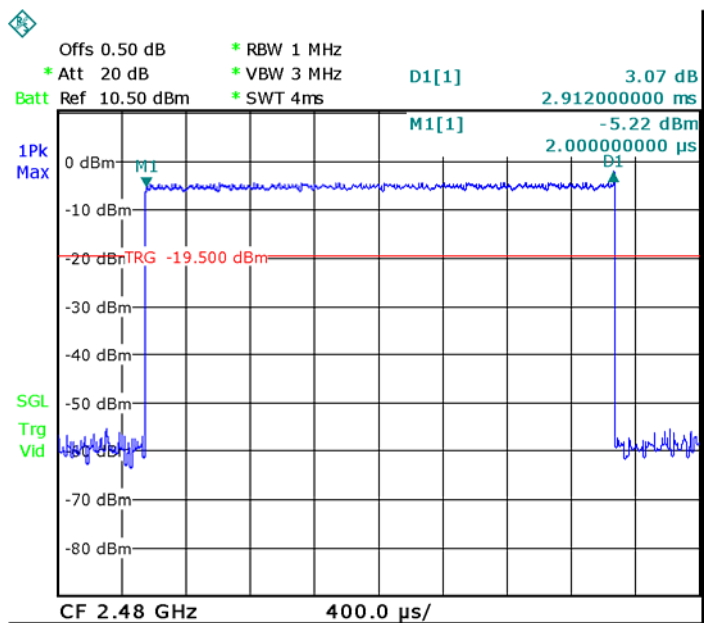


Modulation: 8DPSK
Data Packet:
3DH5.Low channel

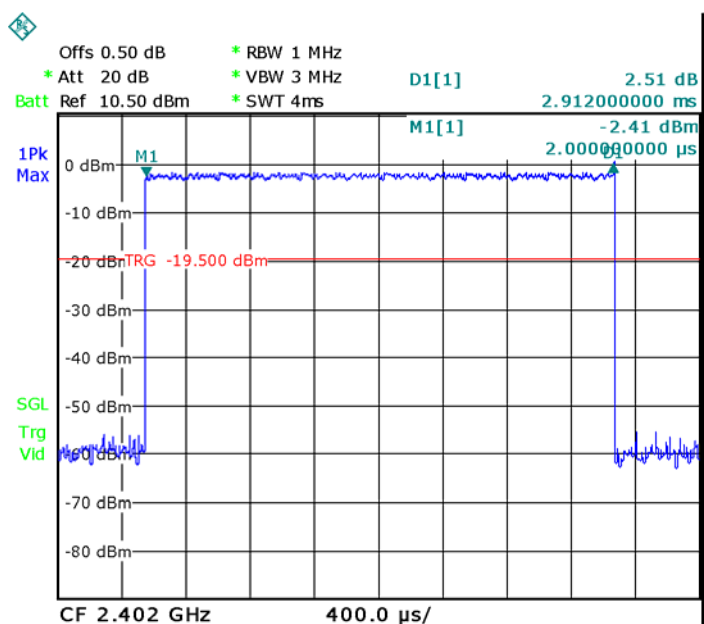

Data Packet:
3DH5.Middle channel

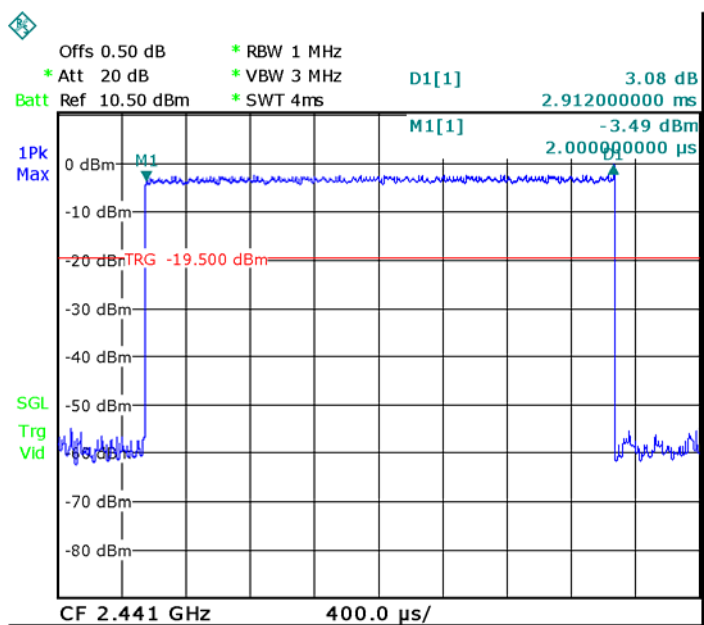

Data Packet:
3DH5,High channel

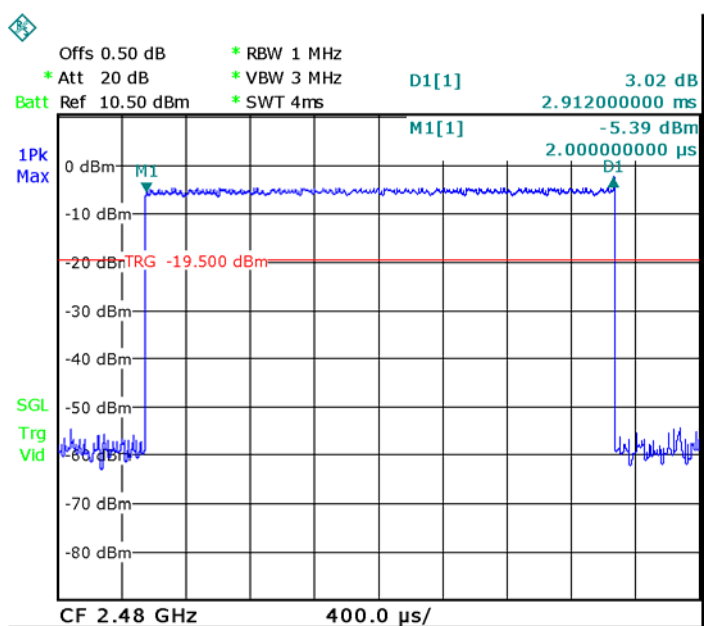

17 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a PCB Printed Antenna, meets the requirements of FCC 15.203.



18 Photographs -Test Setup Photos

18.1 Photograph-Conducted Emissions Test Setup



18.2 Photograph-Radiated Emissions


Test Frequency Below 30MHz




Test Frequency 30MHz to 1000MHz



Test Frequency Above 1GHz

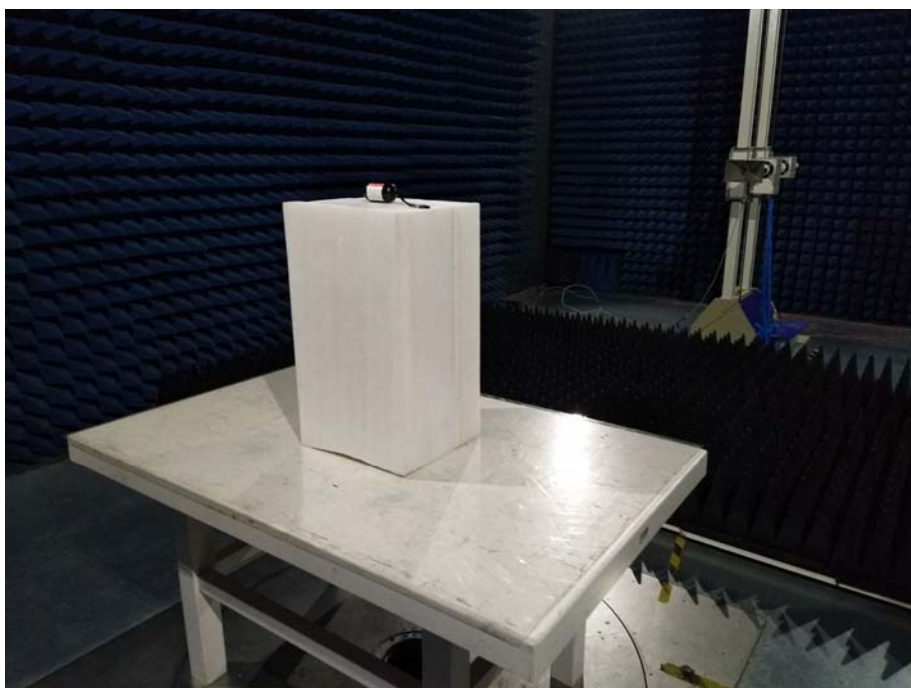

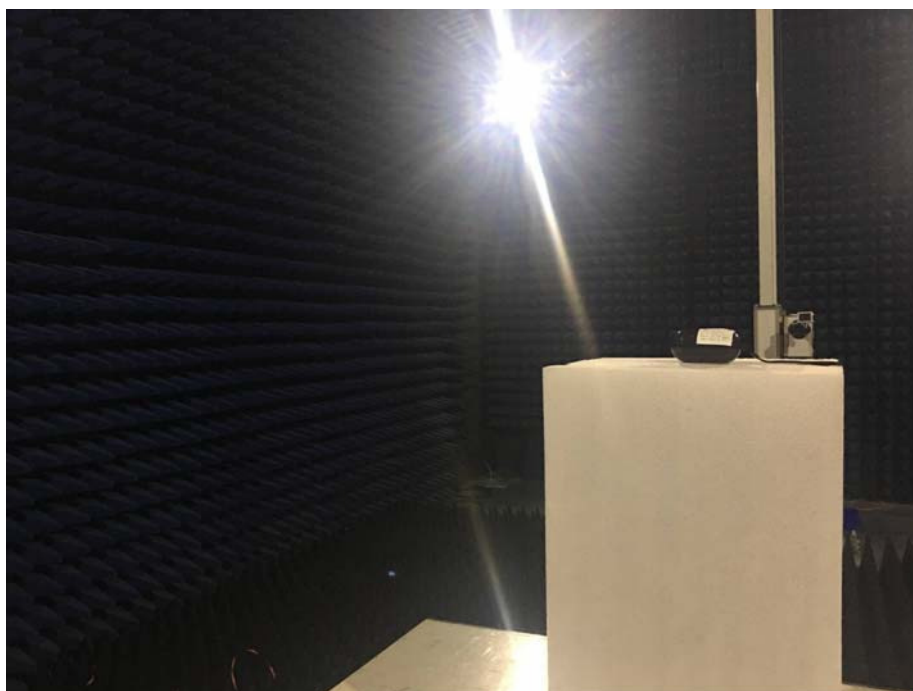

19 Photographs – Constructional Details

19.1 External Photos















19.2 Internal Photos

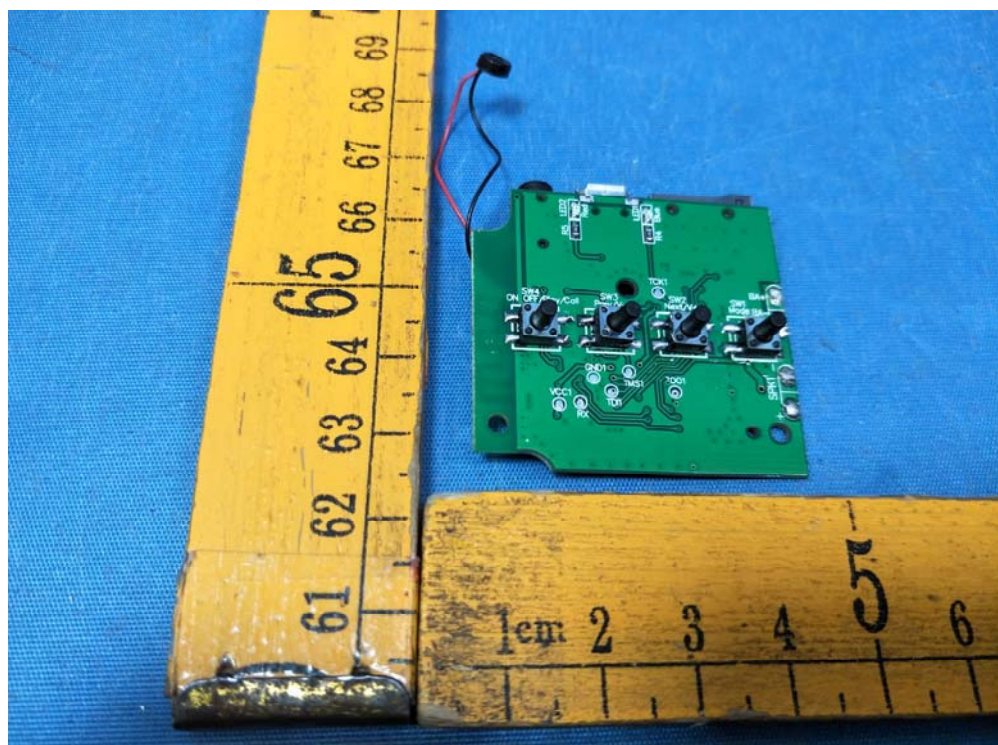

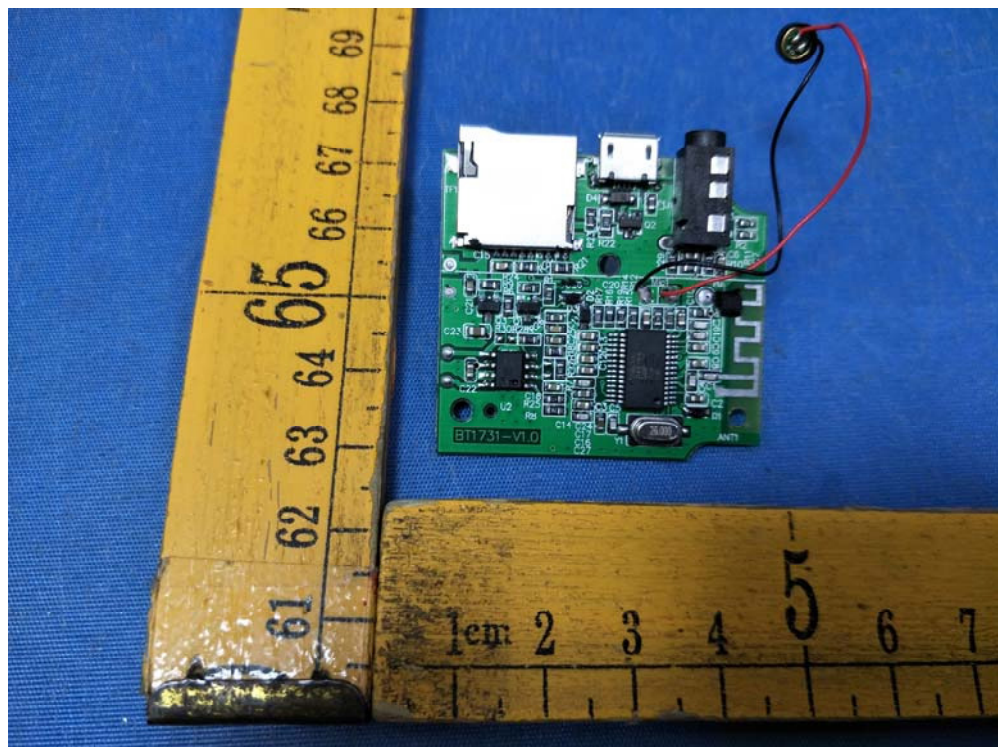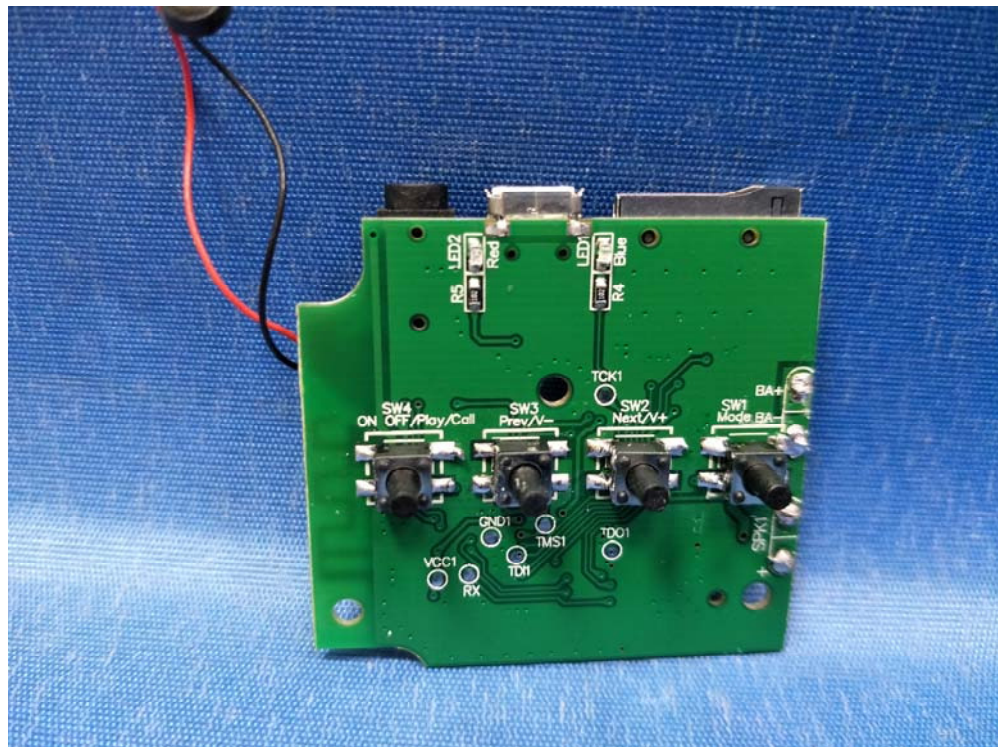

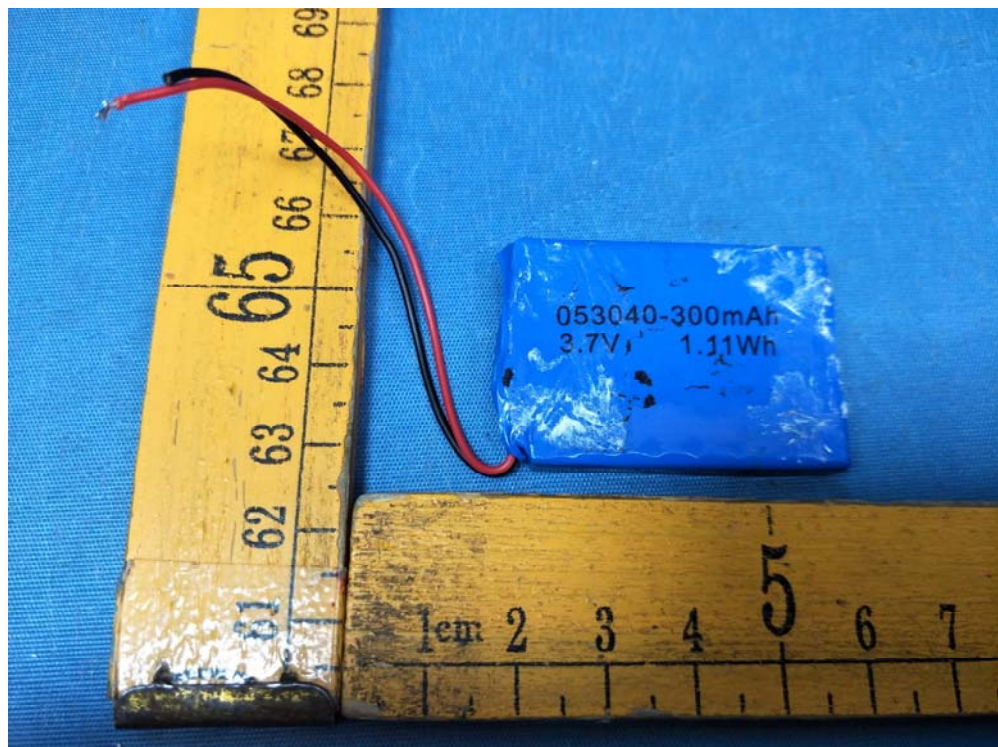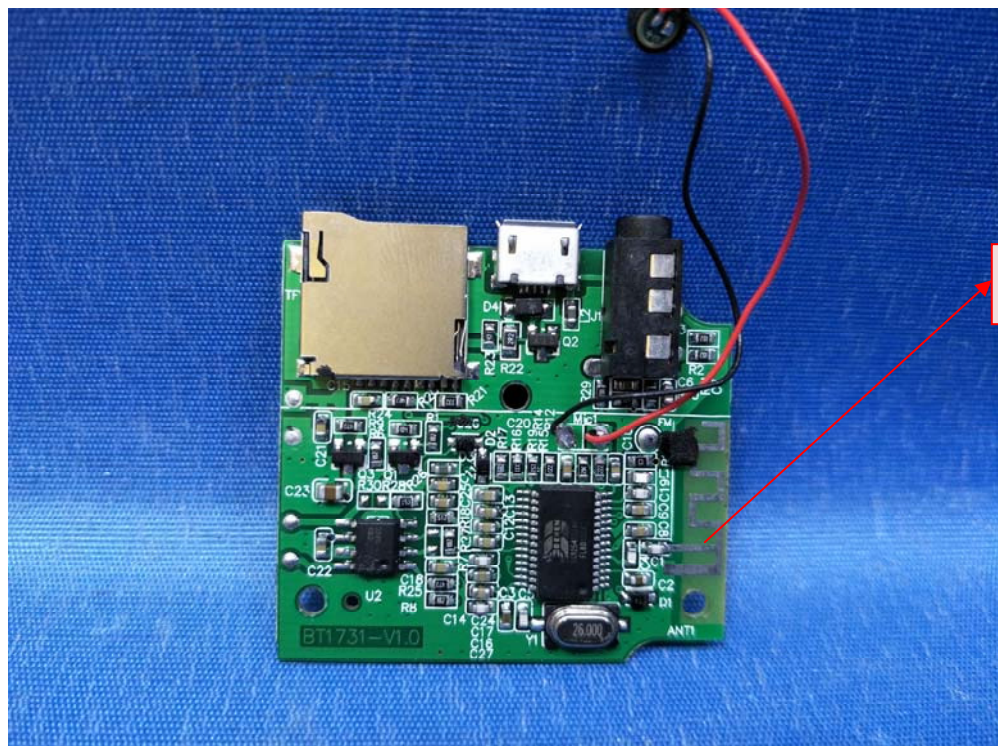

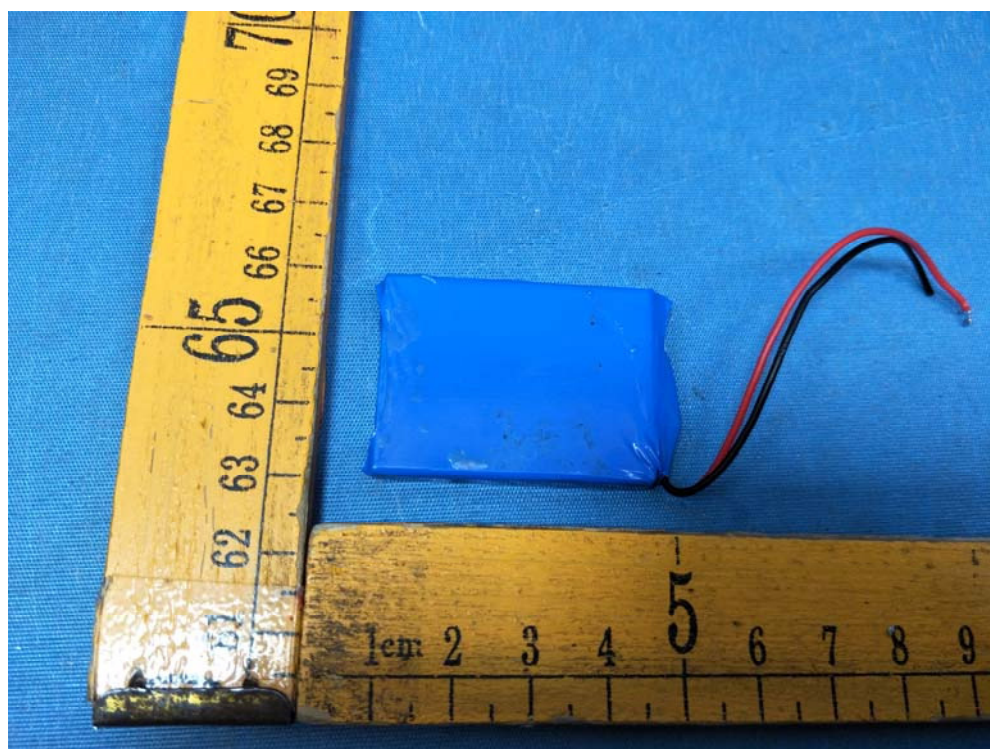

====End of Report====