

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Dongguan City MeiZhiZun Electronics Technology Co., Ltd

Trolley BT Speaker

Model Number: IQ-7210DJBT

Additional Model: CM-09, DM61, M61, DDM61, DM60

FCC ID: 2ALS7IQ7210DJ

Prepared for:	Dongguan City MeiZhiZun Electronics Technology Co., Ltd
	No. 33, Hehe Road, Xiangxi Village, Liaobu Town, Dongguan,
	Guangdong. China
Prepared By:	EST Technology Co., Ltd.
	San Tun Management Zone, Houjie District, Dongguan, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R1708127
Date of Test:	June 22~July 03, 2017
Date of Report:	July 05, 2017





TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test	8
2.5. Block Diagram.....	8
2.6. Test mode	9
2.7. Channel List for Bluetooth	9
2.8. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER.....	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Result	11
3.4. Test Data.....	12
4. 20 DB BANDWIDTH	20
4.1. Limit	20
4.2. Test Procedure	20
4.3. Test Result	20
4.4. Test Data.....	21
5. CARRIER FREQUENCY SEPARATION.....	29
5.1. Limit	29
5.2. Test Procedure	29
5.3. Test Result	29
5.4. Test Data.....	30
6. NUMBER OF HOPPING CHANNEL	38
6.1. Limit	38
6.2. Test Procedure	38
6.3. Test Result	38
6.4. Test Data.....	39
7. DWELL TIME.....	43
7.1. Limit	43
7.2. Test Procedure	43
7.3. Test Result	43
7.4. Test Data.....	44
8. RADIATED EMISSIONS	56
8.1. Limit	56
8.2. Block Diagram of Test setup.....	57
8.3. Test Procedure	58
8.4. Test Result	58
8.5. Test Data.....	59

- 9. BAND EDGE COMPLIANCE 77
 - 9.1. Limit 77
 - 9.2. Block Diagram of Test setup 77
 - 9.3. Test Procedure 77
 - 9.4. Test Result 77
 - 9.5. Test Data..... 78
- 10. POWER LINE CONDUCTED EMISSIONS 110
 - 10.1. Limit 110
 - 10.2. Test Procedure 110
- 11. ANTENNA REQUIREMENTS..... 119
 - 11.1. Limit 119
 - 11.2. Result..... 119
- 12. TEST SETUP PHOTO..... 120
- 13. PHOTO EUT 122



EST Technology Co., Ltd.

Applicant:	Dongguan City MeiZhiZun Electronics Technology Co., Ltd		
Address:	No. 33, Hehe Road, Xiangxi Village, Liaobu Town, Dongguan, Guangdong, China		
Manufacturer:	Dongguan City MeiZhiZun Electronics Technology Co., Ltd		
Address:	No. 33, Hehe Road, Xiangxi Village, Liaobu Town, Dongguan, Guangdong, China		
E.U.T:	Trolley BT Speaker		
Model Number:	IQ-7210DJBT		
Additional Model:	CM-09, DM61, M61, DDM61, DM60 Note: The difference among the six models is just the appearance, color and model name, other is the same.		
Power Supply:	DC 9V From Adapter DC 7.4V From internal battery		
Test Voltage:	DC 9V From Adapter Input AC 120V/60Hz DC 9V From Adapter Input AC 240V/60Hz		
Trade Name:	IQ Sound, MONDIAL, EARISE	Serial No.:	-----
Date of Receipt:	June 22, 2017	Date of Test:	June 22~July 03, 2017
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2016 ANSI C63.10:2013		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p style="text-align: center;">This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		Date: July 05, 2017	
Prepared by:	Reviewed by:	Approved by:	
 _____ Amy / Assistant	 _____ Tony / Engineer	 _____ Iceman Hu / Manager	
			
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Trolley BT Speaker	
FCC ID	:	2ALS7IQ7210DJ	
Model Number	:	IQ-7210DJBT	
Operation frequency	:	2402MHz~2480MHz	
Number of channel	:	79	
Antenna	:	Module 1	Module 2
		PCB antenna 0 dBi Gain	PCB antenna 0 dBi Gain
Modulation	:	BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK	BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK
		Two modules cannot be work simultaneously	
Sample Type	:	Prototype production	

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.247a1 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:201 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab	:	<p>Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: December 07, 2015</p> <p>Certificated by FCC, USA Registration No.: 989591 Date of registration: November 15, 2016</p> <p>Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: December 30, 2015</p> <p>Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2014</p> <p>Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015</p> <p>Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011</p> <p>Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011</p> <p>Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011</p> <p>Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011</p>
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 26GHz)	4.86
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

2.4.1. Adapter

M/N	:	XH-UL0913-A2
Input	:	100-240VAC 300mA 50-60Hz
Output	:	9V $\overline{=}$ 1300mA

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.1 meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: Trolley BT Speaker)

2.6. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
$\pi/4$ -DQPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.7. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June 17,17	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	June 17,17	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June 17,17	1 Year

2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI	100435	June 17,17	1 Year
Loop Antenna	ETS-LINDGREN	6502	00071730	June 08,17	1 Year
RF Cable	MIYAZAKI	5D-2W	966 Chamber No.1	June 17,17	1 Year

2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June 17,17	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June 08,17	1 Year
Signal Amplifier	Agilent	310N	187037	June 17,17	1 Year
RF Cable	MIYAZAKI	5D-2W	966 Chamber No.1	June 17,17	1 Year

2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120D1002	June 08,17	1 Year
Board-Band Horn Antenna	SCHWARZBECK	BBHA 9170	9170-497	June 08,17	1 Year
Signal Amplifier	SCHWARZBECK	BBV9718	9718-212	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 17,17	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	June 17,17	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June 17,17	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.

3.3. Test Result


EUT: Trolley BT Speaker					
M/N: IQ-7210DJBT					
Test date: 2017-06-27		Test site: RF site		Tested by: Viking	
Module 1					
Mode	Freq (MHz)	Result (dBm)	Limit		Conclusion
			dBm	W	
GFSK	2402	-5.432	30.00	1	Pass
	2441	-5.242	30.00	1	Pass
	2480	-5.439	30.00	1	Pass
$\pi/4$ -DQPSK	2402	-4.439	21.00	0.125	Pass
	2441	-4.445	21.00	0.125	Pass
	2480	-4.870	21.00	0.125	Pass
Module 2					
Mode	Freq (MHz)	Result (dBm)	Limit		Conclusion
			dBm	W	
GFSK	2402	-6.142	30.00	1	Pass
	2441	-6.106	30.00	1	Pass
	2480	-5.739	30.00	1	Pass
$\pi/4$ -DQPSK	2402	-5.181	21.00	0.125	Pass
	2441	-5.123	21.00	0.125	Pass
	2480	-4.746	21.00	0.125	Pass

3.4. Test Data


Module 1 GFSK 2402 MHz

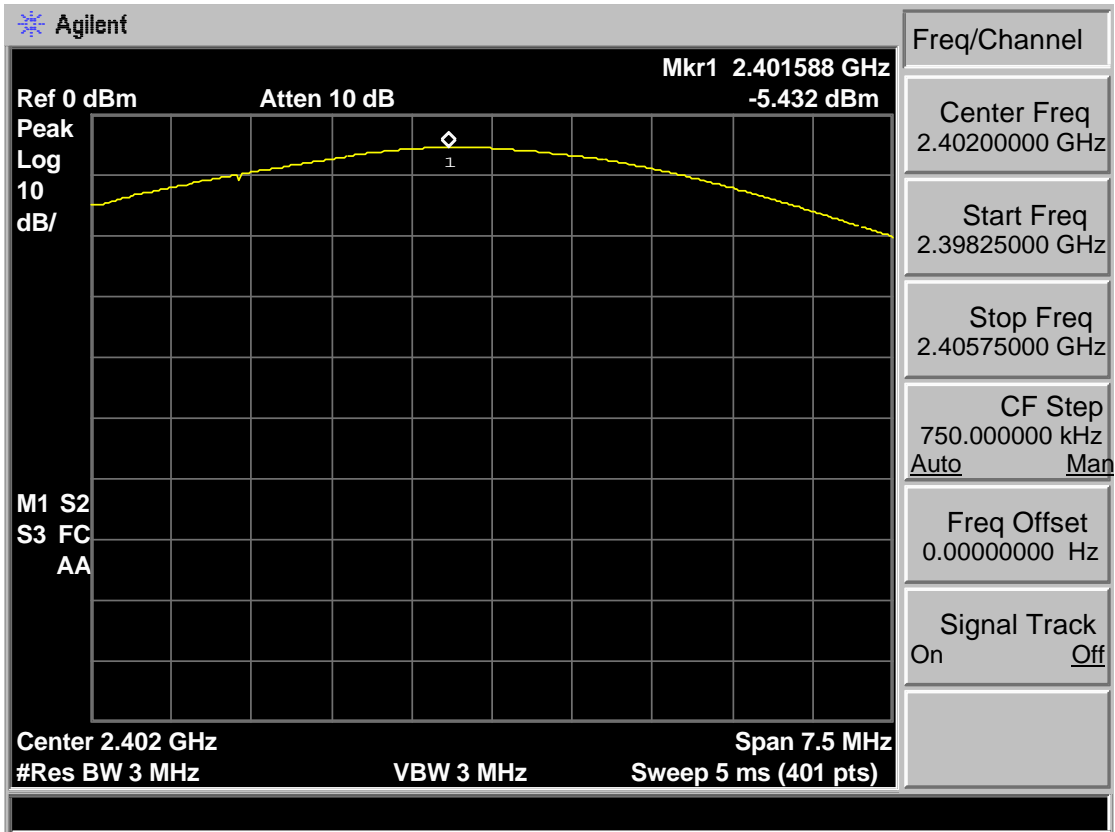


GFSK 2441 MHz

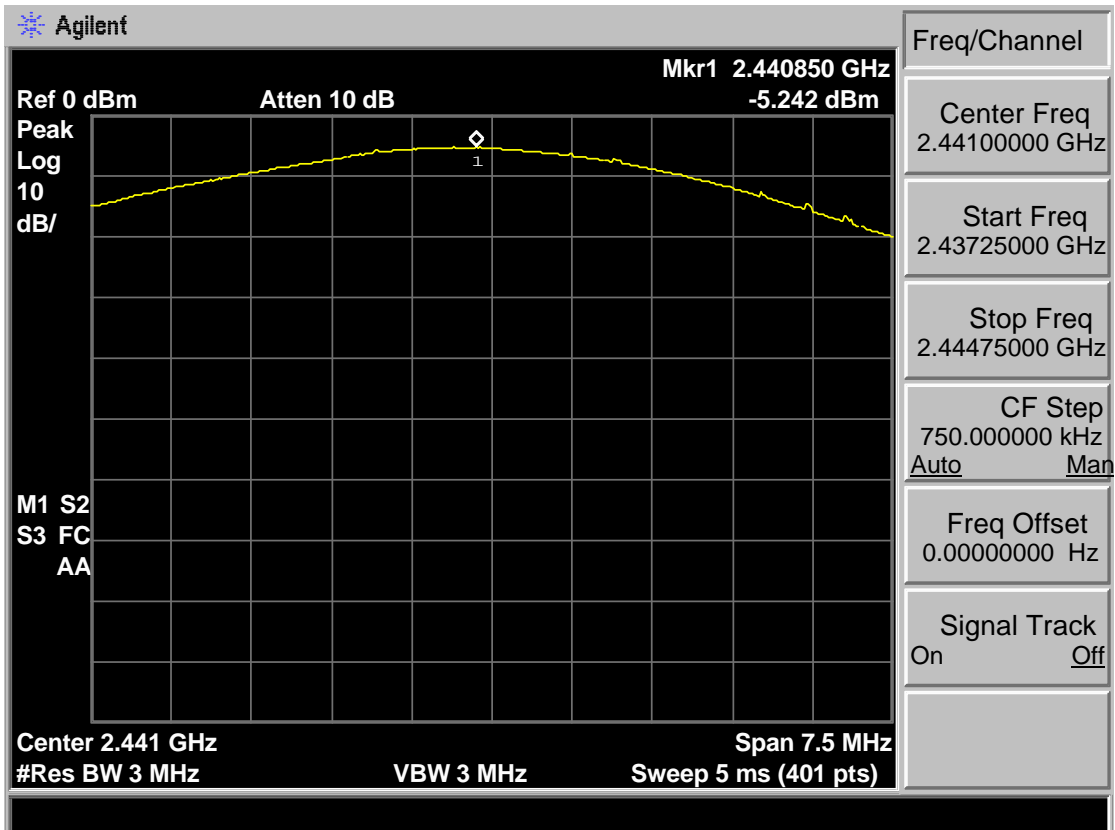


GFSK 2480 MHz

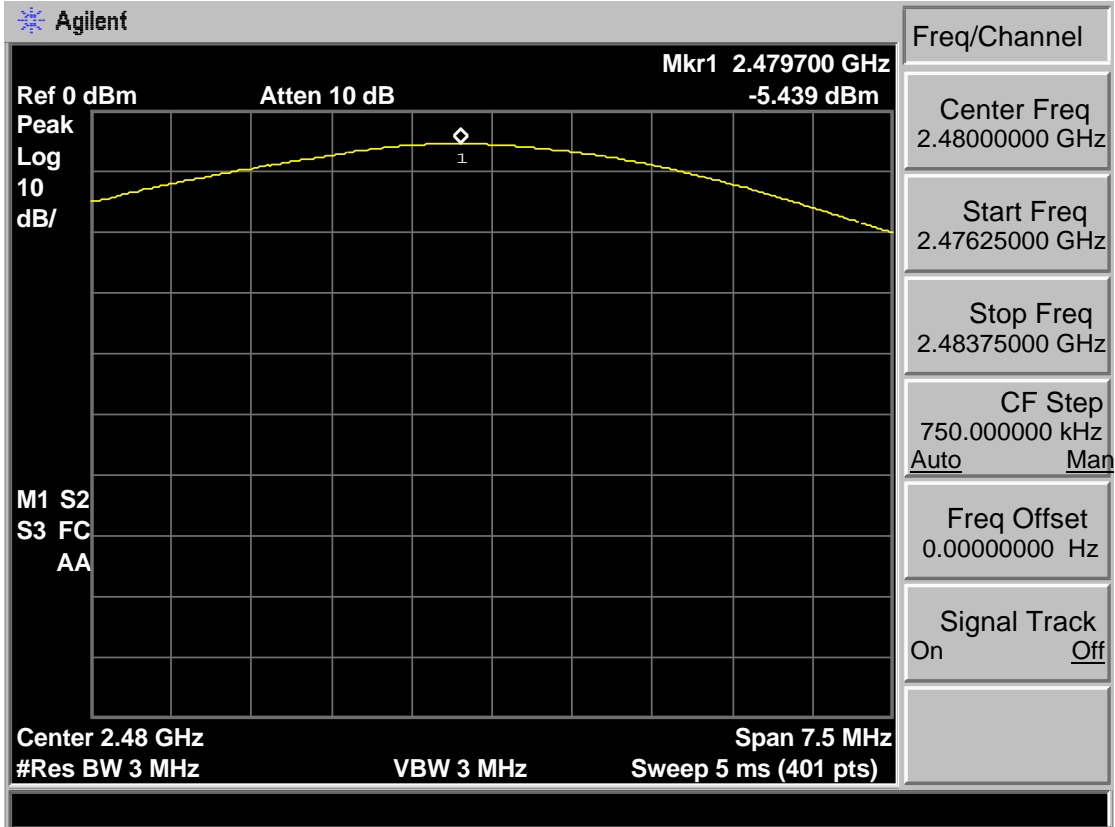


$\pi/4$ -DQPSK 2402 MHz

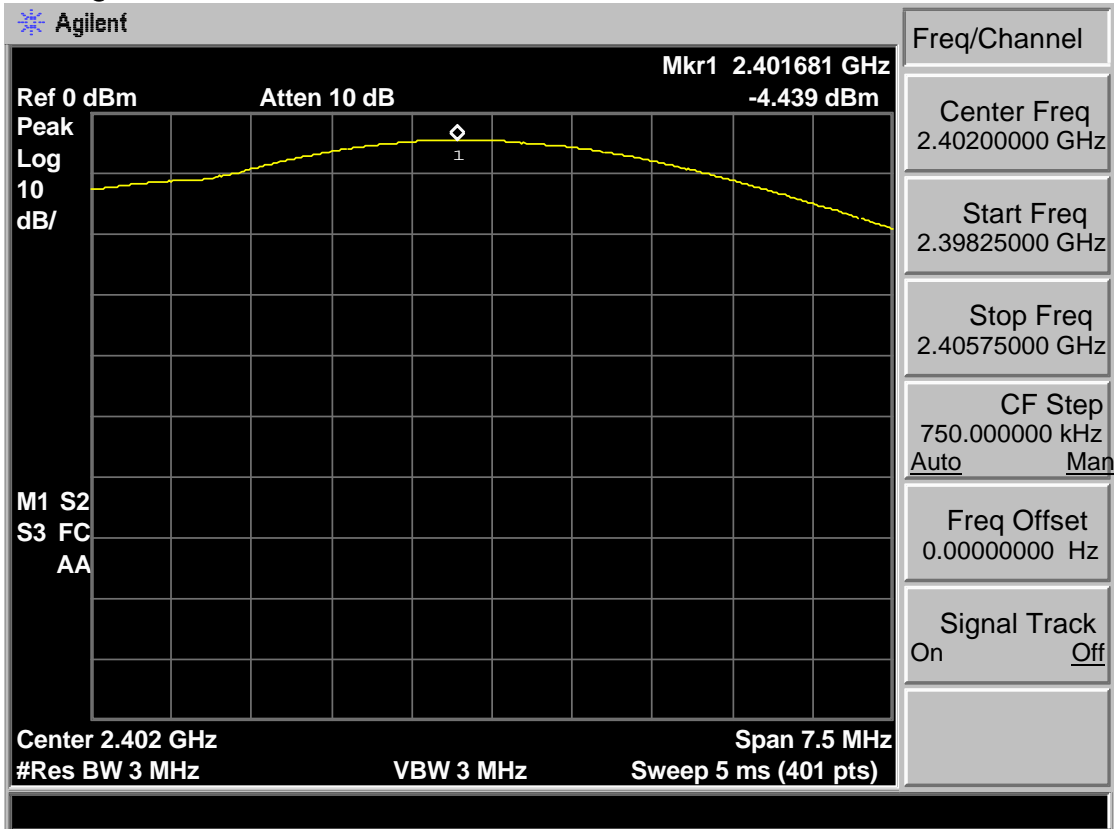


$\pi/4$ -DQPSK 2441 MHz

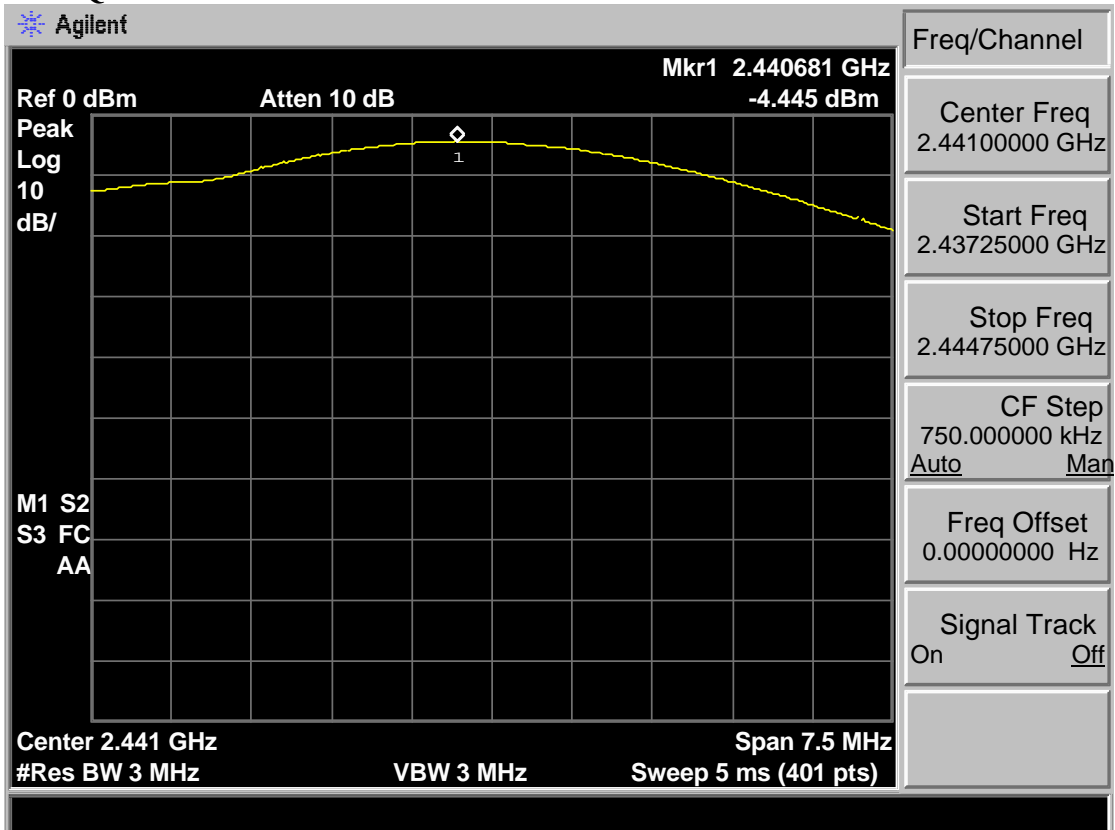


$\pi/4$ -DQPSK 2480 MHz

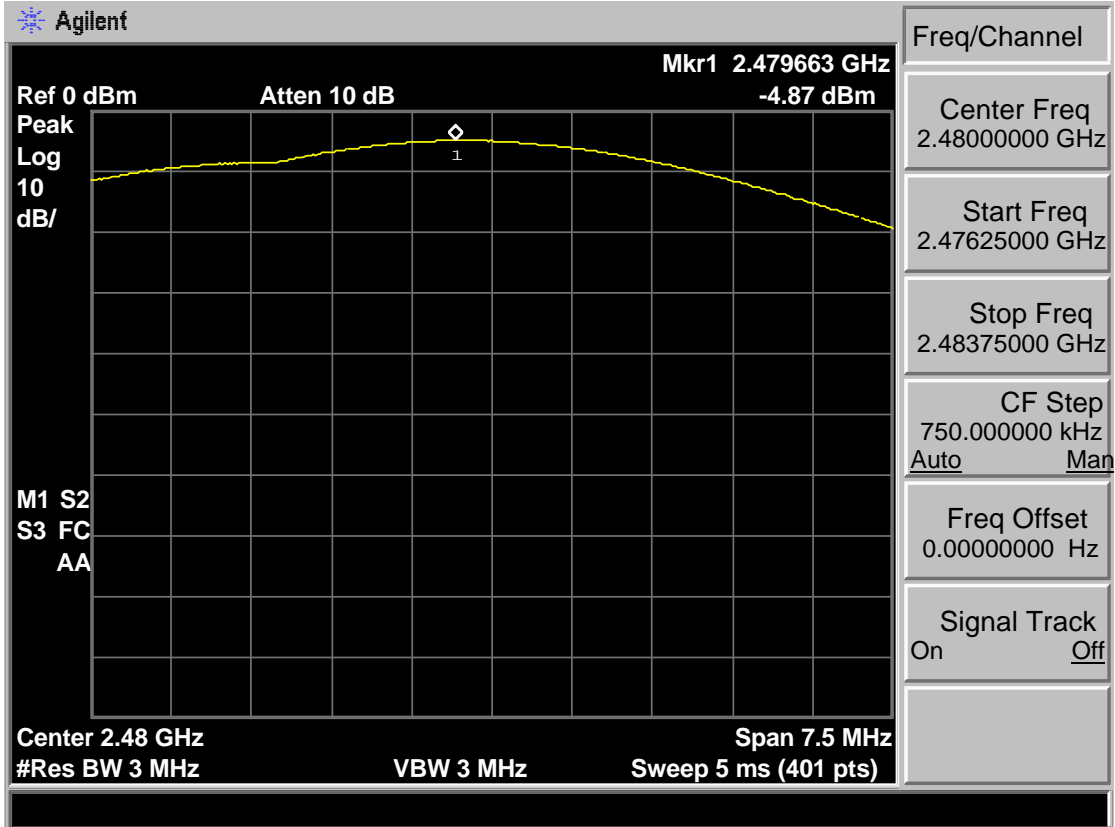


Module 2
GFSK 2402 MHz

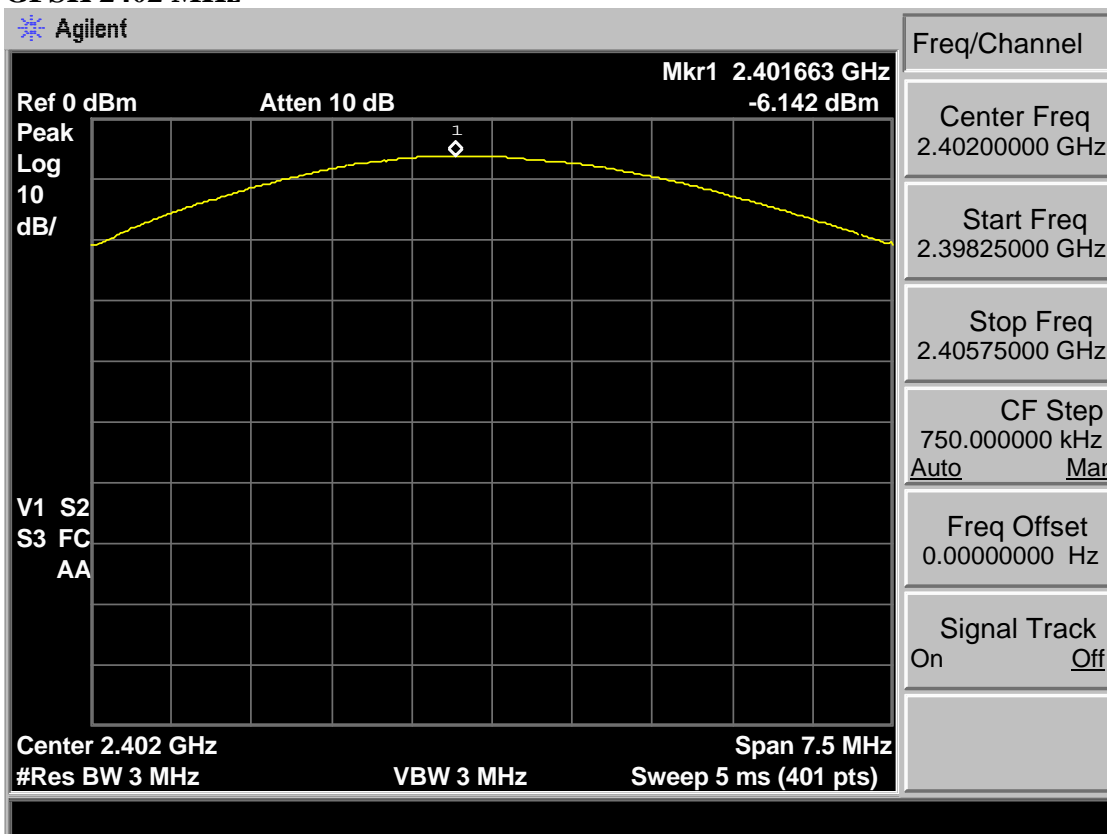


GFSK 2441 MHz

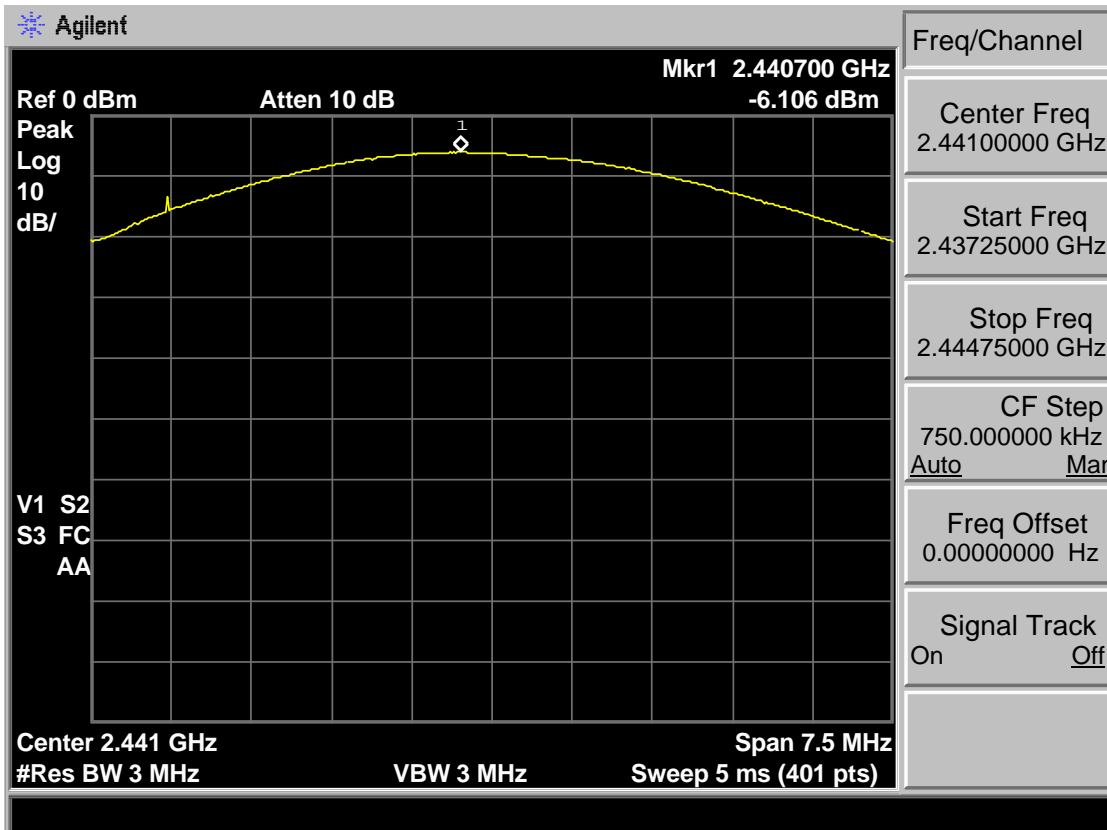


GFSK 2480 MHz

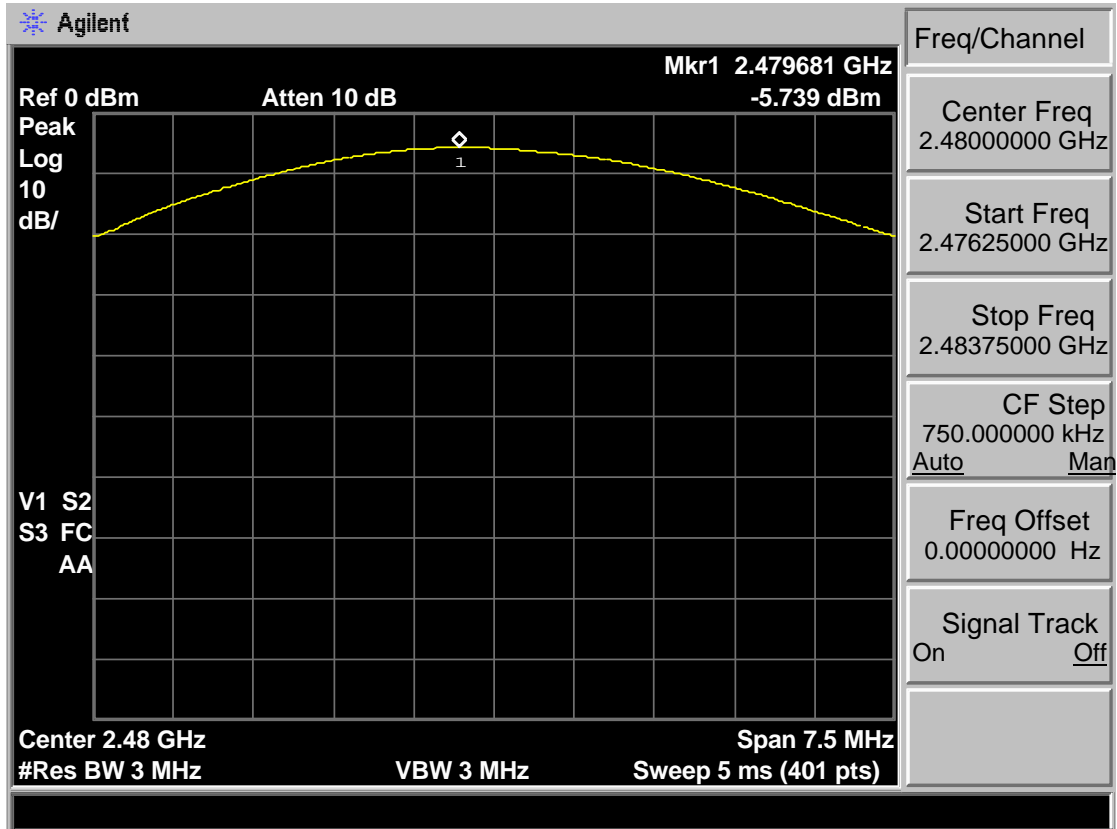


$\pi/4$ -DQPSK 2402 MHz

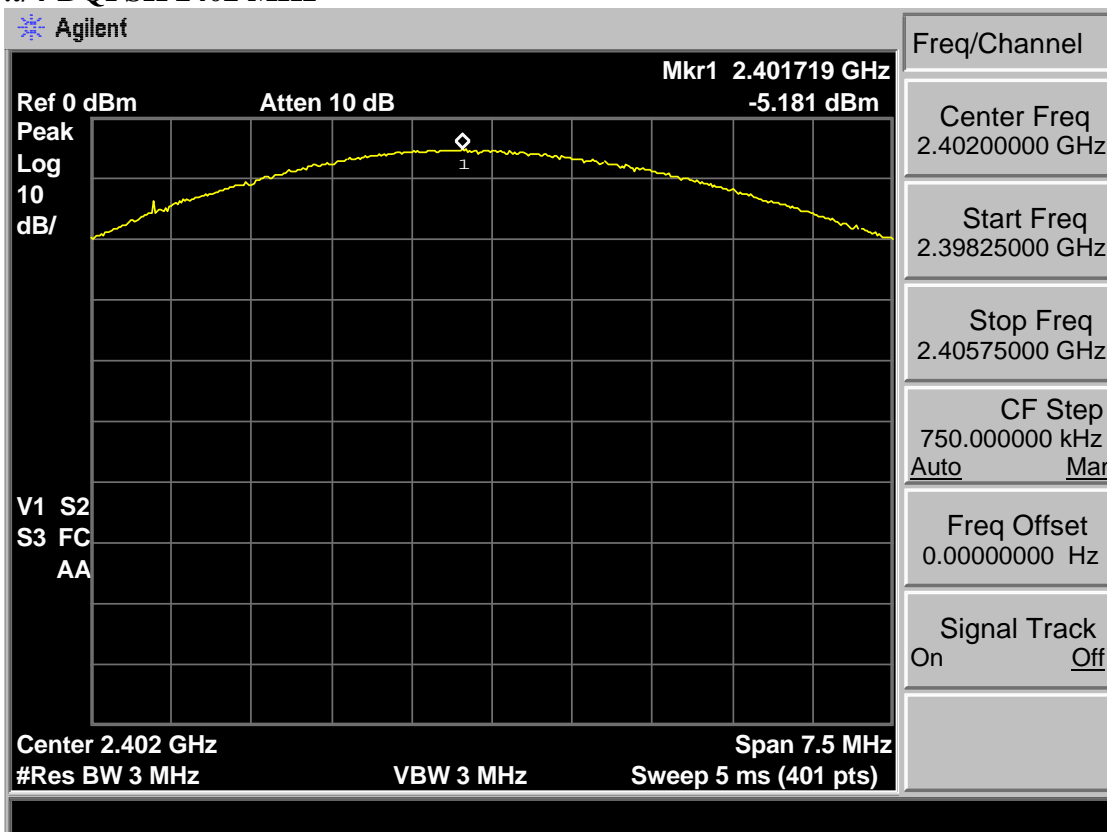

$\pi/4$ -DQPSK 2441 MHz

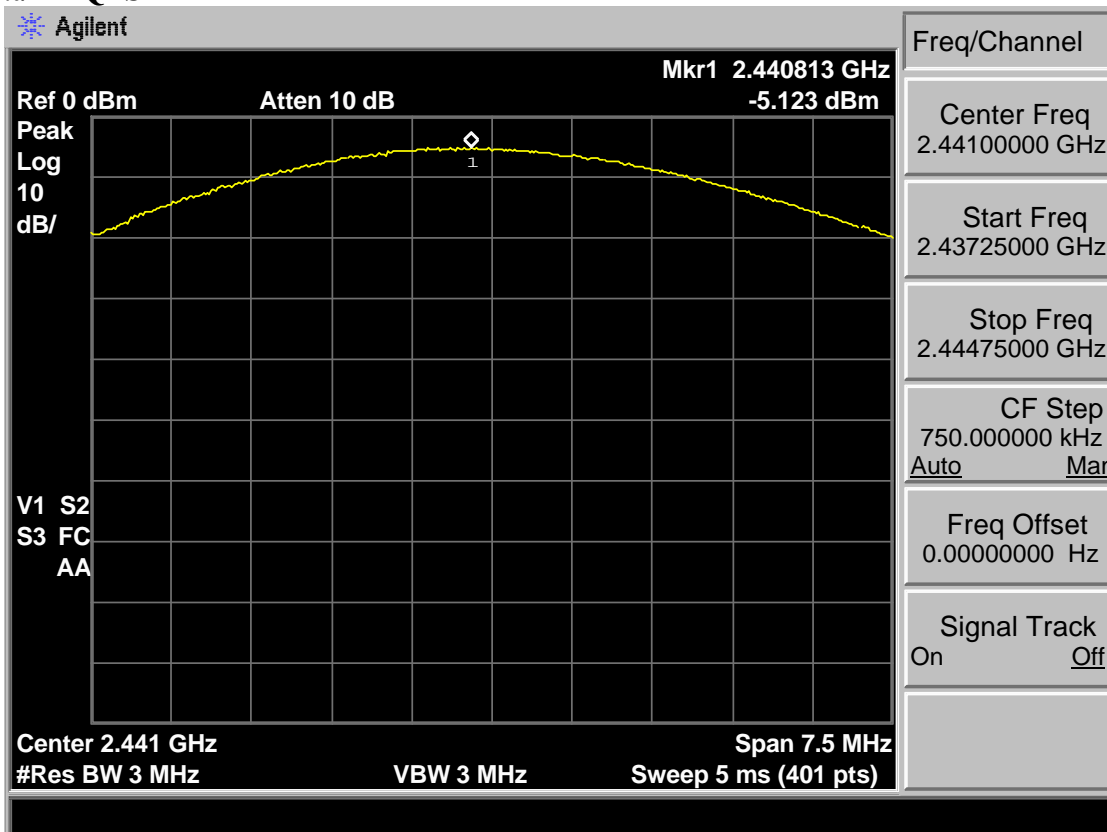

$\pi/4$ -DQPSK 2480 MHz

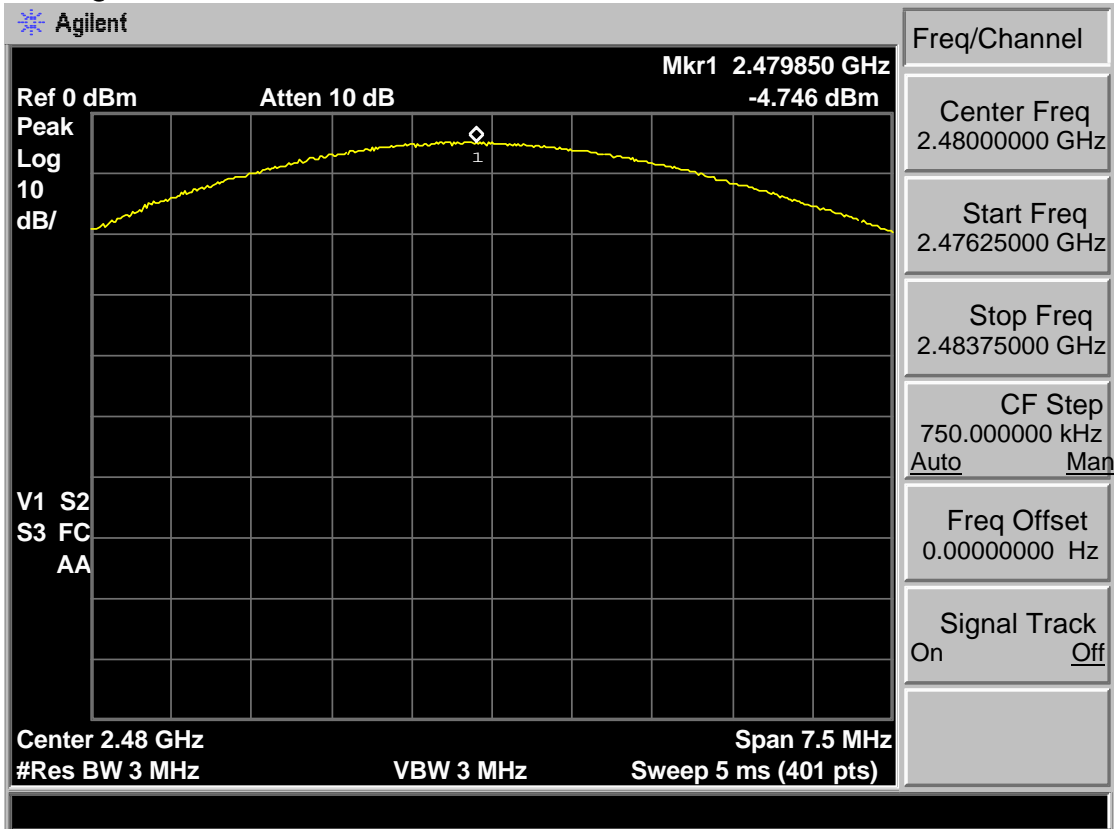

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: Trolley BT Speaker				
M/N: IQ-7210DJBT				
Test date: 2017-06-27		Test site: RF site		Tested by: Viking
Module 1				
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.958	/	PASS
	2441	0.974	/	PASS
	2480	0.964	/	PASS
$\pi/4$ -DQPSK	2402	1.306	/	PASS
	2441	1.309	/	PASS
	2480	1.305	/	PASS
Module 2				
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.967	/	PASS
	2441	0.968	/	PASS
	2480	0.964	/	PASS
$\pi/4$ -DQPSK	2402	1.306	/	PASS
	2441	1.302	/	PASS
	2480	1.307	/	PASS

4.4. Test Data


Module 1 GFSK 2402MHz

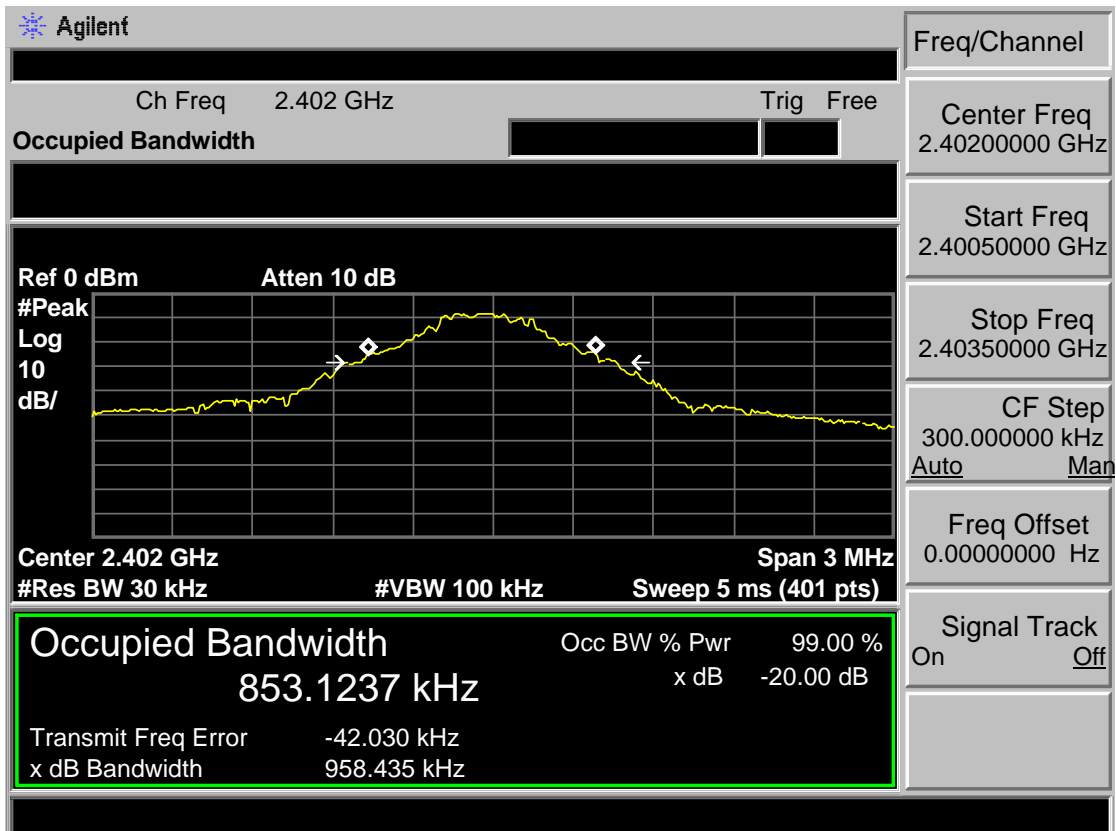


GFSK 2441MHz

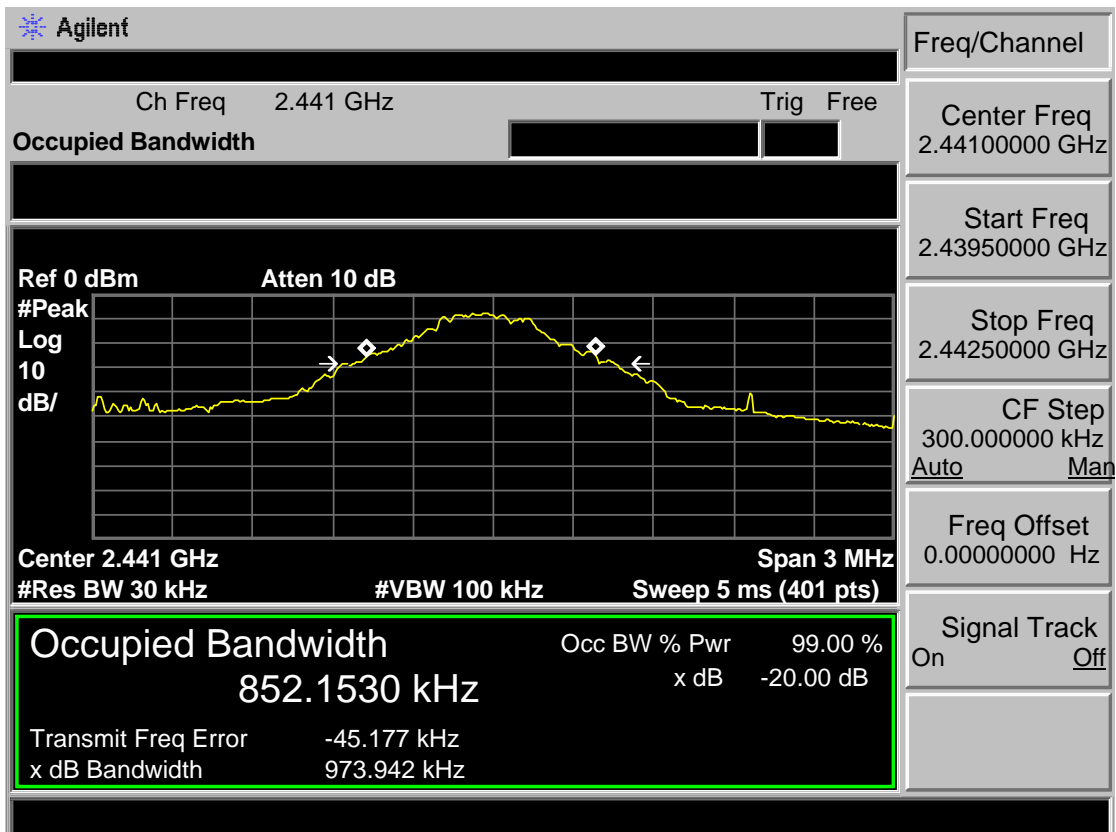


GFSK 2480MHz

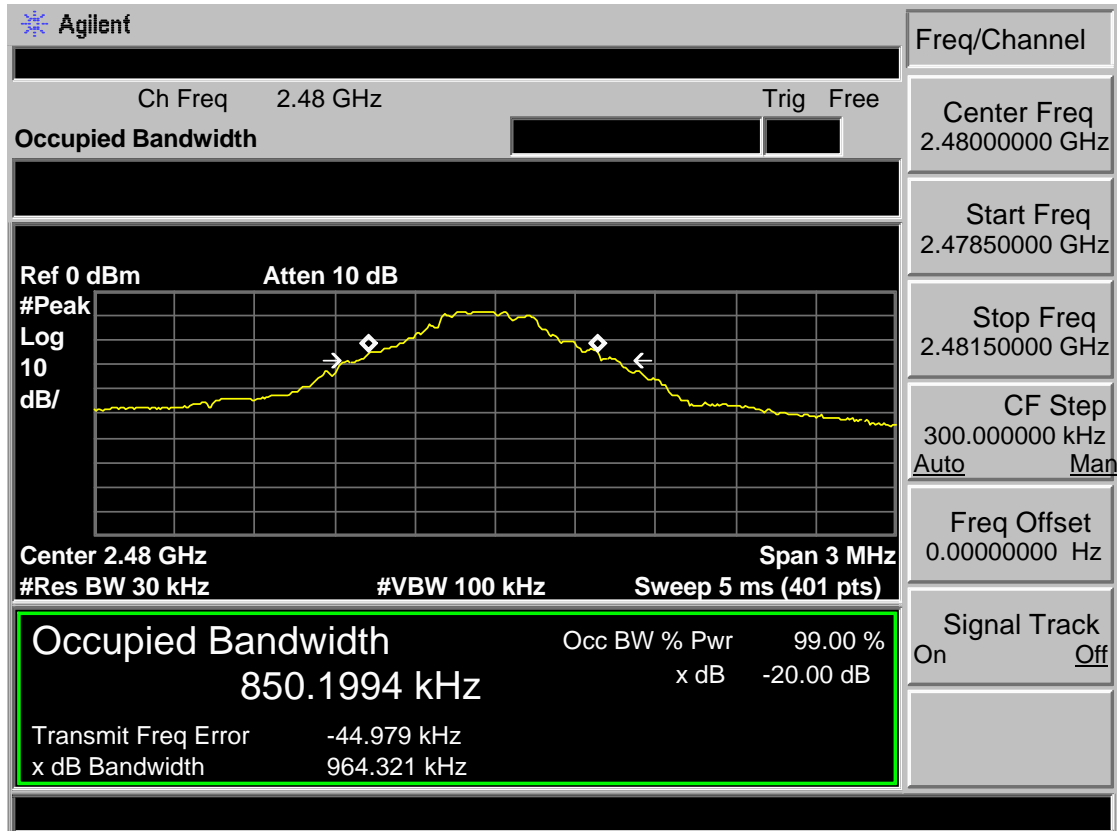


$\pi/4$ -DQPSK 2402MHz

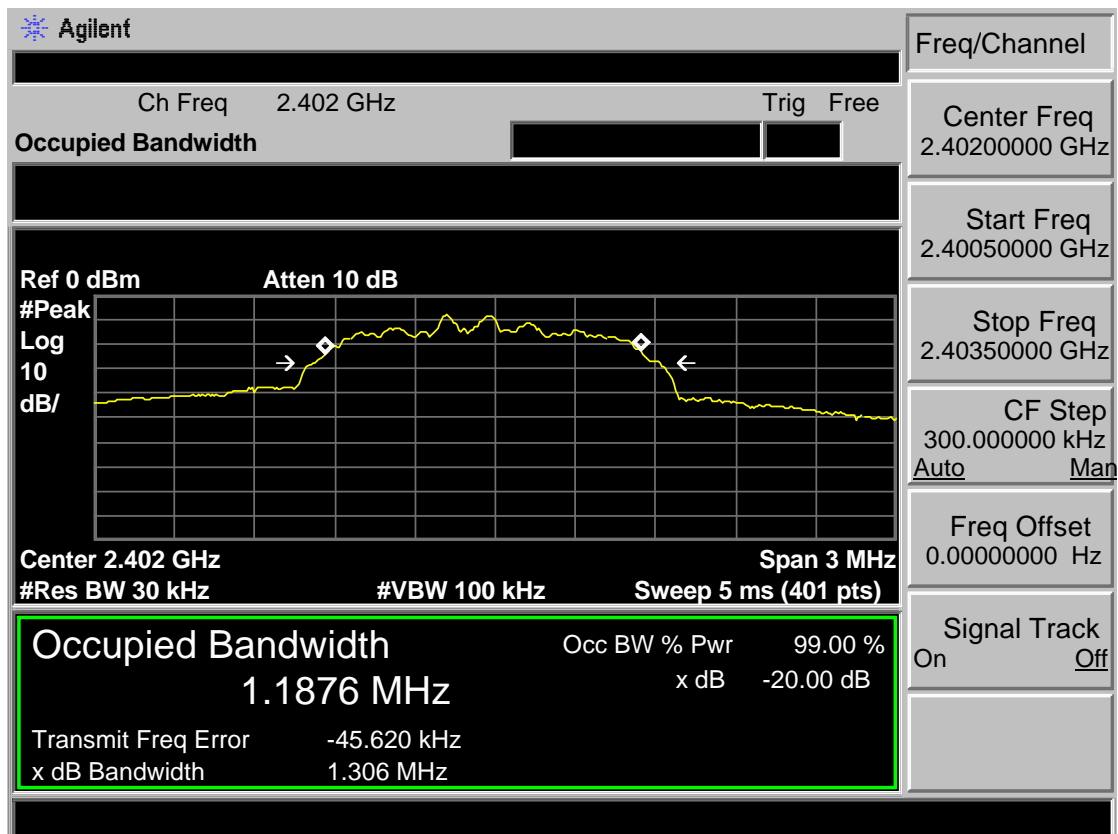


$\pi/4$ -DQPSK 2441MHz

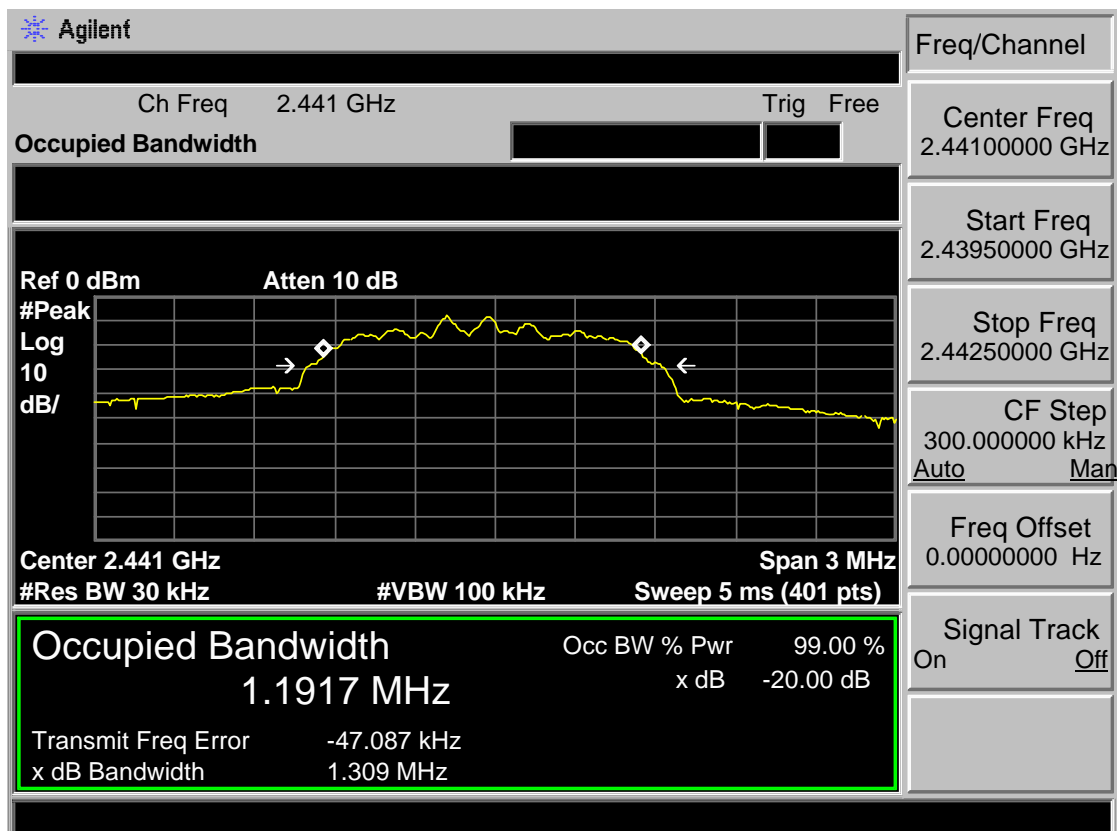


$\pi/4$ -DQPSK 2480MHz

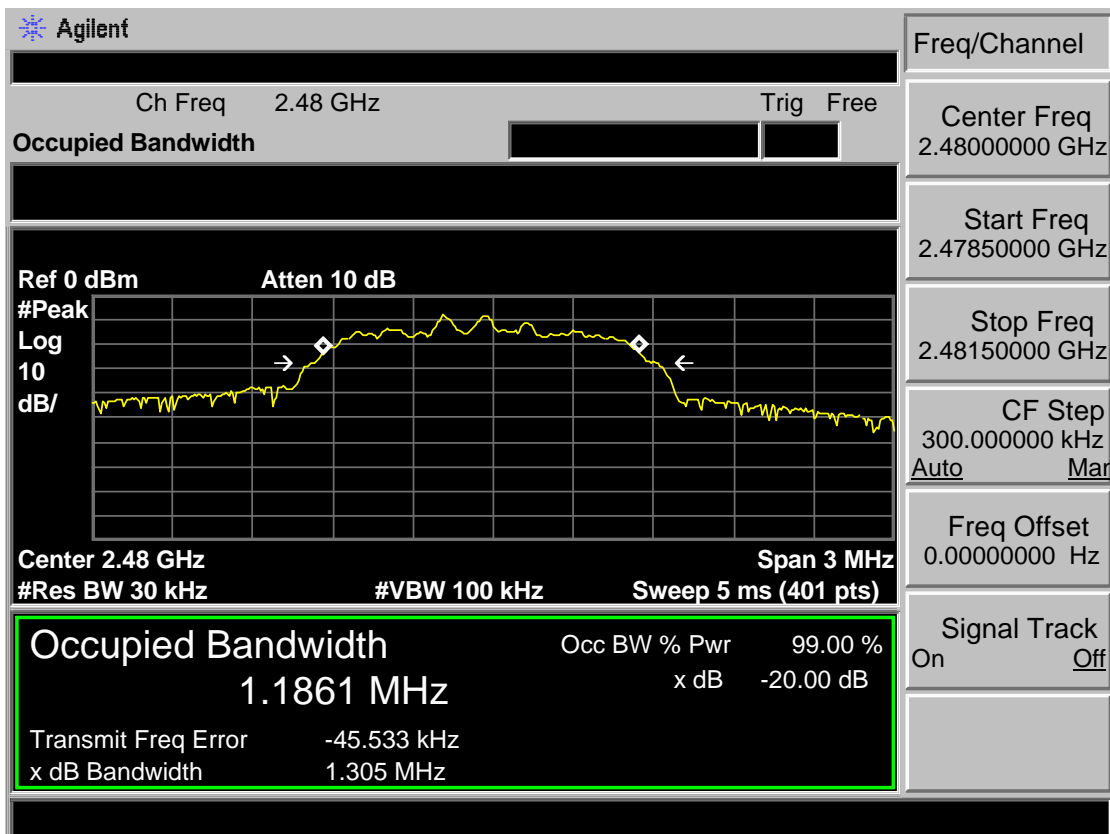


Module 2
GFSK 2402MHz

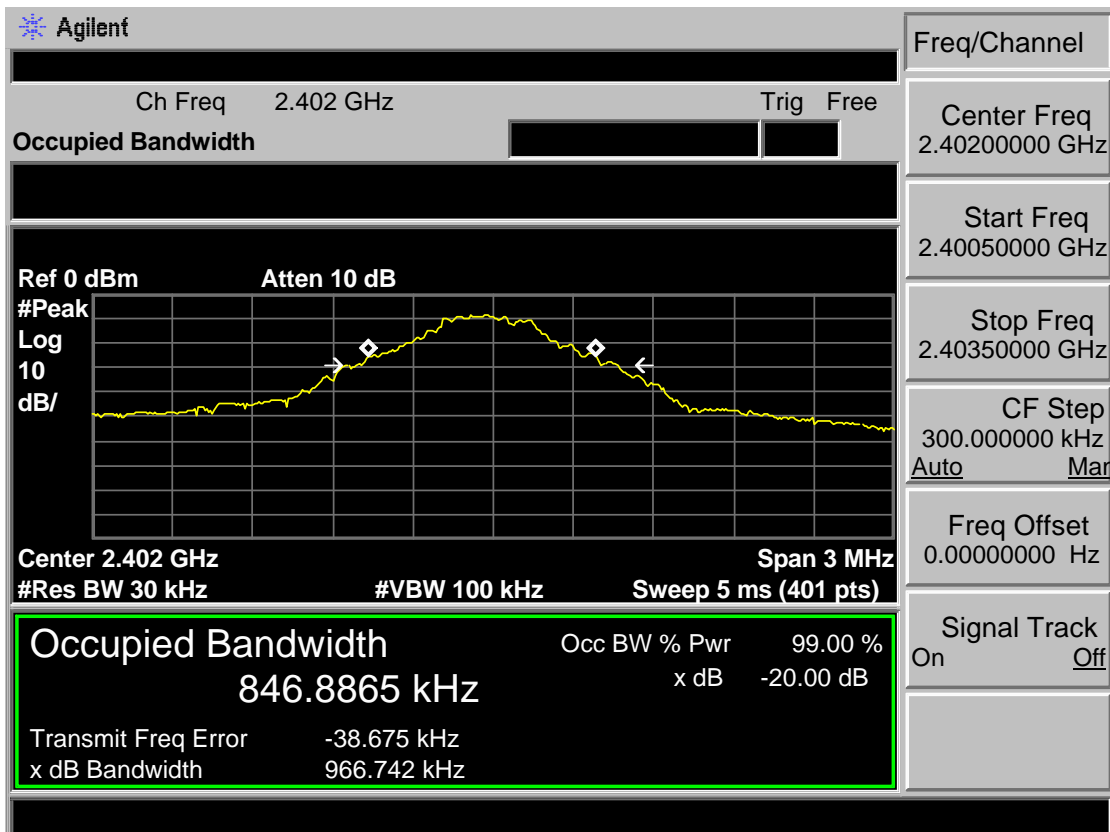


GFSK 2441MHz

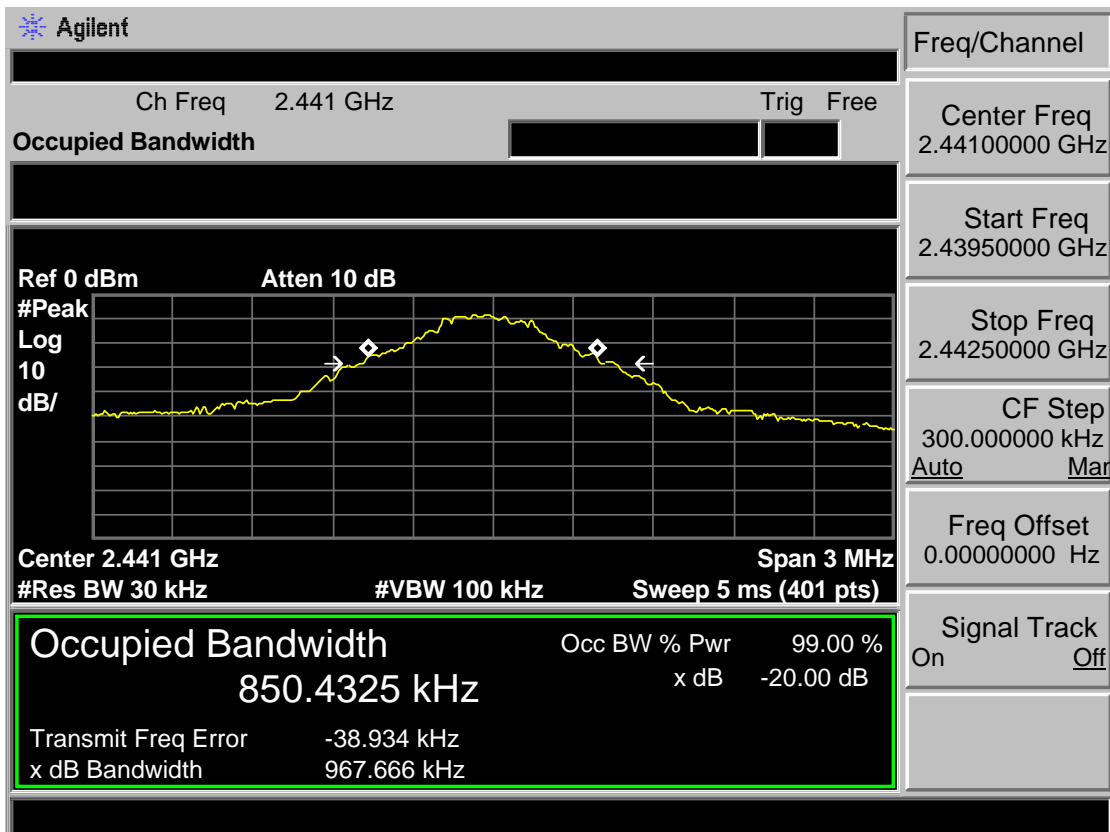


GFSK 2480MHz

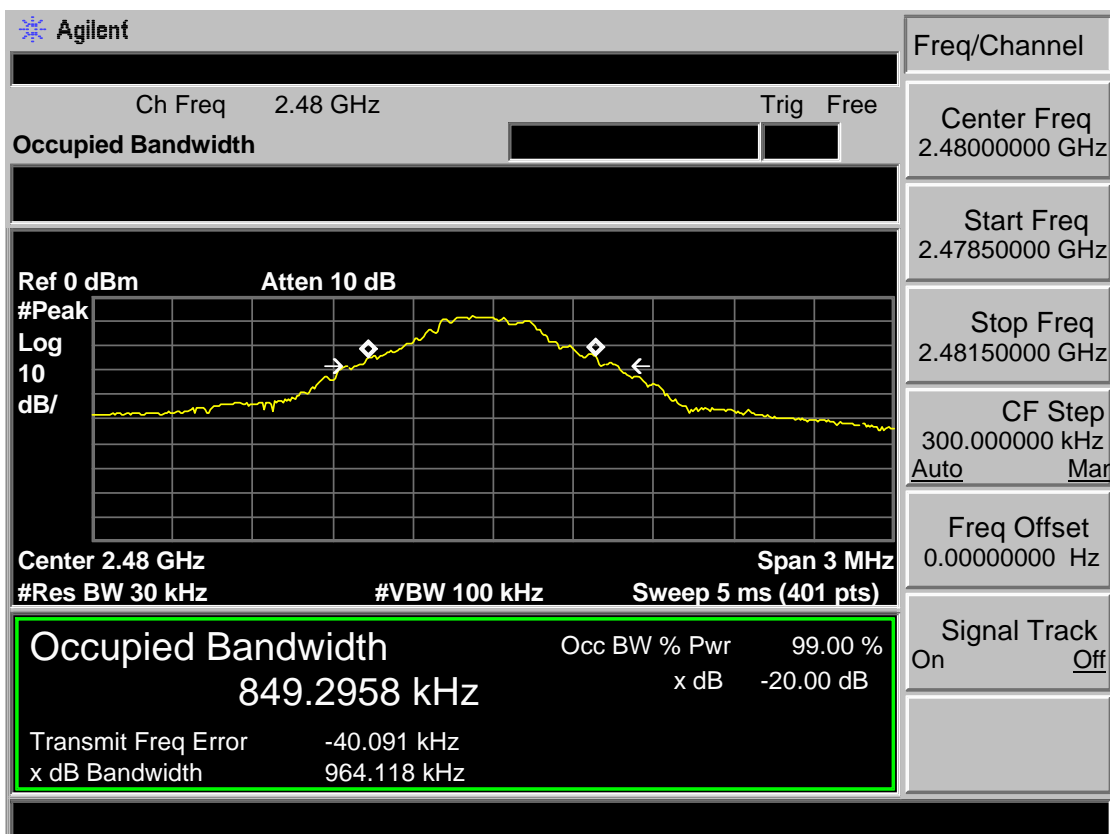

$\pi/4$ -DQPSK 2402MHz

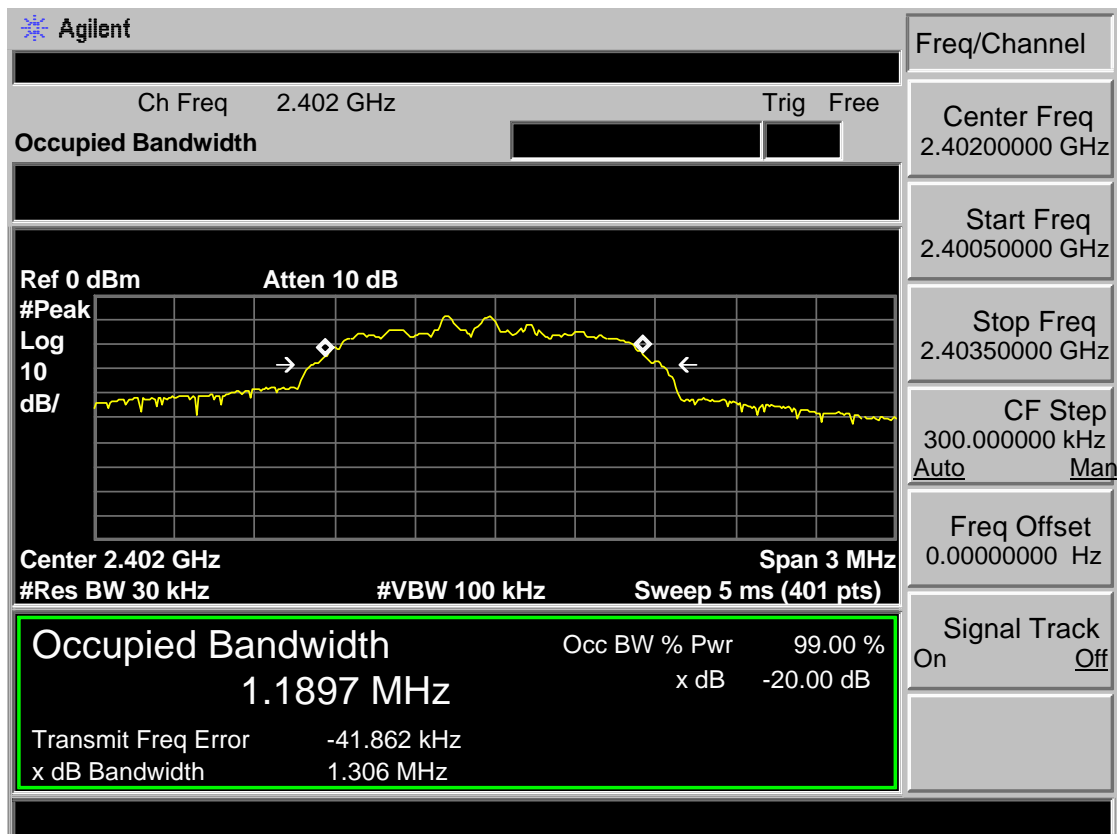

$\pi/4$ -DQPSK 2441MHz

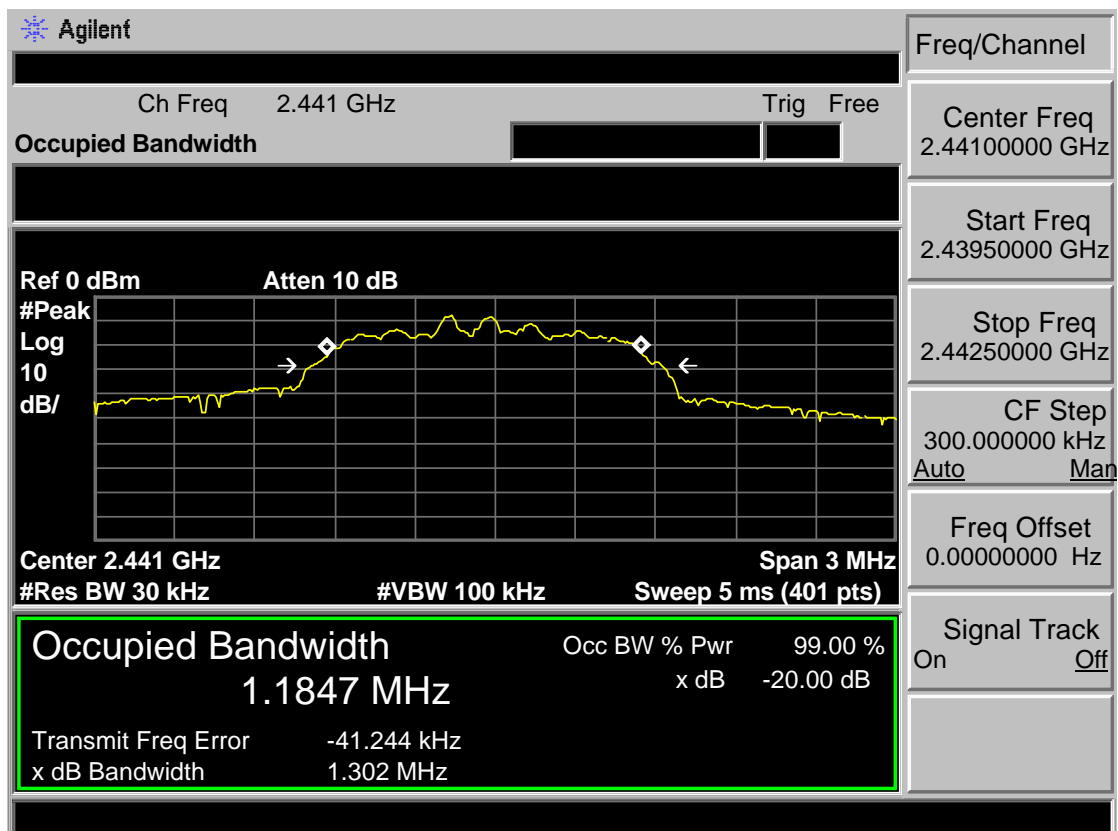

$\pi/4$ -DQPSK 2480MHz



5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.3. Test Result


EUT: Trolley BT Speaker				
M/N: IQ-7210DJBT				
Test date: 2017-06-27		Test site: RF site		Tested by: Viking
Module 1				
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.000	0.958 MHz	PASS
	Mid CH	1.000	0.974 MHz	PASS
	High CH	1.000	0.964 MHz	PASS
$\pi/4$ -DQPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS
Module 2				
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.000	0.967 MHz	PASS
	Mid CH	1.000	0.968 MHz	PASS
	High CH	1.000	0.964 MHz	PASS
$\pi/4$ -DQPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS

5.4. Test Data


Module 1
GFSK
Low Channel

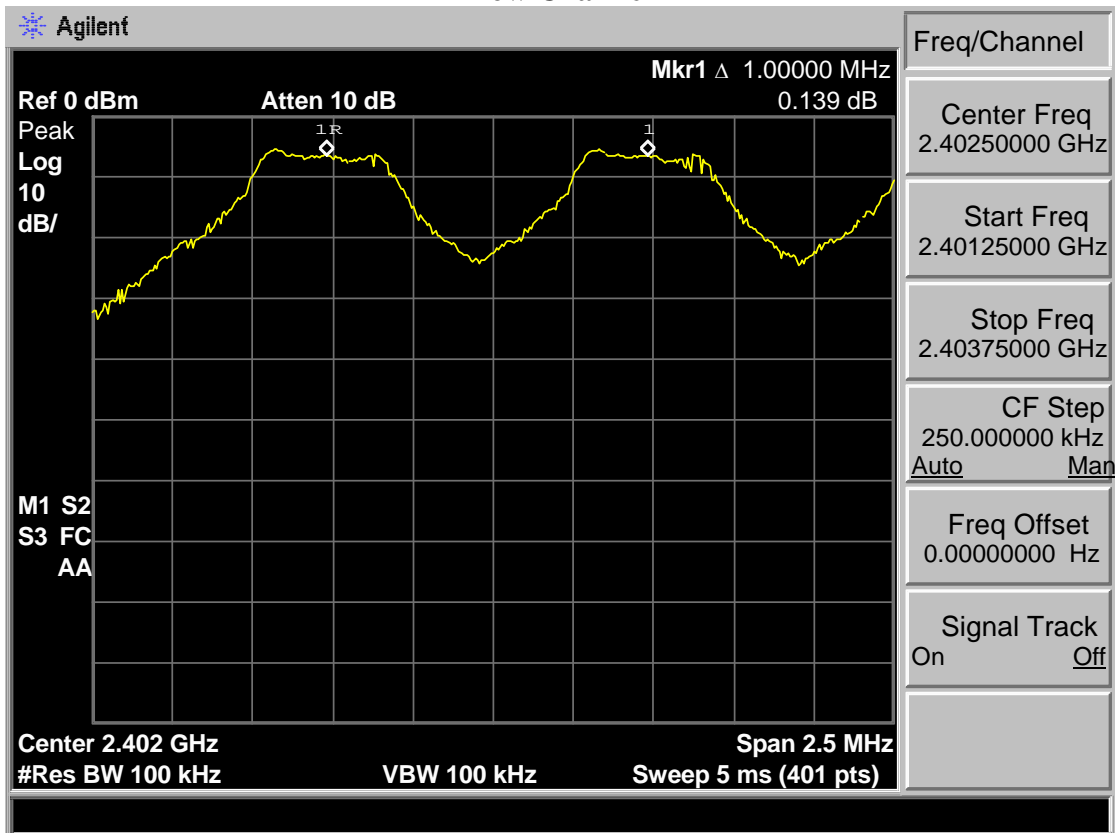


Mid Channel

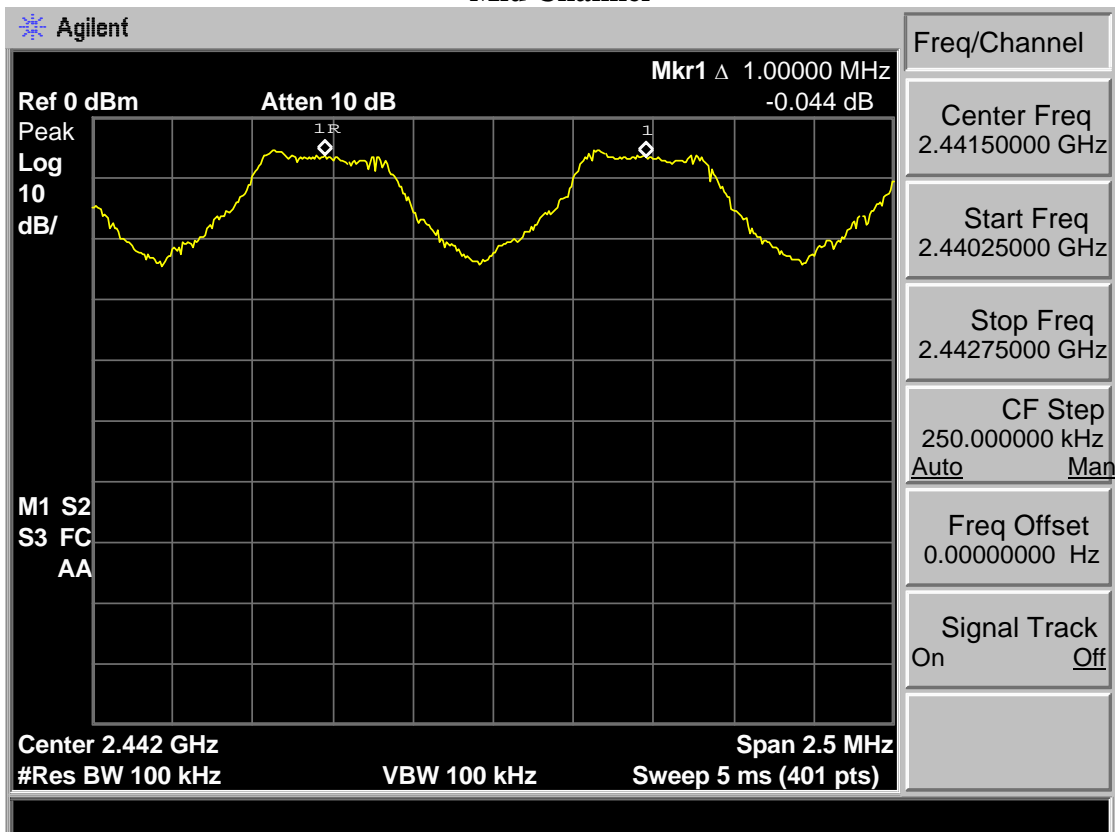


High Channel

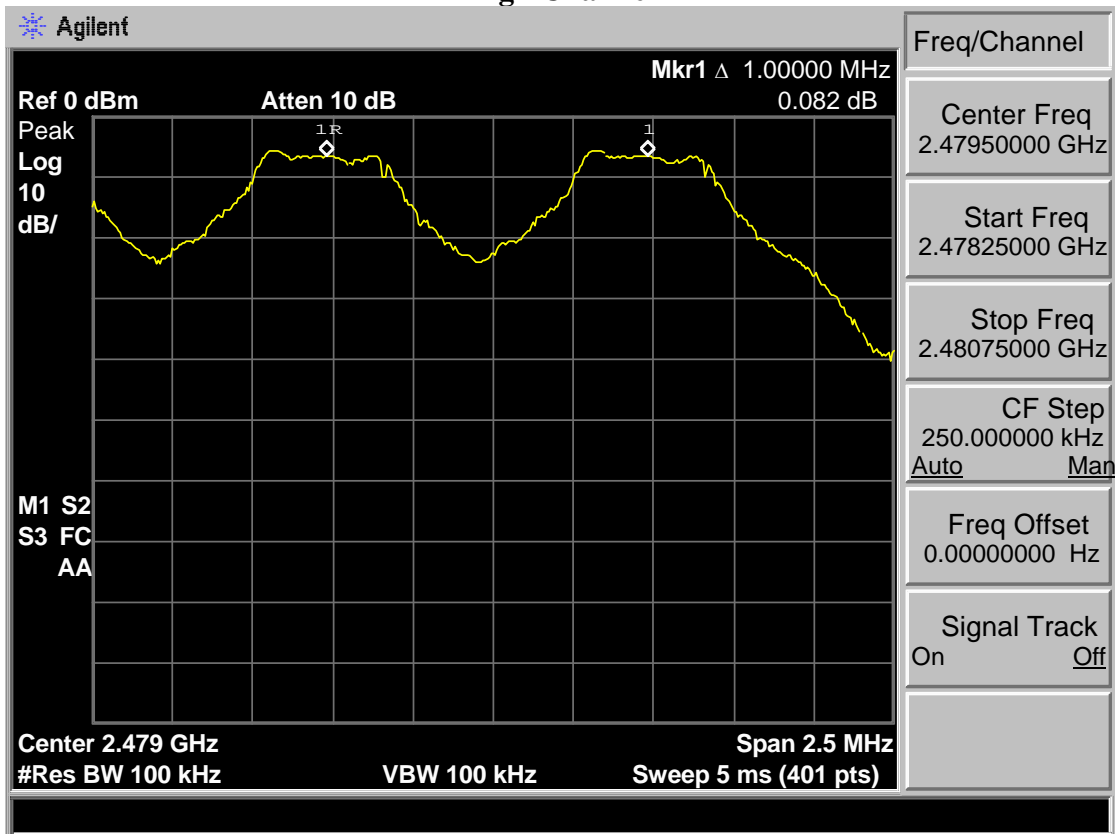


π/4-DQPSK Low Channel

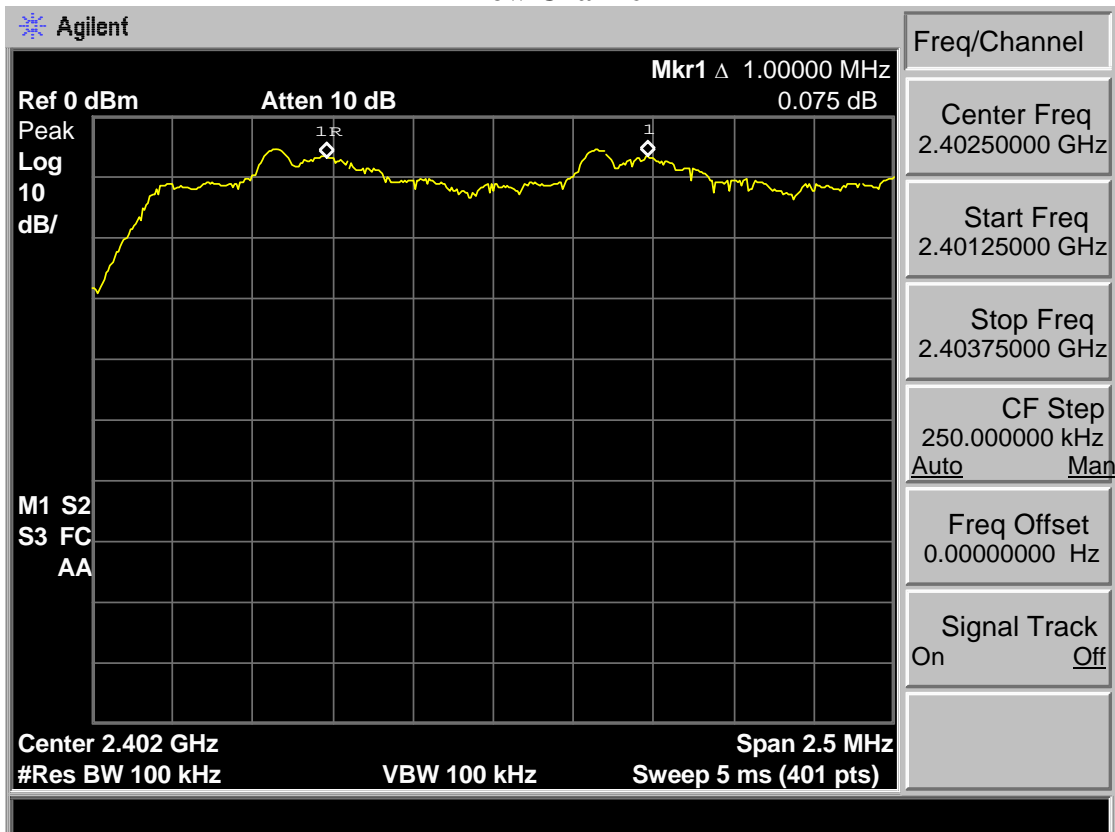


Mid Channel

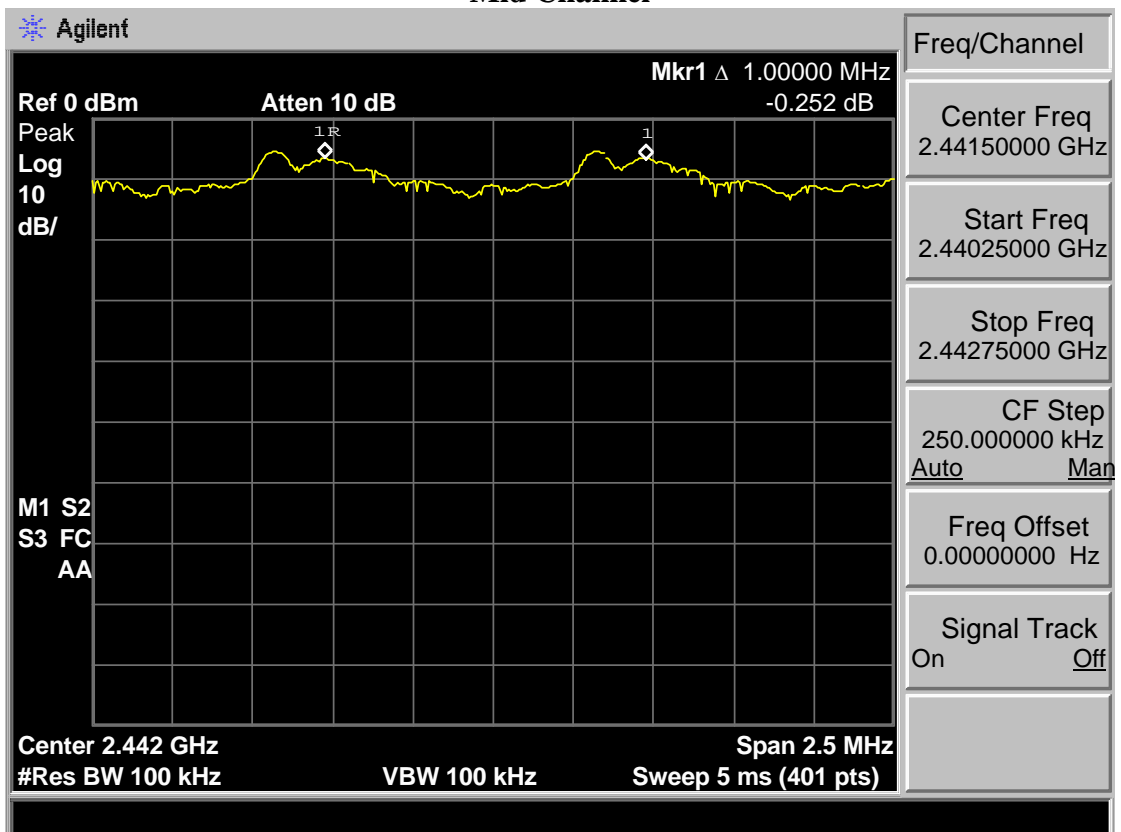


High Channel

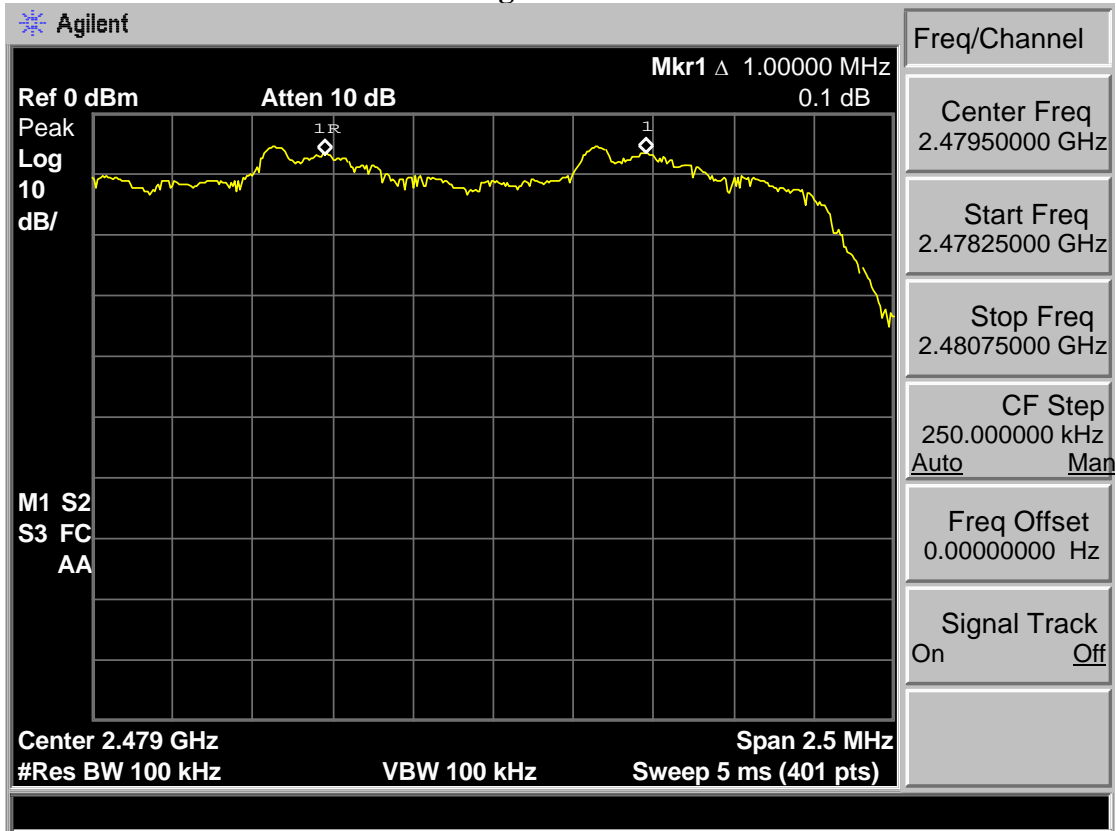


Module 2 GFSK Low Channel

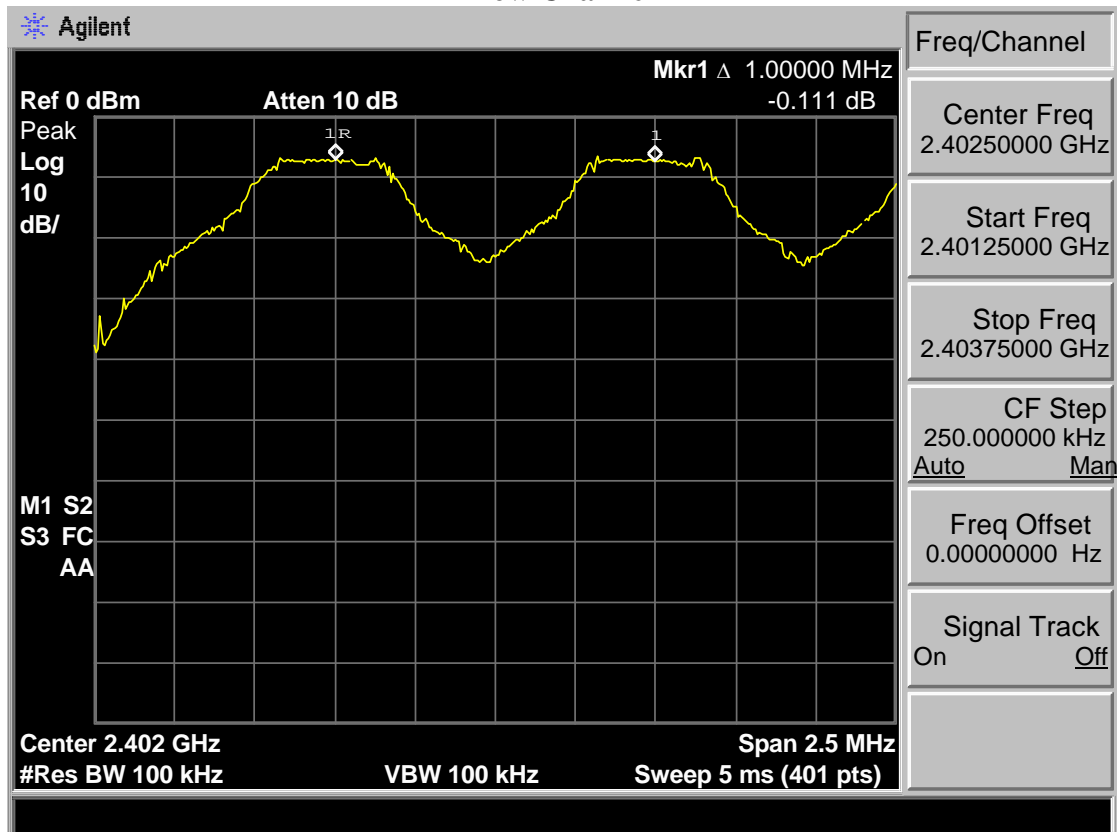


Mid Channel

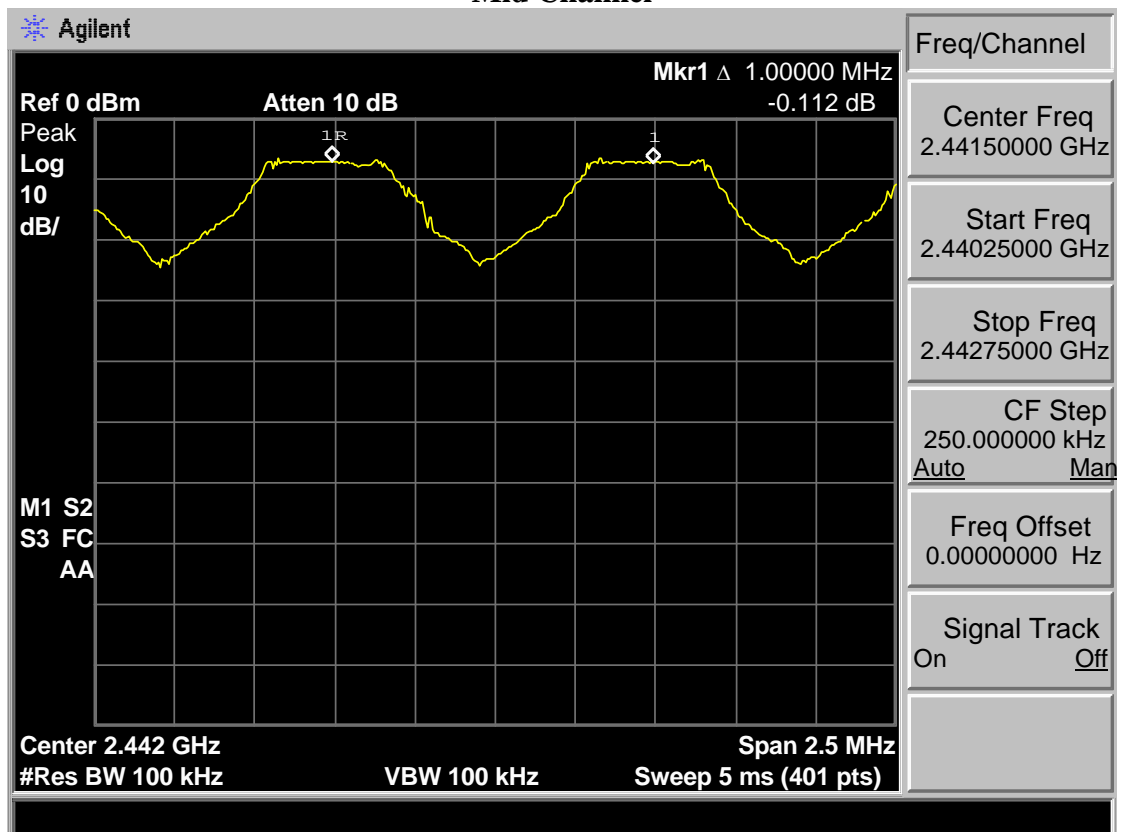


High Channel

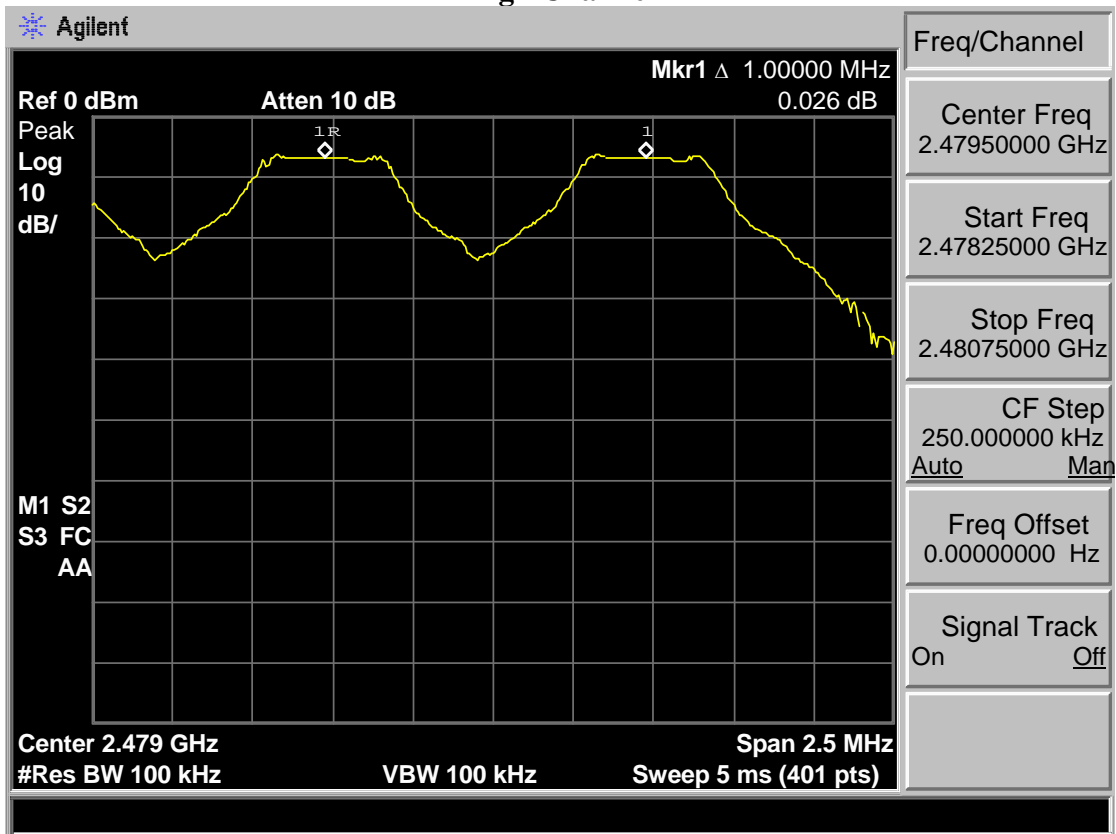


π/4-DQPSK Low Channel

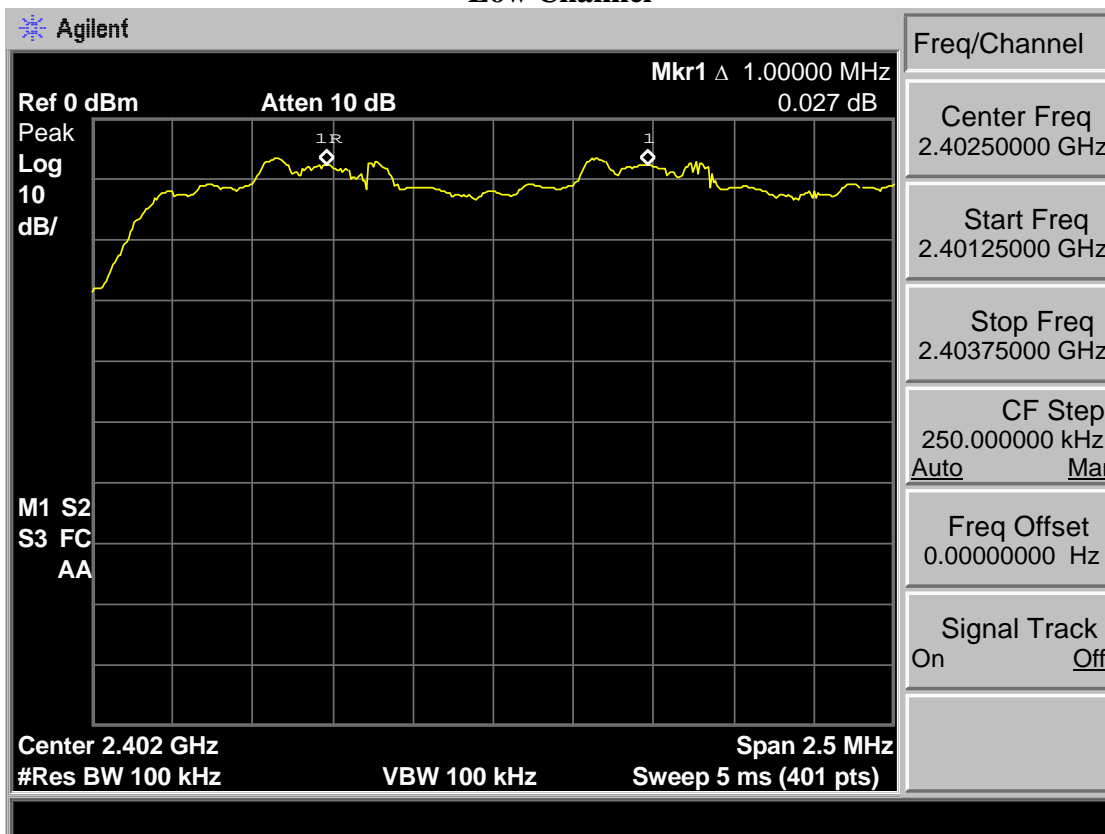

Mid Channel

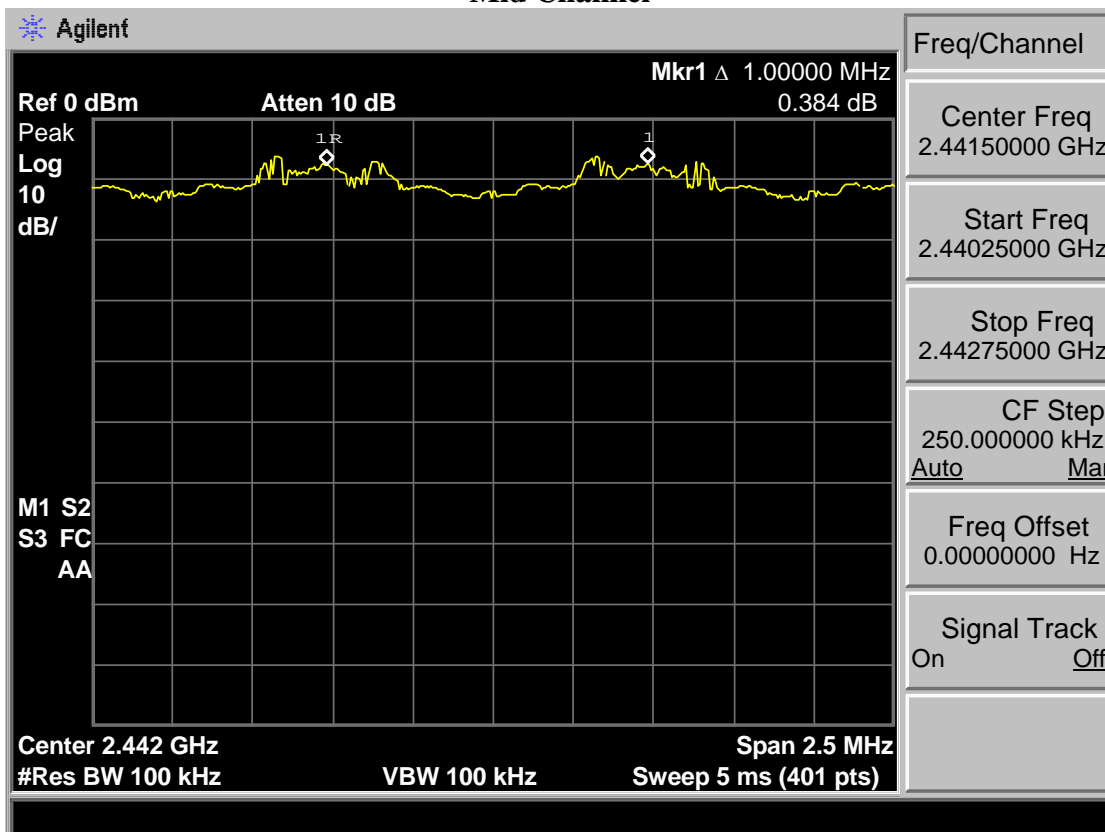

High Channel

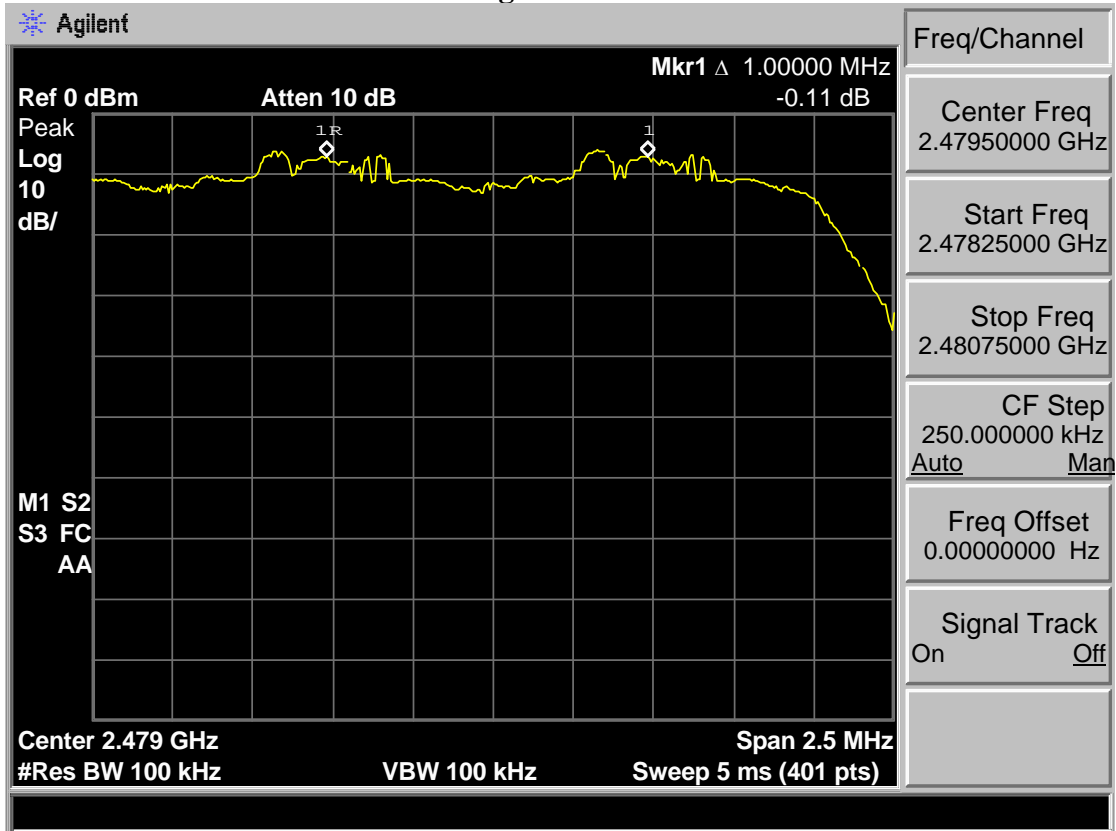

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result




EUT: Trolley BT Speaker			
M/N: IQ-7210DJBT			
Test date: 2017-06-27		Test site: RF site	Tested by: Viking
Module 1			
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
$\pi/4$ -DQPSK	79	>15	PASS
Module 2			
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
$\pi/4$ -DQPSK	79	>15	PASS

6.4. Test Data




Module 1 GFSK

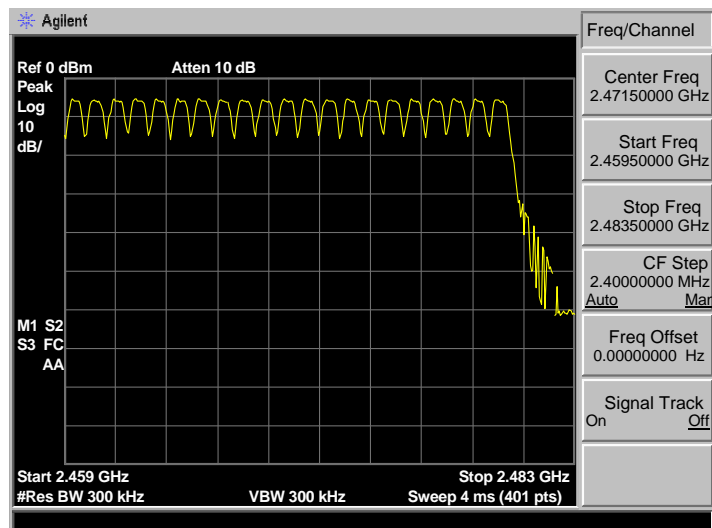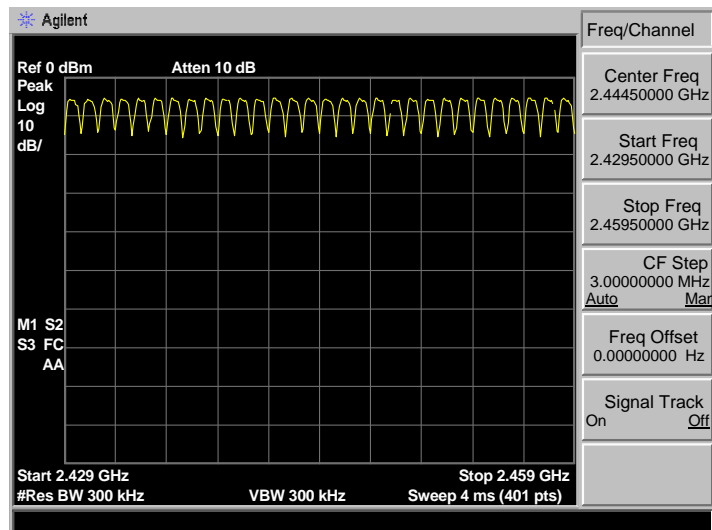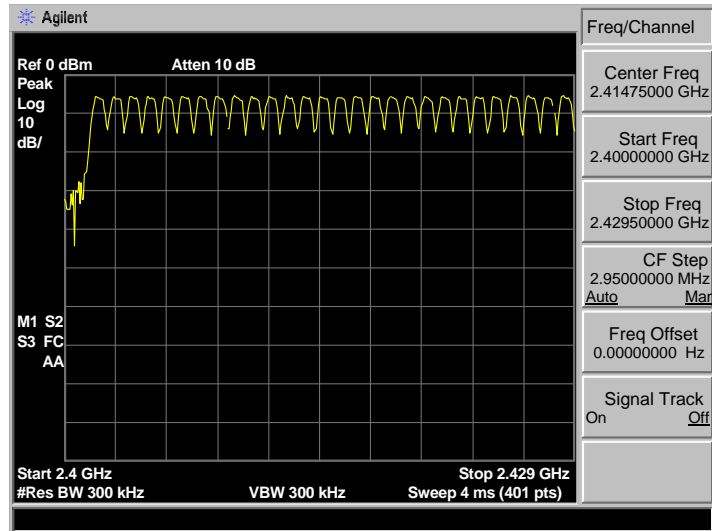




$\pi/4$ -DQPSK

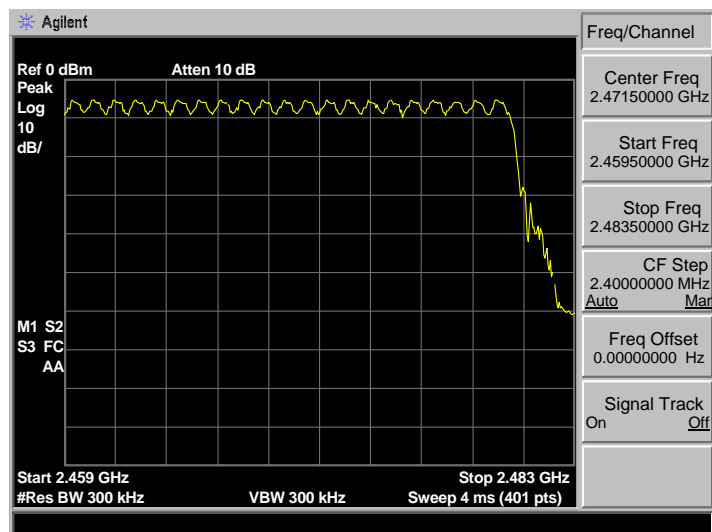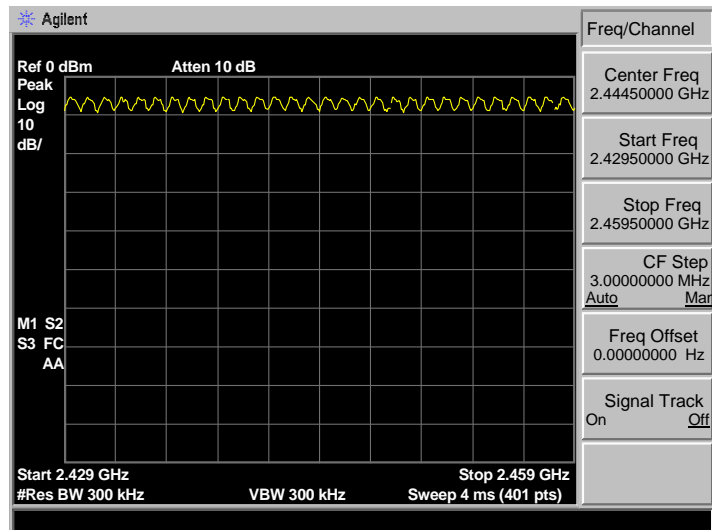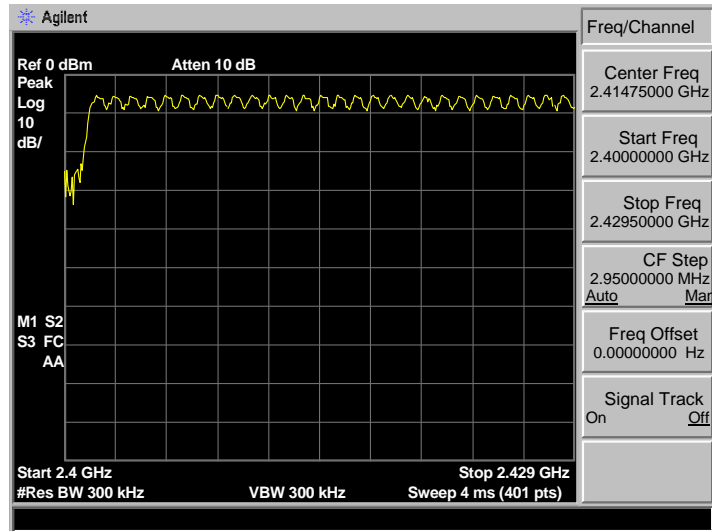

Module 2 GFSK

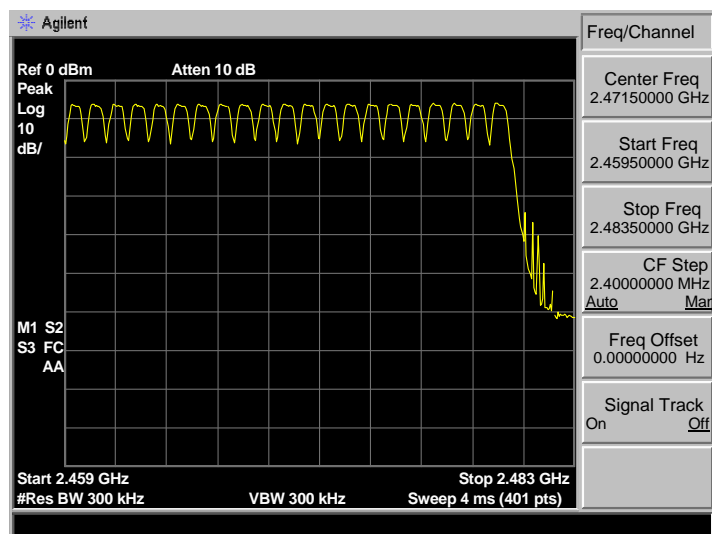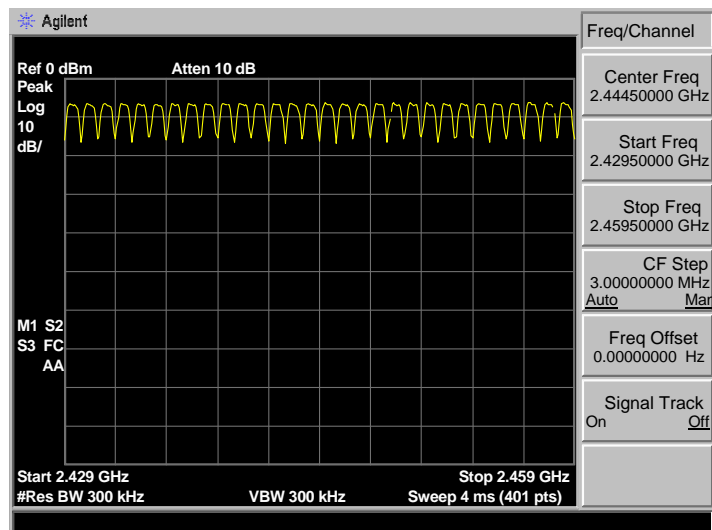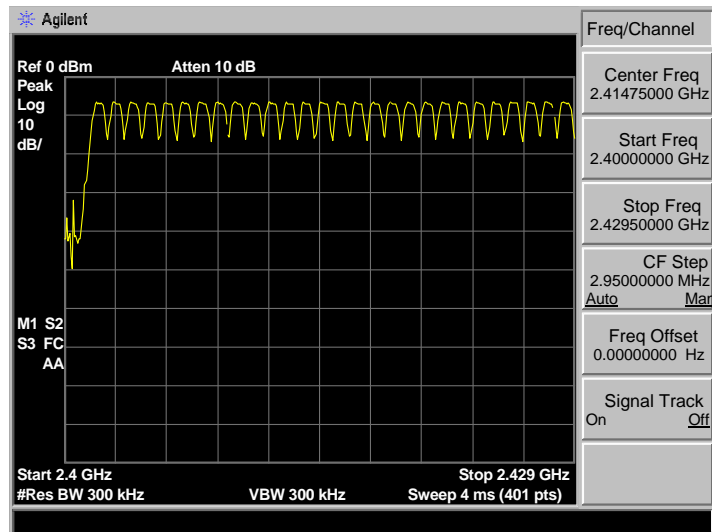

$\pi/4$ -DQPSK

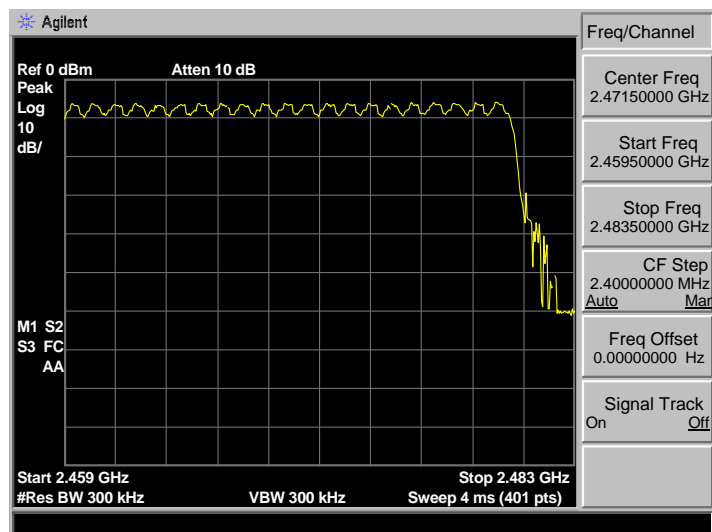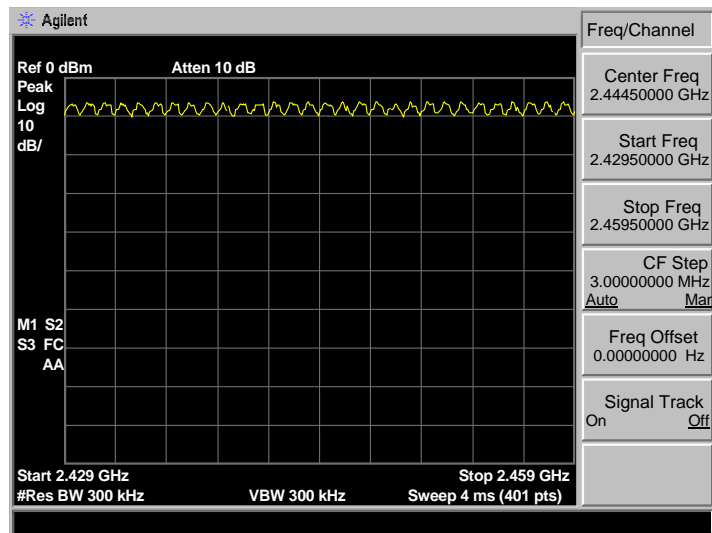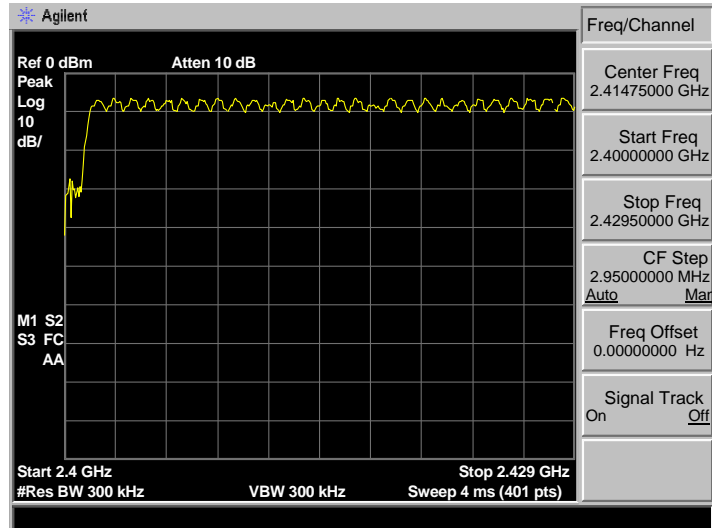

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure



1. The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW= 1MHz, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

7.3. Test Result



EUT: Trolley BT Speaker						
M/N: IQ-7210DJBT						
Test date: 2017-06-27		Test site: RF site		Tested by: Viking		
Module 1						
Mode	Hopping number	Measure time (s)	Burst on time (ms)	Dwell time (ms)	Limit	Conclusion
GFSK DH1	50	5	0.40	126.40	<400ms	PASS
GFSK DH3	22	5	1.66	230.81	<400ms	PASS
GFSK DH5	18	5	2.89	328.77	<400ms	PASS
$\pi/4$ -DQPSK 3DH1	47	5	0.40	118.82	<400ms	PASS
$\pi/4$ -DQPSK 3DH3	24	5	1.65	250.27	<400ms	PASS
$\pi/4$ -DQPSK 3DH5	17	5	2.89	310.50	<400ms	PASS
Module 2						
Mode	Hopping number	Measure time (s)	Burst on time (ms)	Dwell time (ms)	Limit	Conclusion
GFSK DH1	49	5	0.41	126.97	<400ms	PASS
GFSK DH3	21	5	1.67	221.64	<400ms	PASS
GFSK DH5	17	5	2.89	310.50	<400ms	PASS
$\pi/4$ -DQPSK 3DH1	47	5	0.40	118.82	<400ms	PASS
$\pi/4$ -DQPSK 3DH3	22	5	1.66	230.81	<400ms	PASS
$\pi/4$ -DQPSK 3DH5	14	5	2.89	255.71	<400ms	PASS
Dwell time = Hopping number/measure time *0.4*79*burst on time.						

7.4. Test Data



**Module 1
GFSK DH1**

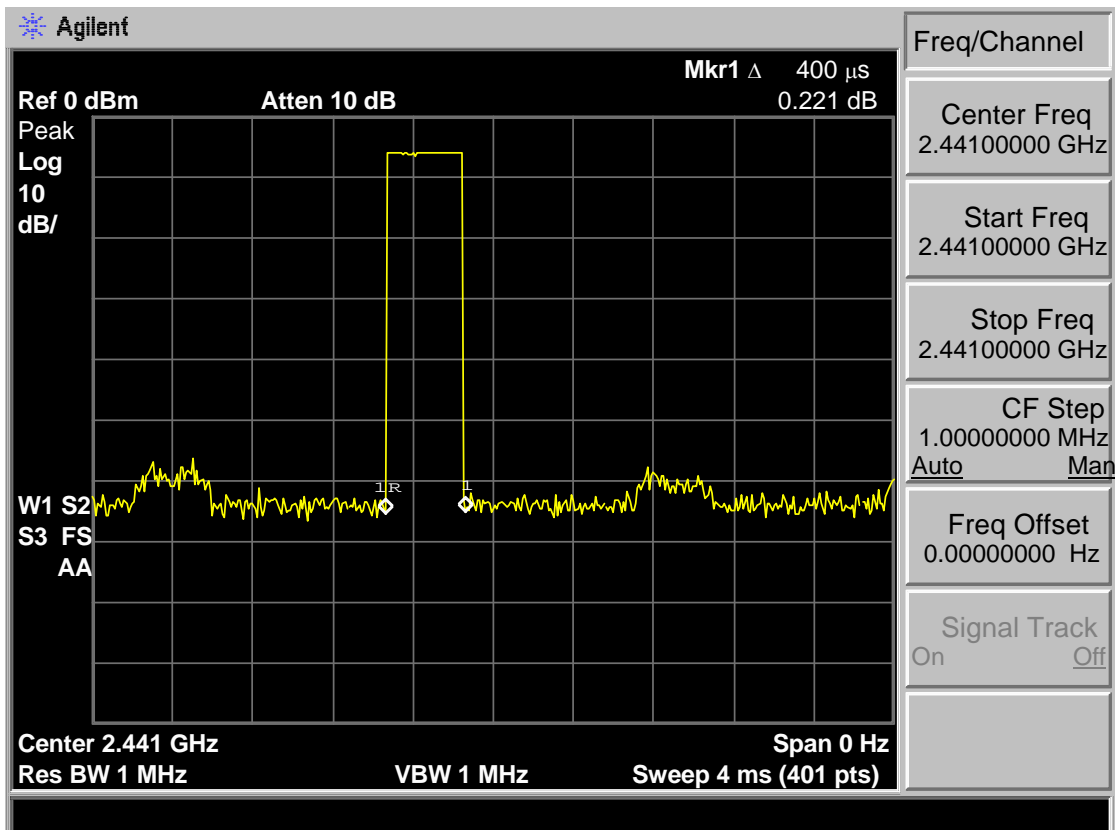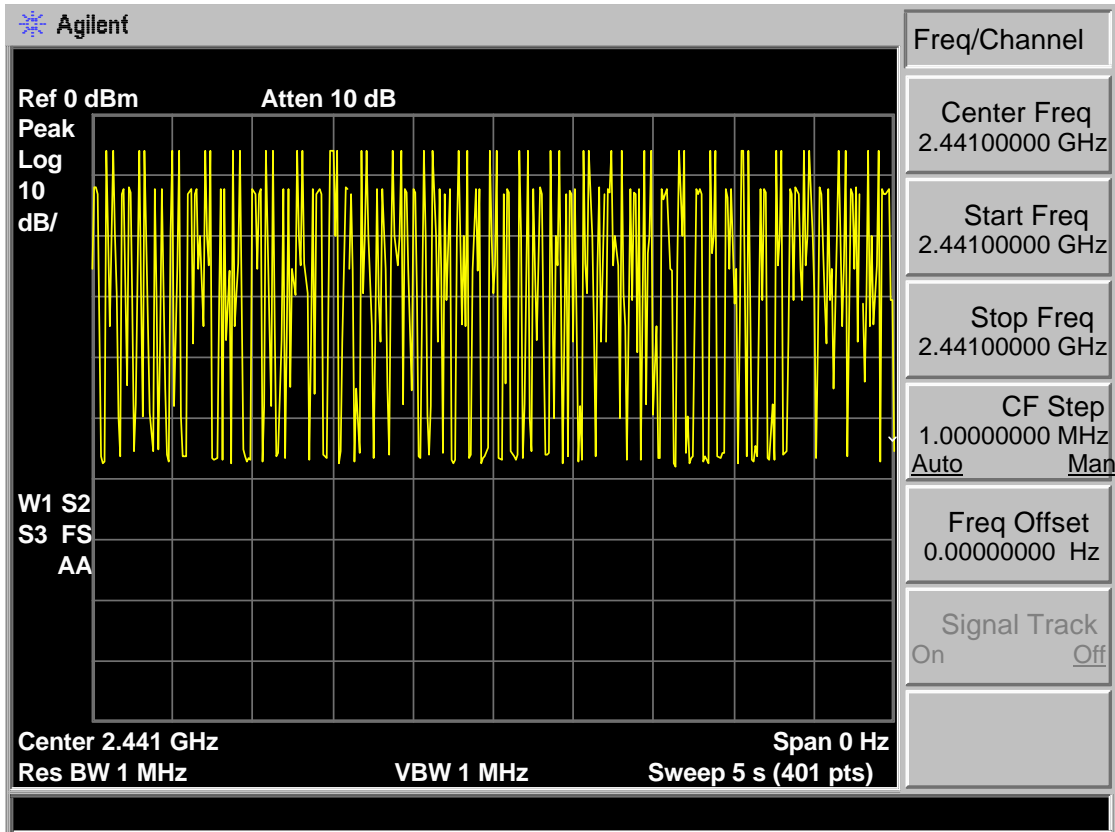



GFSK DH3

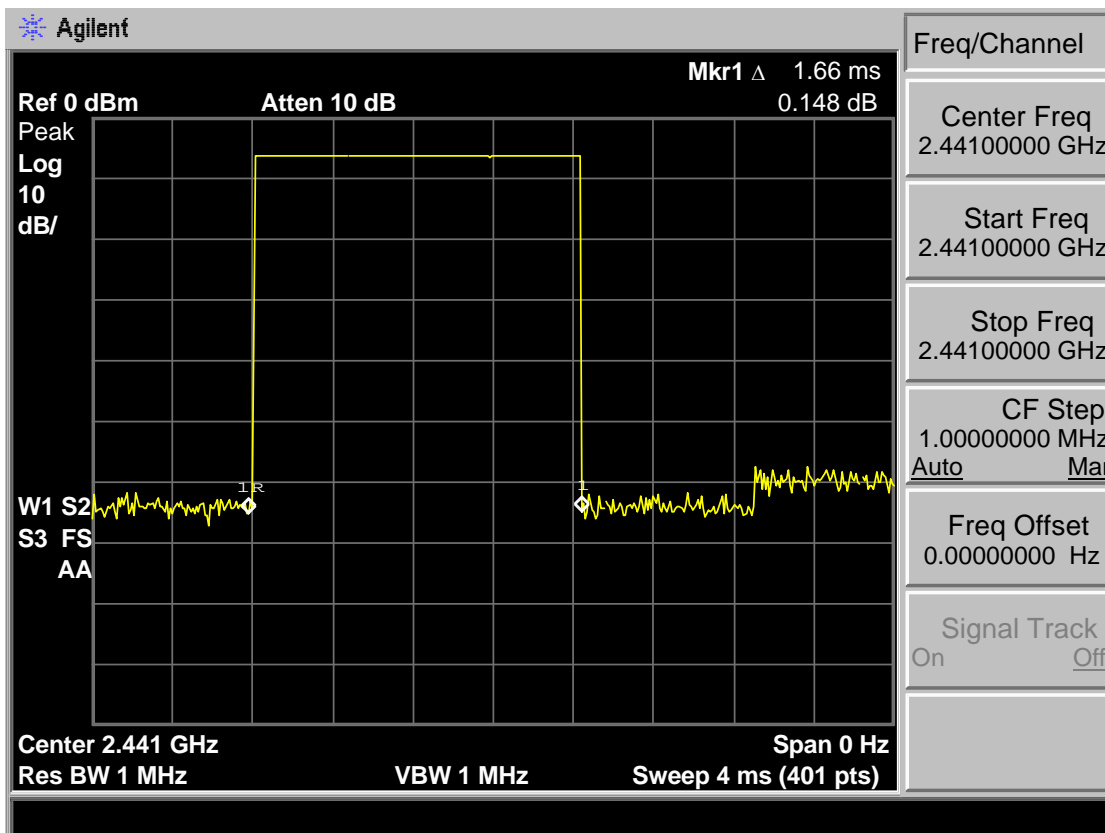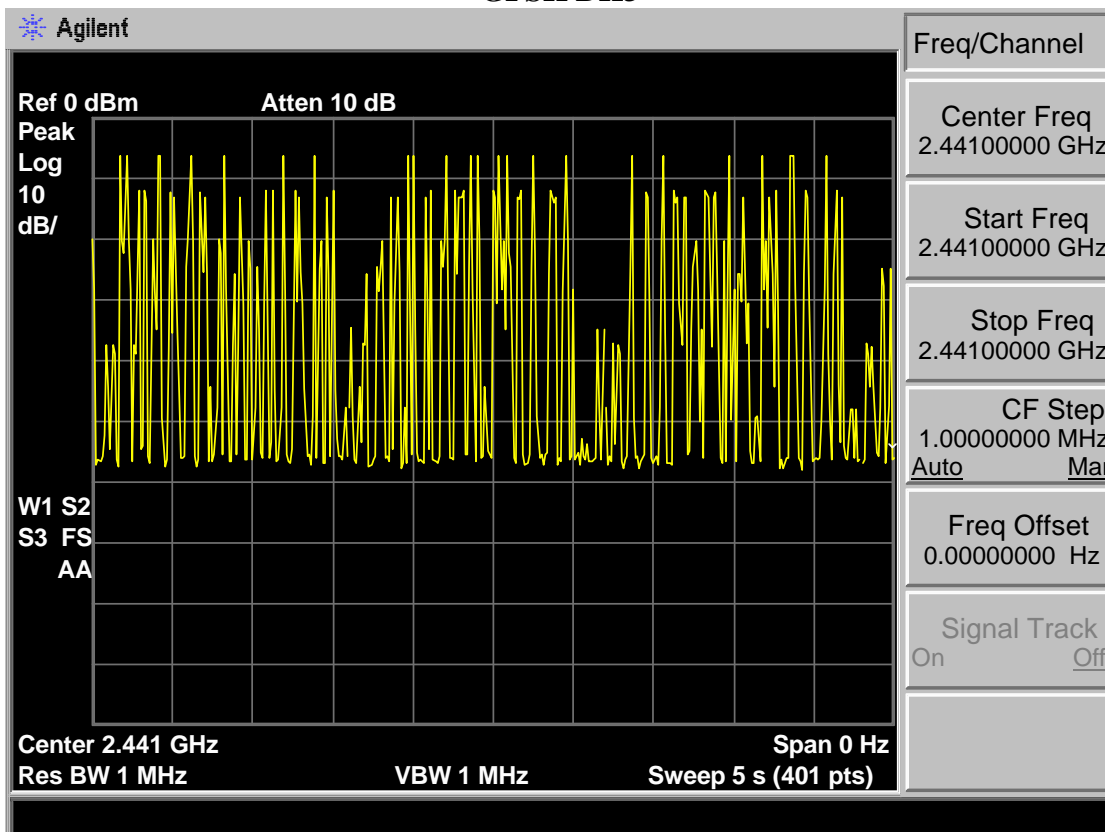



GSFK DH5

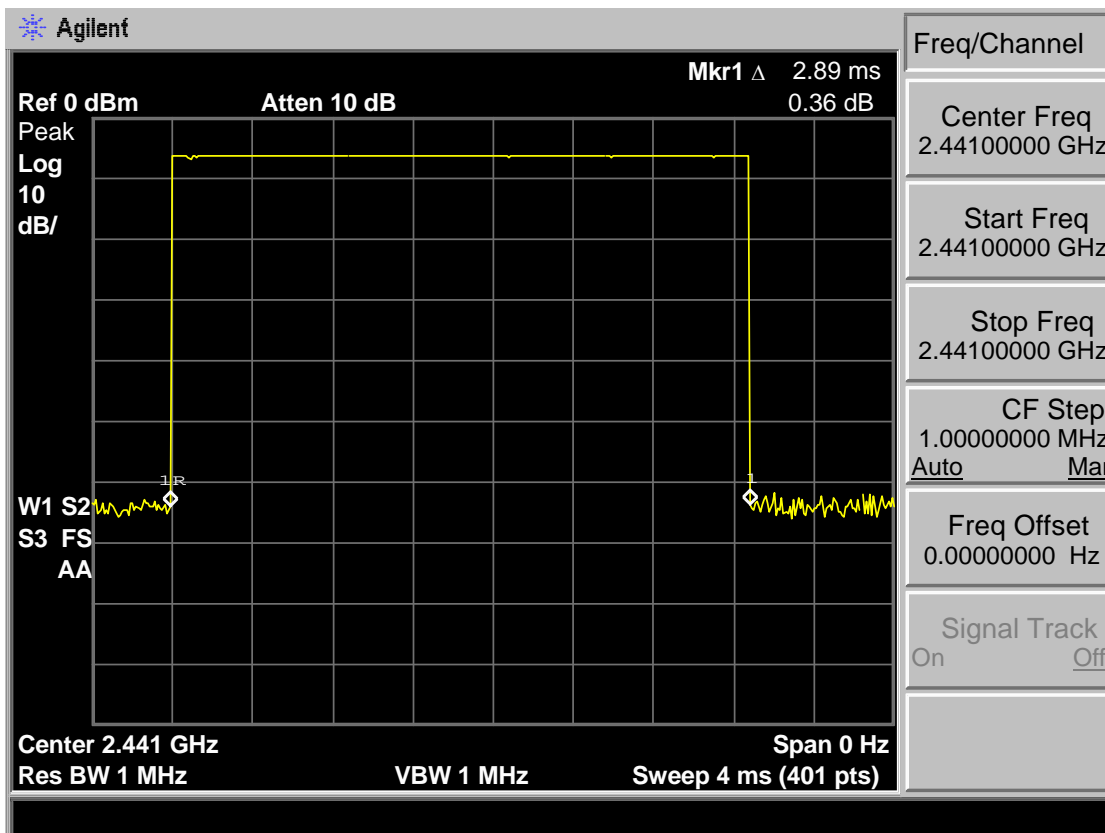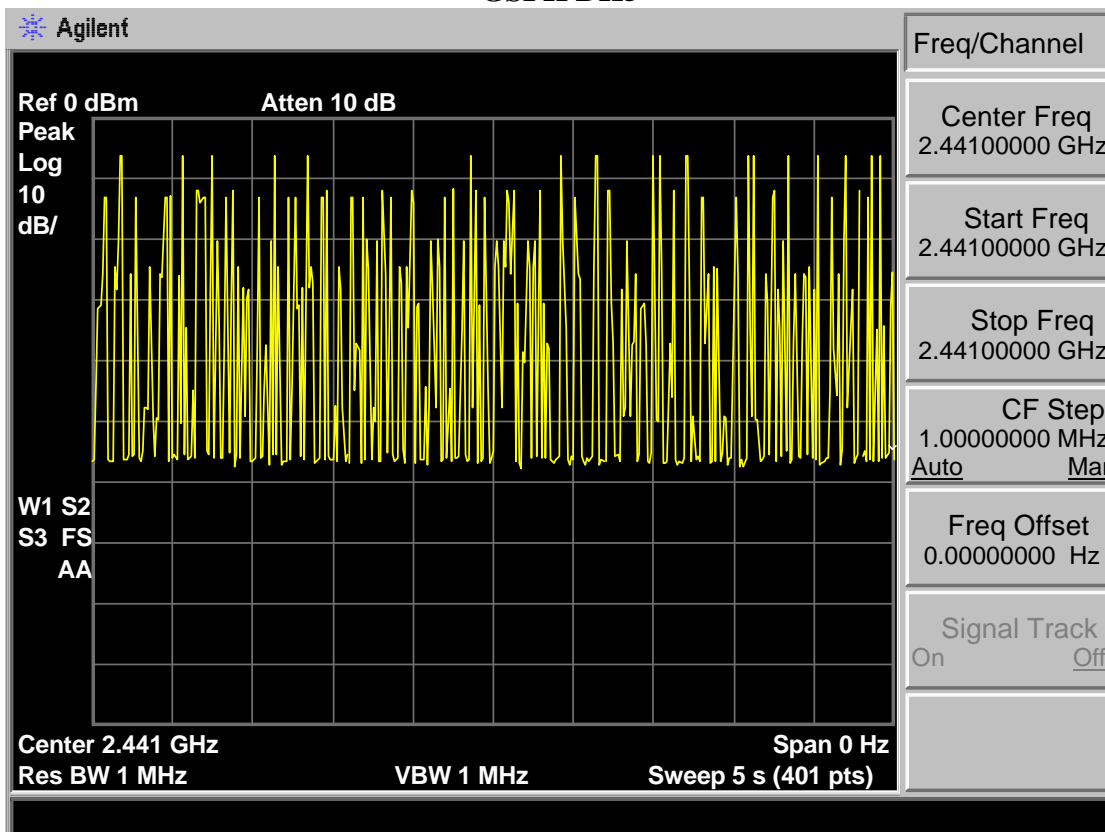



π/4-DQPSK 3DH1

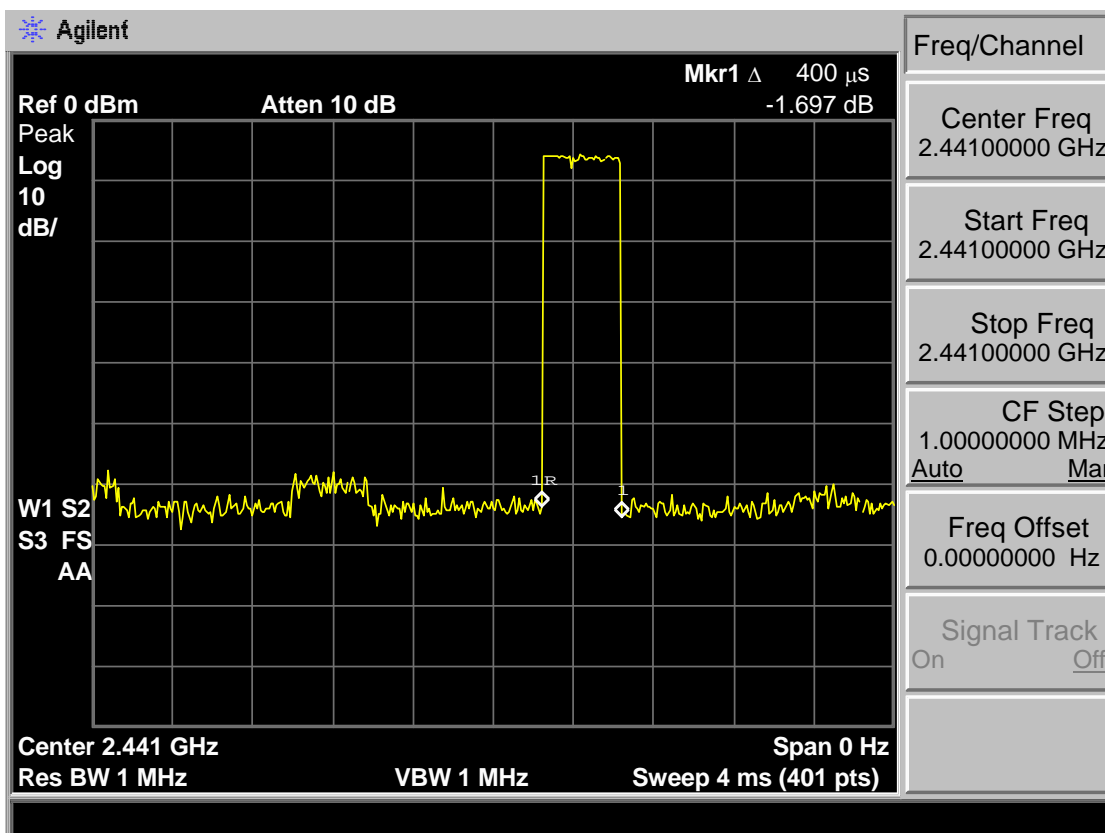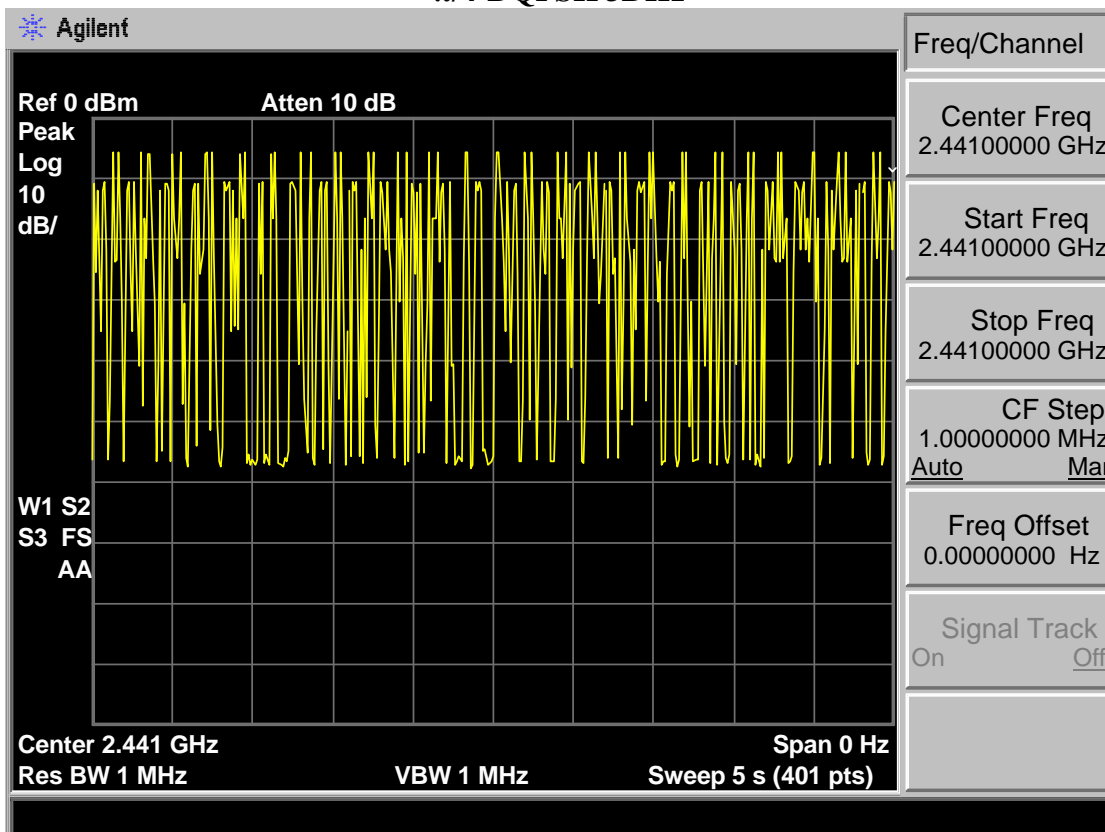



$\pi/4$ -DQPSK 3DH3

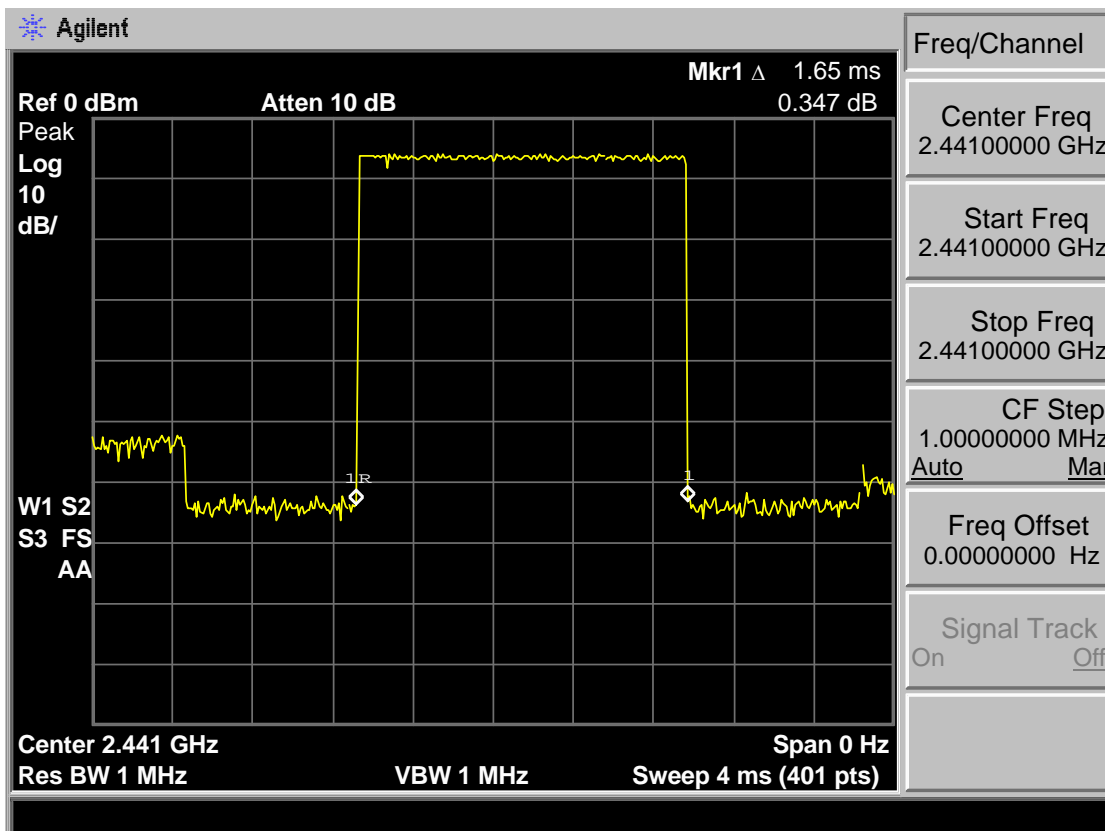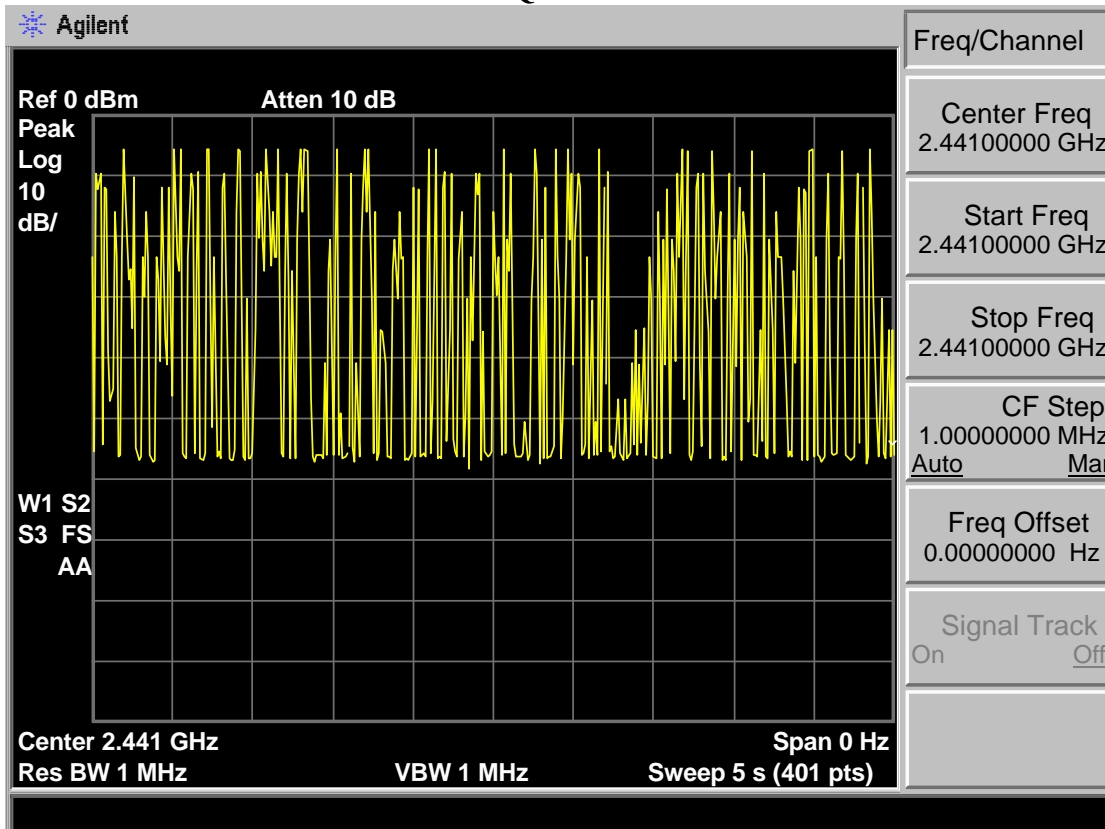



$\pi/4$ -DQPSK 3DH5

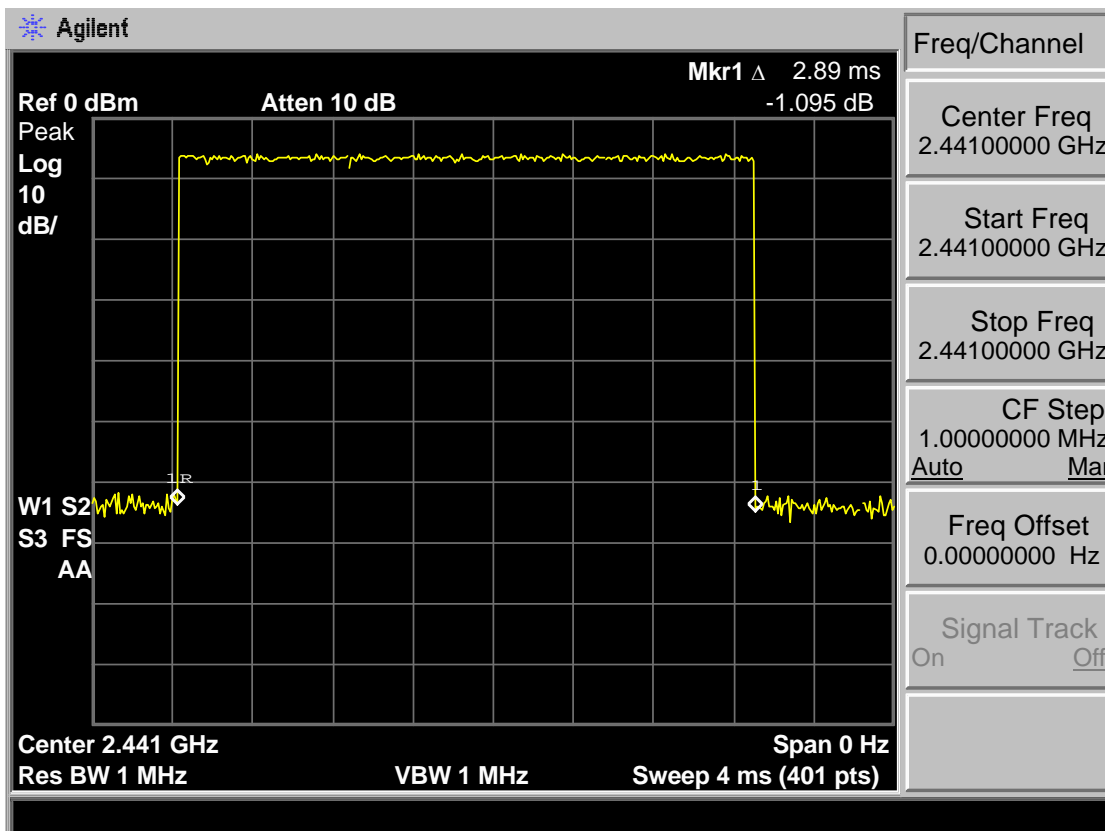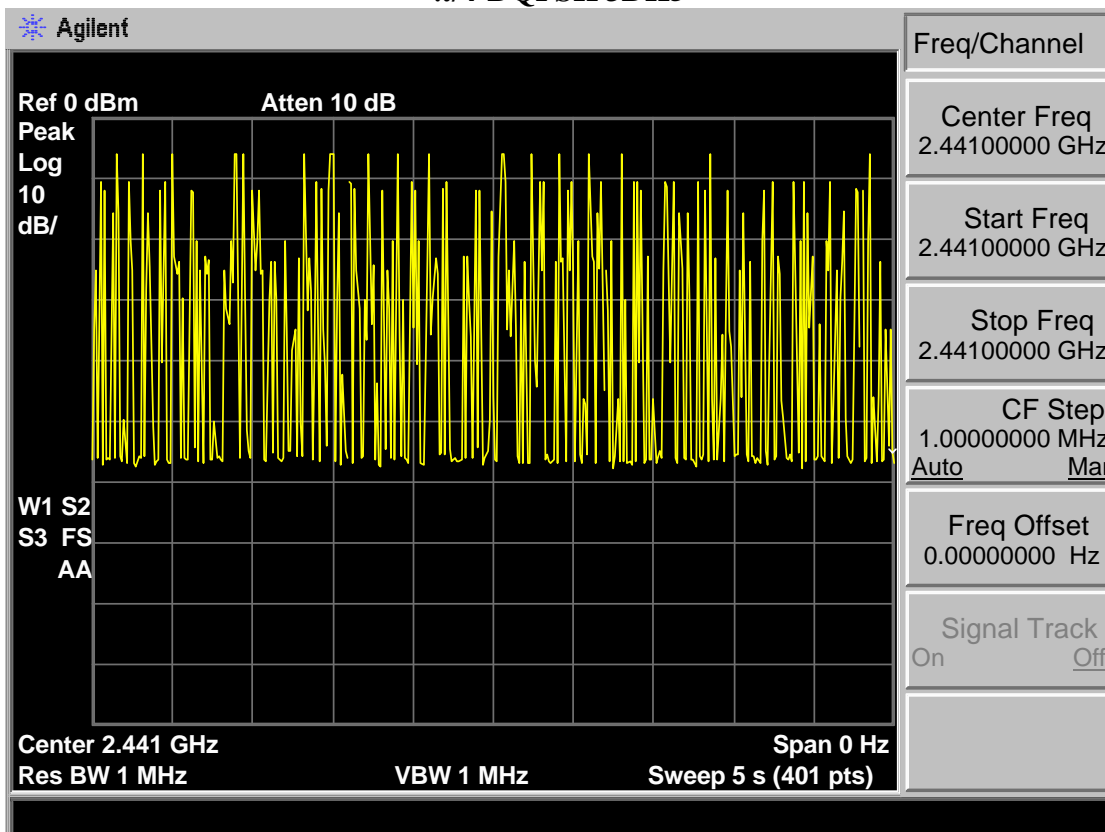



Module 2 GFSK DH1

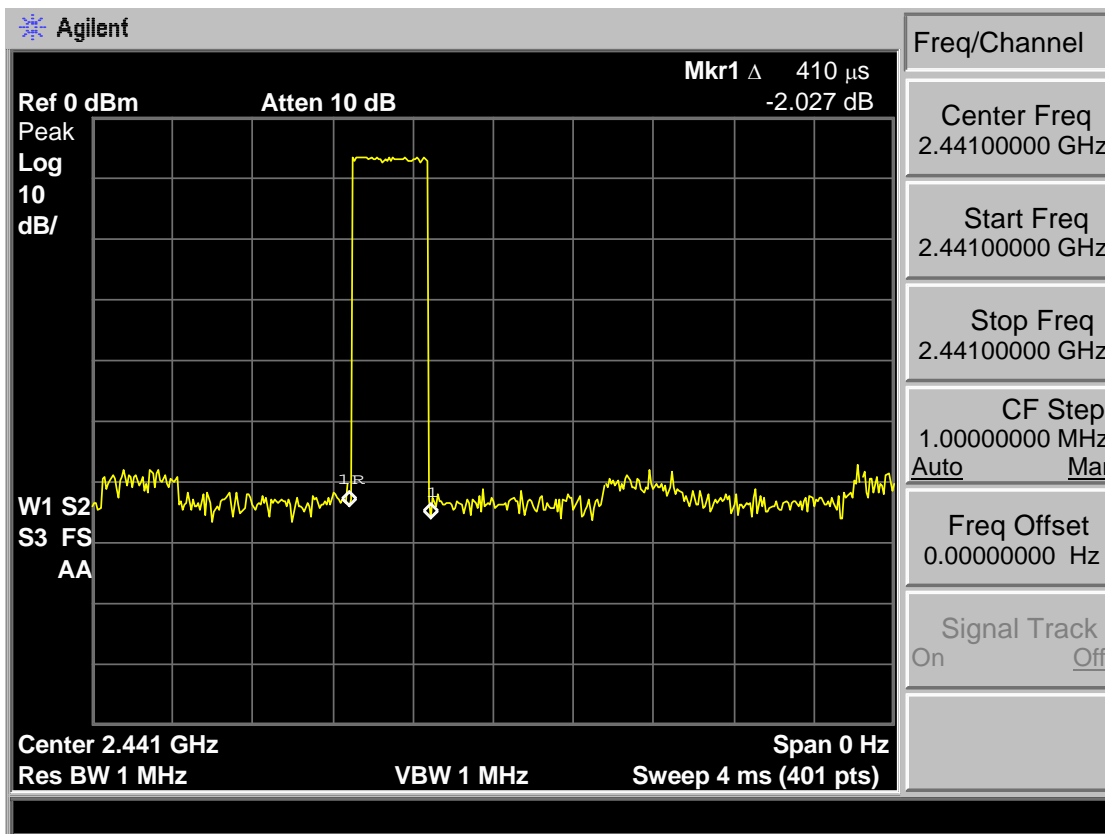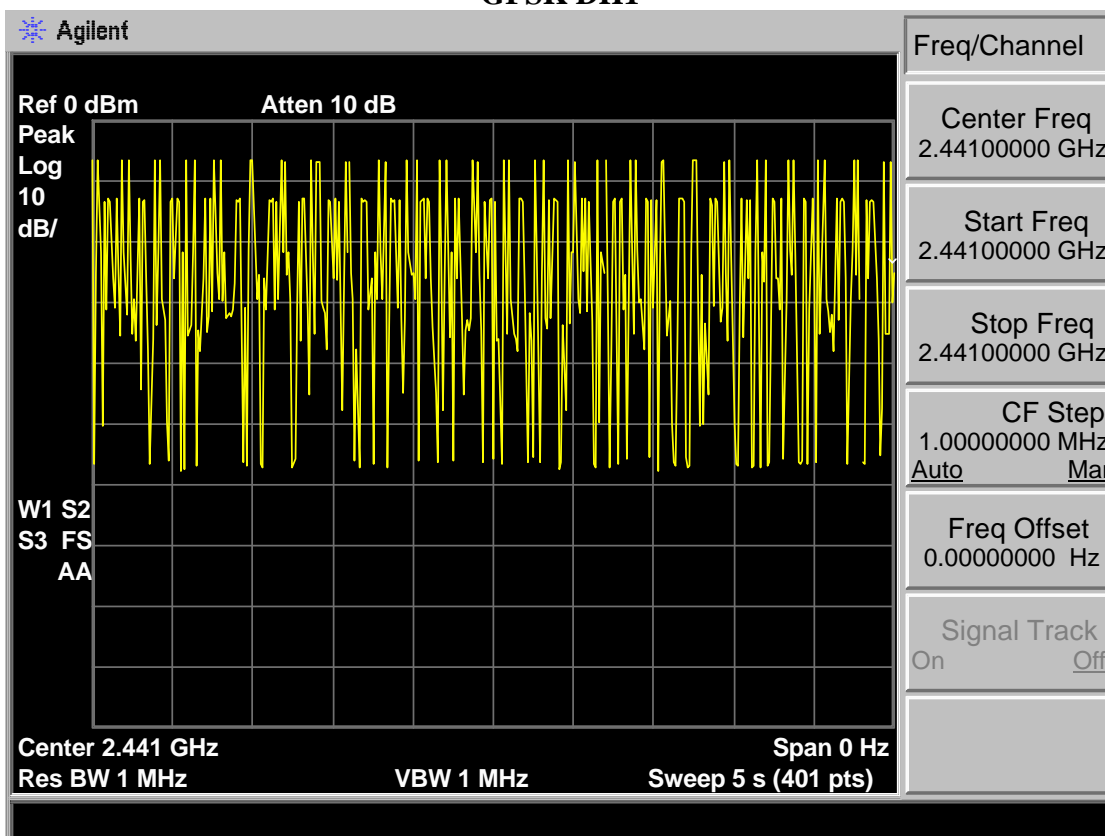



GFSK DH3

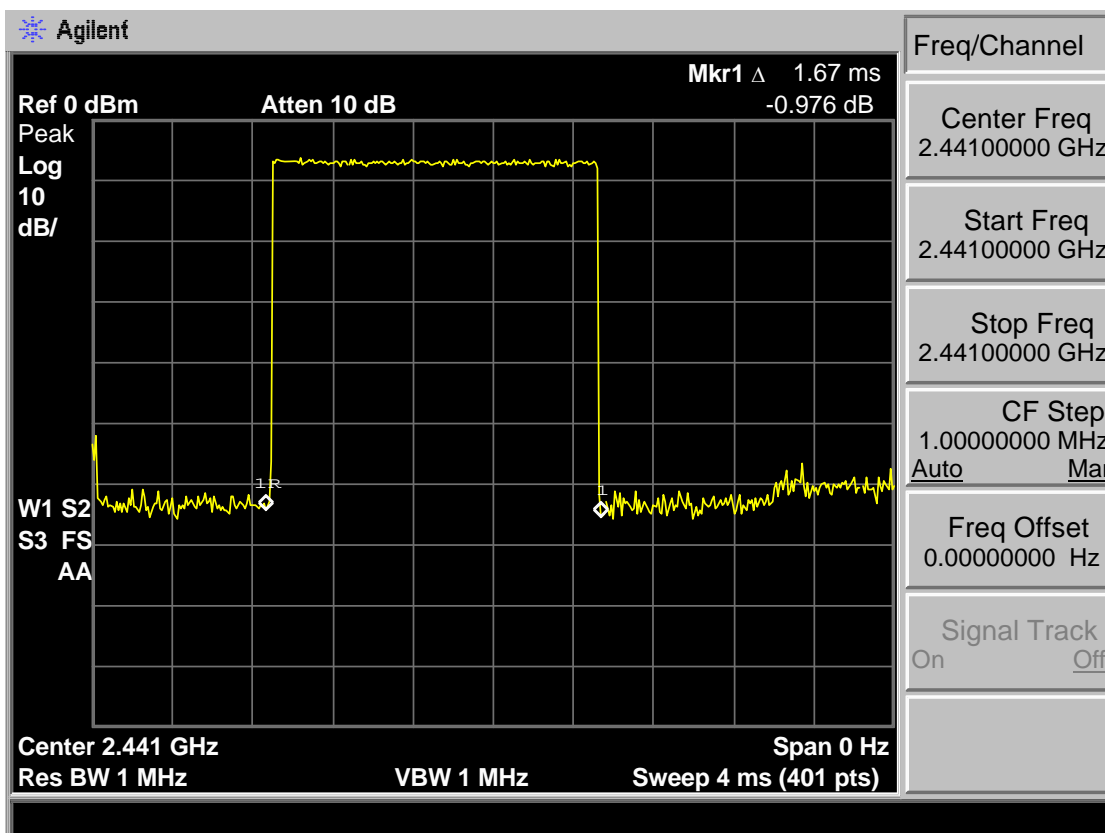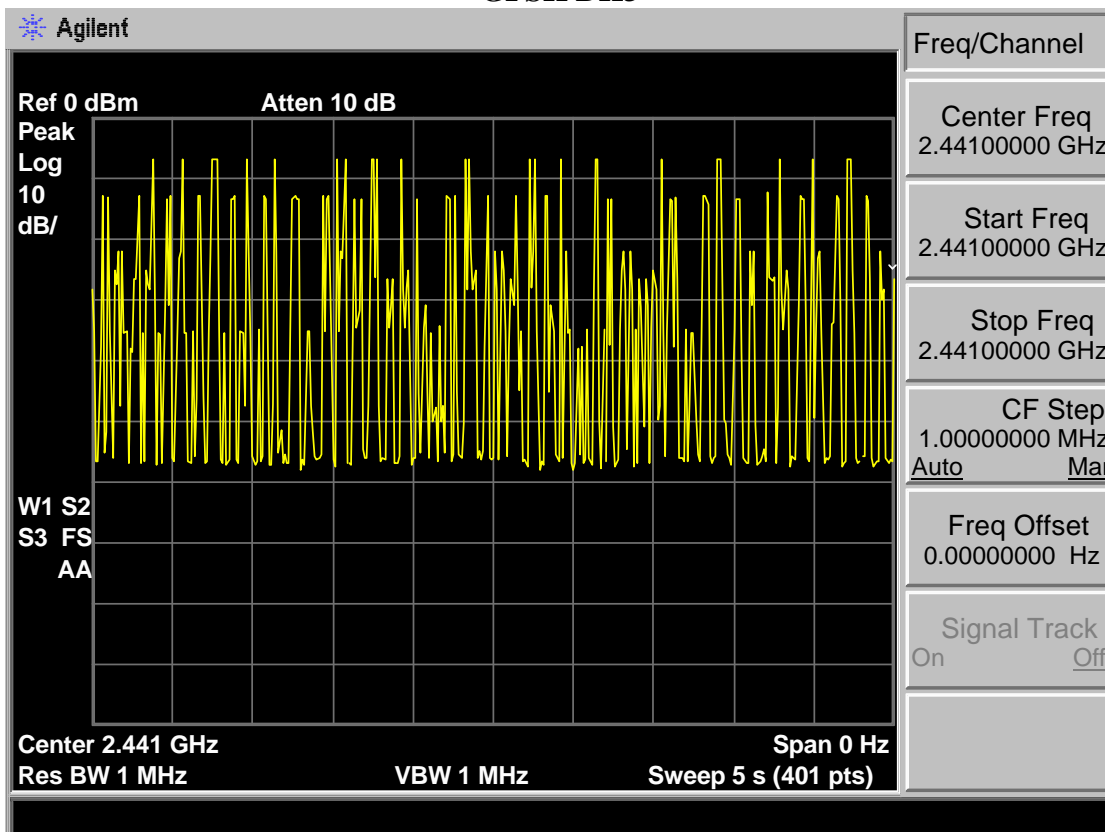



GSFK DH5

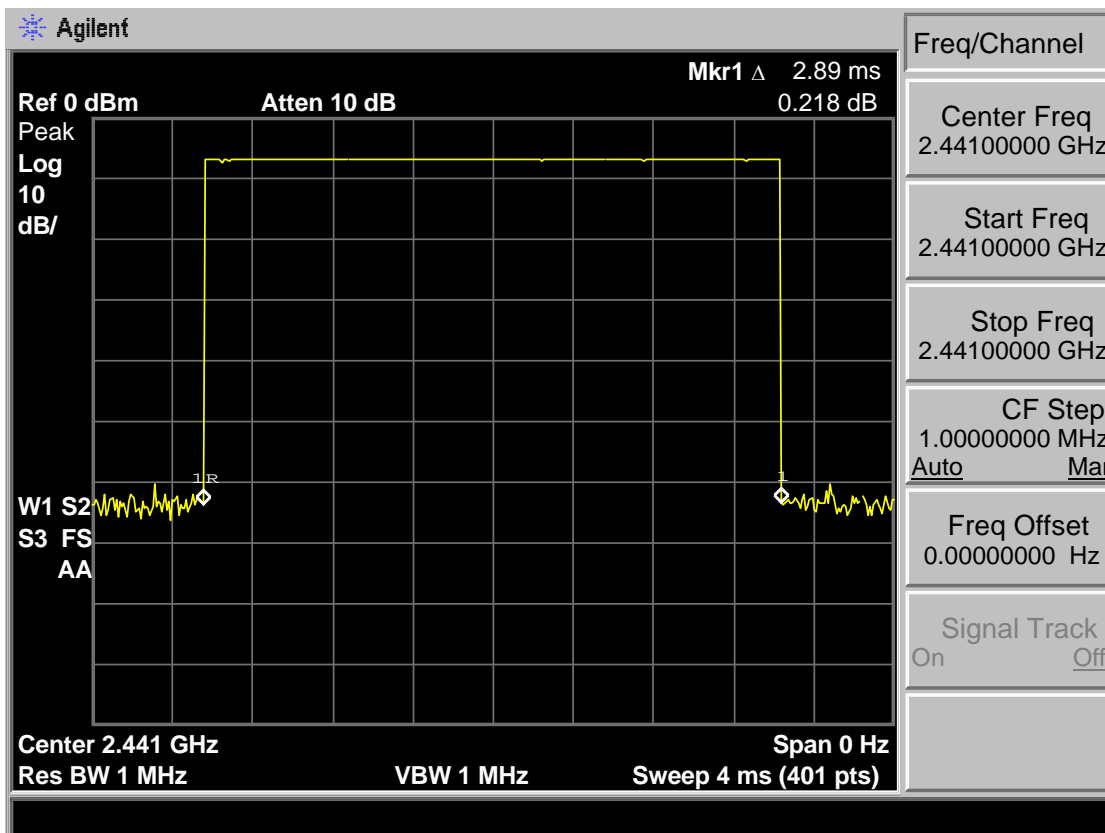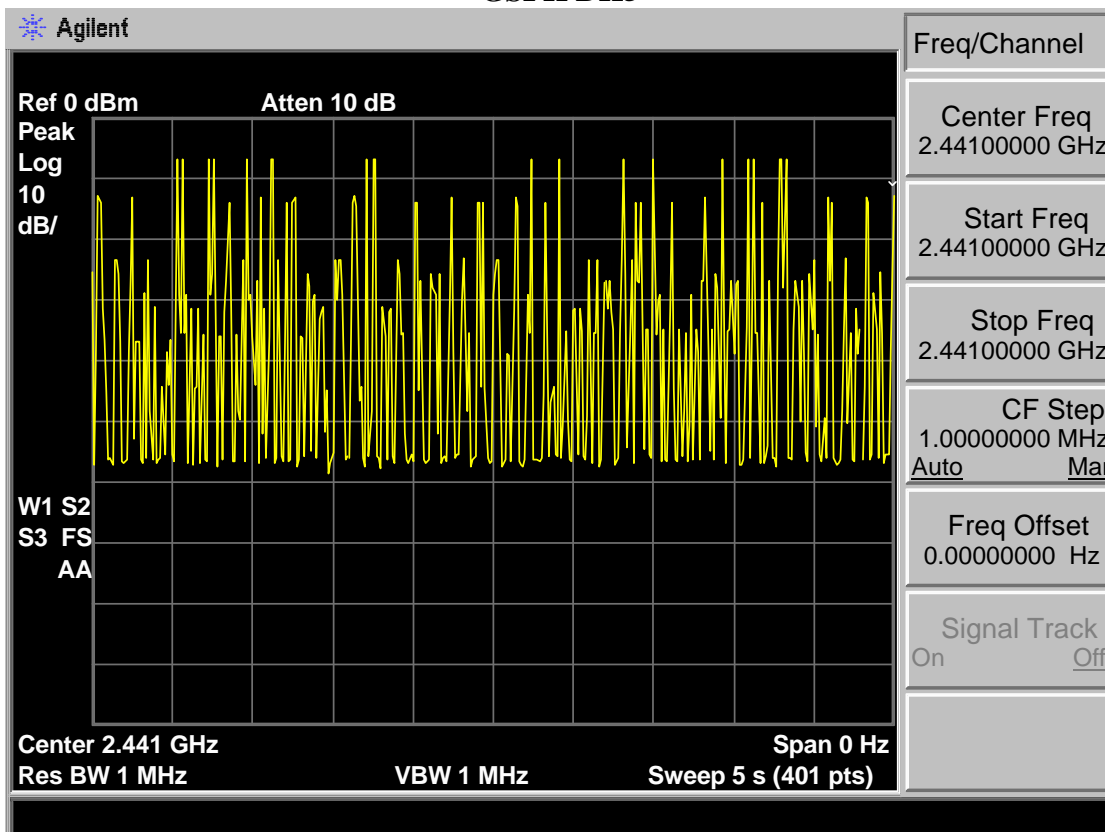



$\pi/4$ -DQPSK 3DH1

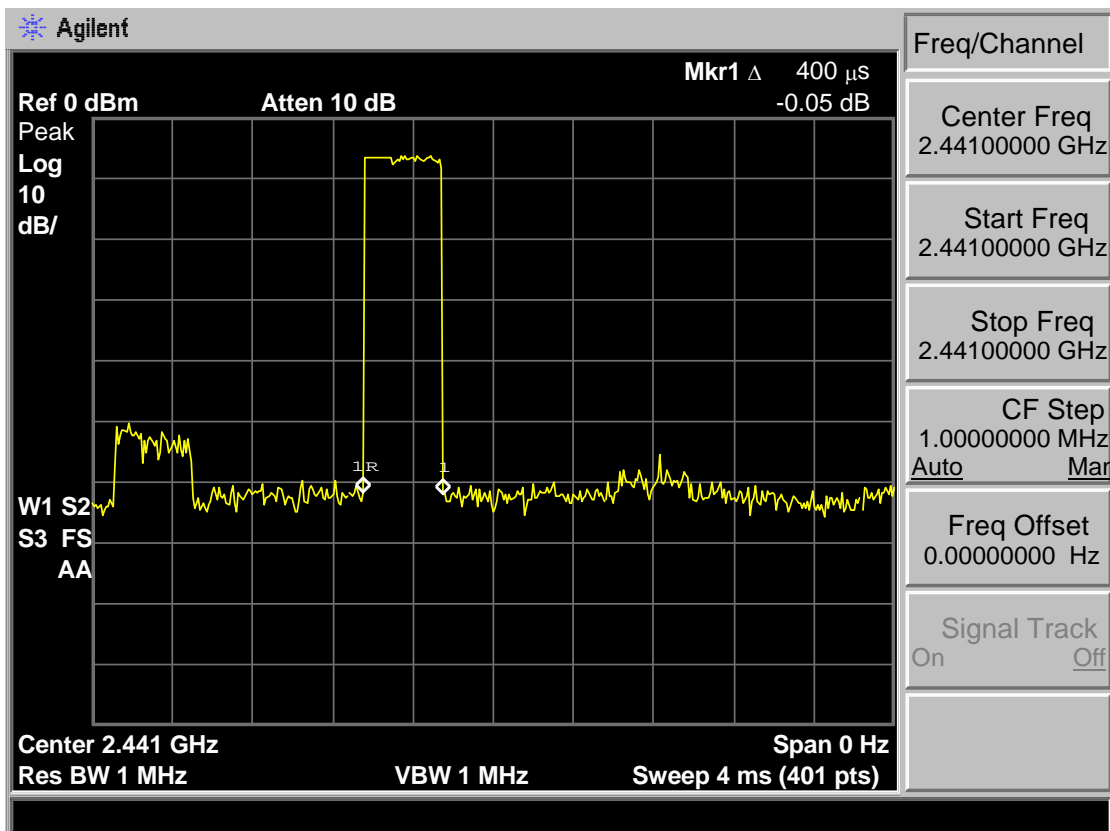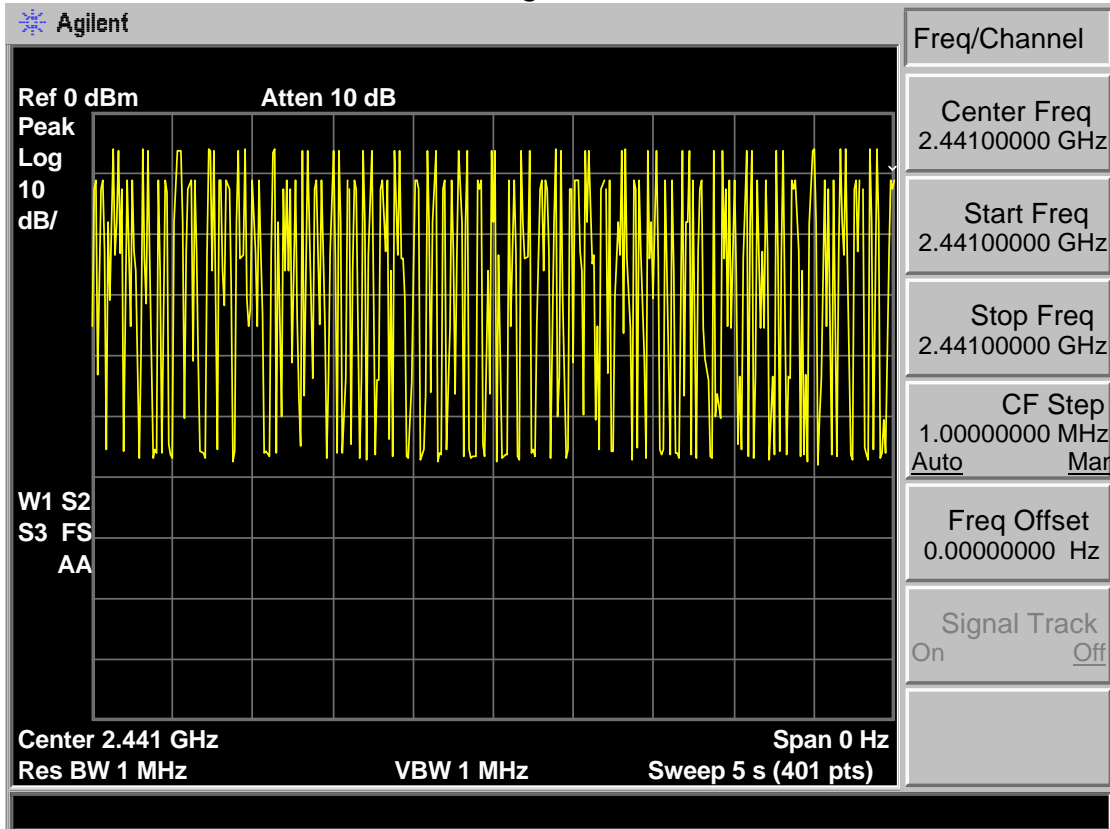

$\pi/4$ -DQPSK 3DH3

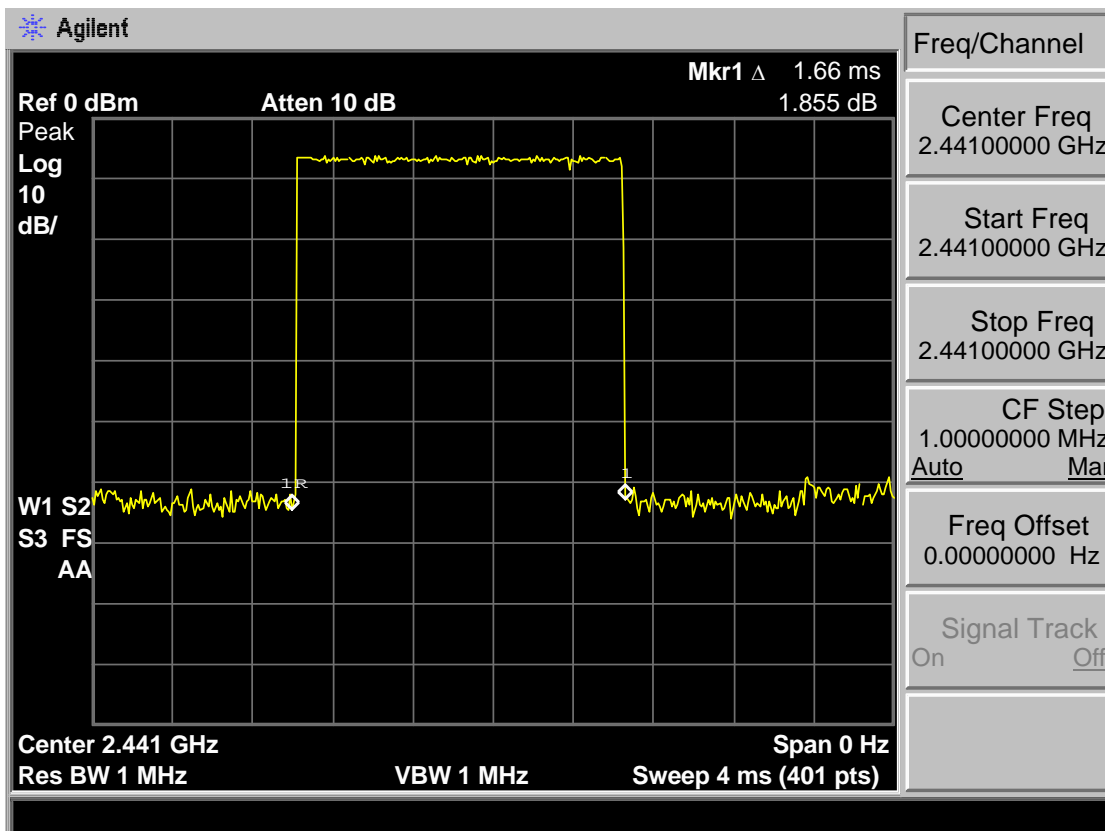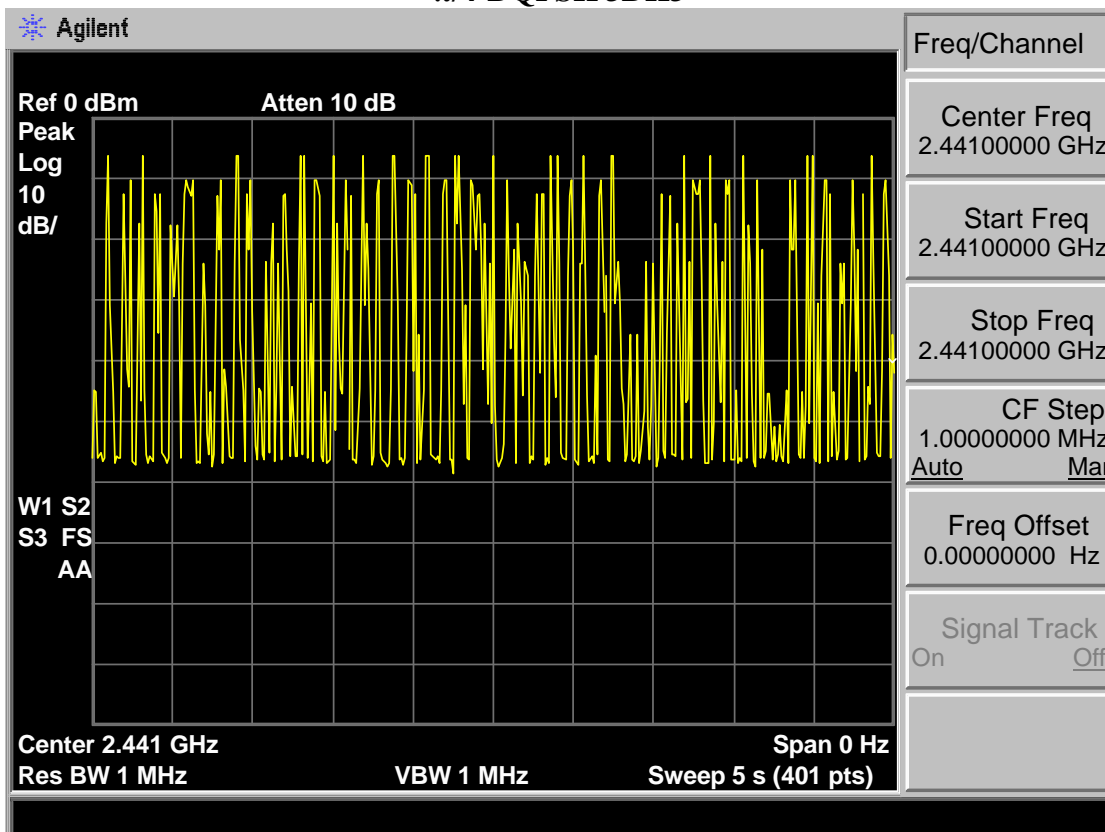

$\pi/4$ -DQPSK 3DH5

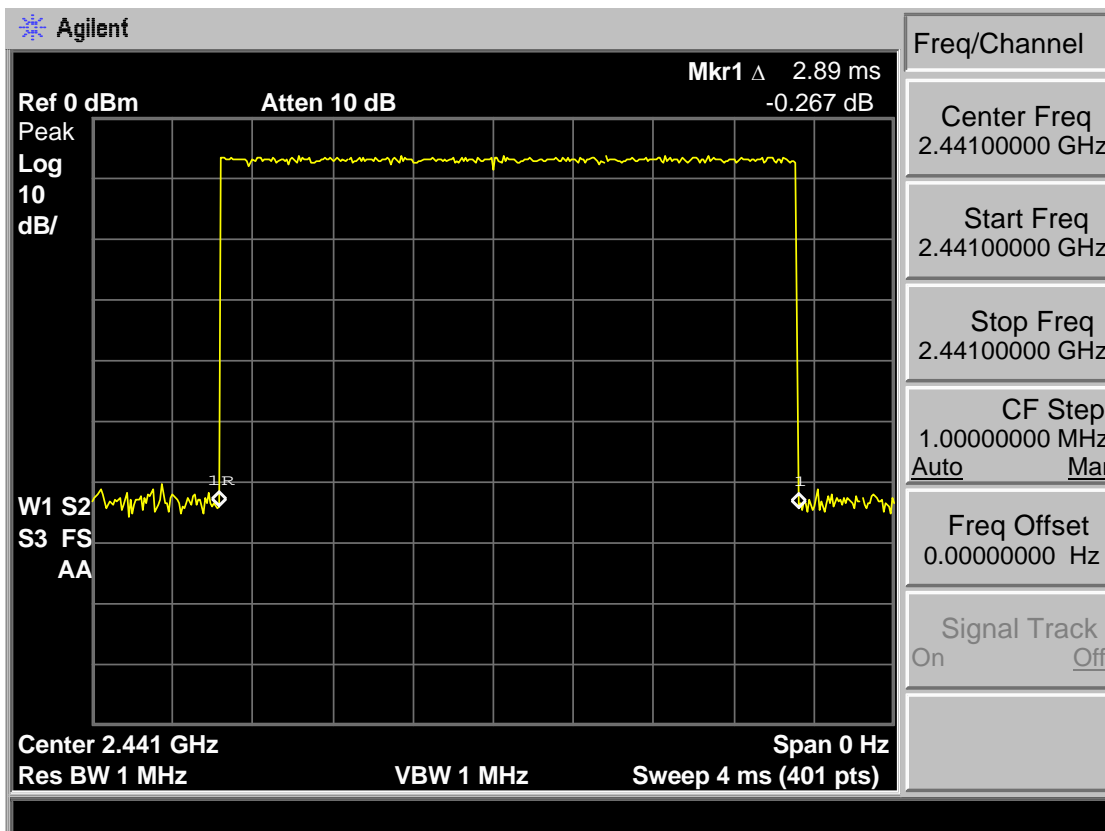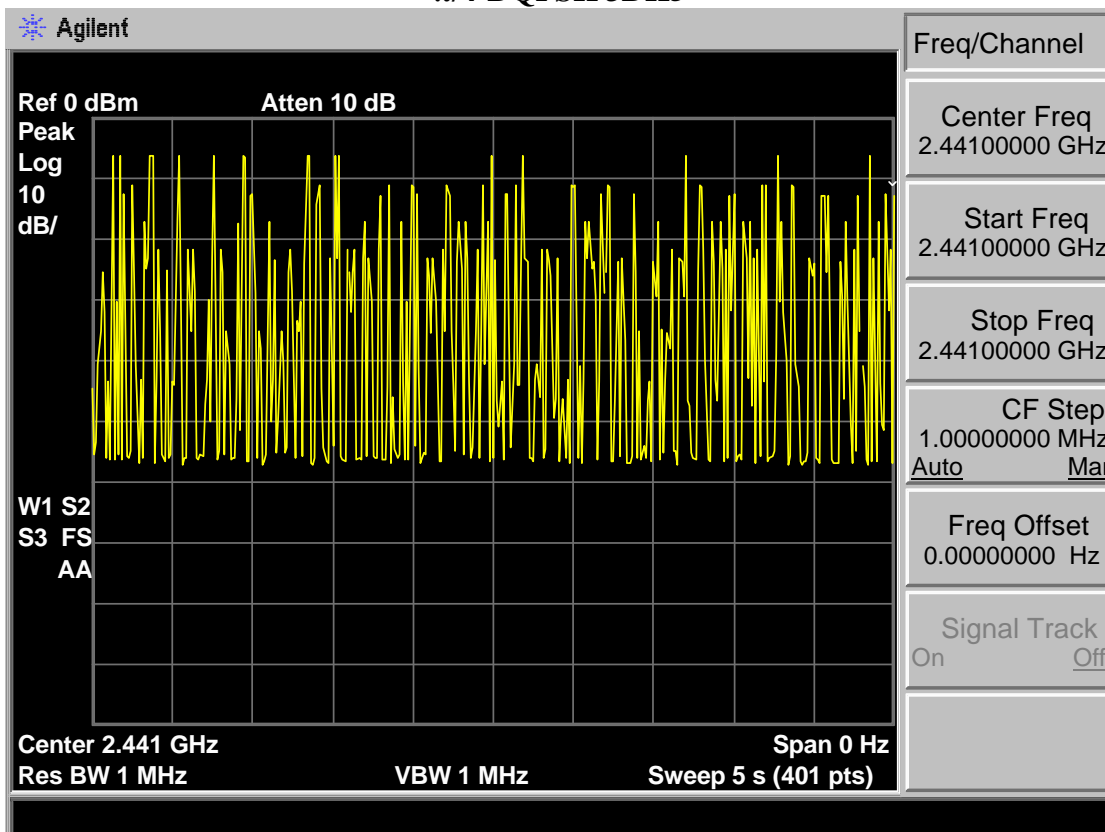

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Block Diagram of Test setup

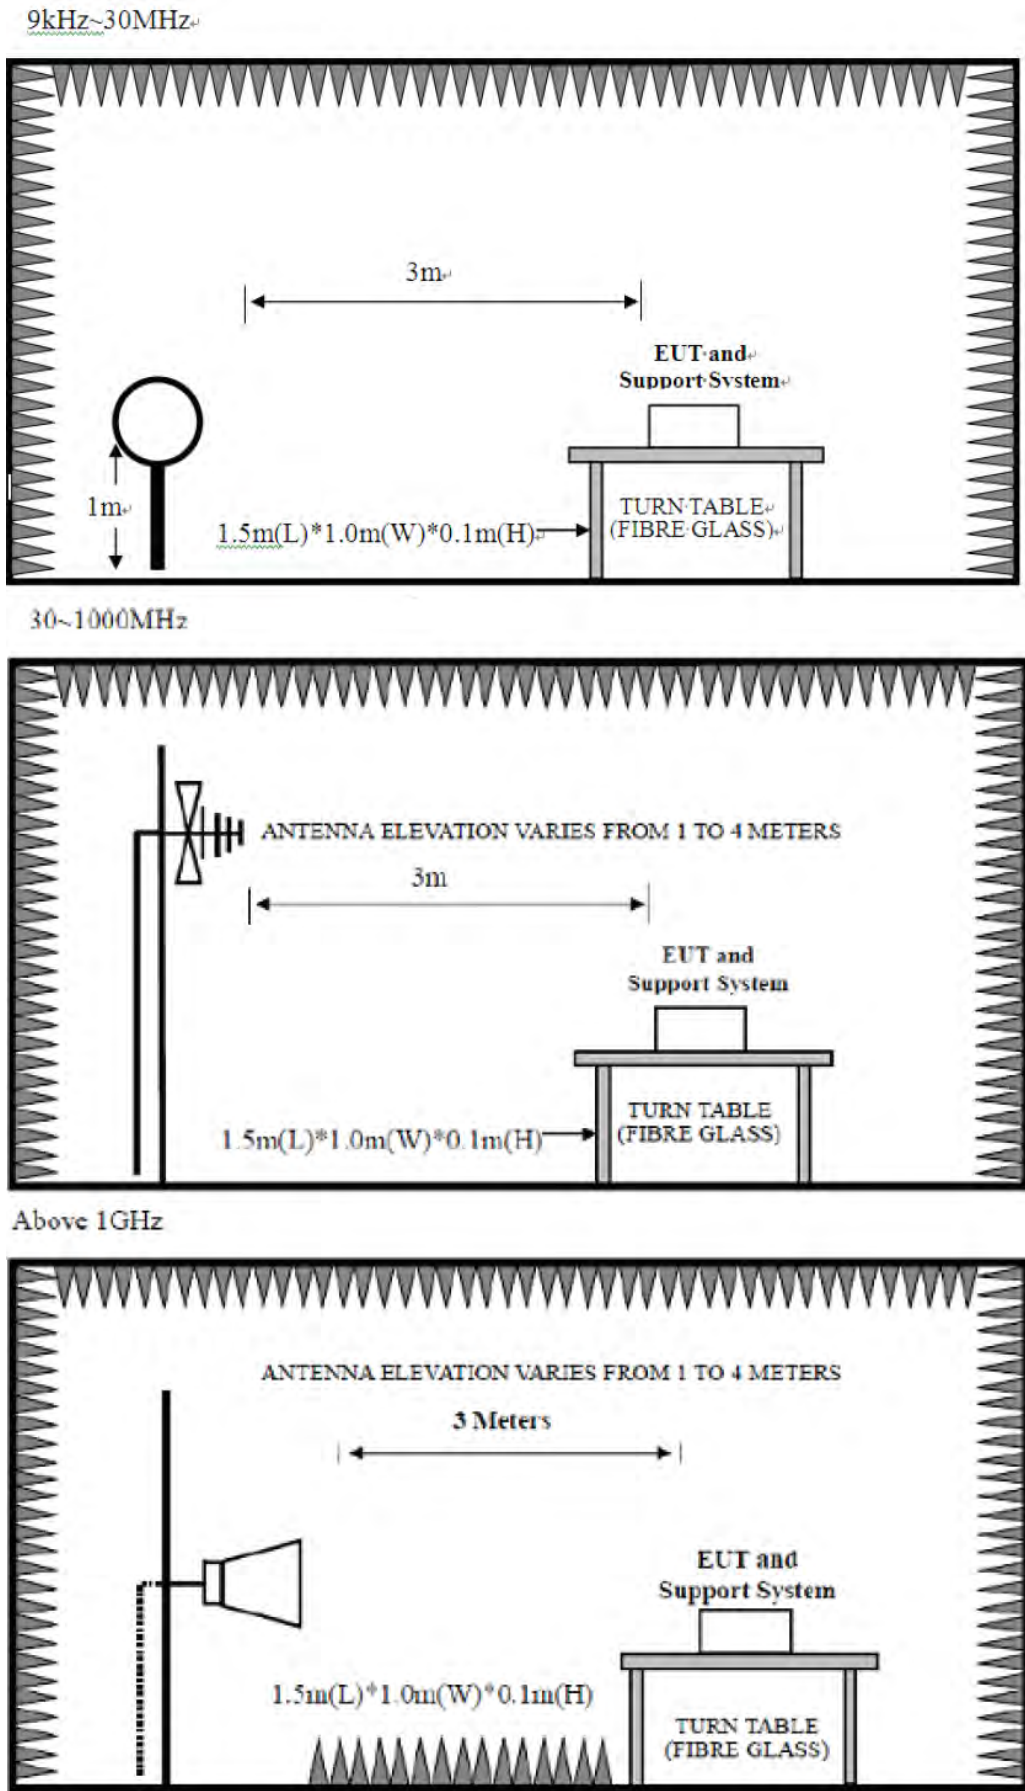

8.3. Test Procedure

EUT was placed on a turn table, which is 0.1 meter high above ground for 9kHz~1000MHz test, and which is 0.1 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result

Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

9 kHz – 30 MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30 MHz – 1000 MHz

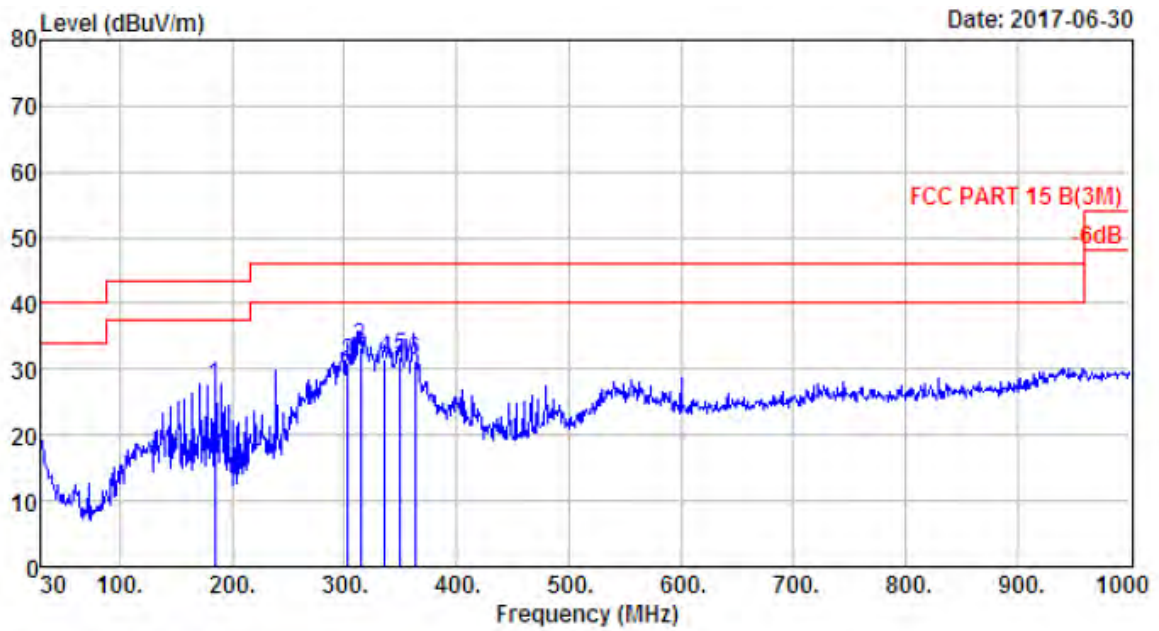


Site no. : site Data no. : 44
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.8';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : IX Mode
 Module 1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	184.23	8.57	1.71	17.15	27.43	43.50	16.07	QP
2	303.84	13.08	2.43	15.36	30.87	46.00	15.13	QP
3	314.21	13.35	2.43	17.63	33.41	46.00	12.59	QP
4	336.52	14.05	2.50	15.10	31.65	46.00	14.35	QP
5	350.10	14.47	2.51	14.76	31.74	46.00	14.26	QP
6	362.71	14.57	2.61	14.15	31.33	46.00	14.67	QP

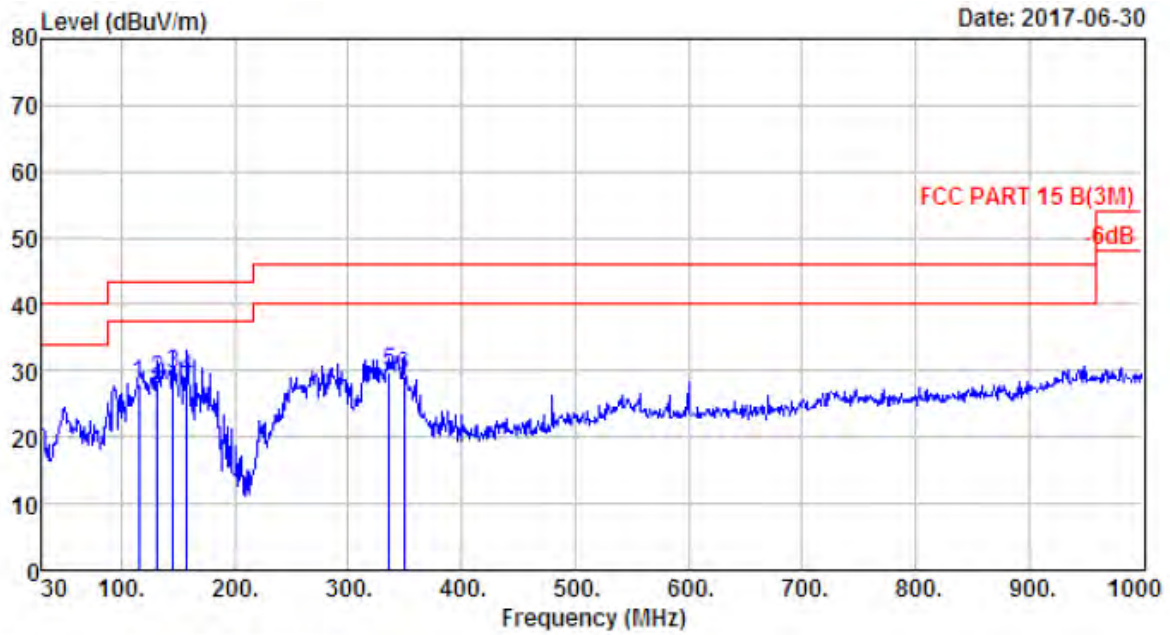

Site no. : 1# 966 Chamber Data no. : 45
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.8';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBI
 Test Mode : TX Mode
 Module 1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	115.36	10.93	1.46	15.78	28.17	43.50	15.33	QP
2	131.85	11.34	1.50	15.66	28.50	43.50	15.00	QP
3	145.43	11.22	1.53	16.90	29.65	43.50	13.85	QP
4	158.04	10.48	1.64	16.84	28.96	43.50	14.54	QP
5	336.52	14.05	2.50	13.39	29.94	46.00	16.06	QP
6	349.13	14.44	2.50	12.35	29.29	46.00	16.71	QP

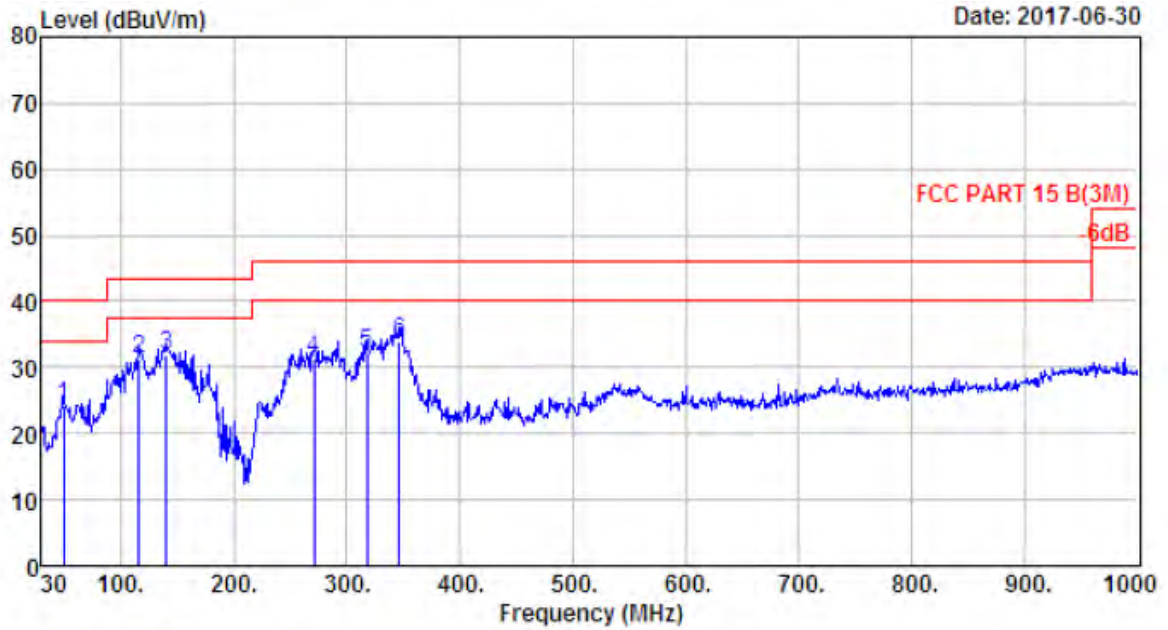

Site no. : 1# 966 Chamber Data no. : 46
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.8';Humi:52%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 2

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	15.24	24.09	40.00	15.91	QP
2	116.33	10.98	1.50	18.87	31.35	43.50	12.15	QP
3	140.58	11.40	1.49	18.87	31.76	43.50	11.74	QP
4	271.53	12.49	2.29	16.49	31.27	46.00	14.73	QP
5	318.09	13.50	2.40	16.28	32.18	46.00	13.82	QP
6	346.22	14.35	2.55	17.18	34.08	46.00	11.92	QP

1000-18000MHz

Site no. : 1# 966 Chamber Data no. : 119
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	86.44	86.03	74.00	-12.03	Peak
2	4804.00	31.25	11.77	35.64	29.55	36.93	74.00	37.07	Peak
3	7206.00	36.52	11.54	33.95	26.62	40.73	74.00	33.27	Peak
4	11200.00	39.39	11.14	33.24	25.14	42.43	74.00	31.57	Peak
5	14056.00	41.51	10.90	33.06	24.48	43.83	74.00	30.17	Peak
6	17864.00	45.12	11.22	30.66	20.56	46.24	74.00	27.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 120
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BI Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	89.80	89.39	74.00	-15.39	Peak
2	4804.00	31.25	11.77	35.64	30.30	37.68	74.00	36.32	Peak
3	7206.00	36.52	11.54	33.95	27.28	41.39	74.00	32.61	Peak
4	11336.00	39.30	11.04	33.44	25.95	42.85	74.00	31.15	Peak
5	13716.00	40.69	11.24	32.94	24.82	43.81	74.00	30.19	Peak
6	17847.00	44.95	11.20	30.52	22.34	47.97	74.00	26.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 1# 966 Chamber Data no. : 121
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2441MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	89.47	88.89	74.00	-14.89	Peak
2	4882.00	31.37	12.07	35.76	32.93	40.61	74.00	33.39	Peak
3	7323.00	36.55	11.57	34.14	28.82	42.80	74.00	31.20	Peak
4	10180.00	38.42	11.49	34.53	27.65	43.03	74.00	30.97	Peak
5	12526.00	38.76	10.94	33.38	25.44	41.76	74.00	32.24	Peak
6	18000.00	46.45	11.38	32.12	19.36	45.07	74.00	28.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 122
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2441MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	87.19	86.61	74.00	-12.61	Peak
2	4882.00	31.37	12.07	35.76	31.88	39.56	74.00	34.44	Peak
3	7323.00	36.55	11.57	34.14	30.05	44.03	74.00	29.97	Peak
4	10826.00	39.33	11.30	34.00	28.49	45.12	74.00	28.88	Peak
5	13155.00	39.26	11.45	32.74	25.98	43.95	74.00	30.05	Peak
6	16657.00	38.73	10.67	32.92	28.33	44.81	74.00	29.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 123
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	87.34	86.52	74.00	-12.52	Peak
2	4960.00	31.49	12.44	36.01	30.59	38.51	74.00	35.49	Peak
3	7440.00	36.54	11.61	34.22	27.40	41.33	74.00	32.67	Peak
4	10180.00	38.42	11.49	34.53	27.00	42.38	74.00	31.62	Peak
5	14090.00	41.54	10.91	33.13	24.36	43.68	74.00	30.32	Peak
6	17813.00	44.62	11.16	30.47	18.02	43.33	74.00	30.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 124
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.40	88.58	74.00	-14.58	Peak
2	4960.00	31.49	12.44	36.01	31.38	39.30	74.00	34.70	Peak
3	7440.00	36.54	11.61	34.22	28.18	42.11	74.00	31.89	Peak
4	11064.00	39.48	11.24	33.83	26.41	43.30	74.00	30.70	Peak
5	14090.00	41.54	10.91	33.13	23.43	42.75	74.00	31.25	Peak
6	17915.00	45.62	11.28	31.26	17.08	42.72	74.00	31.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 125
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2402MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	86.81	86.40	74.00	-12.40	Peak
2	4804.00	31.25	11.77	35.64	31.35	38.73	74.00	35.27	Peak
3	7206.00	36.52	11.54	33.95	27.37	41.48	74.00	32.52	Peak
4	10214.00	38.48	11.47	34.50	26.95	42.40	74.00	31.60	Peak
5	14056.00	41.51	10.90	33.06	24.82	44.17	74.00	29.83	Peak
6	17847.00	44.95	11.20	30.52	18.50	44.13	74.00	29.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 126
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2402MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	85.25	84.84	74.00	-10.84	Peak
2	4804.00	31.25	11.77	35.64	30.06	37.44	74.00	36.56	Peak
3	7206.00	36.52	11.54	33.95	28.50	42.61	74.00	31.39	Peak
4	11370.00	39.28	11.02	33.51	26.48	43.27	74.00	30.73	Peak
5	14005.00	41.46	10.90	33.01	24.61	43.96	74.00	30.04	Peak
6	17864.00	45.12	11.22	30.66	18.47	44.15	74.00	29.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 127
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2441MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	84.86	84.28	74.00	-10.28	Peak
2	4882.00	31.37	12.07	35.76	31.63	39.31	74.00	34.69	Peak
3	7323.00	36.55	11.57	34.14	28.47	42.45	74.00	31.55	Peak
4	10214.00	38.48	11.47	34.50	27.82	43.27	74.00	30.73	Peak
5	15144.00	39.54	10.93	33.83	27.28	43.92	74.00	30.08	Peak
6	18000.00	46.45	11.38	32.12	20.81	46.52	74.00	27.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 128
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2441MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	89.31	88.73	74.00	-14.73	Peak
2	4882.00	31.37	12.07	35.76	32.22	39.90	74.00	34.10	Peak
3	7323.00	36.55	11.57	34.14	28.68	42.66	74.00	31.34	Peak
4	11166.00	39.41	11.17	33.31	25.01	42.28	74.00	31.72	Peak
5	15450.00	38.10	11.08	32.88	26.84	43.14	74.00	30.86	Peak
6	18000.00	46.45	11.38	32.12	19.88	45.59	74.00	28.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 129
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.24	88.42	74.00	-14.42	Peak
2	4960.00	31.49	12.44	36.01	30.57	38.49	74.00	35.51	Peak
3	7440.00	36.54	11.61	34.22	28.22	42.15	74.00	31.85	Peak
4	11234.00	39.37	11.12	33.25	26.03	43.27	74.00	30.73	Peak
5	14464.00	41.85	10.93	33.45	25.25	44.58	74.00	29.42	Peak
6	17439.00	41.36	10.83	31.31	24.66	45.54	74.00	28.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 130
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	86.12	85.30	74.00	-11.30	Peak
2	4960.00	31.49	12.44	36.01	30.15	38.07	74.00	35.93	Peak
3	7440.00	36.54	11.61	34.22	27.15	41.08	74.00	32.92	Peak
4	11251.00	39.35	11.10	33.25	23.04	40.24	74.00	33.76	Peak
5	14345.00	41.76	10.92	33.39	21.72	41.01	74.00	32.99	Peak
6	17864.00	45.12	11.22	30.66	18.63	44.31	74.00	29.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 147
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	89.39	88.98	74.00	-14.98	Peak
2	4804.00	31.25	11.77	35.64	33.88	41.26	74.00	32.74	Peak
3	7206.00	36.52	11.54	33.95	28.54	42.65	74.00	31.35	Peak
4	8735.00	37.40	11.45	33.76	29.82	44.91	74.00	29.09	Peak
5	10826.00	39.33	11.30	34.00	27.89	44.52	74.00	29.48	Peak
6	14226.00	41.66	10.91	33.41	25.50	44.66	74.00	29.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 148
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	85.93	85.52	74.00	-11.52	Peak
2	4804.00	31.25	11.77	35.64	31.63	39.01	74.00	34.99	Peak
3	7206.00	36.52	11.54	33.95	28.23	42.34	74.00	31.66	Peak
4	8650.00	37.27	11.45	33.68	30.04	45.08	74.00	28.92	Peak
5	11234.00	39.37	11.12	33.25	25.95	43.19	74.00	30.81	Peak
6	14124.00	41.57	10.91	33.22	25.14	44.40	74.00	29.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 149
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2441MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	86.13	85.55	74.00	-11.55	Peak
2	4882.00	31.37	12.07	35.76	32.13	39.81	74.00	34.19	Peak
3	7323.00	36.55	11.57	34.14	28.41	42.39	74.00	31.61	Peak
4	8684.00	37.32	11.45	33.66	28.11	43.22	74.00	30.78	Peak
5	11200.00	39.39	11.14	33.24	24.78	42.07	74.00	31.93	Peak
6	13835.00	41.02	11.10	33.06	23.63	42.69	74.00	31.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 150
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2441MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	90.00	89.42	74.00	-15.42	Peak
2	4882.00	31.37	12.07	35.76	31.81	39.49	74.00	34.51	Peak
3	7323.00	36.55	11.57	34.14	28.27	42.25	74.00	31.75	Peak
4	8650.00	37.27	11.45	33.68	28.02	43.06	74.00	30.94	Peak
5	11166.00	39.41	11.17	33.31	26.28	43.55	74.00	30.45	Peak
6	14005.00	41.46	10.90	33.01	26.07	45.42	74.00	28.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 151
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.87	89.05	74.00	-15.05	Peak
2	4960.00	31.49	12.44	36.01	32.80	40.72	74.00	33.28	Peak
3	7440.00	36.54	11.61	34.22	26.36	40.29	74.00	33.71	Peak
4	8684.00	37.32	11.45	33.66	25.03	40.14	74.00	33.86	Peak
5	12084.00	38.64	11.33	33.56	24.98	41.39	74.00	32.61	Peak
6	14617.00	41.54	10.91	33.83	24.30	42.92	74.00	31.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 152
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	86.47	85.65	74.00	-11.65	Peak
2	4960.00	31.49	12.44	36.01	32.83	40.75	74.00	33.25	Peak
3	7440.00	36.54	11.61	34.22	28.01	41.94	74.00	32.06	Peak
4	8684.00	37.32	11.45	33.66	27.83	42.94	74.00	31.06	Peak
5	11540.00	39.16	10.95	33.36	25.63	42.38	74.00	31.62	Peak
6	13580.00	40.31	11.40	32.64	23.55	42.62	74.00	31.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 153
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2402MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	84.53	84.12	74.00	-10.12	Peak
2	4804.00	31.25	11.77	35.64	30.51	37.89	74.00	36.11	Peak
3	7206.00	36.52	11.54	33.95	29.29	43.40	74.00	30.60	Peak
4	8004.00	37.01	11.40	34.96	31.04	44.49	74.00	29.51	Peak
5	11506.00	39.20	10.92	33.46	26.84	43.50	74.00	30.50	Peak
6	15365.00	38.50	11.03	33.13	27.26	43.66	74.00	30.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : site Data no. : 154
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2402MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	88.52	88.11	74.00	-14.11	Peak
2	4804.00	31.25	11.77	35.64	33.59	40.97	74.00	33.03	Peak
3	7206.00	36.52	11.54	33.95	27.88	41.99	74.00	32.01	Peak
4	8650.00	37.27	11.45	33.68	27.66	42.70	74.00	31.30	Peak
5	11030.00	39.50	11.27	33.98	25.23	42.02	74.00	31.98	Peak
6	14515.00	41.89	10.93	33.57	19.63	38.88	74.00	35.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 155
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2441MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	88.71	88.13	74.00	-14.13	Peak
2	4882.00	31.37	12.07	35.76	32.69	40.37	74.00	33.63	Peak
3	7323.00	36.55	11.57	34.14	29.86	43.84	74.00	30.16	Peak
4	8684.00	37.32	11.45	33.66	29.50	44.61	74.00	29.39	Peak
5	10945.00	39.46	11.29	34.13	29.54	46.16	74.00	27.84	Peak
6	16266.00	37.69	10.59	33.31	30.68	45.65	74.00	28.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 156
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2441MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	85.56	84.98	74.00	-10.98	Peak
2	4882.00	31.37	12.07	35.76	32.16	39.84	74.00	34.16	Peak
3	7323.00	36.55	11.57	34.14	28.68	42.66	74.00	31.34	Peak
4	8650.00	37.27	11.45	33.68	30.20	45.24	74.00	28.76	Peak
5	11064.00	39.48	11.24	33.83	28.89	45.78	74.00	28.22	Peak
6	13954.00	41.35	10.96	32.99	26.71	46.03	74.00	27.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 157
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	85.28	84.46	74.00	-10.46	Peak
2	4960.00	31.49	12.44	36.01	32.28	40.20	74.00	33.80	Peak
3	7440.00	36.54	11.61	34.22	31.63	45.56	74.00	28.44	Peak
4	8735.00	37.40	11.45	33.76	30.33	45.42	74.00	28.58	Peak
5	10350.00	38.71	11.39	34.53	29.77	45.34	74.00	28.66	Peak
6	13206.00	39.38	11.46	32.79	26.15	44.20	74.00	29.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 158
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.12	88.30	74.00	-14.30	Peak
2	4960.00	31.49	12.44	36.01	34.24	42.16	74.00	31.84	Peak
3	7440.00	36.54	11.61	34.22	30.83	44.76	74.00	29.24	Peak
4	8684.00	37.32	11.45	33.66	30.02	45.13	74.00	28.87	Peak
5	11234.00	39.37	11.12	33.25	27.58	44.82	74.00	29.18	Peak
6	13784.00	40.88	11.16	33.05	25.94	44.93	74.00	29.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

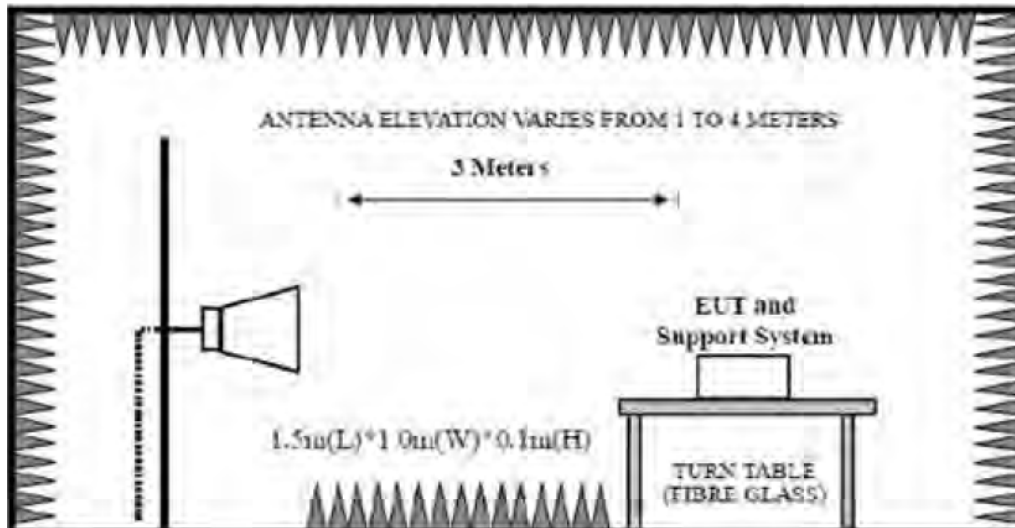

9.3. Test Procedure

EUT was placed on a turn table, which is 0.1 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.


9.4. Test Result

Pass (The testing data was attached in the next pages.)

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


9.5. Test Data

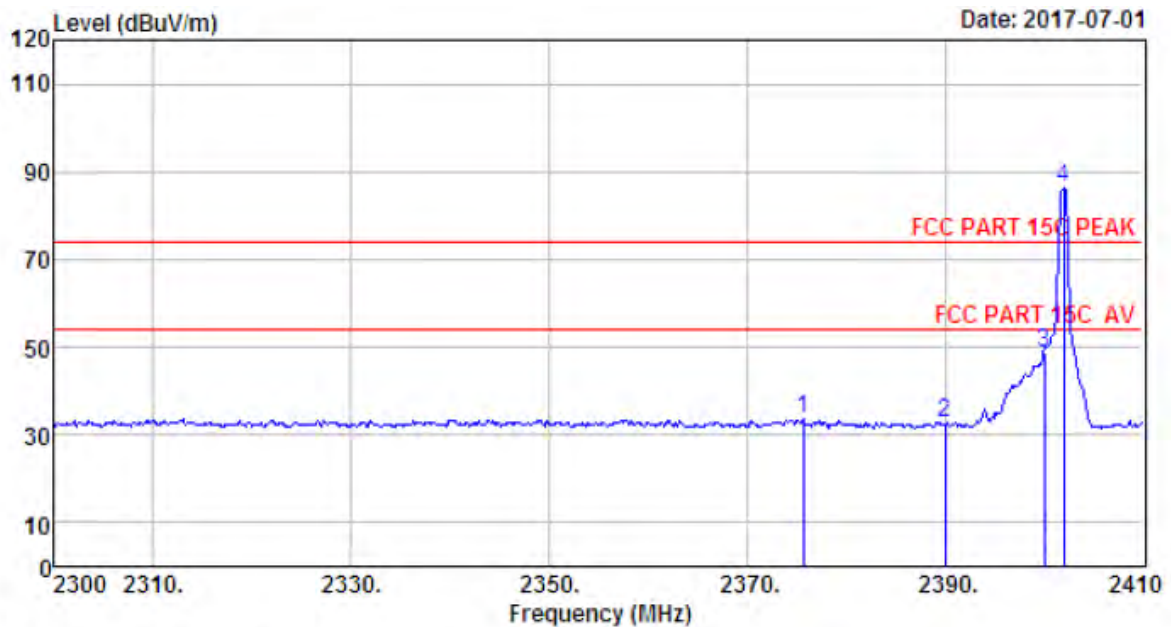

Site no. : 1# 966 Chamber Data no. : 131
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BI Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.68	27.64	6.60	34.59	33.79	33.44	74.00	40.56	Peak
2	2390.00	27.64	6.62	34.62	33.14	32.78	74.00	41.22	Peak
3	2400.00	27.61	6.62	34.64	49.26	48.85	74.00	25.15	Peak
4	2401.97	27.61	6.62	34.64	86.63	86.22	74.00	-12.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

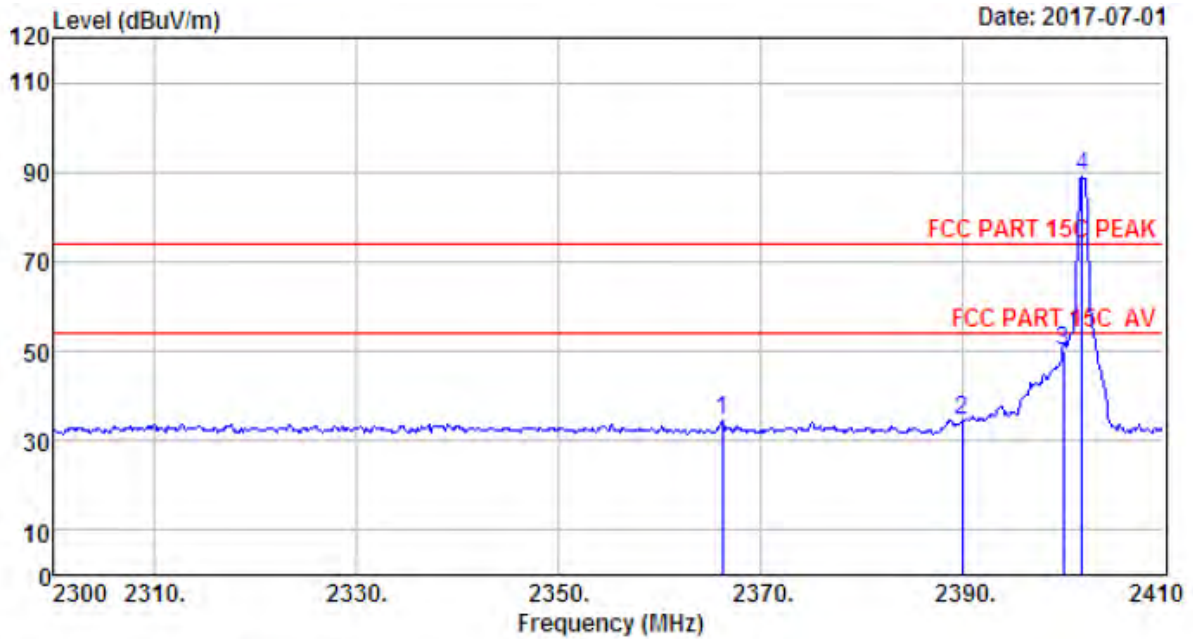


```

Site no.       : 1# 966 Chamber           Data no.    : 132
Dis. / Ant.    : 3m ANT 1-18G           Ant. pol.   : VERTICAL
Limit         : FCC PART 15C PEAK
Env. / Ins.    : Temp:24.0';Humi:51%;Press:101.52kPa
Engineer      : Viking
EUT           : Trolley BT Speaker
Power         : DC 9V From Adapter Input AC 120V/60Hz
M/N          : IQ-7210DJBT
Test Mode     : GFSK TX 2402MHz (No Hopping)
                Module 1
    
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2366.22	27.67	6.58	34.59	34.70	34.36	74.00	39.64	Peak
2	2390.00	27.64	6.62	34.62	34.70	34.34	74.00	39.66	Peak
3	2400.00	27.61	6.62	34.64	50.35	49.94	74.00	24.06	Peak
4	2401.86	27.61	6.62	34.64	89.46	89.05	74.00	-15.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

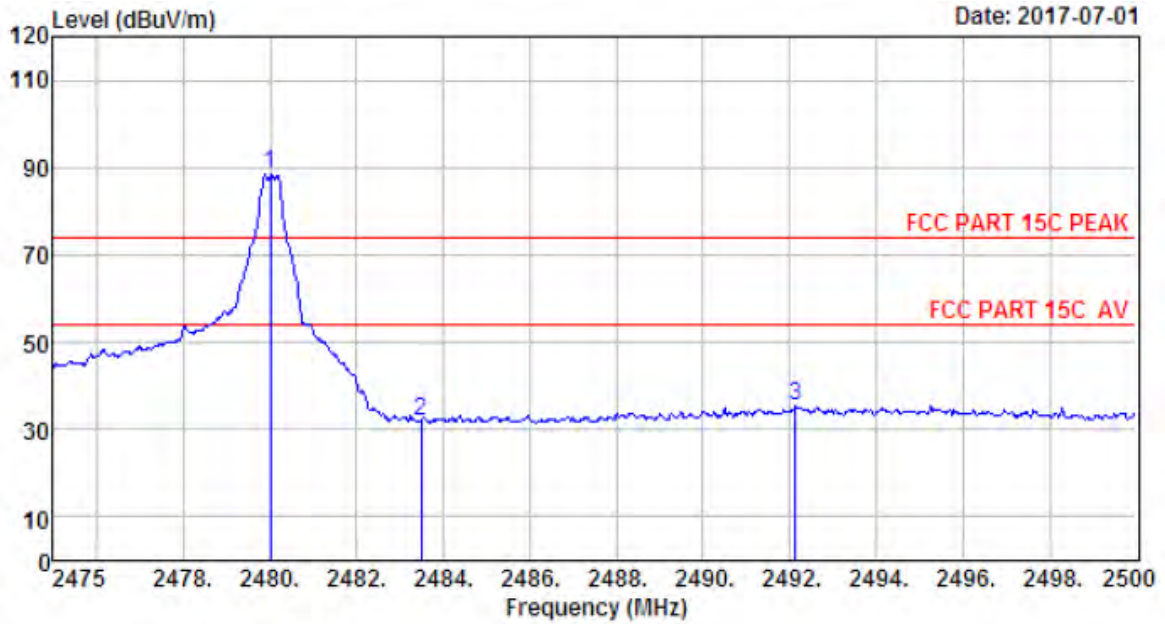

Site no. : 1# 966 Chamber Data no. : 133
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.20	88.38	74.00	-14.38	Peak
2	2483.50	27.58	6.71	35.11	32.64	31.82	74.00	42.18	Peak
3	2492.13	27.58	6.73	35.24	36.14	35.21	74.00	38.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

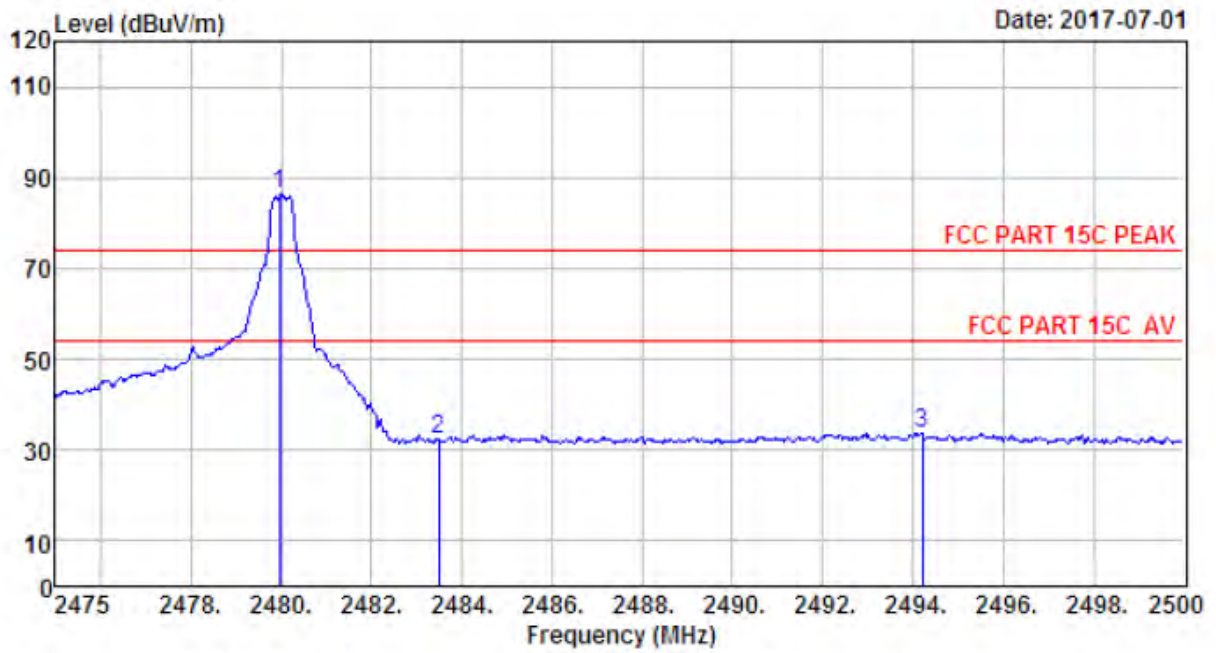

Site no. : 1# 966 Chamber Data no. : 134
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.98	27.58	6.71	35.11	87.01	86.19	74.00	-12.19	Peak
2	2483.50	27.58	6.71	35.11	33.04	32.22	74.00	41.78	Peak
3	2494.20	27.58	6.73	35.24	34.68	33.75	74.00	40.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

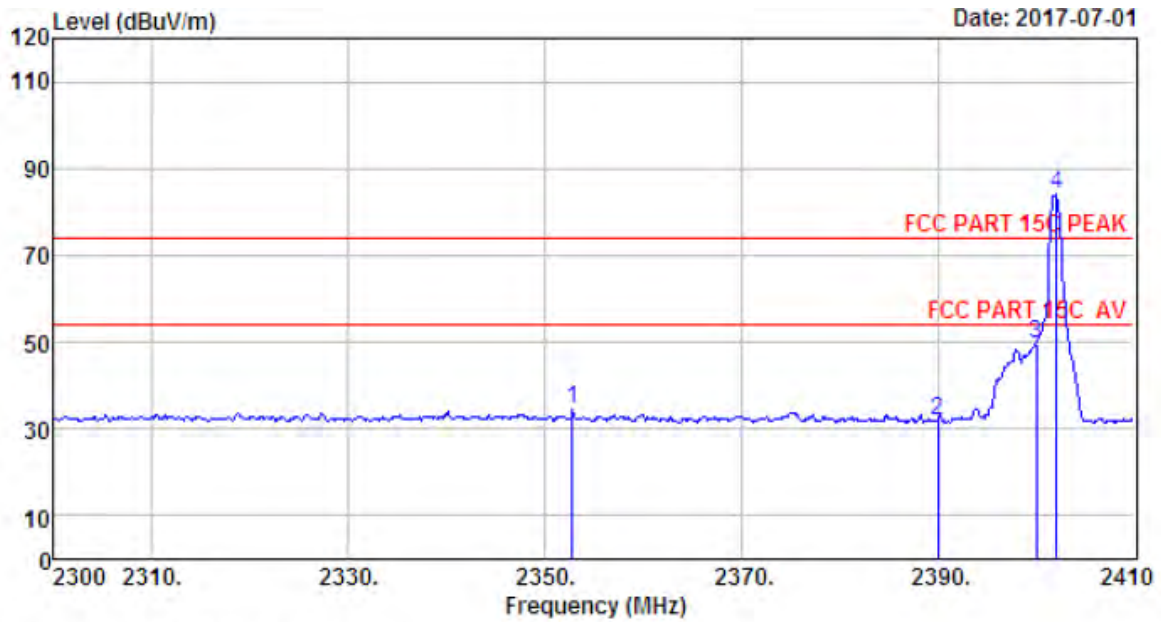

Site no. : 1# 966 Chamber Data no. : 135
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2402MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2352.80	27.70	6.58	34.57	34.88	34.59	74.00	39.41	Peak
2	2390.00	27.64	6.62	34.62	32.16	31.80	74.00	42.20	Peak
3	2400.00	27.61	6.62	34.64	49.90	49.49	74.00	24.51	Peak
4	2402.08	27.61	6.62	34.64	84.66	84.25	74.00	-10.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

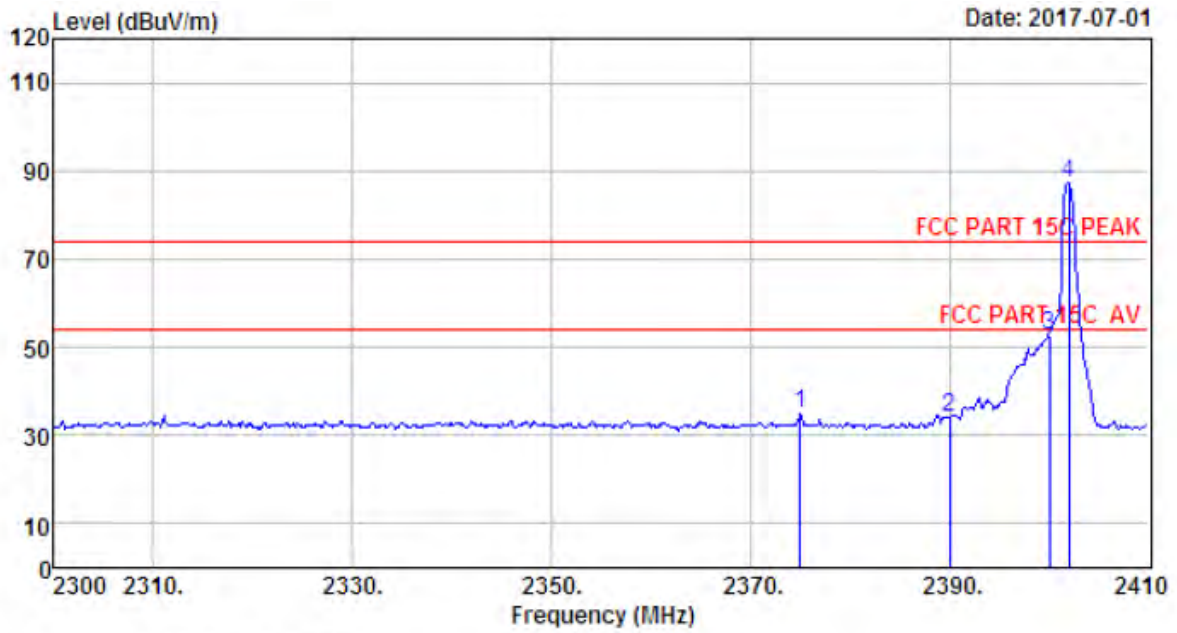

Site no. : 1# 966 Chamber Data no. : 136
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2402MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.02	27.64	6.60	34.59	35.44	35.09	74.00	38.91	Peak
2	2390.00	27.64	6.62	34.62	34.59	34.23	74.00	39.77	Peak
3	2400.00	27.61	6.62	34.64	53.31	52.90	74.00	21.10	Peak
4	2401.97	27.61	6.62	34.64	87.54	87.13	74.00	-13.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

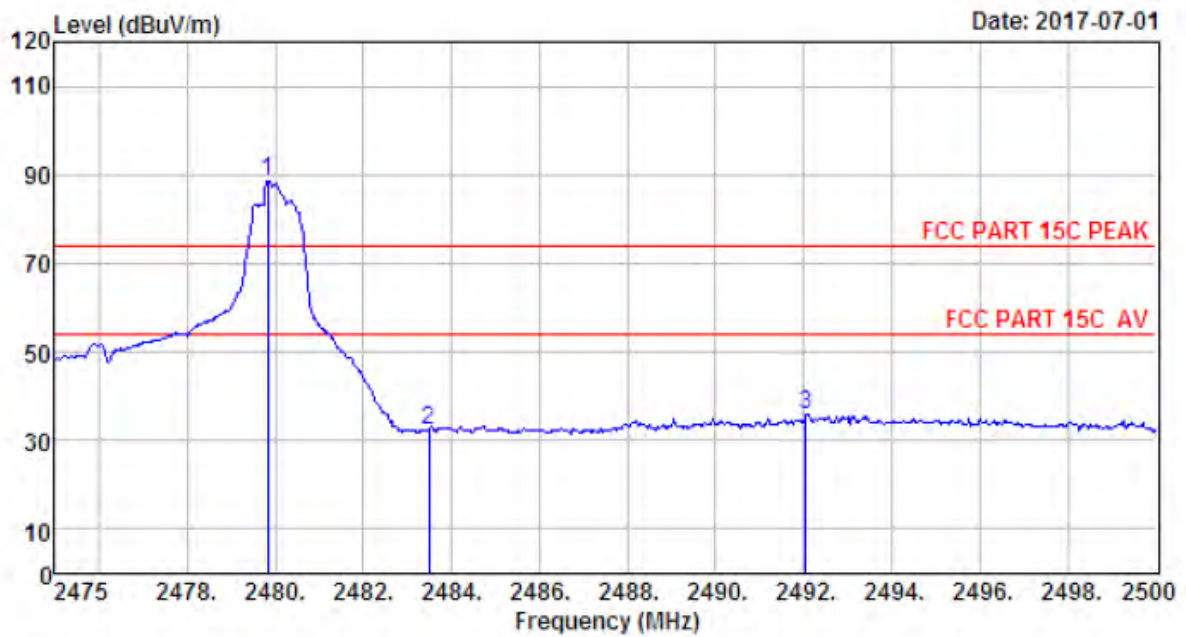

Site no. : 1# 966 Chamber Data no. : 137
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.83	27.58	6.71	35.11	89.36	88.54	74.00	-14.54	Peak
2	2483.50	27.58	6.71	35.11	33.03	32.21	74.00	41.79	Peak
3	2492.05	27.58	6.73	35.24	36.72	35.79	74.00	38.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

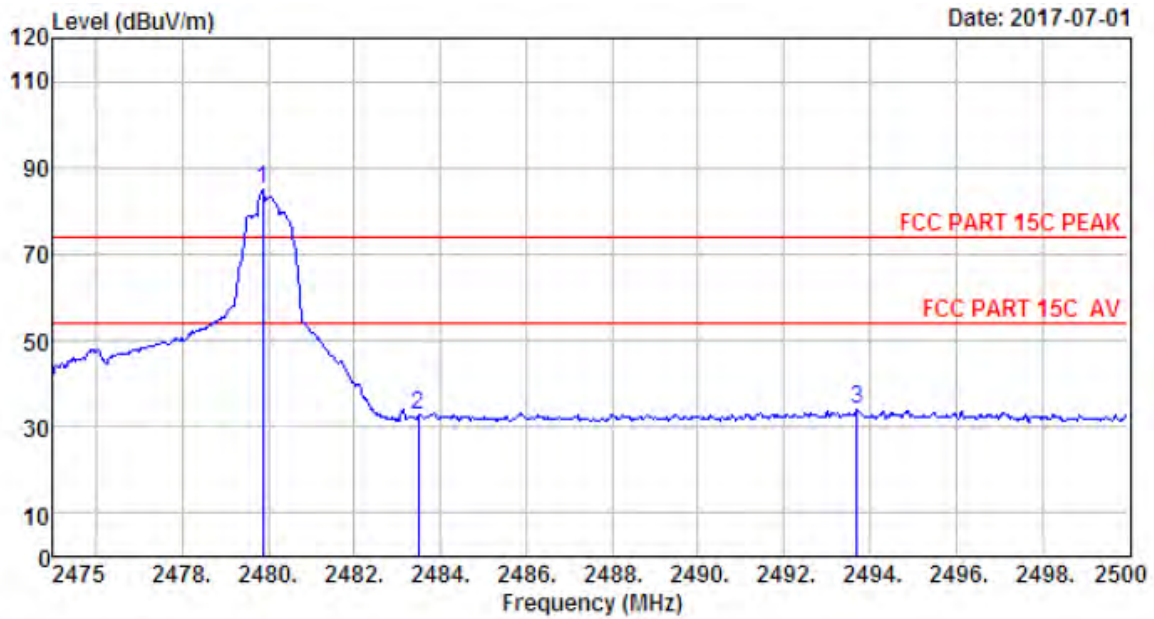

Site no. : 1# 966 Chamber Data no. : 138
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz (No Hopping)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limite (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.58	6.71	35.11	85.95	85.13	74.00	-11.13	Peak
2	2483.50	27.58	6.71	35.11	33.40	32.58	74.00	41.42	Peak
3	2493.70	27.58	6.73	35.24	34.97	34.04	74.00	39.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

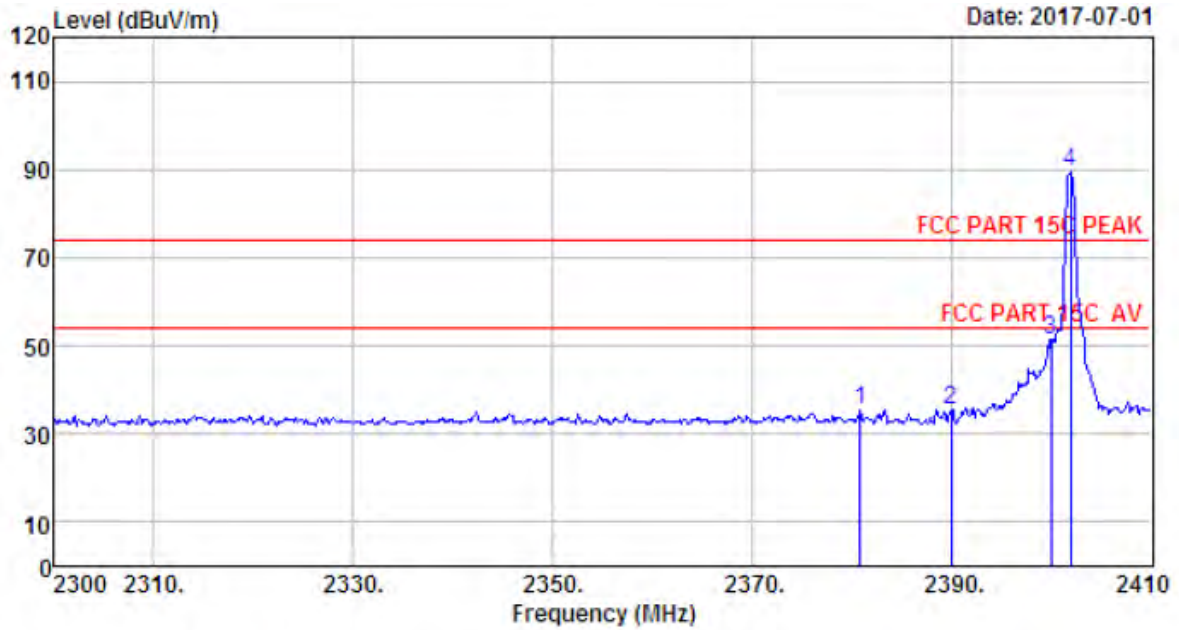

Site no. : 1# 966 Chamber Data no. : 159
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2380.85	27.64	6.60	34.59	35.73	35.38	74.00	38.62	Peak
2	2390.00	27.64	6.62	34.62	35.59	35.23	74.00	38.77	Peak
3	2400.00	27.61	6.62	34.64	51.63	51.22	74.00	22.78	Peak
4	2401.97	27.61	6.62	34.64	89.72	89.31	74.00	-15.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

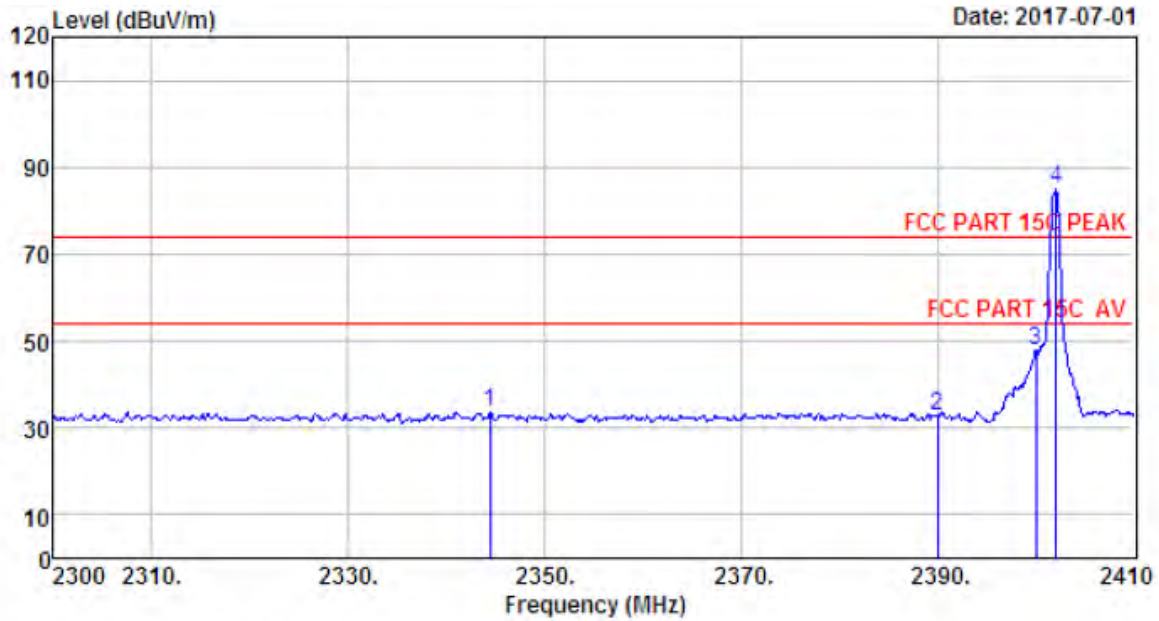

Site no. : 1# 966 Chamber Data no. : 160
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2344.44	27.70	6.56	34.59	33.79	33.46	74.00	40.54	Peak
2	2390.00	27.64	6.62	34.62	33.32	32.96	74.00	41.04	Peak
3	2400.00	27.61	6.62	34.64	48.40	47.99	74.00	26.01	Peak
4	2402.08	27.61	6.62	34.64	85.63	85.22	74.00	-11.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

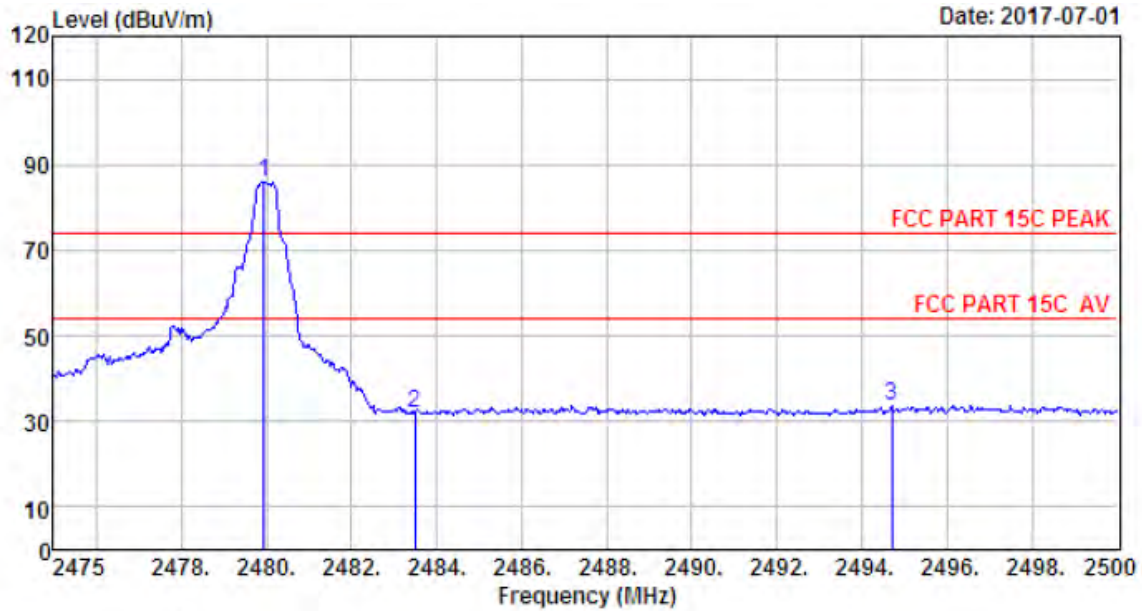


```

Site no.       : 1# 966 Chamber           Data no.   : 161
Dis. / Ant.   : 3m ANT 1-18G           Ant. pol.  : HORIZONTAL
Limit         : FCC PART 15C PEAK
Env. / Ins.   : Temp:24.0';Humi:51%;Press:101.52kPa
Engineer      : Viking
EUT           : Trolley BT Speaker
Power         : DC 9V From Adapter Input AC 120V/60Hz
M/N           : IQ-7210DJBT
Test Mode     : GFSK IX 2480MHz (No Hopping)
                Module 2
    
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.95	27.58	6.71	35.11	86.62	85.80	74.00	-11.80	Peak
2	2483.50	27.58	6.71	35.11	32.55	31.73	74.00	42.27	Peak
3	2494.70	27.57	6.73	35.24	34.60	33.66	74.00	40.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

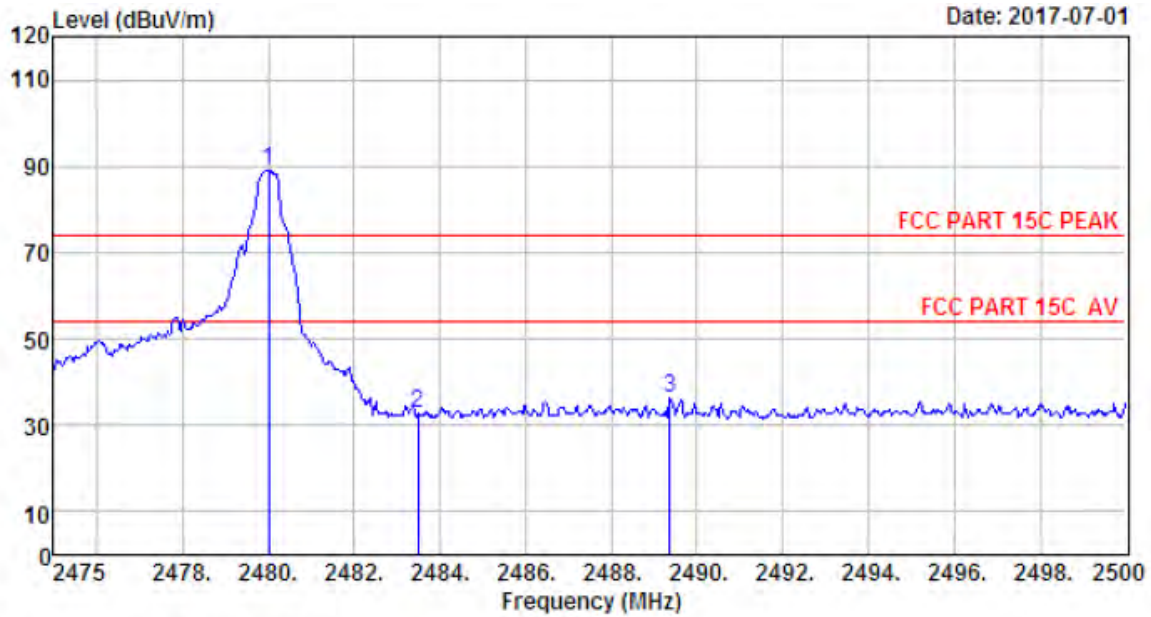

Site no. : 1# 966 Chamber Data no. : 162
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.88	89.06	74.00	-15.06	Peak
2	2483.50	27.58	6.71	35.11	33.42	32.60	74.00	41.40	Peak
3	2489.38	27.58	6.73	35.24	37.24	36.31	74.00	37.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

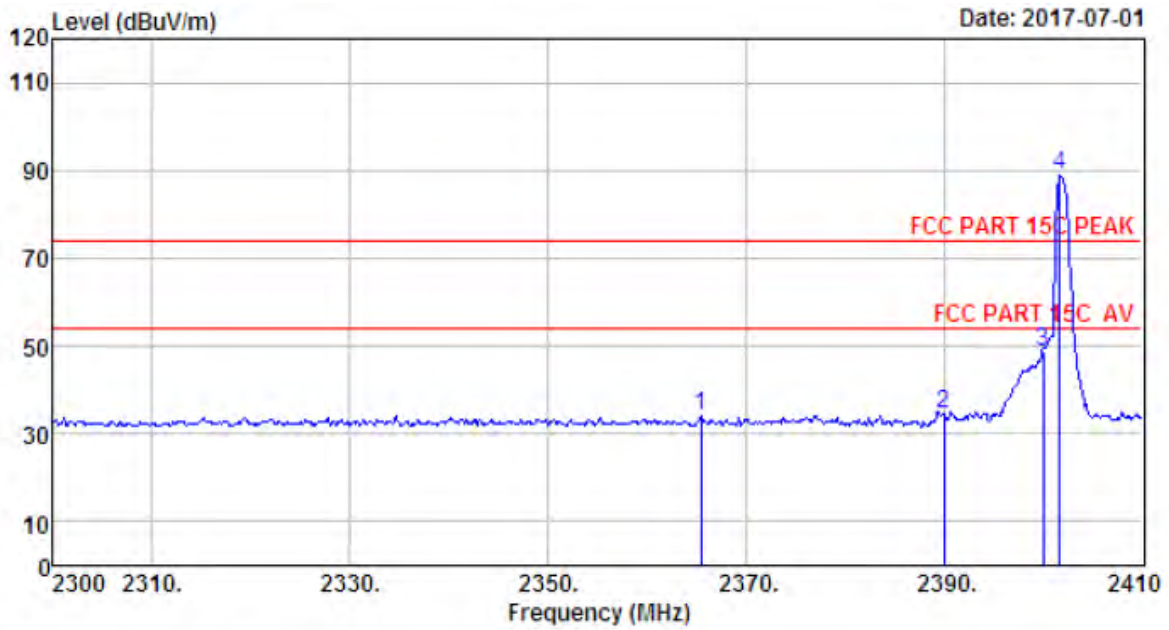

Site no. : 1# 966 Chamber Data no. : 163
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BI Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2402MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2365.45	27.67	6.58	34.59	34.42	34.08	74.00	39.92	Peak
2	2390.00	27.64	6.62	34.62	35.11	34.75	74.00	39.25	Peak
3	2400.00	27.61	6.62	34.64	48.94	48.53	74.00	25.47	Peak
4	2401.75	27.61	6.62	34.64	89.28	88.87	74.00	-14.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

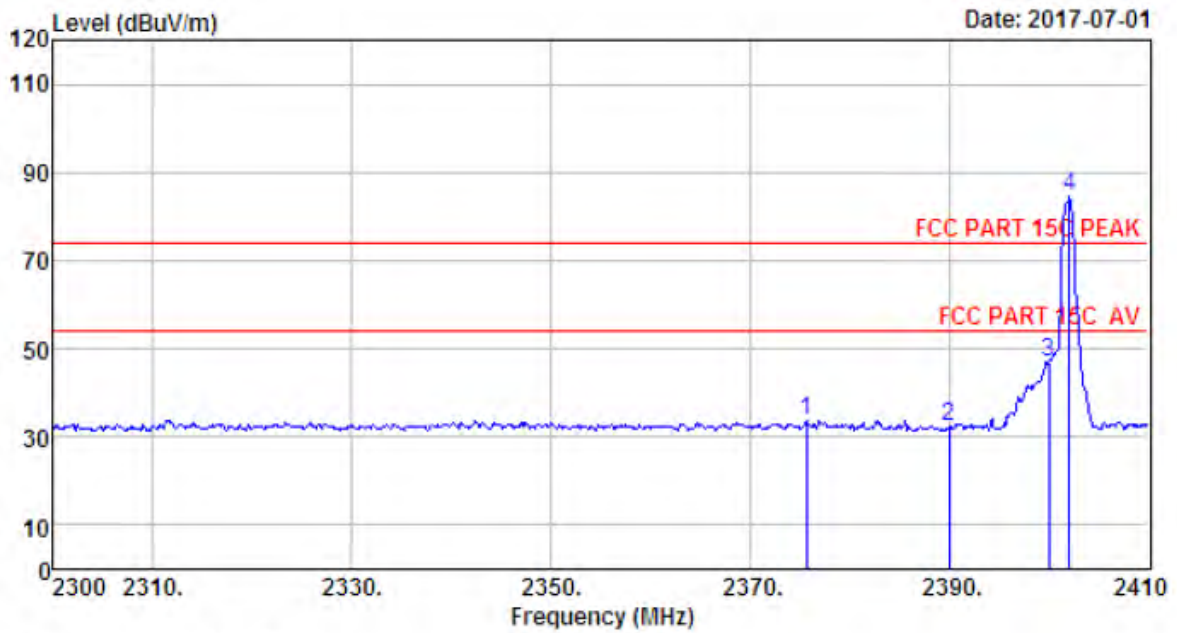

Site no. : 1# 966 Chamber Data no. : 164
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2402MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.68	27.64	6.60	34.59	34.19	33.84	74.00	40.16	Peak
2	2390.00	27.64	6.62	34.62	32.74	32.38	74.00	41.62	Peak
3	2400.00	27.61	6.62	34.64	47.37	46.96	74.00	27.04	Peak
4	2402.08	27.61	6.62	34.64	84.88	84.47	74.00	-10.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

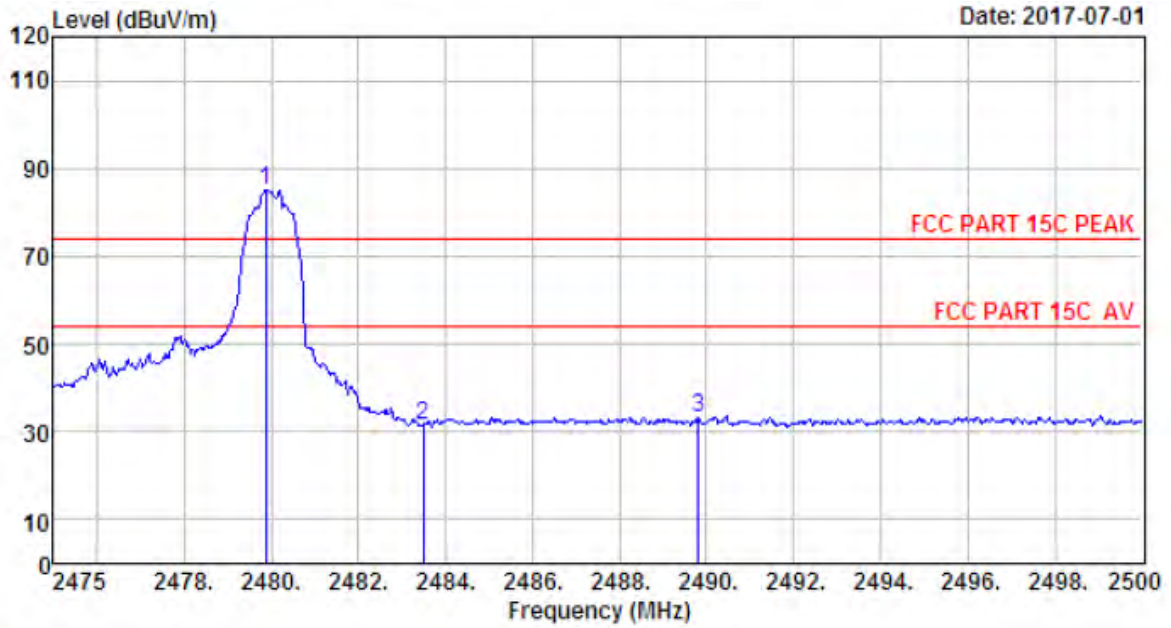


Site no. : 1# 966 Chamber Data no. : 165
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2480MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.58	6.71	35.11	85.95	85.13	74.00	-11.13	Peak
2	2483.50	27.58	6.71	35.11	32.38	31.56	74.00	42.44	Peak
3	2489.80	27.58	6.73	35.24	34.21	33.28	74.00	40.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



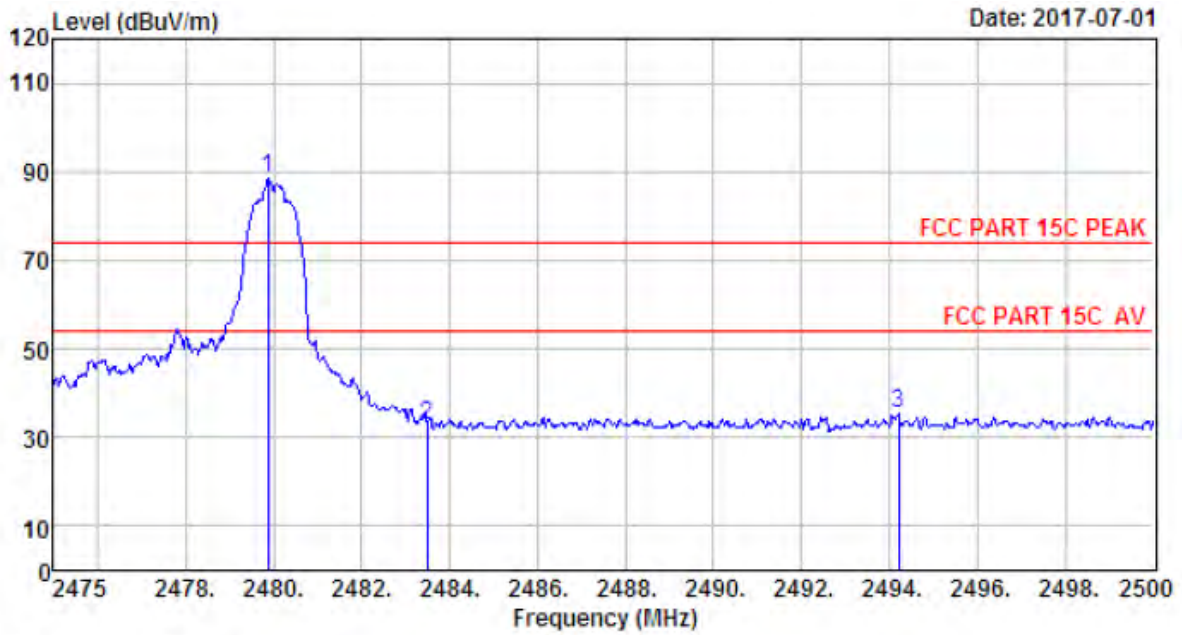


Site no. : 1# 966 Chamber Data no. : 166
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK IX 2480MHz (No Hopping)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.58	6.71	35.11	89.29	88.47	74.00	-14.47	Peak
2	2483.50	27.58	6.71	35.11	33.50	32.68	74.00	41.32	Peak
3	2494.20	27.58	6.73	35.24	36.28	35.35	74.00	38.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.




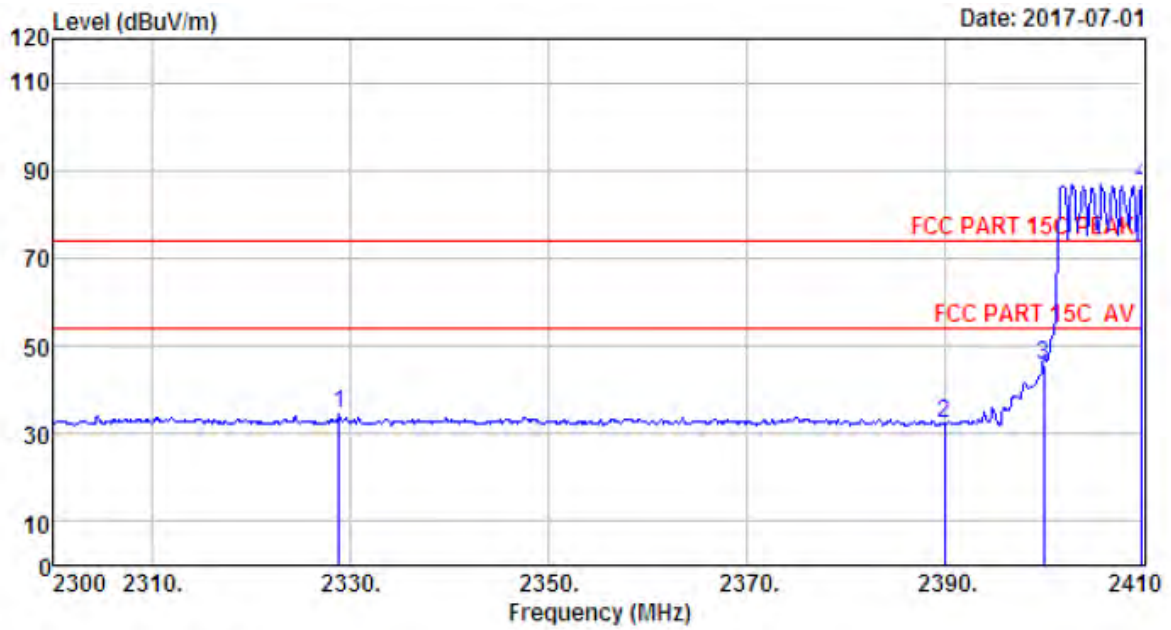

Site no. : 1# 966 Chamber Data no. : 139
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2328.82	27.73	6.54	34.59	34.75	34.43	74.00	39.57	Peak
2	2390.00	27.64	6.62	34.62	32.50	32.14	74.00	41.86	Peak
3	2400.00	27.61	6.62	34.64	46.22	45.81	74.00	28.19	Peak
4	2410.00	27.60	6.64	34.64	87.29	86.89	74.00	-12.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

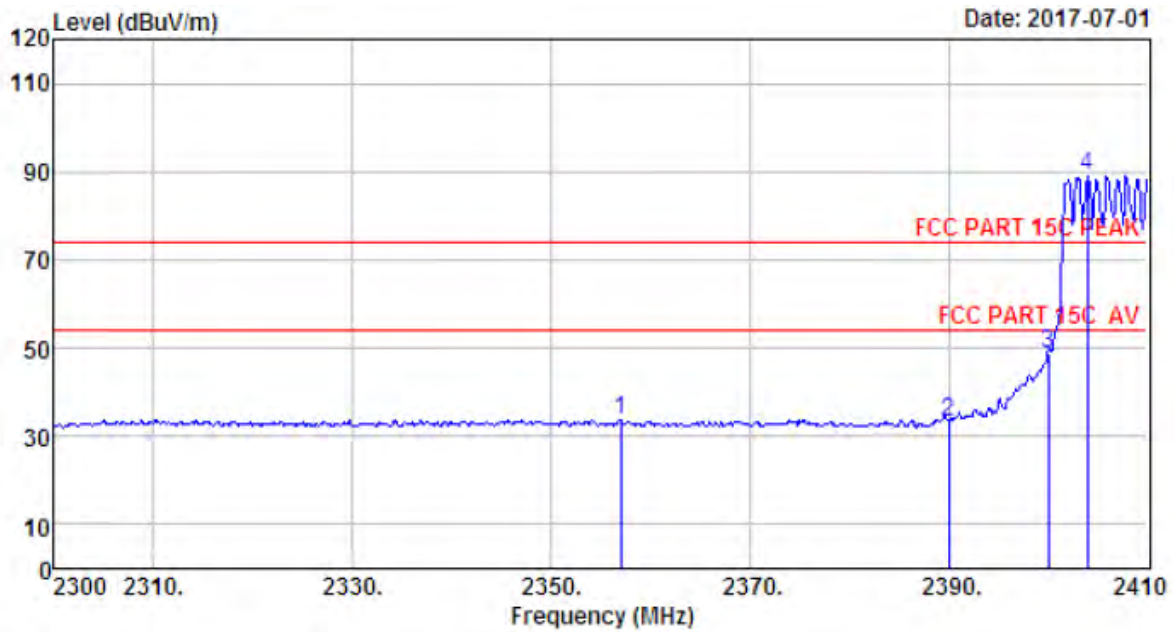

Site no. : 1# 966 Chamber Data no. : 140
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2356.98	27.67	6.58	34.57	34.17	33.85	74.00	40.15	Peak
2	2390.00	27.64	6.62	34.62	33.73	33.37	74.00	40.63	Peak
3	2400.00	27.61	6.62	34.64	48.98	48.57	74.00	25.43	Peak
4	2403.95	27.61	6.64	34.64	89.50	89.11	74.00	-15.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

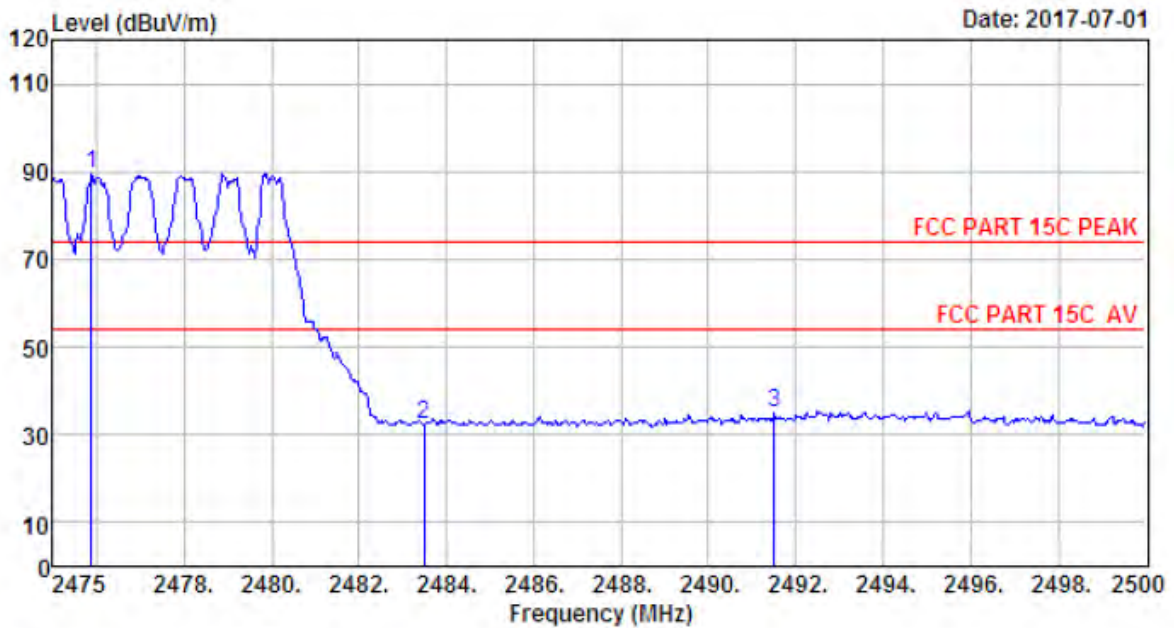

Site no. : 1# 966 Chamber Data no. : 141
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limite (dBuV/m)	Margin (dB)	Remark
1	2475.88	27.58	6.71	35.11	90.32	89.50	74.00	-15.50	Peak
2	2483.50	27.58	6.71	35.11	33.25	32.43	74.00	41.57	Peak
3	2491.50	27.58	6.73	35.24	35.73	34.80	74.00	39.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

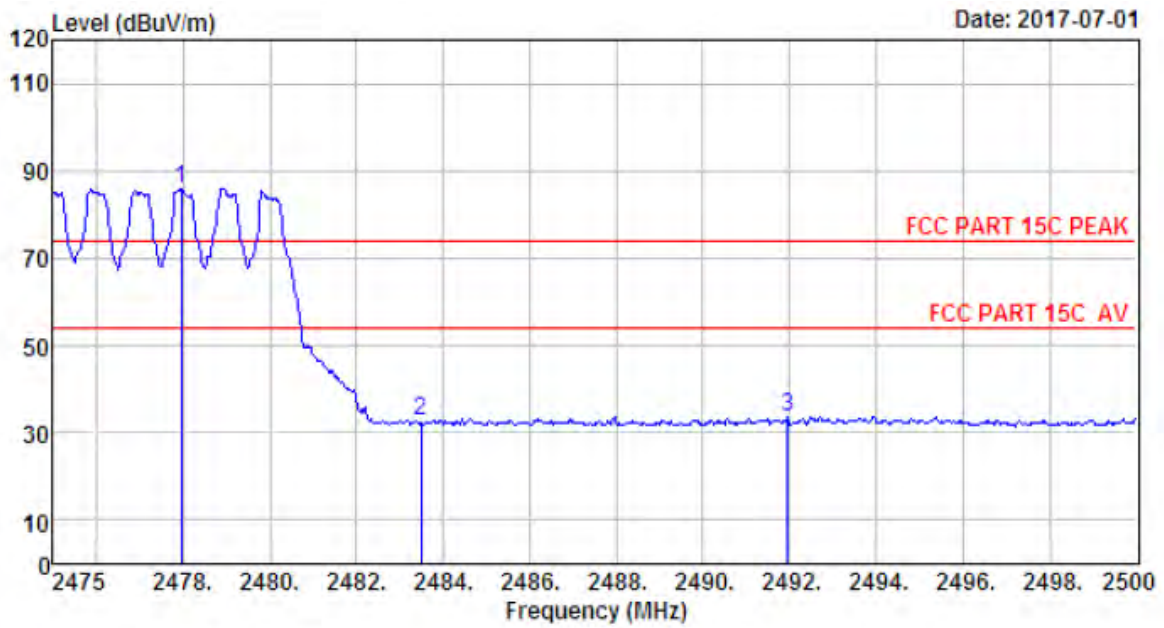

Site no. : 1# 966 Chamber Data no. : 142
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.95	27.58	6.71	35.11	86.92	86.10	74.00	-12.10	Peak
2	2483.50	27.58	6.71	35.11	33.39	32.57	74.00	41.43	Peak
3	2491.95	27.58	6.73	35.24	34.53	33.60	74.00	40.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

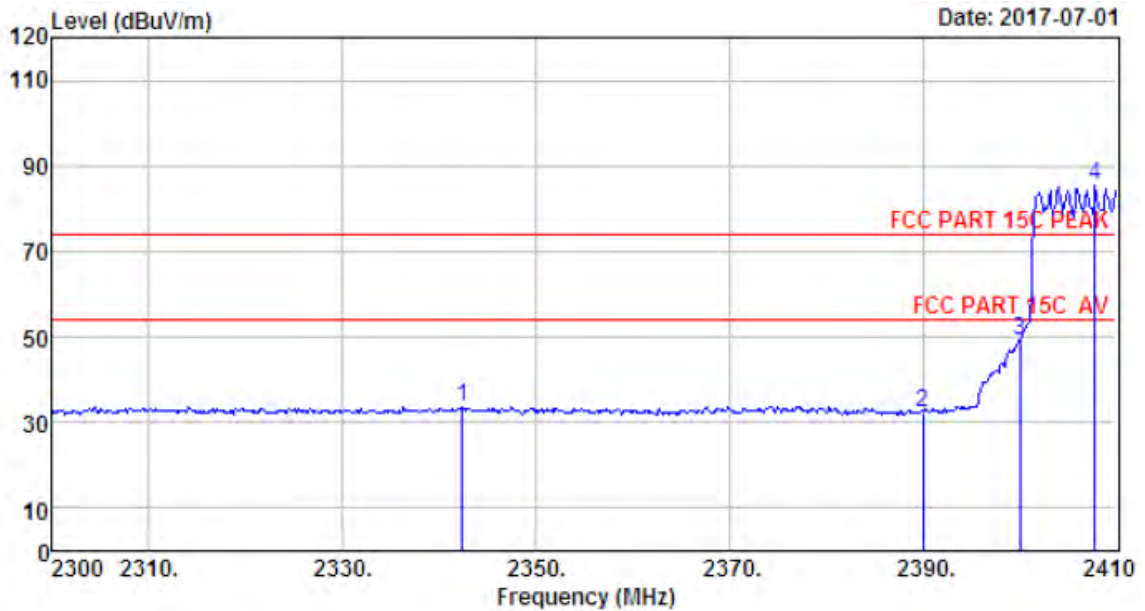

Site no. : 1# 966 Chamber Data no. : 143
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK IX 2402MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2342.35	27.70	6.56	34.59	33.92	33.59	74.00	40.41	Peak
2	2390.00	27.64	6.62	34.62	32.82	32.46	74.00	41.54	Peak
3	2400.00	27.61	6.62	34.64	49.41	49.00	74.00	25.00	Peak
4	2407.80	27.61	6.64	34.64	85.78	85.39	74.00	-11.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

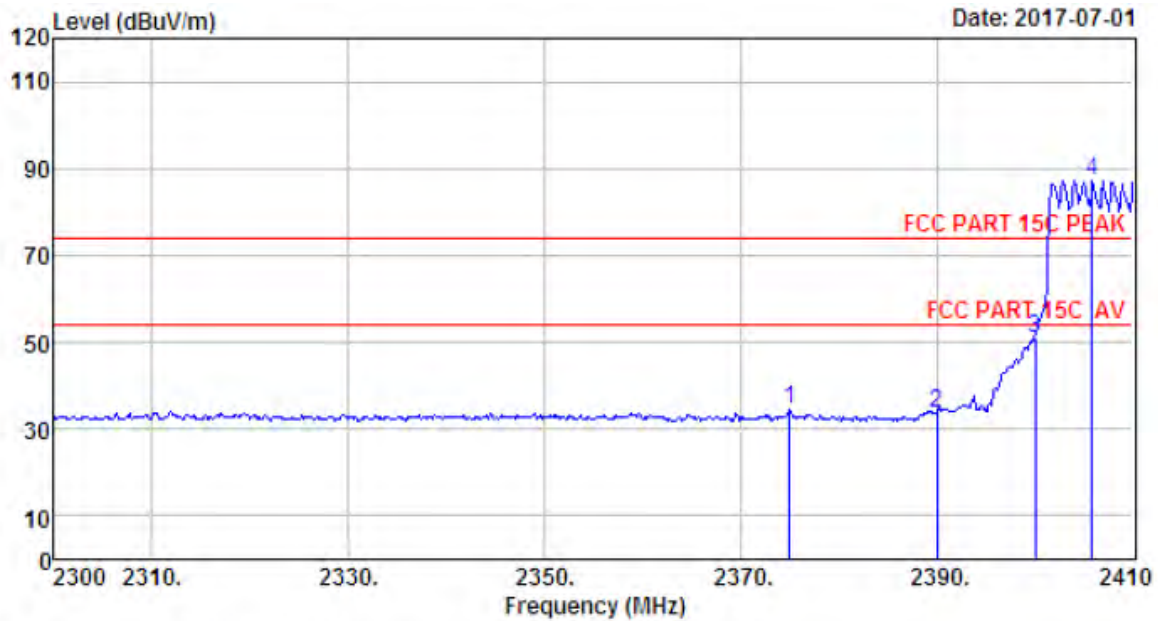

Site no. : 1# 966 Chamber Data no. : 144
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2402MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.02	27.64	6.60	34.59	34.88	34.53	74.00	39.47	Peak
2	2390.00	27.64	6.62	34.62	34.09	33.73	74.00	40.27	Peak
3	2400.00	27.61	6.62	34.64	51.32	50.91	74.00	23.09	Peak
4	2405.82	27.61	6.64	34.64	87.66	87.27	74.00	-13.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

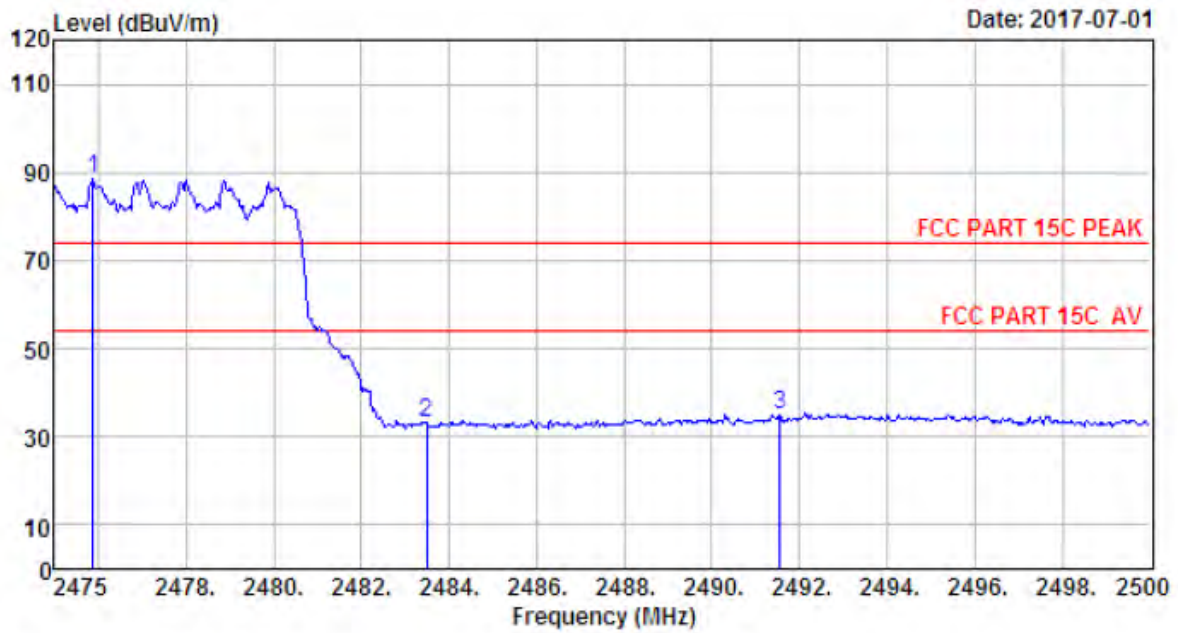

Site no. : 1# 966 Chamber Data no. : 145
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (m/4)-DQPSK TX 2480MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2475.88	27.58	6.71	35.11	89.17	88.35	74.00	-14.35	Peak
2	2483.50	27.58	6.71	35.11	33.89	33.07	74.00	40.93	Peak
3	2491.55	27.58	6.73	35.24	36.09	35.16	74.00	38.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

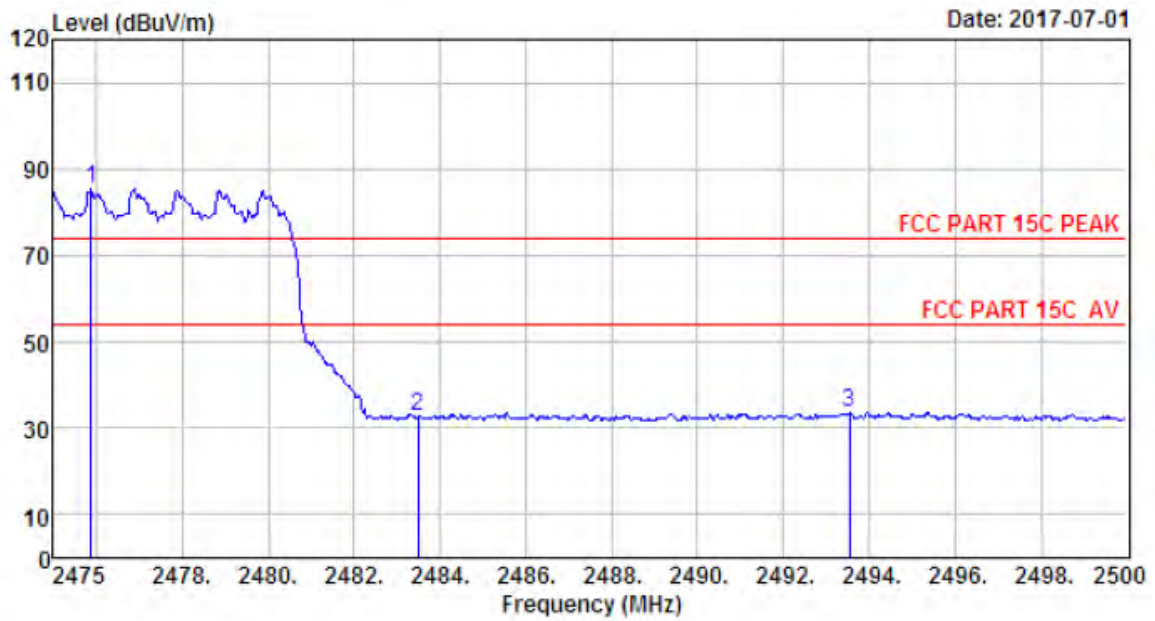

Site no. : 1# 966 Chamber Data no. : 146
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz (Hopping On)
 Module 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2475.88	27.58	6.71	35.11	86.25	85.43	74.00	-11.43	Peak
2	2483.50	27.58	6.71	35.11	33.37	32.55	74.00	41.45	Peak
3	2493.55	27.58	6.73	35.24	34.72	33.79	74.00	40.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

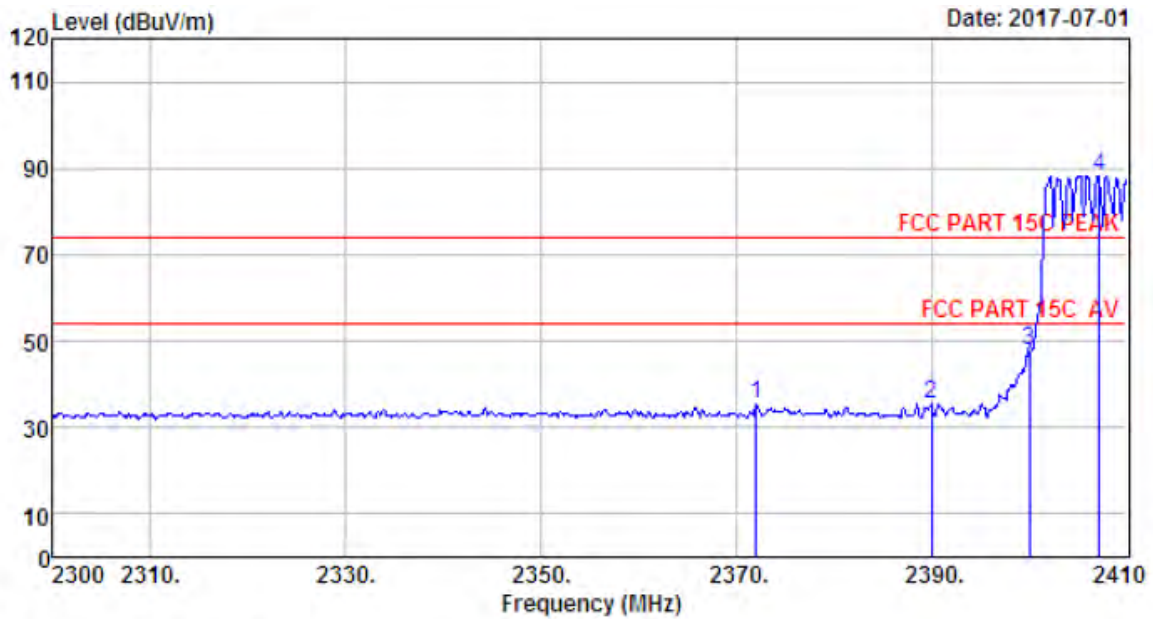

Site no. : 1# 966 Chamber Data no. : 167
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BI Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK IX 2402MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2372.05	27.67	6.60	34.59	35.59	35.27	74.00	38.73	Peak
2	2390.00	27.64	6.62	34.62	35.76	35.40	74.00	38.60	Peak
3	2400.00	27.61	6.62	34.64	48.30	47.89	74.00	26.11	Peak
4	2407.25	27.61	6.64	34.64	88.72	88.33	74.00	-14.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

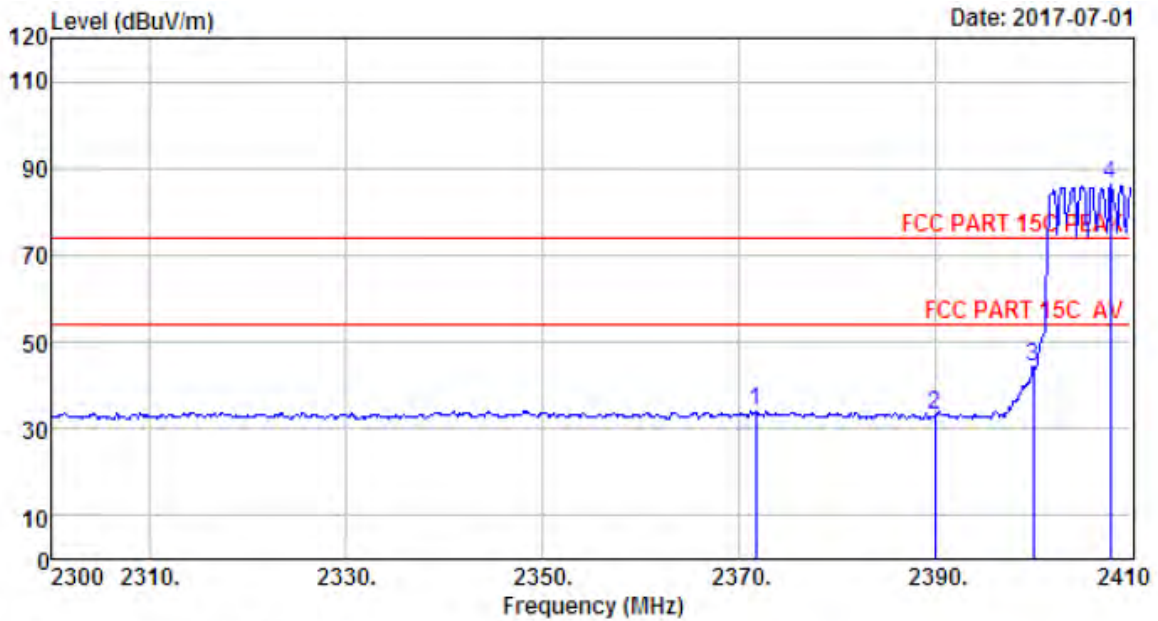

Site no. : 1# 966 Chamber Data no. : 168
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2371.72	27.67	6.60	34.59	34.50	34.18	74.00	39.82	Peak
2	2390.00	27.64	6.62	34.62	33.40	33.04	74.00	40.96	Peak
3	2400.00	27.61	6.62	34.64	44.62	44.21	74.00	29.79	Peak
4	2407.91	27.61	6.64	34.64	86.56	86.17	74.00	-12.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

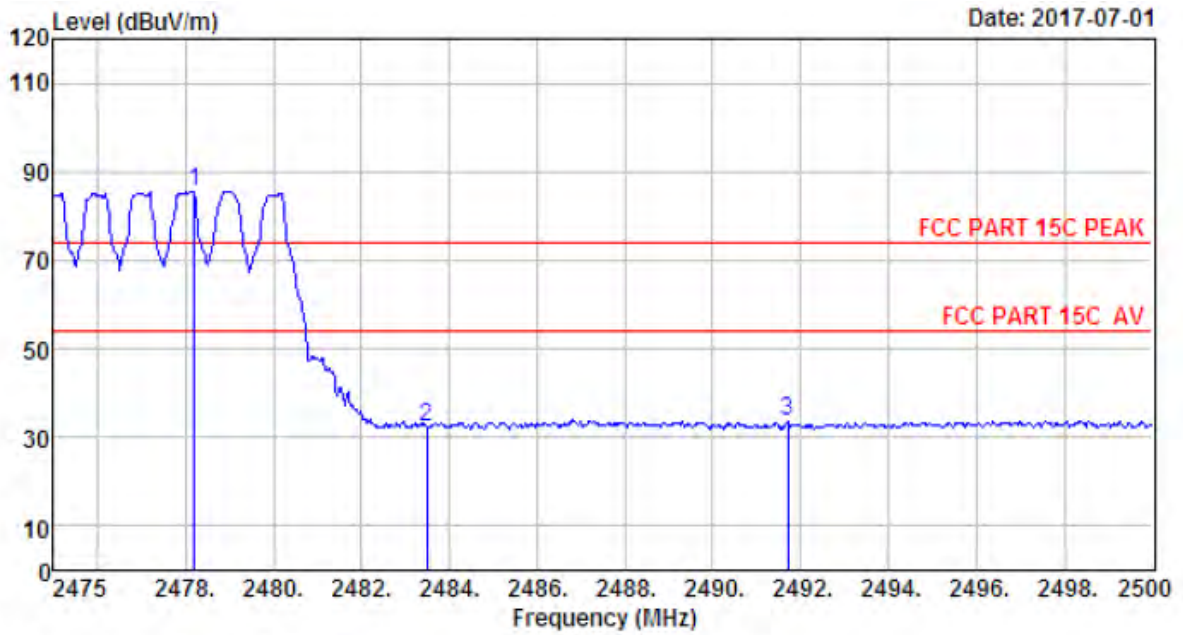

Site no. : 1# 966 Chamber Data no. : 169
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK IX 2480MHz (Hopping On)
 Module 2

	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	27.58	6.71	35.11	86.21	85.39	74.00	-11.39	Peak
2	27.58	6.71	35.11	33.26	32.44	74.00	41.56	Peak
3	27.58	6.73	35.24	34.52	33.59	74.00	40.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

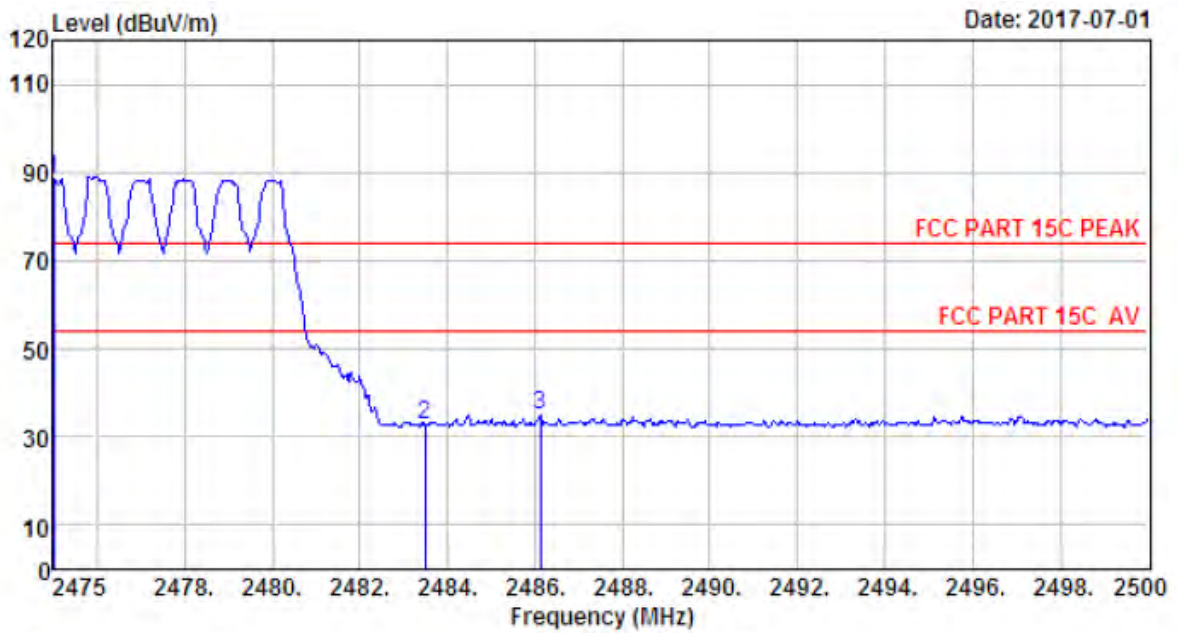

Site no. : 1# 966 Chamber Data no. : 170
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : GFSK TX 2480MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2475.00	27.58	6.71	35.11	89.58	88.76	74.00	-14.76	Peak
2	2483.50	27.58	6.71	35.11	33.60	32.78	74.00	41.22	Peak
3	2486.13	27.58	6.71	35.11	35.93	35.11	74.00	38.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

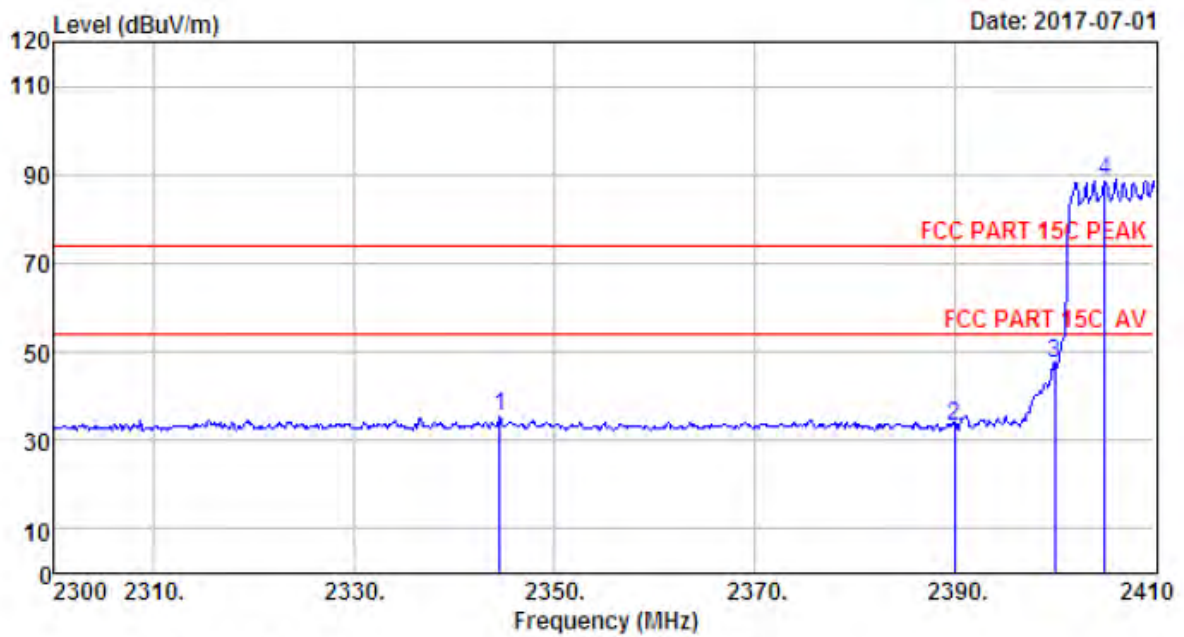

Site no. : 1# 966 Chamber Data no. : 171
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2402MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2344.55	27.70	6.56	34.59	35.92	35.59	74.00	38.41	Peak
2	2390.00	27.64	6.62	34.62	33.72	33.36	74.00	40.64	Peak
3	2400.00	27.61	6.62	34.64	47.90	47.49	74.00	26.51	Peak
4	2405.05	27.61	6.64	34.64	88.89	88.50	74.00	-14.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

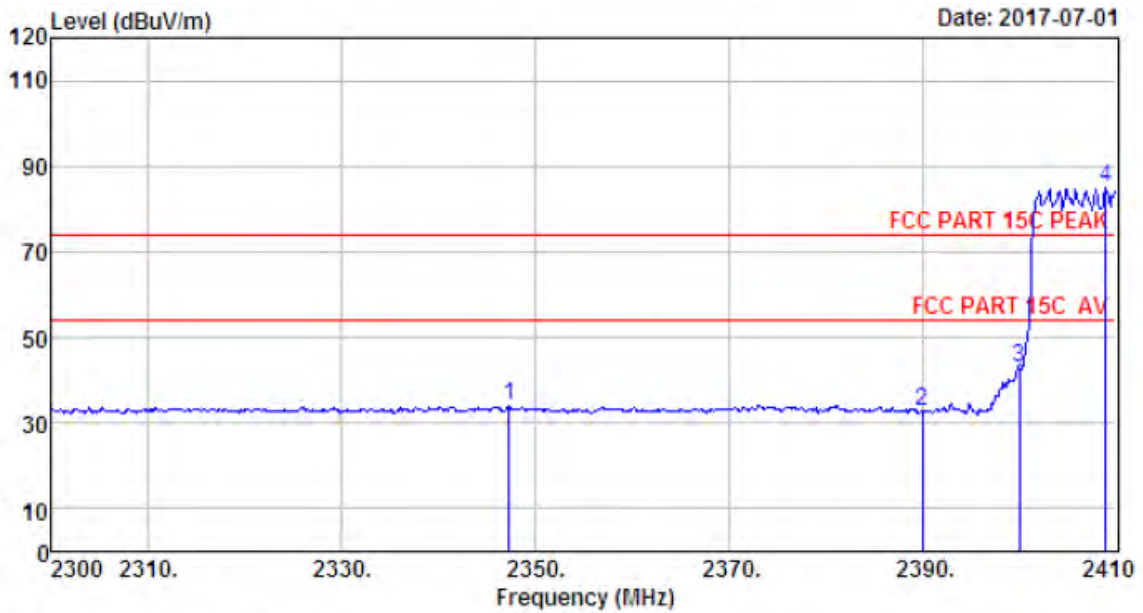

Site no. : 1# 966 Chamber Data no. : 172
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2402MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2347.30	27.70	6.56	34.57	34.56	34.25	74.00	39.75	Peak
2	2390.00	27.64	6.62	34.62	33.11	32.75	74.00	41.25	Peak
3	2400.00	27.61	6.62	34.64	43.40	42.99	74.00	31.01	Peak
4	2409.01	27.60	6.64	34.64	85.21	84.81	74.00	-10.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

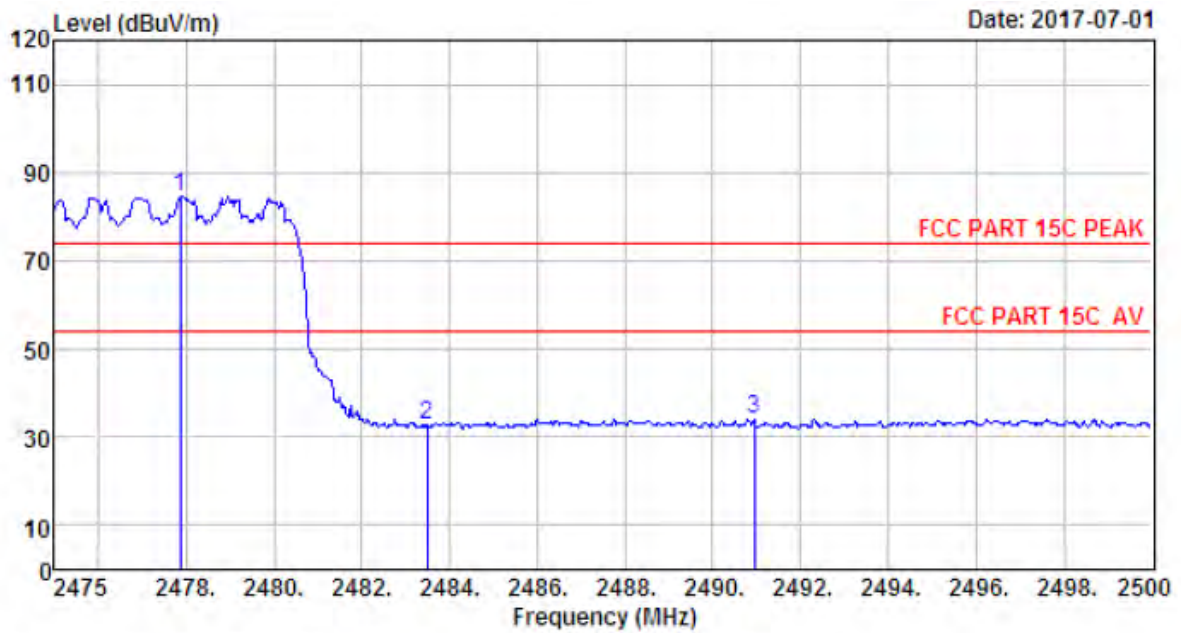

Site no. : 1# 966 Chamber Data no. : 173
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (π/4)-DQPSK TX 2480MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.88	27.58	6.71	35.11	85.50	84.68	74.00	-10.68	Peak
2	2483.50	27.58	6.71	35.11	33.53	32.71	74.00	41.29	Peak
3	2490.95	27.58	6.73	35.24	35.07	34.14	74.00	39.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

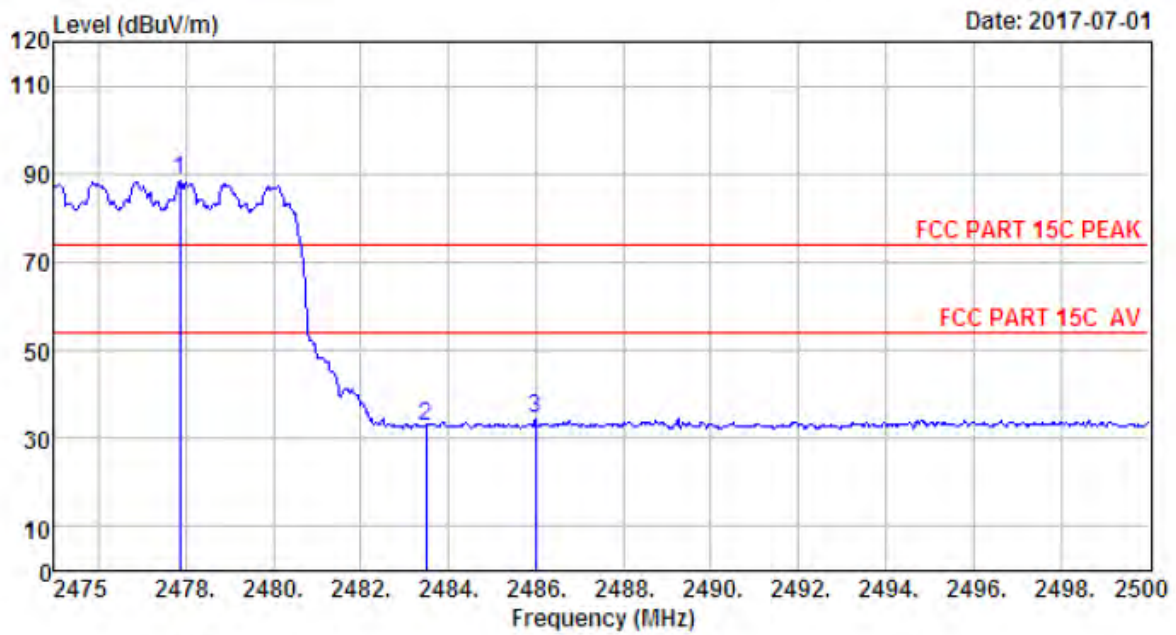

Date: 2017-07-01

Site no. : 1# 966 Chamber Data no. : 174
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.0%;Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : (n/4)-DQPSK TX 2480MHz (Hopping On)
 Module 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.88	27.58	6.71	35.11	89.31	88.49	74.00	-14.49	Peak
2	2483.50	27.58	6.71	35.11	33.70	32.88	74.00	41.12	Peak
3	2486.00	27.58	6.71	35.11	35.41	34.59	74.00	39.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

10. POWER LINE CONDUCTED EMISSIONS

10.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.2. Test Procedure

The EUT was placed on a non-metallic table, 10cm above the ground plane. The EUT was charged from Adapter which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

10.3. Test Result

PASS. (All emissions not reported below are too low against the prescribed limits.)


10.4. Test data

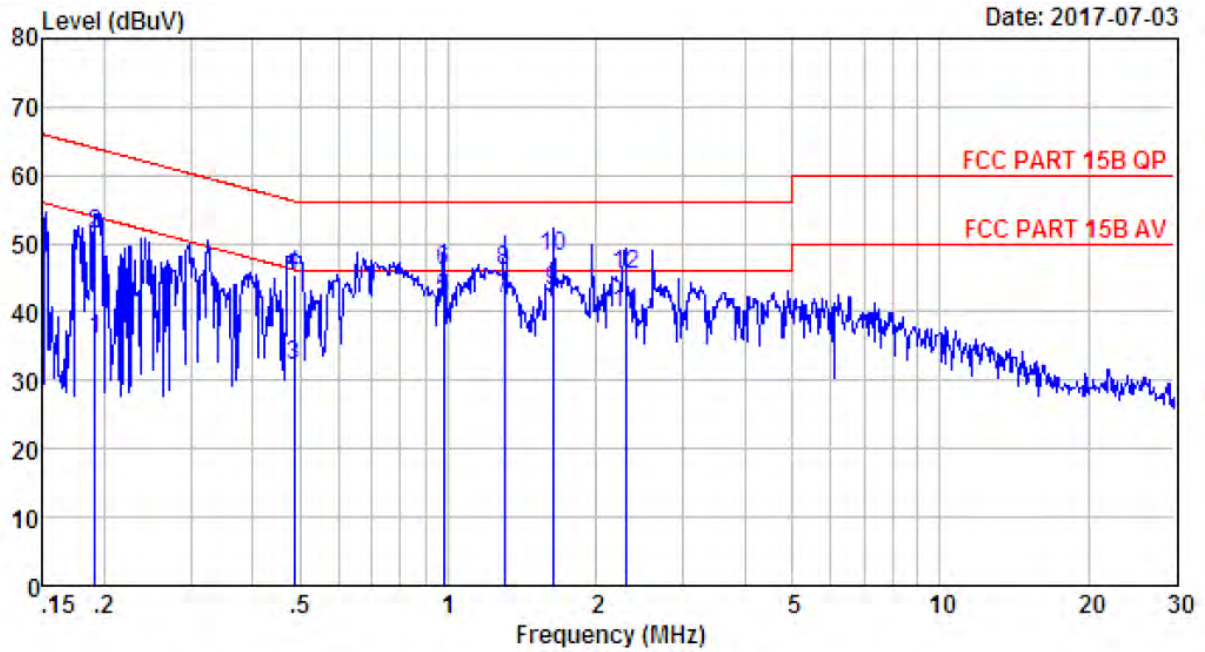

Date: 2017-07-03


Site no : 844 Shield Room Data no. : 111
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 240V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 1

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.19	9.61	9.80	16.57	35.98	53.98	18.00	Average
2	0.19	9.61	9.80	32.04	51.45	63.98	12.53	QP
3	0.49	9.61	9.81	12.67	32.09	46.23	14.14	Average
4	0.49	9.61	9.81	26.00	45.42	56.23	10.81	QP
5	0.98	9.64	9.82	22.54	42.00	46.00	4.00	Average
6	0.98	9.64	9.82	26.51	45.97	56.00	10.03	QP
7	1.30	9.63	9.82	22.33	41.78	46.00	4.22	Average
8	1.30	9.63	9.82	26.55	46.00	56.00	10.00	QP
9	1.63	9.62	9.84	23.51	42.97	46.00	3.03	Average
10	1.63	9.62	9.84	28.79	48.25	56.00	7.75	QP
11	2.30	9.62	9.84	20.26	39.72	46.00	6.28	Average
12	2.30	9.62	9.84	25.87	45.33	56.00	10.67	QP

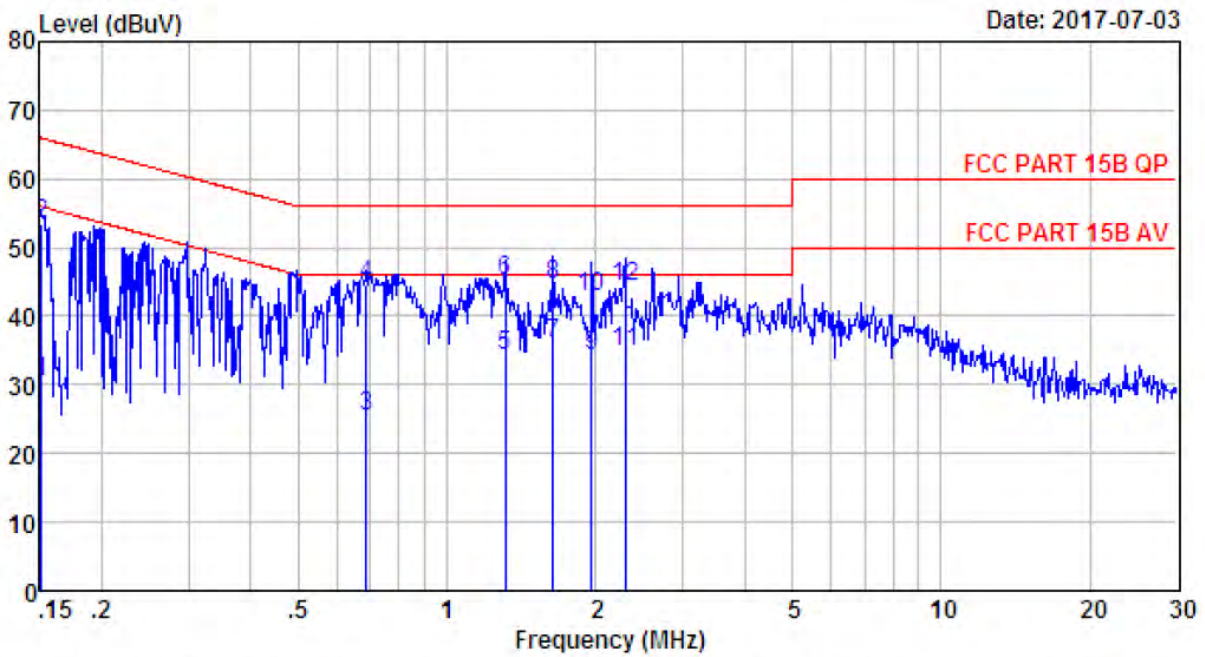


Site no : 844 Shield Room Data no. : 113
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUI : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 240V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 1

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.15	9.46	9.81	11.13	30.40	55.96	25.56	Average
2	0.15	9.46	9.81	34.24	53.51	65.96	12.45	QP
3	0.69	9.63	9.81	6.04	25.48	46.00	20.52	Average
4	0.69	9.63	9.81	25.15	44.59	56.00	11.41	QP
5	1.31	9.61	9.82	14.81	34.24	46.00	11.76	Average
6	1.31	9.61	9.82	25.73	45.16	56.00	10.84	QP
7	1.64	9.62	9.84	16.69	36.15	46.00	9.85	Average
8	1.64	9.62	9.84	25.11	44.57	56.00	11.43	QP
9	1.96	9.62	9.83	14.89	34.34	46.00	11.66	Average
10	1.96	9.62	9.83	23.47	42.92	56.00	13.08	QP
11	2.30	9.62	9.84	15.42	34.88	46.00	11.12	Average
12	2.30	9.62	9.84	24.87	44.33	56.00	11.67	QP

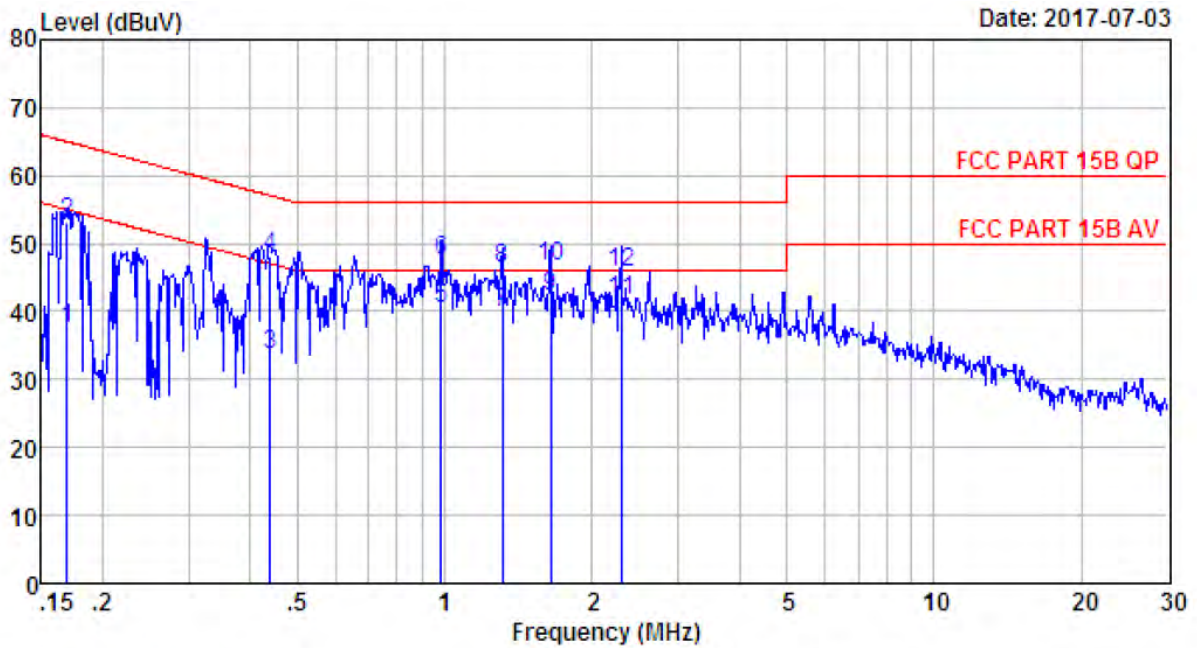


Site no : 844 Shield Room Data no. : 115
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 1

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	0.17	9.61	9.81	18.13	37.55	54.99	17.44	Average
2	0.17	9.61	9.81	33.71	53.13	64.99	11.86	QP
3	0.44	9.61	9.81	14.10	33.52	47.07	13.55	Average
4	0.44	9.61	9.81	28.58	48.00	57.07	9.07	QP
5	0.98	9.64	9.83	21.08	40.55	46.00	5.45	Average
6	0.98	9.64	9.83	27.98	47.45	56.00	8.55	QP
7	1.31	9.63	9.82	20.36	39.81	46.00	6.19	Average
8	1.31	9.63	9.82	26.83	46.28	56.00	9.72	QP
9	1.64	9.62	9.83	22.85	42.30	46.00	3.70	Average
10	1.64	9.62	9.83	27.20	46.65	56.00	9.35	QP
11	2.30	9.62	9.84	22.26	41.72	46.00	4.28	Average
12	2.30	9.62	9.84	26.27	45.73	56.00	10.27	QP

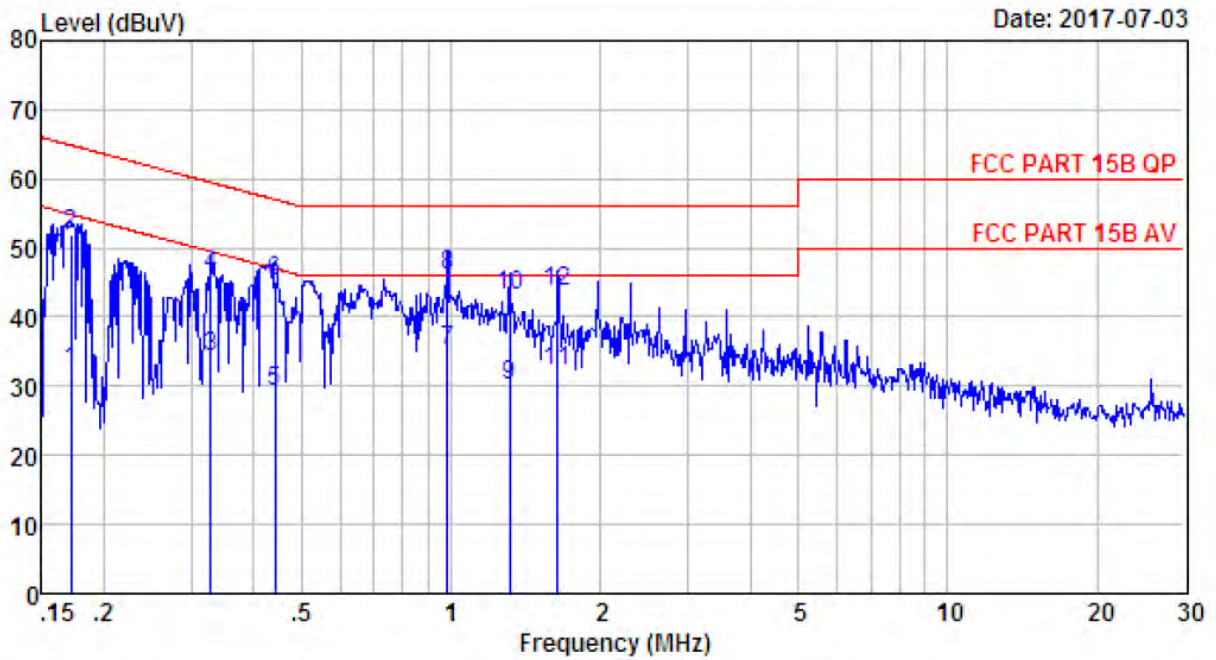


Site no : 844 Shield Room Data no. : 117
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 1

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.17	9.52	9.81	12.74	32.07	54.90	22.83	Average
2	0.17	9.52	9.81	32.50	51.83	64.90	13.07	QP
3	0.33	9.59	9.83	14.92	34.34	49.49	15.15	Average
4	0.33	9.59	9.83	26.58	46.00	59.49	13.49	QP
5	0.44	9.59	9.81	9.97	29.37	47.02	17.65	Average
6	0.44	9.59	9.81	25.72	45.12	57.02	11.90	QP
7	0.98	9.61	9.83	15.76	35.20	46.00	10.80	Average
8	0.98	9.61	9.83	26.73	46.17	56.00	9.83	QP
9	1.31	9.61	9.82	10.81	30.24	46.00	15.76	Average
10	1.31	9.61	9.82	23.79	43.22	56.00	12.78	QP
11	1.64	9.62	9.84	12.69	32.15	46.00	13.85	Average
12	1.64	9.62	9.84	24.19	43.65	56.00	12.35	QP

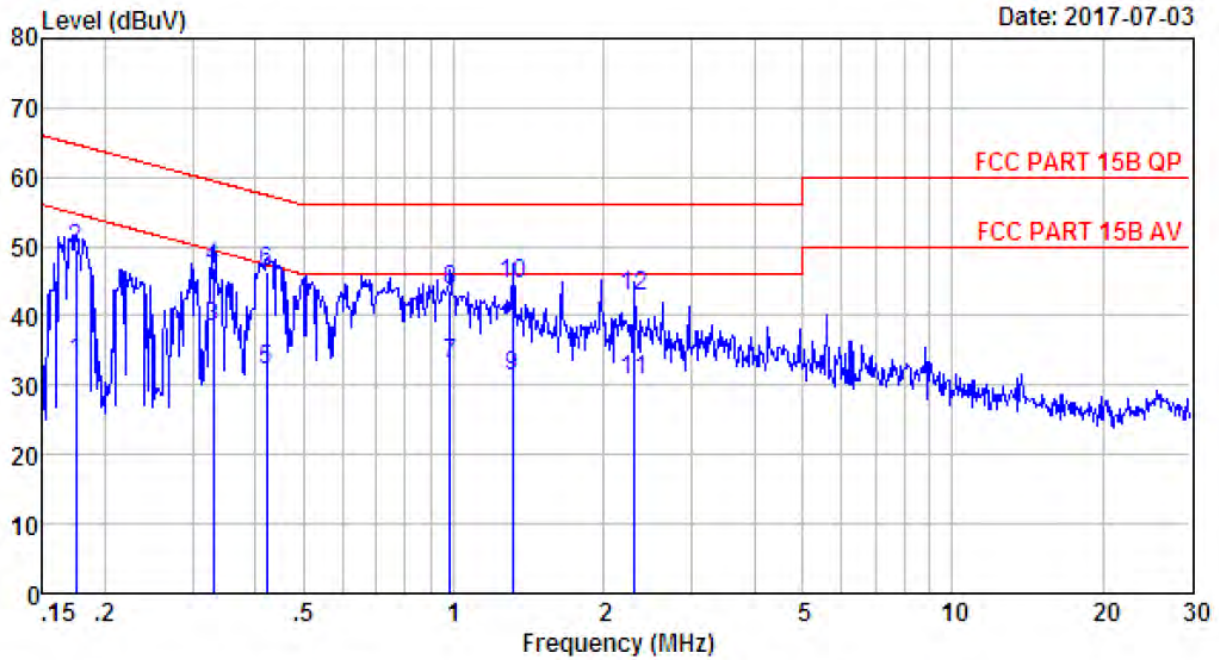


Site no : 844 Shield Room Data no. : 119
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 2

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.17	9.54	9.80	13.97	33.31	54.72	21.41	Average
2	0.17	9.54	9.80	30.37	49.71	64.72	15.01	QP
3	0.33	9.59	9.83	18.92	38.34	49.44	11.10	Average
4	0.33	9.59	9.83	27.42	46.84	59.44	12.60	QP
5	0.42	9.59	9.81	12.91	32.31	47.42	15.11	Average
6	0.42	9.59	9.81	27.02	46.42	57.42	11.00	QP
7	0.98	9.61	9.83	13.76	33.20	46.00	12.80	Average
8	0.98	9.61	9.83	24.15	43.59	56.00	12.41	QP
9	1.31	9.61	9.82	11.81	31.24	46.00	14.76	Average
10	1.31	9.61	9.82	25.13	44.56	56.00	11.44	QP
11	2.31	9.62	9.84	11.33	30.79	46.00	15.21	Average
12	2.31	9.62	9.84	23.37	42.83	56.00	13.17	QP

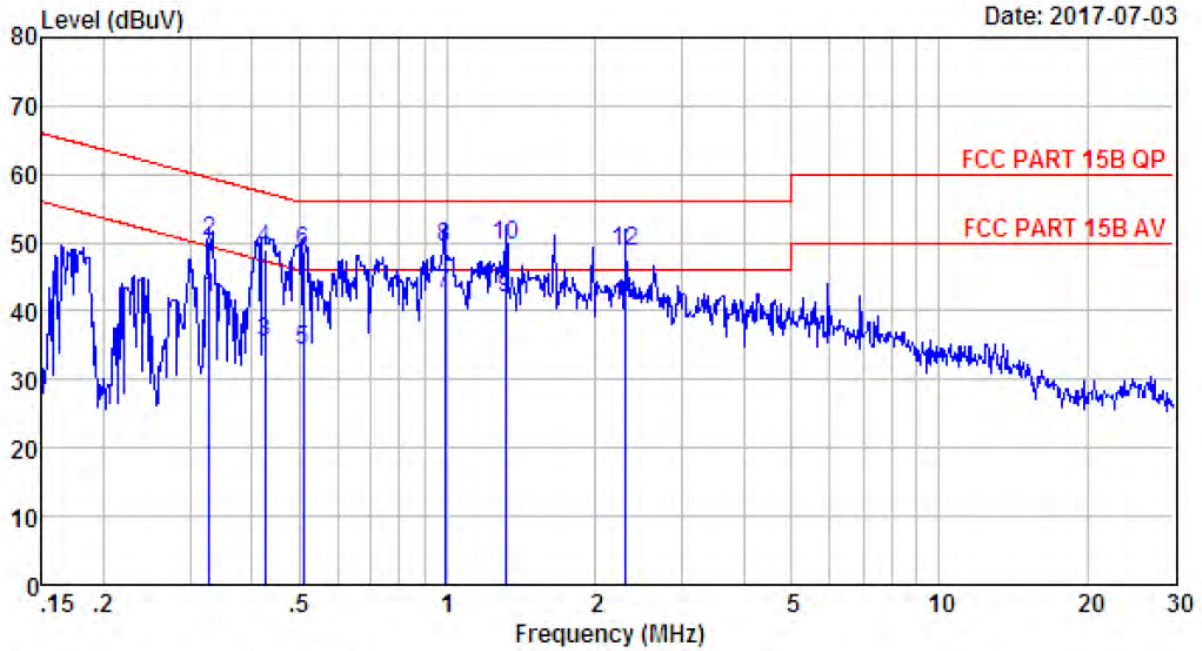


Site no : 844 Shield Room Data no. : 121
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BI Speaker
 Power : DC 9V From Adapter Input AC 120V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 2

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.33	9.61	9.83	22.36	41.80	49.49	7.69	Average
2	0.33	9.61	9.83	30.88	50.32	59.49	9.17	QP
3	0.43	9.61	9.81	16.10	35.52	47.33	11.81	Average
4	0.43	9.61	9.81	29.52	48.94	57.33	8.39	QP
5	0.51	9.61	9.81	14.75	34.17	46.00	11.83	Average
6	0.51	9.61	9.81	29.31	48.73	56.00	7.27	QP
7	0.99	9.64	9.83	23.08	42.55	46.00	3.45	Average
8	0.99	9.64	9.83	29.96	49.43	56.00	6.57	QP
9	1.31	9.63	9.82	22.36	41.81	46.00	4.19	Average
10	1.31	9.63	9.82	30.05	49.50	56.00	6.50	QP
11	2.31	9.62	9.84	21.16	40.62	46.00	5.38	Average
12	2.31	9.62	9.84	29.37	48.83	56.00	7.17	QP

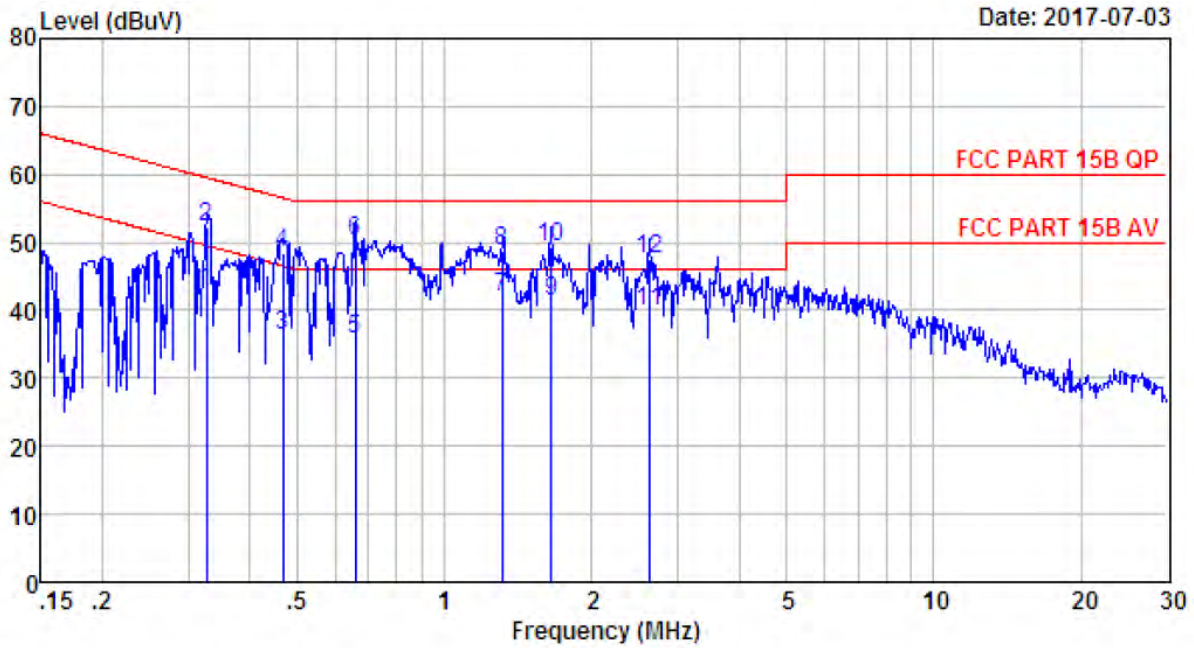

Site no : 844 Shield Room Data no. : 123
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 240V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : IX Mode
 Module 2

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.33	9.61	9.83	23.36	42.80	49.53	6.73	Average
2	0.33	9.61	9.83	32.90	52.34	59.53	7.19	QP
3	0.47	9.61	9.81	16.93	36.35	46.54	10.19	Average
4	0.47	9.61	9.81	29.14	48.56	56.54	7.98	QP
5	0.66	9.59	9.81	16.23	35.63	46.00	10.37	Average
6	0.66	9.59	9.81	30.67	50.07	56.00	5.93	QP
7	1.31	9.63	9.82	22.36	41.81	46.00	4.19	Average
8	1.31	9.63	9.82	29.29	48.74	56.00	7.26	QP
9	1.65	9.62	9.83	21.89	41.34	46.00	4.66	Average
10	1.65	9.62	9.83	29.72	49.17	56.00	6.83	QP
11	2.62	9.62	9.83	20.50	39.95	46.00	6.05	Average
12	2.62	9.62	9.83	28.01	47.46	56.00	8.54	QP

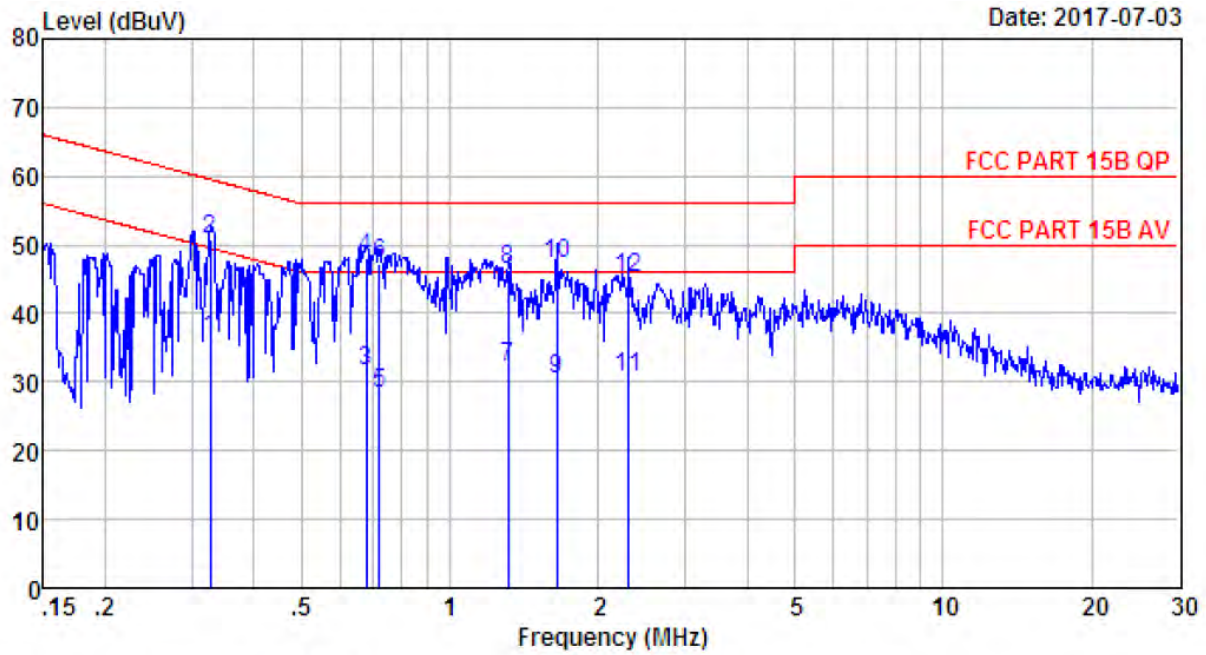

Site no : 844 Shield Room Data no. : 125
 Env. / Ins. : Temp:24.8'C Humi:51% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Trolley BT Speaker
 Power : DC 9V From Adapter Input AC 240V/60Hz
 M/N : IQ-7210DJBT
 Test Mode : TX Mode
 Module 2

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.33	9.59	9.83	16.91	36.33	49.53	13.20	Average
2	0.33	9.59	9.83	31.34	50.76	59.53	8.77	QP
3	0.68	9.63	9.81	12.08	31.52	46.00	14.48	Average
4	0.68	9.63	9.81	28.55	47.99	56.00	8.01	QP
5	0.72	9.63	9.81	9.04	28.48	46.00	17.52	Average
6	0.72	9.63	9.81	27.89	47.33	56.00	8.67	QP
7	1.31	9.61	9.82	12.81	32.24	46.00	13.76	Average
8	1.31	9.61	9.82	26.77	46.20	56.00	9.80	QP
9	1.64	9.62	9.83	10.98	30.43	46.00	15.57	Average
10	1.64	9.62	9.83	27.80	47.25	56.00	8.75	QP
11	2.31	9.62	9.84	11.33	30.79	46.00	15.21	Average
12	2.31	9.62	9.84	25.67	45.13	56.00	10.87	QP

11. ANTENNA REQUIREMENTS

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product are PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0 dBi.

12. TEST SETUP PHOTO


Conducted Test



Radiated Test (30-1000 MHz)



Radiated Test (Above 1GHz)

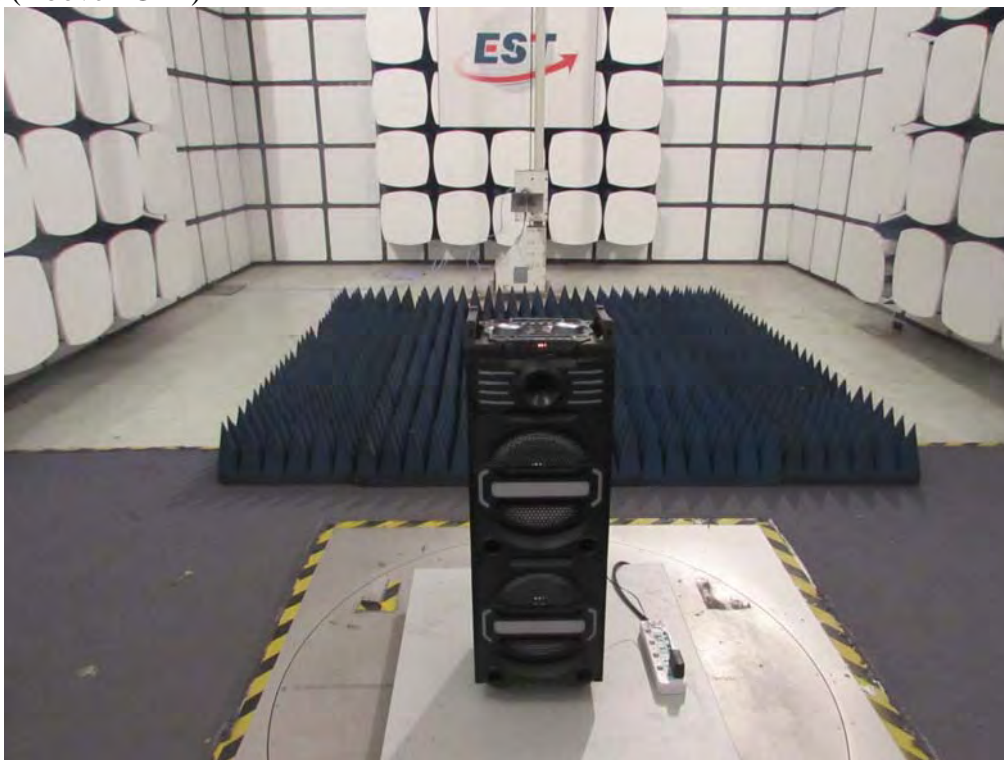

13. PHOTO EUT

External Photos
M/N: IQ-7210DJBT



External Photos
M/N: IQ-7210DJBT



External Photos
M/N: IQ-7210DJBT



External Photos
M/N: IQ-7210DJBT



FM
Receiving
Antenna



External Photos
M/N: IQ-7210DJBT



External Photos
Adapter





External Photos
Adapter



Internal Photos
M/N: IQ-7210DJBT




Internal Photos
M/N: IQ-7210DJBT

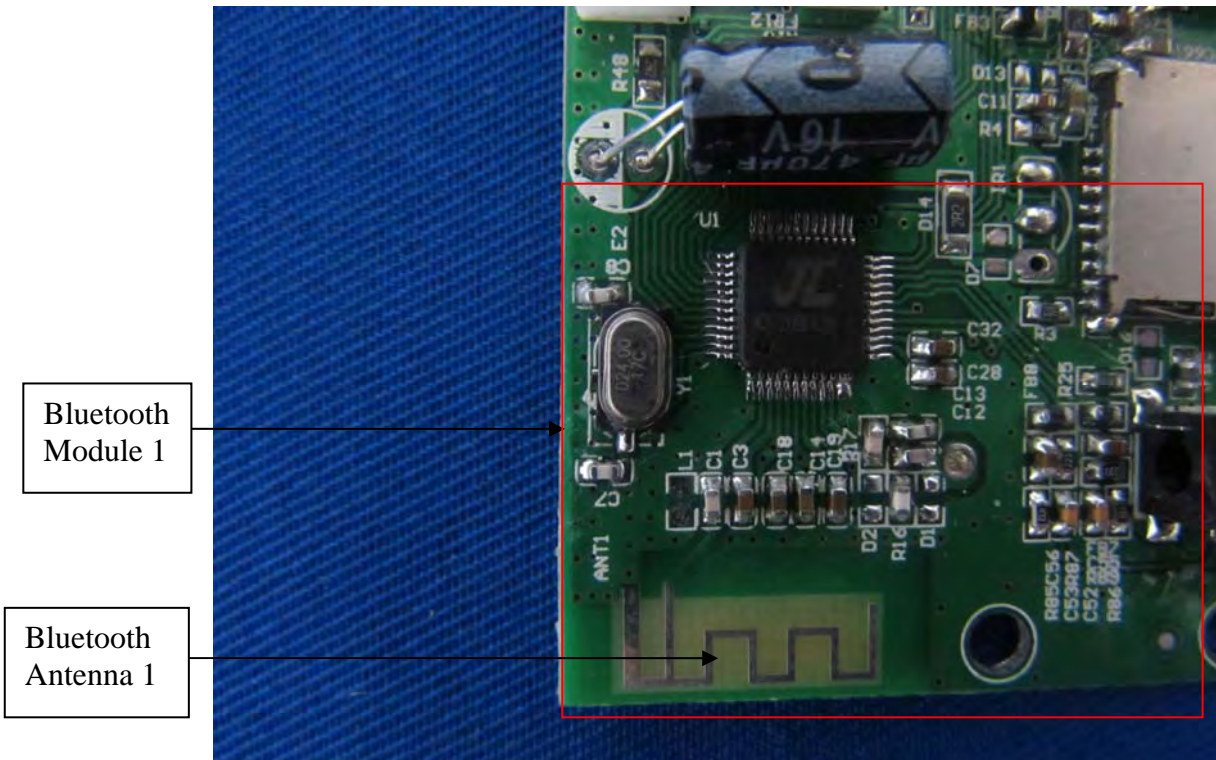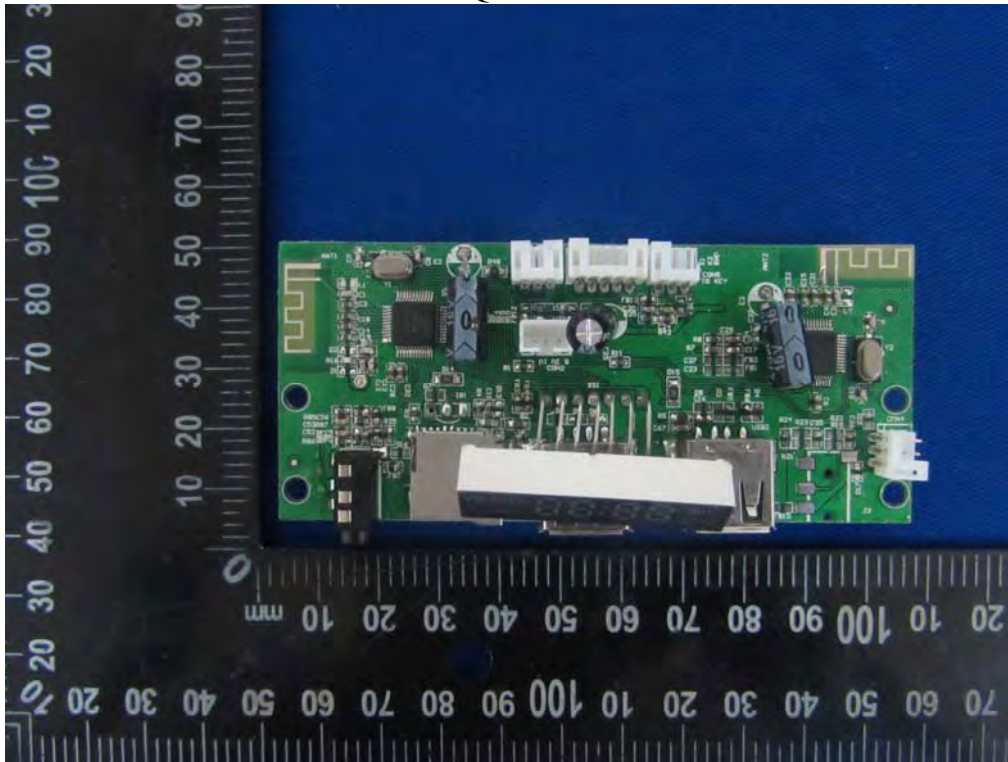

Bluetooth
Module 1


Bluetooth
Antenna 1

Internal Photos
M/N: IQ-7210DJBT


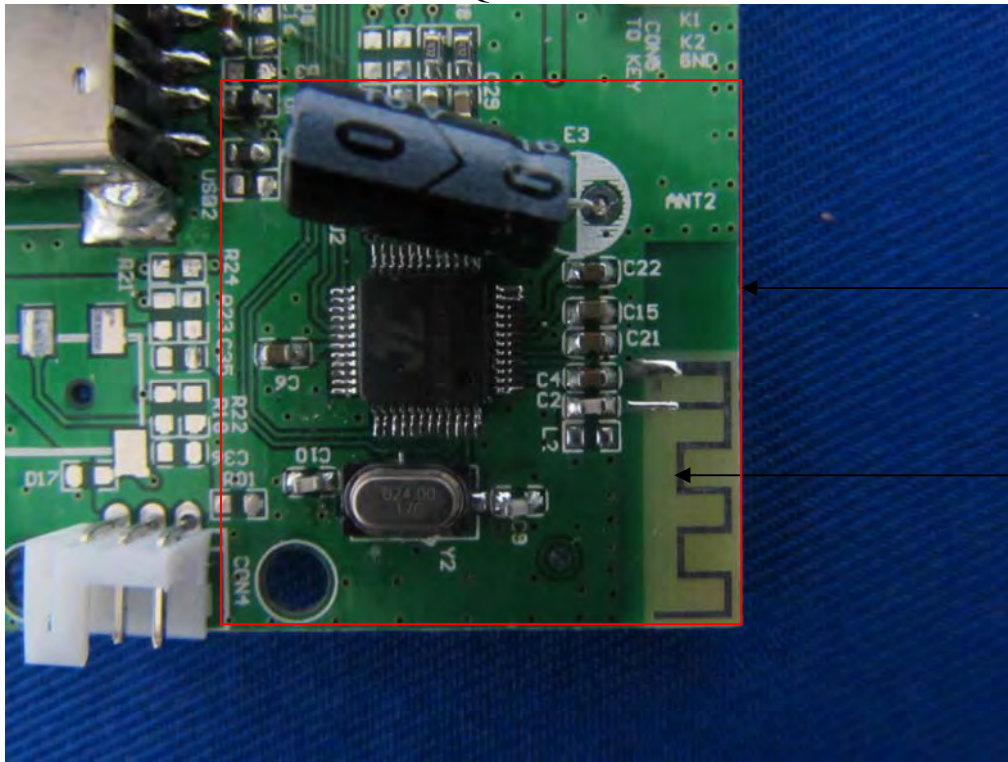


Bluetooth
Module 2



Bluetooth
Antenna 2

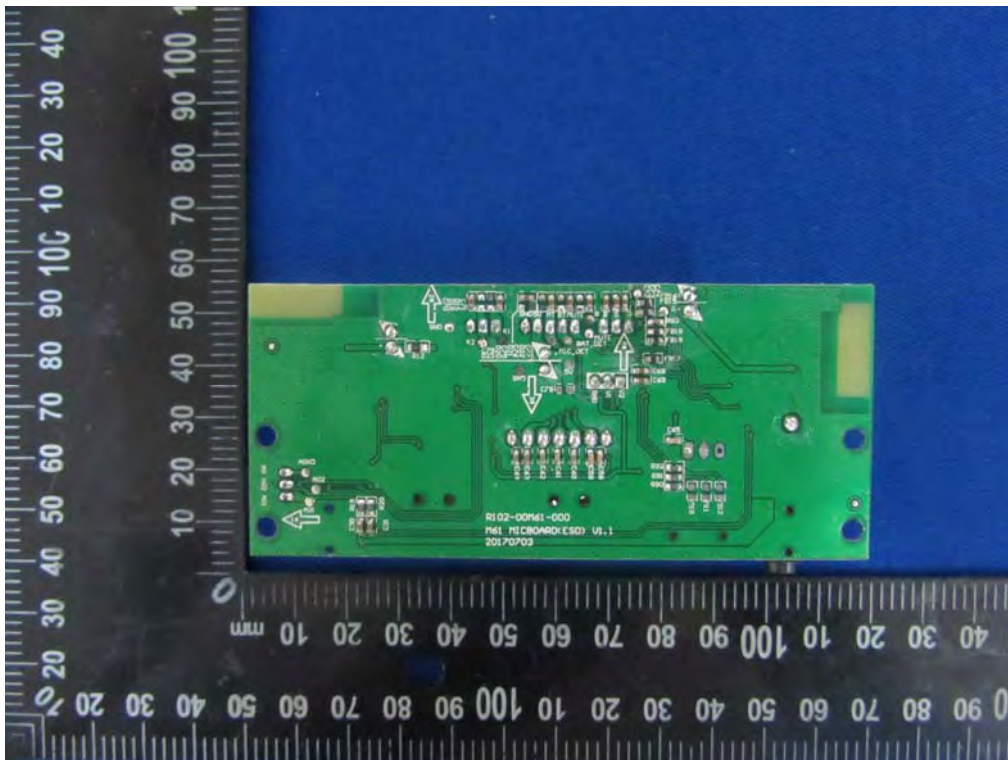



Internal Photos
M/N: IQ-7210DJBT

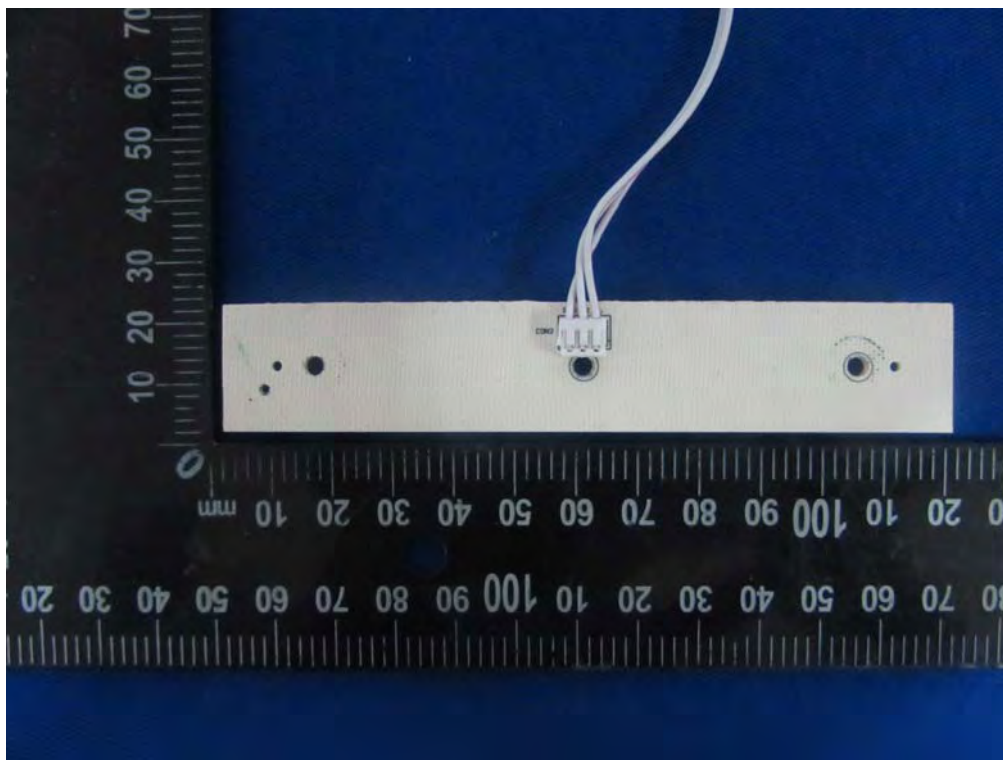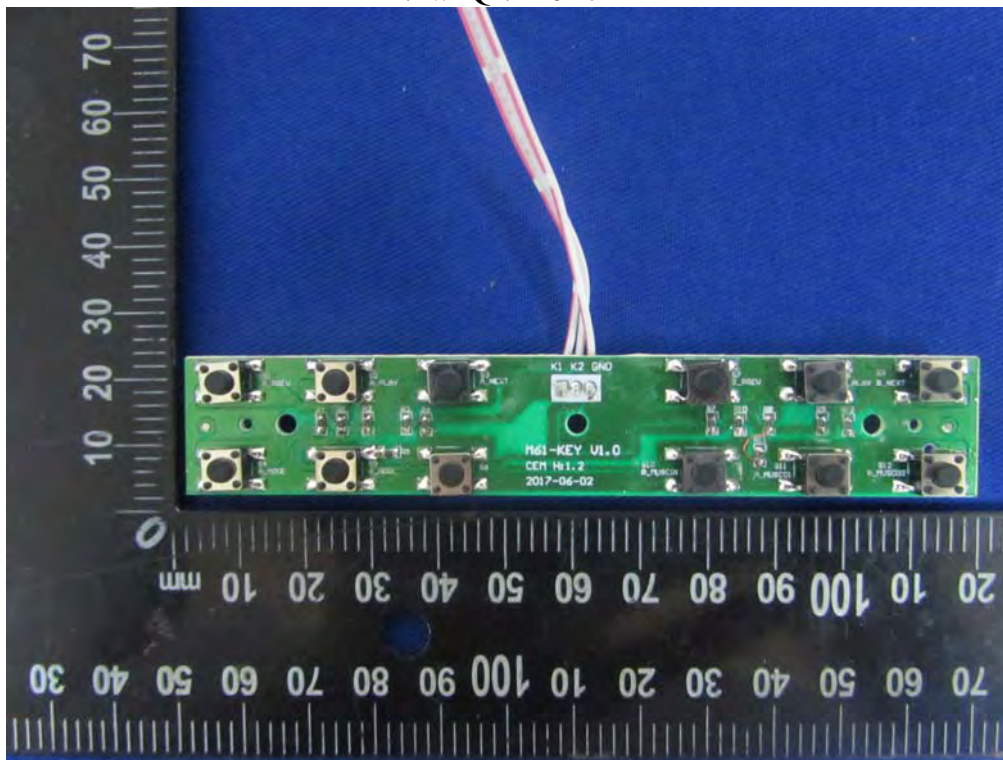



Internal Photos
M/N: IQ-7210DJBT

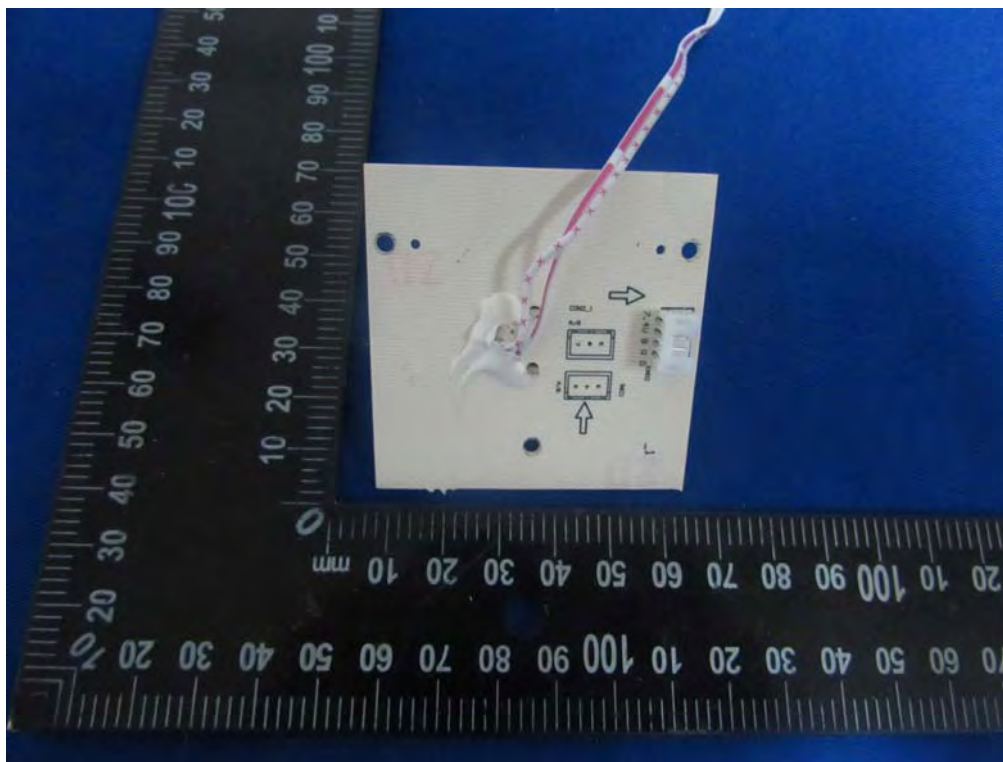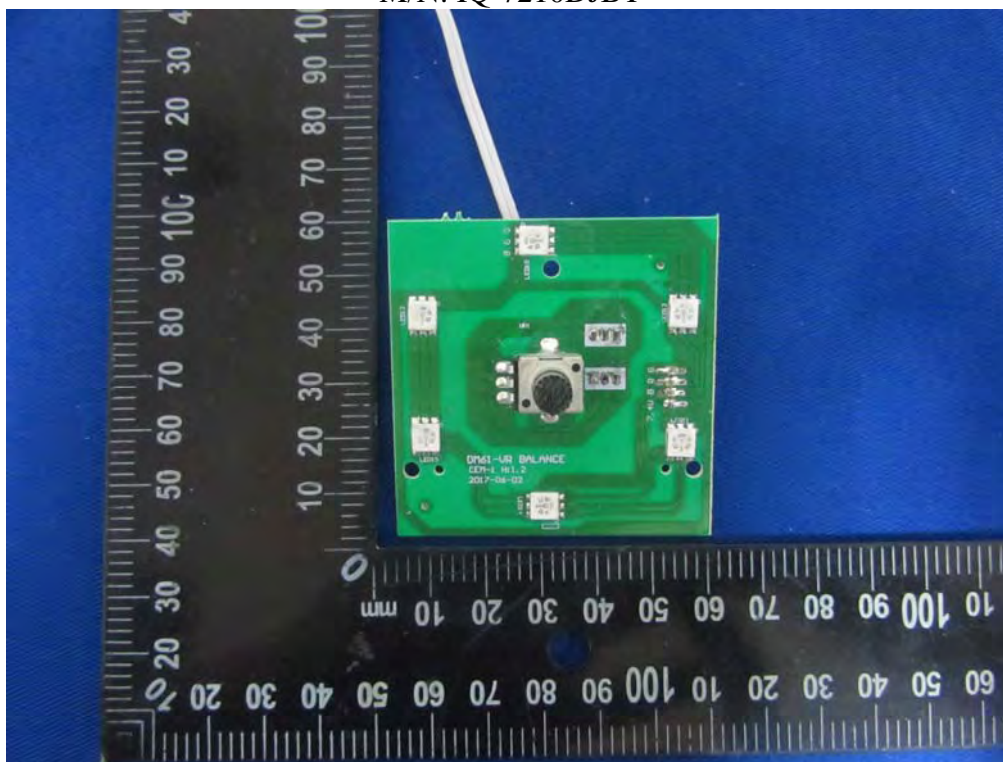



Internal Photos
M/N: IQ-7210DJBT

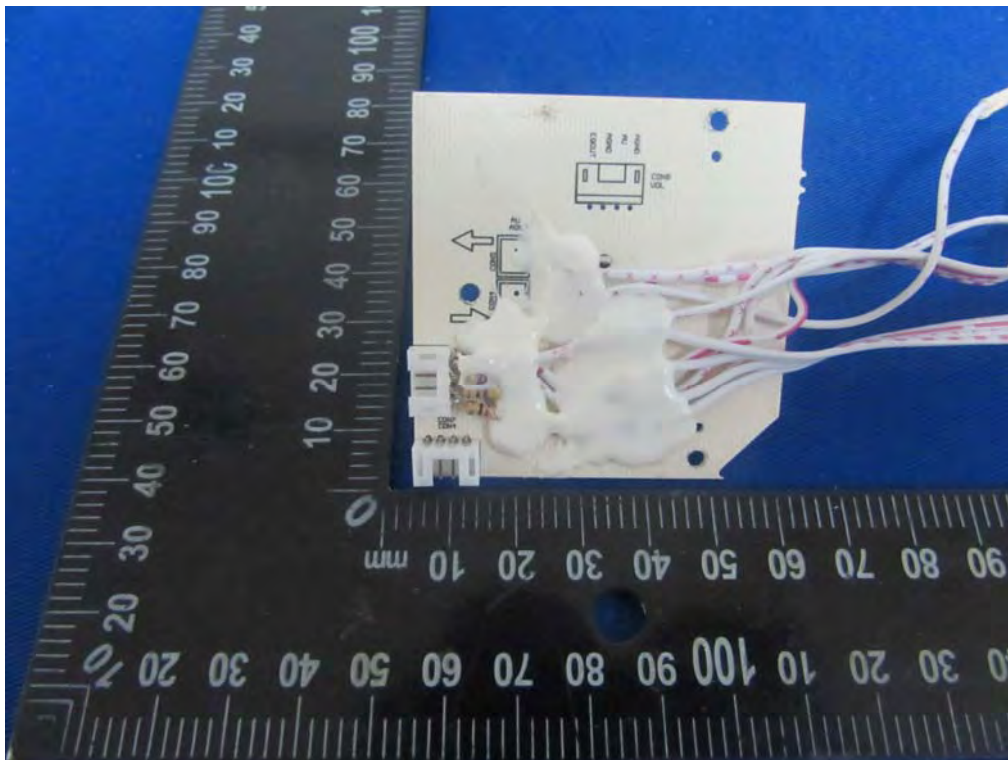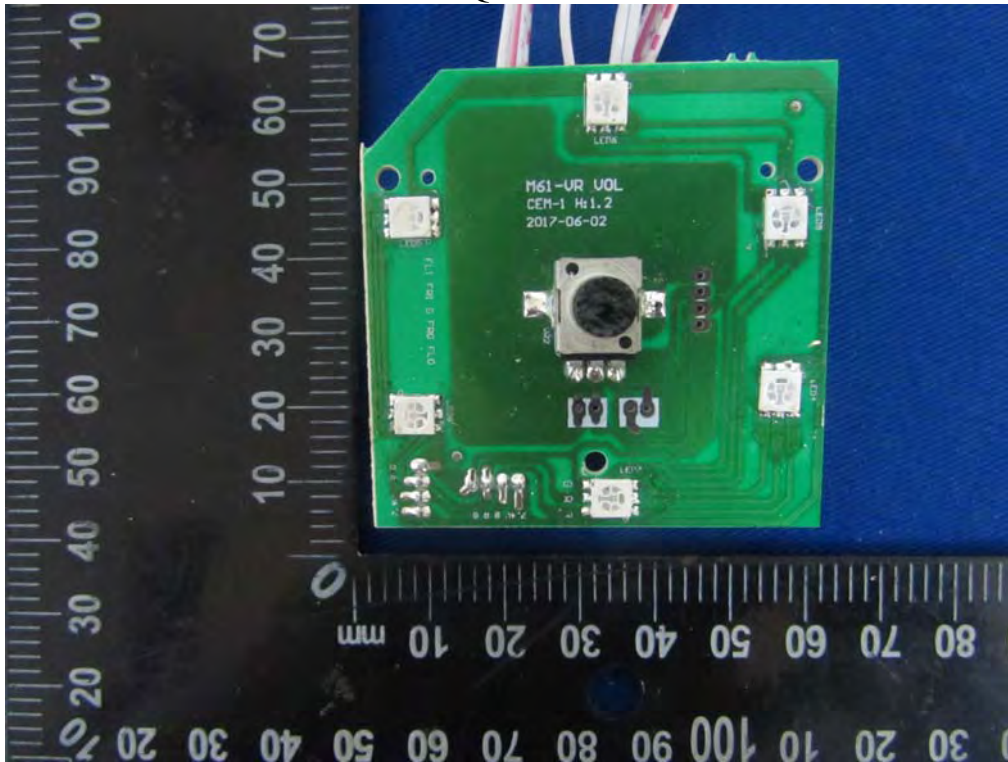


Internal Photos
M/N: IQ-7210DJBT

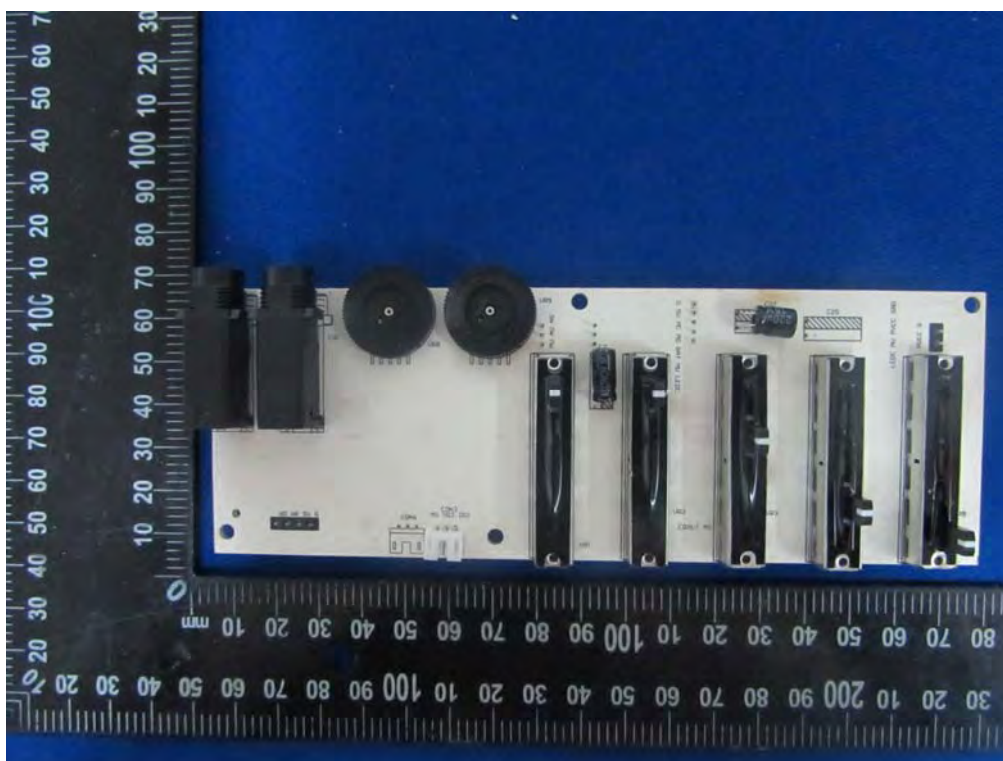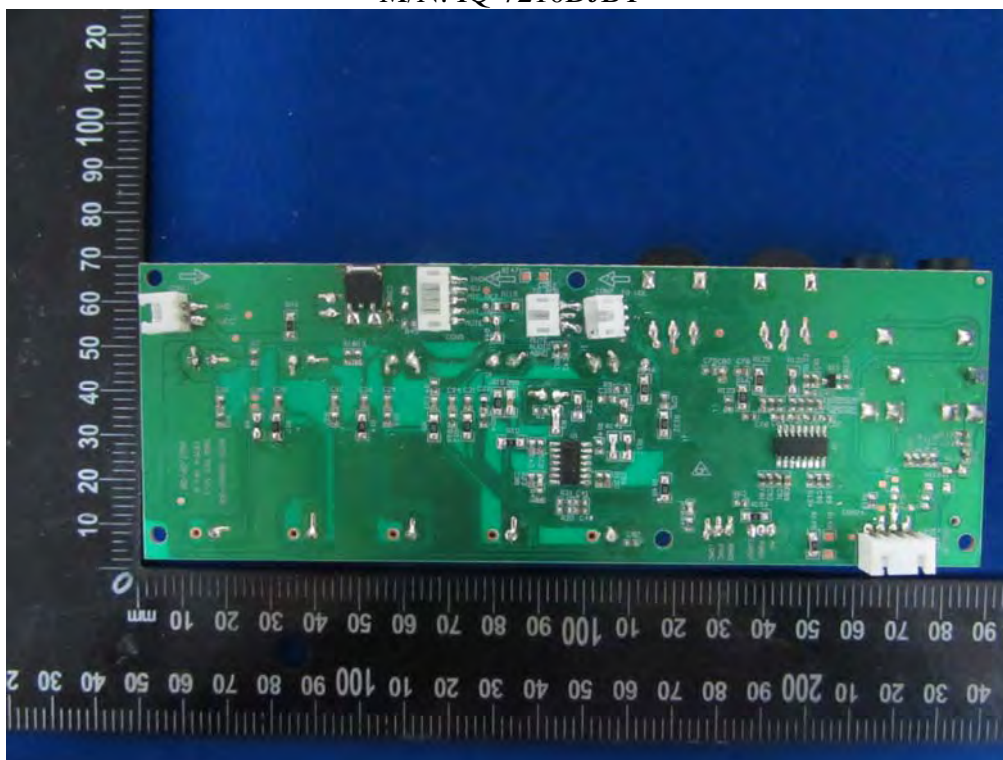

Internal Photos
M/N: IQ-7210DJBT

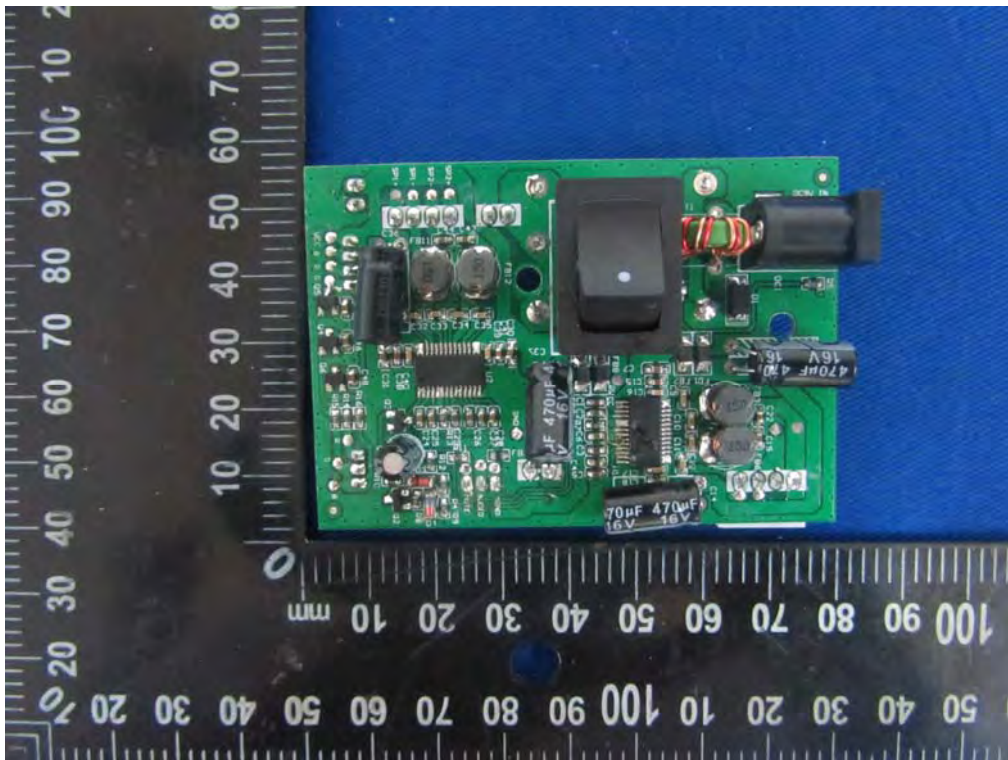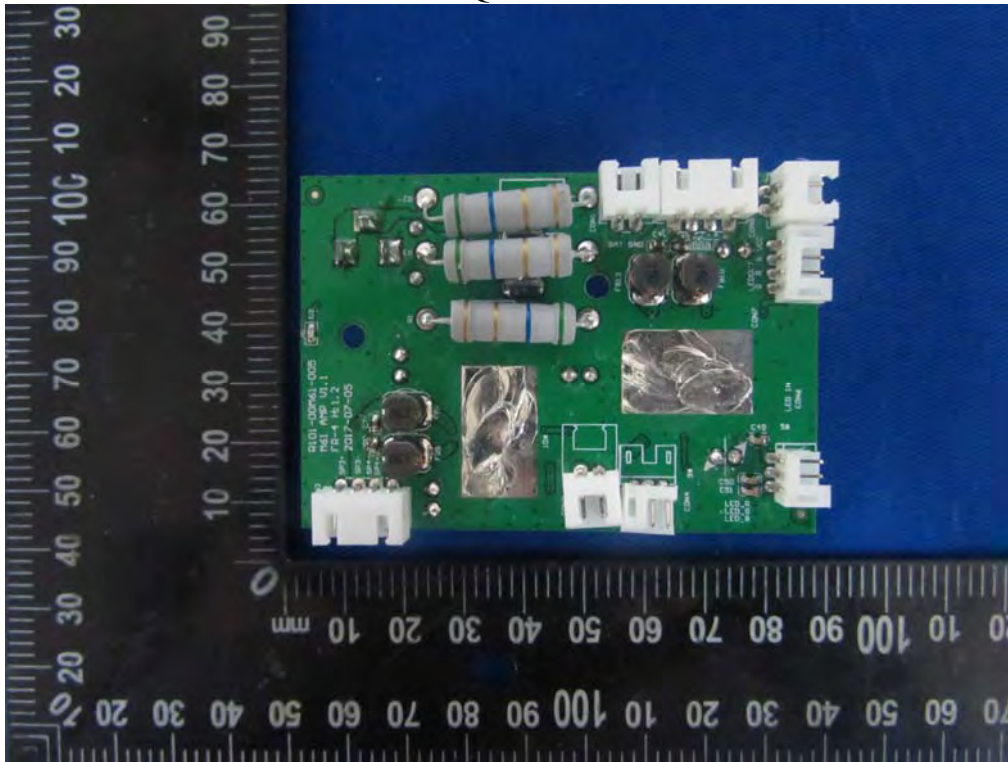

Internal Photos
M/N: IQ-7210DJBT

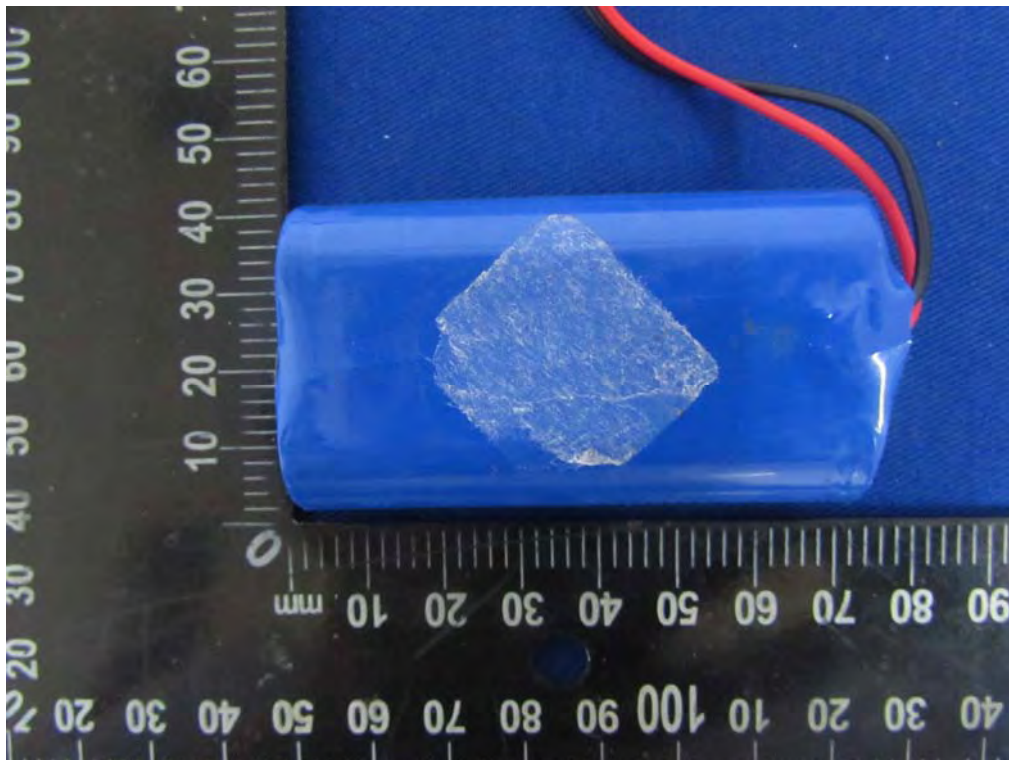

External Photos
M/N: DM60



External Photos
M/N: M61

