


## FCC AND IC CERTIFICATION TEST REPORT

Report No.: DDT-B23070310-2E02

|                      |   |   |
|----------------------|---|---|
| Applicant            | : | Ninebot (Changzhou) Tech Co., Ltd.  |
| Address              | : | 16F-17F, Block A, Building 3, Changwu Mid Road<br>18#, Wujin Dist., Changzhou, Jiangsu, China |
| Equipment under Test | : | Ninebot eKickScooter E2 Pro   |
| Model No.            | : | 051405U   |
| Trade Mark           | : |  ninebot     |
| FCC ID               | : | 2ALS8-KS0018  |
| IC                   | : | 22636-KS0018  |
| Manufacturer         | : | Ninebot (Changzhou) Tech Co., Ltd.  |
| Address              | : | 16F-17F, Block A, Building 3, Changwu Mid Road<br>18#, Wujin Dist., Changzhou, Jiangsu, China |

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park  
Development Area, Tianjin, China.

Tel: +86-22-58038033, E-mail: [ddt@ddt.com](mailto:ddt@ddt.com) <http://www.ddttest.com>




# REPORT

## TABLE OF CONTENTS

|      |   |    |
|------|---|----|
|      | Test report declares.....                         | 3  |
| 1.   | Summary of Test Results .....                     | 6  |
| 2.   | General Test Information .....                    | 7  |
| 2.1. | Description of EUT.....                           | 7  |
| 2.2. | Accessories of EUT .....                          | 7  |
| 2.3. | Assistant equipment used for test.....            | 7  |
| 2.4. | Block diagram of EUT configuration for test ..... | 8  |
| 2.5. | Deviations of test standard .....                 | 8  |
| 2.6. | Test environment conditions .....                 | 9  |
| 2.7. | Test laboratory.....                              | 9  |
| 2.8. | Measurement uncertainty .....                     | 10 |
| 3.   | Equipment Used During Test.....                   | 11 |
| 4.   | 6 dB Bandwidth and 99% Bandwidth.....             | 12 |
| 4.1. | Block diagram of test setup .....                 | 12 |
| 4.2. | Limits .....                                      | 12 |
| 4.3. | Test procedure.....                               | 12 |
| 4.4. | Test result.....                                  | 13 |
| 4.5. | Original test data.....                           | 13 |
| 5.   | Maximum Peak Output Power .....                   | 17 |
| 5.1. | Block diagram of test setup .....                 | 17 |
| 5.2. | Limits .....                                      | 17 |
| 5.3. | Test procedure.....                               | 17 |
| 5.4. | Test result.....                                  | 17 |
| 5.5. | Original test data.....                           | 18 |
| 6.   | Power Spectral Density .....                      | 20 |
| 6.1. | Block diagram of test setup .....                 | 20 |
| 6.2. | Limits .....                                      | 20 |
| 6.3. | Test procedure.....                               | 20 |
| 6.4. | Test result.....                                  | 21 |
| 6.5. | Original test data.....                           | 21 |
| 7.   | Band Edge Compliance (Conducted Method).....      | 23 |
| 7.1. | Block diagram of test setup .....                 | 23 |
| 7.2. | Limits .....                                      | 23 |
| 7.3. | Test procedure.....                               | 23 |
| 7.4. | Test result.....                                  | 24 |
| 7.5. | Original test data.....                           | 24 |
| 8.   | Radiated Emission.....                            | 27 |

|       |  |    |
|-------|--|----|
| 8.1.  | Block diagram of test setup .....            | 27 |
| 8.2.  | Limit .....                                  | 28 |
| 8.3.  | Test Procedure .....                         | 30 |
| 8.4.  | Test result .....                            | 31 |
| 9.    | RF Conducted Spurious Emissions .....        | 45 |
| 9.1.  | Block diagram of test setup .....            | 45 |
| 9.2.  | Limits .....                                 | 45 |
| 9.3.  | Test procedure.....                          | 45 |
| 9.4.  | Test result.....                             | 46 |
| 9.5.  | Original test data.....                      | 46 |
| 10.   | Band Edge Compliance (Radiated Method) ..... | 50 |
| 10.1. | Block diagram of test setup .....            | 50 |
| 10.2. | Limit .....                                  | 50 |
| 10.3. | Test Procedure .....                         | 50 |
| 10.4. | Test result.....                             | 50 |
| 11.   | Power Line Conducted Emission .....          | 55 |
| 11.1. | Block diagram of test setup .....            | 55 |
| 11.2. | Power line conducted emission limits .....   | 55 |
| 11.3. | Test procedure.....                          | 55 |
| 11.4. | Test result.....                             | 56 |
| 12.   | Antenna Requirements .....                   | 58 |
| 12.1. | Limit .....                                  | 58 |
| 12.2. | Result .....                                 | 58 |
| 13.   | Test Setup Photograph.....                   | 59 |
| 14.   | Photos of the EUT .....                      | 61 |

## Test Report Declare

|                             |   |  |
|-----------------------------|---|--|
| <b>Applicant</b>            | : | Ninebot (Changzhou) Tech Co., Ltd.   |
| <b>Address</b>              | : | 16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China |
| <b>Equipment under Test</b> | : | Ninebot eKickScooter E2 Pro  |
| <b>Model No.</b>            | : | 051405U  |
| <b>Trade Mark</b>           | : |  ninebot  |
| <b>Manufacturer</b>         | : | Ninebot (Changzhou) Tech Co., Ltd.   |
| <b>Address</b>              | : | 16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China |

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023.

### Test Procedure Used:

ANSI C63.10:2020, RSS-Gen Issue 5, Apr. 2018.

### We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided test compliance with the requirement of the above FCC&IC standards.**

|                         |                    |                      |                               |
|-------------------------|--------------------|----------------------|-------------------------------|
| <b>Report No.:</b>      | DDT-B23070310-2E02 |                      |                               |
| <b>Date of Receipt:</b> | Jul. 03, 2023      | <b>Date of Test:</b> | Jul. 03, 2023 ~ Aug. 10, 2023 |

**Prepared By:**

*Sunny Zhang*

**Sunny Zhang/Engineer**

**Approved By:**

*Aaron Zhang*

**Aaron Zhang/Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

## Revision History

| Rev. | Revisions     | Issue Date    | Revised By |
|------|---------------|---------------|------------|
| ---  | Initial issue | Aug. 10, 2023 |            |
|      |               |               |            |

## 1. Summary of Test Results

| Description of Test Item                        | Standard   | Verdict |
|---|--|---------|
| 6dB Bandwidth and 99% Bandwidth                 | FCC 15.247 (a) (2)<br>RSS-247 Clause 5.2 (a)   | Pass    |
| Maximum Conducted Output Power                  | FCC 15.247 (b) (3)<br>RSS-247 Clause 5.4 (e)   | Pass    |
| Power Spectral Density                          | FCC 15.247 (e)<br>RSS-247 Clause 5.2 (b)   | Pass    |
| Band-edge and Spurious Emissions<br>(Conducted) | FCC 15.247 (d)<br>RSS-247 Clause 5.5   | Pass    |
| Radiated Spurious Emissions                     | FCC 15.247 (d)<br>FCC 15.209<br>FCC 15.205<br>RSS-247 Clause 5.5<br>RSS-GEN Clause 8.9 | Pass    |
| Radiated Band Edge Compliance                   | FCC 15.247 (d)<br>FCC 15.209<br>FCC 15.205<br>RSS-247 Clause 5.5<br>RSS-GEN Clause 8.9 | Pass    |
| Power Line Conducted Emission                   | FCC 15.207<br>RSS-GEN Clause 8.8   | Pass    |
| Antenna Requirement                             | FCC 15.203<br>RSS-GEN Clause 6.8   | Pass    |

## 2. General Test Information

### 2.1. Description of EUT

|                          |   |
|--------------------------|---|
| EUT* Name                | : Ninebot eKickScooter E2 Pro                 |
| Model Number             | : 051405U                                     |
| EUT Function Description | : Please reference user manual of this device |
| Power Supply             | : DC 36V by Polymer Li-ion built-in battery   |
| Radio Specification      | : Bluetooth V5.1                              |
| Operation Frequency      | : 2402 MHz - 2480 MHz                         |
| Modulation               | : GFSK  |
| Data Rate                | : 1 Mbps                                      |
| Antenna Type             | : PCB antenna, maximum PK gain: -1.26 dBi     |
| Sample Number            | : N/A   |

Note: EUT is the ab. of equipment under test.

| Channel information |                 |         |                 |         |                 |
|---------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0                   | 2402            | 14      | 2430            | 28      | 2458            |
| 1                   | 2404            | 15      | 2432            | 29      | 2460            |
| 2                   | 2406            | 16      | 2434            | 30      | 2462            |
| 3                   | 2408            | 17      | 2436            | 31      | 2464            |
| 4                   | 2410            | 18      | 2438            | 32      | 2466            |
| 5                   | 2412            | 19      | 2440            | 33      | 2468            |
| 6                   | 2414            | 20      | 2442            | 34      | 2470            |
| 7                   | 2416            | 21      | 2444            | 35      | 2472            |
| 8                   | 2418            | 22      | 2446            | 36      | 2474            |
| 9                   | 2420            | 23      | 2448            | 37      | 2476            |
| 10                  | 2422            | 24      | 2450            | 38      | 2478            |
| 11                  | 2424            | 25      | 2452            | 39      | 2480            |
| 12                  | 2426            | 26      | 2454            |         |                 |
| 13                  | 2428            | 27      | 2456            |         |                 |

### 2.2. Accessories of EUT

| Description of Accessories | Manufacturer                       | Model number | Description  | Remark  |
|----------------------------|------------------------------------|--------------|--|---------|
| Power Supply               | Weihai Hitai Electronics Co., Ltd. | NBW41D001D7D | Input:100-240V~50-60Hz<br>2.0A MAX,<br>Output:41V-1.7A | ninebot |

### 2.3. Assistant equipment used for test

| Assistant equipment | Manufacturer            | Model number   | Description | SN       |
|---------------------|-------------------------|----------------|-------------|----------|
| Notebook            | Lenovo Beijing Co. Ltd. | ThinkPad E450c | N/A         | TP00067A |

## 2.4. Block diagram of EUT configuration for test

EUT

Test software: DTM.EXE

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

| Tested mode, channel, information |                  |         |                 |
|-----------------------------------|------------------|---------|-----------------|
| Mode                              | Setting Tx Power | Channel | Frequency (MHz) |
| GFSK                              | 5                | CH0     | 2402            |
|                                   | 5                | CH19    | 2440            |
|                                   | 5                | CH39    | 2480            |

## 2.5. Deviations of test standard

No deviation.



## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |            |
|--------------------|------------|
| Temperature range: | 21-25 °C   |
| Humidity range:    | 25-75%     |
| Pressure range:    | 86-106 kPa |

## 2.7. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: [ddt@dqddt.com](mailto:ddt@dqddt.com)

**NVLAP** (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

**CNAS** (China National Accreditation Service for Conformity Assessment) CODE: L13402

**FCC** Designation Number: CN5004; FCC Test Firm Registration Number: 368676

**ISED** (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

**VCCI** Facility Registration Number: C-20089, T-20093, R-20125, G-20122

## 2.8. Measurement uncertainty


| Test Item   | Uncertainty  |
|---|--|
| Bandwidth   | 0.14%  |
| Peak Output Power (Conducted) (Spectrum Analyzer)   | 0.12 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); |
|   | 0.32 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )   |
| Peak Output Power (Conducted) (Power Sensor)  | 0.51 dB  |
| Power Spectral Density  | 0.12 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); |
|   | 0.32 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )   |
| Frequencies Stability   | $6.7 \times 10^{-8}$ (Antenna couple method)           |
|   | $3.4 \times 10^{-8}$ (Conducted method)                |
| Conducted Spurious Emissions  | 0.12 dB ( $10 \text{ MHz} \leq f < 3.6 \text{ GHz}$ ); |
|   | 0.32 dB ( $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ )   |
|   | 0.52 dB ( $8 \text{ GHz} \leq f < 22 \text{ GHz}$ )    |
| Uncertainty for Radio Frequency (RBW < 20 kHz)  | $3 \times 10^{-7}$                                     |
| Temperature   | $\pm 2^{\circ}\text{C}$                                |
| Humidity  | $\pm 1\%$  |
| Uncertainty for Radiation Emission Test<br>(30 MHz - 1 GHz)   | 2.72 dB (Antenna Polarize: V)                          |
|   | 2.72 dB (Antenna Polarize: H)                          |
| Uncertainty for Radiation Emission Test<br>(1 GHz - 40 GHz)   | 2.74 dB (1 - 6 GHz)                                    |
|   | 2.72 dB (6 GHz - 18 GHz)                               |
|   | 3.54 dB (18 GHz - 26 GHz)                              |
|   | 4.30 dB (26 GHz - 40 GHz)                              |
| Uncertainty for Power Line Conduction Emission Test   | 3.40 dB (150 kHz - 30 MHz)                             |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |  |

### 3. Equipment Used During Test

| Equipment                                  | Manufacturer | Model No.  | Serial No. | Last Cal.  | Cal. Interval |
|--|--------------|------------|------------|------------|---------------|
| <b>RF Connected Test (MWRFtest system)</b> |              |            |            |            |               |
| Microwave Signal Generator                 | R&S          | SMF100A    | 101396     | 2023/05/29 | 1 Year        |
| MXG Vector Signal Generator                | Keysight     | N5182A     | MY50143288 | 2023/03/07 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESU26      | 100243     | 2023/03/03 | 1 Year        |
| Signal Analyzer                            | R&S          | FSV        | 101730     | 2023/04/04 | 1 Year        |
| Wideband Radio Communication Tester        | R&S          | CMW500     | 158800     | 2023/06/10 | 1 Year        |
| Power Sensor                               | KEYSIGHT     | U2021XA    | MY59150007 | 2023/03/22 | 1 Year        |
| DC Power Supply                            | inSTEK       | PSP-2010   | EN122317   | 2023/02/12 | 1 Year        |
| Test Software                              | MWRFtest     | MTS8310    | V03        | N/A        | N/A           |
| <b>Radiated Emission -10m EMI Chamber</b>  |              |            |            |            |               |
| Broadband Horn Antenna                     | TESEQ        | BHA 9118   | 31754      | 2022/10/12 | 1 Year        |
| Broad Band Horn Antenna                    | Schwarzbeck  | BBHA 9170  | 790        | 2023/05/06 | 1 Year        |
| Active Loop Antenna                        | R&S          | HFH2-Z2    | 100269     | 2022/07/11 | 2 Year        |
| Low noise amplifier                        | MITEQ        | TPA0118-36 | 0914       | 2023/02/16 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESCI       | 101024     | 2023/02/15 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESCI       | 101030     | 2023/02/15 | 1 Year        |
| EMI Test Receiver                          | R&S          | ESU26      | 100244     | 2023/03/03 | 1 Year        |
| Bilog Antenna                              | TESEQ        | CBL6112D   | 29068      | 2022/10/10 | 2 Year        |
| Bilog Antenna                              | TESEQ        | CBL6112D   | 29069      | 2022/10/10 | 2 Year        |
| Amplifier                                  | Sonoma       | 310N       | 300913     | 2023/02/15 | 1 Year        |
| Amplifier                                  | Sonoma       | 310N       | 300914     | 2023/02/15 | 1 Year        |
| Ant Mast                                   | Innco        | MA4000     | N/A        | N/A        | N/A           |
| Ant Mast                                   | Innco        | MA4000     | N/A        | N/A        | N/A           |
| Mast Controller                            | Innco        | CO2000     | N/A        | N/A        | N/A           |
| Mast Controller                            | Innco        | CO2000     | N/A        | N/A        | N/A           |
| RF Selector 4CH                            | TOYO         | NS4904N    | Selector1  | N/A        | N/A           |
| RF Selector 4CH                            | TOYO         | NS4904N    | Selector2  | N/A        | N/A           |
| Test software                              | TOYO         | EP5/RSE    | Ver 1.9.1  | N/A        | N/A           |
| Test software                              | TOYO         | EP5/RE     | Ver 5.7.10 | N/A        | N/A           |
| Test software                              | Audix        | E3         | V 6.11111b | N/A        | N/A           |
| <b>Power Line Conducted Emissions Test</b> |              |            |            |            |               |
| Test Receiver                              | R&S          | ESCI       | 101397     | 2023/02/15 | 1 Year        |
| LISN                                       | R&S          | ENV216     | 101122     | 2023/02/15 | 1 Year        |
| Test software                              | TOYO         | EP5/CE     | V 5.4.40   | N/A        | N/A           |

## 4. 6 dB Bandwidth and 99% Bandwidth

### 4.1. Block diagram of test setup

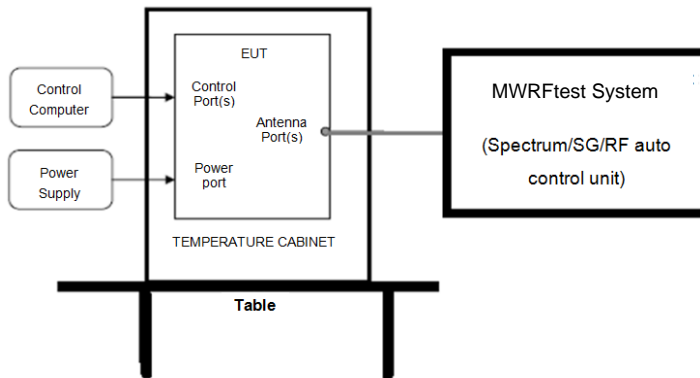

### 4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### 4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

|                |          |
|----------------|----------|
| RBW:           | 30 kHz   |
| VBW:           | 100 kHz  |
| Detector Mode: | Peak     |
| Sweep time:    | auto     |
| Trace mode     | Max hold |

(3) 6 dB Bandwidth set the spectrum analyzer as follows:

|                |          |
|----------------|----------|
| RBW:           | 100 kHz  |
| VBW:           | 300 kHz  |
| Detector Mode: | Peak     |
| Sweep time:    | auto     |
| Trace mode     | Max hold |


(4) Allow the trace to stabilize, measure the 6 dB and 99% bandwidth of signal.


### 4.4. Test result

| Mode   | Channel | 99% bandwidth Result (MHz) | 6 dB bandwidth Result (MHz) | 6 dB width Limit (MHz) | Verdict |
|--------|---------|----------------------------|-----------------------------|------------------------|---------|
| BLE 1M | CH0     | 1.050                      | 0.690                       | >0.5                   | Pass    |
|        | CH19    | 1.075                      | 0.680                       | >0.5                   | Pass    |
|        | CH39    | 1.084                      | 0.699                       | >0.5                   | Pass    |


### 4.5. Original test data

99% bandwidth

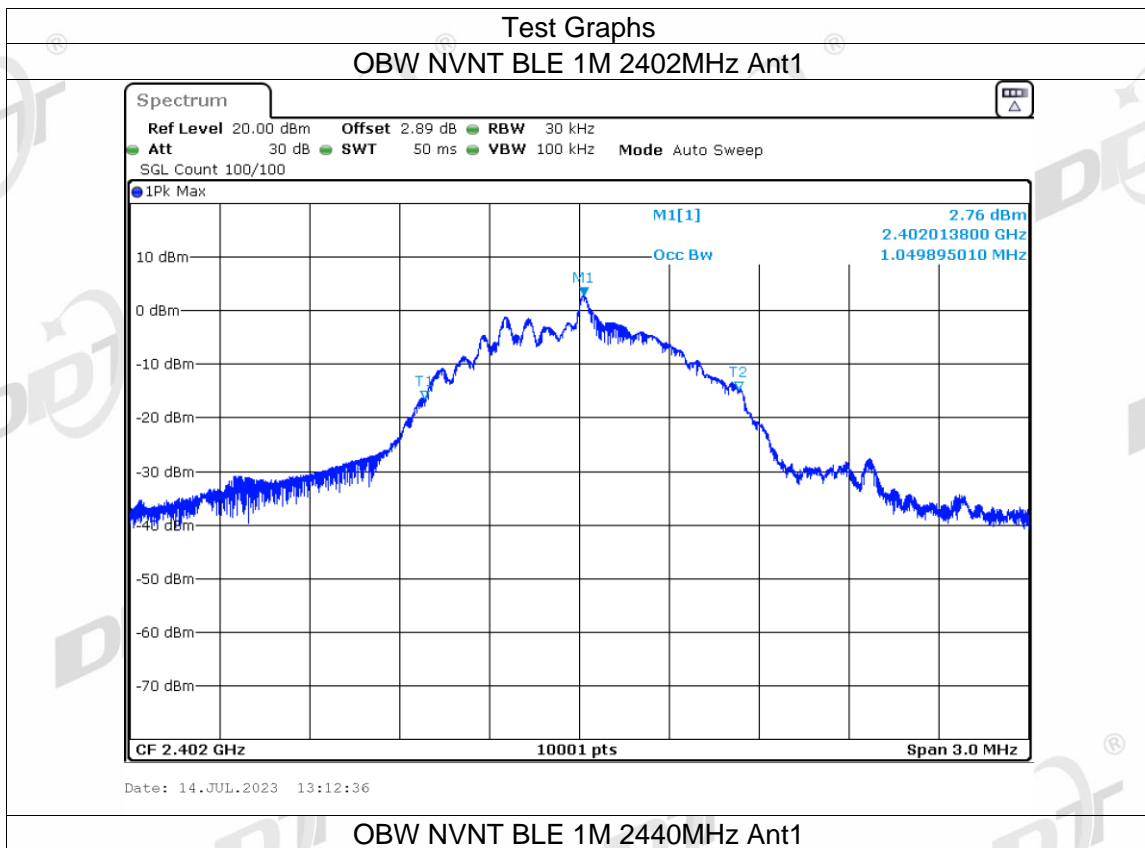


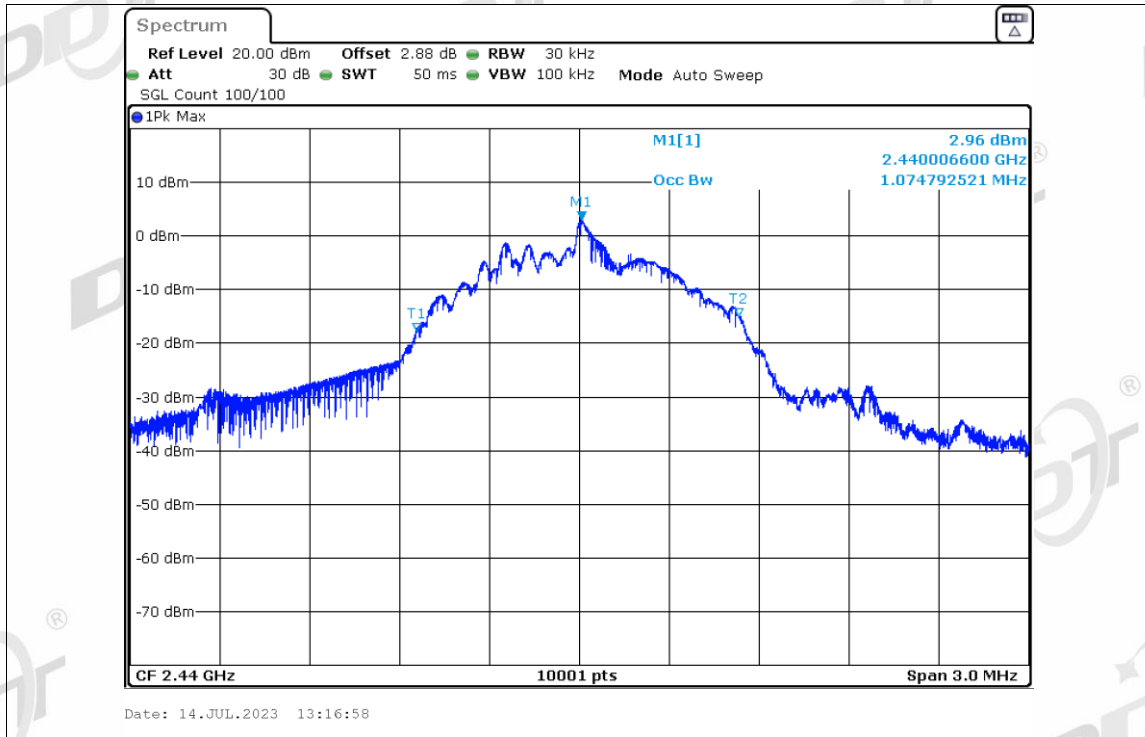


OBW NVNT BLE 1M 2480MHz Ant1

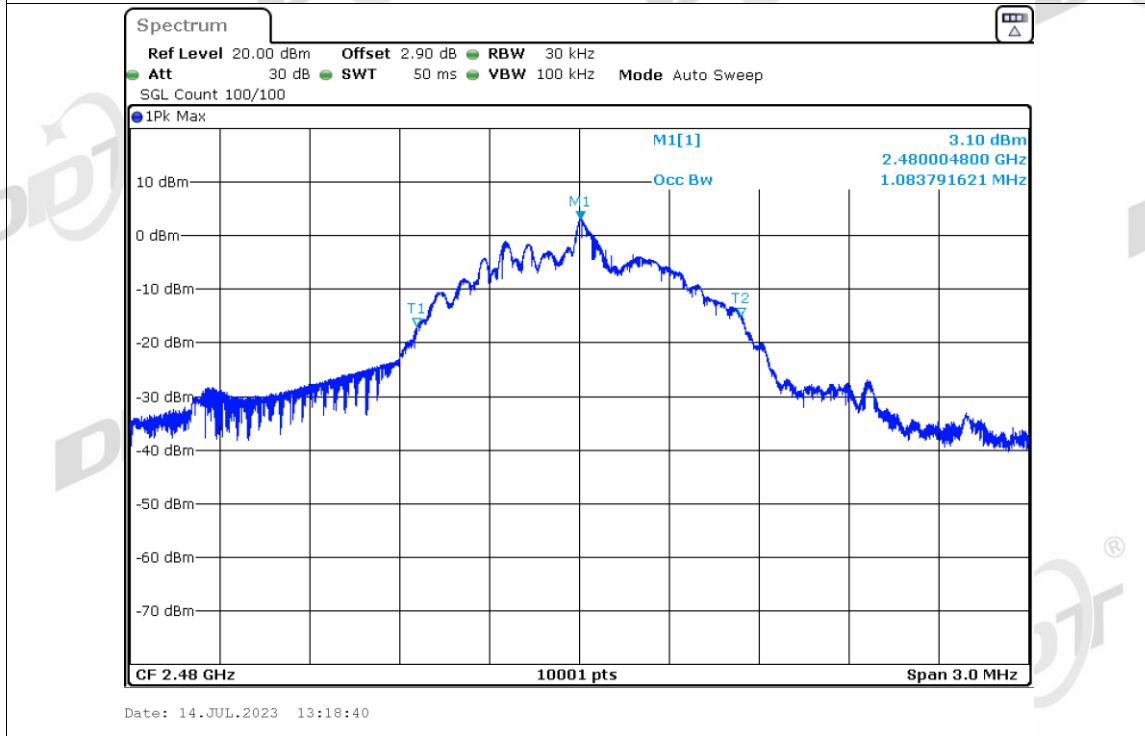

6 dB bandwidth

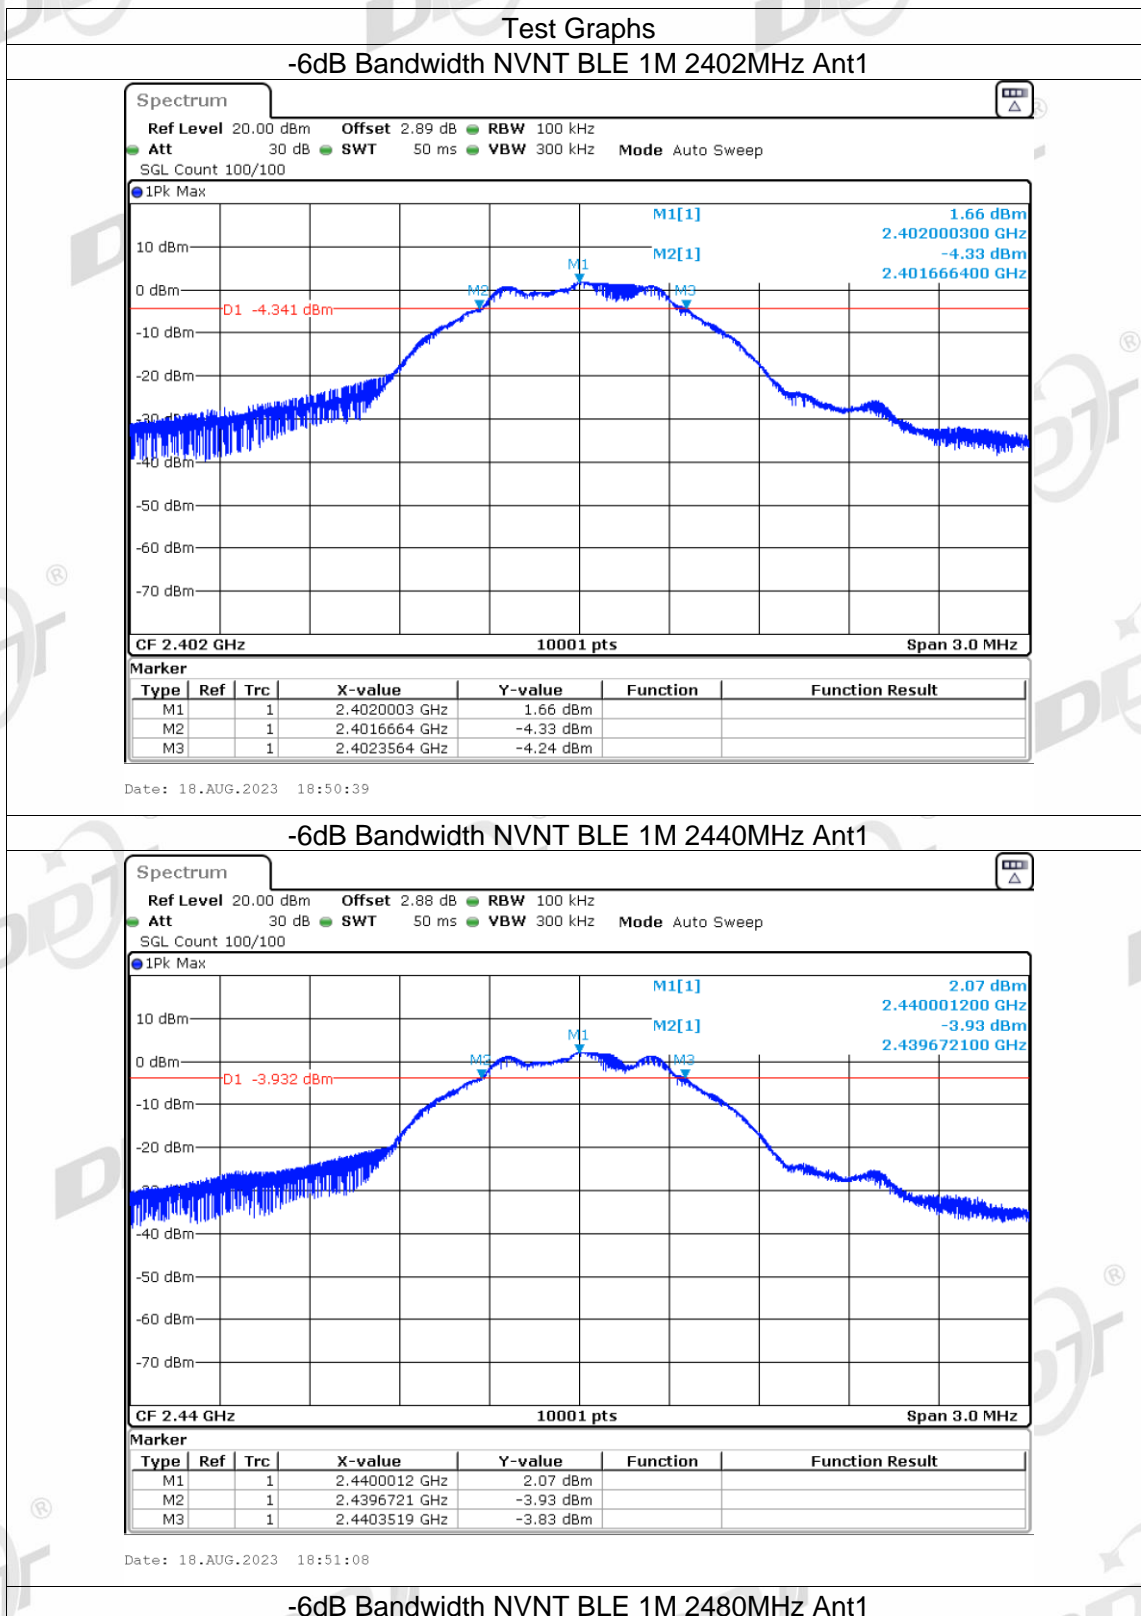

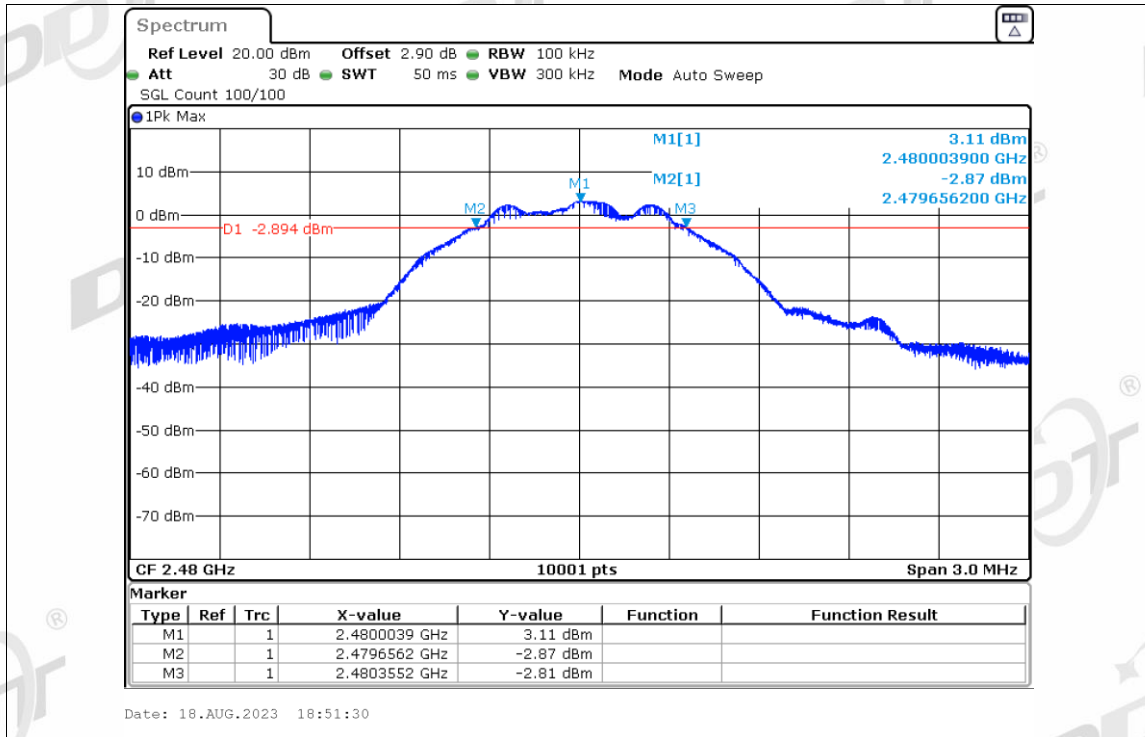



## 5. Maximum Peak Output Power

### 5.1. Block diagram of test setup

Same with 4.1

### 5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:
 


|                |                |
|----------------|----------------|
| RBW:           | ≥DTS bandwidth |
| VBW:           | ≥3 x RBW       |
| Span           | ≥3 x RBW       |
| Detector Mode: | Peak           |
| Sweep time:    | auto           |
| Trace mode     | Max hold       |
- (3) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the PK output power.

### 5.4. Test result

| Mode   | Freq. (MHz) | Peak Output Power (dBm) | Limit (dBm) | EIRP (dBm) | EIRP Limit (dBm) | Verdict |
|--------|-------------|-------------------------|-------------|------------|------------------|---------|
| BLE 1M | 2402        | 2.59                    | 30          | 1.33       | 36               | Pass    |
|        | 2440        | 2.29                    | 30          | 1.03       | 36               | Pass    |
|        | 2480        | 2.39                    | 30          | 1.13       | 36               | Pass    |

### 5.5. Original test data

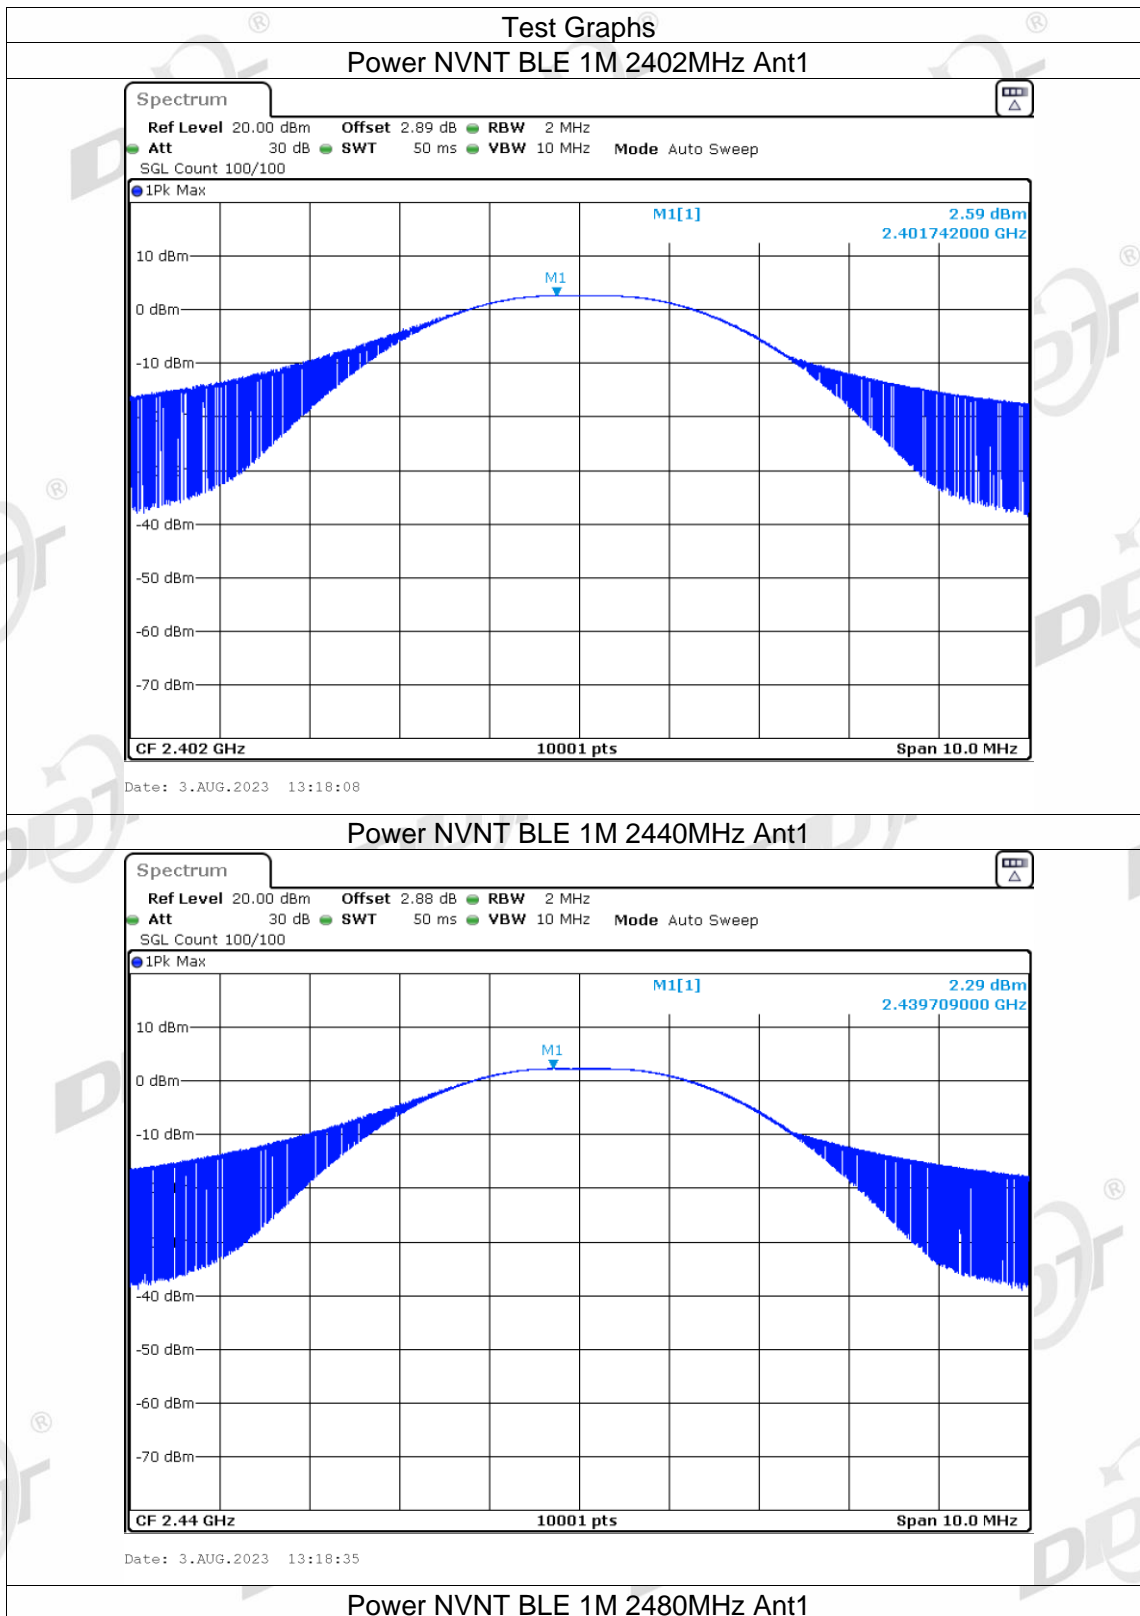

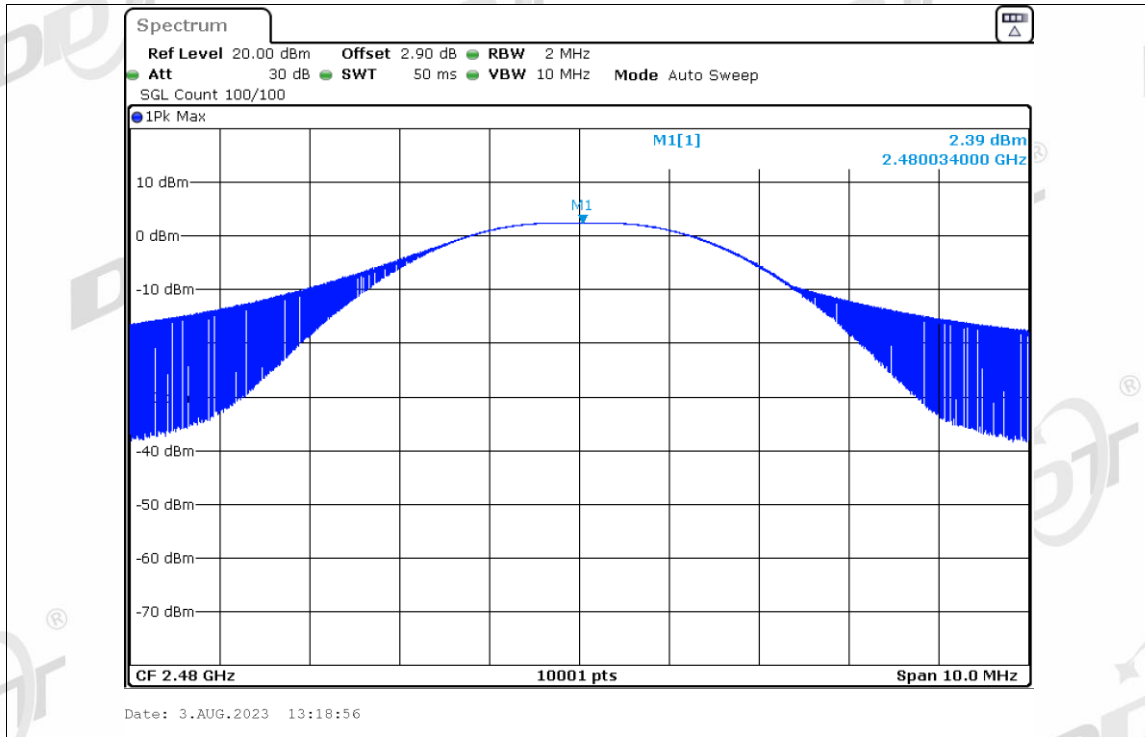

## 6. Power Spectral Density

### 6.1. Block diagram of test setup

Same with 4.1

### 6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

|                  |  |
|------------------|--|
| Center frequency | DTS Channel center frequency                         |
| RBW:             | $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ |
| VBW:             | $\geq 3\text{RBW}$                                   |
| Span             | 1.5 times the DTS bandwidth                          |
| Detector Mode:   | Peak   |
| Sweep time:      | auto   |
| Trace mode       | Max hold   |


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.4. Test result


| EUT Set Mode        | Antenna | Channel | Result (dBm/3 kHz) |
|---------------------|---------|---------|--------------------|
| BLE 1M              | ANT1    | CH0     | -11.46             |
|                     | ANT1    | CH19    | -10.66             |
|                     | ANT1    | CH39    | -10.49             |
| Limit: <8 dBm/3 kHz |         |         | Verdict: Pass      |

### 6.5. Original test data

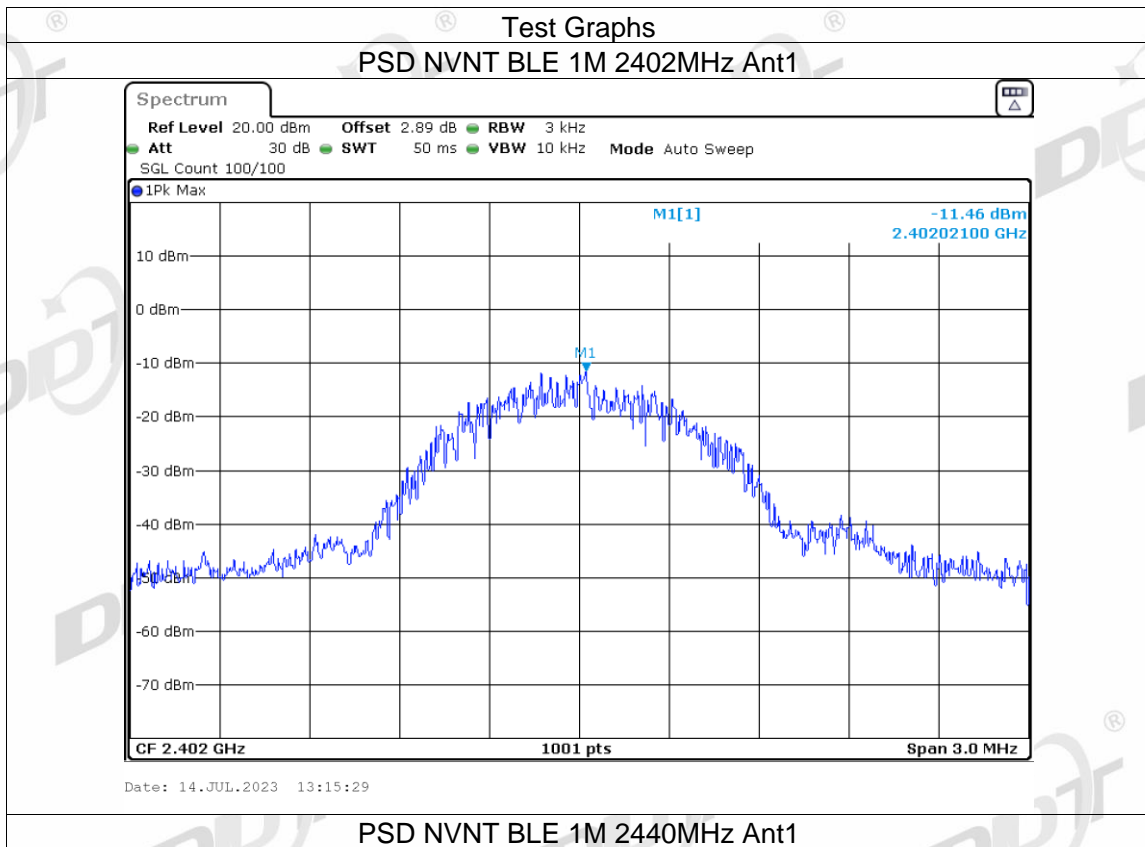

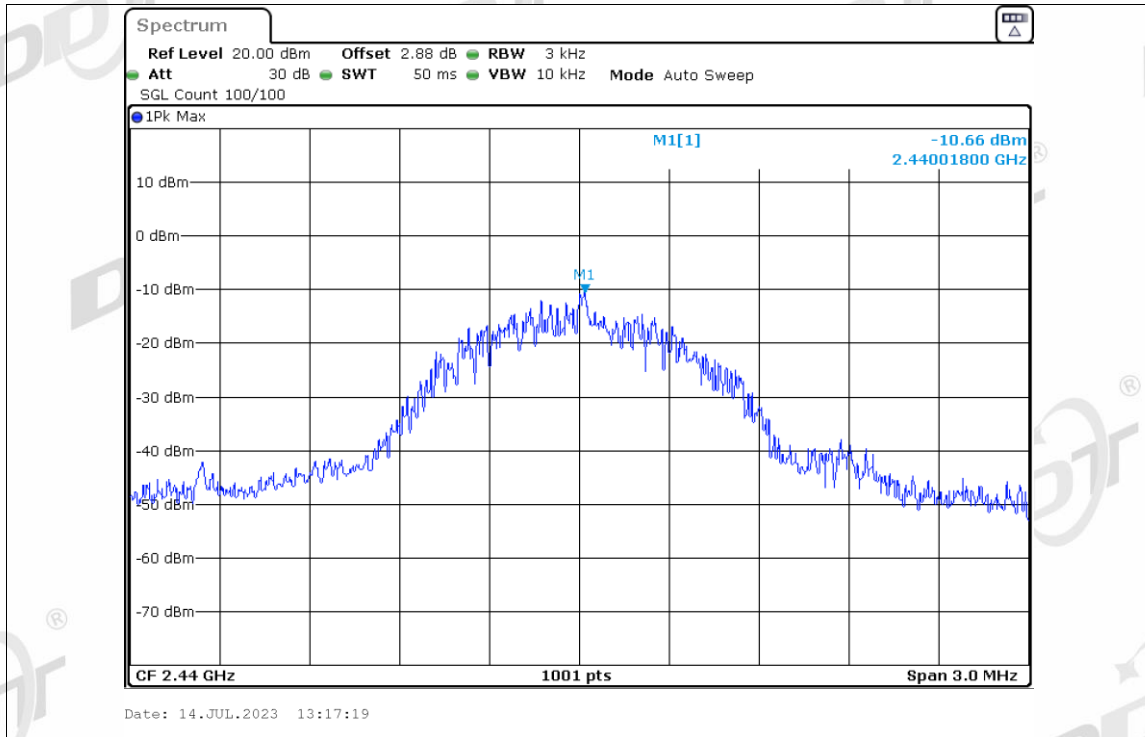

PSD NVNT BLE 1M 2480MHz Ant1

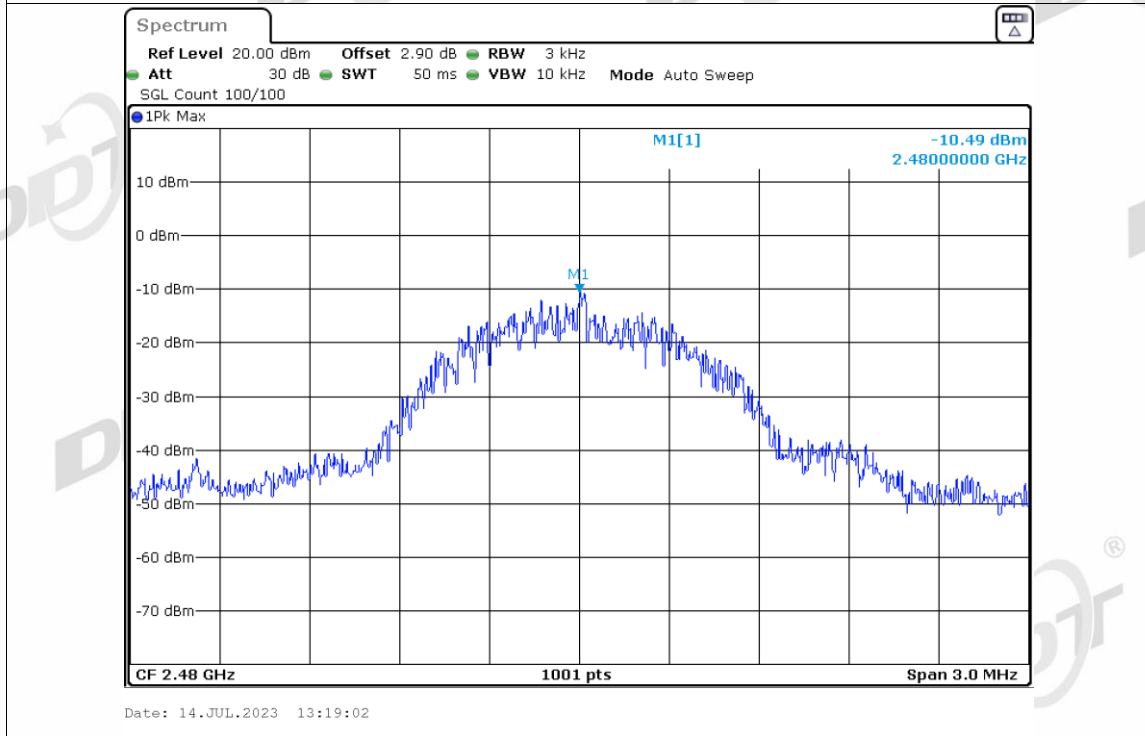

## 7. Band Edge Compliance (Conducted Method)

### 7.1. Block diagram of test setup

Same with 4.1

### 7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

|                  |                              |
|------------------|------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW:             | 100 kHz                      |
| VBW:             | 300 kHz                      |
| Span             | 1.5 times the DTS bandwidth  |
| Detector Mode:   | Peak                         |
| Sweep time:      | auto                         |
| Trace mode       | Max hold                     |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


|                              |  |
|------------------------------|--|
| RBW:                         | 100 kHz                                  |
| VBW:                         | 300 kHz                                  |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


7.4. Test result

| EUT Set Mode | CH or Frequency | Measured Range        | Verdict |
|--------------|-----------------|-----------------------|---------|
| GFSK<br>1M   | CH0             | 2.306 GHz - 2.406 GHz | Pass    |
|              | CH39            | 2.476 GHz - 2.576 GHz | Pass    |


7.5. Original test data

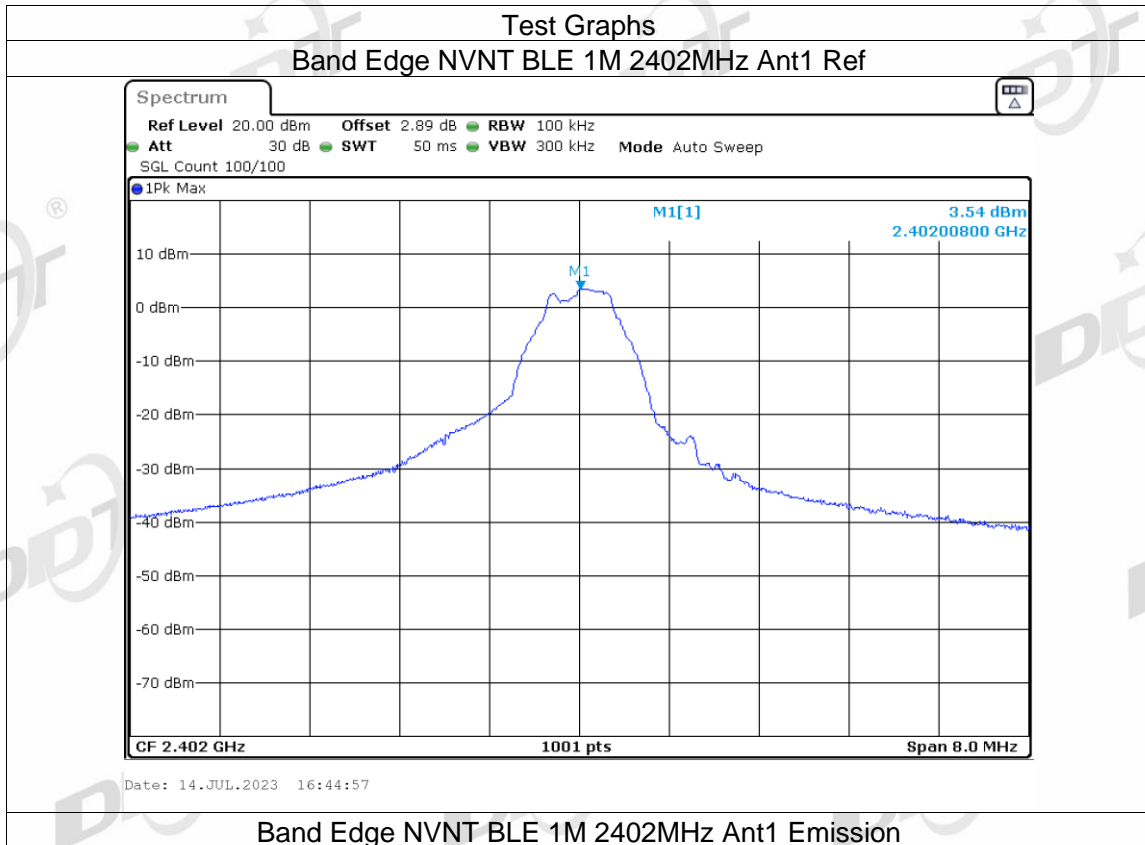




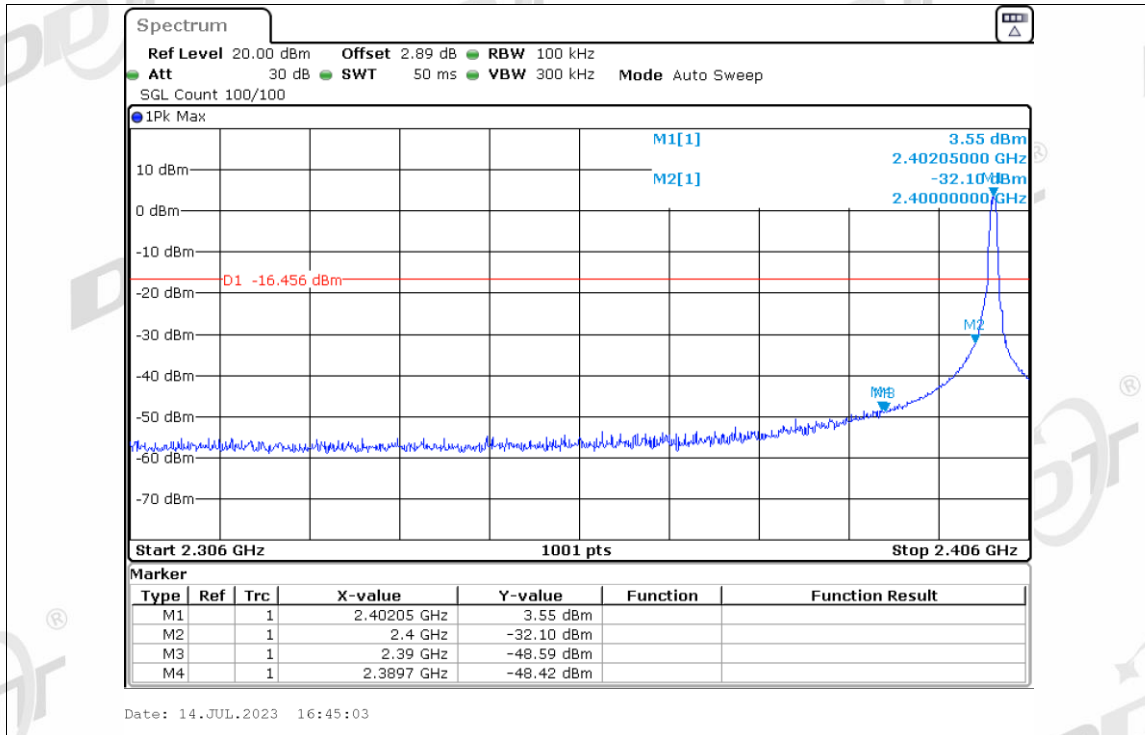

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

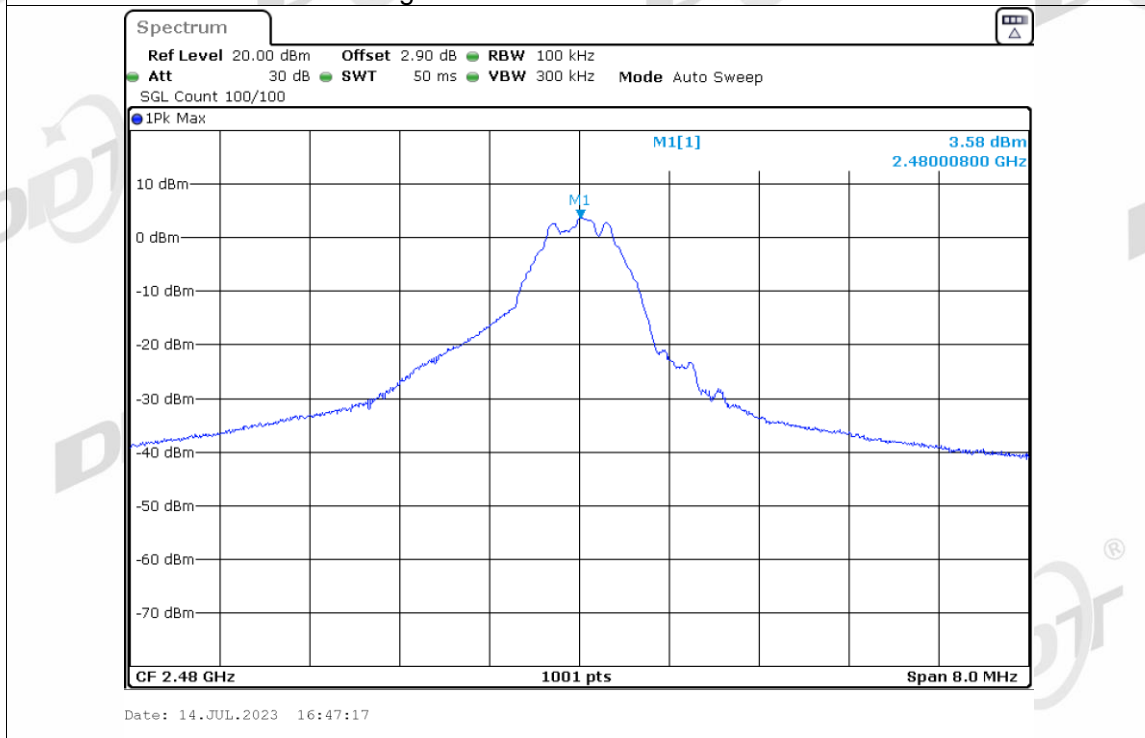


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

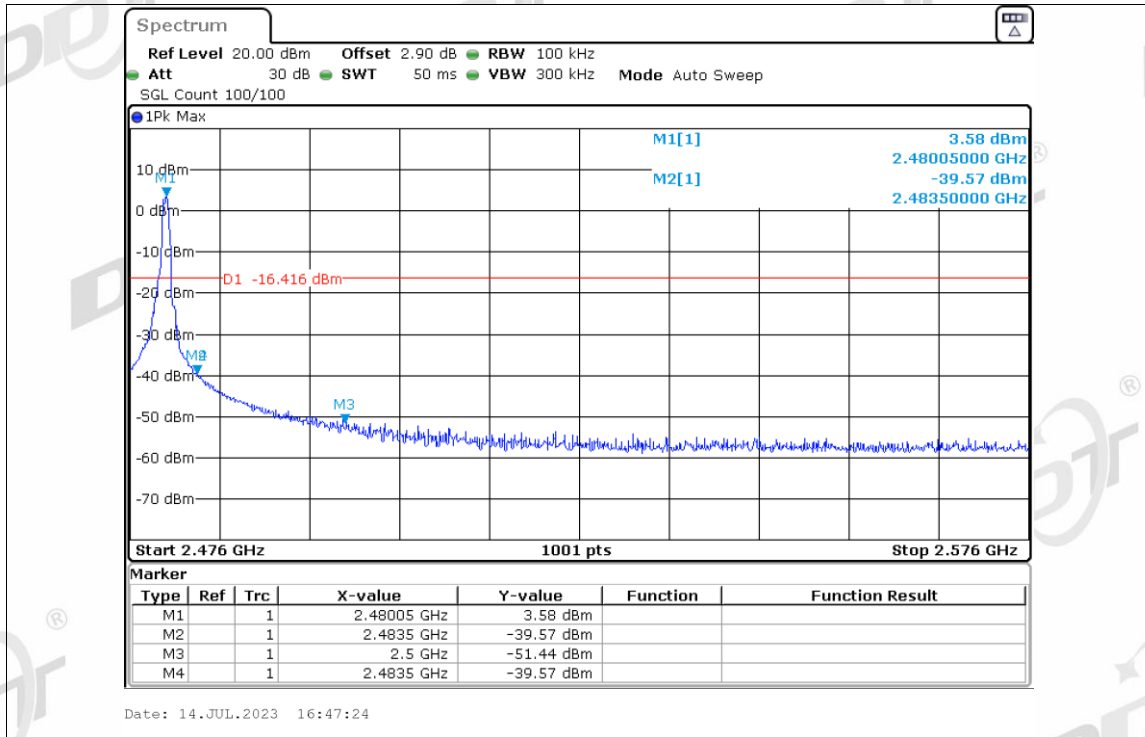


## 8. Radiated Emission

### 8.1. Block diagram of test setup


Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

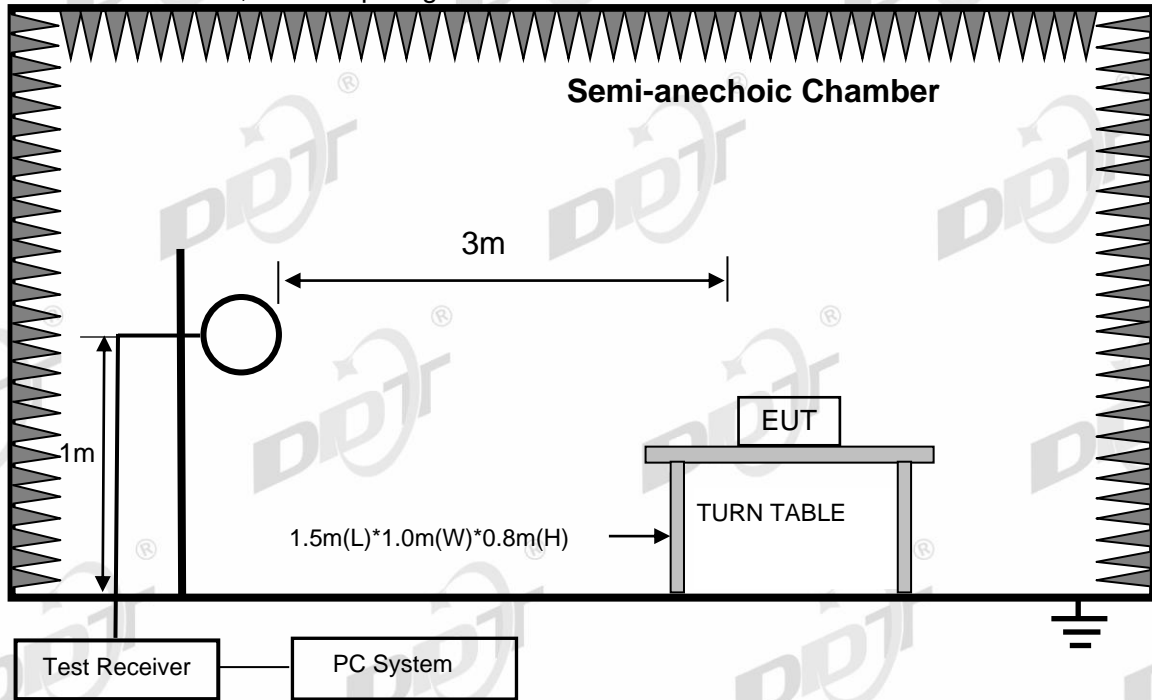

Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

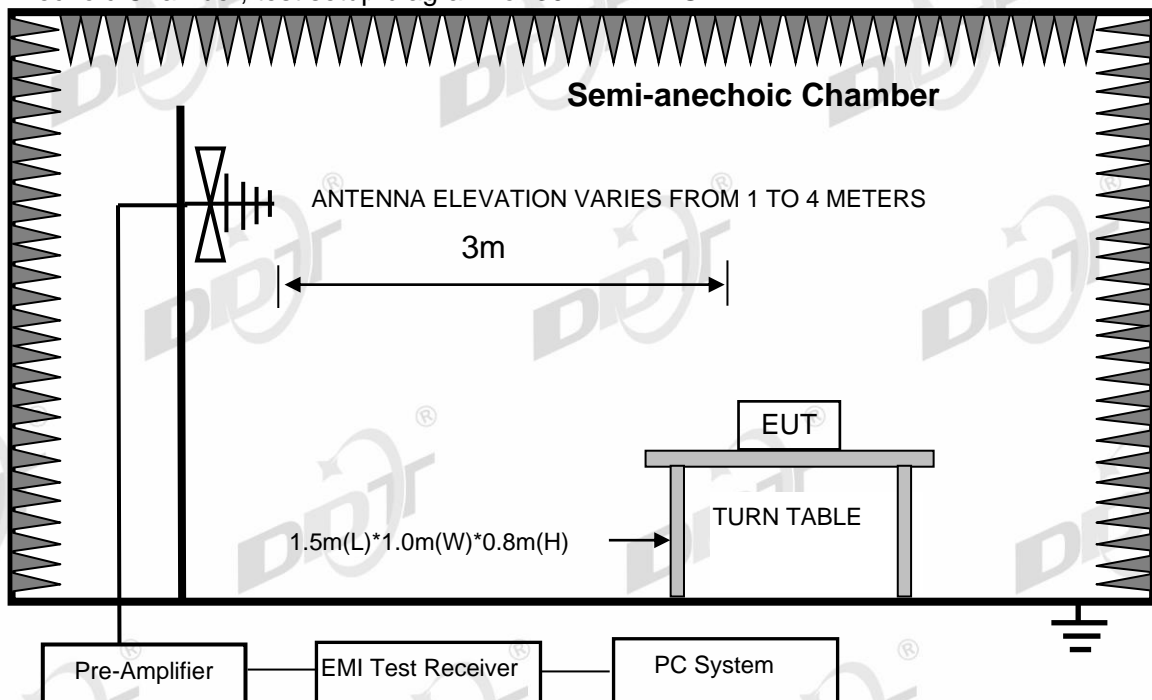

Anechoic Chamber, test setup diagram for frequency above 1 GHz:

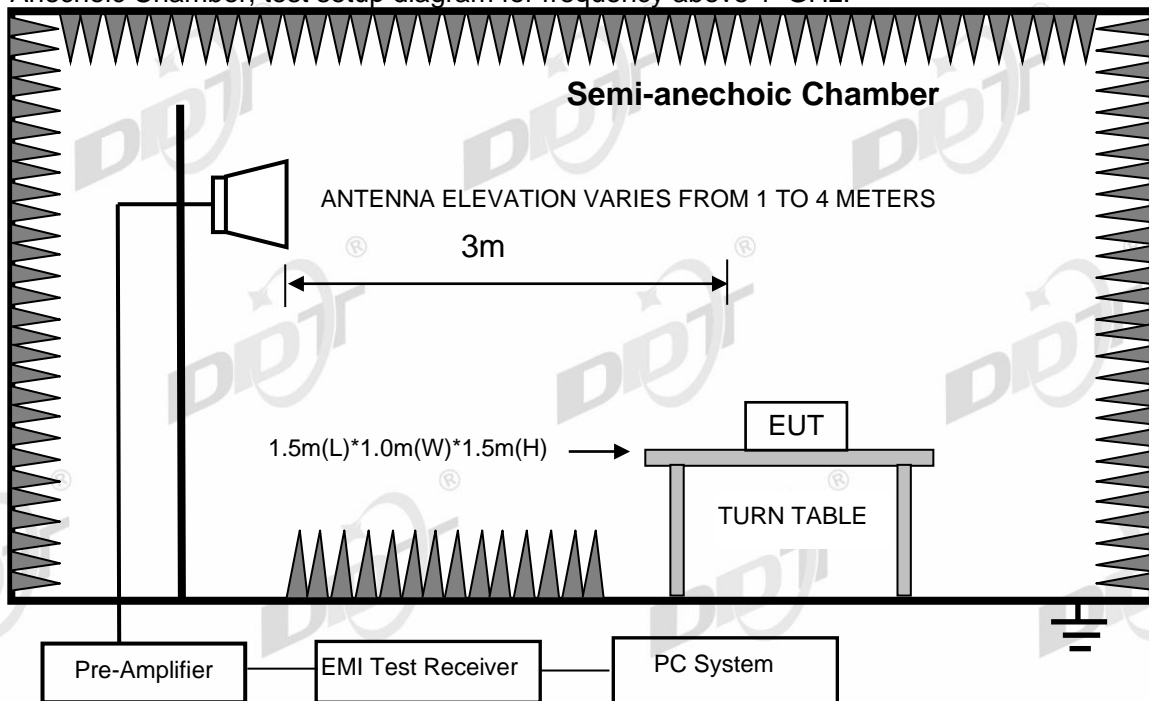

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

### 8.2. Limit

(1) FCC 15.205 Restricted frequency band

| MHz                      | MHz                 | MHz           | GHz              |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.1772&4.17775           | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.2072&4.20775           | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41              |                     |               |                  |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## (2) RSS-GEN Restricted frequency band\*

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 12.57675-12.57725   | 399.9-410     | 7.25-7.75   |
| 0.495-0.505       | 13.36-13.41         | 608-614       | 8.025-8.5   |
| 2.1735-2.1905     | 16.42-16.423        | 960-1427      | 9.0-9.2     |
| 3.020-3.026       | 16.69475-16.69525   | 1435-1626.5   | 9.3-9.5     |
| 4.125-4.128       | 16.80425-16.80475   | 1645.5-1646.5 | 10.6-12.7   |
| 4.17725-4.17775   | 25.5-25.67          | 1660-1710     | 13.25-13.4  |
| 4.20725-4.20775   | 37.5-38.25          | 1718.8-1722.2 | 14.47-14.5  |
| 5.677-5.683       | 73-74.6             | 2200-2300     | 15.35-16.2  |
| 6.215-6.218       | 74.8-75.2           | 2310-2390     | 17.7-21.4   |
| 6.26775-6.26825   | 108-138             | 2483.5-2500   | 22.01-23.12 |
| 6.31175-6.31225   | 149.9-150.05        | 2655-2900     | 23.6-24.0   |
| 8.291-8.294       | 156.52475-156.52525 | 3260-3267     | 31.2-31.8   |
| 8.362-8.366       | 156.7-156.9         | 3332-3339     | 36.43-36.5  |
| 8.37625-8.38675   | 162.0125-167.17     | 3345.8-3358   | Above 38.6  |
| 8.41425-8.41475   | 167.72-173.2        | 3500-4400     |             |
| 12.29-12.293      | 240-285             | 4.5-5.15      |             |
| 12.51975-12.52025 | 322-335.4           | 5.35-5.46     |             |

\* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## (3) FCC 15.209 &amp; RSS-GEN Limit.

| FREQUENCY<br>MHz <sup>®</sup> | DISTANCE<br>Meters <sup>®</sup> | FIELD STRENGTHS LIMIT                           |               |
|-------------------------------|---------------------------------|---|---------------|
|                               |                                 | μV/m  | dB(μV)/m      |
| 0.009 ~ 0.490                 | 300                             | 2400/F(kHz)                                     | 67.6-20log(F) |
| 0.490 ~ 1.705                 | 30                              | 24000/F(kHz)                                    | 87.6-20log(F) |
| 1.705 ~ 30.0                  | 30                              | 30  | 29.54         |
| 30 ~ 88                       | 3                               | 100   | 40.0          |
| 88 ~ 216                      | 3                               | 150   | 43.5          |
| 216 ~ 960                     | 3                               | 200   | 46.0          |
| 960 ~ 1000                    | 3                               | 500   | 54.0          |
| Above 1000                    | 3                               | 74.0 dB(μV)/m (Peak)<br>54.0 dB(μV)/m (Average) |               |

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV}/\text{m}) = \text{Limit}_{30m}(\text{dBuV}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

## (4) Limit for this EUT

All the emissions appearing within 15.205 & RSS-GEN restricted frequency bands shall not exceed the limits shown in 15.209 & RSS-GEN, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 & RSS-GEN limits.

### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

| Test frequency range | Test antenna used                              | Test antenna distance |
|----------------------|--|-----------------------|
| 9 kHz - 30 MHz       | Active Loop antenna                            | 3 m                   |
| 30 MHz - 1 GHz       | Trilog Broadband Antenna                       | 3 m                   |
| 1 GHz - 18 GHz       | Double Ridged Horn Antenna<br>(1 GHz - 18 GHz) | 3 m                   |
| 18 GHz - 40 GHz      | Horn Antenna<br>(18 GHz - 40 GHz)              | 3 m                   |

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

- (b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.

- (d) Change power supply range from 85% to 115% of the rated supply voltage

- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

| Frequency band   | RBW     |
|------------------|---------|
| 9 kHz - 150 kHz  | 200 Hz  |
| 150 kHz - 30 MHz | 9 kHz   |
| 30 MHz - 1 GHz   | 120 kHz |

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.
- (8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

#### 8.4. Test result

Pass. (See below detailed test result)


All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in BLE transmitting mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

**Radiated Emission test (below 1 GHz)**

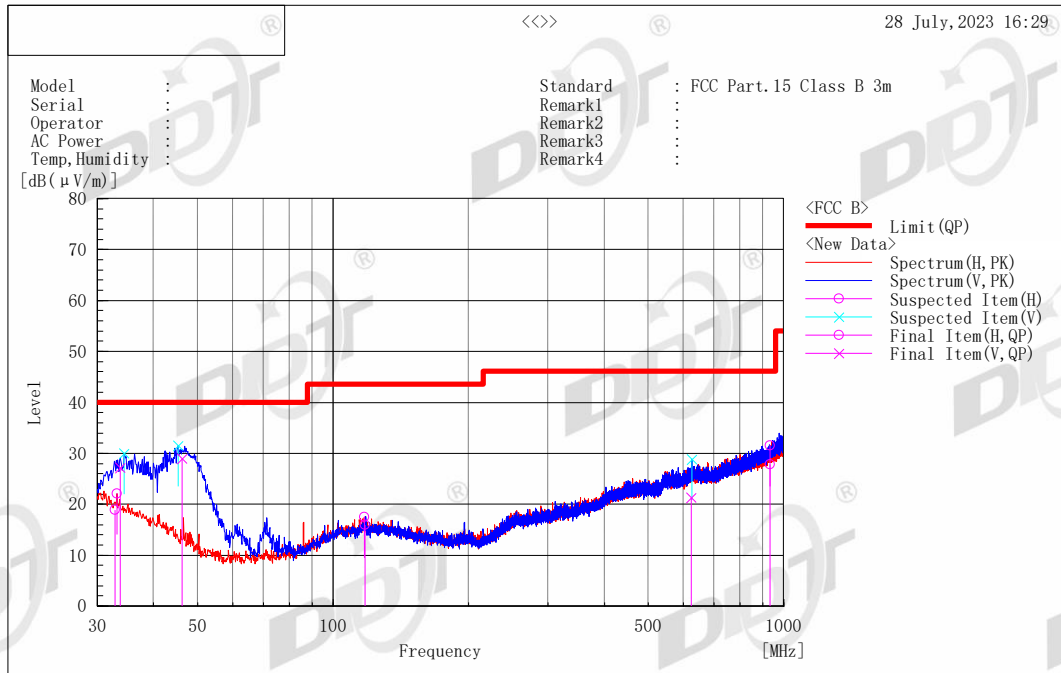

**Final Result**

| No. | Frequency [MHz] | (P) | Reading QP [dB (µV)] | c. f [dB(1/m)] | Result QP [dB (µV/m)] | Limit QP [dB (µV/m)] | Margin QP [dB] | Height [cm] | Angle [°] | System | Remark |
|-----|-----------------|-----|----------------------|----------------|-----------------------|----------------------|----------------|-------------|-----------|--------|--------|
| 1   | 32.852          | H   | 25.3                 | -6.4           | 18.9                  | 40.0                 | 21.1           | 205.0       | 50.5      | 1      |        |
| 2   | 117.895         | H   | 26.7                 | -10.8          | 15.9                  | 43.5                 | 27.6           | 395.0       | 11.2      | 1      |        |
| 3   | 932.854         | H   | 23.1                 | 4.7            | 27.8                  | 46.0                 | 18.2           | 117.0       | 357.9     | 1      |        |
| 4   | 33.675          | V   | 34.5                 | -7.3           | 27.2                  | 40.0                 | 12.8           | 119.0       | 185.7     | 2      |        |
| 5   | 46.261          | V   | 42.8                 | -13.8          | 29.0                  | 40.0                 | 11.0           | 143.0       | 153.9     | 2      |        |
| 6   | 624.426         | V   | 20.4                 | 0.9            | 21.3                  | 46.0                 | 24.7           | 360.0       | 303.9     | 2      |        |

Note) Receiving antenna polarization: Horizontal and/or Vertical

Test Distance: 3 m, Antenna Height: 1 m to 4 m

Level QP (Quasi-Peak) = Reading QP + Factor (Antenna Factor + Cable Loss - Amp. Gain)


Margin QP (Quasi-Peak) = Limit - Level QP



## Radiated Emission test (1 GHz – 3GHz) Radiated Emission Test Result

**Test Site** : 10m Chamber  
**Test Date** : 07-18-2023      **Tested By** : NOVAK  
**EUT** : Ninebot KickScooter E2 Pro      **Model Number** : 051405U  
**Power Supply** : Battery      **Test Mode** : Tx mode  
**Memo** : BLE 2402

Data: 19

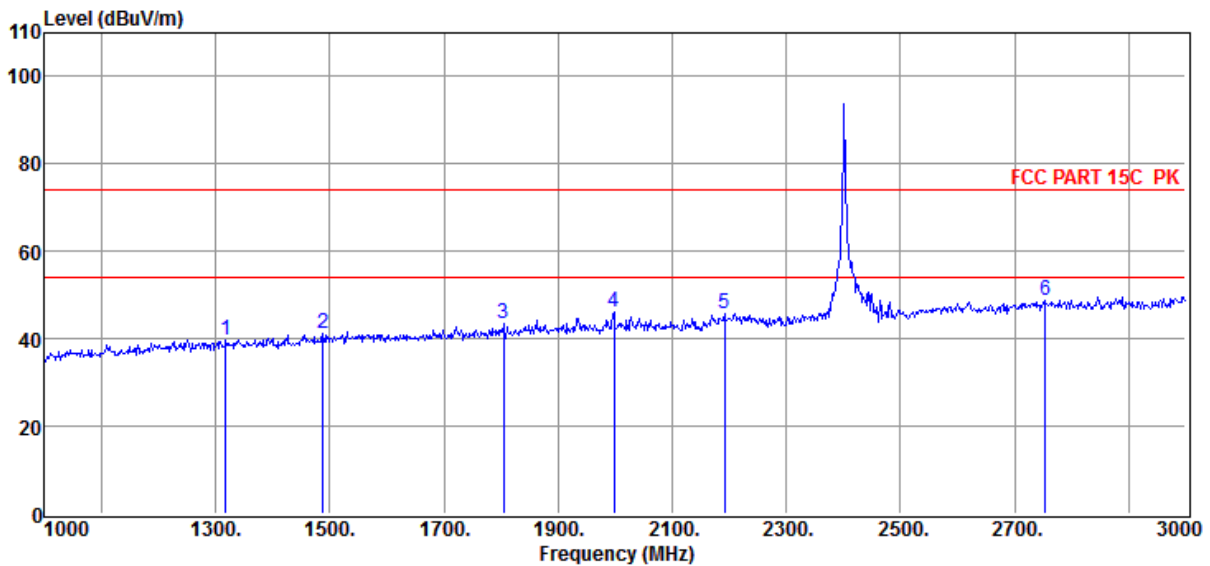

| Item (Mark) | Freq. (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBμV/m) | Limit Line (dBμV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 1318.00     | 44.30             | 29.17                 | -33.74          | 39.73                 | 74.00               | -34.27          | Peak     | HORIZONTAL   |
| 2           | 1488.00     | 44.45             | 30.38                 | -33.46          | 41.37                 | 74.00               | -32.63          | Peak     | HORIZONTAL   |
| 3           | 1804.00     | 44.72             | 31.74                 | -32.81          | 43.65                 | 74.00               | -30.35          | Peak     | HORIZONTAL   |
| 4           | 1998.00     | 45.70             | 32.80                 | -32.56          | 45.94                 | 74.00               | -28.06          | Peak     | HORIZONTAL   |
| 5           | 2192.00     | 43.52             | 34.22                 | -32.05          | 45.69                 | 74.00               | -28.31          | Peak     | HORIZONTAL   |
| 6           | 2754.00     | 42.16             | 37.39                 | -30.76          | 48.79                 | 74.00               | -25.21          | Peak     | HORIZONTAL   |

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2402

Data: 20

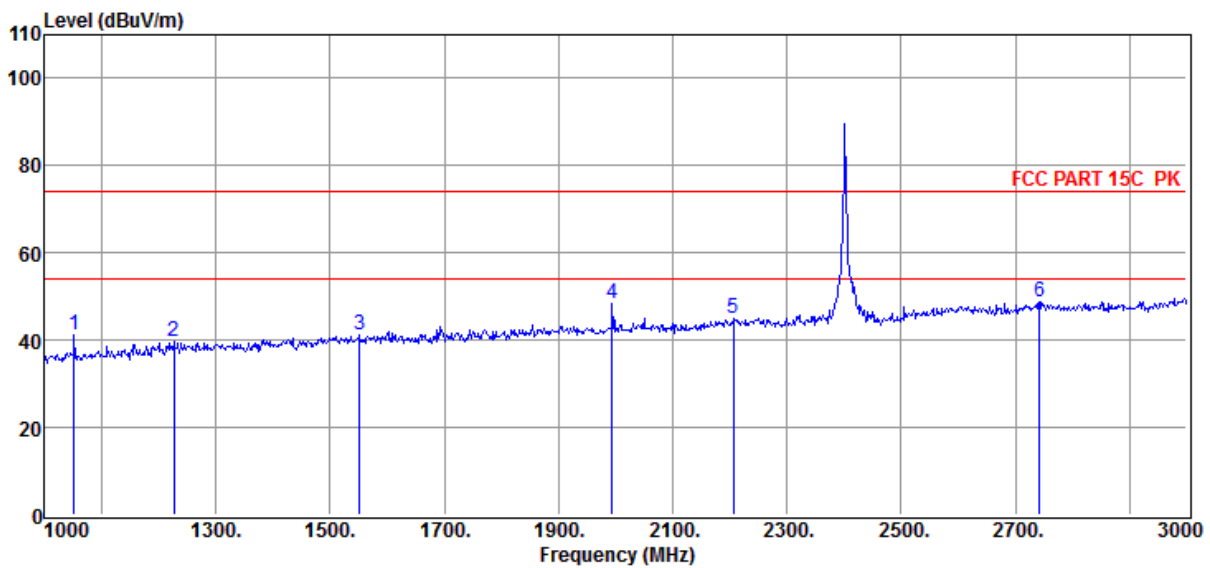

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 1052.00     | 48.08             | 27.40                 | -34.32          | 41.16                 | 74.00               | -32.84          | Peak     | VERTICAL     |
| 2           | 1226.00     | 44.80             | 28.91                 | -33.92          | 39.79                 | 74.00               | -34.21          | Peak     | VERTICAL     |
| 3           | 1552.00     | 43.61             | 30.81                 | -33.26          | 41.16                 | 74.00               | -32.84          | Peak     | VERTICAL     |
| 4           | 1994.00     | 48.15             | 32.79                 | -32.55          | 48.39                 | 74.00               | -25.61          | Peak     | VERTICAL     |
| 5           | 2206.00     | 42.42             | 34.38                 | -32.01          | 44.79                 | 74.00               | -29.21          | Peak     | VERTICAL     |
| 6           | 2742.00     | 42.21             | 37.30                 | -30.77          | 48.74                 | 74.00               | -25.26          | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2440

Data: 21

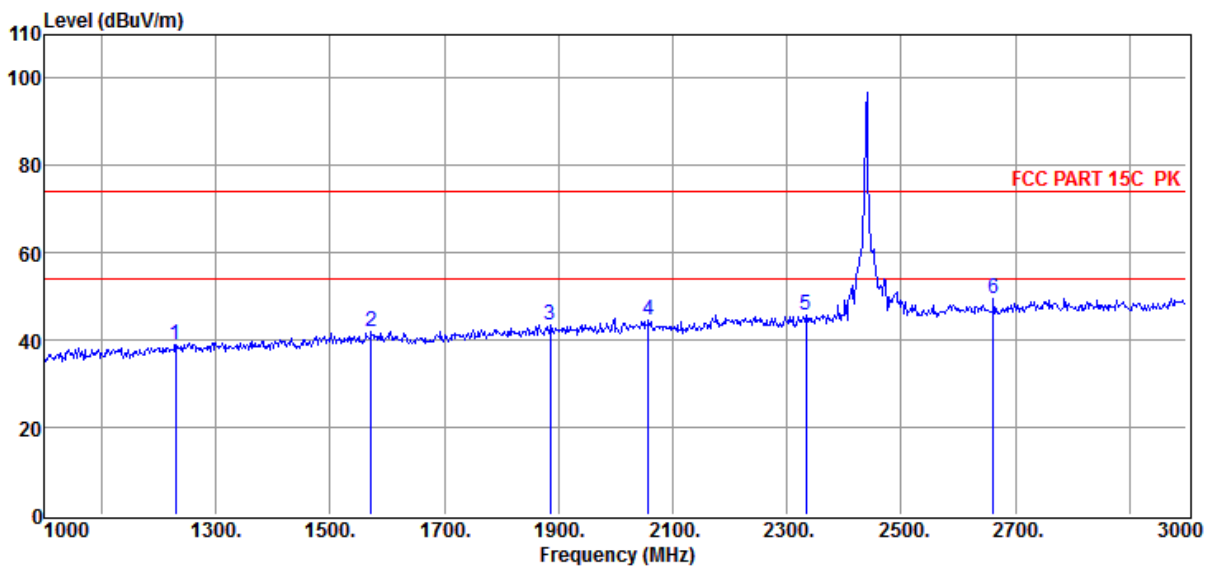

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBuV/m) | Limit<br>Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1230.00        | 43.94                   | 28.94                       | -33.90              | 38.98                       | 74.00                     | -35.02                | Peak     | HORIZONTAL   |
| 2              | 1572.00        | 44.46                   | 30.89                       | -33.27              | 42.08                       | 74.00                     | -31.92                | Peak     | HORIZONTAL   |
| 3              | 1886.00        | 43.75                   | 32.49                       | -32.63              | 43.61                       | 74.00                     | -30.39                | Peak     | HORIZONTAL   |
| 4              | 2058.00        | 43.42                   | 33.40                       | -32.35              | 44.47                       | 74.00                     | -29.53                | Peak     | HORIZONTAL   |
| 5              | 2334.00        | 42.99                   | 34.38                       | -31.60              | 45.77                       | 74.00                     | -28.23                | Peak     | HORIZONTAL   |
| 6              | 2662.00        | 44.01                   | 36.65                       | -31.20              | 49.46                       | 74.00                     | -24.54                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2440

Data: 22

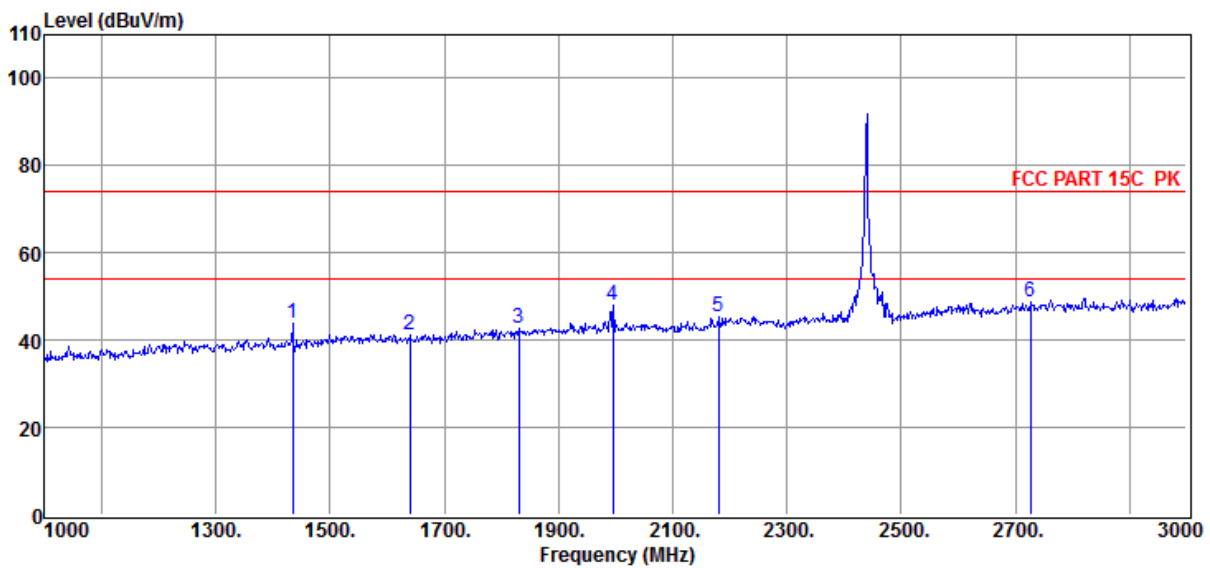

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1434.00        | 47.41                   | 29.84                       | -33.52              | 43.73                       | 74.00                     | -30.27                | Peak     | VERTICAL     |
| 2              | 1640.00        | 43.59                   | 30.76                       | -33.10              | 41.25                       | 74.00                     | -32.75                | Peak     | VERTICAL     |
| 3              | 1830.00        | 43.37                   | 32.00                       | -32.65              | 42.72                       | 74.00                     | -31.28                | Peak     | VERTICAL     |
| 4              | 1996.00        | 47.88                   | 32.79                       | -32.56              | 48.11                       | 74.00                     | -25.89                | Peak     | VERTICAL     |
| 5              | 2180.00        | 43.49                   | 33.96                       | -32.08              | 45.37                       | 74.00                     | -28.63                | Peak     | VERTICAL     |
| 6              | 2726.00        | 42.66                   | 37.11                       | -30.82              | 48.95                       | 74.00                     | -25.05                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2480

Data: 23

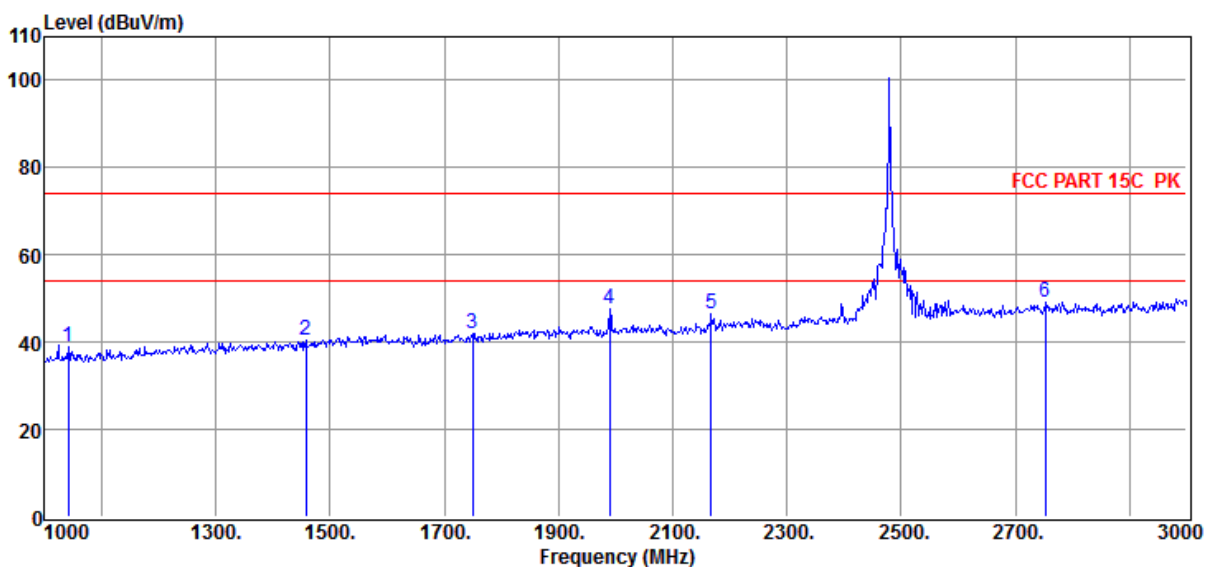

| Item (Mark) | Freq. (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBμV/m) | Limit Line (dBμV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 1042.00     | 45.92             | 27.32                 | -34.33          | 38.91                 | 74.00               | -35.09          | Peak     | HORIZONTAL   |
| 2           | 1458.00     | 43.73             | 30.08                 | -33.48          | 40.33                 | 74.00               | -33.67          | Peak     | HORIZONTAL   |
| 3           | 1750.00     | 43.35             | 31.40                 | -32.84          | 41.91                 | 74.00               | -32.09          | Peak     | HORIZONTAL   |
| 4           | 1990.00     | 47.49             | 32.78                 | -32.54          | 47.73                 | 74.00               | -26.27          | Peak     | HORIZONTAL   |
| 5           | 2168.00     | 44.79             | 33.70                 | -32.11          | 46.38                 | 74.00               | -27.62          | Peak     | HORIZONTAL   |
| 6           | 2752.00     | 42.47             | 37.40                 | -30.76          | 49.11                 | 74.00               | -24.89          | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2480

Data: 24

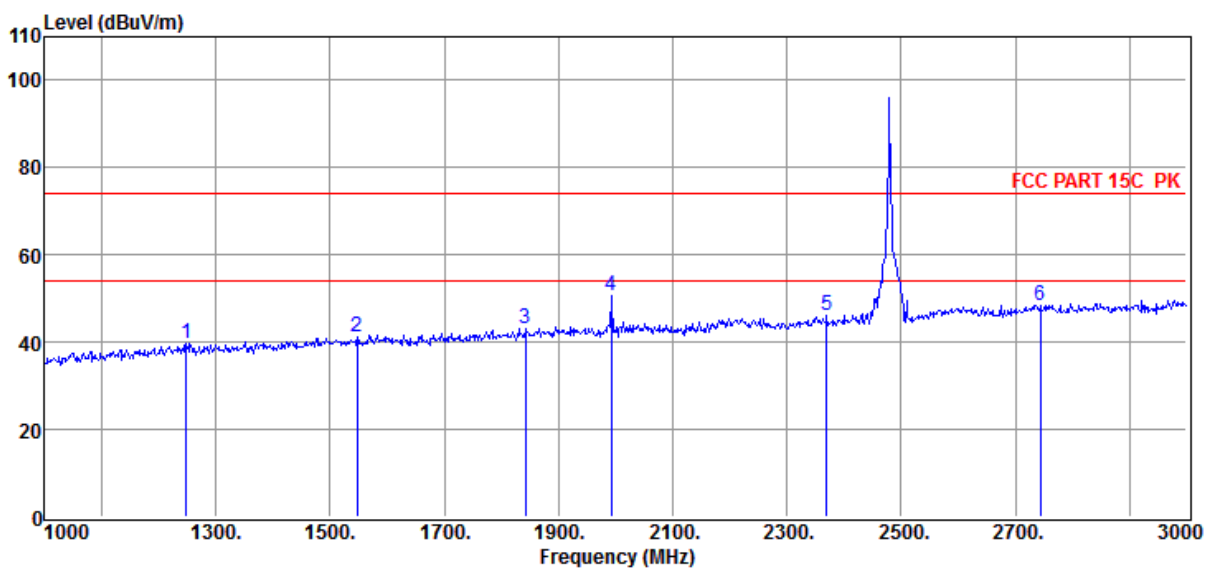

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBuV/m) | Limit<br>Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 1248.00        | 44.59                   | 29.08                       | -33.83              | 39.84                       | 74.00                     | -34.16                | Peak     | VERTICAL     |
| 2              | 1548.00        | 43.62                   | 30.79                       | -33.27              | 41.14                       | 74.00                     | -32.86                | Peak     | VERTICAL     |
| 3              | 1842.00        | 43.69                   | 32.12                       | -32.58              | 43.23                       | 74.00                     | -30.77                | Peak     | VERTICAL     |
| 4              | 1992.00        | 50.55                   | 32.78                       | -32.54              | 50.79                       | 74.00                     | -23.21                | Peak     | VERTICAL     |
| 5              | 2370.00        | 42.72                   | 34.80                       | -31.55              | 45.97                       | 74.00                     | -28.03                | Peak     | VERTICAL     |
| 6              | 2744.00        | 41.93                   | 37.33                       | -30.77              | 48.49                       | 74.00                     | -25.51                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## Radiated Emission test (3 GHz – 18GHz) Radiated Emission Test Result

**Test Site** : 10m Chamber  
**Test Date** : 07-19-2023 **Tested By** : NOVAK  
**EUT** : Ninebot KickScooter E2 Pro **Model Number** : 051405U  
**Power Supply** : Battery **Test Mode** : Tx mode  
**Memo** : BLE 2402

Data: 29

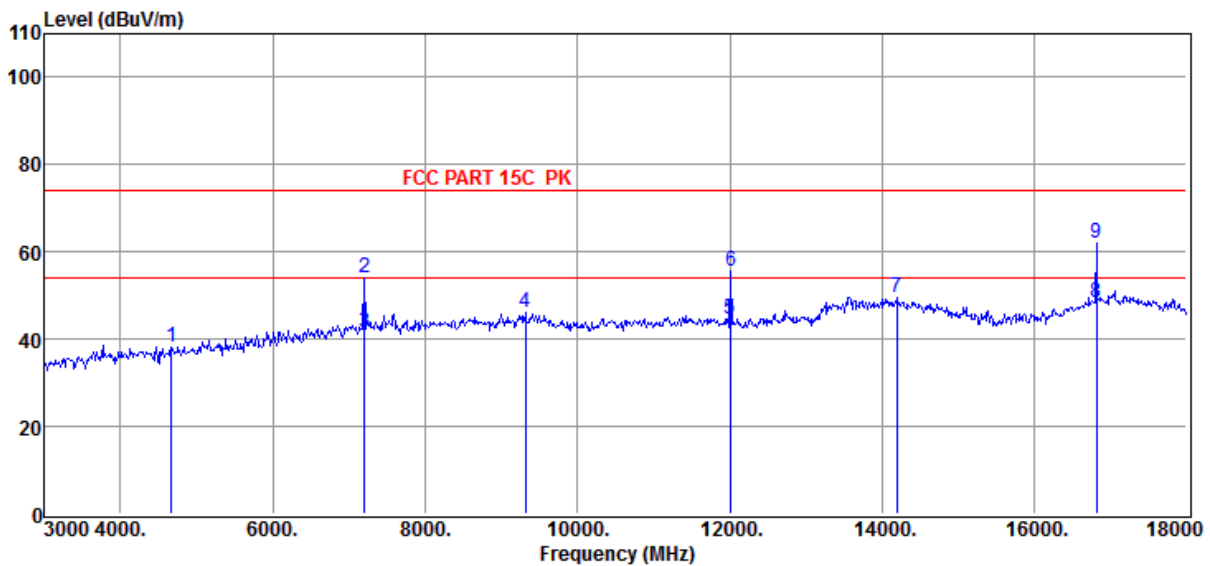

| Item (Mark) | Freq. (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 4665.00     | 37.95             | 32.23                 | -31.87          | 38.31                 | 74.00               | -35.69          | Peak     | HORIZONTAL   |
| 2           | 7200.00     | 48.59             | 36.92                 | -31.29          | 54.22                 | 74.00               | -19.78          | Peak     | HORIZONTAL   |
| 3           | 7206.00     | 35.95             | 36.93                 | -31.21          | 41.67                 | 54.00               | -12.33          | Average  | HORIZONTAL   |
| 4           | 9315.00     | 38.23             | 37.89                 | -30.14          | 45.98                 | 74.00               | -28.02          | Peak     | HORIZONTAL   |
| 5           | 12010.00    | 34.64             | 38.60                 | -28.78          | 44.46                 | 54.00               | -9.54           | Average  | HORIZONTAL   |
| 6           | 12015.00    | 45.80             | 38.60                 | -28.77          | 55.63                 | 74.00               | -18.37          | Peak     | HORIZONTAL   |
| 7           | 14190.00    | 35.46             | 41.13                 | -27.16          | 49.43                 | 74.00               | -24.57          | Peak     | HORIZONTAL   |
| 8           | 16814.00    | 32.93             | 41.31                 | -25.95          | 48.29                 | 54.00               | -5.71           | Average  | HORIZONTAL   |
| 9           | 16815.00    | 46.73             | 41.31                 | -25.96          | 62.08                 | 74.00               | -11.92          | Peak     | HORIZONTAL   |

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-19-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2402

Data: 30

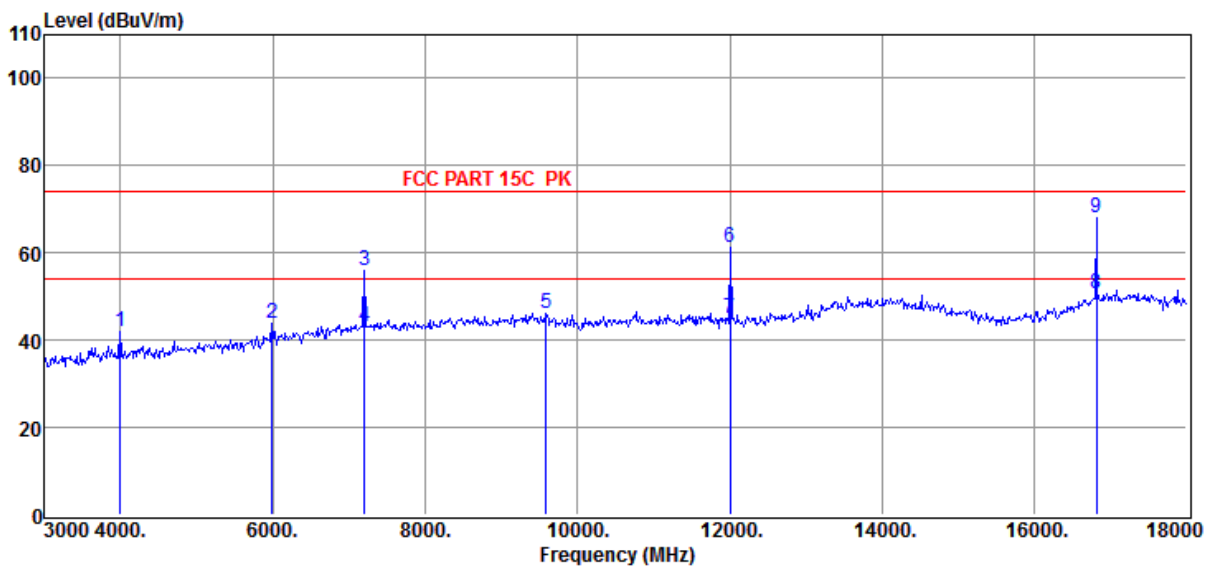

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 3990.00     | 42.54             | 31.58                 | -32.11          | 42.01                 | 74.00               | -31.99          | Peak     | VERTICAL     |
| 2           | 5985.00     | 40.39             | 35.26                 | -31.86          | 43.79                 | 74.00               | -30.21          | Peak     | VERTICAL     |
| 3           | 7200.00     | 50.15             | 36.92                 | -31.29          | 55.78                 | 74.00               | -18.22          | Peak     | VERTICAL     |
| 4           | 7206.00     | 37.30             | 36.93                 | -31.21          | 43.02                 | 54.00               | -10.98          | Average  | VERTICAL     |
| 5           | 9585.00     | 38.23             | 38.05                 | -30.01          | 46.27                 | 74.00               | -27.73          | Peak     | VERTICAL     |
| 6           | 12000.00    | 51.23             | 38.60                 | -28.78          | 61.05                 | 74.00               | -12.95          | Peak     | VERTICAL     |
| 7           | 12010.00    | 35.06             | 38.60                 | -28.78          | 44.88                 | 54.00               | -9.12           | Average  | VERTICAL     |
| 8           | 16814.00    | 35.27             | 41.31                 | -25.95          | 50.63                 | 54.00               | -3.37           | Average  | VERTICAL     |
| 9           | 16815.00    | 52.68             | 41.31                 | -25.96          | 68.03                 | 74.00               | -5.97           | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.



# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-19-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2440

Data: 31

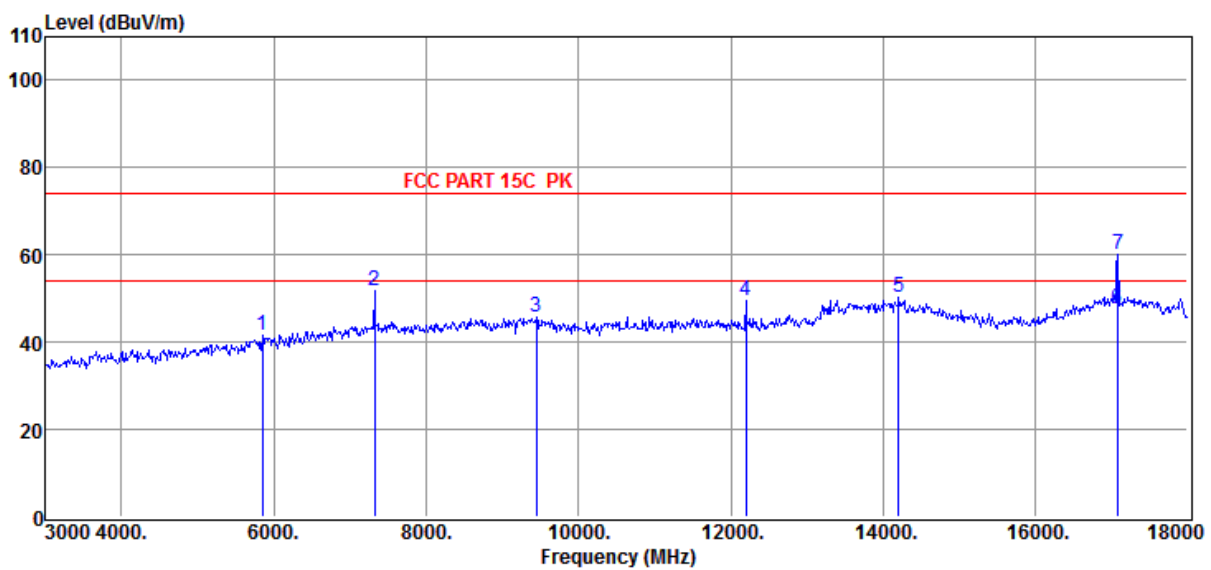

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dB $\mu$ V) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dB $\mu$ V/m) | Limit<br>Line<br>(dB $\mu$ V/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|--------------|
| 1              | 5850.00        | 38.74                         | 34.85                       | -32.17              | 41.42                             | 74.00                           | -32.58                | Peak     | HORIZONTAL   |
| 2              | 7320.00        | 45.45                         | 37.11                       | -30.72              | 51.84                             | 74.00                           | -22.16                | Peak     | HORIZONTAL   |
| 3              | 9450.00        | 37.72                         | 37.97                       | -29.99              | 45.70                             | 74.00                           | -28.30                | Peak     | HORIZONTAL   |
| 4              | 12195.00       | 39.84                         | 38.60                       | -28.91              | 49.53                             | 74.00                           | -24.47                | Peak     | HORIZONTAL   |
| 5              | 14205.00       | 36.25                         | 41.11                       | -27.10              | 50.26                             | 74.00                           | -23.74                | Peak     | HORIZONTAL   |
| 6              | 17080.00       | 31.77                         | 42.31                       | -26.60              | 47.48                             | 54.00                           | -6.52                 | Average  | HORIZONTAL   |
| 7              | 17085.00       | 44.49                         | 42.32                       | -26.65              | 60.16                             | 74.00                           | -13.84                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-19-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2440

Data: 32

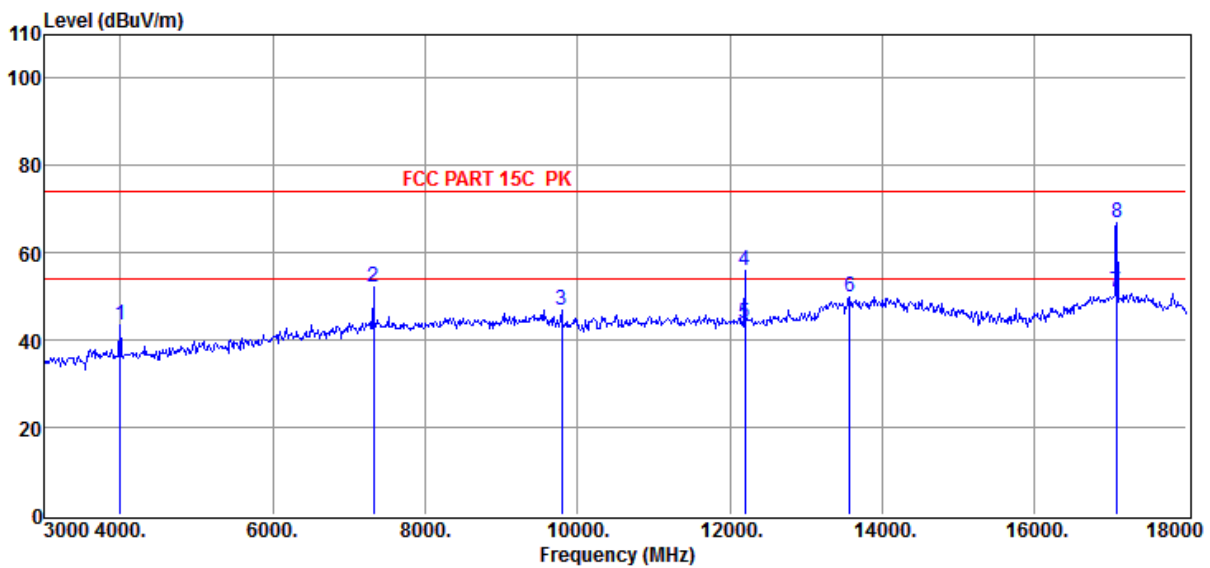

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 3990.00     | 44.04             | 31.58                 | -32.11          | 43.51                 | 74.00               | -30.49          | Peak     | VERTICAL     |
| 2           | 7320.00     | 45.65             | 37.11                 | -30.72          | 52.04                 | 74.00               | -21.96          | Peak     | VERTICAL     |
| 3           | 9795.00     | 38.83             | 38.18                 | -30.07          | 46.94                 | 74.00               | -27.06          | Peak     | VERTICAL     |
| 4           | 12195.00    | 46.07             | 38.60                 | -28.91          | 55.76                 | 74.00               | -18.24          | Peak     | VERTICAL     |
| 5           | 12200.00    | 34.26             | 38.60                 | -28.92          | 43.94                 | 54.00               | -10.06          | Average  | VERTICAL     |
| 6           | 13575.00    | 38.63             | 40.55                 | -29.12          | 50.06                 | 74.00               | -23.94          | Peak     | VERTICAL     |
| 7           | 17080.00    | 35.25             | 42.31                 | -26.60          | 50.96                 | 54.00               | -3.04           | Average  | VERTICAL     |
| 8           | 17085.00    | 51.09             | 42.32                 | -26.65          | 66.76                 | 74.00               | -7.24           | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-19-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2480

Data: 33

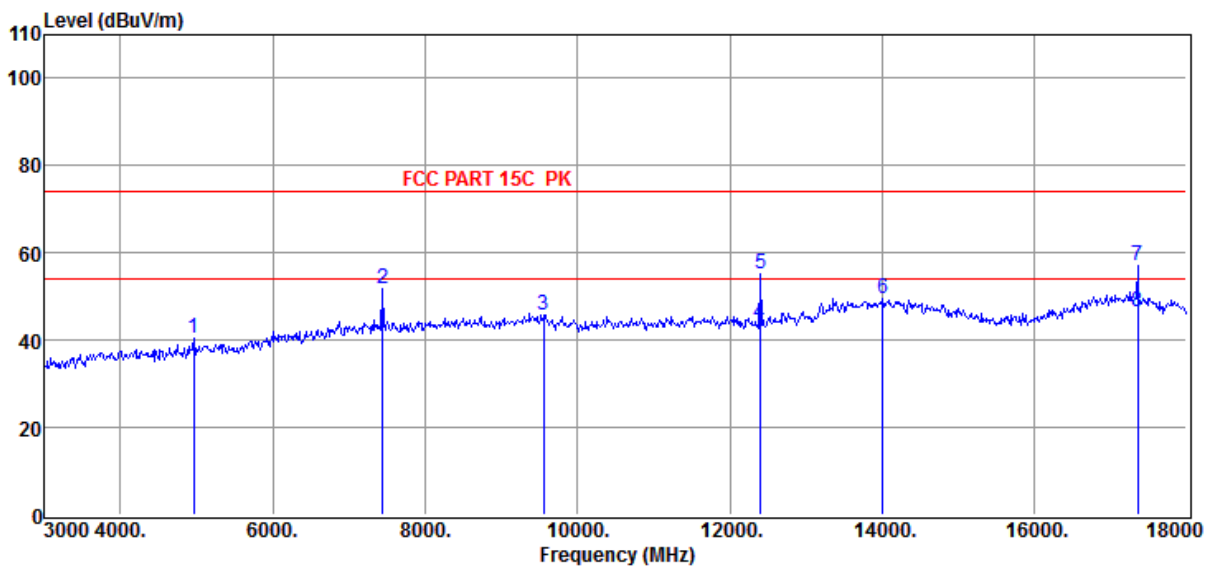

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 4965.00     | 39.37             | 32.83                 | -31.65          | 40.55                 | 74.00               | -33.45          | Peak     | HORIZONTAL   |
| 2           | 7440.00     | 45.40             | 37.30                 | -30.87          | 51.83                 | 74.00               | -22.17          | Peak     | HORIZONTAL   |
| 3           | 9555.00     | 37.91             | 38.03                 | -30.08          | 45.86                 | 74.00               | -28.14          | Peak     | HORIZONTAL   |
| 4           | 12400.00    | 34.09             | 38.60                 | -28.85          | 43.84                 | 54.00               | -10.16          | Average  | HORIZONTAL   |
| 5           | 12405.00    | 45.61             | 38.60                 | -28.88          | 55.33                 | 74.00               | -18.67          | Peak     | HORIZONTAL   |
| 6           | 14010.00    | 36.52             | 41.39                 | -28.38          | 49.53                 | 74.00               | -24.47          | Peak     | HORIZONTAL   |
| 7           | 17355.00    | 41.46             | 42.70                 | -27.00          | 57.16                 | 74.00               | -16.84          | Peak     | HORIZONTAL   |
| 8           | 17360.00    | 30.94             | 42.70                 | -27.02          | 46.62                 | 54.00               | -7.38           | Average  | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-19-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2480

Data: 34

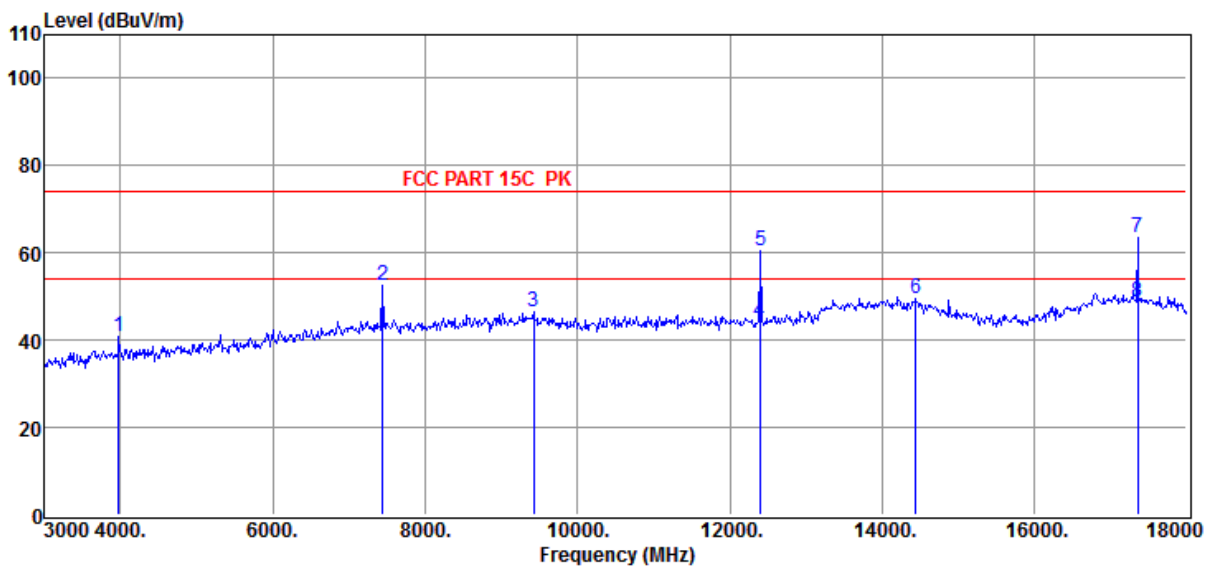

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 3975.00     | 41.67             | 31.54                 | -32.27          | 40.94                 | 74.00               | -33.06          | Peak     | VERTICAL     |
| 2           | 7440.00     | 46.13             | 37.30                 | -30.87          | 52.56                 | 74.00               | -21.44          | Peak     | VERTICAL     |
| 3           | 9420.00     | 38.25             | 37.95                 | -29.84          | 46.36                 | 74.00               | -27.64          | Peak     | VERTICAL     |
| 4           | 12400.00    | 34.59             | 38.60                 | -28.85          | 44.34                 | 54.00               | -9.66           | Average  | VERTICAL     |
| 5           | 12405.00    | 50.86             | 38.60                 | -28.88          | 60.58                 | 74.00               | -13.42          | Peak     | VERTICAL     |
| 6           | 14445.00    | 36.07             | 40.78                 | -27.39          | 49.46                 | 74.00               | -24.54          | Peak     | VERTICAL     |
| 7           | 17355.00    | 47.77             | 42.70                 | -27.00          | 63.47                 | 74.00               | -10.53          | Peak     | VERTICAL     |
| 8           | 17360.00    | 33.10             | 42.70                 | -27.02          | 48.78                 | 54.00               | -5.22           | Average  | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## 9. RF Conducted Spurious Emissions

### 9.1. Block diagram of test setup

Same as section 4.1

### 9.2. Limits

- Ⓜ In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.

- (2) Establish a reference level by using the following procedure:

|                  |   |
|------------------|---|
| Center frequency | Test frequency  |
| RBW: Ⓜ           | 100 kHz   |
| VBW:             | 300 kHz   |
| Span             | Wide enough to capture the peak level of the in-band emission |
| Detector Mode:   | Peak  |
| Sweep time: Ⓜ    | auto  |
| Trace mode       | Max hold  |

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

- (4) Set the spectrum analyzer as follows:


|                              |  |
|------------------------------|--|
| RBW:                         | 100 kHz                                  |
| VBW:                         | 300 kHz                                  |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span}/\text{RBW}$            |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |


- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result


| Mode   | Freq. (MHz) | Verdict |
|--------|-------------|---------|
| BLE 1M | 2402        | Pass    |
|        | 2440        | Pass    |
|        | 2480        | Pass    |

9.5. Original test data

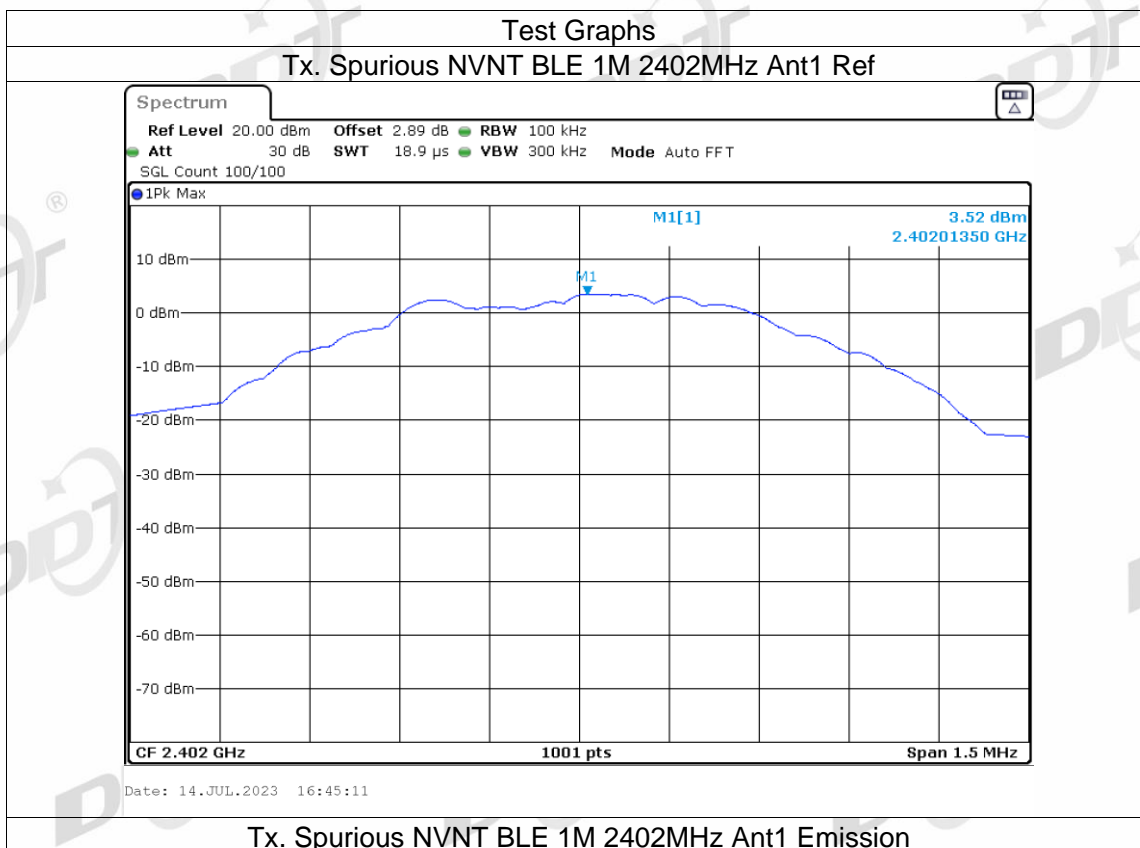


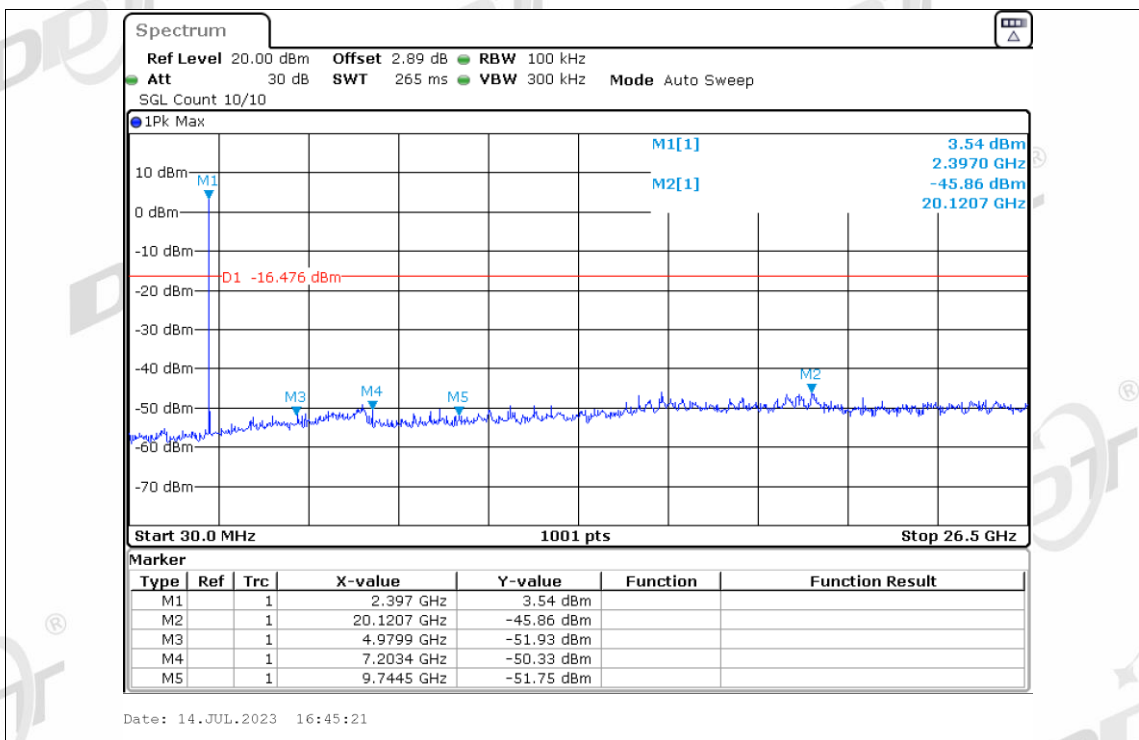


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

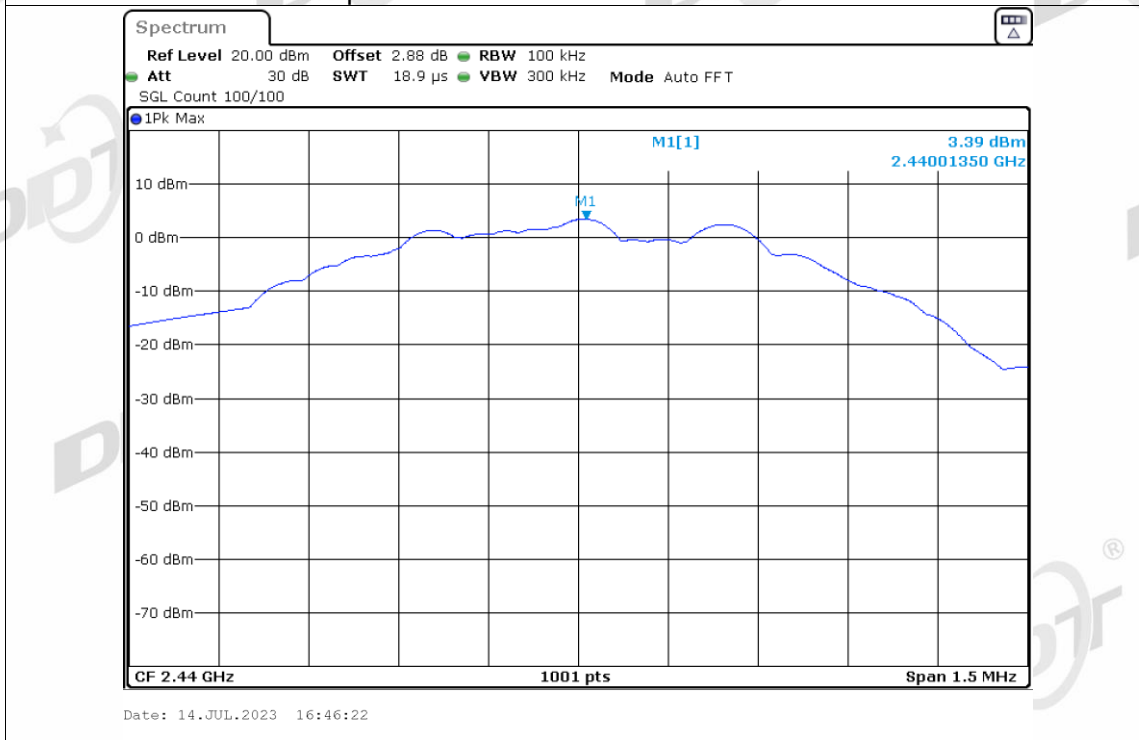

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

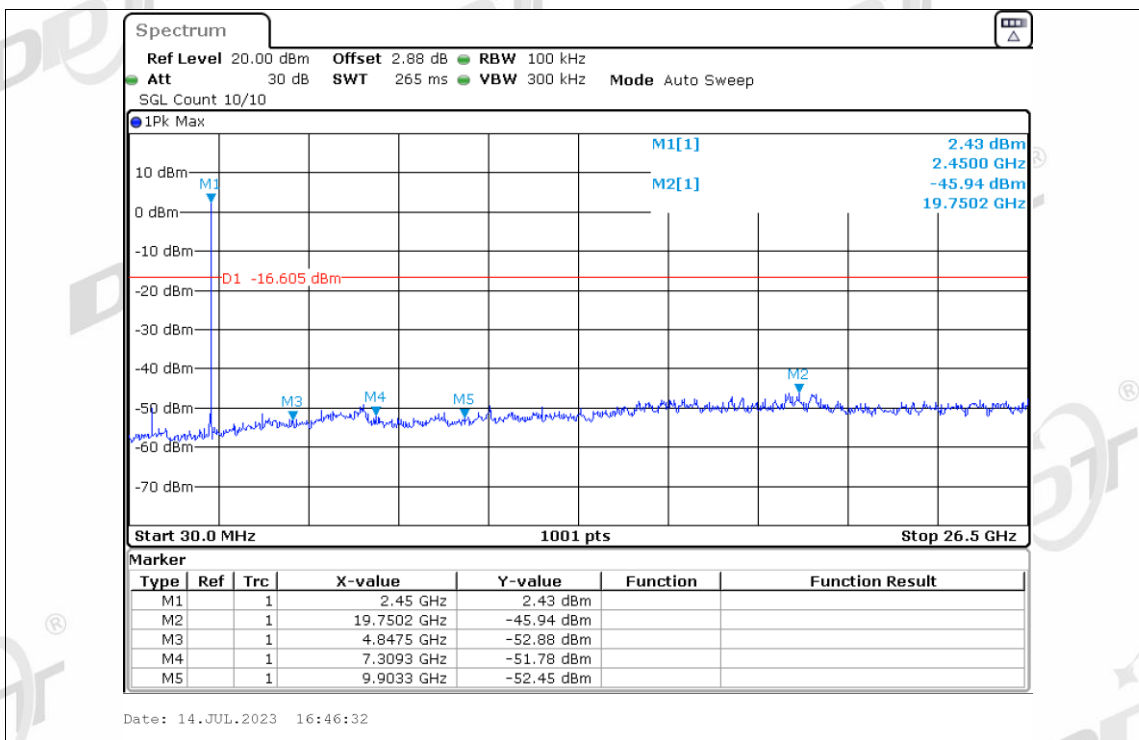


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

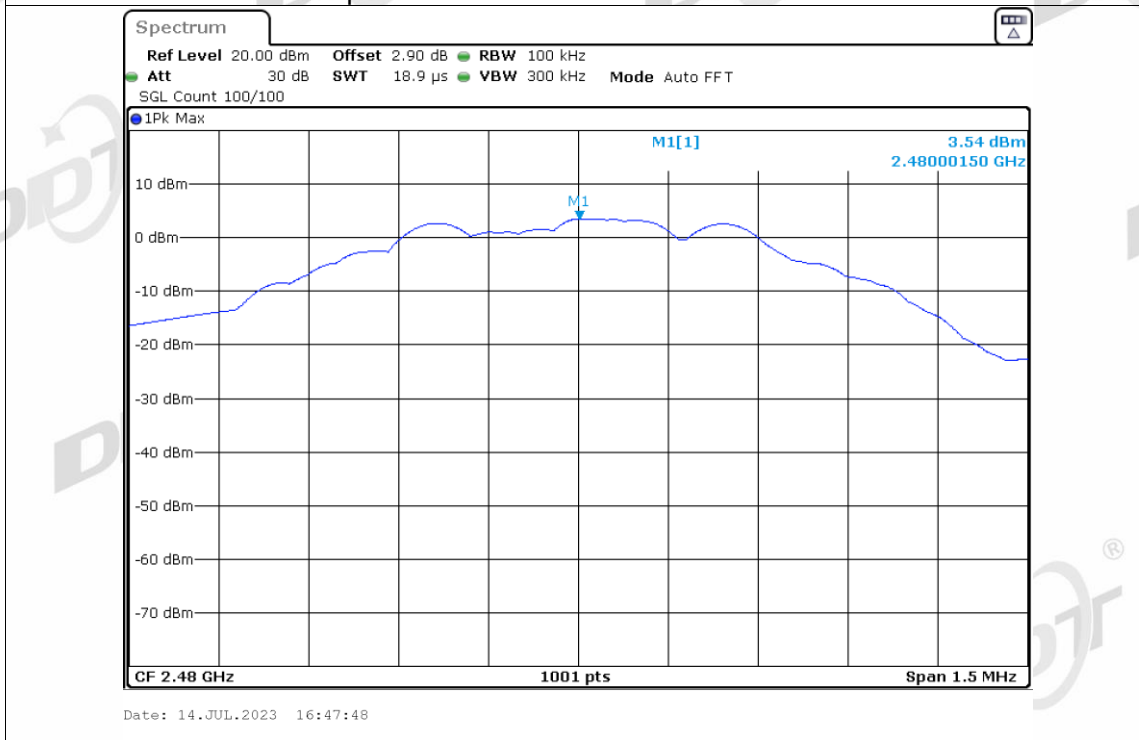


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission



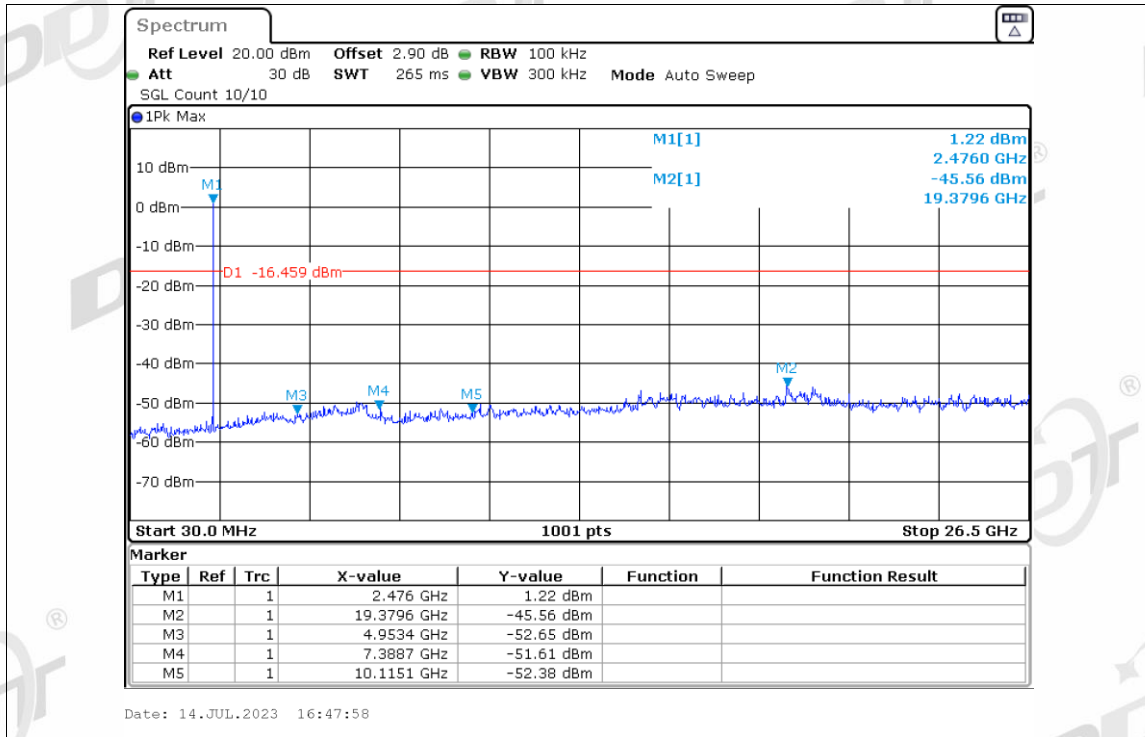

## 10. Band Edge Compliance (Radiated Method)

### 10.1. Block diagram of test setup

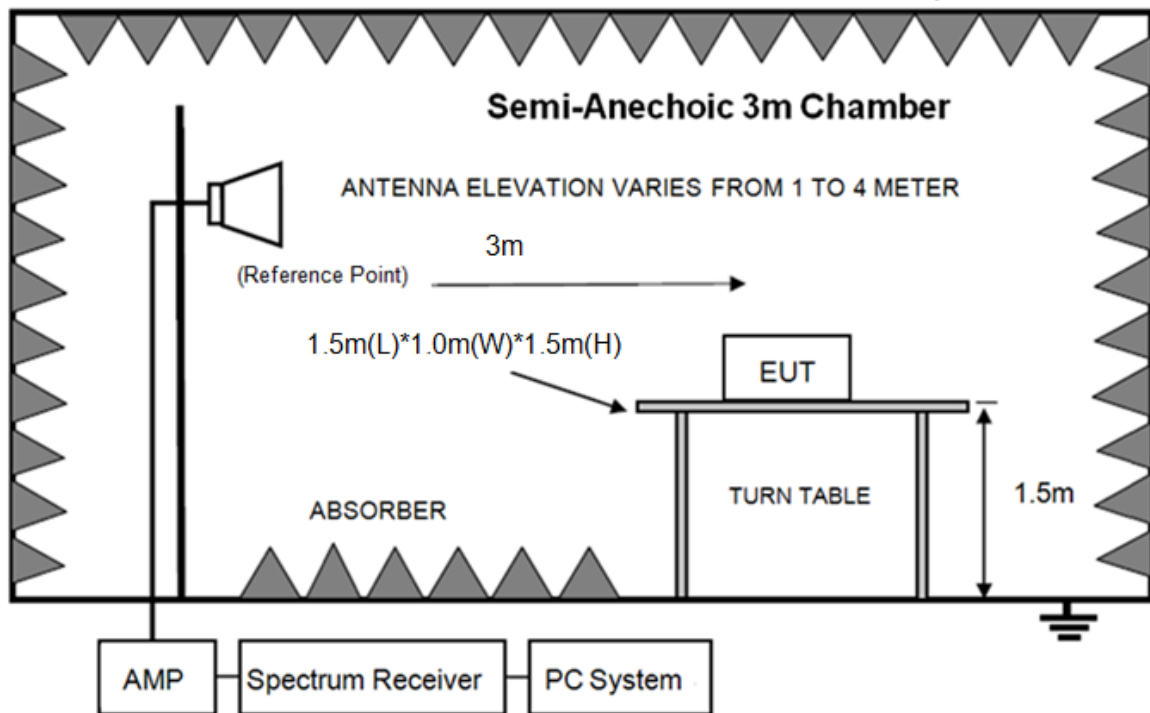

### 10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

### 10.3. Test Procedure

Same with clause 8.3 except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

### 10.4. Test result

Pass. (See below detailed test result)

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2402

Data: 25

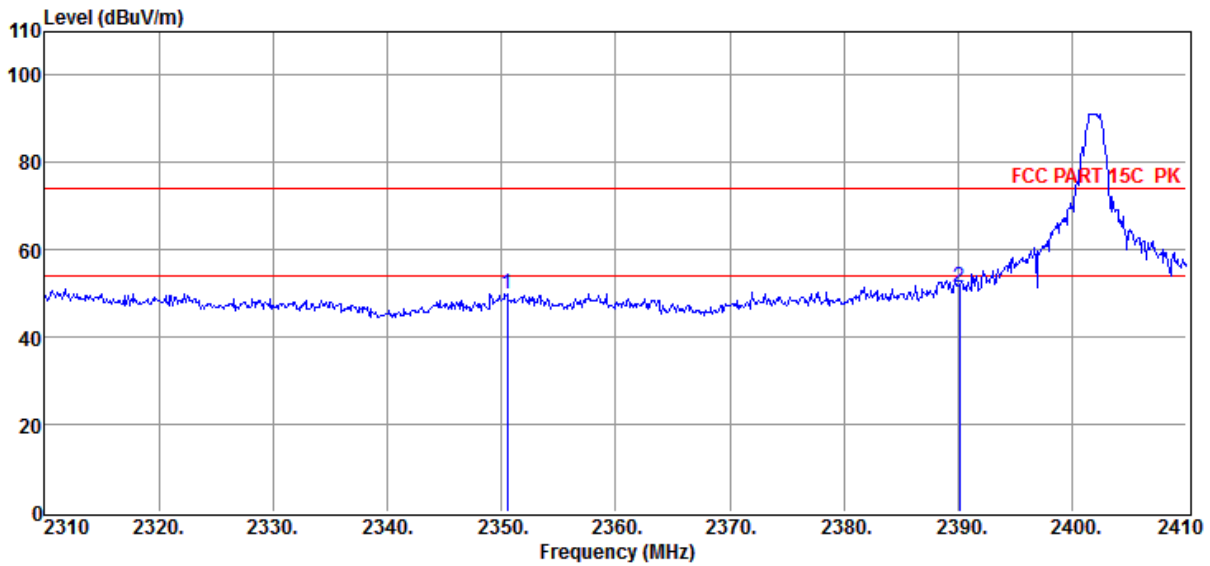

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2350.50        | 18.77                   | 28.11                       | 3.16                | 50.04                       | 74.00                     | -23.96                | Peak     | HORIZONTAL   |
| 2              | 2390.10        | 20.27                   | 28.05                       | 3.18                | 51.50                       | 74.00                     | -22.50                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2402

Data: 26

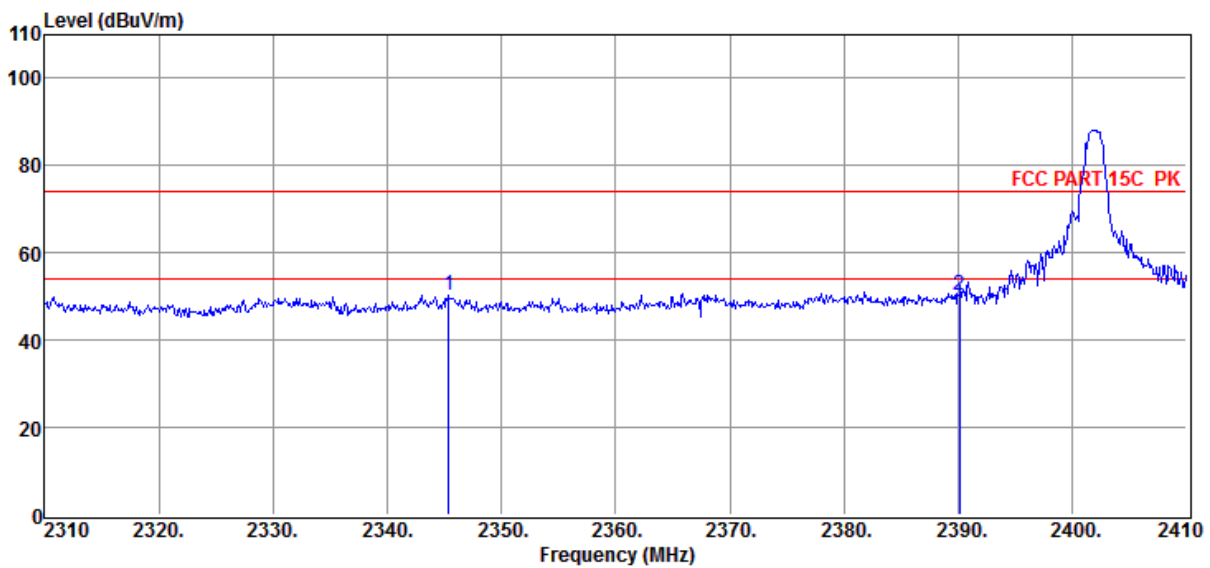

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2345.40        | 18.91                   | 28.12                       | 3.15                | 50.18                       | 74.00                     | -23.82                | Peak     | VERTICAL     |
| 2              | 2390.10        | 18.87                   | 28.05                       | 3.18                | 50.10                       | 74.00                     | -23.90                | Peak     | VERTICAL     |

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2480

Data: 27

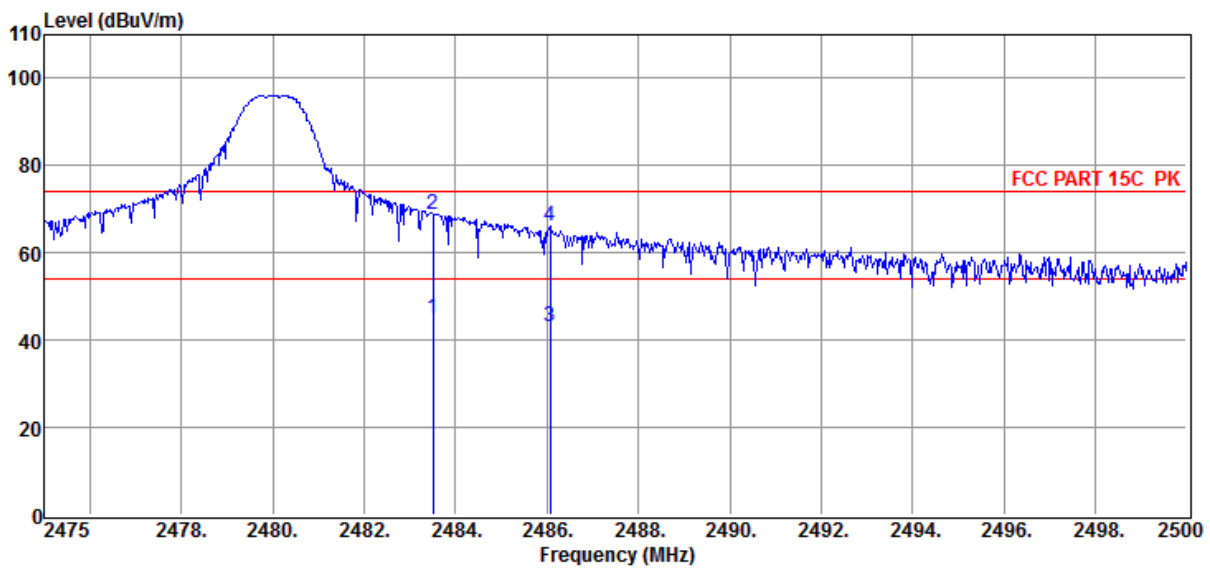

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 2483.50     | 13.91             | 27.92                 | 3.23            | 45.06                 | 54.00               | -8.94           | Average  | HORIZONTAL   |
| 2           | 2483.50     | 37.82             | 27.92                 | 3.23            | 68.97                 | 74.00               | -5.03           | Peak     | HORIZONTAL   |
| 3           | 2486.08     | 11.86             | 27.92                 | 3.23            | 43.01                 | 54.00               | -10.99          | Average  | HORIZONTAL   |
| 4           | 2486.08     | 34.95             | 27.92                 | 3.23            | 66.10                 | 74.00               | -7.90           | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

# Radiated Emission Test Result

**Test Site** : 10m Chamber

**Test Date** : 07-18-2023

**Tested By** : NOVAK

**EUT** : Ninebot KickScooter E2 Pro


**Model Number** : 051405U

**Power Supply** : Battery

**Test Mode** : Tx mode

**Memo** : BLE 2480

Data: 28

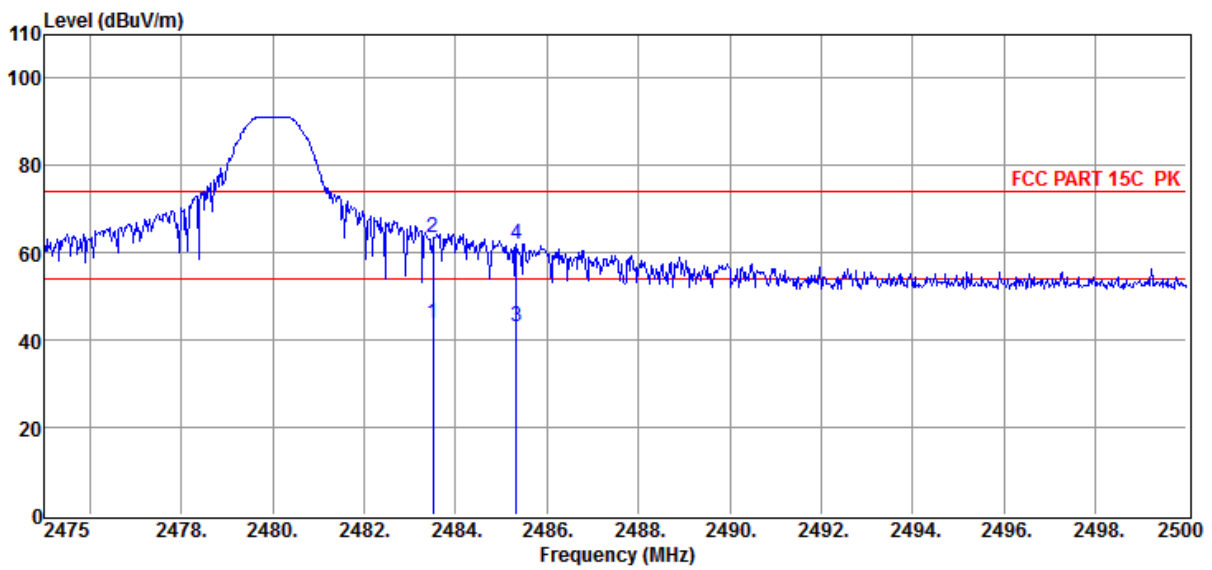

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1           | 2483.50     | 12.79             | 27.92                 | 3.23            | 43.94                 | 54.00               | -10.06          | Average  | VERTICAL     |
| 2           | 2483.50     | 32.35             | 27.92                 | 3.23            | 63.50                 | 74.00               | -10.50          | Peak     | VERTICAL     |
| 3           | 2485.33     | 11.81             | 27.92                 | 3.23            | 42.96                 | 54.00               | -11.04          | Average  | VERTICAL     |
| 4           | 2485.33     | 31.00             | 27.92                 | 3.23            | 62.15                 | 74.00               | -11.85          | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

## 11. Power Line Conducted Emission

### 11.1. Block diagram of test setup

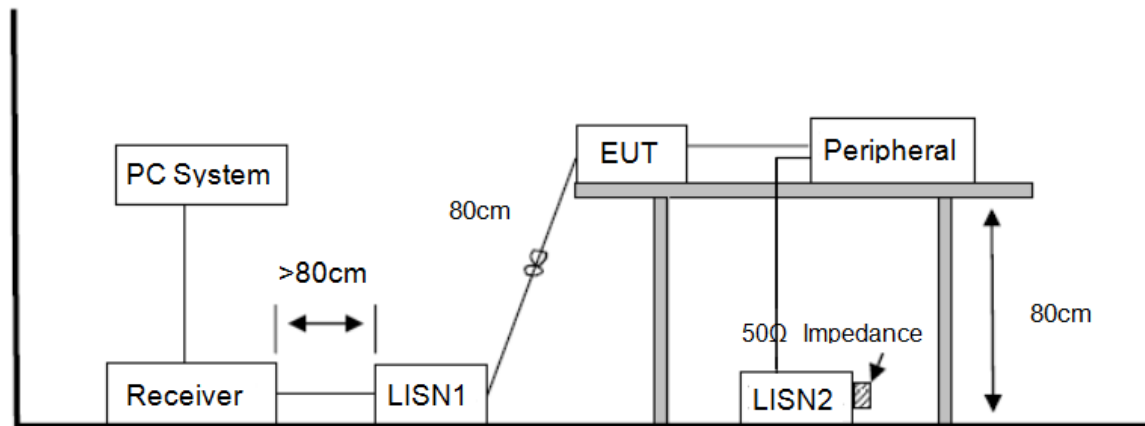

### 11.2. Power line conducted emission limits

| Frequency         | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
|-------------------|----------------------------------|-------------------------------|
| 150 kHz ~ 500 kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500 kHz ~ 5 MHz   | 56                               | 46                            |
| 5 MHz ~ 30 MHz    | 60                               | 50                            |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 11.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 3.0 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### **11.4. Test result**


**PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at all mode, only the worst case was recorded in this report.



# Conducted Emission Test Result

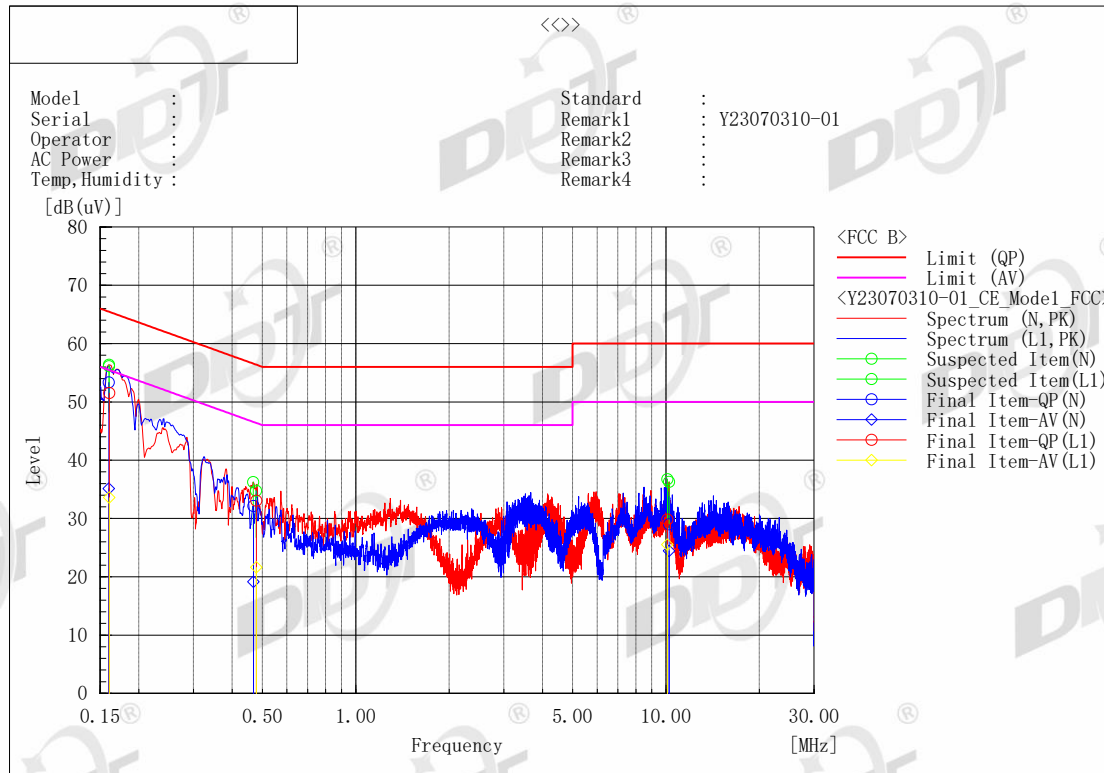

Final Result

--- N Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] | Remark |
|-----|-----------------|---------------------|----------------------|-----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|--------|
| 1   | 0.16014         | 43.5                | 25.3                 | 9.8       | 53.3               | 35.1                | 65.5              | 55.5              | 12.2           | 20.4            |        |
| 2   | 0.46781         | 22.3                | 9.3                  | 9.8       | 32.1               | 19.1                | 56.6              | 46.6              | 24.5           | 27.5            |        |
| 3   | 10.23002        | 18.7                | 14.1                 | 10.3      | 29.0               | 24.4                | 60.0              | 50.0              | 31.0           | 25.6            |        |

--- L1 Phase ---

| No. | Frequency [MHz] | Reading QP [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB] | Result QP [dB(uV)] | Result CAV [dB(uV)] | Limit QP [dB(uV)] | Limit AV [dB(uV)] | Margin QP [dB] | Margin CAV [dB] | Remark |
|-----|-----------------|---------------------|----------------------|-----------|--------------------|---------------------|-------------------|-------------------|----------------|-----------------|--------|
| 1   | 0.16047         | 41.7                | 23.8                 | 9.8       | 51.5               | 33.6                | 65.4              | 55.4              | 13.9           | 21.8            |        |
| 2   | 0.47803         | 23.2                | 11.8                 | 9.8       | 33.0               | 21.6                | 56.4              | 46.4              | 23.4           | 24.8            |        |
| 3   | 10.10285        | 19.5                | 15.2                 | 10.3      | 29.8               | 25.5                | 60.0              | 50.0              | 30.2           | 24.5            |        |

Note1) Level (Quasi-Peak and/or C/Average) = Meter Reading + Factor

Note2) Line = Polarity of input power (Live or Neutral)

N: Abbreviation of Neutral Polarity, L1: Abbreviation of Live Polarity,

Note3) Factor = LISN Insertion Loss + Cable Loss

Note4) Margin = Limit – Level (Quasi-Peak and/or C/Average)

Note5) C/Average: Abbreviation of CISPR Average

## 12. Antenna Requirements

### 12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 12.2. Result

The antenna used for this product is PCB antenna and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is -1.26 dBi.