

Test Site	SIP-AC3	Test Engineer	Wayne Wang
Test Date	2023-08-04	Test Mode:	BLE-1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line above 18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	20812.0	57.1	-9.7	47.4	74.0	-26.6	Peak	Horizontal
	21620.0	66.4	-9.8	56.6	74.0	-17.4	Peak	Horizontal
	21620.0	60.6	-9.8	50.8	54.0	-3.2	Average	Horizontal
	22476.0	55.8	-8.7	47.1	74.0	-26.9	Peak	Horizontal
	21616.0	69.3	-9.8	59.5	74.0	-14.5	Peak	Vertical
	21616.0	63.2	-9.8	53.4	54.0	-0.6	Average	Vertical
	24024.0	58.1	-8.7	49.4	74.0	-24.6	Peak	Vertical
	25156.0	56.6	-8.1	48.5	74.0	-25.5	Peak	Vertical
19	21956.0	66.7	-9.4	57.3	74.0	-16.7	Peak	Horizontal
	21956.0	60.1	-9.4	50.7	54.0	-3.3	Average	Horizontal
	24396.0	57.3	-8.1	49.2	74.0	-24.8	Peak	Horizontal
	25880.0	56.6	-8.3	48.3	74.0	-25.7	Peak	Horizontal
	21128.0	57.6	-9.2	48.4	74.0	-25.6	Peak	Vertical
	21956.0	70.1	-9.4	60.7	74.0	-13.3	Peak	Vertical
	21956.0	63.3	-9.4	53.9	54.0	-0.1	Average	Vertical
	24396.0	56.3	-8.1	48.2	74.0	-25.8	Peak	Vertical
39	22324.0	68.3	-8.9	59.4	74.0	-14.6	Peak	Horizontal
	22324.0	61.3	-8.9	52.4	54.0	-1.6	Average	Horizontal
	23192.0	55.9	-8.1	47.8	74.0	-26.2	Peak	Horizontal
	25008.0	55.5	-8.1	47.4	74.0	-26.6	Peak	Horizontal
	22316.0	69.5	-8.9	60.6	74.0	-13.4	Peak	Vertical
	22316.0	62.8	-8.9	53.9	54.0	-0.1	Average	Vertical
	22968.0	54.7	-8.3	46.4	74.0	-27.6	Peak	Vertical
	25604.0	55.5	-8.1	47.4	74.0	-26.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Arvin Ding
Test Date	2023-07-29	Test Mode:	BLE-2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4808.0	49.9	-6.3	43.6	74.0	-30.4	Peak	Horizontal
	8182.5	41.6	2.9	44.5	74.0	-29.5	Peak	Horizontal
	12016.0	46.6	7.2	53.8	74.0	-20.2	Peak	Horizontal
	12016.0	46.3	7.2	53.5	54.0	-0.5	Average	Horizontal
	3983.5	51.0	-8.2	42.8	74.0	-31.2	Peak	Vertical
	4782.5	48.9	-5.8	43.1	74.0	-30.9	Peak	Vertical
	12007.5	48.1	7.2	55.3	74.0	-18.7	Peak	Vertical
	12007.5	46.1	7.2	53.3	54.0	-0.7	Average	Vertical
19	4876.0	53.7	-6.1	47.6	74.0	-26.4	Peak	Horizontal
	7324.0	49.1	1.5	50.6	74.0	-23.4	Peak	Horizontal
	12203.0	45.1	7.2	52.3	74.0	-21.7	Peak	Horizontal
	12203.0	42.6	7.2	49.8	54.0	-4.2	Average	Horizontal
	4876.0	53.8	-6.1	47.7	74.0	-26.3	Peak	Vertical
	7315.5	52.5	1.5	54.0	74.0	-20.0	Peak	Vertical
	7315.5	49.6	1.5	51.1	54.0	-2.9	Average	Vertical
	12203.0	46.8	7.2	54.0	74.0	-20.0	Peak	Vertical
12203.0	44.7	7.2	51.9	54.0	-2.1	Average	Vertical	
39	4961.0	46.8	-5.4	41.4	74.0	-32.6	Peak	Horizontal
	7434.5	46.3	2.2	48.5	74.0	-25.5	Peak	Horizontal
	12398.5	49.2	7.2	56.4	74.0	-17.6	Peak	Horizontal
	12398.5	45.6	7.2	52.8	54.0	-1.2	Average	Horizontal
	4782.5	48.9	-5.8	43.1	74.0	-30.9	Peak	Vertical
	7443.0	48.6	2.2	50.8	74.0	-23.2	Peak	Vertical
	12398.5	46.6	7.2	53.8	74.0	-20.2	Peak	Vertical
	12398.5	44.5	7.2	51.7	54.0	-2.3	Average	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Wayne Wang
Test Date	2023-08-04	Test Mode:	BLE-2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line above 18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	21616.0	65.9	-9.8	56.1	74.0	-17.9	Peak	Horizontal
	21616.0	63.2	-9.8	53.4	54.0	-0.6	Average	Horizontal
	23316.0	55.1	-8.1	47.0	74.0	-27.0	Peak	Horizontal
	25612.0	57.2	-8.1	49.1	74.0	-24.9	Peak	Horizontal
	21620.0	64.2	-9.8	54.4	74.0	-19.6	Peak	Vertical
	21620.0	58.1	-9.8	48.3	54.0	-5.7	Average	Vertical
	23116.0	55.3	-8.2	47.1	74.0	-26.9	Peak	Vertical
	25296.0	55.8	-7.8	48.0	74.0	-26.0	Peak	Vertical
19	21956.0	67.8	-9.4	58.4	74.0	-15.6	Peak	Horizontal
	21956.0	63.3	-9.4	53.9	54.0	-0.1	Average	Horizontal
	23516.0	56.0	-8.2	47.8	74.0	-26.2	Peak	Horizontal
	25212.0	55.4	-8.1	47.3	74.0	-26.7	Peak	Horizontal
	21956.0	63.8	-9.4	54.4	74.0	-19.6	Peak	Vertical
	21956.0	57.2	-9.4	47.8	54.0	-6.2	Average	Vertical
	22868.0	54.6	-8.2	46.4	74.0	-27.6	Peak	Vertical
	24668.0	54.9	-8.0	46.9	74.0	-27.1	Peak	Vertical
39	22324.0	64.4	-8.9	55.5	74.0	-18.5	Peak	Horizontal
	22324.0	59.4	-8.9	50.5	54.0	-3.5	Average	Horizontal
	22740.0	55.4	-8.4	47.0	74.0	-27.0	Peak	Horizontal
	23156.0	56.1	-7.9	48.2	74.0	-25.8	Peak	Horizontal
	18132.0	56.8	-11.3	45.5	74.0	-28.5	Peak	Vertical
	22324.0	64.0	-8.9	55.1	74.0	-18.9	Peak	Vertical
	22324.0	62.5	-8.9	53.6	54.0	-0.4	Average	Vertical
	24356.0	55.0	-8.3	46.7	74.0	-27.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

MHCB05P-B:

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2023-07-21	Test Mode:	BLE-1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Polarization
00	4799.5	47.5	-6.0	41.5	74.0	-32.5	Peak	Horizontal
	8165.5	42.4	3.0	45.4	74.0	-28.6	Peak	Horizontal
	11489.0	40.8	8.0	48.8	74.0	-25.2	Peak	Horizontal
	4808.0	49.6	-6.3	43.3	74.0	-30.7	Peak	Vertical
	8199.5	41.4	2.8	44.2	74.0	-29.8	Peak	Vertical
	11769.5	41.8	7.2	49.0	74.0	-25.0	Peak	Vertical
19	4876.0	48.7	-6.1	42.6	74.0	-31.4	Peak	Horizontal
	7528.0	42.8	1.8	44.6	74.0	-29.4	Peak	Horizontal
	11642.0	40.8	7.4	48.2	74.0	-25.8	Peak	Horizontal
	4884.5	50.3	-6.0	44.3	74.0	-29.7	Peak	Vertical
	8216.5	42.7	2.6	45.3	74.0	-28.7	Peak	Vertical
	10885.5	42.0	7.5	49.5	74.0	-24.5	Peak	Vertical
39	4961.0	46.8	-5.4	41.4	74.0	-32.6	Peak	Horizontal
	8131.5	41.7	3.2	44.9	74.0	-29.1	Peak	Horizontal
	11582.5	40.6	7.9	48.5	74.0	-25.5	Peak	Horizontal
	4961.0	50.0	-5.4	44.6	74.0	-29.4	Peak	Vertical
	8191.0	42.2	2.9	45.1	74.0	-28.9	Peak	Vertical
	11506.0	41.2	8.1	49.3	74.0	-24.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2023-07-21	Test Mode:	BLE-2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Polarization
00	4935.5	46.1	-5.9	40.2	74.0	-33.8	Peak	Horizontal
	8182.5	42.8	2.9	45.7	74.0	-28.3	Peak	Horizontal
	10987.5	41.6	7.4	49.0	74.0	-25.0	Peak	Horizontal
	4799.5	49.6	-6.0	43.6	74.0	-30.4	Peak	Vertical
	8148.5	42.2	3.1	45.3	74.0	-28.7	Peak	Vertical
	11523.0	40.1	8.0	48.1	74.0	-25.9	Peak	Vertical
19	4884.5	46.1	-6.0	40.1	74.0	-33.9	Peak	Horizontal
	8216.5	42.6	2.6	45.2	74.0	-28.8	Peak	Horizontal
	11497.5	40.5	8.1	48.6	74.0	-25.4	Peak	Horizontal
	4876.0	47.8	-6.1	41.7	74.0	-32.3	Peak	Vertical
	8157.0	41.8	3.1	44.9	74.0	-29.1	Peak	Vertical
	10868.5	41.1	7.5	48.6	74.0	-25.4	Peak	Vertical
39	4961.0	46.7	-5.4	41.3	74.0	-32.7	Peak	Horizontal
	8123.0	42.6	3.4	46.0	74.0	-28.0	Peak	Horizontal
	11625.0	41.1	7.7	48.8	74.0	-25.2	Peak	Horizontal
	4961.0	49.0	-5.4	43.6	74.0	-30.4	Peak	Vertical
	8378.0	42.6	2.4	45.0	74.0	-29.0	Peak	Vertical
	11531.5	40.6	7.9	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Mero Zhou
Test Date	2023-09-15	Test Mode:	Co-location Spurious Emission
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
GR5515 (BLE-1Mbps -CH39) + MHCB05P-B (BLE-1Mbps -CH19)	7443.0	55.0	-6.6	48.4	74.0	-25.6	Peak	Horizontal
	12398.5	52.4	-2.8	49.6	74.0	-24.4	Peak	Horizontal
	15696.5	44.6	3.0	47.6	74.0	-26.4	Peak	Horizontal
	7443.0	60.5	-6.6	53.9	74.0	-20.1	Peak	Vertical
	7443.0	53.7	-6.6	47.1	54.0	-6.9	Average	Vertical
	12398.5	52.6	-2.8	49.8	74.0	-24.2	Peak	Vertical
	15807.0	44.9	3.7	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Mero Zhou
Test Date	2023-09-15	Test Mode:	Co-location Spurious Emission
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line above 18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
GR5515 (BLE-1Mbps -CH39) + MHCB05P-B (BLE-1Mbps -CH19)	21073.0	57.4	-10.8	46.6	74.0	-27.4	Peak	Horizontal
	22322.5	67.6	-10.2	57.4	74.0	-16.6	Peak	Horizontal
	22322.5	54.5	-10.2	44.3	54.0	-9.7	Average	Horizontal
	23820.5	56.5	-9.0	47.5	74.0	-26.5	Peak	Horizontal
	19480.5	57.4	-11.6	45.8	74.0	-28.2	Peak	Vertical
	22319.0	66.6	-10.1	56.5	74.0	-17.5	Peak	Vertical
	22319.0	52.0	-10.1	41.9	54.0	-12.1	Average	Vertical
23873.0	56.5	-9.2	47.3	74.0	-26.7	Peak	Vertical	

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: SIP-AC1	Test Date: 2023-07-28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_25-2000MHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz - GR5515	

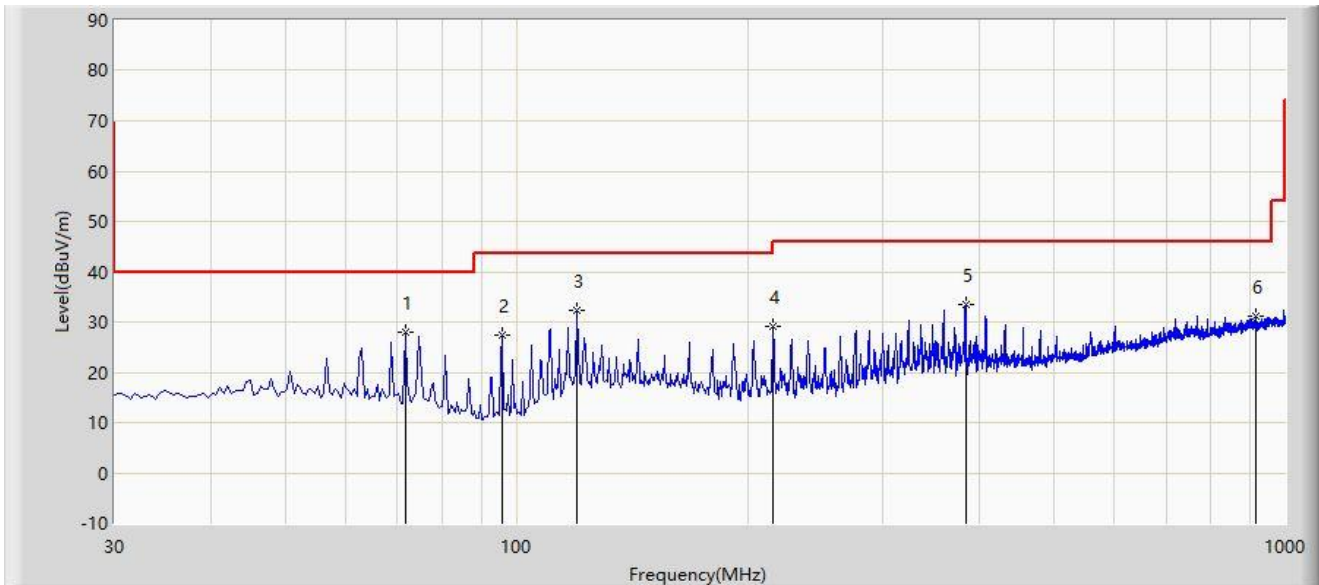

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		71.710	27.920	12.504	-12.080	40.000	15.416	PK
2		95.960	27.526	14.801	-15.974	43.500	12.726	PK
3	*	119.725	32.373	16.776	-11.127	43.500	15.597	PK
4		215.755	29.207	14.541	-14.293	43.500	14.666	PK
5		384.050	33.418	12.968	-12.582	46.000	20.451	PK
6		916.580	31.151	1.480	-14.849	46.000	29.671	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: SIP-AC1	Test Date: 2023-07-28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_25-2000MHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz - GR5515	

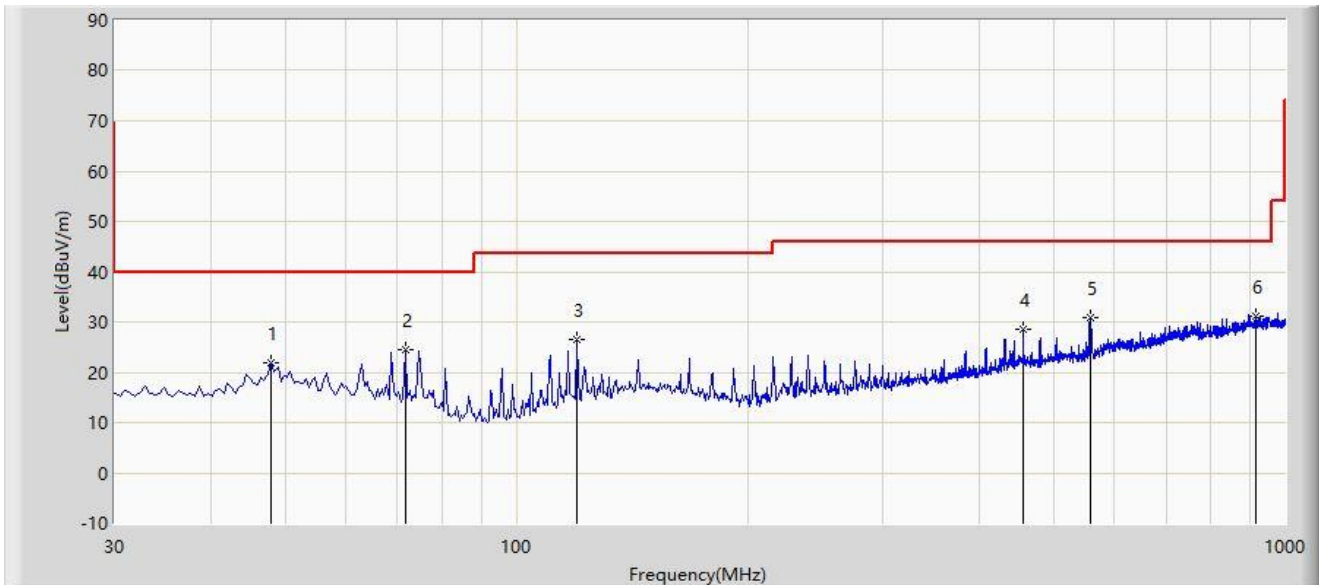

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		47.945	21.781	3.736	-18.219	40.000	18.045	PK
2		71.710	24.611	9.195	-15.389	40.000	15.416	PK
3		119.725	26.577	10.980	-16.923	43.500	15.597	PK
4		455.830	28.511	6.181	-17.489	46.000	22.330	PK
5		557.195	30.808	6.822	-15.192	46.000	23.986	PK
6	*	916.580	31.187	1.516	-14.813	46.000	29.671	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: SIP-AC1	Test Date: 2023-07-28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_25-2000MHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz - MHCB05P-B	

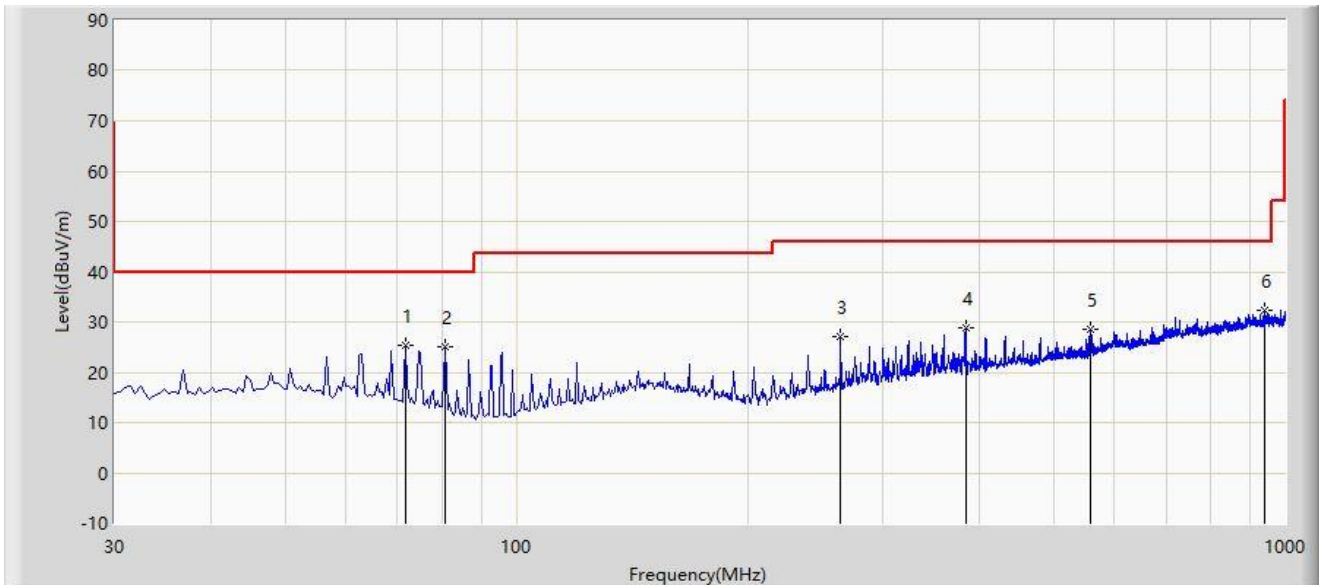

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		71.710	25.284	9.868	-14.716	40.000	15.416	PK
2		80.925	25.127	11.899	-14.873	40.000	13.227	PK
3		264.255	27.061	10.110	-18.939	46.000	16.951	PK
4		384.050	28.714	8.264	-17.286	46.000	20.451	PK
5		557.680	28.585	4.562	-17.415	46.000	24.022	PK
6	*	941.800	32.182	2.595	-13.818	46.000	29.587	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC1	Test Date: 2023-07-28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: VULB 9168_00998_25-2000MHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz - MHCBO5P-B	

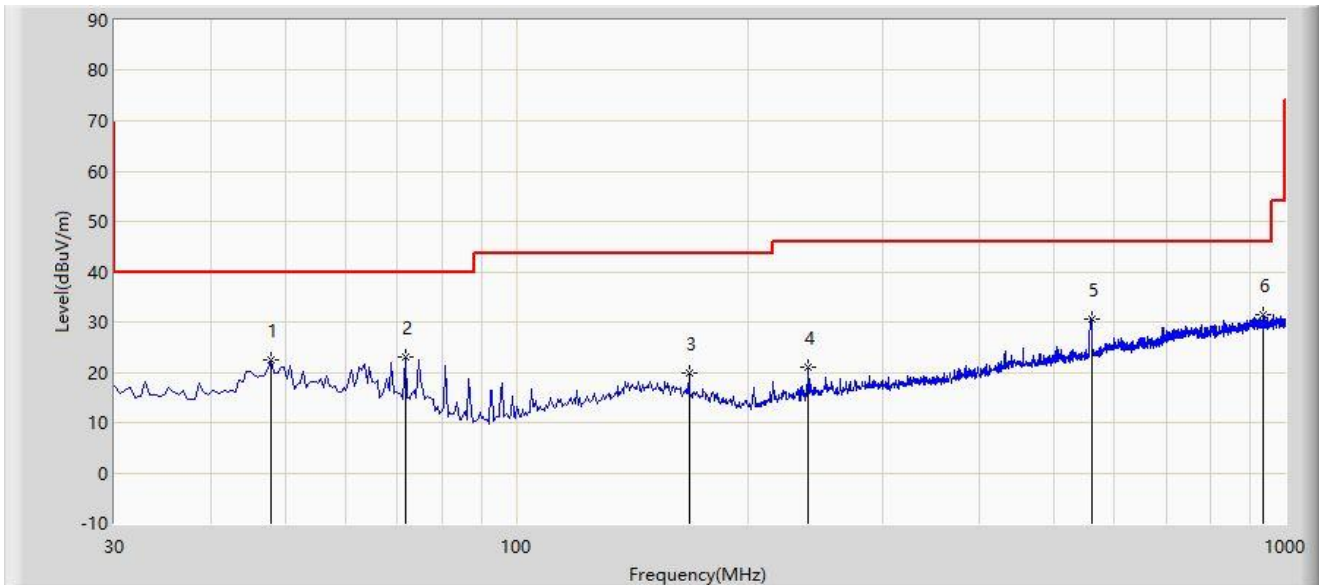

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		47.945	22.449	4.404	-17.551	40.000	18.045	PK
2		71.710	23.095	7.679	-16.905	40.000	15.416	PK
3		167.740	19.911	2.547	-23.589	43.500	17.364	PK
4		240.005	20.988	4.944	-25.012	46.000	16.044	PK
5		561.075	30.671	6.528	-15.329	46.000	24.143	PK
6	*	936.950	31.349	1.694	-14.651	46.000	29.655	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.


Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

GR5515:

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

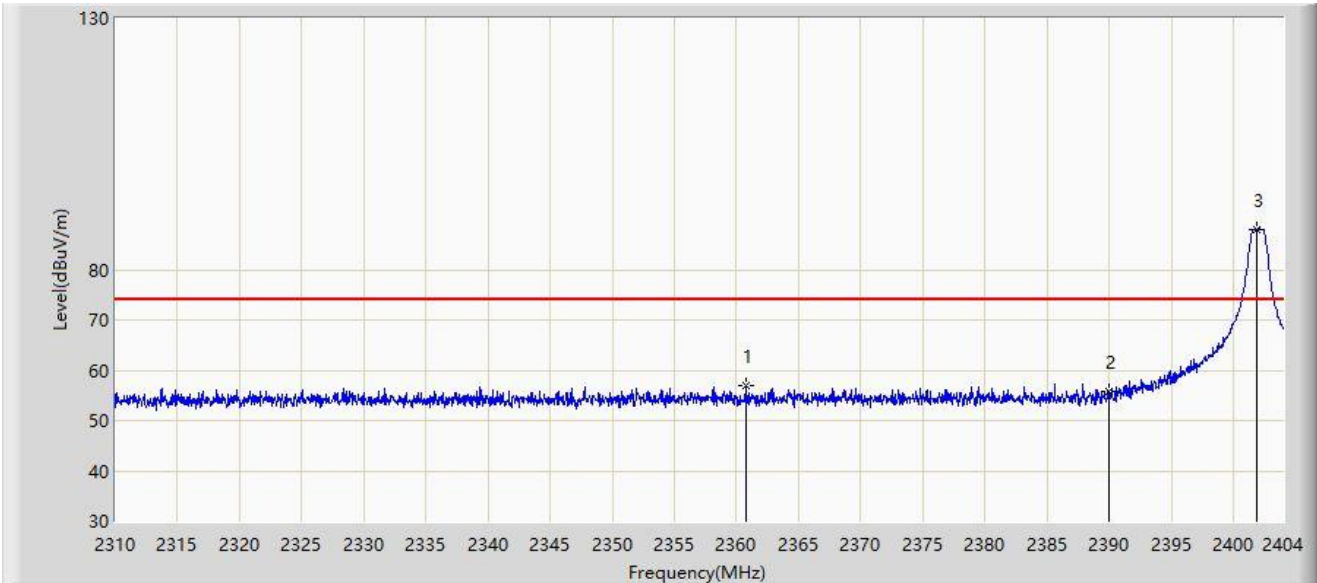


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2360.713	56.998	23.930	-17.002	74.000	33.069	PK
2		2390.000	55.763	22.615	-18.237	74.000	33.148	PK
3		2401.885	88.083	54.901	N/A	N/A	33.181	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

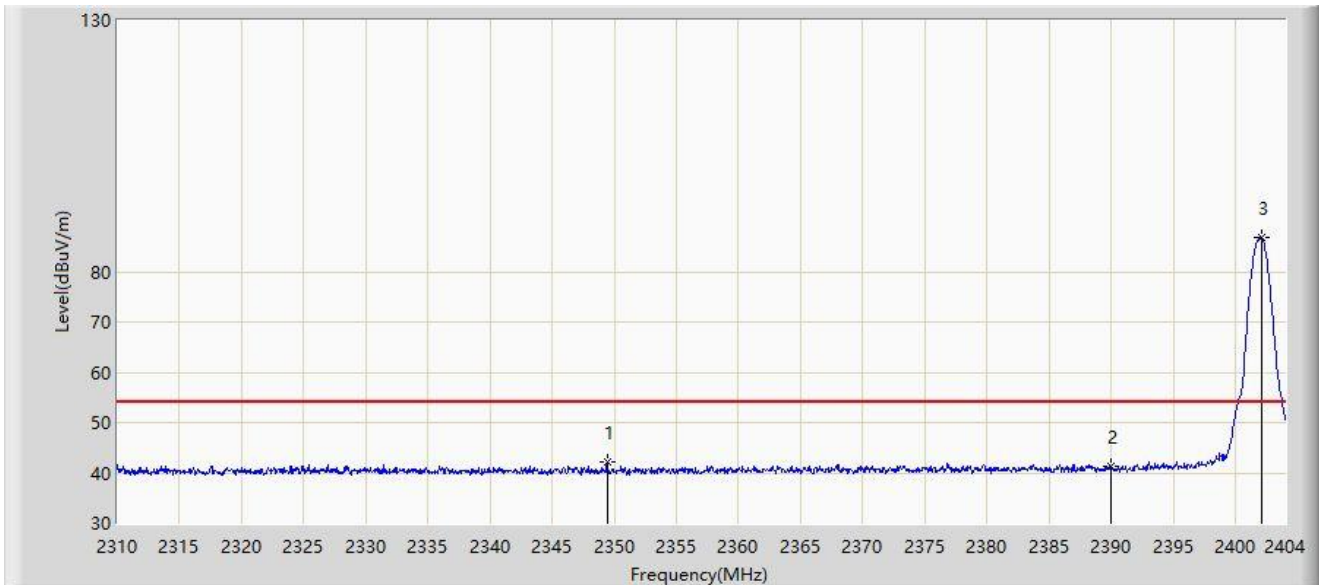


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2349.433	42.045	9.115	-11.955	54.000	32.930	AV
2		2390.000	41.332	8.184	-12.668	54.000	33.148	AV
3		2402.073	86.931	53.749	N/A	N/A	33.182	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

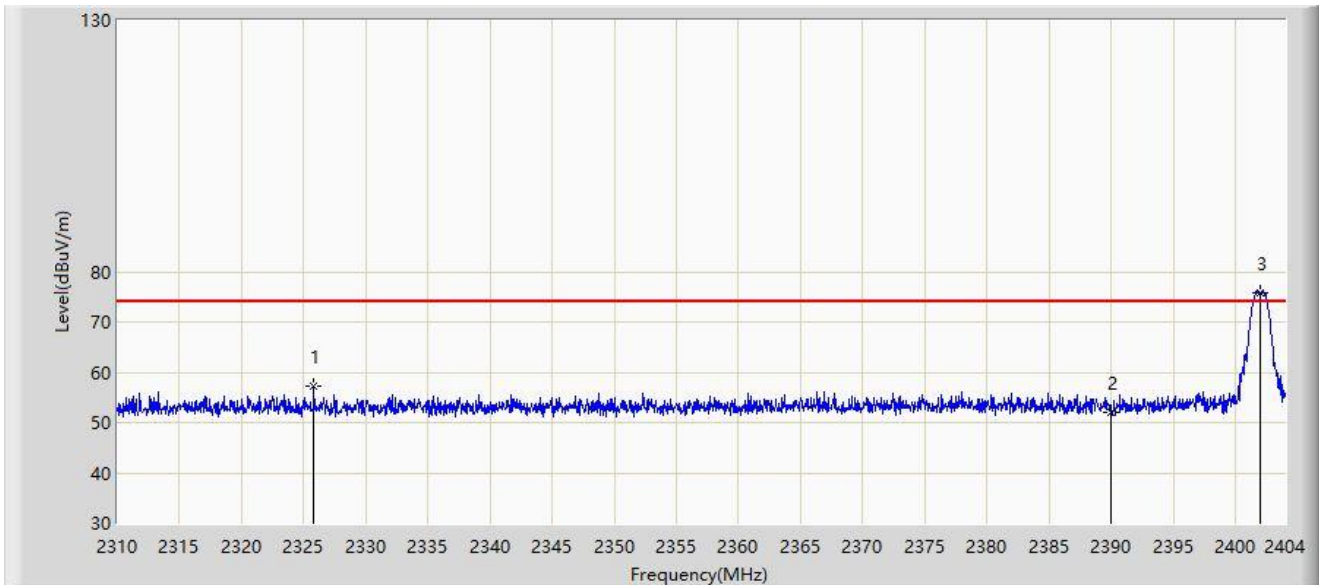


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2325.839	57.221	24.144	-16.779	74.000	33.078	PK
2		2390.000	52.029	18.881	-21.971	74.000	33.148	PK
3		2402.026	75.869	42.687	N/A	N/A	33.182	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

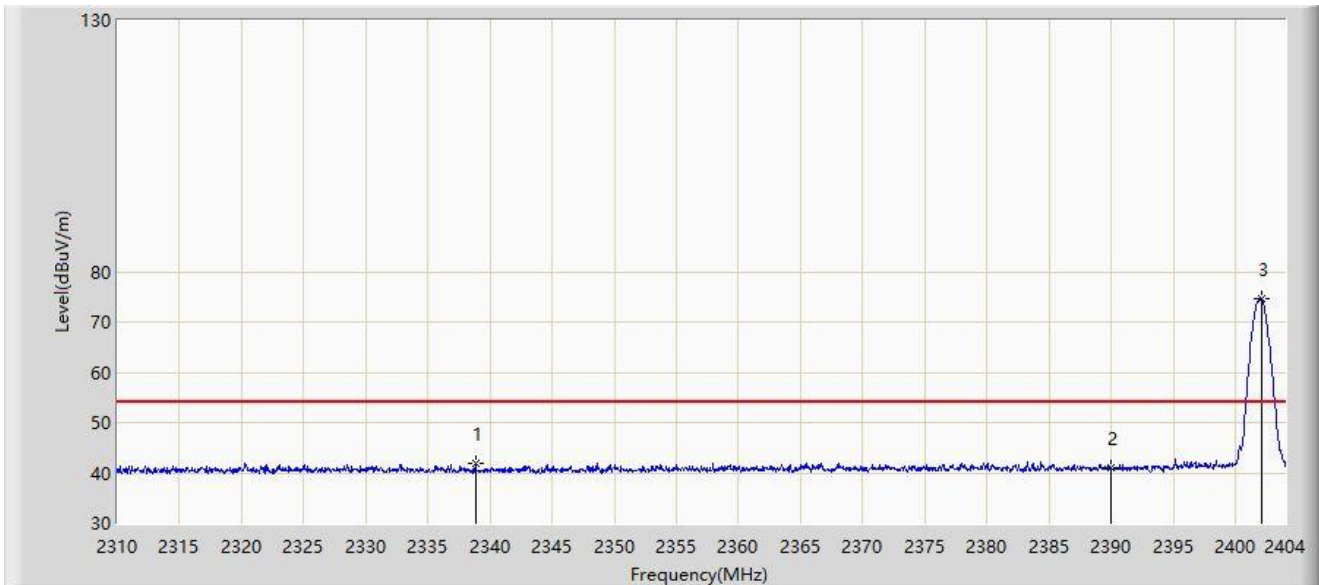


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2338.811	41.997	9.092	-12.003	54.000	32.905	AV
2		2390.000	40.919	7.771	-13.081	54.000	33.148	AV
3		2402.073	74.695	41.513	N/A	N/A	33.182	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

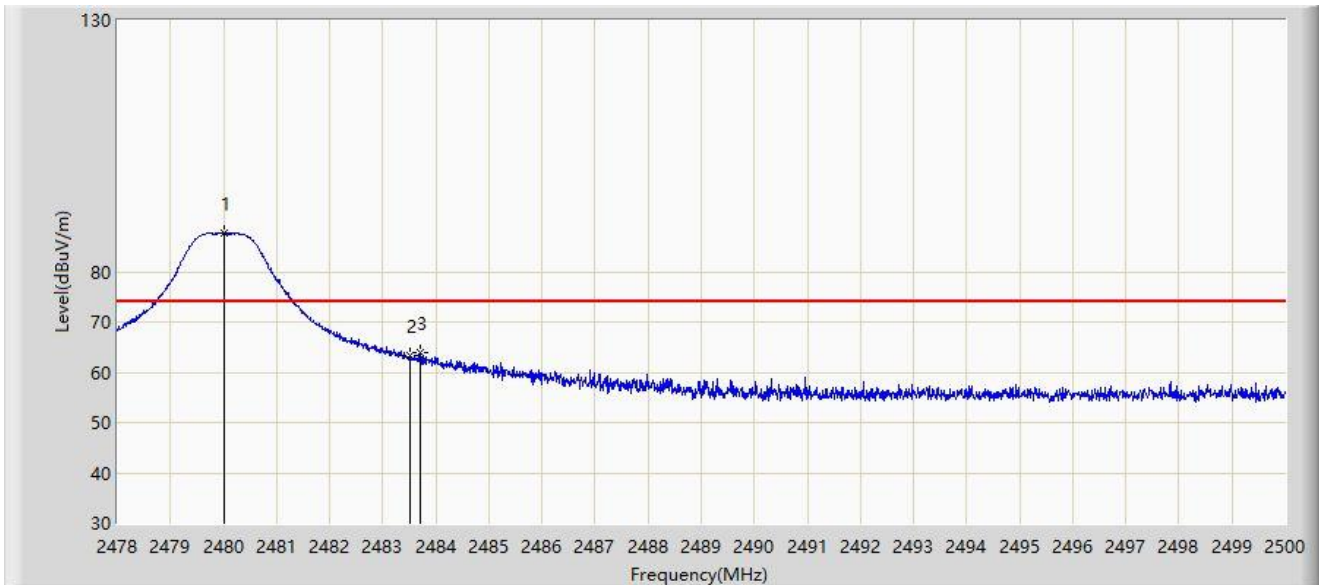


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.013	87.623	54.207	N/A	N/A	33.416	PK
2		2483.500	63.419	29.979	-10.581	74.000	33.440	PK
3	*	2483.720	63.844	30.402	-10.156	74.000	33.442	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

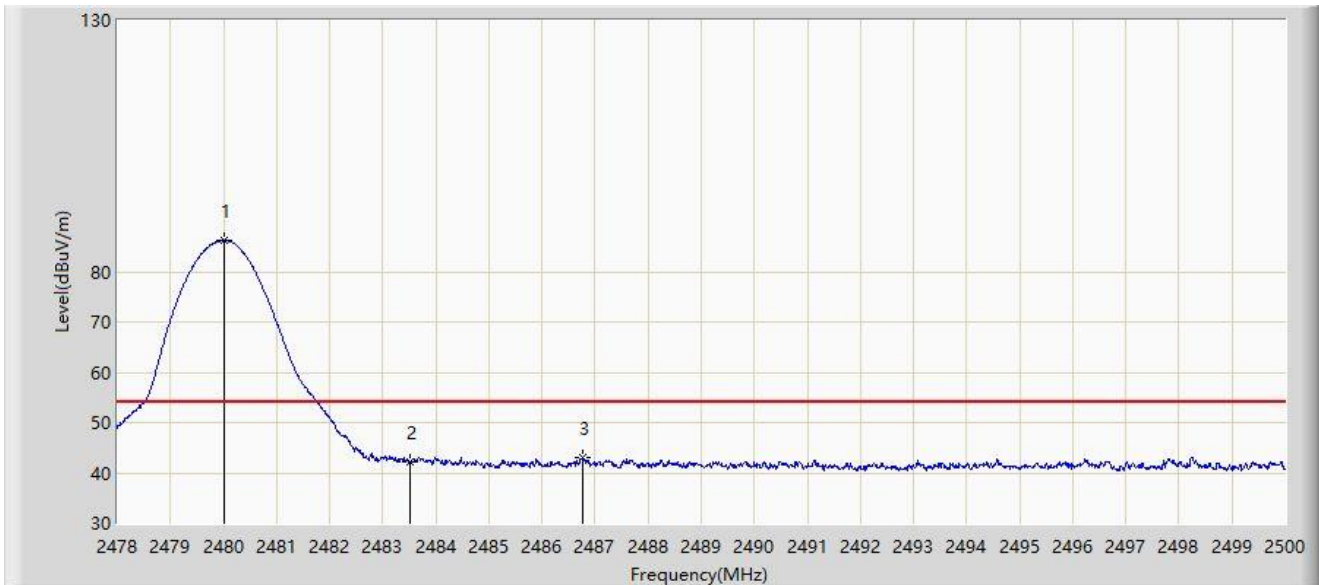


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	86.201	52.785	N/A	N/A	33.416	AV
2		2483.500	42.164	8.724	-11.836	54.000	33.440	AV
3	*	2486.756	42.966	9.503	-11.034	54.000	33.463	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

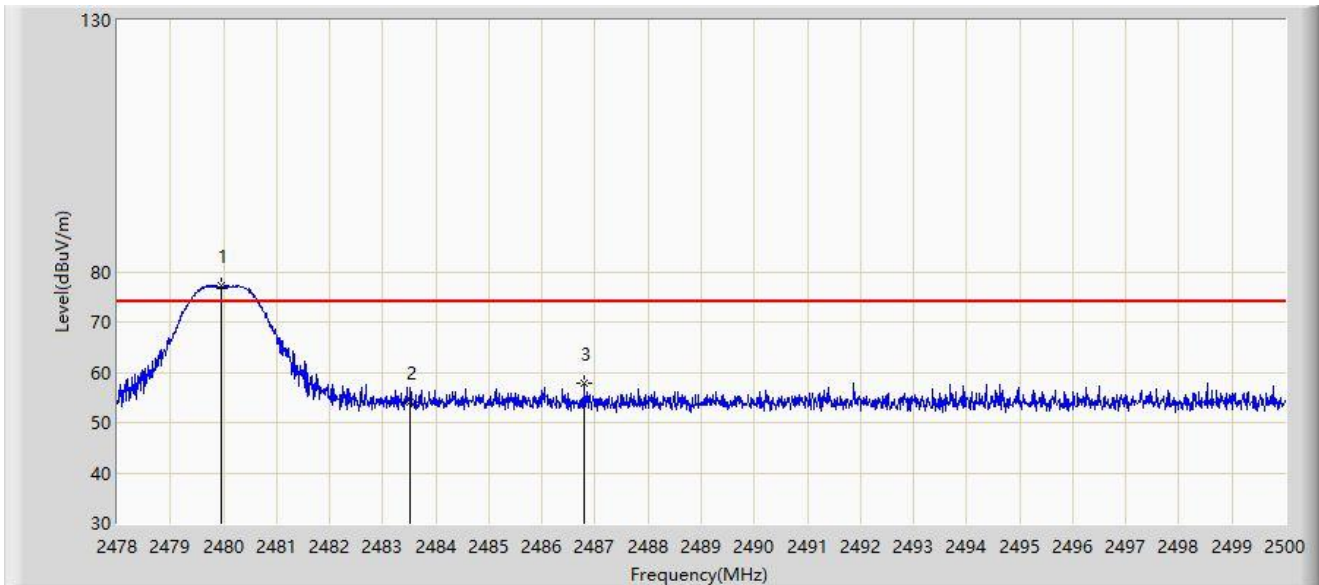


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.947	77.296	43.880	N/A	N/A	33.415	PK
2		2483.500	54.087	20.647	-19.913	74.000	33.440	PK
3	*	2486.800	57.964	24.501	-16.036	74.000	33.463	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

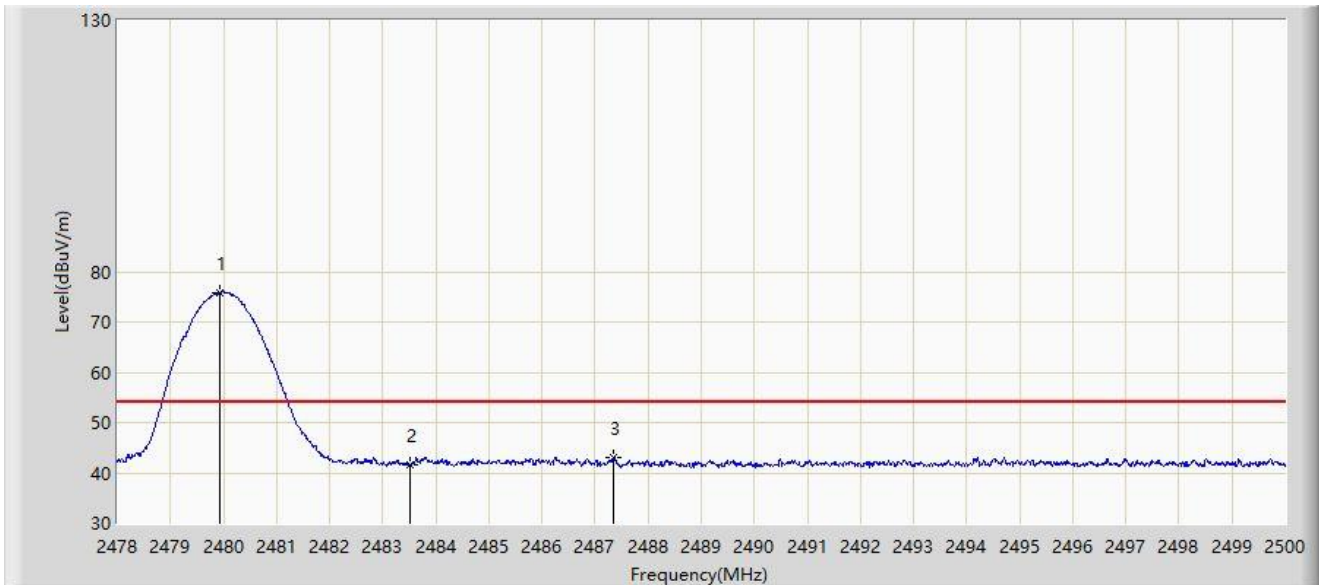


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.936	75.849	42.434	N/A	N/A	33.415	AV
2		2483.500	41.521	8.081	-12.479	54.000	33.440	AV
3	*	2487.339	43.126	9.659	-10.874	54.000	33.466	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

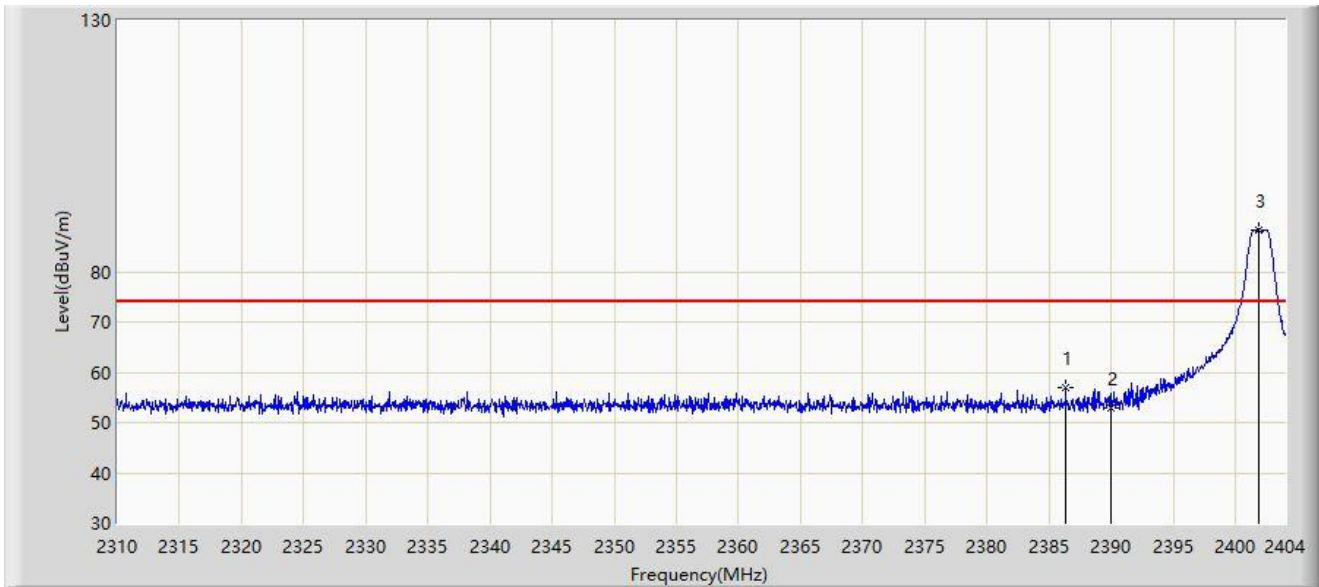


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.328	56.964	24.561	-17.036	74.000	32.404	PK
2		2390.000	52.987	20.604	-21.013	74.000	32.382	PK
3		2401.838	88.385	56.037	N/A	N/A	32.347	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

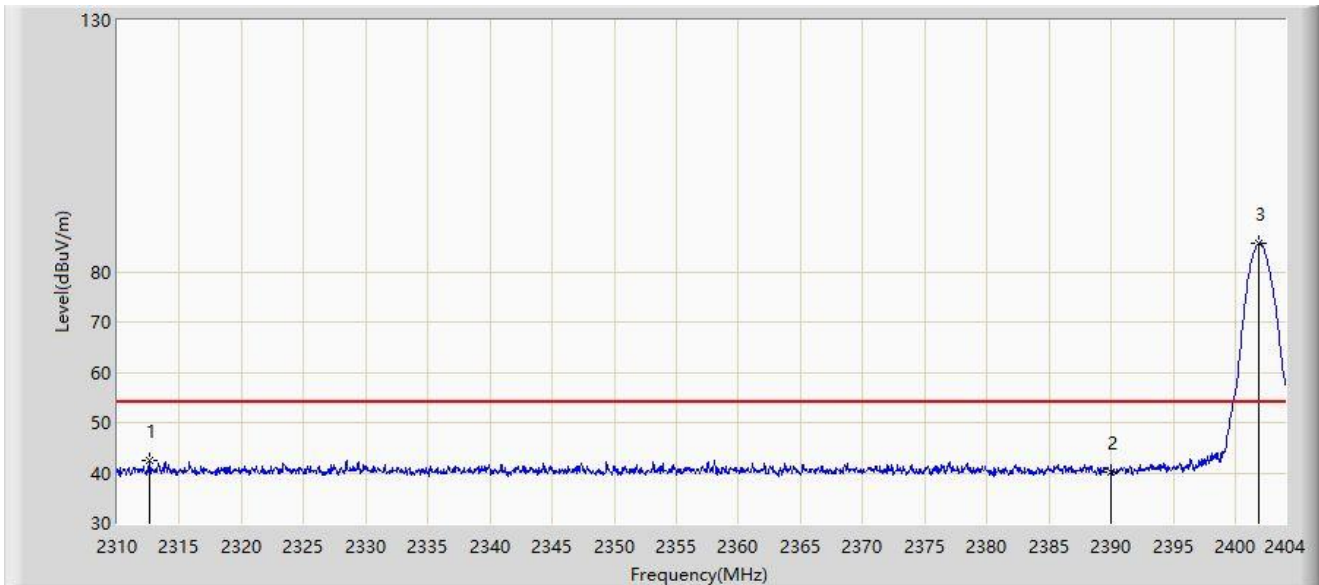


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2312.585	42.465	9.818	-11.535	54.000	32.647	AV
2		2390.000	40.243	7.860	-13.757	54.000	32.382	AV
3		2401.932	85.765	53.418	N/A	N/A	32.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

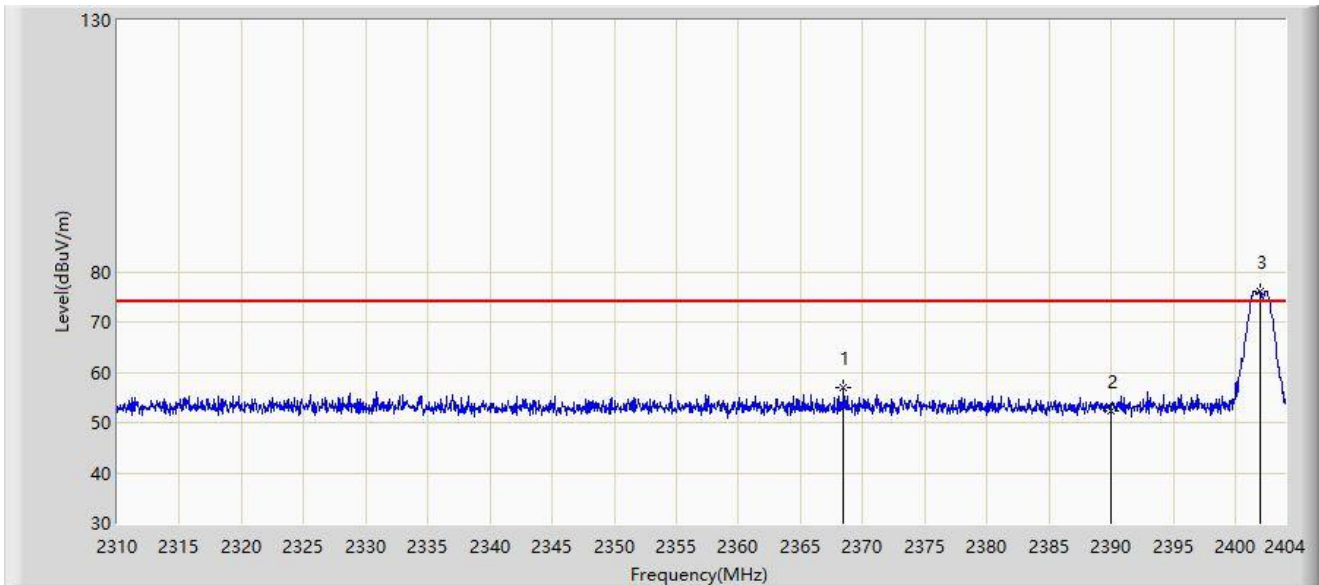


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2368.468	56.992	24.528	-17.008	74.000	32.464	PK
2		2390.000	52.321	19.938	-21.679	74.000	32.382	PK
3		2401.979	76.213	43.866	N/A	N/A	32.347	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

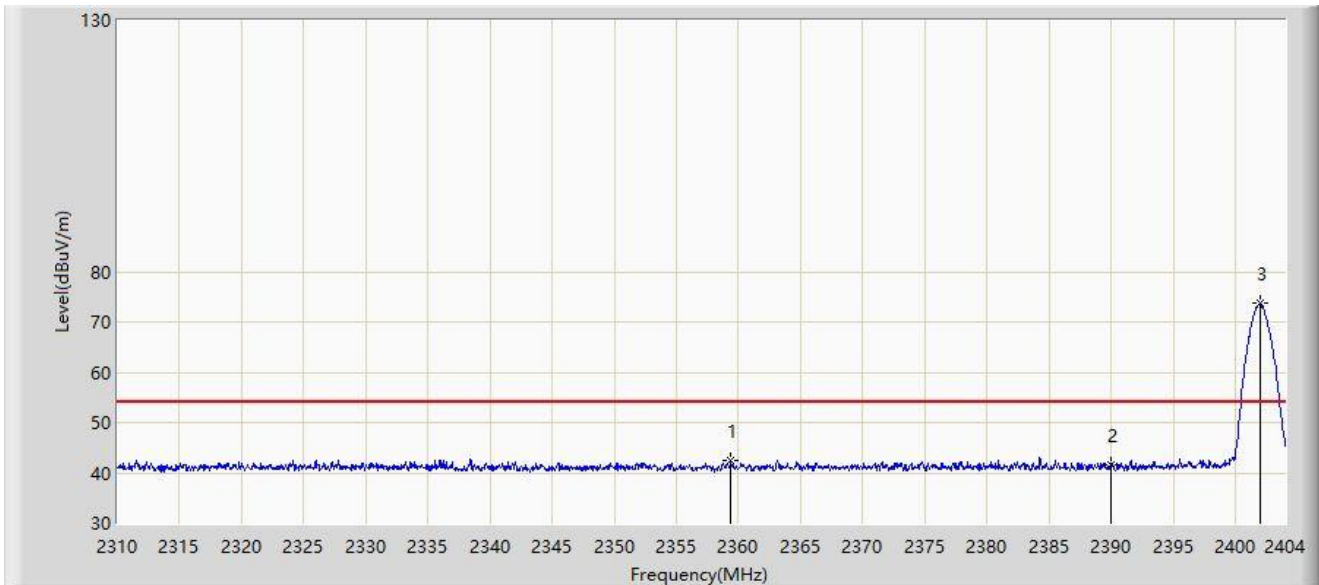


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2359.397	42.473	10.007	-11.527	54.000	32.466	AV
2		2390.000	41.693	9.310	-12.307	54.000	32.382	AV
3		2401.979	73.746	41.399	N/A	N/A	32.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

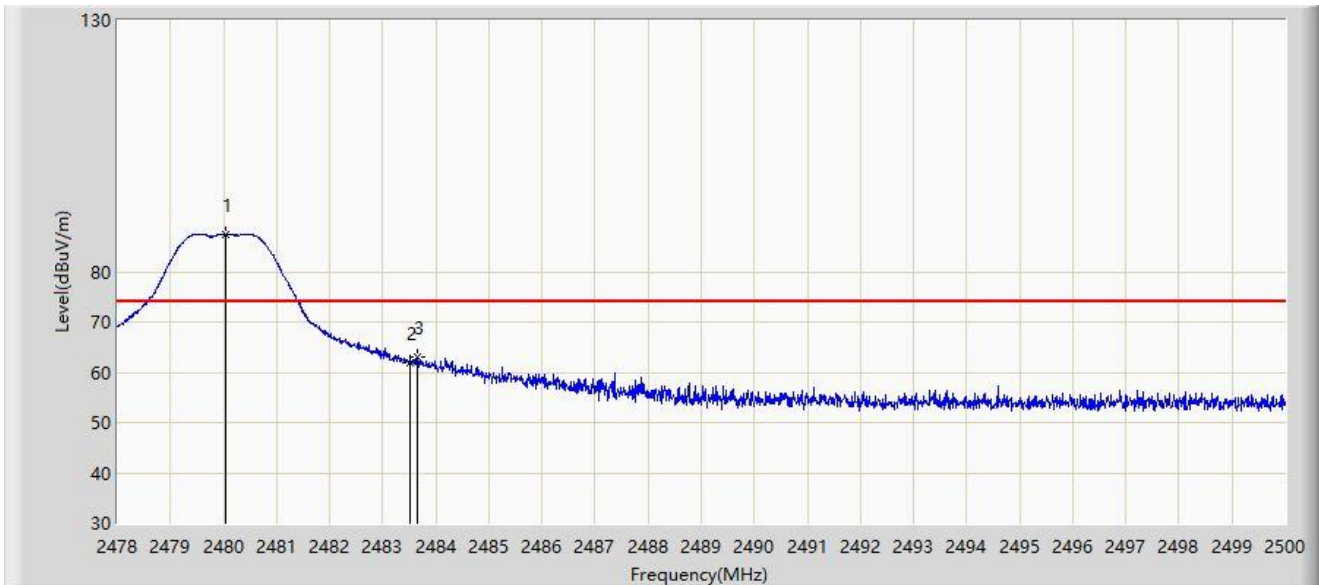

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.046	87.462	55.251	N/A	N/A	32.212	PK
2		2483.500	61.864	29.641	-12.136	74.000	32.222	PK
3	*	2483.654	63.051	30.828	-10.949	74.000	32.223	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.947	84.846	52.635	N/A	N/A	32.211	AV
2		2483.500	42.686	10.463	-11.314	54.000	32.222	AV
3	*	2483.665	43.382	11.159	-10.618	54.000	32.223	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

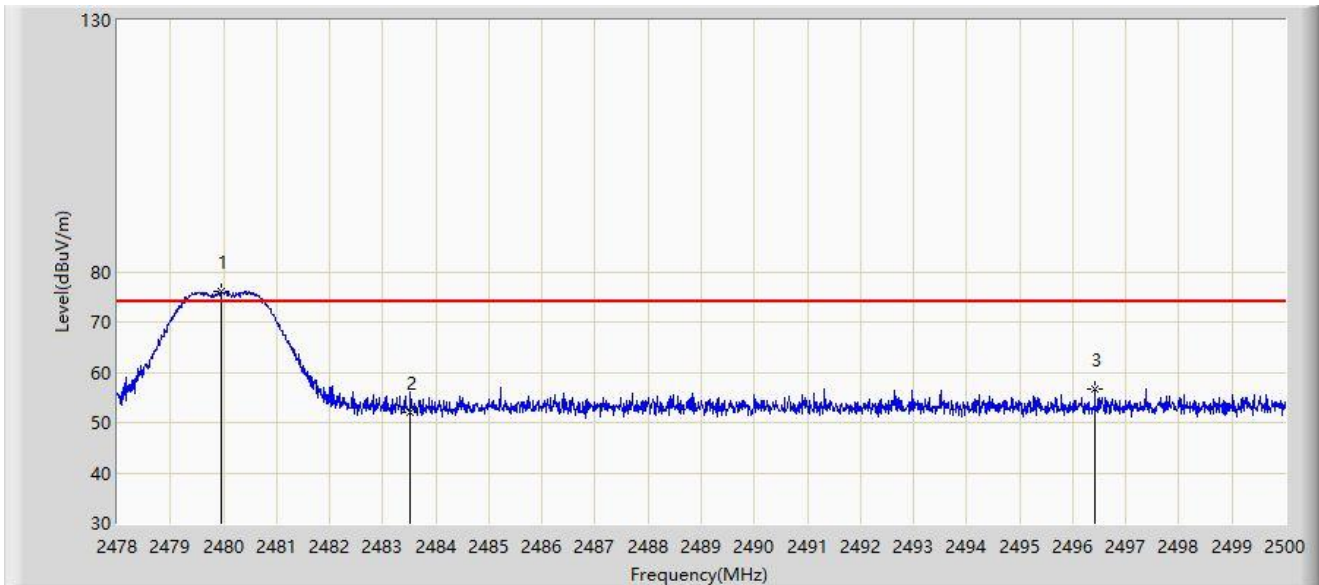


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.958	76.130	43.919	N/A	N/A	32.211	PK
2		2483.500	51.969	19.746	-22.031	74.000	32.222	PK
3	*	2496.414	56.776	24.512	-17.224	74.000	32.264	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-24
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

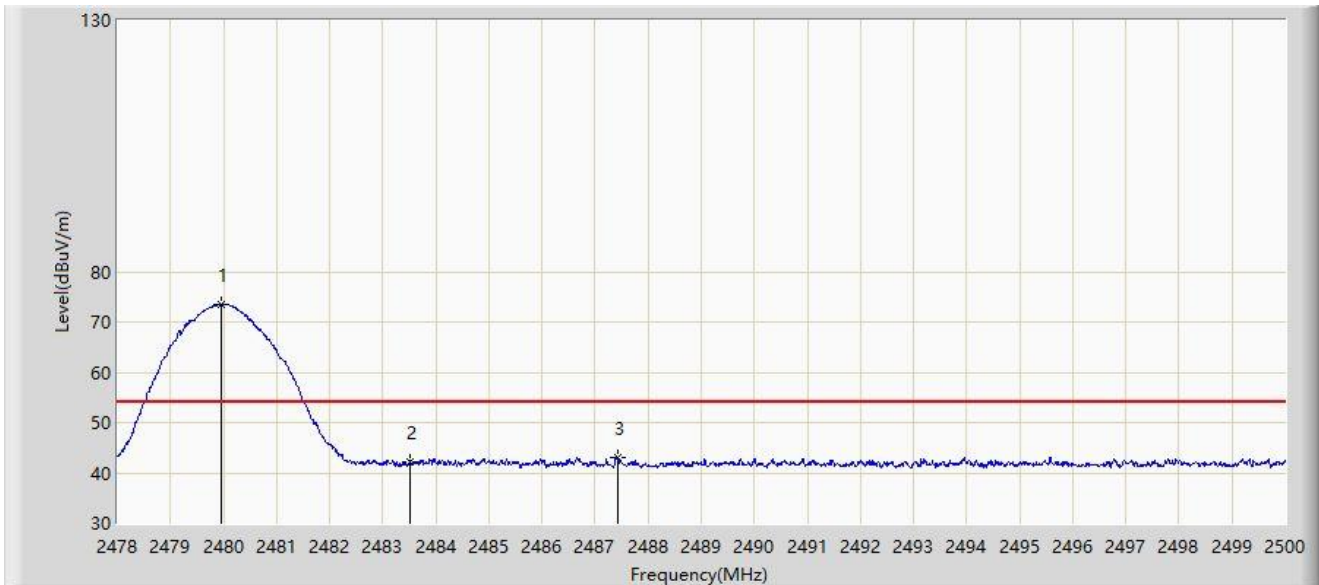

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.969	73.453	41.242	N/A	N/A	32.212	AV
2		2483.500	42.157	9.934	-11.843	54.000	32.222	AV
3	*	2487.427	42.927	10.692	-11.073	54.000	32.236	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

MHCB05P-B:

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

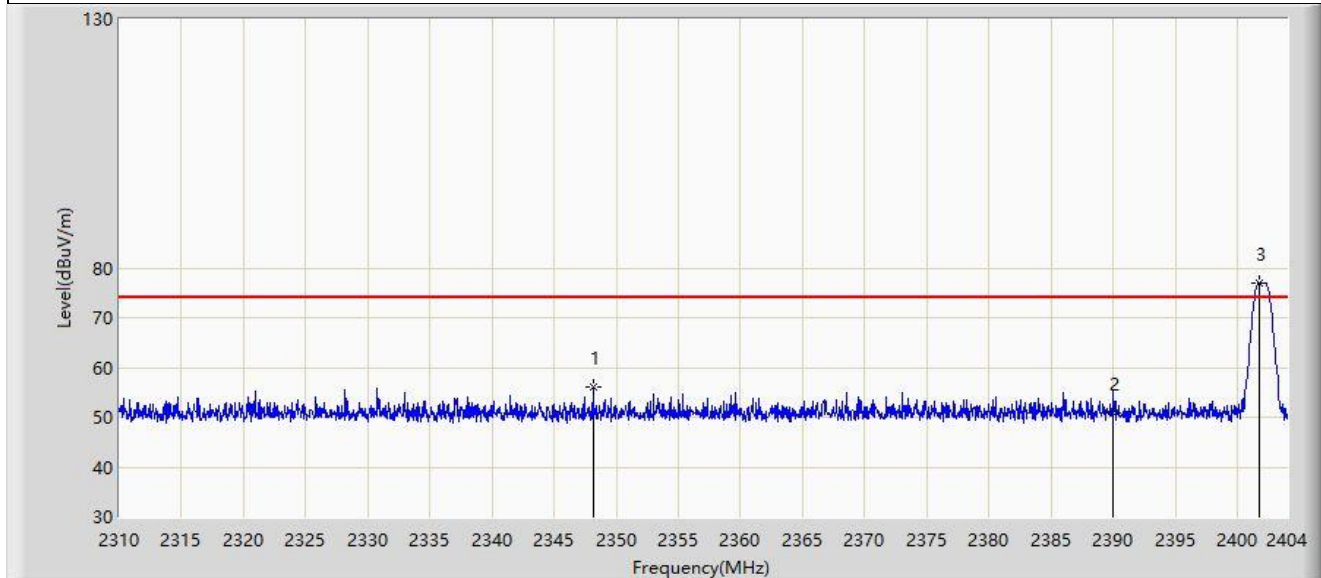


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2348.117	56.051	23.681	-17.949	74.000	32.370	PK
2		2390.000	50.950	18.567	-23.050	74.000	32.382	PK
3		2401.791	77.059	44.711	N/A	N/A	32.348	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

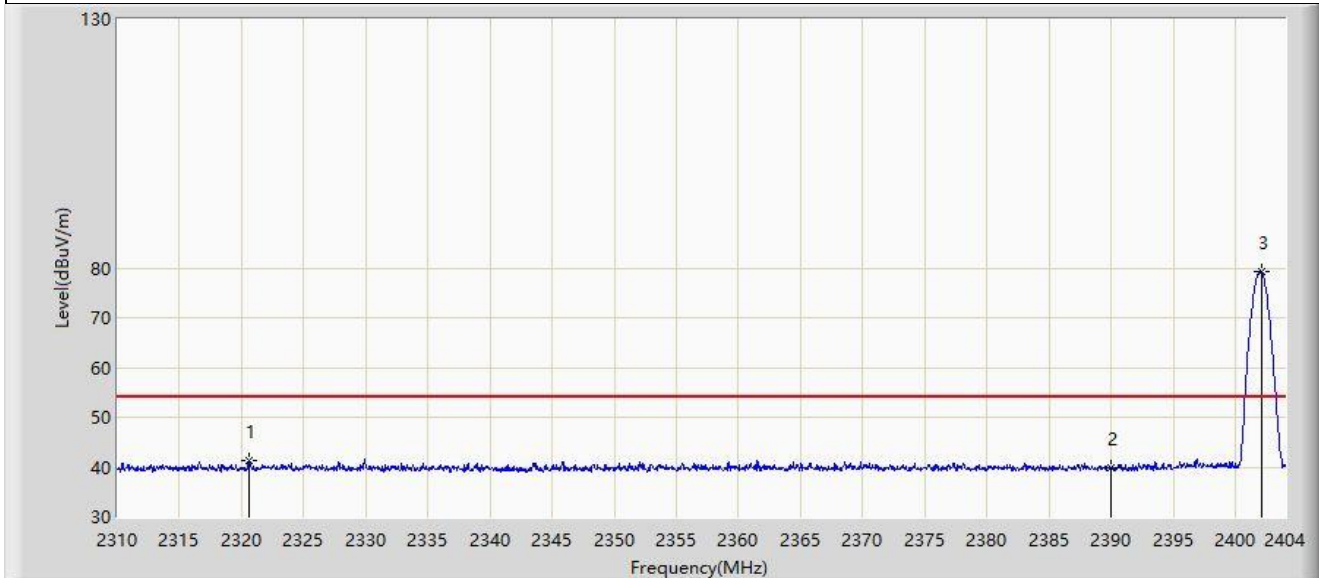


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2320.622	41.366	8.727	-12.634	54.000	32.639	AV
2		2390.000	39.834	7.451	-14.166	54.000	32.382	AV
3		2402.073	79.283	46.936	N/A	N/A	32.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

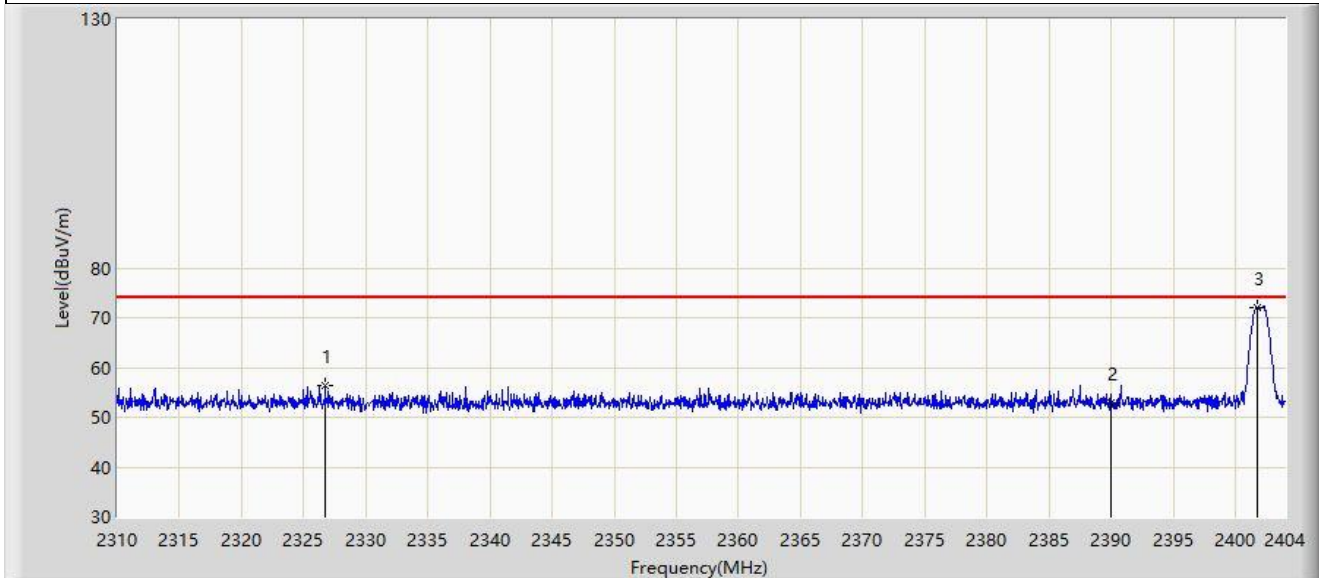


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2326.732	56.393	23.772	-17.607	74.000	32.621	PK
2		2390.000	52.873	20.490	-21.127	74.000	32.382	PK
3		2401.744	72.159	39.811	N/A	N/A	32.348	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2402MHz	

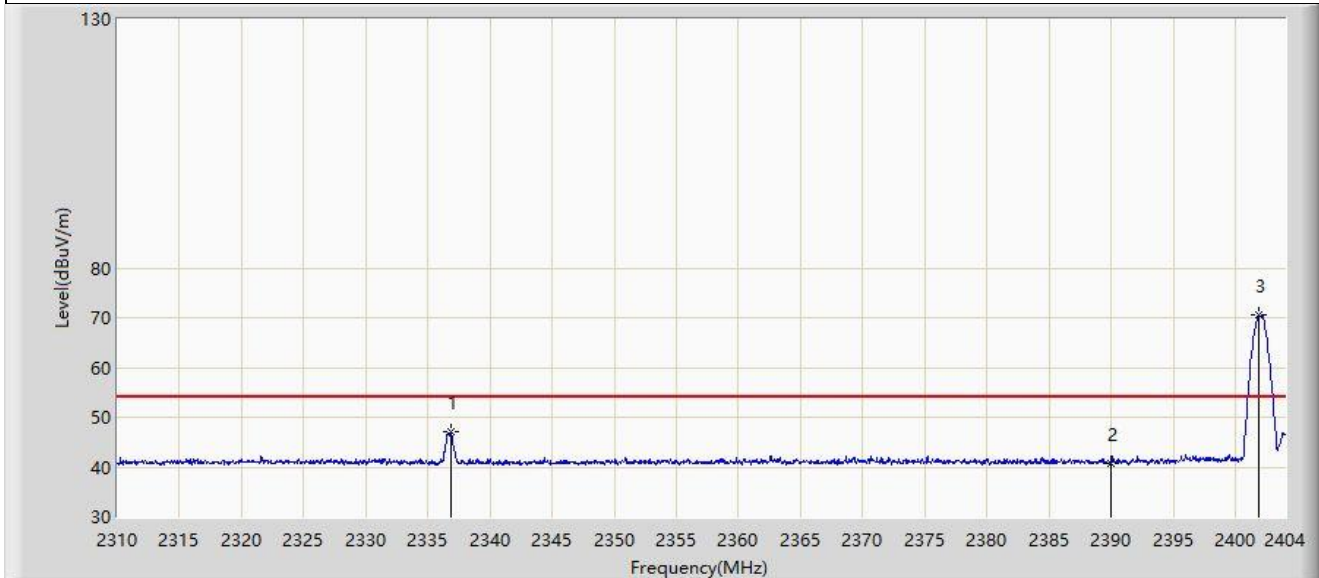


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2336.837	46.957	14.519	-7.043	54.000	32.439	AV
2		2390.000	40.818	8.435	-13.182	54.000	32.382	AV
3		2401.932	70.649	38.302	N/A	N/A	32.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

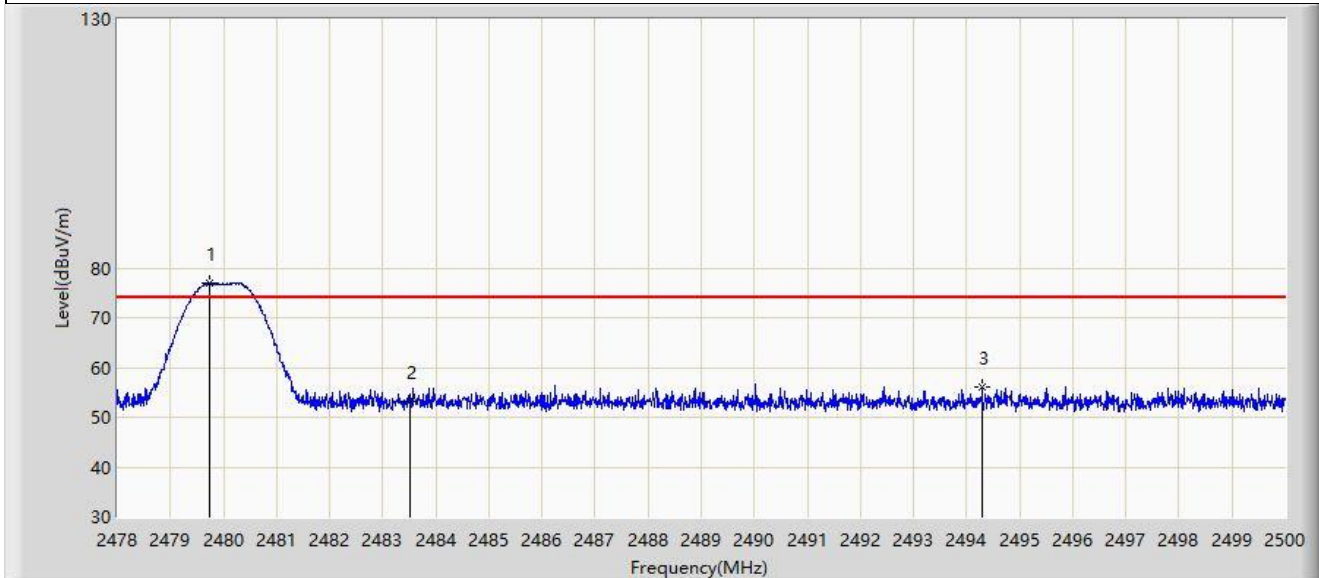


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.738	77.091	44.881	N/A	N/A	32.211	PK
2		2483.500	53.271	21.048	-20.729	74.000	32.222	PK
3	*	2494.291	56.099	23.842	-17.901	74.000	32.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

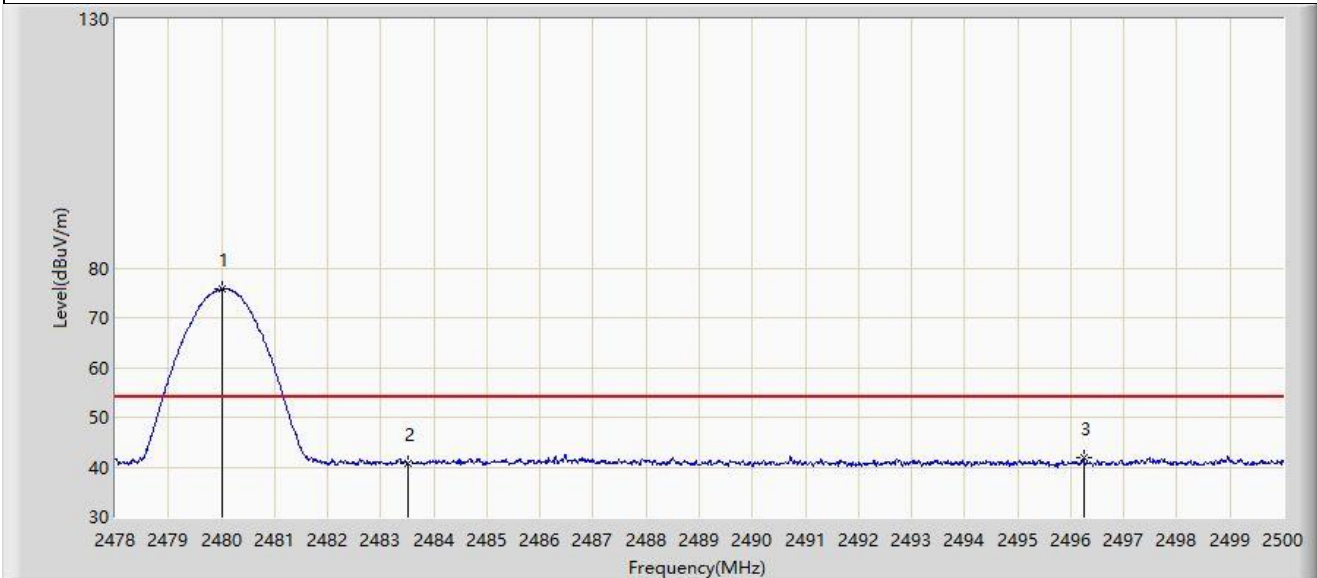


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.024	75.845	43.634	N/A	N/A	32.212	AV
2		2483.500	40.696	8.473	-13.304	54.000	32.222	AV
3	*	2496.238	41.888	9.625	-12.112	54.000	32.263	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

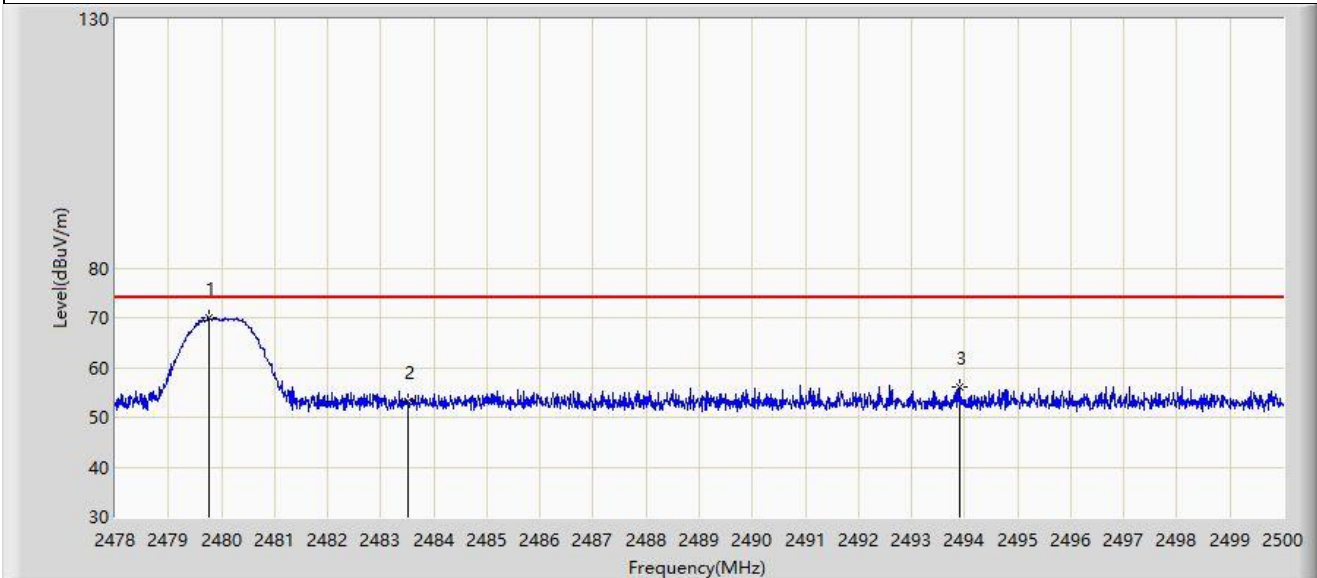


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.771	69.992	37.782	N/A	N/A	32.211	PK
2		2483.500	53.247	21.024	-20.753	74.000	32.222	PK
3	*	2493.906	56.139	23.883	-17.861	74.000	32.256	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 1M at 2480MHz	

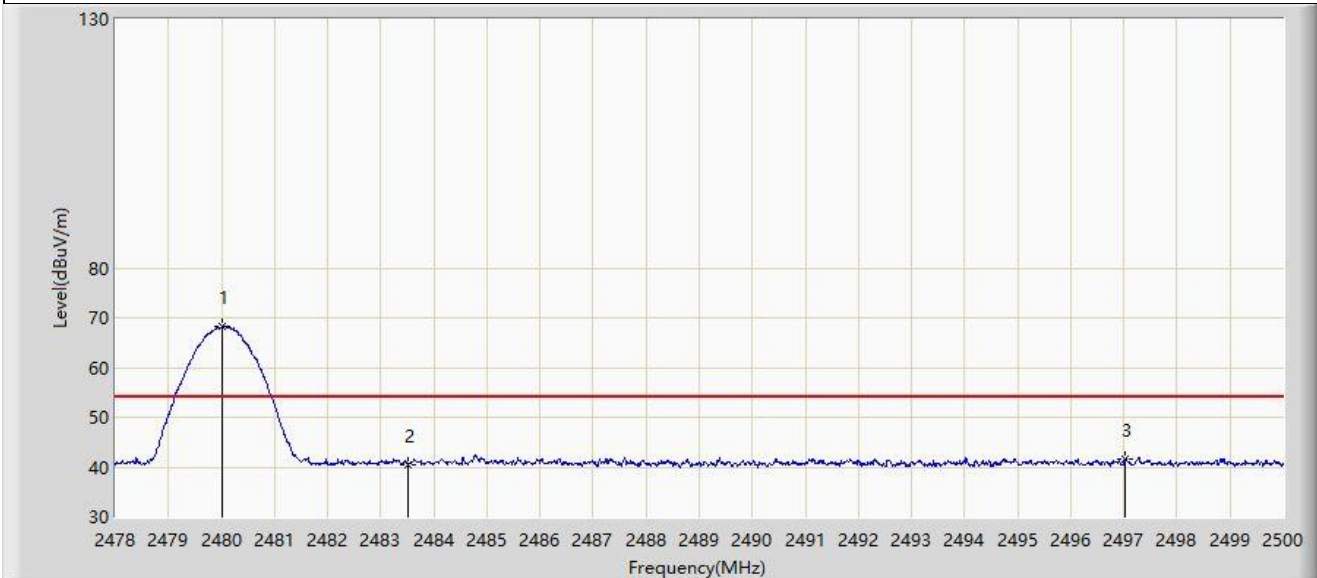


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	68.124	35.913	N/A	N/A	32.212	AV
2		2483.500	40.360	8.137	-13.640	54.000	32.222	AV
3	*	2497.030	41.654	9.389	-12.346	54.000	32.265	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

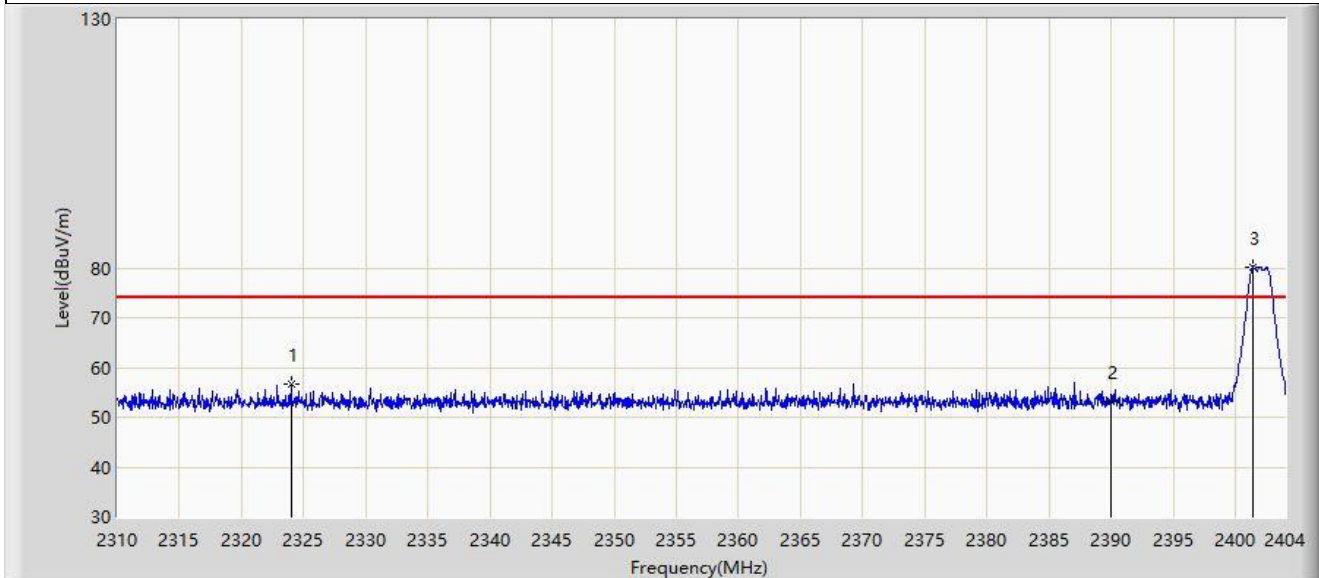


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2323.959	56.745	24.109	-17.255	74.000	32.636	PK
2		2390.000	53.153	20.770	-20.847	74.000	32.382	PK
3		2401.415	80.267	47.919	N/A	N/A	32.348	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

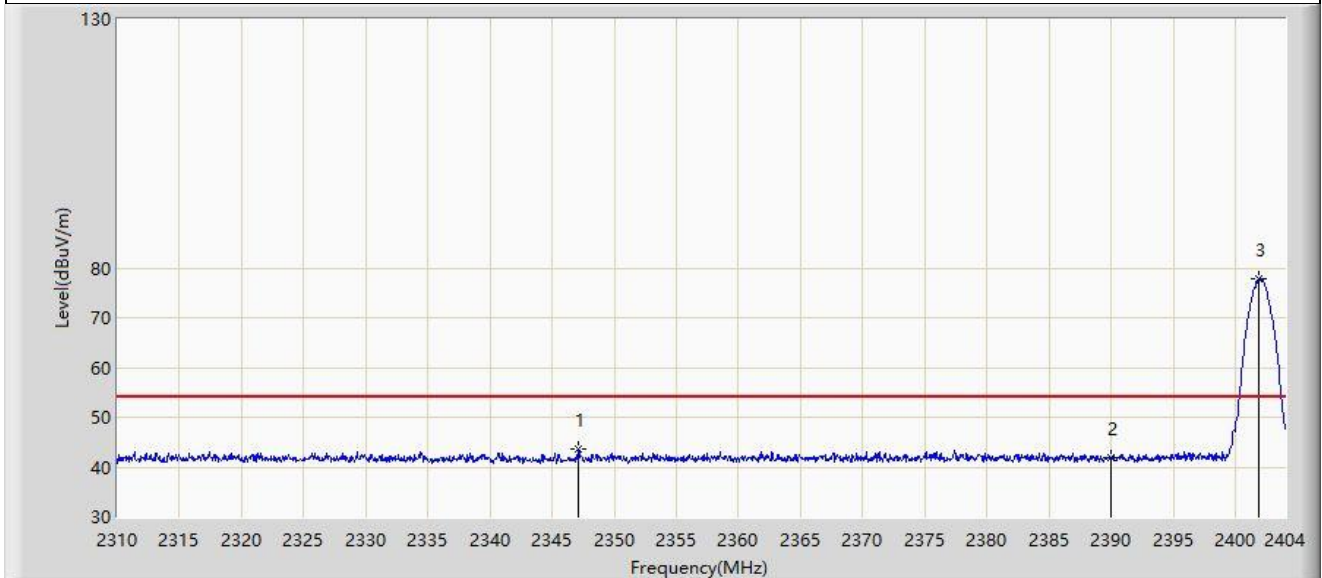


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2347.130	43.487	11.125	-10.513	54.000	32.362	AV
2		2390.000	41.937	9.554	-12.063	54.000	32.382	AV
3		2401.932	77.750	45.403	N/A	N/A	32.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

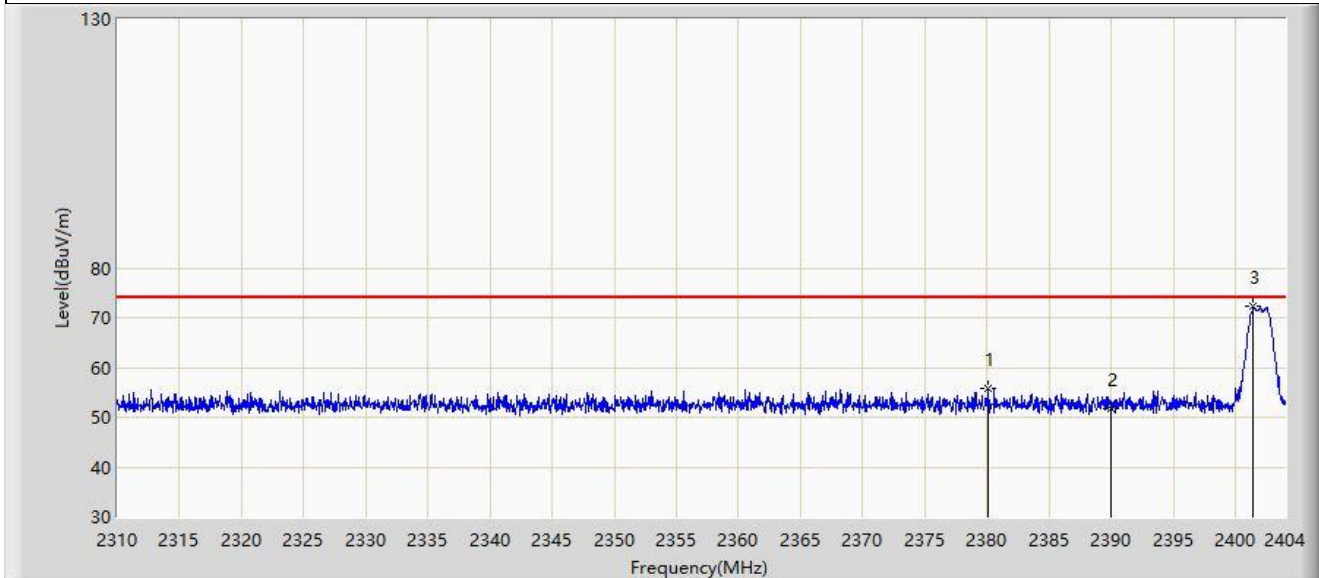


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2380.077	55.695	23.256	-18.305	74.000	32.439	PK
2		2390.000	51.835	19.452	-22.165	74.000	32.382	PK
3		2401.462	72.228	39.880	N/A	N/A	32.348	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2402MHz	

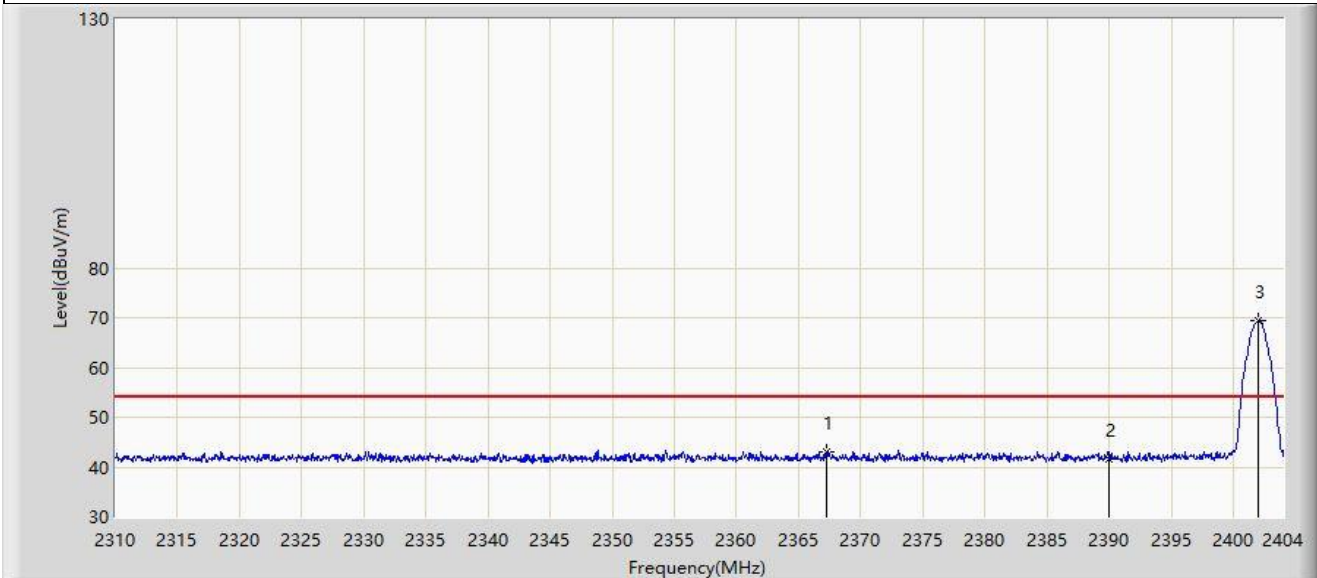


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2367.293	43.073	10.608	-10.927	54.000	32.464	AV
2		2390.000	41.486	9.103	-12.514	54.000	32.382	AV
3		2401.979	69.366	37.019	N/A	N/A	32.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

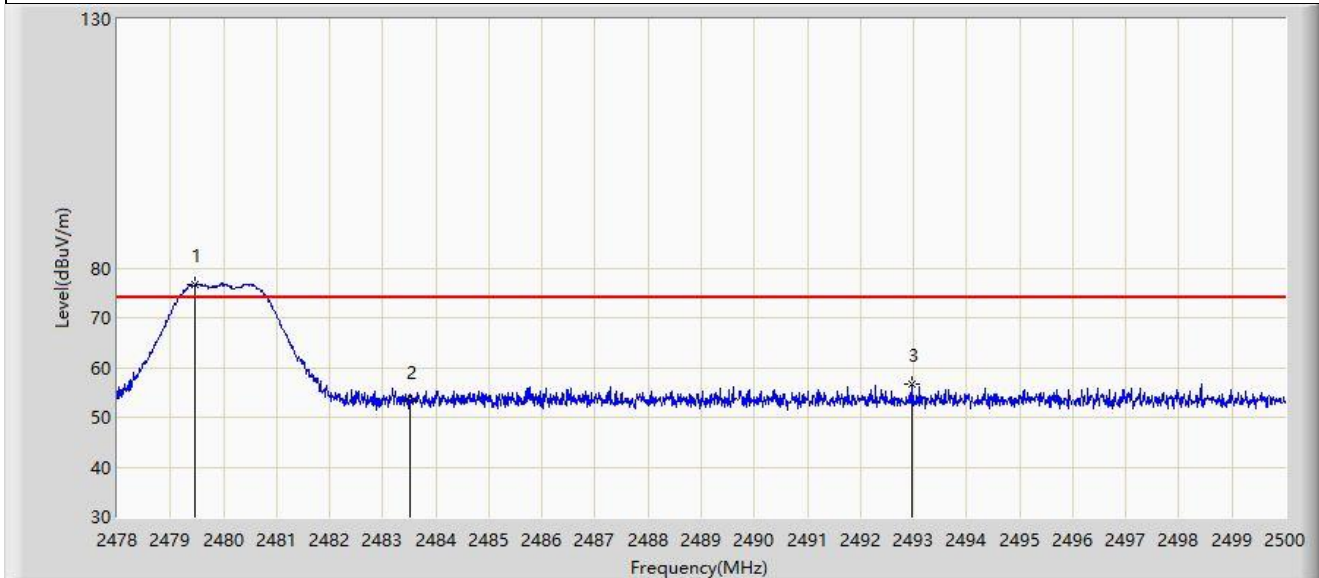


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.456	76.805	44.596	N/A	N/A	32.210	PK
2		2483.500	53.222	20.999	-20.778	74.000	32.222	PK
3	*	2492.980	56.577	24.324	-17.423	74.000	32.253	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

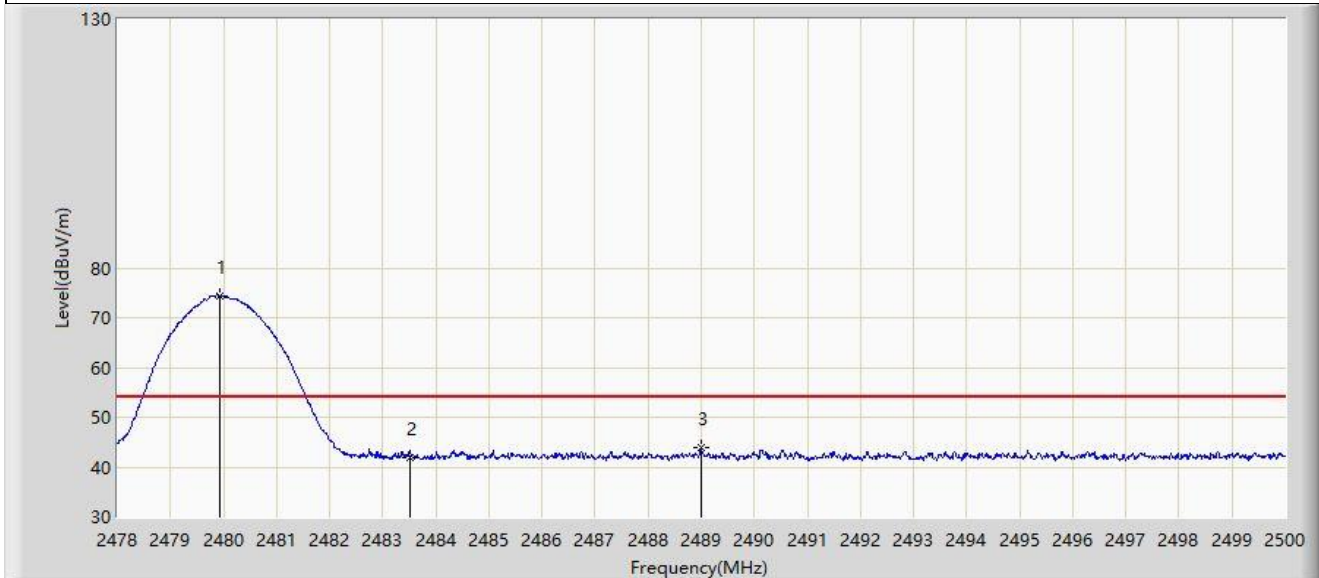


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.936	74.412	42.201	N/A	N/A	32.211	AV
2		2483.500	41.981	9.758	-12.019	54.000	32.222	AV
3	*	2488.989	43.901	11.661	-10.099	54.000	32.240	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

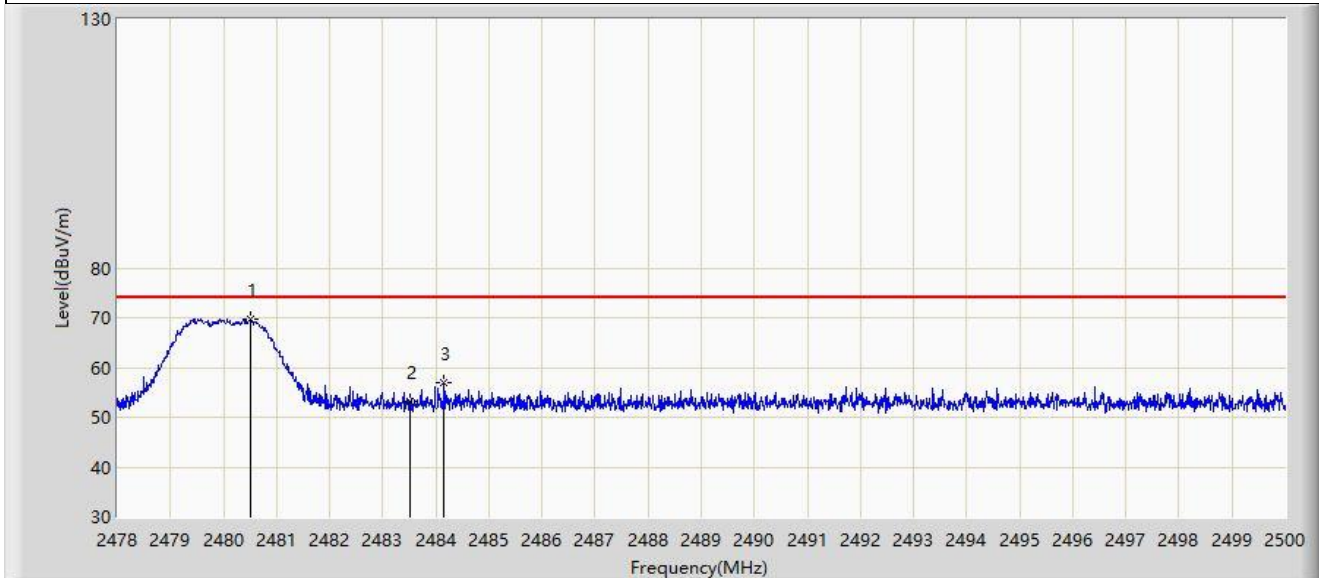


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.519	69.652	37.439	N/A	N/A	32.213	PK
2		2483.500	53.330	21.107	-20.670	74.000	32.222	PK
3	*	2484.160	56.861	24.636	-17.139	74.000	32.225	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC2	Test Date: 2023-07-22
Limit: FCC Part15.209_RSE(3m)	Engineer: Mero Zhou
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: Segway SuperScooter ST2 Pro	Power: By PC
Test Mode: Transmit by BLE 2M at 2480MHz	

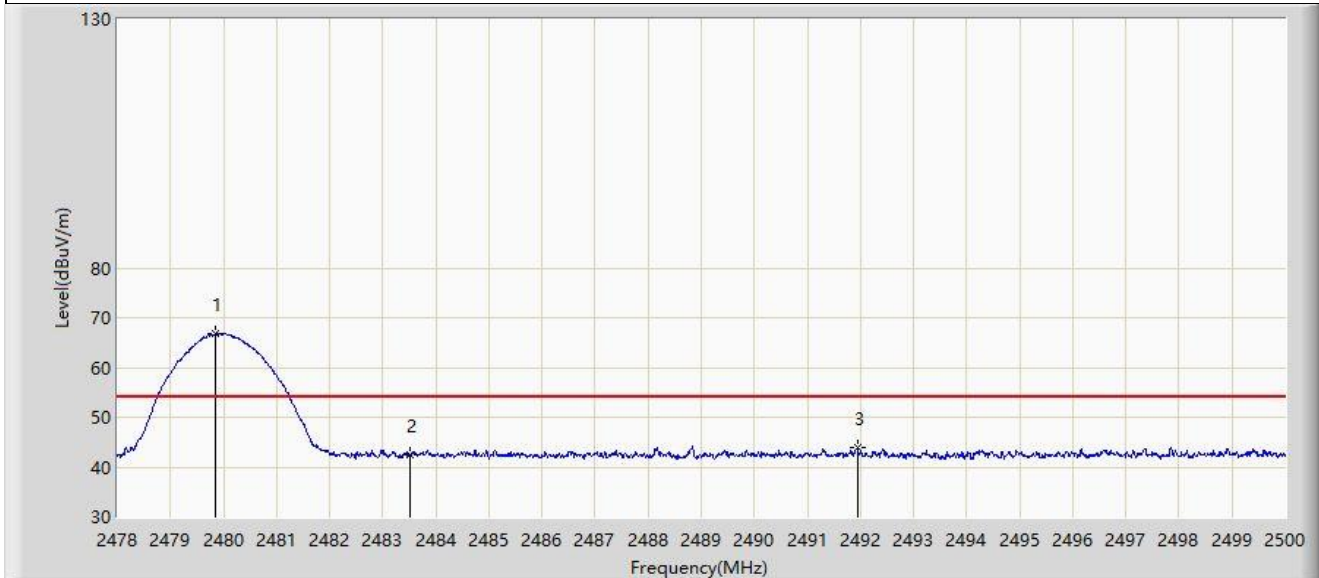

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.848	66.931	34.720	N/A	N/A	32.211	AV
2		2483.500	42.338	10.115	-11.662	54.000	32.222	AV
3	*	2491.937	43.921	11.671	-10.079	54.000	32.250	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: SIP-SR2	Test Data: 2023-08-24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Violet Tao
Temperature: 26.4°C	Humidity: 60.4%
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: Segway SuperScooter ST2 Pro	Power: AC 120V/60Hz

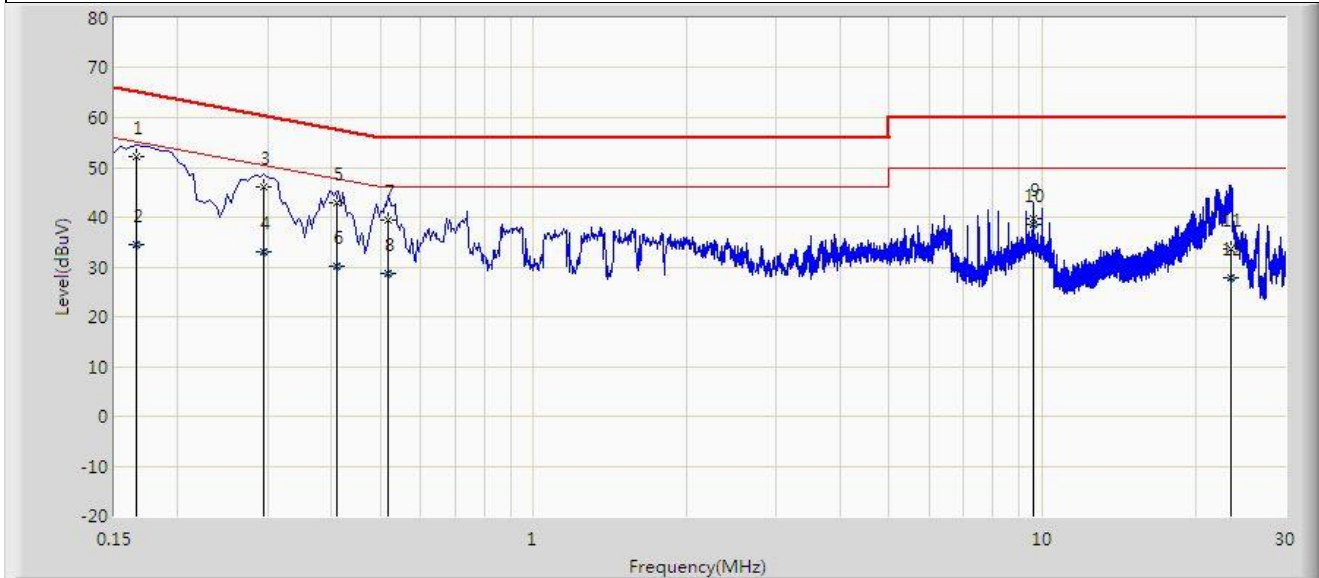Test Mode: Transmit by BLE 1M at 2402MHz - GR5515


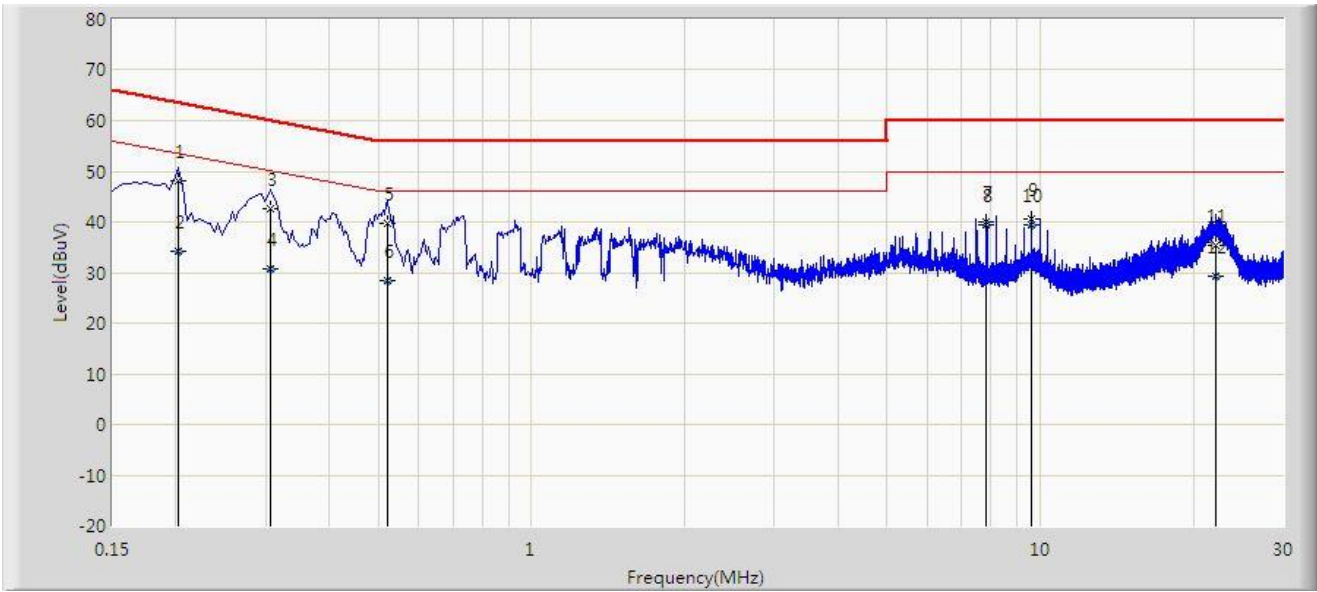
No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.166	52.116	42.162	-13.042	65.158	9.954	QP
2		0.166	34.367	24.413	-20.791	55.158	9.954	AV
3		0.294	46.211	36.446	-14.199	60.411	9.765	QP
4		0.294	33.022	23.257	-17.388	50.411	9.765	AV
5		0.410	42.786	33.056	-14.863	57.648	9.730	QP
6		0.410	30.095	20.365	-17.553	47.648	9.730	AV
7		0.518	39.291	29.559	-16.709	56.000	9.732	QP
8		0.518	28.762	19.030	-17.238	46.000	9.732	AV
9		9.630	39.593	29.527	-20.407	60.000	10.066	QP
10	*	9.630	38.434	28.368	-11.566	50.000	10.066	AV
11		23.434	33.637	23.183	-26.363	60.000	10.454	QP
12		23.434	27.902	17.448	-22.098	50.000	10.454	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Data: 2023-08-24
Temperature: 26.4°C	Humidity: 60.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Violet Tao
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: Segway SuperScooter ST2 Pro	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz - GR5515	




No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.202	48.027	38.359	-15.501	63.528	9.668	QP
2		0.202	34.162	24.494	-19.365	53.528	9.668	AV
3		0.306	42.540	32.837	-17.539	60.078	9.702	QP
4		0.306	30.862	21.160	-19.216	50.078	9.702	AV
5		0.522	39.781	30.071	-16.219	56.000	9.710	QP
6		0.522	28.519	18.809	-17.481	46.000	9.710	AV
7		7.846	40.005	30.051	-19.995	60.000	9.954	QP
8		7.846	39.316	29.362	-10.684	50.000	9.954	AV
9		9.626	40.593	30.561	-19.407	60.000	10.033	QP
10	*	9.626	39.517	29.485	-10.483	50.000	10.033	AV
11		22.138	35.245	24.866	-24.755	60.000	10.379	QP
12		22.138	29.404	19.025	-20.596	50.000	10.379	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Data: 2023-08-24
Temperature: 26.4°C	Humidity: 60.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Violet Tao
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: Segway SuperScooter ST2 Pro	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz - MHCB05P-B	

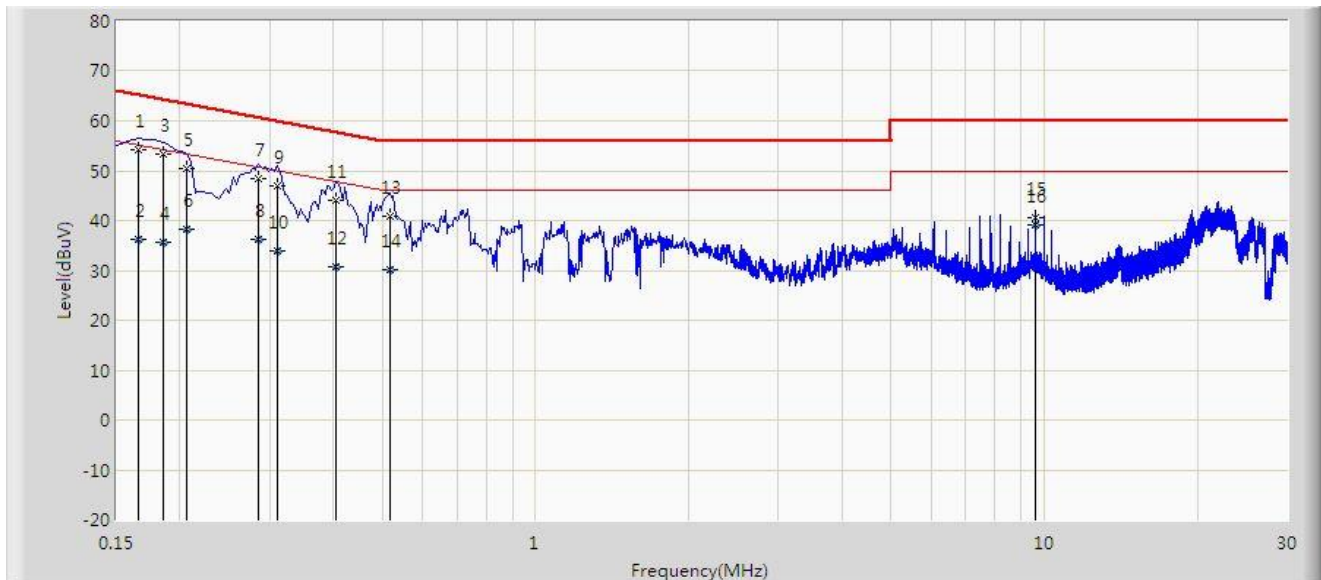


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.166	54.114	44.160	-11.044	65.158	9.954	QP
2		0.166	36.309	26.355	-18.849	55.158	9.954	AV
3	*	0.186	53.424	43.379	-10.789	64.213	10.045	QP
4		0.186	35.793	25.748	-18.420	54.213	10.045	AV
5		0.206	50.432	40.393	-12.933	63.365	10.039	QP
6		0.206	38.370	28.332	-14.995	53.365	10.039	AV
7		0.286	48.504	38.731	-12.136	60.640	9.774	QP
8		0.286	36.196	26.423	-14.443	50.640	9.774	AV
9		0.310	46.835	37.085	-13.136	59.970	9.750	QP
10		0.310	33.874	24.125	-16.096	49.970	9.750	AV
11		0.406	43.914	34.184	-13.816	57.730	9.730	QP
12		0.406	30.771	21.041	-16.959	47.730	9.730	AV
13		0.518	40.980	31.248	-15.020	56.000	9.732	QP
14		0.518	30.123	20.391	-15.877	46.000	9.732	AV
15		9.626	40.470	30.407	-19.530	60.000	10.063	QP
16		9.626	39.042	28.979	-10.958	50.000	10.063	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Data: 2023-08-24
Temperature: 26.4°C	Humidity: 60.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Violet Tao
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: Segway SuperScooter ST2 Pro	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz - MHCB05P-B	

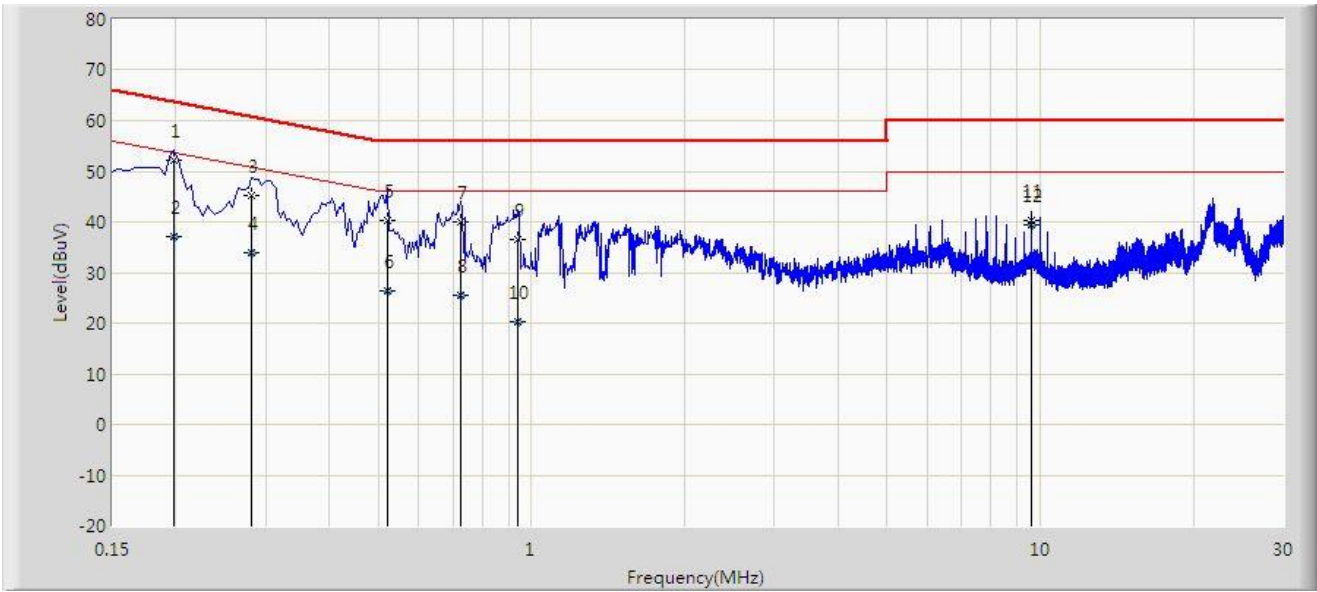

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.198	52.122	42.459	-11.572	63.694	9.663	QP
2		0.198	37.187	27.524	-16.507	53.694	9.663	AV
3		0.282	45.300	35.606	-15.457	60.757	9.694	QP
4		0.282	33.936	24.242	-16.820	50.757	9.694	AV
5		0.522	40.217	30.507	-15.783	56.000	9.710	QP
6		0.522	26.267	16.557	-19.733	46.000	9.710	AV
7		0.726	40.134	30.424	-15.866	56.000	9.710	QP
8		0.726	25.593	15.883	-20.407	46.000	9.710	AV
9		0.938	36.523	26.813	-19.477	56.000	9.710	QP
10		0.938	20.359	10.649	-25.641	46.000	9.710	AV
11		9.626	40.355	30.322	-19.645	60.000	10.033	QP
12	*	9.626	39.295	29.262	-10.705	50.000	10.033	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2307RSU032-UT" file.

Appendix C - EUT Photograph

Refer to "2307RSU032-UE" file.

_____ The End _____