

MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 Bluetooth LE

FCC ID: 2ALS8-PS0003
IC: 22636-PS0003
Applicant: Ninebot (Changzhou) Tech Co., Ltd.
Application Type: Certification
Product: Ninebot S Kids
Model No.: Kids A75C
Brand Name: Ninebot
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
ISED Rule Part(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013
Test Date: January 13 ~ 19, 2021

Reviewed By:

Vincent Yu

Vincent Yu

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2101RSU019-U2	Rev. 01	Initial Report	03-18-2021	Valid

CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Testing Facility	5
2. PRODUCT INFORMATION.....	6
2.1. Feature of Equipment under Test.....	6
2.2. Product Specification Subjective to this report	6
2.3. Working Frequencies for this report	7
2.4. Test Mode	7
2.5. Test Environment Condition	7
2.6. Test Software	7
2.7. Description of Test Configuration	8
2.8. Test System Details	8
2.9. Duty Cycle.....	9
3. ANTENNA REQUIREMENTS	10
4. TEST EQUIPMENT CALIBRATION DATE	11
5. MEASUREMENT UNCERTAINTY	13
6. TEST RESULT	14
6.1. Summary	14
6.2. Occupied Bandwidth Measurement	14
6.2.1. Test Limit	15
6.2.2. Test Procedure used	15
6.2.3. Test Setting.....	15
6.2.4. Test Setup	16
6.2.5. Test Result.....	17
6.3. Output Power Measurement	19
6.3.1. Test Limit	19
6.3.2. Test Procedure Used.....	19
6.3.3. Test Setting.....	19
6.3.4. Test Setup	20
6.3.5. Test Result of Output Power.....	21
6.4. Power Spectral Density Measurement	22
6.4.1. Test Limit	22
6.4.2. Test Procedure Used.....	22

6.4.3.	Test Setting.....	22
6.4.4.	Test Setup	22
6.4.5.	Test Result.....	23
6.5.	Conducted Band Edge and Out-of-Band Emissions	24
6.5.1.	Test Limit	24
6.5.2.	Test Procedure Used.....	24
6.5.3.	Test Settintg.....	24
6.5.4.	Test Setup	25
6.5.5.	Test Result.....	26
6.6.	Radiated Spurious Emission Measurement	28
6.6.1.	Test Limit	28
6.6.2.	Test Procedure Used.....	29
6.6.3.	Test Setting.....	29
6.6.4.	Test Setup	30
6.6.5.	Test Result.....	32
6.7.	Radiated Restricted Band Edge Measurement	37
6.7.1.	Test Limit	37
6.7.2.	Test Procedure Used.....	40
6.7.3.	Test Setting.....	40
6.7.4.	Test Setup	41
6.7.5.	Test Result.....	42
6.8.	AC Conducted Emissions Measurement.....	50
6.8.1.	Test Limit	50
6.8.2.	Test Setup	50
6.8.3.	Test Result.....	51
7.	CONCLUSION.....	53
	Appendix A - Test Setup Photograph.....	54
	Appendix B - EUT Photograph	55

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name	Ninebot S Kids
Model No.	Kids A75C
Brand Name	Ninebot
HVIN	Kids A75C
PMN	Kids A75C
S/N	N5MAL2101C0019
Accessories	
Adapter	MODEL: NBW42D000D6N-US INPUT: 100 - 240V ~ 50/60Hz 0.7A Max OUTPUT: 42V 0.6A

2.2. Product Specification Subjective to this report

Bluetooth Specification	V4.1 (BLE only)
Frequency Range	2402 ~ 2480MHz
Channel Number	40
Data Rate	1Mbps
Modulation	GFSK
Antenna Type	PCB Antenna
Antenna Gain	-1.26dBi

Note: Above information is declared by manufacturer.

2.3. Working Frequencies for this report

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2.4. Test Mode

Test Mode	Mode 1: Transmit by BLE
-----------	-------------------------

2.5. Test Environment Condition



Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~ 75%RH

2.6. Test Software

The test utility software used during testing was “nRFgo Studio”, and the version was 1.12.1.1992. Power parameter values refer to operation description.

2.7. Description of Test Configuration

The ANSI C63.10: 2013 was used to reference the appropriate EUT setup for testing.

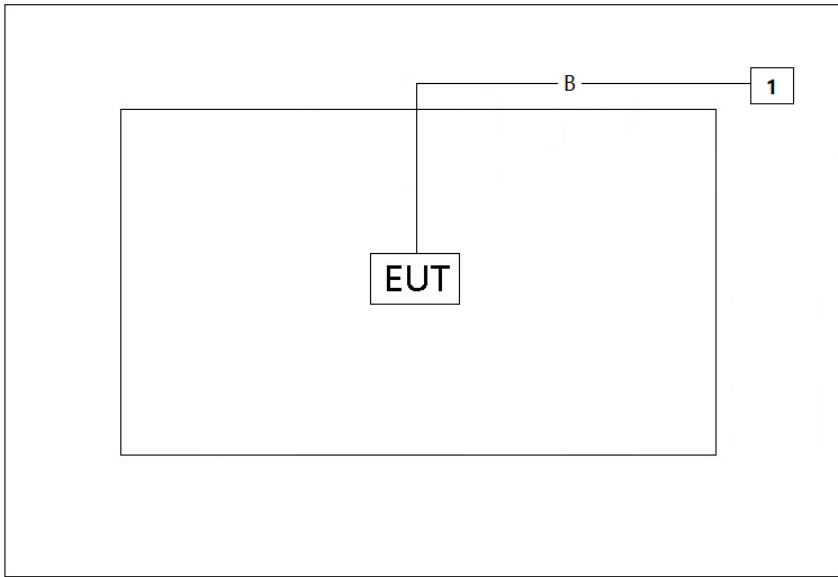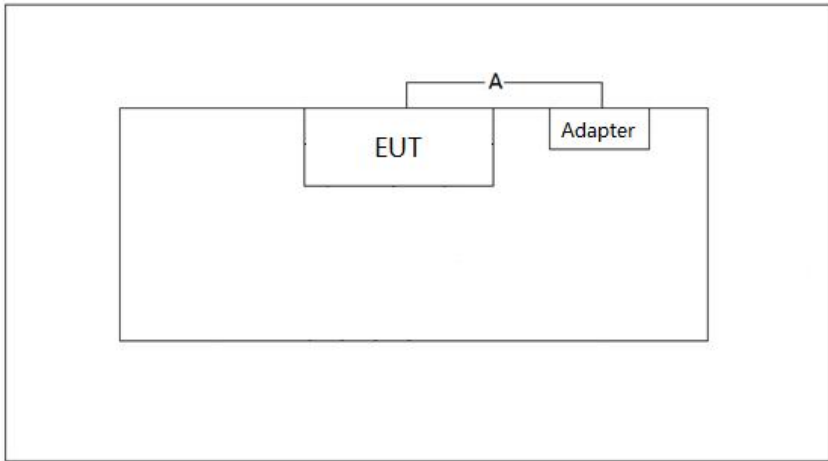Connection Diagram for Radiated Emissions Measurement	
	
Connection Diagram for AC Conducted Emission Measurement	
	
Cable Type	Signal Cable Description
A	Power Cable Shielding, > 1 m
B	Control Cable Non-Shielded, > 5 m


2.8. Test System Details

Product	Manufacturer	Model No.
1	Notebook	Lenovo E495

2.9. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
BLE	68.02%

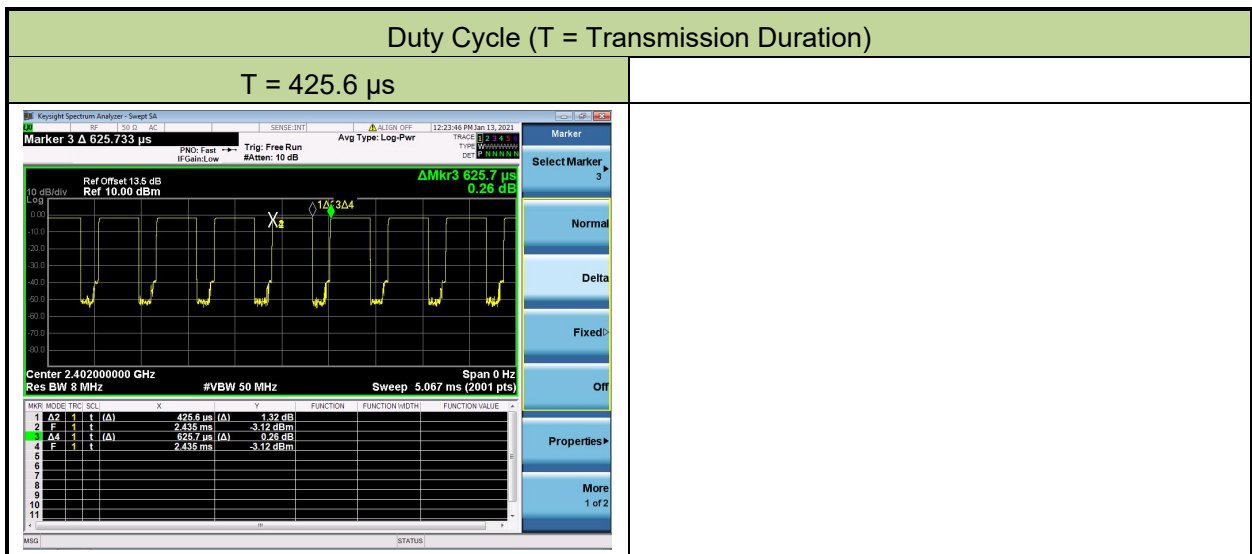

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The device unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/01/12
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2021/07/26
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/05/26
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/01/07
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/08/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/08/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/22
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2021/07/26

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. TEST RESULT

6.1. Summary

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 6.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 6.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 6.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\leq 20\text{dBc}$ (Peak)		Pass	Section 6.5
15.205 15.209	RSS-247 [5.5]	General Field Strength (Restricted Bands and Radiated Emission)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.6 & 6.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC } 15.207$ limits	Line Conducted	Pass	Section 6.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. Occupied Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

6.2.3. Test Setting


For 6dB bandwidth

1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. Allow the trace to stabilize
7. Use the X dB bandwidth mode with X set to 6 dB

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

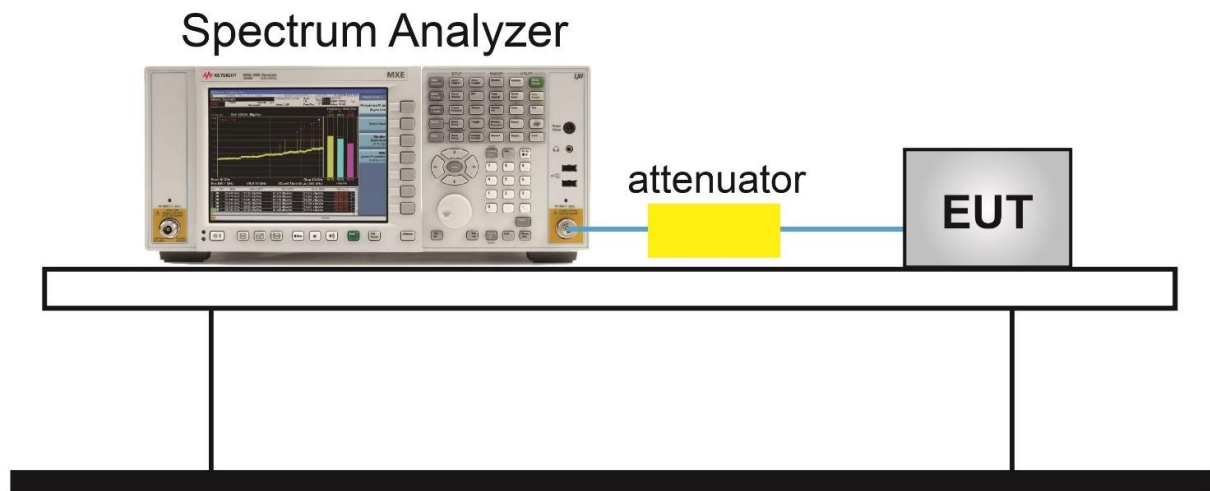

6.2.5. Test Result

Test Site	WZ-TR3	Test Engineer	Yuri Li
Test Date	2021/01/13~2021/01/19		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	99% Bandwidth (MHz)	Result
BLE	1	00	2402	0.717	≥ 0.5	1.435	Pass
BLE	1	19	2440	0.686	≥ 0.5	1.133	Pass
BLE	1	39	2480	0.686	≥ 0.5	1.139	Pass





6.3. Output Power Measurement

6.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36.02dBm).

6.3.2. Test Procedure Used

ANSI C63.10-2013 Section 11.9.1.3

ANSI C63.10-2013 Section 11.9.2.3.2

6.3.3. Test Setting


PKPM1 Peak-reading power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

6.3.4. Test Setup

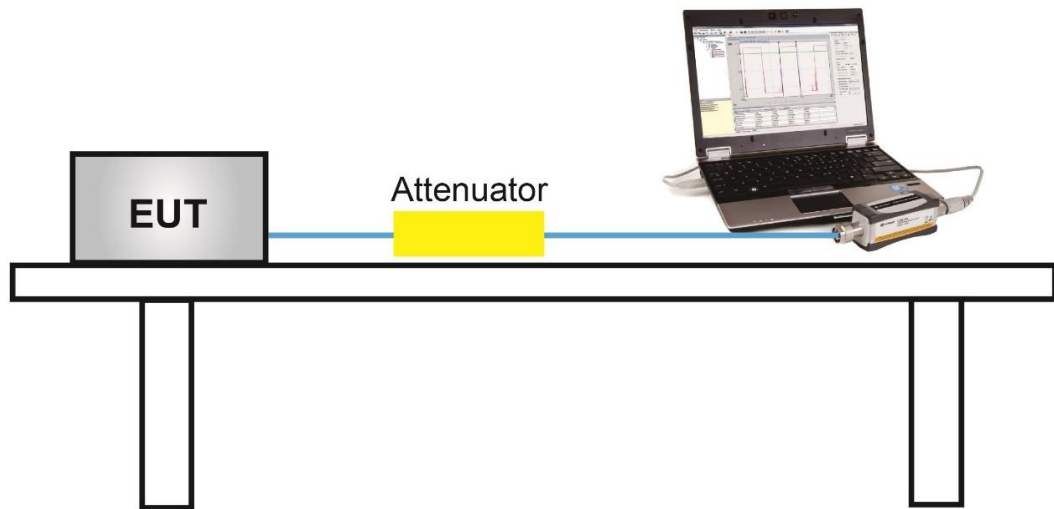

6.3.5. Test Result

Test Site	WZ-TR3	Test Engineer	Yuri Li
Test Date	2021/01/13		

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
BLE	1	00	2402	-1.53	≤ 30.00	-2.79	≤ 36.02	Pass
BLE	1	19	2440	-2.74	≤ 30.00	-4.00	≤ 36.02	Pass
BLE	1	39	2480	-4.37	≤ 30.00	-5.63	≤ 36.02	Pass

Note: EIRP (dBm) = Peak Power (dBm) + Antenna Gain (dBi), Antenna Gain = -1.26 dBi.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
BLE	1	00	2402	-1.98	≤ 30.00	-3.24	≤ 36.02	Pass
BLE	1	19	2440	-3.46	≤ 30.00	-4.72	≤ 36.02	Pass
BLE	1	39	2480	-5.35	≤ 30.00	-6.61	≤ 36.02	Pass

Note: EIRP (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = -1.26 dBi.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure Used

ANSI C63.10-2013 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


6.4.4. Test Setup

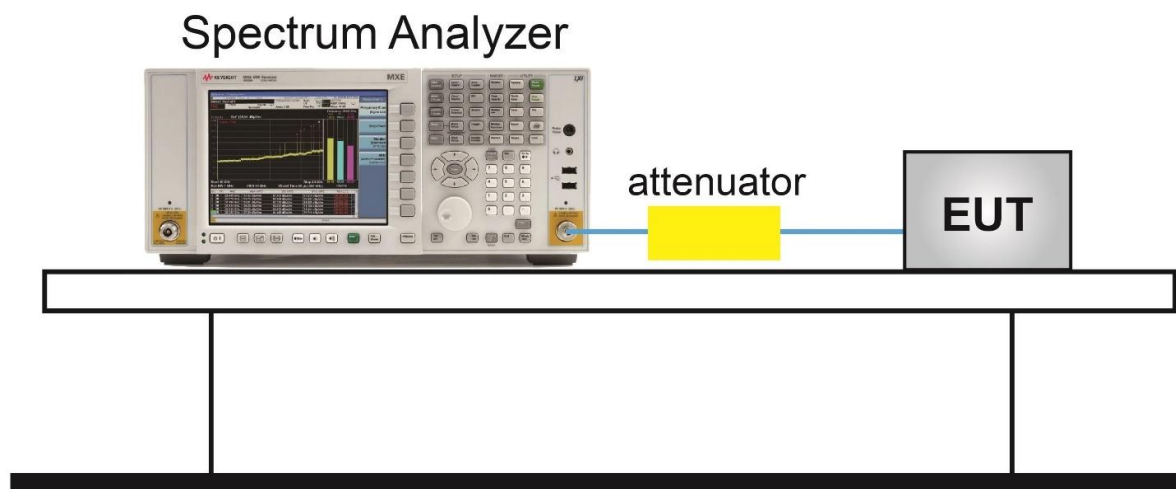

6.4.5. Test Result

Test Site	WZ-TR3	Test Engineer	Yuri Li
Test Date	2021/01/13		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1	00	2402	-15.29	≤ 8.00	Pass
BLE	1	19	2440	-16.94	≤ 8.00	Pass
BLE	1	39	2480	-17.53	≤ 8.00	Pass

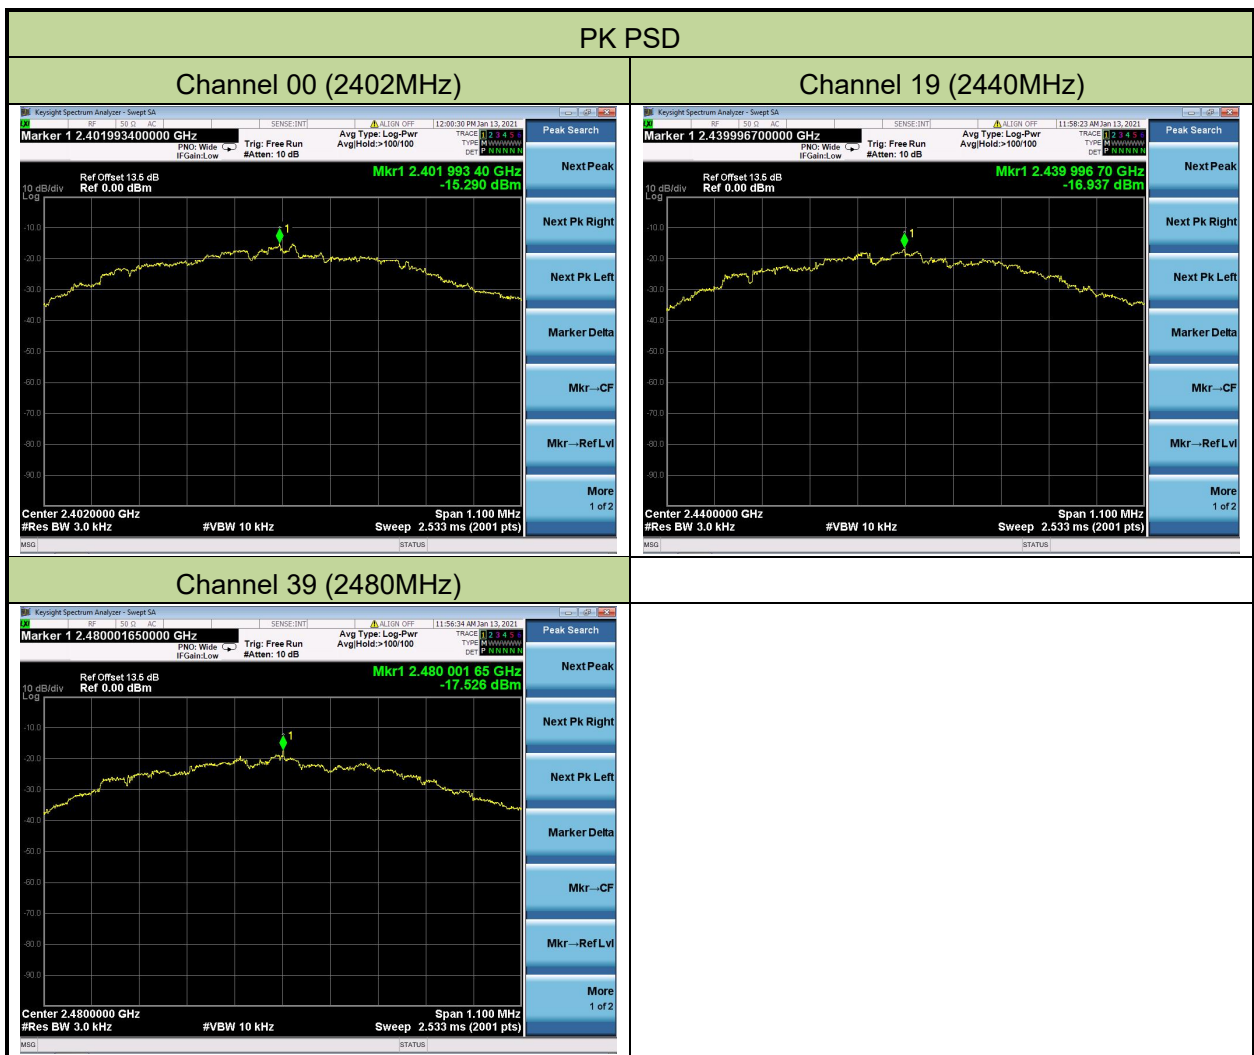

6.5. Conducted Band Edge and Out-of-Band Emissions

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

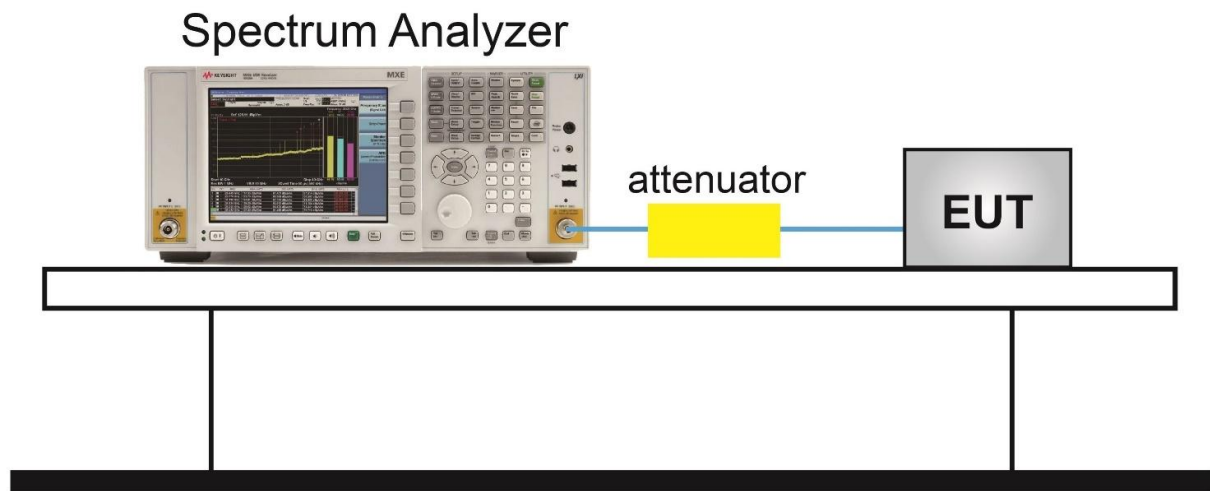



6.5.5. Test Result

Test Site	WZ-TR3	Test Engineer	Yuri Li
Test Date	2021/01/13		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit (dBm)	Result
BLE	1	00	2402	-22.25	Pass
BLE	1	19	2440	-23.74	Pass
BLE	1	39	2480	-25.45	Pass

Note: The limit is 20dB below the fundamental emission level.

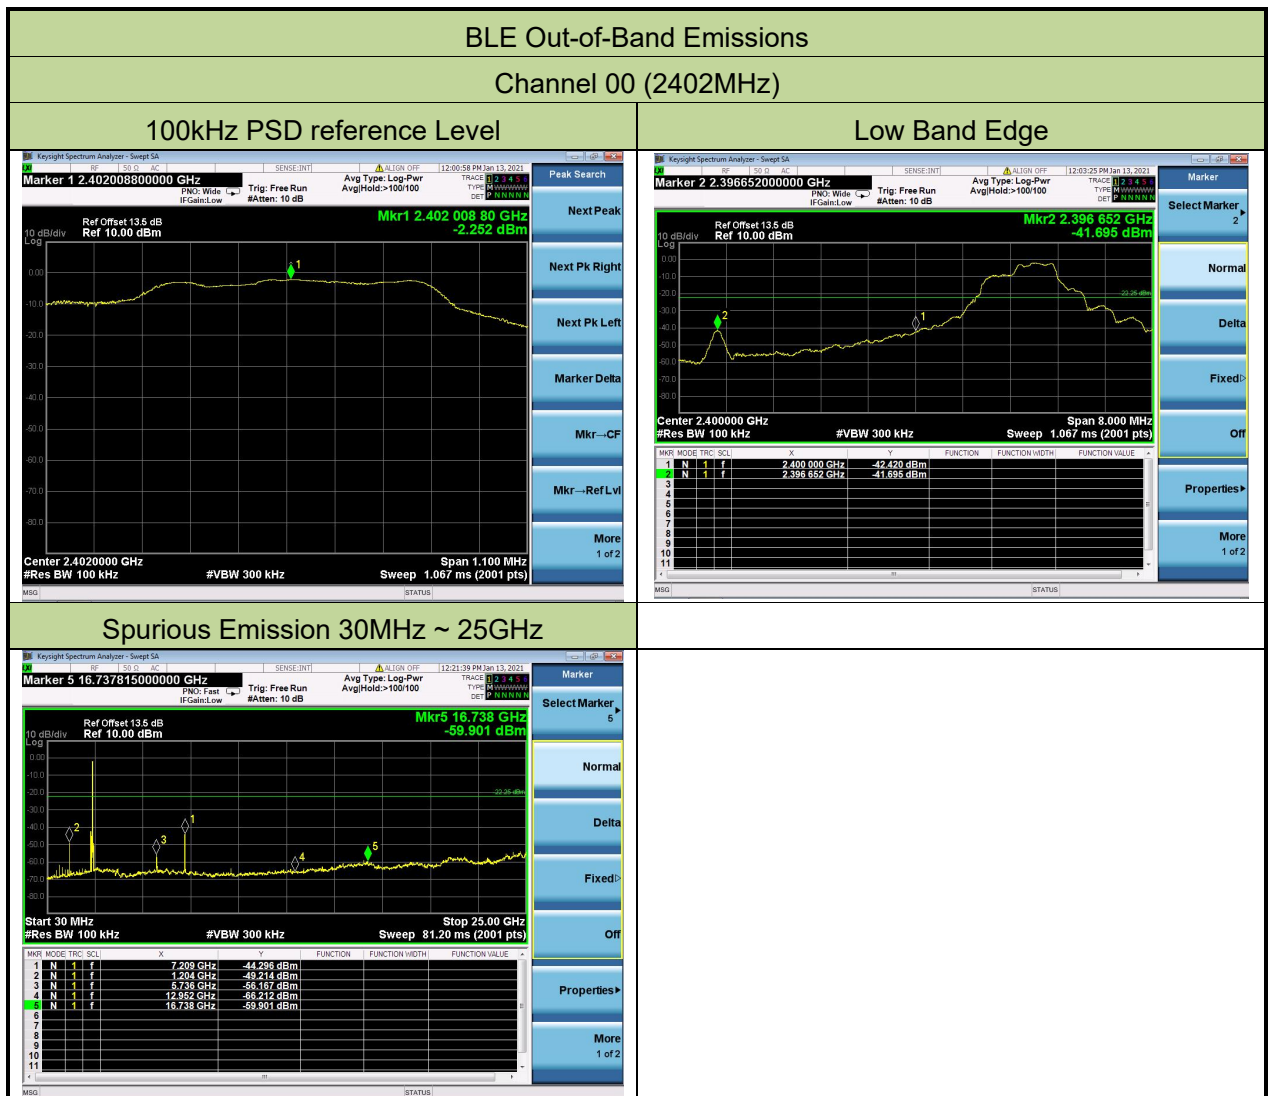

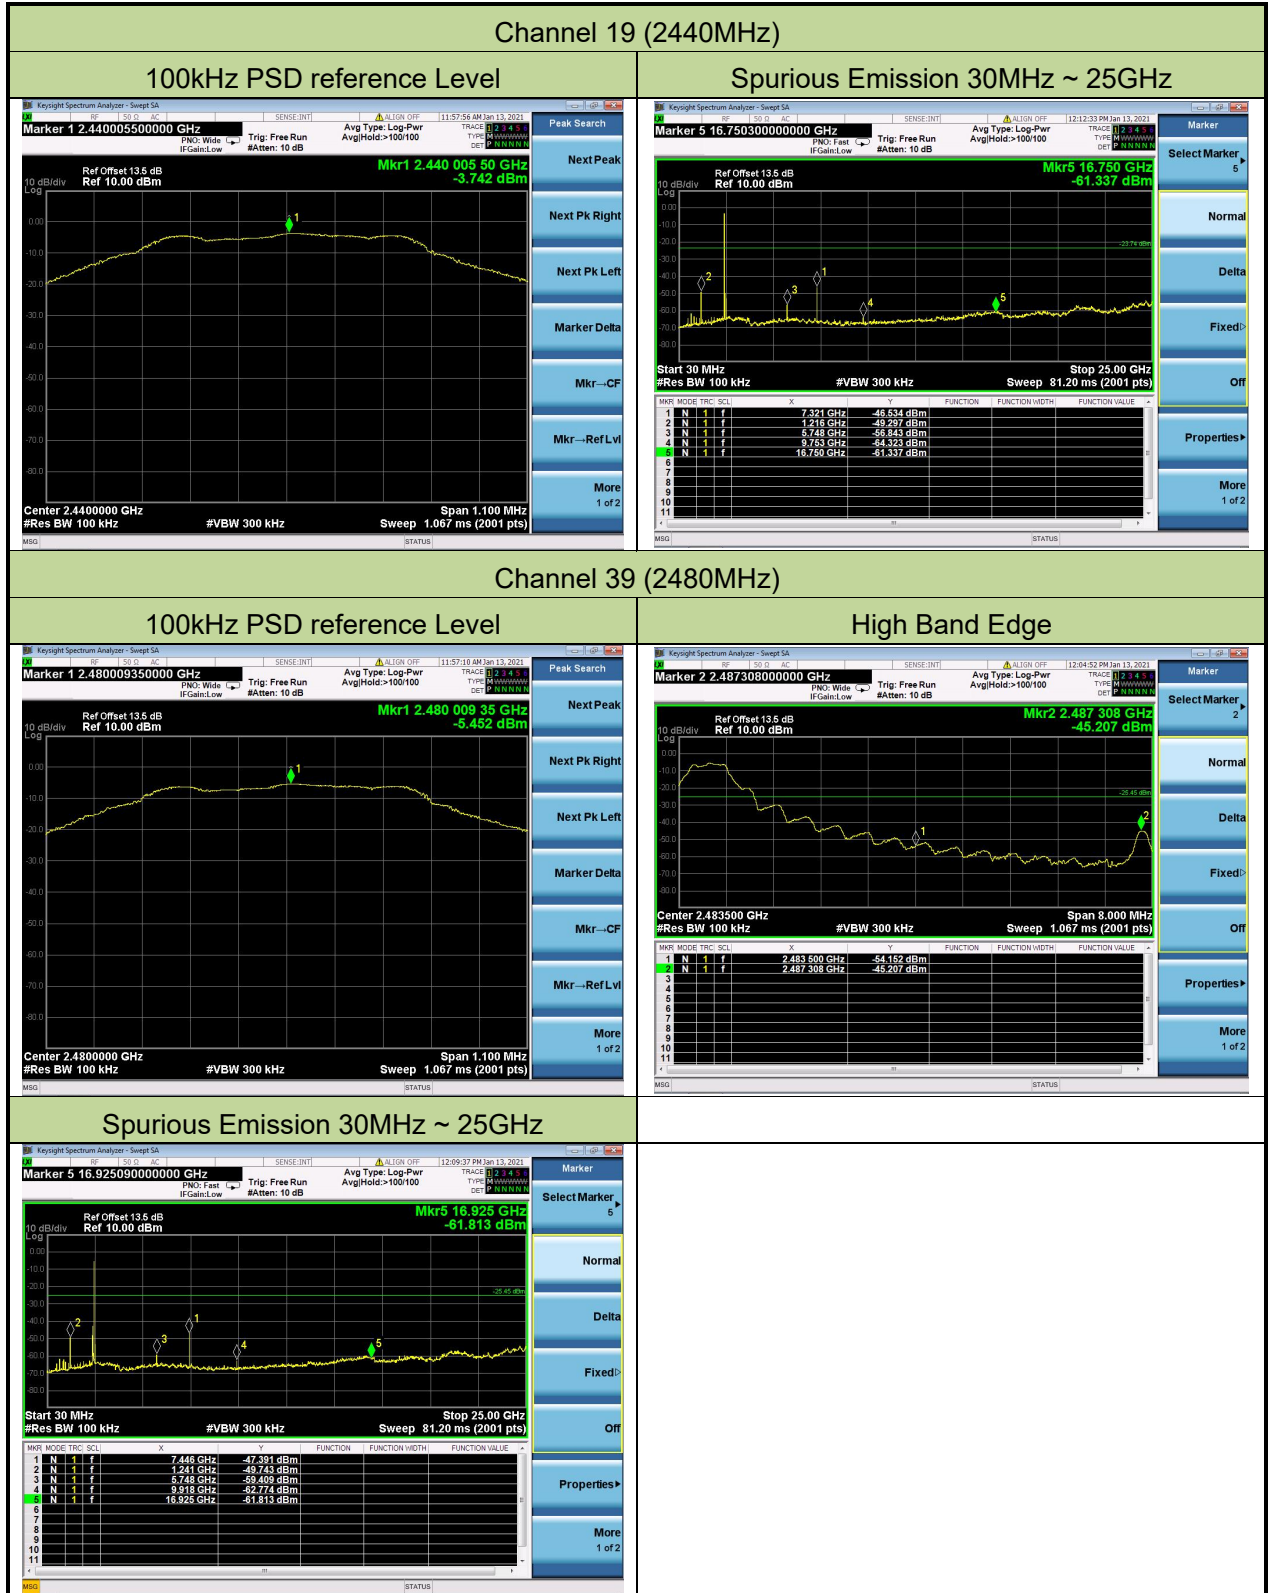

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Magnetic Field Strength (H-Field) ($\mu\text{A}/\text{m}$)	Measured Distance (m)
0.009 - 0.490	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

6.6.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.4 & 6.5 & 6.6

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup

Below 1GHz Test Setup:

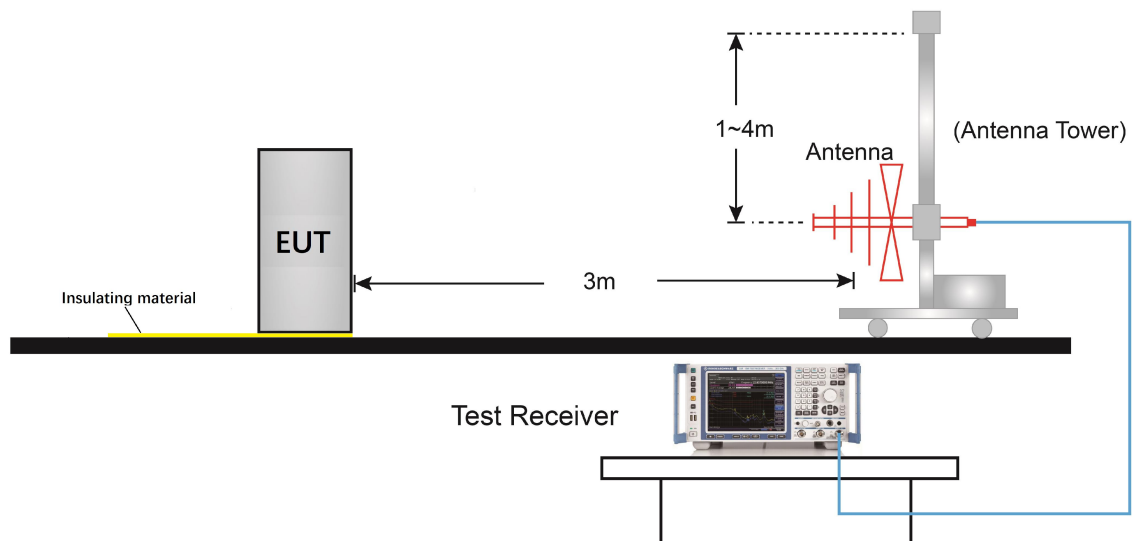

Above 1GHz Test Setup:

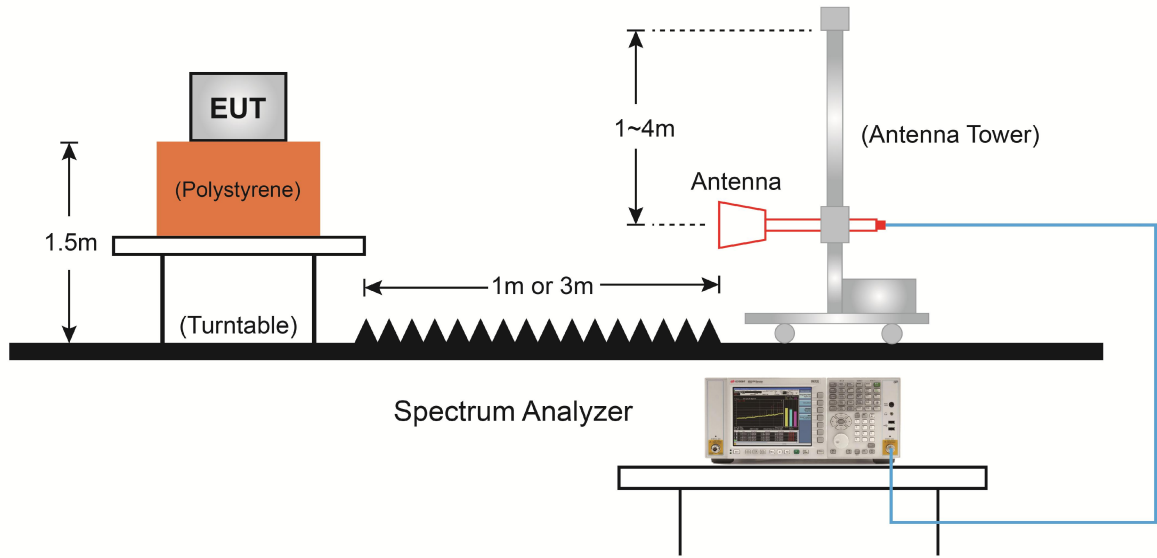

6.6.5. Test Result

Test Site	WZ-AC2	Test Engineer	Antony Yang
Test Date	2021/01/15	Test Mode:	BLE
Test Channel:	00		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3728.5	45.2	0.8	46.0	74.0	-28.0	Peak	Horizontal
	4808.0	44.9	4.6	49.5	74.0	-24.5	Peak	Horizontal
*	7205.0	43.7	11.7	55.4	74.0	-18.6	Peak	Horizontal
*	8021.0	34.8	12.6	47.4	74.0	-26.6	Peak	Horizontal
	3728.5	47.3	0.8	48.1	74.0	-25.9	Peak	Vertical
	4808.0	43.0	4.6	47.6	74.0	-26.4	Peak	Vertical
*	5998.0	50.7	6.9	57.6	74.0	-16.4	Peak	Vertical
*	7205.0	44.2	11.7	55.9	74.0	-18.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.0dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Antony Yang
Test Date	2021/01/15	Test Mode:	BLE
Test Channel:	19		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4884.5	46.1	5.3	51.4	74.0	-22.6	Peak	Horizontal
*	5751.5	40.7	6.5	47.2	74.0	-26.8	Peak	Horizontal
	7324.0	47.4	10.1	57.5	74.0	-16.5	Peak	Horizontal
	7324.0	41.5	10.1	51.6	54.0	-2.4	Average	Horizontal
*	8701.0	37.4	12.0	49.4	74.0	-24.6	Peak	Horizontal
	4876.0	41.5	5.2	46.7	74.0	-27.3	Peak	Vertical
*	6380.5	38.1	7.6	45.7	74.0	-28.3	Peak	Vertical
	7315.0	43.0	10.1	53.1	54.0	-0.9	Average	Vertical
	7315.0	46.1	10.1	56.2	74.0	-17.8	Peak	Vertical
*	8650.0	37.3	11.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (92.2dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Antony Yang
Test Date	2021/01/15	Test Mode:	BLE
Test Channel:	39		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4961.0	48.8	5.5	54.3	74.0	-19.7	Peak	Horizontal
*	6712.0	37.9	8.6	46.5	74.0	-27.5	Peak	Horizontal
	7443.0	46.8	10.1	56.9	74.0	-17.1	Peak	Horizontal
	7443.0	43.0	10.1	53.1	54.0	-0.9	Average	Horizontal
*	8726.5	38.6	11.9	50.5	74.0	-23.5	Peak	Horizontal
	4961.0	41.0	5.5	46.5	74.0	-27.5	Peak	Vertical
*	5539.0	37.6	6.4	44.0	74.0	-30.0	Peak	Vertical
	7443.0	45.9	10.1	56.0	74.0	-18.0	Peak	Vertical
	7443.0	41.1	10.1	51.2	54.0	-2.8	Average	Vertical
*	8930.5	38.1	12.1	50.2	74.0	-23.8	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (91.0dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2021/01/18 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2440MHz	

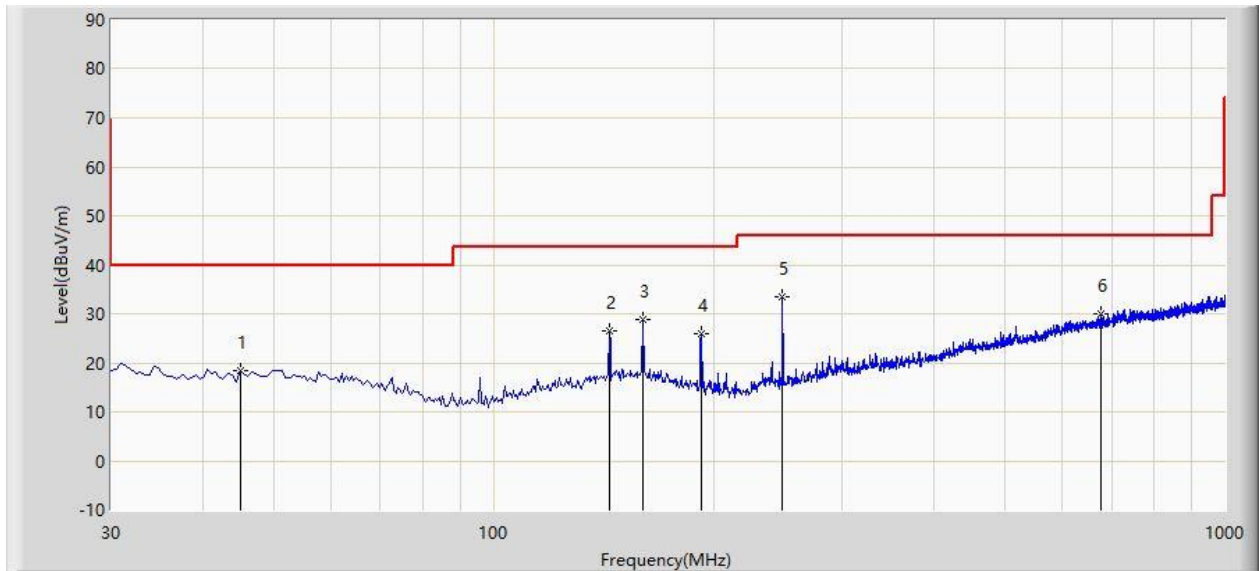

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			45.035	18.494	0.608	-21.506	40.000	17.886	PK
2			143.975	26.452	8.503	-17.048	43.500	17.949	PK
3			159.980	28.903	10.705	-14.597	43.500	18.198	PK
4			192.475	26.025	10.574	-17.475	43.500	15.451	PK
5		*	248.250	33.517	16.698	-12.483	46.000	16.819	PK
6			678.445	29.991	3.166	-16.009	46.000	26.824	PK


Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: WZ-AC1	Time: 2021/01/18 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2440MHz	

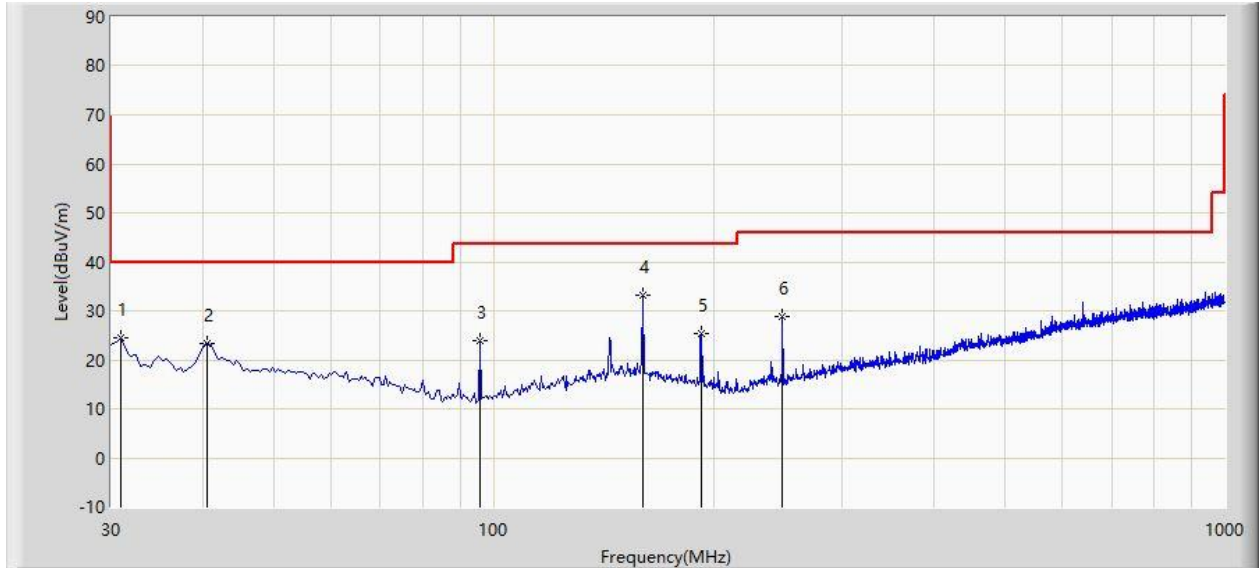

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			30.970	24.447	7.775	-15.553	40.000	16.672	PK
2			40.670	23.362	5.845	-16.638	40.000	17.517	PK
3			95.960	23.906	11.102	-19.594	43.500	12.804	PK
4		*	159.980	33.133	14.935	-10.367	43.500	18.198	PK
5			192.475	25.372	9.921	-18.128	43.500	15.451	PK
6			248.250	28.907	12.088	-17.093	46.000	16.819	PK

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 Requirement

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR and in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table.

RSS-Gen Section 8.9			
Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Magnetic Field Strength (H-Field) ($\mu\text{A}/\text{m}$)	Measured Distance (m)
0.009 - 0.490	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

6.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 6.10

6.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4.Test Setup

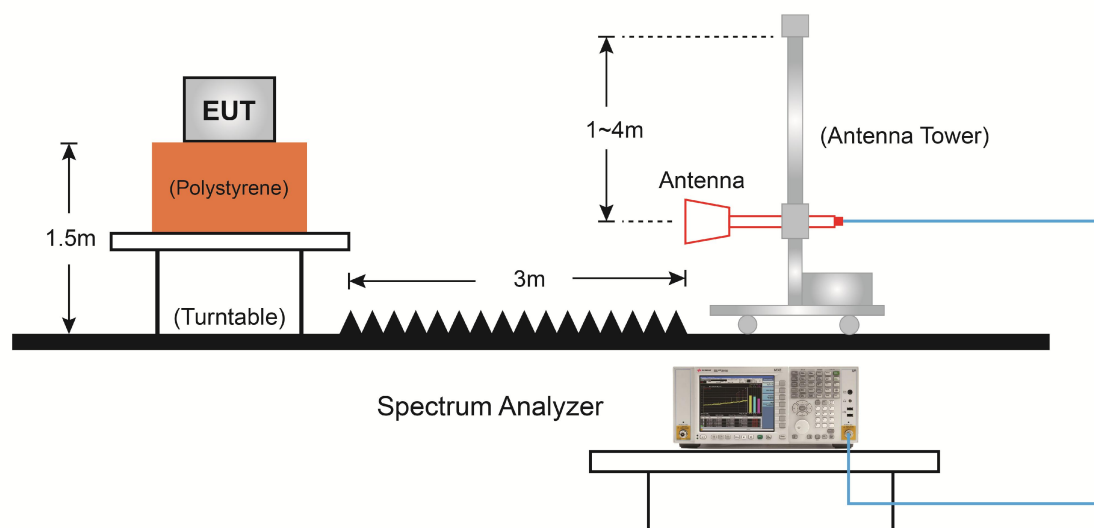

6.7.5. Test Result

Site: WZ-AC2	Time: 2021/01/15 - 11:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

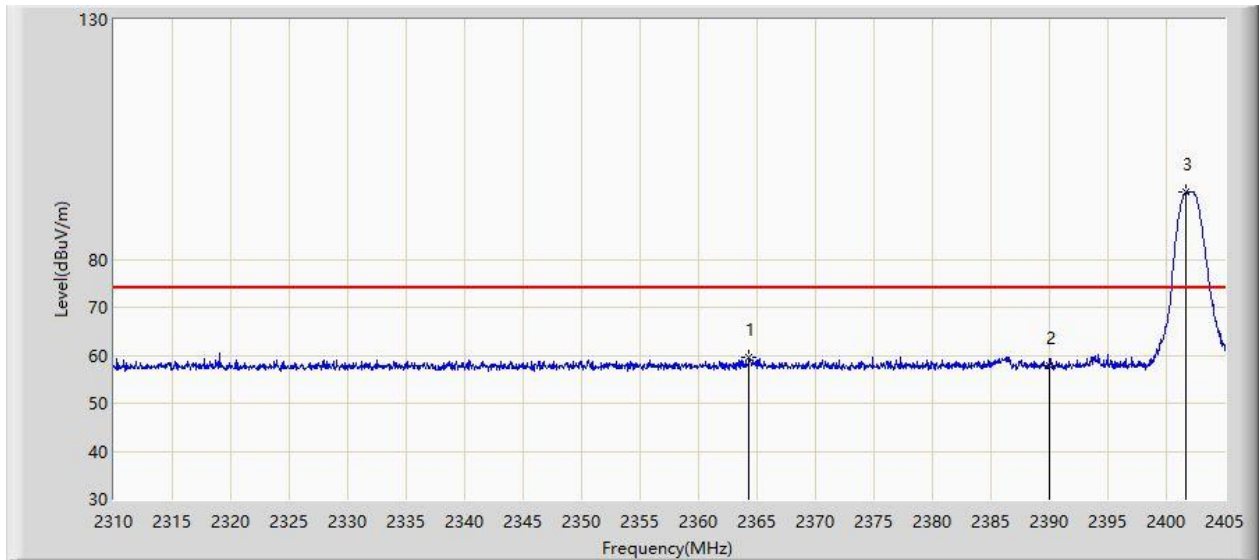


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2364.292	59.680	27.234	-14.320	74.000	32.445	PK
2			2390.000	57.820	25.469	-16.180	74.000	32.351	PK
3		*	2401.722	93.984	61.645	N/A	N/A	32.338	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

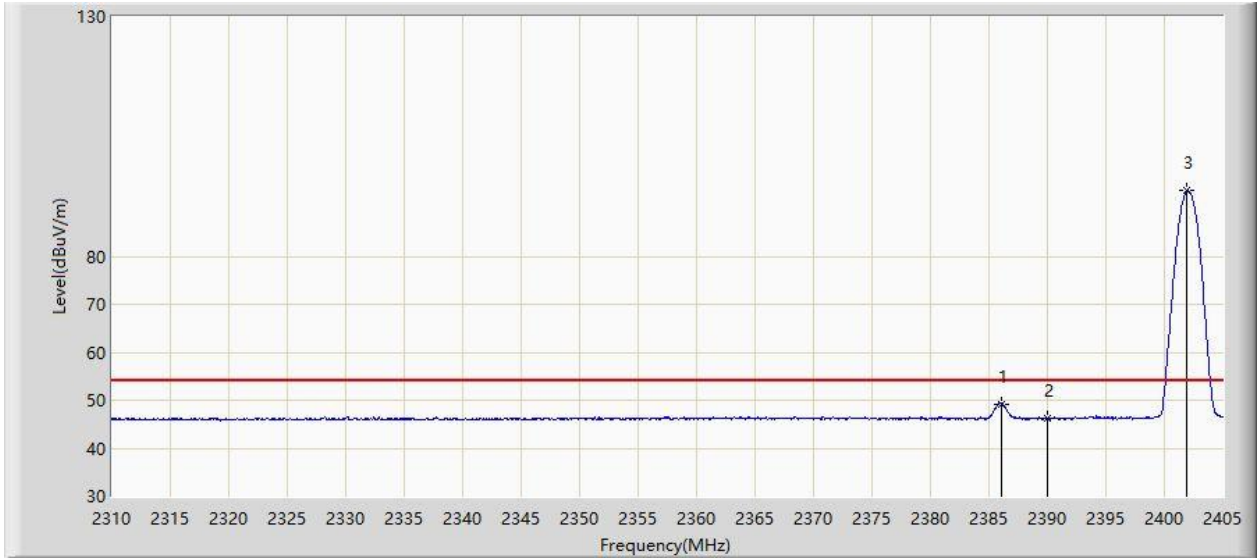


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2386.048	49.224	16.862	-4.776	54.000	32.362	AV
2			2390.000	46.140	13.789	-7.860	54.000	32.351	AV
3		*	2401.960	93.634	61.295	N/A	N/A	32.339	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

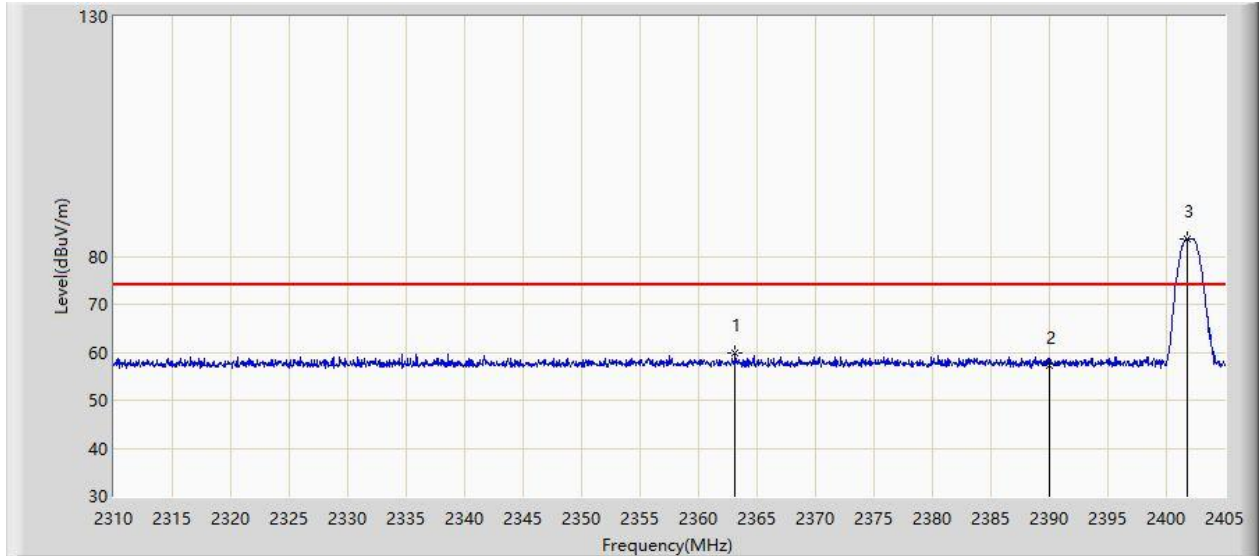


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2363.153	59.825	27.374	-14.175	74.000	32.451	PK
2			2390.000	57.322	24.971	-16.678	74.000	32.351	PK
3		*	2401.770	83.624	51.285	N/A	N/A	32.338	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

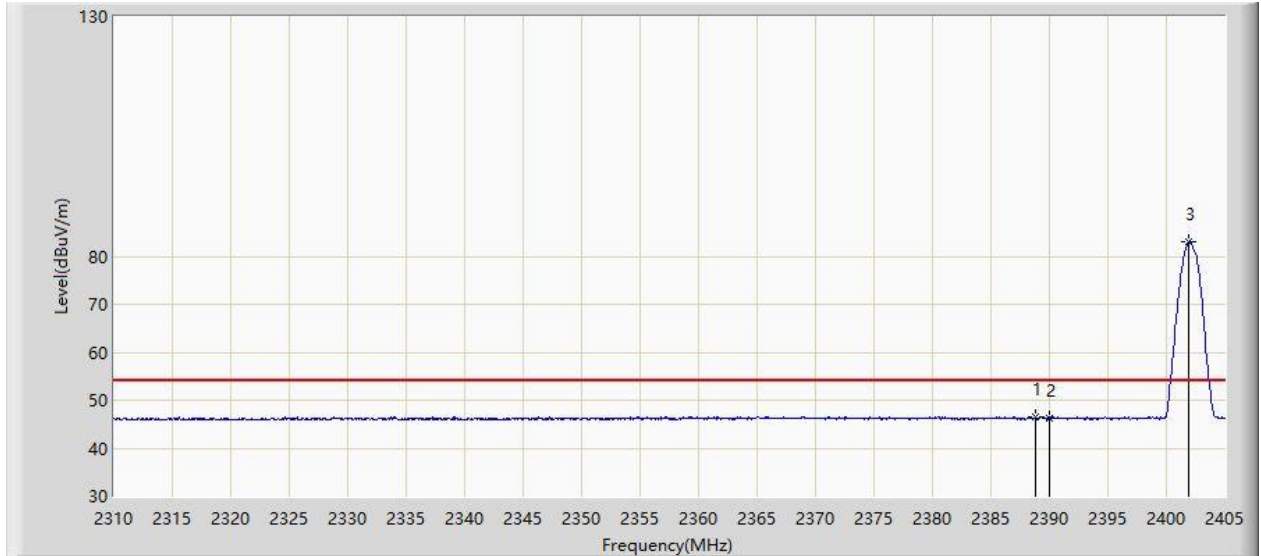


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.755	46.623	14.268	-7.377	54.000	32.355	AV
2			2390.000	46.342	13.991	-7.658	54.000	32.351	AV
3		*	2401.960	83.015	50.676	N/A	N/A	32.339	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

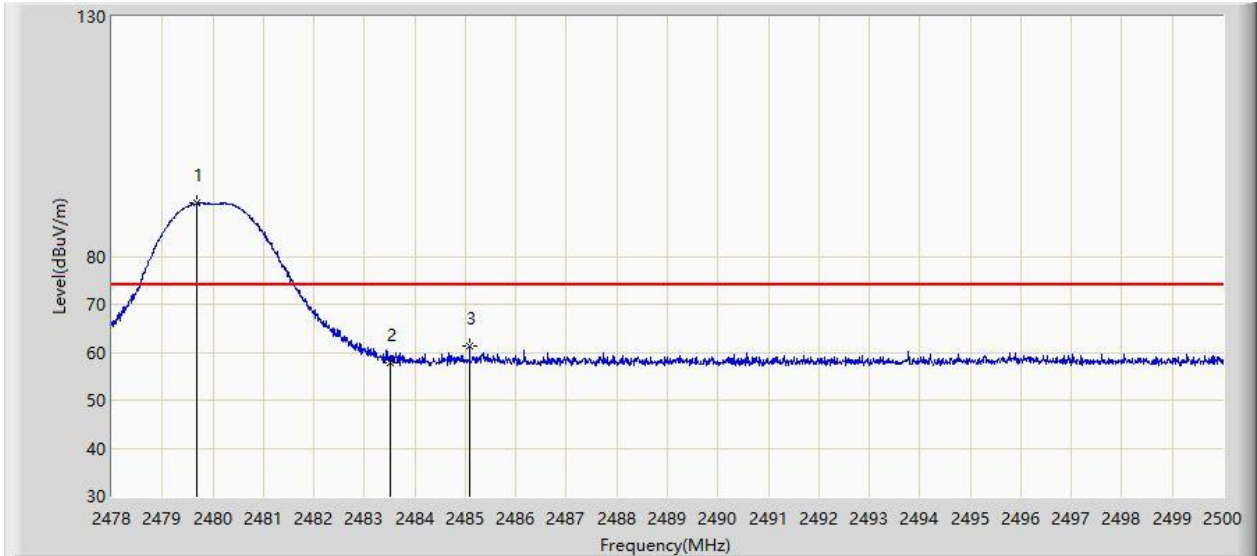


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.683	91.026	58.713	N/A	N/A	32.313	PK
2			2483.500	57.701	25.394	-16.299	74.000	32.307	PK
3			2485.084	61.246	28.942	-12.754	74.000	32.304	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

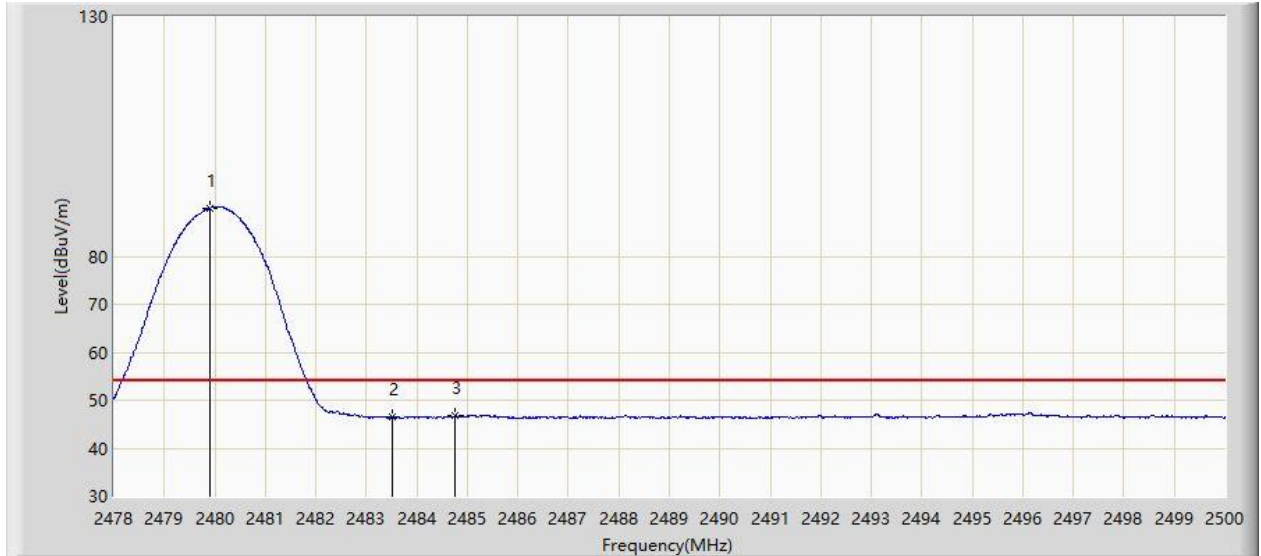


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	90.102	57.789	N/A	N/A	32.313	AV
2			2483.500	46.457	14.150	-7.543	54.000	32.307	AV
3			2484.754	46.928	14.624	-7.072	54.000	32.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

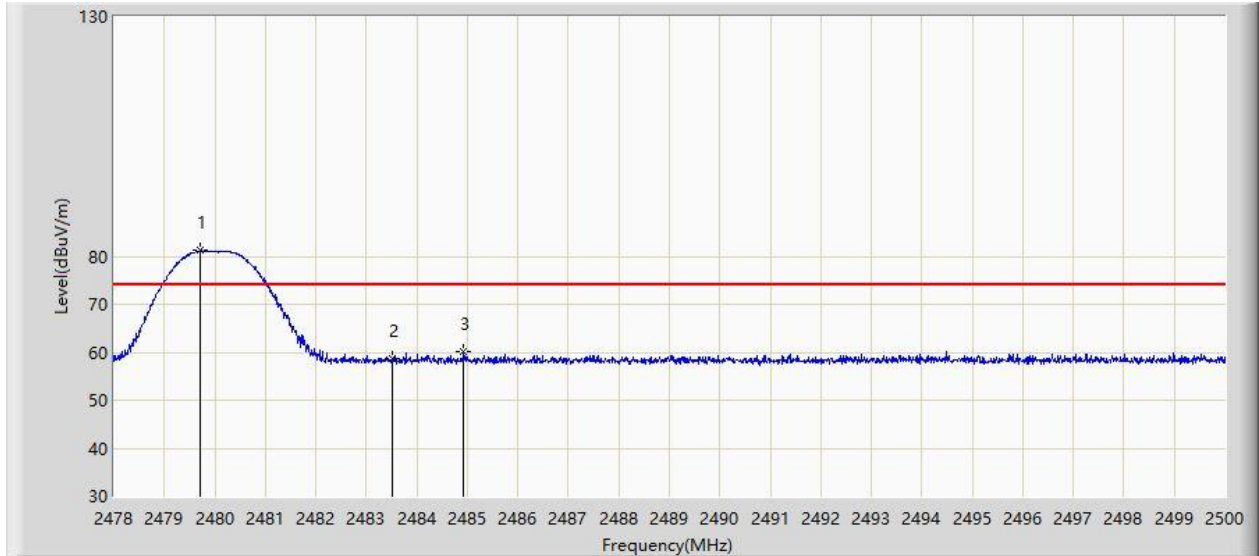


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.705	81.173	48.860	N/A	N/A	32.313	PK
2			2483.500	58.754	26.447	-15.246	74.000	32.307	PK
3			2484.930	60.068	27.764	-13.932	74.000	32.304	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/01/15 - 11:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot S Kids	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

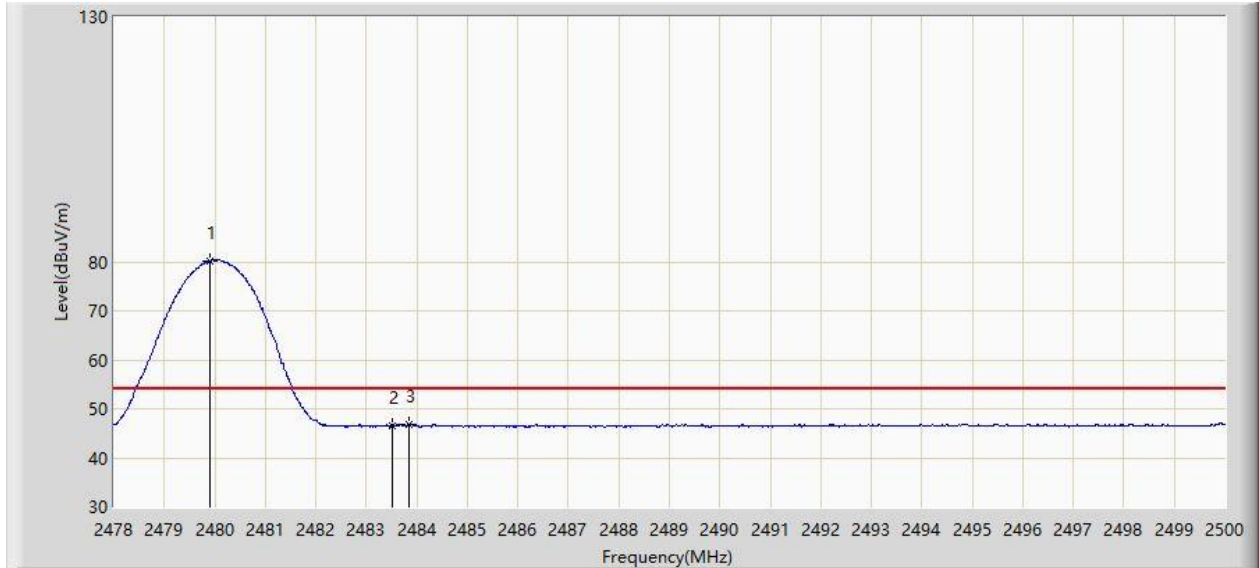

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	80.189	47.876	N/A	N/A	32.313	AV
2			2483.500	46.625	14.318	-7.375	54.000	32.307	AV
3			2483.852	46.876	14.570	-7.124	54.000	32.306	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits & RSS-Gen Issue 5 Section 8.8 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


6.8.2. Test Setup

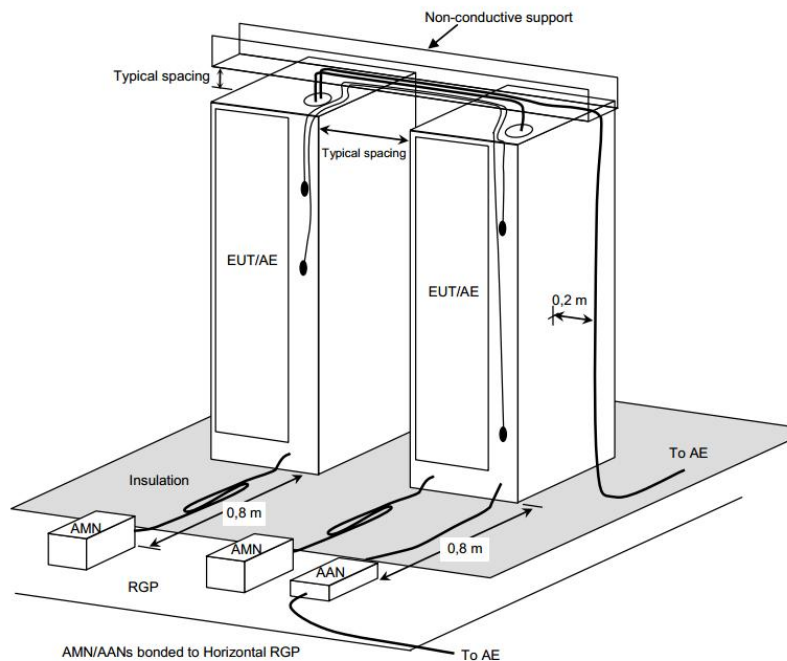

Example measurement arrangement for floor standing EUT

6.8.3. Test Result

Site: WZ-SR2	Time: 2021/01/19 - 18:06
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Ninebot S Kids	Power: AC 120V/60Hz
Test Mode: Transmit by Bluetooth-LE at Channel 2480MHz	

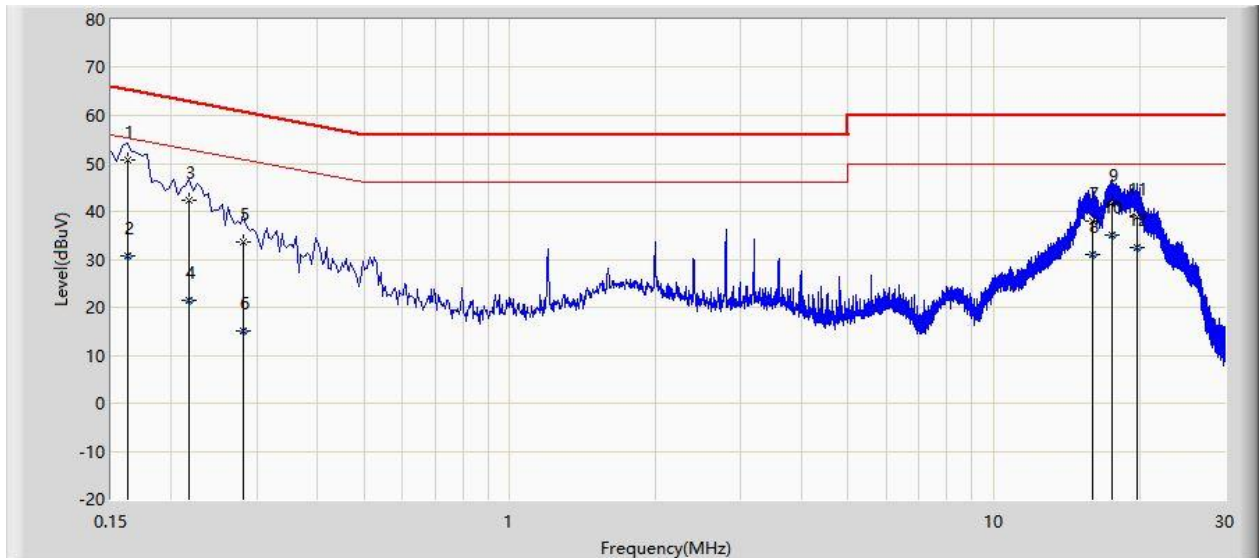


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1		*	0.162	50.678	41.235	-14.682	65.361	9.444	QP
2			0.162	30.629	21.186	-24.732	55.361	9.444	AV
3			0.218	42.313	32.852	-20.582	62.895	9.461	QP
4			0.218	21.568	12.107	-31.327	52.895	9.461	AV
5			0.282	33.603	24.130	-27.154	60.757	9.473	QP
6			0.282	14.962	5.489	-35.795	50.757	9.473	AV
7			15.946	38.047	27.942	-21.953	60.000	10.104	QP
8			15.946	31.094	20.990	-18.906	50.000	10.104	AV
9			17.546	41.726	31.570	-18.274	60.000	10.156	QP
10			17.546	35.012	24.856	-14.988	50.000	10.156	AV
11			19.802	38.858	28.634	-21.142	60.000	10.225	QP
12			19.802	32.339	22.114	-17.661	50.000	10.225	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2021/01/19 - 18:12
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Ninebot S Kids	Power: AC 120V/60Hz
Test Mode: Transmit by Bluetooth-LE at Channel 2480MHz	

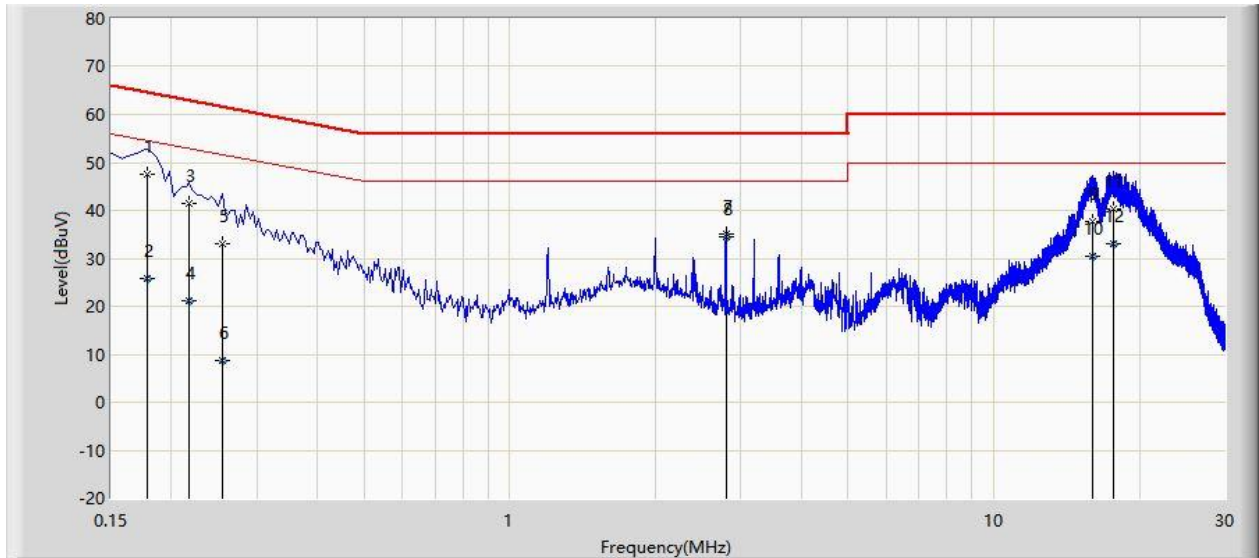

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.178	47.637	38.185	-16.941	64.578	9.452	QP
2			0.178	25.733	16.281	-28.845	54.578	9.452	AV
3			0.218	41.322	31.861	-21.573	62.895	9.461	QP
4			0.218	21.070	11.609	-31.825	52.895	9.461	AV
5			0.254	32.906	23.441	-28.719	61.625	9.465	QP
6			0.254	8.830	-0.635	-42.795	51.625	9.465	AV
7			2.794	35.211	25.607	-20.789	56.000	9.604	QP
8		*	2.794	34.462	24.858	-11.538	46.000	9.604	AV
9			15.954	37.825	27.682	-22.175	60.000	10.143	QP
10			15.954	30.563	20.421	-19.437	50.000	10.143	AV
11			17.686	40.204	30.009	-19.796	60.000	10.194	QP
12			17.686	33.089	22.895	-16.911	50.000	10.194	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15.247 of the FCC Rules and RSS-247 Section 5 of the ISED Rules.

Appendix A - Test Setup Photograph

Refer to "2101RSU019-UT" file.

Appendix B - EUT Photograph

Refer to "2101RSU019-UE" file.